

INTERNATIONAL STANDARD



Test method for the mechanical strength of cores made of magnetic oxides

IECNORM.COM : Click to view the full PDF of IEC 61631:2020 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IECNORM.COM : Click to view the IEC Standard IEC 61200 REV



IEC 61631

Edition 2.0 2020-05
REDLINE VERSION

INTERNATIONAL STANDARD



Test method for the mechanical strength of cores made of magnetic oxides

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.100.10

ISBN 978-2-8322-8343-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
INTRODUCTION	2
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Apparatus	7
4.1 Test core support and loading wedge	7
4.2 Testing device	7
4.3 Humidity measuring device	7
5 Test cores	7
5.1 General	7
5.2 Number of test cores	7
5.3 Precautions	7
6 Testing	8
6.1 Test conditions	8
6.2 Test procedures	8
6.2.1 General	8
6.2.2 Test of E-cores	8
6.2.3 I-test Test of I-cores	10
6.2.4 Test of ring-cores	11
Annex A (normative) Standard dimensions of E-cores and their support for strength test	13
A.1 Introduction General	13
A.2 Designation	13
A.3 Test core support	13
Annex B (normative) Standard dimensions of ring-cores and methods for strength test	16
B.1 General	16
B.2 Selection of mechanical strength test method for ring-core	16
Bibliography	17
Figure 1 – E test	9
Figure 2 – W test	9
Figure 3 – T test	10
Figure 4 – M test	10
Figure 5 – I test	11
Figure 6 – Stretching method	11
Figure 7 – Shearing method	12
Figure 8 – Pressure method	12
Figure A.1 – Designation of E-core	13
Figure B.1 – Dimensions of ring-core	16
Table A.1 – Test core support	14
Table B.1 – Ring-core dimension designations	16

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**TEST METHOD FOR THE MECHANICAL STRENGTH
OF CORES MADE OF MAGNETIC OXIDES**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 61631 has been prepared by IEC technical committee 51: Magnetic components, ferrite and magnetic powder materials.

This second edition cancels and replaces the first edition published in 2001. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the phrase: "This document is also applicable to the mechanical strength measurement of magnetic powder cores" has been added in the scope;
- b) IEC 61246 has been replaced by IEC 63093-8; EN 1002-2 has been replaced by ISO 7500-1; ISO 4677-1 and ISO 4677-2 have been withdrawn;
- c) dimensions D and F in Figure A.1 and Table A.1 have been changed to be consistent with Figure 1 of IEC 63093-8:2018;
- d) addition of the content of ring-cores test;
- e) addition of Annex B;
- f) the location of the jig is amended in Figure 3;
- g) in Figure 5, the roller bars are moved to the edge of the I-core, aligned with the core.

The text of this International Standard is based on the following documents:

CDV	Report on voting
51/1312/CDV	51/1333/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The method specified in this document is intended to be used for obtaining agreements between parties for material development, quality checking, characterization and data acquisition purposes. The method places closely defined restrictions on the arrangement of the test-piece and the function of the test apparatus, including the test-jigs, in order to minimize the errors that can arise as a consequence of the test method.

All other factors are ~~required to be~~ stated in the test report ~~in order to be allowed for~~ ~~in the~~ comparison of the behavior of the magnetic oxide cores. It is not possible to rigorously standardize particular surface finishes, since it is difficult to control all the mechanical factors. But, ~~it is absolutely essential to mention~~ the state of the surface in the report ~~should be mentioned~~, as surface defects can have a large effect on mechanical strength in certain types of tests (see Clause 6). The extrapolation of mechanical strength data to other geometries, multi-axial stressing, other rates of stressing or other environmental conditions, should be viewed with caution. The origin of a fracture in a mechanical test piece can be a valuable guide to the nature and position of strength-limiting defects (such as pores, large grains and impurity concentration).

The results of strength tests are influenced by a combination of the following factors: the microstructure of the material, the surface finishing procedure applied to the test cores, the size and shape of the test cores, the mechanical parameters of the testing apparatus, the rate of load application and the relative humidity of the ambient atmosphere. Because of the ceramic nature of magnetic oxide cores, a considerable range of results is usually obtained from a number of nominally identical test cores. Thus test results ~~need to be~~ are interpreted with caution.

IECNORM.COM : Click to view the full PDF of IEC 61631:2020 RLV

TEST METHOD FOR THE MECHANICAL STRENGTH OF CORES MADE OF MAGNETIC OXIDES

1 Scope

This document specifies a test method for the mechanical strength of cores made of magnetic oxides. This test method is suitable for most of the E-cores, ETD-cores, I-cores and ring-cores but other core types such as U-cores could be tested according to a derived method agreed by the parties concerned. This document is also applicable to the mechanical strength measurement of magnetic powder cores.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 61246:1994, Magnetic oxide cores (E-cores) of rectangular cross-section and associated parts – Dimensions~~

~~EN 10002-2:1992, Tensile testing of metallic materials – Part 2: Verification of the force measuring system of the tensile testing machine~~

~~ISO 4677-1:1985, Atmospheres for conditioning and testing – Determination of relative humidity – Part 1: Aspirated psychrometer method.~~

~~ISO 4677-2:1985, Atmospheres for conditioning and testing – Determination of relative humidity – Part 2: Whirling psychrometer method~~

ISO 7500-2, *Metallic materials – Verification of static uniaxial testing machines – Part 2: Tension creep testing machines – Verification of the applied force*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

mechanical strength

maximum recorded force at the instant of fracture of a magnetic oxide core when it is loaded with the bending stress

4 Apparatus

4.1 Test core support and loading wedge

Test cores shall be supported on free moving roller bars or on a flat support depending on their size (see 6.2). The loading wedge, the roller bars and the stretch bar or the flat support shall be made of hardened steel with a hardness of 40 HRC (HRC is Rockwell hardness) to 60 HRC. The loading wedge and the roller bars shall have a radius of 2 mm. The radius of the contact part of the stretching rod head and the measured core is 2 mm. The loading wedge and the stretch bar shall be connected to a device for measuring and recording the load applied.

4.2 Testing device

The testing device shall be a mechanical testing machine capable of applying a force to the loading wedge high enough to break the test core. The machine shall be capable of applying the force at a constant loading rate. The machine shall be equipped with a device for recording the peak load applied to the test core. The accuracy of the machine shall be ~~in accordance with EN 10002-2, Grade 1 (accuracy 1 % of the indicated load)~~. The force calibration of the machine shall be checked in accordance with ~~EN 10002-2~~ ISO 7500-2.

4.3 Humidity measuring device

~~A humidity measuring device shall be as specified in ISO 4677-1 or ISO 4677-2 and shall be capable of measuring relative humidity to an accuracy of $\pm 2\%$.~~

A humidity measuring device, such as, but not limited to, an aspirated psychrometer or whirling psychrometer that is capable of measuring relative humidity to an accuracy of $\pm 2\%$ shall be used.

5 Test cores

5.1 General

The test cores shall be selected as agreed between the parties concerned. They may be machined to the specified dimensions, because any machined surface plays an important role in the mechanical strength (see the Introduction).

5.2 Number of test cores

For material development, characterization or quality checking, the minimum number of test cores shall be five pieces. For statistical evaluation of strength data (for example, Weibull parameters), the minimum number shall be thirty.

NOTE For comparison of data for different materials, it is important that the number of specimens is high enough to obtain results with sufficient statistical confidence. Since the confidence limits, in general, depend on the number of test results and their dispersion, the number of test specimens should be decided on the basis of statistical considerations.

5.3 Precautions

The prepared test cores should be handled with care to avoid introduction of additional damage. Test cores should be kept separately at all times, and should be wrapped individually for transport.

6 Testing

6.1 Test conditions

The test shall be carried out at an ambient temperature between 15 °C and 35 °C. The temperature shall not vary by more than 3 °C during the course of a test series. The relative humidity shall be between 45 % and 85 % and shall not vary by more than 10 % during the course of a test series.

6.2 Test procedures

6.2.1 General

The test core shall be arranged in the test apparatus in accordance with 6.2.2.2, 6.2.2.3, 6.2.2.4, 6.2.2.5, 6.2.3, 6.2.4.2.2, 6.2.4.2.3 or 6.2.4.2.4 as applicable (see Figure 1 to Figure 58). For standard dimensions of E-cores and their support for strength test see Annex A.

The E test and W test can be used for material-related purposes, while the M test and T test can be used for process-related purposes. The ~~I test~~ test of I-cores is only recommended for flat-shaped test cores such as antenna rods. The test method of stretching, shearing and pressure is only applicable to ring-cores. A preloading force of 5 N to 25 N shall be applied because the upper and lower faces of the test cores are never absolutely parallel. The test force shall then be applied at a loading rate of between 5 mm/min and 20 mm/min until the test core fractures. The load at the instant of fracture shall be recorded. The fractured fragments shall be identified and preserved for later fractographic examination.

6.2.2 Test of E-cores

6.2.2.1 Dimensions

The specifications and dimensions of E-cores are according to IEC 63093-8.

6.2.2.2 E test

For test core sizes equal to or larger than E13, the test core shall be placed on roller bars as shown in Figure 1. For test core sizes less than E13, the test core shall be placed on a flat support as shown in Figure 1. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters

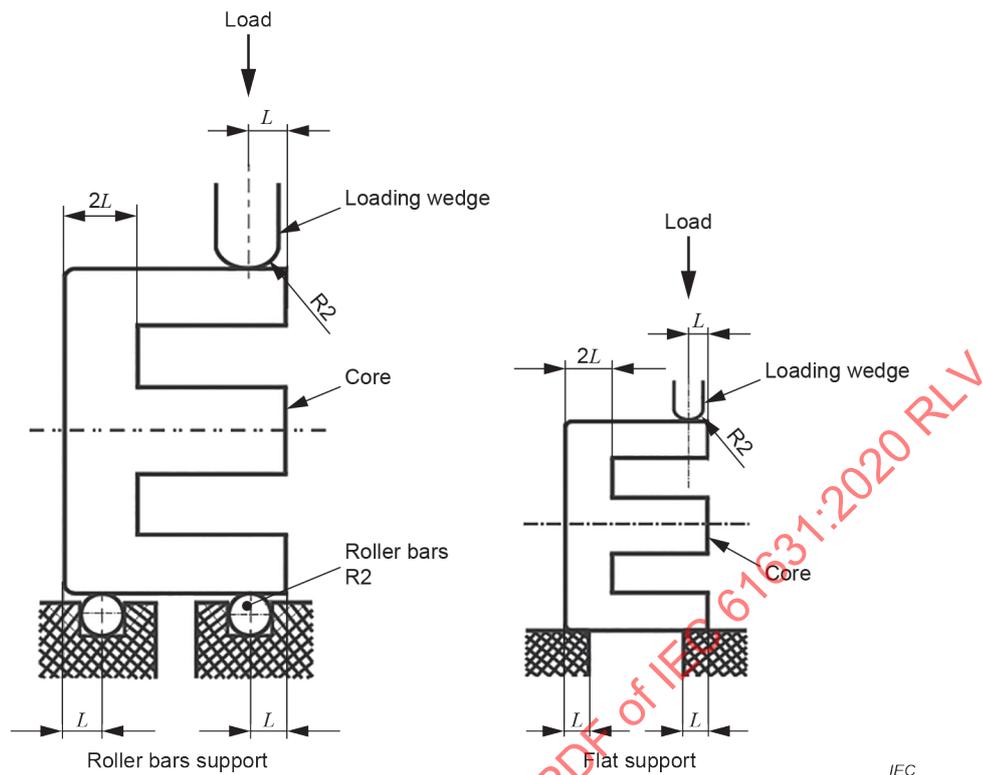


Figure 1 – E test

6.2.2.3 W test

For test core sizes equal to or larger than E13, the test core shall be placed on roller bars as shown in Figure 2. For test core sizes less than E13, the test core shall be placed on a flat support as shown in Figure 2. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters

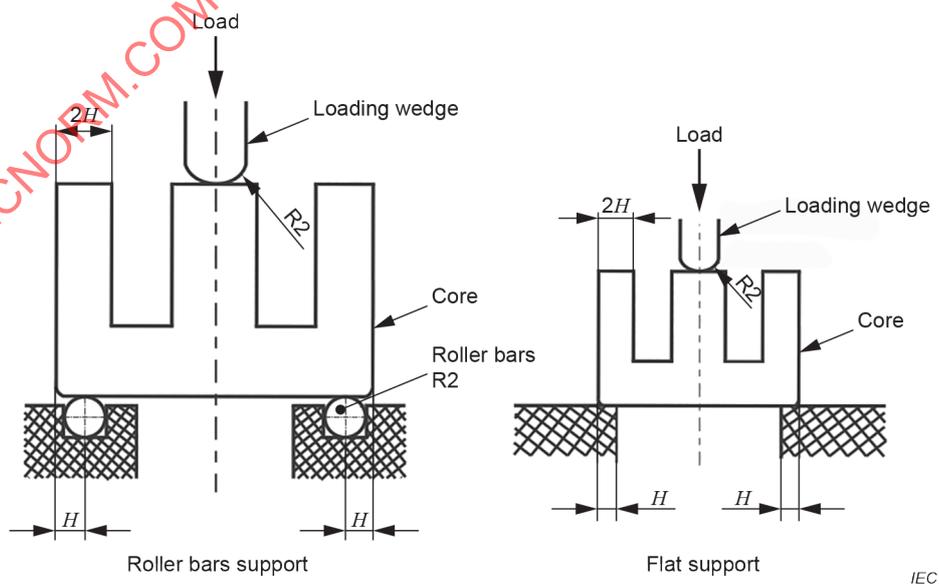


Figure 2 – W test

6.2.2.4 T test

The test core shall be placed as shown in Figure 3. For test core sizes equal to or larger than E32, the load shall be applied to the core legs from the roller bars as shown in Figure 3. For test core sizes less than E32, the load shall be applied through jigs, which shall be agreed between the parties concerned, and the load at the instant of fracture recorded.

Dimensions in millimeters

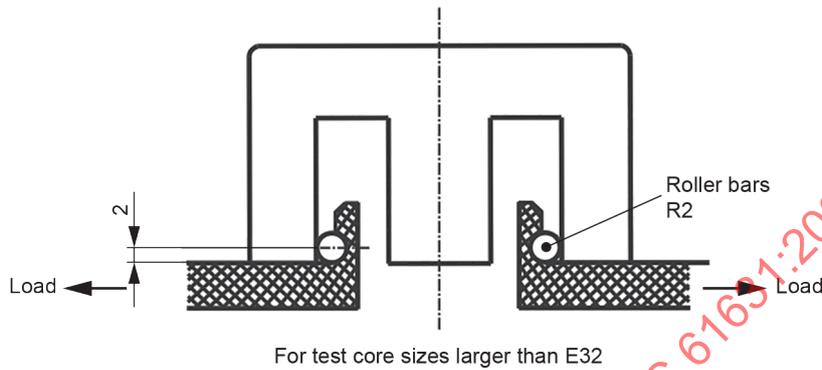


Figure 3 – T test

6.2.2.5 M test

For test core sizes equal to or larger than E13, the test core shall be placed on roller bars as shown in Figure 4. For test core sizes less than E13, the test core shall be placed on a flat support as shown in Figure 4. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters

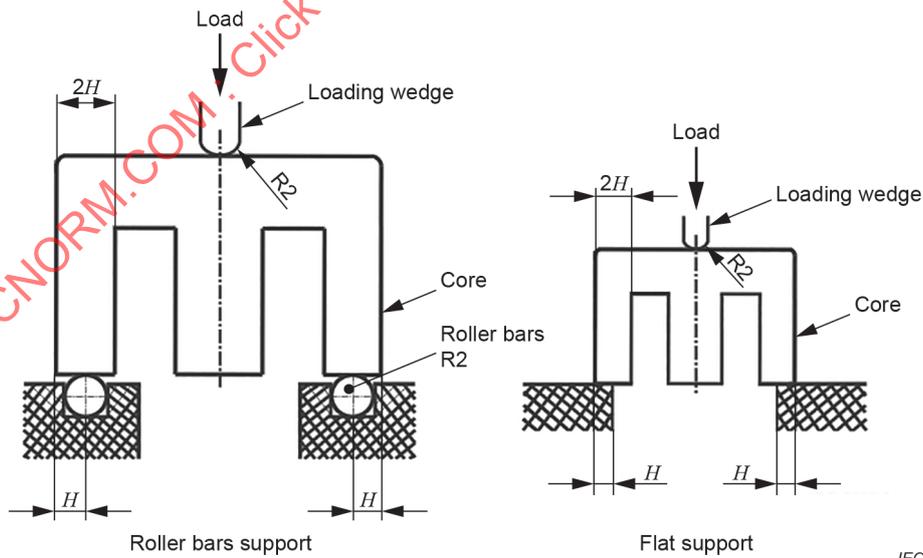


Figure 4 – M test

6.2.3 I-test Test of I-cores

For test core sizes equal to or larger than I13, the test core shall be placed on roller bars as shown in Figure 5. For test core sizes less than I13, the test core shall be placed on a flat

support as shown in Figure 5. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

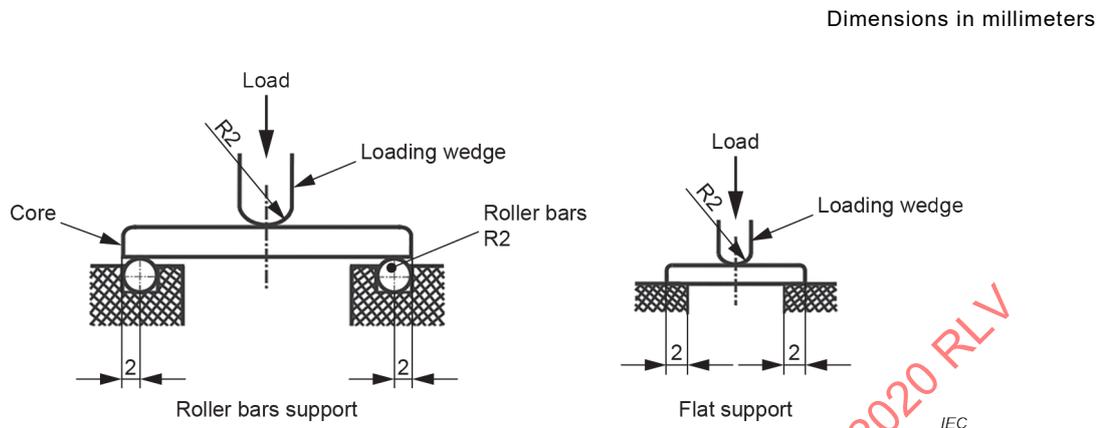


Figure 5 – I test

6.2.4 Test of ring-cores

6.2.4.1 Dimensions

The specifications and dimensions of ring-cores are according to IEC 63093-12. For standard dimensions of ring-cores and methods for strength test see Annex B.

6.2.4.2 Ring test

6.2.4.2.1 General

There are three methods for testing the strength of ring-cores. The method shall be selected as agreed between the parties concerned. The load shall be applied through the loading wedge, and the load at the instant of fracture shall be recorded.

6.2.4.2.2 Stretching method

For the stretching method, see Figure 6.



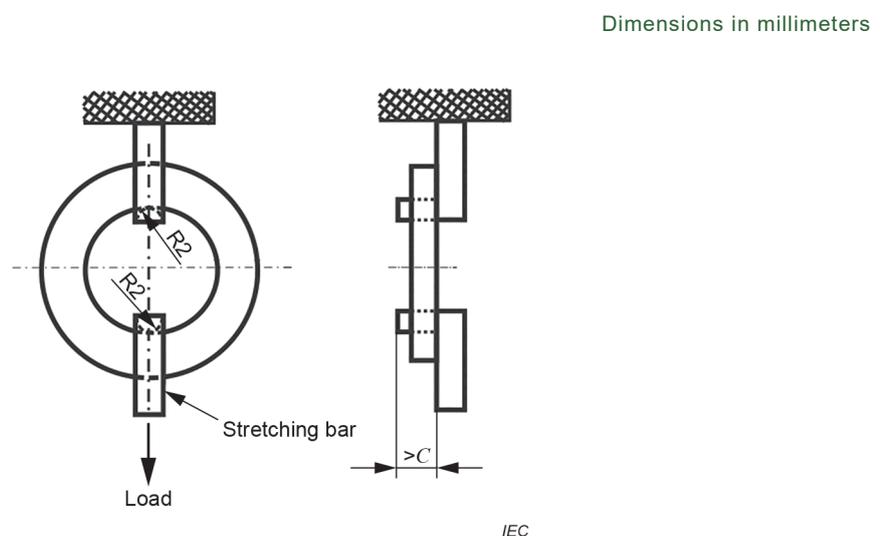


Figure 6 – Stretching method

6.2.4.2.3 Shearing method

For the shearing method, see Figure 7.

Dimensions in millimeters

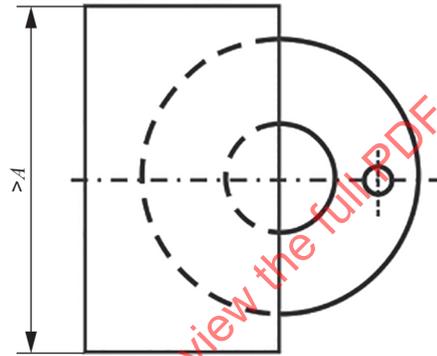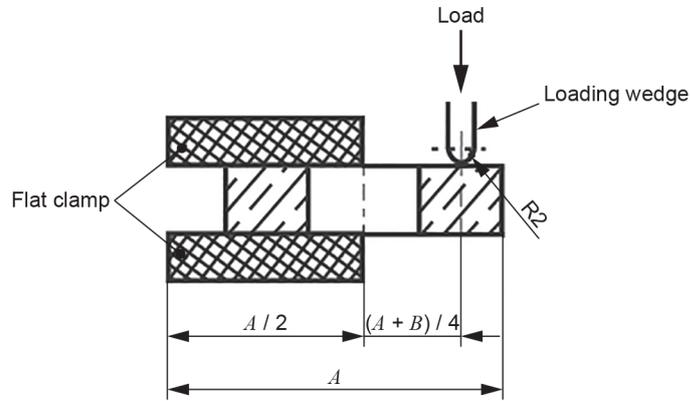


IEC

Figure 7 – Shearing method

6.2.4.2.4 Pressure method

For the pressure method, see Figure 8.

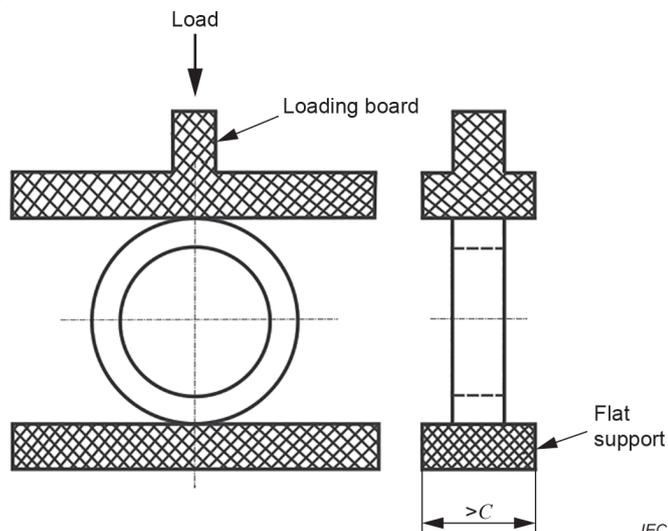

IEC

Figure 8 – Pressure method

Annex A (normative)


Standard dimensions of E-cores and their support for strength test

A.1 Introduction General

Annex A gives standard dimensions of E-cores specified in ~~IEC 61246~~ IEC 63093-8 and the type of core support for mechanical strength testing. The nominal dimensions of L and H are calculated from the nominal values of (B and F) and (A and E) respectively and are rounded off to the first decimal place.

A.2 Designation

For the designation of an E-core, see Figure A.1.

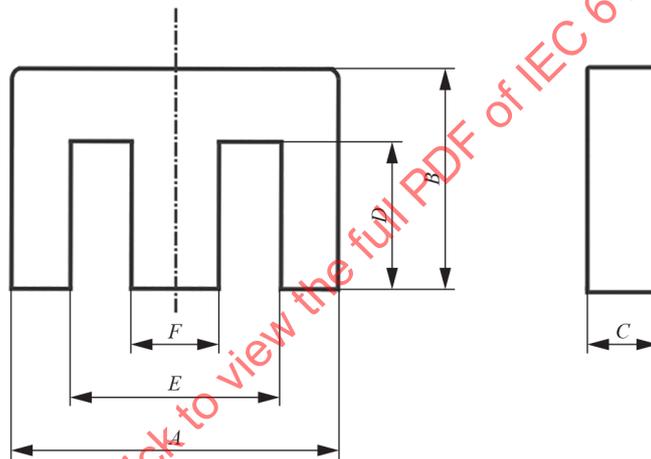

IEC

Figure A.1 – Designation of E-core

A.3 Test core support

The type of test core support is described in Table A.1.

Table A.1 – Test core support

Parameter	Core size													
	E5-3/2	E6-3/2	E8-8/2	E10/3	E13/4	E16/5	E20/6	E25/7	E32/9	E42/15	E42/20	E55/24	E55/25	E65/27
A	Max.	-5,30	-6,30	-8,15	-9,40	-13,10	-16,70	-20,80	-25,80	-32,90	-43,00	-56,20	-56,20	-66,50
	Min.	-5,20	-6,05	-7,85	-9,80	-12,20	-15,50	-19,40	-24,30	-31,30	-41,30	-54,10	-54,10	-63,80
B	Max.	-2,70	-2,90	-4,05	-5,00	-6,50	-8,20	-10,20	-12,80	-16,40	-21,20	-27,80	-27,80	-32,80
	Min.	-2,60	-2,80	-3,95	-4,88	-6,30	-7,90	-9,80	-12,30	-15,80	-20,80	-27,20	-27,20	-32,20
C	Max.	-2,00	-2,00	-2,40	-3,00	-3,70	-4,70	-5,90	-7,50	-9,50	-15,20	-21,00	-25,00	-27,40
	Min.	-1,90	-1,90	-2,30	-2,88	-3,40	-4,30	-5,40	-6,90	-8,80	-14,70	-20,40	-24,20	-26,60
D	Max.	-1,40	-1,40	-2,40	-3,00	-3,70	-4,70	-5,90	-7,50	-9,50	-12,20	-17,20	-17,20	-20,00
	Min.	-1,30	-1,30	-2,30	-2,88	-3,40	-4,40	-5,50	-7,00	-8,90	-11,70	-16,70	-16,70	-19,30
E	Max.	-4,00	-3,80	-5,80	-7,30	-9,50	-11,90	-14,70	-18,30	-23,70	-30,70	-38,70	-38,70	-45,70
	Min.	-3,90	-3,60	-5,60	-7,00	-8,90	-11,30	-14,10	-17,50	-22,70	-29,50	-37,50	-37,50	-44,20
F	Max.	-2,10	-1,95	-2,90	-3,62	-4,80	-6,10	-7,40	-9,20	-11,80	-15,50	-19,30	-19,30	-23,00
	Min.	-2,00	-1,85	-2,80	-3,50	-4,50	-5,70	-7,00	-8,70	-11,20	-14,80	-18,50	-18,50	-22,20
L⁴	Nom.	0,3	0,5	0,6	0,7	0,9	1,1	1,4	1,8	2,3	2,9	4,3	4,3	5,0
H⁴	Nom.	0,3	0,6	1,0	0,7	0,9	1,1	1,4	1,8	2,2	3,0	4,3	4,3	5,0
Test-core support	E-mode	a ¹	a	a	a	R ³	R	R	R	R	R	R	R	R
	M-mode	a	a	a	a	R	R	R	R	R	R	R	R	R
	W-mode	a	a	a	a	R	R	R	R	R	R	R	R	R
	T-mode	b ²	b	b	b	b	b	b	b	R	R	R	R	R

¹-a: Flat support used.

²-b: Jigs used, which shall be agreed between the parties concerned.

³-R: Roller bars used.

⁴The tolerance of position shall be $\pm 0,1$ mm for $L, H \leq 1,0$ mm and ± 10 % for $L, H > 1,0$ mm.

Dimensions in millimeters

Parameter	Core size															
	E5,3/2	E6,3/2	E8/2	E8,8/2	E10/3	E13/4	E16/5	E20/6	E25/7	E32/9	E42/15	E42/20	E55/21	E55/25	E65/27	
A	Max.	5,35	6,30	8,15	9,40	10,20	13,10	16,70	20,80	25,80	32,90	43,00	43,00	56,20	56,20	66,50
	Min.	5,15	6,05	7,85	8,60	9,80	12,20	15,50	19,40	24,30	31,30	41,30	41,30	54,10	54,10	63,80
B	Max.	2,73	2,90	4,05	4,15	5,00	6,50	8,20	10,20	12,80	16,40	21,20	21,20	27,80	27,80	32,80
	Min.	2,57	2,80	3,95	3,85	4,88	6,30	7,90	9,80	12,30	15,80	20,80	20,80	27,20	27,20	32,20
C	Max.	2,00	2,00	2,40	2,02	3,00	3,70	4,70	5,90	7,50	9,50	20,00	20,00	21,00	25,00	27,40
	Min.	1,90	1,90	2,30	1,78	2,88	3,40	4,30	5,40	6,90	8,80	19,20	19,20	20,40	24,20	26,60
D	Max.	1,92	2,05	2,95	2,40	3,62	4,80	6,10	7,40	9,20	11,80	15,50	15,50	19,30	19,30	23,00
	Min.	2,08	1,85	2,85	2,03	3,50	4,50	5,70	7,00	8,70	11,20	14,80	14,80	18,50	18,50	22,20
E	Max.	4,00	3,80	5,80	5,33	7,30	9,50	11,90	14,70	18,30	23,70	30,70	30,70	38,70	38,70	45,70
	Min.	3,80	3,60	5,60	5,07	7,00	8,90	11,30	14,10	17,50	22,70	29,50	29,50	37,50	37,50	44,20
F	Max.	1,40	1,40	2,40	2,02	3,00	3,70	4,70	5,90	7,50	9,50	12,20	12,20	17,20	17,20	20,00
	Min.	1,30	1,30	2,30	1,78	2,88	3,40	4,40	5,50	7,00	8,90	11,70	11,70	16,70	16,70	19,30
L ^d	Nom.	0,3	0,5	0,6	0,9	0,7	0,9	1,1	1,4	1,8	2,3	2,9	2,9	4,3	4,3	5,0
H ^d	Nom.	0,3	0,6	0,6	1,0	0,7	0,9	1,1	1,4	1,8	2,2	3,0	3,0	4,3	4,3	5,0
Test core support	E-mode	A ^a	a	a	a	a	R ^c	R	R	R	R	R	R	R	R	R
	M-mode	a	a	a	a	a	R	R	R	R	R	R	R	R	R	R
	W-mode	a	a	a	a	a	R	R	R	R	R	R	R	R	R	R
	T-mode	B ^b	b	b	b	b	b	b	b	b	R	R	R	R	R	R

^a Flat support is used.

^b Jigs are used, which shall be agreed between the parties concerned.

^c R: Roller bars are used.

^d The tolerance of the position shall be $\pm 0,1$ mm for L , with $H \leq 1,0$ mm, and $\pm 10\%$ for L , with $H > 1,0$ mm.

Annex B (normative)

Standard dimensions of ring-cores and methods for strength test

B.1 General

Annex B gives standard dimensions of ring-cores specified in IEC 63093-12.

Figure B.1 and Table B.1 describe the alphabetic character assignments for the dimensions of ferrite ring-cores.

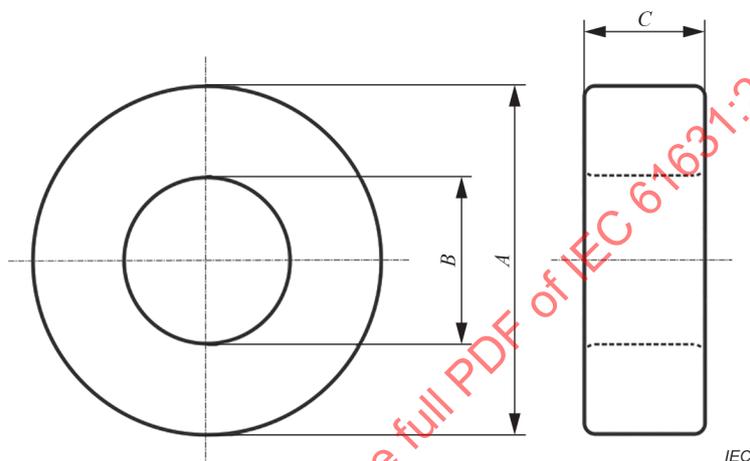


Figure B.1 – Dimensions of ring-core

Table B.1 – Ring-core dimension designations

Letter	Dimension description
<i>A</i>	Outside diameter
<i>B</i>	Inside diameter
<i>C</i>	Height

B.2 Selection of mechanical strength test method for ring-core

- a) For $B \geq 13$ mm, $C \geq 8$ mm, use the stretching method.
- b) For $B < 13$ mm, $C \geq 8$ mm, use the pressure method.
- c) For $C < 8$ mm, use the shearing method.

Bibliography

IEC 63093-6, *Ferrite cores – Guidelines on dimensions and the limits of surface irregularities – Part 6: ETD-cores for use in power supplies*

IEC 63093-8, *Ferrite cores – Guidelines on dimensions and the limits of surface irregularities – Part 8: E-cores*

IEC 63093-12, *Ferrite cores – Guidelines on dimensions and the limits of surface irregularities – Part 12: Ring-cores*

IECNORM.COM : Click to view the full PDF of IEC 61631:2020 RLV

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of IEC 61631:2020 RLV

INTERNATIONAL STANDARD

Test method for the mechanical strength of cores made of magnetic oxides

IECNORM.COM : Click to view the full PDF of IEC 61631:2020 RLV

CONTENTS

FOREWORD	3
INTRODUCTION	5
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Apparatus	6
4.1 Test core support and loading wedge	6
4.2 Testing device	7
4.3 Humidity measuring device	7
5 Test cores	7
5.1 General	7
5.2 Number of test cores	7
5.3 Precautions	7
6 Testing	7
6.1 Test conditions	7
6.2 Test procedures	7
6.2.1 General	7
6.2.2 Test of E-cores	8
6.2.3 Test of I-cores	10
6.2.4 Test of ring-cores	10
Annex A (normative) Standard dimensions of E-cores and their support for strength test	13
A.1 General	13
A.2 Designation	13
A.3 Test core support	13
Annex B (normative) Standard dimensions of ring-cores and methods for strength test	15
B.1 General	15
B.2 Selection of mechanical strength test method for ring-core	15
Bibliography	16
Figure 1 – E test	8
Figure 2 – W test	9
Figure 3 – T test	9
Figure 4 – M test	10
Figure 5 – I test	10
Figure 6 – Stretching method	11
Figure 7 – Shearing method	12
Figure 8 – Pressure method	12
Figure A.1 – Designation of E-core	13
Figure B.1 – Dimensions of ring-core	15
Table A.1 – Test core support	14
Table B.1 – Ring-core dimension designations	15

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**TEST METHOD FOR THE MECHANICAL STRENGTH
OF CORES MADE OF MAGNETIC OXIDES**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61631 has been prepared by IEC technical committee 51: Magnetic components, ferrite and magnetic powder materials.

This second edition cancels and replaces the first edition published in 2001. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the phrase: "This document is also applicable to the mechanical strength measurement of magnetic powder cores" has been added in the scope;
- b) IEC 61246 has been replaced by IEC 63093-8; EN 1002-2 has been replaced by ISO 7500-1; ISO 4677-1 and ISO 4677-2 have been withdrawn;
- c) dimensions D and F in Figure A.1 and Table A.1 have been changed to be consistent with Figure 1 of IEC 63093-8:2018;
- d) addition of the content of ring-cores test;
- e) addition of Annex B;

- f) the location of the jig is amended in Figure 3;
- g) in Figure 5, the roller bars are moved to the edge of the I-core, aligned with the core.

The text of this International Standard is based on the following documents:

CDV	Report on voting
51/1312/CDV	51/1333/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 61631:2020 RLV

INTRODUCTION

The method specified in this document is intended to be used for obtaining agreements between parties for material development, quality checking, characterization and data acquisition purposes. The method places closely defined restrictions on the arrangement of the test-piece and the function of the test apparatus, including the test-jigs, in order to minimize the errors that can arise as a consequence of the test method.

All other factors are stated in the test report for comparison of the behavior of the magnetic oxide cores. It is not possible to rigorously standardize particular surface finishes, since it is difficult to control all the mechanical factors. But the state of the surface in the report should be mentioned, as surface defects can have a large effect on mechanical strength in certain types of tests (see Clause 6). The extrapolation of mechanical strength data to other geometries, multi-axial stressing, other rates of stressing or other environmental conditions, should be viewed with caution. The origin of a fracture in a mechanical test piece can be a valuable guide to the nature and position of strength-limiting defects (such as pores, large grains and impurity concentration).

The results of strength tests are influenced by a combination of the following factors: the microstructure of the material, the surface finishing procedure applied to the test cores, the size and shape of the test cores, the mechanical parameters of the testing apparatus, the rate of load application and the relative humidity of the ambient atmosphere. Because of the ceramic nature of magnetic oxide cores, a considerable range of results is usually obtained from a number of nominally identical test cores. Thus test results are interpreted with caution.

IECNORM.COM : Click to view the full PDF of IEC 61631:2020 (PL)

TEST METHOD FOR THE MECHANICAL STRENGTH OF CORES MADE OF MAGNETIC OXIDES

1 Scope

This document specifies a test method for the mechanical strength of cores made of magnetic oxides. This test method is suitable for most of the E-cores, ETD-cores, I-cores and ring-cores but other core types such as U-cores could be tested according to a derived method agreed by the parties concerned. This document is also applicable to the mechanical strength measurement of magnetic powder cores.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7500-2, *Metallic materials – Verification of static uniaxial testing machines – Part 2: Tension creep testing machines – Verification of the applied force*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

mechanical strength

maximum recorded force at the instant of fracture of a magnetic oxide core when it is loaded with the bending stress

4 Apparatus

4.1 Test core support and loading wedge

Test cores shall be supported on free moving roller bars or on a flat support depending on their size (see 6.2). The loading wedge, the roller bars and the stretch bar or the flat support shall be made of hardened steel with a hardness of 40 HRC (HRC is Rockwell hardness) to 60 HRC. The loading wedge and the roller bars shall have a radius of 2 mm. The radius of the contact part of the stretching rod head and the measured core is 2 mm. The loading wedge and the stretch bar shall be connected to a device for measuring and recording the load applied.

4.2 Testing device

The testing device shall be a mechanical testing machine capable of applying a force to the loading wedge high enough to break the test core. The machine shall be capable of applying the force at a constant loading rate. The machine shall be equipped with a device for recording the peak load applied to the test core. The accuracy of the machine shall be 1 % of the indicated load. The force calibration of the machine shall be checked in accordance with ISO 7500-2.

4.3 Humidity measuring device

A humidity measuring device, such as, but not limited to, an aspirated psychrometer or whirling psychrometer that is capable of measuring relative humidity to an accuracy of ± 2 % shall be used.

5 Test cores

5.1 General

The test cores shall be selected as agreed between the parties concerned. They may be machined to the specified dimensions, because any machined surface plays an important role in the mechanical strength (see the Introduction).

5.2 Number of test cores

For material development, characterization or quality checking, the minimum number of test cores shall be five pieces. For statistical evaluation of strength data (for example, Weibull parameters), the minimum number shall be thirty.

For comparison of data for different materials, it is important that the number of specimens is high enough to obtain results with sufficient statistical confidence. Since the confidence limits, in general, depend on the number of test results and their dispersion, the number of test specimens should be decided on the basis of statistical considerations.

5.3 Precautions

The prepared test cores should be handled with care to avoid introduction of additional damage. Test cores should be kept separately at all times, and should be wrapped individually for transport.

6 Testing

6.1 Test conditions

The test shall be carried out at an ambient temperature between 15 °C and 35 °C. The temperature shall not vary by more than 3 °C during the course of a test series. The relative humidity shall be between 45 % and 85 % and shall not vary by more than 10 % during the course of a test series.

6.2 Test procedures

6.2.1 General

The test core shall be arranged in the test apparatus in accordance with 6.2.2.2, 6.2.2.3, 6.2.2.4, 6.2.2.5, 6.2.3, 6.2.4.2.2, 6.2.4.2.3 or 6.2.4.2.4 as applicable (see Figure 1 to Figure 8). For standard dimensions of E-cores and their support for strength test see Annex A.

The E test and W test can be used for material-related purposes, while the M test and T test can be used for process-related purposes. The test of I-cores is only recommended for flat-shaped test cores such as antenna rods. The test method of stretching, shearing and pressure is only applicable to ring-cores. A preloading force of 5 N to 25 N shall be applied because the upper and lower faces of the test cores are never absolutely parallel. The test force shall then be applied at a loading rate of between 5 mm/min and 20 mm/min until the test core fractures. The load at the instant of fracture shall be recorded. The fractured fragments shall be identified and preserved for later fractographic examination.

6.2.2 Test of E-cores


6.2.2.1 Dimensions

The specifications and dimensions of E-cores are according to IEC 63093-8.

6.2.2.2 E test

For test core sizes equal to or larger than E13, the test core shall be placed on roller bars as shown in Figure 1. For test core sizes less than E13, the test core shall be placed on a flat support as shown in Figure 1. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters

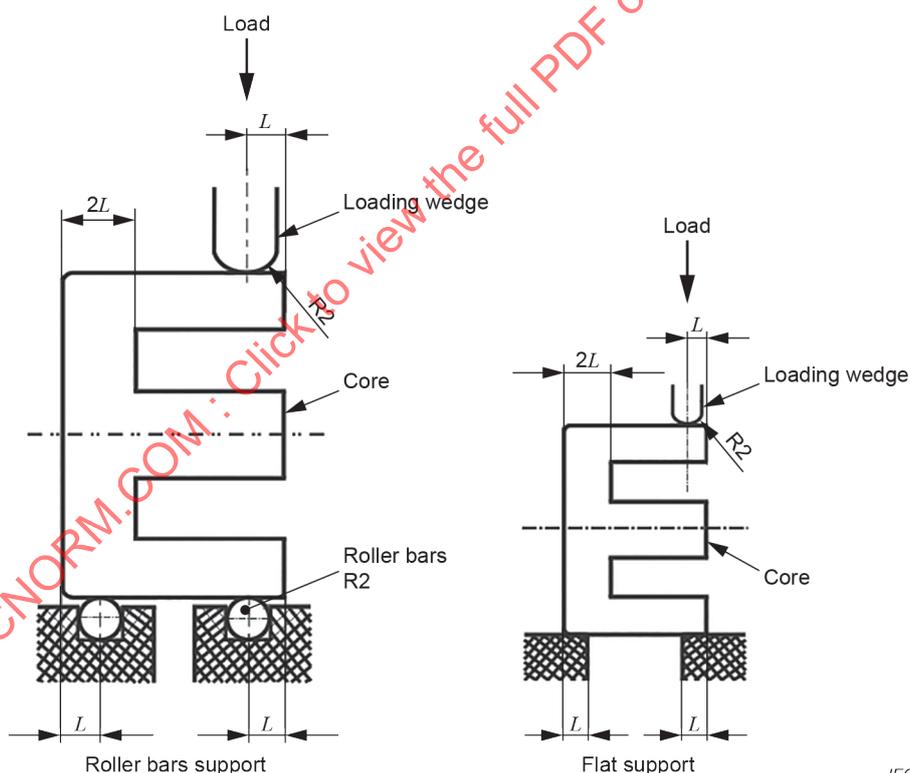

IEC

Figure 1 – E test

6.2.2.3 W test

For test core sizes equal to or larger than E13, the test core shall be placed on roller bars as shown in Figure 2. For test core sizes less than E13, the test core shall be placed on a flat support as shown in Figure 2. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters


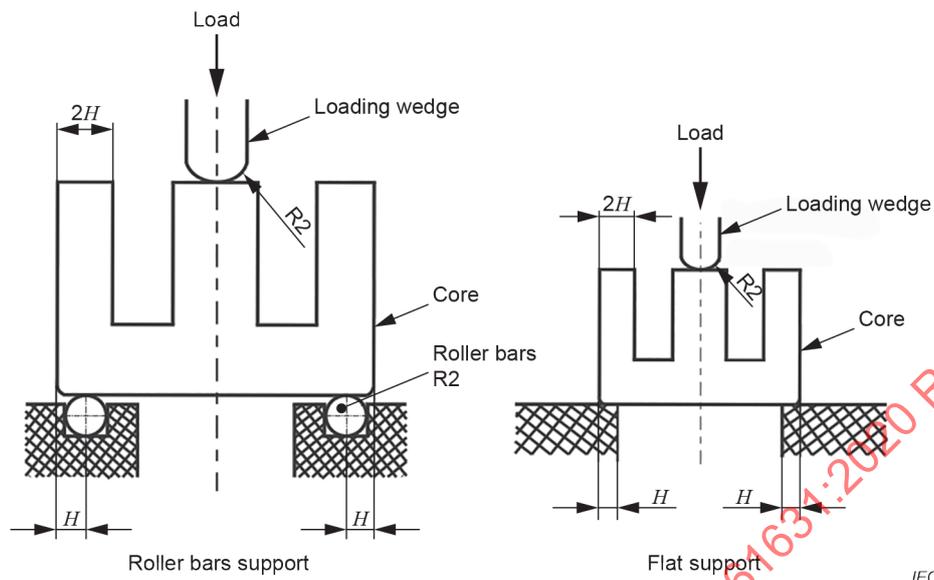


Figure 2 – W test

6.2.2.4 T test

The test core shall be placed as shown in Figure 3. For test core sizes equal to or larger than E32, the load shall be applied to the core legs from the roller bars as shown in Figure 3. For test core sizes less than E32, the load shall be applied through jigs, which shall be agreed between the parties concerned, and the load at the instant of fracture recorded.

Dimensions in millimeters

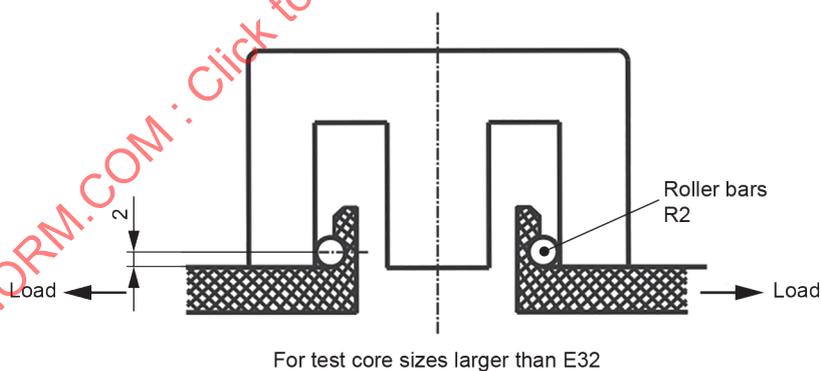

For test core sizes larger than E32

IEC

Figure 3 – T test

6.2.2.5 M test

For test core sizes equal to or larger than E13, the test core shall be placed on roller bars as shown in Figure 4. For test core sizes less than E13, the test core shall be placed on a flat support as shown in Figure 4. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters

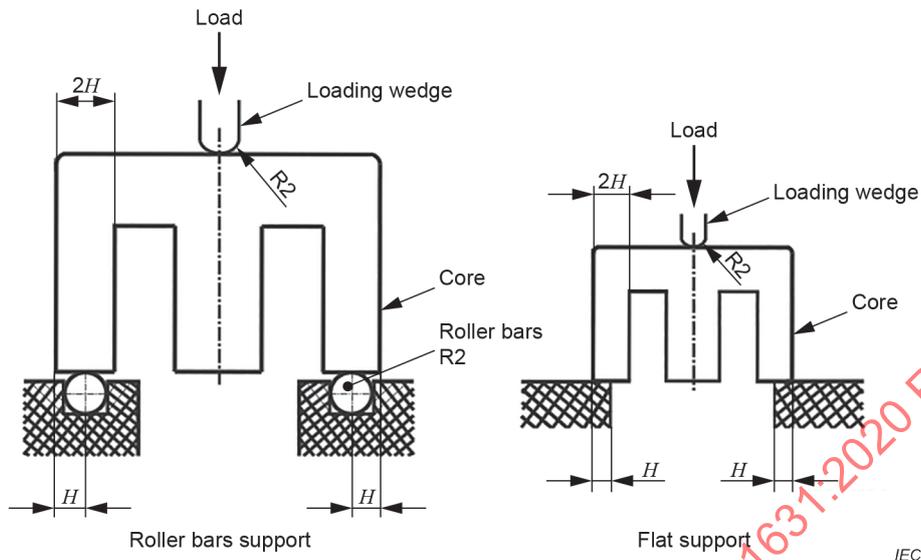


Figure 4 – M test

6.2.3 Test of I-cores

For test core sizes equal to or larger than I13, the test core shall be placed on roller bars as shown in Figure 5. For test core sizes less than I13, the test core shall be placed on a flat support as shown in Figure 5. The load shall be applied through the loading wedge, and the load at the instant of fracture recorded.

Dimensions in millimeters

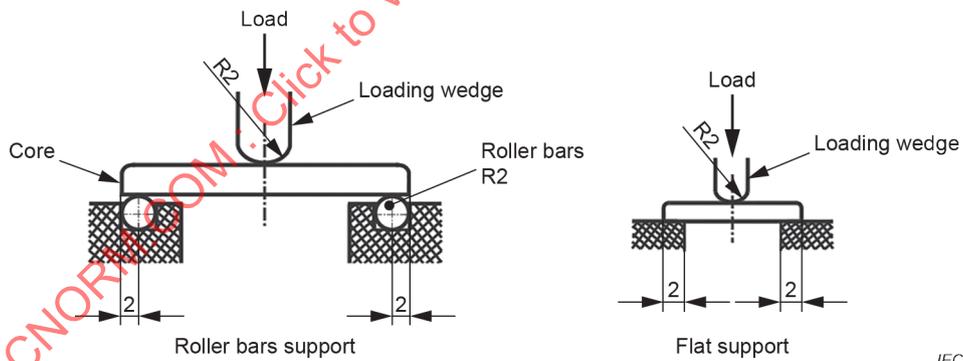


Figure 5 – I test

6.2.4 Test of ring-cores

6.2.4.1 Dimensions

The specifications and dimensions of ring-cores are according to IEC 63093-12. For standard dimensions of ring-cores and methods for strength test see Annex B.