

AMERICAN NATIONAL STANDARD

General Purpose Uniform Cross Section Spiral Retaining Rings

ANSI B27.6-1972

SECRETARIAT

SOCIETY OF AUTOMOTIVE ENGINEERS
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

PUBLISHED BY

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

United Engineering Center 345 East 47th Street New York, N. Y. 10017

Any part of this standard may be quoted. Credit lines should read: "Extracted from American National Standard—General Purpose Uniform Cross Section Spiral Retaining Rings, ANSI B27.6-1972, with the permission of the publisher, The American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, N.Y. 10017."

FOREWORD

Formation of Subcommittee 3 was authorized by Standards Committee B27 at its meeting on November 30, 1950. Organization meeting of the Subcommittee was held on October 24, 1951 at which time it was agreed that bearing retainer rings, if included in the standard, would conform with practice of Anti-Friction Bearing Manufacturers Association and that technical development within the Subcommittee would be limited to general purpose retainer rings. Subgroups were appointed to investigate materials, adequacy of the AFBMA bearing retainer ring standard, general purpose and aeronautical ring usage.

One of the subgroups prepared a draft proposal, General Purpose Uniform Section Spiral Retaining Ring, which was circulated to members of Subcommittee 3 on May 8, 1970. The next meeting of the Subcommittee was held on February 4, 1971 at which time changes were made to satisfy comments received as a result of this ballot. It was then agreed to circulate the revised draft proposal to the ANSI B27 Standards Committee. The letter ballot was circulated on August 17, 1971. All who responded balloted affirmative. Several of the affirmative ballots offered editorial type comments. Each comment was carefully reviewed by a subgroup and minor nontechnical changes were made to the document. The Standard was duly approved by sponsors and was submitted to the American National Standards Institute for designation, as an American Standard. This was granted on July 11, 1972.

AMERICAN NATIONAL STANDARDS COMMITTEE B27

Washers and Machine Rings

(The following is the roster of the Committee at the time of approval of this standard)

OFFICERS

R. P. Trowbridge, Chairman
Jules Freedman, Vice Chairman
Jack Levy, Secretary

AMERICAN HARDWARE MFRS. ASSN.

Ray Christenson, Wrought Washer Mfg. Co., Milwaukee, Wisconsin

AMERICAN SOCIETY OF MECHANICAL ENGINEERS, THE

To be appointed

ASSOCIATION OF AMERICAN RAILROADS

J. H. Bean, Association of American Railroads, Chicago, Illinois
A. E. Hinson, Southern Railway Systems, Alexandria, Virginia

FARM AND INDUSTRIAL EQUIPMENT INST.

C. W. Stockwell, International Harvester Co., Hinsdale, Illinois

HELICAL WASHER INST.

To be appointed

INDUSTRIAL FASTENERS INST.

R. B. Belford, Industrial Fasteners Inst., Cleveland, Ohio

NATIONAL ELECTRICAL MFRS. ASSOCIATION

F. V. Kupchak, Westinghouse Electric Corp., Pittsburgh, Pa.
J. B. Levy, General Electric Co., Schenectady, N.Y.

SOCIETY OF AUTOMOTIVE ENGINEERS

R. L. Berkbighler, Ramsey Corp., St. Louis, Missouri
R. P. Trowbridge, General Motors Tech. Center, Warren, Michigan

SPRING MFGRS. ASSOCIATION, INC.

W. L. Abrams, Precision Spring Corp., Detroit, Michigan

TELEPHONE GROUP, THE

R. H. Van Horn, Bell Telephone Laboratories, Inc., Columbus, Ohio
F. P. Balacek, Alternate, Bell Telephone Laboratories, Columbus, Ohio
M. C. Berryman, Alternate, Western Electric Co., Inc., Chicago, Illinois
D. Lipari, Alternate, Bell Telephone Laboratories, Inc., Columbus, Ohio

U.S. DEPT. OF THE ARMY

R. C. Engelmann, Liaison, Rock Island Arsenal, Rock Island, Illinois
O. M. Kelley, Alternate, Rock Island Arsenal, Rock Island, Illinois

U.S. DEPT. OF DEFENSE

J. D. Jones, Defense Industrial Supply Center, Phila., Pa.

U.S. DEPT. OF THE NAVY

C. A. Fulesdy, Naval Ship Systems Command, Wash., D.C.

INDIVIDUAL COMPANIES

R. W. Bertoia, Ohio Nut & Washer Co., Minge Junction, Ohio
Jules Freedman, George K. Garrett Co., Inc., Phila., Pa.
G. A. Moos, Gordon A. Moos Associates Corp., Wash., D.C.
R. A. Munse, Microdot, Inc., Troy, Michigan
K. G. Roth, Mack Trucks, Inc., Allentown, Pa.
N. C. Strandwitz, National Lock Washer Co., North Branch, N.J.

INDIVIDUAL MEMBERS

E. D. Cowlin, Canton, Ohio

CONTENTS

	Page
1. Introductory Notes	1
2. General Data	1
3. Alternate Groove Design	4
4. Assembly Precautions	4

TABLES

1. Dimensions of Type 2A01	
Light Duty External Retaining	
Rings, Grooves, and Gages	6
2. Dimensions of Type 2A02	
Heavy Duty External Retaining	
Rings, Grooves, and Gages	12
3. Dimensions of Type 2B01	
Light Duty Internal Retaining	
Rings, Grooves, and Gages	16
4. Dimensions of Type 2B02	
Heavy Duty Internal Retaining	
Rings, Grooves, and Gages	22

APPENDIX

I. Recommended Standard	
Drawing Format	26

INTENTIONALLY LEFT BLANK

AMERICAN NATIONAL STANDARD

GENERAL PURPOSE UNIFORM CROSS SECTION
SPIRAL RETAINING RINGS

External Types – 2A01, 2A02

Internal Types – 2B01, 2B02

1.0 INTRODUCTORY NOTES

1.1 Scope

This standard is intended to cover complete general and dimensional data for two series of general purpose uniform cross section spiral retaining rings which may be used with the nominal size shafts and housings listed and in grooves of the recommended dimensions listed.

1.2 Ring Types

1.2.1 External Rings. The external retaining rings covered by this standard are designated Type 2A01 Light Duty and Type 2A02 Heavy Duty. Dimensions of rings, grooves and gages applicable to the various shaft sizes are given in Tables 1 and 2, respectively.

1.2.2 Internal Rings. The internal retaining rings covered by this standard are designated Type 2B01 Light Duty and Type 2B02 Heavy Duty. Dimensions of rings, grooves and gages applicable to the various housing bores are given in Tables 3 and 4, respectively.

1.3 Applicability

The rings denoted in this standard are intended primarily for use with the shaft, housing, and groove sizes recommended; however, in certain cases these diameters may be altered somewhat to suit the requirements of a particular design. When such changes are made, care should be taken to not alter the shaft or housing size to such an extent that the ring will take enough permanent set to allow a loose fit after the ring has been assembled into the groove. Neither should the groove diameter be altered to the extent to permit the ring to fit loosely.

1.4 Dimensions

All dimensions in this standard are in inches unless otherwise stated.

2.0 GENERAL DATA

2.1 Material

2.1.1 Carbon Spring Steel. Retaining rings made from carbon spring steel shall conform to the chemical composition of SAE 1070 to 1090 or AISI 1070 to 1090 or equivalent and have the following physical properties:

Material Thickness (minimum)	Rockwell Scale	Hardness	Tensile Strength (psi)
0.0067	15N	85-90	269,000-299,000
0.0142	30N	68-73	255,000-285,000
0.0213	A	72-78	221,000-251,000
0.0433	C	43-49	211,000-236,000

2.1.2 Corrosion Resistant Steel. Retaining rings made from corrosion resistant steel shall conform to the chemical composition of SAE 30302 or equivalent and have the following physical properties:

Material Thickness (minimum)	Rockwell Scale	Hardness	Tensile Strength (psi)
0.008	15N	83.0-86.0	210,000-250,000
0.016	30N	64.0-69.5	210,000-250,000
0.023	A	72.0-74.9	200,000-230,000
0.048	C	39.8-48.5	185,000-235,000
0.062	C	38.0-47.0	175,000-225,000

2.2 Finish

Unless otherwise specified, rings shall be furnished with a natural (as processed) finish, unplated or uncoated. Where corrosion preventative treatment is required, rings shall be plated or coated as agreed upon between the manufacturer and the purchaser. However, where plated or coated rings are subject to hydrogen embrittlement they shall be baked for three hours at 375°F, or other suitable times and temperatures,

as soon as possible after the plating or coating operation to obviate such embrittlement.

2.3 Crimp

Unless otherwise specified by the purchaser, the following types of rings and sizes shall be uncrimped:

Ring Type	Nominal Ring Size
2A01 Light Duty External	0.500-1.500
2A02 Heavy Duty External	0.469-0.688
2B01 Light Duty Internal	0.500-1.500
2B02 Heavy Duty Internal	0.469-0.750

All other rings shall be crimped. See Fig. 2 for crimp illustration.

2.4 Removal Notches or Slots

Unless otherwise specified in the contract or order, the rings shall have removal notches or slots as follows:

Ring Type	Nominal Ring Size	Removal Provision
2A01 Light Duty External	0.500- 2.750	Notch
	2.813-11.000	Slot
2A02 Heavy Duty External	All	Notch
2B01 Light Duty Internal	0.500- 2.750	Notch
	2.813-11.000	Slot
2B02 Heavy Duty Internal	All	Notch

2.5 Dish

The dish shall be considered the height difference indicated in Figure 1 and shall not exceed the values shown in the following table:

Radial Wall	Maximum Allowable Dish
0-0.039	0.001
0.040-0.069	0.002
0.070-0.099	0.003
0.100-0.129	0.004
0.130-0.159	0.005
0.160-0.194	0.006
0.195-0.224	0.007
0.225-0.259	0.008
0.260-0.294	0.009
0.295-0.339	0.010
0.340-0.394	0.011
0.395-0.474	0.012
0.475-0.649	0.013
0.650-1.000	0.014

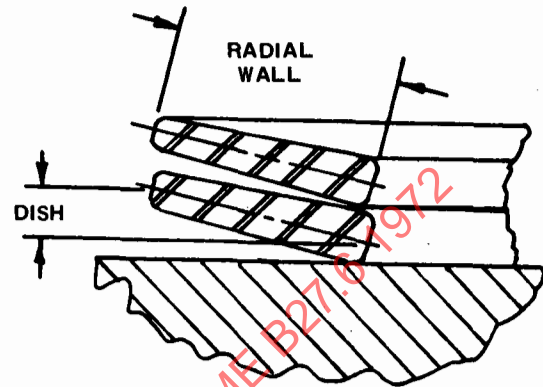


FIGURE 1

2.6 Misalignment

The leaves of the ring shall lie above each other as specified below and illustrated in Figure 2.

Nominal Ring Size	Maximum Misalignment
0.375-0.984	0.010
1.000-1.969	0.020
2.000-5.905	0.045
6.000 and above	0.070

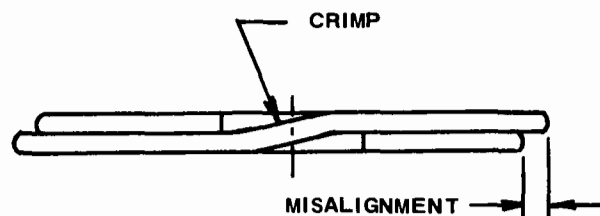


FIGURE 2

2.7 Lateral Deformation

Lateral deformation may be cutoff deformation or lateral kink as illustrated. Lateral kink usually exists over a short section of the ring circumference and is not the same as helix which is a uniform slope along the entire 360 degrees. Lateral deformation shall be inspected by placing the ring between parallel hardened and ground steel platens equipped with a deflection gage graduated in thousandths so located that readings are obtained at approximately the center of

the platens. The specimen shall then be compressed under a ten (10) pound load and the distance between the platens determined. The ring shall be acceptable if this distance does not exceed the minimum recommended groove width "F". A comparatively simple inspection fixture is depicted in Figure 4.

2.8 Ring Section Edge Radius (R)

The edges of the ring material shall be rounded and the radius shall not be less than $T/8$ nor more than $T/4$ where T equals the ring thickness. Ring thickness shall be measured under 10 pounds load as illustrated in Figure 4 and described in Paragraph 2.7 but shall be measured in a location other than at the ring ends or gap.

2.9 Parallelism (P)

The side outer surfaces of the rings in the free state shall be parallel to each other within one half the total tolerance of the ring section thickness as illustrated in Figure 3.

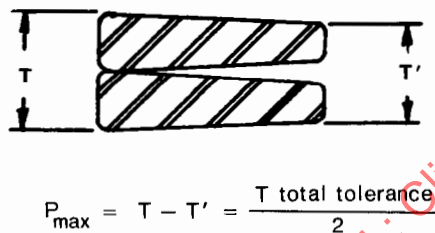


FIGURE 3

2.10 Total Free Height (S)

The maximum total free height, $S_{\max}$, (reference Column S and illustrations in Tables 1 through 4) shall not exceed the sum of the maximum section thickness $T_{\max}$ plus $0.375 \times$ nominal section thickness T_{nom} :

$$S_{\max} = T_{\max} + 0.375 T_{\text{nom}}$$

2.11 Workmanship

Retaining rings shall be free from burrs, rust, pit marks, cracks and all other defects that might affect their serviceability.

2.12 Performance Test

The suitability of the retaining rings with regard to uniformity of temper and section shall be determined by the rings being capable of successfully passing the following described tests.

External rings after having been expanded to pass over external gage diameter "E" shall not in the free state be entered by external gage diameter "D" when the axes of the ring and gage are parallel. Internal rings after having been compressed to fit into internal gage diameter "E" shall not in the free state enter internal gage diameter "D" when the axes of the ring and gage are parallel.

2.13 Ring Gages

2.13.1 External Ring Gage Diameter E.

The external ring gage diameter E is equal to the nominal shaft size, B_{nom} :

$$E = B_{\text{nom}}$$

2.13.2 External Ring Gage Diameter D.

The external ring gage diameter D is equal to the minimum recommended groove diameter, $C_{\min}$, minus 0.005 times the nominal shaft diameter, B_{nom} :

$$D = C_{\min} - 0.005 B_{\text{nom}}$$

2.13.3 Internal Ring Gage Diameter E. The internal ring gage diameter E is equal to the nominal housing size, B_{nom} :

$$E = B_{\text{nom}}$$

2.13.4 Internal Ring Gage Diameter D. The internal ring gage diameter D is equal to the maximum recommended groove diameter, $C_{\max}$, plus 0.005 times the nominal housing diameter, B_{nom} :

$$D = C_{\max} + 0.005 B_{\text{nom}}$$

2.14 Designation

Nominal ring sizes are intended for use on corresponding nominal shaft sizes and housing bores. Where specifying these retaining rings on drawings, parts lists, purchase orders, etc., it is recommended the following data be included in the designation and appear in the sequence shown: Product name (noun first), including the ANSI type designation and series; nominal ring size; material; and protective finish, if required. See examples below:

Ring Type 2A01 Light Duty External Retaining, 1.250, Steel, Cadmium Plated.

Ring Type 2B02 Heavy Duty Internal Retaining, 2.750, Corrosion Resistant Steel

3.0 ALTERNATE GROOVE DESIGN

In applications where shafts are subjected to critical bending loads or fatigue, it is recommended that the alternate groove design specified in Figure 5 be used to minimize stress concentration.

4.0 ASSEMBLY PRECAUTIONS

Care should be exercised not to overexpand external rings or overcontract internal rings upon installation for this may lead to failure of the assembly. Rings which are radically loose in grooves should not be used.

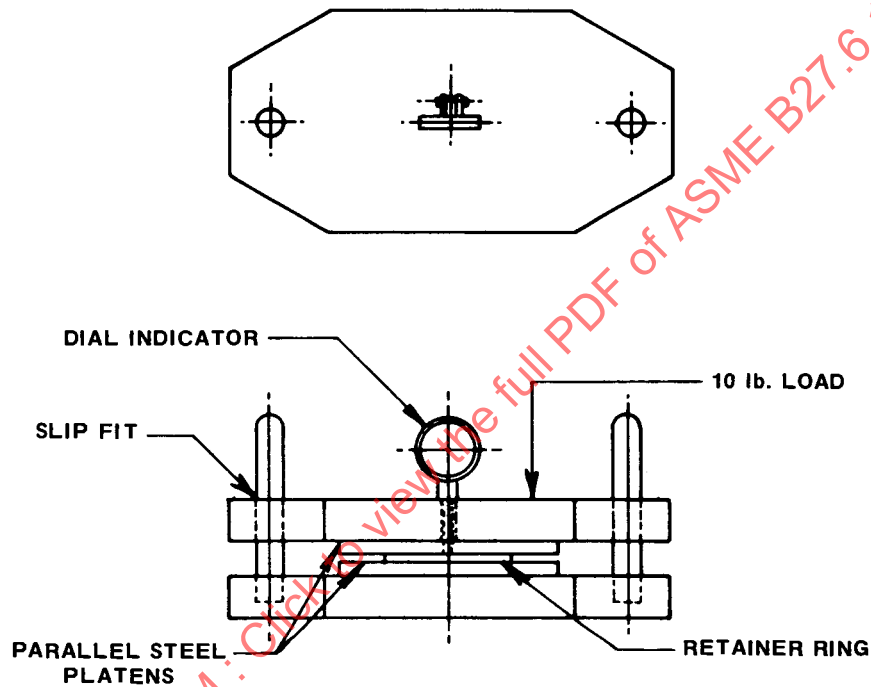


FIGURE 4 INSPECTION FIXTURE


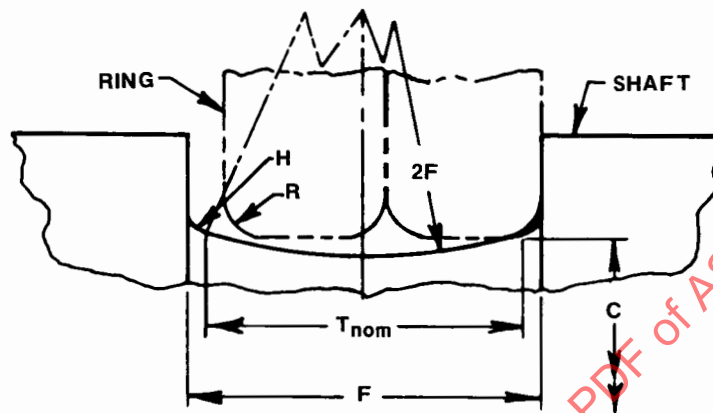


FIGURE 5 ALTERNATE GROOVE DESIGN

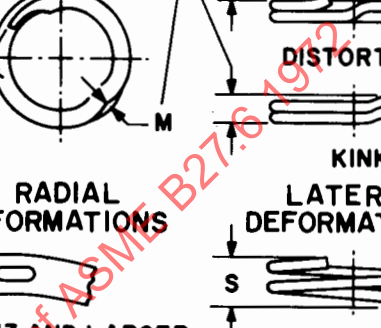

REMOVAL PROVISIONS

3 AND LARGER ↑ TOTAL FREE
VS HEIGHT

3 AND LARGER ↑ TOTAL FREE
VS HEIGHT

Table 1. Dimensions of Type 2A01 Light Duty External Retaining Rings, Grooves, and Gages (Continued)

B	C		F		H	A		T		W		G		R		M	S	E	D
1.023	0.983	0.977	0.045	0.042	0.010	0.968	0.955	0.039	0.035	0.078	0.070	0.375	0.187	0.009	0.005	0.010	0.053	1.023	0.972
1.031	0.991	0.985	0.045	0.042	0.010	0.978	0.965	0.039	0.035	0.078	0.070	0.375	0.187	0.009	0.005	0.010	0.053	1.031	0.980
1.062	1.024	1.016	0.045	0.042	0.010	1.007	0.992	0.039	0.035	0.078	0.070	0.375	0.187	0.009	0.005	0.010	0.053	1.062	1.011
1.093	1.055	1.047	0.045	0.042	0.010	1.040	1.025	0.039	0.035	0.078	0.070	0.375	0.187	0.009	0.005	0.010	0.053	1.093	1.042
1.125	1.087	1.079	0.045	0.042	0.010	1.070	1.055	0.039	0.035	0.078	0.070	0.375	0.187	0.009	0.005	0.010	0.053	1.125	1.073
1.156	1.118	1.110	0.045	0.042	0.010	1.102	1.087	0.039	0.035	0.078	0.070	0.375	0.187	0.009	0.005	0.010	0.053	1.156	1.104
1.188	1.144	1.136	0.052	0.048	0.010	1.127	1.112	0.045	0.041	0.088	0.080	0.375	0.187	0.011	0.006	0.010	0.061	1.188	1.130
1.218	1.174	1.166	0.052	0.048	0.010	1.159	1.144	0.045	0.041	0.088	0.080	0.375	0.187	0.011	0.006	0.010	0.061	1.218	1.160
1.250	1.206	1.198	0.052	0.048	0.010	1.188	1.173	0.045	0.041	0.088	0.080	0.375	0.187	0.011	0.006	0.010	0.061	1.250	1.192
1.281	1.237	1.229	0.052	0.048	0.010	1.221	1.206	0.045	0.041	0.088	0.080	0.375	0.187	0.011	0.006	0.010	0.061	1.281	1.223
1.312	1.268	1.260	0.052	0.048	0.010	1.251	1.236	0.045	0.041	0.098	0.090	0.375	0.187	0.011	0.006	0.010	0.061	1.312	1.254
1.343	1.299	1.291	0.052	0.048	0.010	1.282	1.267	0.045	0.041	0.098	0.090	0.438	0.250	0.011	0.006	0.010	0.061	1.343	1.284
1.375	1.327	1.319	0.052	0.048	0.010	1.308	1.293	0.045	0.041	0.098	0.090	0.438	0.250	0.011	0.006	0.010	0.061	1.375	1.312
1.406	1.358	1.350	0.052	0.048	0.010	1.340	1.325	0.045	0.041	0.098	0.090	0.438	0.250	0.011	0.006	0.010	0.061	1.406	1.343
1.437	1.389	1.381	0.052	0.048	0.010	1.370	1.355	0.045	0.041	0.098	0.090	0.438	0.250	0.011	0.006	0.010	0.061	1.437	1.374
1.468	1.420	1.412	0.052	0.048	0.010	1.402	1.387	0.045	0.041	0.098	0.090	0.438	0.250	0.011	0.006	0.010	0.061	1.468	1.405
1.500	1.452	1.444	0.052	0.048	0.010	1.433	1.418	0.045	0.041	0.098	0.090	0.438	0.250	0.011	0.006	0.010	0.061	1.500	1.437
1.562	1.512	1.502	0.060	0.056	0.010	1.490	1.470	0.052	0.046	0.111	0.103	0.438	0.250	0.012	0.006	0.010	0.070	1.562	1.494
1.575	1.525	1.515	0.060	0.056	0.010	1.503	1.483	0.052	0.046	0.111	0.103	0.438	0.250	0.012	0.006	0.010	0.070	1.575	1.507
1.625	1.571	1.561	0.060	0.056	0.010	1.549	1.529	0.052	0.046	0.111	0.103	0.438	0.250	0.012	0.006	0.010	0.070	1.625	1.553
1.687	1.633	1.623	0.060	0.056	0.010	1.610	1.590	0.052	0.046	0.121	0.113	0.438	0.250	0.012	0.006	0.010	0.070	1.687	1.615
1.750	1.696	1.686	0.060	0.056	0.010	1.673	1.653	0.052	0.046	0.121	0.113	0.438	0.250	0.012	0.006	0.010	0.070	1.750	1.677
1.771	1.713	1.703	0.060	0.056	0.010	1.690	1.670	0.052	0.046	0.121	0.113	0.438	0.250	0.012	0.006	0.010	0.070	1.771	1.694
1.813	1.754	1.744	0.060	0.056	0.010	1.730	1.710	0.052	0.046	0.121	0.113	0.438	0.250	0.012	0.006	0.010	0.070	1.813	1.735
1.875	1.813	1.803	0.060	0.056	0.010	1.789	1.769	0.052	0.046	0.131	0.123	0.438	0.250	0.012	0.006	0.010	0.070	1.875	1.794
1.938	1.866	1.856	0.060	0.056	0.010	1.844	1.824	0.052	0.046	0.131	0.123	0.438	0.250	0.012	0.006	0.010	0.070	1.938	1.846
1.969	1.907	1.897	0.060	0.056	0.010	1.882	1.862	0.052	0.046	0.131	0.123	0.500	0.312	0.012	0.006	0.010	0.070	1.969	1.887
2.000	1.934	1.924	0.060	0.056	0.010	1.909	1.889	0.052	0.046	0.131	0.123	0.500	0.312	0.012	0.006	0.020	0.070	2.008	1.914
2.062	1.998	1.986	0.060	0.056	0.010	1.971	1.951	0.052	0.046	0.131	0.123	0.500	0.312	0.012	0.006	0.020	0.070	2.062	1.976
2.125	2.057	2.045	0.060	0.056	0.010	2.029	2.009	0.052	0.046	0.131	0.123	0.500	0.312	0.012	0.006	0.020	0.070	2.125	2.034
2.156	2.088	2.076	0.060	0.056	0.010	2.060	2.035	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.156	2.065
2.165	2.097	2.085	0.060	0.056	0.010	2.070	2.045	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.165	2.074
2.188	2.119	2.107	0.060	0.056	0.010	2.092	2.067	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.188	2.096
2.250	2.182	2.170	0.060	0.056	0.010	2.153	2.128	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.250	2.159
2.312	2.240	2.228	0.060	0.056	0.010	2.211	2.186	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.312	2.217
2.362	2.290	2.278	0.060	0.056	0.010	2.261	2.236	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.362	2.266
2.375	2.303	2.291	0.060	0.056	0.010	2.273	2.248	0.052	0.046	0.141	0.133	0.500	0.312	0.012	0.006	0.020	0.070	2.375	2.279
2.437	2.361	2.349	0.060	0.056	0.010	2.331	2.306	0.052	0.046	0.151	0.143	0.500	0.312	0.012	0.006	0.020	0.070	2.437	2.337
2.500	2.424	2.412	0.060	0.056	0.010	2.394	2.369	0.052	0.046	0.151	0.143	0.500	0.312	0.012	0.006	0.020	0.070	2.500	2.400
2.559	2.479	2.467	0.060	0.056	0.010	2.449	2.424	0.052	0.046	0.151	0.143	0.500	0.312	0.012	0.006	0.020	0.070	2.559	2.454

AMERICAN NATIONAL STANDARD
GENERAL PURPOSE UNIFORM CROSS SECTION
SPIRAL RETAINING RINGS

ANSI B27.6-1972

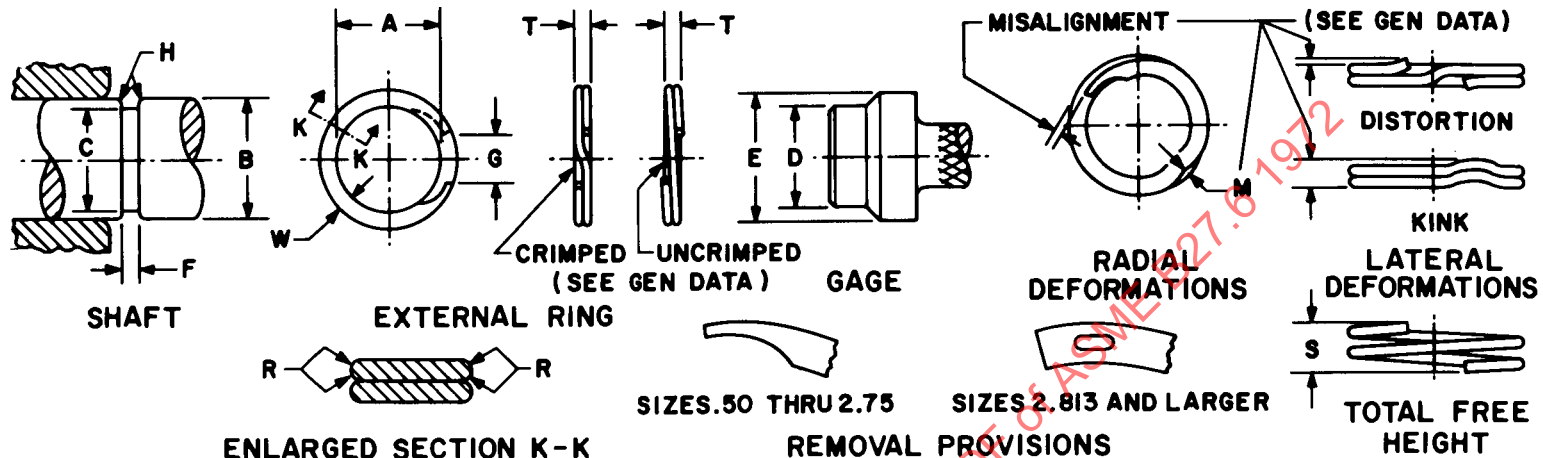


Table 1. Dimensions of Type 2A01 Light Duty External Retaining Rings, Grooves, and Gages (Continued)

Shaft						Ring											Gage		
B	C		F		H	A		T		W		G		R		M	S	E	D
Nominal Size	Groove Dia.		Groove Width		Groove Radius	Free Inside Diameter		Ring Thickness		Section Width		Free Gap		Radius		Radial Deform- ation	Total Free Height	Dia.	Dia.
	Max	Min	Max	Min	Max	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	+ 0.001 - 0.000	+ 0.000 - 0.001
2.562	2.482	2.470	0.060	0.056	0.010	2.452	2.427	0.052	0.046	0.151	0.143	0.532	0.344	0.012	0.006	0.020	0.070	2.562	2.457
2.625	2.545	2.533	0.060	0.056	0.010	2.514	2.489	0.052	0.046	0.151	0.143	0.532	0.344	0.012	0.006	0.020	0.070	2.625	2.520
2.688	2.603	2.591	0.060	0.056	0.010	2.572	2.547	0.052	0.046	0.161	0.153	0.532	0.344	0.012	0.006	0.020	0.070	2.688	2.578
2.750	2.666	2.654	0.060	0.056	0.010	2.635	2.605	0.052	0.046	0.161	0.153	0.532	0.344	0.012	0.006	0.020	0.070	2.750	2.640
2.813	2.728	2.716	0.060	0.056	0.010	2.696	2.666	0.052	0.046	0.172	0.162	0.532	0.344	0.012	0.066	0.020	0.070	2.813	2.702
2.875	2.787	2.775	0.060	0.056	0.010	2.755	2.725	0.052	0.046	0.172	0.162	0.532	0.344	0.012	0.006	0.020	0.070	2.875	2.761
2.937	2.849	2.837	0.060	0.056	0.010	2.817	2.787	0.052	0.046	0.172	0.162	0.532	0.344	0.012	0.006	0.020	0.070	2.937	2.822
2.952	2.864	2.852	0.060	0.056	0.010	2.831	2.801	0.052	0.046	0.172	0.162	0.532	0.344	0.012	0.006	0.020	0.070	2.952	2.837
3.000	2.910	2.898	0.073	0.068	0.010	2.877	2.847	0.064	0.058	0.172	0.162	0.532	0.344	0.015	0.008	0.020	0.087	3.000	2.883
3.062	2.972	2.960	0.073	0.068	0.010	2.938	2.908	0.064	0.058	0.172	0.162	0.532	0.344	0.015	0.008	0.020	0.087	3.062	2.945
3.125	3.033	3.021	0.073	0.068	0.010	3.000	2.970	0.064	0.058	0.182	0.172	0.532	0.344	0.015	0.008	0.020	0.087	3.125	3.005
3.149	3.057	3.045	0.073	0.068	0.010	3.023	2.993	0.064	0.058	0.182	0.172	0.532	0.344	0.015	0.008	0.020	0.087	3.149	3.029
3.187	3.095	3.083	0.073	0.068	0.010	3.061	3.031	0.064	0.058	0.182	0.172	0.532	0.344	0.015	0.008	0.020	0.087	3.187	3.067
3.250	3.156	3.144	0.073	0.068	0.010	3.121	3.091	0.064	0.058	0.182	0.172	0.532	0.344	0.015	0.008	0.020	0.087	3.250	3.128
3.312	3.214	3.202	0.073	0.068	0.010	3.180	3.150	0.064	0.058	0.192	0.182	0.532	0.344	0.015	0.008	0.020	0.087	3.312	3.186
3.343	3.245	3.233	0.073	0.068	0.010	3.210	3.180	0.064	0.058	0.192	0.182	0.594	0.406	0.015	0.008	0.020	0.087	3.343	3.216
3.375	3.277	3.265	0.073	0.068	0.010	3.242	3.212	0.064	0.058	0.192	0.182	0.594	0.406	0.015	0.008	0.020	0.087	3.375	3.248
3.437	3.337	3.325	0.073	0.068	0.010	3.301	3.271	0.064	0.058	0.192	0.182	0.594	0.406	0.015	0.008	0.020	0.087	3.437	3.308
3.500	3.400	3.388	0.073	0.068	0.010	3.363	3.323	0.064	0.058	0.192	0.182	0.594	0.406	0.015	0.008	0.020	0.087	3.500	3.371
3.543	3.439	3.427	0.073	0.068	0.010	3.402	3.362	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.543	3.409

Table 1. Dimensions of Type 2A01 Light Duty External Retaining Rings, Grooves, and Gages (Continued)

B	C		F		H	A		T		W		G		R		M	S	E	D
3.562	3.458	3.446	0.073	0.068	0.010	3.422	3.382	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.562	3.428
3.625	3.521	3.509	0.073	0.068	0.010	3.483	3.443	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.625	3.491
3.687	3.581	3.569	0.073	0.068	0.010	3.543	3.503	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.687	3.551
3.740	3.634	3.622	0.073	0.068	0.010	3.597	3.557	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.740	3.603
3.750	3.644	3.632	0.073	0.068	0.010	3.606	3.566	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.750	3.613
3.812	3.706	3.694	0.073	0.068	0.010	3.668	3.628	0.064	0.058	0.202	0.192	0.594	0.406	0.015	0.008	0.020	0.087	3.812	3.675
3.875	3.763	3.751	0.073	0.068	0.010	3.724	3.684	0.064	0.058	0.212	0.202	0.594	0.406	0.015	0.008	0.020	0.087	3.875	3.732
3.938	3.826	3.814	0.073	0.068	0.010	3.784	3.744	0.064	0.058	0.212	0.202	0.594	0.406	0.015	0.008	0.020	0.087	3.938	3.794
4.000	3.882	3.870	0.073	0.068	0.010	3.842	3.802	0.064	0.058	0.222	0.212	0.594	0.406	0.015	0.008	0.020	0.087	4.000	3.850
4.063	3.945	3.933	0.073	0.068	0.010	3.906	3.866	0.064	0.058	0.222	0.212	0.594	0.406	0.015	0.008	0.020	0.087	4.063	3.913
4.125	4.006	3.994	0.073	0.068	0.010	3.967	3.927	0.064	0.058	0.222	0.212	0.656	0.468	0.015	0.008	0.020	0.087	4.125	3.968
4.134	4.016	4.004	0.073	0.068	0.010	3.975	3.935	0.064	0.058	0.222	0.212	0.656	0.468	0.015	0.008	0.020	0.087	4.134	3.983
4.188	4.064	4.052	0.073	0.068	0.010	4.030	3.990	0.064	0.058	0.222	0.212	0.656	0.468	0.015	0.008	0.020	0.087	4.188	4.031
4.250	4.126	4.114	0.073	0.068	0.010	4.084	4.044	0.064	0.058	0.232	0.222	0.656	0.468	0.015	0.008	0.020	0.087	4.250	4.093
4.312	4.188	4.176	0.073	0.068	0.010	4.147	4.107	0.064	0.058	0.232	0.222	0.656	0.468	0.015	0.008	0.020	0.087	4.312	4.155
4.331	4.206	4.194	0.073	0.068	0.010	4.164	4.124	0.064	0.058	0.232	0.222	0.656	0.468	0.015	0.008	0.020	0.087	4.331	4.172
4.375	4.251	4.239	0.073	0.068	0.010	4.208	4.168	0.064	0.058	0.232	0.222	0.656	0.468	0.015	0.008	0.020	0.087	4.375	4.217
4.437	4.313	4.301	0.073	0.068	0.010	4.271	4.231	0.064	0.058	0.232	0.222	0.656	0.468	0.015	0.008	0.020	0.087	4.437	4.279
4.500	4.370	4.358	0.073	0.068	0.010	4.326	4.286	0.064	0.058	0.242	0.233	0.656	0.468	0.015	0.008	0.020	0.087	4.500	4.336
4.562	4.428	4.416	0.084	0.079	0.010	4.384	4.344	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.562	4.393
4.625	4.491	4.479	0.084	0.079	0.010	4.447	4.407	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.625	4.456
4.687	4.553	4.541	0.084	0.079	0.010	4.508	4.468	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.687	4.518
4.724	4.590	4.578	0.084	0.079	0.010	4.546	4.506	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.724	4.554
4.750	4.616	4.604	0.084	0.079	0.010	4.571	4.531	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.750	4.580
4.812	4.678	4.666	0.084	0.079	0.010	4.633	4.593	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.812	4.642
4.875	4.741	4.729	0.084	0.079	0.010	4.695	4.655	0.076	0.068	0.254	0.244	0.656	0.468	0.018	0.009	0.020	0.090	4.875	4.705
4.937	4.803	4.791	0.084	0.079	0.010	4.757	4.717	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	4.937	4.766
5.000	4.862	4.850	0.084	0.079	0.010	4.820	4.780	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.000	4.825
5.118	4.980	4.968	0.084	0.079	0.010	4.934	4.894	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.118	4.946
5.125	4.987	4.975	0.084	0.079	0.010	4.939	4.899	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.125	4.949
5.250	5.114	5.100	0.084	0.079	0.010	5.064	5.014	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.250	5.074
5.375	5.235	5.221	0.084	0.079	0.010	5.187	5.137	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.375	5.194
5.500	5.360	5.346	0.084	0.079	0.010	5.308	5.258	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.500	5.319
5.511	5.371	5.357	0.084	0.079	0.010	5.320	5.270	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.511	5.330
5.625	5.485	5.471	0.084	0.079	0.010	5.438	5.388	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.625	5.443
5.750	5.604	5.590	0.084	0.079	0.010	5.550	5.500	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.750	5.561
5.875	5.729	5.715	0.084	0.079	0.010	5.674	5.624	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.875	5.686
5.905	5.759	5.745	0.084	0.079	0.010	5.705	5.655	0.076	0.068	0.254	0.244	0.719	0.531	0.018	0.009	0.020	0.090	5.905	5.716
6.000	5.854	5.840	0.084	0.079	0.010	5.798	5.748	0.076	0.068	0.254	0.244	0.750	0.500	0.018	0.009	0.020	0.090	6.000	5.810
6.125	5.961	5.945	0.100	0.094	0.010	5.903	5.853	0.090	0.082	0.316	0.304	0.750	0.500	0.021	0.011	0.020	0.122	6.125	5.914

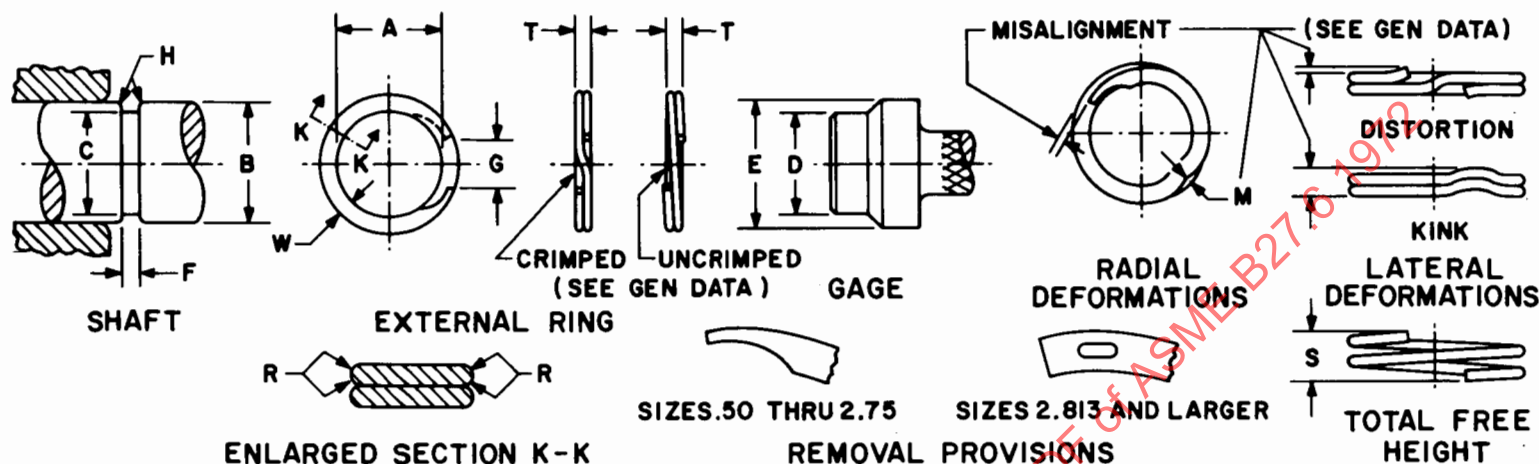


Table 1. Dimensions of Type 2A01 Light Duty External Retaining Rings, Grooves, and Gages (Continued)

Shaft						Ring												Gage	
B	C		F		H	A		T		W		G		R		M	S	E	D
Nominal Size	Groove Dia.		Groove Width		Groove Radius	Free Inside Diameter		Ring Thickness		Section Width		Free Gap		Radius		Radial Deform- ation	Total Free Height	Dia.	Dia.
	Max	Min	Max	Min	Max	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	+0.001 -0.000	+0.000 -0.000
6.250	6.086	6.070	0.100	0.094	0.010	6.026	5.966	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.250	6.039
6.299	6.135	6.119	0.100	0.094	0.010	6.076	6.016	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.299	6.088
6.375	6.211	6.195	0.100	0.094	0.010	6.152	6.092	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.375	6.163
6.500	6.336	6.320	0.100	0.094	0.010	6.274	6.214	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.500	6.288
6.625	6.451	6.435	0.100	0.094	0.010	6.390	6.330	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.625	6.402
6.750	6.576	6.560	0.100	0.094	0.010	6.513	6.453	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.750	6.526
6.875	6.701	6.685	0.100	0.094	0.010	6.638	6.578	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	6.875	6.651
7.000	6.826	6.810	0.100	0.094	0.010	6.761	6.701	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.000	6.775
7.125	6.941	6.925	0.100	0.094	0.010	6.877	6.817	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.125	6.889
7.250	7.066	7.050	0.100	0.094	0.010	6.999	6.939	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.250	7.014
7.375	7.191	7.175	0.100	0.094	0.010	7.125	7.065	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.375	7.138
7.500	7.316	7.300	0.100	0.094	0.010	7.250	7.180	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.500	7.263
7.625	7.431	7.415	0.100	0.094	0.010	7.363	7.293	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.625	7.377
7.750	7.556	7.540	0.100	0.094	0.010	7.486	7.416	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.750	7.501
7.875	7.681	7.665	0.100	0.094	0.010	7.611	7.541	0.090	0.082	0.316	0.304	0.875	0.625	0.021	0.011	0.020	0.122	7.875	7.626
8.000	7.806	7.790	0.100	0.094	0.010	7.734	7.664	0.090	0.082	0.316	0.304	1.125	0.875	0.021	0.011	0.020	0.122	8.000	7.750
8.250	8.046	8.030	0.100	0.094	0.010	7.972	7.902	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	8.250	7.989
8.500	8.296	8.280	0.100	0.094	0.010	8.220	8.150	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	8.500	8.238
8.750	8.536	8.520	0.100	0.094	0.010	8.459	8.389	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	8.750	8.476
9.000	8.786	8.770	0.100	0.094	0.010	8.707	8.637	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	9.000	8.725

Table 1. Dimensions of Type 2A01 Light Duty External Retaining Rings, Grooves, and Gages (Continued)

B	C		F		H	A		T		W		G		R		M	S	E	D
9.250	9.026	9.010	0.100	0.094	0.010	8.945	8.875	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	9.250	8.964
9.500	9.276	9.260	0.100	0.094	0.010	9.194	9.124	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	9.500	9.213
9.750	9.516	9.500	0.100	0.094	0.010	9.432	9.362	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	9.750	9.451
10.000	9.766	9.750	0.100	0.094	0.010	9.680	9.610	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	10.000	9.700
10.250	10.006	9.990	0.100	0.094	0.010	9.918	9.848	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	10.250	9.939
10.500	10.256	10.240	0.100	0.094	0.010	10.166	10.096	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	10.500	10.188
10.750	10.496	10.480	0.100	0.094	0.010	10.405	10.335	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	10.750	10.426
11.000	10.746	10.730	0.100	0.094	0.010	10.653	10.583	0.090	0.082	0.379	0.367	1.125	0.875	0.021	0.011	0.020	0.122	11.000	10.675

ASMENORMDOC.COM : Click to view the full PDF of ANSI B27.6-1972

Table 2. Dimensions of Type 2A02 Heavy Duty External Retaining Rings, Grooves, and Gages (Continued)

B	C		F		H	A		T		W		G		R		M	S	E	D
1.312	1.236	1.228	0.060	0.056	0.010	1.218	1.205	0.052	0.048	0.121	0.113	0.375	0.187	0.012	0.006	0.010	0.070	1.312	1.222
1.375	1.295	1.287	0.060	0.056	0.010	1.277	1.264	0.052	0.048	0.121	0.113	0.375	0.187	0.012	0.006	0.010	0.070	1.375	1.280
1.438	1.354	1.346	0.060	0.056	0.010	1.336	1.323	0.052	0.048	0.121	0.113	0.442	0.254	0.012	0.006	0.010	0.070	1.438	1.339
1.500	1.410	1.402	0.060	0.056	0.010	1.385	1.372	0.052	0.048	0.121	0.113	0.442	0.254	0.012	0.006	0.010	0.070	1.500	1.395
1.562	1.473	1.463	0.072	0.068	0.010	1.453	1.433	0.065	0.059	0.131	0.123	0.442	0.254	0.015	0.008	0.010	0.088	1.562	1.455
1.625	1.534	1.524	0.072	0.068	0.010	1.513	1.493	0.065	0.059	0.131	0.123	0.442	0.254	0.015	0.008	0.010	0.088	1.625	1.516
1.687	1.594	1.584	0.072	0.068	0.010	1.573	1.553	0.065	0.059	0.131	0.123	0.442	0.254	0.015	0.008	0.010	0.088	1.687	1.576
1.750	1.655	1.645	0.072	0.068	0.010	1.633	1.613	0.065	0.059	0.131	0.123	0.442	0.254	0.015	0.008	0.010	0.088	1.750	1.636
1.771	1.674	1.664	0.072	0.068	0.010	1.651	1.631	0.065	0.059	0.131	0.123	0.442	0.254	0.015	0.008	0.010	0.088	1.771	1.655
1.812	1.713	1.703	0.072	0.068	0.010	1.690	1.670	0.065	0.059	0.131	0.123	0.442	0.254	0.015	0.008	0.010	0.088	1.812	1.694
1.875	1.774	1.764	0.072	0.068	0.010	1.751	1.731	0.065	0.059	0.161	0.153	0.442	0.254	0.015	0.008	0.010	0.088	1.875	1.755
1.969	1.862	1.852	0.072	0.068	0.010	1.838	1.818	0.065	0.059	0.161	0.153	0.442	0.254	0.015	0.008	0.010	0.088	1.969	1.842
2.000	1.891	1.881	0.072	0.068	0.010	1.867	1.847	0.065	0.059	0.161	0.153	0.442	0.254	0.015	0.008	0.020	0.088	2.000	1.871
2.062	1.952	1.940	0.091	0.086	0.010	1.932	1.907	0.081	0.075	0.171	0.161	0.500	0.312	0.019	0.010	0.020	0.110	2.062	1.930
2.125	2.009	1.997	0.091	0.086	0.010	1.989	1.964	0.081	0.075	0.171	0.161	0.500	0.312	0.019	0.010	0.020	0.110	2.125	1.986
2.156	2.038	2.026	0.091	0.086	0.010	2.018	1.993	0.081	0.075	0.171	0.161	0.500	0.312	0.019	0.010	0.020	0.110	2.156	2.015
2.250	2.126	2.114	0.091	0.086	0.010	2.105	2.080	0.081	0.075	0.171	0.161	0.500	0.312	0.019	0.010	0.020	0.110	2.250	2.103
2.312	2.184	2.172	0.091	0.086	0.010	2.163	2.138	0.081	0.075	0.171	0.161	0.500	0.312	0.019	0.010	0.020	0.110	2.312	2.161
2.375	2.245	2.233	0.091	0.086	0.010	2.223	2.198	0.081	0.075	0.204	0.194	0.500	0.312	0.019	0.010	0.020	0.110	2.375	2.221
2.437	2.305	2.293	0.091	0.086	0.010	2.283	2.258	0.081	0.075	0.204	0.194	0.500	0.312	0.019	0.010	0.020	0.110	2.437	2.281
2.500	2.366	2.354	0.091	0.086	0.010	2.343	2.318	0.081	0.075	0.204	0.194	0.500	0.312	0.019	0.010	0.020	0.110	2.500	2.342
2.559	2.425	2.413	0.091	0.086	0.010	2.402	2.377	0.081	0.075	0.204	0.195	0.500	0.312	0.019	0.010	0.020	0.110	2.559	2.400
2.625	2.487	2.475	0.091	0.086	0.010	2.464	2.439	0.081	0.075	0.204	0.194	0.500	0.312	0.019	0.010	0.020	0.110	2.625	2.462
2.687	2.547	2.535	0.091	0.086	0.010	2.523	2.498	0.081	0.075	0.204	0.194	0.500	0.312	0.019	0.010	0.020	0.110	2.687	2.522
2.750	2.608	2.596	0.108	0.103	0.010	2.584	2.554	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	2.750	2.582
2.875	2.727	2.715	0.108	0.103	0.010	2.702	2.672	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	2.875	2.701
2.937	2.785	2.773	0.108	0.103	0.010	2.760	2.730	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	2.937	2.758
3.000	2.844	2.832	0.108	0.103	0.010	2.818	2.788	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.000	2.817
3.062	2.904	2.892	0.108	0.103	0.010	2.878	2.848	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.062	2.877
3.125	2.963	2.951	0.108	0.103	0.010	2.936	2.906	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.125	2.935
3.156	2.992	2.980	0.108	0.103	0.010	2.965	2.935	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.156	2.964
3.250	3.082	3.070	0.108	0.103	0.010	3.054	3.024	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.250	3.066
3.344	3.172	3.160	0.108	0.103	0.010	3.144	3.114	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.344	3.143
3.437	3.263	3.251	0.108	0.103	0.010	3.234	3.204	0.096	0.090	0.229	0.219	0.625	0.375	0.023	0.012	0.020	0.130	3.437	3.234
3.500	3.322	3.310	0.125	0.120	0.010	3.293	3.258	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.500	3.293
3.543	3.363	3.351	0.125	0.120	0.010	3.333	3.298	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.543	3.333
3.625	3.441	3.429	0.125	0.120	0.010	3.411	3.376	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.625	3.411
3.687	3.499	3.487	0.125	0.120	0.010	3.469	3.434	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.687	3.469
3.750	3.558	3.546	0.125	0.120	0.010	3.527	3.492	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.750	3.527
3.875	3.679	3.667	0.125	0.120	0.010	3.647	3.612	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.875	3.648

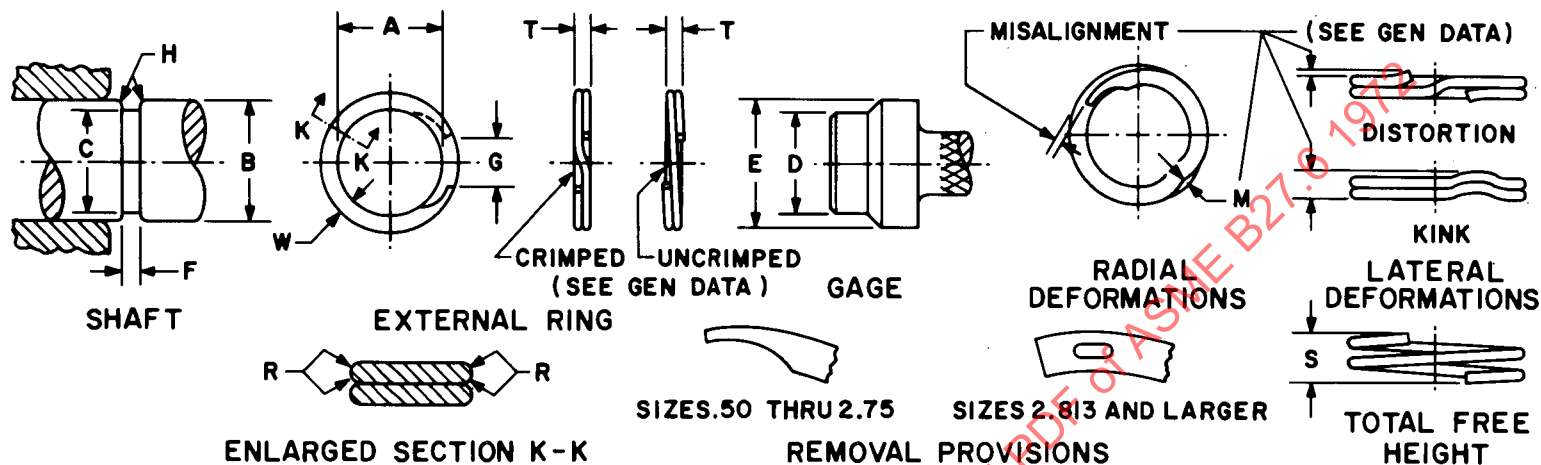


Table 2. Dimensions of Type 2A02 Heavy Duty External Retaining Rings, Grooves, and Gages (Continued)

Shaft						Ring											Gage		
B	C		F		H	A		T		W		G		R		M	S	E	D
Nominal Size	Groove Dia.		Groove Width		Groove Radius	Free Inside Diameter		Ring Thickness		Section Width		Free Gap		Radius		Radial Deformation	Total Free Height	Dia.	Dia.
	Max	Min	Max	Min	Max	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	+ 0.001 - 0.000	+ 0.000 - 0.001
3.938	3.740	3.728	0.125	0.120	0.010	3.708	3.673	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	3.938	3.708
4.000	3.798	3.786	0.125	0.120	0.010	3.765	3.730	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	4.000	3.766
4.250	4.071	4.059	0.125	0.120	0.010	4.037	4.002	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	4.250	4.038
4.375	4.196	4.184	0.125	0.120	0.010	4.161	4.126	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	4.375	4.162
4.500	4.316	4.304	0.125	0.120	0.010	4.280	4.245	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	4.500	4.282
4.750	4.556	4.544	0.125	0.120	0.010	4.518	4.483	0.114	0.108	0.274	0.264	0.657	0.469	0.027	0.014	0.020	0.155	4.750	4.520
5.000	4.796	4.784	0.125	0.120	0.010	4.756	4.721	0.114	0.108	0.274	0.264	0.844	0.656	0.027	0.014	0.020	0.155	5.000	4.782
5.250	5.037	5.023	0.145	0.139	0.010	4.995	4.945	0.131	0.123	0.354	0.342	0.844	0.656	0.031	0.016	0.020	0.178	5.250	4.997
5.500	5.272	5.258	0.145	0.139	0.010	5.228	5.178	0.131	0.123	0.354	0.342	0.844	0.656	0.031	0.016	0.020	0.178	5.500	5.231
5.750	5.512	5.498	0.145	0.139	0.010	5.466	5.416	0.131	0.123	0.354	0.342	0.844	0.656	0.031	0.016	0.020	0.178	5.750	5.469
6.000	5.752	5.738	0.145	0.139	0.010	5.705	5.655	0.131	0.123	0.354	0.342	0.844	0.656	0.031	0.016	0.020	0.178	6.000	5.708
6.250	5.993	5.977	0.182	0.174	0.010	5.938	5.878	0.161	0.151	0.422	0.410	0.844	0.656	0.039	0.020	0.020	0.219	6.250	5.665
6.500	6.233	6.217	0.182	0.174	0.010	6.181	6.121	0.161	0.151	0.422	0.410	0.844	0.656	0.039	0.020	0.020	0.219	6.500	5.892
6.750	6.473	6.457	0.182	0.174	0.010	6.410	6.350	0.161	0.151	0.422	0.410	0.844	0.656	0.039	0.020	0.020	0.219	6.750	6.423
7.000	6.713	6.697	0.182	0.174	0.010	6.648	6.588	0.161	0.151	0.422	0.410	0.844	0.656	0.039	0.020	0.020	0.219	7.000	6.662
7.250	6.950	6.934	0.182	0.174	0.010	6.891	6.821	0.161	0.151	0.441	0.429	1.000	0.750	0.039	0.020	0.020	0.219	7.250	6.898
7.500	7.188	7.172	0.217	0.209	0.010	7.130	7.060	0.192	0.182	0.441	0.429	1.000	0.750	0.046	0.023	0.020	0.261	7.500	7.135
7.750	7.428	7.412	0.217	0.209	0.010	7.368	7.298	0.192	0.182	0.441	0.429	1.000	0.750	0.046	0.023	0.020	0.261	7.750	7.373
8.000	7.668	7.652	0.217	0.209	0.010	7.606	7.536	0.192	0.182	0.441	0.429	1.000	0.750	0.046	0.023	0.020	0.261	8.000	7.585
8.250	7.908	7.892	0.217	0.209	0.010	7.845	7.775	0.192	0.182	0.441	0.429	1.000	0.750	0.046	0.023	0.020	0.261	8.250	7.851

AMERICAN NATIONAL STANDARD
GENERAL PURPOSE UNIFORM CROSS SECTION
SPIRAL RETAINING RINGS

ANSI B27.6-1972

Table 2. Dimensions of Type 2A02 Heavy Duty External Retaining Rings, Grooves, and Gages (Continued)

B	C	F	H	A	T	W	G	R	M	S	E	D
8.500	8.148	0.217	0.010	8.083	0.192	0.441	1.000	0.046	0.020	0.261	8.500	8.090
8.750	8.391	0.217	0.010	8.324	0.192	0.441	1.000	0.046	0.020	0.261	8.750	8.331
9.000	8.628	0.217	0.010	8.560	0.192	0.505	1.000	0.046	0.020	0.261	9.000	8.567
9.250	8.868	0.217	0.010	8.798	0.192	0.505	1.000	0.046	0.020	0.261	9.250	8.822
9.500	9.108	0.217	0.010	9.036	0.192	0.505	1.000	0.046	0.020	0.261	9.500	9.045
9.750	9.346	0.217	0.010	9.275	0.192	0.507	1.031	0.046	0.020	0.261	9.750	9.281
10.000	9.583	0.217	0.010	9.508	0.192	0.507	1.031	0.046	0.020	0.261	10.000	9.517
10.250	9.824	0.217	0.010	9.745	0.192	0.507	1.500	0.046	0.020	0.261	10.250	9.753
10.500	10.064	0.217	0.010	9.984	0.192	0.507	1.500	0.046	0.020	0.261	10.500	9.992
10.750	10.303	0.217	0.010	10.221	0.192	0.507	1.500	0.046	0.020	0.261	10.750	10.229
11.000	10.543	0.217	0.010	10.459	0.192	0.507	1.500	0.046	0.020	0.261	11.000	10.468
11.250	10.782	0.217	0.010	10.692	0.192	0.507	1.500	0.046	0.020	0.261	11.250	10.706
11.500	11.021	0.217	0.010	10.934	0.192	0.567	1.500	0.046	0.020	0.261	11.500	10.944
11.750	11.260	0.217	0.010	11.171	0.192	0.567	1.500	0.046	0.020	0.261	11.750	11.181
12.000	11.500	0.217	0.010	11.410	0.192	0.567	1.500	0.046	0.020	0.261	12.000	11.420
12.250	11.739	0.217	0.010	11.647	0.192	0.567	1.500	0.046	0.020	0.261	12.250	11.658
12.500	11.979	0.217	0.010	11.885	0.192	0.567	1.500	0.046	0.020	0.261	12.500	11.897
12.750	12.220	0.217	0.010	12.124	0.192	0.567	1.813	0.046	0.020	0.261	12.750	12.132
13.000	12.460	0.217	0.010	12.361	0.192	0.667	1.813	0.046	0.020	0.261	13.000	12.371
13.250	12.699	0.217	0.010	12.598	0.192	0.667	1.813	0.046	0.020	0.261	13.250	12.609
13.500	12.939	0.217	0.010	12.837	0.192	0.667	1.813	0.046	0.020	0.261	13.500	12.848
13.750	13.178	0.217	0.010	13.074	0.192	0.667	1.813	0.046	0.020	0.261	13.750	13.085
14.000	13.417	0.217	0.010	13.311	0.192	0.667	1.813	0.046	0.020	0.261	14.000	13.323
14.250	13.656	0.217	0.010	13.548	0.192	0.667	1.813	0.046	0.020	0.261	14.250	13.561
14.500	13.896	0.217	0.010	13.787	0.192	0.755	1.813	0.046	0.020	0.261	14.500	13.824
14.750	14.135	0.217	0.010	14.024	0.192	0.755	1.813	0.046	0.020	0.261	14.750	14.037
15.000	14.375	0.217	0.010	14.262	0.192	0.755	1.813	0.046	0.020	0.261	15.000	14.276

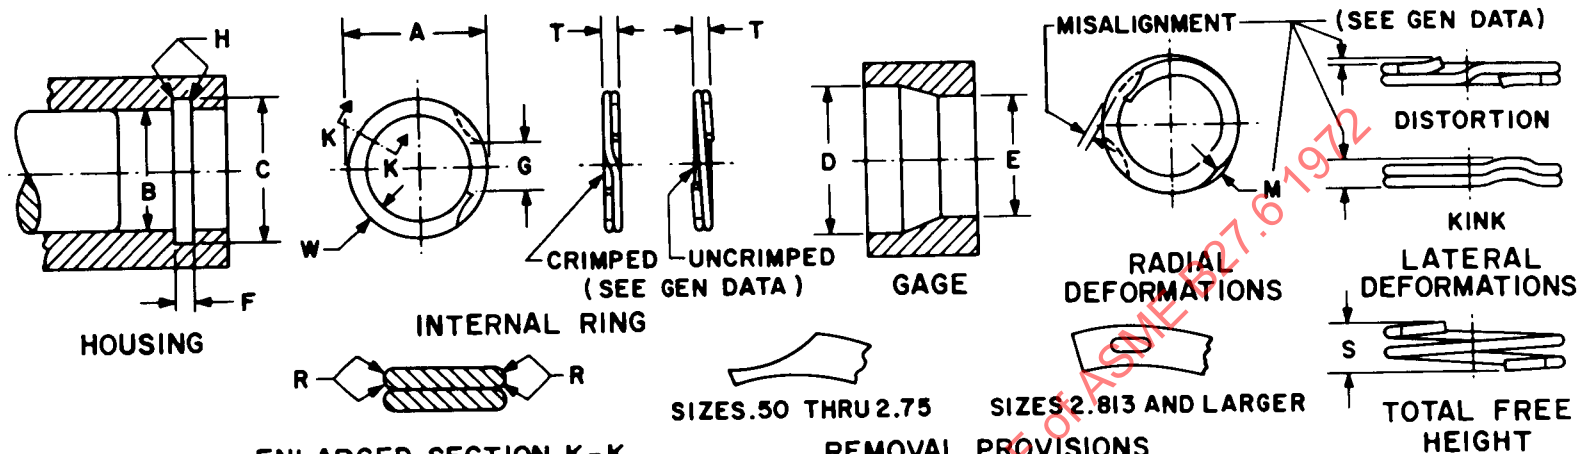


Table 3. Dimensions of Type 2B01 Light Duty Internal Retaining Rings, Grooves, and Gages

Housing					Ring												Gage		
B	C		F		H	A		T		W		G		R		M	S	D	E
Nominal Size	Groove Dia.		Groove Width		Groove Radius	Free Outside Diameter		Ring Thickness		Section Width		Free Gap		Radius		Radial Deforma- tion	Total Free Height	Dia.	Dia.
	Max	Min	Max	Min	Max	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	+ 0.001 - 0.000	+ 0.000 - 0.001
0.500	0.528	0.524	0.033	0.030	0.005	0.545	0.532	0.027	0.023	0.048	0.040	0.407	0.281	0.006	0.003	0.010	0.036	0.531	0.500
0.512	0.540	0.536	0.033	0.030	0.005	0.557	0.544	0.027	0.023	0.048	0.040	0.407	0.281	0.006	0.003	0.010	0.036	0.543	0.512
0.531	0.559	0.555	0.033	0.030	0.005	0.577	0.564	0.027	0.023	0.048	0.040	0.407	0.281	0.006	0.003	0.010	0.036	0.562	0.531
0.562	0.590	0.586	0.033	0.030	0.005	0.607	0.594	0.027	0.023	0.048	0.040	0.407	0.281	0.006	0.003	0.010	0.036	0.593	0.562
0.594	0.621	0.617	0.033	0.030	0.005	0.639	0.626	0.027	0.023	0.048	0.040	0.438	0.312	0.006	0.003	0.010	0.036	0.624	0.594
0.625	0.653	0.649	0.033	0.030	0.005	0.671	0.658	0.027	0.023	0.048	0.040	0.438	0.312	0.006	0.003	0.010	0.036	0.656	0.625
0.656	0.684	0.680	0.033	0.030	0.005	0.702	0.689	0.027	0.023	0.048	0.040	0.438	0.312	0.006	0.003	0.010	0.036	0.687	0.656
0.687	0.715	0.711	0.033	0.030	0.005	0.733	0.720	0.027	0.023	0.048	0.040	0.438	0.312	0.006	0.003	0.010	0.036	0.718	0.687
0.718	0.746	0.742	0.033	0.030	0.005	0.764	0.751	0.027	0.023	0.048	0.040	0.438	0.312	0.006	0.003	0.010	0.036	0.750	0.718
0.750	0.784	0.780	0.039	0.036	0.005	0.803	0.790	0.033	0.029	0.068	0.060	0.438	0.312	0.008	0.004	0.010	0.044	0.788	0.750
0.777	0.811	0.805	0.039	0.036	0.005	0.830	0.817	0.033	0.029	0.068	0.060	0.438	0.312	0.008	0.004	0.010	0.044	0.815	0.777
0.781	0.815	0.809	0.039	0.036	0.005	0.834	0.821	0.033	0.029	0.068	0.060	0.438	0.312	0.008	0.004	0.010	0.044	0.819	0.781
0.812	0.846	0.840	0.039	0.036	0.005	0.866	0.853	0.033	0.029	0.068	0.060	0.438	0.312	0.008	0.004	0.010	0.044	0.850	0.812
0.843	0.883	0.877	0.039	0.036	0.005	0.902	0.889	0.033	0.029	0.068	0.060	0.438	0.312	0.008	0.004	0.010	0.044	0.887	0.843
0.866	0.906	0.900	0.039	0.036	0.005	0.926	0.913	0.033	0.029	0.068	0.060	0.469	0.343	0.008	0.004	0.010	0.044	0.910	0.866
0.875	0.915	0.909	0.039	0.036	0.005	0.935	0.922	0.033	0.029	0.068	0.060	0.469	0.343	0.008	0.004	0.010	0.044	0.915	0.875
0.906	0.946	0.940	0.039	0.036	0.005	0.962	0.949	0.033	0.029	0.068	0.060	0.469	0.343	0.008	0.004	0.010	0.044	0.951	0.906
0.938	0.978	0.972	0.039	0.036	0.005	0.999	0.986	0.033	0.029	0.068	0.060	0.469	0.343	0.008	0.004	0.010	0.044	0.983	0.938
0.968	1.018	1.012	0.045	0.042	0.005	1.038	1.025	0.039	0.035	0.078	0.070	0.469	0.343	0.009	0.005	0.010	0.053	1.023	0.968
0.987	1.033	1.027	0.045	0.042	0.005	1.054	1.041	0.039	0.035	0.078	0.070	0.469	0.343	0.009	0.005	0.010	0.053	1.038	0.987

Table 3. Dimensions of Type 2B01 Light Duty Internal Retaining Rings, Grooves, and Gages (Continued)

B	C		F		H	A		T		W		G		R		M	S	D	E
1.000	1.046	1.040	0.045	0.042	0.005	1.067	1.054	0.039	0.035	0.078	0.070	0.469	0.343	0.009	0.005	0.010	0.053	1.051	1.000
1.023	1.069	1.063	0.045	0.042	0.010	1.091	1.078	0.039	0.035	0.078	0.070	0.469	0.343	0.009	0.005	0.010	0.053	1.074	1.023
1.031	1.077	1.071	0.045	0.042	0.010	1.097	1.084	0.039	0.035	0.078	0.070	0.469	0.343	0.009	0.005	0.010	0.053	1.082	1.031
1.062	1.108	1.100	0.045	0.042	0.010	1.132	1.117	0.039	0.035	0.078	0.070	0.501	0.375	0.009	0.005	0.010	0.053	1.113	1.062
1.093	1.139	1.131	0.045	0.042	0.010	1.162	1.147	0.039	0.035	0.078	0.070	0.501	0.375	0.009	0.005	0.010	0.053	1.144	1.093
1.125	1.171	1.163	0.045	0.042	0.010	1.195	1.180	0.039	0.035	0.078	0.070	0.501	0.375	0.009	0.005	0.010	0.053	1.177	1.125
1.156	1.202	1.194	0.045	0.042	0.010	1.225	1.210	0.039	0.035	0.078	0.070	0.501	0.375	0.009	0.005	0.010	0.053	1.208	1.156
1.188	1.240	1.232	0.052	0.048	0.010	1.264	1.249	0.045	0.041	0.088	0.080	0.501	0.375	0.011	0.006	0.010	0.061	1.246	1.188
1.218	1.270	1.262	0.052	0.048	0.010	1.293	1.278	0.045	0.041	0.088	0.080	0.501	0.375	0.011	0.006	0.010	0.061	1.268	1.218
1.250	1.302	1.294	0.052	0.048	0.010	1.327	1.312	0.045	0.041	0.088	0.080	0.501	0.375	0.011	0.006	0.010	0.061	1.308	1.250
1.281	1.333	1.325	0.052	0.048	0.010	1.357	1.342	0.045	0.041	0.088	0.080	0.501	0.375	0.011	0.006	0.010	0.061	1.339	1.281
1.312	1.364	1.356	0.052	0.048	0.010	1.389	1.374	0.045	0.041	0.088	0.080	0.594	0.406	0.011	0.006	0.010	0.061	1.371	1.312
1.343	1.399	1.391	0.052	0.048	0.010	1.423	1.408	0.045	0.041	0.088	0.080	0.594	0.406	0.011	0.006	0.010	0.061	1.406	1.343
1.375	1.431	1.423	0.052	0.048	0.010	1.457	1.442	0.045	0.041	0.098	0.090	0.594	0.406	0.011	0.006	0.010	0.061	1.438	1.375
1.406	1.462	1.454	0.052	0.048	0.010	1.487	1.472	0.045	0.041	0.098	0.090	0.594	0.406	0.011	0.006	0.010	0.061	1.469	1.406
1.437	1.493	1.485	0.052	0.048	0.010	1.519	1.504	0.045	0.041	0.098	0.090	0.594	0.406	0.011	0.006	0.010	0.061	1.500	1.437
1.456	1.512	1.504	0.052	0.048	0.010	1.538	1.523	0.045	0.041	0.098	0.090	0.594	0.406	0.011	0.006	0.010	0.061	1.519	1.456
1.468	1.524	1.516	0.052	0.048	0.010	1.550	1.535	0.045	0.041	0.098	0.090	0.594	0.406	0.011	0.006	0.010	0.061	1.531	1.468
1.500	1.556	1.548	0.052	0.048	0.010	1.582	1.567	0.045	0.041	0.098	0.090	0.594	0.406	0.011	0.006	0.010	0.061	1.564	1.500
1.562	1.622	1.612	0.060	0.056	0.010	1.654	1.634	0.052	0.046	0.111	0.103	0.688	0.500	0.012	0.006	0.010	0.070	1.630	1.562
1.574	1.638	1.628	0.060	0.056	0.010	1.669	1.649	0.052	0.046	0.111	0.103	0.688	0.500	0.012	0.006	0.010	0.070	1.646	1.574
1.625	1.689	1.679	0.060	0.056	0.010	1.721	1.701	0.052	0.046	0.111	0.103	0.688	0.500	0.012	0.006	0.010	0.070	1.697	1.625
1.653	1.717	1.707	0.060	0.056	0.010	1.750	1.730	0.052	0.046	0.111	0.103	0.688	0.500	0.012	0.006	0.010	0.070	1.725	1.653
1.687	1.755	1.745	0.060	0.056	0.010	1.788	1.768	0.052	0.046	0.121	0.113	0.688	0.500	0.012	0.006	0.010	0.070	1.763	1.687
1.750	1.818	1.808	0.060	0.056	0.010	1.854	1.834	0.052	0.046	0.121	0.113	0.688	0.500	0.012	0.006	0.010	0.070	1.827	1.750
1.813	1.880	1.870	0.060	0.056	0.010	1.914	1.894	0.052	0.046	0.121	0.113	0.688	0.500	0.012	0.006	0.010	0.070	1.889	1.813
1.850	1.922	1.912	0.060	0.056	0.010	1.957	1.937	0.052	0.046	0.121	0.113	0.688	0.500	0.012	0.006	0.010	0.070	1.931	1.850
1.875	1.947	1.937	0.060	0.056	0.010	1.980	1.960	0.052	0.046	0.121	0.113	0.688	0.500	0.012	0.006	0.010	0.070	1.956	1.875
1.938	2.010	2.000	0.060	0.056	0.010	2.045	2.025	0.052	0.046	0.121	0.113	0.688	0.500	0.012	0.006	0.010	0.070	2.020	1.938
2.000	2.076	2.066	0.060	0.056	0.010	2.111	2.091	0.052	0.046	0.131	0.123	0.719	0.531	0.012	0.006	0.020	0.070	2.086	2.000
2.047	2.123	2.113	0.060	0.056	0.010	2.158	2.138	0.052	0.046	0.131	0.123	0.719	0.531	0.012	0.006	0.020	0.070	2.133	2.047
2.062	2.138	2.126	0.060	0.056	0.010	2.179	2.154	0.052	0.046	0.131	0.123	0.719	0.531	0.012	0.006	0.020	0.070	2.148	2.062
2.125	2.201	2.189	0.060	0.056	0.010	2.242	2.217	0.052	0.046	0.131	0.123	0.719	0.531	0.012	0.006	0.020	0.070	2.212	2.125
2.165	2.245	2.233	0.060	0.056	0.010	2.285	2.260	0.052	0.046	0.141	0.133	0.719	0.531	0.012	0.006	0.020	0.070	2.256	2.165
2.188	2.268	2.256	0.060	0.056	0.010	2.309	2.284	0.052	0.046	0.141	0.133	0.719	0.531	0.012	0.006	0.020	0.070	2.279	2.188
2.250	2.330	2.318	0.060	0.056	0.010	2.372	2.347	0.052	0.046	0.141	0.133	0.719	0.531	0.012	0.006	0.020	0.070	2.341	2.250
2.312	2.396	2.384	0.060	0.056	0.010	2.428	2.403	0.052	0.046	0.141	0.133	0.719	0.531	0.012	0.006	0.020	0.070	2.408	2.312
2.375	2.459	2.447	0.060	0.056	0.010	2.501	2.476	0.052	0.046	0.141	0.133	0.719	0.531	0.012	0.006	0.020	0.070	2.471	2.375
2.437	2.525	2.513	0.060	0.056	0.010	2.568	2.543	0.052	0.046	0.151	0.143	0.719	0.531	0.012	0.006	0.020	0.070	2.537	2.437

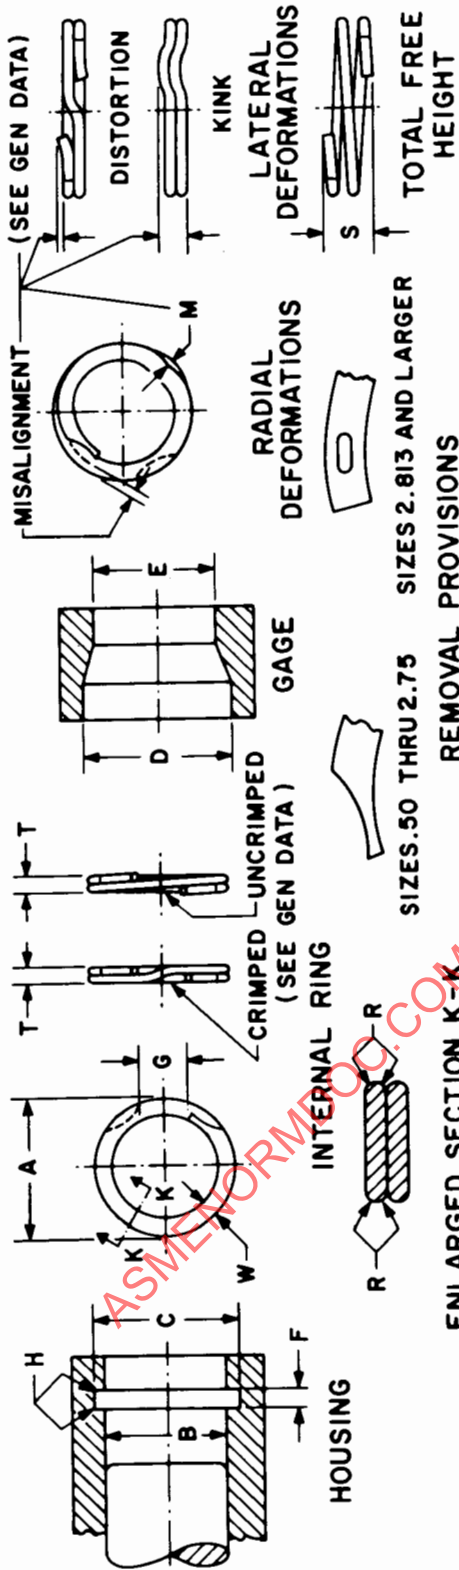


Table 3. Dimensions of Type 2B01 Light Duty Internal Retaining Rings, Grooves, and Gages (Continued)

18

Table 3. Dimensions of Type 2B01 Light Duty Internal Retaining Rings, Grooves, and Gages (Continued)

B	C	F	H	A	T	W	G	R	M	S	D	E
3.346	3.444	0.073	0.068	3.509	0.064	0.192	1.125	0.015	0.020	0.087	3.473	3.346
3.375	3.473	0.073	0.068	3.539	0.064	0.192	1.125	0.015	0.020	0.087	3.502	3.375
3.437	3.537	0.073	0.068	3.604	0.064	0.192	1.125	0.015	0.020	0.087	3.566	3.437
3.500	3.612	0.073	0.068	3.666	0.064	0.192	1.125	0.015	0.020	0.087	3.630	3.500
3.543	3.659	0.073	0.068	3.714	0.064	0.202	1.125	0.015	0.020	0.087	3.677	3.543
3.562	3.666	0.073	0.068	3.733	0.064	0.202	1.125	0.015	0.020	0.087	3.696	3.562
3.625	3.731	0.073	0.068	3.799	0.064	0.202	1.125	0.015	0.020	0.087	3.761	3.625
3.687	3.793	0.073	0.068	3.862	0.064	0.202	1.125	0.015	0.020	0.087	3.823	3.687
3.740	3.846	0.073	0.068	3.915	0.064	0.202	1.125	0.015	0.020	0.087	3.877	3.740
3.750	3.856	0.073	0.068	3.924	0.064	0.202	1.125	0.015	0.020	0.087	3.887	3.750
3.812	3.924	0.073	0.068	3.993	0.064	0.212	1.125	0.015	0.020	0.087	3.955	3.812
3.875	3.987	0.073	0.068	4.055	0.064	0.212	1.125	0.015	0.020	0.087	4.018	3.875
3.938	4.050	0.073	0.068	4.119	0.064	0.212	1.125	0.015	0.020	0.087	4.082	3.938
4.000	4.118	0.073	0.068	4.187	0.064	0.222	1.125	0.015	0.020	0.087	4.150	4.000
4.063	4.181	0.073	0.068	4.252	0.064	0.222	1.125	0.015	0.020	0.087	4.213	4.063
4.125	4.243	0.073	0.068	4.319	0.064	0.222	1.125	0.015	0.020	0.087	4.276	4.125
4.188	4.305	0.073	0.068	4.382	0.064	0.222	1.125	0.015	0.020	0.087	4.338	4.188
4.250	4.367	0.073	0.068	4.445	0.064	0.222	1.125	0.015	0.020	0.087	4.407	4.250
4.312	4.429	0.073	0.068	4.508	0.064	0.232	1.125	0.015	0.020	0.087	4.470	4.312
4.330	4.454	0.073	0.068	4.532	0.064	0.232	1.125	0.015	0.020	0.087	4.488	4.330
4.375	4.499	0.073	0.068	4.578	0.064	0.232	1.125	0.015	0.020	0.087	4.533	4.375
4.437	4.567	0.073	0.068	4.646	0.064	0.242	1.125	0.015	0.020	0.087	4.601	4.437
4.500	4.630	0.073	0.068	4.709	0.064	0.242	1.125	0.015	0.020	0.087	4.665	4.500
4.527	4.657	0.073	0.068	4.736	0.064	0.242	1.125	0.015	0.020	0.087	4.692	4.527
4.562	4.692	0.073	0.068	4.772	0.064	0.242	1.125	0.015	0.020	0.087	4.727	4.562
4.625	4.759	0.084	0.079	4.838	0.076	0.254	1.125	0.018	0.020	0.090	4.794	4.625
4.687	4.821	0.084	0.079	4.902	0.076	0.254	1.125	0.018	0.020	0.090	4.856	4.687
4.724	4.858	0.084	0.079	4.938	0.076	0.254	1.125	0.018	0.020	0.090	4.894	4.724
4.750	4.884	0.084	0.079	4.965	0.076	0.254	1.125	0.018	0.020	0.090	4.920	4.750
4.812	4.946	0.084	0.079	5.028	0.076	0.254	1.125	0.018	0.020	0.090	4.982	4.812
4.875	5.009	0.084	0.079	5.090	0.076	0.254	1.125	0.018	0.020	0.090	5.045	4.875
4.921	5.055	0.084	0.079	5.137	0.076	0.254	1.125	0.018	0.020	0.090	5.092	4.921
4.937	5.087	0.084	0.079	5.157	0.076	0.254	1.125	0.018	0.020	0.090	5.112	4.937
5.000	5.138	0.084	0.079	5.220	0.076	0.254	1.125	0.018	0.020	0.090	5.175	5.000
5.118	5.256	0.084	0.079	5.339	0.076	0.254	1.125	0.018	0.020	0.090	5.294	5.118
5.125	5.275	0.084	0.079	5.346	0.076	0.254	1.125	0.018	0.020	0.090	5.301	5.125
5.250	5.386	0.084	0.079	5.481	0.076	0.254	1.125	0.018	0.020	0.090	5.426	5.250
5.375	5.529	0.084	0.079	5.611	0.076	0.254	1.125	0.018	0.020	0.090	5.556	5.375
5.500	5.654	0.084	0.079	5.738	0.076	0.254	1.125	0.018	0.020	0.090	5.682	5.500
5.511	5.665	0.084	0.079	5.748	0.076	0.254	1.125	0.018	0.020	0.090	5.693	5.511



ENLARGED SECTION K-K

Table 3. Dimensions of Type 2B01 Light Duty Internal Retaining Rings, Grooves, and Gages (Continued)

Housing					Ring							Gage								
B	C		F		H	A		T		W		G		R		M	S	D	E	
	Groove Dia.		Groove Width			Free Outside Diameter		Ring Thickness		Section Width		Free Gap		Radius						
Nominal Size	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	Min	Max	Min	Max	Max	Total Free Height	Dia.	Dia.	+ 0.001 - 0.000	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	Min	Max	Min	Max	Max					
5.625	5.779	5.765	0.084	0.079	0.010	0.010	5.863	5.818	0.076	0.068	0.254	0.244	1.625	1.375	0.018	0.009	0.020	0.090	5.807	5.625
5.708	5.868	5.854	0.084	0.079	0.010	0.010	5.954	5.909	0.076	0.068	0.254	0.244	1.875	1.625	0.018	0.009	0.020	0.090	5.897	5.708
5.750	5.910	5.896	0.084	0.079	0.010	0.010	5.995	5.950	0.076	0.068	0.254	0.244	1.875	1.625	0.018	0.009	0.020	0.090	5.939	5.750
5.875	6.035	6.021	0.084	0.079	0.010	0.010	6.122	6.077	0.076	0.068	0.254	0.244	1.875	1.625	0.018	0.009	0.020	0.090	6.064	5.875
5.905	6.065	6.051	0.084	0.079	0.010	0.010	6.151	6.106	0.076	0.068	0.254	0.244	1.875	1.625	0.018	0.009	0.020	0.090	6.095	5.905
6.000	6.160	6.146	0.084	0.079	0.010	0.010	6.247	6.202	0.076	0.068	0.254	0.244	1.875	1.625	0.018	0.009	0.020	0.090	6.190	6.000
6.125	6.305	6.289	0.100	0.094	0.010	0.010	6.394	6.349	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.336	6.125
6.250	6.430	6.414	0.100	0.094	0.010	0.010	6.529	6.474	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.461	6.250
6.299	6.479	6.463	0.100	0.094	0.010	0.010	6.579	6.524	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.510	6.299
6.375	6.555	6.539	0.100	0.094	0.010	0.010	6.656	6.601	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.587	6.375
6.500	6.680	6.664	0.100	0.094	0.010	0.010	6.781	6.726	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.713	6.500
6.625	6.815	6.799	0.100	0.094	0.010	0.010	6.918	6.863	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.848	6.625
6.692	6.882	6.866	0.100	0.094	0.010	0.010	6.986	6.931	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.915	6.692
6.750	6.940	6.924	0.100	0.094	0.010	0.010	7.042	6.987	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	6.974	6.750
6.875	7.065	7.049	0.100	0.094	0.010	0.010	7.169	7.114	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	7.099	6.875
7.000	7.190	7.174	0.100	0.094	0.010	0.010	7.294	7.239	0.090	0.082	0.316	0.304	1.875	1.625	0.021	0.011	0.020	0.122	7.225	7.000
7.086	7.286	7.270	0.100	0.094	0.010	0.010	7.392	7.337	0.090	0.082	0.316	0.304	2.313	2.063	0.021	0.011	0.020	0.122	7.321	7.086
7.125	7.325	7.309	0.100	0.094	0.010	0.010	7.431	7.376	0.090	0.082	0.316	0.304	2.313	2.063	0.021	0.011	0.020	0.122	7.361	7.125
7.250	7.450	7.434	0.100	0.094	0.010	0.010	7.566	7.501	0.090	0.082	0.316	0.304	2.313	2.063	0.021	0.011	0.020	0.122	7.486	7.250
7.375	7.575	7.559	0.100	0.094	0.010	0.010	7.693	7.628	0.090	0.082	0.316	0.304	2.313	2.063	0.021	0.011	0.020	0.122	7.412	7.375

Table 3. Dimensions of Type 2B01 Light Duty Internal Retaining Rings, Grooves, and Gages (Continued)

B	C	F	H	A	T	W	G	R	M	S	D	E
7.480	7.680	0.100	0.010	7.799	0.090	0.316	2.313	0.021	0.020	0.122	7.717	7.480
7.500	7.664	0.100	0.010	7.734	0.090	0.304	2.063	0.011	0.020	0.122	7.738	7.500
7.625	7.684	0.100	0.010	7.819	0.090	0.316	2.313	0.021	0.020	0.122	7.750	7.625
7.750	7.835	0.100	0.010	7.890	0.090	0.316	2.063	0.011	0.020	0.122	7.773	7.750
7.875	7.960	0.100	0.010	8.014	0.090	0.304	2.313	0.021	0.020	0.122	7.799	7.875
8.000	8.069	0.100	0.010	8.131	0.090	0.316	2.063	0.011	0.020	0.122	8.124	8.000
8.250	8.210	0.100	0.010	8.331	0.090	0.304	2.313	0.021	0.020	0.122	8.250	8.250
8.267	8.470	0.100	0.010	8.528	0.090	0.379	2.063	0.021	0.020	0.122	8.511	8.267
8.464	8.487	0.100	0.010	8.546	0.090	0.379	2.313	0.021	0.020	0.122	8.528	8.464
8.500	8.684	0.100	0.010	8.744	0.090	0.379	2.063	0.021	0.020	0.122	8.726	8.500
8.750	8.720	0.100	0.010	8.809	0.090	0.379	2.313	0.021	0.020	0.122	8.763	8.750
8.858	8.964	0.100	0.010	8.845	0.090	0.367	2.063	0.021	0.020	0.122	9.024	8.858
9.000	9.072	0.100	0.010	9.106	0.090	0.379	2.313	0.021	0.020	0.122	9.132	9.000
9.055	9.214	0.100	0.010	9.151	0.090	0.367	2.063	0.021	0.020	0.122	9.275	9.055
9.250	9.279	0.100	0.010	9.293	0.090	0.379	2.313	0.021	0.020	0.122	9.340	9.250
9.448	9.474	0.100	0.010	9.359	0.090	0.367	2.063	0.021	0.020	0.122	9.536	9.448
9.500	9.672	0.100	0.010	9.424	0.090	0.379	2.313	0.021	0.020	0.122	9.735	9.500
9.750	9.724	0.100	0.010	9.555	0.090	0.367	2.063	0.021	0.020	0.122	9.788	9.750
10.000	9.820	0.100	0.010	9.806	0.090	0.379	2.313	0.021	0.020	0.122	10.049	10.000
10.250	9.871	0.100	0.010	10.068	0.090	0.367	2.063	0.021	0.020	0.122	10.300	10.250
10.500	10.133	0.100	0.010	10.320	0.090	0.379	2.313	0.021	0.020	0.122	10.561	10.500
10.750	10.385	0.100	0.010	10.582	0.090	0.367	2.063	0.021	0.020	0.122	10.813	10.750
11.000	10.647	0.100	0.010	10.834	0.090	0.379	2.313	0.021	0.020	0.122	11.074	11.000
	10.760	0.100	0.010	10.899	0.090	0.367	2.063	0.021	0.020	0.122	11.325	
	11.020	0.100	0.010	11.160	0.090	0.379	2.313	0.021	0.020	0.122		
	11.270	0.100	0.010	11.412	0.090	0.367	2.063	0.021	0.020	0.122		

