

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Safety requirements for electrical equipment for measurement, control, and laboratory use –

Part 2-033: Particular requirements for hand-held multimeters and other meters for domestic and professional use, capable of measuring mains voltage

Exigences de sécurité pour appareils électriques de mesurage, de régulation et de laboratoire –

Partie 2-033: Exigences particulières pour les multimètres portatifs pour usage domestique et professionnel, capables de mesurer la tension réseau



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Safety requirements for electrical equipment for measurement, control, and laboratory use –

Part 2-033: Particular requirements for hand-held multimeters and other meters for domestic and professional use, capable of measuring mains voltage

Exigences de sécurité pour appareils électriques de mesurage, de régulation et de laboratoire –

Partie 2-033: Exigences particulières pour les multimètres portatifs pour usage domestique et professionnel, capables de mesurer la tension réseau

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 19.080, 71.040.10

ISBN 978-2-8322-7418-7

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	7
1 Scope and object.....	8
2 Normative references	9
3 Terms and definitions	10
4 Tests	10
5 Marking and documentation.....	11
6 Protection against electric shock	13
7 Protection against mechanical HAZARDS.....	18
8 Resistance to mechanical stresses	18
9 Protection against the spread of fire and arc flash	18
10 Equipment temperature limits and resistance to heat.....	22
11 Protection against HAZARDS from fluids and solid foreign objects	22
12 Protection against radiation, including laser sources, and against sonic and ultrasonic pressure	22
13 Protection against liberated gases and substances, explosion and implosion	23
14 Components and subassemblies	23
15 Protection by interlocks	23
16 HAZARDS resulting from application	23
17 RISK assessment	23
101 Measuring circuits	23
Annexes	27
Annex K (normative) Insulation requirements not covered by 6.7	28
Annex L (informative) Index of defined terms	36
Annex AA (normative) MEASUREMENT CATEGORIES	37
Annex BB (informative) HAZARDS pertaining to measurements performed in certain environments	40
Annex CC (informative) 4 mm "banana" TERMINALS	43
Annex DD (informative) Flowchart for insulation according to the type of circuit	45
Annex EE (informative) Determination of CLEARANCES for Table 101	48
Bibliography.....	49
Figure 4 – Acceptable arrangement of protective means against electric shock	14
Figure AA.1 – Example to identify the locations of MEASUREMENT CATEGORIES	38
Figure CC.1 – Recommended dimensions of 4 mm TERMINALS	44
Figure DD.1 – Requirements for CLEARANCE, CREEPAGE DISTANCE and solid insulation.....	47
Table 101 – CLEARANCES for unmated measuring circuit TERMINALS.....	15
Table 102 – Impulse voltages for circuits connected to MAINS.....	22
Table K.15 – CLEARANCE values for the calculation of K.3.2	29
Table K.16 – Test voltages based on CLEARANCES	30
Table K.101 – CLEARANCES for measuring circuits RATED for MEASUREMENT CATEGORIES.....	32

Table K.102 – Impulse test voltages for testing electric strength of solid insulation for measuring circuits RATED for MEASUREMENT CATEGORIES	33
Table K.103 – a.c. test voltages for testing electric strength of solid insulation for measuring circuits RATED for MEASUREMENT CATEGORIES	33
Table K.104 – Minimum values for distance or thickness of solid insulation for measuring circuits RATED for MEASUREMENT CATEGORIES	34
Table AA.1 – Characteristics of MEASUREMENT CATEGORIES	39
Table EE.1 – CLEARANCE values for Table 101	48

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SAFETY REQUIREMENTS FOR ELECTRICAL EQUIPMENT
FOR MEASUREMENT, CONTROL, AND LABORATORY USE –****Part 2-033: Particular requirements for hand-held multimeters
and other meters for domestic and professional use,
capable of measuring mains voltage**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61010-2-033 has been prepared by IEC technical committee 66: Safety of measuring, control and laboratory equipment. It is an International Standard.

This third edition cancels and replaces the second edition published in 2019. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Clause 2, all normative references have been dated and new normative references have been added;
- b) 4.4.2.101 is a new subclause about surge protective devices;

- c) Subclause 6.6.101 modifies 6.6.101 and 6.6.102 of previous edition:
- 1) in 6.6.101.1, insulating material of group I may be allowed for determination of CREEPAGE DISTANCES of measuring circuit TERMINALS;
 - 2) in 6.6.101.2, CLEARANCES and CREEPAGE DISTANCES up to 3 000 V for measuring circuit TERMINALS in unmated position have been defined;
 - 3) in 6.6.101.3, requirements for measuring circuit TERMINALS in partially mated position have been specified;
 - 4) in 6.6.101.4, requirements for measuring circuit TERMINALS in mated position have been specified;
 - 5) Subclause 6.6.101.5 replaces 6.6.102;
- d) Subclause 6.101 replaces 6.9.101 of the previous edition with modifications;
- e) 9.101 is a new subclause to consider the protection of measuring circuits against the spread of fire and arc flash;
- f) in 9.101.2, relocation of 101.3 of previous edition;
- g) in 9.101.3, relocation of 101.4 of previous edition;
- h) in 101.3, relocation of Clause 102 of previous edition;
- i) in K.2.1, another method for determination of CLEARANCES of secondary circuits is proposed;
- j) in K.3.2, new Table K.15 and Table K.16 for CLEARANCE calculation;
- k) Clause K.4 of the previous edition has been deleted;
- l) Subclause K.101.4 has been reviewed;
- m) Table K.104 of the previous edition has been deleted;
- n) Annex AA: Figure AA.1 has been redesigned;
- o) Annex EE: addition of a new informative annex for determination of CLEARANCES for the purposes of Table 101.

The text of this International Standard is based on the following documents:

Draft	Report on voting
66/787/FDIS	66/797/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts of the IEC 61010 series, under the general title *Safety requirements for electrical equipment for measurement, control, and laboratory use*, can be found on the IEC website.

This document is to be used in conjunction with IEC 61010-1:2010 and IEC 61010-1:2010/AMD1:2016.

This document supplements or modifies the corresponding clauses in IEC 61010-1 so as to convert that publication into the IEC standard: *Particular requirements for hand-held multimeters and other meters for domestic and professional use, capable of measuring mains voltage*.

Where a particular subclause of IEC 61010-1 is not mentioned in this document, that subclause applies as far as is reasonable. Where this document states "addition", "modification", "replacement", or "deletion" the relevant requirement, test specification or note in IEC 61010-1 should be adapted accordingly.

In this standard:

- a) the following print types are used:
 - requirements: in roman type;
 - NOTES: in small roman type;
 - *conformity and tests: in italic type*;
 - terms used throughout this standard which have been defined in Clause 3: SMALL ROMAN CAPITALS;
- b) subclauses, figures, tables and notes which are additional to those in IEC 61010-1 are numbered starting from 101. Additional annexes are lettered starting from AA and additional list items are lettered from aa).

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 61010-1 specifies the safety requirements that are generally applicable to all equipment within its scope. For certain types of equipment, the requirements of IEC 61010-1 and its amendment will be supplemented or modified by the special requirements of one or more standard from the IEC 61010-2 series which is/are read in conjunction with the requirements of IEC 61010-1.

- 1) IEC 61010-2-030:2023 specifies the safety requirements for equipment with testing or measuring circuits which are connected for test or measurement purposes to devices or circuits outside the measurement equipment itself.
- 2) IEC 61010-2-032:2023 specifies the safety requirements for hand-held and hand-manipulated current sensors for measuring, detecting, injecting current, or indicating current waveforms on circuits without physically opening the current path of the circuit being measured.

Most of the requirements of IEC 61010-2-030:2023 have been included in IEC 61010-2-032:2023. Equipment within the scopes of both IEC 61010-2-030:2023 and IEC 61010-2-032:2023 is considered to be covered by the requirements of IEC 61010-2-032:2023.

However, for current sensors in combined equipment with protective bonding and automatic disconnection of the supply, IEC 61010-2-030:2023 and IEC 61010-2-032:2023 are read in conjunction.

- 3) This document specifies the safety requirements for hand-held multimeters and other meters for domestic and professional use, capable of measuring mains voltage, intended to measure voltage and other electrical quantities such as resistance or current.

All relevant requirements of IEC 61010-2-030:2023 have been included in this document.

- 4) IEC 61010-2-034:2023 specifies the safety requirements for measurement equipment for insulation resistance and test equipment for electric strength which are connected to units, lines or circuits for test or measurement purposes.

All relevant requirements of IEC 61010-2-030:2023 have been included in IEC 61010-2-034:2023. However, for equipment within the scope of IEC 61010-2-032:2023 and IEC 61010-2-034:2023, these standards are read in conjunction.

IEC 61010-031 specifies the safety requirements for hand-held and hand-manipulated probe assemblies and their related accessories intended to be used in particular with equipment in the scope of IEC 61010-2-030, IEC 61010-2-032, this document, and IEC 61010-2-034. These probe assemblies are for non-contact or direct electrical connection between a part and electrical test and measurement equipment. They may be fixed to the equipment or be detachable accessories for the equipment.

SAFETY REQUIREMENTS FOR ELECTRICAL EQUIPMENT FOR MEASUREMENT, CONTROL, AND LABORATORY USE –

Part 2-033: Particular requirements for hand-held multimeters and other meters for domestic and professional use, capable of measuring mains voltage

1 Scope and object

IEC 61010-1:2010, Clause 1 and IEC 61010-1:2010/AMD1:2016, Clause 1 apply except as follows:

1.1.1 Equipment included in scope

Replace the existing text with the following:

This document specifies safety requirements for hand-held multimeters and other meters for domestic and professional use, capable of measuring MAINS.

Hand-held multimeters are multi-range multifunction measuring instruments intended to measure voltage and other electrical quantities such as resistance or current. Their primary purpose is to measure voltage on a live MAINS. They are suitable to be supported by one hand during NORMAL USE.

1.1.2 Equipment excluded from scope

Add the following new item to the list and the following paragraph:

- aa) IEC 61557 (all parts), *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures*

HAND-HELD EQUIPMENT such as oscilloscopes, wattmeters, process control multimeters not RATED for measuring voltage on a live MAINS, clamp multimeters and communications test sets are not within the scope of this document.

1.2.1 Aspects included in scope

Replace item c) of the second paragraph with the following new item c):

- c) spread of fire or arc flash from the hand-held multimeters (see Clause 9);

Replace the third paragraph with the following two new paragraphs:

Requirements for protection against HAZARDS arising from NORMAL USE, REASONABLY FORESEEABLE MISUSE and ergonomic factors are specified in Clause 16 and Clause 101.

Annex BB provides guidance to equipment manufacturers on HAZARDS that should be considered for equipment intended for performing tests and measurements on hazardous conductors, including MAINS conductors and telecommunication network conductors.

2 Normative references

IEC 61010-1:2010, Clause 2 and IEC 61010-1:2010/AMD1:2016, Clause 2 apply except as follows:

Replace the following existing normative references:

IEC 60364-4-44:2007, *Low-voltage electrical installations – Part 4-44: Protection for safety – Protection against voltage disturbances and electromagnetic disturbances*
IEC 60364-4-44:2007/AMD1:2015

IEC 61010-031, *Safety requirements for electrical equipment for measurement, control and laboratory use – Part 031: Safety requirements for hand-held probe assemblies for electrical measurement and test*

IEC 61180 (all parts), *High-voltage test techniques for low-voltage equipment*

IEC 61180-1, *High-voltage test techniques for low-voltage equipment – Part 1: Definitions, test and procedure requirements*

IEC 61180-2, *High-voltage test techniques for low-voltage equipment – Part 2: Test equipment*

with the following new normative references:

IEC 60364-4-44:2007, *Low-voltage electrical installations – Part 4-44: Protection for safety – Protection against voltage disturbances and electromagnetic disturbances*
IEC 60364-4-44:2007/AMD1:2015
IEC 60364-4-44:2007/AMD2:2018

IEC 61010-031:2022, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 031: Safety requirements for hand-held and hand-manipulated probe assemblies for electrical test and measurement*

IEC 61180:2016, *High-voltage test techniques for low-voltage equipment – Definitions, test and procedure requirements, test equipment*¹

Add the following new normative references:

IEC 61000-4-5:2014, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*
IEC 61000-4-5:2014/AMD1:2017

IEC 61010-2-030:2023, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-030: Special requirements for testing and measuring circuits*

IEC 61010-2-032:2023, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-032: Particular requirements for hand-held and hand-manipulated current sensors for electrical test and measurement*

¹ IEC 61180:2016 replaces everywhere IEC 61180, IEC 61180-1 and IEC 61180-2 are referenced in IEC 61010-1.

3 Terms and definitions

IEC 61010-1:2010, Clause 3 and IEC 61010-1:2010/AMD1:2016, Clause 3 apply except as follows:

3.5 Safety terms

Replace the definition of 3.5.4 with the following new definition:

3.5.4

MAINS

electricity supply system

Add the following new term and definition:

3.5.101

MEASUREMENT CATEGORY

classification of testing and measuring circuits according to the type of MAINS to which they are intended to be connected

4 Tests

IEC 61010-1:2010, Clause 4 and IEC 61010-1:2010/AMD1:2016, Clause 4 apply except as follows:

4.3.2.5 MAINS supply

Replace the existing title and text with the following:

4.3.2.5 Power supply

The following requirements apply:

- a) the voltage of the power supply connected to the MAINS shall be between 90 % and 110 % of any RATED supply voltage for which the hand-held multimeter can be set or, if the hand-held multimeter is RATED for a greater fluctuation, at any supply voltage within the fluctuation range;
- b) the MAINS frequency shall be any RATED frequency;
- c) hand-held multimeters for both a.c. and d.c. shall be connected to an a.c. or d.c. supply;
- d) hand-held multimeters powered from MAINS by single-phase a.c. shall be connected both with normal and reverse polarity;
- e) if the means of connection permit reversal, battery-operated and d.c. hand-held multimeters shall be connected with both reverse and normal polarity.

4.3.2.6 Input and output voltages

Replace the existing title and text with the following:

4.3.2.6 Input and output voltages or currents

Input and output voltages or currents, including floating voltages but excluding the supply voltage connected to the MAINS, shall be set to any voltage or current within their RATED range, in normal and reverse polarity if possible.

Add the following new subclause:

4.4.2.101 Surge protective devices

Surge protective devices used in MAINS CIRCUITS or in circuits measuring MAINS shall be short-circuited and open-circuited.

5 Marking and documentation

IEC 61010-1:2010, Clause 5 and IEC 61010-1:2010/AMD1:2016, Clause 5 apply except as follows:

5.1.2 Identification

Add the following note after the existing note:

NOTE 101 Some national regulations can require a marking to indicate the name and edition of the standard used for compliance evaluation.

5.1.5 TERMINALS, connections and operating devices

5.1.5.1 General

Replace the first paragraph with the following:

If necessary for safety, an indication shall be given of the purpose of TERMINALS, connectors, controls, and indicators. Where there is insufficient space, symbol 14 from Table 1 may be used.

5.1.5.2 TERMINALS

Replace the existing item d) with the following item d):

- d) TERMINALS supplied from the interior of the hand-held multimeter and which could be HAZARDOUS LIVE, with the voltage, current, charge or energy value or range, or with symbol 12 of Table 1;

Add the following new item to the list:

- aa) TERMINALS supplied from other TERMINALS which could be HAZARDOUS LIVE, with symbol 12 or symbol 14 of Table 1.

Add the following new subclause:

5.1.5.101 Measuring circuit TERMINALS

Measuring circuit TERMINALS are usually arranged in pairs or sets. Each pair or set of TERMINALS may have a RATED voltage or a RATED current, or both, within that set, and each individual TERMINAL will have a RATED voltage to earth. For some hand-held multimeters, the RATED voltage between TERMINALS may be different from the RATED voltage to earth. Markings shall be clear to avoid misunderstanding.

Each pair or set of measuring circuit TERMINALS that are intended to be used together shall be marked with the value of the RATED voltage or the RATED current as applicable to the pair or set of TERMINALS.

TERMINALS of measuring circuits RATED for MAINS voltage measurements shall be marked with "CAT III" or "CAT IV" and its RATED a.c. r.m.s. line-to-neutral or d.c. voltage as applicable. Marking those TERMINALS with these two types of MEASUREMENT CATEGORY is permissible. Marking of MEASUREMENT CATEGORY II is not allowed. Other measuring circuit TERMINALS shall be marked with the value of the RATED voltage to earth.

NOTE CLEARANCES and solid insulation for MEASUREMENT CATEGORIES are specified for a nominal a.c. r.m.s. line-to-neutral or d.c. voltage of MAINS being measured. Neutral is considered to be earthed (see Table K.101 Annex I).

Measuring circuit TERMINALS that do not have a RATING for connection to voltages above the levels of 6.3.1, may be marked with alternative markings.

Measuring circuit TERMINALS which are dedicated only for connection to specific TERMINALS of other equipment need not be marked provided that there is a means of identifying these TERMINALS.

TERMINAL markings shall be visible when the hand-held multimeter is ready for NORMAL USE with connectors and TERMINALS mated and shall reference the applicable TERMINALS.

Conformity is checked by inspection.

5.2 Warning markings

Replace the existing text with the following text:

Warning markings specified in this document shall meet the following requirements.

Warning markings shall be visible when the hand-held multimeter is ready for NORMAL USE. If a warning applies to a particular part of the hand-held multimeter, the marking shall be placed on or near that part.

The size of warning markings shall be as follows.

- a) Symbols shall be at least 2,75 mm high. Text shall be at least 1,5 mm high and contrast in colour with the background.
- b) Symbols or text moulded, stamped or engraved in a material shall be at least 2,0 mm high. If not contrasting in colour, they shall have a depth or raised height of at least 0,5 mm.

If it is necessary for the RESPONSIBLE BODY or OPERATOR to refer to the instruction manual to preserve the protection afforded by the hand-held multimeter, the hand-held multimeter shall be marked with symbol 14 of Table 1. Symbol 14 is not required to be used together with symbols which are explained in the manual.

If the instructions for use state that an OPERATOR is permitted to gain access, using a TOOL, to a part which in NORMAL USE may be HAZARDOUS LIVE, there shall be a warning marking which states that the hand-held multimeter shall be isolated or disconnected from the HAZARDOUS LIVE voltage before access.

NOTE National regulations can require safety markings in a nationally accepted language.

Conformity is checked by inspection.

5.4.1 General

Replace the first paragraph except its list with the following paragraph:

The following documentation necessary for safety purposes, as needed by the OPERATOR or the RESPONSIBLE BODY, shall be provided with the hand-held multimeter, in an accepted language of the country where the product is intended to be placed on the market. The following safety documentation for service personnel authorized by the manufacturer shall be made available to those personnel, in a language selected by the manufacturer:

Add the following two new items to the list and a new paragraph at the end of the list:

- aa) the documentation shall indicate that probe assemblies to be used for MAINS measurements shall be RATED as appropriate for MEASUREMENT CATEGORY III or IV according to IEC 61010-031:2022 and shall have a voltage RATING of at least the voltage of the circuit to be measured;
- bb) information about each relevant MEASUREMENT CATEGORY (see 5.1.5.101).

If the hand-held multimeter is capable of measuring in multiple MEASUREMENT CATEGORY RATINGS for the same measuring circuit, the documentation shall clearly identify the MEASUREMENT CATEGORIES where the hand-held multimeter may be used and where it shall not be used.

6 Protection against electric shock

IEC 61010-1:2010, Clause 6 and IEC 61010-1:2010/AMD1:2016, Clause 6 apply except as follows:

6.5.1 General

Replace the text, the conformity statement, and Figure 4 with the following text, conformity statement and Figure 4:

ACCESSIBLE parts shall be prevented from becoming HAZARDOUS LIVE in SINGLE FAULT CONDITION. The primary means of protection (see 6.4) shall be supplemented by one of a) or b) below. Alternatively, one of the single means of protection c) or d) below shall be used (see Figure 4 and Annex DD).

- a) SUPPLEMENTARY INSULATION (see 6.5.3);
- b) current- or voltage-limiting device (see 6.5.6);
- c) REINFORCED INSULATION (see 6.5.3);
- d) PROTECTIVE IMPEDANCE (see 6.5.4).

Conformity is checked by inspection and as specified in 6.5.3, 6.5.4, or 6.5.6, as applicable.

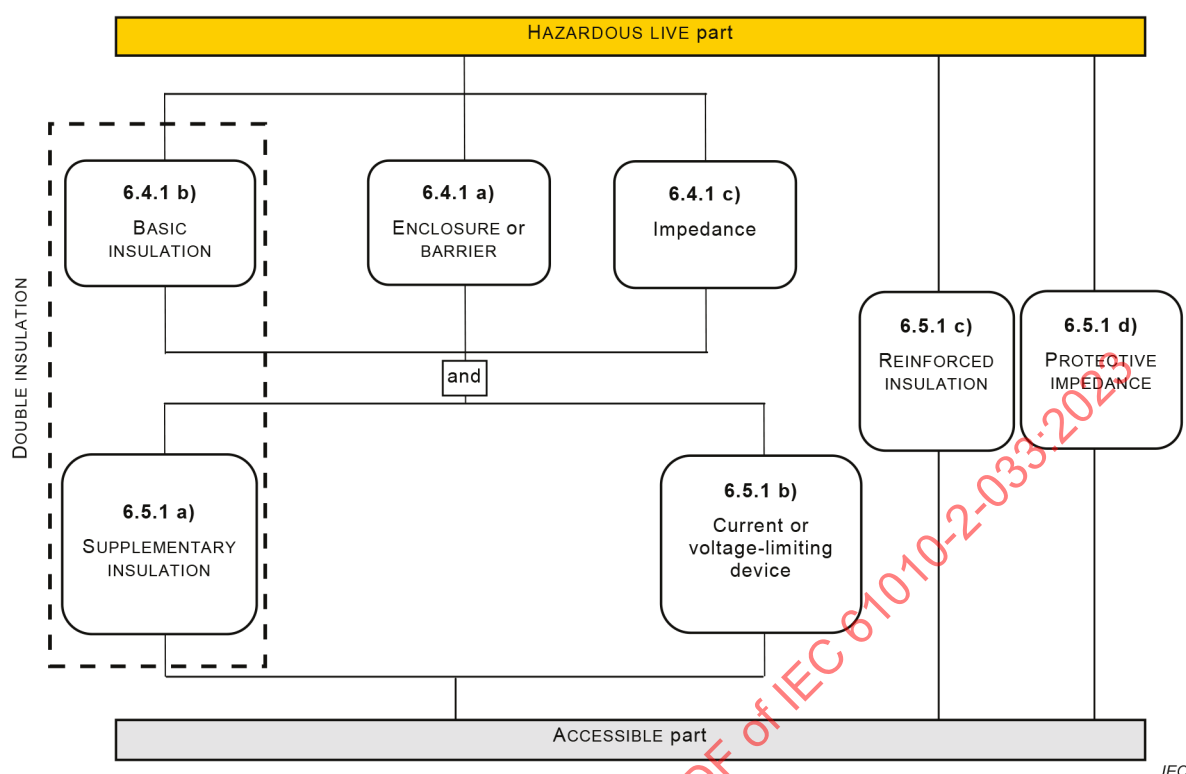


Figure 4 – Acceptable arrangement of protective means against electric shock

6.5.2 Protective bonding

Replace the existing title of 6.5.2 with the following title and delete the text:

6.5.2 Not used

6.5.5 Automatic disconnection of the supply

Replace the existing title of 6.5.5 with the following title and delete the text:

6.5.5 Not used

6.6 Connections to external circuits

Add the following new subclause and table:

6.6.101 Measuring circuit TERMINALS

6.6.101.1 General

When determining the values of CREEPAGE DISTANCES for measuring circuit TERMINALS of a hand-held multimeter intended to be connected only to a hand-held probe assembly complying with IEC 61010-031:2022, or to a current sensor complying with IEC 61010-2-032:2023, the applicable values of CREEPAGE DISTANCES from material group I are allowed to be applied to all material groups.

Requirements for measuring circuit TERMINALS in unmated position, partially mated or mated position are defined respectively in 6.6.101.2, 6.6.101.3 and 6.6.101.4. Requirements for specialized measuring circuit TERMINALS are defined in 6.6.101.5.

Annex CC provides information regarding the recommended dimensions of 4 mm "banana" TERMINALS.

6.6.101.2 Measuring circuit TERMINALS in unmated position

The following requirements apply to measuring circuits TERMINALS in unmated position when RATED voltages are applied to any other TERMINALS of the hand-held multimeter.

ACCESSIBLE parts of unmated measuring circuit TERMINALS shall be insulated from HAZARDOUS LIVE parts by PROTECTIVE IMPEDANCE or CLEARANCES and CREEPAGE DISTANCES meeting the requirements of a) and b) as follows.

- a) For measuring circuit TERMINALS with a voltage RATING up to 3 000 V, the CLEARANCES shall be at least the applicable values of Table 101.

Table 101 – CLEARANCES for unmated measuring circuit TERMINALS

Maximum voltage applied to the conductive parts of the TERMINAL V	CLEARANCE	
	a.c. r.m.s. mm	d.c. mm
600	0,8	0,8
1 000	1,0	0,8
1 500	2,0	1,1
2 000	3,2	1,8
3 000	6,4	3,5
For maximum voltages above 30 V a.c. r.m.s. or 60 V d.c. up to 600 V, CLEARANCES are 0,8 mm. Linear interpolation is allowed above 600 V. NOTE See Annex EE.		

If the hand-held multimeter is RATED to operate at an altitude greater than 2 000 m, the value of the CLEARANCE shall be multiplied by the applicable factor of Table 3.

Conformity is checked by one of the following tests:

- inspection and measurement of CLEARANCE from the closest approach of the test finger touching the external parts of the TERMINAL in the least favourable position (see Figure 1), or*
- the a.c. voltage test of 6.8.3.1 or the d.c. voltage test of 6.8.3.2 for TERMINAL stressed only by d.c. with a duration of at least 5 s, or the impulse voltage test of 6.8.3.3, using the applicable test voltage of Table K.16 for the required CLEARANCE.*

Correction factors of Table 10 are applicable to the values of test voltages for CLEARANCES given in Table K.16.

- b) The CREEPAGE DISTANCE values shall be at least the applicable CLEARANCE values defined in a) of this Subclause 6.6.101.2.

Conformity is checked by inspection and measurement of CREEPAGE DISTANCES from the closest approach of the test finger touching the external parts of TERMINAL in the least favourable position.

In addition for hand-held multimeters RATED for WET LOCATIONS, conductive parts of TERMINALS with voltage RATINGS above 16 V a.c. r.m.s., 22,6 V a.c. peak and 35 V d.c. shall not be ACCESSIBLE.

Conformity is checked by inspection and measurement.

6.6.101.3 Measuring circuit TERMINALS in partially mated position

ACCESSIBLE parts of measuring circuit TERMINALS in partially mated position shall be insulated from HAZARDOUS LIVE parts by BASIC INSULATION.

Conformity is checked by inspection and measurement.

6.6.101.4 Measuring circuit TERMINALS in mated position

ACCESSIBLE parts of measuring circuit TERMINALS in mated position which are not intended to be hand-held or touched during the measurement operation shall be insulated from HAZARDOUS LIVE parts by BASIC INSULATION.

ACCESSIBLE parts of TERMINALS in mated position of other measuring circuits shall be insulated from HAZARDOUS LIVE parts by DOUBLE INSULATION or REINFORCED INSULATION.

Conformity is checked by inspection and measurement.

6.6.101.5 Specialized measuring circuit TERMINALS

Specialized measuring circuit TERMINALS are TERMINALS intended to be connected to components, sensors, and devices.

NOTE These specialized TERMINALS include, but are not limited to, TERMINALS for thermocouple sockets.

Components, sensors, and devices intended to be connected to specialized measuring circuit TERMINALS shall not be both ACCESSIBLE and HAZARDOUS LIVE, in either NORMAL CONDITION or in SINGLE FAULT CONDITION, even when the highest RATED voltage is applied to any other measuring circuit TERMINAL.

Conformity is checked by inspection and measurement. Components, sensors, and devices intended to be connected to specialized measuring circuit TERMINALS are connected. The measurements of 6.3 are made to establish that the levels of 6.3.1 and 6.3.2 are not exceeded when each of the following voltages is applied to each of the other measuring circuit TERMINALS, if applicable:

- a) highest RATED a.c. voltage at any RATED MAINS frequency;
- b) highest RATED d.c. voltage;
- c) highest RATED a.c. voltage at the related maximum RATED measurement frequency.

6.7.1.3 CREEPAGE DISTANCES

Add the following new paragraph after the third paragraph:

For a hand-held multimeter not powered from the MAINS or from the measuring circuit, the applicable values of CREEPAGE DISTANCES from material group I are allowed to be applied to all materials.

6.7.1.5 Requirements for insulation according to type of circuit

Replace the text with the following:

Requirements for insulation in particular types of circuits are specified as follows:

- a) in 6.7.2 for MAINS CIRCUITS of OVERVOLTAGE CATEGORY II with a nominal supply voltage up to 300 V;
- b) in 6.7.3 for secondary circuits separated from the circuits in a) by means of a transformer only;

- c) in Clause K.1 for MAINS CIRCUITS of OVERVOLTAGE CATEGORY III or IV or for OVERVOLTAGE CATEGORY II over 300 V;
- d) in Clause K.2 for secondary circuits separated from the circuits in c) by means of a transformer only;
- e) in Clause K.3 for circuits that have one or more of the following characteristics:
 - 1) the maximum possible TRANSIENT OVERVOLTAGE is limited by the supply source or within the hand-held multimeter to a known level below the level assumed for the MAINS CIRCUIT;
 - 2) the maximum possible TRANSIENT OVERVOLTAGE is above the level assumed for the MAINS CIRCUIT;
 - 3) the WORKING VOLTAGE is the sum of voltages from more than one circuit, or is a mixed voltage;
 - 4) the WORKING VOLTAGE includes a recurring peak voltage that may include a periodic non-sinusoidal waveform or a non-periodic waveform that occurs with some regularity;
 - 5) the WORKING VOLTAGE has a frequency above 30 kHz;
 - 6) the circuit is a measuring circuit where MEASUREMENT CATEGORIES do not apply;
- f) in Clause K.101 for measuring circuits RATED for MEASUREMENT CATEGORIES.

NOTE 1 See Annex I for line-to-neutral voltage pertinent to MAINS type and nominal voltage.

NOTE 2 These requirements are illustrated in the flowchart of Annex DD, Figure DD.1.

NOTE 3 See Clause K.3 for requirements for switching circuits such as a switching power supply.

The TRANSIENT OVERVOLTAGE levels for the MAINS correspond to the impulse voltage values specified in Table 102.

6.8.1 General

Replace the second and third paragraphs with the following three new paragraphs:

Test equipment for the voltage tests is specified in IEC 61180:2016.

For testing CLEARANCES of unmated TERMINALS (see 6.6.101.2 a) ii)), the reference point for application of the test voltage is determined using the test finger applied to the external parts of the TERMINAL in the least favourable position with the closest approach. Alternatively, a test probe with a tip in the shape of the test finger can be used for application of the test voltage.

For other testing, ACCESSIBLE insulating parts of the ENCLOSURE are covered with metal foil everywhere except around unmated TERMINALS. For test voltages up to 10 kV a.c. peak or 10 kV d.c., the distance from foil to TERMINAL is not more than 20 mm. For higher voltages it is the minimum to prevent flashover. For guidance on these minimum distances, see Table 9.

6.8.3.1 The a.c. voltage test

Replace the first sentence with the following sentence:

The voltage tester shall be capable of maintaining the test voltage throughout the test within ± 3 % of the specified value.

6.8.3.2 The d.c. voltage test

Add a new sentence at the beginning of the first paragraph:

The voltage tester shall have a regulated output capable of maintaining the test voltage throughout the test within ± 3 % of the specified value.

Add the following new subclause:

6.101 Hand-held multimeter ratings

TERMINALS of measuring circuits intended for MAINS voltage measurements shall be RATED for a minimum voltage of 300 V a.c. r.m.s. line-to-neutral or 300 V d.c., a maximum voltage of 3 000 V and a minimum MEASUREMENT CATEGORY III.

The RATED voltage of the TERMINALS of a measuring circuit intended for MAINS voltage measurements shall be equal to or higher than their RATED a.c. r.m.s. line-to-neutral or d.c. voltage.

NOTE These TERMINALS can also have RATING for other functions.

Conformity is checked by inspection.

7 Protection against mechanical HAZARDS

IEC 61010-1:2010, Clause 7 and IEC 61010-1:2010/AMD1:2016, Clause 7 apply.

8 Resistance to mechanical stresses

IEC 61010-1:2010, Clause 8 applies.

9 Protection against the spread of fire

Replace the existing title with the following title:

9 Protection against the spread of fire and arc flash

IEC 61010-1:2010, Clause 9 and IEC 61010-1:2010/AMD1:2016, Clause 9 apply except as follows:

Add the following new subclause and table:

9.101 Protection of measuring circuits

9.101.1 General

The hand-held multimeter shall provide protection against fire or arc flash resulting from NORMAL USE and REASONABLY FORESEEABLE MISUSE of measuring circuits, as specified in a) and b) below:

- a) an electrical quantity that is within specification for any TERMINAL when it is applied to that TERMINAL or to any other compatible TERMINAL, with the range and function settings set in any possible manner (see 9.101.2);
- b) a TEMPORARY OVERVOLTAGE or a TRANSIENT OVERVOLTAGE when it is applied on the measuring circuit TERMINALS in a voltage measurement function (see 9.101.3).

Conformity is checked as specified in 9.101.2 and 9.101.3 as applicable.

9.101.2 Protection against mismatches of inputs and ranges

9.101.2.1 General

In NORMAL CONDITION and in cases of REASONABLY FORESEEABLE MISUSE, no HAZARD shall arise when the highest RATED voltage or current of a measuring circuit TERMINAL is applied to that TERMINAL or to any other compatible TERMINAL, with any combination of function and range settings.

NOTE Mismatches of inputs and ranges are examples of REASONABLY FORESEEABLE MISUSE, even if the documentation or markings prohibit such mismatch. A typical example is inadvertent connection of a high voltage to a measuring input intended for current or resistance. Possible HAZARDS include electric shock, burns, fire, arcing and explosion.

TERMINALS that are clearly not of similar types and that will not retain the connectors of the probe assembly or the accessory do not need to be tested and TERMINALS that can only be accessed by use of a TOOL do not need to meet the requirements of this Subclause 9.101.2.1.

The hand-held multimeter shall provide protection against these HAZARDS. One of the following techniques in a) or b) shall be used:

- a) use of a certified overcurrent protection device to interrupt short-circuit currents before a HAZARD arises (see 9.101.2.2);
- b) use of an uncertified current limitation device, an impedance, or a combination of both to prevent the HAZARD from arising (see 9.101.2.3).

Conformity is checked by inspection, evaluation of the design of the hand-held multimeter, and as specified in 9.101.2.2 and 9.101.2.3, as applicable.

9.101.2.2 Protection by a certified overcurrent protection device

An overcurrent protection device is considered suitable if it is certified by a recognized testing authority and if all of the following requirements in a) to c) are met.

- a) The a.c. and d.c. RATED voltages of the overcurrent protection device shall be at least as high as, respectively, the highest a.c. and d.c. RATED voltages of any measuring circuit TERMINAL on the hand-held multimeter.
- b) The RATED time-current characteristic (speed) of the overcurrent protection device shall be such that no HAZARD will result from any possible combination of RATED input voltages, TERMINALS, and range selection.

NOTE In practice, downstream circuit elements such as components and printed wiring board traces are selected to be able to withstand the energy that the overcurrent protection device will let through.

- c) The a.c. and d.c. RATED breaking capacities of the overcurrent protection device shall exceed, respectively, the possible a.c. and d.c. short-circuit currents.

The possible a.c. and d.c. short-circuit currents shall be calculated as the highest RATED voltages for any TERMINAL divided by the impedance of the overcurrent-protected measuring circuit, taking the impedance of the test leads specified in 9.101.2.4 into account.

The possible a.c. short-circuit current does not need to exceed the applicable values of Table AA.1.

Additionally, spacings surrounding the overcurrent protection device in the hand-held multimeter and following the protection device in the measuring circuit shall be sufficiently large to prevent arcing after the protection device opens.

Conformity is checked by inspection of the RATING of the overcurrent protection device and by the following test.

If the protection device is a fuse, it is replaced with an open-circuited fuse. If the protection device is a circuit-breaker, it is set to its open position. A voltage of two times the highest RATED voltage for any TERMINAL is applied to the TERMINALS of the overcurrent-protected measuring circuit for 1 min. During and after the test, no damage to the hand-held multimeter shall occur.

9.101.2.3 Protection by uncertified current limitation devices or by impedances

Devices used for current limitation shall be capable of safely withstanding, dissipating, or interrupting the energy that will result from the application of the maximum RATED voltage of any compatible TERMINAL in NORMAL CONDITION and in the event of REASONABLY FORESEEABLE MISUSE.

An impedance used for limitation of current shall be an appropriate single component as specified in a) or a combination of components as specified in b).

- a) An appropriate single component which is constructed, selected, and tested so that safety and reliability for protection against relevant HAZARDS is ensured. In particular, the component shall:
 - 1) be RATED for the maximum voltage that may be present in NORMAL CONDITION or during the REASONABLY FORESEEABLE MISUSE event;
 - 2) if a resistor, be RATED for twice the power or energy dissipation that may occur in NORMAL CONDITION or from the REASONABLY FORESEEABLE MISUSE event;
 - 3) meet the applicable CLEARANCE and CREEPAGE DISTANCE requirements of Annex K for BASIC INSULATION between its terminations.
- b) A combination of components which shall:
 - 1) withstand the maximum voltage that may be present in NORMAL CONDITION or during the REASONABLY FORESEEABLE MISUSE event;
 - 2) be able to dissipate the power or energy that may occur in NORMAL CONDITION or from the REASONABLY FORESEEABLE MISUSE event;
 - 3) meet the applicable CLEARANCE and CREEPAGE DISTANCE requirements of Annex K for BASIC INSULATION between the terminations of the combination of components.

NOTE 1 The CLEARANCES and CREEPAGE DISTANCES take into account the WORKING VOLTAGE across each insulation.

Conformity is checked by inspection and by the following test, performed three times on the same unit of hand-held multimeter. If the test results in heating of any component, the hand-held multimeter is allowed to cool before the test is repeated.

The possible a.c. and d.c. short-circuit currents are calculated as the highest RATED voltage for any TERMINAL divided by the impedance of the current-limited measuring circuit, taking the impedance of the test leads specified in 9.101.2.4 into account. For MEASUREMENT CATEGORIES III, the possible a.c. short-circuit current should not exceed the values in Table AA.1.

A voltage equal to the highest RATED voltage for any TERMINAL is applied between the TERMINALS of the measuring circuit for 1 min. The source of the test voltage shall be able to deliver a current of at least the possible a.c. or d.c. short-circuit current as applicable. If the function or range controls have any effect on the electrical characteristics of the input circuit, the test is repeated with the function or range controls in every combination of positions, including during the change of function or range. During the test, the voltage output of the source is measured. If the source voltage decreases by more than 20 % for more than 10 ms, the test is considered inconclusive and is repeated with a lower impedance source.

During and after the test, no HAZARD shall arise, nor shall there be any evidence of fire, arcing, explosion, or damage to current limitation devices, impedances or any component intended to provide protection against electric shock, heat, arc or fire, including the ENCLOSURE and traces on the printed wiring board, except for fuses which can open.

NOTE 2 This test can be extremely hazardous. Explosion shields and other provisions can be used to protect personnel performing the test.

9.101.2.4 Test leads for the tests

The tests of 9.101.2.2 and 9.101.2.3 shall be performed with all test leads that are specified or supplied by the manufacturer for use with the hand-held multimeter and if the manufacturer has not specified the test leads, the tests shall be performed with test leads that meet the following specifications in a) to e):

- a) length of each test lead = 1,0 m;
- b) cross section of the conductor = 1,5 mm², stranded copper wire (a conductor with a 16 AWG (American Wire Gauge) cross section is acceptable);
- c) connector compatible with the measuring circuit TERMINALS;
- d) connection to the test voltage source via a bare wire into suitable screw TERMINALS or thimble connectors (twist-on wire connectors) or equivalent means of providing a low impedance connection;
- e) arranged as straight as possible.

Test leads built to these specifications will have a d.c. resistance of about 15 mΩ each, or 30 mΩ per pair. For the purposes of calculation of possible fault current in 9.101.2.2 and 9.101.2.3, the value of 30 mΩ can be used for these test leads.

If the manufacturer-supplied test leads are permanently connected to the hand-held multimeter, then the attached test leads supplied by the manufacturer shall be used without modification.

When the test procedures of 6.8.3 are applied to the hand-held multimeter, the test leads can be the test leads supplied with the test generator without modification.

9.101.3 Protection against MAINS overvoltages

Voltage measuring circuits RATED for MEASUREMENT CATEGORIES shall have CLEARANCES and CREEPAGE DISTANCES for BASIC INSULATION between MAINS-connected conductive parts of opposite polarity including between the terminations of the devices or components used for limiting the current.

Conformity is checked by inspection and measurement.

In addition, these voltage measuring circuits shall take into consideration expected TRANSIENT OVERVOLTAGES.

Conformity is checked by the following impulse voltage test using the applicable values of Table 102.

The impulse voltage is applied between each pair of TERMINALS RATED for MAINS voltage measurements while the circuit is working under conditions of NORMAL USE, in combination with the MAINS voltage. The voltage measurement function selectors are set for the proper function and range.

The impulse voltage test is conducted for five impulses of each polarity spaced up to 1 min apart, from a combination wave generator according to IEC 61000-4-5:2014, 6.2. The generator produces an open-circuit voltage waveform of 1,2/50 μs, a short-circuit current waveform of 8/20 μs, with an output impedance (peak open-circuit voltage divided by peak short-circuit current) of 2 Ω maximum for MEASUREMENT CATEGORIES III and IV. Resistance may be added in series if needed to raise the impedance.

The MAINS voltage used for the test is the maximum RATED line-to-neutral voltage of the MAINS being measured. For measuring circuits RATED for MAINS voltages above 400 V a.c. r.m.s. line-to-neutral or 400 V d.c., the test may be performed with an available MAINS voltage source that has a voltage of at least 400 V a.c. r.m.s. or 400 V d.c. The MAINS voltage source does not, in this case, need to match the measuring circuit RATING. For measuring circuits RATED for MAINS in d.c., an a.c. source can be used. When an a.c. source is used, the impulses are synchronized with the MAINS voltage phase, timed to occur at the peak of the MAINS voltage, and to be of the same polarity as the cycle, with a phase tolerance of $\pm 10^\circ$ (see IEC 61000-4-5:2014, 6.2).

NOTE 1 This test can be extremely hazardous. Explosion shields and other provisions can be used to protect personnel performing the test.

No HAZARD shall arise. No flashover of CLEARANCES or breakdown of solid insulation shall occur during the test, but partial discharges are allowed. Partial discharge will be indicated by a step in the resulting wave shape which will occur earlier in successive impulses. Breakdown on the first impulse may either indicate a complete failure of the insulation system or the operation of overvoltage limiting devices in the hand-held multimeter. If overvoltage limiting devices are present, they shall not rupture or overheat during the test. Tripping the circuit breaker of the MAINS installation is an indication of failure. If the results of the test are questionable or inconclusive, the test is to be repeated two more times.

NOTE 2 Partial discharges in voids can lead to partial notches of extremely short durations in the wave shape which can be repeated in the course of an impulse.

Table 102 – Impulse voltages for circuits connected to MAINS

Nominal a.c. r.m.s line-to-neutral or d.c. voltage of MAINS being measured V	Impulse voltage V peak	
	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV
≤ 150	2 500	4 000
$> 150 \leq 300$	4 000	6 000
$> 300 \leq 600$	6 000	8 000
$> 600 \leq 1\,000$	8 000	12 000
$> 1\,000 \leq 1\,500$	10 000	15 000
$> 1\,500 \leq 2\,000$	15 000	18 000
$> 2\,000 \leq 3\,000$	18 000	20 000
Values up to 1 000 V are from IEC 60664-1:2020, Table F.1.		
Values over 1 000 V are from IEC TS 62993:2017, Table 1.		

10 Equipment temperature limits and resistance to heat

IEC 61010-1:2010, Clause 10 and IEC 61010-1:2010/AMD1:2016, Clause 10 apply.

11 Protection against HAZARDS from fluids and solid foreign objects

IEC 61010-1:2010, Clause 11 and IEC 61010-1:2010/AMD1:2016, Clause 11 apply.

12 Protection against radiation, including laser sources, and against sonic and ultrasonic pressure

IEC 61010-1:2010, Clause 12 and IEC 61010-1:2010/AMD1:2016, Clause 12 apply.

13 Protection against liberated gases and substances, explosion and implosion

IEC 61010-1:2010, Clause 13 and IEC 61010-1:2010/AMD1:2016, Clause 13 apply.

14 Components and subassemblies

IEC 61010-1:2010, Clause 14 and IEC 61010-1:2010/AMD1:2016, Clause 14 apply except as follows:

14.8 Circuits used to limit TRANSIENT OVERVOLTAGES

Replace the existing title of 14.8 with the following title and delete the text:

14.8 Not used

Add the following new subclause:

14.101 Probe assemblies and accessories

Probe assemblies and accessories within the scope of IEC 61010-031:2022 and current sensors within the scope of IEC 61010-2-032:2023 shall meet the requirements thereof.

At minimum, one set of the test leads supplied with the hand-held multimeter shall be RATED according to IEC 61010-031:2022 for at least the highest voltage and MEASUREMENT CATEGORIES of the hand-held multimeter.

Conformity is checked by inspection of the documentation or by carrying out all the relevant tests of IEC 61010-031:2022 or IEC 61010-2-032:2023 as applicable.

15 Protection by interlocks

IEC 61010-1:2010, Clause 15 applies.

16 HAZARDS resulting from application

IEC 61010-1:2010, Clause 16 applies.

17 Risk assessment

IEC 61010-1:2010, Clause 17 applies.

Add the following new clause:

101 Measuring circuits

101.1 General

The hand-held multimeter shall provide protection against HAZARDS resulting from NORMAL USE and REASONABLY FORESEEABLE MISUSE of measuring circuits, as specified in a) to c) below:

- a) a current measuring circuit which could interrupt the circuit being measured during range changing, or during the use of current transformers without internal protection (see 101.2);
- b) a displayed voltage value which can be incorrect or ambiguous (see 101.3);

- c) other HAZARDS that could result from REASONABLY FORESEEABLE MISUSE shall be addressed by RISK assessment (see Clause 16 and Clause 17).

Any interconnection between the hand-held multimeter and other devices or accessories intended to be used with the hand-held multimeter shall not cause a HAZARD even if the documentation or markings prohibit the interconnection while the hand-held multimeter is used for measurement purposes (see 6.6).

Conformity is checked as specified in 6.6, Clause 16, Clause 17, 101.2 and 101.3 as applicable.

101.2 Current measuring circuits

Current measuring circuits shall be so designed that, when range changing takes place, there shall be no interruption which could cause a HAZARD.

Conformity is checked by inspection, and when an interruption of the current measuring circuit may occur, by causing the device to switch the maximum RATED current 6 000 times.

When the secondary circuit of a current transformer is disconnected from its burden, a high voltage can appear between the ends of the open circuit, and could lead to a hazardous situation.

Current measuring circuits intended for connection to current transformers without internal protection shall be adequately protected to prevent a HAZARD arising from interruption of these circuits during operation.

Conformity is checked by an overload test at a value of 10 times the maximum RATED current for 1 s, and, if applicable, by causing the hand-held multimeter to switch the maximum RATED current 6 000 times. No interruption which could cause a HAZARD shall occur during the tests.

101.3 Indicating devices

101.3.1 General

No HAZARD shall occur from reading a voltage value when the hand-held multimeter is operated for measuring MAINS voltages and in the event of REASONABLY FORESEEABLE MISUSE.

A displayed voltage value is considered to be unambiguous when the value is less than 10 % inaccurate, or if there is an indication when the value is out of range, or if there is a clear indication that the value is not correct. A display off is also considered to be unambiguous.

The tests of 101.3.2, 101.3.3 and 101.3.4 shall be performed when relevant.

The a.c. r.m.s. voltages applied to the TERMINALS during the tests have a frequency of 50 Hz or 60 Hz.

101.3.2 Battery level

A voltage value displayed by the hand-held multimeter shall not be affected by the expected variation of its battery voltage.

Conformity is checked by the following test:

For each measuring circuit TERMINAL RATED for MAINS voltage measurements, the voltage in the dashed list below is applied to these TERMINALS.

- a.c. measurement TERMINALS are connected to 60 V a.c. r.m.s.
- d.c. measurement TERMINALS are connected to 120 V d.c.

The supply voltage of the d.c. source connected to the battery connectors decreases by no more than 20 mV/s from the maximum battery voltage to zero. The d.c. source used for this test shall be the batteries or similar source while the impedance of the batteries and ripple-free conditions are taken into account. The test terminates when the display turns off.

The displayed voltage values during the test shall be unambiguous.

NOTE See 101.3.1 for the meaning of the term "unambiguous".

101.3.3 Over-range indication

The hand-held multimeter shall be able to display unambiguously over-range voltage values whenever the value is above the maximum absolute value of the range to which the hand-held multimeter is set.

NOTE Examples of ambiguous indications include the following, unless there is a separate unambiguous indication of an over-range value:

- a) analogue hand-held multimeter which stops at the exact ends of the range;
- b) digital hand-held multimeter which shows a low value when the true value is above the range maximum (for example 1 001,5 V displayed as 001,5 V).

Conformity is checked by the following test:

An over-range voltage is applied to the measuring circuit TERMINALS RATED for MAINS voltage measurements set to each voltage measurement range.

The value of the over-range voltage applied to the TERMINALS is set at 110 % of the RATED voltage measurement range. For measurements RATED for d.c., the over-range voltage is applied with positive and negative polarities.

The displayed voltage values during the test shall be unambiguous.

101.3.4 Permanent overvoltages

The hand-held multimeter shall be able to withstand permanent overvoltages and continue to give an unambiguous indication of any HAZARDOUS LIVE voltages up to the maximum RATED voltage.

NOTE 1 Subclause 9.101.3 provides requirements for protection against HAZARDS from TRANSIENT OVERVOLTAGES.

Conformity is checked by the following test:

An overvoltage is applied for 5 min to the measuring circuit TERMINALS RATED for MAINS voltage measurements of the hand-held multimeter set to each voltage measurement range.

The value of the overvoltage applied to the TERMINALS is based on the TERMINALS' RATED voltage between the TERMINALS:

- a) *when the TERMINALS' RATED voltage value is up to 1 000 V a.c. r.m.s., the overvoltage value is the TERMINALS' RATED voltage value multiplied by 1,9 but without exceeding 1 100 V a.c. r.m.s.;*
- b) *when the TERMINALS' RATED voltage value is above 1 000 V a.c. r.m.s. the overvoltage value is the RATED voltage value multiplied by 1,1;*
- c) *when the TERMINALS' RATED voltage is d.c., the overvoltage value is the RATED voltage value multiplied by 1,1.*

NOTE 2 The 1,9 multiplication factor is derived from phase-to-phase voltage measurements with a 10 % overvoltage condition.

The above test may need to be repeated at any combination of settings, TERMINALS and voltage RATINGS.

After each overvoltage has been applied, each measuring circuit TERMINAL RATED for MAINS voltage measurements shall in turn:

- 1) measure a voltage of 60 V a.c. r.m.s. or 120 V d.c. based on the measurement TERMINAL input type;*
- 2) measure a voltage equal to the maximum RATED voltage for the measurement TERMINAL under test.*

The displayed voltage values shall be unambiguous.

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annexes

All annexes of IEC 61010-1:2010 and IEC 61010-1:2010/AMD1:2016 apply except as follows.

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annex K (normative)

Insulation requirements not covered by 6.7

K.2 Insulation in secondary circuits

K.2.1 General

Delete the note.

Add the following two new paragraphs and the example at the end of Subclause K.2.1.

The maximum TRANSIENT OVERVOLTAGE level of earthed secondary circuit is assumed to be one level lower from the series of impulse voltages of Table 102 for the considered nominal a.c. r.m.s. line-to-neutral or d.c. voltage of the primary MAINS CIRCUIT with the same OVERVOLTAGE CATEGORY or MEASUREMENT CATEGORY.

EXAMPLE If the nominal a.c. r.m.s. line-to-neutral voltage of MAINS being measured is 2 000 V in MEASUREMENT CATEGORY III, the applicable impulse voltage is 15 000 V and the lower level is 10 000 V.

CLEARANCES for secondary circuits are determined:

- 1) for earthed secondary circuits, by the method in K.2.2 or in K.3.2 using the lower TRANSIENT OVERVOLTAGE value of one level, or
- 2) for all secondary circuits, by the method in K.3.2 using the U_t value defined in IEC 61010-2-030:2023, Clause K.4.

K.3 Insulation in circuits not addressed in 6.7, Clause K.1 or Clause K.2

Replace the existing title of Clause K.3 with the following:

K.3 Insulation in circuits not addressed in 6.7, Clause K.1, Clause K.2 or Clause K.101, and for measuring circuits where MEASUREMENT CATEGORIES do not apply

K.3.1 General

Replace the text with the following:

The circuits covered by this Clause K.3 have one or more of the following characteristics in a) to f):

- a) the circuit is a measuring circuit where MEASUREMENT CATEGORIES do not apply;
- b) the maximum possible TRANSIENT OVERVOLTAGE is above the level from the series of impulse voltages of Table K.101, assumed for the MAINS CIRCUIT;
- c) the maximum possible TRANSIENT OVERVOLTAGE is limited by the supply source or within the hand-held multimeter to a known level below the level assumed for the MAINS CIRCUIT;
- d) the working voltage is the sum of voltages from more than one circuit, or is a mixed voltage;
- e) the working voltage includes a recurring peak voltage that may include a periodic non-sinusoidal waveform or a non-periodic waveform that occurs with some regularity;
- f) the working voltage has a frequency above 30 kHz.

In cases a) to d), CLEARANCES are determined according to K.3.2.

In cases e) and f), CLEARANCES are determined according to K.3.3.

NOTE 1 CLEARANCES for measuring circuit TERMINALS are defined in 6.6.101.

In all cases, K.3.4 addresses CREEPAGE DISTANCES and K.3.5 solid insulation.

NOTE 2 These requirements are illustrated in the flowchart of Annex DD, Figure DD.1.

K.3.2 CLEARANCE calculation

Replace the existing conformity statement, Table K.15, Table K.16 and Note 2 (including Example 1 and Example 2) with the following new conformity statement, Table K.15, Table K.16 and Note 2 (including a new example).

Conformity is checked by inspection and measurement, or by the a.c. voltage test of 6.8.3.1 with a duration of at least 5 s, or by the d.c. voltage test of 6.8.3.2 for measuring circuits stressed only by d.c. with a duration of at least 5 s, or by the impulse voltage test of 6.8.3.3, using the applicable test voltage of Table K.16 for the required CLEARANCE.

Correction factors of Table 10 are applicable to the values of test voltages.

Table K.15 – CLEARANCE values for the calculation of K.3.2

Maximum voltage U_m V	CLEARANCE		Maximum voltage U_m V	CLEARANCE	
	D_1 mm	D_2 mm		D_1 mm	D_2 mm
14,1 to 266	0,010	0,010	4 000	3,00	3,80
283	0,010	0,010	4 530	3,53	4,80
330	0,010	0,010	5 660	4,99	7,15
354	0,012	0,013	6 000	5,50	7,90
453	0,030	0,030	7 070	6,84	9,55
500	0,040	0,040	8 000	8,00	11,0
566	0,053	0,053	8 910	9,37	12,9
707	0,081	0,097	11 300	13,0	17,7
800	0,10	0,13	14 100	16,8	23,2
891	0,12	0,19	17 700	21,8	29,9
1 130	0,22	0,36	22 600	29,2	39,2
1 410	0,43	0,66	28 300	37,6	51,3
1 500	0,50	0,76	35 400	50,8	66,9
1 770	0,77	1,04	45 300	68,0	89,2
2 260	1,26	1,55	56 600	85,0	115
2 500	1,50	1,80	70 700	111	148
2 830	1,83	2,20	89 100	148	190
3 540	2,54	3,16	100 000	170	215
Linear interpolation is allowed.					
NOTE See Annex EE.					

Table K.16 – Test voltages based on CLEARANCES

Required CLEARANCE mm	Impulse 1,2/50 µs V peak	a.c. r.m.s. 50/60 Hz V	a.c. peak 50/60 Hz or d.c. V	Required CLEARANCE mm	Impulse 1,2/50 µs V peak	a.c. r.m.s. 50/60 Hz V	a.c. peak 50/60 Hz or d.c. V
0,010	330	230	330	16,5	14 000	7 600	10 700
0,025	440	310	440	17,0	14 300	7 800	11 000
0,040	520	370	520	17,5	14 700	8 000	11 300
0,063	600	420	600	18,0	15 000	8 200	11 600
0,1	806	500	700	19,0	15 800	8 600	12 100
0,2	1 140	620	880	20	16 400	9 000	12 700
0,3	1 310	710	1 010	25	19 900	10 800	15 300
0,5	1 550	840	1 200	30	23 300	12 600	17 900
1,0	1 950	1 060	1 500	35	26 500	14 400	20 400
1,4	2 440	1 330	1 880	40	29 700	16 200	22 900
2,0	3 100	1 690	2 400	45	32 900	17 900	25 300
2,5	3 600	1 960	2 770	50	36 000	19 600	27 700
3,0	4 070	2 210	3 130	55	39 000	21 200	30 000
3,5	4 510	2 450	3 470	60	42 000	22 900	32 300
4,0	4 930	2 680	3 790	65	45 000	24 500	34 600
4,5	5 330	2 900	4 100	70	47 900	26 100	36 900
5,0	5 720	3 110	4 400	75	50 900	27 700	39 100
5,5	6 100	3 320	4 690	80	53 700	29 200	41 300
6,0	6 500	3 520	4 970	85	56 610	30 800	43 500
6,5	6 800	3 710	5 250	90	59 400	32 300	45 700
7,0	7 200	3 900	5 510	95	62 200	33 800	47 900
7,5	7 500	4 080	5 780	100	65 000	35 400	50 000
8,0	7 800	4 300	6 030	110	70 500	38 400	54 200
8,5	8 200	4 400	6 300	120	76 000	41 300	58 400
9,0	8 500	4 600	6 500	130	81 300	44 200	62 600
9,5	8 800	4 800	6 800	140	86 600	47 100	66 700
10,0	9 100	4 950	7 000	150	91 900	50 000	70 700
10,5	9 500	5 200	7 300	160	97 100	52 800	74 700
11,0	9 900	5 400	7 600	170	102 300	55 600	78 700
11,5	10 300	5 600	7 900	180	107 400	58 400	82 600
12,0	10 600	5 800	8 200	190	112 500	61 200	86 500
12,5	11 000	6 000	8 500	200	117 500	63 900	90 400
13,0	11 400	6 200	8 800	210	122 500	66 600	94 200
13,5	11 800	6 400	9 000	220	127 500	69 300	98 000
14,0	12 100	6 600	9 300	230	132 500	72 000	102 000
14,5	12 500	6 800	9 600	240	137 300	74 700	106 000
15,0	12 900	7 000	9 900	250	142 200	77 300	109 400
15,5	13 200	7 200	10 200	264	149 000	81 100	115 000
16,0	13 600	7 400	10 500				

Linear interpolation is allowed.

NOTE 2 An example of calculations is given below.

EXAMPLE CLEARANCE for REINFORCED INSULATION for a WORKING VOLTAGE with peak value of 3 500 V and an additional transient voltage of 4 500 V (this can be expected within an electronic switching-circuit).

D_{BI} is the clearance for basic insulation.

D_{RI} is the CLEARANCE for REINFORCED INSULATION.

U_m is the maximum voltage:

$$U_m = U_w + U_t = (3\,500 + 4\,500) \text{ V} = 8\,000 \text{ V}$$

$$U_w / U_m = 3\,500 / 8\,000 = 0,44 > 0,2$$

$$\text{thus } F = (1,25 \times U_w / U_m) - 0,25 = (1,25 \times 3\,500 / 8\,000) - 0,25 = 0,297$$

D_1 and D_2 values are derived from Table K.15 at 8 000 V:

$$D_1 = 8,00 \text{ mm}, D_2 = 11,0 \text{ mm}$$

$$D_{BI} = D_1 + F \times (D_2 - D_1) = 8,00 + 0,297 \times (11,0 - 8,00) = 8,00 + 0,89 = 8,89 \text{ mm}$$

CLEARANCE for REINFORCED INSULATION is doubled: $D_{RI} = 2 \times D_{BI} = 17,8 \text{ mm}$.

K.4 Reduction of TRANSIENT OVERVOLTAGES by the use of overvoltage limiting devices

Replace the existing title of Clause K.4 with the following title and delete the text:

K.4 Not used

Add the following new clause and four tables:

K.101 Insulation requirements for measuring circuits RATED for MEASUREMENT CATEGORIES

K.101.1 General

Measuring circuits are subjected to WORKING VOLTAGES and transient stresses from the circuits to which they are connected during measurement or test. When the measuring circuit is used to measure MAINS, the transient stresses can be estimated by the location within the installation at which the measurement is performed. When the measuring circuit is used to measure any other electrical signal, the transient stresses shall be considered by the OPERATOR to ensure that they do not exceed the capabilities of the hand-held multimeter.

MEASUREMENT CATEGORIES take into account OVERVOLTAGE CATEGORIES, short-circuit current levels, the location where the test or measurement is to be made and some forms of energy limitation or transient protection included in the building installation. When the measuring circuit is used to connect to MAINS, there is a RISK of arc blast. MEASUREMENT CATEGORIES in accordance with Annex AA define the amount of energy available, which may contribute to arc flash (see also BB.2.3).

K.101.2 CLEARANCES

For hand-held multimeters intended to be powered from the circuit being measured, CLEARANCES for the MAINS CIRCUIT shall be designed according to the requirements of the RATED MEASUREMENT CATEGORY, but overvoltage limiting devices may be used to reduce the TRANSIENT OVERVOLTAGES to a level consistent with a lower MEASUREMENT CATEGORY. Additional marking requirements are given in 5.1.5.2 and 5.1.5.101.

CLEARANCES of measuring circuits RATED for MEASUREMENT CATEGORIES are specified in Table K.101.

NOTE See Annex I for line-to-neutral voltages for common MAINS.

If the hand-held multimeter is RATED to operate at an altitude greater than 2 000 m, the values for CLEARANCES shall be multiplied by the applicable factor of Table K.1.

For BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION, the minimum CLEARANCE for POLLUTION DEGREE 2 is 0,2 mm and for POLLUTION DEGREE 3 is 0,8 mm.

Table K.101 – CLEARANCES for measuring circuits RATED for MEASUREMENT CATEGORIES

Nominal a.c. r.m.s. line-to-neutral or d.c. voltage of MAINS being measured V	Clearance mm			
	BASIC INSULATION and SUPPLEMENTARY INSULATION		REINFORCED INSULATION	
	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV
≤ 300	3,0	5,5	6,0	10,4
> 300 ≤ 600	5,5	8,0	10,4	15
> 600 ≤ 1 000	8,0	14,0	15,0	23,9
> 1 000 ≤ 1 500	11,0	18,0	22,0	36
> 1 500 ≤ 2 000	18,0	22,0	36	44
> 2 000 ≤ 3 000	22,0	25,0	44	50

Conformity is checked by inspection and measurement or by the a.c. voltage test of 6.8.3.1 with a duration of at least 5 s, or by the d.c. voltage test of 6.8.3.2 for measuring circuits stressed only by d.c. with a duration of at least 5 s, or by the impulse voltage test of 6.8.3.3, using the applicable test voltage of Table K.16 for the required CLEARANCE.

K.101.3 CREEPAGE DISTANCES

The requirements of K.2.3 apply.

Conformity is checked as specified in K.2.3.

K.101.4 Solid insulation

K.101.4.1 General

Solid insulation shall withstand the electrical and mechanical stresses that may occur in NORMAL USE, in all RATED environmental conditions (see 1.4), during the intended life of the hand-held multimeter.

Conformity is checked by both of the following tests:

- the impulse voltage test of 6.8.3.3 using the applicable test voltage of Table K.102 or, as an alternative, the a.c. voltage test of 6.8.3.1 using the applicable test voltage of Table K.103 with a duration of at least 5 s;
- for measuring circuits stressed by a.c. or a.c. plus d.c. voltage, the a.c. voltage test of 6.8.3.1 or for measuring circuits stressed only by pure d.c. voltage, the d.c. voltage test of 6.8.3.2, using the test voltage determined by K.101.4.2 with a duration of at least 1 min.

NOTE Test a) checks the effects of TRANSIENT OVERVOLTAGES, while test b) checks the effects of long-term stress of solid insulation.

Table K.102 – Impulse test voltages for testing electric strength of solid insulation for measuring circuits RATED for MEASUREMENT CATEGORIES

Nominal a.c. r.m.s. line-to-neutral or d.c. voltage of MAINS being measured V	Impulse test voltage V peak			
	BASIC INSULATION and SUPPLEMENTARY INSULATION		REINFORCED INSULATION	
	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV
≤ 300	4 000	6 000	6 400	9 600
> 300 ≤ 600	6 000	8 000	9 600	12 800
> 600 ≤ 1 000	8 000	12 000	12 800	19 200
> 1 000 ≤ 1 500	10 000	15 000	17 900	27 100
> 1 500 ≤ 2 000	15 000	18 000	27 100	32 000
> 2 000 ≤ 3 000	18 000	20 000	32 000	36 000

Table K.103 – a.c. test voltages for testing electric strength of solid insulation for measuring circuits RATED for MEASUREMENT CATEGORIES

Nominal a.c. r.m.s. line-to-neutral or d.c. voltage of MAINS being measured V	a.c. test voltage			
	BASIC INSULATION and SUPPLEMENTARY INSULATION		REINFORCED INSULATION	
	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV	MEASUREMENT CATEGORY III	MEASUREMENT CATEGORY IV
≤ 300	2 200	3 300	3 500	5 100
> 300 ≤ 600	3 300	4 300	5 100	7 000
> 600 ≤ 1 000	4 300	6 600	7 000	10 000
> 1 000 ≤ 1 500	5 400	8 200	9 700	15 000
> 1 500 ≤ 2 000	8 200	9 700	15 000	18 000
> 2 000 ≤ 3 000	9 700	11 000	18 000	20 000

K.101.4.2 Long-term stress test voltage value calculation

Test voltage values for testing the long-term stress of solid insulation are determined as follows.

The test voltage value for BASIC INSULATION and SUPPLEMENTARY INSULATION is calculated with the following formula:

$$U_T = A \times U_N + B$$

where

U_T is the a.c. or d.c. test voltage;

U_N is the nominal a.c. r.m.s. line-to-neutral or d.c. voltage of MAINS being measured;

A and B are parameters determined as follows:

when $U_N \leq 1\,000\text{ V}$, $A = 1$ and $B = 1\,200\text{ V}$;

when $U_N > 1\,000\text{ V}$, $A = 1,5$ and $B = 750\text{ V}$.

NOTE Parameter values up to 1 000 V are derived from IEC 60364-4-44:2007, 442.2.2 and parameter values over 1 000 V are derived from IEC TS 62993:2017, 6.1.3.1.

For REINFORCED INSULATION, the test voltage value is twice the value for BASIC INSULATION.

K.101.4.3 Constructional requirements

K.101.4.3.1 General

Solid insulation shall also meet the following requirements, as applicable:

- 1) for solid insulation used as an ENCLOSURE or PROTECTIVE BARRIER, the requirements of Clause 8 apply;
- 2) for moulded and potted parts, the requirements of K.101.4.3.2 apply;
- 3) for insulating layers of printed wiring boards, the requirements of K.101.4.3.3 apply;
- 4) for thin-film insulation, the requirements of K.101.4.3.4 apply.

Conformity is checked as specified in K.101.4.3.2 to K.101.4.3.4, and Clause 8, as applicable.

K.101.4.3.2 Moulded and potted parts

For BASIC INSULATION, SUPPLEMENTARY INSULATION, and REINFORCED INSULATION, conductors located between the same two layers moulded together (see Figure K.1, item L) shall be separated by at least the applicable minimum distance of Table K.104 after the moulding is completed.

Conformity is checked by inspection and either by measurement of the separation or by inspection of the manufacturer's specifications.

K.101.4.3.3 Insulating layers of printed wiring boards

For BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION, conductors located between the same two layers (see Figure K.2, item L) shall be separated by at least the applicable minimum distance of Table K.104.

Conformity is checked by inspection and either by measurement of the separation or by inspection of the manufacturer's specifications.

**Table K.104 – Minimum values for distance or thickness of solid insulation
for measuring circuits RATED for MEASUREMENT CATEGORIES**

a.c. r.m.s. line-to-neutral or d.c. voltage	Minimum thickness ^a	Minimum distance L (see Figure K.1 and Figure K.2) ^{a, b}
V	mm	mm
≤ 300	0,4	0,4
> 300 ≤ 600	0,6	0,6
> 600	1,0	1,0
^a This value is independent of the MEASUREMENT CATEGORY.		
^b This value applies for BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION.		

REINFORCED INSULATION of inner insulating layers of printed wiring boards shall also have adequate electric strength through the respective layers. One of the following methods shall be used.

- a) The thickness through the insulation is at least the applicable value of Table K.104.

Conformity is checked by inspection and either by measurement of the separation or by inspection of the manufacturer's specifications.

- b) The insulation is assembled from at least two separate layers of printed wiring board materials, each of which is RATED by the manufacturer of the material for an electric strength of at least the value of the applicable test voltage for BASIC INSULATION of Table K.102 or Table K.103 with a duration of at least 5 s.

Conformity is checked by inspection of the manufacturer's specifications.

- c) The insulation is assembled from at least two separate layers of printed wiring board materials, and the combination of layers is RATED by the manufacturer of the material for an electric strength of at least the value of the applicable test voltage for REINFORCED INSULATION of Table K.102 or Table K.103 with a duration of at least 5 s.

Conformity is checked by inspection of the manufacturer's specifications.

K.101.4.3.4 Thin-film insulation

For BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION, conductors located between the same two layers (see Figure K.3, item L) shall be separated by at least the applicable CLEARANCE and CREEPAGE DISTANCE of K.101.2 and K.101.3.

Conformity is checked by inspection and either by measurement of the separation or by inspection of the manufacturer's specifications.

REINFORCED INSULATION through the layers of thin-film insulation shall also have adequate electric strength. One of the following methods shall be used.

- a) The thickness through the insulation is at least the applicable value of Table K.104.

Conformity is checked by inspection and either by measurement of the separation or by inspection of the manufacturer's specifications.

- b) The insulation consists of at least two separate layers of thin-film materials, each of which is RATED by the manufacturer of the material for an electric strength of at least the value of the applicable test voltage for BASIC INSULATION of Table K.102 or Table K.103 with a duration of at least 5 s.

Conformity is checked by inspection of the manufacturer's specifications.

- c) The insulation consists of at least three separate layers of thin-film materials, any two of which have been tested to exhibit adequate electric strength.

Conformity is checked by the voltage tests of K.101.4.1 applied to two of the three layers for REINFORCED INSULATION.

For the purposes of these tests, a special sample may be assembled with only two layers of the material.

Annex L
(informative)

Index of defined terms

Add the following defined term to the list:

MEASUREMENT CATEGORY 3.5.101

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Add the following new annexes:

Annex AA (normative)

MEASUREMENT CATEGORIES

AA.1 General

For the purposes of this document, the following MEASUREMENT CATEGORIES are used. These MEASUREMENT CATEGORIES are not the same as the overvoltage categories according to K.1.1, IEC 60364-4-44:2007, 443.6 or IEC 60664-1:2020, 4.3.

MEASUREMENT CATEGORIES are based on locations on the MAINS where measurements can be made.

NOTE IEC 60364-4-44 and IEC 60664-1 overvoltage categories are created to achieve an insulation coordination of the components and equipment used within low-voltage MAINS.

AA.2 MEASUREMENT CATEGORIES

AA.2.1 MEASUREMENT CATEGORY II

MEASUREMENT CATEGORY II is applicable to test and measuring circuits connected directly to utilization points (socket outlets and similar points) of the low-voltage MAINS installation (see Table AA.1 and Figure AA.1).

EXAMPLE Measurements on MAINS CIRCUITS of household appliances, portable TOOLS and similar equipment, and on the consumer side only of socket-outlets in fixed installations.

AA.2.2 MEASUREMENT CATEGORY III

MEASUREMENT CATEGORY III is applicable to test and measuring circuits connected to the distribution part of the building's low-voltage MAINS installation (see Table AA.1 and Figure AA.1).

To avoid RISKS caused by the HAZARDS arising from these higher short-circuit currents, additional insulation and other provisions are required.

For equipment that is part of a fixed installation, the fuse or circuit breaker of the installation is considered to provide adequate protection against short-circuit currents.

EXAMPLE Measurements on distribution boards (including secondary meters), photovoltaic panels, circuit-breakers, wiring, including cables, bus-bars, junction boxes, switches, socket-outlets in the fixed installation, and equipment for industrial use and some other equipment such as stationary motors with permanent connection to the fixed installation.

AA.2.3 MEASUREMENT CATEGORY IV

MEASUREMENT CATEGORY IV is applicable to test and measuring circuits connected at the source of the building's low-voltage MAINS installation (see Table AA.1 and Figure AA.1).


Owing to the high potential short-circuit currents existing in these circuits, any accidental short-circuit caused whilst making measurements can create a high-energy-level arc flash which is extremely dangerous to bystanders in the immediate vicinity. Great precautions must be taken to avoid any chance of a short-circuit.

EXAMPLE Measurements on devices installed before the MAINS CIRCUIT breaker or isolator switch in the building installation.

AA.2.4 Measuring circuits without a MEASUREMENT CATEGORY RATING

Many types of test and measuring circuits are not intended to be directly connected to the MAINS. Some of these measuring circuits are intended for very low energy applications, but others of these measuring circuits may experience very high amounts of available energy because of high short-circuit currents or high open-circuit voltages. There are no standard transient levels defined for these circuits. An analysis of the WORKING VOLTAGES, loop impedances, TEMPORARY OVERVOLTAGES, and TRANSIENT OVERVOLTAGES in these circuits is necessary to determine the insulation requirements and short-circuit current requirements.

EXAMPLE Thermocouple measuring circuits, high-frequency measuring circuits, automotive testers, and testers used to characterize the MAINS installation before the installation is connected to the MAINS.

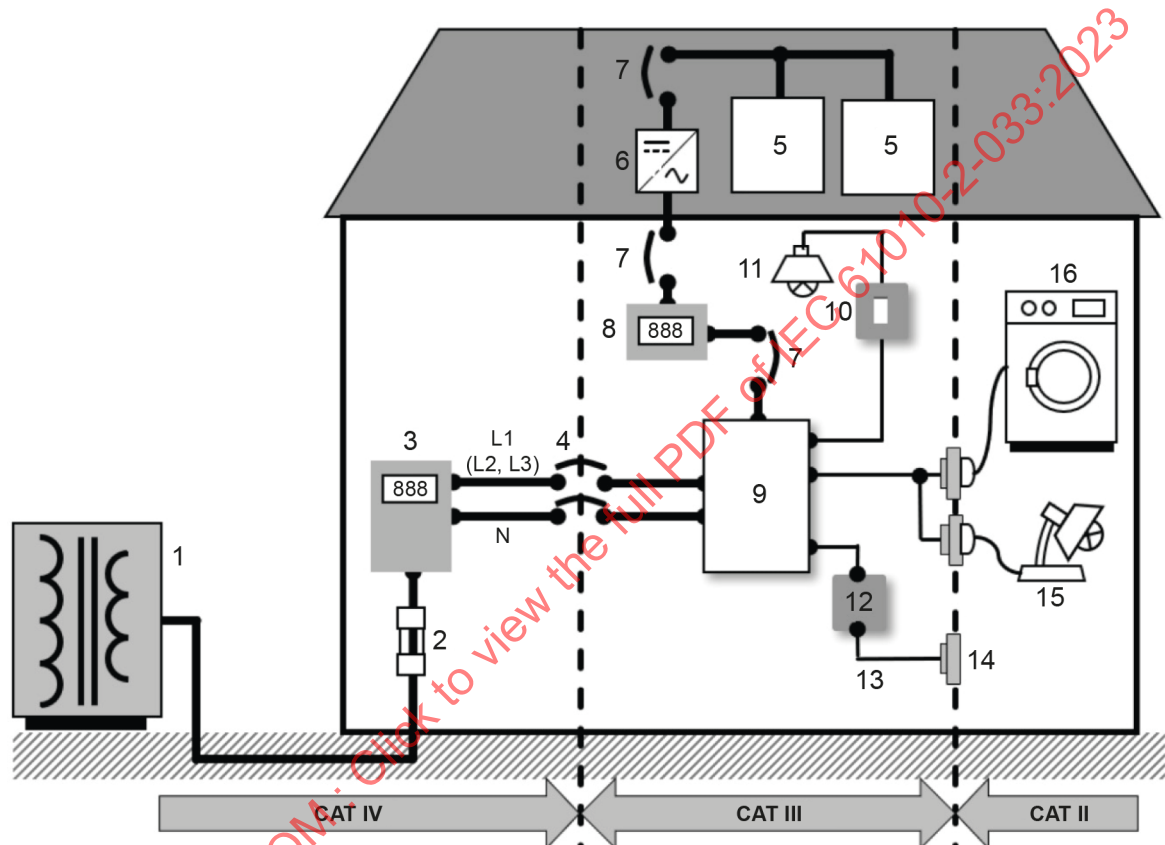

IEC

Key

- | | |
|---|---|
| 1 low-voltage supply source over or under ground | 9 distribution board |
| 2 service fuse | 10 light switch |
| 3 tariff meter | 11 lighting |
| 4 MAINS CIRCUIT breaker or isolator switch ^a | 12 junction box |
| 5 photovoltaic panel | 13 socket wiring |
| 6 d.c. to a.c. inverter | 14 socket outlets |
| 7 circuit breaker or isolator switch | 15 plug-in lamps |
| 8 generation meter | 16 household appliances, portable tools |

^a The MAINS CIRCUIT breaker or isolator switch may be installed by the service provider. If not, the demarcation point between CAT IV and CAT III is the first isolating switch in the distribution board.

- CAT II MEASUREMENT CATEGORY II
 CAT III MEASUREMENT CATEGORY III
 CAT IV MEASUREMENT CATEGORY IV

Figure AA.1 – Example to identify the locations of MEASUREMENT CATEGORIES

Table AA.1 – Characteristics of MEASUREMENT CATEGORIES

MEASUREMENT CATEGORY	Short-circuit current ^a (typical) kA	Location
II	< 10	Circuits connected to MAINS socket outlets and similar points in the MAINS installation
III	< 50	MAINS distribution parts of the building
IV	> 50	Source of the MAINS installation
^a The values of loop impedances (installation impedances) do not take into account the resistance of the test leads and impedances internal to the measuring equipment. These short-circuit currents vary, depending on the characteristics of the installation and the nominal voltage of the distribution system.		

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annex BB (informative)

HAZARDS pertaining to measurements performed in certain environments

BB.1 General

Annex BB provides guidance to the equipment manufacturer on HAZARDS that should be considered for equipment intended to measure electrical quantities in certain environments. This list of HAZARDS is not to be considered comprehensive: other HAZARDS certainly exist in these and in other environments.

BB.2 Hazards

BB.2.1 General

Testing and measuring circuits are subjected to WORKING VOLTAGES and transient stresses from the circuit to which they are connected during measurement or test. When the measuring circuit is used to measure MAINS, the transient stresses can be estimated by the location within the installation at which the measurement is performed.

BB.2.2 Electric shock

MAINS CIRCUITS present a HAZARD of electric shock. The voltages and currents are above the permissible levels (see 6.3), and access to the circuit is usually required to perform the measurement. The manufacturer should provide adequate information to permit the OPERATOR to be aware of the HAZARD of electric shock, and should ensure that the design requirements of this document and those of other related documents (for example, see 5.4 and IEC 61010-031 for voltage probe assemblies) are met.

BB.2.3 Arc flash and arc blast

An arc flash is a release of thermal energy from an electric arc by the vaporization and ionization of materials. An arc blast is a release of mechanical, acoustical, thermal, and optical energy from an electric arc.

Arc flash occurs when a conductor (such as a probe tip or a low-impedance measuring circuit) temporarily bridges two high-energy conductors and then opens or is withdrawn. This can result in arcing, which ionizes the air. Ionized air is conductive and can result in continued current flow in the vicinity of the conductors.

The arc flash will release significant amounts of very hot air and molten or vaporised metal particles (from the active conductors) which are the primary RISK to the OPERATOR and other persons in the immediate vicinity.

If there is sufficient available energy, then the ionization of the air will continue to spread and the flow of current through the air continues to increase. The resulting arc blast is similar to an explosion, and can cause significant injury or death to an OPERATOR or a bystander.

When the measuring circuit is used to measure live MAINS, there is a RISK of arc flash. MEASUREMENT CATEGORIES (see Annex AA) define the amount of energy available, which may contribute to arc flash. In conditions where arc flash can exist, the instructions for use need to specify additional precautions to reduce the HAZARD related to shock and burn from arc flash.

BB.2.4 Thermal burns

Any conductor (such as jewellery) that connects two high-energy conductors may become hot from current flow through the item. This can cause burns to the skin adjacent to the item.

BB.3 Telecommunications networks

The voltages and currents continually present in telecommunications networks are below the levels that could be considered HAZARDOUS LIVE. However, the "ring" voltages (the voltage imposed on the telecommunications line to indicate that the telephone receiver should signal an incoming call) are typically around 90 V a.c., which is considered HAZARDOUS LIVE. If a technician were to come into contact with the hazardous conductor while the ring event was occurring, then the technician could suffer an electric shock.

IEC 62949 addresses safety requirements for equipment to be connected to telecommunications networks. IEC 62949 addresses the possibility of electric shock from contact with telecommunications conductors, and concludes that, with the access limitations imposed by the connectors, the RISK is reduced to a negligible level. However, if in the process of test or measurement, the conductor is made fully ACCESSIBLE, then there is a possibility of electric shock.

The manufacturer of equipment that may be used for testing and measuring of telecommunications networks should be aware of the HAZARD from the ring voltage and should take suitable steps to reduce the HAZARD where possible by limiting access to the conductors and in other cases, by providing adequate instructions and warnings to the OPERATOR (see 5.4 and IEC 61010-031).

BB.4 Current measurements in inductive circuits

When a current-measuring device is inserted in series with an inductive circuit, a HAZARD can occur if the circuit is suddenly opened (a probe falls off or a fuse opens, for example). Such sudden events can produce an inductive voltage spike across the unintentional opening of the circuit. These spikes can be many times the magnitude of the WORKING VOLTAGE of the circuit, and can cause breakdown of insulation or electric shock to an OPERATOR.

The manufacturer should provide adequate instructions to an OPERATOR to ensure that current-measuring devices are not used in series with inductive circuits, or if it is necessary to do so, then precautions are taken to mitigate the HAZARD of electric shock from the voltage spike (see 5.4, and 101.2).

BB.5 Battery-driven circuits

Batteries can present electrical, explosion and fire HAZARDS to the person conducting tests on them or their associated circuits. Examples include batteries used for stand-by sources or to operate motors.

HAZARDS can arise from electric shock, explosions from short-circuiting the TERMINALS of the battery, or explosions from arc ignition of gases evolved from the battery during charging cycles.

BB.6 Measurements at higher frequencies

Some measuring equipment depends on inductive connection to the circuit being measured (see also IEC 61010-2-032). The behaviour of the measuring circuit will, in these cases, depend on the frequency of the signal being measured. If the measuring device is used to measure a frequency higher than that for which it was designed, then circulating currents could cause significant heating of some of the conductive parts of the measuring device.

The manufacturer should provide adequate instructions for the use of such devices.

BB.7 Measurements using measuring circuits with a FUNCTIONAL EARTH TERMINAL

Oscilloscopes and spectrum analysers are examples of equipment that often include FUNCTIONAL EARTH TERMINALS in the measuring circuit. A case of REASONABLY FORESEEABLE MISUSE is when the OPERATOR might disconnect the PROTECTIVE CONDUCTOR TERMINAL so that the FUNCTIONAL EARTH TERMINAL can float above earth potential. This allows the OPERATOR to make a floating measurement, but introduces a HAZARD. If the OPERATOR inadvertently connects the FUNCTIONAL EARTH TERMINAL to a HAZARDOUS LIVE voltage, then the chassis of the measuring equipment could also be connected to the HAZARDOUS LIVE voltage, and the OPERATOR or a bystander could receive an electric shock from the chassis (see IEC 61010-2-033:2023, 101.1 c)).

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annex CC (informative)

4 mm "banana" TERMINALS

CC.1 General

A HAZARD can arise from an OPERATOR's reliance on values displayed by the hand-held multimeter when connectors and TERMINALS appear to be in mated position but conductive parts are not in contact with one another.


This annex gives the recommended dimensions for safety purposes of 4 mm TERMINALS when probe assemblies complying with Annex E of IEC 61010-031:2022 can be connected. These 4 mm TERMINALS are often called "banana connectors".

CC.2 Dimensions

The dimensions of the TERMINALS given in Figure CC.1 are compatible with the requirements of TERMINALS RATED for MEASUREMENT CATEGORIES up to 1 000 V.

These dimensions ensure that the CLEARANCES and CREEPAGE DISTANCES values of 6.6.101 are met when the connectors and TERMINALS are mated, unmated or partially mated, and that conductive parts of mated connectors and TERMINALS are in contact with one another.

NOTE Extraction or insertion forces and contact resistance values have not been considered.

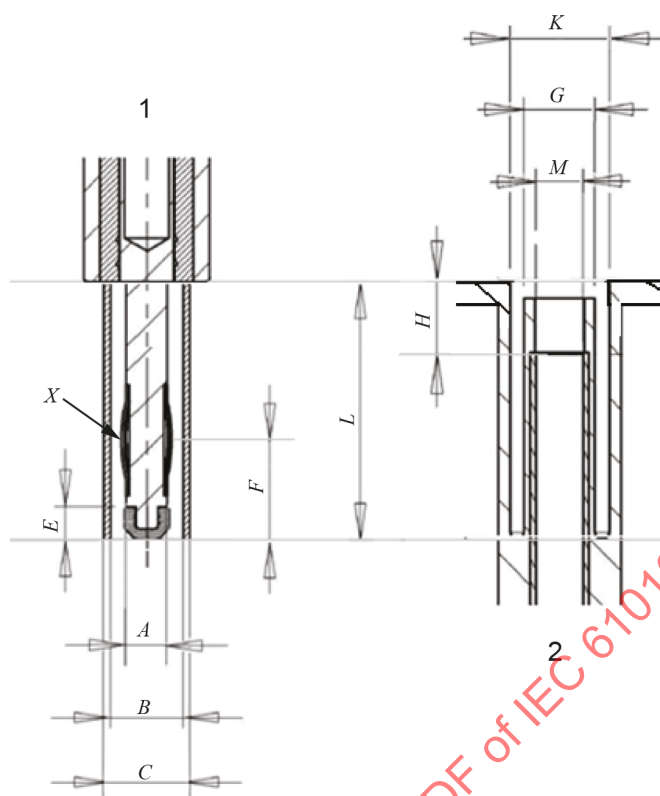

IEC

Key

A = 3,90 mm $\pm$ 0,05 mm (compressed)

B $\geq$ 6,6 mm

C $\leq$ 7,9 mm

2,6 mm $\leq$ E $\leq$ 6 mm

F $\leq$ 12 mm

G $\leq$ 6,4 mm

K $\geq$ 8,1 mm

4 mm $\leq$ H $\leq$ 6 mm

L $\geq$ 20 mm

M = 4,00 mm $\pm$ 0,05 mm

Tolerances on dimensions without specific tolerances: $\pm$ 0,1 mm

1 is a male TERMINAL

2 is a female TERMINAL

X is the location where the best contact occurs

A is the maximum diameter where the contact occurs

The minimum values of E and H depend on whether or not plastic parts are present.

Figure CC.1 – Recommended dimensions of 4 mm TERMINALS

Annex DD

(informative)

Flowchart for insulation according to the type of circuit

A circuit can fall under more than one category. It is then necessary to follow two or more branches of the flowchart of Figure DD.1 and compare the results. For example, a measuring circuit can be RATED for MEASUREMENT CATEGORY III and can also be RATED for measuring signals at 1 MHz. This measuring circuit has to be evaluated under both K.3.3 and Clause K.101.

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023



Key	
ACC	RATED altitude correction of CLEARANCE
ACV	Site altitude correction of test voltage
&	Both required
ACM	Alternative conformity means
▶	As applicable
⇩	Optional test path

Figure DD.1 – Requirements for CLEARANCE, CREEPAGE DISTANCE and solid insulation

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annex EE (informative)

Determination of CLEARANCES for Table 101

D_1 values of Table K.15 are interpolated values from Table F.2 of IEC 60664-1:2020. D_2 values of Table K.15 below 100 mm are interpolated values from Table F.8 of IEC 60664-1:2020 and D_2 values of Table K.15 above 100 mm are extrapolated values from Table F.8 of IEC 60664-1:2020.

CLEARANCES of Table EE.1 have been calculated using linear interpolation of D_2 values from Table K.15 for BASIC INSULATION (see K.3.2) with a 25 % safety factor. TRANSIENT OVERVOLTAGES have been disregarded.

Table EE.1 – CLEARANCE values for Table 101

[A]	[B]	[C]	[D]	[E]	[F]	[G]	[H]
a.c. r.m.s. or d.c. voltage V	Safety factor × 1,25 V	Peak value		Exact CLEARANCE		Final CLEARANCE	
		a.c. V	d.c. V	a.c. mm	d.c. mm	a.c. mm	d.c. mm
300	375	530	375	0,046	0,016	0,8	0,8
600	750	1 061	750	0,31	0,11	0,8	0,8
1 000	1 250	1 768	1 250	1,03	0,48	1,0	0,8
1 500	1 875	2 652	1 875	2,00	1,14	2,0	1,1
2 000	2 500	3 536	2 500	3,20	1,80	3,2	1,8
3 000	3 750	5 303	3 750	6,40	3,45	6,4	3,5
Column [A]:		Nominal a.c. r.m.s. or d.c. voltage to which the TERMINAL of the hand-held multimeter is RATED					
Column [B]:		Values including a safety factor of +25 %					
Column [C]:		Peak values of the a.c. r.m.s. voltage					
Column [D]:		Peak values of the d.c. voltage					
Columns [E] and [F]:		Exact values according to Table K.15					
Columns [G] and [H]:		Final CLEARANCE values with the following					
		The 0,8 mm value is the minimum CLEARANCE value for POLLUTION DEGREE 3. Since TERMINALS are external and exposed, POLLUTION DEGREE 3 has been used.					

Bibliography

The Bibliography of IEC 61010-1:2010 and of IEC 61010-1:2010/AMD1:2016 applies except as follows:

Add the following new references:

IEC 60664-1:2020, *Insulation coordination for equipment within low-voltage supply systems – Part 1: Principles, requirements and tests*

IEC 61010-2-034, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-034: Particular requirements for measurement equipment for insulation resistance and test equipment for electric strength*

IEC 61557 (all parts), *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures*

IEC 61730-1:2016, *Photovoltaic (PV) module safety qualification – Part 1: Requirements for construction*

IEC 62949, *Particular safety requirements for equipment to be connected to information and communication technology networks*

IEC TS 62993:2017, *Guidance for determination of clearances, creepage distances and requirements for solid insulation for equipment with a rated voltage above 1 000 V AC and 1 500 V DC, and up to 2 000 V AC and 3 000 V DC*

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

SOMMAIRE

AVANT-PROPOS	52
INTRODUCTION.....	55
1 Domaine d'application et objet.....	56
2 Références normatives	57
3 Termes et définitions	58
4 Essais	58
5 Marquage et documentation	59
6 Protection contre les chocs électriques.....	61
7 Protection contre les DANGERS mécaniques	66
8 Résistance aux contraintes mécaniques	66
9 Protection contre la propagation du feu et des arcs électriques	66
10 Limites de température de l'appareil et résistance à la chaleur	71
11 Protection contre les DANGERS des fluides et des corps solides étrangers.....	71
12 Protection contre les radiations, y compris les sources laser, et contre la pression acoustique et ultrasonique.....	71
13 Protection contre les émissions de gaz et substances, les explosions et les implosions.....	71
14 Composants et sous-ensembles	71
15 Protection par systèmes de verrouillage	72
16 DANGERS résultant de l'application.....	72
17 Évaluation des RISQUES	72
101 Circuits de mesure.....	72
Annexes	76
Annexe K (normative) Exigences d'isolation non couvertes par 6.7	77
Annexe L (informative) Index des termes définis	86
Annexe AA (normative) CATEGORIES DE MESURE	87
Annexe BB (informative) DANGERS se rapportant aux mesurages effectués dans certains environnements	91
Annexe CC (informative) Bornes "bananes" de 4 mm.....	94
Annexe DD (informative) Organigramme de l'isolation selon le type de circuit.....	96
Annexe EE (informative) Détermination des DISTANCES D'ISOLEMENT pour le Tableau 101	99
Bibliographie.....	100
Figure 4 – Agencements acceptables des moyens de protection contre les chocs électriques	62
Figure AA.1 – Exemple d'identification des emplacements des CATEGORIES DE MESURE	89
Figure CC.1 – Dimensions recommandées des BORNES de 4 mm	95
Figure DD.1 – Exigences relatives à la distance d'isolement, à la LIGNE DE FUITE et à l'isolation solide	98
Tableau 101 – DISTANCES D'ISOLEMENT pour les BORNES des circuits de mesure en position découplée	63
Tableau 102 – Tensions de choc pour circuits connectés au RESEAU.....	71

Tableau K.15 – Valeurs de la DISTANCE D'ISOLEMENT pour le calcul de K.3.2.....	78
Tableau K.16 – Tensions d'essai en fonction des DISTANCES D'ISOLEMENT	79
Tableau K.101 – Exigences relatives aux circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES	81
Tableau K.102 – Tensions d'essai de choc pour l'essai de rigidité diélectrique de l'isolation solide des circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES	82
Tableau K.103 – Tensions d'essai alternatives pour l'essai de rigidité diélectrique de l'isolation solide des circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES	82
Tableau K.104 – Valeurs minimales pour la ligne de fuite ou l'épaisseur de l'isolation solide des circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES	84
Tableau AA.1 – Caractéristiques des CATEGORIES DE MESURE	90
Tableau EE.1 – Valeurs de la distance d'isolement pour Tableau 101	99

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

**EXIGENCES DE SÉCURITÉ POUR APPAREILS ÉLECTRIQUES
DE MESURAGE, DE RÉGULATION ET DE LABORATOIRE –****Partie 2-033: Exigences particulières pour les multimètres
portatifs pour usage domestique et professionnel,
capables de mesurer la tension réseau**

AVANT-PROPOS

- 1) La Commission Électrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. À cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses Publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de propriété intellectuelle ou de droits analogues. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets.

L'IEC 61010-2-033 a été établie par le comité d'études 66 de l'IEC: Sécurité des appareils de mesure, de commande et de laboratoire. Il s'agit d'une Norme internationale.

Cette troisième édition annule et remplace la deuxième édition publiée en 2019. Cette édition constitue une révision technique.

Cette édition inclut les modifications techniques majeures suivantes par rapport à l'édition précédente:

- a) à l'Article 2, toutes les références normatives ont été datées et de nouvelles références normatives ont été ajoutées;

- b) le paragraphe 4.4.2.101 est un nouveau paragraphe sur les dispositifs de protection contre les surtensions;
- c) le paragraphe 6.6.101 modifie les paragraphes 6.6.101 et 6.6.102 de l'édition précédente:
 - 1) au paragraphe 6.6.101.1, les matériaux isolants du groupe I peuvent être admis pour la détermination des DISTANCES D'ISOLEMENT des BORNES des circuits de mesure;
 - 2) au paragraphe 6.6.101.2, les DISTANCES D'ISOLEMENT et les LIGNES DE FUITE inférieures à 3 000 V pour les BORNES des circuits de mesure en position découplée ont été définies;
 - 3) au paragraphe 6.6.101.3, des exigences relatives aux BORNES des circuits de mesure en position partiellement couplée ont été spécifiées;
 - 4) au paragraphe 6.6.101.4, des exigences relatives aux BORNES des circuits de mesure en position couplée ont été spécifiées;
 - 5) le paragraphe 6.6.101.5 remplace le paragraphe 6.6.102;
- d) le paragraphe 6.101 remplace le paragraphe 6.9.101 de l'édition précédente avec des modifications;
- e) le paragraphe 9.101 est un nouveau paragraphe pour prendre en compte la protection des circuits de mesure contre la propagation du feu et les arcs électriques;
- f) le paragraphe 101.3 de la précédente édition a été déplacé en 9.101.2;
- g) le paragraphe 101.4 de la précédente édition a été déplacé en 9.101.3;
- h) l'Article 102 de la précédente édition a été déplacé en 101.3;
- i) au paragraphe K.2.1, une autre méthode de détermination des DISTANCES D'ISOLEMENT des circuits secondaires a été proposée;
- j) au paragraphe K.3.2, le Tableau K.15 et le Tableau K.16 ont été ajoutés pour le calcul de la DISTANCE D'ISOLEMENT;
- k) l'Article K.4 de l'édition précédente a été supprimé;
- l) le paragraphe K.101.4 a été revu;
- m) le Tableau K.104 de l'édition précédente a été supprimé;
- n) en Annexe AA: la Figure AA.1 a été modifiée;
- o) en Annexe EE: une nouvelle annexe informative a été ajoutée pour la détermination des DISTANCES D'ISOLEMENT pour le Tableau 101.

Le texte de cette Norme internationale est issu des documents suivants:

Projet	Rapport de vote
66/787/FDIS	66/797/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à son approbation.

La langue employée pour l'élaboration de cette Norme internationale est l'anglais.

Le présent document a été rédigé selon les Directives ISO/IEC, Partie 2, et a été élaboré selon les Directives ISO/IEC, Partie 1 et les Directives ISO/IEC, Supplément IEC, disponibles à l'adresse www.iec.ch/members_experts/refdocs. Les principaux types de documents développés par l'IEC sont décrits plus en détail à l'adresse www.iec.ch/publications.

Une liste de toutes les parties de la série IEC 61010, publiées sous le titre général *Exigences de sécurité pour appareils électriques de mesurage, de régulation et de laboratoire*, peut être consultée sur le site web de l'IEC.

Le présent document est à utiliser conjointement avec l'IEC 61010-1:2010 et l'IEC 61010-1:2010/A1:2016.

Le présent document complète ou modifie les articles correspondants de l'IEC 61010-1 de façon à transformer cette publication en Norme IEC: *Exigences particulières pour les multimètres portatifs pour usage domestique et professionnel, capables de mesurer la tension réseau.*

Lorsqu'un paragraphe particulier de l'IEC 61010-1 n'est pas mentionné dans le présent document, ce paragraphe s'applique pour autant que cela soit raisonnable. Lorsque le présent document spécifie "addition", "modification", "remplacement" ou "suppression", il convient d'adapter en conséquence l'exigence, la spécification d'essai ou la note correspondante de l'IEC 61010-1.

Dans la présente norme:

- a) les caractères d'imprimerie suivants sont employés:
- exigences: caractères romains;
 - NOTES: petits caractères romains;
 - *conformité et essais: caractères italiques;*
 - termes définis à l'Article 3 et utilisés tout au long de la présente norme: PETITES CAPITALES EN CARACTÈRES ROMAINS;
- b) les paragraphes, figures, tableaux et notes supplémentaires à ceux de l'IEC 61010-1 sont numérotés à partir de 101. Les annexes supplémentaires sont nommées à partir de AA et les listes de termes additionnels à partir de aa).

Le comité a décidé que le contenu de ce document ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous webstore.iec.ch dans les données relatives au document recherché. À cette date, le document sera:

- reconduit,
- supprimé,
- remplacé par une édition révisée, ou
- amendé.

IMPORTANT – Le logo "colour inside" qui se trouve sur la page de couverture de ce document indique qu'elle contient des couleurs qui sont considérées comme utiles à une bonne compréhension de son contenu. Les utilisateurs devraient, par conséquent, imprimer cette publication en utilisant une imprimante couleur.

INTRODUCTION

L'IEC 61010-1 spécifie les exigences de sécurité qui sont d'application générale à tous les appareils qu'elle concerne. Pour certains types d'appareils, les exigences de l'IEC 61010-1 et de son amendement sont complétées ou modifiées par les exigences particulières d'une ou de plusieurs normes de la série IEC 61010-2, qui sont utilisées conjointement avec les exigences de l'IEC 61010-1.

- 1) L'IEC 61010-2-030:2023 spécifie les exigences de sécurité pour les appareils équipés de circuits d'essai ou de mesure qui sont reliés à des fins d'essai ou de mesurage à des dispositifs ou à des circuits extérieurs à l'appareil de mesure même.
- 2) L'IEC 61010-2-032:2023 spécifie les exigences de sécurité pour les capteurs de courant portatifs et manipulés à la main pour mesurer, détecter, injecter du courant, ou afficher les formes d'onde du courant sur les circuits sans ouverture physique du chemin du courant sur le circuit mesuré.

La plupart des exigences de l'IEC 61010-2-030:2023 ont été incluses dans l'IEC 61010-2-032:2023. Les appareils entrant dans le champ d'application de l'IEC 61010-2-030:2023 et de l'IEC 61010-2-032:2023 sont considérés comme couverts par les exigences de l'IEC 61010-2-032:2023.

Cependant, pour les capteurs de courant dans un appareil combiné avec liaison de protection et déconnexion automatique de l'alimentation, l'IEC 61010-2-030:2023 et l'IEC 61010-2-032:2023 sont utilisés conjointement.

- 3) Le présent document spécifie les exigences de sécurité pour les multimètres portatifs et autres mesureurs pour usage domestique et professionnel, capables de mesurer la tension réseau, destinés à mesurer la tension et d'autres grandeurs électriques comme la résistance ou le courant.

Toutes les exigences pertinentes de l'IEC 61010-2-030:2023 ont été incluses dans le présent document.

- 4) L'IEC 61010-2-034:2023 spécifie les exigences de sécurité applicables aux appareils de mesure de la résistance d'isolement et aux appareils d'essai de rigidité diélectrique qui sont connectés aux unités, aux lignes ou aux circuits à des fins d'essai ou de mesurage.

Toutes les exigences pertinentes de l'IEC 61010-2-030:2023 ont été incluses dans l'IEC 61010-2-034:2023. Cependant, pour les appareils relevant des domaines d'application de l'IEC 61010-2-032:2023 et de l'IEC 61010-2-034:2023, ces normes sont utilisées conjointement.

L'IEC 61010-031 spécifie les exigences de sécurité relatives aux sondes portatives et manipulées à la main et leurs accessoires connexes destinés à être utilisés en particulier avec les appareils relevant du domaine d'application de l'IEC 61010-2-030, de l'IEC 61010-2-032, du présent document et de l'IEC 61010-2-034. Ces sondes équipées sont prévues pour la connexion sans contact électrique ou la connexion électrique directe entre une partie et un appareil de mesure et d'essai électrique. Elles peuvent être solidaires de l'appareil ou en être des accessoires détachables.

EXIGENCES DE SÉCURITÉ POUR APPAREILS ÉLECTRIQUES DE MESURAGE, DE RÉGULATION ET DE LABORATOIRE –

Partie 2-033: Exigences particulières pour les multimètres portatifs pour usage domestique et professionnel, capables de mesurer la tension réseau

1 Domaine d'application et objet

L'IEC 61010-1:2010, Article 1, et l'IEC 61010-1:2010/A1:2016, Article 1, s'appliquent avec les exceptions suivantes:

1.1.1 Appareils inclus dans le domaine d'application

Remplacer le texte existant par le texte suivant:

Le présent document spécifie les exigences de sécurité particulières pour les multimètres portatifs pour usage domestique et professionnel, capables de mesurer la tension RESEAU.

Les MULTIMETRES portatifs sont des instruments de mesure multifonctions et avec plusieurs plages, destinés à mesurer la tension et d'autres grandeurs électriques telles que la résistance ou le courant. Ils ont pour objectif principal de mesurer la tension sur un RESEAU sous tension. Ils peuvent être tenus à la main en UTILISATION NORMALE.

1.1.2 Appareils exclus du domaine d'application

Ajouter le nouveau point suivant à la liste, ainsi que l'alinéa suivant:

- aa) IEC 61557 (toutes les parties), *Sécurité électrique dans les réseaux de distribution basse tension au plus égale à 1 000 V c.a. et 1 500 V c.c. – Dispositifs de contrôle, de mesure ou de surveillance de mesures de protection*

Les APPAREILS PORTATIFS tels que les oscilloscopes, les wattmètres, les multimètres utilisés pour la commande de processus non ASSIGNES pour mesurer la tension sur un RESEAU sous tension, les pinces multimètres et les équipements d'essais de transmission ne relèvent pas du domaine d'application du présent document.

1.2.1 Aspects inclus dans le domaine d'application

Remplacer le point c) du deuxième alinéa par le nouveau point suivant:

- c) la propagation du feu et d'arcs électriques à partir des multimètres portatifs (voir Article 9);

Remplacer le troisième alinéa par les deux nouveaux alinéas suivants:

Les exigences relatives à la protection contre les DANGERS engendrés par l'UTILISATION NORMALE, le MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE et les facteurs ergonomiques sont spécifiées à l'Article 16 et à l'Article 101.

Annexe BB L'Annexe BB fournit des recommandations aux fabricants d'appareils sur les DANGERS qu'il convient de prendre en compte pour les appareils destinés à effectuer des essais et des mesurages sur des conducteurs dangereux, y compris des conducteurs du RESEAU et des conducteurs de réseaux de télécommunication.

2 Références normatives

L'IEC 61010-1:2010, Article 2, et l'IEC 61010-1:2010/A1:2016, Article 2, s'appliquent avec les exceptions suivantes:

Remplacer les références normatives existantes suivantes:

IEC 60364-4-44:2007, *Installations électriques à basse tension – Partie 4-44: Protection pour assurer la sécurité – Protection contre les perturbations de tension et les perturbations électromagnétiques*

IEC 60364-4-44:2007/A1:2015

IEC 61010-031, *Règles de sécurité pour appareils électriques de mesure, de régulation et de laboratoire – Partie 031: Exigences de sécurité pour sondes équipées portatives pour mesure et essais électriques*

IEC 61180 (toutes les parties), *Techniques des essais à haute tension pour matériel à basse tension*

IEC 61180-1, *Techniques des essais à haute tension pour matériels à basse tension – Partie 1: Définitions, prescriptions et modalités relatives aux essais*

IEC 61180-2, *Techniques des essais à haute tension pour matériel à basse tension – Partie 2: Matériel d'essai*

par les nouvelles références normatives suivantes:

IEC 60364-4-44:2007, *Installations électriques à basse tension – Partie 4-44: Protection pour assurer la sécurité – Protection contre les perturbations de tension et les perturbations électromagnétiques*

IEC 60364-4-44:2007/A1:2015

IEC 60364-4-44:2007/A2:2018

IEC 61010-031:2022, *Exigences de sécurité pour appareils électriques de mesure, de régulation et de laboratoire – Partie 031: Exigences de sécurité pour sondes équipées tenues à la main et manipulées pour mesure et essais électriques*

IEC 61180:2016, *Techniques des essais à haute tension pour matériels à basse tension – Définitions, exigences et modalités relatives aux essais, matériel d'essai*¹

Ajouter les nouvelles références normatives suivantes:

IEC 61000-4-5:2014, *Compatibilité électromagnétique (CEM) – Partie 4-5: Techniques d'essai et de mesure – Essai d'immunité aux ondes de choc*

IEC 61000-4-5:2014/A1:2017

IEC 61010-2-030:2023, *Exigences de sécurité pour appareils électriques de mesure, de régulation et de laboratoire – Partie 2-030: Exigences particulières pour les appareils équipés de circuits d'essai ou de mesure*

IEC 61010-2-032:2023, *Exigences de sécurité pour appareils électriques de mesure, de régulation et de laboratoire – Partie 2-032: Exigences particulières pour les capteurs de courant, portatifs et manipulés manuellement, pour essai électrique et mesure*

¹ L'IEC 61180:2016 remplace partout l'IEC 61180, l'IEC 61180-1 et l'IEC 61180-2 sont référencées dans l'IEC 61010-1.

3 Termes et définitions

L'IEC 61010-1:2010, Article 3, et l'IEC 61010-1:2010/A1:2016, Article 3, s'appliquent avec les exceptions suivantes:

3.5 Termes de sécurité

Remplacer la définition de 3.5.4 par la nouvelle définition suivante:

3.5.4

RESEAU

alimentation électrique

Ajouter le nouveau terme et la nouvelle définition suivants:

3.5.101

CATEGORIE DE MESURE

classification des circuits d'essai et de mesure selon le type de RESEAUX auxquels ils sont prévus d'être reliés

4 Essais

L'IEC 61010-1:2010, Article 4, et l'IEC 61010-1:2010/A1:2016, Article 4, s'appliquent avec les exceptions suivantes:

4.3.2.5 Alimentation RESEAU

Remplacer le titre et le texte existants par le texte suivant:

4.3.2.5 Alimentation électrique

Les exigences suivantes s'appliquent:

- a) la tension d'alimentation RESEAU doit être comprise entre 90 % et 110 % de toute tension d'alimentation ASSIGNEE pour laquelle le multimètre portatif peut être réglé ou, si le multimètre portatif est ASSIGNE pour une fluctuation supérieure, toute tension d'alimentation comprise dans la plage de fluctuation;
- b) la fréquence RESEAU doit être toute fréquence ASSIGNEE;
- c) les multimètres portatifs prévus pour être alimentés en courant alternatif aussi bien qu'en courant continu doivent être connectés à une alimentation en courant alternatif ou en courant continu;
- d) la polarité de connexion des multimètres portatifs prévus pour être alimentés par RESEAU en courant alternatif monophasé doit être à la fois normale et inverse;
- e) si les moyens de connexion permettent une inversion, la polarité de connexion des multimètres portatifs fonctionnant sur accumulateurs ou piles, et en courant continu doit être à la fois inverse et normale.

4.3.2.6 Tensions d'entrée et de sortie

Remplacer le titre et le texte existants par le texte suivant:

4.3.2.6 Tensions ou courants d'entrée et de sortie

Les tensions ou courants d'entrée et de sortie, y compris les potentiels flottants, mais à l'exclusion de la tension d'alimentation RACCORDEE AU RESEAU, doivent être réglés sur toute tension ou tout courant dans leur plage ASSIGNEE, en polarité normale ou inverse si possible.

Ajouter le nouveau paragraphe suivant:

4.4.2.101 Dispositifs de protection contre les surtensions

Les dispositifs de protection contre les surtensions utilisés dans les CIRCUITS RESEAU ou dans les circuits de mesure du RESEAU doivent être court-circuités et mis en circuit ouvert.

5 Marquage et documentation

L'IEC 61010-1:2010, Article 5, et l'IEC 61010-1:2010/A1:2016, Article 5, s'appliquent avec les exceptions suivantes:

5.1.2 Identification

Ajouter la note suivante après la note existante:

NOTE 101 Certaines réglementations nationales peuvent exiger un marquage pour indiquer le nom et l'édition de la norme utilisée pour l'évaluation de la conformité.

5.1.5 BORNES, connexions et dispositifs de manœuvre

5.1.5.1 Généralités

Remplacer le premier alinéa par le texte suivant:

Si cela est nécessaire pour la sécurité, l'objectif des BORNES, connecteurs, dispositifs de commande et indicateurs doit être indiqué. Lorsqu'il n'y a pas suffisamment d'espace, le symbole 14 indiqué dans le Tableau 1 peut être utilisé.

5.1.5.2 BORNES

Remplacer le point d) existant par le point d) suivant:

- d) les BORNES alimentées de l'intérieur du multimètre portatif et qui peuvent être sous TENSION DANGEREUSE doivent porter la valeur ou la plage de tension, courant, charge ou énergie, ou le symbole 12 du Tableau 1;

Ajouter le nouveau point suivant à la liste:

- aa) les BORNES alimentées par d'autres BORNES qui peuvent être sous TENSION DANGEREUSE doivent porter le symbole 12 ou 14 indiqués dans le Tableau 1.

Ajouter le nouveau paragraphe suivant:

5.1.5.101 BORNES des circuits de mesure

Les BORNES des circuits de mesure sont habituellement associées par paires ou jeux. Chaque paire ou jeu de BORNES peut avoir une tension ASSIGNEE ou un courant ASSIGNE, ou les deux, au sein de ce jeu, et chaque BORNE peut avoir individuellement une tension ASSIGNEE par rapport à la terre. Pour certains multimètres portatifs, la tension ASSIGNEE entre les BORNES peut être différente de la tension ASSIGNEE par rapport à la terre. Les marquages doivent être clairs pour éviter toute confusion.

Les bornes de chaque paire ou jeu de BORNES de circuits de mesure destinées à être utilisées ensemble doivent porter le marquage de la valeur de la tension ASSIGNEE ou du courant ASSIGNE applicable à chaque paire ou jeu de BORNES.

Les BORNES des circuits de mesure ASSIGNEES pour les mesurages de la tension RESEAU doivent porter le marquage "CAT III" ou "CAT IV" et sa tension phase-neutre alternative efficace ou continue, suivant le cas. Le marquage des BORNES de ces deux types de CATEGORIES DE MESURE est admissible. Le marquage de la CATEGORIE DE MESURE II n'est pas autorisé. Le marquage de la valeur de la tension ASSIGNEE par rapport à la terre doit être apposé sur les BORNES d'autres circuits de mesure.

NOTE Les DISTANCES D'ISOLEMENT et l'isolation pour les CATEGORIES DE MESURE sont spécifiées pour une tension nominale phase-neutre alternative efficace ou continue du RESEAU en cours de mesure. Le neutre est considéré comme relié à la terre (voir Tableau K.101 et Annexe I).

Les BORNES des circuits de mesure qui ne sont pas ASSIGNEES pour une connexion à des tensions supérieures aux niveaux définis en 6.3.1 peuvent être marquées au moyen d'autres marquages.

Il n'est pas nécessaire de marquer les BORNES des circuits de mesure destinées uniquement à être connectées à des BORNES spécifiques d'autres appareils, sous réserve qu'il existe un moyen d'identification de ces BORNES.

Les marquages des BORNES doivent être visibles lorsque le multimètre portatif est prêt pour une UTILISATION NORMALE avec couplage des connecteurs et des BORNES, et doivent concerner les BORNES applicables.

La conformité est vérifiée par examen.

5.2 Marquages d'avertissement

Remplacer le texte existant par le texte suivant:

Le marquage des avertissements spécifiés dans le présent document doit satisfaire aux exigences suivantes.

Le marquage des avertissements doit être visible lorsque le multimètre portatif est prêt pour une UTILISATION NORMALE. Si un avertissement s'applique à une partie particulière du multimètre portatif, il doit être marqué sur celle-ci ou à proximité.

Le marquage des avertissements doit avoir les dimensions suivantes.

- a) Les symboles doivent avoir au moins une hauteur de 2,75 mm. Le texte doit avoir au moins une hauteur de 1,5 mm et une couleur contrastée par rapport à la couleur du fond.
- b) Les symboles ou les textes moulés, estampés ou gravés dans un matériau doivent avoir au moins une hauteur de 2,0 mm. S'ils ne sont pas contrastés en couleur, ils doivent avoir une profondeur ou une élévation d'au moins 0,5 mm.

S'il est nécessaire que l'ORGANISME RESPONSABLE ou l'OPERATEUR se reporte au manuel d'instructions pour disposer de la protection offerte par le multimètre portatif, celui-ci doit porter le marquage du symbole 14 indiqué dans le Tableau 1. L'utilisation du symbole 14 avec d'autres symboles expliqués dans le manuel n'est pas exigée.

Si les instructions d'utilisation indiquent qu'un OPERATEUR est autorisé à avoir accès, en utilisant un OUTIL, à une partie qui peut être sous TENSION DANGEREUSE en UTILISATION NORMALE, un avertissement doit être marqué indiquant que le multimètre portatif doit être isolé ou déconnecté de la TENSION DANGEREUSE avant l'accès.

NOTE Les réglementations nationales peuvent exiger que le marquage de sécurité soit rédigé dans une langue acceptée à l'échelle nationale.

La conformité est vérifiée par examen.

5.4.1 Généralités

Remplacer le premier alinéa à l'exception de sa liste par l'alinéa suivant:

La documentation suivante nécessaire à des fins de sécurité selon les besoins de l'OPERATEUR ou de l'ORGANISME RESPONSABLE doit être fournie avec le multimètre portatif dans une langue acceptée par le pays dans lequel le produit est destiné à être mis sur le marché. La documentation de sécurité suivante à l'intention du personnel d'entretien autorisé par le fabricant doit être mise à disposition de celui-ci, dans une langue choisie par le fabricant.

Ajouter les deux nouveaux points suivants à la liste, ainsi qu'un nouvel alinéa à la fin de la liste:

- aa) la documentation doit indiquer que les sondes équipées à utiliser pour des mesurages de tension RESEAU doivent avoir, selon le cas, une CATEGORIE DE MESURE III ou IV ASSIGNEE conformément à l'IEC 61010-031:2022 et une tension ASSIGNEE au moins égale à la tension du circuit à mesurer;
- bb) les informations sur chaque CATEGORIE DE MESURE applicable (voir 5.1.5.101).

Si le multimètre PORTATIF est capable de mesurer plusieurs catégories de mesure assignées pour le même circuit de mesure, la documentation doit clairement identifier les CATEGORIES DE MESURE dans lesquelles le multimètre PORTATIF peut être utilisé et celles dans lesquelles il ne doit pas l'être.

6 Protection contre les chocs électriques

L'IEC 61010-1:2010, Article 6, et l'IEC 61010-1:2010/A1:2016, Article 6, s'appliquent avec les exceptions suivantes:

6.5.1 Généralités

Remplacer le texte, la déclaration de conformité et la Figure 4 par le texte, la déclaration de conformité et la Figure 4 suivants:

Les parties ACCESSIBLES ne doivent pas pouvoir être sous TENSION DANGEREUSE en CONDITION DE PREMIER DEFECT. Les moyens principaux de protection (voir 6.4) doivent être complétés par un des moyens de a) ou b) ci-dessous. En variante, l'un des moyens uniques de protection de c) ou d) ci-dessous doit être utilisé (voir Figure 4 et Annexe DD):

- a) ISOLATION SUPPLEMENTAIRE (voir 6.5.3);
- b) dispositif de limitation du courant ou de la tension (voir 6.5.6);
- c) ISOLATION RENFORCEE (voir 6.5.3);
- d) IMPEDANCE DE PROTECTION (voir 6.5.4).

La conformité est vérifiée par examen et comme cela est spécifié en 6.5.3, 6.5.4, ou 6.5.6 selon le cas.

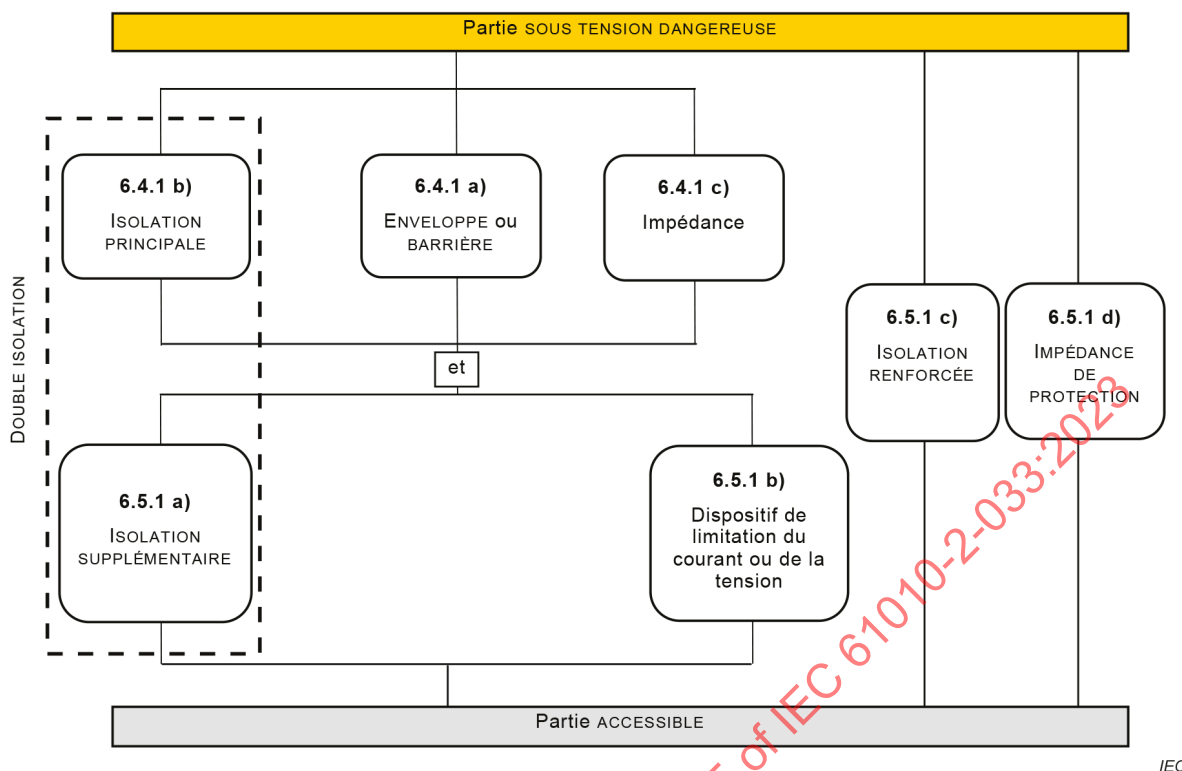


Figure 4 – Agencements acceptables des moyens de protection contre les chocs électriques

6.5.2 Liaison de protection

Remplacer le titre existant de 6.5.2 par le suivant et supprimer le texte:

6.5.2 Non utilisé

6.5.5 Déconnexion automatique de l'alimentation

Remplacer le titre existant de 6.5.5 par le suivant et supprimer le texte:

6.5.5 Non utilisé

6.6 Connexions aux circuits extérieurs

Ajouter le nouveau paragraphe suivant, ainsi que le nouveau tableau suivant:

6.6.101 BORNES des circuits de mesure

6.6.101.1 Généralités

Lors de la détermination des valeurs des LIGNES DE FUITE des BORNES des circuits de mesure d'un multimètre portatif prévu pour être connecté uniquement à une sonde équipée portative conforme à l'IEC 61010-031:2022 ou à un capteur de courant conforme à l'IEC 61010-2-032:2023, il est admis d'appliquer les valeurs applicables des LIGNES DE FUITE du groupe de matériaux I à tous les groupes de matériaux.

Exigences relatives aux BORNES des circuits de mesure en position découplée, en position partiellement couplée et en position couplée sont définies respectivement en 6.6.101.2, en 6.6.101.3 et en 6.6.101.4. Les exigences relatives aux BORNES spécialisées des circuits de mesure sont définies en 6.6.101.5.

L'Annexe CC fournit des informations concernant les dimensions recommandées des BORNES "banane" de 4 mm.

6.6.101.2 BORNES des circuits de mesure en position découplée

Les exigences suivantes s'appliquent aux BORNES des circuits de mesure en position découplée lorsque des tensions ASSIGNEES sont appliquées à n'importe quelles autres BORNES du multimètre portatif.

Les parties ACCESSIBLES des BORNES en position découplée des circuits de mesure doivent être isolées des parties SOUS TENSION DANGEREUSE par une IMPEDANCE DE PROTECTION ou des DISTANCES D'ISOLEMENT et des LIGNES DE FUITE satisfaisant aux exigences de a) et de b).

- a) Pour les BORNES des circuits de mesure ayant une tension ASSIGNEE inférieure ou égale à 3 000 V, les DISTANCES D'ISOLEMENT doivent être au moins égales aux valeurs applicables indiquées dans le Tableau 101.

Tableau 101 – DISTANCES D'ISOLEMENT pour les BORNES des circuits de mesure en position découplée

Tension maximale appliquée aux parties conductrices de la BORNE V	DISTANCE D'ISOLEMENT	
	Tension alternative efficace mm	Tension continue mm
600	0,8	0,8
1 000	1,0	0,8
1 500	2,0	1,1
2 000	3,2	1,8
3 000	6,4	3,5
Pour les tensions maximales comprises entre 30 V en courant alternatif efficace, ou 60 V en courant continu, et 600 V, les DISTANCES D'ISOLEMENT sont de 0,8 mm. L'interpolation linéaire est admise au-delà de 600 V. NOTE Voir Annexe EE.		

Si l'altitude de fonctionnement assignée au multimètre PORTATIF est supérieure à 2 000 m, la valeur de la DISTANCE D'ISOLEMENT doit être multipliée par le coefficient applicable indiqué dans le Tableau 3.

La conformité est vérifiée par un des deux essais suivants:

- l'examen et mesurage de la DISTANCE D'ISOLEMENT de la partie la plus proche du doigt d'épreuve touchant les parties extérieures de cette BORNE dans la position la plus défavorable (voir Figure 1); ou
- l'essai en tension alternative de 6.8.3.1 ou l'essai en tension continue de 6.8.3.2 pour une BORNE contrainte uniquement en tension continue pendant au moins 5 s ou l'essai de tension de choc de 6.8.3.3 en utilisant la tension d'essai applicable indiquée dans le Tableau K.16 pour la DISTANCE D'ISOLEMENT exigée.

Les coefficients de correction indiqués dans le Tableau 10 sont applicables aux valeurs des tensions d'essai pour les DISTANCES D'ISOLEMENT indiquées dans le Tableau K.16.

- b) Les valeurs des LIGNES DE FUITE doivent être au moins égales aux valeurs des DISTANCES D'ISOLEMENT applicables définies en a) du paragraphe 6.6.101.2.

La conformité est vérifiée par examen et mesurage des LIGNES DE FUITE de la partie la plus proche du doigt d'épreuve touchant les parties extérieures de cette BORNE dans la position la plus défavorable.

En outre, pour les multimètres portatifs ASSIGNEES pour EMBLEMENTS HUMIDES, les parties conductrices des BORNES d'une tension ASSIGNEE supérieure à 16 V efficace en courant alternatif, à 22,6 V crête en courant alternatif ou à 35 V en courant continu ne doivent pas être ACCESSIBLES.

La conformité est vérifiée par examen et mesurage.

6.6.101.3 BORNES des circuits de mesure en position partiellement couplée

Les parties ACCESSIBLES des BORNES des circuits de mesure en position partiellement couplée doivent être isolées des parties SOUS TENSION DANGEREUSE par une ISOLATION PRINCIPALE.

La conformité est vérifiée par examen et mesurage.

6.6.101.4 BORNES des circuits de mesure en position couplée

Les parties ACCESSIBLES des BORNES des circuits de mesure en position couplée qui ne sont pas destinées à être tenues à la main ou touchées pendant le mesurage doivent être isolées des parties SOUS TENSION DANGEREUSE par l'ISOLATION PRINCIPALE.

Les parties ACCESSIBLES des BORNES en position couplée des circuits de mesure doivent être isolées des parties SOUS TENSION DANGEREUSE par une DOUBLE ISOLATION ou une ISOLATION RENFORCEE.

La conformité est vérifiée par examen et mesurage.

6.6.101.5 BORNES spécialisées des circuits de mesure

Les BORNES spécialisées des circuits de mesure sont des BORNES prévues pour être connectées à des composants, des capteurs et dispositifs.

NOTE Ces BORNES spécialisées incluent, entre autres, les BORNES pour les connecteurs de thermocouple.

Les composants, les capteurs et les dispositifs prévus pour être connectés à des BORNES spécialisées des circuits de mesure ne doivent pas être à la fois ACCESSIBLES et SOUS TENSION DANGEREUSE, que ce soit en CONDITION NORMALE ou en CONDITION DE PREMIER DEFUT, même lorsque la tension ASSIGNEE la plus élevée est appliquée à n'importe quelle autre BORNE du circuit de mesure.

La conformité est vérifiée par examen et mesurage. Les composants, les capteurs et les dispositifs prévus pour être connectés à des BORNES spécialisées des circuits de mesure sont connectés. Les mesurages de 6.3 sont effectués afin de s'assurer que les niveaux de 6.3.1 et de 6.3.2 ne sont pas dépassés lorsque chacune des tensions suivantes est appliquée à n'importe quelle BORNE du circuit de mesure, le cas échéant:

- a) la tension alternative ASSIGNEE la plus élevée à n'importe quelle fréquence ASSIGNEE du RESEAU;
- b) la tension continue ASSIGNEE la plus élevée;
- c) la tension alternative ASSIGNEE la plus élevée à la fréquence de mesure maximale ASSIGNEE associée.

6.7.1.3 LIGNES DE FUITE

Ajouter le nouvel alinéa suivant après le troisième alinéa:

Pour un multimètre PORTATIF non alimenté par le RESEAU ou le circuit de mesure, il est admis d'appliquer les valeurs applicables des LIGNES DE FUITE du groupe de matériaux I à l'ensemble des matériaux.

6.7.1.5 Exigences pour l'isolation suivant le type de circuit

Remplacer le texte par le texte suivant:

Les exigences pour l'isolation de types particuliers de circuits sont spécifiées comme suit:

- a) en 6.7.2 pour les CIRCUITS RESEAU en CATEGORIE DE SURTENSION II avec une tension nominale d'alimentation jusqu'à 300 V;
- b) en 6.7.3 pour les circuits secondaires séparés des circuits de a) au moyen d'un transformateur seulement;
- c) à l'Article K.1 pour les CIRCUITS RESEAU en CATEGORIE DE SURTENSION III ou IV, ou en CATEGORIE DE SURTENSION II au-delà de 300 V;
- d) à l'Article K.2 pour les circuits secondaires séparés des circuits du c) au moyen d'un transformateur seulement;
- e) à l'Article K.3 pour les circuits ayant une ou plusieurs des caractéristiques suivantes:
 - 1) la SURTENSION TRANSITOIRE maximale possible est limitée par la source d'alimentation ou à l'intérieur du multimètre portatif à une valeur connue inférieure aux valeurs supposées pour le CIRCUIT RESEAU;
 - 2) la SURTENSION TRANSITOIRE maximale possible est supérieure à la valeur présumée pour le CIRCUIT RESEAU;
 - 3) la TENSION DE SERVICE est la somme des tensions de plusieurs circuits, ou est une tension composée;
 - 4) la TENSION DE SERVICE comporte une tension de crête répétitive pouvant être composée d'une forme d'onde périodique non sinusoïdale ou d'une forme d'onde non périodique survenant régulièrement;
 - 5) la fréquence de la TENSION DE SERVICE est supérieure à 30 kHz;
 - 6) le circuit est un circuit de mesure pour lequel les CATEGORIES DE MESURE ne s'appliquent pas;
- f) à l'Article K.101 pour les circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES.

NOTE 1 Voir l'Annexe I pour la tension phase-neutre correspondant au type de RESEAU et à la tension nominale.

NOTE 2 Ces exigences sont représentées dans l'organigramme de la Figure DD.1 de l'Annexe DD.

NOTE 3 Voir l'Article K.3 pour les exigences des circuits à découpage tels que les alimentations de puissance à découpage.

Les niveaux des SURTENSIONS TRANSITOIRES pour le RESEAU correspondent aux valeurs de la tension de choc spécifiées dans le Tableau 102.

6.8.1 Généralités

Remplacer le deuxième et le troisième alinéas par les trois nouveaux alinéas suivants:

Le matériel d'essai pour les essais de tension est spécifié dans l'IEC 61180:2016.

Pour les essais des DISTANCES D'ISOLEMENT de BORNES en position découplée [voir 6.6.101.2 a) ii)], le point de référence pour l'application de la tension d'essai est déterminé depuis la partie la plus proche du doigt d'épreuve appliqué sur les parties extérieures de cette BORNE dans la position la plus défavorable. En variante, une sonde d'essai ayant une extrémité en forme de doigt d'épreuve peut être utilisée pour l'application de la tension d'essai.

Pour les autres essais, les parties isolantes ACCESSIBLES de l'ENVELOPPE sont recouvertes d'une feuille de métal en tout point, excepté autour des BORNES en position déconnectée. Pour les tensions d'essai inférieures ou égales à 10 kV crête en courant alternatif ou 10 kV en courant continu, la distance entre la feuille et la BORNE n'est pas supérieure à 20 mm. Pour des tensions plus élevées, la distance est réduite au minimum afin d'empêcher tout contournement. Pour des recommandations relatives à ces distances minimales, voir le Tableau 9.

6.8.3.1 Essai en tension alternative

Remplacer la première phrase par la phrase suivante:

Le générateur de tension doit pouvoir maintenir la tension d'essai à $\pm 3\%$ de la valeur spécifiée tout au long de l'essai.

6.8.3.2 Essai en tension continue

Ajouter une nouvelle phrase au début du premier alinéa:

Le générateur de tension doit avoir une sortie régulée capable de maintenir la tension d'essai pendant l'essai à $\pm 3\%$ de la valeur spécifiée.

Ajouter le nouveau paragraphe suivant:

6.101 Caractéristiques assignées des multimètres portatifs

Les BORNES des circuits de mesure destinées aux mesurages de la tension RESEAU doivent être ASSIGNEES pour une tension minimale phase-neutre alternative efficace ou continue de 300 V, une tension maximale de 3 000 V et une CATEGORIE DE MESURE III au moins.

La tension ASSIGNEE des BORNES d'un circuit de mesure destiné aux mesurages de la tension RESEAU doit être supérieure ou égale à leur tension phase-neutre alternative efficace ou continue ASSIGNEE.

NOTE Ces BORNES peuvent également avoir d'autres CARACTERISTIQUES ASSIGNEES pour d'autres fonctions.

La conformité est vérifiée par examen.

7 Protection contre les DANGERS mécaniques

L'IEC 61010-1:2010, Article 7, et l'IEC 61010-1:2010/A1:2016, Article 7, s'appliquent.

8 Résistance aux contraintes mécaniques

L'IEC 61010-1:2010, Article 8, s'applique.

9 Protection contre la propagation du feu

Remplacer le titre existant par le titre suivant:

9 Protection contre la propagation du feu et des arcs électriques

L'IEC 61010-1:2010, Article 9, et l'IEC 61010-1:2010/A1:2016, Article 9, s'appliquent avec les exceptions suivantes:

Ajouter le nouveau paragraphe suivant, ainsi que le nouveau tableau suivant:

9.101 Protection des circuits de mesure

9.101.1 Généralités

Le multimètre portatif doit assurer une protection contre le feu ou les arcs électriques résultant de l'UTILISATION NORMALE et du MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE des circuits de mesure, comme indiqué en a) et b) ci-après:

- a) une grandeur électrique qui est conforme aux spécifications de n'importe quelle BORNE quand elle est appliquée à cette BORNE ou à toute autre BORNE compatible, pour tous les réglages possibles des fonctions ou calibres (voir 9.101.2);
- b) une SURTENSION TEMPORAIRE ou une SURTENSION TRANSITOIRE appliquée sur les BORNES des circuits de mesure en vue de mesurer la tension (voir 9.101.3);

La conformité est vérifiée de la manière spécifiée en 9.101.2 et 9.101.3, suivant le cas.

9.101.2 Protection contre l'inadéquation des entrées et des calibres

9.101.2.1 Généralités

En CONDITION NORMALE et en cas de MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE, aucun DANGER ne doit survenir lorsque la tension ou le courant ASSIGNE le plus élevé d'une BORNE d'un circuit de mesure est appliqué à cette BORNE ou à toute autre BORNE compatible, pour tous les réglages possibles des fonctions ou calibres.

NOTE L'inadéquation des entrées et des calibres sont des exemples de MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE, même si la documentation ou les marquages interdisent de telles opérations. Un exemple typique est la connexion par inadvertance d'une tension élevée à une entrée prévue pour des mesures de courants ou de résistances. Les DANGERS possibles comprennent les chocs électriques, les brûlures, le feu, les explosions et les arcs électriques.

Il n'est pas nécessaire de soumettre à essai les BORNES qui ne sont manifestement pas de types similaires et qui ne retiendront pas les connecteurs de la sonde équipée ou de l'accessoire et il n'est pas nécessaire que les BORNES auxquelles il ne peut être accédé qu'à l'aide d'un OUTIL satisfassent aux exigences du paragraphe 9.101.2.1.

Le multimètre portatif doit assurer une protection contre ces DANGERS. Une des techniques suivantes en a) ou b) doit être utilisée:

- a) utilisation d'un dispositif certifié de protection contre les surintensités pour couper le courant de court-circuit avant l'occurrence d'un DANGER (voir 9.101.2.2);
- b) utilisation d'un dispositif non certifié de limitation du courant, d'une impédance, ou d'une combinaison des deux pour empêcher l'occurrence d'un DANGER (voir 9.101.2.3).

La conformité est vérifiée par examen, par évaluation de la conception du multimètre portatif et comme cela est spécifié en 9.101.2.2 et 9.101.2.3, selon le cas.

9.101.2.2 Protection par un dispositif certifié de protection contre les surintensités

Un dispositif de protection contre les surintensités est considéré comme acceptable s'il est certifié par une autorité de contrôle reconnue et si l'ensemble des exigences suivantes de a) à c) sont satisfaites:

- a) les tensions alternatives et continues ASSIGNEES du dispositif de protection contre les surintensités doivent être au moins aussi élevées que, respectivement, les tensions alternatives et continues ASSIGNEES les plus élevées de toute BORNE de circuit de mesure du multimètre portatif;
- b) la CARACTERISTIQUE ASSIGNEE temps-courant (vitesse) du dispositif de protection contre les surintensités doit être telle qu'aucun DANGER ne survient dans toutes les combinaisons possibles de tensions d'entrée ASSIGNEES, de BORNES et de calibres;

NOTE Dans la pratique, les éléments en aval du circuit tels que les composants et les pistes du circuit imprimé sont sélectionnés de façon à pouvoir résister à l'énergie que le dispositif de protection contre les surintensités laisse passer.

- c) les pouvoirs de coupure ASSIGNEES en courant alternatif et en courant continu du dispositif de protection contre les surintensités doivent être supérieurs, respectivement, aux courants de court-circuit possibles en alternatif et continu.

Les courants de court-circuit possibles en alternatif et en continu doivent être calculés en divisant les tensions ASSIGNEES les plus élevées de n'importe quelle BORNE par l'impédance du circuit de mesure protégé contre les surintensités en prenant en compte l'impédance des cordons d'essai spécifiée en 9.101.2.4.

Il n'est pas nécessaire que le courant de court-circuit alternatif possible dépasse les valeurs applicables indiquées dans le Tableau AA.1.

De plus, les distances séparant le dispositif de protection contre les surintensités dans le multimètre portatif et en aval du circuit de mesure doivent être suffisamment grandes pour éviter l'apparition d'un arc électrique après l'ouverture du dispositif de protection.

La conformité est vérifiée par l'examen des CARACTERISTIQUES ASSIGNEES du dispositif de protection contre les surintensités et par l'essai suivant.

Si le dispositif de protection est un fusible, il est remplacé par un fusible fondu. Si le dispositif de protection est un disjoncteur, il est réglé en position ouverte. Une tension valant deux fois la tension ASSIGNEE la plus élevée de n'importe quelle BORNE est appliquée aux BORNES du circuit de mesure protégé contre les surintensités pendant 1 min. Pendant et après l'essai, le multimètre portatif ne doit subir aucun dommage.

9.101.2.3 Protection par des dispositifs non certifiés de limitation du courant ou par des impédances

Les dispositifs utilisés comme limiteurs de courant doivent être capables en toute sécurité de supporter, de dissiper ou d'interrompre l'énergie induite par l'application de la tension ASSIGNEE maximale de n'importe quelle BORNE compatible en CONDITION NORMALE et dans le cas d'un MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE.

Une impédance utilisée pour limiteur de courant doit être un composant unique approprié comme spécifié en a) ou une combinaison de composants comme spécifié en b).

- a) Un composant individuel approprié qui est fabriqué, choisi et soumis à l'essai de manière à assurer la sécurité et la fiabilité pour la protection contre les DANGERS appropriés. Ce composant doit notamment:

- 1) avoir une tension ASSIGNEE égale à la tension maximale susceptible d'être présente en CONDITION NORMALE ou pendant le MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE;
- 2) s'il s'agit d'une résistance, avoir une dissipation en puissance ou en énergie ASSIGNEE du double de celle qui peut être présente en CONDITION NORMALE ou pendant le MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE;
- 3) satisfaire aux exigences applicables de l'Annexe K en matière de DISTANCE D'ISOLEMENT et de LIGNE DE FUITE pour l'ISOLATION PRINCIPALE entre ses bornes;

- b) une combinaison de composants qui doit:

- 1) supporter la tension maximale qui peut être présente en CONDITION NORMALE ou pendant le MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE;
- 2) pouvoir dissiper la puissance ou l'énergie qui peut être présente en CONDITION NORMALE ou pendant le MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE;
- 3) satisfaire aux exigences applicables de l'Annexe K en matière de DISTANCE D'ISOLEMENT et de LIGNE DE FUITE pour l'ISOLATION PRINCIPALE entre les bornes de la combinaison de composants.

NOTE 1 Les DISTANCES D'ISOLEMENT et LIGNES DE FUITE tiennent compte de la TENSION DE SERVICE à travers chaque isolation.

La conformité est vérifiée par examen et l'essai suivant, réalisé trois fois sur le même multimètre portatif. Si l'essai entraîne l'échauffement de tout composant, il est admis de laisser le multimètre portatif refroidir avant de répéter l'essai.

Les courants de court-circuit possibles en alternatif et en continu sont calculés en divisant la tension ASSIGNEE la plus élevée de n'importe quelle BORNE par l'impédance du circuit de mesure limité en courant en prenant en compte l'impédance des cordons d'essai spécifiée en 9.101.2.4. Pour les CATEGORIES DE MESURE III, il convient que le courant de court-circuit possible en alternatif ne dépasse pas les valeurs indiquées dans le Tableau AA.1.

Une tension égale à la tension ASSIGNEE la plus élevée à n'importe quelle BORNE est appliquée entre les BORNES du circuit de mesure pendant 1 min. La source de la tension d'essai doit pouvoir fournir au moins le courant de court-circuit possible en alternatif ou en continu, suivant le cas. Si les commandes de fonctions ou de calibres ont une influence sur les caractéristiques électriques du circuit d'entrée, l'essai est répété avec les commandes de fonctions ou de calibres dans toutes les combinaisons de positions, y compris lors de la modification d'une fonction ou d'un calibre. Au cours de l'essai, la tension de sortie de la source est mesurée. Si la tension de source diminue de plus de 20 % pendant plus de 10 ms, l'essai est considéré comme non concluant et est répété avec une source d'impédance plus faible.

Pendant et après l'essai, aucun DANGER ne doit survenir, et il ne doit y avoir aucun signe de feu, d'arc électrique, d'explosion ou de dommages aux dispositifs de limitation du courant, aux impédances ou à tout composant prévu pour assurer une protection contre les chocs électriques, la chaleur, les arcs électriques ou le feu, y compris l'ENVELOPPE et les pistes du circuit imprimé, à l'exception des fusibles qui peuvent fondre.

NOTE 2 Cet essai peut être extrêmement dangereux. Des enceintes antidéflagrantes et d'autres dispositions peuvent être utilisées pour protéger le personnel en charge de l'essai.

9.101.2.4 Cordons d'essai pour les essais

Les essais de 9.101.2.2 et 9.101.2.3 doivent être réalisés avec l'ensemble des cordons d'essai livrés avec le multimètre portatif ou spécifiés par le fabricant pour être utilisés avec le multimètre portatif. En l'absence d'indication du fabricant, les essais doivent être réalisés avec des cordons d'essai qui satisfont aux spécifications suivantes de a) à e):

- a) longueur de chaque cordon d'essai = 1,0 m;
- b) section du conducteur = 1,5 mm², fil multibrin en cuivre (un conducteur de section 16 AWG [American Wire Gauge] est acceptable);
- c) connecteur compatible avec les BORNES des circuits de mesure;
- d) raccordement à la source de tension d'essai avec des BORNES à vis ou à ressort (sur conducteur dénudé) ou tout autre moyen assurant une impédance de connexion faible;
- e) disposés aussi droits que possible.

Les cordons d'essai suivant ces spécifications ont une résistance en courant continu d'environ 15 mΩ chacun, soit 30 mΩ pour une paire. Pour calculer le courant de défaut possible de 9.101.2.2 et 9.101.2.3, la valeur de 30 mΩ peut être retenue pour ces cordons d'essai.

Si les cordons d'essai fournis par le fabricant sont connectés en permanence au multimètre portatif, ils doivent alors être utilisés sans modification.

Lorsque les procédures d'essai de 6.8.3 sont appliquées au multimètre portatif, les cordons d'essai peuvent être ceux fournis avec le générateur d'essai sans modification.

9.101.3 Protection contre les surtensions du RESEAU

Les circuits de mesure de tension dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES doivent présenter les DISTANCES D'ISOLEMENT et les LIGNES DE FUITE pour l'ISOLATION PRINCIPALE entre les parties conductrices de la polarité opposée connectées au RESEAU y compris entre les bornes des dispositifs ou composants utilisés pour limiter le courant.

La conformité est vérifiée par examen et mesurage.

En outre, ces circuits de mesure de tension doivent prendre en compte les SURTENSIONS TRANSITOIRES prévues.

La conformité est vérifiée par l'essai de tension de choc suivant en utilisant les valeurs applicables du Tableau 102.

La tension de choc est appliquée entre chaque paire de BORNES ASSIGNEES pour le mesurage de la tension RESEAU, alors que le circuit fonctionne en conditions d'UTILISATION NORMALE, en combinaison avec la tension RESEAU. Les sélecteurs des fonctions de mesure de la tension sont réglés sur la bonne fonction et le bon calibre.

L'essai de tension de choc est réalisé en appliquant cinq impulsions de chaque polarité, espacées entre elles de 1 min, produites par un générateur d'ondes combinées conformément à l'IEC 61000-4-5:2014, 6.2. Le générateur produit une tension de forme d'onde 1,2/50 μ s en circuit ouvert, un courant de court-circuit de forme d'onde 8/20 μ s, avec une impédance de sortie (valeur de crête de la tension en circuit ouvert divisée par la valeur de crête du courant de court-circuit) de 2 Ω pour les CATEGORIES DE MESURE III et IV. Une résistance peut être ajoutée en série si nécessaire pour augmenter l'impédance.

La tension RESEAU utilisée pour l'essai est la tension phase-neutre maximale ASSIGNEE du RESEAU en cours de mesure. Pour les circuits de mesure ASSIGNES pour des tensions phase-neutre alternatives efficaces ou continues du RESEAU supérieures à 400 V, l'essai peut être réalisé avec une source de tension RESEAU disponible ayant une tension alternative efficace ou continue au moins égale à 400 V. Dans ce cas, il n'est pas nécessaire que la source de tension RESEAU corresponde aux CARACTERISTIQUES ASSIGNEES du circuit de mesure. Pour les circuits de mesure ASSIGNES pour le RESEAU en courant continu, une source de tension alternative peut être utilisée. Lorsqu'une source de courant alternatif est utilisée, les impulsions sont synchronisées avec la phase de tension RESEAU, programmées pour se produire à la valeur de crête de la tension RESEAU, et pour avoir la même polarité que le cycle, avec une tolérance de phase de $\pm 10^\circ$ (voir IEC 61000-4-5:2014, 6.2).

NOTE 1 Cet essai peut être extrêmement dangereux. Des enceintes antidéflagrantes et d'autres dispositions peuvent être utilisées pour protéger le personnel en charge de l'essai.

Aucun DANGER ne doit survenir. Aucun contournement des DISTANCES D'ISOLEMENT ou claquage de l'isolation solide ne doit survenir pendant l'essai. Néanmoins des décharges partielles sont admises. La décharge partielle est indiquée par un échelon dans la forme d'onde induite qui se produit plus tôt dans des impulsions successives. Un claquage lors de la première impulsion peut indiquer soit une défaillance généralisée du système d'isolation, soit le fonctionnement de dispositifs de limitation des surtensions dans le multimètre portatif. Si des dispositifs de limitation des surtensions sont présents, ils ne doivent pas se rompre ou surchauffer pendant l'essai. Le déclenchement du disjoncteur de l'installation RESEAU indique une défaillance. Si les résultats de l'essai sont contestables ou peu concluants, l'essai est à répéter deux nouvelles fois.

NOTE 2 Des décharges partielles dans le vide peuvent induire des échelons de tension de très courte durée dans la forme d'onde, qui peuvent se reproduire tout au long de l'impulsion.

Tableau 102 – Tensions de choc pour circuits connectés au RESEAU

Tension nominale phase-neutre alternative efficace ou continue du RESEAU en cours de mesure V	Tension de choc V crête	
	CATEGORIE DE MESURE III	CATEGORIE DE MESURE IV
≤ 150	2 500	4 000
> 150 ≤ 300	4 000	6 000
> 300 ≤ 600	6 000	8 000
> 600 ≤ 1 000	8 000	12 000
> 1 000 ≤ 1 500	10 000	15 000
> 1 500 ≤ 2 000	15 000	18 000
> 2 000 ≤ 3 000	18 000	20 000
Les valeurs inférieures ou égales à 1 000 V sont tirées de l'IEC 60664-1:2020, Tableau F.1.		
Les valeurs supérieures à 1 000 V sont tirées de l'IEC TS 62993:2017, Tableau 1.		

10 Limites de température de l'appareil et résistance à la chaleur

L'IEC 61010-1:2010, Article 10, et l'IEC 61010-1:2010/A1:2016, Article 10, s'appliquent.

11 Protection contre les DANGERS des fluides et des corps solides étrangers

L'IEC 61010-1:2010, Article 11, et l'IEC 61010-1:2010/A1:2016, Article 11, s'appliquent.

12 Protection contre les radiations, y compris les sources laser, et contre la pression acoustique et ultrasonique

L'IEC 61010-1:2010, Article 12, et l'IEC 61010-1:2010/A1:2016, Article 12, s'appliquent.

13 Protection contre les émissions de gaz et substances, les explosions et les implosions

L'IEC 61010-1:2010, Article 13, et l'IEC 61010-1:2010/A1:2016, Article 13, s'appliquent.

14 Composants et sous-ensembles

L'IEC 61010-1:2010, Article 14, et l'IEC 61010-1:2010/A1:2016, Article 14, s'appliquent avec les exceptions suivantes:

14.8 Circuits utilisés pour limiter les SURTENSIONS TRANSITOIRES

Remplacer le titre existant de 14.8 par le suivant et supprimer le texte:

14.8 Non utilisé

Ajouter le nouveau paragraphe suivant:

14.101 Sondes équipées et accessoires

Les sondes équipées et les accessoires relevant du domaine d'application de l'IEC 61010-031:2022 et les capteurs de courant relevant du domaine d'application de l'IEC 61010-2-032:2023, doivent satisfaire aux exigences applicables de ces normes.

Au moins un ensemble de cordons d'essai fourni avec le multimètre portatif doit être ASSIGNE conformément à l'IEC 61010-031:2022 pour au moins la tension et la CATEGORIE DE MESURE les plus élevées du multimètre portatif.

La conformité est vérifiée par examen de la documentation ou en réalisant tous les essais pertinents de l'IEC 61010-031:2022 ou de l'IEC 61010-2-032:2023, suivant le cas.

15 Protection par systèmes de verrouillage

L'IEC 61010-1:2010, Article 15, s'applique.

16 DANGERS résultant de l'application

L'IEC 61010-1:2010, Article 16, s'applique.

17 Évaluation des RISQUES

L'IEC 61010-1:2010, Article 17, s'applique.

Ajouter le nouvel article suivant:

101 Circuits de mesure

101.1 Généralités

Le multimètre portatif doit assurer une protection contre les DANGERS résultant de l'UTILISATION NORMALE et du MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE des circuits de mesure, comme spécifié de a) à c) ci-dessous:

- a) un circuit de mesure de courant susceptible d'interrompre le circuit mesuré en cas de changement de calibre ou lors de l'utilisation de transformateurs de courant sans protection interne (voir 101.2);
- b) une valeur de tension affichée qui peut être incorrecte ou ambiguë (voir 101.3);
- c) les autres DANGERS susceptibles de résulter d'un MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE doivent être traités par une appréciation du RISQUE (voir Article 16 et Article 17).

Tout raccordement entre le multimètre portatif et d'autres dispositifs ou accessoires prévus pour être utilisés avec le multimètre portatif ne doit pas provoquer de DANGER même si le marquage ou la documentation interdit le raccordement alors que le multimètre portatif est utilisé à des fins de mesurage (voir 6.6).

La conformité est vérifiée tel que spécifié en 6.6, à l'Article 16, et à l'Article 17, 101.2 et 101.3 suivant le cas.

101.2 Circuits de mesure de courant

Les circuits de mesure de courant doivent être conçus de telle façon que, lors d'un changement de calibre, il ne doit pas y avoir de coupure qui puisse être source de DANGER.

La conformité est vérifiée par examen, et lorsqu'une interruption du circuit de mesure de courant peut se produire, par un essai de 6 000 commutations du courant maximal ASSIGNE par le dispositif.

Lorsque le circuit secondaire d'un transformateur de courant est déconnecté de sa charge, une tension élevée peut apparaître entre les extrémités du circuit ouvert et peut conduire à une situation dangereuse.

Les circuits de mesure de courant destinés à être connectés à des transformateurs de courant sans protection interne doivent être protégés de façon satisfaisante pour éviter tout DANGER provoqué par la coupure de ces circuits pendant le fonctionnement.

La conformité est vérifiée par un essai de surcharge basé sur 10 fois le courant maximal ASSIGNE pendant 1 s et, le cas échéant, par un essai de 6 000 commutations du multimètre portatif pour le courant maximal ASSIGNE. Aucune coupure pouvant entraîner un DANGER ne doit se produire pendant les essais.

101.3 Dispositifs indicateurs

101.3.1 Généralités

Le relevé d'une valeur de tension ne doit pas engendrer de DANGER lorsque le multimètre portatif est utilisé pour mesurer des tensions RESEAU, ainsi que dans le cas d'un MAUVAIS USAGE RAISONNABLEMENT PREVISIBLE.

Une valeur de tension affichée est considérée comme non ambiguë lorsque son inexactitude est inférieure à 10 %, ou s'il est indiqué que la valeur est en dehors de la gamme de mesure, ou s'il est clairement indiqué que la valeur n'est pas correcte. L'arrêt de l'affichage est également considéré comme non ambigu.

Les essais de 101.3.2, 101.3.3 et 101.3.4 doivent être réalisés s'ils sont pertinents.

Les tensions alternatives efficaces appliquées aux BORNES pendant les essais ont une fréquence de 50 Hz ou 60 Hz.

101.3.2 Niveau de la batterie

Une valeur de tension affichée par le multimètre portatif ne doit pas être altérée par la variation prévue de la tension de sa batterie.

La conformité est vérifiée par l'essai suivant:

pour les BORNES de chaque CIRCUIT DE MESURE ASSIGNEES pour les mesurages de la tension RESEAU, la tension dans la liste ci-après est appliquée à ces BORNES:

- *les BORNES de mesure de la tension alternative sont connectées à une source de tension alternative efficace de 60 V;*
- *les BORNES de mesure de la tension continue sont connectées à une source de tension continue de 120 V.*

La tension d'alimentation de la source de tension continue connectée aux bornes de la batterie diminue de 20 mV/s au plus entre la tension maximale de la batterie et une tension nulle. La batterie ou une source analogue doit constituer la source de tension continue utilisée pour cet essai tout en tenant compte de l'impédance de la batterie et des conditions sans ondulation. L'arrêt de l'affichage signifie la fin de l'essai.

Les valeurs de tension affichées pendant l'essai doivent être non ambiguës.

NOTE Voir 101.3.1 pour la signification du terme "non ambigu".

101.3.3 Indication de dépassement de plage

Le multimètre portatif doit être capable d'afficher de manière non ambiguë les valeurs de tension de dépassement de plage à chaque fois que la valeur est supérieure à la valeur maximale absolue de sa plage de réglage.

NOTE Des exemples d'indications ambiguës comprennent les situations suivantes, sauf quand il existe une indication distincte et non ambiguë d'un dépassement:

- a) multimètre portatif analogique qui s'arrête exactement aux extrémités de la plage;
- b) multimètre portatif numérique qui affiche une valeur inférieure lorsque la valeur vraie est supérieure à la valeur maximale de la plage (par exemple 001,5 V affiché pour 1 001,5 V).

La conformité est vérifiée par l'essai suivant:

Une tension de dépassement de plage est appliquée aux BORNES du circuit de mesure ASSIGNEES pour les mesurages de la tension RESEAU de l'appareil réglé pour chaque gamme de mesure de la tension.

La valeur de la tension de dépassement de plage appliquée aux BORNES est égale à 110 % de la gamme de mesure de la tension ASSIGNEE. Pour les mesurages ASSIGNEES pour la tension continue, la tension de dépassement de plage est appliquée avec des polarités positives et négatives.

Les valeurs de tension affichées pendant l'essai doivent être non ambiguës.

101.3.4 Surtensions permanentes

Le multimètre portatif doit être capable de résister à des surtensions permanentes et continuer à indiquer de manière non ambiguë les tensions DANGEREUSES éventuelles jusqu'à la tension maximale ASSIGNEE.

NOTE 1 Le paragraphe 9.101.3 fournit les exigences relatives à la protection contre les DANGERS dus aux SURTENSIONS TRANSITOIRES.

La conformité est vérifiée par l'essai suivant:

Une surtension est appliquée pendant 5 min aux BORNES du circuit de mesure ASSIGNEES pour les mesurages de la tension RESEAU du multimètre portatif réglé pour chaque gamme de mesure de la tension.

La valeur de la surtension appliquée aux BORNES est fondée sur la tension ASSIGNEE entre les BORNES:

- a) *lorsque la valeur de tension ASSIGNEE des BORNES est inférieure à 1 000 V efficace en courant alternatif, la valeur de surtension est la valeur de tension ASSIGNEE des BORNES multipliée par 1,9, sans toutefois dépasser 1 100 V efficace en courant alternatif;*
- b) *lorsque la valeur de tension ASSIGNEE des BORNES est supérieure à 1 000 V efficace en courant alternatif, la valeur de surtension est la valeur de tension ASSIGNEE multipliée par 1,1;*

c) lorsque la valeur de tension ASSIGNEE des BORNES est en courant continu, la valeur de surtension est la valeur de tension ASSIGNEE multipliée par 1,1.

NOTE 2 Le coefficient multiplicateur par 1,9 est dérivé des mesurages de la tension entre phases avec une surtension de 10 %.

Il peut être nécessaire de répéter l'essai ci-dessus avec toute combinaison de réglages, de BORNES et de tensions ASSIGNEES.

Après l'application de chaque surtension, les BORNES de chaque circuit de mesure ASSIGNEES pour les mesurages de la tension RESEAU doivent à tour de rôle:

- 1) mesurer une tension alternative efficace de 60 V ou une tension continue de 120 V sur la base du type d'entrée de BORNE de mesure;
- 2) mesurer une tension égale à la tension maximale ASSIGNEE pour la BORNE de mesure soumise à l'essai.

Les valeurs de tension affichées doivent être non ambiguës.

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annexes

Toutes les annexes de l'IEC 61010-1:2010 et de l'IEC 61010-1:2010/A1:2016 s'appliquent, avec les exceptions suivantes.

IECNORM.COM : Click to view the full PDF of IEC 61010-2-033:2023

Annexe K (normative)

Exigences d'isolation non couvertes par 6.7

K.2 Isolation dans les circuits secondaires

K.2.1 Généralités

Supprimer la note.

Ajouter les deux nouveaux alinéas suivants, ainsi que l'exemple à la fin du paragraphe K.2.1:

Le niveau maximal de SURTENSION TRANSITOIRE d'un circuit secondaire relié à la terre est présumé être inférieur d'un niveau à la série de tensions de choc du Tableau 102 pour la tension nominale phase-neutre alternative efficace ou continue considérée du CIRCUIT RESEAU primaire de la même CATEGORIE DE SURTENSION ou CATEGORIE DE MESURE.

EXEMPLE Si la tension nominale phase-neutre efficace alternative du RESEAU en cours de mesure est 2 000 V en CATEGORIE DE MESURE III, la tension de choc applicable est de 15 000 V et la valeur basse est égale à 10 000 V.

Les DISTANCES D'ISOLEMENT pour les circuits secondaires sont déterminées:

- 1) pour les circuits secondaires reliés à la terre, par la méthode de K.2.2 ou en K.3.2 en utilisant la valeur la plus basse de SURTENSION TRANSITOIRE d'un niveau; ou
- 2) pour tous les circuits secondaires, par la méthode indiquée en K.3.2 en utilisant la valeur de U_t définie dans l'IEC 61010-2-030:2023, Article K.4.

K.3 Isolation des circuits autres que ceux couverts par 6.7, l'Article K.1 ou l'Article K.2

Remplacer le titre existant de l'Article K.3 par le titre suivant:

K.3 Isolation des circuits autres que ceux couverts par 6.7, l'Article K.1, l'Article K.2 ou l'Article K.101 et des circuits de mesure pour lesquels les catégories de mesure ne s'appliquent pas

K.3.1 Généralités

Remplacer le texte par le texte suivant:

Les circuits couverts par l'article K.3 présentent une ou plusieurs des caractéristiques suivantes de a) à f):

- a) le circuit est un circuit de mesure pour lequel les CATEGORIES DE MESURE ne s'appliquent pas;
- b) la SURTENSION TRANSITOIRE maximale possible est supérieure au niveau par rapport à la série de tensions de choc de Tableau K.101, supposée pour le CIRCUIT RESEAU;
- c) la SURTENSION TRANSITOIRE maximale possible est limitée par la source d'alimentation ou à l'intérieur du multimètre portatif à une valeur connue inférieure aux valeurs supposées pour le CIRCUIT RESEAU;
- d) la tension de service est la somme des tensions de plusieurs circuits, ou est une tension composée;
- e) la tension de service comporte une tension de crête répétitive pouvant être composée d'une forme d'onde périodique non sinusoïdale ou d'une forme d'onde non périodique survenant régulièrement;

f) la fréquence de la tension de service est supérieure à 30 kHz.

Dans les cas a) à d), les DISTANCES D'ISOLEMENT sont déterminées selon K.3.2.

Dans les cas e) et f), les DISTANCES D'ISOLEMENT sont déterminées selon K.3.3.

NOTE 1 Les DISTANCES D'ISOLEMENT pour les BORNES des circuits de mesure sont définies en 6.6.101.

Dans tous les cas, K.3.4 concerne les LIGNES DE FUITE et K.3.5 concerne l'isolation solide.

NOTE 2 Ces exigences sont représentées dans l'organigramme de la Figure DD.1 de l'Annexe DD.

K.3.2 CALCUL DES distances d'isolement

Remplacer la déclaration de conformité existante, Tableau K.15, Tableau K.16 et la Note 2 (comprenant l'exemple 1 et l'exemple 2) par la nouvelle déclaration de conformité suivante, Tableau K.15, Tableau K.16 et la Note 2 (comprenant un nouvel exemple).

La conformité est vérifiée par examen et mesurage ou par l'essai en tension alternative de 6.8.3.1 pendant au moins 5 s, l'essai en tension continue de 6.8.3.2 pour les circuits de mesure contraints uniquement en tension continue pendant au moins 5 s ou l'essai de tension de choc de 6.8.3.3 en utilisant la tension d'essai applicable indiquée dans le Tableau K.16 pour la DISTANCE D'ISOLEMENT exigée.

Les coefficients de correction indiqués dans le Tableau 10 sont applicables aux valeurs des tensions d'essai.

Tableau K.15 – Valeurs de la DISTANCE D'ISOLEMENT pour le calcul de K.3.2

Tension maximale U_m V	DISTANCE D'ISOLEMENT		Tension maximale U_m V	DISTANCE D'ISOLEMENT	
	D_1 mm	D_2 mm		D_1 mm	D_2 mm
14,1 à 266	0,010	0,010	4 000	3,00	3,80
283	0,010	0,010	4 530	3,53	4,80
330	0,010	0,010	5 660	4,99	7,15
354	0,012	0,013	6 000	5,50	7,90
453	0,030	0,030	7 070	6,84	9,55
500	0,040	0,040	8 000	8,00	11,0
566	0,053	0,053	8 910	9,37	12,9
707	0,081	0,097	11 300	13,0	17,7
800	0,10	0,13	14 100	16,8	23,2
891	0,12	0,19	17 700	21,8	29,9
1 130	0,22	0,36	22 600	29,2	39,2
1 410	0,43	0,66	28 300	37,6	51,3
1 500	0,50	0,76	35 400	50,8	66,9
1 770	0,77	1,04	45 300	68,0	89,2
2 260	1,26	1,55	56 600	85,0	115
2 500	1,50	1,80	70 700	111	148
2 830	1,83	2,20	89 100	148	190
3 540	2,54	3,16	100 000	170	215

L'interpolation linéaire est admise.

NOTE Voir Annexe EE.

Tableau K.16 – Tensions d'essai en fonction des DISTANCES D'ISOLEMENT

DISTANCE D'ISOLEMENT exigée	Impulsion 1,2/50 µs	Tension alternative efficace 50/60 Hz	Tension de crête alternative à 50/60 Hz ou tension continue	DISTANCE D'ISOLEMENT exigée	Impulsion 1,2/50 µs	Tension alternative efficace 50/60 Hz	Tension de crête alternative à 50/60 Hz ou tension continue
mm	V crête	V	V	mm	V crête	V	V
0,010	330	230	330	16,5	14 000	7 600	10 700
0,025	440	310	440	17,0	14 300	7 800	11 000
0,040	520	370	520	17,5	14 700	8 000	11 300
0,063	600	420	600	18,0	15 000	8 200	11 600
0,1	806	500	700	19,0	15 800	8 600	12 100
0,2	1 140	620	880	20	16 400	9 000	12 700
0,3	1 310	710	1 010	25	19 900	10 800	15 300
0,5	1 550	840	1 200	30	23 300	12 600	17 900
1,0	1 950	1 060	1 500	35	26 500	14 400	20 400
1,4	2 440	1 330	1 880	40	29 700	16 200	22 900
2,0	3 100	1 690	2 400	45	32 900	17 900	25 300
2,5	3 600	1 960	2 770	50	36 000	19 600	27 700
3,0	4 070	2 210	3 130	55	39 000	21 200	30 000
3,5	4 510	2 450	3 470	60	42 000	22 900	32 300
4,0	4 930	2 680	3 790	65	45 000	24 500	34 600
4,5	5 330	2 900	4 100	70	47 900	26 100	36 900
5,0	5 720	3 110	4 400	75	50 900	27 700	39 100
5,5	6 100	3 320	4 690	80	53 700	29 200	41 300
6,0	6 500	3 520	4 970	85	56 610	30 800	43 500
6,5	6 800	3 710	5 250	90	59 400	32 300	45 700
7,0	7 200	3 900	5 510	95	62 200	33 800	47 900
7,5	7 500	4 080	5 780	100	65 000	35 400	50 000
8,0	7 800	4 300	6 030	110	70 500	38 400	54 200
8,5	8 200	4 400	6 300	120	76 000	41 300	58 400
9,0	8 500	4 600	6 500	130	81 300	44 200	62 600
9,5	8 800	4 800	6 800	140	86 600	47 100	66 700
10,0	9 100	4 950	7 000	150	91 900	50 000	70 700
10,5	9 500	5 200	7 300	160	97 100	52 800	74 700
11,0	9 900	5 400	7 600	170	102 300	55 600	78 700
11,5	10 300	5 600	7 900	180	107 400	58 400	82 600
12,0	10 600	5 800	8 200	190	112 500	61 200	86 500
12,5	11 000	6 000	8 500	200	117 500	63 900	90 400
13,0	11 400	6 200	8 800	210	122 500	66 600	94 200
13,5	11 800	6 400	9 000	220	127 500	69 300	98 000
14,0	12 100	6 600	9 300	230	132 500	72 000	102 000
14,5	12 500	6 800	9 600	240	137 300	74 700	106 000
15,0	12 900	7 000	9 900	250	142 200	77 300	109 400
15,5	13 200	7 200	10 200	264	149 000	81 100	115 000
16,0	13 600	7 400	10 500				

L'interpolation linéaire est admise.

NOTE 2 Un exemple de calculs est présenté ci-après.

EXEMPLE DISTANCE D'ISOLEMENT pour une ISOLATION RENFORCEE avec une TENSION DE SERVICE de 3 500 V crête et une tension transitoire supplémentaire de 4 500 V (cela peut être réalisé par un circuit de commutation électronique).

D_{BI} est la distance d'isolement pour l'isolation principale.

D_{RI} est la DISTANCE D'ISOLEMENT pour l'ISOLATION RENFORCEE.

U_m est la tension maximale:

$$U_m = U_w + U_t = (3\,500 + 4\,500) \text{ V} = 8\,000 \text{ V}$$

$$U_w / U_m = 3\,500 / 8\,000 = 0,44 > 0,2$$

$$\text{ainsi } F = (1,25 \times U_w / U_m) - 0,25 = (1,25 \times 3\,500 / 8\,000) - 0,25 = 0,297$$

Les valeurs D_1 et D_2 sont tirées du Tableau K.15 à 8 000 V:

$$D_1 = 8,00 \text{ mm}, D_2 = 11,0 \text{ mm}$$

$$D_{BI} = D_1 + F \times (D_2 - D_1) = 8,00 + 0,297 \times (11,0 - 8,00) = 8,00 + 0,89 = 8,89 \text{ mm}$$

La DISTANCE D'ISOLEMENT pour l'ISOLATION RENFORCEE est multipliée par deux: $D_{RI} = 2 \times D_{BI} = 17,8 \text{ mm}$.

K.4 Réduction des surtensions transitoires par l'utilisation de dispositifs de limitation des surtensions

Remplacer le titre existant de l'Article K.4 par le suivant et supprimer le texte:

K.4 Non utilisé

Ajouter les deux nouveaux articles et les quatre tableaux suivants:

K.101 Exigences relatives à l'isolation pour les circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES

K.101.1 Généralités

Les circuits de mesure sont soumis aux TENSIONS DE SERVICE et aux contraintes transitoires des circuits auxquels ils sont branchés durant le mesurage ou l'essai. Quand le circuit de mesure est utilisé pour mesurer un RESEAU, les contraintes transitoires peuvent être estimées par l'emplacement à l'intérieur de l'installation où le mesurage est réalisé. Quand le circuit de mesure est utilisé pour mesurer tout autre signal électrique, l'OPERATEUR doit prendre en considération les contraintes transitoires afin d'assurer qu'elles ne dépassent pas les capacités du multimètre portatif.

Les CATEGORIES DE MESURE tiennent compte des CATEGORIES DE SURTENSION, des niveaux des courants de court-circuit, de l'endroit où l'essai ou le mesurage est à réaliser et de certaines dispositions de limitation de l'énergie ou de protection contre les transitoires de l'installation du bâtiment. Quand le circuit de mesure est utilisé pour être raccordé au RESEAU, il existe un RISQUE d'explosion due à un arc. Les CATEGORIES DE MESURE conformes à Annexe AA définissent la quantité d'énergie disponible qui peut contribuer à l'apparition de l'arc électrique (voir également BB.2.3).

K.101.2 DISTANCES D'ISOLEMENT

Les DISTANCES D'ISOLEMENT du CIRCUIT RESEAU des multimètres portatifs prévus pour être alimentés par le circuit mesuré doivent être calculées conformément aux exigences de la CATEGORIE DE MESURE ASSIGNEE, mais des dispositifs de limitation des surtensions peuvent être utilisés pour réduire les SURTENSIONS TRANSITOIRES à un niveau compatible avec une CATEGORIE DE MESURE inférieure. Des exigences de marquage supplémentaires sont données en 5.1.5.2 et 5.1.5.101.

Les DISTANCES D'ISOLEMENT des circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES sont spécifiées dans le Tableau K.101.

NOTE Voir Annexe I pour les tensions phase-neutre pour les RESEAUX communs.

Si l'altitude de fonctionnement assignée au multimètre PORTATIF est supérieure à 2 000 m, les valeurs des DISTANCES D'ISOLEMENT doivent être multipliées par le coefficient applicable indiqué dans le Tableau K.1.

Pour l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLEMENTAIRE et l'ISOLATION RENFORCEE, la DISTANCE D'ISOLEMENT minimale est de 0,2 mm pour le DEGRE DE POLLUTION 2 et de 0,8 mm pour le DEGRE DE POLLUTION 3.

Tableau K.101 – Exigences relatives aux circuits de mesure dont les CATEGORIES DE MESURE sont des CARACTERISTIQUES ASSIGNEES

Tension nominale phase-neutre alternative efficace ou continue du RESEAU en cours de mesure V	Distance d'isolement mm			
	ISOLATION PRINCIPALE et ISOLATION SUPPLEMENTAIRE		ISOLATION RENFORCEE	
	CATEGORIE DE MESURE III	CATEGORIE DE MESURE IV	CATEGORIE DE MESURE III	CATEGORIE DE MESURE IV
≤ 300	3,0	5,5	6,0	10,4
> 300 ≤ 600	5,5	8,0	10,4	15
> 600 ≤ 1 000	8,0	14,0	15,0	23,9
> 1 000 ≤ 1 500	11,0	18,0	22,0	36
> 1 500 ≤ 2 000	18,0	22,0	36	44
> 2 000 ≤ 3 000	22,0	25,0	44	50

La conformité est vérifiée par examen et mesurage ou par l'essai en tension alternative de 6.8.3.1 pendant au moins 5 s, l'essai en tension continue de 6.8.3.2 pour les circuits de mesure contraints uniquement en tension continue pendant au moins 5 s ou l'essai de tension de choc de 6.8.3.3 en utilisant la tension d'essai applicable indiquée dans le Tableau K.16 pour la DISTANCE D'ISOLEMENT exigée.

K.101.3 LIGNES DE FUITE

Les exigences de K.2.3 s'appliquent.

La conformité est vérifiée tel que spécifié en K.2.3.

K.101.4 Isolation solide

K.101.4.1 Généralités

L'isolation solide doit résister aux contraintes électriques et mécaniques qui peuvent survenir en UTILISATION NORMALE, dans toutes les conditions d'environnement ASSIGNEES (voir 1.4) pendant la durée de vie prévue du multimètre portatif.

La conformité est vérifiée par les deux essais suivants:

- l'essai de tension de choc de 6.8.3.3 en utilisant la tension d'essai applicable indiquée dans le Tableau K.102 ou, en variante, l'essai de tension alternative de 6.8.3.1 en utilisant la tension d'essai applicable indiquée dans le Tableau K.103 pendant au moins 5 s;