

INTERNATIONAL STANDARD

**Fixed resistors for use in electronic equipment –
Part 1: Generic specification**

IECNORM.COM: Click to view the full PDF of IEC 60115-1:2008
WithNorm



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2008 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

IECNORM.COM: Click to view full PDF of IEC 60115-1:2008

INTERNATIONAL STANDARD

**Fixed resistors for use in electronic equipment –
Part 1: Generic specification**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

XC

ICS 31.040.10

ISBN 2-8318-9846-3

CONTENTS

FOREWORD.....	7
1 General.....	9
1.1 Scope.....	9
1.2 Normative references.....	9
2 Technical data.....	11
2.1 Units and symbols.....	11
2.2 Terms and definitions.....	11
2.3 Preferred values.....	15
2.3.1 General.....	15
2.3.2 Preferred values of nominal resistance.....	15
2.4 Marking.....	15
2.5 Coding.....	16
2.6 Packaging.....	16
2.7 Storage.....	16
2.8 Transportation.....	16
3 Quality assessment procedures.....	16
4 Test and measurement procedures.....	17
4.1 General.....	17
4.2 Standard atmospheric conditions.....	17
4.2.1 Standard atmospheric conditions for testing.....	17
4.2.2 Recovery conditions.....	17
4.2.3 Referee conditions.....	17
4.2.4 Reference conditions.....	18
4.3 Drying.....	18
4.4 Visual examination and checking of dimensions.....	18
4.4.1 Visual examination.....	18
4.4.2 Dimensions (gauging).....	18
4.4.3 Dimensions (detail).....	19
4.5 Resistance.....	19
4.5.1 Test methods.....	19
4.5.2 Requirements.....	20
4.6 Insulation resistance.....	20
4.6.1 Test methods.....	20
4.6.2 Measuring conditions.....	22
4.6.3 Requirements.....	23
4.7 Voltage proof.....	23
4.7.1 Test methods.....	23
4.7.2 Test conditions.....	23
4.7.3 Requirements.....	23
4.8 Variation of resistance with temperature.....	23
4.8.1 Preconditioning.....	23
4.8.2 Measuring temperatures.....	23
4.8.3 Measuring procedures.....	23
4.8.4 Calculation of temperature coefficient of resistance α	24
4.8.5 Requirements.....	24
4.9 Reactance.....	25

4.9.1	Test procedures.....	25
4.9.2	Pulse generator specification	25
4.9.3	Oscilloscope specification.....	25
4.9.4	Measurements	26
4.9.5	Impedance analyzer.....	26
4.10	Non-linear properties	26
4.11	Voltage coefficient.....	26
4.11.1	Preconditioning.....	26
4.11.2	Measuring methods	26
4.11.3	Calculation of voltage coefficient.....	27
4.11.4	Requirements	27
4.12	Noise.....	27
4.13	Short time overload	27
4.13.1	Initial measurements.....	27
4.13.2	Test procedures.....	27
4.13.3	Final inspection, measurements and requirements	27
4.14	Temperature rise.....	27
4.14.1	Object.....	27
4.14.2	Mounting.....	27
4.14.3	Test procedures.....	28
4.14.4	Requirements	28
4.15	Robustness of the resistor body.....	28
4.15.1	Object.....	28
4.15.2	Test procedure	28
4.15.3	Requirements	28
4.16	Robustness of terminations.....	29
4.16.1	Test methods.....	29
4.16.2	Test Ua ₁ – Tensile.....	29
4.16.3	Test Ub – Bending.....	30
4.16.4	Test Uc – Torsion	30
4.16.5	Test Ud – Torque.....	30
4.16.6	Final measurements	30
4.17	Solderability.....	30
4.17.1	Preconditioning.....	31
4.17.2	Test procedures.....	31
4.17.3	Final inspection, measurements and requirements	31
4.18	Resistance to soldering heat.....	31
4.18.1	Preconditioning.....	31
4.18.2	Test procedures.....	32
4.18.3	Recovery	32
4.18.4	Final inspection, measurements and requirements	32
4.19	Rapid change of temperature.....	32
4.19.1	Initial measurements.....	32
4.19.2	Test procedures.....	32
4.19.3	Final inspection, measurements and requirements	32
4.20	Bump	33
4.20.1	Mounting.....	33
4.20.2	Initial measurements.....	33
4.20.3	Test procedures.....	33

4.20.4	Final inspection, measurements and requirements	33
4.21	Shock.....	33
4.21.1	Mounting.....	33
4.21.2	Initial measurements.....	33
4.21.3	Test procedures.....	33
4.21.4	Measurements under test.....	33
4.21.5	Final inspection, measurements and requirements	33
4.22	Vibration.....	33
4.22.1	Mounting.....	33
4.22.2	Initial measurements.....	34
4.22.3	Test procedures.....	34
4.22.4	Final inspection, measurements and requirements	34
4.23	Climatic sequence	34
4.23.1	Initial measurements.....	34
4.23.2	Dry heat.....	34
4.23.3	Damp heat, cyclic, test Db, first cycle.....	34
4.23.4	Cold.....	34
4.23.5	Low air pressure	34
4.23.6	Damp heat, cyclic, test Db, remaining cycles.....	35
4.23.7	DC load	35
4.23.8	Final inspection, measurements and requirements	35
4.24	Damp heat, steady state	35
4.24.1	Initial measurements.....	35
4.24.2	Test procedures.....	35
4.24.3	DC load.....	36
4.24.4	Final inspection, measurements and requirements	36
4.25	Endurance	36
4.25.1	Endurance at 70 °C.....	36
4.25.2	Endurance at room temperature.....	38
4.25.3	Endurance at upper category temperature.....	39
4.26	Accidental overload test.....	40
4.26.1	Object.....	40
4.26.2	Gauze cylinder test method.....	40
4.26.3	Conditions of test.....	41
4.26.4	Test procedure	42
4.26.5	Requirement.....	42
4.27	Single-pulse high-voltage overload test.....	42
4.27.1	Object.....	42
4.27.2	Terminology.....	42
4.27.3	Test procedure	42
4.28	Periodic-pulse high-voltage overload test	45
4.28.1	Object.....	45
4.28.2	Terminology.....	45
4.28.3	Test procedure	45
4.29	Component solvent resistance	47
4.29.1	Initial measurement	47
4.29.2	Test conditions	47
4.29.3	Requirements	47
4.30	Solvent resistance of marking.....	48

4.30.1	Test conditions	48
4.30.2	Requirements	48
4.31	Mounting of surface mount resistors	48
4.31.1	Substrate	48
4.31.2	Wave soldering	48
4.31.3	Reflow soldering	49
4.32	Shear test	51
4.32.1	Mounting	51
4.32.2	Severities	51
4.32.3	Requirements	51
4.33	Substrate bending test	51
4.33.1	Preparation	51
4.33.2	Initial measurements	51
4.33.3	Test procedures	51
4.33.4	Final inspection and requirements	51
4.34	Corrosion	52
4.34.1	Test method	52
4.34.2	Requirements	52
4.35	Flammability	52
4.35.1	Test conditions	52
4.35.2	Requirements	52
4.36	Operation at low temperature	52
4.36.1	Initial measurements	52
4.36.2	Test procedures	52
4.36.3	Final inspection, measurements and requirements	52
4.37	Damp heat, steady state, accelerated	52
4.37.1	Initial measurements	52
4.37.2	Test methods	52
4.37.3	Test procedures	53
4.37.4	Final inspection, measurements and requirements	53
4.38	Electrostatic discharge	53
4.38.1	Test methods	53
4.38.2	Initial measurements	53
4.38.3	Test procedures	53
4.38.4	Final inspection, measurements and requirements	53
4.39	Periodic-pulse overload test	53
4.39.1	Preconditioning	53
4.39.2	Mounting	53
4.39.3	Initial measurements	54
4.39.4	Severities	54
4.39.5	Recovery	54
4.39.6	Final inspection, measurements and requirements	54
4.40	Whisker growth test	54
4.40.1	General	54
4.40.2	Preparation of specimen	54
4.40.3	Initial measurement	54
4.40.4	Test procedures	55
4.40.5	Test severities	55
4.40.6	Final inspection, measurements and requirements	55

4.41 Hydrogen sulphide test	55
Annex A (normative) Interpretation of sampling plans and procedures as described in IEC 60410 for use within the IECQ system	56
Annex B (normative) Rules for the preparation of detail specifications for resistors and capacitors for electronic equipment for use within the IECQ system	57
Annex C (informative) Example of test equipment for the periodic-pulse high-voltage overload test	58
Annex D (normative) Layout of the first page of a PCP/CQC specification	60
Annex E (normative) Requirements for capability approval test report	61
Annex F (informative) Letter symbols and abbreviations	62
Annex G (informative) Index table for test and measurement procedures	64
Annex Q (normative) Quality assessment procedures	66
Figure 1 – Insulation resistance and voltage proof test jig for rectangular surface mount resistors	21
Figure 2 – Insulation resistance and voltage proof test jig for cylindrical surface mount resistors	22
Figure 3 – Test circuit	25
Figure 4 – Oscilloscope trace	26
Figure 5 – Testing of resistor body robustness	29
Figure 6 – Gauze cylinder fixture	41
Figure 7 – Pulse generator 1,2/50	43
Figure 8 – Pulse generator 10/700	43
Figure 9 – Suitable substrate for mechanical and electrical tests (may not be suitable for impedance measurements)	50
Figure 10 – Suitable substrate for electrical tests	50
Figure C.1 – Block diagram of test equipment	58
Figure C.2 – Tolerances on the pulse shape	59
Figure Q.1 – General scheme for capability approval	69
Table 1 – Referee conditions	18
Table 2 – Measuring voltages	19
Table 3 – Calculation of resistance value (R) and change in resistance (ΔR)	24
Table 4 – Calculation of temperature differences (ΔT)	24
Table 5 – Tensile force for wire terminations	30
Table 6 – Torque	30
Table 7 – Number of cycles	35
Table 8 – Severities (see Note 2)	44
Table 9 – List of preferred severities	46
Table 10 – Periodic-pulse overload test condition	54

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIXED RESISTORS FOR USE IN ELECTRONIC EQUIPMENT –

Part 1: Generic specification

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60115-1 has been prepared by IEC technical committee 40: Capacitors and resistors for electronic equipment

This fourth edition cancels and replaces the third edition issued in 1999 and Amendment 1 (2001). It constitutes a technical revision.

This standard cancels and replaces IEC 61045-1 (1991), IEC 61045-2 (1991) and IEC 61045-2-1 (1991).

This edition contains the following significant technical changes with respect to the previous edition:

- a) implementation of Annex Q which replaces Clause 3;
- b) addition of new tests procedures in 4.34 through 4.38;
- c) removal of the property "temperature characteristics" from 4.8;

- d) introduction of a new system of test severities for the shear test in 4.32;
- e) introduction of new bias voltages for the damp heat steady-state test in 4.24;
- f) furthermore, this fourth edition cancels and replaces the third edition published in 1999 and constitutes minor revisions related to tables, figures and references.

The text of this standard is based on the following documents:

FDIS	Report on voting
40/1907/FDIS	40/1922/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

A list of all parts of the IEC 60115 series, under the general title *Fixed resistors for use in electronic equipment*, can be found on the IEC website.

All sectional specifications mentioned above do have one or more blank detail specifications being a supplementary document, containing requirements for style, layout and minimum content of detail specifications.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

FIXED RESISTORS FOR USE IN ELECTRONIC EQUIPMENT –

Part 1: Generic specification

1 General

1.1 Scope

This part of IEC 60115 is a generic specification and is applicable to fixed resistors for use in electronic equipment.

It establishes standard terms, inspection procedures and methods of test for use in sectional and detail specifications of electronic components for quality assessment or any other purpose.

1.2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60027 (all parts), *Letter symbols to be used in electrical technology*

IEC 60050 (all parts), *International Electrotechnical Vocabulary*

IEC 60060-1:1989, *High-voltage test techniques – Part 1: General definitions and test requirements*

IEC 60062:2004, *Marking codes for resistors and capacitors*

IEC 60063:1963, *Preferred number series for resistors and capacitors*
Amendment 1(1967)
Amendment 2(1977)

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1(1992)

IEC 60068-2-1:1990, *Environmental testing – Part 2: Tests – Tests A: Cold*
Amendment 1(1993)
Amendment 2(1994)

IEC 60068-2-2:1974, *Environmental testing – Part 2: Tests – Tests B: Dry heat*
Amendment 1(1993)
Amendment 2(1994)

IEC 60068-2-6:2007, *Environmental testing – Part 2: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-11:1981, *Environmental testing – Part 2: Tests – Test Ka: Salt mist*

IEC 60068-2-13:1983, *Environmental testing – Part 2: Tests – Test M: Low air pressure*

IEC 60068-2-14:1984, *Environmental testing – Part 2: Tests – Test N: Change of temperature*
Amendment 1(1986)

IEC 60068-2-20:1979, *Environmental testing – Part 2: Tests – Test T: Soldering*
Amendment 2(1987)

IEC 60068-2-21:2006, *Environmental testing – Part 2: Tests – Test U: Robustness of terminations and integral mounting devices*

IEC 60068-2-27:1987, *Environmental testing – Part 2: Tests – Test Ea and guidance: Shock*

IEC 60068-2-29:1987, *Environmental testing – Part 2: Tests – Test Eb and guidance: Bump*

IEC 60068-2-30:2005, *Environmental testing – Part 2: Tests – Test Db: Damp heat, cyclic (12 h+ 12 h cycle)*

IEC 60068-2-45:1980, *Environmental testing – Part 2: Tests – Test XA and guidance: Immersion in cleaning solvents*
Amendment 1(1993)

IEC 60068-2-54: 2006, *Environmental testing – Part 2.54: Tests – Test Ta: Solderability testing of electronic components by the wetting balance method*

IEC 60068-2-58:2005, *Environmental testing – Part 2-58: Tests – Test Td: Test methods for solderability, resistance to dissolution of metallization and to soldering heat of surface mounting devices (SMD)*

IEC 60068-2-67:1995, *Environmental testing – Part 2-67: Tests – Test Cy: Damp heat, steady state, accelerated test primarily intended for components*

IEC 60068-2-78:2001, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60195:1965, *Method of measurement of current noise generated in fixed resistors*

IEC 60286, *Packaging of components for automatic handling*

IEC 60294:1969, *Measurement of the dimensions of a cylindrical component having two axial terminations*

IEC 60410:1973, *Sampling plans and procedures for inspection by attributes*

IEC 60440:1973, *Method of measurement of non-linearity in resistors* IEC 60617:2007, *Graphical symbols for diagrams*

IEC 60617, *Graphical symbols for diagrams*

IEC 60695-11-5:2004, *Fire hazard testing – Part 11-5: Test flames – Needle-flame test method – Apparatus, confirmatory test arrangement and guidance*

IEC 61193-2:2007, *Quality assessment systems – Part 2: Selection and use of sampling plans for inspection of electronic components and packages*

IEC 61249-2-7:2002, *Materials for printed boards and other interconnecting structures – Part 2-7: Reinforced base materials clad and unclad – Epoxide woven E-glass laminated sheet of defined flammability (vertical burning test), copper-clad*

IEC 61249-2-22: 2005, *Materials for printed boards and other interconnecting structures – Part 2-22: Reinforced base materials clad and unclad – Modified non-halogenated epoxide woven E-glass laminated sheets of defined flammability (vertical burning test), copper-clad*

IEC 61249-2-35, *Materials for printed boards and other interconnecting structures – Part 2-35: Reinforced base materials clad and unclad – Modified epoxide woven E-glass laminated sheets of defined flammability (vertical burning test), copper-clad for lead-free assembly¹*

IEC 61340-3-1:2006, *Electrostatics – Part 3-1: Methods for simulation of electrostatic effects – Human body model (HBM) electrostatic discharge test waveforms*

IEC 61760-1:2006, *Surface mounting technology – Part 1: Standard method for the specification of surface mounting components (SMDs)*

IEC QC 001002-3:2005, *IEC Quality Assessment System for Electronic Components (IECQ) – Rules of procedure – Part 3: Approval procedures*

ISO 1000:1992, *SI units and recommendations for the use of their multiples and of certain other units*

2 Technical data

2.1 Units and symbols

Units, graphical symbols and letter symbols should, whenever possible, be taken from the following publications:

- IEC 60027;
- IEC 60050;
- IEC 60617;
- ISO 1000.

When further items are required they shall be derived in accordance with the principles of the publications listed above.

2.2 Terms and definitions

For the purposes of this document, the following terms and definitions apply, in alphabetical order:

2.2.1

category dissipation

fraction of the rated dissipation exactly defined in the detail specification, applicable at the upper category temperature, taking account of the derating curve prescribed in the detail specification

NOTE 1 For resistors the category dissipation is zero, where the upper category temperature is the maximum element temperature.

NOTE 2 Related terminology: rated dissipation, upper category temperature, derating curve

2.2.2

category temperature range

range of ambient temperatures for which the resistor has been designed to operate continuously; this is given by the lower and upper category temperature

¹ To be published.

NOTE Related terminology: lower category temperature, upper category temperature

2.2.3

critical resistance

resistance value at which the rated voltage is equal to the limiting element voltage (see 2.2.18 and 2.2.11)

NOTE 1 At an ambient temperature of 70 °C, the maximum voltage which may be applied across the terminations of a resistor is either the calculated rated voltage, if the resistance is less than the critical resistance, or the limiting element voltage, if the resistance is equal to or greater than the critical resistance. At temperatures other than 70 °C, it is important that account be taken of the derating curve and of the limiting element voltage in the calculation of any voltage to be applied.

NOTE 2 Related terminology: Rated voltage, limiting element voltage

2.2.4

derating curve

curve which shows the maximum allowable dissipation at ambient temperatures between the upper and lower category temperature

NOTE 1 In the range between lower category temperature and rated temperature it shows the rated dissipation, and between rated temperature and maximum element temperature it shows a linear slope down to zero dissipation at the maximum element temperature. The slope depends on the thermal properties of the resistor, i.e. its capability to abduct the dissipation to the environment.

NOTE 2 Related terminology: rated dissipation, rated temperature, maximum element temperature

2.2.5

family (of electronic components)

group of components which predominantly displays a particular physical attribute and/or fulfils a defined function

NOTE Related terminology: subfamily

2.2.6

grade

term indicating additional general characteristics concerning the intended application, for example, long-life applications

NOTE 1 The term "grade" may be used only in combination with one or more words (for example, long-life grade) and not with a single letter or number.

NOTE 2 Related terminology: stability class

2.2.7

heat-sink resistor

resistor type designed for mounting on a separate heat-sink

NOTE Related terminology: insulated resistor

2.2.8

insulated resistor

resistor which fulfils the voltage proof and insulation resistance test requirements and the damp-heat, steady-state test with a polarizing voltage applied when mounted on a metal plate

NOTE Related terminology: heat-sink resistor

2.2.9

insulation resistance

resistance of the encapsulation of the insulated resistor measured between the resistor terminations connected together and any conducting mounting surface

NOTE Related terminology: insulated resistor

2.2.10**insulation voltage**

maximum peak voltage which may be applied under continuous operating conditions between the resistor terminations and any conducting mounting surface

NOTE Related terminology: insulated resistor

2.2.11**limiting element voltage**

maximum d.c. or a.c. r.m.s. voltage that may be continuously applied to the terminations of a resistor (generally dependent upon size and manufacturing technology of the resistor)

NOTE 1 Where the term "a.c. r.m.s. voltage" is used in this standard, the peak voltage is not exceed 1,42 times the r.m.s. value.

NOTE 2 This voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

NOTE 3 Related terminology: rated voltage, critical resistance

2.2.12**lower category temperature****LCT**

minimum ambient temperature at which a resistor has been designed to operate continuously

NOTE Related terminology: upper category temperature, category temperature range

2.2.13**maximum element temperature**

maximum stated temperature at any point on or within the resistor, under any permissible operating condition

NOTE 1 The maximum element temperature is the sum of the rated temperature and the temperature rise generated by the rated dissipation. For ambient temperature above the rated temperature, the maximum element temperature is the sum of the ambient temperature and the related permissible dissipation as specified by the derating curve.

NOTE 2 Related terminology: maximum surface temperature

2.2.14**maximum surface temperature**

maximum temperature permitted on the surface for any resistor of that type when operated continuously at rated dissipation at an ambient temperature of 70 °C

NOTE Related terminology: maximum element temperature

2.2.15**nominal resistance**

designated resistance value usually indicated on the resistor

2.2.16**rated dissipation**

maximum allowable dissipation at an ambient temperature of 70 °C under the conditions of the endurance test at 70 °C and for which the permitted change in resistance for this endurance test is not exceeded

NOTE 1 If the rated dissipation depends on special means supporting the abduction of the dissipation to the environment, for example, special circuit board material, special conductor dimensions, heat-sink, such means have to be identified whenever the rated dissipation is mentioned.

NOTE 2 The term for heat-sink resistors is defined as maximum allowable dissipation at an ambient temperature of 25 °C, when mounted on the reference heat-sink, under the conditions of the endurance test at room temperature for heat-sink resistors, and which will result in a change in resistance not greater than that specified for this endurance test

NOTE 3 Related terminology: rated temperature, rated voltage

2.2.17

rated temperature

maximum ambient temperature at which the rated dissipation may be applied continuously under the conditions of the endurance test prescribed for this temperature. It has a value of 70 °C, unless otherwise prescribed in the relevant sectional specification

NOTE Related terminology: rated dissipation

2.2.18

rated voltage

U_r

d.c. or a.c. r.m.s. voltage calculated from the square root of the product of the nominal resistance and the rated dissipation

NOTE 1 At high values of resistance, the rated voltage may not be applicable because of the size and the construction of the resistor (see 2.2.11).

NOTE 2 Related terminology: rated dissipation, limiting element voltage

2.2.19

stability class

term representing a predefined set of stability requirements, i.e. specific limits of permissible resistance change assigned to individual tests

NOTE 1 The term “stability class” may be used only in combination with a plain number representing the typical stability requirement for long term test, for example, endurance at upper category temperature or 1 000 h endurance at 70 °C. Stability requirements for short term tests will typically be lower than indicated by the stability class number.

NOTE 2 Related terminology: grade

2.2.20

style

subdivision of a type, generally based on dimensional factors, which may include several variants, generally of a mechanical order

NOTE Related terminology: type

2.2.21

subfamily (of electronic components)

group of components within a family manufactured by similar technological methods

NOTE Related terminology: family

2.2.22

surface mount resistor

fixed resistor whose small dimensions and nature or shape of terminations make it suitable for use in hybrid circuits and on printed boards

NOTE Related terminology: type, style

2.2.23

temperature coefficient of resistance

α

relative variation of resistance between two given temperatures divided by the difference in the temperature producing it

NOTE 1 It should be noted that the use of the term does not imply any degree of linearity for this function, nor should any be assumed.

NOTE 2 Related terminology: variation of resistance with temperature

2.2.24 temperature rise

T_r

increase of temperature on or within a resistor generated by application of a dissipation and depending on the thermal properties of the resistor, i.e. its capability to abduct the dissipation to the environment

2.2.25 type

group of components having similar design features and manufacturing techniques, enabling them to be considered together either for qualification approval or for quality conformance inspection. They are generally covered by a single detail specification

NOTE 1 Components described in several detail specifications, may, in some cases, be considered as belonging to the same type and may therefore be grouped for quality assessment purposes.

NOTE 2 Mounting accessories are ignored, provided they have no significant effect on the test results.

NOTE 3 Related terminology: style

2.2.26 upper category temperature

UCT

maximum ambient temperature at which a resistor has been designed to operate continuously at that portion of the rated dissipation which is indicated in the category dissipation

NOTE 1 For resistors with a linear derating down to zero category dissipation, the upper category temperature is equal to the maximum element temperature.

NOTE 2 Related terminology: lower category temperature, category temperature range

2.2.27 variation of resistance with temperature

variation of resistance with temperature expressed as the temperature coefficient of resistance

NOTE Related terminology: temperature coefficient of resistance

2.2.28 visible damage

visible damage which reduces the usability of the resistor for its intended purpose

2.2.29 voltage coefficient of resistance

reversible change in resistance caused by the applied voltage and expressed as a percentage change in resistance per applied volt

2.3 Preferred values

2.3.1 General

Each sectional specification shall prescribe the preferred values appropriate to the subfamily; for nominal resistance, see also 2.3.2.

2.3.2 Preferred values of nominal resistance

The preferred values of nominal resistance shall be taken from the series specified in IEC 60063.

2.4 Marking

The information given in the marking is normally selected from the following list; the relative importance of each item is indicated by its position in the list:

- a) nominal resistance;
- b) tolerance on nominal resistance;
- c) temperature coefficient (if applicable);
- d) year and month (or week) of manufacture;
- e) number of the detail specification and style reference;
- f) manufacturer's name or trade mark.

The resistor shall be clearly marked with a) and b) above, and with as many of the remaining items as is practicable. Any duplication of information in the marking on the resistor should be avoided.

The package containing the resistor(s) shall be clearly marked with all the information listed above.

Any additional marking shall be so applied that no confusion can arise.

Small resistor styles are generally not marked on the body. However, if some marking is applied to the body, the resistor shall as a minimum be marked with the nominal resistance according to IEC 60062, Clause 3. Specific requirements shall be prescribed in the relevant specifications.

2.5 Coding

When coding is used for resistance value, tolerance or date of manufacture, the method shall be selected from those given in IEC 60062.

2.6 Packaging

Where applicable, the sectional specification shall provide information about packaging, preferably selected from IEC 60286.

2.7 Storage

Unless otherwise specified, storage conditions shall not exceed the following limits:

- maximum temperature: +40 °C
- maximum relative humidity: 75 %

The resistor shall be stored in original package.

Further requirements shall be prescribed by the relevant specification.

2.8 Transportation

Environmental conditions under transportation may exceed the above specifications for a limited duration. The relevant specification may specify suitable conditions.

3 Quality assessment procedures

When this standard, and related sectional and detail specifications are used for the purpose of a full quality assessment system such as IEC Quality Assessment System for Electronic Components (IECQ), the relevant clauses of Annex Q apply.

NOTE Clause 3 has been moved to Annex Q. To maintain reference to previous editions of this standard, the clause numbers of Clause 3 have been converted into the clause numbers of Annex Q as shown by following example:

Subclause 3.1 → Clause Q.1

Subclause 3.1.2 → Subclause Q.1.2

4 Test and measurement procedures

4.1 General

The sectional and/or blank detail specification shall indicate the tests to be carried out, the measurements which are to be made before and after each test or subgroup of tests, and the sequence in which the tests shall be performed. The stages of each test shall be carried out in the order written. The measuring conditions shall be the same for initial and final measurements.

If national specifications within any quality assessment system include methods other than those specified in the above documents, these methods shall be fully described.

The limits given in all specifications are absolute limits. The principle of taking measurement uncertainty into account shall be applied (see IEC QC 001002-3, Annex C to Clause 2).

4.2 Standard atmospheric conditions

4.2.1 Standard atmospheric conditions for testing

Unless otherwise specified, all tests and measurements shall be made under standard atmospheric conditions for testing, as given in IEC 60068-1, 5.3.

- temperature: 15 °C to 35 °C;
- relative humidity: 25 % to 75 %;
- air pressure: 86 kPa to 106 kPa.

Before measurements are made, the resistor shall be stored at the measuring temperature for a time sufficient to allow the entire resistor to reach this temperature. The period as prescribed for recovery at the end of a test is normally sufficient for this purpose.

When measurements are made at a temperature other than the specified temperature, the results shall, where necessary, be corrected to the specified temperature. The ambient temperature during the measurements shall be stated in the test report. In the event of a dispute, the measurements shall be repeated using one of the referee temperatures (as given in 4.2.3) and such other conditions as are prescribed in this specification.

When tests are conducted in a sequence, the final measurements of one test may be taken as the initial measurements for the succeeding test.

During the measurements, the resistor shall not be exposed to draughts, direct sunlight or other influences likely to cause error.

4.2.2 Recovery conditions

Unless otherwise specified, recovery shall take place under the standard atmospheric conditions for testing (4.2.1).

If recovery under closely controlled conditions is necessary, the controlled recovery conditions of IEC 60068-1, 5.4.1 shall be used.

4.2.3 Referee conditions

For referee purposes, one of the standard atmospheric conditions for referee tests taken from

IEC 60068-1, 5.2, as given below, shall be chosen.

Table 1 – Reference conditions

Temperature °C	Relative humidity %	Air pressure kPa
20 ± 1	63 to 67	86 to 106
23 ± 1	48 to 52	86 to 106
25 ± 1	48 to 52	86 to 106
27 ± 1	63 to 67	86 to 106

4.2.4 Reference conditions

For reference purposes, the standard atmospheric conditions for reference given in IEC 60068-1, 5.1 apply:

- temperature: 20 °C;
- air pressure: 101,3 kPa.

4.3 Drying

When drying is prescribed, the resistor shall be conditioned before measurement is made using procedure I or procedure II as prescribed in the detail specification.

Procedure I: for 24 h ± 4 h in an oven at a temperature of 55 °C ± 2 °C and at a relative humidity not exceeding 20 %

Procedure II: for 96 h ± 4 h in an oven at 100 °C ± 5 °C

The resistor shall then be allowed to cool in a desiccator using a suitable desiccant, such as activated alumina or silica gel, and it shall be kept therein from the time of removal from the oven to the beginning of the specified tests.

4.4 Visual examination and checking of dimensions

4.4.1 Visual examination

The condition, workmanship and finish shall be satisfactory, as checked by visual examination.

The marking shall be legible, as checked by visual examination. It shall be in accordance with the requirements of the detail specification.

4.4.2 Dimensions (gauging)

The dimensions indicated in the detail specification as being suitable for gauging shall be checked, and shall comply with the values prescribed in the detail specification.

When applicable, measurements shall be made in accordance with IEC 60294.

Distortions of the component's shape shall be checked with an optical equipment, and shall comply with the dimensions prescribed in the detail specification.

The optical equipment shall provide sufficient magnification and geometrical resolution to ensure an accuracy of 10 % of the permitted dimensional tolerance.

4.4.3 Dimensions (detail)

All the dimensions prescribed in the detail specification shall be checked and shall conform to the values prescribed.

4.5 Resistance

4.5.1 Test methods

Measurements of resistance shall be made by using a direct voltage of small magnitude for as short a time as is practicable, in order that the temperature of the resistance element does not rise appreciably during measurement.

In the event of conflicting results attributable to such test voltages, the voltage specified in Table 2 shall be used for referee purposes.

Table 2 – Measuring voltages

Rated resistance R	Measuring voltage U V
$R < 10 \Omega$	0,1
$10 \Omega \leq R < 100 \Omega$	0,3
$100 \Omega \leq R < 1 \text{ k}\Omega$	1
$1 \text{ k}\Omega \leq R < 10 \text{ k}\Omega$	3
$10 \text{ k}\Omega \leq R < 100 \text{ k}\Omega$	10
$100 \text{ k}\Omega \leq R < 1 \text{ M}\Omega$	25
$1 \text{ M}\Omega \leq R$	50
NOTE 1 When the nominal resistance is less than 10 Ω , the measuring voltage should be so chosen that the resistor dissipates less than 10 % of its rated dissipation, but does not exceed 0,1 V.	
NOTE 2 Not to exceed the limiting element voltage.	

The accuracy of the measuring method shall be such that the total error does not exceed 10 % of the tolerance. When the measurement forms part of a test sequence, it shall be possible to measure a change of resistance with an error not exceeding 10 % of the maximum change permitted for that test sequence.

In addition to the provisions for reference purposes, the points of measurement for resistors shall be specified in the respective sectional specifications.

For leaded resistors a suitable definition should be based on a defined distance from the resistor body.

For SMD resistors a suitable definition should be based on a reference to the component side on which the resistance is to be measured.

Reproducibility of the measurement is the most critical issue, therefore the definition may exclude the influence of the mounting of the specimen, for example, the influence of attached solder.

4.5.2 Requirements

The resistance value at 20 °C shall correspond with the nominal resistance taking into account the specified tolerance.

4.6 Insulation resistance

NOTE This test is applicable only to insulated resistors.

4.6.1 Test methods

The test shall be performed using one of the following four methods, as prescribed in the relevant detail specification. The V-block method is the preferred method for resistors without mounting devices.

4.6.1.1 V-block method

The resistor shall be clamped in the trough of a 90° metallic V-block of such size that the resistor body does not extend beyond the extremities of the block.

The clamping force shall be such as to guarantee adequate contact between the resistor and the block. The clamping force shall be chosen in such a way that no destruction or damage to the resistor occurs.

The resistor shall be positioned in accordance with the following:

- a) for cylindrical resistors: the resistor shall be positioned in the block so that the termination farthest from the axis of the resistor is nearest to one of the faces of the block;
- b) for rectangular resistors: the resistor shall be positioned in the block so that the termination nearest to the edge of the resistor is nearest to one of the faces of the block.

For cylindrical and rectangular resistors with axial leads, any out-of-centre positioning of the point of emergence of the terminations from the body shall be ignored.

4.6.1.2 Foil method

This is an alternative method for resistors without mounting devices.

A metal foil shall be wrapped closely around the body of the resistor.

For resistors not having axial terminations, a space of 1 mm to 1,5 mm shall be left between the edge of the foil and each termination.

For resistors having axial terminations, the foil shall be wrapped around the whole body of the resistor protruding by at least 5 mm from each end, provided that a minimum space of 1 mm between the foil and the termination can be maintained. The ends of the foil shall not be folded over the ends of the resistor.

4.6.1.3 Method for resistors with mounting devices


The resistor shall be mounted in its normal manner on a metal plate (or between two metal plates) extending at least 12,7 mm in all directions beyond the mounting face of the resistor.

4.6.1.4 Method for rectangular surface mount resistors

The test shall be performed with the resistor mounted as shown in Figure 1.

The clamping force of the spring shall be $1,0 \text{ N} \pm 0,2 \text{ N}$, unless otherwise specified in the detail specification. The point of contact of the metal block shall be centrally located to ensure good

repeatability of the results.

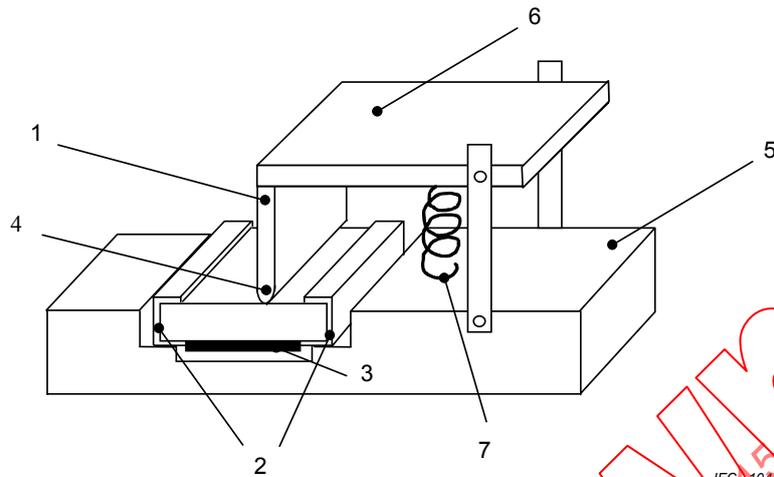

Key

- | | |
|--------------------------------|-----------------------------|
| 1 Metal block, test point A | 5 Metal plate, test point B |
| 2 Terminations of the resistor | 6 Insulation material |
| 3 Coating side | 7 Spring |
| 4 Radius 0,25 mm to 0,5 mm | |


Figure 1 – Insulation resistance and voltage proof test jig for rectangular surface mount resistors

4.6.1.5 Method for cylindrical types


The test shall be performed with the resistor mounted as shown in Figure 2.

The clamping force of the spring shall be $1,0 \text{ N} \pm 0,2 \text{ N}$, unless otherwise specified in the detail specification.

Dimension L_1 of the test block shall be chosen so that a minimum distance of 0,5 mm to the contact areas is maintained.

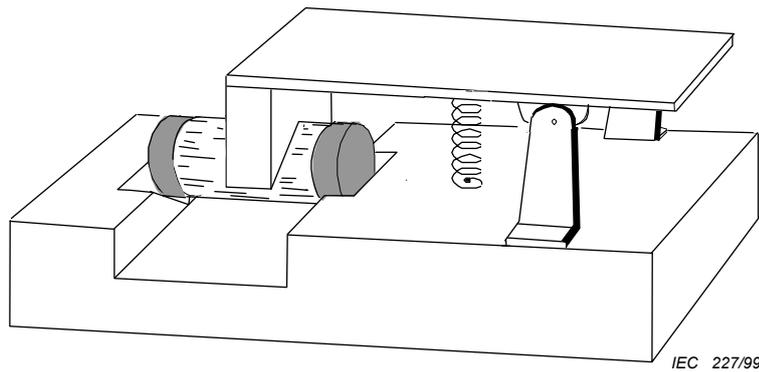

Jig details:

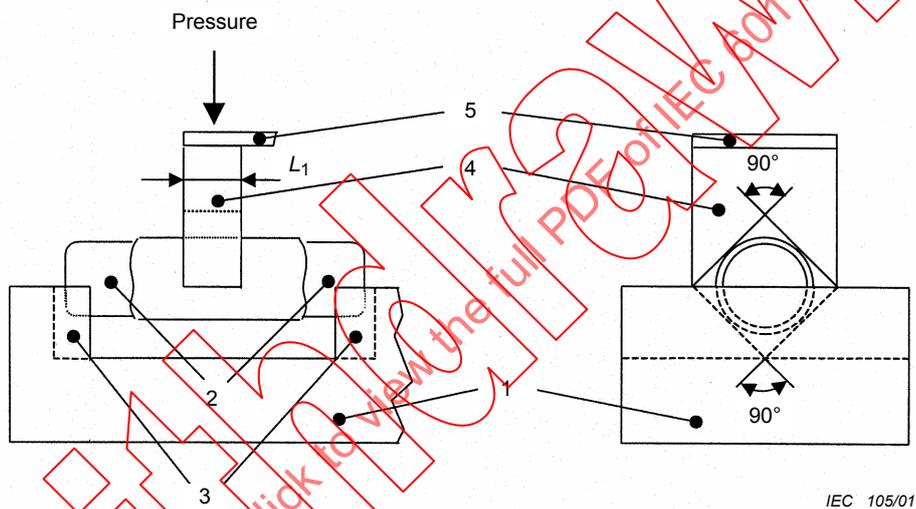

Key

- | | |
|--------------------------------|--------------------------------------|
| 1 Metal plate, test point B | 4 V-shaped metal block, test point A |
| 2 Terminations of the resistor | 5 Insulation material |
| 3 Grooves in the metal plate | |

Figure 2 – Insulation resistance and voltage proof test jig for cylindrical surface mount resistors

4.6.2 Measuring conditions

For all resistors except surface mount resistors, the insulation resistance shall be measured between both terminations of the resistor connected together as one pole and the V-block or the metal foil or the mounting device as the other pole. The measuring voltage shall be either $100\text{ V} \pm 15\text{ V}$ d.c. for resistors with an insulation voltage lower than 500 V or $500\text{ V} \pm 50\text{ V}$ d.c. for resistors with an insulation voltage equal to or greater than 500 V.

For surface mount resistors, the insulation resistance shall be measured with a direct voltage of $100\text{ V} \pm 15\text{ V}$ or a voltage equal to the insulation voltage between test points A and B, as shown in Figure 1 and Figure 2 (test point A shall be positive).

The voltage shall be applied for 1 min or for such shorter time as is necessary to obtain a stable reading; the insulation resistance shall be read at the end of that period.

4.6.3 Requirements

The insulation resistance shall be not less than the value prescribed in the relevant specification.

4.7 Voltage proof

4.7.1 Test methods

The test shall be performed using one of the methods specified in 4.6.1, as prescribed in the relevant specification.

The V-block method is the preferred method for resistors without mounting devices.

4.7.2 Test conditions

For all resistors except surface mount resistors, the test voltage shall be applied between the terminations of the resistor connected together as one pole, and the V-block or metal foil or mounting plate(s) as the other pole. The test voltage shall be alternating (40 Hz to 60 Hz) and shall be increased, at a rate of about 100 V/s, from zero to a peak value of 1,42 times the value of the insulation voltage specified in the detail specification.

After the specified voltage has been reached, the voltage shall continue to be applied for $60 \text{ s} \pm 5 \text{ s}$.

For surface mount resistors, an alternating voltage of 40 Hz to 60 Hz, with a peak value of 1,42 times the insulation voltage, shall be applied for a period of $60 \text{ s} \pm 5 \text{ s}$ between test points A and B as shown in Figures 1 and 2. The voltage shall be applied gradually at a rate of approximately 100 V/s.

4.7.3 Requirements

There shall be no breakdown (i.e. a leakage current equal to or greater than $10 \mu\text{A}$) or flashover.

4.8 Variation of resistance with temperature

4.8.1 Preconditioning

The resistor shall be dried using either procedure I or procedure II of 4.3, as prescribed in the relevant specification.

4.8.2 Measuring temperatures

The resistor shall be maintained at each of the following temperatures in turn or at other temperatures specified in the relevant specification:

- a) $20_{-1}^{+5} \text{ }^\circ\text{C}$;
- b) lower category temperature $\pm 3 \text{ }^\circ\text{C}$;
- c) $20_{-1}^{+5} \text{ }^\circ\text{C}$;
- d) upper category temperature $\pm 2 \text{ }^\circ\text{C}$;
- e) $20_{-1}^{+5} \text{ }^\circ\text{C}$.

4.8.3 Measuring procedures

Resistance measurements shall be made at each of the temperatures specified in 4.8.2, after the resistor has reached thermal stability.

The condition of thermal stability is deemed to be reached when two readings of resistance taken at an interval of not less than 5 min do not differ by an amount greater than that which can be attributed to the measuring apparatus.

The temperature of the resistor at the time of measurement shall be recorded. The error of measurement of temperature shall not exceed 1 °C.

4.8.4 Calculation of temperature coefficient of resistance α

The temperature coefficient of resistance α between 20 °C and each of the other temperatures specified in 4.8.2 shall be calculated from the following formula:

$$\alpha = \frac{\Delta R}{R \times \Delta T} \times 10^6$$

where

ΔT is the algebraic difference, in kelvins, between the specified ambient temperature and the reference temperature;

ΔR is the change in resistance between the two specified ambient temperatures;

R is the resistance value at the reference temperature.

The temperature coefficient of resistance α is expressed in parts per million per kelvin ($10^{-6}/K$).

If the resistances recorded in 4.8.3 are designated R_a , R_b , R_c , R_d and R_e , R and ΔR shall be calculated as shown in Table 3.

Table 3 – Calculation of resistance value (R) and change in resistance (ΔR)

	Lower category temperature	Upper category temperature
R	$\frac{R_a + R_c}{2}$	$\frac{R_c + R_e}{2}$
ΔR	$R_b - R$	$R_d - R$

If the temperatures recorded in 4.8.3 are designated T_a , T_b , T_c , T_d and T_e , the temperature differences (ΔT) between the recorded temperatures shall be calculated as shown in Table 4.

Table 4 – Calculation of temperature differences (ΔT)

	Lower category temperature	Upper category temperature
ΔT	$T_b - \frac{T_a + T_c}{2}$	$T_d - \frac{T_c + T_e}{2}$

4.8.5 Requirements

The temperature coefficient of resistance α , ascertained as described above, shall be within the limits prescribed in the detail specification for the appropriate category temperature.

When the resistance value is greater than 5 Ω but less than 10 Ω , the temperature coefficient shall not exceed the limits prescribed in the detail specification for values equal to or above

10 Ω by more than a factor of 2.


NOTE The temperature coefficient of resistance is not specified for resistance values of less than 5 Ω owing to difficulty of accurate measurement.

4.9 Reactance

4.9.1 Test procedures

The reactance test is applicable only to resistors for which a low reactance is required and is specified in the detail specification. It is a suitable test for inductance in the range exhibited by wire-wound resistors. The instrumentation shown in Figure 3 can be used for resistors with a L/R time greater than 20 ns. The resistance range which can be tested is from 100 Ω to 1 M Ω .

A suitable impedance analyzer may be used as an alternative to the test circuit shown in Figure 3, see 4.9.5.

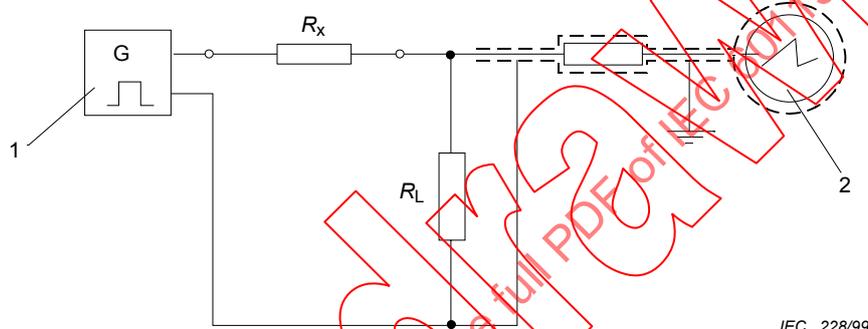

1 pulse generator

2 oscilloscope

R_x resistor under test

R_L non-inductive resistor with resistance approximately equal to 0,1 times the resistance of R_x

NOTE The length of the connecting leads between the generator and resistor R_x should not exceed 50 mm.

Figure 3 – Test circuit

4.9.2 Pulse generator specification

The pulse generator shall have the following characteristics.

- Pulse width: sufficient to cover three times L/R period.
- Rise time on load (10 % to 90 %): less than 3 ns.
- Repetition rate: greater than 10 kHz, or that required to obtain good oscilloscope readability.

4.9.3 Oscilloscope specification

The oscilloscope shall have the following characteristics.

- Rise time (10 % to 90 %): less than 3,7 ns (frequency response: 100 MHz or better).
- Time base: 2 ns per mm or faster.
- Input capacitance at R_L should be 25 pF or less.
- Amplification shall be sufficient to obtain good readability with the pulse voltage used.

4.9.4 Measurements

The L/R time constant is determined by measuring the time between the start of the pulse and the time when the voltage attains 63,2 % of the maximum (see Figure 4). If there is noise or distortion at the start of the rise, the zero voltage point can be determined by extension of the curve. If there is no overshoot or oscillation and the L/R time is greater than 20 ns, then the formula below can be used with sufficient accuracy:

$$\text{effective inductance (H)} = L/R \text{ (s)} \times R \text{ (\Omega)}$$

NOTE A specification limit could be set either as a maximum L/R time or, resulting from use of the calculation, as a maximum inductance.

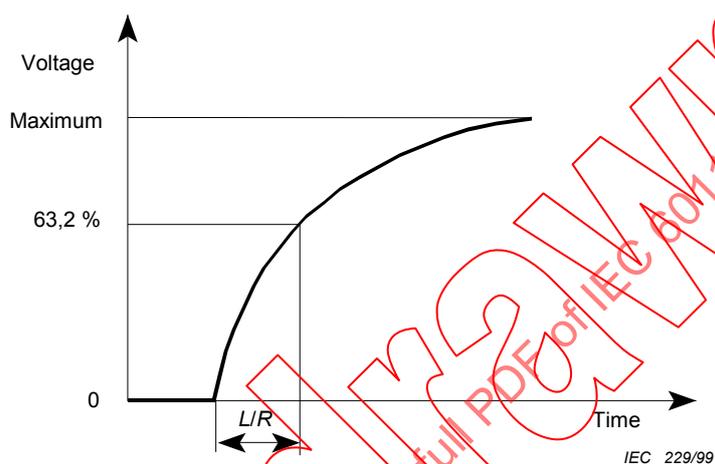


Figure 4 – Oscilloscope trace

4.9.5 Impedance analyzer

High frequency impedance analyzer or equivalent test equipment shall be used.

The measuring frequency shall be taken from the relevant specification.

4.10 Non-linear properties

The resistors shall be measured for non-linearity in accordance with IEC 60440. The voltage to be applied shall be the rated voltage or the limiting element voltage, whichever is the less severe. When there are specific requirements for non-linearity, such requirements shall be specified in the detail specification.

4.11 Voltage coefficient

4.11.1 Preconditioning

The resistor shall be dried using either procedure I or procedure II of 4.3, as prescribed in the relevant specification.

4.11.2 Measuring methods

The resistance shall then be measured at 10 % and at 100 % of either the rated voltage or the limiting element voltage, whichever is the smaller. The 100 % voltage shall be applied for not more than 0,5 s in every 5 s; the 10 % voltage shall be applied for 4,5 s. Care shall be taken that there is no appreciable temperature rise of the resistor.

4.11.3 Calculation of voltage coefficient

The voltage coefficient is normally expressed in per cent per volt and shall be calculated from the following formula:

$$\text{voltage coefficient} = \frac{(R_2 - R_1)}{0,9 \times (U \times R_1)} \times 100 [\%]$$

where

U is the higher applied voltage;

R_1 is the resistance measured at $0,1 \times U$;

R_2 is the resistance measured at U .

4.11.4 Requirements

The value of the voltage coefficient shall not exceed that prescribed in the relevant specification.

4.12 Noise

The resistors shall be subjected to the procedure given in IEC 60195.

4.13 Short time overload

4.13.1 Initial measurements

The resistance shall be measured as specified in 4.5.

4.13.2 Test procedures

The resistor shall be mounted horizontally. For wire-wound resistors, the axis of the winding shall be horizontal. The resistor shall be in free air at an ambient temperature between 15 °C and 35 °C. A voltage shall then be applied to the terminations of the resistor. The value of the voltage and the duration of its application shall be as prescribed in the relevant specification. Connections shall be made in the usual manner. For resistors with soldering tags, copper wire of approximately 1,0 mm diameter shall be used for connecting the resistors. The relevant specification shall prescribe any special mounting arrangements.

4.13.3 Final inspection, measurements and requirements

After a recovery of not less than 1 h and not more than 2 h, the resistors shall be visually examined. There shall be no visible damage and the marking shall be legible.

The resistance shall then be measured as specified in 4.5. The change of resistance, with respect to the value measured in 4.13.1, shall not exceed the value prescribed in the relevant specification.

4.14 Temperature rise

4.14.1 Object

Resistors having a nominal resistance less than the critical resistance shall be subjected to the following test.

4.14.2 Mounting

The resistor shall be mounted horizontally. For wire-wound resistors, the axis of the winding shall be horizontal. Connections shall be made in the usual manner. For resistors with

soldering tags, copper wire of approximately 1,0 mm diameter shall be used for connecting the resistors.

Surface mounting (SMD) resistors shall be mounted normally on a 1,6 mm thick copper clad epoxide woven E-glass laminated circuit board as defined, for example, in IEC 61249-2-7, IEC 61249-2-22 or IEC 61249-2-35. A 0,635 mm thick alumina substrate may be used if explicitly specified in the relevant specification for resistors which are typically assembled and operated on such substrates.

4.14.3 Test procedures

The ambient temperature for the test shall be 15 °C to 35 °C. There shall be no air circulation other than that produced by natural convection caused by the heated resistor.

The rated voltage shall be applied.

The temperature at the hottest point on the surface of the resistor shall be measured after temperature equilibrium has been attained. The temperature measuring device shall be of such dimensions as not to affect the result of the measurement.

4.14.4 Requirements

The temperature rise shall not exceed the value prescribed in the detail specification.

If applicable, infrared thermometer, that is properly calibrated, shall be used for measurement of temperature.

4.15 Robustness of the resistor body

4.15.1 Object


Resistors having a body length not less than 25 mm shall be subjected to the following test.

4.15.2 Test procedure

The body of the resistor is supported at both ends, the distance of the supports from the end faces being not more than 5 mm. The support shall have a radius of not less than 6 mm. A thrust as prescribed in the detail specification is applied gradually to the centre of the body in a direction perpendicular to the axis, for a period of 10 s. The load shall be applied through a device having a radius of not less than 6 mm (see Figure 5).

4.15.3 Requirements

At the conclusion of the test, the body of the resistor shall not be cracked or broken.

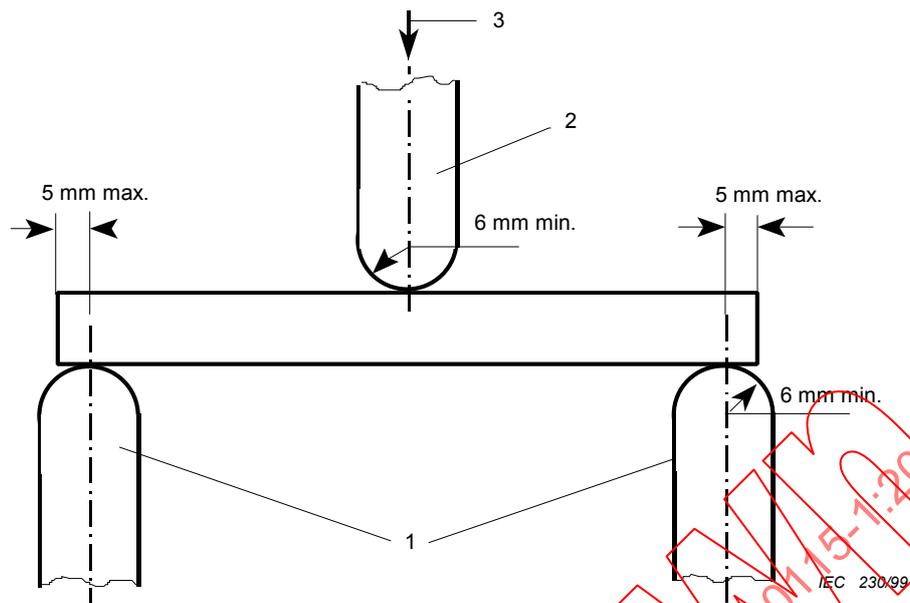

- 1 support
- 2 device through which the load is applied
- 3 load

Figure 5 – Testing of resistor body robustness

4.16 Robustness of terminations

4.16.1 Test methods

The resistors shall be subjected to tests U_{a1} , U_b , U_c and U_d of IEC 60068-2-21, as applicable.

The resistors shall be measured as specified in the detail specification.

4.16.2 Test U_{a1} – Tensile

The force applied shall be as follows:

- for terminations other than wire terminations: 20 N;
- for wire terminations: see Table 5.

Table 5 – Tensile force for wire terminations

Nominal cross-sectional area mm ²	Corresponding diameter for circular-section wires mm	Force N
$S \leq 0,05$	$d \leq 0,25$	1
$0,05 < S \leq 0,1$	$0,25 < d \leq 0,35$	2,5
$0,1 < S \leq 0,2$	$0,35 < d \leq 0,5$	5
$0,2 < S \leq 0,5$	$0,5 < d \leq 0,8$	10
$0,5 < S \leq 1,2$	$0,8 < d \leq 1,25$	20
$1,2 < S$	$1,25 < d$	40

NOTE For circular-section wires, strips or pins: the nominal cross-sectional area is equal to the value calculated from the nominal dimension(s) given in the relevant specification. For stranded wires, the nominal cross-sectional area is obtained by taking the sum of the cross-sectional areas of the individual strands of the conductor specified in the relevant specification.

4.16.3 Test Ub – Bending

Method 1: two consecutive bends shall be applied in each direction. This test shall not apply if, in the detail specification, the terminations are described as rigid.

4.16.4 Test Uc – Torsion

Method A, severity 2 (two successive rotations of 180°) shall be used.

This test shall not apply if, in the detail specification, the terminations are described as rigid, and it shall not apply to components with unidirectional terminations designed for printed wiring applications.

4.16.5 Test Ud – Torque

This test shall be applicable for terminations with threaded studs or screws and for integral mounting devices.

Table 6 – Torque

Nominal thread diameter mm		2,6	3	3,5	4	5	6
Torque Nm	Severity 1	0,4	0,5	0,8	1,2	2,0	2,5
	Severity 2	0,2	0,25	0,4	0,6	1,0	1,25

4.16.6 Final measurements

The following procedure shall be applied.

- a) After each of these tests, the resistors shall be visually examined. There shall be no visible damage.
- b) At the conclusion of the last of these tests the resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.16.1 shall not exceed the value prescribed in the relevant specification.

4.17 Solderability

NOTE Not applicable to those terminations which the detail specification describes as not designed for soldering.

4.17.1 Preconditioning

The relevant specification shall prescribe whether ageing is to be applied. If accelerated ageing is required, one of the ageing procedures given in IEC 60068-2-20 shall be applied.

Unless otherwise stated in the relevant specification, the test shall be carried out with non-activated flux.

4.17.2 Test procedures

Unless otherwise stated in the relevant specification, one of the following tests as set out in the same specification shall be applied.

The test conditions shall be defined in the relevant specification.

a) For all resistors except those of item b) and c) below:

1) IEC 60068-2-20, Test Ta, method 1 (solder bath)

Depth of immersion (from the seating plane or component body):

$2,0^{+0}_{-0,5}$ mm, using a thermal insulating screen of $1,5 \text{ mm} \pm 0,5$ mm thickness;

2) IEC 60068-2-20, Test Ta, method 2 (soldering iron);

3) IEC 60068-2-54, solder bath wetting balance method.

NOTE IEC 60068-2-54 is applicable only when prescribed in the detail specification or when agreed upon between manufacturer and customer.

b) For resistors not designed for use in printed boards, but with connections intended for soldering as indicated by the detail specification:

1) IEC 60068-2-20, Test Ta, method 1 (solder bath)

Depth of immersion (from the seating plane or component body): $3,5^{+0}_{-0,5}$ mm;

2) IEC 60068-2-20, Test Ta, method 2 (soldering iron).

c) For surface mounting resistors:

1) IEC 60068-2-58, reflow or solder bath method;

2) IEC 60068-2-69, solder bath wetting balance or solder globule wetting balance method.

NOTE IEC 60068-2-69 is applicable only when prescribed in the detail specification or when agreed upon between manufacturer and customer.

4.17.3 Final inspection, measurements and requirements

The terminations shall be examined for good tinning as evidenced by free flowing of the solder with wetting of the terminations.

The resistors shall meet the requirements as prescribed in the relevant specification.

4.18 Resistance to soldering heat

4.18.1 Preconditioning

When prescribed by the relevant specification, the resistors shall be dried using the method of 4.3.

The resistors shall be measured as prescribed in the relevant specification.

4.18.2 Test procedures

Unless otherwise stated in the relevant specification, one of the following tests as set out in the same specification shall be applied.

The test conditions shall be defined in the relevant specification.

- a) For all resistors except those of item b) and c) below:
IEC 60068-2-20, Test Tb, method 1 (solder bath).
- b) For resistors not designed for use in printed boards, but with connections intended for soldering as indicated by the detail specification:
 - 1) IEC 60068-2-20, Test Tb, method 1 (solder bath);
 - 2) IEC 60068-2-20, Test Tb, method 2 (soldering iron).
- c) For surface mounting resistors:
IEC 60068-2-58, reflow or solder bath method.

4.18.3 Recovery

The period of recovery shall, unless otherwise specified by the detail specification, be not less than 1 h nor more than 2 h, except for surface mount resistors, for which the period of recovery shall be $24 \text{ h} \pm 2 \text{ h}$.

4.18.4 Final inspection, measurements and requirements

For all resistors, except surface mount resistors, the following shall apply:

- when the test has been carried out the resistors shall be visually examined;
- there shall be no visible damage and the marking shall be legible;
- the resistors shall then be measured as prescribed in the relevant specification.

Surface mount resistors shall be visually examined and measured and shall meet the requirements as prescribed in the relevant specification.

4.19 Rapid change of temperature

4.19.1 Initial measurements

The resistance shall be measured as specified in 4.5.

4.19.2 Test procedures

The resistors shall be subjected to test Na of IEC 60068-2-14. Preferred numbers of cycles are 5, 100, 200, 500 and 1 000, to be specified in the relevant specification. Unless otherwise specified in the relevant specification, the duration of the exposure at each of the extremes of temperature shall be 30 min. Unless otherwise specified the transition time, t_2 between the temperatures shall be less than 30 s.

The resistors shall then remain under standard atmospheric conditions for recovery for not less than 1 h and not more than 2 h.

For this test, only the number of cycles is counted. During interruptions, the components shall be stored under standard atmospheric conditions.

4.19.3 Final inspection, measurements and requirements

After recovery, the resistors shall be visually examined. There shall be no visible damage.

The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.19.1 shall not exceed the limit prescribed in the relevant specification.

4.20 Bump

4.20.1 Mounting

The resistor shall be mounted as indicated in the relevant specification.

4.20.2 Initial measurements

The resistance shall be measured as specified in 4.5.

4.20.3 Test procedures

The resistors shall be subjected to test Eb of IEC 60068-2-29, using the degree of severity prescribed in the relevant specification.

4.20.4 Final inspection, measurements and requirements

After the test, the resistors shall be visually examined. There shall be no visible damage.

The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.20.2 shall not exceed the limit prescribed in the relevant specification.

4.21 Shock

4.21.1 Mounting

The resistor shall be mounted as indicated in the relevant specification.

4.21.2 Initial measurements

The resistance shall be measured as specified in 4.5.

4.21.3 Test procedures

The resistors shall be subjected to test Ea of IEC 60068-2-27, using the degree of severity prescribed in the relevant specification.

4.21.4 Measurements under test

When prescribed in the detail specification, measurements of resistance shall be made at intervals during the test, as prescribed in the relevant specification.

4.21.5 Final inspection, measurements and requirements

After the test, the resistors shall be visually examined. There shall be no visible damage.

The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.21.2 shall not exceed the limit prescribed in the relevant specification.

4.22 Vibration

4.22.1 Mounting

The resistor shall be mounted as indicated in the relevant specification.

4.22.2 Initial measurements

The resistance shall be measured as specified in 4.5.

4.22.3 Test procedures

Unless otherwise prescribed by the relevant specification, the resistors shall be subjected to test Fc of IEC 60068-2-6, using the degree of severity prescribed in the relevant specification.

When specified in the detail specification, during the last half-hour of the vibration test, in each direction of movement, an electrical measurement shall be made to check intermittent contacts, or open or short circuit. The duration of the measurement shall be the time needed for one sweep of the frequency range from one frequency extreme to the other.

4.22.4 Final inspection, measurements and requirements

After the test, the resistor shall be visually examined. There shall be no visible damage. When the resistors are tested as specified in 4.22.3, there shall be no intermittent contact greater than or equal to 0,5 ms, nor open or short circuit.

The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.22.2 shall not exceed the limit prescribed in the relevant specification.

4.23 Climatic sequence

In the climatic sequence, an interval of three days maximum is permitted between any of the tests, except that the cold test shall be applied immediately after the recovery period specified for the first cycle of the damp heat, cyclic, test Db of IEC 60068-2-30.

4.23.1 Initial measurements

The following procedure shall apply:

- a) the resistors shall be dried using either procedure I or procedure II of 4.3 as prescribed in the relevant specification;
- b) the resistance shall be measured as specified in 4.5.

4.23.2 Dry heat

The resistors shall be subjected to test Ba of IEC 60068-2-2:1974, at the upper category temperature, for a duration of 16 h.

4.23.3 Damp heat, cyclic, test Db, first cycle

The resistors shall be subjected to test Db of IEC 60068-2-30 for one cycle of 24 h, using a temperature of 55 °C (severity b)).

4.23.4 Cold

The resistors shall be subjected to test Aa of IEC 60068-2-1:1990, at the lower category temperature, for a duration of 2 h.

4.23.5 Low air pressure

The following procedure shall apply:

- a) the resistors shall be subjected to test M of IEC 60068-2-13, using the degree of severity prescribed in the relevant specification;

- b) the test shall be carried out at a temperature between 15 °C and 35 °C. The duration of the test shall be 1 h.

4.23.6 Damp heat, cyclic, test Db, remaining cycles

The resistors shall be subjected to test Db of IEC 60068-2-30 for the following cycles of 24 h, as indicated in Table 7, under the same conditions as used for the first cycle.

Table 7 – Number of cycles

Climatic categories	Number of cycles
–/–/56	5
–/–/21	1
–/–/10	1
–/–/04	None

4.23.7 DC load

This test shall be applicable only to non-wire-wound resistors.

At the end of the test, the resistors shall be subjected to the standard atmospheric conditions for testing. The time of transfer shall be as short as possible and shall not exceed 5 min. At 30 min \pm 5 min after removal from the chamber, the resistors shall be subjected to a d.c. voltage for 1 min. The voltage shall be the rated voltage, or the limiting element voltage, whichever is the smaller. The resistors shall then remain in the standard atmospheric conditions for testing for not less than 1 h and not more than 2 h.

4.23.8 Final inspection, measurements and requirements

The resistor shall then be visually examined. There shall be no visible damage and the marking shall be legible.

The resistance and, for insulated resistors only, the insulation resistance shall then be measured as specified. The change of resistance with respect to the value measured in 4.23.1 b) shall not exceed the value prescribed in the relevant specification.

The insulation resistance shall be not less than the value prescribed in the relevant specification.

4.24 Damp heat, steady state

NOTE This test is also known as load humidity test or 40/93-test.

4.24.1 Initial measurements

The resistance shall be measured as specified in 4.5.

4.24.2 Test procedures

The resistors shall be subjected to test Cab of IEC 60068-2-78 using the severity of

- temperature: 40 °C \pm 2 °C;
- relative humidity: 93 % \pm 3 %;
- duration: according to the climatic category of the resistor as indicated in the relevant specification.

4.24.2.1 For insulated resistors

For insulated resistors or for resistors which are normally mounted on or between metal plates with or without additional insulation, a division into three groups shall be effected as follows:

- a) the first group shall be subjected to the test without any voltage applied;
- b) the second group shall be subjected to the test with a direct voltage between the terminations. The voltage to be applied shall be selected from the following series:

0 V; 0,25 V; 0,4 V; 0,63 V; 1 V; 1,6 V; 2,5 V; 4 V; 6,3 V; 10 V; 16 V; 25 V; 40 V; 63 V and 100 V.

The voltage selected shall be the next lower value to the value derived from a calculation of the voltage required, so that the resistor is dissipating 0,01 times the rated dissipation, or shall be 0,1 times the limiting element voltage, whichever is the smaller. Throughout the test period the voltage shall be kept as close as possible to the specified voltage, a tolerance of $\pm 5\%$ being allowed for mains voltage fluctuations and similar factors,

- c) the third group shall be subjected to the test with a direct voltage of $20\text{ V} \pm 2\text{ V}$ applied between the mounting plates and one of the terminations. The mounting plates are connected to the negative pole and the termination to the positive pole of the voltage source. The voltage shall be applied continuously throughout the test.

4.24.2.2 For all other resistors

For all other resistors, the lot shall be divided into two groups and only the tests of items a) and b) of 4.24.2.1 shall be carried out.

4.24.3 DC load

This test shall be applicable only to non-wire-wound resistors.

At the end of the test, the resistors shall be subjected to the standard atmospheric conditions for testing. The time of transfer shall be as short as possible and shall not exceed 5 min. At $30\text{ min} \pm 5\text{ min}$ after removal from the chamber, the resistors shall be subjected to a d.c. voltage for 1 min. The voltage shall be the rated voltage or the limiting element voltage, whichever is the smaller. The resistors shall then remain in the standard atmospheric conditions for testing for not less than 1 h and not more than 2 h.

4.24.4 Final inspection, measurements and requirements

The resistors shall then be visually examined. There shall be no visible damage and the marking shall be legible.

The resistance and, for insulated resistors only, the insulation resistance shall then be measured as specified. The change of resistance with respect to the value measured in 4.24.1 shall not exceed the value prescribed in the relevant specification.

The insulation resistance shall be not less than that prescribed in the relevant specification.

4.25 Endurance

4.25.1 Endurance at 70 °C

4.25.1.1 Initial measurements

The resistance shall be measured as specified in 4.5.

4.25.1.2 Test duration

The resistors shall be subjected to an endurance test of 42 days (1 000 h) at an ambient temperature of $70\text{ °C} \pm 2\text{ °C}$. The relevant specification may specify an extended duration of the test (see 4.25.1.8).

4.25.1.3 Test voltage

The voltage shall be applied in cycles of 1,5 h on and 0,5 h off throughout the test. This voltage shall be the rated voltage or the limiting element voltage, whichever is the smaller.

The applied voltage shall be within $\pm 5\%$ of this voltage.

NOTE The half-hour off-periods are included in the total test duration specified in 4.25.1.2.

4.25.1.4 Mounting

The resistor shall be mounted as indicated in the relevant specification.

There shall be no undue draught over the resistors. If forced air circulation is used in the test chamber, the resistors shall be protected so that there is no draught, other than by natural convection, over the resistors.

4.25.1.5 Test chamber

The size of the testing chamber and the number of resistors under test shall be such that, when all resistors are fully loaded, the heat produced by them shall be less than that required to maintain the atmosphere in the chamber at 70 °C so that the temperature can still be controlled by the heating element. The temperature-controlling elements shall be suitably spaced from the resistors and shall be shielded so as not to be directly influenced by the radiation of the resistors. It is assumed, in this test, that the ambient temperature of the resistors is 70 °C .

4.25.1.6 Recovery

After approximately 48 h, 500 h and 1 000 h, the resistors shall be removed from the chamber and allowed to recover, under standard atmospheric conditions for testing, for not less than 1 h and not more than 4 h. The removal from the chamber shall take place at the end of the half-hour off-period.

Alternatively, resistance change measurements may be made at test temperature and the marking shall be legible. In that case, at the beginning of the test, an additional resistance measurement at test temperature, for reference purposes, has to be made. However, initial and final measurements shall always be made under standard atmospheric conditions for testing.

4.25.1.7 Final inspection, measurements and requirements

The resistors shall be visually examined. There shall be no visible damage and the marking shall be legible. The resistance shall be measured as specified in 4.5 and the change in resistance with respect to the value measured in 4.25.1.1, in each of the succeeding measurements, shall not exceed the value prescribed in the relevant specification.

After intermediate measurements, the resistors shall be returned to the test chamber. The interval between the removal of any resistor from the chamber and its return to the chamber shall not exceed 12 h.

After 1 000 h, the insulation resistance shall be measured (insulated resistors only) and the value shall be not less than that prescribed in the relevant specification.

4.25.1.8 Extended test

When prescribed by the relevant specification, the duration of the test shall be extended by a specified period. For this period, the relevant specification shall specify the time at which any measurements shall be made and the requirements.

4.25.2 Endurance at room temperature

4.25.2.1 Initial measurement

The resistance shall be measured as specified in 4.5.

4.25.2.2 Test duration

The resistors shall be subjected to an endurance test of 42 days (1 000 h) at an ambient temperature between 15 °C and 35 °C. When required by the detail specification, the duration of the test may be extended (see 4.25.2.7).

4.25.2.3 Test voltage

All heat-sink resistors shall be tested with an alternating voltage, unless otherwise specified in the detail specification.

When resistors specifically designed for d.c. application are allowed to have a surface temperature that exceeds the ambient temperature by more than 200 °C, the test duration shall be extended to 3 000 h or 5 000 h, as prescribed by the detail specification. In this case, the voltage shall be applied with the same polarity during the total test duration.

The voltage shall be applied in cycles of 1,5 h on and 0,5 h off throughout the test.

The voltage applied to the resistors shall be within $\pm 5\%$ of the calculated voltage.

NOTE The half-hour off-periods are included in the total test duration specified in 4.25.2.2.

4.25.2.4 Mounting

The resistor shall be mounted as indicated in the relevant specification.

There shall be no undue draught over the resistors. If forced air circulation is used in the test chamber, the resistors shall be protected so that there is no draught, other than by natural convection, over the resistors.

4.25.2.5 Recovery

After approximately 48 h, 168 h, 500 h and 1 000 h, the resistors shall be removed from the chamber and allowed to recover, under standard atmospheric conditions, for testing for not less than 1 h and not more than 4 h.

4.25.2.6 Final inspection, measurements and requirements

The resistors shall be visually examined. There shall be no visible damage and the marking shall be legible. The resistance shall be measured as specified in 4.5 and the change of resistance with respect to the value measured in 4.25.2.1 shall not exceed the value prescribed in the relevant specification.

After intermediate measurements, the resistors shall be returned to the test chamber. The interval between the removal of any resistor from the chamber and its return to the chamber shall not exceed 12 h.

After 1 000 h, the insulation resistance shall be measured (insulated resistors only), as specified in 4.6, and the value shall be not less than that prescribed in the relevant specification.

4.25.2.7 Extended test

When prescribed by the relevant specification, the duration of the test shall be extended by a specified period. For this period, the relevant specification shall specify the time at which any measurement shall be made and the requirements.

4.25.3 Endurance at upper category temperature

4.25.3.1 Initial measurement

The resistance shall be measured as specified in 4.5.

4.25.3.2 Test duration and procedures

The resistors shall be subjected to an endurance test of 42 days (1 000 h), at an ambient temperature equal to the upper category temperature prescribed in the relevant specification. When required by the detail specification, the duration of the test may be extended

4.25.3.3 Test voltage

The voltage shall be applied in cycles of 1,5 h on and 0,5 h off throughout the test.

The voltage shall be the limiting element voltage, or the voltage calculated from the category dissipation and the rated resistance, whichever is the smaller.

The applied voltage shall be within $\pm 5\%$ of this voltage.

NOTE The half-hour off-periods are included in the total test duration specified in 4.25.3.2.

4.25.3.4 Mounting

When the resistors are dissipating power, they shall be mounted in the same manner as specified in 4.25.1.4 or 4.25.2.4, as appropriate.

There shall be no undue draught over the resistors. If forced air circulation is used in the test chamber, the resistors shall be protected so that there is no draught, other than by natural convection, over the resistors.

4.25.3.5 Test chamber

The size of the testing chamber and the number of resistors under test shall be such that, when all resistors are fully loaded, the heat produced by them shall be less than that required to maintain the atmosphere in the chamber at the upper category temperature so that the temperature can still be controlled by the heating elements. The temperature-controlling elements shall be suitably spaced from the resistors and shall be shielded so as not to be directly influenced by the radiation of the resistors. It is assumed, in this test, that the ambient temperature of the resistors is the same as the upper category temperature.

4.25.3.6 Recovery

After approximately 48 h, 500 h and 1 000 h, the resistors shall be removed from the chamber and allowed to recover, under standard atmospheric conditions for testing, for not less than 1 h and not more than 4 h. The removal from the chamber shall take place at the end of the half-hour off-period for those resistors which are dissipating power.

4.25.3.7 Final inspection, measurement and requirements

The resistors shall be visually examined. There shall be no visible damage and the marking shall be legible. The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.25.3.1, in each of the succeeding measurements, shall not exceed the value prescribed in the relevant specification for the corresponding endurance test at 70 °C (4.25.1) or at room temperature (4.25.2).

After intermediate measurements, the resistors shall be returned to the test chamber. The interval between the removal of any resistor from the chamber and its return to the chamber shall not exceed 12 h.

After 1 000 h, the insulation resistance shall be measured (insulated resistors only) and the value shall be not less than that prescribed in the relevant specification.

4.25.3.8 Extended test

When prescribed by the relevant specification, the duration of the test shall be extended by a specified period. For this period, the relevant specification shall specify the time at which any measurements shall be made and the requirements.

4.26 Accidental overload test

4.26.1 Object


The object of the accidental overload test is to assess the fire hazard, resulting from the application of overload to low-power non-wire-wound resistors.

4.26.2 Gauze cylinder test method

The test fixture shall consist of a single layer gauze cylinder around the specimen under test, at a distance of 25 mm ± 3 mm from the body.

A single layer of cheese-cloth shall be placed around an internal framework to form a cylinder (see Figure 6) with open ends.

The internal framework shall be constructed from cylindrical wire with a diameter smaller than or equal to 0.6 mm (22 AWG); copper wire shall not be used. The framework wires shall be equally spaced throughout the cylinder and shall not cover more than 10 % of the gauze cylinder.

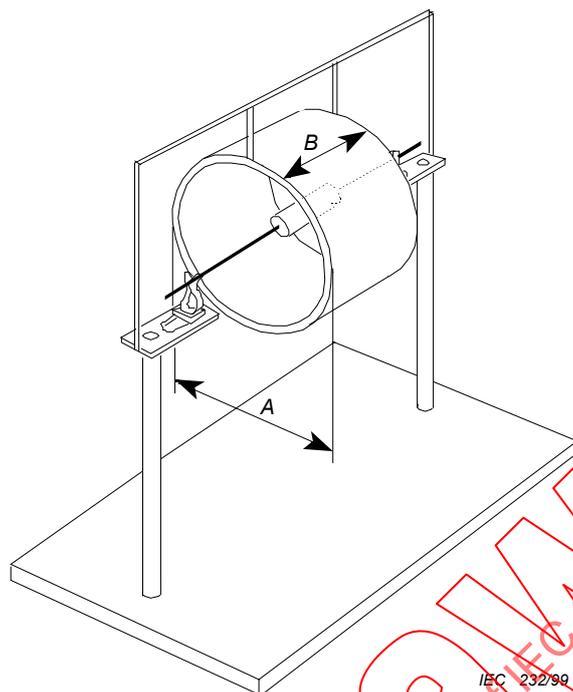

A is 50 mm \pm 1,5 mm larger than the component diameter.

B is not less than two times the length of the component under test.

Figure 6 – Gauze cylinder fixture

The length of the cylinder shall be not less than two times the length of the body of the specimen under test.

The cheese-cloth used in the forming of the cylinder shall be untreated cotton cloth, the type described as 914,4 mm (36 inches) wide, running 36,3 g/m² to 38,8 g/m² (14 yards to 15 yards per pound) and having what is known as a count of 32" by 28".

The cheese-cloth shall be pre-conditioned under standard atmospheric conditions for testing for 24 h.

The test specimen shall be placed in the fixture so that the gauze cylinder is centred around the unit under test in both the axial and longitudinal direction.

4.26.3 Conditions of test

4.26.3.1 Ventilation

The test shall be made in an area which is suitably vented for elimination of smoke and fumes.

The air velocity over the test specimen shall not exceed 30 m per minute.

4.26.3.2 Mounting clips

The mounting clips shall be of a lightweight terminal design, and shall contact the leads of the component in such a manner that no excessive heat dissipation resulting from the mounting method affects the test results.

4.26.4 Test procedure

When this test is prescribed by a detail specification, the detail specification shall also specify the resistance range for which the test applies and the resistance range from which the test sample shall be taken.

The resistors shall be connected to a constant a.c. voltage supply at standard atmospheric conditions for testing, unless otherwise specified in the detail specification.

Overloads of 5, 10, 16, 25, 40, 63 and 100 times the rated dissipation shall be applied to the resistors under test, but the applied voltage shall not exceed four times the limiting element voltage, unless otherwise specified in the detail specification.

Each overload shall be applied to a fresh specimen for a duration of $5 \text{ min} \pm 0,5 \text{ min}$, or until the resistor becomes open-circuit or the gauze cylinder ignites, whichever is the shorter.

During the test, the current through each resistor shall be monitored by the measurement of the voltage across a low value resistor in series with the resistor under test. The value of this series resistor shall be equal to or less than $1 \% R_{\text{test}}$.

The voltage across the series resistor is then a measure for the current through R_{test} and shall be observed.

During each overload, the times of occurrence of the following phenomena shall be recorded:

- a) flaming of the gauze cylinder;
- b) low impedance or open circuit (for information only).

4.26.5 Requirement

There shall be no flaming of the gauze cylinder.

4.27 Single-pulse high-voltage overload test

4.27.1 Object

The object of this test is to determine the ability of a resistor to withstand single-pulse conditions of high-voltage overloads occurring occasionally.

This test shows the effect of high-voltage overload on resistor electrical parameters and characteristics.

NOTE The repetitive voltage is usually a function of the circuit and increases the power dissipation of the device. A non-repetitive transient voltage is usually due to an external cause and it is assumed that its effect has completely disappeared before the next transient arrives.

4.27.2 Terminology


To define the pulse load, the terms and definitions given in IEC 60060-1 shall apply.

4.27.3 Test procedure

4.27.3.1 Description of test equipment


The test equipment shall be able to deliver at least six pulses per minute of the required pulse shape into the resistor under test.

The circuit diagrams to achieve the two preferred pulse shapes are shown in Figures 7 and 8.

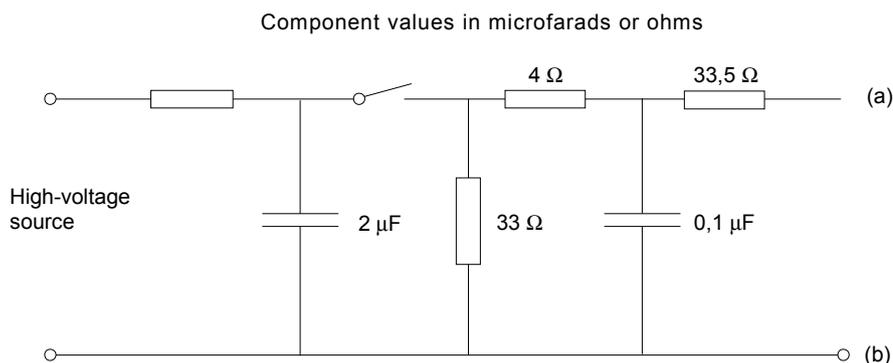

IEC 233/99

Figure 7 – Pulse generator 1,2/50

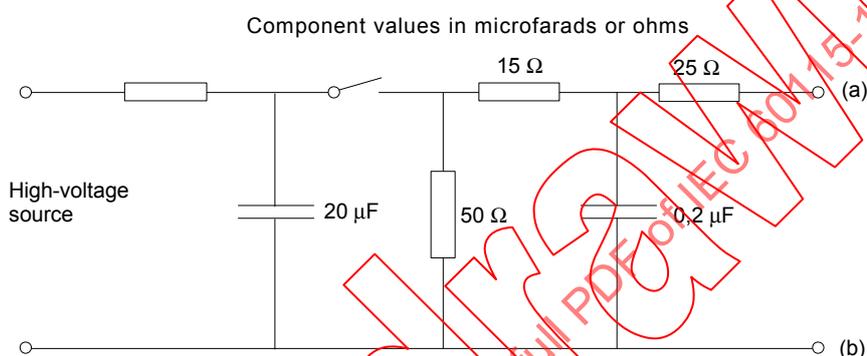

IEC 234/99

Figure 8 – Pulse generator 10/700

NOTE The switch indicated in Figures 7 and 8 may be a spark gap or a mechanical switch or a thyristor switch, as appropriate with respect to voltage and current.

4.27.3.2 Preconditioning

Before the test begins, the resistor shall have attained thermal and humidity equilibrium under standard atmospheric conditions for testing. If required by the detail specification, the resistors shall be dried by using procedure I of 4.3.

4.27.3.3 Initial measurements

Unless otherwise specified, the resistors shall be visually examined and the resistance shall be measured.

4.27.3.4 Conditioning

The method of mounting of the resistor shall be specified in the relevant specification.

The resistor shall be tested under standard atmospheric conditions for testing.

The test is performed with the test specimens dry and clean at ambient laboratory temperature. The voltage pulse applied shall be based upon the application and shall be selected from Table 8.

The pulse test voltage shall be applied with the appropriate severity as specified in the relevant specification. The resistor under test is connected across (a) and (b) in Figure 7 or Figure 8. The voltage shall appear across the terminals of the resistor under test. The relevant specification shall give the details.

4.27.3.5 Severities

The test shall be performed with a severity chosen from Table 8.

Table 8 – Severities (see Note 2)

Severity No.	Pulse shape according to 18.1 or 21.1 of IEC 60060-1 T_1/T_2 μs	Pulse voltage U		Number of pulses per minute	Total number of pulses
		Multiples of U_r (* and Note 1)	Multiples of U_{max} (* and Note 1)		
1	1,2/50		10	≤ 6	5
2			15		
3			20		
4	10/1 000 or 10/700	10	2	≤ 1	10
5		20	3		
6		30	4		
7		40	5		
8		50	6		

NOTE 1 U_r is the rated voltage; U_{max} is the limiting element voltage.
 NOTE 2 The given values of pulse voltage are prospective peak voltages as defined in IEC 60060-1.
 * Whichever is the lower.

4.27.3.6 Recovery

Recovery shall take place under standard atmospheric conditions for testing, until thermal equilibrium has been reached, with a maximum of 24 h.

4.27.3.7 Final inspection, measurements and requirements

The resistors shall be visually examined. There shall be no visible damage. The marking shall be legible.

The resistance shall be measured. The change of resistance with respect to the value measured initially (see 4.27.3.3) shall not exceed the limit for the endurance test, unless otherwise specified in the detail specification.

4.27.3.8 Information to be given in the detail specification

The detail specification shall include the following:

- a) method of mounting of the resistor for the test;
- b) test severity, to be selected from Table 8;
- c) ambient temperature, if other than 15 °C to 35 °C;
- d) failure criteria, for example,
 - permissible resistance change, if different from that specified for the endurance test;
 - insulation breakdown;
 - short circuit;
 - open circuit;
 - other criteria.

4.28 Periodic-pulse high-voltage overload test

4.28.1 Object

The object of this test is to determine the ability of a resistor to withstand conditions of short high overloads occurring periodically (pulse conditions).

Changes in the resistor parameters after the test are basically due to

- internal voltage effects;
- current effects, including local thermal stresses and mechanical forces.

4.28.2 Terminology

The following terms and definitions apply.

4.28.2.1 Pulse duration (t_p)

The duration between pulse start time and pulse stop time.

4.28.2.2 Pulse repetition period (t_r)

The interval between the pulse start time of a first pulse waveform and the pulse start time of the pulse waveform immediately following in a periodic pulse train.

4.28.2.3 Nominal pulse voltage

The steady-state value of the voltage shown in Annex C and designated there by \hat{U} .

NOTE \hat{U} may be expressed in multiples of U_r , which is the rated voltage on the resistor as defined in 2.2.18.

4.28.3 Test procedure

4.28.3.1 Description of the test equipment

The pulse generator shall be able to produce a continuous sequence of the specified pulse with the specified repetition period over the specified duration of the test. Care has to be taken not to have one test specimen influenced by another. This may require a separate output stage for each specimen.

A block diagram of a suitable test equipment is given in Figure C.1. It consists of a series of power amplifiers with low internal impedance as compared to the resistor under test (voltage source), which can transmit the specified pulse train within the distortion limits given in Figure C.2. These amplifiers are fed from a conventional pulse generator delivering the desired waveform, when necessary, via further forming, shifting and driving stages.

To permit the use of a more economical power supply for the driver and power stages when testing many resistors at the same time, it is recommended to drive them sequentially by appropriately phased pulses.

4.28.3.2 Preconditioning

Before the test begins, the resistors shall have attained thermal and humidity equilibrium under standard atmospheric conditions for testing.

For special applications, other preconditioning requirements may be given by the relevant specification.

4.28.3.3 Initial measurements

Unless otherwise specified, the resistors shall be visually examined and the resistance shall be measured.

4.28.3.4 Conditioning

The test is performed with unipolar rectangular pulse trains with specified nominal pulse voltage, having a specified pulse repetition period and pulse duration.

The method of mounting of the resistor shall be specified in the relevant specification and shall be thermally equivalent to normal endurance testing. The mounting shall not distort the pulse shape outside the limits given in Figure C.2.

At a temperature of $25\text{ °C} \pm 5\text{ °C}$ (or at such other temperature as may be given in the relevant specification), the resistor shall be subjected to a continuous train of rectangular pulses delivered according to the severity specified by the relevant specification.

4.28.3.5 Severities

The severity of the test is given by nominal pulse voltage, pulse duration, pulse repetition period, total test duration and the ambient temperature.

A test severity shall be chosen from those described in Table 9 and shall be given in the relevant specification. When no severity is specified, severity 3 shall be used.

Table 9 – List of preferred severities

Severity	1 (see Note 1)	2	3	4
Nominal pulse voltage \hat{U} (multiples of U_r) (see Note 3)	10	2,5	5	4,5 ($\sim \sqrt{20}$)
Pulse duration t_p (μs) (see Note 2)	150 to 170	7 to 11,5	100	820 to 1 000
Pulse repetition period t_r (μs) and corresponding frequency f (see Note 2)	16 667 to 20 000	59 to 72	2 500	16 667 to 20 000
Equivalent average power P (% of P_r)	100	100	100	100
Duration of test (hours)	100	100	100	100

NOTE 1 This severity is intended to cover high pulse overload voltage requirements. It should only be applied where required.

NOTE 2 The independent parameters of the table are \hat{U} and P . The value of t_p/t_r (or the corresponding value $t_p \cdot f$) should be adjusted to conform to the specified values of \hat{U} and P .

The pulse duration t_p should be adjusted so that, with t_r at a value within its tolerance, the average power P has its correct value.

NOTE 3 With an upper limit as given in the relevant specification.

These severities are intended to be used with Figures of permitted change of resistance similar to those used with the endurance tests.

For all severities, rectangular pulses are preferred. In order to collect more test data in a shorter time, it shall be permitted to use exponential pulses, provided the nominal pulse voltage \hat{U} and the average power P in the pulse train remain the same as with rectangular pulses.

If pulses other than those described in Annex C are used, the shape of the pulses applied to the terminations of the resistor shall be described in full in the detail specification.

4.28.3.6 Intermediate measurements

Intermediate measurements may be performed to shorten the test, in the case of failure of the resistors under test, after 4 h, 24 h and 50 h.

4.28.3.7 Recovery

Recovery shall take place under standard atmospheric conditions for testing, until thermal equilibrium has been reached, with a maximum of 24 h.

4.28.3.8 Final inspection, measurements and requirements

The resistors shall be visually examined. There shall be no visible damage. The marking shall be legible.

The resistance shall be measured. The change of resistance with respect to the value measured initially (4.28.3.3) shall not exceed the limit for the endurance test, unless otherwise specified in the detail specification.

For insulated resistors, only the insulation resistance shall be measured.

The value shall be not less than the limit given in the detail specification.

4.28.3.9 Information to be given in the detail specification

The detail specification shall include the following:

- a) method of mounting of the resistor for the test;
- b) test severity, to be selected from 4.28.3.5;
- c) ambient temperature, if other than $25\text{ °C} \pm 5\text{ °C}$;
- d) nominal pulse voltage (as defined in 4.28.2.3);
- e) permissible resistance change for the endurance test;
- f) insulation resistance.

4.29 Component solvent resistance

4.29.1 Initial measurement

The measurements prescribed in the relevant specification shall be made.

4.29.2 Test conditions

The components shall be subjected to test XA of IEC 60068-2-45, with the following details:

- a) solvent to be used: IPA;
- b) solvent temperature: $23\text{ °C} \pm 5\text{ °C}$, unless otherwise specified in the detail specification;
- c) conditioning: method 2 (without rubbing);
- d) duration: $5 \pm 0.5\text{ min}$;
- e) recovery time: 48 h, unless otherwise stated in the detail specification.

4.29.3 Requirements

The measurements prescribed in the relevant specification shall then be made and the specified requirements be met.

4.30 Solvent resistance of marking

4.30.1 Test conditions

The components shall be subjected to test XA of IEC 60068-2-45, with the following details:

- a) solvent to be used: IPA;
- b) solvent temperature: $23\text{ °C} \pm 5\text{ °C}$, unless otherwise specified in the detail specification;
- c) conditioning: method 1 (with rubbing); unless otherwise stated in the detail specification;
- d) rubbing material: cotton wool;
- e) duration: $5 \pm 0.5\text{ min}$;
- f) recovery time: not applicable, unless otherwise stated in the detail specification.

4.30.2 Requirements

After the test, the marking shall be legible.

4.31 Mounting of surface mount resistors

4.31.1 Substrate

Surface mount resistors shall be mounted on a suitable substrate; the method of mounting will depend on the resistor construction. The substrate material shall normally be a 1,6 mm thick copper clad epoxide woven E-glass laminated circuit board as defined, for example, in IEC 61249-2-7, IEC 61249-2-22 or IEC 61249-2-35, and it shall not affect the result of any test or measurement. If explicitly specified in the relevant specification, a 0,635 mm thick alumina substrate may be used, this should be applicable for resistors that are typically assembled and operated on such substrates. The detail specification shall indicate which material is to be used for electrical measurements.

The substrate shall have metallized land areas of proper spacing to permit mounting of surface mount resistors, and it shall provide electrical connection to the surface mount resistor terminals. The details shall be specified in the detail specification.

Examples of test substrates for mechanical and electrical tests are shown in Figures 9 and 10 respectively.

If another mounting method applies, the method should be clearly described in the detail specification.

4.31.2 Wave soldering

When the detail specification specifies wave soldering, a suitable glue, details of which may be specified in the detail specification, shall be used to fasten the component to the substrate before soldering is performed.

Small dots of glue shall be applied between the conductors of the substrate by means of a suitable device securing repeatable results.

The surface mount resistors shall be placed on the dots using tweezers. In order to ensure that no glue is applied to the conductors, the surface mount resistors shall not be moved about.

The substrate with the surface mount resistors shall be heat-treated in an oven at 100 °C for 15 min.

The substrate shall be soldered in a wave soldering apparatus. The apparatus shall be

adjusted to have a pre-heating temperature of 80 °C to 100 °C, a solder bath at 260 °C ± 5 °C, and a soldering time of 5 s ± 0,5 s.

The soldering operation shall be repeated a second time (two cycles in total).

The substrate shall be cleaned for 3 min in a suitable solvent (see 3.1.2 of IEC 60068-2-45).

4.31.3 Reflow soldering


When the detail specification specifies reflow soldering, the following mounting procedure applies:

- a) the solder used, in preform or paste form, shall be silver bearing (2 % minimum) eutectic Sn/Pb solder together with a non-activated flux, as stated in test T of IEC 60068-2-20. Alternative solders, such as 60/40 or 63/37 may be used on surface mounts whose construction includes solder leach barriers. The Pb-free solder used in preform or paste form shall be Sn96,5Ag3,0Cu0,5 or similar composition, together with a flux as stated in IEC 60068-2-58;
- b) the surface mount resistor shall then be placed across the metallized land areas of the test substrate so as to make contact between surface mount and substrate land areas;
- c) the substrate shall then be placed in or on a suitable heating system (molten solder, hot plate, tunnel oven, etc.). The temperature of the unit shall be maintained between 215 °C and 260 °C, until the solder melts and reflows forming a homogeneous solder bond, but for not longer than 10 s (see IEC 61760-1).

NOTE 1 The flux is removed by a suitable solvent (see 3.1.2 of IEC 60068-2-45). All subsequent handling is such as to avoid contamination. Care is taken to maintain cleanliness in test chambers and during post test measurements.


NOTE 2 The detail specification may require a more restricted temperature range.

NOTE 3 If vapour phase soldering is applied, the same method may be used with the temperatures adapted.

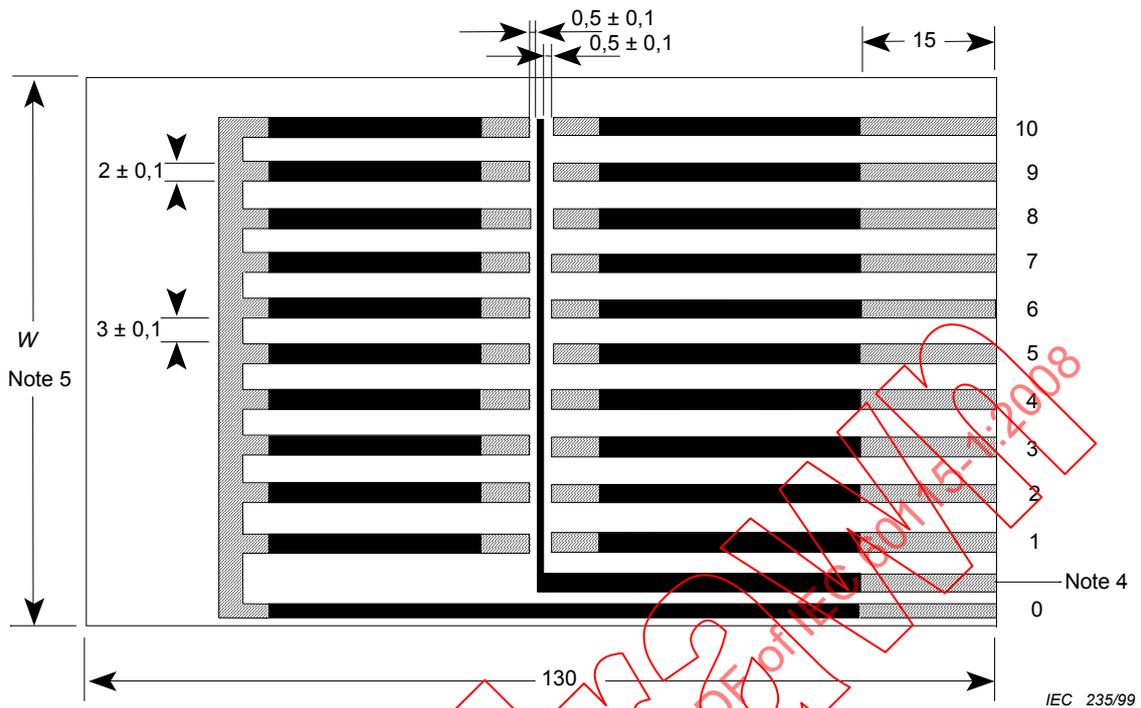

Material: epoxide woven glass
 Thickness: 1,6 mm ± 0,1 mm or 0,8 mm ± 0,1 mm

**Figure 9 – Suitable substrate for mechanical and electrical tests
 (may not be suitable for impedance measurements)**

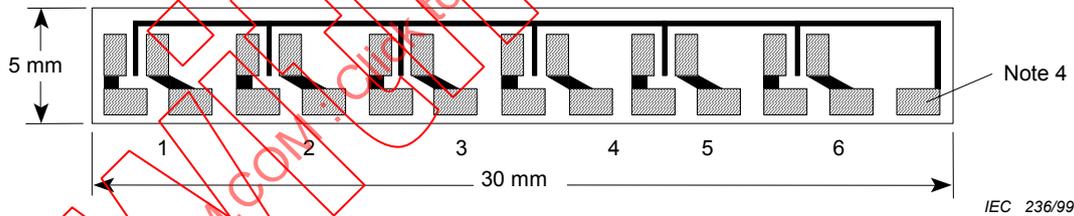

Material: 90 % to 98 % alumina substrate
 Thickness: 0,635 mm ± 0,05 mm or over

Figure 10 – Suitable substrate for electrical tests

Notes to Figures 9 and 10

- NOTE 1  solderable areas
-  areas which are not solderable (covered with non-solderable lacquer)

NOTE 2 All dimensions are in millimetres.

NOTE 3 Dimensions not given should be chosen according to the design and size of the specimens to be tested.

NOTE 4 This conductor may be omitted or used as a guard electrode.

NOTE 5 Dimension *W* is dependent on the design of the test equipment.

4.32 Shear test

NOTE 1 This test is only applicable to surface mount resistors.

NOTE 2 This test is also known as adhesion test.

4.32.1 Mounting

The surface mount resistors shall be mounted as described in 4.31.

4.32.2 Severities

The surface mount resistors shall be subjected to test Ue_3 of IEC 60068-2-21. One of the following conditions shall be applied, as prescribed in the relevant specification:

- a) a force of 5 N shall be applied to the resistor body progressively, without shock, and shall be maintained for a period of $10\text{ s} \pm 1\text{ s}$;
- b) a force proportional to the mass of the components shall be applied to the resistor body progressively, without shock. The stress may be immediately removed after reaching the given force. The relevant specification shall prescribe the required test forces based on the typical masses of the resistors covered therein.

4.32.3 Requirements

The surface mount resistors shall be visually examined in the mounted state. There shall be no visible damage.

4.33 Substrate bending test

NOTE This test is also known as bond strength of the end face plating.

4.33.1 Preparation

The surface mount resistor shall be mounted on an epoxide woven glass printed board, as described in 4.31. A bending tool chamfered with a radius of 5 mm shall be used for RR3216M and smaller sizes. 0.8mm thickness should be used for RR1005M or smaller sizes.

4.33.2 Initial measurements

The resistance of the surface mount resistor shall be measured as specified in 4.5.

4.33.3 Test procedures

The resistor shall be subjected to test Ue_1 of IEC 60068-2-21 using the conditions as prescribed in the relevant specification for deflection D and the number of bends.

The resistance of the surface mount resistors shall be measured as specified in 4.5, with the board in the bent position. The change in resistance compared with that measured in 4.33.2 shall not exceed the value specified in the detail specification.

The printed board shall be allowed to recover from the bent position and then removed from the test jig.

4.33.4 Final inspection and requirements

The surface mount resistors shall be visually examined and there shall be no visible damage.

4.34 Corrosion

4.34.1 Test method

The resistors shall be subjected to test Ka of IEC 60068-2-11.

4.34.2 Requirements

The conditioning time and requirements shall be stated in the detail specification.

4.35 Flammability

4.35.1 Test conditions

The resistors shall be subjected to the needle flame test of IEC 60695-11-5 using the appropriate severity chosen from 5 s, 10 s, 20 s, 30 s, 60 s and 120 s duration of application (t_a) of test flame.

4.35.2 Requirements

The permitted duration of burning (t_b) shall be specified in the detail specification.

4.36 Operation at low temperature

4.36.1 Initial measurements

The resistance shall be measured as specified in 4.5.

4.36.2 Test procedures

The resistors shall be subjected to the following test sequence:

- cool down from room temperature to -55_{-8}^0 °C for 1,5 h without load;
- keep resistors cool at this temperature for additional 1 h without load;
- apply the rated dissipation or the limiting element voltage, whichever is the less severe, to the resistors for 45 min;
- keep resistors cool for 15 min without load;
- heat up and recover for min. 24 h.

4.36.3 Final inspection, measurements and requirements

The resistor shall be visually examined. There shall be no visible damage.

The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.36.1 shall not exceed the limit prescribed in the detail specification.

4.37 Damp heat, steady state, accelerated

NOTE This test is also known as load humidity test or 85/85-test.

4.37.1 Initial measurements

The resistors shall be measured as specified in 4.5.

4.37.2 Test methods

The resistor shall be subjected preferably to test Cy of IEC 60068-2-67 for 1 000 h. The detail specification may prescribe another duration according to Clause 4 of IEC 60068-2-67.

4.37.3 Test procedures

The resistors shall be applied with the power at 10 % of their rated voltage (100 V d.c. maximum). Throughout the test period the test voltage shall be kept within a tolerance of ± 5 % of the calculated value.

At 500 h the resistors shall be measured within 1 h to 2 h and at 1 000 h within 4 h to 24 h as specified in 4.5. Intermediate measurement at approximately 48 h may be prescribed.

4.37.4 Final inspection, measurements and requirements

The resistors shall be visually examined. There shall be no visible damage and the marking shall be legible.

The resistance change shall not exceed the value prescribed in the detail specification. The insulation resistance for insulated resistors shall be measured as specified in 4.6. The value shall be not less than the value prescribed in the detail specification.

4.38 Electrostatic discharge

4.38.1 Test methods

The ability of the resistors to withstand electrostatic discharge (ESD) pulses shall be tested with the human body model (HBM) according to IEC 61340-3-1.

The resistor shall be tested under standard atmospheric conditions. The method of mounting shall be specified in the detail specification.

4.38.2 Initial measurements

The resistance shall be measured as specified in 4.5.

4.38.3 Test procedures

The pulse test voltage shall be specified in the detail specification, preferably 300 V, 500 V, 800 V, 1 000 V, 1 500 V, 2 000 V, 3 000 V and 4 000 V. The pulse voltage shall be applied to the specimen 6 times (3 times positive and 3 times negative polarity) unless otherwise specified in the detail specification. The minimum time between pulses shall be 1 s.

4.38.4 Final inspection, measurements and requirements

The resistors shall be visually examined. There shall be no visible damage and the marking shall be legible.

The resistance shall be measured as specified in 4.5. The change of resistance with respect to the value measured in 4.38.2 shall not exceed the value prescribed in the detail specification.

4.39 Periodic-pulse overload test

4.39.1 Preconditioning

The resistor shall be dried using procedure I of 4.3 (Dry)

4.39.2 Mounting

The method of mounting of the resistor shall be specified in the relevant specification and shall be thermally equivalent to normal endurance testing.

4.39.3 Initial measurements

The resistance shall be measured as specified in 4.5.

4.39.4 Severities

The severities for the test are given by the following: apply voltage or power, interval and number of cycles for applied voltage. A test severity shall be chosen from those described in Table 10 and shall be given in the relevant specification.

Table 10 – Periodic-pulse overload test condition

Apply voltage or power	Interval	Number of cycles for applied voltage
$2xU_r$	0.1s on / 2.5s off 1s on / 25s off	1 000 ⁺¹⁰⁰ 10 000 ⁺¹⁰⁰
$2.5xU_r$		
$3xU_r$		
$4xU_r$		
$15xP$		

4.39.5 Recovery

Recovery shall take place under standard atmospheric conditions for testing, until thermal equilibrium has been reached, within a maximum of 24 h.

4.39.6 Final inspection, measurements and requirements

The resistance shall be measured as specified in 4.5.

The change of resistance with respect to the value measured in 4.39.3 shall not exceed the value prescribed in the detail specification.

4.40 Whisker growth test

4.40.1 General

If prescribed by the relevant specification, the test of IEC 60068-2-82 shall be applied in the testing for qualification approval and for quality conformance inspection, based on the recommendations of IEC 60068-2-82, Annex C.

The relevant specification shall prescribe a suitable fixing jig for the support of the specimen during this test.

4.40.2 Preparation of specimen

The preparation of specimen shall be according to IEC 60068-2-82, Clause 5.

Specimen of resistors intended for soldering shall receive a preconditioning by heat treatment according to IEC 60068-2-82, 5.5.

Resistors with leads shall receive a preconditioning by leads forming according to IEC 60068-2-82, 5.6.

4.40.3 Initial measurement

The resistors shall be examined for appearance according to IEC 60068-2-82, 7.2.

4.40.4 Test procedures

The ambient test, the damp heat test and the temperature cycling test shall be applied according to the prescriptions in IEC 60068-2-82, Clause 6.

4.40.5 Test severities

The selections IEC 60068-2-82, Table 6 according to the component's material composition shall be applied.

The following discrimination shall be applied to the selection of the severity of the temperature cycling test - temperature:

- a) the severity N, $-55\text{ °C} / 125\text{ °C}$ shall be applied for resistors with LCT = -55 °C or below and UCT = 125 °C or above;
- b) the severity K, $-40\text{ °C} / 85\text{ °C}$ shall be applied for resistors with an LCT above -55 °C and/or an UCT below 125 °C .

4.40.6 Final inspection, measurements and requirements

The resistor shall be examined for appearance according to IEC 60068-2-82, Annex A.

The whisker shall not exceed the limit prescribed in the detail specification.

4.41 Hydrogen sulphide test

Under consideration.

Annex A
(normative)

Interpretation of sampling plans and procedures as described in IEC 60410 for use within the IECQ system

When using IEC 60410 for inspection by attributes, the interpretations of the clauses and subclauses of IEC 60410, as indicated below, apply for the purpose of this standard.

- 1 The responsible authority is the national authorized institution implementing the basic rules and rules of procedure.
- 1.5 The unit of product is the electronic component defined in a detail specification.
- 2 Only the following definitions from this clause are required.
 - a “defect” is any non-conformance of the unit of product to specified requirements;
 - a “defective” is a unit of product which contains one or more non-conformances.
- 3.1 The extent of non-conformance of a product shall be expressed in terms of percent defective.
- 3.3 Not applicable.
- 4.5 The responsible authority is the IEC technical committee drafting the blank detail specification which forms part of the generic or sectional specification.
- 5.4 The responsible authority is the designated management representative (DMR), acting in accordance with the procedures prescribed in the document describing the inspection department of the approved manufacturer, and approved by the national supervising inspectorate.
- 6.2 The responsible authority is the DMR.
- 6.3 Not applicable.
- 6.4 The responsible authority is the DMR.
- 8.1 Normal inspection shall always be used at the start of inspection.
- 8.3.3 d) The responsible authority is the DMR.
- 8.4 The responsible authority is the national supervising inspectorate.
- 9.2 The responsible authority is the IEC technical committee drafting the blank detail specification which forms part of the generic or sectional specification.
- 9.4 (Fourth sentence only) Not applicable.
(Fifth sentence only) The responsible authority is the DMR.
- 10.2 Not applicable.

Annex B (normative)

Rules for the preparation of detail specifications for resistors and capacitors for electronic equipment for use within the IECQ system

B.1 The drafting of a complete detail specification by IEC technical committee 40, if required, shall begin only when all the following conditions have been met:

- a) the generic specification has been approved;
- b) the sectional specification, when appropriate, has been circulated for approval as an FDIS;
- c) the associated blank detail specification has been circulated for approval as an FDIS;
- d) there is evidence that at least three national committees have formally approved, as their own national standard, specifications covering a component of closely similar performance.

When a national committee formally asserts that substantial or significant use is made, within its country, of a part described by some other national standard, this assertion may count towards the foregoing requirement.


B.2 Detail specifications prepared under the responsibility of technical committee 40 shall use the standard or preferred values, ratings and characteristics, and severities for environmental tests, etc. which are given in the appropriate generic or sectional specifications.

An exception to this rule may only be granted for a specified detail specification, when agreed by technical committee 40.

B.3 The detail specification should not be circulated as an FDIS until the sectional and blank detail specifications have been approved for publication.

Annex C (informative)


Example of test equipment for the periodic-pulse high-voltage overload test

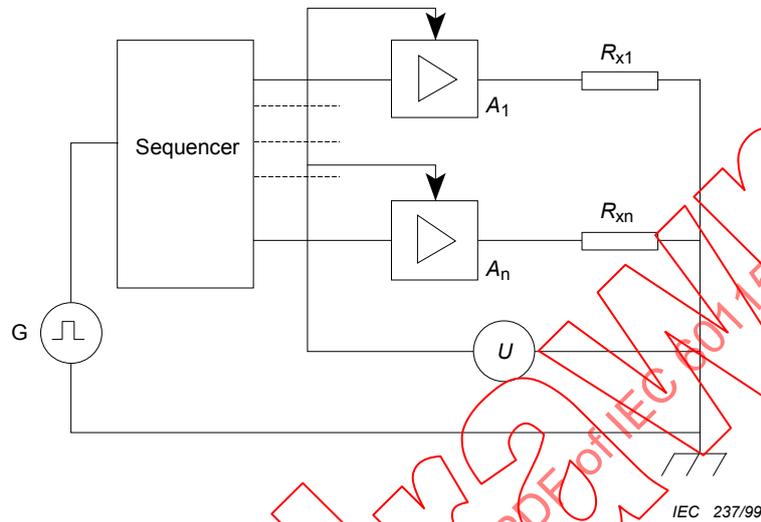

IEC 237/99

- G: pulse generator
- A₁ to A_n: power amplifiers
- R_{x1} to R_{xn}: resistors under test
- U: voltage source (power supply)

Figure C.1 – Block diagram of test equipment

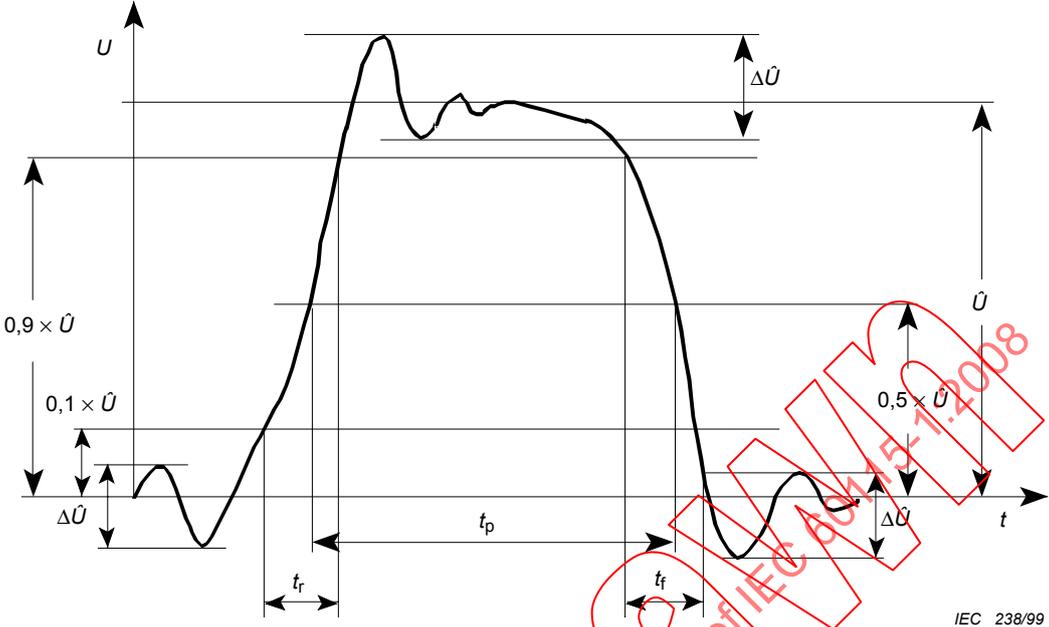

IEC 238/99

$t_r, t_f \leq 2 \mu s$ or 10 % of t_p (the higher value)

$\Delta \hat{U} \leq 0,1 \times \hat{U}$

Figure C.2 – Tolerances on the pulse shape

Annex D
(normative)

Layout of the first page of a PCP/CQC specification

Manufacturer's name

Location

Capability approval number

PCP/CQC specification number

Issue

Capability manual reference number


Date

Description of PCP/CQC

Purpose of PCP/CQC

Drawing reference

Part identity

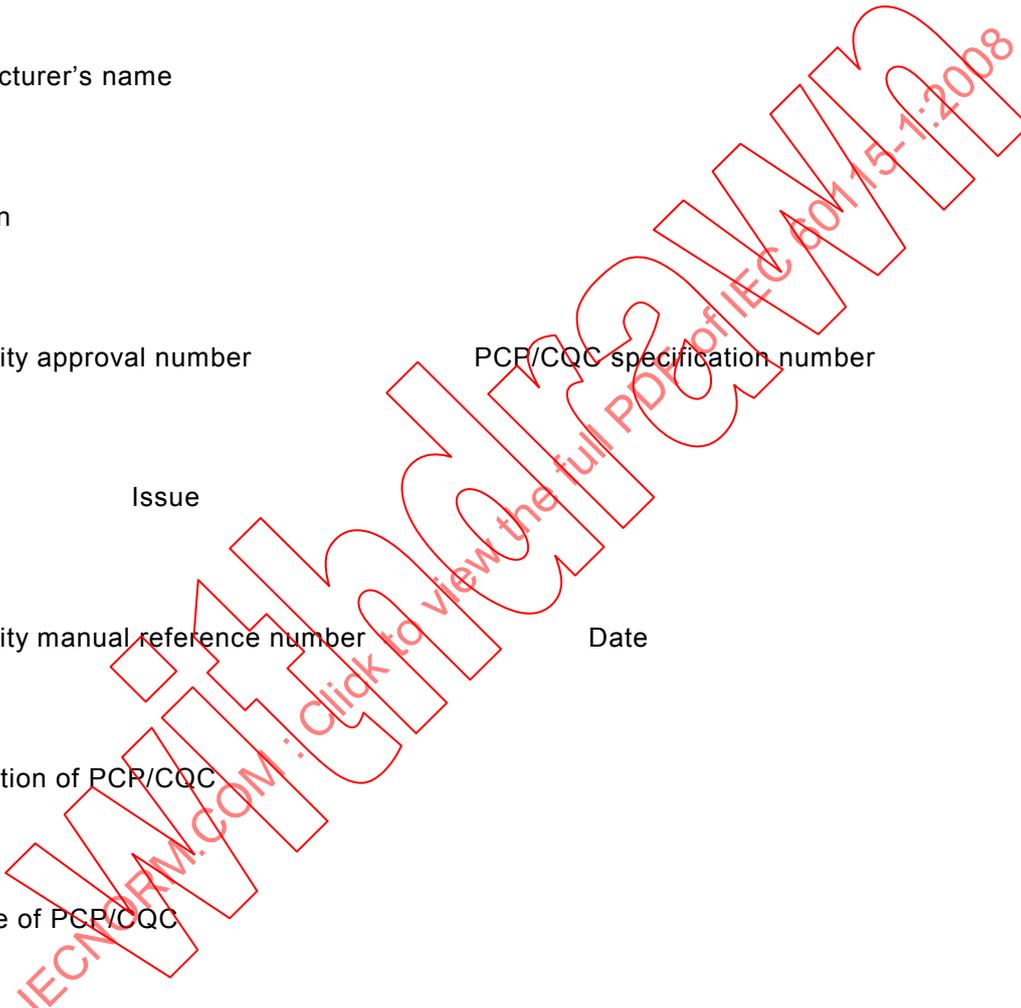

Annex E (normative)

Requirements for capability approval test report

E.1 Introduction

The test report shall be dated and shall include the information given in Clauses E.2, E.3 and E.4:

E.2 General

The following information shall be given:

- manufacturer's name and address;
- place of manufacture, if different from above;
- generic and sectional specification number, issue and amendment date;
- the issue number and date of the description of capability;
- reference to PCP/CQC specification;
- reference to the test programme for capability approval, as applicable;
- a list of test equipment used together with appropriate uncertainties of measurement.

E.3 Summary of test information (for each CQC)

The following test information shall be given:

- tests;
- number of specimens tested;
- number of non-conforming items allowed;
- number of non-conforming items found.

E.4 Measurement record

A record of the results of the measurements is taken before and after the various mechanical, environmental, and endurance tests for which post-test limits or final measurements are specified.

Annex F
(informative)

Letter symbols and abbreviations

F.1 Letter symbols

L	Length, measured along the axis from termination to termination	mm
D	Diameter	mm
I_{\max}	Maximum permissible current	A
P_{70}	Rated dissipation at 70 °C ambient temperature	W
R	Actual resistance value	Ω
R_{ins}	Insulation resistance	Ω
R_n	Nominal resistance value	Ω
R_{res}	Residual resistance	Ω
$R_{\text{res max}}$	Maximum permissible residual resistance	Ω
ΔR	Change of resistance	Ω
$\Delta R/R$	Change of resistance related to the prior measurement	%
U	Voltage, for example, test voltage	V
U_{ins}	Insulation voltage	V
U_{max}	Limiting element voltage, maximum permissible voltage	V
U_r	Rated voltage, $U_r = \sqrt{P_{70} \cdot R}$	V
t_a	Duration of application of a test flame	s
t_b	Duration of burning after removal of the test flame	s
T	Height (thickness)	mm
T_A	Low temperature of a change of temperature test	°C
T_B	High temperature of a change of temperature test	°C
W	Width	mm