

# INTERNATIONAL STANDARD



**Sound system equipment – Electroacoustical transducers – Measurement of large signal parameters**

IECNORM.COM : Click to view the full PDF of IEC 62458:2010



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)  
Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00

IECNORM.COM : Click to view the full PDF of IEC 62450:2010



IEC 62458

Edition 1.0 2010-01

# INTERNATIONAL STANDARD



**Sound system equipment – Electroacoustical transducers – Measurement of large signal parameters**

IECNORM.COM : Click to view the full PDF of IEC 62458:2010

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE

T

ICS 33.160.50

ISBN 978-2-88910-733-9

## CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references.....	7
3 Terms and definitions.....	7
4 Test signals.....	9
4.1 General.....	9
4.2 Large d.c. signal.....	9
4.3 Large d.c. signal and small a.c. signal.....	9
4.4 Broadband noise signal.....	9
4.5 Music.....	9
5 Mounting condition.....	10
5.1 Drive units.....	10
5.2 Loudspeaker systems.....	10
6 Climatic conditions.....	10
7 Acoustical environment.....	10
8 Preconditioning.....	10
9 Time-varying properties of the loudspeaker.....	11
10 Methods of measurement.....	11
10.1 General.....	11
10.2 Static or quasi-static method.....	11
10.3 Point-by-point dynamic method.....	12
10.4 Full dynamic method.....	14
11 Nonlinear force factor.....	15
11.1 Force factor curve $Bl(x)$ .....	15
11.2 Force-factor limited displacement, $X_{Bl}$ .....	16
11.3 Symmetry point, $x_{sym}(x_{ac})$ .....	17
11.4 Voice coil offset, $x_{offset}$ .....	18
12 Nonlinear stiffness.....	18
12.1 Nonlinear stiffness curve $K_{ms}(x)$ .....	18
12.2 Compliance-limited displacement $x_c$ .....	19
12.3 Stiffness asymmetry $A_K(x_{peak})$ .....	19
13 Displacement-dependent inductance, $L_e(x)$ .....	20
13.1 Inductance curve $L_e(x)$ .....	20
13.2 Inductance-limited displacement, $x_L$ .....	21
14 Current -dependent inductance, $L_e(i)$ .....	21
14.1 Characteristic to be specified.....	21
14.2 Method of measurement.....	21
15 Parameters derived from geometry and performance.....	22
15.1 Maximal peak displacement, $x_{MAXd}$ .....	22
15.2 Method of measurement.....	22
Bibliography.....	23
Figure 1 – Electro-dynamical transducer.....	7

Figure 2 –Static and quasi-static measurement setup .....	12
Figure 3 – Setup for measurement of large signal parameters by using the point-by-point dynamic method .....	13
Figure 4 – Setup for dynamic measurement of large signal parameters.....	14
Figure 5 – Reading the maximal peak displacement $x_B$ limited by force factor only .....	16
Figure 6 – Reading the voice coil offset from the symmetry point $x_{\text{sym}}(x_{\text{ac}})$ curve.....	17
Figure 7 – Definition of the symmetry point $x_{\text{sym}}$ in the nonlinear force factor characteristic $Bl(x)$ .....	18
Figure 8 – Reading the stiffness asymmetry from the $K_{\text{ms}}(x)$ curve .....	20

IECNORM.COM : Click to view the full PDF of IEC 62458:2010

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

---

**SOUND SYSTEM EQUIPMENT –  
ELECTROACOUSTICAL TRANSDUCERS –  
MEASUREMENT OF LARGE SIGNAL PARAMETERS**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62458 has been prepared by IEC technical committee 100: Audio, video and multimedia systems and equipment.

This first edition cancels and replaces IEC/PAS 62458 published in 2006. It constitutes a technical revision. The main changes are listed below:

- descriptions of the methods of measurement are adjusted to the state of the technology;
- addition of Clauses 4 to 15;
- integration of Annex A in the main body of the standard;
- overall textual review.

The text of this standard is based on the following documents:

FDIS	Report on voting
100/1624/FDIS	100/1647/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

**IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.**

IECNORM.COM : Click to view the full PDF of IEC 62458:2010

## INTRODUCTION

Electro-mechanical-acoustical transducers such as loudspeaker drive units, loudspeaker systems, headphones, micro-speakers, shakers, and other actuators behave in a nonlinear manner at higher amplitudes. This limits the acoustical output and generates nonlinear signal distortion. Linear models fail in describing the large signal behaviour of such transducers and extended models have been developed which consider dominant nonlinearities in the motor and suspension. The free parameters of the large signal model have to be measured on the particular transducer by using static or dynamic methods. The large signal parameters show the physical cause of the signal distortion directly and are very important for the objective assessment of sound quality and failure diagnostics in development and manufacturing. Furthermore, the model and parameters identified for a particular transducer are the basis for predicting the maximum output and signal distortion for any input signal. The close relationship between causes and symptoms simplifies the interpretation of the harmonic and intermodulation distortion measured according to IEC 60268-5. Large signal parameters are valuable input data for the synthesis of loudspeaker systems and the development of electrical control systems dedicated to loudspeakers.

IECNORM.COM : Click to view the full PDF of IEC 62458:2010

# SOUND SYSTEM EQUIPMENT – ELECTROACOUSTICAL TRANSDUCERS – MEASUREMENT OF LARGE SIGNAL PARAMETERS

## 1 Scope

This International Standard applies to transducers such as loudspeaker drive units, loudspeaker systems, headphones, micro-speakers, shakers and other actuators using either an electro-dynamical or electro-magnetic motor coupled with a mechanical suspension. The large signal behaviour of the transducer is modelled by a lumped parameter model considering dominant nonlinearities such as force factor, stiffness and inductance as shown in Figure 1. The standard defines the basic terms and parameters of the model, the methods of measurements and the way the results should be reported.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60268-1, *Sound system equipment – Part 1: General*

IEC 60268-5:2003, *Sound system equipment – Part 5: Loudspeakers*  
Amendment 1 (2007)


## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### electro-mechanical equivalent circuit

electrical circuit of an electro-dynamical transducer, as shown in Figure 1

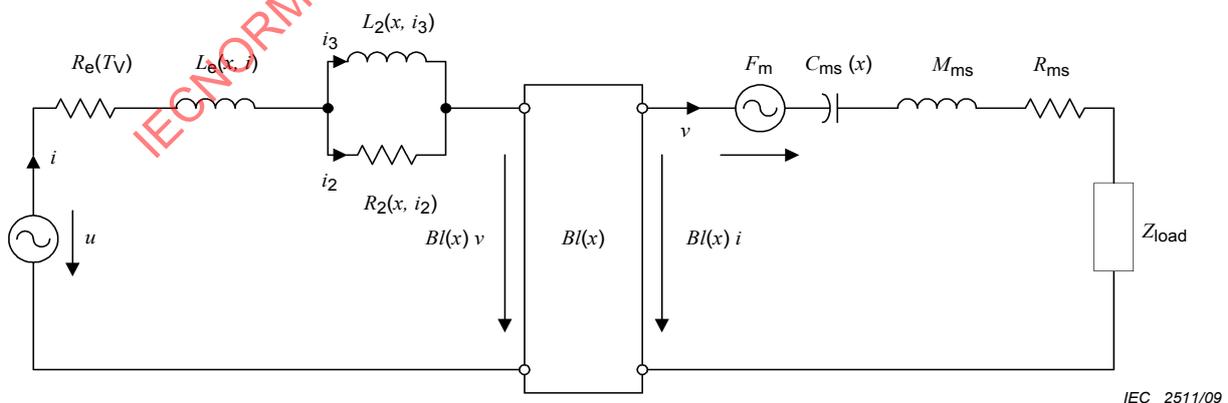

NOTE 1 This Figure shows an example of a lumped parameter model of an electro-dynamical transducer considering the dominant nonlinearities.

NOTE 2 Other equivalent circuits can be applied. Contrary to the results of linear modelling some parameters of the lumped elements are not constant but depend on instantaneous state variables (such as displacement  $x$ , velocity  $v$ , current  $i$ ).

**Figure 1 – Electro-dynamical transducer**

### 3.2 input current and voltage

$i, u$

electrical state variables at the terminals of the transducer

### 3.3 displacement

$x$

deflection of the voice coil from the rest position

### 3.4 velocity

$v$

time derivative of displacement  $x$

### 3.5 d.c. resistance

$R_e$

electrical impedance  $Z_e(s)$  at very low frequencies where the effect of the back EMF can be neglected

NOTE Electrical impedance can be used for measuring the d.c. resistance  $R_e$  of the voice coil. The d.c. resistance  $R_e$  depends on the mean voice coil temperature  $T_V$ .

### 3.6 nonlinear inductance and losses

nonlinear elements to model the effect of the magnetic a.c. field, the losses in the magnetic material, and the losses caused by eddy currents where the equivalent circuit in Figure 1 uses the LR-2 model comprising the inductance  $L_e(x, i)$ , the inductance  $L_2(x, i_2)$  and additional resistance  $R_2(x, i_3)$

### 3.7 nonlinear force factor

$Bl(x)$

dependency of instantaneous force factor  $Bl(x)$  on voice coil displacement  $x$  defined by the integral of magnetic flux density  $B$  versus the voice-coil conductor of length  $l$

NOTE The product of force factor  $Bl(x)$  and velocity  $v$  is the back EMF generated on the electrical side in an equivalent circuit as shown in Figure 1. The product of force factor  $Bl(x)$  and input current  $i$  gives the electro-dynamical driving force of the mechanical system.

### 3.8 reluctance force

$F_m$

additional electro-magnetic driving force caused by the displacement varying inductances  $L_e(x, i)$  and  $L_2(x, i_2)$

### 3.9 stiffness, $K_{ms}(x)$ , of the suspension

ratio between the instantaneous restoring force  $F(x)$  and the displacement  $x$  as given by

$$K_{ms}(x) = \frac{F(x)}{x} \quad (1)$$

NOTE The nonlinear compliance  $C_{ms}(x) = 1/K_{ms}(x)$  is the reciprocal quantity of the mechanical stiffness.

**3.10****mechanical mass** $M_{ms}$ 

total moving mass including the mass of the moving assembly and the reactive part of the air load on both sides of the diaphragm

**3.11****mechanical resistance** $R_{ms}$ 

non-electrical losses of the driver, due to suspension, turbulences and radiation

**3.12****mechanical impedance** $Z_{load}$ 

mechanical impedance which may represent any additional load caused by mechanical elements (cone, panel) or acoustical elements (such as a vented enclosure or horn)

**4 Test signals****4.1 General**

The measurement of the large signal parameters requires an electrical, mechanical or acoustical stimulus. Depending on the method used for the measurement of the large signal parameters different kind of test signals are used as stimulus for the excitation of the transducer. Since the loudspeaker behaves as a time-varying system the stimulus may cause a permanent or temporary change of the loudspeaker properties. Thus, the properties of the stimulus (spectral bandwidth, crest factor, probability density function) shall be stated. The same stimulus should be used if the numerical values of the results should be compared from two measurements.

**4.2 Large d.c. signal**

A constant d.c. voltage or d.c. current of defined magnitude and sufficient duration is supplied to the electrical terminals to measure the steady-state response of the transducer. If the transducer is mounted in a sealed enclosure a difference between the static air pressures inside and outside the enclosure may be used as d.c. stimulus.

**4.3 Large d.c. signal and small a.c. signal**

A constant d.c. signal of defined magnitude and sufficient duration (see 4.2) superimposed with a small a.c. signal is used as stimulus. The a.c. signal (such as noise, sinusoidal sweep, impulsive test signals) should have sufficient bandwidth to identify all parameters of the loudspeaker model.

**4.4 Broadband noise signal**

One of the noise signals defined in IEC 60268-1 or any other noise having sufficient bandwidth and amplitude may be used as stimulus. The crest factor of the noise should be less than 4 to reduce clipping in the amplifier.

**4.5 Music**

Ordinary music, speech of sufficient bandwidth and amplitude may be used as a stimulus.

NOTE The dynamic methods need a stimulus which provides persistent excitation of the loudspeaker to identify the parameters correctly. The stimulus should have enough spectral components at least one octave below resonance frequency  $f_s$  and one decade above  $f_s$ .

## 5 Mounting condition

### 5.1 Drive units

The driver unit may be mounted

- a) in free air without a baffle or enclosure,
- b) in a standard baffle according to 11.1 of IEC 60268-5,
- c) in half-space free field according to 5.2 of IEC 60268-5,
- d) in the standard measuring enclosure (type A or type B) according to 11.2 of IEC 60268-5, or another, specified enclosure,
- e) in vacuum,
- f) other configuration defined in the presentation of the results.

The acoustic loading depends upon the mounting arrangement, which shall be clearly described in the presentation of the results.

During the measurement the transducer should be firmly clamped to suppress additional mechanical resonances close to the resonance frequency  $f_s$ . A vertical position of the transducer (cone displacement in horizontal direction) is recommended to avoid any bias due to the weight of the moving assembly.

Drive units for horn loaded loudspeakers, headphones, micro-speakers and microphones should preferably be measured in a vacuum to reduce the acoustic load, suppress additional acoustic resonances, and to avoid nonlinear damping due to turbulent air flow.

### 5.2 Loudspeaker systems

Loudspeaker systems are measured under conditions which correspond with the intended use.

## 6 Climatic conditions

The measurements should be made at an ambient temperature 15°C to 35°C, preferably at 20°C, relative humidity 25 % to 75 %, air pressure 86 kPa to 106 kPa as specified in IEC 60268-1 to avoid any influence of temperature and humidity that may affect the properties of the drive unit suspensions.

## 7 Acoustical environment

The measurement room shall be large enough that the influence of the acoustical environment on the mechanical vibration of the transducer is negligible.

If the measurement of the large signal parameters is based on sound pressure output it is recommended to place the measuring microphone in the near field of the transducer. It is recommended to use a method that measures electrical or mechanical signals only, which is thus immune to unwanted acoustic noise.

## 8 Preconditioning

The loudspeaker should be preconditioned according to Clause 12 of IEC 60268-5. A temporary voice coil offset caused by storing the transducer for some time in the horizontal position can be removed by operating the transducer for at least 5 min in the vertical position before performing the regular measurement.

## 9 Time-varying properties of the loudspeaker

The stimulus provided to the electrical input of the loudspeaker may cause a heating of the voice coil and may also change the properties of the suspension during measurement. Thus, the electrical resistance of the coil should be measured during measurement and considered in the calculation of the loudspeaker parameters (e.g. electrical loss factor  $Q_{es}$ ).

## 10 Methods of measurement

### 10.1 General

The following methods may be used for the measurement of the large signal parameters. The method used should be stated together with the results.

### 10.2 Static or quasi-static method


#### 10.2.1 General

This technique determines the non-linear parameters of the transducer by using a d.c. signal with magnitude  $u_i$  (usually voltage) as stimulus. After reaching steady state relevant state variables (d.c. displacement  $x_i$ , d.c. force  $F_i$ ) are measured and the parameter value (such as  $K(x_i) = F_i/x_i$ ) is calculated. After changing the magnitude of the d.c. signal the measurement is repeated at further working points  $x_i$  with  $i = 1, \dots, N$  to measure the non-linear parameters within the working range  $-x_{\text{peak}} < x_i < x_{\text{peak}}$  with sufficient resolution.

Due to the visco-elastic behaviour of the suspension material, the settling time required to reach steady state may exceed several seconds and a static method is very time consuming. In a quasi-static method the state variables are measured before steady state is reached and the settling time used should be stated.

Creep and other visco-elastic properties of the suspension cause significant discrepancies between the stiffness  $K(x)$  measured statically by using a d.c. signal and the stiffness  $K_{ms}(x)$  measured dynamically by using an broadband noise signal.

The d.c. signal of the static and quasi-static methods cannot be used for the measurement of the nonlinear voice coil inductance  $L_e(x, i)$ . Figure 2 shows a setup for static and quasi-static measurement of large signal parameters.

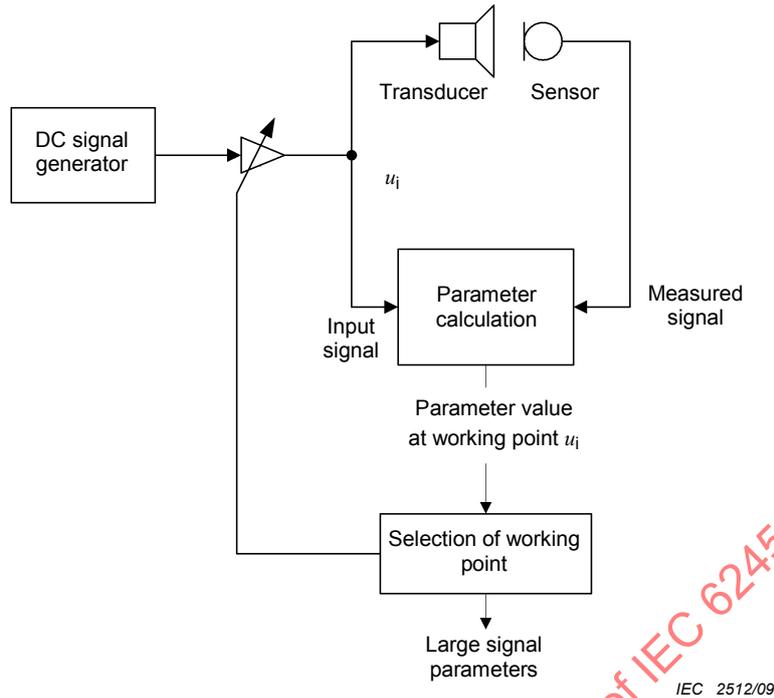

**Figure 2 –Static and quasi-static measurement setup**

### 10.2.2 Procedure

Proceed as follows.

- a) According to the limits of working range  $-x_{\text{peak}} < x_i < x_{\text{peak}}$  investigated and the resolution required, the number of measurements  $N$  is determined, a starting voltage  $u_{\text{start}}$  is selected and the incremental voltage  $u_{\text{step}}$  is defined.
- b) The first working point  $i = 1$  is initialized.
- c) The transducer is excited by a d.c. signal voltage  $u_i = u_{\text{start}} + i \times u_{\text{step}}$ .
- d) At the working point,  $i$ , the displacement,  $x_i$ , and other relevant state variables (such as force  $F_i$ ) are measured after the transducer has reached steady state or a defined settling time  $T$  has passed.
- e) The nonlinear parameter (for example,  $K(x_i) = F_i/x_i$ ) is calculated.
- f) The next working point  $i = i + 1$  is selected and previous steps 1 to 5 are repeated until  $i > N$ .
- g) The parameter values are interpolated between the working points  $x_i$  with  $i = 1, \dots, N$  or the coefficients of the power series expansion (such as Equation (3)) are calculated.

### 10.3 Point-by-point dynamic method

#### 10.3.1 General

This technique determines the non-linear parameters of the transducer with a d.c. signal,  $u_i$  (such as d.c. voltage or a constant air pressure), superimposed with a small a.c. signal,  $u_{\text{ac}}$ , as stimulus. After reaching the steady state, the relevant state variables (d.c. displacement  $x_i$  and the amplitudes of the a.c. force  $F_{\text{ac}}$  and a.c. displacement  $x_{\text{ac}}$ ) are measured and the parameter value (such as the incremental stiffness  $K_{\text{inc}}(x_i) = F_{\text{ac}}/x_{\text{ac}}$ ) is calculated. After changing the magnitude of the d.c. part of the stimulus the measurement is repeated at further working points  $x_i$  with  $i = 1, \dots, N$ , to measure the non-linear parameters within the working range  $-x_{\text{peak}} < x_i < x_{\text{peak}}$  with sufficient resolution.

The amplitude  $u_{ac}$  of the a.c. stimulus is sufficiently small to ensure that the transducer behaves linearly ( $K(x_i + x_{ac}) \approx \text{constant}$ ,  $Bl(x_i + x_{ac}) \approx \text{constant}$  and  $L_e(x_i + x_{ac}) \approx \text{constant}$ ) and a linear loudspeaker model can be applied.


Whereas some small signal parameters (force factor  $Bl(x_i)$  and inductance  $L_e(x_i)$ ) are identical to the large signal parameters measured by other methods, this technique provides the incremental stiffness,  $K_{inc}(x_i)$ , which can only be transformed into the regular stiffness by integration

$$K(x) = \frac{1}{x} \int_0^x K_{inc}(x) dx \quad (2)$$

Due to the visco-elastic behaviour of the suspension material, there are significant differences between the stiffness  $K(x)$  measured by the point-by-point method using a d.c. signal and the stiffness  $K_{ms}(x)$  measured dynamically with a program like an a.c. signal. Figure 3 shows a setup for point-by-point dynamic measurement of large signal parameters.

### 10.3.2 Test equipment

The stimulus comprising a d.c. part and an a.c. part can be produced by using a generator with a d.c. offset and a d.c.-coupled power amplifier. However, providing the d.c. part via the electrical input produces significant heating of the voice coil at high amplitudes. Alternatively, the transducer may be mounted in a sealed box, and the voice coil position may be varied by changing the d.c. air pressure inside the box.

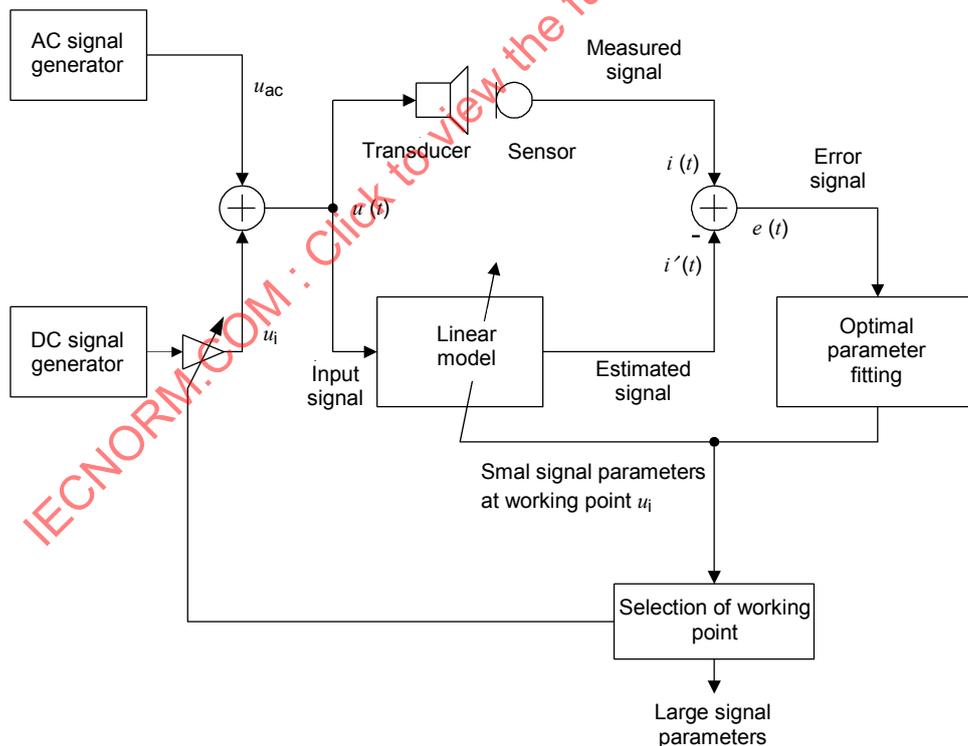

IEC 2513/09

**Figure 3 – Setup for measurement of large signal parameters by using the point-by-point dynamic method**

### 10.3.3 Procedure

According to the limits of working range  $-x_{\text{peak}} < x_i < x_{\text{peak}}$  investigated and the resolution required, the number of measurements  $N$ , starting voltage  $u_{\text{start}}$  and incremental voltage  $u_{\text{step}}$  is defined. The first working point  $i = 1$  is selected.

Proceed as follows.

- a) The transducer is excited by a stimulus  $u_i + u_{\text{ac}} = u_{\text{start}} + i \times u_{\text{step}} + u_{\text{ac}}$ .
- b) At working point,  $i$ , the d.c. displacement,  $x_i$ , and a.c. state variables (such as a.c. force  $F_{\text{ac}}$  and a.c. displacement  $x_{\text{ac}}$ ) are measured after the transducer has reached steady state or a defined settling time  $T$  has passed.
- c) The small signal parameters (such as  $K_{\text{inc}}(x_i) = F_{\text{ac}}/x_{\text{ac}}$ ) are calculated at the particular working point  $x_i$  by using a linear model which is optimally fitted to the measured signal.
- d) The next working point  $i = i + 1$  is selected and steps 1 to 5 are repeated until  $i > N$ .
- e) The parameter values are interpolated between the working points  $x_i$  with  $i = 1, \dots, N$  or the coefficients of the power series expansion (such as Equation (3)) are calculated.

## 10.4 Full dynamic method

### 10.4.1 General

The full dynamic method uses an a.c. stimulus of sufficient amplitude and bandwidth such as music or an audio-like signal (noise). Usually, there is no d.c. component in the stimulus. Measured state variables (voltage, current, displacement) are the basis for the identification of free parameters of the non-linear model (such as the lumped model in Figure 1). Based on identified state variables (such as voice coil temperature) and transducer nonlinearities (stiffness  $K_{\text{ms}}$ ) the amplitude of the stimulus is adjusted automatically to operate the transducer at maximal amplitudes  $-x_{\text{peak}} < x_i < x_{\text{peak}}$  safely and to avoid any damage of the transducer. Figure 4 shows the setup for dynamic measurement of large signal parameters.

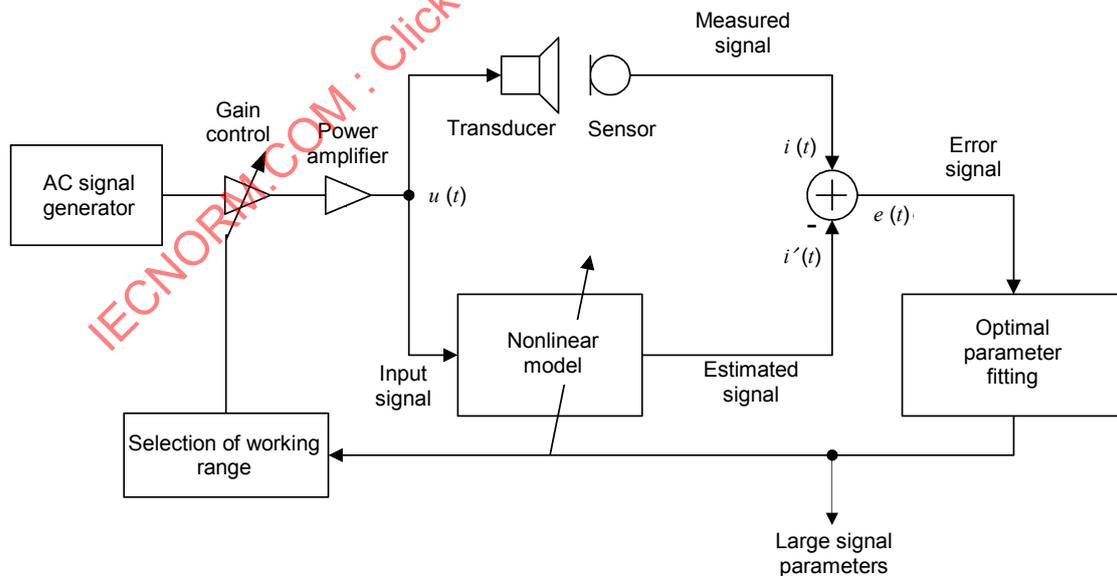


Figure 4 – Setup for dynamic measurement of large signal parameters

### 10.4.2 Requirements

A signal source is required providing an audio-like signal which is provided via a power amplifier to the loudspeaker terminals. A sensor is required to monitor at least one state variable (such as current) of the loudspeaker. A signal processing system is required to model the relationship between input signal (such as voltage) and monitored state variable (such as current) and to calculate the optimal parameters by using a fitting technique.

### 10.4.3 Procedure

Proceed as follows.

- a) A broadband noise signal of small amplitude is supplied via a power amplifier to the terminals of the speaker (voltage supply).
- b) The electrical input current  $i$  at the terminals or other state signals (displacement or sound pressure) is measured using a mechanical or acoustical sensor.
- c) The input current  $i'(t)$  is predicted using the nonlinear transducer model (such as lumped model in Figure 1). The error signal  $e(t) = i(t) - i'(t)$  is calculated and the free parameters are estimated by minimizing the error signal  $e(t)$ .
- d) The displacement limits  $x_{Bl}$  and  $x_C$  are derived from Equations (4) and (7). The increase of the voice coil temperature  $\Delta T_V$  is estimated by monitoring the d.c. resistance  $R_e$  of the coil.
- e) The amplitude of the stimulus is increased until the peak displacement  $x_{peak}$  exceeds either the force factor limited displacement,  $x_{Bl}$ , or the compliance limited displacement,  $x_C$  or the increase of the voice coil temperature  $\Delta T_V$  exceeds the permissible limits.
- f) Adequacy of the modeling and optimal parameter fitting shall be checked by calculating the mean squared error between measured and modeled response (such as current, velocity, displacement).

## 11 Nonlinear force factor

### 11.1 Force factor curve $Bl(x)$

#### 11.1.1 Characteristic to be specified

The non-linear force factor,  $Bl(x)$ , is preferably reported as a graphical representation showing the parameter as a function of displacement,  $x$ , within the measured range  $-x_{peak} < x < x_{peak}$ . Positive displacement,  $x$ , corresponds to a deflection of the coil away from the back-plate. It is recommended that the displacement axis is labelled with verbal comments to support the orientation of the coil-in and coil-out position.

#### 11.1.2 Method of measurement

##### 11.1.2.1 General

The force factor characteristic may be measured by the static, point-by-point dynamic or the full dynamic method as defined in Clause 10. The method used shall be reported.

##### 11.1.2.2 Coefficients of force factor expansion

The coefficients  $b_j$  with  $j = 0, 1, \dots, N$  in the power series expansion of the force factor curve

$$Bl(x) = \sum_{j=0}^N b_j x^j \quad (3)$$

shall be reported with peak displacement  $x_{peak}$  describing the limits of the fitting range  $-x_{peak} < x < x_{peak}$ .

**11.2 Force-factor limited displacement,  $x_{Bl}$**

**11.2.1 Characteristic to be specified**

The decrease of the  $Bl$ -value caused by a movement of the coil away from the rest position  $x = 0$  limits the maximal peak displacement. The force-factor limited peak displacement  $x_{Bl}$  is implicitly defined by the condition that the minimal force factor ratio

$$\min_{-x_{Bl} < x < x_{Bl}} \left( \frac{Bl(x)}{Bl(0)} \right) 100 \% = Bl_{\min} \tag{4}$$

equals a defined threshold  $Bl_{\min}$ .

It is recommended to use a threshold of  $Bl_{\min} = 82 \%$  which corresponds with 10 % modulation distortion according to Clause 24 of IEC 60268-5 for a two-tone signal comprising a tone at resonance frequency  $f_1 = f_s$  and a second tone at  $f_2 = 8,5 f_s$ .

The peak value  $x_B$  shall be reported with the minimal force factor ratio,  $Bl_{\min}$  used, for example:


$$x_{Bl} = 3 \text{ mm with } Bl_{\min} = 82 \%$$

**11.2.2 Method of measurement**

The nonlinear force factor curve shall be measured according to 11.1.2.

The value  $Bl(x = 0)$  at the rest position is determined and this value is multiplied by the threshold of the minimal force factor ratio (such as  $Bl_{\min} = 82 \%$ ).

The smallest displacement  $x$  for which  $Bl(x_{Bl}) = Bl(x = 0) * Bl_{\min}$  gives  $x_{Bl}$ . See Figure 5.

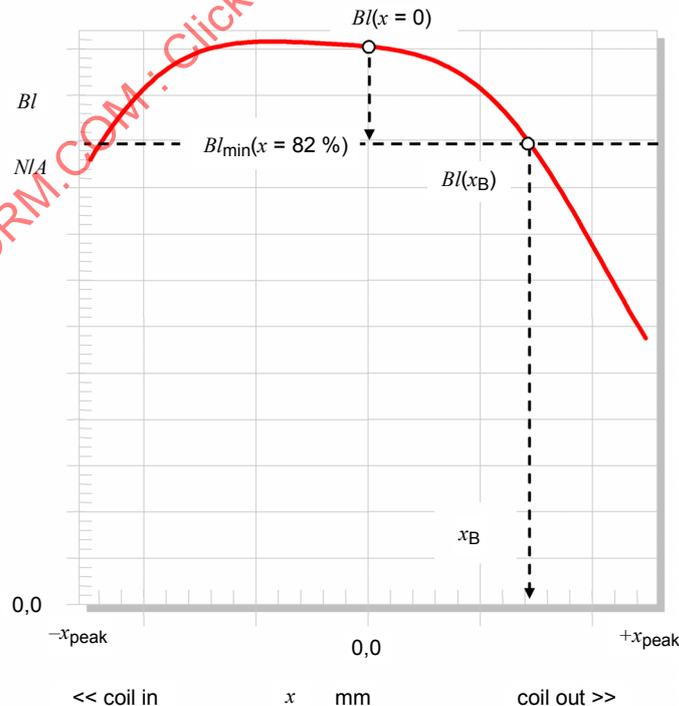

IEC 2515/09

**Figure 5 – Reading the maximal peak displacement  $x_B$  limited by force factor only**

### 11.3 Symmetry point, $x_{\text{sym}}(x_{\text{ac}})$

#### 11.3.1 Characteristic to be specified

The symmetry point in the  $Bl$ -curve describes the centre point between two points on the  $Bl$ -curve producing the same  $Bl$ -value

$$Bl(x_{\text{sym}}(x_{\text{ac}}) - x_{\text{ac}}) = Bl(x_{\text{sym}}(x_{\text{ac}}) + x_{\text{ac}}) \quad (5)$$

which are separated by  $2 x_{\text{ac}}$ . The dependency of the symmetry point  $x_{\text{sym}}(x_{\text{ac}})$  versus displacement  $x_{\text{ac}}$  shall be reported as a curve as shown in Figure 6.


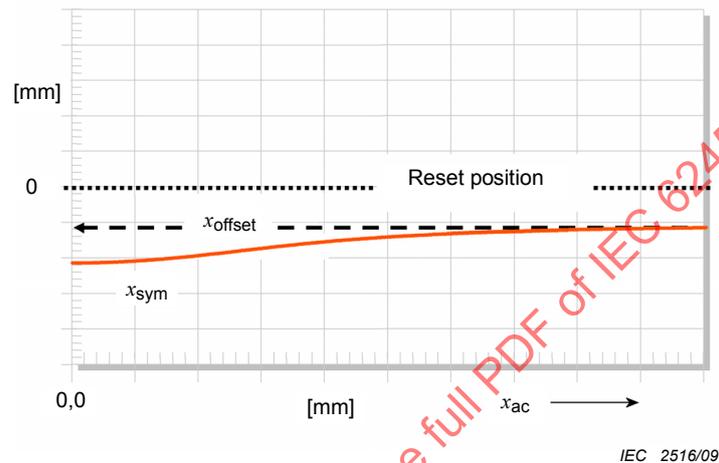


Figure 6 – Reading the voice coil offset from the symmetry point  $x_{\text{sym}}(x_{\text{ac}})$  curve

**11.3.2 Method of measurement**

As illustrated in Figure 7, a  $Bl$ -value is selected which is smaller than  $Bl_{max}$  and the corresponding displacement values  $x_1$  and  $x_2$  are read on both sides of the  $Bl$  maximum giving  $Bl(x_1) = Bl(x_2)$ . The symmetry point  $x_{sym} = (x_1 + x_2)/2$  and the displacement  $x_{ac} = |x_2 - x_1|/2$  are calculated. The procedure is repeated for smaller  $Bl$ -values.

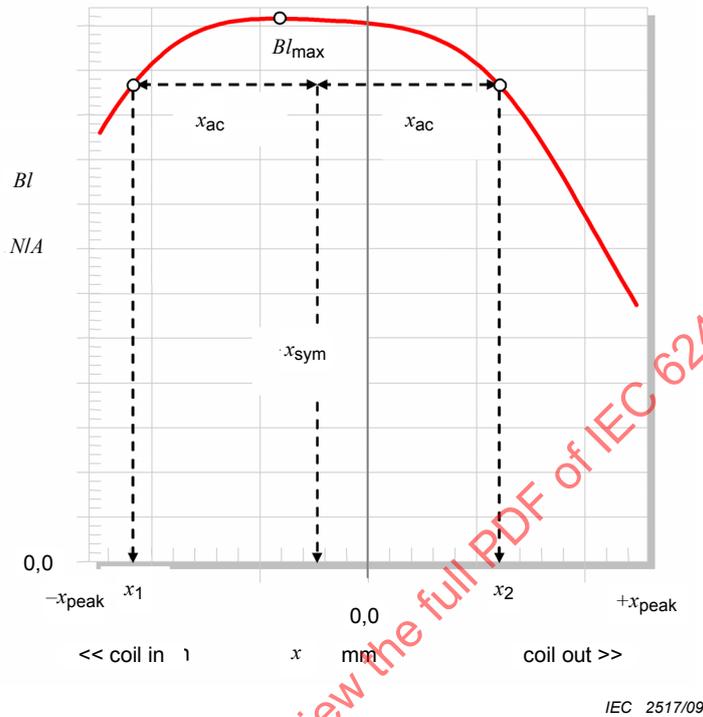

**Figure 7 – Definition of the symmetry point  $x_{sym}$  in the nonlinear force factor characteristic  $Bl(x)$**

**11.4 Voice coil offset,  $x_{offset}$**

The voice coil offset  $x_{offset}$  is the symmetry point  $x_{sym}(x_{ac})$  for a high value of  $x_{ac}(x_{ac} > x_{Bl})$  to assess the symmetry at the steep slopes of the  $Bl$ -curve. The voice coil offset  $x_{offset}$  is reported together with the amplitude  $x_{ac}$ , for example:

$x_{offset} = 0,4 \text{ mm at } x_{ac} = 5,2 \text{ mm}$

NOTE If the symmetry point varies significantly with the displacement ( $x_{sym}(x_{ac}) \neq \text{constant}$ ), the asymmetry of the  $Bl$ -curve is caused by the magnetic field geometry and cannot be compensated by a coil shift.

**12 Nonlinear stiffness**

**12.1 Nonlinear stiffness curve  $K_{ms}(x)$**

**12.1.1 Characteristic to be specified**

The non-linearity of the suspension is preferably reported as a graphical representation of the stiffness showing the parameter  $K_{ms}(x)$  as a function of displacement,  $x$ , within the measured range  $-x_{peak} < x < x_{peak}$  as shown in Figure 8. Positive displacement,  $x$ , corresponds to a deflection of the coil away from the back-plate. It is recommended that the displacement axis be labeled with verbal comments to support the orientation of the coil-in and coil-out position.

NOTE The graphical representation of the nonlinear compliance  $C_{ms}(x)$  which is the reciprocal of the nonlinear stiffness  $K_{ms}(x)$  makes the interpretation of nonlinearity more difficult at higher displacements, where the impact of the nonlinearity on the restoring force is dominant.

## 12.1.2 Method of measurement

### 12.1.2.1 General

The stiffness characteristic shall preferably be measured by using the full dynamic method as defined in Clause 10, because it describes the behavior of the suspension for an audio-like stimulus best. The d.c. component in the stimulus used in static, quasi-static and point-by-point dynamic techniques causes significant differences in the measured stiffness due to visco-elastic behavior.

### 12.1.2.2 Coefficients of stiffness expansion

The coefficients  $k_j$  with  $j = 0, 1, \dots, N$  in the power series expansion of the stiffness curve defined by

$$K_{ms}(x) = \sum_{j=0}^N k_j x^j \quad (6)$$

shall be reported together with peak displacement  $x_{\text{peak}}$  describing the limits of the fitting range  $-x_{\text{peak}} < x < x_{\text{peak}}$ .

## 12.2 Compliance-limited displacement $x_C$

### 12.2.1 Characteristic to be specified

The decrease of the compliance  $C_{MS}$ -value of the suspension caused by a movement of the coil away from the rest position  $x = 0$  limits the maximal peak displacement. The compliance limited displacement  $x_C$  is implicitly defined by the condition that the minimal compliance ratio

$$\min_{-x_C < x < x_C} \left( \frac{C_{MS}(x)}{C_{MS}(0)} \right) 100 \% = C_{\text{min}} \quad (7)$$

equals a defined threshold  $C_{\text{min}}$ .

It is recommended to use a threshold of  $C_{\text{min}} = 75 \%$  which corresponds with 10 % harmonic distortion for a sinusoidal excitation tone at resonance frequency  $f_s$ . The limit used shall be reported with the displacement  $x_C$ , for example:

$$x_C = 2 \text{ mm at } C_{\text{min}} = 75 \%$$

### 12.2.2 Method of measurement

The nonlinear stiffness curve is measured according to 12.1. The compliance curve  $C_{ms} = 1/K_{ms}(x)$  is then calculated. The value  $C_{ms}(x = 0)$  is read at the rest position and this value is multiplied by the threshold of the minimal compliance ratio (such as  $C_{\text{min}} = 75 \%$ ). The smallest  $x$  for which the  $C_{ms}(x)$  equals  $C_{ms}(x = 0) \times C_{\text{min}}$  gives  $x_C$ .

## 12.3 Stiffness asymmetry $A_K(x_{\text{peak}})$

### 12.3.1 Characteristic to be specified

The asymmetry of the  $K_{ms}(x)$  curve is assessed by a single value

$$A_K(x_{\text{peak}}) = \frac{2(K_{\text{MS}}(-x_{\text{peak}}) - K_{\text{MS}}(x_{\text{peak}}))}{K_{\text{MS}}(-x_{\text{peak}}) + K_{\text{MS}}(x_{\text{peak}})} 100 \% \quad (8)$$

using the stiffness at the negative and positive limits  $\pm x_{\text{peak}}$  of the measured  $K_{\text{ms}}$ -curve. It is recommended to measure the  $K_{\text{ms}}$  at high amplitude, so as to have  $x_{\text{peak}} > x_{\text{C}}$ . The peak displacement  $x_{\text{peak}}$  used for reading the stiffness asymmetry shall also be reported

$$A_K = 90 \% (x_{\text{peak}} = 5,5 \text{ mm}).$$

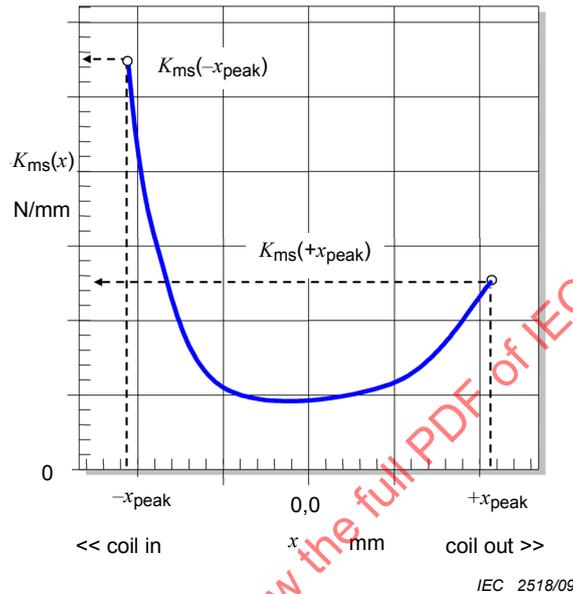


Figure 8 – Reading the stiffness asymmetry from the  $K_{\text{ms}}(x)$  curve

### 12.3.2 Method of measurement

As illustrated in Figure 8, read the stiffness values at positive and negative peak displacement  $x_{\text{peak}}$  in the measured  $K_{\text{ms}}(x)$  curve. Calculate the stiffness asymmetry  $A_K$  using Equation (8).

## 13 Displacement-dependent inductance, $L_e(x)$

### 13.1 Inductance curve $L_e(x)$

#### 13.1.1 Characteristic to be specified

The non-linearity of the inductance is preferably reported as a graphical representation of the inductance parameter  $L_e(x)$  as a function of displacement,  $x$ , within the measured range  $-x_{\text{peak}} < x < x_{\text{peak}}$  without input current ( $i = 0$ ). Positive displacement,  $x$ , corresponds to a deflection of the coil away from the back-plate. It is recommended that the displacement axis is labeled with verbal comments to support the orientation of the coil-in and coil-out position.

#### 13.1.2 Method of measurement

##### 13.1.2.1 General

The inductance curve characteristic may be measured by the point-by-point dynamic or the full dynamic method, as defined in Clause 10.