
**Radiofrequency identification of
animals —**

**Part 3:
Evaluation of performance of RFID
transponders conforming with ISO
11784 and ISO 11785**

Identification des animaux par radiofréquence —

*Partie 3: Évaluation de la performance des transpondeurs RFID
conformes à l'ISO 11784 et à l'ISO 11785*

STANDARDSISO.COM : Click to view the full PDF of ISO 24631-3:2017



STANDARDSISO.COM : Click to view the full PDF of ISO 24631-3:2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Conformance.....	3
5 Abbreviated terms.....	3
6 Application.....	4
7 Test procedures.....	5
7.1 General.....	5
7.2 Helmholtz configuration.....	5
7.2.1 Transponder parameter test set-up.....	5
7.2.2 Field strength calculation.....	5
7.2.3 Helmholtz transmitting antenna (HTA) coils.....	5
7.2.4 Helmholtz sensing coils (HSC) and sensing coils (SC).....	6
7.2.5 Positioning HSC and SC in relation to HTA.....	8
7.2.6 Matching network (MN).....	8
7.2.7 Matching network (MN).....	9
7.2.8 Compensation network (CN).....	9
7.3 Test apparatus.....	10
7.4 Test setups for measuring the modulation amplitude.....	11
7.4.1 FDX-B transponders.....	11
7.4.2 HDX transponders.....	12
7.5 Test conditions.....	12
7.6 Tests.....	12
7.6.1 General.....	12
7.6.2 Transponder orientation.....	12
7.6.3 Constant magnetic field nulling.....	13
7.6.4 Minimal activating magnetic field strength in FDX-B mode.....	14
7.6.5 Minimal activating magnetic field strength in HDX mode.....	15
7.6.6 Modulation amplitude in FDX-B mode.....	15
7.6.7 Modulation amplitude in HDX mode.....	17
7.6.8 Bit length stability in FDX-B mode.....	19
7.6.9 Frequency stability in HDX mode.....	22
Annex A (normative) Test application form (ISO 24631-3).....	26
Annex B (informative) Current source transmitter (ISO 24631-3).....	27
Bibliography.....	28

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 19, *Agricultural electronics*.

This second edition cancels and replaces the first edition (ISO 24631-3:2009), which has been technically revised.

The main changes compared to the previous edition are as follows:

- quality of the figures has been improved (see [Clause 7](#)).

A list of all parts in the ISO 24631 series can be found on the ISO website.

Introduction

ISO has appointed a registration authority (RA) competent to register manufacturer codes used in the radiofrequency identification (RFID) of animals in accordance with ISO 11784 and ISO 11785.

The registration authority for ISO 11784 and ISO 11785 can be found under http://www.iso.org/iso/home/standards_development/list_of_iso_technical_committees/maintenance_agencies.htm.

This document deals with the performance of RFID transponders, of which the main types used for animal identification are

- injectable transponders,
- electronic ear tag transponders,
- electronic ruminal bolus transponders,
- leg tag transponders, and
- tag attachments.

This document permits the characterization of the two RFID communication paths: the energy transfer from transceiver to transponder and the data transfer from transponder to transceiver. This characterization can be obtained from the results of two measurements: the first determining the minimal activating magnetic field strength needed for transmitting the information and the second the transponder modulation amplitude. Both measurements use a reference measurement antenna configuration under conditions allowing the absolute values to be obtained for comparison of data between the tested transponders. Additional measurements that contribute to the performance assessment of the transponders are the bit length stability in the case of FDX-B transponders and the frequency stability in the case of HDX transponders. These parameters can be measured using the same measurement antenna configuration.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 24631-3:2017

Radiofrequency identification of animals —

Part 3:

Evaluation of performance of RFID transponders conforming with ISO 11784 and ISO 11785

1 Scope

This document provides the means of evaluating the performance of ISO 11784- and ISO 11785-conformant radiofrequency identification (RFID) transponders used in the individual identification of animals.

The test procedures specified in this document are recognized by the Federation of European Companion Animals Veterinary Association (FECAVA) and World Small Animal Veterinarian Association (WSAVA) and as such can be applied also to companion animals.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11784, *Radio frequency identification of animals — Code structure*

ISO 11785:1996, *Radio frequency identification of animals — Technical concept*

ISO 24631-1, *Radiofrequency identification of animals — Part 1: Evaluation of conformance of RFID transponders with ISO 11784 and ISO 11785 (including granting and use of a manufacturer code)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 accreditation

third-party attestation related to a conformity assessment body conveying formal demonstration of its competence to carry out specific conformity assessment tasks

[SOURCE: ISO/IEC 17000:2004, 5.6]

3.2 activation field

electromagnetic field with a frequency of 134,2 kHz

3.3 bit length stability

stability of an FDX-B *transponder* (3.18) expressed by the standard deviation of the duration of one-bit information

3.4

country code

three-digit numeric code representing a country in accordance with ISO 3166-1

3.5

frequency stability

stability of an HDX *transponder* (3.18) expressed by the standard deviation of the two frequencies representing the low and high bit of an FSK-modulated signal

3.6

identification code

code used to identify the animal individually, at the national and, in combination with a *country code* (3.4), international levels

Note 1 to entry: It is a national responsibility to ensure the uniqueness of national ID codes.

3.7

laboratory reference transceiver

transceiver (3.17) used to test the *transponders* (3.18) generating the *activation field* (3.2), able to read FDX-B and HDX transponders

3.8

manufacturer

company that submits an application for conformance testing or for the granting and use of a *manufacturer code* (3.9) for *transponders* (3.18) in conformance with ISO 11784 and ISO 11785 while accepting the conditions set forth in ISO 24631-1:2017, Annexes B, C and E

3.9

manufacturer code

MFC

three-digit number granted by the RA to a *manufacturer* (3.8) under the conditions set forth in ISO 24631-1:2017, Annex E, whose range and placement within the code structure are in accordance with ISO 11784

Note 1 to entry: Only one manufacturer code is granted to the same manufacturer.

3.10

product code

six-digit number granted (and registered) by the *registration authority* (3.14) to a *manufacturer* (3.8) for a certain type of *transponder* (3.18), formatted such that its first part is the *manufacturer code* (3.9) and second part a three-digit serial number

3.11

RA-recognized test centre

accredited test centre meeting the criteria of the *registration authority* (3.14)

3.12

RA-registered transponder

transponder (3.18) registered by the *registration authority* (3.14)

3.13

RA-registered manufacturer

manufacturer (3.8) with one or more *RA-registered transponders* (3.12)

3.14

registration authority

RA

entity that approves test laboratories and issues and registers *manufacturer* (3.8) and *product codes* (3.10)

3.15**retagging**

process that assigns to a new *transponder* (3.18) the same identification number as a transponder that has been lost or that is no longer readable

3.16**retagging counter**

three-bit field for counting the number of *retagging* (3.15)

3.17**transceiver**

device used to communicate with the transponder

3.18**transponder**

radio frequency identification (RFID) device that transmits its stored information when activated by a *transceiver* (3.17) and that may be able to store new information

Note 1 to entry: See ISO 24631-1 for definitions of the main types.

3.19**transponder modulation amplitude**

characterization of the transponder signal strength sent back to the *transceiver* (3.17)

Note 1 to entry: For FDX-B it corresponds to the modulation depth; for HDX to the average voltage depth.

3.20**transponder minimal activating magnetic field strength**

minimal value of magnetic field strength needed to obtain full activity of the transponder

Note 1 to entry: The transponder is activated after having been placed in a magnetic field whose strength depends on the antenna, chip and packaging design. Full activity is obtained when the transponder is supplied with energy sufficient to transmit the complete data according to ISO 11785.

3.21**user information field**

five-bit field for additional user information, used only in conjunction with the *country code* (3.4)

4 Conformance

Test centres recognized by the registration authority (RA) shall perform transponder testing using the procedures specified in [Clause 7](#) and shall report the test results to the RA. These tests are in accordance with the technical requirements of ISO 11784 and ISO 11785. The manufacturer shall apply for transponder testing by completing and submitting to the RA the application form provided in [Annex A](#). Only transponders with a product code issued by the RA (see ISO 24631-1) shall be tested. A transponder test report shall be accorded to a manufacturer whose transponder product has been tested as per [Clause 7](#).

5 Abbreviated terms

CN	compensating network
CRC	cyclic redundancy check
FDX-B	full duplex communication protocol (conforming to ISO 11785, excluding protocols mentioned in ISO 11785:1996, Annex A)
FSK	frequency shift keying

HDX	half duplex communication protocol
HSC	Helmholtz sensing coil
HTA	Helmholtz transmitting antenna
IEEE	Institute of Electrical and Electronics Engineers
MFC	manufacturer code
MN	matching network
RA	registration authority
RFID	radiofrequency identification
SC	sensing coil
TUT	transponder under test

6 Application

6.1 The application submitted to the RA for testing the performance of a transponder shall consist of a covering letter and the application form presented in [Annex A](#). The RA shall confirm receipt of the application to the manufacturer within 2 weeks. By signing the application form, the manufacturer agrees to fulfil the provisions of this document.

6.2 Approval in accordance with ISO 24631-1 is a prerequisite for approval for testing in accordance with this document.

6.3 Test centres that are ISO/IEC 17025 accredited for the measurements defined in this document can be recognized by the RA.

6.4 The RA maintains a list of recognized test centres, from which the manufacturer may choose the centre that will test his transponder product.

6.5 The manufacturer shall provide the RA-recognized test centre with 50 transponders of the same type and model for testing. If the RA-recognized test centre selected already has this number of the same transponders, they may be used. The transponders shall carry the country code "999" (indicating a test transponder) or the manufacturer's code if existent. The manufacturer may freely choose the identification codes, but duplicated numbers are not allowed. The manufacturer shall provide a list of the transponder codes in decimal representation.

6.6 The RA-recognized test centre shall verify the transponders using the test procedures specified in [Clause 7](#). All tested transponders shall be readable by the configuration also specified in [Clause 7](#). The codes read shall match the codes provided by the manufacturer.

6.7 The RA-recognized test centre shall prepare a confidential report of the results and shall send two copies (or an electronic version) of the report to the chairman of the RA.

6.8 The RA chairman shall inform the manufacturer of the test results in a letter together with a copy of the report.

6.9 The tested transponders shall be kept by the RA-recognized test centre, under the ownership of the RA.

6.10 The RA shall make publicly available a photograph of the registered transponder.

6.11 The RA shall make publicly available the main results of the test. A manufacturer shall have the right to refuse that the results be made publicly available or to request their withdrawal from public availability. In the first case, the manufacturer shall send a request to the RA not to publish, within two weeks of having received the test report. In the second, the manufacturer shall send a request to the RA and the RA shall remove the results from public availability within four weeks of receipt of this request.

6.12 The RA shall do everything within its power to protect the integrity of this procedure with regard to ISO 11784 and ISO 11785.

7 Test procedures

7.1 General

The test centre shall test five transponders randomly picked from the 50 transponders provided by the manufacturer, in accordance with the following procedures. During the measurements, the transponder shall be positioned in a Helmholtz configuration producing an adjustable uniform magnetic field.

7.2 Helmholtz configuration

7.2.1 Transponder parameter test set-up

The Helmholtz transmitting antennas (HTA) produce a homogeneous, cylindrically shaped field. A functional diagram of the Helmholtz configuration and corresponding test setup is shown in [Figure 1](#). The transponder under test (TUT) shall be positioned on the central axis, centred between the transmitter coils of the test configuration.¹⁾ The matching network (MN) shall be used to match the setup of the two HTA to 50 Ω output resistance of the amplifier.

7.2.2 Field strength calculation

A very accurate relation exists between the magnetic field and the current in the Helmholtz coils. By measuring the current through the HTA, the magnetic field strength, H_{rms} (root mean square, 35,8 mA/m to 35,8 A/m) can be calculated from [Formula \(1\)](#):

$$H_{\text{rms}} = \frac{N_{\text{HTA}} \times U_{\text{HTA_pp}}}{1,9764 \times d_{\text{HTA}} \times R_{\text{HTA}}} \quad (1)$$

where

N_{HTA} is the number of turns on HTA coil (= 5);

$U_{\text{HTA_pp}}$ is the peak-to-peak voltage at R_{HTA} ;

d_{HTA} is the diameter of HTA coil;

R_{HTA} is the resistor in series with HTA coils.

7.2.3 Helmholtz transmitting antenna (HTA) coils

The dimensions and characteristics of the HTA coils shall be as shown in [Figure 2](#).

1) The maximum size of the transponder is limited by the Helmholtz configuration's dimensions — in length by the distance between the HTA coils, and in diameter by the HSC diameter. The signal emitted by small transponders could require smaller sensing coil dimensions. If that is the case, the ISO/TC 23/SC 19 animal identification working group will develop a special setup for those devices.


Two HTA coils are used in the Helmholtz configuration.

Owing to the low number of turns (five), the best way to manufacture the HTA is by winding onto a core element.

7.2.4 Helmholtz sensing coils (HSC) and sensing coils (SC)

HSC shall be used for both FDX-B and HDX. Two HSC shall be connected in series.

The HSC and the SC shall be made in accordance with [Figure 3](#) and shall be connected by means of the compensation network (CN) (see [Figure 1](#)).

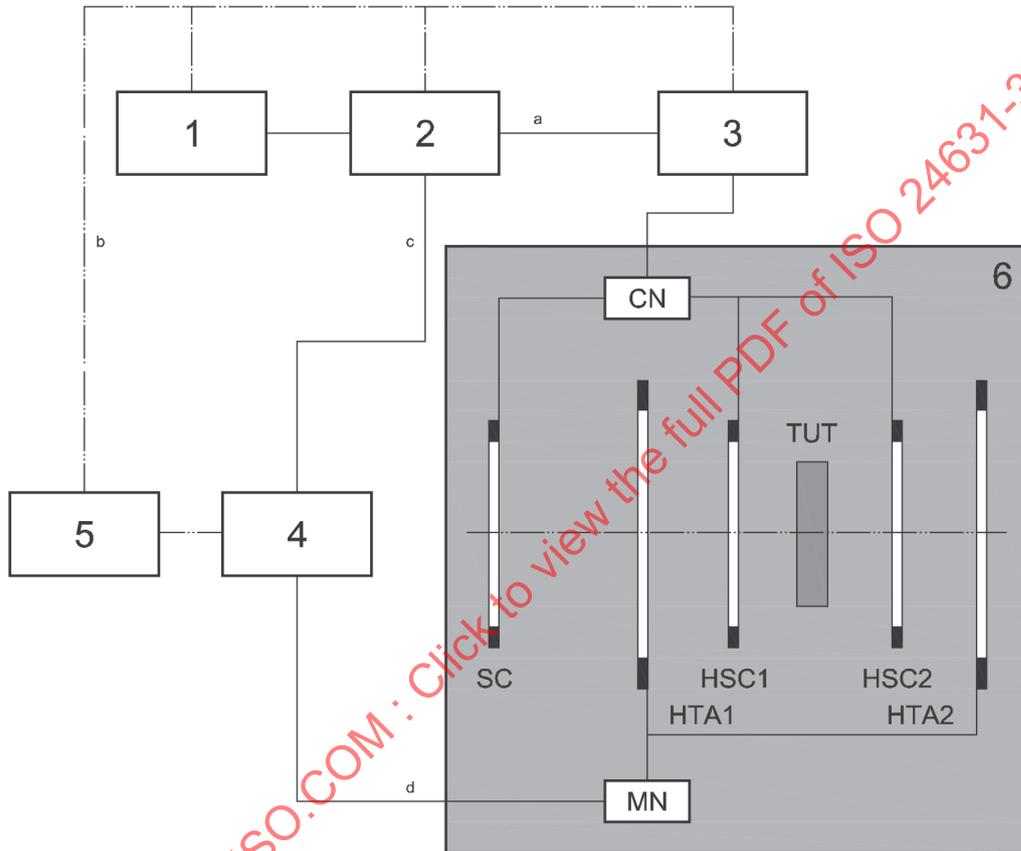


Key

- | | | | |
|---|---|------|--|
| 1 | code generator | CN | compensation network |
| 2 | function waveform or arbitrary waveform generator | HSC1 | first Helmholtz sensing coil ^e |
| 3 | oscilloscope | HSC2 | second Helmholtz sensing coil ^e |
| 4 | amplifier | HTA1 | first Helmholtz transmitting antenna ^e |
| 5 | personal computer (PC) with IEEE card | HTA2 | second Helmholtz transmitting antenna ^e |
| 6 | measurement antenna configuration | MN | matching network |
| | | SC | sensing coil |
| | | TUT | transponder under test |

- a Trigger.
- b IEEE interface.
- c Output signal.
- d 50 Ω.
- e Serial and in phase.

Figure 1 — Test setup and Helmholtz configuration

Dimensions in millimetres

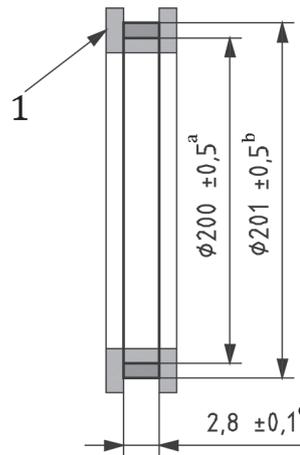

Key

1 core element

a $d_{i,HTA}$.

b $d_{e,HTA}$.


c l_{HTA} .

NOTE 1 Wire: B155 500 μm Grade 1B.

NOTE 2 N_{HTA} (number of turns on HTA) = 5.

Figure 2 — HTA coils — Physical characteristics

Dimensions in millimetres

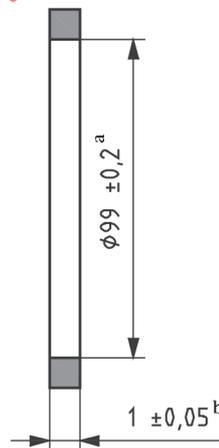

Key

a $d_{i,HSC}$.

b l_{HSC} .

NOTE 1 Wire: B155 100 μm Grade 1B or P155 100 μm Grade 2.

NOTE 2 N_{HSC} (number of turns on HSC) = 70.


NOTE 3 N_{SC} (number of turns on SC) = 45.

Figure 3 — HSC and SC — Physical characteristics

7.2.5 Positioning HSC and SC in relation to HTA

The HSC shall be centred between the two HTA. The external SC, if needed, shall be positioned as shown in Figure 4.

Dimensions in millimetres

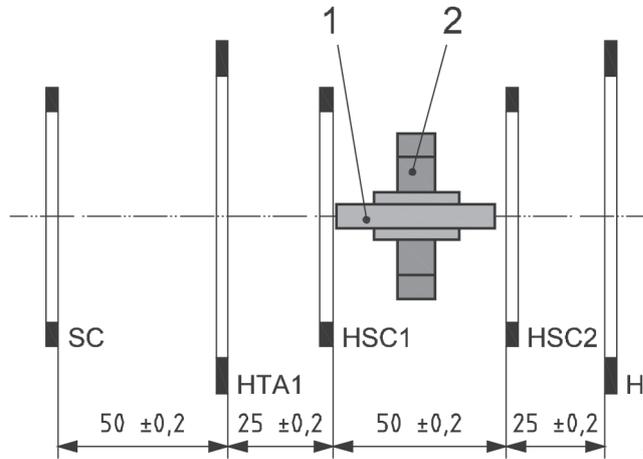


Key

- | | | | |
|------|-------------------------------|------|---------------------------------------|
| 1 | ferrite coil | HTA1 | first Helmholtz transmitting antenna |
| 2 | air coil | HTA2 | second Helmholtz transmitting antenna |
| CN | compensation network | MN | matching network |
| HSC1 | first Helmholtz sensing coil | SC | sensing coil |
| HSC2 | second Helmholtz sensing coil | | |

Figure 4 — HTA, HSC and SC positions

7.2.6 Matching network (MN)

The matching network shall be realized according to Figure 5 (see also Figure 1).

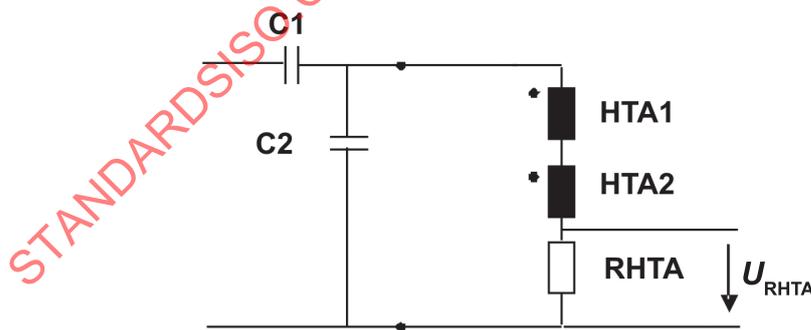

Key

- | | |
|------------|-----------------------------------|
| C1, C2 | capacitors |
| HTA1, HTA2 | Helmholtz transmitting antennas |
| U_{RHTA} | voltage at RHTA |
| RHTA | resistor in series with HTA coils |

Figure 5 — MN and magnetic field-generating coils

Capacitors C1 and C2 shall be adjusted (e.g. parallel capacitors) to match the resistor, RHTA, and HTA1 and HTA2 to 50 Ω of the amplifier output. Values for C1, C2 and RHTA shall be adjusted around the start values for 134,2 kHz in accordance with [Table 1](#).

Table 1 — Matching components for 134,2 kHz

Component	Value	Comment
C1	15 nF	500 V, film capacitance
C2	30 nF	500 V, film capacitance
RHTA	5 Ω ^a	10 W, low inductance

^a The value of 5 Ω for RHTA takes into account the series resistance of the HTA coils, which have an approximate value of 0,4 Ω .

7.2.7 Matching network (MN)

The HTA shall be matched to the output impedance of the amplifier: 1 V into 50 Ω gives 1 A into the HTA coils.

In order to respect the inductance value of the HTA, which shall be 33 μ H, the series capacitor value shall be 42 nF.

During the test, couple the transponder with the HTA and HSC.

For very small transponders, the coupling between the transponder coil and the HTA is very low and negligible.

For larger transponders, couple the HTA to the transponder for a given value: a part of the energy is absorbed in the calculated output resistor of 4,7 Ω of the transmitter. Only a transmitter that works as a current source possesses very high output resistance and is therefore without influence on the behaviour of the transponder.


Another problem that can occur is detuning due to the coupling of these coils — resulting in distortion of the transponder code and a wrong measurement of the modulation amplitude.

Such problems can be avoided if a current source transmitter such as the one illustrated in [Annex B](#) is used.

7.2.8 Compensation network (CN)

The CN shall be used to zero out the constant magnetic field generated by the HTA and shall be built according to the schematic diagram shown in [Figure 6](#). The adjustment potentiometer (P1) compensates for mechanical and electrical mismatches.

The oscilloscope probe used should have at least the characteristics: ≥ 10 M Ω and ≤ 20 pF, or instead of the probe, an emitter follower (with the same characteristics), for example, can be used in combination with a 7th order 170 kHz Low Pass Filter and an amplifier.

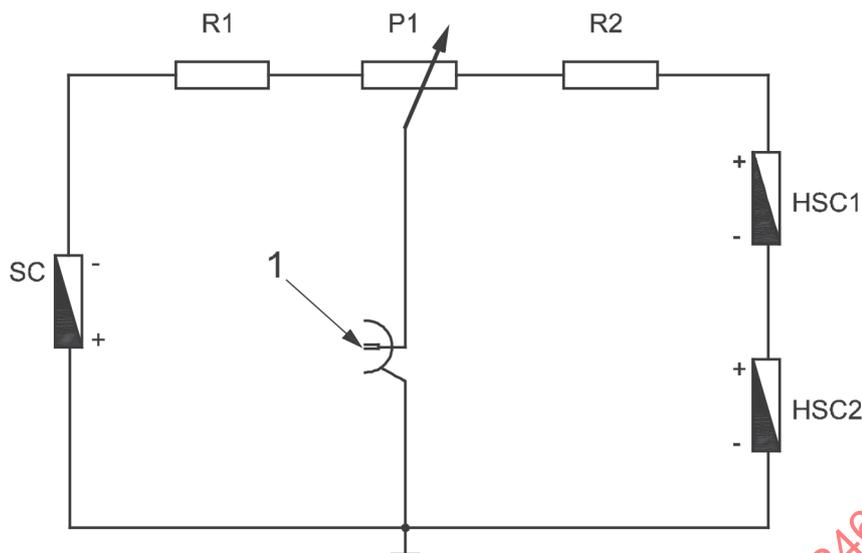

Key

- 1 oscilloscope
- HSC1 first Helmholtz sensing coil
- HSC2 second Helmholtz sensing coil
- P1 adjustment potentiometer (10 k Ω)
- R1 first resistor (15 k Ω)
- R2 second resistor (100 k Ω)
- SC sensing coil

Figure 6 — Compensation network for zeroing out HTA magnetic field

7.3 Test apparatus


7.3.1 Magnetic field generation.

7.3.1.1 Helmholtz transmitting antenna (HTA) configuration, built in accordance with [Figure 7](#).

7.3.1.2 Function waveform generator (FWG) or arbitrary waveform generator (AWG).

7.3.2 Matching network (MN), in accordance with [7.2.7](#).

7.3.3 Compensation network, in accordance with [7.2.8](#).

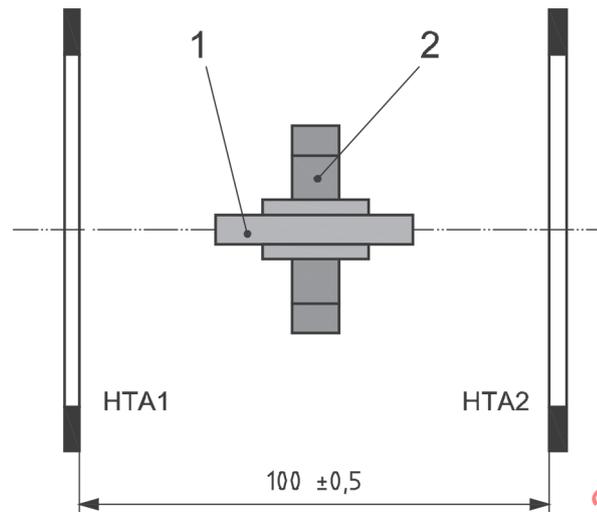**Key**

- 1 ferrite coil
- 2 air coil
- HTA1 first Helmholtz transmitting antenna
- HTA2 second Helmholtz transmitting antenna

Figure 7 — HTA configuration — Physical characteristics

7.3.4 Magnetic field modulation (FDX-B only).

7.3.4.1 Compensated field measurement coil configuration.

The compensated field measurement coil configuration uses three coils disposed in specific orientations. Two HSCs collect the modulation magnetic field emitted by the transponder, while an SC collects the magnetic field, which is almost not modulated. Combining both the collected signals from the HSC and SC through the CN shall allow the nulling of the constant magnetic field generated by the HTA. This configuration is required in order to reduce the position sensitivity of the TUT.

7.3.4.2 Two-channel oscilloscope, with a bandwidth of at least 100 MHz.

7.3.4.3 **Personal computer (PC)**, with an interface allowing full control of the instruments used — for example, by means of an IEEE interface.

7.4 Test setups for measuring the modulation amplitude

7.4.1 FDX-B transponders

The sensing of the modulation amplitude shall be performed using a three-coil configuration, consisting of two HSCs placed into a Helmholtz configuration within the Helmholtz transmitting antennas, and one SC placed outside the Helmholtz transmitting antennas. The internal HSC shall sense the generated field and emitted modulation signal with low influence from the coupling factor and position of the transponder unit; the external SC shall sense only the generated field and can consequently be used as a compensation signal by subtracting the generated field. The output of the CN is the return signal of the transponder.

7.4.2 HDX transponders

The sensing of the modulation amplitude shall be performed using a two-coil configuration, consisting of two HSC placed into a Helmholtz configuration within the Helmholtz transmitting antennas. The HSC shall sense the generated field and the emitted frequencies with low influence from the coupling factor and position of the transponder unit, and shall deliver the bit value representing frequencies directly to the oscilloscope.

The external SC and CN shall remain connected, despite not having a functional impact on the HDX frequency measurements.

7.5 Test conditions

The test conditions shall be as follows.

Ambient temperature: minimum 15 °C and maximum 30 °C

Ambient humidity: minimum 40 % RH and maximum 80 % RH

Ambient noise floor: <70 dB μ V/m (bandwidth 2,7 kHz)
80 kHz to 200 kHz

The ambient noise is measured with a spectrum analyser and calibrated antenna in 80 kHz to 200 kHz band before measurements. Special attention shall be given to spurious emissions, which can be emitted, for example, by insufficiently shielded computer monitors. The electromagnetic test conditions of the measurements shall be checked by carrying out the measurements both with and without a transponder in the field.

7.6 Tests

7.6.1 General

For a complete characterization of the TUT, perform all the tests. The transmitting pattern shall be generated in accordance with ISO 11785. The time sequence shall be such that the magnetic field is activated for a period of 50 ms, followed by a magnetic field interruption of 20 ms. See [Figure 8](#).


7.6.2 Transponder orientation

The system has been designed so that minor positioning errors shall not influence the measurements results. Nevertheless, in order to obtain reproducible measurements, the transponder position has to be well defined:

- in the case of an air-coil transponder, its orientation shall be parallel to the transmitting antenna plane;
- in the case of a ferrite-coil transponder, its orientation shall be perpendicular to the transmitting antenna plane.

See [Figure 4](#).

Values in milliseconds

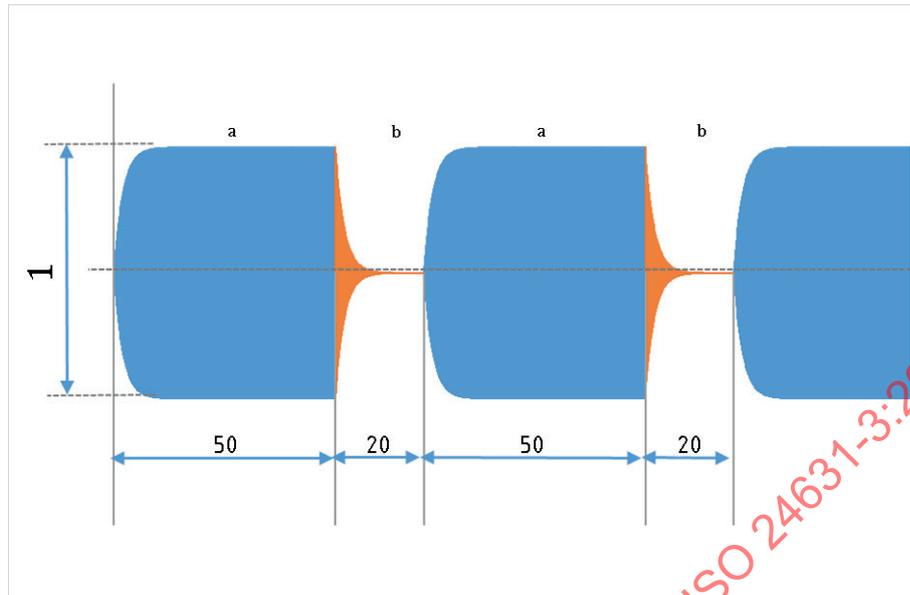**Key**

- 1 activation field
- a Field ON.
- b Field OFF.

Figure 8 — Magnetic field activation sequence**7.6.3 Constant magnetic field nulling**

The purpose of this test is to compensate for all mechanical and electrical mismatches of the measurement antenna configuration. It is necessary to use and adjust the CN prior to measurement in order to obtain the minimal noise level measured using the oscilloscope. The procedure, as follows, shall be repeated before each measurement series or after each mechanical intervention, equipment change or test location change.

- a) Check all interconnections and switch on all equipment.
- b) Set the waveform generator to product a 134,2 kHz continuous sine wave.
- c) Set the antenna current to obtain a magnetic field strength of 2 A/m.
- d) Adjust the potentiometer (P1) to obtain the minimal voltage noise measured on the oscilloscope (for FDX-B).
- e) Set the antenna current to obtain a magnetic field strength of 0,2 A/m.
- f) Measure the voltage noise with the oscilloscope.
- g) Set the antenna current to obtain a magnetic field strength of 20 A/m.
- h) Measure the voltage noise with the oscilloscope.
- i) If measurements f) and h) show more than 10 %, recheck the measurement configuration setup both mechanically and electrically.
- j) Record the following for each measurement:
 - 1) test type residual noise level;

- | | |
|--------------------------------------|----------------------------|
| 2) magnetic field value | 0,2 A/m, 2 A/m and 20 A/m; |
| 3) waveform generator frequency | in kilohertz; |
| 4) RMS noise level | in millivolts; |
| 5) ambient temperature | in degrees Celsius; |
| 6) ambient humidity (relative value) | as a percentage. |

7.6.4 Minimal activating magnetic field strength in FDX-B mode

The purpose of this test is to determine the minimal magnetic field strength values for which the transponder will transmit a complete valid data sequence. It is necessary that the oscilloscope data be processed by the PC so that the identification code can be read out from the received data stream. The code has to be complete and checked against the CRC information, then sent inside a time window corresponding to the theoretical maximal acceptable [(30,52 ± 0,03) ms, in step e), of the following procedure].

- a) Check that the constant magnetic field nulling procedure (see 7.6.3) has been carried out.
- b) Set the waveform generator to 134,2 kHz and generate an interrogation pattern in accordance with ISO 11785.
- c) Set the antenna current to 1 mA.
- d) Record the voltage pattern measured on the CN with the oscilloscope over 100 ms.
- e) Process the data stream to extract the identification code, which shall be sent inside a time window of (30,52 ± 0,03) ms.
- f) If the identification code has not been extracted, repeat 1) to 3) until it has been extracted.
 - 1) Increase the antenna current by 1 mA.
 - 2) Record the voltage pattern measured on the CN with the oscilloscope over 30,52 ms;
 - 3) Process the data stream to extract the identification code, which has to be sent inside the time window of (30,52 ± 0,03) ms.
- g) If the identification code has been extracted, calculate the corresponding magnetic field strength value.
- h) Record the identification code and its corresponding minimal activating magnetic field strength.
- i) Record the following for each measurement:

1) test type	minimal activating magnetic field strength in FDX-B mode;
2) waveform generator frequency	in kilohertz;
3) identification code;	
4) minimal activating magnetic field value	in amperes per metre;
5) ambient temperature	in degrees Celsius;
6) ambient humidity (relative value)	as a percentage.

7.6.5 Minimal activating magnetic field strength in HDX mode

The purpose of this test is to define the minimal magnetic field strength values for which the transponder transmits a complete valid data sequence. It is necessary that the oscilloscope data be processed by the PC in such a way that the identification code can be read out from the received data stream. The code has to be complete and checked against the CRC information, then sent inside a time window corresponding to the theoretical maximal acceptable [20 ms, in step d) of the following procedure].

- a) Set the waveform generator to 134,2 kHz and generate an interrogation pattern for HDX in accordance with ISO 11785.
- b) Set the antenna current to 1 mA.
- c) Record the voltage pattern measured on the HSC with the oscilloscope over 20 ms.
- d) Process the data stream to extract the identification code, which shall be sent inside a time window of 20 ms.
- e) If the identification code has not been extracted, increase the antenna current by 1 mA and repeat steps c) and d).
- f) Record the identification code and its corresponding minimal activating magnetic field strength.
- g) Record the following for each measurement:
 - 1) test type minimal activating magnetic field strength in HDX mode;
 - 2) waveform generator frequency in kilohertz;
 - 3) identification code;
 - 4) minimal activating magnetic field value in amperes per metre;
 - 5) ambient temperature in degrees Celsius;
 - 6) ambient humidity (relative value) as a percentage.

7.6.6 Modulation amplitude in FDX-B mode

The purpose of this test is to determine the transponder's modulation amplitude from the minimal activating field strength value up to a magnetic field strength value of 50 A/m. It is necessary that the oscilloscope data be processed by the PC such that both the high and low voltage levels of the received data stream can be defined. To obtain a more stable value, the transition period between the high and low level or the reverse should not be considered (see Figure 9), so that for calculation purposes the four clock frequency cycles after any transition are removed. The final value has to consider five low and five high level bit patterns representing a logical "1" [step d) of the following procedure].


Calculate the high and low level (U_{high} and U_{low}) values using [Formulae \(2\)](#) and [\(3\)](#), respectively:

$$U_{high} = \frac{\sum_{bit1}^{bit5} \frac{\sum_{cycle5}^{cycle24} U_{high_pp_cycle}}{20}}{5} \tag{2}$$

where $U_{high_pp_cycle}$ is the high voltage level peak-to-peak value of one cycle.

$$U_{low} = \frac{\sum_{bit1}^{bit5} \frac{\sum_{cycle5}^{cycle24} U_{low_pp_cycle}}{20}}{5} \tag{3}$$

where $U_{low_pp_cycle}$ is the high voltage level peak-to-peak value of one cycle.

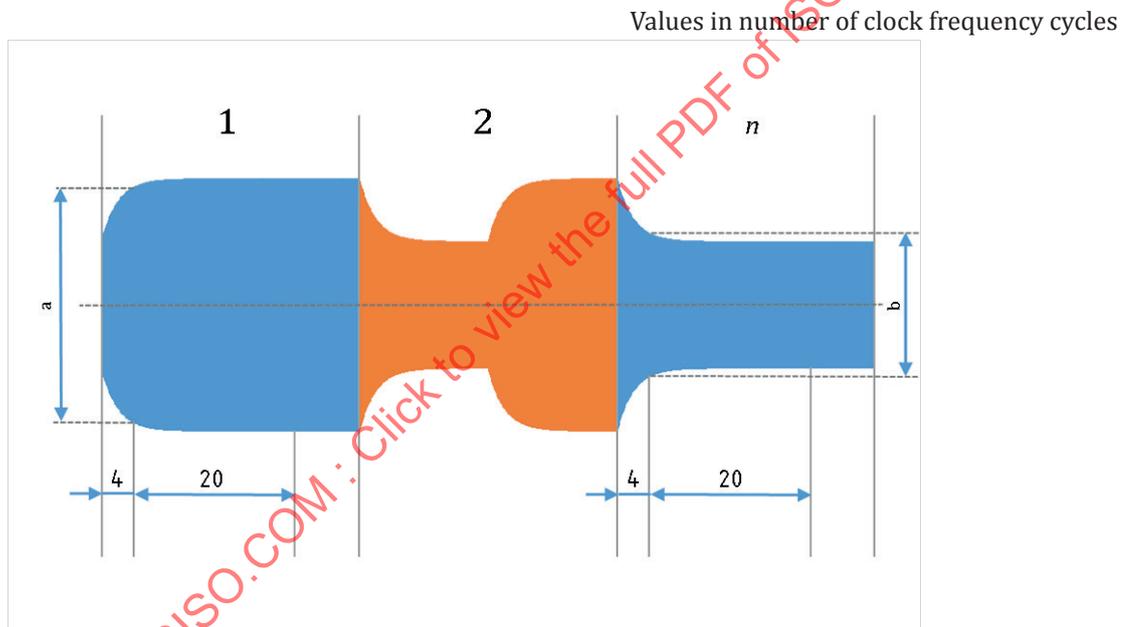

- Key**
- 1 bit 1 (1)
 - 2 bit 2 (0)
 - n bit n (1)
 - a High level average.
 - b Low level average.

Figure 9 — Cycles used to calculate FDX-B modulation amplitude

- a) Check that the constant magnetic field nulling procedure (see [7.6.3](#)) has been carried out.
- b) Set the waveform generator to 134,2 kHz and generate an interrogation pattern in accordance with ISO 11785.
- c) Set the antenna current to obtain the minimal activating magnetic field strength.
- d) Record the voltage pattern measured on the CN with the oscilloscope over five low and five high level bit patterns representing a logical “1”.

- e) Process the data stream to extract the U_{high} and U_{low} values.
- f) Calculate the modulation amplitude of the FDX-B transponder, $U_{\text{MA_FDX}}$, at the corresponding magnetic field strength: $U_{\text{MA_FDX}} = U_{\text{high}} - U_{\text{low}}$.
- g) Create a result table in accordance with [Table 2](#) as well as a graphical presentation of the results.

Table 2 — FDX-B modulation amplitude measurement results

Magnetic field strength A/m	U_{high}	U_{low} V	$U_{\text{MA_FDX}}$
Minimal activating value	X	Y	X-Y
...
50	R	S	R-S

- h) Increase the magnetic field strength by 10 measuring points per decade and repeat the measurement until the table is completed.
- i) Record the following for each measurement:
- 1) test type modulation amplitude in FDX-B mode ;
 - 2) waveform generator frequency in kilohertz;
 - 3) identification code;
 - 4) magnetic field value in amperes per metre;
 - 5) U_{high} in volts;
 - 6) U_{low} in volts;
 - 7) $U_{\text{MA_FDX}}$ in volts;
 - 8) results table as per [Table 2](#);
 - 9) graphic representation of results similar to [Figure 12](#);
 - 10) ambient temperature in degrees Celsius;
 - 11) ambient humidity (relative value) as a percentage.


7.6.7 Modulation amplitude in HDX mode

The purpose of this test is to determine the transponder's modulation amplitude from the minimal activating field strength value up to a magnetic field strength value of 50 A/m. It is necessary that the oscilloscope data be processed by the PC such that the voltage level of the received data stream can be defined. The final value has to consider 10 consecutive bits starting 10 ms after the start of the header [see [Figure 10](#) and step c) of the following procedure]. Calculate the high voltage level (U_{high}) value using [Formula \(4\)](#):

$$U_{\text{high}} = \frac{\sum_{\text{bit1}}^{\text{bit10}} \frac{\sum_{\text{cycle5}}^{\text{cycle16}} U_{\text{high_pp_cycle}}}{12}}{10} \quad (4)$$

where $U_{\text{high_pp_cycle}}$ is the high voltage level peak-to-peak value of one cycle.

Values in number of clock frequency cycles

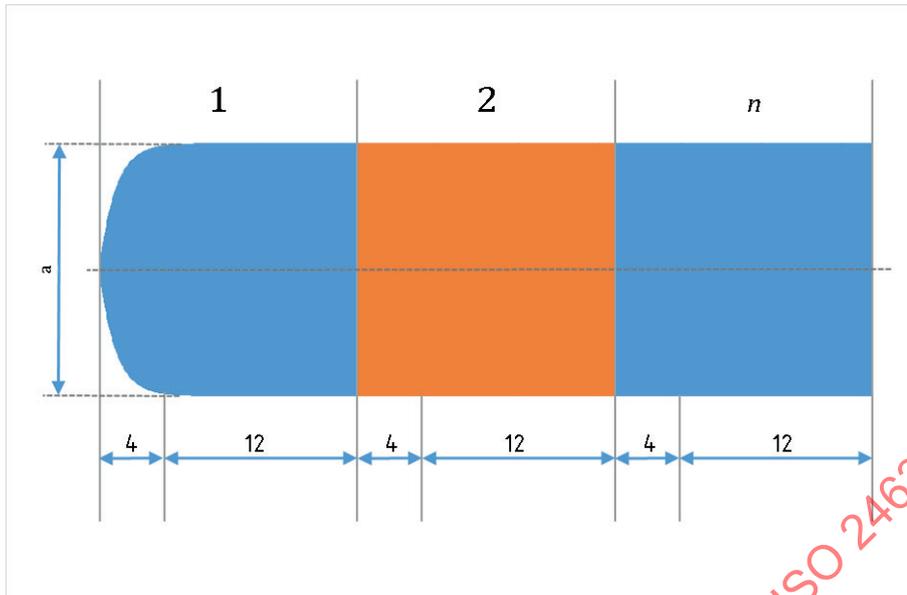

Key

- 1 bit 1 (1)
- 2 bit 2 (0)
- n bit n (1)
- a High level average.

Figure 10 — Cycles used to calculate HDX modulation amplitude

- a) Set the waveform generator to 134,2 kHz and generate an interrogation pattern in accordance with ISO 11785.
- b) Set the antenna current to obtain the minimal activating magnetic field strength.
- c) Record the voltage pattern measured on the HSC with the oscilloscope over 10 consecutive bits following 10 ms after the rising edge of the starting byte.
- d) Process the data stream to extract the U_{high} value.
- e) Calculate the modulation amplitude of the HDX transponder, U_{MA_HDX} , at the corresponding magnetic field strength: $U_{MA_HDX} = U_{high}$
- f) Create a result table in accordance with Table 3 as well as a graphical presentation of the results.

Table 3 — HDX modulation amplitude measurement results

Magnetic field strength A/m	U_{MA_HDX} V
Minimal activating value	X
...	...
50	R

- g) Increase the magnetic field strength by 10 measuring points per decade and repeat the measurement until the table is completed.
- h) Record the following for each measurement:

- | | |
|---------------------------------------|--|
| 1) test type | modulation amplitude in HDX mode; |
| 2) waveform generator frequency | in kilohertz; |
| 3) identification code; | |
| 4) magnetic field value | in amperes per metre; |
| 5) U_{high} | in volts; |
| 6) $U_{\text{MA_HDX}}$ | in volts; |
| 7) results table | as per Table 3 ; |
| 8) graphic representation of results | similar to Figure 12 ; |
| 9) ambient temperature | in degrees Celsius; |
| 10) ambient humidity (relative value) | as a percentage. |

7.6.8 Bit length stability in FDX-B mode


The purpose of this test is to determine the stability of the individual bit length. This value is related to the standard deviation of the time needed for transmitting 1 bit of information. The value depends on the magnetic field strength and therefore shall be measured from the minimal activating field strength value up to a magnetic field strength value of 50 A/m. It is necessary that the oscilloscope data be processed by the PC so that the bit length time can be defined [see [Figure 11](#) and step e) of the following procedure]. The bit length time, as well as its related stability, are defined at 50 % modulation level and over 128 consecutive bits [step d) below]. The average bit length ($\text{bit}_{\text{length}}$) and the bit stability ($\text{bit}_{\text{stability}}$), expressed in microseconds (μs), are calculated [step f) below] using [Formulae \(5\)](#) and [\(6\)](#), respectively:

$$\text{bit}_{\text{length}} = \frac{\sum_{\text{bit } n=1}^{\text{bit } 128} \text{bit}_{\text{length}_n}}{128} \quad (5)$$

where $\text{bit}_{\text{length}_n}$ is the length of one bit.

$$\text{bit}_{\text{stability}} = 3 \sqrt{\frac{\sum_{\text{bit } n=1}^{\text{bit } 128} (\text{bit}_{\text{length}_n} - \text{bit}_{\text{length}})^2}{n-1}} \quad (6)$$

where n is the number of bits.

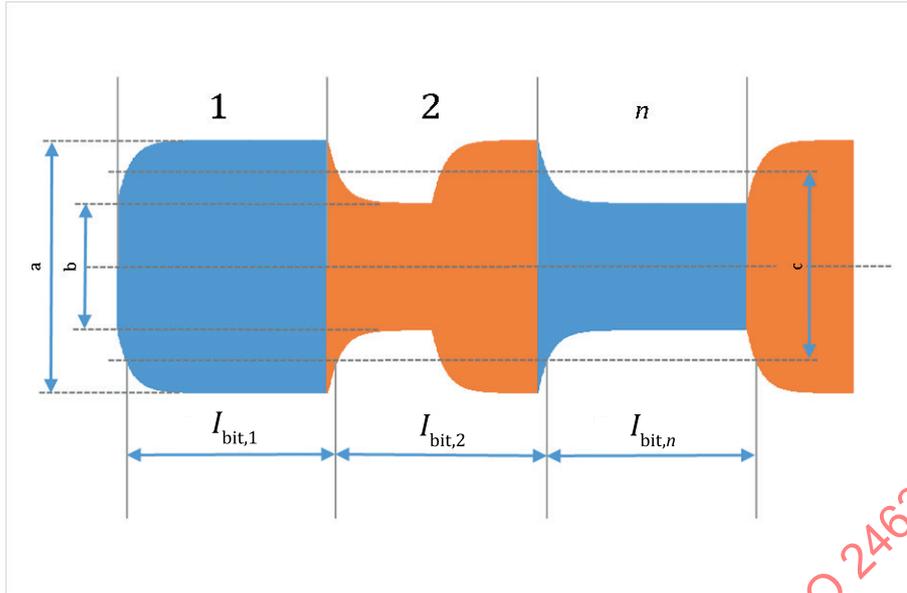

- Key**
- 1 bit 1 (1)
 - 2 bit 2 (0)
 - n* bit *n* (1)
 - $I_{bit,1}$ length of bit 1, μs
 - $I_{bit,2}$ length of bit 2, μs
 - $I_{bit,n}$ length of bit *n*, μs
 - a* High level average.
 - b* Low level average.
 - c* 50 % modulation level.


Figure 11 — Bit length measurement — FDX-B

- a) Check that the constant magnetic field nulling procedure (see 7.6.3) has been carried out.
- b) Set the waveform generator to 134,2 kHz.
- c) Set the antenna current to obtain the minimal activating magnetic field strength.
- d) Record the voltage pattern measured on the CN with the oscilloscope over 128 consecutive bits.
- e) Process the data stream to extract each single bit length, $I_{bit,n}$.
- f) Calculate the average bit length, I_{bit} , and bit stability, S_{bit} , expressed in microseconds (μs) at the corresponding magnetic field strength.
- g) Create a result table in accordance with Table 4, as well as a graphical presentation of the results.

Table 4 — Bit length stability measurement results — FDX-B

Magnetic field strength A/m	I_{bit} μs	S_{bit}
Minimal activating value	X	Y
...
50	R	S

- h) Increase the magnetic field strength by five measuring points per decade and repeat the measurement until the table is completed.
- i) Record the following for each measurement:
- | | |
|---------------------------------------|--|
| 1) test type | bit length stability; |
| 2) waveform generator frequency | in kilohertz; |
| 3) identification code; | |
| 4) magnetic field value | in amperes per metre; |
| 5) single bit length, $I_{bit,n}$ | in microseconds; |
| 6) average bit length, I_{bit} | in microseconds; |
| 7) bit stability | in microseconds; |
| 8) results table | as per Table 4 ; |
| 9) graphic representation of results | similar to Figure 12 ; |
| 10) ambient temperature | in degrees Celsius; |
| 11) ambient humidity (relative value) | as a percentage. |

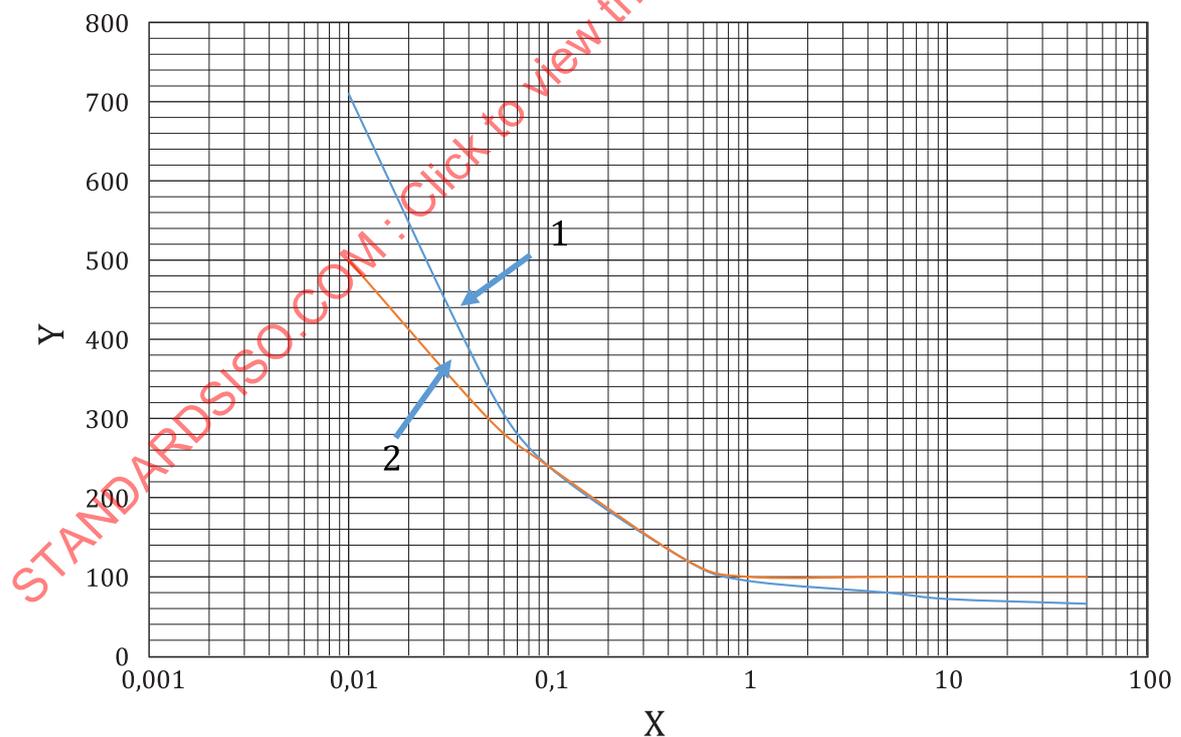

Key

- X magnetic field strength, A/m
- Y bit stability (s_{bit}), μs
- 1 TUT 1
- 2 TUT 2

Figure 12 — Bit length stability versus magnetic field strength — FDX-B

7.6.9 Frequency stability in HDX mode

The purpose of this test is to determine the frequency stability of the bit representing frequencies. This value is related to the deviation of the frequency representing the time needed to transmit 1 bit of information. The value does not depend on the magnetic field strength and therefore shall be measured at the minimal activating field strength value and, if needed for verification, at a number of additional magnetic field strength values. It is necessary that the oscilloscope data be processed by the PC. The bit length time is measured based on the duration of the 16 cycles of the corresponding bit frequency (see Figure 13). The bit frequency value and its related stability are defined over the 94 bits from the rising edge of the start byte to the falling edge of the end byte [step c) of the following procedure]. Measure both return frequencies and compare them with the standard using Formulae (7) and (8):

$$f_1 = \frac{\sum_{\text{bit } n=1}^{\text{bit } 94} \frac{\sum_{\text{cycle } m=1}^{\text{cycle } 16} f_{1_m}}{16}}{n_{f_1}} \tag{7}$$

where

- f_1 is the average frequency of logical “1” bits, in hertz;
- f_{1_m} is the frequency of one cycle of a logical “1” bit, in hertz;
- n_{f_1} is the number of logical “1” bits.

$$f_0 = \frac{\sum_{\text{bit } n=1}^{\text{bit } 94} \frac{\sum_{\text{cycle } m=1}^{\text{cycle } 16} f_{0_m}}{16}}{n_{f_0}} \tag{8}$$

where

- f_0 is the average frequency of logical “0” bits, in hertz;
- f_{0_m} is the frequency of one cycle of a logical “0” bit, in hertz;
- n_{f_0} is the number of logical “0” bits.