

Second edition  
2005-08-01

AMENDMENT 5  
2006-08-15

IEEE Std 802.11h-2003  
(Amendment to  
IEEE Std 802.11-1999)

---

---

**Information technology —  
Telecommunications and information  
exchange between systems — Local and  
metropolitan area networks — Specific  
requirements —**

Part 11:  
**Wireless LAN Medium Access Control  
(MAC) and Physical Layer (PHY)  
specifications**

**AMENDMENT 5: Spectrum and Transmit  
Power Management Extensions in the  
5 GHz band in Europe**

*Technologies de l'information — Télécommunications et échange  
d'information entre systèmes — Réseaux locaux et métropolitains —  
Exigences spécifiques*

*Partie 11: Spécifications pour le contrôle d'accès au support et la  
couche physique*

*AMENDEMENT 5: Extensions de gestion de spectre et de puissance à  
l'émission dans la bande de 5 GHz en Europe*

**ISO/IEC 8802-11:2005/Amd.5:2006(E)**  
**IEEE Std 802.11h-2003**  
**(Amendment to IEEE Std 802.11-1999)**

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8802-11:2005/Amd 5:2006

ISO

Case postale 56 • CH-1211 Geneva 20

Tel. + 41 22 749 01 11

Fax + 41 22 749 09 47

E-mail [copyright@iso.org](mailto:copyright@iso.org)

IEEE Std 802.11h™-2003

(Amendment to IEEE Std 802.11™, 1999 Edition (Reaff 2003),  
as amended by  
IEEE Stds 802.11a™-1999, 802.11b™-1999,  
802.11b™-1999/Cor 1-2001, 802.11d™-2001,  
and 802.11g™-2003)

# 802.11h™

**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless LAN Medium Access Control  
(MAC) and Physical Layer (PHY) specifications**

**Amendment 5: Spectrum and Transmit Power  
Management Extensions in the 5 GHz band in  
Europe**

**IEEE Computer Society**

Sponsored by the  
LAN/MAN Standards Committee

This amendment is an approved IEEE  
Standard. It will be incorporated into the  
base standard in a future edition.



Published by  
The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

14 October 2003

Print: SH95172  
PDF: SS95172

Recognized as an  
American National Standard (ANSI)

**IEEE Std 802.11h™-2003**  
(Amendment to IEEE Std 802.11™, 1999 Edition (Reaff 2003),  
as amended by  
IEEE Stds 802.11a™-1999, 802.11b™-1999,  
802.11b™-1999/Cor 1-2001, 802.11d™-2001,  
and 802.11g™-2003)

**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless Medium Access Control (MAC)  
and Physical Layer (PHY) specifications:**

**Amendment 5: Spectrum and transmit power  
management extensions in the 5 GHz band in  
Europe**

Sponsor  
**LAN/MAN Committee**  
of the  
**IEEE Computer Society**

Approved 29 December 2003  
**American National Standard Institute**

Approved 11 September 2003  
**IEEE-SA Standards Board**

**Abstract:** This amendment specifies the extensions to IEEE 802.11™ for wireless local area networks (WLANs) providing mechanisms for dynamic frequency selection (DFS) and transmit power control (TPC) that may be used to satisfy regulatory requirements for operation in the 5 GHz band in Europe.

**Keywords:** dynamic frequency selection (DFS), local area network (LAN), transmit power control (TPC)

The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2003 by the Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 14 October 2003. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by the Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 0-7381-3818-5 SH95172  
PDF: ISBN 0-7381-3819-3 SS95172

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

## **International Standard ISO/IEC 8802-11:2005/Amd.5:2006(E)**

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 5 to ISO/IEC 8802-11:2005 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.



**IEEE Standards** documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Use of an IEEE Standard is wholly voluntary. The IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon this, or any other IEEE Standard document.

The IEEE does not warrant or represent the accuracy or content of the material contained herein, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained herein is free from patent infringement. IEEE Standards documents are supplied "AS IS."

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation. When a document is more than five years old and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

In publishing and making this document available, the IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is the IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing this, and any other IEEE Standards document, should rely upon the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE-SA Standards Board  
445 Hoes Lane  
P.O. Box 1331  
Piscataway, NJ 08855-1331  
USA

Note: Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.

Authorization to photocopy portions of any individual standard for internal or personal use is granted by the Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

## Introduction

(This introduction is not part of IEEE 802.11h-2003, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements—Part 11: Wireless Medium Access Control (MAC) and Physical Layer (PHY) specifications: Amendment # 5: Spectrum and Transmit Power Management Extensions in the 5 GHz band in Europe.)

## IEEE Std 802.11h-2003

IEEE Std 802.11h-2003 provides mechanisms for dynamic frequency selection (DFS) and transmit power control (TPC) that may be used to satisfy regulatory requirements for operation in the 5 GHz band in Europe.

## Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention. A patent holder has filed a statement of assurance that it will grant licenses under these rights without compensation or under reasonable rates and nondiscriminatory, reasonable terms and conditions to all applicants desiring to obtain such licenses. The IEEE makes no representation as to the reasonableness of rates and/or terms and conditions of the license agreements offered by patent holders. Further information may be obtained from the IEEE Standards Department.

## Interpretations and errata

Interpretations and errata associated with this amendment may be found at one of the following Internet locations:

- <http://standards.ieee.org/reading/ieee/interp/>
- <http://standards.ieee.org/reading/ieee/updates/errata/>

## Participants

When the IEEE 802.11 Working Group approved this amendment, it had the following membership:

**Stuart J. Kerry**, *Chair*

**Al Petrick** and **Harry R. Worstell**, *Vice-Chairs*

**Tim Godfrey**, *Secretary*

**Brian Mathews**, *Publicity Standing Committee*

**Teik-Kheong Tan**, *Wireless Next-Generation Standing Committee*

**John Fakatselis**, *Chair Task Group e*

**Duncan Kitchin**, *Vice-Chair Task Group e*

**David Bagby**, *Chair Task Group f*

**Matthew B. Shoemake**, *Chair Task Group g*

**David Halasz**, *Chair Task Group i*

When the IEEE 802.11 Working Group approved this amendment, the Task Group H had the following membership:

**Mika Kasslin**, *Chair*  
**Carl Temme**, *Study Group Chair*  
**Andrew Myles**, *Editor*  
**Evan Green**, *Secretary*

Steven Aafjes	Kevin M. Barry	Po-Lin Chiu
Osama Aboul-Magd	Charles R. Bartel	Sangsung Choi
Robert Achatz	Anuj Batra	Sunghyun Choi
Tomoko Adachi	Burak Baysal	Woo-Yong Choi
Hossam Afifi	Glenn R. Beckett	Ojas T. Choksi
Brian G. Agee	Tomer Bentzion	Per Christoffersson
Jae-Young Ahn	Mathilde Benveniste	Jim Christy
Hiroshi Akagi	Armen Berjikly	Mooi Chuah
Masaaki Akahane	Fred Berkowitz	Simon Chung
James Aldis	Brett Bernath	Simon Chun-Yu Chung
Thomas Alexander	Don Berry	Song Ci
Vali Ali	Jan Biermann	Frank Cotti
Areg Alimian	A. Mark Bilstad	Richard Clayton
James Allen	Bjorn Bjerke	Ken Clements
James G. Allen	Simon Black	John T. Coffey
Richard Allen	Dennis Bland	Terry Cole
Keith Amann	Jan Boer	Anthony Collins
Song H. An	James Bohac	Paul Congdon
Dov Andelman	Satish Bommareddy	Craig Conkling
Geoffrey T. Anderson	Herve Bonneville	Steven W. Conner
Merwyn Andrade	William M. Brasier	Dennis Connors
Carl F. Andren	Jennifer A Bray	Charles Cook
David C. Andrus	Jim Brennan	Todor Cooklev
Kofi Anim-Appiah	Jean-Claude Brien	Kenneth D. Cornett
Hidenori Aoki	Ronald Brockmann	Mary Cramer
Takashi Arakawa	Phillip Brownlee	William Crilly
Mitch Aramaki	Phillip Lynn Brownlee	Richard Cross
Takashi Aramaki	Alex Bugeja	Glen Crowder
William A. Arbaugh	Alistair G. Buttar	Steven Crowley
Larry Arnett	Pete Cain	Ramon Adriano Cruz
Hiroshi Asai	Richard Cam	Terence J. Cummings
Brian G. Asee	Nancy Cam-Winget	Anand Dabak
Mehdi Asgharzadeh	Bill Carney	Nora Dabbous
Naiel Askar	Pat Carson	William Dai
Arthur Astrin	Broady Cash	Bipin D. Dama
Malik Audeh	Michael Cave	Thomas V. D'Amico
Geert A. Awater	Anthony Caviglia	Khamphuc Daulasim
Ender Ayanoglu	Kiran Challiarali	Barry Davis
Shahrmaz Azizi	Ginny Chan	Rolf De Vegt
Floyd Backes	Jayant Chande	Javier del Prado
Jin-Seok Bae	Eugene Chang	Udi Delgoshen
David Bagby	Jeffrey Chang	Karl L. Denninghoff
Venkat Bahl	Kisoo Chang	Darryl Denton
Jay Bain	Shue-Lee Chang	Michael Derby
Dennis J. Baker	Chi-Chao Chao	Richard DeSalvo
Bala Balachander	Clint Chaplin	Jimmy H. Dho
John Balian	Hung-Kun Chen	Wim Diepstraten
Raja Banerjea	Jay Jui-Chieh Chen	Lakshminath Dondeti
Boyd Bangerter	Ye Chen	Bob Donnan
Simon Barber	Yi-Ming Chen	Glenn Dooley
Thomas Barber	Hong Cheng	Bretton Lee Douglas
Farooq Bari	Greg Chesson	Alon Drory
Sina Barkeshli	Lieshu Chiang	Simon John Duggins
Michael Barkway	Alan Chickinsky	Baris B. Dundar
David Barr	Francois Po_Shin Chin	Larry Dunn
John Barr	Aik Chindapol	Roger Durand

Eryk Dutkiewicz  
Mary DuVal  
Donald E. Eastlake III  
Dennis Eaton  
Peter Ecclesine  
Brian S. Edmonston  
Jon Edney  
Jack Ehrhardt  
Jan Eiliger  
Natrajan Ekambaram  
Jason L. Ellis  
Darwin Engwer  
Greg Ennis  
Frederick Enns  
Guy Erb  
Vinko Erceg  
Randal L. Erman  
Noam Eshel  
Javier Espinoza  
Steven Ettles  
Christoph Euscher  
John Fakatselis  
Lars Falk  
Rainer Falk  
Steve Fantaske  
Charles S. Farlow  
Augustin J. Farrugia  
Alex Feldman  
Weishi Feng  
Andres Fernstedt  
Nestor Fesas  
Gerhard Fettweis  
Mark W. Fidler  
Norm Finn  
Matthew James Fischer  
Tom Flaherty  
Jeff R. Foerster  
Brian Forde  
Ruben Formoso  
David Fotland  
Sheila E. Frankel  
Martin Freedman  
David Fridley  
Michael Froning  
Taketo Fukui  
Shinya Fukuoka  
John Nels Fuller  
Marcus Gahler  
Gilles Ganault  
Rodrigo Garcés  
James Gardner  
Atul Garg  
Sanchin Garg  
Al Garrett  
Michael Genossar  
Noam Geri  
Vafa Ghazi  
Monisha Ghosh  
Ian Gifford  
James Gilb  
Jeffrey Gilbert  
Bindu Gill  
Tim Godfrey

Yan Siang Goh  
Wataru Gohda  
Peter Goidas  
Patrick S. Gonia  
Jim Goodman  
Gilbert Goodwill  
Yuval Goren  
Alex Gorokhov  
Andrew J. Gowans  
Rik Graulus  
Martin Gravenstein  
Gordon Gray  
William H. Gray  
John Green  
Larry Green  
Michael Green  
Patrick Green  
Kerry Greer  
John Griesing  
Daqing Gu  
Srikanth Gummadi  
Ajay Gummalla  
Qiang Guo  
Bert Gyselinck  
Dongwoon Hahn  
Fred Haisch  
David Halasz  
Steve D. Halford  
Robert J Hall  
Neil Hamady  
Rabah Hamdi  
Mark Hamilton  
Robert E Hancock  
Christopher J. Hansen  
Yasuo Harada  
Thomas Hardjono  
Daniel N. Harkins  
Thomas Haslestad  
Amer A. Hassan  
Vann Hasty  
James P. Hauser  
Yutaka Hayakawa  
Morihiro Hayashi  
Ryoji Hayashi  
Kevin Hayes  
Victor Hayes  
Haixiang He  
Xiaoning He  
Robert Heile  
Richard Hibbard  
Gerrit Hiddink  
Dan Hilberman  
Garth Hillman  
Christopher Hinsz  
Jun Hirano  
Mikael Hjelm  
Jin-Meng Ho  
James Hobza  
Maarten Hoeben  
Michael Hoghooghi  
Allen Hollister  
Keith Holt  
Satoru Hori  
William Horne

Srinath Hosur  
Russell Housley  
Frank P Howley, Jr  
Chin-Yu Hsu  
Dave Hudak  
John Hughes  
Grant Hulse  
Ronald Hunt  
David Hunter  
Keith Huntington  
Chuck Hwang  
Eon Hwang  
Gyung Ho Hwang  
Hyosun Hwang  
Syang-Myau Hwang  
David Hytha  
Young Guen Hyun  
Hiroshi Ide  
L. V. Jagannatha  
Ho-In Jeon  
Tachyun Jeon  
Young-Sik Jeon  
Moo Ryong Jeong  
De Ji  
Habetha Joerg  
Henric A. Johnson  
Walter Johnson  
Cesar Augusto Johnston  
David Johnston  
Jari Jokela  
Doug Jones  
V. K. Jones  
Bobby Jose  
Tyan-Shu Jou  
Seiji Kachi  
Daryl Kaiser  
Srinivas Kandala  
You Kang  
You Sung Kang  
Martin Kappes  
Isuke Karaki  
Jeyhan Karaoguz  
Kevin Karcz  
Jaime E. Kardontchik  
Murat Karsi  
Scoff Kasin  
Srinivas Katar  
Yasuhiro Katsube  
Eiji Kawase  
Khurram Kazi  
Kris Kelkar  
Joy H. Kelly  
Patrick Kelly  
Richard Kennedy  
Nick Kerry  
Stuart J. Kerry  
Vyatas Kezys  
Andrew K. Khieu  
Jamshid Khun-Jush  
Poh Boon Kiat  
Ryoji Kido  
Byoung-Jo Kim  
Daeik Kim  
Dongkyu Kim

Dooseok Kim  
Dukhyun Kim  
Edward Kim  
Hyung-Jin Kim  
Je Woo Kim  
Joonsuk Kim  
Myoung Soo Kim  
Steve Kim  
Sunny Kim  
Yongbum Kim  
Yong-Sun Kim  
Young Kim  
Young Hwan Kim  
Young-Ju Kim  
Young-soo Kim  
Ziv Kimhi  
Kursat Kimyacioglu  
Eric J. King  
Wayne King  
Duncan Kitchin  
Günter Kleindl  
Mark Klerer  
Kevin Klesenski  
Cees Klik  
David Kline  
Julius Knapp  
Toshiya Kobashi  
Srinivasa Kocherla  
Blaine Kohl  
Philip S. Kossin  
Lalit Kotecha  
John M. Kowalski  
Bruce P. Kraemer  
Gopal Krishnan  
Thomas Kuehnel  
Sandeep Kumar  
Yutaka Kuno  
Bill Kunz  
Masahiro Kuroda  
Denis Kuwahara  
Dong-hoon Kwak  
Joe Kwak  
ChangYeul Kwon  
Oh Sang Kwon  
Paul A. Lambert  
Kevin Lan  
David S. Landeta  
John B. Langley  
Jim Lansford  
Colin Lanzl  
Kim Laraqui  
Jon LaRosa  
Choi Law  
Lionel Le Scolan  
David J. Leach, Jr.  
Chun Lee  
Dongjun Lee  
Hyeon-Jae Lee  
Insun Lee  
Jay Hwa Lee  
K. C. Lee  
Kab Joo Lee  
Ki-Cheol Lee  
Myung Jong Lee

Nag Yeon Lee  
Richard van Leeuwen  
Martin Lefkowitz  
Uriel Lemberger  
Jean Luc Lemberg  
Onno Letanche  
Shmuel Levy  
Mike Lewis  
Liang Li  
Pen Li  
Quinn Li  
Sheung Li  
Jie Liang  
John Liebetreu  
Daniel B. Lieman  
Peter J. Ligertwood  
Jae-Woo Lim  
Yong Je Lim  
Isaac Lim Wei Lih  
Huai-An Lin  
Huashih A. Lin  
Sheng Lin  
Victor Chiwu Lin  
Stanley Ling  
Titus Lo  
Manuel Lobeira  
Peter Loc  
Patrick Lopez  
Fernando López-de-Victoria  
Hui-Ling Lou  
Marc Loutrel  
Willie Lu  
Xiaolin Lu  
David Lucia  
Luke Ludeman  
Hui Luo  
Yeong-Chang Maa  
Takuji Maekawa  
Akira Maeki  
Osamu Maeshima  
Mats Erik Magnusson  
Tom M. Mahoney  
Douglas Makishima  
Tim Maleck  
Majid Malek  
Jouni Kalevi Malinen  
Krishna Malladi  
Alexander A. Maltsev  
Stefan Mangold  
Mahalingam Mani  
Shrikant Manivannan  
Paul Mantilla  
Bob Mapes  
Jonn Martell  
Naotaka Maruyama  
Paul Marzec  
Ralph Mason  
Brian Mathews  
Jo-Ellen F. Mathews  
Mark Mathews  
Noriaki Matsuno  
Sudheer Matta  
Thomas Maufer  
Conrad Maxwell

Michael McLaughlin  
Justin McCann  
Stephen McCann  
Kelly McClellan  
Gary McCoy  
Bill McFarland  
Gary McGarr  
Timothy McGovern  
Michael D. McInnis  
Bill McIntosh  
James Mclean  
Frank McLinn  
Justin P. McNew  
Jorge Medina  
Michael Medina  
Mehul Mehta  
Pratik Mehta  
Robert C. Meier  
Graham Melville  
Klaus Meyer  
David G. Michelson  
Scott F Migaldi  
Leonard E Miller  
Robert Miller  
Reiner Mim  
Masahiro Mimura  
Ral Xiao Min  
Julian E. Minard  
Lin Tzu Ming  
Vinod R Mirchandani  
Partho Mishra  
David James Mitton  
Shunji Miura  
Fanny Mlinarsky  
Sachin Mody  
Sanjay Moghe  
Behzad Mohebbi  
Rishi Mohindra  
Bryan Jeffery Moles  
James Mollenauer  
Peter R. Molnar  
Anton Monk  
Leo Monteban  
Michael Montemurro  
Jae Moon  
Mike Moreton  
Yuichi Morioka  
Roy Morris  
Robert Moskowitz  
Oliver Muelhens  
Joe Mueller  
Michael Mueller  
Takeshi Murakami  
Peter Murphy  
Boyd Murray  
Peter Murray  
Guruprasad I Naik  
Ravi Narasimhan  
Panos E. Nastou  
Nersi Nazari  
Slobodan Nedic

Kevin Negus  
Robert J. Neilsen  
Bahva Nelakanti  
David B. Nelson  
Dan Nemits  
Chiu Ngo  
Terry Ngo  
Tuan Nguyen  
Qiang Ni  
Kazuaki Nimura  
Toshi Nishida  
Gunnar Nitsche  
Puthiya Nizar  
Erwin R. Noble  
Hiroshi Nomura  
Tzvetan D. Novkov  
Ivan Oakes  
Kei Obara  
Hideaki Odadgiri  
Paul Odlyzko  
Karen O'Donoghue  
Bob O'Hara  
Yoshihiro Ohtani  
Eric J. Ojard  
Kazuhiro Okanoue  
Dean E. Oliver  
Kim J. Olsiewski  
Chandra S. Olson  
Tim Olson  
Takeshi Onizawa  
Lior Ophir  
Ian Oppermann  
Toshikuni Osogoe  
Richard H. Paine  
Mike Paljug  
Stephen R. Palm  
Carl Panasik  
Aleksandar Pance  
Subra Parameswaran  
John B. Pardee  
Jong Ae Park  
Jonghun Park  
Michael Park  
Seung-Keun Park  
Taegon Park  
Alan Parrish  
Glenn Parsons  
Dave Patton  
Jeff Paul  
Lizy Paul  
Eldad Perahia Perahia  
Sebastien Perrot  
Al Petrick  
James Everett Pigg  
Leo Pluswick  
Dennis Yu Kiu Pong  
Stephen Pope  
James Portaro  
Al Potter  
Satish Premanathan  
Mike Press  
Clifford Prettie  
James A. Proctor

Henry Ptasinski  
Hugo Pues  
Anuj Puri  
Aleksandar Purkovic  
Jim Raab  
Raad Raad  
Ali Raissinia  
Thierry Rakotoarivelo  
Murali Ramadoss  
Ravindra Ranasinghe  
Noman Rangwala  
Murli M Rao  
Yaron Rashi  
Gregg Rasor  
Kamlesh Rath  
Stephen G. Rayment  
Chakradher Reddy  
Ivan Reede  
Einan Regev  
John Regnier  
Stanley A. Reible  
Anthony Reid  
Joe Repice  
Danny Rettig  
Edward Reuss  
Valentine Joseph Rhodes  
Bill Rhyne  
David B. Ribner  
Mark Rich  
Jim Richards  
Terry Richards  
David Richkas  
Maximilian Riegel  
John Rinderknecht  
Carlos A. Rios  
Benno Ritter  
David Robak  
Randy Roberts  
Walt Roehr  
Hyun Suk Roh  
Benjamin Rolfe  
Kent G. Rollins  
Gregory Roman  
Stefan Rommer  
Gary Roosevelt  
Jon Rosdahl  
Pejman Roshan  
Brian Rosnov  
Philippe Rouzet  
Reinhard Ruckriem  
Mikael Rudberg  
Chandos Rypinski  
Michael J. Sabin  
Ali Sadri  
Shin Saito  
Katsumi Sakai  
Tetsu Sakata  
Shoji Sakurai  
Kenichi Sakusabe  
Antonio E. Salloum Salazar  
Janne Salmi  
Hemanth Sampath  
Yukitoshi Sanada  
Sumeet Sandhu

Sunny Sandhu  
John H. Santhoff  
Anil K. Sanwalka  
Nicholas J. Sargologos  
Shanuj Sarin  
Hideaki Sato  
Masatoshi Sato  
Takashi Sato  
John Sauer  
Kurt Sauter  
Hans G. Schantz  
Jerry Schoemann  
Sid Schrum  
Erik Schylander  
Thomas Scribner  
Michael Seals  
Joe Sensendorf  
Krishna Seshadri  
Caspar Settels  
Ankur Shah  
Nimish Shah  
N. K. Shankaranarayanan  
Sandeep K. Sharma  
S. Shelton  
Tamara Shelton  
Yangmin Shen  
Veronica Sherard  
Matthew Sherman  
Tamara Sophia Sheton  
Ming Sheu  
Masaaki Shida  
Shusaku Shimada  
Brian Byung-Cheol Shin  
Cheol ho Shin  
Junho Shin  
Daisuke Shinomiya  
Etan A. Shirron  
Guy Shochet  
Matthew B. Shoemake  
Lance Crispin Shrader  
William Shvodia  
Salvador Sibecas  
Michael Sim  
Sebastien Simoens  
Floyd Simpson  
Manoneet Singh  
Sandeep K. Singhal  
Hasse Sinivaara  
Stan Skafidas  
David Skellern  
Roger Ray Skidmore  
Donald I. Sloan  
Kevin Smart  
Andrew Smith  
David Smith  
Douglas A. Smith  
Wendell Smith  
Paul A. Snopko  
Yoram Solomon  
Ho-Kyung Son

Pyeong-Jung Song  
Wei-Jei Song  
Amjad Soomro  
Massimo Sorbara  
David F. Sorrells  
Essam Sourour  
Gary Spiess  
Manikantan Srinivasan  
Dorothy V. Stanley  
William K. Steck  
Greg Steele  
Adrian Stephens  
William M. Stevens  
Carl R. Stevenson  
Fred Stivers  
Warren E. Strand  
Paul F. Struhsaker  
Thomas W. Studwell  
Michael Su  
Yuhsiang Su  
Gary Sugar  
Hiroki Sugimoto  
Hajime Suzuki  
Hirokazu Tagiri  
Ehab Tahir  
Masahiro Takagi  
Mineo Takai  
Katsumi Takaoka  
Minoru Takemoto  
Nir Tal  
Tsuyoshi Tamaki  
Jasper Tan  
Pek-Yew Tan  
Teik-Kheong Tan  
Ming Tang  
Takuma Tanimoto  
Kenichi Taniuchi  
Mamoru Tashiro  
H. C. Taylor  
Larry Taylor  
Roger Teague  
Carl Temme  
John Terry  
Walter Thirion  
Kevin Thomaszios  
Lars E. Thon  
Peter Thornycroft  
Jerry A. Thrasher  
Yasuo Tobita  
Troy Tom  
James D. Tomcik  
David W. Trainor  
John Trick  
Jonathon Trostle

Walt Trzaskus  
Allen Tsai  
Joseph Tsai  
Jean Tsao  
Chih C. Tsien  
Tom Tsoulogiannis  
Kwei Tu  
Sandra Turner  
Stephen E. Turner  
Marcos Tzannes  
Tomoyuki Udagawa  
Takashi Ueda  
Toru Ueda  
Naoki Urano  
Hidemi Usuba  
Gary Vacon  
Chandra Vaidyanathan  
Harmen R. van As  
Hans van der Ven  
Niels Van Erven  
Wim J. van Houtum  
Richard van Nee  
Lamar Van Wagenen  
Patrick Vandenameele  
Sarah Elizabeth Vargas-Hurlston  
Dmitri Varsanofiev  
Narasimhan Venkatesh  
Jagannatha L. Venkatesha  
Madan Venugopal  
Ingrid Verbauwhede  
Sarosh Vesuna  
Fernando Victoria  
Bhupender Virk  
George Vlantis  
Nanci Vogtli  
Aleksey Voitovich  
Dennis Volpano  
Toan X. Vu  
Klaus Wacker  
Brian C. Wadell  
Tim Wakeley  
Jesse R. Walker  
Brad Wallace  
Thierry Walrant  
Vivek G. Wandile  
Chao-Chun Wang  
Joe Wang  
Stanley Wang  
Wheng Wang  
Christopher Ware  
Fujio Watanabe  
Katsumi Watanabe  
Yoshinori Watanabe  
Andrew Watts  
Mati Wax

Mark Webster  
Mathew Welborn  
Kimberly Welch  
Michael W. Wellman  
Menzo Wentink  
David A. Wheeler  
Robert Whelan  
Stephen R. Whitesell  
Douglas L. Whiting  
Michael Willhoyte  
Michael Glenn Williams  
Peter K. Williams  
Richard G. C. Williams  
Steven D. Williams  
Steven Wilson  
Christopher Wingert  
Jeffrey John Wojtiuk  
Jin Kue Wong  
Kensing Wong  
Timothy G. Wong  
Stephen R. Wood  
Edward G Woodrow  
Patrick A. Worfolk  
Harry Worstell  
Charles R. Wright  
Micheal Wright  
Frank Wu  
Gang Wu  
Liwen Wu  
Shyhtsun Wu  
Yang Xiao  
Sheng-Bo Xu  
Shugong Xu  
Steven Xu  
Hirohisa Yamaguchi  
James Chih-Shi Yee  
Jung Yee  
Kazim O. Yildiz  
Don Yonce  
Kit Yong  
Charles You  
Albert Young  
Heejung Yu  
Patrick Yu  
Hon Mo Yung  
Erol Yurtkuran  
Nakache Yves-paul  
Chris Zegelin  
Jin Zhang  
Zhun Zhong  
Glen Zorn  
Bachar Zouari  
Robert J. Zuccherato  
Arnoud Zwemmer  
Jim Zyren

Major contributions were received from the following individuals:

Simon Black  
Peter Ecclesine

Chris Hansen  
Bill MacFarland  
Andrew Myles

David Skellern  
Amjad Soomro

The following members of the balloting committee voted on this amendment. Balloters may have voted for approval, disapproval, or abstention.

Butch Anton  
David Bagby  
John Barnett  
Mitchell Buchman  
Todd Cooper  
Kimara Chin  
Keith Chow  
Terry Cole  
Michael Coletta  
Todor Cooklev  
Javier del Prado Pavon  
Guru Dutt Dhingra  
Thomas Dineen  
Peter Ecclesine  
Keng Fong  
Avraham Freedman  
Michele Gammel  
Andrew Germano  
James Gilb  
Tim Godfrey

Robert Heile  
Srinivas Kandala  
Stuart Kerry  
Cees Klik  
John Kowalski  
Pi-Cheng Law  
Daniel Levesque  
Kyle Maus  
George Miao  
Apurva Mody  
Mike Moreton  
Andrew Myles  
Paul Nikolich  
Erwin Noble  
Bob O'Hara  
Satoshi Oyama  
Sebastien Perrot  
Albert A. Petrick  
Subbu Ponnuswamy  
Hugo Pues  
Vikram Punj

Charles Rice  
Maximilian Riegel  
Jon Rosdahl  
Thomas Ruf  
Durga Prasad Satapathy  
Michael Seals  
Matthew J. Sherman  
Neil Shipp  
Kevin Smart  
Amjad Soomro  
Clay Stocklin  
Minoru Takemoto  
Jerry Thrasher  
Toru Ueda  
Dmitri Varsanofiev  
Hung-yu Wei  
Harry R. Worstell  
Jung Yee  
Oren Yuen  
Arnoud Zwemmer

When the IEEE-SA Standards Board approved this amendment on 11 September 2003, it had the following membership:

**Don Wright, Chair**

**Howard M. Frazier, Vice Chair**

**Judith Gorman, Secretary**

H. Stephen Berger  
Joseph A. Bruder  
Bob Davis  
Richard DeBlasio  
Julian Forster\*  
Toshio Fukuda  
Arnold M. Greenspan  
Raymond Hapeman

Donald N. Heirman  
Laura Hitchcock  
Richard H. Hulett  
Anant Kumar Jain  
Lowell G. Johnson  
Joseph L. Koepfinger\*  
Tom McGean  
Steve M. Mills

Daleep C. Mohla  
William J. Moylan  
Paul Nikolich  
Gary S. Robinson  
Malcolm V. Thaden  
Geoffrey O. Thompson  
Doug Topping  
Howard L. Wolfman

\*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Alan Cookson, *NIST Representative*  
Satish K. Aggarwal, *NRC Representative*

Don Messina  
IEEE Standards Project Editor

# Contents

1.	Overview.....	1
	1.2 Purpose.....	1
2.	Normative references.....	2
3.	Definitions.....	2
4.	Abbreviations and acronyms.....	3
5.	General description.....	3
	5.3 Logical service interfaces.....	3
	5.3.1 Station service (SS).....	3
	5.4 Overview of the services.....	3
	5.4.4 Spectrum management services.....	3
	5.4.4.1 TPC.....	4
	5.4.4.2 DFS.....	4
	5.5 Relationships between services.....	4
	5.7 Message information contents that support the services.....	5
	5.7.2 Association.....	5
	5.7.3 Reassociation.....	5
	5.7.8 Spectrum management.....	5
7.	Frame formats.....	6
	7.1 MAC frame formats.....	6
	7.1.3 Frame fields.....	6
	7.1.3.1 Frame Control field.....	6
	7.2 Format of individual frame types.....	6
	7.2.3 Management frames.....	6
	7.2.3.1 Beacon frame format.....	6
	7.2.3.4 Association Request frame format.....	7
	7.2.3.6 Reassociation Request frame format.....	7
	7.2.3.9 Probe Response frame format.....	7
	7.2.3.12 Action frame format.....	8
	7.3 Management frame body components.....	8
	7.3.1 Fixed fields.....	8
	7.3.1.4 Capability Information field.....	8
	7.3.1.7 Reason Code field.....	9
	7.3.1.9 Status Code field.....	9
	7.3.1.11 Action field.....	10
	7.3.2 Information elements.....	10
	7.3.2.15 Power Constraint element.....	11
	7.3.2.16 Power Capability element.....	11
	7.3.2.17 TPC Request element.....	12
	7.3.2.18 TPC Report element.....	12
	7.3.2.19 Supported Channels element.....	13
	7.3.2.20 Channel Switch Announcement element.....	13
	7.3.2.21 Measurement Request element.....	14
	7.3.2.22 Measurement Report element.....	17

7.3.2.23	Quiet element.....	22
7.3.2.24	IBSS DFS element.....	22
7.4	Action frame format details.....	23
7.4.1	Spectrum management action details.....	23
7.4.1.1	Measurement Request frame format.....	23
7.4.1.2	Measurement Report frame format.....	24
7.4.1.3	TPC Request frame format.....	24
7.4.1.4	TPC Report frame format.....	25
7.4.1.5	Channel Switch Announcement frame format.....	25
9.	MAC sublayer functional description.....	26
9.2	Distributed coordination function (DCF).....	26
9.2.3	Interframe space (IFS).....	26
9.2.3.2	Point coordination function (PCF) IFS (PIFS).....	26
10.	Layer management.....	26
10.3	MAC sublayer management entity (MLME) service access point (SAP) interface.....	26
10.3.2	Scan.....	26
10.3.2.2	MLME-SCAN.confirm.....	26
10.3.6	Associate.....	27
10.3.6.1	MLME-ASSOCIATE.request.....	27
10.3.7	Reassociate.....	27
10.3.7.1	MLME-REASSOCIATE.request.....	27
10.3.10	Start.....	28
10.3.10.1	MLME-START.request.....	28
10.3.11	Spectrum management protocol layer model.....	29
10.3.12	Measurement request.....	33
10.3.12.1	MLME-MREQUEST.request.....	33
10.3.12.2	MLME-MREQUEST.confirm.....	34
10.3.12.3	MLME-MREQUEST.indication.....	35
10.3.13	Channel measurement.....	35
10.3.13.1	MLME-MEASURE.request.....	36
10.3.13.2	MLME-MEASURE.confirm.....	36
10.3.14	Measurement report.....	37
10.3.14.1	MLME-MREPORT.request.....	37
10.3.14.2	MLME-MREPORT.confirm.....	38
10.3.14.3	MLME-MREPORT.indication.....	39
10.3.15	Channel switch.....	39
10.3.15.1	MLME-CHANNELSWITCH.request.....	39
10.3.15.2	MLME-CHANNELSWITCH.confirm.....	40
10.3.15.3	MLME-CHANNELSWITCH.indication.....	41
10.3.15.4	MLME-CHANNELSWITCH.response.....	42
10.3.16	TPC request.....	42
10.3.16.1	MLME-TPCADAPT.request.....	43
10.3.16.2	MLME-TPCADAPT.confirm.....	43
11.	MLME.....	44
11.5	TPC procedures.....	44
11.5.1	Association based on transmit power capability.....	45
11.5.2	Specification of regulatory and local maximum transmit power levels.....	45
11.5.3	Selection of a transmit power.....	46

11.5.4	Adaptation of the transmit power .....	46
11.6	DFS procedures.....	46
11.6.1	Association based on supported channels.....	47
11.6.2	Quieting channels for testing .....	47
11.6.3	Testing channels for radars .....	48
11.6.4	Discontinuing operations after detecting radars .....	48
11.6.5	Detecting radars .....	48
11.6.6	Requesting and reporting of measurements.....	48
11.6.7	Selecting and advertising a new channel .....	49
11.6.7.1	Selecting and advertising a new channel in an infrastructure BSS.....	50
11.6.7.2	Selecting and advertising a new channel in an IBSS.....	50
17.	Orthogonal frequency division multiplexing (OFDM) PHY specification for the 5 GHz band .....	52
17.3	OFDM physical layer convergence procedure (PLCP) sublayer.....	52
17.3.8	Physical medium dependent (PMD) operating specifications (general).....	52
17.3.8.3	Operating channel frequencies.....	52
17.3.9	PMD transmit specifications.....	53
17.3.9.1	Transmit power levels.....	53
Annex A (normative)	Protocol Implementation conformance Statement (PICS) proforma .....	54
A.4	PICS proforma—IEEE Std 802.11, 1999 Edition .....	54
A.4.3	IUT configuration .....	54
A.4.12	Spectrum management extensions.....	54
Annex D (normative)	ASN.1 encoding of the MAC and PHY MIB.....	57

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8802-11:2005/Am5:2006

## Figures

Figure 27—Capability Information fixed field.....	9
Figure 33a—Action field.....	10
Figure 46a—Power Constraint element format.....	11
Figure 46c—TPC Request element format.....	12
Figure 46d—TPC Report element format.....	12
Figure 46b—Power Capability element format.....	12
Figure 46e—Supported Channels element format.....	13
Figure 46g—Measurement Request element format.....	14
Figure 46h—Measurement Request Mode field.....	14
Figure 46f—Channel Switch Announcement element format.....	14
Figure 46i—Measurement Request field format for a basic request.....	16
Figure 46j—Measurement Request field format for a CCA request.....	17
Figure 46k—Measurement Request field format for a RPI histogram request.....	17
Figure 46l—Measurement Report element format.....	18
Figure 46m—Measurement Report Mode field.....	18
Figure 46n—Measurement Report field format for a basic report.....	19
Figure 46o—Map field format.....	19
Figure 46p—Measurement Report field format for a CCA report.....	20
Figure 46q—Measurement Report field format for an RPI histogram report.....	21
Figure 46r—Quiet element format.....	22
Figure 46s—IBSS DFS element format.....	22
Figure 46t—Channel Map field format.....	22
Figure 46v—Measurement Report frame body format.....	24
Figure 46u—Measurement Request frame body format.....	24
Figure 46x—TPC Report frame body format.....	25
Figure 46y—Channel Switch Announcement frame body format.....	25
Figure 46w—TPC Request frame body format.....	25
Figure 67a—Layer management model.....	29
Figure 67b—Measurement request—accepted.....	30
Figure 67c—Measurement request - rejected.....	31
Figure 67d—TPC adaptation.....	32
Figure 67e—Channel switch.....	33

## Tables

Table 1—Valid type and subtype combinations.....	6
Table 5—Beacon frame body .....	6
Table 7—Association Request frame body .....	7
Table 9—Reassociation Request frame body.....	7
Table 12—Probe Response frame body .....	7
Table 15a—Action frame body .....	8
Table 18—Reason codes .....	9
Table 19—Status codes .....	9
Table 19a—Category values.....	10
Table 20—Element IDs .....	10
Table 20a—Summary of use of Enable, Request, and Report bits.....	15
Table 20b—Measurement Type definitions for measurement requests .....	16
Table 20c—Measurement Type definitions for measurement reports .....	19
Table 20d—RPI definitions for an RPI histogram report.....	21
Table 20e—Spectrum management Action field values .....	23
Table 26a—Allowed measurement requests .....	48
Table 94—Valid operating channel numbers by regulatory domain and band.....	52
Table 95—Transmit power level for the United States by regulatory domain.....	53

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8802-11:2005/Amendment 5:2006

**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless Medium Access Control (MAC)  
and Physical Layer (PHY) specifications:**

**Amendment 5: Spectrum and Transmit Power  
Management Extensions in the 5 GHz band in  
Europe**

[This amendment is based on IEEE Std 802.11™, 1999 Edition (Reaff 2003), as amended by IEEE Std 802.11a™-1999, IEEE Std 802.11b™-1999, IEEE Std 802.11b-1999/Cor 1-2001, IEEE Std 802.11d™-2001, and IEEE Std 802.11g™-2003.]

NOTE—The editing instructions contained in this amendment define how to merge the material contained herein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in *bold italic*. Three editing instructions are used: change, delete, and insert. *Change* is used to make small corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed either by using ~~striketrough~~ (to remove old material) or underscore (to add new material). *Delete* removes existing material. *Insert* adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instructions. Editorial notes will not be carried over into future editions.

## **1. Overview**

### **1.2 Purpose**

*Insert the following item at the end of the list at the end of 1.2:*

- Defines mechanisms for dynamic frequency selection (DFS) and transmit power control (TPC) that may be used to satisfy regulatory requirements for operation in the 5 GHz band in Europe. The regulations and conformance tests are listed in Clause 2.

## 2. Normative references

*Insert the following citations at the appropriate locations in Clause 2:*

ERC/DEC/(99)23, ERC Decision of 29 November 1999 on the harmonized frequency bands to be designated for the introduction of High Performance Radio Local Area Networks (HIPERLANs).<sup>1</sup>

ETSI EN 301 893, Broadband Radio Access Networks (BRAN); 5 GHz high performance RLAN; Part 2: Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive.<sup>2</sup>

## 3. Definitions

*Insert the following definitions in alphabetical order into Clause 3, renumbering as necessary:*

**3.53 dynamic frequency selection (DFS):** Facilities mandated to satisfy requirements in some regulatory domains for radar detection and uniform channel spreading in the 5 GHz band. These facilities may also be used for other purposes, such as automatic frequency planning.

**3.54 dynamic frequency selection (DFS) owner:** A station (STA) in an independent basic service set (IBSS) that takes responsibility for selecting the next channel after radar is detected operating in a channel. Due to the nature of IBSSs, it cannot be guaranteed that there will be a single DFS owner at any particular time and the protocol is robust to this situation.

**3.55 effective isotropic radiated power (EIRP):** The equivalent power of a transmitted signal in terms of an isotropic (omnidirectional) radiator. Normally the EIRP equals the product of the transmitter power and the antenna gain (reduced by any coupling losses between the transmitter and antenna).

**3.56 5 GHz band in Europe:** Refers to the nineteen 20 MHz channels between 5 GHz and 6 GHz in which wireless local area network (WLAN) operation is allowed in the CEPT regulatory domain.

**3.57 link margin:** Ratio of the received signal power to the minimum desired by the station (STA). The STA may incorporate rate information and channel conditions, including interference, into its computation of link margin. The specific algorithm for computing the link margin is implementation dependent.

**3.58 receive power:** Mean power measured at the antenna connector.

**3.59 received power indicator (RPI):** A quantized measure of the received power level as seen at the antenna connector.

**3.60 transmit power:** The effective isotropic radiated power (EIRP) when referring to the operation of a 5 GHz 802.11™ orthogonal frequency division multiplexing (OFDM) physical layer (PHY) in a country where so regulated.

**3.61 transmit power control (TPC):** Facilities mandated to satisfy requirements in some regulatory domains for maximum transmit power and transmit power mitigation in the 5 GHz band. These facilities may also be used for other purposes, e.g., reduction of interference, range control reduction of power consumption.

<sup>1</sup>ERC documents are available from European Radiocommunications Office, Midtermolen 1, DK-2100, Copenhagen, Denmark (<http://www.ero.dk>).

<sup>2</sup>ETSI documents are available from ETSI, 650 Route des Lucioles, F-06921 Sophia Antipolis Cedex, France (<http://www.etsi.org>).

**3.62 uniform spreading:** A regulatory requirement per ERC/DEC/(99)23 for a channel selection mechanism that provides uniform loading across a minimum set of channels in the regulatory domain.<sup>3</sup>

## 4. Abbreviations and acronyms

*Insert the following abbreviations in alphabetical order into Clause 4:*

DFS	dynamic frequency selection
RLAN	radio local area network
RPI	receive power indicator
TPC	transmit power control

## 5. General description

### 5.3 Logical service interfaces

*Insert the following items at the end of the list of architectural services in 5.3 as follows:*

- j) DFS
- k) TPC

#### 5.3.1 Station service (SS)

*Insert the following items at the end of the list of SSs in 5.3.1 as follows:*

- e) DFS
- f) TPC

### 5.4 Overview of the services

*Change the first paragraph in 5.4 as follows:*

There are ~~nine~~ several services specified by IEEE 802.11. Six of the services are used to support medium access control (MAC) service data unit (MSDU) delivery between stations (STAs). Three of the services are used to control IEEE 802.11 LAN access and confidentiality. Two of the services are used to provide spectrum management.

*Insert the following text for 5.4.4 through 5.4.4.2 after 5.4.3.3 as follows:*

#### 5.4.4 Spectrum management services

Two services are required to satisfy requirements in some regulatory domains for operation in the 5 GHz band. These services are called transmit power control (TPC) and dynamic frequency selection (DFS).

<sup>3</sup>For information on references, see Clause 2.

#### 5.4.4.1 TPC

ERC/DEC/(99)23 requires radio local area networks (RLANs) operating in the 5 GHz band to use transmitter power control, involving specification of a regulatory maximum transmit power and a mitigation requirement for each allowed channel, to reduce interference with satellite services. The TPC service is used to satisfy this regulatory requirement.

The TPC service provides for the following:

- Association of STAs with an access point (AP) in a basic service set (BSS) based on the STAs power capability.
- Specification of regulatory and local maximum transmit power levels for the current channel.
- Selection of a transmit power for each transmission in a channel within constraints imposed by regulatory requirements.
- Adaptation of transmit power based on a range of information, including path loss and link margin estimates.

#### 5.4.4.2 DFS

ERC/DEC/(99)23 requires RLANs operating in the 5 GHz band to implement a mechanism to avoid co-channel operation with radar systems and to ensure uniform utilization of available channels. The DFS service is used to satisfy these regulatory requirements.

The DFS service provides for the following:

- Association of STAs with an AP in a BSS based on the STAs' supported channels.
- Quieting the current channel so it can be tested for the presence of radar with less interference from other STAs.
- Testing channels for radar before using a channel and while operating in a channel.
- Discontinuing operations after detecting radar in the current channel to avoid interference with radar.
- Detecting radar in the current and other channels based on regulatory requirements.
- Requesting and reporting of measurements in the current and other channels.
- Selecting and advertising a new channel to assist the migration of a BSS or independent BSS (IBSS) after radar is detected.

### 5.5 Relationships between services

*Change the following list in 5.5 as follows:*

- a) Class 1 frames (permitted from within States 1, 2, and 3):
  - 2) Management frames
    - i) Probe request/response
    - ii) Beacon
    - iii) Authentication: Successful authentication enables a STA to exchange Class 2 frames. Unsuccessful authentication leaves the STA in State 1.
    - iv) Deauthentication: Deauthentication notification when in State 2 or State 3 changes the STA's state to State 1. The STA shall become authenticated again prior to sending Class 2 frames.
    - v) Announcement traffic indication message (ATIM)
    - vi) Action

## 5.7 Message information contents that support the services

### 5.7.2 Association

*Change the following list in 5.7.2 as follows:*

*Association request*

- Message type: Management
- Message subtype: Association request
- Information items:
  - IEEE address of the STA initiating the association
  - IEEE address of the AP with which the initiating STA will associate
  - ESS ID
  - Power capability
  - Supported channels
- Direction of message: From STA to AP

### 5.7.3 Reassociation

*Change the following list in 5.7.3 as follows:*

*Reassociation request*

- Message type: Management
- Message subtype: Reassociation request
- Information items:
  - IEEE address of the STA initiating the reassociation
  - IEEE address of the AP with which the initiating STA will reassociate
  - IEEE address of the AP with which the initiating STA is currently associated
  - ESS ID
  - Power capability
  - Supported channels
- Direction of message:
  - From STA to AP (The AP with which the STA is requesting reassociation)

*Insert the following text for 5.7.8 after 5.7.7 as follows:*

### 5.7.8 Spectrum management

The spectrum management services are supported by the following action message:

*Spectrum Management Action*

- Message type: Management
- Message subtype: Spectrum Management Action
- Information items:
  - Action identification
  - Dialog token
  - Action dependent information
  - Direction of message: From STA to STA

## 7. Frame formats

### 7.1 MAC frame formats

#### 7.1.3 Frame fields

##### 7.1.3.1 Frame Control field

##### 7.1.3.1.2 Type and Subtype fields

*Insert the Management/Action row before the Management/Reserved row and change the Management/Reserved row in Table 1 as follows:*

**Table 1—Valid type and subtype combinations**

Type value b3 b2	Type description	Subtype value b7 b6 b5 b4	Subtype description
00	Management	1101	Action
00	Management	<del>1101</del> 1110–1111	Reserved

### 7.2 Format of individual frame types

#### 7.2.3 Management frames

##### 7.2.3.1 Beacon frame format

*Change the order 11 information field and insert the order 14–18 information fields in Table 5 as follows:*

**Table 5—Beacon frame body**

Order	Information	Notes
11	Country	The Country information element shall be present when dot11MultiDomainCapabilityEnabled is true <u>or</u> dot11SpectrumManagementRequired is true.
14	Power Constraint	Power Constraint element shall be present if dot11SpectrumManagementRequired is true.
15	Channel Switch Announcement	Channel Switch Announcement element may be present if dot11SpectrumManagementRequired is true.
16	Quiet	Quiet element may be present if dot11SpectrumManagementRequired is true.
17	IBSS DFS	IBSS DFS element shall be present if dot11SpectrumManagementRequired is true in an IBSS.
18	TPC Report	TPC Report element shall be present if dot11SpectrumManagementRequired is true.

**7.2.3.4 Association Request frame format**

*Insert the order 6 and 7 information fields in Table 7 as follows:*

**Table 7—Association Request frame body**

Order	Information	Notes
6	Power Capability	The Power Capability element shall be present if dot11SpectrumManagementRequired is true.
7	Supported Channels	The Supported Channels element shall be present if dot11SpectrumManagementRequired is true.

**7.2.3.6 Reassociation Request frame format**

*Insert the order 7 and 8 information fields in Table 9 as follows:*

**Table 9—Reassociation Request frame body**

Order	Information	Notes
7	Power Capability	The Power Capability element shall be present if dot11SpectrumManagementRequired is true.
8	Supported Channels	The Supported Channels element shall be present if dot11SpectrumManagementRequired is true.

**7.2.3.9 Probe Response frame format**

*Change Table 12 from order 10 information field to the end of the table as follows:*

**Table 12—Probe Response frame body**

Order	Information	Notes
10	Country	Included if dot11MultiDomainCapabilityEnabled <u>or</u> dot11SpectrumManagementRequired is true.
11	FH Parameters	FH Parameters, as specified in 7.3.2.10, may be included if dot11MultiDomainCapabilityEnabled is true.
12	FH Pattern Table	FH Pattern Table information, as specified in 7.3.2.11, may be included if dot11MultiDomainCapability-Enabled is true.
13	<u>Power Constraint</u>	<u>Shall be included if dot11SpectrumManagementRequired is true.</u>
14	<u>Channel Switch Announcement</u>	<u>May be included if dot11SpectrumManagementRequired is true.</u>
15	<u>Quiet</u>	<u>May be included if dot11SpectrumManagementRequired is true.</u>

**Table 12—Probe Response frame body (continued)**

Order	Information	Notes
16	IBSS DFS	Shall be included if dot11SpectrumManagementRequired is true in an IBSS.
17	TPC Report	Shall be included if dot11SpectrumManagementRequired is true.
18		Reserved
19	ERP Information	The ERP Information element is present within Beacon frames generated by STAs using ERP PHYs and is optionally present in other cases.
20	Extended Supported Rates	The Extended Supported Rates element is present whenever there are more than eight supported rates, and it is optional otherwise.
21–n	Requested information elements	Elements requested by the Request information element of the Probe Request frame.

Insert 7.2.3.12 after 7.2.3.11 as follows:

### 7.2.3.12 Action frame format

The frame body of a management frame of subtype Action contains the information shown in Table 15a.

**Table 15a—Action frame body**

Order	Information
1	Action

## 7.3 Management frame body components

### 7.3.1 Fixed fields

#### 7.3.1.4 Capability Information field

Change the second paragraph in 7.3.1.4 as follows:

The length of the Capability Information field is 2 octets. The Capability Information field consists of the following subfields: extended service set (ESS), IBSS, contention-free (CF)-Pollable, CF-Poll Request, Privacy, Short Preamble, Packet Binary Convolutional Code (PBCC), Channel Agility, Spectrum Management, Short Slot Time, and DSSS-OFDM. The format of the Capability Information field is as illustrated in Figure 27. No subfield is supplied for ERP as a STA supports ERP operation if it includes all of the Clause 19 mandatory rates in its supported rate set.

Change the contents of Figure 27 as shown:

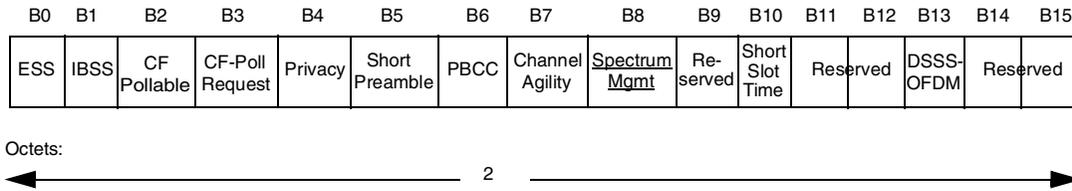


Figure 27—Capability Information fixed field

Insert the following text after the paragraph that starts “Bit 7 of the ...” in 7.3.1.4:

A STA shall set the Spectrum Management subfield in the Capability Information field to 1 if the STA’s dot11SpectrumManagementRequired is true; otherwise, it shall be set to 0.

7.3.1.7 Reason Code field

Insert reason codes 10 and 11 and change the Reserved reason code row in Table 18 as follows:

Table 18—Reason codes

Reason code	Meaning
10	Disassociated because the information in the Power Capability element is unacceptable
11	Disassociated because the information in the Supported Channels element is unacceptable
12–65 535	Reserved

7.3.1.9 Status Code field

Insert status codes 22-24 and change the Reserved status code row in Table 19 as follows:

Table 19—Status codes

Status code	Meaning
22	Association request rejected because Spectrum Management capability is required
23	Association request rejected because the information in the Power Capability element is unacceptable
24	Association request rejected because the information in the Supported Channels element is unacceptable
25–65 535	Reserved

*Insert 7.3.1.11 after 7.3.1.10 and renumber figures and tables as necessary:*

### 7.3.1.11 Action field

The Action field provides a mechanism for specifying extended management actions. The format of the Action field is shown in Figure 33a.



**Figure 33a—Action field**

The Category field shall be set to one of the nonreserved values shown in Table 19a. If a STA receives a unicast Action frame with an unrecognized Category field or some other syntactic error and the most significant bit (MSB) of the Category field set to 0, then the STA shall return the Action frame to the source without change except that the MSB of the Category field shall be set to 1.

The Action Details field contains the details of the action. The details of the actions allowed in each category are described in the appropriate subclause referenced in Table 19a.

**Table 19a—Category values**

Name	Value	See subclause
Spectrum management	0	7.4.1
Reserved	1–127	—
Error	128–255	—

### 7.3.2 Information elements

*Change Table 20 from element identifier (ID) 17 to the end of the table as follows:*

**Table 20—Element IDs**

Information element	Element ID
Reserved	17–31
<u>Power Constraint</u>	<u>32</u>
<u>Power Capability</u>	<u>33</u>
<u>TPC Request</u>	<u>34</u>
<u>TPC Report</u>	<u>35</u>
<u>Supported Channels</u>	<u>36</u>
<u>Channel Switch Announcement</u>	<u>37</u>


**Table 20—Element IDs (continued)**

Information element	Element ID
<u>Measurement Request</u>	<u>38</u>
<u>Measurement Report</u>	<u>39</u>
<u>Quiet</u>	<u>40</u>
<u>IBSS DFS</u>	<u>41</u>
ERP Information	42
Reserved	43–49
Extended Supported Rates	50
Reserved	51–255

*Insert 7.3.2.15 through 7.4.1.5 after 7.3.2.14 and renumber figures and tables as appropriate:*

**7.3.2.15 Power Constraint element**

The Power Constraint element contains the information necessary to allow a STA to determine the local maximum transmit power in the current channel. The format of the Power Constraint element is shown in Figure 46a.



**Figure 46a—Power Constraint element format**

The Length field shall be set to 1.


The Local Power Constraint field shall be set to a value that allows the mitigation requirements to be satisfied in the current channel. The field is coded as an unsigned integer in units of decibels. The local maximum transmit power for a channel is thus defined as the maximum transmit power level specified for the channel in the Country element minus the local power constraint specified for the channel [from the management information base (MIB)] in the Power Constraint element.

The Power Constraint element is included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of Power Constraint elements is described in 11.5.2.

**7.3.2.16 Power Capability element**

The Power Capability element specifies the minimum and maximum transmit powers with which a STA is capable of transmitting in the current channel. The format of the Power Capability element is shown in Figure 46b.

The Length field shall be set to 2.

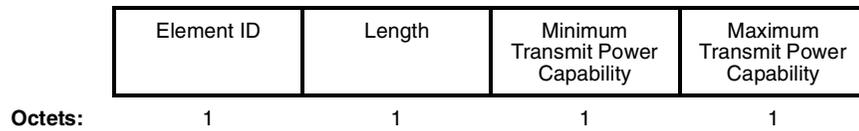

**Figure 46b—Power Capability element format**


The Minimum Transmit Power Capability field shall be set to the nominal minimum transmit power with which the STA is capable of transmitting in the current channel, with a tolerance  $\pm 5$  dB. The field is coded as a signed integer in units of decibels relative to 1 mW.

The Maximum Transmit Power Capability field shall be set to the nominal maximum transmit power with which the STA is capable of transmitting in the current channel, with a tolerance  $\pm 5$  dB. The field is coded as a signed integer in units of decibels relative to 1 mW.

The Power Capability element is included in Association Request frames, as described in 7.2.3.4, and Reassociation Request frames, as described in 7.2.3.6. The use of Power Capability elements is described in 11.5.1.

### 7.3.2.17 TPC Request element

The TPC Request element contains a request for a STA to report transmit power and link margin information using a TPC Report element. The format of the TPC Request element is shown in Figure 46c.




**Figure 46c—TPC Request element format**

The Length field shall be set to 0.

The TPC Request element is included in TPC Request frames, as described in 7.4.1.3. The use of TPC Request elements and frames is described in 11.5.4.

### 7.3.2.18 TPC Report element

The TPC Report element contains transmit power and link margin information sent in response to a TPC Request element. A TPC Report element is included in a Beacon frame or Probe Response frame without a corresponding request. The format of the TPC Report element is shown in Figure 46d.



**Figure 46d—TPC Report element format**

The Length field shall be set to 2.


The Transmit Power field shall be set to the transmit power used to transmit the frame containing the TPC Report element. The field is coded as a signed integer in units of decibels relative to 1 mW. The maximum tolerance for the transmit power value reported in the TPC Response element shall be  $\pm 5$  dB. This tolerance is defined as the difference, in decibels, between the reported power value and the actual EIRP of the STA (measured when transmitting 1500 octet frames).

The Link Margin field contains the link margin at the time and for the rate at which the frame containing the TPC Request element was received. The field is coded as a signed integer in units of decibels. The Link Margin field shall be set to 0 and shall be ignored when a TPC Report element is included in a Beacon frame or Probe Response frame. The measurement method of Link Margin is beyond the scope of this amendment.

The TPC Report element is included in TPC Report frames, as described in 7.4.1.4; Beacon frames, as described in 7.2.3.1; and Probe Response frames, as described in 7.2.3.9. The use of TPC Report elements and frames is described in 11.5.4.

**7.3.2.19 Supported Channels element**

The Supported Channels element contains a list of channel subbands (from those channels defined in 17.3.8.3.3) in which a STA is capable of operating. The format of the Supported Channels element is shown in Figure 46e.

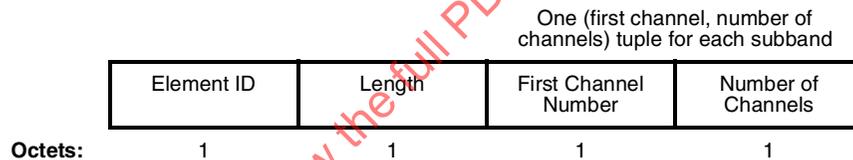

**Figure 46e—Supported Channels element format**

The Length field is variable and depends on the number of subbands, defined by a First Channel Number–Number of Channels pair, that are included in the element.

The First Channel Number field shall be set to the first channel (as defined in 17.3.8.3.3) in a subband of supported channels.


The Number of Channels field shall be set to the number of channels in a subband of supported channels.

The Supported Channels element is included in Association Request frames, as described in 7.2.3.4, and Reassociation Request frames, as described in 7.2.3.6. The use of the Supported Channels element is described in 11.6.1 and 11.6.7.

**7.3.2.20 Channel Switch Announcement element**

The Channel Switch Announcement element is used by an AP in a BSS or a STA in an IBSS to advertise when it is changing to a new channel and the channel number of the new channel. The format of the Channel Switch Announcement element is shown in Figure 46f.

The Length field shall be set to 3.



**Figure 46f—Channel Switch Announcement element format**

The Channel Switch Mode field indicates any restrictions on transmission until a channel switch. An AP in a BSS or a STA in an IBSS shall set the Channel Switch Mode field to either 0 or 1 on transmission. A Channel Switch Mode set to 1 means that the STA in a BSS to which the frame containing the element is addressed shall transmit no further frames within the BSS until the scheduled channel switch. A STA in an IBSS may treat a Channel Switch Mode field set to 1 as advisory. A Channel Switch Mode set to 0 does not impose any requirement on the receiving STA.


The New Channel Number field shall be set to the number of the channel to which the STA is moving (as defined in 17.3.8.3.3).

The Channel Switch Count field either shall be set to the number of target beacon transmission times (TBTTs) until the STA sending the Channel Switch Announcement element switches to the new channel or shall be set to 0. A value of 1 indicates that the switch will occur immediately before the next TBTT. A value of 0 indicates that the switch will occur at any time after the frame containing the element is transmitted.


The Channel Switch Announcement element is included in Channel Switch Announcement frames, as described in 7.4.1.5, and may be included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of Channel Switch Announcement elements and frames is described in 11.6.7.

**7.3.2.21 Measurement Request element**

The Measurement Request element contains a request that the receiving STA undertake the specified measurement action. The format of the Measurement Request element is shown in Figure 46g.

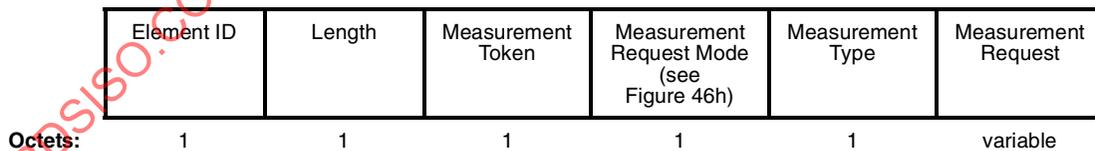

**Figure 46g—Measurement Request element format**



**Figure 46h—Measurement Request Mode field**

The Length field is variable and depends on the length of the Measurement Request field. The minimum value of the Length field is 3 (based on a minimum length for the Measurement Request field of 0 octets).

The Measurement Token shall be set to a nonzero number that is unique among the Measurement Request elements in a particular Measurement Request frame.

The Measurement Request Mode field (shown in Figure 46h) is a bit field with the following bits defined:

- Enable bit (bit 1) indicates whether this element is used to request the destination STA to enable or disable the sending of measurement requests and autonomous measurement reports of a specified type to this STA. The Enable bit shall be set to 1 when the Request bit and Report bit are valid. The Enable bit shall be set to 0 when the Request bit and Report bit are invalid.
- Request bit (bit 2) indicates whether the STA receiving the request shall enable or disable measurement requests of the type specified in the Measurement Type field. The Request bit shall be set to 1 when enabling a measurement request. The Request bit shall be set to 0 when disabling a measurement request or when the Request bit is invalid (i.e., when the Enable bit is set to 0 or when the Measurement Type field contains a reserved measurement request type value).
- Report bit (bit 3) indicates whether the STA receiving the request shall enable or disable autonomous measurement reports of the type corresponding to the measurement report specified in the Measurement Type field. The Report bit shall be set to 1 when enabling an autonomous measurement report. The Report bit shall be set to 0 when disabling an autonomous measurement report or when the Report bit is invalid (i.e., when the Enable bit is set to 0 or when the Measurement Type field contains a reserved measurement report type value).
- All other bits are reserved and shall be set to 0.

The use of the Enable, Request, and Report bits is also summarized in Table 20a. See 11.6.6 for the description of how a STA shall handle requests to enable or disable measurement requests and autonomous reports.

**Table 20a—Summary of use of Enable, Request, and Report bits**

Bits			Meaning of bits
Enable	Request	Report	
0	0	0	When Enable bit is set to 0, Request and Report bits are invalid and shall be set to 0.
0	0	1	Not allowed.
0	1	0	Not allowed.
0	1	1	Not allowed.
1	0	0	The transmitting STA is requesting that it be sent neither measurement requests nor autonomous measurement reports of the types indicated in the Measurement Type field.
1	1	0	The transmitting STA is indicating it will accept measurement requests and requesting it not be sent autonomous measurement reports of the types indicated in the Measurement Type field.
1	0	1	The transmitting STA is requesting it not be sent measurement requests and indicating it will accept autonomous measurement reports of the types indicated in the Measurement Type field.
1	1	1	The transmitting STA is indicating it will accept measurement requests and autonomous measurement reports of the type indicated in the Measurement Type field.

The Measurement Type field shall be set to a number that identifies a measurement request or a measurement report. The Measurement Types that have been allocated for measurement requests are shown in Table 20b and measurement reports are shown in Table 20c (in 7.3.2.22).

**Table 20b—Measurement Type definitions for measurement requests**


Name	Measurement Type
Basic request	0
Clear channel assessment (CCA) request	1
Receive power indication (RPI) histogram request	2
Reserved	3–255

The Measurement Request field shall be null when the Enable bit is set to 1 and shall contain the specification of the measurement request, as described in 7.3.2.21.1 through 7.3.2.21.3, when the Enable bit is set to 0.

The Measurement Request element is included in a Measurement Request frame as described in 7.4.1.1. The use of Measurement Request elements and frames is described in 11.6.6.

### 7.3.2.21.1 Basic request

A Measurement Type in the Measurement Request element may indicate a basic request. The response to a basic request is a basic report. It is mandatory for a STA in a BSS to generate a basic report in response to a basic request if the request is received from the AP with which it is associated, except as specified in 11.6.6. The Measurement Request field corresponding to a basic request is shown in Figure 46i.



**Figure 46i—Measurement Request field format for a basic request**


The Channel Number field shall be set to the channel number for which the measurement request applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the timing synchronization function (TSF) timer at the time ( $\pm 32\mu\text{s}$ ) at which the requested basic request measurement shall start. A value of 0 shall indicate it shall start immediately.

The Measurement Duration field shall be set to the duration of the requested measurement, expressed in time units (TUs).

**7.3.2.21.2 CCA request**

A Measurement Type in the Measurement Request element may indicate a CCA request. A response to a CCA request is a CCA report. It is optional for a STA to generate a CCA report in response to a CCA Request. The Measurement Request field corresponding to a CCA request is shown in Figure 46j.



**Figure 46j—Measurement Request field format for a CCA request**


The Channel Number field shall be set to the channel number for which the measurement request applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu s$ ) at which the requested CCA request measurement shall start. A value of 0 shall indicate it shall start immediately.

The Measurement Duration field shall be set to the duration of the requested measurement, expressed in TUs.

**7.3.2.21.3 RPI histogram request**

A Measurement Type in the Measurement Request element may indicate an RPI histogram request. A response to an RPI histogram request is an RPI histogram report. It is optional for a STA to generate a RPI histogram report in response to a RPI histogram request. The Measurement Request field corresponding to an RPI histogram request is shown in Figure 46k.



**Figure 46k—Measurement Request field format for a RPI histogram request**

The Channel Number field shall be set to the channel number for which the measurement request applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu s$ ) at which the requested RPI histogram request measurement shall start. A value of 0 shall indicate it shall start immediately.


The Measurement Duration field shall be set to the duration of the requested measurement, expressed in TUs.

**7.3.2.22 Measurement Report element**

The Measurement Report element contains a measurement report. The format of the Measurement Report element is shown in Figure 46l.



**Figure 46l—Measurement Report element format**



**Figure 46m—Measurement Report Mode field**

The Length field is variable and depends on the length of the Measurement Report field. The minimum value of the Length field is 3.

The Measurement Token field shall be set to the Measurement Token in the corresponding Measurement Request element. If the Measurement Report element is being sent autonomously, then the Measurement Token shall be set to 0.

The Measurement Report Mode field (shown in Figure 46m) is a bit field with the following bits defined:

- Late bit (bit 0) indicates whether this STA is unable to carry out a measurement request because it received the request after the requested measurement time. The Late bit shall be set to 1 to indicate the request was too late. The Late bit shall be set to 0 to indicate the request was received in time for the measurement to be executed.
- Incapable bit (bit 1) indicates whether this STA is incapable of generating a report of the type specified in the Measurement Type field that was previously requested by the destination STA of this Measurement Report element. The Incapable bit shall be set to 1 to indicate the STA is incapable. The Incapable bit shall be set to 0 to indicate the STA is capable or the report is autonomous.
- Refused bit (bit 2) indicates whether this STA is refusing to generate a report of the type specified in the Measurement Type field that was previously requested by the destination STA of this Measurement Report element. The Refused bit shall be set to 1 to indicate the STA is refusing. The Refused bit shall be set to 0 to indicate the STA is not refusing or the report is autonomous.
- All other bits are reserved and shall be set to 0.

The Measurement Type field shall be set to a number that identifies the measurement report. The Measurement Types that have been allocated are shown in Table 20c.

The Measurement Report field shall be null when the Late bit is set to 1, the Incapable bit is set to 1, or the Refused bit is set to 1. Otherwise, it shall contain the specification of the measurement report, as described in 7.3.2.22.1 through 7.3.2.22.3.


The Measurement Report element is included in a Measurement Report frame as described in 7.4.1.2. The use of Measurement Report elements and frames is described in 11.6.6.

**Table 20c—Measurement Type definitions for measurement reports**


Name	Measurement Type
Basic report	0
CCA report	1
RPI histogram report	2
Reserved	3–255

**7.3.2.22.1 Basic report**

A Measurement Type in the Measurement Report element may indicate a basic report. The format of the Measurement Report field corresponding to a basic report is shown in Figure 46n. It is mandatory for a STA to support the generation of this report.



**Figure 46n—Measurement Report field format for a basic report**

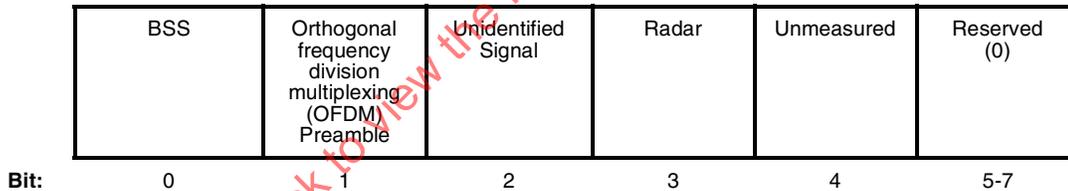

**Figure 46o—Map field format**

The Channel Number field shall be set to the channel number to which the basic report applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu\text{s}$ ) at which the basic report measurement started.

The Measurement Duration field shall be set to the duration over which the basic report was measured, expressed in TUs.

The Map field is coded as a bit field, as shown in Figure 46o, and shall contain the following bits:


- BSS bit, which shall be set to 1 when at least one valid MAC protocol data unit (MPDU) was received in the channel during the measurement period from another BSS or IBSS. Otherwise, the BSS bit shall be set to 0.
- OFDM Preamble bit, which shall be set to 1 when at least one sequence of short training symbols, as defined in 17.3.3, was detected in the channel during the measurement period without a subsequent

valid Signal field (see 17.3.4). This may indicate the presence of an OFDM preamble, such as high-performance RLAN/2 (HIPERLAN/2). Otherwise, the OFDM Preamble bit shall be set to 0.

- Unidentified Signal bit, which may be set to 1 when significant power is detected in the channel during the measurement period that cannot be characterized as radar, an OFDM preamble, or a valid MPDU. Otherwise, the Unidentified Signal bit shall be set to 0. The definition of significant power is implementation dependent.
- Radar bit, which shall be set to 1 when radar was detected operating in the channel during the measurement period. The algorithm to detect radar shall satisfy regulatory requirements and is outside the scope of this amendment. Otherwise, the Radar bit shall be set to 0.
- Unmeasured bit, which shall be set to 1 when this channel has not been measured. Otherwise, the Unmeasured bit shall be set to 0. When the Unmeasured field is set to 1, all the other bit fields shall be set to 0.

### 7.3.2.22.2 CCA report

A Measurement Type in the Measurement Report element may indicate a CCA report. It is optional for a STA to support the generation of this report. The format of the Measurement Report field corresponding to a CCA report is shown in Figure 46p.



**Figure 46p—Measurement Report field format for a CCA report**

The Channel Number field shall contain the channel number to which the CCA report applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu\text{s}$ ) at which the CCA report measurement started.

The Measurement Duration field shall be set to the duration over which the CCA report was measured, expressed in TUs.


The CCA Busy Fraction field shall contain the fractional duration over which CCA indicated the channel was busy during the measurement duration. The resolution of the CCA busy measurement is in microseconds. The CCA Busy Fraction value is defined as  $\text{Ceiling}(255 * [\text{Duration CCA indicated channel was busy (microseconds)}] / (1024 * [\text{Measurement duration (TUs)}]))$ .

### 7.3.2.22.3 RPI histogram report

A Measurement Type in the Measurement Report element may indicate an RPI histogram report. It is optional for a STA to support the generation of this report. The format of the Measurement Report field corresponding to an RPI histogram report is shown in Figure 46q.

The Channel Number field shall be set to the channel number to which the RPI histogram report applies (as defined in 17.3.8.3.3).

The Measurement Start Time field shall be set to the TSF at the time ( $\pm 32\mu\text{s}$ ) at which the RPI histogram report measurement started.

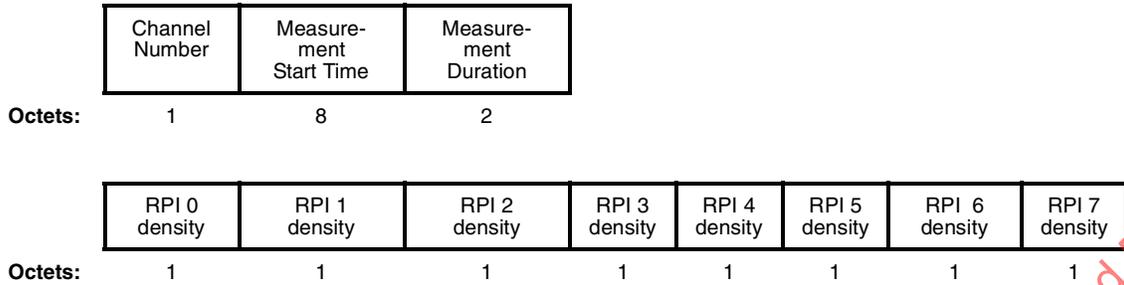

**Figure 46q—Measurement Report field format for an RPI histogram report.**

The Measurement Duration field shall be set to the duration over which the RPI histogram report was measured, expressed in TUs.

The RPI histogram report shall contain the RPI densities observed in the channel for the eight RPI levels defined in Table 20d. To compute the RPI densities, the STA shall measure the received power level on the specified channel, as detected at the antenna connector, as a function of time over the measurement duration. The maximum tolerance of the received power measurements shall be  $\pm 5$  dB. Furthermore, the received signal power measurement should be a monotonic function of the actual power at the antenna. The time resolution of the received power measurements is in microseconds. The received power measurements are converted to a sequence of RPI values by quantizing the measurements according to Table 4. The RPI densities are then computed for each of the eight possible RPI values using Ceiling ( $255 * [\text{Duration receiving at RPI value (microseconds)} / (1024 * \text{Measurement duration})]$ ). The sum of the RPI densities will be approximately 255, but could be up to 262 because of rounding effects.

**Table 20d—RPI definitions for an RPI histogram report**

RPI	Power observed at the antenna (dBm)
0	Power $\leq -87$
1	$-87 < \text{Power} \leq -82$
2	$-82 < \text{Power} \leq -77$
3	$-77 < \text{Power} \leq -72$
4	$-72 < \text{Power} \leq -67$
5	$-67 < \text{Power} \leq -62$
6	$-62 < \text{Power} \leq -57$
7	$-57 < \text{Power}$

The RPI histogram report provides an additional mechanism for a STA to gather information on the state of a channel from other STAs. The STA may use this information to assist in the choice of new channel, to help avoid false radar detections, and to assess the general level of interference present on a channel.

### 7.3.2.23 Quiet element

The Quiet element defines an interval during which no transmission shall occur in the current channel. This interval may be used to assist in making channel measurements without interference from other STAs in the BSS or IBSS. The format of the Quiet element is shown in Figure 46r.




Figure 46r—Quiet element format

The Length field shall be set to 6.

The Quiet Count field shall be set to the number of TBTTs until the beacon interval during which the next quiet interval shall start. A value of 1 indicates the quiet interval will start during the beacon interval starting at the next TBTT. A value of 0 is reserved.

The Quiet Period field shall be set to the number of beacon intervals between the start of regularly scheduled quiet intervals defined by this Quiet element. A value of 0 indicates that no periodic quiet interval is defined.

The Quiet Duration field shall be set to the duration of the quiet interval, expressed in TUs.

The Quiet Offset field shall be set to the offset of the start of the quiet interval from the TBTT specified by the Quiet Count field, expressed in TUs. The value of the Quiet Offset field shall be less than one beacon interval.

The Quiet element may be included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of Quiet elements is described in 11.6.2.

### 7.3.2.24 IBSS DFS element

The IBSS DFS element contains information for DFS operation in an IBSS. The format of the IBSS DFS element is shown in Figure 46s.



Figure 46s—IBSS DFS element format




Figure 46t—Channel Map field format

The Length field is variable.

The DFS Owner field shall be set to the individual IEEE MAC address of the STA that is the currently known DFS Owner in the IBSS.

The DFS Recovery Interval field indicates the time interval that shall be used for DFS owner recovery, expressed as an integral number of beacon intervals. The DFS Recovery Interval value is static throughout the lifetime of the IBSS and is determined by the STA that starts the IBSS.

The Channel Map field shown in Figure 46t shall contain a Channel Number field and a Map field (see 7.3.2.22.1) for each channel supported by the STA transmitting the IBSS DFS element. Note that  $n$  in Figure 46s is the number of channels supported by the STA.

The IBSS DFS element may be included in Beacon frames, as described in 7.2.3.1, and Probe Response frames, as described in 7.2.3.9. The use of IBSS DFS elements is described in 11.6.7.2.

## 7.4 Action frame format details

This subclause describes the Action frame formats, including the Action Details field, allowed in each of the action categories defined in Table 19a in 7.3.1.11.

### 7.4.1 Spectrum management action details

Five Action frame formats are defined for spectrum management. An Action field, in the octet field immediately after the Category field, differentiates the five formats. The Action field values associated with each frame format are defined in Table 20e.

**Table 20e—Spectrum management Action field values**


Action field value	Description
0	Measurement Request
1	Measurement Report
2	TPC Request
3	TPC Report
4	Channel Switch Announcement
5–255	Reserved

#### 7.4.1.1 Measurement Request frame format

The Measurement Request frame uses the Action frame body format and is transmitted by a STA requesting another STA to measure one or more channels. The format of the Measurement Request frame body is shown in Figure 46u.

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 0 (representing a Measurement Request frame).




**Figure 46u—Measurement Request frame body format**

The Dialog Token field shall be set to a nonzero value chosen by the STA sending the measurement request to identify the request/report transaction.

The Measurement Request Elements field shall contain one or more of the Measurement Request elements described in 7.3.2.21. The number and length of the Measurement Request elements in a Measurement Request frame is limited by the maximum allowed MAC management PDU (MMPDU) size.

#### 7.4.1.2 Measurement Report frame format

The Measurement Report frame uses the Action frame body format and is transmitted by a STA in response to a Measurement Request frame or by a STA autonomously providing measurement information. The format of the Measurement Report frame body is shown in Figure 46v.



**Figure 46v—Measurement Report frame body format**

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 1 (representing a Measurement Report frame).

The Dialog Token field shall be set to the value in any corresponding Measurement Request frame. If the Measurement Report frame is not being transmitted in response to a Measurement Request frame, then the Dialog token shall be set to 0.


The Measurement Report Elements field shall contain one or more of the Measurement Report elements described in 7.3.2.22. The number and length of the Measurement Report elements in a Measurement Report frame is limited by the maximum allowed MMPDU size.

#### 7.4.1.3 TPC Request frame format

The TPC Request frame uses the Action frame body format and is transmitted by a STA requesting another STA for transmit power and link margin information. The format of the TPC Request frame body is shown in Figure 46w.

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 2 (representing a TPC Request frame).



**Figure 46w—TPC Request frame body format**

The Dialog Token field shall be set to a nonzero value chosen by the STA sending the request to identify the transaction.

The TPC Request element shall be set as described in 7.3.2.17.

**7.4.1.4 TPC Report frame format**

The TPC Report frame uses the Action frame body format and is transmitted by a STA in response to a TPC Request frame. The format of the TPC Report frame body is shown in Figure 46x.



**Figure 46x—TPC Report frame body format**

The Category field shall be set to 0 (representing spectrum management).


The Action field shall be set to 3 (representing a TPC Report frame).

The Dialog Token field shall be set to the Dialog Token value in the corresponding TPC Request frame.

The TPC Report element shall be set as described 7.3.2.18.

**7.4.1.5 Channel Switch Announcement frame format**

The Channel Switch Announcement frame uses the Action frame body format and is transmitted by an AP in a BSS or a STA in an IBSS to advertise a channel switch. The format of the Channel Switch Announcement frame body is shown in Figure 46y.



**Figure 46y—Channel Switch Announcement frame body format**

The Category field shall be set to 0 (representing spectrum management).

The Action field shall be set to 4 (representing a Channel Switch Announcement frame).

The Channel Switch Announcement element shall be set as described 7.3.2.20.

## 9. MAC sublayer functional description

### 9.2 Distributed coordination function (DCF)

#### 9.2.3 Interframe space (IFS)

##### 9.2.3.2 Point coordination function (PCF) IFS (PIFS)

*Change the first paragraph of 9.2.3.2 as follows:*

The PIFS shall be used only by STAs operating under the PCF to gain priority access to the medium at the start of the contention-free period (CFP) or by a STA to transmit a Channel Switch Announcement frame. A STA using the PCF shall be allowed to transmit CF traffic after its carrier sense (CS) mechanism (see 9.2.1) determines that the medium is idle at the TxPIFS slot boundary as defined in 9.2.10. A STA may also transmit a Channel Switch Announcement frame after its CS mechanism (see 9.2.1) determines that the medium is idle at the TxPIFS slot boundary. The use of the PIFS by STAs operating under the PCF is described in 9.3. The use of PIFS by STAs transmitting a Channel Switch Announcement frame is described in 11.6.7.1.

## 10. Layer management

### 10.3 MAC sublayer management entity (MLME) service access point (SAP) interface

#### 10.3.2 Scan

##### 10.3.2.2 MLME-SCAN.confirm

###### 10.3.2.2.2 Semantics of the service primitive

*Insert the following elements at the end of the untitled table listing the elements of BSSDescription in 10.3.2.2.2:*

Name	Type	Valid range	Description
Country	As defined in the Country element	As defined in the Country element	The information required to identify the regulatory domain in which the STA is located and to configure its physical layer (PHY) for operation in that regulatory domain. Present only when TPC functionality is required, as specified in 11.5, or when dot11MultiDomainCapabilityEnabled is true.
IBSS DFS Recovery Interval	Integer	1–255	Only present if BSSType = INDEPENDENT. The time interval that shall be used for DFS recovery. Present only when DFS functionality is required, as specified in 11.6.

### 10.3.6 Associate

#### 10.3.6.1 MLME-ASSOCIATE.request

##### 10.3.6.1.2 Semantics of the service primitive

*Change the following primitive parameter list in 10.3.6.1.2:*

```
MLME-ASSOCIATE.request(
    PeerSTAAddress,
    AssociateFailureTimeout,
    CapabilityInformation,
    ListenInterval,
    Supported Channels
)
```

*Insert the following row at the end of the untitled table defining the primitive parameters in 10.3.6.1.2:*

Name	Type	Valid range	Description
Supported Channels	As defined in the Supported Channels element	As defined in the Supported Channels element	The list of channels in which the STA is capable of operating. Present only when DFS functionality is required, as specified in 11.6.

### 10.3.7 Reassociate

#### 10.3.7.1 MLME-REASSOCIATE.request

##### 10.3.7.1.2 Semantics of the service primitive

*Change the following primitive parameter list in 10.3.7.1.2:*

```
MLME-REASSOCIATE.request(
    NewAPAddress,
    ReassociateFailureTimeout,
    CapabilityInformation,
    ListenInterval,
    Supported Channels
)
```

*Insert the following row at the end of the untitled table defining the primitive parameters in 10.3.7.1.2:*

Name	Type	Valid range	Description
Supported Channels	As defined in the Supported Channels element	As defined in the Supported Channels element	The list of channels in which the STA is capable of operating. Present only when DFS functionality is required, as specified in 11.6.

### 10.3.10 Start

#### 10.3.10.1 MLME-START.request

##### 10.3.10.1.2 Semantics of the service primitive

*Change the following primitive parameter list in 10.3.10.1.2:*

```
MLME-START.request(
    SSID,
    BSSType,
    BeaconPeriod,
    DTIMPeriod,
    CF parameter set,
    PHY parameter set,
    IBSS parameter set,
    ProbeDelay,
    CapabilityInformation,
    BSSBasicRateSet,
    OperationalRateSet,
    Country,
    IBSS DFS Recovery Interval
)
```


*Insert the following rows at the end of the untitled table defining the primitive parameters in 10.3.10.1.2:*

Name	Type	Valid range	Description
Country	As defined in the Country element	As defined in the Country element	The information required to identify the regulatory domain in which the STA is located and to configure its PHY for operation in that regulatory domain. Present only when TPC functionality is required, as specified in 11.5, or when dot11MultiDomainCapabilityEnabled is true.
IBSS DFS Recovery Interval	Integer	1–255	Present only if BSSType = INDEPENDENT. The time interval that shall be used for DFS recovery. Present only when DFS functionality is required, as specified in 11.6.

*Insert 10.3.11 through 10.3.16.2.4 after 10.3.10.2.4 as follows:*

**10.3.11 Spectrum management protocol layer model**

The layer management extensions for measurement and channel switching assume a certain partition of spectrum management functionality between the MLME and station management entity (SME). This partitioning assumes that policy decisions (e.g., regarding measurement and channel switching) reside in the SME, while the protocol for measurement, switch timing, and the associated frame exchanges resides within the MLME (see Figure 67a).

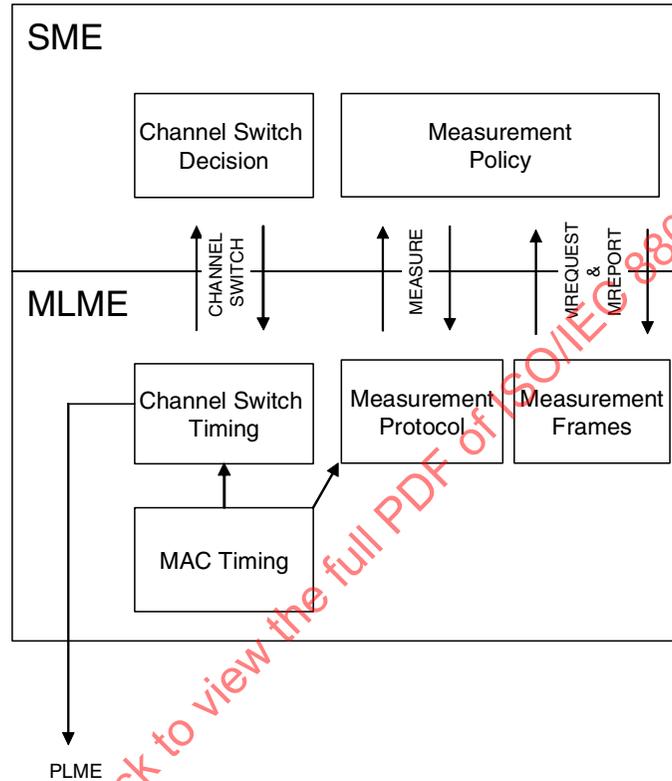

**Figure 67a—Layer management model**

The informative diagrams within this subclause further illustrate the spectrum management protocol model adopted. Figure 67b and Figure 67c depict the measurement process for a peer STA to accept and reject a measurement request, respectively. Figure 67d illustrates the TPC adaptation process. Lastly, Figure 67e depicts the management process for a channel switch using a Channel Switch Announcement frame.

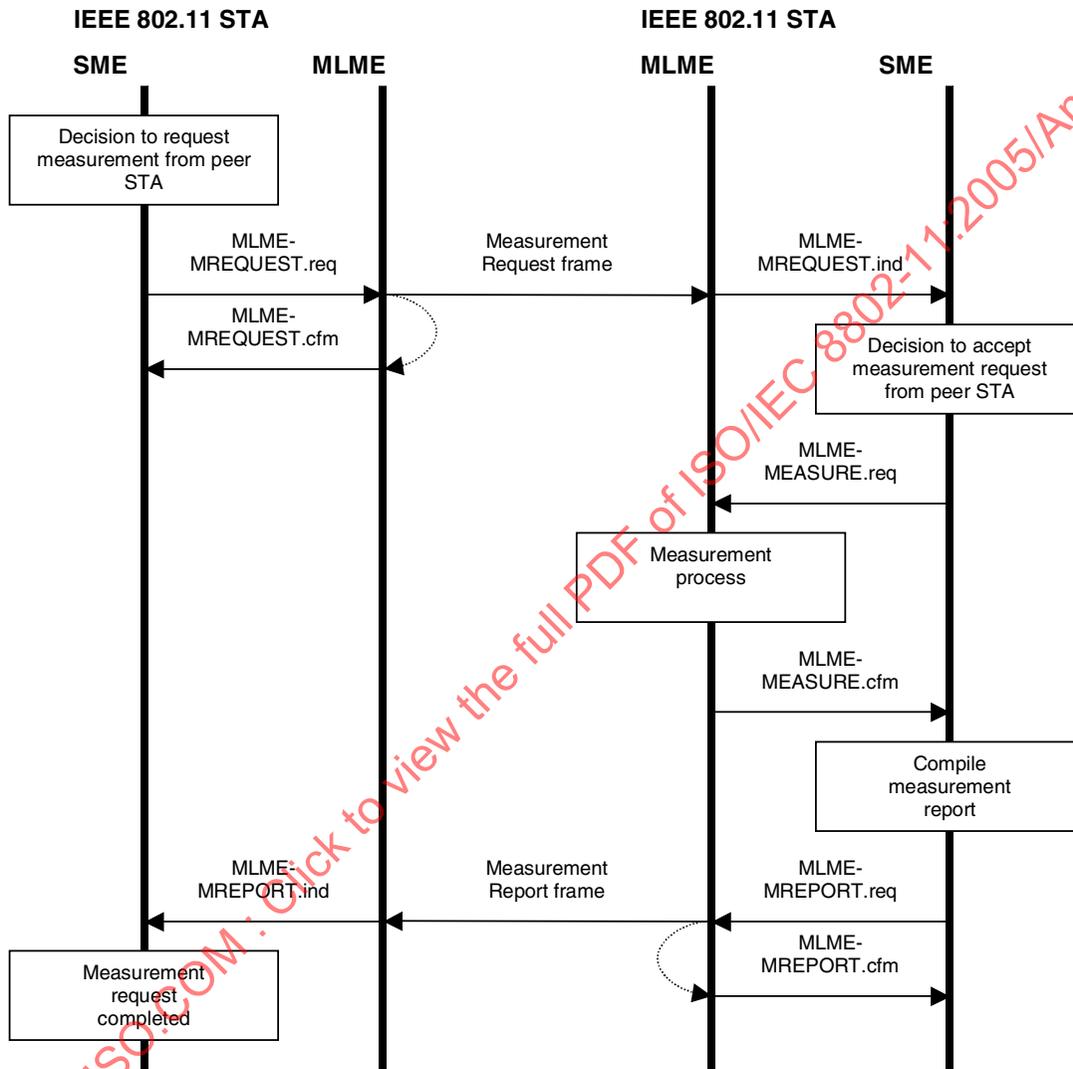


Figure 67b—Measurement request—accepted

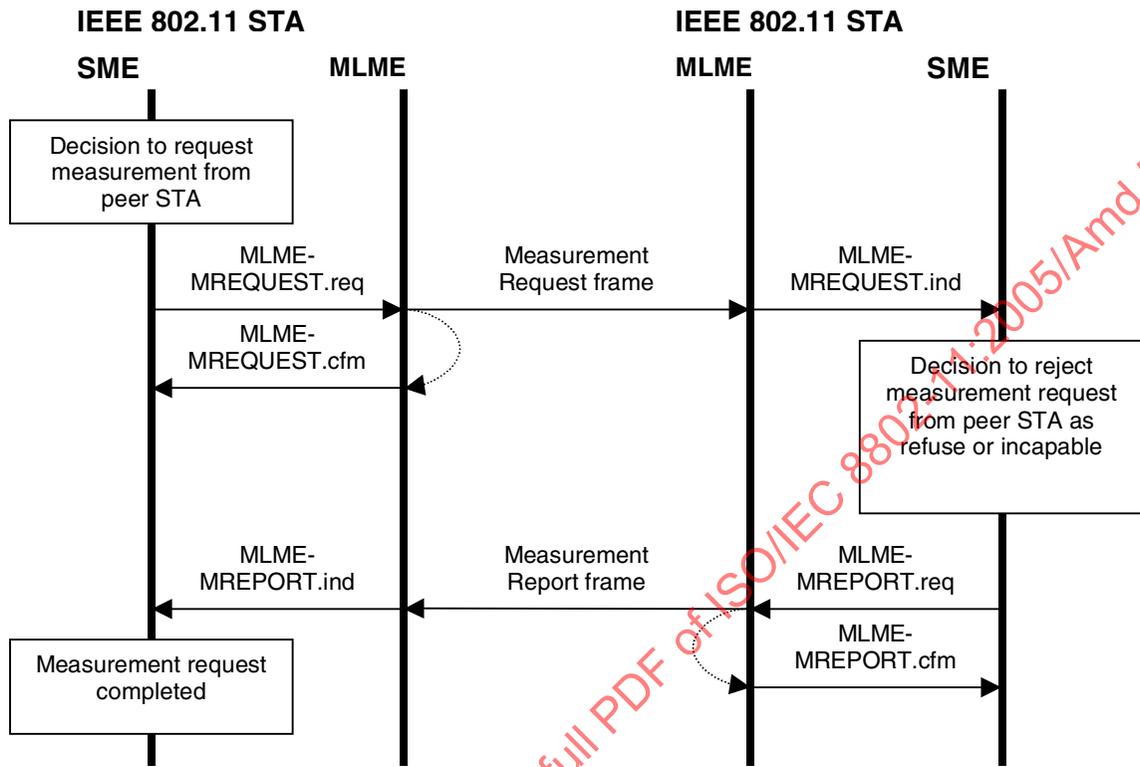


Figure 67c—Measurement request - rejected

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8802/11:2005/Amd 5:2006

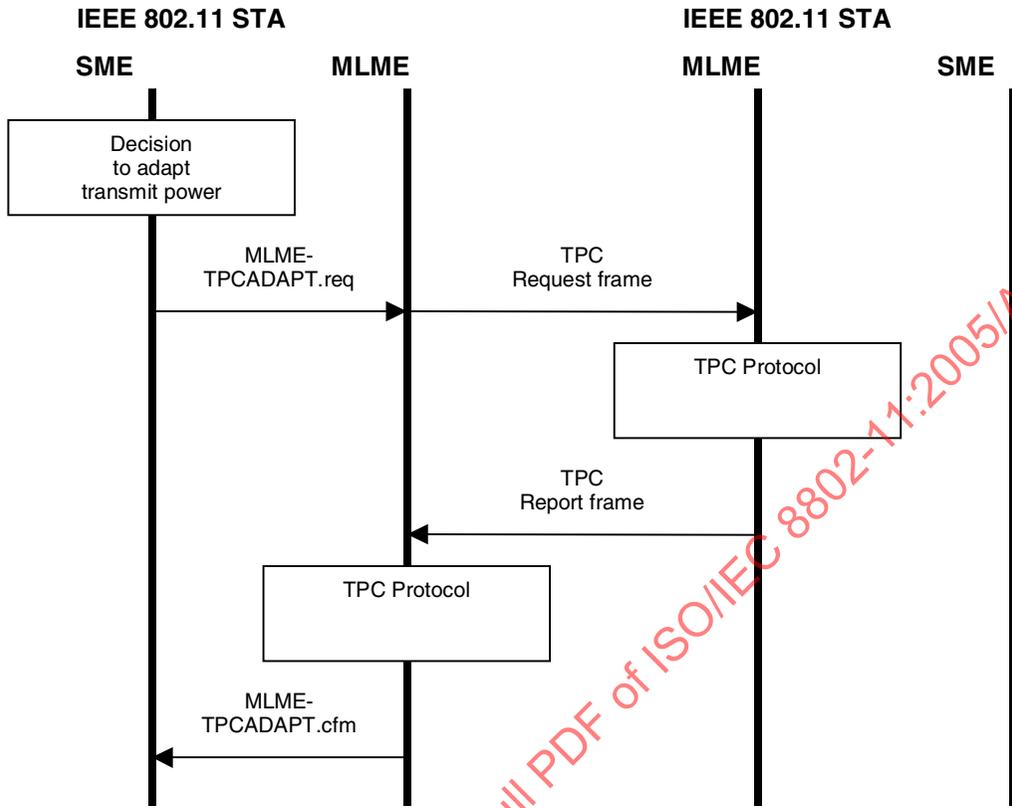


Figure 67d—TPC adaptation

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8802-11:2005/Amd 5:2006

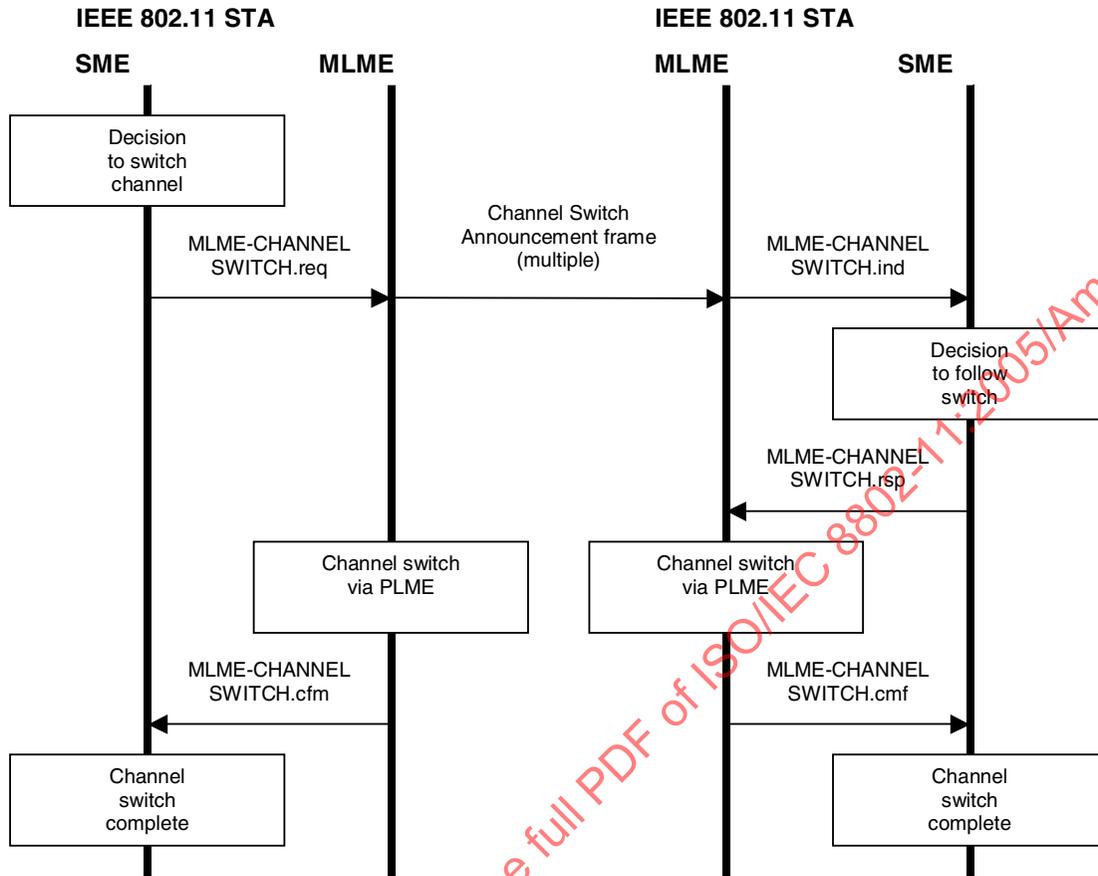


Figure 67e—Channel switch

### 10.3.12 Measurement request

This set of primitives supports the signaling of measurement requests between peer SMEs.

#### 10.3.12.1 MLME-MREQUEST.request

##### 10.3.12.1.1 Function

This primitive requests the transmission of a measurement request to a peer entity.

##### 10.3.12.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MREQUEST.request(
    Peer MAC Address,
    Dialog Token,
    Measurement Request Set
)
```

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual or group MAC Address	The address of the peer MAC entity to which the measurement request shall be set.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction.
Measurement Request Set	Set of measurement requests, each as defined in the Measurement Request element	Set of measurement requests, each as defined in the Measurement Request element	A set of measurement requests, each containing a Measurement Token, Measurement Request Mode, Measurement Type, and a Measurement Request.

### 10.3.12.1.3 When generated

This primitive is generated by the SME to request that a Measurement Request frame be sent to a peer entity to initiate one or more measurements.

### 10.3.12.1.4 Effect of receipt

On receipt of this primitive, the MLME shall construct a Measurement Request frame containing the set of Measurement Request elements specified. This frame shall then be scheduled for transmission.

### 10.3.12.2 MLME-MREQUEST.confirm

#### 10.3.12.2.1 Function

This primitive reports the result of a request to send a Measurement Request frame.

#### 10.3.12.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MREQUEST.confirm(
    ResultCode
)
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the outcome of a request to send a Measurement Request frame.

### 10.3.12.2.3 When generated

This primitive is generated by the MLME when the request to transmit a Measurement Request frame completes.



### 10.3.13.1 MLME-MEASURE.request

#### 10.3.13.1.1 Function

This primitive is generated by the SME to request that the MLME initiate specified measurements.

#### 10.3.13.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MEASURE.request(
                                Dialog Token,
                                Measurement Request Set
                                )
```

Name	Type	Valid range	Description
Dialog Token	Integer	0-255	The Dialog Token to identify the measurement transaction.
Measurement Request Set	Set of measurement requests, each as defined in the Measurement Request element	Set of measurement requests, each as defined in the Measurement Request element	A set of measurement requests, each containing a Measurement Token, Measurement Request Mode, Measurement Type, and a Measurement Request.

#### 10.3.13.1.3 When generated

This primitive is generated by the SME to request that the MLME initiate the specified measurements.

#### 10.3.13.1.4 Effect of receipt

On receipt of this primitive, the MLME shall commence the measurement process.

### 10.3.13.2 MLME-MEASURE.confirm

#### 10.3.13.2.1 Function

This primitive reports the result of a measurement.

#### 10.3.13.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MEASURE.confirm(
                                ResultCode,
                                Dialog Token,
                                Measurement Report Set
                                )
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	The outcome of the measurement request.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction.
Measurement Report Set	Set of measurement reports, each as defined in the Measurement Report element	Set of measurement reports, each as defined in the Measurement Report element	A set of measurement reports, each containing a Measurement Token, Measurement Report Mode, Measurement Type, and a Measurement Report.

### 10.3.13.2.3 When generated

This primitive is generated by the MLME to report the results when a measurement set completes.

### 10.3.13.2.4 Effect of receipt

On receipt of this primitive, the SME shall evaluate the result code and, if appropriate, shall store the channel measurements pending communication to the requesting entity or for local use.

### 10.3.14 Measurement report

This set of primitives supports the signaling of measurement reports.

#### 10.3.14.1 MLME-MREPORT.request

##### 10.3.14.1.1 Function

This primitive supports the signaling of measurement reports between peer SMEs.

##### 10.3.14.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-MREPORT.request(
    Peer MAC Address,
    Dialog Token,
    Measurement Report Set
)
```



#### 10.3.14.2.4 Effect of receipt

On receipt of this primitive, the SME shall evaluate the result code.

#### 10.3.14.3 MLME-MREPORT.indication

##### 10.3.14.3.1 Function

This primitive indicates that a Measurement Report frame has been received from a peer entity. This management report may be in response to an earlier measurement request (e.g., MLME-MREQUEST.request) or may be an autonomous report.

##### 10.3.14.3.2 Semantics of the service primitive

The primitive parameters are as follows:

MLME-MREPORT.indication(  
     Peer MAC Address,  
     Dialog Token,  
     Measurement Report Set  
 )

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual MAC Address	The address of the peer MAC entity from which the Measurement Report frame was received.
Dialog Token	Integer	0–255	The dialog token to identify the measurement transaction. Set to 0 for an autonomous report.
Measurement Report Set	Set of measurement reports, each as defined in the Measurement Report element	Set of measurement reports, each as defined in the Measurement Report element	A set of measurement reports, each containing a Measurement Token, Measurement Report Mode, Measurement Type, and a Measurement Report.

##### 10.3.14.3.3 When generated

This primitive is generated by the MLME when a valid Measurement Report frame is received.

##### 10.3.14.3.4 Effect of receipt

On receipt of this primitive, measurement data may be available for SME processes, such as channel selection.

#### 10.3.15 Channel switch

##### 10.3.15.1 MLME-CHANNELSWITCH.request

##### 10.3.15.1.1 Function

This primitive requests a switch to a new operating channel.

### 10.3.15.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-CHANNELSWITCH.request(
    Mode,
    Channel Number,
    Channel Switch Count
)
```

Name	Type	Valid range	Description
Mode	Integer	0, 1	Channel switch mode, as defined for the Channel Switch Announcement element.
Channel Number	Integer	As defined in 17.3.8.3.3	Specifies the new channel number.
Channel Switch Count	Integer	0-255	Specifies the number of TBTTs until the channel switch event, as described for the Channel Switch Announcement element.

### 10.3.15.1.3 When generated

This primitive is generated by the SME to schedule a channel switch and announce this switch to peer entities in the BSS.

### 10.3.15.1.4 Effect of receipt

On receipt of this primitive, the MLME shall schedule the channel switch event and announce this switch to other STAs in the BSS using the Channel Switch Announcement frame or element. The MLME shall ensure the timing of frame transmission takes into account the activation delay. The actual channel switch may be achieved at the appropriate time through the MLME-PLME interface using the PLME-SET primitive of the dot11CurrentFrequency MIB attribute.

### 10.3.15.2 MLME-CHANNELSWITCH.confirm

#### 10.3.15.2.1 Function

This primitive reports the result of a request to switch channel.

#### 10.3.15.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-CHANNELSWITCH.confirm(
    ResultCode
)
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the result of a channel switch request.

### 10.3.15.2.3 When generated

This primitive is generated by the MLME when a channel switch request completes. Possible unspecified failure causes include an inability to schedule a channel switch announcement.

### 10.3.15.2.4 Effect of receipt

The SME is notified of the results of the channel switch procedure.

### 10.3.15.3 MLME-CHANNELSWITCH.indication

#### 10.3.15.3.1 Function

This primitive indicates that a channel switch announcement has been received from a peer entity.

#### 10.3.15.3.2 Semantics of the service primitive

The primitive parameters are as follows:

MLME-CHANNELSWITCH.indication(  
     Peer MAC Address,  
     Mode,  
     Channel Number,  
     Channel Switch Count  
 )

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual MAC Address	The address of the peer MAC entity from which the Measurement Report frame was received.
Mode	Integer	0, 1	Channel switch mode, as defined for the Channel Switch Announcement element.
Channel Number	Integer	As defined in 17.3.8.3.3	Specifies the new channel number.
Channel Switch Count	Integer	0-255	Specifies the number of TBTTs until the channel switch event, as described for the Channel Switch Announcement element.

### 10.3.15.3.3 When generated

This primitive is generated by the MLME when a valid Channel Switch Announcement frame is received.

### 10.3.15.3.4 Effect of receipt

On receipt of this primitive, the SME shall decide whether to accept the switch.

### 10.3.15.4 MLME-CHANNELSWITCH.response

#### 10.3.15.4.1 Function

This primitive is used to schedule an accepted channel switch.

#### 10.3.15.4.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-CHANNELSWITCH.response(
    Mode,
    Channel Number,
    Channel Switch Count
)
```

Name	Type	Valid range	Description
Mode	Integer	0, 1	Channel switch mode, as defined for the Channel Switch Announcement element.
Channel Number	Integer	As defined in 17.3.8.3.3	Specifies the new channel number.
Channel Switch Count	Integer	0–255	Specifies the number of TBTTs until the channel switch event, as described for the Channel Switch Announcement element.

#### 10.3.15.4.3 When generated

This primitive is generated by the SME to schedule an accepted channel switch request.

#### 10.3.15.4.4 Effect of receipt

On receipt of this primitive, the MLME shall schedule the channel switch. The actual channel switch may be achieved at the appropriate time through the MLME-PLME interface using the PLME-SET primitive of the dot11CurrentFrequency MIB attribute.

### 10.3.16 TPC request

This set of primitives supports the adaptation of transmit power between peer entities as described in 11.5.4.

### 10.3.16.1 MLME-TPCADAPT.request

#### 10.3.16.1.1 Function

This primitive supports the adaptation of transmit power between peer entities as specified in 11.5.4.

#### 10.3.16.1.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-TPCADAPT.request(
                                Peer MAC Address,
                                Dialog Token
                                )
```

Name	Type	Valid range	Description
Peer MAC Address	MACAddress	Any valid individual or group MAC Address	The address of the peer MAC entity to which the TPC request shall be set.
Dialog Token	Integer	0-255	The dialog token to identify the TPC transaction.

#### 10.3.16.1.3 When generated

This primitive is generated by the SME to request that a TPC Request frame be sent to a peer entity to request that entity to report transmit power and link margin information.

#### 10.3.16.1.4 Effect of receipt

On receipt of this primitive, the MLME shall construct a TPC Request frame. This frame shall then be scheduled for transmission.

### 10.3.16.2 MLME-TPCADAPT.confirm

#### 10.3.16.2.1 Function

This primitive reports the result of the TPC adaptation procedure.

#### 10.3.16.2.2 Semantics of the service primitive

The primitive parameters are as follows:

```
MLME-TPCADAPT.confirm(
                                ResultCode
                                )
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS, or UNSPECIFIED FAILURE	Reports the outcome of a request to send a TPC Request frame.

### 10.3.16.2.3 When generated

This primitive is generated by the MLME when the TPC adaptation procedure completes.

### 10.3.16.2.4 Effect of receipt

The SME is notified of the results of the TCP adaptation procedure.

## 11. MLME

*Insert 11.5 through 11.6.7.2 after 11.4 as follows and renumber figures and tables, as appropriate:*

### 11.5 TPC procedures

ERC/DEC/(99)23 requires RLANs operating in the 5 GHz band to use transmitter power control, involving specification of a regulatory maximum transmit power and a mitigation requirement for each allowed channel, to reduce interference with satellite services. This amendment describes such a mechanism, referred to as transmit power control (TPC).

This subclause describes TPC procedures that may be used to satisfy these and similar future regulatory requirements in Europe. The procedures may also satisfy comparable needs in other regulatory domains and other frequency bands and may be useful for other purposes (e.g., reduction of interference, range control, reduction of power consumption).

STAs shall use the TPC procedures defined in this subclause if dot11SpectrumManagementRequired is true. dot11SpectrumManagementRequired shall be set to TRUE when regulatory authorities require TPC. It may also be set to TRUE in other circumstances. The TPC procedures provide for the following:

- Association of STAs with an AP in a BSS based on the STA's power capability (see 11.5.1).
- Specification of regulatory and local maximum transmit power levels for the current channel (see 11.5.2).
- Selection of a transmit power for each transmission in a channel within constraints imposed by regulatory and local requirements (see 11.5.3).
- Adaptation of transmit power based on a range of information, including path loss and link margin estimates (see 11.5.4).

For the purposes of TPC, the following statements apply:

- A STA with dot11SpectrumManagementRequired set to TRUE shall not operate in a BSS or IBSS unless the Spectrum Management bit is set to 1 in the Capability Information field in Beacon frames and Probe Response frames received from other STAs in the BSS or IBSS, *with the following exception.*