

INTERNATIONAL STANDARD



**Household and similar electrical appliances – Safety –
Part 2-62: Particular requirements for commercial electric rinsing sinks**

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IECNORM.COM : Click to view the full text of IEC 60352-62:2019 PLV



IEC 60335-2-62

Edition 4.0 2019-12
REDLINE VERSION

INTERNATIONAL STANDARD



**Household and similar electrical appliances – Safety –
Part 2-62: Particular requirements for commercial electric rinsing sinks**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 97.040.50

ISBN 978-2-8322-7730-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
INTRODUCTION	7
1 Scope	8
2 Normative references	8
3 Terms and definitions	9
4 General requirement.....	10
5 General conditions for the tests	10
6 Classification.....	10
7 Marking and instructions.....	10
8 Protection against access to live parts.....	12
9 Starting of motor-operated appliances	12
10 Power input and current.....	13
11 Heating.....	13
12 Void.....	15
13 Leakage current and electric strength at operating temperature.....	15
14 Transient overvoltages	15
15 Moisture resistance	15
16 Leakage current and electric strength.....	16
17 Overload protection of transformers and associated circuits	17
18 Endurance	17
19 Abnormal operation	17
20 Stability and mechanical hazards.....	17
21 Mechanical strength	18
22 Construction	18
23 Internal wiring.....	19
24 Components	19
25 Supply connection and external flexible cords	19
26 Terminals for external conductors.....	20
27 Provision for earthing	20
28 Screws and connections.....	20
29 Clearances, creepage distances and solid insulation	21
30 Resistance to heat and fire.....	21
31 Resistance to rusting.....	22
32 Radiation, toxicity and similar hazards.....	22
Annexes	24
Annex N (normative) Proof tracking test.....	24
Annex P (informative) Guidance for the application of this standard to appliances used in tropical climates	25
Bibliography.....	26
Figure 101 – Probe for measuring surface temperatures.....	22
Figure 101 102 – Splash apparatus.....	23

Table 101 – Maximum temperature rises for specified external accessible surfaces under normal operating conditions 14

Table 102 – Assembling torques for screwed connections providing earthing continuity 21

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –

Part 2-62: Particular requirements for commercial electric rinsing sinks

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 60335-2-62 has been prepared by IEC technical committee 61: Safety of household and similar electrical appliances.

This fourth edition cancels and replaces the third edition published in 2002 and its Amendment 1:2008. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- indicates specific values for temperatures for accessible parts and water and aligns the text with IEC 60335-1, Edition 5, and its Amendments 1 and 2;
- requires the application of test probe 12 for the verification of access to live parts (8.101);
- foresees the use of a specific test probe for the measurements of temperatures of accessible surfaces (11.3);
- washing vessel (11.8);
- modification on leakage current defining the value for appliances with a power consumption less than 1 kW (13.2);
- addition of specific requirements concerning types of screws to be used for electrical connections and connections for earth continuity (Clause 28);
- addition of informative Annex P dealing with leakage currents for appliances used in tropical climates.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
61/5938/FDIS	61/5950/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60335 series, under the general title: *Household and similar electrical appliances – Safety*, can be found on the IEC website.

This part 2 is to be used in conjunction with the latest edition of IEC 60335-1 and its amendments. It was established on the basis of the fifth edition (2010) of that standard.

NOTE 1 When “Part 1” is mentioned in this standard, it refers to IEC 60335-1.

This part 2 supplements or modifies the corresponding clauses in IEC 60335-1, so as to convert that publication into the IEC standard: *Particular requirements for commercial electric rinsing sinks*.

When a particular subclause of Part 1 is not mentioned in this part 2, that subclause applies as far as is reasonable. When this standard states “addition”, “modification” or “replacement”, the relevant text in Part 1 is to be adapted accordingly.

NOTE 2 The following numbering system is used:

- subclauses, tables and figures that are numbered starting from 101 are additional to those in Part 1;
- unless notes are in a new subclause or involve notes in Part 1, they are numbered starting from 101, including those in a replaced clause or subclause;
- additional annexes are lettered AA, BB, etc.

NOTE 3 The following print types are used:

- requirements: in roman type;

- test specifications: in italic type;
- notes: in small roman type.

Words in **bold** in the text are defined in Clause 3. When a definition concerns an adjective, the adjective and the associated noun are also in bold.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

NOTE 4 The attention of National Committees is drawn to the fact that equipment manufacturers and testing organizations may need a transitional period following publication of a new, amended or revised IEC publication in which to make products in accordance with the new requirements and to equip themselves for conducting new or revised tests.

It is the recommendation of the committee that the content of this publication be adopted for implementation nationally not earlier than 12 months from the date of publication.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

INTRODUCTION

It has been assumed in the drafting of this International Standard that the execution of its provisions is entrusted to appropriately qualified and experienced persons.

This standard recognizes the internationally accepted level of protection against hazards such as electrical, mechanical, thermal, fire and radiation of appliances when operated as in normal use taking into account the manufacturer's instructions. It also covers abnormal situations that can be expected in practice and takes into account the way in which electromagnetic phenomena can affect the safe operation of appliances.

This standard takes into account the requirements of IEC 60364 as far as possible so that there is compatibility with the wiring rules when the appliance is connected to the supply mains. However, national wiring rules may differ.

If an appliance within the scope of this standard also incorporates functions that are covered by another part 2 of IEC 60335, the relevant part 2 is applied to each function separately, as far as is reasonable. If applicable, the influence of one function on the other is taken into account.

When a part 2 standard does not include additional requirements to cover hazards dealt with in Part 1, Part 1 applies.

NOTE 1 This means that the technical committees responsible for the part 2 standards have determined that it is not necessary to specify particular requirements for the appliance in question over and above the general requirements.

This standard is a product family standard dealing with the safety of appliances and takes precedence over horizontal and generic standards covering the same subject.

NOTE 2 Horizontal and generic standards covering a hazard are not applicable since they have been taken into consideration when developing the general and particular requirements for the IEC 60335 series of standards. For example, in the case of temperature requirements for surfaces on many appliances, generic standards, such as ISO 13732-1 for hot surfaces, are not applicable in addition to Part 1 or part 2 standards.

An appliance that complies with the text of this standard will not necessarily be considered to comply with the safety principles of the standard if, when examined and tested, it is found to have other features that impair the level of safety covered by these requirements.

An appliance employing materials or having forms of construction differing from those detailed in the requirements of this standard may be examined and tested according to the intent of the requirements and, if found to be substantially equivalent, may be considered to comply with the standard.

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –

Part 2-62: Particular requirements for commercial electric rinsing sinks

1 Scope

This clause of Part 1 is replaced by the following.

This part of IEC 60335 deals with the safety of electrically operated commercial **rinsing sinks** ~~not intended for household use~~ used in commercial kitchens, their **rated voltage** being not more than 250 V for single-phase appliances connected between one phase and neutral, and 480 V for other appliances.

NOTE 101 These appliances are used for example in **kitchens** of restaurants, canteens, hospitals and commercial enterprises such as bakeries, butcheries, etc.

The electrical part of appliances making use of other forms of energy is also within the scope of this standard.

As far as is practicable, this standard deals with the common hazards presented by these types of appliances.

NOTE 102 Attention is drawn to the fact that

- for appliances intended to be used in vehicles or on board ships or aircraft, additional requirements ~~may~~ can be necessary;
- for appliances intended to be used in tropical countries, special requirements ~~may~~ can be necessary;
- in many countries, additional requirements are specified by the national health authorities, the national authorities responsible for the protection of labour, the national water supply authorities and similar authorities.

NOTE 103 This standard does not apply to

- appliances designed primarily for sterilizing to clinical standards;
- dishwashers (IEC 60335-2-58);
- appliances designed exclusively for industrial purposes;
- appliances intended to be used in locations where special conditions prevail, such as the presence of a corrosive or explosive atmosphere (dust, vapour or gas).

2 Normative references

This clause of Part 1 is applicable **except** as follows.

Addition:

IEC 60584-1, *Thermocouples – Part 1: EMF specifications and tolerances*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel – Part 1: Bolts, screws and studs with specified property classes – Coarse thread and fine pitch thread*

ISO 3506-1, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 1: Bolts, screws and studs*

ISO 3506-2, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 2: Nuts*

ISO 3506-3, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 3: Set screws and similar fasteners not under tensile stress*

ISO 3506-4, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 4: Tapping screws*

3 Terms and definitions

This clause of Part 1 is applicable except as follows.

3.1 Definitions relating to physical characteristics

3.1.4 ~~Addition:~~

NOTE 101 The **rated power input** is the sum of the power inputs of all the individual elements in the appliance that can be on at one time; where there are several such combinations possible, that giving the highest power input is used in determining the **rated power input**.

3.1.9 *Replacement:*

normal operation

operation of the appliance under the following conditions:

Appliances are operated in accordance with the instructions ~~for use~~, with all the controls intended to be operated by the user adjusted to their maximum setting. Lids and covers, if any, are placed in their intended position.

Appliances intended to be filled by hand or by a manually operated tap are filled to the **indicated level**.

Where several levels are marked, that giving the most unfavourable conditions is used.

Appliances intended to be filled automatically are connected to a water supply having the pressure designated by the manufacturer.

Where the manufacturer specifies a range of pressures, the pressure is adjusted to that giving the most unfavourable conditions.

The temperature of the water supplied is $15\text{ °C} \pm 5\text{ °C}$.

Motors incorporated in the appliance are operated in the intended manner, under the most severe conditions that can be expected in normal use taking into account the instructions ~~for use~~.

3.5 Definitions relating to types of appliances

3.5.101

rinsing sink

an appliance intended for rinsing crockery, cutlery chopsticks and utensils with water heated in the appliance itself

3.8 Definitions relating to miscellaneous matters

~~3.102~~3.8.101

indicated level

a mark on the appliance to indicate the maximum liquid level for correct operation

~~3.103~~ 3.8.102

installation wall

a special fixed construction containing supply facilities for appliances installed in conjunction with it

4 General requirement

This clause of Part 1 is applicable.

5 General conditions for the tests

This clause of Part 1 is applicable except as follows.

5.10 Addition:

*Appliances intended for installation in a bank of other appliances and appliances intended to be fixed to an **installation wall** are enclosed to obtain protection against electric shock and harmful ingress of water equivalent to that when installed in accordance with the instructions provided with the appliance.*

NOTE 101 Appropriate enclosures or additional appliances ~~may~~ can be needed for test purposes.

5.101 *Appliances are tested as **heating appliances**, even if they incorporate a motor.*

5.102 *Appliances, when assembled in combination with or incorporating other appliances, are tested in accordance with the requirements of this standard. The other appliances are operated simultaneously in accordance with the requirements of the relevant standards.*

6 Classification

This clause of Part 1 is applicable except as follows.

6.1 Replacement:

Appliances shall be **class I** with respect to protection against electric shock.

Compliance is checked by inspection and by the relevant tests.

6.2 Addition:

Appliances normally used on a table shall be at least IPX3. Other appliances shall be at least IPX4.


7 Marking and instructions

This clause of Part 1 is applicable except as follows.

7.1 Addition:

Appliances shall be marked with the water pressure or range of pressures, in kilopascals (kPa), for appliances intended to be connected to a water supply, unless this is indicated in the instructions ~~for use~~.

~~7.6 Addition:~~



7.12 Addition:

If symbol IEC 60417-5021 (2002-10) is marked on the appliance its meaning shall be explained.

The instructions shall warn on potential injury and state that the tableware shall be free from sharp food residues like sharp fish bones or bone fragments before being put into the appliance.

The instructions shall include the substance of the following:

These appliances are intended to be used for commercial applications, for example in kitchens of restaurants, canteens, hospitals and in commercial enterprises such as bakeries, butcheries, etc.

If the manufacturer wants to limit the use of the appliance to less than the above, this has to be clearly stated in the instructions.

Modification:

The instructions concerning persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge and children playing with the appliance are not applicable.

7.12.1 Replacement:

~~The appliance shall be accompanied by instructions detailing any special precautions necessary for installation.~~

Addition:

For appliances intended for installation in a bank of other appliances and appliances intended to be fixed to an **installation wall**, details of how to ensure appropriate protection against electric shock and harmful ingress of water shall be supplied. If the controls of more than one appliance are combined in a separate enclosure, detailed installation instructions shall be supplied. Instructions for **user maintenance**, for example cleaning, shall also be given. They shall include a statement that the appliance is not to be cleaned with a water jet or a steam cleaner.

For appliances that are permanently connected to fixed wiring and for which leakage currents may exceed 10 mA, particularly if disconnected or not used for long periods, or during initial installation, the instructions shall give recommendations regarding the rating of **protective devices**, such as earth leakage relays, to be installed.

If a **stationary appliance** is intended to be moved for cleaning, this shall be stated.

For **stationary appliances** equipped with rollers or castors or intended to be moved for cleaning, the instructions shall state the substance of the following.

This appliance is to be connected with flexible connections for equipotential bonding and connection to services such as electricity supply, water supply, gas supply and steam

supply such that the appliance can be moved in the direction required for cleaning a distance not less than the dimension of the appliance in the direction of movement plus 500 mm without the flexible connections becoming taut or being subject to strain.

~~Compliance is checked by inspection.~~

7.12.4 Addition:

The instructions for **built-in appliances** having a separate control panel for several appliances shall state that the control panel is only to be connected to the specified appliances in order to avoid a possible hazard.

7.15 Addition:

~~When it is not practical to place the marking of **fixed appliances** so that it is visible after the appliance has been installed, the relevant information shall also be included in the instructions for use or on an additional label that can be fixed near the appliance after installation.~~

For **fixed appliances**, the marking of the name or trademark or identification mark of the manufacturer or responsible vendor and the model or type reference shall be marked on the appliance and, if not visible when the appliance is installed as in normal use, shall be included in the instructions or on an additional label that can be fixed near the appliance after installation.

NOTE 101 An example of such an appliance is a **built-in appliance**.

~~7.101 Equipotential bonding terminals shall be marked with symbol 5021 of IEC 60417-1.~~

~~These markings shall not be placed on screws, removable washers or other parts that can be removed when conductors are being connected.~~

~~Compliance is checked by inspection.~~

~~7.102~~ 7.101 Appliances intended to be filled by hand or a manually operated tap shall be marked with an **indicated level**.

Compliance is checked by inspection.

8 Protection against access to live parts

This clause of Part 1 is applicable except as follows:

8.101 Heating elements that are liable to be touched accidentally by a fork or similar pointed object in normal use shall be so protected that it is not possible to touch their **live parts** with such an object.

Compliance is checked by inserting test probe 12 of IEC 61032 at all points where the probe can enter in the vicinity of live parts. The probe is applied with a force not exceeding 1 N.

9 Starting of motor-operated appliances

This clause of Part 1 is not applicable ~~except as follows~~.

~~9.101 Fan motors providing a cooling effect in order to comply with the requirements of Clause 11 shall start under all voltage conditions that may occur in use.~~

~~Compliance is checked by starting the motor three times at a voltage equal to 0,85 times rated voltage, the motor being at room temperature at the beginning of the test.~~

~~The motor is started each time under the conditions occurring at the beginning of normal operation or, for automatic appliances, at the beginning of the normal cycle of operation, the motor being allowed to come to rest between successive starts. For appliances provided with motors having other than centrifugal starting switches, this test is repeated at a voltage equal to 1,06 times rated voltage.~~

~~In all cases, the motor shall start and it shall function in such a way that safety is not affected, and the overload protection devices of the motor shall not operate.~~

~~NOTE—The supply source is such that, during the test, the drop in voltage does not exceed 1 %.~~

10 Power input and current

This clause of Part 1 is applicable except as follows.

10.1 Addition:

~~NOTE 101~~ For appliances having more than one **heating unit**, the total power input may be determined by measuring the power input of each **heating unit** separately (see also 3.1.4).

11 Heating

This clause of Part 1 is applicable except as follows.

11.2 Addition:

Appliances intended to be fixed to the floor and appliances with a mass greater than 40 kg and not provided with rollers, castors or similar means are installed in accordance with the manufacturer's instructions. If no instructions are given, these appliances are considered as appliances normally placed on the floor.

11.3 Addition:

Where the external **accessible surfaces** are suitably flat and access permits, then the test probe of Figure 101 is used to measure the temperature rises of external **accessible surfaces** specified in Table 101. The probe is applied with a force of $4\text{ N} \pm 1\text{ N}$ to the surface in such a way that the best possible contact between the probe and the surface is ensured. The measurement is performed after a contact period of 30 s.

The probe may be held in place using a laboratory stand clamp or similar device. Any measuring instrument giving the same results as the probe may be used.

The water temperature is measured 25 mm below the centre of the liquid surface. However, the distance from the heating element shall be at least 10 mm.

11.4 Replacement:

Appliances are operated under **normal operation** such that the total power input of the appliance is 1,15 times **rated power input**. If it is not possible to switch on all heating elements at the same time, the test is made with each of the combinations that the switch arrangement will allow, the highest load possible with each switching arrangement being in circuit.

If the appliance is provided with a control that limits the total power input, the test is made with whichever combination of heating units, as may be selected by the control, imposes the most severe condition.

If the temperature rise limits of motors, transformers or electronic circuits are exceeded, the test is repeated with the appliance supplied at 1,06 times **rated voltage**. In this case, only the temperature rises of motors, transformers or electronic circuits are measured.

~~NOTE 101 – See also 11.7.~~

11.7 Replacement:

~~Appliances are operated until steady conditions are established.~~

When an appliance is assembled in combination with, equipped with or incorporating accessories or other appliances, the interactions shall be covered if they are provided to operate simultaneously as stated by the manufacturer or by a common control.

NOTE 101 The duration of the test ~~may~~ can consist of more than one cycle of operation.

11.8 Addition:

During the test, the temperature rises are monitored continuously and shall not exceed the values shown in Table 3 and Table 101.

Table 101 – Maximum temperature rises for specified external accessible surfaces under normal operating conditions

Surface ^a	Temperature rise of external accessible surfaces ^b K
Bare metal	48
Coated metal ^c	59
Glass and ceramic	65
Plastic and plastic coating > 0,4 mm ^d	74

^a Temperature rises are not measured on:

- the underside of appliances intended to be used on a working surface or floor;
- the rear surface of appliances;
- surfaces that are inaccessible to a 75 mm diameter probe having a hemispherical end applied with a force not exceeding 1 N;
- surfaces that are submersed during normal operation.

^b Metal is considered coated when a coating having a minimum thickness of 90 µm made by enamel or non-substantially plastic coating is used.

^c The temperature rise limit of plastic also applies for plastic material having a metal finish of thickness less than 0,1 mm.

^d When the thickness of the plastic coating does not exceed 0,4 mm, the temperature rise limits of coated metal for underlying metal apply or the temperature rise limits for glass or ceramic material for underlying glass or ceramic material apply.

For appliances that require manual assistance for cleaning, the water temperature shall not exceed 55 °C.

12 Void

13 Leakage current and electric strength at operating temperature

This clause of Part 1 is applicable except as follows.

13.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with a maximum of 10 mA, whichever is higher
- for other appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with no maximum, whichever is higher

For **portable class I appliances**, instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with a maximum of 10 mA, whichever is higher

14 Transient overvoltages

This clause of Part 1 is applicable.

15 Moisture resistance

This clause of Part 1 is applicable except as follows.

15.1.1 Addition:

~~In addition, IPX0, IPX1, IPX2,~~ IPX3 and IPX4 appliances are subjected for 5 min to the following splash test.

The apparatus shown in Figure ~~101~~ 102 is used. During the test, the water pressure is so regulated that the water splashes up 150 mm above the bottom of the bowl. The bowl is placed on the floor for appliances normally used on the floor. For all other appliances, on a horizontal support 50 mm below the lowest edge of the appliance, the bowl is so moved around as to splash the appliance from all directions. Care is taken that the appliance is not hit by the direct jet.

15.1.2 Modification:

Appliances normally used on a table are placed on a support having dimensions that are 15 cm ± 5 cm in excess of those of the orthogonal projection of the appliance on the support.

15.2 ~~Replacement:~~

~~Appliances shall be constructed so that spillage of liquid in normal use does not affect their electrical insulation.~~

~~Compliance is checked by the following test.~~

~~Appliances with **type X attachment**, except those having a specially prepared cord, are fitted with the lightest permissible type of flexible cable or cord, of the smallest cross-sectional area specified in 26.6, and other appliances are tested as delivered.~~

~~Detachable parts are removed.~~

~~The containers of appliances intended to be filled by hand are completely filled with water containing approximately 1 % NaCl and a further quantity equal to 15 % of the capacity of the container but not more than 10 l is poured in steadily over a period of 1 min.~~

Addition:

Appliances intended to be filled by a manually operated tap or automatically are connected to a water supply having the maximum supply pressure indicated by the manufacturer. The means for controlling the incoming water is held fully open and the filling continued for ~~4~~ 15 min after the first evidence of overflow, or until a further protective system operates to stop the inflow.

~~The appliance shall then withstand the electric strength test of 16.3, and inspection shall show that there is no trace of water on the insulation that could result in a reduction of clearances and creepage distances below the values specified in Clause 29.~~

~~15.3 Addition:~~

~~NOTE 101 If it is not possible to place the whole appliance in the humidity cabinet, parts containing electrical components are tested separately, taking into account the conditions that occur in the appliance.~~

15.101 Appliances that are provided with a tap intended for filling or cleaning shall be constructed so that the water from the tap cannot come into contact with **live parts**.

Compliance is checked by the following test.

The tap is fully opened for 1 min with the appliance connected to a water supply having the maximum water pressure indicated by the manufacturer. Tiltable and movable parts, including lids, are tilted or placed in the most unfavourable position. Swivelling outlets of water taps are so positioned as to direct water on to those parts that will give the most unfavourable result.

Immediately following this treatment, the appliance shall withstand an electric strength test as specified in 16.3.

16 Leakage current and electric strength

This clause of Part 1 is applicable except as follows.

16.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances *0,75 mA or 1 mA per kW rated power input of the appliance with a maximum of 10 mA, whichever is higher*
- for other appliances *0,75 mA or 1 mA per kW rated power input of the appliance with no maximum, whichever is higher*

For portable class I appliances, instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances *0,75 mA or 1 mA per kW rated power input of the appliance with a maximum of 10 mA, whichever is higher*

17 Overload protection of transformers and associated circuits

This clause of Part 1 is applicable.

18 Endurance

This clause of Part 1 is applicable.

19 Abnormal operation

This clause of Part 1 is applicable except as follows.

~~19.1 Addition:~~

~~A control or switching device that is intended for different settings corresponding to different functions of the same part of the appliance and that are covered by different standards is, in addition, set in the most severe setting irrespective of the instructions for use.~~

19.2 Addition:

Appliances are tested without water and those intended to be automatically filled are tested with the water supply turned off.

19.4 Addition:

NOTE 101 *The main contacts of the contactor intended for switching on and off the heating element(s) in normal use are locked in the "on" position. However, if two contactors operate independently of each other or if one contactor operates two independent sets of main contacts, these contacts are locked in the "on" position in turn.*

20 Stability and mechanical hazards

This clause of Part 1 is applicable except as follows.

20.1 Addition:

Covers, lids and accessories are placed in their most unfavourable positions.

NOTE 101 Any spillage of liquid is ignored.

21 Mechanical strength

This clause of Part 1 is applicable.

22 Construction

This clause of Part 1 is applicable except as follows.

22.54 Not applicable.

22.55 Not applicable.

22.101 For three-phase appliances, **thermal cut-outs** protecting circuits with heating elements, and those for motors of which the unexpected starting ~~of which~~ may cause a hazard, shall be of the non-self-resetting and trip-free type, and shall provide **all-pole disconnection** from ~~the~~ related supply circuits.

For single-phase appliances and for single-phase heating elements, and/or motors connected between one phase and neutral or between phase and phase, **thermal cut-outs** protecting circuits with heating elements, and those for motors of which the unexpected starting may cause a hazard, shall be of the non-self-resetting and trip-free type, and shall provide at least one-pole disconnection.

If the **non-self-resetting thermal cut-out** is only accessible after removing parts with the aid of a **tool**, the trip-free type is not required.

NOTE 1 **Thermal cut-outs** of the trip-free type have an automatic action, with a reset actuating member, so constructed that the automatic action is independent of manipulation or position of the reset mechanism.

Thermal cut-outs of the bulb and capillary type that operate during the tests of Clause 19 shall be such that rupture of the capillary tube shall not impair compliance with the requirements of 19.13.

Compliance is checked by inspection, by manual test and by rupturing the capillary tube.

NOTE 2 Care ~~must~~ shall be taken to ensure that the rupture does not seal the capillary tube.

22.102 Lights, switches or push-buttons shall only be coloured red for the indication of danger, alarm or similar situations.

Compliance is checked by inspection.

22.103 Drain cocks and other emptying devices for hot liquids shall be constructed so that they cannot be opened inadvertently. Moreover, it shall not be possible to withdraw drain plugs inadvertently.

Compliance is checked by inspection and by manual test.

NOTE For example, this requirement is met when the valve handle is such that, when released, it returns automatically to the closed position, or is of the wheel type or is placed in a recess.

22.104 Means provided to allow drainage of liquid from appliances shall discharge the liquid in such a manner that electrical insulation is not affected.

Compliance is checked by inspection and by manual test.

~~22.105 Portable appliances shall not have openings on the underside that would allow small items to penetrate and touch live parts.~~

~~Compliance is checked by inspection and by measuring the distance between the supporting surface and live parts through openings. This distance shall be at least 6 mm. However, if the appliance is fitted with legs, this distance is increased to 10 mm if the appliance is intended to stand on the table and to 20 mm if it is intended to stand on the floor.~~

~~22.106~~**22.105** The level to which manually filled appliances have to be filled shall be so located as to be readily visible when filling.

Compliance is checked by inspection.

23 Internal wiring

This clause of Part 1 is applicable except as follows.

23.3 Addition:

~~When the capillary tube of the thermostat is liable to flexing in normal use the following applies:~~

- ~~— where the capillary tube is fitted as part of the internal wiring, Part 1 applies;~~
- ~~— where the capillary tube is separate, it shall be subjected to 1 000 flexings at a rate not exceeding 30 per minute.~~

~~NOTE 101 If, in any of the above cases, it is not possible to move the movable part of the appliance at the given rate, due for example to the mass of the part, the rate of flexing may be reduced.~~

~~After the test, the capillary tube shall show no sign of damage within the meaning of this standard and no damage impairing its further use.~~

~~However, if a rupture of the capillary tube renders the appliance inoperative (fail-safe), separate capillary tubes are not tested, and those fitted as part of the internal wiring are not inspected for compliance with the requirements.~~

~~Compliance in this instance is checked by rupturing the capillary tube.~~

~~NOTE 102 Care must be taken to ensure that the rupture does not seal the capillary tube.~~

When the capillary tube of a thermostat is fitted as part of the internal wiring where flexing occurs in normal use, it is subjected to the flexing test that is applied to the internal wiring. In this case, if a rupture of the capillary tube occurs, the appliance shall be rendered inoperative (fail-safe).

Other capillary tubes of thermostats where flexing occurs in normal use are subjected to 1 000 flexings at a rate not exceeding 30/min. In this case, the capillary tube shall show no sign of damage impairing the thermostat's further use.

24 Components

This clause of Part 1 is applicable.

25 Supply connection and external flexible cords

This clause of Part 1 is applicable except as follows.

25.1 Modification:

Appliances shall not be provided with an appliance inlet.

25.3 Addition:

~~Fixed appliances and~~ Appliances with a mass greater than 40 kg intended for permanent connection to fixed wiring and not provided with rollers, castors or similar means shall be constructed so that the ~~supply cord~~ connection can be ~~connected~~ done after the appliance has been installed in accordance with the ~~installation~~ manufacturer's instructions.

Terminals for permanent connection of cables to fixed wiring may also be suitable for the **type X attachment** of a **supply cord**. In this case, a cord anchorage complying with 25.16 shall be fitted to the appliance.

If the appliance is provided with a set of terminals allowing the connection of a flexible cord, they shall be suitable for the **type X attachment** of the cord.

In both cases, the instructions shall give full particulars of the power **supply cord**.

The connection to the supply wires of **built-in appliances** may be made before the appliance is installed.

~~Compliance is checked by inspection.~~

25.7 Modification:

~~Instead of the types of supply cords specified, the following applies.~~

Supply cords shall be oil-resistant sheathed flexible cable not lighter than ordinary polychloroprene ~~or other equivalent synthetic elastomer~~ sheathed cord (code designation 60245 IEC 57).

26 Terminals for external conductors

This clause of Part 1 is applicable.

27 Provision for earthing

This clause of Part 1 is applicable except as follows.

27.2 Addition:

Stationary appliances shall be provided with a terminal for the connection of an external equipotential conductor. This terminal shall be in effective electrical contact with all fixed exposed metal parts of the appliance, and shall allow the connection of a conductor having a nominal cross-sectional area of up to 10 mm². It shall be located in a position convenient for the connection of the bonding conductor after installation of the appliance.

NOTE 101 Small fixed exposed metal parts, for example nameplates and the like, are not required to be in electrical contact with the terminal.

28 Screws and connections

This clause of Part 1 is applicable except as follows.

28.1 Addition:

Screws made of carbon steel and alloy steel shall be made in accordance with ISO 898-1.

Screws made of corrosion-resistant stainless-steel shall be made in accordance with ISO 3506-1, or ISO 3506-2, or ISO 3506-3, or ISO 3506-4.

28.4 Addition:

Screws that make mechanical connections and electrical connections shall be so designed that the contact pressure does not change appreciably through loosening of the screwed assembly parts during operational stress and contact corrosion.

Screws that make mechanical connections and provide earthing continuity shall be so designed that the contact pressure does not change appreciably through loosening of the screwed assembly parts due to operational stress and contact corrosion. They shall be designed so that a minimum contact pressure remains.

Compliance is checked by inspection and by measuring the assembling torques for screwed connections providing earthing continuity by applying a torque as specified in Table 102 to turn the screw in the fastening direction. The screw shall not turn.

The screw shall not have been unfastened prior to performing this test.

Table 102 – Assembling torques for screwed connections providing earthing continuity

Outer thread diameter of the screw mm	Assembling torque Nm	
	Screwed connections for the mechanical strength of the screws A2-70 according to ISO 3506-1, or ISO 3506-2, or ISO 3506-3, or ISO 3506-4 and 5.8 according to ISO 898-1	Screwed connections for the mechanical strength of the screws > 8.8 according to ISO 898-1
>2,8 and ≤3,6	0,8	1,3
>3,6 and ≤4,2	1,9	3,0
>4,2 and ≤5,3	3,7	6,0
>5,3 and ≤6,3	6,5	10,0
M 8	15,0	25,0
M 10	31,0	50,0

29 Clearances, creepage distances and solid insulation

This clause of Part 1 is applicable except as follows.

29.2 Addition:

The microenvironment is pollution degree 3 and the insulation shall have a comparative tracking index (CTI) not less than 250, unless the insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance.

30 Resistance to heat and fire

This clause of Part 1 is applicable except as follows.

30.2.1 Modification:

The glow-wire test is carried out at 650 °C. The glow-wire flammability index (GWFI) according to IEC 60695-2-12 shall be at least 650 °C.


30.2.2 Not applicable

31 Resistance to rusting

This clause of Part 1 is applicable.

32 Radiation, toxicity and similar hazards

This clause of Part 1 is applicable.

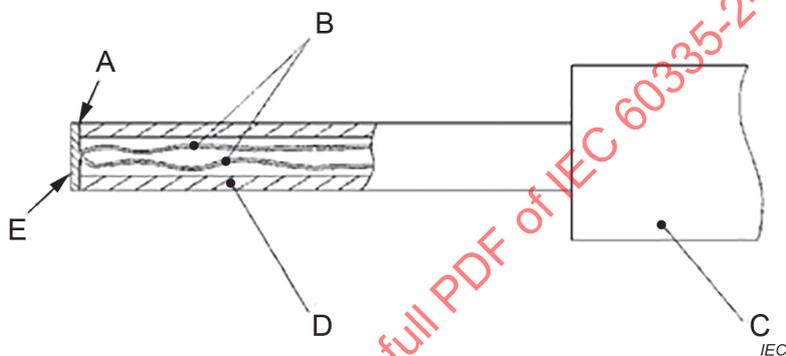


Key

- A adhesive
- B thermocouple wires 0,3 mm diameter to IEC 60584-1 Type K (chrome alumel)
- C handle arrangement permitting a contact force of $4\text{ N} \pm 1\text{ N}$
- D polycarbonate tube: inside diameter 3 mm, outside diameter 5 mm
- E tinned copper disc: 5 mm diameter, 0,5 mm thick with flat contact face

Figure 101 – Probe for measuring surface temperatures

Dimensions in millimetres

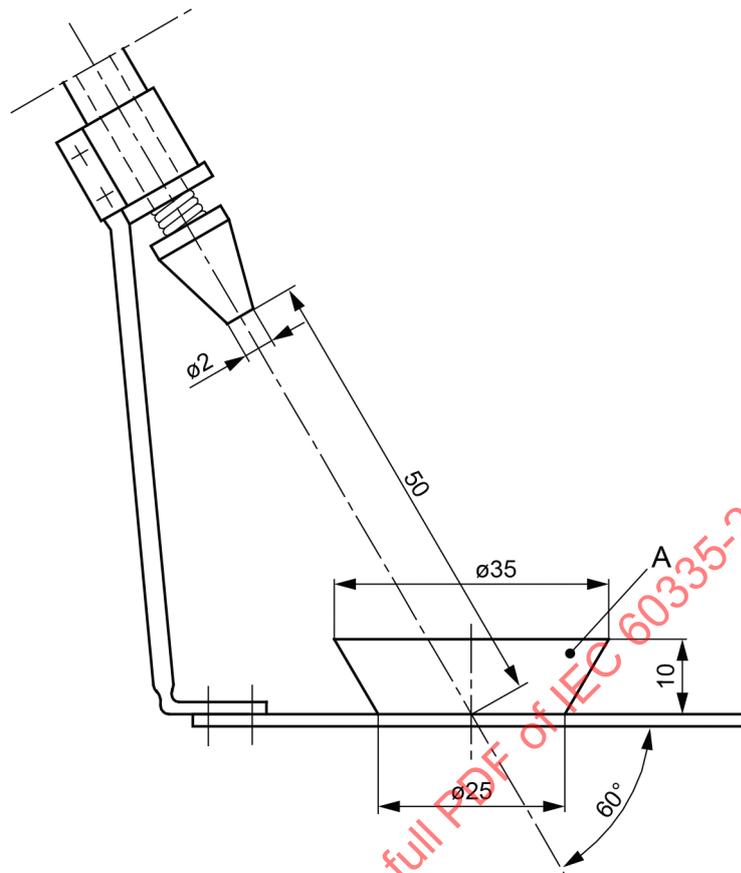

IEC

Key

A bowl

Figure 101 102 – Splash apparatus

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

Annexes

The annexes of Part 1 are applicable except as follows.

Annex N (normative)

Proof tracking test

~~6.3~~ *Addition:*

~~Add 250 V to the list of specified voltages.~~

10.1 *Addition:*

If appropriate, the proof tracking voltage is 250 V.

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

Annex P (informative)

Guidance for the application of this standard to appliances used in tropical climates

13 Leakage current and electric strength at operating temperature

13.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA, whichever is higher
- for other appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with no maximum

For **portable class I appliances**, instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA, whichever is higher

16 Leakage current and electric strength

16.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA
- for other appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with no maximum

For **portable class I appliances** instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA, whichever is higher

Bibliography

The bibliography of Part 1 is applicable except as follows.

Addition:

IEC 60335-2-58, *Household and similar electrical appliances – Safety – Part 2-58: Particular requirements for commercial electric dishwashing machines*

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Household and similar electrical appliances – Safety –
Part 2-62: Particular requirements for commercial electric rinsing sinks**

**Appareils électrodomestiques et analogues – Sécurité –
Partie 2-62: Exigences particulières pour les plonges électriques à usage
collectif**

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Household and similar electrical appliances – Safety –
Part 2-62: Particular requirements for commercial electric rinsing sinks**

**Appareils électrodomestiques et analogues – Sécurité –
Partie 2-62: Exigences particulières pour les plonges électriques à usage
collectif**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 97.040.50

ISBN 978-2-8322-7670-9

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	4
INTRODUCTION	7
1 Scope	8
2 Normative references	8
3 Terms and definitions	9
4 General requirement.....	10
5 General conditions for the tests	10
6 Classification.....	10
7 Marking and instructions.....	10
8 Protection against access to live parts.....	12
9 Starting of motor-operated appliances	12
10 Power input and current.....	12
11 Heating.....	12
12 Void.....	14
13 Leakage current and electric strength at operating temperature.....	14
14 Transient overvoltages	14
15 Moisture resistance	14
16 Leakage current and electric strength.....	15
17 Overload protection of transformers and associated circuits	15
18 Endurance	15
19 Abnormal operation	16
20 Stability and mechanical hazards.....	16
21 Mechanical strength	16
22 Construction	16
23 Internal wiring.....	17
24 Components	17
25 Supply connection and external flexible cords	17
26 Terminals for external conductors.....	18
27 Provision for earthing	18
28 Screws and connections.....	18
29 Clearances, creepage distances and solid insulation	19
30 Resistance to heat and fire.....	19
31 Resistance to rusting.....	20
32 Radiation, toxicity and similar hazards.....	20
Annexes	22
Annex N (normative) Proof tracking test.....	22
Annex P (informative) Guidance for the application of this standard to appliances used in tropical climates	23
Bibliography.....	24
Figure 101 – Probe for measuring surface temperatures	20

Figure 102 – Splash apparatus21

Table 101 – Maximum temperature rises for specified external accessible surfaces
under normal operating conditions 13

Table 102 – Assembling torques for screwed connections providing earthing continuity 19

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES –
SAFETY –****Part 2-62: Particular requirements
for commercial electric rinsing sinks**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60335-2-62 has been prepared by IEC technical committee 61: Safety of household and similar electrical appliances.

This fourth edition cancels and replaces the third edition published in 2002 and its Amendment 1:2008. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- indicates specific values for temperatures for accessible parts and water and aligns the text with IEC 60335-1, Edition 5, and its Amendments 1 and 2;
- requires the application of test probe 12 for the verification of access to live parts (8.101);
- foresees the use of a specific test probe for the measurements of temperatures of accessible surfaces (11.3);

- washing vessel (11.8);
- modification on leakage current defining the value for appliances with a power consumption less than 1 kW (13.2);
- addition of specific requirements concerning types of screws to be used for electrical connections and connections for earth continuity (Clause 28);
- addition of informative Annex P dealing with leakage currents for appliances used in tropical climates.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
61/5938/FDIS	61/5950/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60335 series, under the general title: *Household and similar electrical appliances – Safety*, can be found on the IEC website.

This part 2 is to be used in conjunction with the latest edition of IEC 60335-1 and its amendments. It was established on the basis of the fifth edition (2010) of that standard.

NOTE 1 When “Part 1” is mentioned in this standard, it refers to IEC 60335-1.

This part 2 supplements or modifies the corresponding clauses in IEC 60335-1, so as to convert that publication into the IEC standard: *Particular requirements for commercial electric rinsing sinks*.

When a particular subclause of Part 1 is not mentioned in this part 2, that subclause applies as far as is reasonable. When this standard states “addition”, “modification” or “replacement”, the relevant text in Part 1 is to be adapted accordingly.

NOTE 2 The following numbering system is used:

- subclauses, tables and figures that are numbered starting from 101 are additional to those in Part 1;
- unless notes are in a new subclause or involve notes in Part 1, they are numbered starting from 101, including those in a replaced clause or subclause;
- additional annexes are lettered AA, BB, etc.

NOTE 3 The following print types are used:

- requirements: in roman type;
- test specifications: in italic type;
- notes: in small roman type.

Words in **bold** in the text are defined in Clause 3. When a definition concerns an adjective, the adjective and the associated noun are also in bold.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

NOTE 4 The attention of National Committees is drawn to the fact that equipment manufacturers and testing organizations may need a transitional period following publication of a new, amended or revised IEC publication in which to make products in accordance with the new requirements and to equip themselves for conducting new or revised tests.

It is the recommendation of the committee that the content of this publication be adopted for implementation nationally not earlier than 12 months from the date of publication.

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 REV

INTRODUCTION

It has been assumed in the drafting of this International Standard that the execution of its provisions is entrusted to appropriately qualified and experienced persons.

This standard recognizes the internationally accepted level of protection against hazards such as electrical, mechanical, thermal, fire and radiation of appliances when operated as in normal use taking into account the manufacturer's instructions. It also covers abnormal situations that can be expected in practice and takes into account the way in which electromagnetic phenomena can affect the safe operation of appliances.

This standard takes into account the requirements of IEC 60364 as far as possible so that there is compatibility with the wiring rules when the appliance is connected to the supply mains. However, national wiring rules may differ.

If an appliance within the scope of this standard also incorporates functions that are covered by another part 2 of IEC 60335, the relevant part 2 is applied to each function separately, as far as is reasonable. If applicable, the influence of one function on the other is taken into account.

When a part 2 standard does not include additional requirements to cover hazards dealt with in Part 1, Part 1 applies.

NOTE 1 This means that the technical committees responsible for the part 2 standards have determined that it is not necessary to specify particular requirements for the appliance in question over and above the general requirements.

This standard is a product family standard dealing with the safety of appliances and takes precedence over horizontal and generic standards covering the same subject.

NOTE 2 Horizontal and generic standards covering a hazard are not applicable since they have been taken into consideration when developing the general and particular requirements for the IEC 60335 series of standards. For example, in the case of temperature requirements for surfaces on many appliances, generic standards, such as ISO 13732-1 for hot surfaces, are not applicable in addition to Part 1 or part 2 standards.

An appliance that complies with the text of this standard will not necessarily be considered to comply with the safety principles of the standard if, when examined and tested, it is found to have other features that impair the level of safety covered by these requirements.

An appliance employing materials or having forms of construction differing from those detailed in the requirements of this standard may be examined and tested according to the intent of the requirements and, if found to be substantially equivalent, may be considered to comply with the standard.

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –

Part 2-62: Particular requirements for commercial electric rinsing sinks

1 Scope

This clause of Part 1 is replaced by the following.

This part of IEC 60335 deals with the safety of electrically operated commercial **rinsing sinks** used in commercial kitchens, their **rated voltage** being not more than 250 V for single-phase appliances connected between one phase and neutral, and 480 V for other appliances.

NOTE 101 These appliances are used for example in kitchens of restaurants, canteens, hospitals and commercial enterprises such as bakeries, butcheries, etc.

The electrical part of appliances making use of other forms of energy is also within the scope of this standard.

As far as is practicable, this standard deals with the common hazards presented by these types of appliances.

NOTE 102 Attention is drawn to the fact that

- for appliances intended to be used in vehicles or on board ships or aircraft, additional requirements can be necessary;
- for appliances intended to be used in tropical countries, special requirements can be necessary;
- in many countries, additional requirements are specified by the national health authorities, the national authorities responsible for the protection of labour, the national water supply authorities and similar authorities.

NOTE 103 This standard does not apply to

- appliances designed primarily for sterilizing to clinical standards;
- dishwashers (IEC 60335-2-58);
- appliances designed exclusively for industrial purposes;
- appliances intended to be used in locations where special conditions prevail, such as the presence of a corrosive or explosive atmosphere (dust, vapour or gas).

2 Normative references

This clause of Part 1 is applicable except as follows.

Addition:

IEC 60584-1, *Thermocouples – Part 1: EMF specifications and tolerances*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel – Part 1: Bolts, screws and studs with specified property classes – Coarse thread and fine pitch thread*

ISO 3506-1, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 1: Bolts, screws and studs*

ISO 3506-2, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 2: Nuts*

ISO 3506-3, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 3: Set screws and similar fasteners not under tensile stress*

ISO 3506-4, *Mechanical properties of corrosion-resistant stainless steel fasteners – Part 4: Tapping screws*

3 Terms and definitions

This clause of Part 1 is applicable except as follows.

3.1 Definitions relating to physical characteristics

3.1.4

NOTE 101 The **rated power input** is the sum of the power inputs of all the individual elements in the appliance that can be on at one time; where there are several such combinations possible, that giving the highest power input is used in determining the **rated power input**.

3.1.9 *Replacement:* **normal operation**

operation of the appliance under the following conditions:

Appliances are operated in accordance with the instructions, with all the controls intended to be operated by the user adjusted to their maximum setting. Lids and covers, if any, are placed in their intended position.

Appliances intended to be filled by hand or by a manually operated tap are filled to the **indicated level**.

Where several levels are marked, that giving the most unfavourable conditions is used.

Appliances intended to be filled automatically are connected to a water supply having the pressure designated by the manufacturer.

Where the manufacturer specifies a range of pressures, the pressure is adjusted to that giving the most unfavourable conditions.

The temperature of the water supplied is $15\text{ °C} \pm 5\text{ °C}$.

Motors incorporated in the appliance are operated in the intended manner, under the most severe conditions that can be expected in normal use taking into account the instructions.

3.5 Definitions relating to types of appliances

3.5.101

rinsing sink

an appliance intended for rinsing crockery, cutlery chopsticks and utensils with water heated in the appliance itself

3.8 Definitions relating to miscellaneous matters

3.8.101

indicated level

a mark on the appliance to indicate the maximum liquid level for correct operation

3.8.102

installation wall

a special fixed construction containing supply facilities for appliances installed in conjunction with it

4 General requirement

This clause of Part 1 is applicable.

5 General conditions for the tests

This clause of Part 1 is applicable except as follows.

5.10 Addition:

*Appliances intended for installation in a bank of other appliances and appliances intended to be fixed to an **installation wall** are enclosed to obtain protection against electric shock and harmful ingress of water equivalent to that when installed in accordance with the instructions provided with the appliance.*

NOTE 101 Appropriate enclosures or additional appliances can be needed for test purposes.

5.101 *Appliances are tested as **heating appliances**, even if they incorporate a motor.*

5.102 *Appliances, when assembled in combination with or incorporating other appliances, are tested in accordance with the requirements of this standard. The other appliances are operated simultaneously in accordance with the requirements of the relevant standards.*

6 Classification

This clause of Part 1 is applicable except as follows.

6.1 Replacement:

Appliances shall be **class I** with respect to protection against electric shock.

Compliance is checked by inspection and by the relevant tests.

6.2 Addition:

Appliances normally used on a table shall be at least IPX3. Other appliances shall be at least IPX4.

7 Marking and instructions

This clause of Part 1 is applicable except as follows.

7.1 Addition:

Appliances shall be marked with the water pressure or range of pressures, in kilopascals (kPa), for appliances intended to be connected to a water supply, unless this is indicated in the instructions.

7.12 Addition:

If symbol IEC 60417-5021 (2002-10) is marked on the appliance its meaning shall be explained.

The instructions shall warn on potential injury and state that the tableware shall be free from sharp food residues like sharp fish bones or bone fragments before being put into the appliance.

The instructions shall include the substance of the following:

These appliances are intended to be used for commercial applications, for example in kitchens of restaurants, canteens, hospitals and in commercial enterprises such as bakeries, butcheries, etc.

If the manufacturer wants to limit the use of the appliance to less than the above, this has to be clearly stated in the instructions.

Modification:

The instructions concerning persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge and children playing with the appliance are not applicable.

7.12.1 *Addition:*

For appliances intended for installation in a bank of other appliances and appliances intended to be fixed to an **installation wall**, details of how to ensure appropriate protection against electric shock and harmful ingress of water shall be supplied. If the controls of more than one appliance are combined in a separate enclosure, detailed installation instructions shall be supplied. Instructions for **user maintenance**, for example cleaning, shall also be given. They shall include a statement that the appliance is not to be cleaned with a water jet or a steam cleaner.

For appliances that are permanently connected to fixed wiring and for which leakage currents may exceed 10 mA, particularly if disconnected or not used for long periods, or during initial installation, the instructions shall give recommendations regarding the rating of **protective devices**, such as earth leakage relays, to be installed.

If a **stationary appliance** is intended to be moved for cleaning, this shall be stated.

For **stationary appliances** equipped with rollers or castors or intended to be moved for cleaning, the instructions shall state the substance of the following.

This appliance is to be connected with flexible connections for equipotential bonding and connection to services such as electricity supply, water supply, gas supply and steam supply such that the appliance can be moved in the direction required for cleaning a distance not less than the dimension of the appliance in the direction of movement plus 500 mm without the flexible connections becoming taut or being subject to strain.

7.12.4 *Addition:*

The instructions for **built-in appliances** having a separate control panel for several appliances shall state that the control panel is only to be connected to the specified appliances in order to avoid a possible hazard.

7.15 *Addition:*

For **fixed appliances**, the marking of the name or trademark or identification mark of the manufacturer or responsible vendor and the model or type reference shall be marked on the appliance and, if not visible when the appliance is installed as in normal use, shall be included in the instructions or on an additional label that can be fixed near the appliance after installation.

NOTE 101 An example of such an appliance is a **built-in appliance**.

7.101 Appliances intended to be filled by hand or a manually operated tap shall be marked with an **indicated level**.

Compliance is checked by inspection.

8 Protection against access to live parts

This clause of Part 1 is applicable except as follows:

8.101 Heating elements that are liable to be touched accidentally by a fork or similar pointed object in normal use shall be so protected that it is not possible to touch their **live parts** with such an object.

Compliance is checked by inserting test probe 12 of IEC 61032 at all points where the probe can enter in the vicinity of live parts. The probe is applied with a force not exceeding 1 N.

9 Starting of motor-operated appliances

This clause of Part 1 is not applicable.

10 Power input and current

This clause of Part 1 is applicable except as follows.

10.1 Addition:

*For appliances having more than one **heating unit**, the total power input may be determined by measuring the power input of each **heating unit** separately (see also 3.1.4).*

11 Heating

This clause of Part 1 is applicable except as follows.

11.2 Addition:

Appliances intended to be fixed to the floor and appliances with a mass greater than 40 kg and not provided with rollers, castors or similar means are installed in accordance with the manufacturer's instructions. If no instructions are given, these appliances are considered as appliances normally placed on the floor.

11.3 Addition:

*Where the external **accessible surfaces** are suitably flat and access permits, then the test probe of Figure 101 is used to measure the temperature rises of external **accessible surfaces** specified in Table 101. The probe is applied with a force of $4\text{ N} \pm 1\text{ N}$ to the surface in such a way that the best possible contact between the probe and the surface is ensured. The measurement is performed after a contact period of 30 s.*

The probe may be held in place using a laboratory stand clamp or similar device. Any measuring instrument giving the same results as the probe may be used.

The water temperature is measured 25 mm below the centre of the liquid surface. However, the distance from the heating element shall be at least 10 mm.

11.4 Replacement:

Appliances are operated under **normal operation** such that the total power input of the appliance is 1,15 times **rated power input**. If it is not possible to switch on all heating elements at the same time, the test is made with each of the combinations that the switch arrangement will allow, the highest load possible with each switching arrangement being in circuit.

If the appliance is provided with a control that limits the total power input, the test is made with whichever combination of heating units, as may be selected by the control, imposes the most severe condition.

If the temperature rise limits of motors, transformers or electronic circuits are exceeded, the test is repeated with the appliance supplied at 1,06 times **rated voltage**. In this case, only the temperature rises of motors, transformers or electronic circuits are measured.

11.7 Replacement:

When an appliance is assembled in combination with, equipped with or incorporating accessories or other appliances, the interactions shall be covered if they are provided to operate simultaneously as stated by the manufacturer or by a common control.

NOTE 101 The duration of the test can consist of more than one cycle of operation.

11.8 Addition:

During the test, the temperature rises are monitored continuously and shall not exceed the values shown in Table 3 and Table 101.

Table 101 – Maximum temperature rises for specified external accessible surfaces under normal operating conditions

Surface ^a	Temperature rise of external accessible surfaces ^b K
Bare metal	48
Coated metal ^c	59
Glass and ceramic	65
Plastic and plastic coating > 0,4 mm ^d	74

^a Temperature rises are not measured on:

- the underside of appliances intended to be used on a working surface or floor;
- the rear surface of appliances;
- surfaces that are inaccessible to a 75 mm diameter probe having a hemispherical end applied with a force not exceeding 1 N;
- surfaces that are submersed during normal operation.

^b Metal is considered coated when a coating having a minimum thickness of 90 µm made by enamel or non-substantially plastic coating is used.

^c The temperature rise limit of plastic also applies for plastic material having a metal finish of thickness less than 0,1 mm.

^d When the thickness of the plastic coating does not exceed 0,4 mm, the temperature rise limits of coated metal for underlying metal apply or the temperature rise limits for glass or ceramic material for underlying glass or ceramic material apply.

For appliances that require manual assistance for cleaning, the water temperature shall not exceed 55 °C.

12 Void

13 Leakage current and electric strength at operating temperature

This clause of Part 1 is applicable except as follows.

13.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with a maximum of 10 mA, whichever is higher
- for other appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with no maximum, whichever is higher

For **portable class I appliances**, instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with a maximum of 10 mA, whichever is higher

14 Transient overvoltages

This clause of Part 1 is applicable.

15 Moisture resistance

This clause of Part 1 is applicable except as follows.

15.1.1 Addition:

IPX3 and IPX4 appliances are subjected for 5 min to the following splash test.

The apparatus shown in Figure 102 is used. During the test, the water pressure is so regulated that the water splashes up 150 mm above the bottom of the bowl. The bowl is placed on the floor for appliances normally used on the floor. For all other appliances, on a horizontal support 50 mm below the lowest edge of the appliance, the bowl is so moved around as to splash the appliance from all directions. Care is taken that the appliance is not hit by the direct jet.

15.1.2 Modification:

Appliances normally used on a table are placed on a support having dimensions that are 15 cm ± 5 cm in excess of those of the orthogonal projection of the appliance on the support.

15.2 Addition:

Appliances intended to be filled by a manually operated tap or automatically are connected to a water supply having the maximum supply pressure indicated by the manufacturer. The means for controlling the incoming water is held fully open and the filling continued for 15 min after the first evidence of overflow, or until a further protective system operates to stop the inflow.

15.101 Appliances that are provided with a tap intended for filling or cleaning shall be constructed so that the water from the tap cannot come into contact with **live parts**.

Compliance is checked by the following test.

The tap is fully opened for 1 min with the appliance connected to a water supply having the maximum water pressure indicated by the manufacturer. Tiltable and movable parts, including lids, are tilted or placed in the most unfavourable position. Swivelling outlets of water taps are so positioned as to direct water on to those parts that will give the most unfavourable result.

Immediately following this treatment, the appliance shall withstand an electric strength test as specified in 16.3.

16 Leakage current and electric strength

This clause of Part 1 is applicable except as follows.

16.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with a maximum of 10 mA, whichever is higher
- for other appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with no maximum, whichever is higher

For **portable class I appliances**, instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,75 mA or 1 mA per kW **rated power input** of the appliance with a maximum of 10 mA, whichever is higher

17 Overload protection of transformers and associated circuits

This clause of Part 1 is applicable.

18 Endurance

This clause of Part 1 is applicable.

19 Abnormal operation

This clause of Part 1 is applicable except as follows.

19.2 Addition:

Appliances are tested without water and those intended to be automatically filled are tested with the water supply turned off.

19.4 Addition:

The main contacts of the contactor intended for switching on and off the heating element(s) in normal use are locked in the "on" position. However, if two contactors operate independently of each other or if one contactor operates two independent sets of main contacts, these contacts are locked in the "on" position in turn.

20 Stability and mechanical hazards

This clause of Part 1 is applicable except as follows.

20.1 Addition:

Covers, lids and accessories are placed in their most unfavourable positions.

NOTE 101 Any spillage of liquid is ignored.

21 Mechanical strength

This clause of Part 1 is applicable.

22 Construction

This clause of Part 1 is applicable except as follows.

22.54 Not applicable.

22.55 Not applicable.

22.101 For three-phase appliances, **thermal cut-outs** protecting circuits with heating elements, and those for motors of which the unexpected starting may cause a hazard, shall be of the non-self-resetting and trip-free type, and shall provide **all-pole disconnection** from related supply circuits.

For single-phase appliances and for single-phase heating elements and/or motors connected between one phase and neutral or between phase and phase, **thermal cut-outs** protecting circuits with heating elements, and those for motors of which the unexpected starting may cause a hazard, shall be of the non-self-resetting and trip-free type, and shall provide at least one-pole disconnection.

If the **non-self-resetting thermal cut-out** is only accessible after removing parts with the aid of a **tool**, the trip-free type is not required.

NOTE **Thermal cut-outs** of the trip-free type have an automatic action, with a reset actuating member, so constructed that the automatic action is independent of manipulation or position of the reset mechanism.

Thermal cut-outs of the bulb and capillary type that operate during the tests of Clause 19 shall be such that rupture of the capillary tube shall not impair compliance with the requirements of 19.13.

Compliance is checked by inspection, by manual test and by rupturing the capillary tube.

Care shall be taken to ensure that the rupture does not seal the capillary tube.

22.102 Lights, switches or push-buttons shall only be coloured red for the indication of danger, alarm or similar situations.

Compliance is checked by inspection.

22.103 Drain cocks and other emptying devices for hot liquids shall be constructed so that they cannot be opened inadvertently. Moreover, it shall not be possible to withdraw drain plugs inadvertently.

Compliance is checked by inspection and by manual test.

NOTE For example, this requirement is met when the valve handle is such that, when released, it returns automatically to the closed position, or is of the wheel type or is placed in a recess.

22.104 Means provided to allow drainage of liquid from appliances shall discharge the liquid in such a manner that electrical insulation is not affected.

Compliance is checked by inspection and by manual test.

22.105 The level to which manually filled appliances have to be filled shall be so located as to be readily visible when filling.

Compliance is checked by inspection.

23 Internal wiring

This clause of Part 1 is applicable except as follows.

23.3 Addition:

When the capillary tube of a thermostat is fitted as part of the internal wiring where flexing occurs in normal use, it is subjected to the flexing test that is applied to the internal wiring. In this case, if a rupture of the capillary tube occurs, the appliance shall be rendered inoperative (fail-safe).

Other capillary tubes of thermostats where flexing occurs in normal use are subjected to 1 000 flexings at a rate not exceeding 30/min. In this case, the capillary tube shall show no sign of damage impairing the thermostat's further use.

24 Components

This clause of Part 1 is applicable.

25 Supply connection and external flexible cords

This clause of Part 1 is applicable except as follows.

25.1 *Modification:*

Appliances shall not be provided with an appliance inlet.

25.3 *Addition:*

Appliances with a mass greater than 40 kg intended for permanent connection to fixed wiring and not provided with rollers, castors or similar means shall be constructed so that the connection can be done after the appliance has been installed in accordance with the manufacturer's instructions.

Terminals for permanent connection of cables to fixed wiring may also be suitable for the **type X attachment** of a **supply cord**. In this case, a cord anchorage complying with 25.16 shall be fitted to the appliance.

If the appliance is provided with a set of terminals allowing the connection of a flexible cord, they shall be suitable for the **type X attachment** of the cord.

In both cases, the instructions shall give full particulars of the power **supply cord**.

The connection to the supply wires of **built-in appliances** may be made before the appliance is installed.

25.7 *Modification:*

Supply cords shall be oil-resistant, sheathed flexible cable not lighter than ordinary polychloroprene sheathed cord (code designation 60245 IEC 57).

26 Terminals for external conductors

This clause of Part 1 is applicable.

27 Provision for earthing

This clause of Part 1 is applicable except as follows.

27.2 *Addition:*

Stationary appliances shall be provided with a terminal for the connection of an external equipotential conductor. This terminal shall be in effective electrical contact with all fixed exposed metal parts of the appliance, and shall allow the connection of a conductor having a nominal cross-sectional area of up to 10 mm². It shall be located in a position convenient for the connection of the bonding conductor after installation of the appliance.

NOTE 101 Small fixed exposed metal parts, for example nameplates and the like, are not required to be in electrical contact with the terminal.

28 Screws and connections

This clause of Part 1 is applicable except as follows.

28.1 *Addition:*

Screws made of carbon steel and alloy steel shall be made in accordance with ISO 898-1.

Screws made of corrosion-resistant stainless-steel shall be made in accordance with ISO 3506-1, or ISO 3506-2, or ISO 3506-3, or ISO 3506-4.

28.4 Addition:

Screws that make mechanical connections and electrical connections shall be so designed that the contact pressure does not change appreciably through loosening of the screwed assembly parts during operational stress and contact corrosion.

Screws that make mechanical connections and provide earthing continuity shall be so designed that the contact pressure does not change appreciably through loosening of the screwed assembly parts due to operational stress and contact corrosion. They shall be designed so that a minimum contact pressure remains.

Compliance is checked by inspection and by measuring the assembling torques for screwed connections providing earthing continuity by applying a torque as specified in Table 102 to turn the screw in the fastening direction. The screw shall not turn.

The screw shall not have been unfastened prior to performing this test.

Table 102 – Assembling torques for screwed connections providing earthing continuity

Outer thread diameter of the screw mm	Assembling torque Nm	
	Screwed connections for the mechanical strength of the screws A2-70 according to ISO 3506-1, or ISO 3506-2, or ISO 3506-3, or ISO 3506-4 and 5.8 according to ISO 898-1	Screwed connections for the mechanical strength of the screws > 8.8 according to ISO 898-1
>2,8 and ≤3,6	0,8	1,3
>3,6 and ≤4,2	1,9	3,0
>4,2 and ≤5,3	3,7	6,0
>5,3 and ≤6,3	6,5	10,0
M 8	15,0	25,0
M 10	31,0	50,0

29 Clearances, creepage distances and solid insulation

This clause of Part 1 is applicable except as follows.

29.2 Addition:

The microenvironment is pollution degree 3 and the insulation shall have a comparative tracking index (CTI) not less than 250, unless the insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance.

30 Resistance to heat and fire

This clause of Part 1 is applicable except as follows.

30.2.1 Modification:

The glow-wire test is carried out at 650 °C. The glow-wire flammability index (GWFI) according to IEC 60695-2-12 shall be at least 650 °C.


30.2.2 Not applicable

31 Resistance to rusting

This clause of Part 1 is applicable.

32 Radiation, toxicity and similar hazards

This clause of Part 1 is applicable.

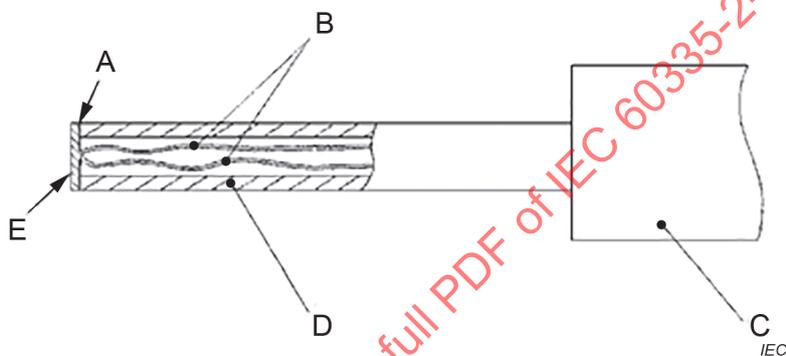


Key

- A adhesive
- B thermocouple wires 0,3 mm diameter to IEC 60584-1 Type K (chrome alumel)
- C handle arrangement permitting a contact force of $4\text{ N} \pm 1\text{ N}$
- D polycarbonate tube: inside diameter 3 mm, outside diameter 5 mm
- E tinned copper disc: 5 mm diameter, 0,5 mm thick with flat contact face

Figure 101 – Probe for measuring surface temperatures

Dimensions in millimetres

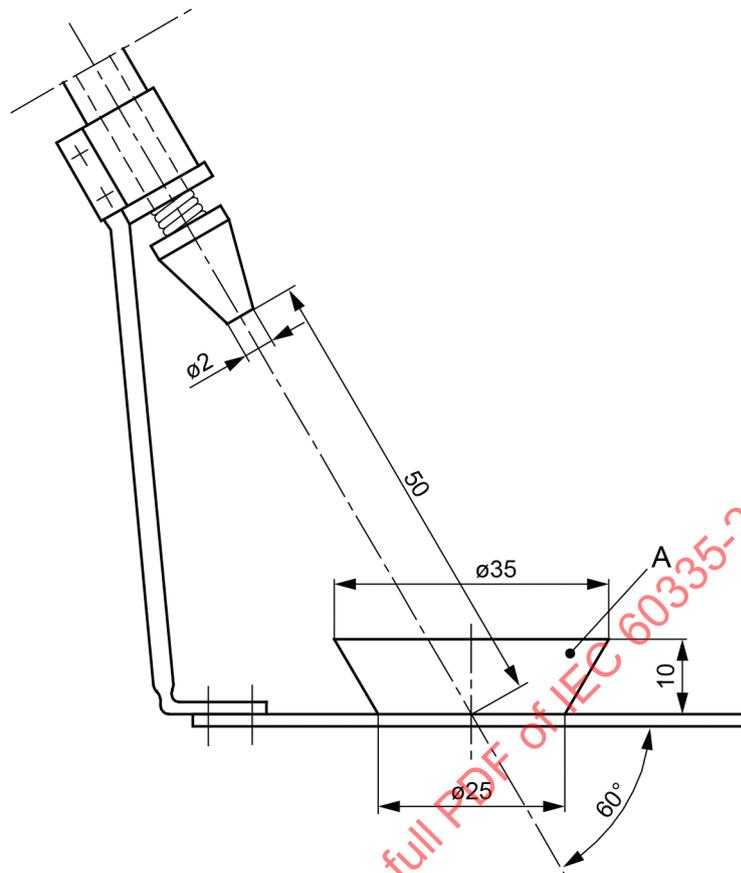

Key

A bowl

Figure 102 – Splash apparatus

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

IEC

Annexes

The annexes of Part 1 are applicable except as follows.

Annex N (normative)

Proof tracking test

10.1 *Addition:*

If appropriate, the proof tracking voltage is 250 V.

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

Annex P (informative)

Guidance for the application of this standard to appliances used in tropical climates

13 Leakage current and electric strength at operating temperature

13.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA, whichever is higher
- for other appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with no maximum

For **portable class I appliances**, instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA, whichever is higher

16 Leakage current and electric strength

16.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA
- for other appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with no maximum

For **portable class I appliances** instead of the permissible leakage current, the following applies:

- for cord and plug connected appliances 0,5 mA or 0,5 mA per kW **rated power input** of the appliance with a maximum of 5 mA, whichever is higher

Bibliography

The bibliography of Part 1 is applicable except as follows.

Addition:

IEC 60335-2-58, *Household and similar electrical appliances – Safety – Part 2-58: Particular requirements for commercial electric dishwashing machines*

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

SOMMAIRE

INTRODUCTION.....	31
1 Domaine d'application	32
2 Références normatives	32
3 Termes et définitions	33
4 Exigences générales	34
5 Conditions générales d'essais	34
6 Classification	34
7 Marquage et instructions	35
8 Protection contre l'accès aux parties actives	36
9 Démarrage des appareils à moteur	36
10 Puissance et courant	36
11 Échauffements.....	37
12 Vacant.....	38
13 Courant de fuite et rigidité diélectrique à la température de régime	38
14 Surtensions transitoires	39
15 Résistance à l'humidité.....	39
16 Courant de fuite et rigidité diélectrique	39
17 Protection contre la surcharge des transformateurs et des circuits associés	40
18 Endurance	40
19 Fonctionnement anormal	40
20 Stabilité et dangers mécaniques	40
21 Résistance mécanique.....	41
22 Construction	41
23 Conducteurs internes.....	42
24 Composants	42
25 Raccordement au réseau et câbles souples extérieurs	42
26 Bornes pour conducteurs externes	43
27 Dispositions en vue de la mise à la terre	43
28 Vis et connexions	43
29 Distances d'isolement, lignes de fuite et isolation solide	44
30 Résistance à la chaleur et au feu.....	44
31 Protection contre la rouille	44
32 Rayonnement, toxicité et dangers analogues	44
Annexes	46
Annexe N (normative) Essai de tenue au cheminement.....	46
Annexe P (informative) Lignes directrices pour l'application de la présente norme aux appareils utilisés en climat tropical	47
Bibliographie.....	48
Figure 101 – Sonde de mesure des températures de surface	45
Figure 102 – Appareil d'éclaboussement.....	45

Tableau 101 – Échauffements maximaux pour les surfaces accessibles extérieures spécifiées en conditions de fonctionnement normal.....	38
Tableau 102 – Couples d’assemblage pour les connexions vissées assurant la continuité de terre.....	44

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

**APPAREILS ÉLECTRODOMESTIQUES ET ANALOGUES –
SÉCURITÉ –****Partie 2-62: Exigences particulières pour
les plonges électriques à usage collectif**

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. À cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets et de ne pas avoir signalé leur existence.

La Norme internationale IEC 60335-2-62 a été établie par le comité d'études 61 de l'IEC: Sécurité des appareils électrodomestiques et analogues.

Cette quatrième édition annule et remplace la troisième édition parue en 2002 et son Amendement 1:2008. Cette édition constitue une révision technique.

Cette édition inclut les modifications techniques majeures suivantes par rapport à l'édition précédente:

- indication des valeurs spécifiques des températures pour les parties accessibles et l'eau dans le cadre de l'alignement du texte sur l'IEC 60335-1, Édition 5, et ses Amendements 1 et 2;

- ajout de l'exigence de l'application de la sonde d'essai 12 pour vérifier l'accès aux parties actives (8.101);
- prévision de l'utilisation d'une sonde d'essai spécifique pour le mesurage des températures des surfaces accessibles (11.3);
- cuve de lavage (voir 11.8);
- modification de la définition par le courant de fuite de la valeur pour les appareils dont la consommation d'énergie est inférieure à 1 kW (13.2);
- ajout d'exigences spécifiques relatives aux types de vis à utiliser dans les connexions électriques et les connexions pour continuité de terre (Article 28);
- ajout d'une Annexe P informative traitant des courants de fuite pour les appareils utilisés en climat tropical.

Le texte de cette Norme internationale est issu des documents suivants:

FDIS	Rapport de vote
61/5938/FDIS	61/5950/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à l'approbation de cette Norme internationale.

Ce document a été rédigé selon les Directives ISO/IEC, Partie 2.

Une liste de toutes les parties de la série IEC 60335, sous le titre général: *Appareils électrodomestiques et analogues – Sécurité*, peut être consultée sur le site web de l'IEC.

La présente partie 2 doit être utilisée conjointement avec la dernière édition de l'IEC 60335-1 et ses amendements. Elle a été établie sur la base de la cinquième édition (2010) de cette norme.

NOTE 1 L'expression "Partie 1" utilisée dans la présente norme fait référence à l'IEC 60335-1.

La présente partie 2 complète ou modifie les articles correspondants de l'IEC 60335-1, de façon à transformer cette publication en norme IEC: *Exigences particulières pour les plonges électriques à usage collectif*.

Lorsqu'un paragraphe particulier de la Partie 1 n'est pas mentionné dans cette partie 2, ce paragraphe s'applique pour autant qu'il soit raisonnable. Lorsque la présente norme spécifie "addition", "modification" ou "remplacement", le texte correspondant de la Partie 1 doit être adapté en conséquence.

NOTE 2 Le système de numérotation suivant est utilisé:

- paragraphes, tableaux et figures: ceux qui sont numérotés à partir de 101 sont complémentaires à ceux de la Partie 1;
- notes: à l'exception de celles qui sont dans un nouveau paragraphe ou de celles qui concernent des notes de la Partie 1, les notes sont numérotées à partir de 101, y compris celles des articles ou paragraphes qui sont remplacés;
- annexes: les annexes supplémentaires sont appelées AA, BB, etc.

NOTE 3 Les caractères d'imprimerie suivants sont utilisés:

- exigences: caractères romains;
- modalités d'essais: caractères italiques;
- notes: petits caractères romains.

Les mots **en gras** dans le texte sont définis à l'Article 3. Lorsqu'une définition concerne un adjectif, l'adjectif et le nom associé figurent également en gras.

Le comité a décidé que le contenu de ce document ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous "<http://webstore.iec.ch>" dans les données relatives au document recherché. A cette date, le document sera

- reconduit,
- supprimé,
- remplacé par une édition révisée, ou
- amendé.

NOTE 4 L'attention des Comités nationaux est attirée sur le fait que les fabricants d'appareils et les organismes d'essai peuvent avoir besoin d'une période transitoire après la publication d'une nouvelle publication IEC, ou d'une publication amendée ou révisée, pour fabriquer des produits conformes aux nouvelles exigences et pour adapter leurs équipements aux nouveaux essais ou aux essais révisés.

Le comité recommande que le contenu de la présente publication soit entériné au niveau national au plus tôt 12 mois après la date de publication.

IECNORM.COM : Click to view the full PDF of IEC 60335-2-62:2019 RLV

INTRODUCTION

Il a été considéré en établissant la présente Norme internationale que l'exécution de ses dispositions était confiée à des personnes expérimentées et ayant une qualification appropriée.

La présente reconnaît le niveau de protection internationalement accepté contre les dangers électriques, mécaniques, thermiques, liés au feu et au rayonnement des appareils, lorsqu'ils fonctionnent comme en usage normal en tenant compte des instructions du fabricant. Elle couvre également les situations anormales auxquelles on peut s'attendre dans la pratique et elle tient compte de la façon dont les phénomènes électromagnétiques peuvent affecter le fonctionnement sûr des appareils.

La présente tient compte autant que possible des exigences de l'IEC 60364, de façon à rester compatible avec les règles d'installation quand l'appareil est raccordé au réseau d'alimentation. Cependant, des règles nationales d'installation peuvent être différentes.

Si les fonctions d'un appareil sont couvertes par différentes parties 2 de l'IEC 60335, la partie 2 correspondante est appliquée à chaque fonction séparément, dans la limite du raisonnable. Si cela est applicable, l'influence d'une fonction sur les autres fonctions est prise en compte.

Lorsqu'une partie 2 ne comporte pas d'exigences complémentaires pour couvrir les dangers traités dans la Partie 1, la Partie 1 s'applique.

NOTE 1 Cela signifie que les comités d'études responsables pour les parties 2 ont déterminé qu'il n'était pas nécessaire de spécifier des exigences particulières pour l'appareil en question en plus des exigences générales.

La présente norme est une norme de famille de produits traitant de la sécurité d'appareils et a préséance sur les normes horizontales et génériques couvrant le même sujet.

NOTE 2 Les normes horizontales et génériques couvrant un danger ne sont pas applicables parce qu'elles ont été prises en considération lorsque les exigences générales et particulières ont été étudiées pour la série de normes IEC 60335. Par exemple, dans le cas des exigences de température de surface pour de nombreux appareils, des normes génériques, comme l'ISO 13732-1 pour les surfaces chaudes, ne sont pas applicables en plus de la Partie 1 ou des parties 2.

Un appareil conforme au texte de la présente norme ne sera pas nécessairement jugé conforme aux principes de sécurité de la norme si, lorsqu'il est examiné et soumis aux essais, il apparaît qu'il présente d'autres caractéristiques qui compromettent le niveau de sécurité visé par ces exigences.

Un appareil utilisant des matériaux ou présentant des modes de construction différents de ceux décrits dans les exigences de la présente norme peut être examiné et soumis à l'essai en fonction de l'objectif poursuivi par ces exigences et, s'il est jugé pratiquement équivalent, il peut être estimé conforme aux principes de sécurité de la norme.

APPAREILS ÉLECTRODOMESTIQUES ET ANALOGUES – SÉCURITÉ –

Partie 2-62: Exigences particulières pour les plonges électriques à usage collectif

1 Domaine d'application

L'article de la Partie 1 est remplacé par l'article ci-après.

La présente partie de l'IEC 60335 traite de la sécurité des **plonges électriques** à usage commercial, utilisées dans les cuisines commerciales et dont la **tension assignée** n'est pas supérieure à 250 V pour les appareils monophasés alimentés entre phase et neutre, et à 480 V pour les autres appareils.

NOTE 101 Ces appareils sont par exemple utilisés dans les cuisines de restaurants, les cantines, les hôpitaux et les entreprises artisanales, telles que les boulangeries, les boucheries, etc.

La partie électrique des appareils utilisant d'autres formes d'énergie relève également du domaine d'application de la présente norme.

Dans la mesure du possible, la présente norme traite des dangers ordinaires présentés par ces types d'appareils.

NOTE 102 L'attention est attirée sur le fait que

- pour les appareils destinés à être utilisés dans des véhicules ou à bord de navires ou d'avions, des exigences supplémentaires peuvent être nécessaires;
- pour les appareils destinés à être utilisés dans les pays tropicaux, des exigences spéciales peuvent être nécessaires;
- dans de nombreux pays, des exigences supplémentaires sont spécifiées par les organismes nationaux de la santé, par les organismes nationaux responsables de la protection des travailleurs, par les organismes nationaux responsables de l'alimentation en eau et par des organismes similaires.

NOTE 103 La présente norme ne s'applique pas:

- aux appareils destinés principalement à la stérilisation conforme aux normes cliniques;
- aux lave-vaisselle (IEC 60335-2-58);
- aux appareils prévus exclusivement pour des usages industriels;
- aux appareils destinés à être utilisés dans des locaux présentant des conditions particulières, telles que la présence d'une atmosphère corrosive ou explosive (poussière, vapeur ou gaz).

2 Références normatives

L'article de la Partie 1 est applicable avec l'exception suivante.

Addition:

IEC 60584-1, *Couples thermoélectriques – Partie 1: Spécifications et tolérances en matière de FEM*

ISO 898-1, *Caractéristiques mécaniques des éléments de fixation en acier au carbone et en acier allié – Partie 1: Vis, goujons et tiges filetés de classes de qualité spécifiées – Filetages à pas gros et filetages à pas fin*

ISO 3506-1, *Caractéristiques mécaniques des éléments de fixation en acier inoxydable résistant à la corrosion – Partie 1: Vis et goujons*

ISO 3506-2, *Caractéristiques mécaniques des éléments de fixation en acier inoxydable résistant à la corrosion – Partie 2: Écrous*

ISO 3506-3, *Caractéristiques mécaniques des éléments de fixation en acier inoxydable résistant à la corrosion – Partie 3: Vis sans tête et éléments de fixation similaires non soumis à des contraintes de traction*

ISO 3506-4, *Caractéristiques mécaniques des éléments de fixation en acier inoxydable résistant à la corrosion – Partie 4: Vis à tôle*

3 Termes et définitions

L'article de la Partie 1 est applicable avec les exceptions suivantes.

3.1 Définitions relatives aux caractéristiques physiques

3.1.4

NOTE 101 La **puissance assignée** est la somme des puissances de tous les éléments individuels de l'appareil qui peuvent être alimentés simultanément; si plusieurs combinaisons d'éléments sont possibles, celle qui donne la puissance la plus élevée sert à déterminer la **puissance assignée**.

3.1.9 Remplacement:

conditions de fonctionnement normal

fonctionnement de l'appareil dans les conditions suivantes:

Les appareils sont mis en fonctionnement conformément aux instructions, tous les dispositifs de commande destinés à être manœuvrés par l'utilisateur étant ajustés à leur réglage maximal. Les couvercles éventuels sont placés dans la position prévue.

Les appareils destinés à être remplis à la main ou par manœuvre d'un robinet sont remplis jusqu'au **niveau indiqué**.

Si plusieurs niveaux sont marqués, celui donnant les conditions les plus défavorables est utilisé.

Les appareils destinés à être remplis automatiquement sont raccordés à un réseau de distribution d'eau à la pression indiquée par le fabricant.

Si le fabricant indique une plage de pressions, la pression est réglée de façon à obtenir les conditions les plus défavorables.

La température de l'eau d'alimentation est de $15\text{ °C} \pm 5\text{ °C}$.

Les moteurs incorporés dans l'appareil sont mis en fonctionnement de la manière prévue, dans les conditions les plus sévères qui peuvent se produire en utilisation normale, en tenant compte des instructions.

3.5 Définitions relatives aux types d'appareils

3.5.101

plonge électrique

appareil destiné au rinçage de la vaisselle, des couverts, des baguettes et des ustensiles de cuisine avec de l'eau chauffée dans l'appareil lui-même

3.8 Définitions relatives à des sujets divers

3.8.101

niveau indiqué

marque sur l'appareil indiquant le niveau maximal du liquide pour un fonctionnement correct

3.8.102

mur d'installation

construction fixe spéciale comportant les dispositifs pour alimenter les appareils qui y seront raccordés

4 Exigences générales

L'article de la Partie 1 est applicable.

5 Conditions générales d'essais

L'article de la Partie 1 est applicable avec les exceptions suivantes.

5.10 Addition:

*Les appareils destinés à être installés en batterie avec d'autres appareils et les appareils destinés à être fixés à un **mur d'installation** sont enveloppés de façon à obtenir une protection contre les chocs électriques et contre les effets nuisibles de la pénétration de l'eau équivalente à celle obtenue lorsqu'ils sont installés selon les instructions fournies avec l'appareil.*

NOTE 101 Des enveloppes appropriées ou des appareils supplémentaires peuvent être nécessaires pour les essais.

5.101 *Les appareils sont soumis à l'essai comme des **appareils chauffants** même s'ils comportent un moteur.*

5.102 *Les appareils assemblés avec d'autres appareils ou incorporant d'autres appareils sont soumis à l'essai conformément aux exigences de la présente norme. Les autres appareils sont mis en fonctionnement simultanément, conformément aux exigences des normes correspondantes.*

6 Classification

L'article de la Partie 1 est applicable avec les exceptions suivantes.

6.1 Remplacement:

Les appareils doivent être de la **classe I** en ce qui concerne la protection contre les chocs électriques.

La vérification est effectuée par examen et par les essais correspondants.

6.2 Addition:

Les appareils normalement utilisés sur une table doivent être au moins IPX3. Les autres appareils doivent être au moins IPX4.