

INTERNATIONAL STANDARD

IEC
61937-7

First edition
2002-05

**Digital audio – Interface for non-linear PCM
encoded audio bitstreams applying IEC 60958 –**

**Part 7:
Non-linear PCM bitstreams according
to the ATRAC and ATRAC 2/3 formats**



Reference number
IEC 61937-7:2002(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/catlg-e.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/JP.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 61937-7

First edition
2002-05

Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 –

Part 7: Non-linear PCM bitstreams according to the ATRAC and ATRAC 2/3 formats

© IEC 2002 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия


PRICE CODE

L

For price, see current catalogue

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	4
1 Scope.....	5
2 Normative references	5
3 Terms, definitions and abbreviations	5
3.1 Definitions	5
3.2 Abbreviations	5
4 Mapping of the audio bitstream on to IEC 61937.....	6
4.1 General.....	6
4.2 ATRAC and ATRAC2/3 burst-info	6
5 Format of ATRAC and ATRAC2/3 data-bursts.....	6
5.1 General.....	6
5.2 Audio data-bursts	6
5.2.1 The data ATRAC	6
5.2.2 Latency of ATRAC decoding.....	8
5.2.3 The data ATRAC2/3.....	8
5.2.4 Latency of ATRAC2/3 decoding.....	9
Bibliography.....	11
Figure 1 – ATRAC data-burst.....	7
Figure 2 – Latency of ATRAC decoding	8
Figure 3 – ATRAC2/3 data-burst.....	8
Figure 4 – Latency of ATRAC2/3 decoding.....	9
Table 1 – Fields of burst-info	6
Table 2 – Data-type-dependent information for data-type ATRAC	7
Table 3 – Data-type dependent information for data-type ATRAC2/3.....	9

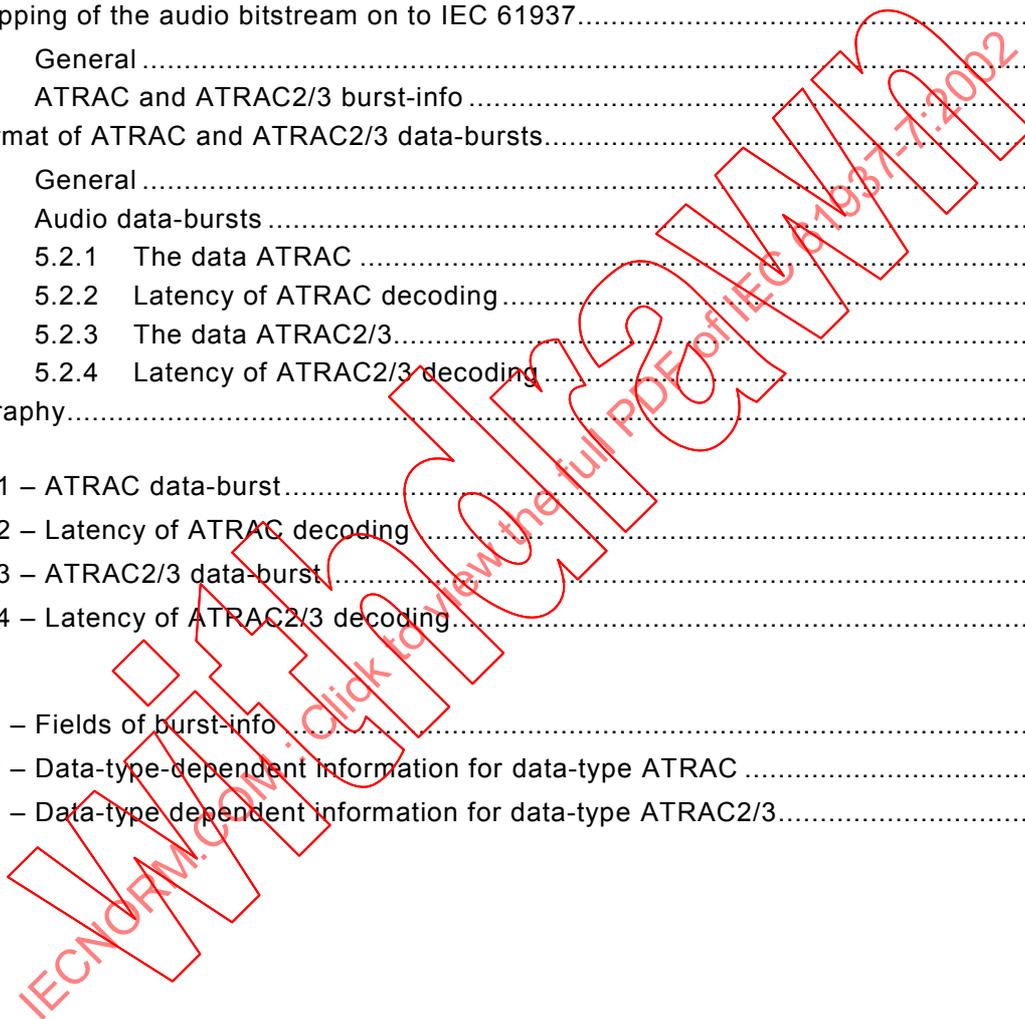

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**DIGITAL AUDIO – INTERFACE FOR NON-LINEAR PCM ENCODED
AUDIO BITSTREAMS APPLYING IEC 60958 –**
**Part 7: Non-linear PCM bitstreams according to
the ATRAC and ATRAC2/3 formats**

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61937-7 has been prepared by Technical Area 4, Digital system interfaces, of IEC Technical Committee 100: Audio, video and multimedia systems and equipment.

The text of this standard is based on the following documents:

FDIS	Report on voting
100/457/FDIS	100/492/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until 2005. At this date, the publication will be:

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

INTRODUCTION

The format of the IEC 60958 interface consists of a sequence of IEC 60958 sub-frames. Each IEC 60958 sub-frame is normally used to carry one linear PCM sample, but may also be used to convey data. The non-linear PCM encoded audio bitstreams to be transported over this interface are formed into a sequence of data-bursts. IEC 61937 defines the data-bursts of the data-types NULL, AC-3, PAUSE, MPEG-1, AC-3, MPEG-1, Layer-2 or Layer-3, or MPEG-2 without extension, MPEG-2 with extension, MPEG-2, Layer-1 Low sampling frequency and MPEG-2, Layer-2 or Layer-3 Low sampling frequency.

This part specifies the data-types ATRAC and ATRAC2/3.

IECNORM.COM: Click to view the full PDF of IEC 61937-7:2002
Withdrawn

DIGITAL AUDIO – INTERFACE FOR NON-LINEAR PCM ENCODED AUDIO BITSTREAMS APPLYING IEC 60958 –

Part 7: Non-linear PCM bitstreams according to the ATRAC and ATRAC2/3 formats

1 Scope

This part of IEC 61937 specifies the method for the digital audio interface specified in IEC 60958 to convey non-linear PCM bitstreams encoded in accordance with the ATRAC and ATRAC2/3 formats.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60958-1, *Digital audio interface – Part 1: General*

IEC 60958-3, *Digital audio interface – Part 3: Consumer applications*

IEC 61937-1, *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 – Part 1: General*¹

IEC 61937-2, *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 – Part 2: Burst information*¹

3 Terms, definitions and abbreviations

3.1 Definitions

For the purpose of this standard, the definitions given in IEC 61937-1 and IEC 61937-2, as well as the following apply.

3.1.1

latency

delay time of an external audio decoder to decode a ATRAC and ATRAC2/3 data-burst, defined as the sum of two values of the receiving delay time and the decoding delay time

3.2 Abbreviations

ATRAC	Adaptive TRansform Acoustic Coding
ATRAC2	Adaptive TRansform Acoustic Coding 2
ATRAC3	Adaptive TRansform Acoustic Coding 3
ATRAC2/3	ATRAC2 and/or ATRAC3

¹ To be published.

4 Mapping of the audio bitstream on to IEC 61937

4.1 General

The coding of the bitstream and data-burst shall be in accordance with IEC 61937.

4.2 ATRAC and ATRAC2/3 burst-info

This 16-bit burst-info shall contain data-burst information structured in accordance with table 1.

Table 1 – Fields of burst-info

Bits of Pc	Value	Contents	Reference point R	Repetition period of data-burst in IEC 60958 frames
0-4	0-13	data-type in accordance with IEC 61937		
	14	ATRAC	bit 0 of Pa	512
	15	ATRAC2/3	bit 0 of Pa	1024
	16-31	reserved		
5-15		in accordance with IEC 61937		

5 Format of ATRAC and ATRAC2/3 data-bursts

5.1 General

This clause specifies the audio data-bursts ATRAC and ATRAC2/3. Specific properties such as reference points, repetition period, the method of filling stream gaps, and decoding latency are specified for each data-type of ATRAC and ATRAC2/3.

The decoding latency (or delay), indicated for the data-types, shall be used by the transmitter to schedule data-bursts as necessary to establish synchronization between the picture and the decoded audio.

NOTE For both ATRAC and ATRAC2/3 formats, the recommended repetition value period of pause data-bursts is 32 IEC 60958 frames.

5.2 Audio data-bursts

5.2.1 The data ATRAC

The ATRAC bitstream consists of sequences of ATRAC frames. The data-type of an ATRAC data-burst is 0Eh. The data-burst is headed with a burst-preamble, followed by the burst-payload, and is stuffed with stuffing bits (see figure 1). The burst-payload of each data-burst of ATRAC data shall contain one complete ATRAC frame, and represents 512 samples for each encoded channel. The length of the ATRAC data-burst depends on the encoded bit rate (which determines the ATRAC-frame length).

NOTE The reference to the specification for the ATRAC bitstream, representing 512 samples of encoded audio per frame, may be found in the bibliography.

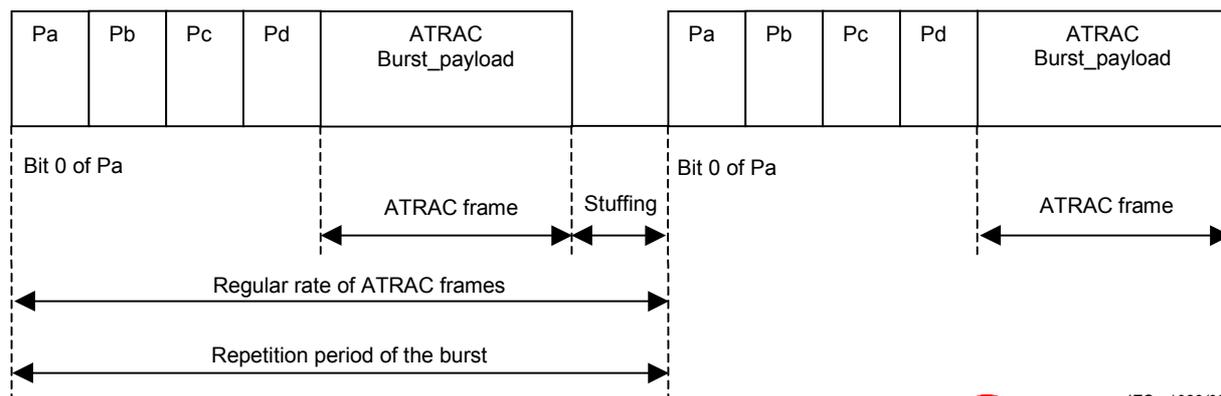


Figure 1 – ATRAC data-burst

The data-type-dependent information for ATRAC is given in table 2.

Table 2 – Data-type-dependent information for data-type ATRAC

Bits of Pc LSB..MSB	Data type dependent, bit number LSB..MSB	Contents
8-12	00h – 1Fh	reserved, shall be set to '0'

The reference point of an ATRAC data-burst is bit 0 of Pa and shall occur exactly once every 512 sampling periods. The data-burst containing ATRAC frames shall occur at a regular rate, with the reference point of each ATRAC data-burst beginning 512 IEC 60958 frames after the reference point of the preceding ATRAC data-burst (of the same bit-stream-number).

NOTE 1 It is recommended that pause data-bursts are used to fill stream gaps in the ATRAC bit stream as described in IEC 61937, and that pause data-bursts be transmitted with a repetition period of 32 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream gap length (which may not be a multiple of 32 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937-1).

When a stream gap in an ATRAC stream is filled by a sequence of pause data-bursts, the Pa of the first pause data-burst shall be located 512 sampling periods following the Pa of the previous ATRAC frame.

NOTE 2 It is recommended that the sequence(s) of pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 32 IEC 60958 frame length of the pause data-burst) the Pa of the first ATRAC data-burst which follows the stream gap.

The gap-length parameter contained in the pause data-burst is intended to be interpreted by the ATRAC decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

5.2.2 Latency of ATRAC decoding

The latency of an external audio decoder to decode ATRAC is defined as the sum of the receiving delay time and the decoding delay time, as illustrated in figure 2.

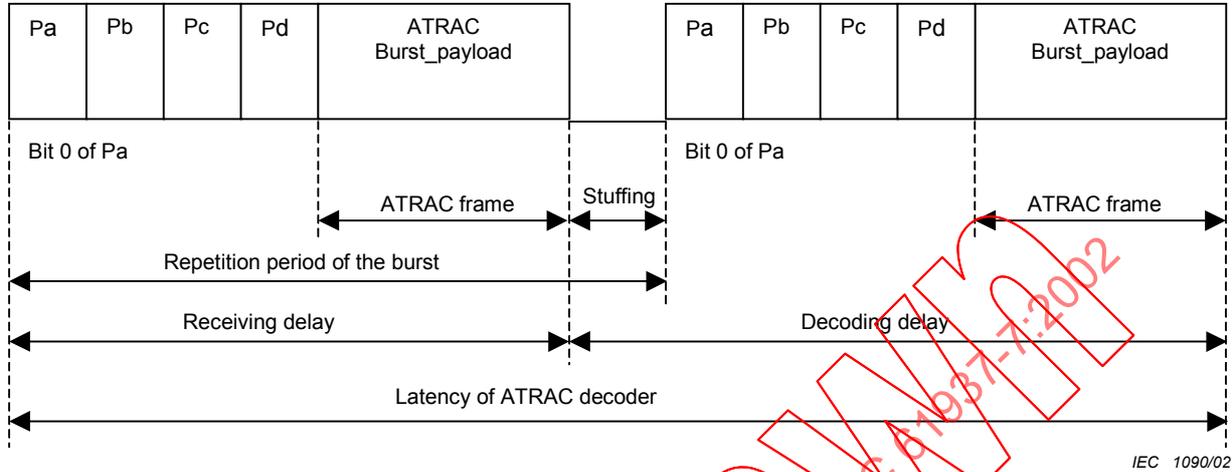


Figure 2 – Latency of ATRAC decoding

IEC 1090/02

EXAMPLE The receiving delay time to receive a whole data-burst is calculated as follows. The length of preamble is 64 bit. If each ATRAC frame consists of 1 696 B (Eight channels of 146,08 kbit/s per channel), the length of the whole data burst-payload is 13 568 bit. In this case, the whole length of the data burst is 13 632 bit. The receiving delay time is calculated as 9,66 ms with 44,1 kHz sampling frequency. The decoding delay time is calculated as 11,61 ms, and is equal to the decoding time for one ATRAC frame data. Hence, the latency of ATRAC decoding is approximately 21,27 ms in this case.

The absolute maximum decoding latency is taken when ATRAC burst-payload extends to just before the Pa of the next frame, and is equal to 23,22 ms at 44,1 kHz sampling frequency.

5.2.3 The data ATRAC2/3

The ATRAC2/3 bitstream consists of sequences of ATRAC2/3 frames. The data-type of an ATRAC2/3 data-burst is 0Fh. The data-burst is headed with a burst-preamble, followed by the burst-payload, and stuffed with stuffing bits (see figure 3). The burst-payload of each data-burst of ATRAC2/3 data shall contain one complete ATRAC2/3 frame, and represents 1 024 samples for each encoded channel. The length of the ATRAC2/3 data-burst depends on the encoded bit rate (which determines the ATRAC2/3-frame length).

NOTE The reference to the specification for the ATRAC2/3 bitstream, representing 1 024 samples of encoded audio per frame, may be found in the bibliography.

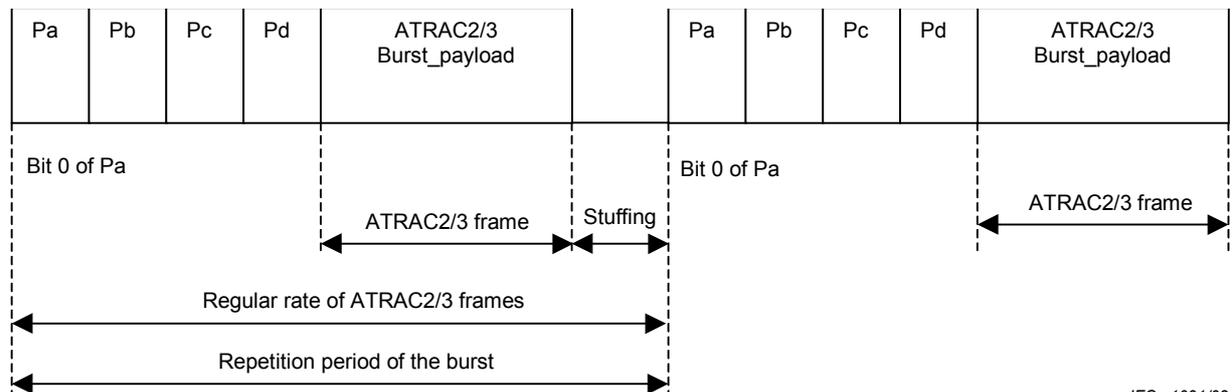


Figure 3 – ATRAC2/3 data-burst

IEC 1091/02

The data-type dependent information for ATRAC2/3 is given in table 3.

Table 3 – Data-type dependent information for data-type ATRAC2/3

Bits of Pc LSB..MSB	Data type dependent, bit number LSB..MSB	Contents
8-12	00h	ATRAC2
	01h	ATRAC3
	02h-1Fh	reserved

The reference point of an ATRAC2/3 data-burst is bit 0 of Pa and shall occur exactly once every 1 024 sampling periods. The data-burst containing ATRAC2/3 frames shall occur at a regular rate, with the reference point of each ATRAC2/3 data-burst beginning 1 024 IEC 60958 frames after the reference point of the preceding ATRAC2/3 data-burst (of the same bit-stream-number).

NOTE 1 It is recommended that pause data-bursts are used to fill stream gaps in the ATRAC2/3 bit stream as described in IEC 61937, and that pause data-bursts be transmitted with a repetition period of 32 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream gap length (which may not be a multiple of 32 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937-1).

When a stream gap in an ATRAC2/3 stream is filled by a sequence of pause data-bursts, the Pa of the first pause data-burst shall be located 1 024 sampling periods following the Pa of the previous ATRAC2/3 frame.

NOTE 2 It is recommended that the sequence(s) of pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 32 IEC 60958 frame length of the pause data-burst) the Pa of the first ATRAC2/3 data-burst which follows the stream gap.

The gap-length parameter contained in the pause data-burst is intended to be interpreted by the ATRAC2/3 decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

5.2.4 Latency of ATRAC2/3 decoding

The latency of an external audio decoder to decode ATRAC2/3 is defined as the sum of the receiving delay time and the decoding delay time (see figure 4).

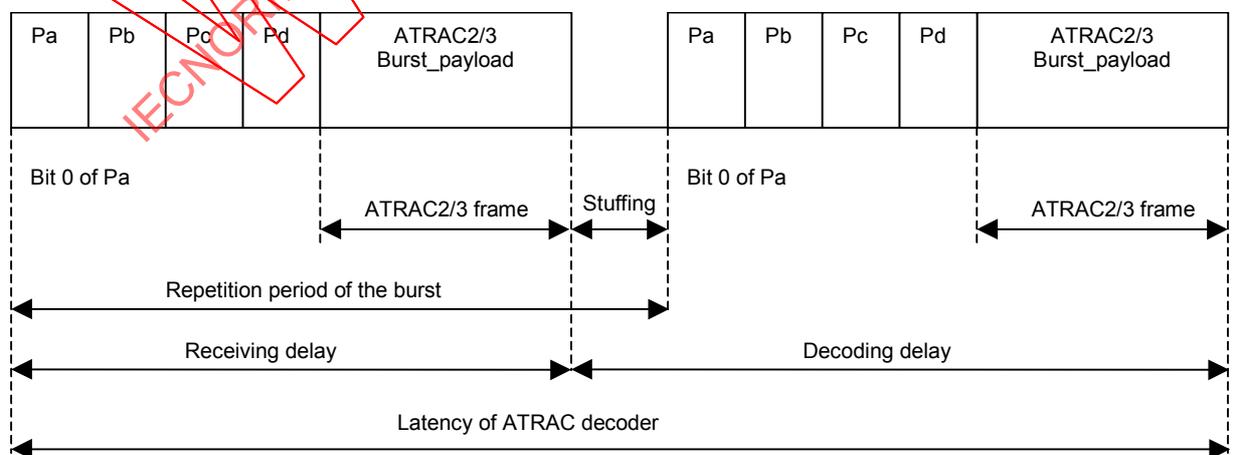


Figure 4 – Latency of ATRAC2/3 decoding

EXAMPLE The receiving delay time to receive a whole data-burst is calculated as follows. The length of preamble is 64 bit. If, for example, each ATRAC2/3 frame consists of 1 696 B

(eight channels of 73,04 kbit/s per channel), the length of the whole data burst-payload is 13 568 bit. In this case, the whole length of data burst is 13 632 bit. The receiving delay time is calculated as 9,66 ms with 44,1 kHz sampling frequency. The decoding delay time is calculated as 23,22 ms, and is equal to the decoding time for one ATRAC2/3 frame data. Hence, the latency of ATRAC2/3 decoding is approximately 32,88 ms in this case.

The absolute maximum decoding latency is taken when ATRAC2/3 burst-payload extends to just before the Pa of the next frame, and is equal to 46,44 ms at 44,1 kHz sampling frequency.

IECNORM.COM: Click to view the full PDF of IEC 61937-7:2002
Withdrawn

Bibliography

The following documents have served as references for the specification of the related data-type.

<i>Data-type</i>	<i>Reference</i>
ATRAC	IEC 61909: <i>Audio recording – Minidisc system</i>
ATRAC2	<i>MD Data System Description</i> , January 1995, Sony Corporation
ATRAC3	<i>Memory Stick Standard Audio File Format Specifications</i> , ver. 1.0, September 1999, Sony Corporation

IECNORM.COM: Click to view the full PDF of IEC 61937-7:2002

Withdrawing

IECNORM.COM : Click to view the full PDF of IEC 61937-7:2002

Withdrawn