



IEC 62769-101-1

Edition 3.0 2023-04
REDLINE VERSION

INTERNATIONAL STANDARD



Field device Integration (FDI)[®] –
Part 101-1: Profiles - Foundation Fieldbus H1

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 60216-101:2023 RLV



IEC 62769-101-1

Edition 3.0 2023-04
REDLINE VERSION

INTERNATIONAL STANDARD



Field device Integration (FDI)[®] –
Part 101-1: Profiles - Foundation Fieldbus H1

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.040.40; 35.100.05

ISBN 978-2-8322-6847-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Terms, definitions, abbreviated terms and conventions acronyms.....	7
3.1 Terms and definitions.....	7
3.2 Abbreviated terms and acronyms.....	7
4 Conventions	7
4.1 EDDL syntax.....	7
4.2 XML syntax.....	7
4.3 Capitalizations	8
5 Profile for CP 1/1 (FOUNDATION™ H1).....	8
5.1 General.....	8
5.2 Catalog profile	8
5.2.1 Protocol support file (Capability File).....	8
5.2.2 CommunicationProfile definition.....	9
5.2.3 Profile device.....	9
5.2.4 Protocol version information	9
5.3 Associating a Package with a CP 1/1 device.....	9
5.3.1 Device type identification mapping.....	9
5.3.2 Device type revision mapping.....	9
5.4 Information Model mapping.....	10
5.4.1 ProtocolType definition	10
5.4.2 DeviceType mapping	10
5.4.3 FunctionalGroup Identification definition	10
5.4.4 BlockType property mapping	11
5.4.5 Mapping to Block ParameterSet.....	11
5.5 Topology elements.....	11
5.5.1 ConnectionPoint definition	11
5.5.2 Communication Device definition	13
5.5.3 Communication service provider definition.....	15
5.5.4 Network definition.....	16
5.6 Methods.....	16
5.6.1 Methods for FDI® Communication Servers	16
5.6.2 Methods for Gateways	23
Annex A (normative) Topology scan schema.....	24
A.1 General.....	24
A.2 Target Namespace.....	24
A.3 FoundationH1AddressT	24
A.4 FoundationH1ConnectionPointT.....	24
A.5 FoundationH1NetworkT	25
A.6 Network	25
A.7 FoundationBlockIdentificationT	26
A.8 FoundationIdentificationT.....	26
Annex B (normative) Transfer service parameters.....	28
B.1 General.....	28
B.2 receiveData	28

B.3	sendData	28
B.4	OperationT.....	29
B.5	ResponseCodeT	29
B.6	TransferResultDataT.....	29
B.7	TransferSendDataT.....	30
Annex C (informative) Communication service arguments for Transfer Method		31
Bibliography.....		32
Table 1	– Capability File part	8
Table 2	– CommunicationProfile definition	9
Table 3	– Device type catalog mapping.....	9
Table 4	– ProtocolType Foundation_H1 definition	10
Table 5	– Inherited DeviceType Property mapping	10
Table 6	– Identification parameters	11
Table 7	– Inherited BlockType property mapping.....	11
Table 8	– ConnectionPointType ConnectionPoint_Foundation_H1 definition	12
Table 9	– Communication device ParameterSet definition.....	15
Table 10	– Method Connect arguments.....	17
Table 11	– Method Disconnect arguments	18
Table 12	– Method Transfer arguments.....	19
Table 13	– Method GetPublishedData arguments.....	21
Table 14	– Method SetAddress arguments.....	22
Table A.1	– Attributes of FoundationH1ConnectionPointT	25
Table A.2	– Elements of FoundationH1ConnectionPointT	25
Table A.3	– Elements of FoundationH1NetworkT	25
Table A.4	– Attributes of FoundationBlockIdentificationT.....	26
Table A.5	– Attributes of FoundationIdentificationT	27
Table B.1	– Elements of receiveData	28
Table B.2	– Enumerations of OperationT	29
Table B.3	– Attributes of ResponseCodeT	29
Table B.4	– Attributes of TransferResultDataT	30
Table B.5	– Attributes of TransferSendDataT.....	30

IECNORM.COM: Click to view the full PDF of IEC 62769-101-1:2023 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIELD DEVICE INTEGRATION (FDI®) –

Part 101-1: Profiles – Foundation Fieldbus H1

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 62769-101-1:2020. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 62769-101-1 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation. It is an International Standard.

This third edition cancels and replaces the second edition published in 2020. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) updated Transfer service;
- b) added OPERATION “GETOD” and “GETDEVICETYPEINFO”;
- c) added DeviceTag and Block_Index to FoundationIdentificationT and Target;
- d) removed arguments “BlockTag” and “ServiceId”;
- e) changed content type of CFF file to application/vnd.ff.cff.

The text of this International Standard is based on the following documents:

Draft	Report on voting
65E/860/CDV	65E/917/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 62769 series, published under the general title *Field device integration (FDI®)*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

FIELD DEVICE INTEGRATION (FDI®) –

Part 101-1: Profiles – Foundation Fieldbus H1

1 Scope

This part of IEC 62769 specifies ~~the IEC 62769~~ an FDI®¹ profile of IEC 62769 for IEC 61784-1_CP 1/1 (FOUNDATION™ Fieldbus H1)².

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-5-9:2014, *Industrial communication networks – Fieldbus specifications – Part 5-9: Application layer service definition – Type 9 elements*

IEC 61784-1, *Industrial communication networks – Profiles – Part 1: Fieldbus Profiles*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC ~~IEEE~~ 8802-3*

IEC 61784-3:2016/2021, *Industrial communication networks – Profiles – Part 3: Functional safety fieldbuses – General rules and profile definitions*

IEC 61804 (all parts), *Devices and integration in enterprise systems – Function blocks (FB) for process control and electronic device description language (EDDL)*

~~IEC 62541-6, OPC unified architecture – Part 6: Mappings~~

IEC 62541-100:–2015, *OPC unified architecture – Part 100: Device Interface*

~~IEC 62769-1, Field device integration (FDI) – Part 1: Overview~~

IEC 62769-2, *Field device integration (FDI®) – Part 2: ~~FDI~~ Client*

IEC 62769-3, *Field device integration (FDI®) – Part 3: Server*

IEC 62769-4, *Field device integration (FDI®) – Part 4: FDI® Packages*

¹ FDI is a registered trademark of the non-profit organization Fieldbus Foundation, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance does not require use of the trade name. Use of the trade name requires permission of the trade name holder.

² FOUNDATION™ Fieldbus is the trade name of the non-profit consortium Fieldbus Foundation. This information is given for the convenience of users of this standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance does not require use of the trade name. Use of the trade name requires permission of the trade name holder.

IEC 62769-5, *Field device integration (FDI®) – Part 5: ~~FDI~~ Information Model*

IEC 62769-6, *Field device integration (FDI®) – Part 6: ~~FDI~~ Technology Mapping*

IEC 62769-7, *Field device integration (FDI®) – Part 7: ~~FDI~~ Communication Devices*

3 Terms, definitions, abbreviated terms and ~~conventions~~ acronyms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions listed in the normative references given in ~~IEC 61158-5-9, IEC 61784-1, IEC 61784-2, IEC 61784-3, IEC 61804 (all parts), IEC 62541-6, IEC 62541-100, IEC 62769-1, IEC 62769-2, IEC 62769-4, IEC 62769-5, IEC 62769-6, and IEC 62769-7~~ Clause 2 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.2 Abbreviated terms and acronyms

For the purposes of this document, the following abbreviations apply:

CFF	common file format
CP	communication profile (see IEC 61784-1 or IEC 61784-2)
CPF	communication profile family (see IEC 61784-1 or IEC 61784-2)
EDD	Electronic Device Description (see IEC 61804 series)
EDDL	Electronic Device Description Language (see IEC 61804 series)
FB	function block
IM	Information Model
SMIB	system management information base
VFD	virtual field device

4 Conventions

4.1 EDDL syntax

This document specifies content for the EDD component that is part of an FDI® Communication Package. EDDL syntax uses the font `Courier New`. EDDL syntax is used for method signature, variable, data structure and component declarations.

4.2 XML syntax

XML syntax examples use the font `Courier New`. The XML syntax is used to describe XML document schema.

Example: `<xsd:simpleType name="Example">`.

4.3 Capitalizations

The IEC 62769 series uses capitalized terms to emphasize that these terms have an FDI® specific meaning.

Some of these terms use an acronym as a prefix for example

- FDI® Client, or
- FDI® Server.

Some of these terms are compound terms such as:

- Communication Servers, or
- Profile Package.

Parameter names or attributes are concatenated to a single term, where the original terms start in this term with a capital letter such as:

- ProtocolSupportFile, or
- ProtocolType.

Parameter names or attributes can also be constructed by using an underscore character to concatenate two or more terms such as:

- PROFILE_ID, or
- Profibus_PA_Network.

5 Profile for CP 1/1 (FOUNDATION™ H1)

5.1 General

This profile specifies the protocol specifics needed for FDI® Packages describing communication servers, gateways and devices. ~~Requirements for Direct Access transfer service parameters are given in Annex B.~~

Annex B defines the XML schema for Direct Access Services. Annex C provides an overview of mapping PROFIBUS standard parameters to PA DIM.

5.2 Catalog profile

5.2.1 Protocol support file (Capability File)

Each CP 1/1 FDI® Device Package shall contain a capability file. The capability file part is described in Table 1.

Table 1 – Capability File part

Parameter	Description
Content Type:	txt/plain application/vnd.ff.cff
Root Namespace:	Not applicable
Source Relationship:	http://fdi-cooperation.com/2010/relationships/attachment-protocol
Filename:	Use file extension .CFF

5.2.2 CommunicationProfile definition

IEC 62769-4 defines a CommunicationProfileT string type for the Catalog XML schema. Table 2 defines the CP 1/1 specific values for this string.

Table 2 – CommunicationProfile definition

CommunicationProfile	Description
foundation_h1	CP 1/1 device type with a function block application

5.2.3 Profile device

Not supported in this document.

5.2.4 Protocol version information

IEC 62769-4 defines an element type named InterfaceT for the Catalog XML Schema. Element type InterfaceT contains an element named Version which is supposed to provide version information about the applied communication protocol profile. The value follows the IEC 62769-4 defined version information schema defined in element type VersionT.

The major version part of VersionT shall be set to the ITK_VER parameter. The minor and builds parts shall be set to 0.

EXAMPLE For ITK_VER 5, the value for InterfaceT is 5.0.0.

5.3 Associating a Package with a CP 1/1 device

5.3.1 Device type identification mapping

CP 1/1 device types are uniquely identified by the parameters MANUFAC_ID, DEVICE_TYPE and DEV_REV found in the Resource Block. These parameters are used to associate a given device instance to an FDI® Device Package. These parameters are mapped to the FDI® Device Package Catalog according to Table 3.

Table 3 – Device type catalog mapping

Catalog Element	CP Mapping
Manufacturer element of InterfaceT (IEC 62769-4)	MANUFAC_ID String format "0xdddd" where dddd is the MANUFAC_ID number in hexadecimal format.
DeviceModel element of InterfaceT (IEC 62769-4)	DEVICE_TYPE String format "0xdddd" where dddd is the DEVICE_TYPE number in hexadecimal format.
DeviceRevision element ListOfSupportedDeviceRevisionsT (IEC 62769-4)	DEV_REV String format "x.0.0" where x is the DEV_REV in decimal format (no leading zeros).

5.3.2 Device type revision mapping

Each device type is identified according to 5.3.1. A device may also include a parameter COMPATIBILITY_REV from the Resource Block. This parameter specifies the lowest device version (DEV_REV) that a new device can replace while maintaining compatibility with a prior FDI® Device Package.

5.4 Information Model mapping

5.4.1 ProtocolType definition

Table 4 defines the ProtocolType used to identify CP 1/1 network communications.

Table 4 – ProtocolType Foundation_H1 definition

Attribute	Value				
BrowseName	Foundation_H1				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Inherits the properties of ProtocolType defined in IEC 62541-100.					

5.4.2 DeviceType mapping

Each device type inherits the properties of the DeviceType. The mapping of the inherited properties from the DeviceType is defined in Table 5.

Table 5 – Inherited DeviceType Property mapping

Property	CP Mapping
SerialNumber	DEV_ID (System Management Information Base)
RevisionCounter	-1 (not defined)
Manufacturer	String obtained from FDI [®] package catalog (ManufacturerName from PackageT)
Model	String obtained from FDI [®] package catalog (Name of DeviceTypeT, which is a localized name)
DeviceManual	entry text string (not supported) ^a
DeviceRevision	DEV_REV (Resource Block)
SoftwareRevision	SOFTWARE_REV (if available, otherwise empty string)
HardwareRevision	HARDWARE_REV (if available, otherwise empty string)
^a Device manuals are exposed as attachments of the FDI [®] Device Package.	

5.4.3 FunctionalGroup Identification definition

As defined in IEC 62541-100, each device representation in the FDI[®] Server hosted Information Model shall contain a protocol specific FunctionalGroup called Identification. This FunctionalGroup organizes variables found in the Resource Block of the device type instance. The FunctionalGroup Identification for CP 1/1 is defined in Table 6.

Table 6 – Identification parameters

BrowseName	DataType	Optional/Mandatory
MANUFAC_ID	UInt32	Mandatory
DEV_TYPE	UInt16	Mandatory
DEV_REV	UInt8	Mandatory
HARDWARE_REV	String	Optional
SOFTWARE_REV	String	Optional
COMPATIBILITY_REV	UInt8	Optional
CAPABILITY_LEV	UInt8	Optional
ITK_VER	UInt16	Mandatory
SIF_ITK_VER	UInt16	Optional
FD_VER	UInt16	Optional
DeviceTag	String	Optional
Block_index	UInt16	Optional

5.4.4 BlockType property mapping

CP 1/1 device types are block-oriented according to IEC 62541-100. IEC 62769-5 specifies the mapping of EDDL BLOCK_A elements to block types and instances.

The BLOCK_A maps as a subtype of the topology element BlockType and inherits the properties per IEC 62541-100. The mapping of the inherited properties of the BlockType is specified in Table 7.

Table 7 – Inherited BlockType property mapping

Property	CP Mapping (Block ParameterSet)
RevisionCounter	ST_REV
ActualMode	MODE_BLK.ACTUAL
PermittedMode	MODE_BLK.PERMITTED
NormalMode	MODE_BLK.NORMAL
TargetMode	MODE_BLK.TARGET

5.4.5 Mapping to Block ParameterSet

The ParameterSet is relative to each Block. The ParameterSet includes the CHARACTERISTICS records of the block and all the parameters found in the PARAMETERS, LOCAL_PARAMETERS and LIST_ITEMS.

The browse name of the parameters found in the PARAMETERS and LOCAL_PARAMETERS is the member name in the respective lists. For example, ST_REV is the browse name of the Static Revision parameter. LIST_ITEMS do not have member names; therefore the browse name of each LIST in the LIST_ITEMS is the item name of the list.

5.5 Topology elements

5.5.1 ConnectionPoint definition

The ConnectionPoint type ConnectionPoint_Foundation_H1 shall be used to identify CP 1/1 network communication and is defined in Table 8. The ConnectionPoint_Foundation_H1 type is a sub type of the abstract type ConnectionPointType defined in IEC 62541-100.

The Address property shall be the H1 node address.

The OrdinalNumber property reflects the position of the VFD within the SMIB VFD list. For devices exposing multiple FB VFDs, the OrdinalNumber property is mandatory to address the FB VFD. For devices with a single FB VFD, the OrdinalNumber property can be omitted. Devices exposed as instances of type DeviceType define their connection points as components. Hence Devices with multiple FB VFDs shall contain multiple Connection Points, one per FB VFD.

The SIFConnection property denotes whether a safety instrumented function (SIF) connection is necessary or not according to the functional safety profile (IEC 61784-3:2016/2021, Clause 6). CP 1/1 devices that implement the functional safety profile shall have a connection point as a component that has set this property to true. Devices supporting standard connections and SIF connections shall expose two Connections Points as components.

Table 8 – ConnectionPointType ConnectionPoint_Foundation_H1 definition

Attribute	Value				
BrowseName	ConnectionPoint_Foundation_H1				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	Type Definition	Modelling Rule
Inherits the properties of ConnectionPointType defined in IEC 62541-100.					
HasProperty	Variable	Address	Byte	PropertyType	Mandatory
HasProperty	Variable	OrdinalNumber	Int32	PropertyType	Optional
HasProperty	Variable	SIFConnection	Boolean	PropertyType	Optional

The ConnectionPoint type ConnectionPoint_Foundation_H1 shall be described by an EDD element contained in a Communication Device related FDI® Package that can drive a CP 1/1 network. Actual ConnectionPoint_Foundation_H1 properties are declared by VARIABLE constructs grouped together in a COLLECTION named Foundation_H1_ConnectionPoint_Properties.

```
COMPONENT ConnectionPoint_Foundation_H1
{
    LABEL "Foundation H1 Connection point";
    CLASSIFICATION NETWORK_CONNECTION_POINT;
    CAN_DELETE FALSE;
    PROTOCOL Foundation_H1;
    CONNECTION_POINT Foundation_H1_ConnectionPoint_Properties;
}
```

```
VARIABLE Address
{
    LABEL "H1 Node address";
    HELP "Address of the H1 Node";
    CLASS DEVICE;
    TYPE UNSIGNED_INTEGER (1)
    {
        MIN_VALUE 16;
        MAX_VALUE 255;
    }
    HANDLING READ & WRITE;
}
```

```
VARIABLE OrdinalNumber
{
    LABEL "OrdinalNumber address property";
```

```

HELP "OrdinalNumber property to address the Function Block
Application";
CLASS DEVICE;
TYPE UNSIGNED_INTEGER (4);
HANDLING READ & WRITE;
}

```

```

VARIABLE SIFConnection
{
  LABEL "SIFConnection address property";
  HELP "Connection point supports SIF Connections";
  CLASS DEVICE;
  TYPE ENUMERATED (1)
  {
    {0, "NO_SIFCONNECTION"} ,
    {1, "SIFCONNECTION"}
  }
  HANDLING READ & WRITE;
}

```

```

COLLECTION Foundation_H1_ConnectionPoint_Properties
{
  LABEL "FF H1 Connection Point data";
  MEMBERS
  {
    CONNECTION_POINT_ADDRESS, Address;
    CONNECTION_POINT_ORDINALNUMBER, OrdinalNumber;
    CONNECTION_POINT_SIFCONNECTION , SIFConnection;
  }
}

```

5.5.2 Communication Device definition

According to IEC 62769-7 each FDI[®] Communication Package shall contain an EDD element describing the device. The following EDDL source code is an example describing an FDI[®] Communication Server.

```

COMPONENT Foundation_H1_Communication_Server
{
  LABEL "Foundation H1 communication server",
  PRODUCT_URI "urn:Fieldbus Foundation:Foundation H1 Communication
Server";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Communication_Device_Setup
  }
}

```

```

COMPONENT_RELATION Foundation_H1_Communication_Device_Setup
{
  LABEL "Relation between Device and communication device";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING { LinkId }
  COMPONENTS
  {
    Foundation_H1_Communication_Device{AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 4;
}

```

```
VARIABLE LinkId
{
  LABEL "Link Id address parameter of the Communication device";
  HELP "Link Id address parameter of the Communication device";
  CLASS DEVICE;
  TYPE UNSIGNED_INTEGER (2)
  {
    MIN_VALUE 4096;
    MAX_VALUE 65535;
  }
  HANDLING READ & WRITE;
}
```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI[®] server and FDI[®] Communication Server to create an instance of type CommunicationServerType as described in IEC 62769-7.

The LinkId VARIABLE holds the address value for a Communication device instance. In the Information model the LinkId will be represented as an instance of BaseDataVariableType and as a component of the ParameterSet of the communication device.

According to IEC 62769-7, each FDI[®] Communication Package shall contain at least one EDD element describing at least one Communication Device component. The following EDDL source code is an example for a communication device.

```
COMPONENT Foundation_H1_Communication_Device
{
  LABEL "Foundation H1 communication device";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Service_Provider_Relation
  }
}

COMPONENT_RELATION Foundation_H1_Service_Provider_Relation
{
  LABEL "Foundation H1 communication service provider";
  RELATION_TYPE CHILD_COMPONENT;
  COMPONENTS
  {
    Foundation_H1_Service_Provider{AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 16;
}
```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI[®] server and FDI[®] Communication Server to create an instance of type ServerCommunicationDeviceType as described in IEC 62769-7.

An instance of ServerCommunicationDeviceType shall contain the following parameter(s) with its ParameterSet. Table 9 shows the definition of Communication device ParameterSet.

Table 9 – Communication device ParameterSet definition

Attribute	Value				
BrowseName	ParameterSet				
References	NodeClass	BrowseName	Data Type	Type Definition	Modelling Rule
See IEC 62541-100:–2015, 5.2.					
HasTypeDefinition	ObjectType	BaseObjectType			
HasComponent	Variable	LinkId	UInt16	BaseDataVariable Type	Mandatory
HasComponent	Variable	<ParameterIdentifier>		BaseDataVariable Type	Mandatory-Placeholder

The LinkId parameter is an addressing parameter distinguishing multiple H1 Links. If an FDI[®] Communication Server supports multiple physical H1 Links these are mapped within the Information Model to multiple communication device instances. If the FDI[®] Communication Server supports only one H1 Link it shall define only one communication device within the Information Model. The value of the variable can be set to 0 in this case.

The EDD declaration of the variable LinkId is with the ADDRESSING attribute of the COMPONENT_RELATION of the FDI[®] Communication Server definition (see 5.5.2).

5.5.3 Communication service provider definition

According to IEC 62769-7 each FDI[®] Communication Package shall contain at least one EDD element describing at least one communication service provider component. The following EDDL source code is an example for a CP 1/1 communication service provider component.

The component reference ConnectionPoint_Foundation_H1 corresponds to the related Connection Point definition in 5.5.1.

```

COMPONENT Foundation_H1_Service_Provider
{
  LABEL "Foundation_H1 communication service provider";
  CAN_DELETE FALSE;
  CLASSIFICATION NETWORK_COMMUNICATION_SERVICE_PROVIDER;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Connection_Point_Relation
  }
  BYTE_ORDER BIG_ENDIAN;
}

COMPONENT_RELATION
Foundation_H1_Service_Provider_Connection_Point_Relation
{
  LABEL "Relation between communication service provider and
connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {Address}
  COMPONENTS
  {
    ConnectionPoint_Foundation_H1{ AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 1;
}

```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI® server and FDI® Communication Server to create an instance of type ServerCommunicationServiceType as described in IEC 62769-7.

5.5.4 Network definition

According to IEC 62769-7 each FDI® Communication Package shall contain at least one EDD element describing one Network for each of the protocols that are supported by the Communication Device. The definition supports the network topology engineering.

```
COMPONENT Network_Foundation_H1
{
  LABEL "Foundation H1 Network";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK;
  PROTOCOL Foundation_H1
  COMPONENT_RELATIONS
  {
    Foundation_H1_Network_Connection_Point_Relation
  }
}

COMPONENT_RELATION Foundation_H1_Network_Connection_Point_Relation
{
  LABEL "Relation between network and connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {Address}
  COMPONENTS
  {
    ConnectionPoint_Foundation_H1
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 32;
}
```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI® server and FDI® Communication Server to create an instance of type NetworkType as described in IEC 62541-100.

5.6 Methods

5.6.1 Methods for FDI® Communication Servers

5.6.1.1 General

The FDI® Communication Server shall implement the services according to the method signatures described in 5.6.1 and according to the Information Model.

5.6.1.2 Connect

Table 10 shows the Method Connect arguments. The connect transaction may need a significant amount of time since configuration of communication endpoints is involved. Ensure the OPC UA timeout is configured appropriately (e.g. 30 seconds).

Signature:

```

Connect (
    [in]   ByteString      CommunicationRelationId,
    [in]   UInt16          LinkId
    [in]   byte            Address,
    [in]   Int32           OrdinalNumber
    [in]   Boolean         SIFConnection
    [out]  Int32           ServiceError);

```

Table 10 – Method Connect arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeId of the Device ConnectionPoint representing the connection between a device and a physical network which is directly connected to the FDI [®] Communication Server hardware. The nodeId allows finding the direct parent-child relation.
LinkId	The argument name shall match with the corresponding BrowseName of the Variable defined as a component of an instance of type ServerCommunicationDeviceType (refer to 5.5.2). The argument value is passed by the parent instance of a ServerCommunicationDeviceType. The value may be obtained by the Scan Method or may be directly configured.
Address	The argument name shall match with the corresponding attribute name defined for the ConnectionPoint which is described by a corresponding EDD element. The argument value holds the device's node address.
OrdinalNumber	The argument name shall match with the corresponding attribute name defined for the ConnectionPoint which is described by a corresponding EDD element specified in 5.5.1. The argument value holds the OrdinalNumber. The OrdinalNumber is the position of the VFD within the SMIB VFD list. If a value 0 is passed with this argument the first FB VFD is selected.
SIFConnection	The argument name shall match with the corresponding attribute name defined for the ConnectionPoint which is described by a corresponding EDD element specified in 5.5.1. The argument value denotes whether a SIF Connection is necessary or not.
ServiceError	<ul style="list-style-type: none"> 0: OK / execution finished, connection established successfully -1: Connect Failed / canceled by caller -2: Call Failed / unknown service ID -3: Connect Failed / device not found -4: Connect Failed / invalid device node address -5: Connect Failed / invalid device identification -6: Connect Failed / invalid LinkId argument -7: Connect Failed / invalid OrdinalNumber argument
<p>NOTE IEC 62769-7 defines the argument AddressData of the Connect Method as an array of Variant. The address arguments defined with the table are represented as entries of the Variant array in the order they are specified above. IEC 62769-7 defines the argument DeviceInformation as a protocol specific argument list in which the Connect Method stores the resulting data. The DeviceInformation argument is defined as an array of Variant. The DeviceInformation argument is not used.</p>	

5.6.1.3 Disconnect

Table 11 shows the Method Disconnect arguments.

Signature:

```
Disconnect (
    [in]   ByteString      CommunicationRelationId,
    [out]  UInt32          ServiceError)
```

Table 11 – Method Disconnect arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeld of the Device ConnectionPoint representing the connection between a device and a physical network which is directly connected to the FDI® Communication Server hardware. The nodeld allows finding the direct parent-child relation.
ServiceError	0: OK / disconnect finished successfully -1: Disconnect Failed / no existing communication relation -2: Disconnect Failed / invalid communication relation identifier

5.6.1.4 Transfer

Table 12 shows the Method Transfer arguments.

Signature

```
Transfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   String          OPERATION,
    [in]   String          BlockTag,
    [in]   UInt32          INDEX,
    [in]   UInt32          SUB_INDEX,
    [in]   Byte[]          WriteData,
    [in]   UInt32          ServiceId,
    [out]  Byte[]          ReadData,
    [out]  Int32           ServiceError);
    [in]   ByteString      CommunicationRelationId,
    [in]   String          OPERATION,

    [in]   UInt32          INDEX,
    [in]   UInt32          SUB_INDEX,
    [in]   ByteString      WriteData,
    [out]  ByteString      ReadData,
    [out]  Int32           ServiceError);
```

Table 12 – Method Transfer arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeId of the ConnectionPoint representing the connection between a device and a physical network within the Information Model.
OPERATION	The argument value indicates the data transfer operation. The allowed values are "READ", "WRITE", "GETOD", "GETDEVICETYPEINFO" and "VIEW_READ".
BlockTag	The argument denotes the Block tag of the block instance being addressed. The value can be obtained by the Method Scan.
	When BlockTag is used, the INDEX argument should be a block related, relative index.
INDEX	<p>OPERATION indicates "READ", "GETOD" or "WRITE": The argument denotes the relative absolute index of the block parameter being addressed. The relative index can be calculated by iterating the parameters of a block within the FDI Information Model. A value of 0 addresses the block header record (described by the CHARACTERISTICS attribute within the EDD). The first parameter is addressed with the INDEX 1.</p> <p>OPERATION indicates "VIEW_READ": The argument denotes the view identifier in a range from 1 to 4. For instance a value of 1 requests that View_1 shall be read. Multiple View_3 or View_4 objects are identified by the INDEX and the SUB_INDEX argument.</p> <p>OPERATION indicates "GETDEVICETYPEINFO": The argument is not relevant.</p>
SUB_INDEX	<p>OPERATION indicates "READ" or "WRITE": The argument denotes the subindex of a member of the block parameter being addressed if the block parameter is of type RECORD or ARRAY. To address a simple parameter a value of 0 shall be passed with this argument. To address a specific member of a parameter of type RECORD or ARRAY a 1 relative value shall be passed with this argument. To address the parameter of type RECORD or ARRAY as a whole a value of 0 shall be passed with this argument.</p> <p>OPERATION indicates "VIEW_READ": The argument addresses a View_3 or View_4 if multiple views of that type exist. The argument shall be 0 if there are no multiple views of the type addressed with the INDEX argument. Values of 1 up to the number of views of that type address the specific view.</p> <p>OPERATION indicates "GETOD" or "GETDEVICETYPEINFO": The argument is not relevant.</p>
WriteData	Write data encoded as byte array. Encoding of integers shall follow the rules defined in IEC 62541-6. The argument shall be ignored if OPERATION indicates a read transfer or a view read transfer "READ", "GETOD", "GETDEVICETYPEINFO" or a "VIEW_READ".
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response.
ReadData	With this argument the read data byte stream is returned as byte array. Encoding of integers shall follow the rules defined in IEC 62541-6. The argument shall be ignored if OPERATION indicates a write transfer "WRITE".
ServiceError	<p>0: OK / execution finished</p> <p>-1: Transfer Failed / canceled by caller</p> <p>-2: Call Failed/unknown service ID</p> <p>-3: Transfer Failed / no existing communication relation.</p> <p>-4: Transfer Failed / invalid communication relation identifier</p> <p>-5: Transfer Failed / invalid sendData content</p> <p>-6: Transfer Failed / invalid receiveData format</p> <p>-7: Transfer Failed / parameter Check ^a</p>

	<p>-8: Transfer Failed / exceeds Parameter Limits ^a</p> <p>-9: Transfer Failed / wrong Mode for Request ^a</p> <p>-10: Transfer Failed / write is prohibited by write lock switch or write lock Function Block for SIS devices ^a</p> <p>-11: Transfer Failed / data value is never writeable ^a</p> <p>-12: Transfer Failed/duplicate BlockTag detected</p> <p>-13: Invalid INDEX, SUB_INDEX argument provided with a "VIEW_READ" transfer</p>
<p>The FDI[®] Server maintains an Information Model defined in IEC 62541-100. Hence topology elements representing an FFBlockType are separated from actual block instances. An instance called Blocks of a ConfigurableObjectType is used to implement instantiation rules. Instantiation of blocks is further detailed with IEC 62769-5. According to the rules defined in IEC 62769-5, the FDI[®] Server needs to gather information of the FF Directory object in order to be able to create block instances. This information shall be provided by the Scan Method defined in 5.6.1.7. According to IEC 62769-5, the BlockTag argument denoted above is obtained from the DisplayName attribute of the corresponding Block instance within the FDI Information Model.</p> <p>NOTE 1 IEC 62769-7, defines the argument SendData of the Transfer Method as an array of Variant. The arguments OPERATION, BlockTag, INDEX, SUB_INDEX and WriteData defined in the table are represented as entries of the Variant array in the order they are specified above.</p> <p>NOTE 2 IEC 62769-7, defines the argument ReceiveData of the Transfer Method as an array of Variant. The argument ReadData defined in the table is represented as an entry of the Variant array in the order specified above.</p> <p>NOTE 3 Example (for clarification): A block has two views of type View_4. The first view of type View_4 is addressed with the arguments INDEX = 4 and SUB_INDEX = 1. The second view is addressed with the arguments INDEX = 4 and SUB_INDEX = 2.</p>	
<p>^a A ServiceError value may be returned with a write operation.</p>	
<p>See Annex C for a description on how the communication service arguments for the Transfer Method are obtained from the EDD.</p>	

5.6.1.5 GetPublishedData

CP 1/1 alerts represent unsolicited messages as defined in IEC 62769-7. Table 13 shows the Method GetPublishedData arguments.

NOTE CP 1/1 uses the term alerts to refer to alarms and event messages. These are asynchronous, unsolicited messages that deliver state change notifications such as diagnostic conditions. These messages are mapped to the GetPublishedData service. CP 1/1 also uses the term publish to refer to synchronous, network scheduled communication for process values. These published messages are not mapped to the GetPublishedData service.

Signature:

```

GetPublishedData(
    [in] ByteString CommunicationRelationId,
    [out] String BlockTag,
    [out] Byte[] AlarmEventData,
    [out] NodeId AlarmEventType,
    [out] DateTime TimeStamp,
    [out] Int32 ServiceError);
    
```

Table 13 – Method GetPublishedData arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeId of the ConnectionPoint representing the connection between a device and a physical network within the Information Model.
BlockTag	The output argument denotes the Block tag of the block instance that issued the alarm or event.
AlarmEventData	With this argument the alarm/event data byte stream is returned as a byte array. Encoding of integers shall follow the rules defined in IEC 62541-6.
AlarmEventType	NodeId of the alarm or event type node defined within the FDI [®] Information model to decode the alarm / event data stream. The alarm and event types shall be read from the EDD by the FDI [®] Server when creating the Information Model.
TimeStamp	Denotes the time the alarm or event was detected by the device.
ServiceError	<ul style="list-style-type: none"> 0: OK / execution finished. -1: GetPublishedData Failed / canceled by caller -2: Call Failed / unknown service ID -3: GetPublishedData Failed / not supported -4: GetPublishedData Failed / no existing communication relation. -5: GetPublishedData Failed / invalid communication relation identifier -8: GetPublishedData Failed / no alarm/event data published. -9: GetPublishedData Failed / invalid AlarmEventType
<p>The FDI[®] Server maintains an Information Model defined in IEC 62541-100. Hence topology elements representing an FFBlockType are separated from actual block instances. An instance called Blocks of a ConfigurableObjectType is used to implement instantiation rules. Instantiation of blocks is further detailed with IEC 62769-5. According to the rules defined in IEC 62769-5, the FDI[®] Server needs to gather information of the FF Directory object in order to be able to create block instances. This information shall be provided by the Scan Method defined in 5.6.1.7. According to IEC 62769-5, the BlockTag argument denoted above is obtained from the DisplayName attribute of the corresponding Block instance within the FDI[®] Information Model.</p> <p>A ServiceError value may be returned with a write operation.</p> <p>NOTE 1 IEC 62769-7, defines the argument ReceiveData of the GetPublishedData Method as an array of Variant. The arguments BlockTag, AlarmEventData and AlarmEventType defined in the table are represented as entries of the Variant array in the order they are specified above.</p> <p>NOTE 2 IEC 62769-7, defines the argument SendData of the Transfer Method as an array of Variant. The arguments OPERATION, BlockTag, INDEX, SUB_INDEX and WriteData defined in the table are represented as entries of the Variant array in the order they are specified above.</p> <p>NOTE 3 IEC 62769-7, defines the argument ReceiveData of the Transfer Method as an array of Variant. The argument ReadData defined in the table is represented as an entry of the Variant array in the order specified above.</p>	

5.6.1.6 SetAddress

Table 14 shows the Method SetAddress arguments.

NOTE Modifying the address of a device will have an impact on the communications of a distributed control system (DCS) if present. Setting the address of a device will take a significant amount of time.

Signature

```

SetAddress (
    [in] String OPERATION,
    [in] UInt16 LinkId,
    [in] byte OldAddress,
    [in] byte NewAddress,
    [in] String NewPDTag
    [in] UInt32 ServiceId,
    [out] Int32 ServiceError);
    
```

Table 14 – Method SetAddress arguments

Argument	Description
OPERATION ^a	The argument value indicates the type of addressing operation. The allowed values are "SETASSIGNMENT", "CLEARASSIGNMENT". Argument values given with the arguments below may be ignored depending on the value of the OPERATION argument.
LinkId ^a	The argument name shall match with the corresponding BrowseName of the Variable defined as a component of an instance of type ServerCommunicationDeviceType (refer to 5.5.2). The argument value is passed by the parent instance of a ServerCommunicationDeviceType. The value may be obtained by the Scan Method or may be directly configured.
OldAddress ^a	The argument value holds the current address of a device. Allowed values are 16...255.
NewAddress ^b	The argument value holds the new address for a device. Allowed values are 0 and 16...247. The value is 0 if the service is not being used to change the H1 device's address. The argument value is ignored if the OPERATION argument value is "CLEARASSIGNMENT".
NewPDTag ^b	The argument value holds the new PD-Tag to set for the device. The argument value is ignored if the OPERATION argument value is "CLEARASSIGNMENT".
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response
ServiceError	0: OK / execution finished successfully -1: SetAddress Failed / canceled by caller -2: Call Failed / unknown service ID -3: SetAddress Failed / not initialized -4: SetAddress Failed / not connected to a network -5: SetAddress Failed / no device found responding to oldAddress -6: SetAddress Failed / duplicate address error -7: SetAddress Failed / device did not accept new address -8: SetAddress Failed / invalid oldAddress (in terms of syntax, data type, data format, and so on) -9: SetAddress Failed / invalid newAddress (in terms of syntax, data type, data format, and so on) -10: SetAddress Failed / not possible in status connected
^a	IEC 62769-7 defines the argument OldAddress of the SetAddress Method as an array of Variant. The arguments OPERATION, OldAddress and LinkId defined in the table are represented as entries of the Variant array in the order they are specified above.
^b	IEC 62769-7 defines the argument NewAddress of the SetAddress Method as an array of Variant. The arguments NewAddress and NewPDTag defined in the table are represented as entries of the Variant array in the order they are specified above.

5.6.1.7 Scan

The Method signature specified in IEC 62769-7 applies. The corresponding topologyScanResult schema is specified in Annex A.

5.6.1.8 ResetScan

The Method signature specified in IEC 62769-7 applies.

5.6.2 Methods for Gateways

Not supported in this document.

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV

Annex A (normative)

Topology scan schema

A.1 General

The topology scan result schema specified in Annex A describes the CP 1/1 specific format Method Scan argument `topologyScanResult`. The XML document content and structure shall correspond to the Information Model designed concept to describe a topology in order to enable generic matching between physical devices connected to the network and the FDI[®] Server hosted Information Model.

A.2 Target Namespace

The target namespace defined for the scan result is defined by:

```
<xs:schema
  xmlns:ff=" http://fdi-cooperation.com/2021/FDI/PROFILE/FFH1"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://fdi-cooperation.com/2021/FDI/PROFILE/FFH1"
  elementFormDefault="unqualified" version="1.1.0">
```

A.3 FoundationH1AddressT

A simple type that defines the address structure for CP 1/1.

The XML schema for a FoundationH1AddressT type is:

```
<xsd:simpleType name="FoundationH1AddressT">
  <xsd:restriction base="xsd:unsignedByte">
    <xsd:minInclusive value="16"/>
    <xsd:maxInclusive value="255"/>
  </xsd:restriction>
</xsd:simpleType>
```

A.4 FoundationH1ConnectionPointT

A complex type that defines the Connection Point for CP 1/1.

The XML schema for a FoundationH1ConnectionPointT type is:

```
<xsd:complexType name="FoundationH1ConnectionPointT">
  <xsd:sequence>
    <xsd:element name="Identification"
      type="ff:FoundationIdentificationT"/>
    <xsd:element name="BlockScanInstance"
      type="ff:FoundationBlockIdentificationT" minOccurs="0"
      maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="Address" type="ff:FoundationH1AddressT"
    use="required"/>
  <xsd:attribute name="SIFConnection" type="xsd:boolean"
    use="required"/>
</xsd:complexType>
```

```

<xsd:attribute name="OrdinalNumber" type="xsd:unsignedInt"
  use="required"/>
</xsd:complexType>

```

The attributes of a FoundationH1ConnectionPointT type are described in Table A.1.

Table A.1 – Attributes of FoundationH1ConnectionPointT

Attribute	Description
Address	The Attribute value holds the address of the network connected device.
SIFConnection	SIFConnection denotes whether a SIF Connection is necessary or not.
OrdinalNumber	The OrdinalNumber property reflects the position of the VFD within the System Management VFD list. Multiple VFDs are mapped to multiple ScanItem elements.

The elements of a FoundationH1ConnectionPointT type are described in Table A.2.

Table A.2 – Elements of FoundationH1ConnectionPointT

Element	Description
Identification	The element data holds the device type identification data. Compared to the Information Model (IEC 62769-5) the ConnectionPoint does not contain or refer to the device type identification data. But in order to support the FDI [®] host system in finding the package that matches the connected device this schema associates the device type identification with the ConnectionPoint.
BlockScanInstance	Block instance information of the scanned device VFD. Used to create Block instances within FDI [®] Server IM. See IEC 62769-5.

A.5 FoundationH1NetworkT

A complex type that defines the network for CP 1/1.

The XML schema for a FoundationH1NetworkT type is:

```

<xsd:complexType name="FoundationH1NetworkT">
  <xsd:sequence>
    <xsd:element name="ConnectionPoint"
      type="ff:FoundationH1ConnectionPointT"
      maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

The elements of a FoundationH1NetworkT type are described in Table A.3.

Table A.3 – Elements of FoundationH1NetworkT

Element	Description
ConnectionPoint	CP 1/1 Connection Point.

A.6 Network

The root element that is used to return the scan result of a CP 1/1 network.

The XML schema for a Network element is:

```
<xsd:element name="Network" type="ff:FoundationH1NetworkT"/>
```

A.7 FoundationBlockIdentificationT

A complex type that defines the block instance information of the scanned device.

The XML schema for a FoundationBlockIdentificationT type is:

```
<xsd:complexType name="FoundationBlockIdentificationT">
  <xsd:attribute name="BlockTag" use="required"/>
  <xsd:attribute name="DDItem" use="required"/>
  <xsd:attribute name="DirectoryPosition" use="required"/>
</xsd:complexType>
```

The attributes of a FoundationBlockIdentificationT type are described in Table A.4.

Table A.4 – Attributes of FoundationBlockIdentificationT

Attribute	Description
BlockTag	The BlockTag attribute shall be mapped to the DisplayName of a block instance to be created within the FDI [®] Server IM.
DDItem	This attribute is used to find the correct block type of a block instance to be created within the FDI [®] Server IM. The block type is looked up within the SupportedTypes Folder in the Blocks component of a DeviceType.
DirectoryPosition	This attribute denotes the relative position of the block instance within the Directory object. The first block instance has a value of 0. See block instantiation rules in IEC 62769-5.

A.8 FoundationIdentificationT

A complex type that defines the content corresponds to the FunctionalGroup Identification.

The XML schema for a FoundationIdentificationT type is:

```
<xsd:complexType name="FoundationIdentificationT">
  <xsd:attribute name="MANUFAC_ID" type="xsd:unsignedInt"
    use="required"/>
  <xsd:attribute name="DEV_TYPE" type="xsd:unsignedShort"
    use="required"/>
  <xsd:attribute name="DEV_REV" type="xsd:unsignedShort"
    use="optional"/>
  <xsd:attribute name="ITK_VER" type="xsd:unsignedShort"
    use="optional"/>
  <xsd:attribute name="HARDWARE_REV" type="xsd:string"
    use="optional"/>
  <xsd:attribute name="SOFTWARE_REV" type="xsd:string"
    use="optional"/>
  <xsd:attribute name="COMPATIBILITY_REV" type="xsd:unsignedInt"
    use="optional"/>
  <xsd:attribute name="CAPABILITY_LEV" type="xsd:unsignedByte"
    use="optional"/>
  <xsd:attribute name="SIF_ITK_VER" type="xsd:unsignedShort"
    use="optional"/>
```

```

<xsd:attribute name="FD_VER" type="xsd:unsignedShort"
  use="optional"/>
<xs:attribute name="DeviceTag" type="xs:string" use="optional" />
<xs:attribute name="BLOCK_INDEX" type="xs:unsignedShort"
  use="optional" />
</xsd:complexType>

```

The attributes of a FoundationIdentificationT type are described in Table A.5.

Table A.5 – Attributes of FoundationIdentificationT

Attribute	Description
MANUFAC_ID	Manufacturer identification number.
DEV_TYPE	Manufacturer model number associated with the resource.
DEV_REV	Manufacturer revision number associated with the resource. Conditional: Shall be available if the device exposes a Function block VFD.
ITK_VER	ITK Profile Number. Conditional: Shall be available if the device exposes a Function block VFD.
HARDWARE_REV	Manufacturer hardware revision.
SOFTWARE_REV	Manufacturer software revision.
COMPATIBILITY_REV	This parameter is optionally used when replacing field devices. The correct usage of this parameter presumes the COMPATIBILITY_REV value of the replacing device should be equal to or lower than the DEV_REV value of the replaced device.
CAPABILITY_LEV	This parameter may be included in a device to indicate the capability level supported by a device.
SIF_ITK_VER	SIF ITK Profile Number
FD_VER	A parameter equal to the value of the major version of the Field Diagnostics specification that this device was designed for.
DeviceTag	Device Tag
BLOCK_INDEX	Block index

Annex B (normative)

Transfer service parameters

B.1 General

Direct Access Services specified in IEC 62769-2 enable the User Interface Plug-in (UIP) to directly exchange data with the device. Direct data exchange means that data exchanged between a device and a UIP may not be reflected in the Information Model. The IEC 62769-6 defined interface IDirectAccess corresponds to the IEC 62769-2 specified Direct Access Services. Interface IDirectAccess defined functions BeginTransfer and EndTransfer needed to convey protocol specific information. The protocol specifics shall be captured in an XML document.

B.2 receiveData

An element contains data that is returned through IDirectAccess function Transfer defined argument receiveData.

The XML schema for a receiveData element is:

```
<xsd:element name="receiveData">
  <xsd:complexType>
    <xsd:complexContent>
      <xsd:extension base="ff:TransferResultDataT">
        <xsd:sequence>
          <xsd:element name="ResponseCode"
            type="ff:ResponseCodeT" minOccurs="0"/>
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
</xsd:element>
```

The elements of a receiveData element are described in Table B.1.

Table B.1 – Elements of receiveData

Element	Description
ResponseCode	Optional element that holds the return values for a negative service response.

B.3 sendData

An element contains data that is submitted through the IDirectAccess function Transfer defined argument sendData.

The XML schema for a sendData element is:

```
<xsd:element name="sendData" type="ff:TransferSendDataT"/>
```

B.4 OperationT

A simple type that defines service operations.

The XML schema for an OperationT enumeration type is:

```
<xsd:simpleType name="OperationT">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="READ"/>
    <xsd:enumeration value="WRITE"/>
    <xsd:enumeration value="GETOD"/>
  </xsd:restriction>
</xsd:simpleType>
```

The enumeration values of a OperationT enumeration type are described in Table B.2.

Table B.2 – Enumerations of OperationT

Enumeration	Description
READ	Read Service according to IEC 61158-5-9:2014, 6.3.5.3.2
WRITE	Write Service according to IEC 61158-5-9:2014, 6.3.5.3.3
GETOD	GetOD (long form) service according to IEC 61158-5-9:2014, 6.3.2.3.2

B.5 ResponseCodeT

A complex type that defines negative response error information.

The XML schema for a ResponseCodeT type is:

```
<xsd:complexType name="ResponseCodeT">
  <xsd:attribute name="ErrorClass" type="xsd:unsignedShort"
    use="required"/>
  <xsd:attribute name="AdditionalCode" type="xsd:short"
    use="optional"/>
  <xsd:attribute name="AdditionalDescription" type="xsd:string"
    use="optional"/>
</xsd:complexType>
```

The attributes of a ResponseCodeT type are described in Table B.3.

Table B.3 – Attributes of ResponseCodeT

Attribute	Description
ErrorClass	Class of error reported by the negative service response.
AdditionalCode	Optional reason code provided by the function block application.
AdditionalDescription	Optional text description of the negative service response.

B.6 TransferResultDataT

A complex type that defines the service parameter data format that shall be applied to Transfer defined recievedData return value.

The XML schema for a TransferResultDataT type is:

```
<xsd:complexType name="TransferResultDataT">
  <xsd:attribute name="DATA" type="xsd:hexBinary" use="optional"/>
</xsd:complexType>
```

The attributes of a TransferResultDataT type are described in Table B.4.

Table B.4 – Attributes of TransferResultDataT

Attribute	Description
DATA	Data received after the service operation. This attribute is required for the GETOD and READ service operations.

B.7 TransferSendDataT

A complex type that defines the service parameter data format that shall be applied to Transfer defined argument sendData.

The XML schema for a TransferSendDataT type is:

```
<xsd:complexType name="TransferSendDataT">
  <xsd:attribute name="OPERATION" type="ff:OperationT"
    use="required"/>
  <xsd:attribute name="OD_INDEX" type="xsd:unsignedInt"
    use="required"/>
  <xsd:attribute name="OD_SUB_INDEX" type="xsd:unsignedInt"
    use="required"/>
  <xsd:attribute name="DATA" type="xsd:hexBinary" use="optional"/>
</xsd:complexType>
```

The attributes of a TransferSendDataT type are described in Table B.5.

Table B.5 – Attributes of TransferSendDataT

Attribute	Description
OPERATION	Data transfer operation
OD_INDEX	Object dictionary index relative to the Function Block application
OD_SUB_INDEX	To address a simple parameter a value of 0 shall be passed with this attribute. To address a specific member of a parameter of type RECORD or ARRAY a 1-relative value shall be passed with this attribute. To address the parameter of type RECORD or ARRAY as a whole a value of 0 shall be passed with this attribute
DATA	Mandatory attribute for data to be transferred in the service WRITE operation. This attribute is not used for the READ or GETOD service operation.

Annex C (informative)

Communication service arguments for Transfer Method

IEC 62769-3 details that communication service arguments for the Transfer Method (see 5.6.1.4) are obtained from COMMAND elements associated to the VARIABLE element. For variable read or write access the FDI[®] server ~~shall~~ will obtain the related COMMAND description and obtain the communication service arguments for the Transfer Method from the attributes of the COMMAND description via name matching.

Since the CPF1 EDD profile does not provide a COMMAND EDD item this approach requires additional considerations. In order to keep the FDI[®] Server as generic as possible the following solution is proposed.

The COMMAND construct is introduced but only at a virtual level. This means there will be no means within the CPF1 EDD profile grammar to define a COMMAND item.

The COMMAND item will have the following attributes:

- INDEX
- SUB_INDEX

The COMMAND item ~~shall be~~ is related to the PARAMETER of the block.

The COMMAND item representation will be created automatically (on the fly) for each block parameter by the FDI[®] (EDD) engine when a block is loaded by the engine.

NOTE With today's EDD services the creation of the COMMAND items for PARAMETERS can be accomplished during ddi_get_item() for the block when the list of parameters is created.

For parameters of the type RECORD or ARRAY COMMAND DD, items ~~shall~~ will be created for each member of the RECORD or ARRAY. This is to ease operation for the FDI[®] Server.

When the EDD is loaded by the FDI[®] Server, the BlockTypes are created within the SupportedTypes Folder in the Blocks component of the DeviceType (see IEC 62769-5 and IEC 62541-100). For each parameter of the BlockType, the COMMAND description is provided by the FDI[®] (EDD) engine.

Block instances are created with the result of the Scan Method as described in 5.6.1.7. Block instances are created as (child) components of the Blocks component. According to IEC 62769-5, the DisplayName of the Block instance is the BlockTag.

For variable read or write access the FDI[®] Server ~~shall~~ will obtain the communication service arguments INDEX and SUB_INDEX from the COMMAND description of the parameter via name matching. For the communication service argument BlockTag the DisplayName of the block instance ~~shall~~ will be used.

Bibliography

IEC 62769 (all parts), *Field device integration (FDI)*[®]

~~IEC 62769-3, *Field device integration (FDI)*—Part 3: *FDI Server*~~

~~NOTE—IEC 62769-3 is technically identical to FDI-2023~~

FIELDBUS FOUNDATION. *FOUNDATION Specification Common File Format*. FF-103, Version 1.9. 4 June 2010

~~FIELDBUS FOUNDATION. *FOUNDATION Specification Function Block Application Process*—Part 1. *FF-890*, Version 1.10. 2 Aug. 2012.~~

~~FIELDBUS FOUNDATION. *FOUNDATION Specification Function Block Application Process*—Part 2. *FF-891*, Version 1.10. 2 Aug. 2012.~~

~~FIELDBUS FOUNDATION. *FF-880: FOUNDATION Specification System Management*. *FF-980*, Version 1.6. 1 Dec. 2005.~~

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Field device Integration (FDI)[®] –
Part 101-1: Profiles - Foundation Fieldbus H1**

**Intégration des appareils de terrain (FDI)[®] –
Partie 101-1: Profils - Foundation Fieldbus H1**

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Terms, definitions, abbreviated terms and acronyms	7
3.1 Terms and definitions.....	7
3.2 Abbreviated terms and acronyms	7
4 Conventions	7
4.1 EDDL syntax.....	7
4.2 XML syntax.....	7
4.3 Capitalizations	7
5 Profile for CP 1/1 (FOUNDATION™ H1).....	8
5.1 General.....	8
5.2 Catalog profile	8
5.2.1 Protocol support file (Capability File).....	8
5.2.2 CommunicationProfile definition.....	8
5.2.3 Profile device.....	9
5.2.4 Protocol version information	9
5.3 Associating a Package with a CP 1/1 device	9
5.3.1 Device type identification mapping.....	9
5.3.2 Device type revision mapping	9
5.4 Information Model mapping.....	9
5.4.1 ProtocolType definition	9
5.4.2 DeviceType mapping	10
5.4.3 FunctionalGroup Identification definition	10
5.4.4 BlockType property mapping	11
5.4.5 Mapping to Block ParameterSet.....	11
5.5 Topology elements.....	11
5.5.1 ConnectionPoint definition	11
5.5.2 Communication Device definition	13
5.5.3 Communication service provider definition.....	15
5.5.4 Network definition	16
5.6 Methods.....	16
5.6.1 Methods for FDI® Communication Servers	16
5.6.2 Methods for Gateways	23
Annex A (normative) Topology scan schema.....	24
A.1 General.....	24
A.2 Target Namespace.....	24
A.3 FoundationH1AddressT	24
A.4 FoundationH1ConnectionPointT.....	24
A.5 FoundationH1NetworkT	25
A.6 Network	25
A.7 FoundationBlockIdentificationT	26
A.8 FoundationIdentificationT	26
Annex B (normative) Transfer service parameters.....	28
B.1 General.....	28
B.2 receiveData	28

B.3	sendData	28
B.4	OperationT.....	29
B.5	ResponseCodeT	29
B.6	TransferResultDataT.....	29
B.7	TransferSendDataT.....	30
Annex C (informative) Communication service arguments for Transfer Method		31
Bibliography.....		32
Table 1	– Capability File part	8
Table 2	– CommunicationProfile definition	8
Table 3	– Device type catalog mapping.....	9
Table 4	– ProtocolType Foundation_H1 definition	10
Table 5	– Inherited DeviceType Property mapping	10
Table 6	– Identification parameters	11
Table 7	– Inherited BlockType property mapping.....	11
Table 8	– ConnectionPointType ConnectionPoint_Foundation_H1 definition	12
Table 9	– Communication device ParameterSet definition.....	15
Table 10	– Method Connect arguments.....	17
Table 11	– Method Disconnect arguments	18
Table 12	– Method Transfer arguments.....	19
Table 13	– Method GetPublishedData arguments.....	21
Table 14	– Method SetAddress arguments.....	22
Table A.1	– Attributes of FoundationH1ConnectionPointT	25
Table A.2	– Elements of FoundationH1ConnectionPointT	25
Table A.3	– Elements of FoundationH1NetworkT	25
Table A.4	– Attributes of FoundationBlockIdentificationT.....	26
Table A.5	– Attributes of FoundationIdentificationT	27
Table B.1	– Elements of receiveData	28
Table B.2	– Enumerations of OperationT	29
Table B.3	– Attributes of ResponseCodeT	29
Table B.4	– Attributes of TransferResultDataT	30
Table B.5	– Attributes of TransferSendDataT.....	30

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIELD DEVICE INTEGRATION (FDI®) –**Part 101-1: Profiles – Foundation Fieldbus H1**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62769-101-1 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation. It is an International Standard.

This third edition cancels and replaces the second edition published in 2020. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) updated Transfer service;
- b) added OPERATION “GETOD” and “GETDEVICETYPEINFO”;
- c) added DeviceTag and Block_Index to FoundationIdentificationT and Target;
- d) removed arguments “BlockTag” and “ServiceId”;
- e) changed content type of CFF file to application/vnd.ff.cff.

The text of this International Standard is based on the following documents:

Draft	Report on voting
65E/860/CDV	65E/917/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 62769 series, published under the general title *Field device integration (FDI)*[®], can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 PL V

FIELD DEVICE INTEGRATION (FDI®) –

Part 101-1: Profiles – Foundation Fieldbus H1

1 Scope

This part of IEC 62769 specifies an FDI®¹ profile of IEC 62769 for IEC 61784-1_CP 1/1 (FOUNDATION™ Fieldbus H1)².

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-5-9:2014, *Industrial communication networks – Fieldbus specifications – Part 5-9: Application layer service definition – Type 9 elements*

IEC 61784-1, *Industrial communication networks – Profiles – Part 1: Fieldbus Profiles*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3*

IEC 61784-3:2021, *Industrial communication networks – Profiles – Part 3: Functional safety fieldbuses – General rules and profile definitions*

IEC 61804 (all parts), *Devices and integration in enterprise systems – Function blocks (FB) for process control and electronic device description language (EDDL)*

IEC 62541-100:–2015, *OPC unified architecture – Part 100: Device Interface*

IEC 62769-2, *Field device integration (FDI®) – Part 2: Client*

IEC 62769-3, *Field device integration (FDI®) – Part 3: Server*

IEC 62769-4, *Field device integration (FDI®) – Part 4: FDI® Packages*

IEC 62769-5, *Field device integration (FDI®) – Part 5: Information Model*

IEC 62769-6, *Field device integration (FDI®) – Part 6: Technology Mapping*

¹ FDI is a registered trademark of the non-profit organization Fieldbus Foundation, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance does not require use of the trade name. Use of the trade name requires permission of the trade name holder.

² FOUNDATION™ Fieldbus is the trade name of the non-profit consortium Fieldbus Foundation. This information is given for the convenience of users of this standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance does not require use of the trade name. Use of the trade name requires permission of the trade name holder.

3 Terms, definitions, abbreviated terms and acronyms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions listed in the normative references given in Clause 2 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.2 Abbreviated terms and acronyms

For the purposes of this document, the following abbreviations apply:

CFF	common file format
CP	communication profile (see IEC 61784-1 or IEC 61784-2)
CPF	communication profile family (see IEC 61784-1 or IEC 61784-2)
EDD	Electronic Device Description (see IEC 61804 series)
EDDL	Electronic Device Description Language (see IEC 61804 series)
FB	function block
IM	Information Model
SMIB	system management information base
VFD	virtual field device

4 Conventions

4.1 EDDL syntax

This document specifies content for the EDD component that is part of an FDI® Communication Package. EDDL syntax uses the font `Courier New`. EDDL syntax is used for method signature, variable, data structure and component declarations.

4.2 XML syntax

XML syntax examples use the font `Courier New`. The XML syntax is used to describe XML document schema.

Example: `<xsd:simpleType name="Example">`.

4.3 Capitalizations

The IEC 62769 series uses capitalized terms to emphasize that these terms have an FDI® specific meaning.

Some of these terms use an acronym as a prefix for example

- FDI® Client, or
- FDI® Server.

Some of these terms are compound terms such as:

- Communication Servers, or
- Profile Package.

Parameter names or attributes are concatenated to a single term, where the original terms start in this term with a capital letter such as:

- ProtocolSupportFile, or
- ProtocolType.

Parameter names or attributes can also be constructed by using an underscore character to concatenate two or more terms such as:

- PROFILE_ID, or
- Profibus_PA_Network.

5 Profile for CP 1/1 (FOUNDATION™ H1)

5.1 General

This profile specifies the protocol specifics needed for FDI® Packages describing communication servers, gateways and devices.

Annex B defines the XML schema for Direct Access Services. Annex C provides an overview of mapping PROFIBUS standard parameters to PA DIM.

5.2 Catalog profile

5.2.1 Protocol support file (Capability File)

Each CP 1/1 FDI® Device Package shall contain a capability file. The capability file part is described in Table 1.

Table 1 – Capability File part

Parameter	Description
Content Type:	application/vnd.ff.cff
Root Namespace:	Not applicable
Source Relationship:	http://fdi-cooperation.com/2010/relationships/attachment-protocol
Filename:	Use file extension .CFF

5.2.2 CommunicationProfile definition

IEC 62769-4 defines a CommunicationProfileT string type for the Catalog XML schema. Table 2 defines the CP 1/1 specific values for this string.

Table 2 – CommunicationProfile definition

CommunicationProfile	Description
foundation_h1	CP 1/1 device type with a function block application

5.2.3 Profile device

Not supported in this document.

5.2.4 Protocol version information

IEC 62769-4 defines an element type named InterfaceT for the Catalog XML Schema. Element type InterfaceT contains an element named Version which is supposed to provide version information about the applied communication protocol profile. The value follows the IEC 62769-4 defined version information schema defined in element type VersionT.

The major version part of VersionT shall be set to the ITK_VER parameter. The minor and builds parts shall be set to 0.

EXAMPLE For ITK_VER 5, the value for InterfaceT is 5.0.0.

5.3 Associating a Package with a CP 1/1 device

5.3.1 Device type identification mapping

CP 1/1 device types are uniquely identified by the parameters MANUFAC_ID, DEVICE_TYPE and DEV_REV found in the Resource Block. These parameters are used to associate a given device instance to an FDI® Device Package. These parameters are mapped to the FDI® Device Package Catalog according to Table 3.

Table 3 – Device type catalog mapping

Catalog Element	CP Mapping
Manufacturer element of InterfaceT (IEC 62769-4)	MANUFAC_ID String format "0xddd" where dddd is the MANUFAC_ID number in hexadecimal format.
DeviceModel element of InterfaceT (IEC 62769-4)	DEVICE_TYPE String format "0xddd" where dddd is the DEVICE_TYPE number in hexadecimal format.
DeviceRevision element ListOfSupportedDeviceRevisionsT (IEC 62769-4)	DEV_REV String format "x.0.0" where x is the DEV_REV in decimal format (no leading zeros).

5.3.2 Device type revision mapping

Each device type is identified according to 5.3.1. A device may also include a parameter COMPATIBILITY_REV from the Resource Block. This parameter specifies the lowest device version (DEV_REV) that a new device can replace while maintaining compatibility with a prior FDI® Device Package.

5.4 Information Model mapping

5.4.1 ProtocolType definition

Table 4 defines the ProtocolType used to identify CP 1/1 network communications.

Table 4 – ProtocolType Foundation_H1 definition

Attribute	Value				
BrowseName	Foundation_H1				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Inherits the properties of ProtocolType defined in IEC 62541-100.					

5.4.2 DeviceType mapping

Each device type inherits the properties of the DeviceType. The mapping of the inherited properties from the DeviceType is defined in Table 5.

Table 5 – Inherited DeviceType Property mapping

Property	CP Mapping
SerialNumber	DEV_ID (System Management Information Base)
RevisionCounter	-1 (not defined)
Manufacturer	String obtained from FDI® package catalog (ManufacturerName from PackageT)
Model	String obtained from FDI® package catalog (Name of DeviceTypeT, which is a localized name)
DeviceManual	entry_text string (not supported) ^a
DeviceRevision	DEV_REV (Resource Block)
SoftwareRevision	SOFTWARE_REV (if available, otherwise empty string)
HardwareRevision	HARDWARE_REV (if available, otherwise empty string)
^a Device manuals are exposed as attachments of the FDI® Device Package.	

5.4.3 FunctionalGroup Identification definition

As defined in IEC 62541-100, each device representation in the FDI® Server hosted Information Model shall contain a protocol specific FunctionalGroup called Identification. This FunctionalGroup organizes variables found in the Resource Block of the device type instance. The FunctionalGroup Identification for CP 1/1 is defined in Table 6.

Table 6 – Identification parameters

BrowseName	Data Type	Optional/Mandatory
MANUFAC_ID	UInt32	Mandatory
DEV_TYPE	UInt16	Mandatory
DEV_REV	UInt8	Mandatory
HARDWARE_REV	String	Optional
SOFTWARE_REV	String	Optional
COMPATIBILITY_REV	UInt8	Optional
CAPABILITY_LEV	UInt8	Optional
ITK_VER	UInt16	Mandatory
SIF_ITK_VER	UInt16	Optional
FD_VER	UInt16	Optional
DeviceTag	String	Optional
Block_index	UInt16	Optional

5.4.4 BlockType property mapping

CP 1/1 device types are block-oriented according to IEC 62541-100. IEC 62769-5 specifies the mapping of EDDL BLOCK_A elements to block types and instances.

The BLOCK_A maps as a subtype of the topology element BlockType and inherits the properties per IEC 62541-100. The mapping of the inherited properties of the BlockType is specified in Table 7.

Table 7 – Inherited BlockType property mapping

Property	CP Mapping (Block ParameterSet)
RevisionCounter	ST_REV
ActualMode	MODE_BLK.ACTUAL
PermittedMode	MODE_BLK.PERMITTED
NormalMode	MODE_BLK.NORMAL
TargetMode	MODE_BLK.TARGET

5.4.5 Mapping to Block ParameterSet

The ParameterSet is relative to each Block. The ParameterSet includes the CHARACTERISTICS records of the block and all the parameters found in the PARAMETERS, LOCAL_PARAMETERS and LIST_ITEMS.

The browse name of the parameters found in the PARAMETERS and LOCAL_PARAMETERS is the member name in the respective lists. For example, ST_REV is the browse name of the Static Revision parameter. LIST_ITEMS do not have member names; therefore the browse name of each LIST in the LIST_ITEMS is the item name of the list.

5.5 Topology elements

5.5.1 ConnectionPoint definition

The ConnectionPoint type ConnectionPoint_Foundation_H1 shall be used to identify CP 1/1 network communication and is defined in Table 8. The ConnectionPoint_Foundation_H1 type is a sub type of the abstract type ConnectionPointType defined in IEC 62541-100.

The Address property shall be the H1 node address.

The OrdinalNumber property reflects the position of the VFD within the SMIB VFD list. For devices exposing multiple FB VFDs, the OrdinalNumber property is mandatory to address the FB VFD. For devices with a single FB VFD, the OrdinalNumber property can be omitted. Devices exposed as instances of type DeviceType define their connection points as components. Hence Devices with multiple FB VFDs shall contain multiple Connection Points, one per FB VFD.

The SIFConnection property denotes whether a safety instrumented function (SIF) connection is necessary or not according to the functional safety profile (IEC 61784-3:2021, Clause 6). CP 1/1 devices that implement the functional safety profile shall have a connection point as a component that has set this property to true. Devices supporting standard connections and SIF connections shall expose two Connections Points as components.

Table 8 – ConnectionPointType ConnectionPoint_Foundation_H1 definition

Attribute	Value				
BrowseName	ConnectionPoint_Foundation_H1				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Inherits the properties of ConnectionPointType defined in IEC 62541-100.					
HasProperty	Variable	Address	Byte	PropertyType	Mandatory
HasProperty	Variable	OrdinalNumber	Int32	PropertyType	Optional
HasProperty	Variable	SIFConnection	Boolean	PropertyType	Optional

The ConnectionPoint type ConnectionPoint_Foundation_H1 shall be described by an EDD element contained in a Communication Device related FDI® Package that can drive a CP 1/1 network. Actual ConnectionPoint_Foundation_H1 properties are declared by VARIABLE constructs grouped together in a COLLECTION named Foundation_H1_ConnectionPoint_Properties.

```

COMPONENT ConnectionPoint_Foundation_H1
{
    LABEL "Foundation H1 Connection point";
    CLASSIFICATION NETWORK_CONNECTION_POINT;
    CAN_DELETE FALSE;
    PROTOCOL Foundation_H1;
    CONNECTION_POINT Foundation_H1_ConnectionPoint_Properties;
}
    
```

```

VARIABLE Address
{
    LABEL "H1 Node address";
    HELP "Address of the H1 Node";
    CLASS DEVICE;
    TYPE UNSIGNED_INTEGER (1)
    {
        MIN_VALUE 16;
        MAX_VALUE 255;
    }
    HANDLING READ & WRITE;
}
    
```

```

VARIABLE OrdinalNumber
{
    LABEL "OrdinalNumber address property";
}
    
```

```

    HELP "OrdinalNumber property to address the Function Block
Application";
    CLASS DEVICE;
    TYPE UNSIGNED_INTEGER (4);
    HANDLING READ & WRITE;
}

```

```

VARIABLE SIFConnection
{
    LABEL "SIFConnection address property";
    HELP "Connection point supports SIF Connections";
    CLASS DEVICE;
    TYPE ENUMERATED (1)
    {
        {0, "NO_SIFCONNECTION"} ,
        {1, "SIFCONNECTION"}
    }
    HANDLING READ & WRITE;
}

```

```

COLLECTION Foundation_H1_ConnectionPoint_Properties
{
    LABEL "FF H1 Connection Point data";
    MEMBERS
    {
        CONNECTION_POINT_ADDRESS, Address;
        CONNECTION_POINT_ORDINALNUMBER, OrdinalNumber;
        CONNECTION_POINT_SIFCONNECTION , SIFConnection;
    }
}

```

5.5.2 Communication Device definition

According to IEC 62769-7 each FDI[®] Communication Package shall contain an EDD element describing the device. The following EDDL source code is an example describing an FDI[®] Communication Server.

```

COMPONENT Foundation_H1_Communication_Server
{
    LABEL "Foundation H1 communication server",
    PRODUCT_URI "urn:Fieldbus Foundation:Foundation H1 Communication
Server";
    CAN_DELETE TRUE;
    CLASSIFICATION NETWORK_COMPONENT;
    COMPONENT_RELATIONS
    {
        Foundation_H1_Communication_Device_Setup
    }
}

```

```

COMPONENT_RELATION Foundation_H1_Communication_Device_Setup
{
    LABEL "Relation between Device and communication device";
    RELATION_TYPE CHILD_COMPONENT;
    ADDRESSING { LinkId }
    COMPONENTS
    {
        Foundation_H1_Communication_Device{AUTO_CREATE 1;}
    }
    MINIMUM_NUMBER 1;
    MAXIMUM_NUMBER 4;
}

```

```

VARIABLE LinkId
{
  LABEL "Link Id address parameter of the Communication device";
  HELP "Link Id address parameter of the Communication device";
  CLASS DEVICE;
  TYPE UNSIGNED_INTEGER (2)
  {
    MIN_VALUE 4096;
    MAX_VALUE 65535;
  }
  HANDLING READ & WRITE;
}

```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI® server and FDI® Communication Server to create an instance of type CommunicationServerType as described in IEC 62769-7.

The LinkId VARIABLE holds the address value for a Communication device instance. In the Information model the LinkId will be represented as an instance of BaseDataVariableType and as a component of the ParameterSet of the communication device.

According to IEC 62769-7, each FDI® Communication Package shall contain at least one EDD element describing at least one Communication Device component. The following EDDL source code is an example for a communication device.

```

COMPONENT Foundation_H1_Communication_Device
{
  LABEL "Foundation H1 communication device";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Service_Provider_Relation
  }
}

COMPONENT_RELATION Foundation_H1_Service_Provider_Relation
{
  LABEL "Foundation H1 communication service provider";
  RELATION_TYPE CHILD_COMPONENT;
  COMPONENTS
  {
    Foundation_H1_Service_Provider{AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 16;
}

```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI® server and FDI® Communication Server to create an instance of type ServerCommunicationDeviceType as described in IEC 62769-7.

An instance of ServerCommunicationDeviceType shall contain the following parameter(s) with its ParameterSet. Table 9 shows the definition of Communication device ParameterSet.

Table 9 – Communication device ParameterSet definition

Attribute	Value				
BrowseName	ParameterSet				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
See IEC 62541-100:–2015, 5.2.					
HasTypeDefinition	ObjectType	BaseObjectType			
HasComponent	Variable	LinkId	UInt16	BaseDataVariable Type	Mandatory
HasComponent	Variable	<ParameterIdentifier>		BaseDataVariable Type	Mandatory-Placeholder

The LinkId parameter is an addressing parameter distinguishing multiple H1 Links. If an FDI[®] Communication Server supports multiple physical H1 Links these are mapped within the Information Model to multiple communication device instances. If the FDI[®] Communication Server supports only one H1 Link it shall define only one communication device within the Information Model. The value of the variable can be set to 0 in this case.

The EDD declaration of the variable LinkId is with the ADDRESSING attribute of the COMPONENT_RELATION of the FDI[®] Communication Server definition (see 5.5.2).

5.5.3 Communication service provider definition

According to IEC 62769-7 each FDI[®] Communication Package shall contain at least one EDD element describing at least one communication service provider component. The following EDDL source code is an example for a CP 1/1 communication service provider component.

The component reference ConnectionPoint_Foundation_H1 corresponds to the related Connection Point definition in 5.5.1.

```

COMPONENT Foundation_H1_Service_Provider
{
  LABEL "Foundation_H1 communication service provider";
  CAN_DELETE FALSE;
  CLASSIFICATION NETWORK_COMMUNICATION_SERVICE_PROVIDER;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Connection_Point_Relation
  }
  BYTE_ORDER BIG_ENDIAN;
}

COMPONENT_RELATION
Foundation_H1_Service_Provider_Connection_Point_Relation
{
  LABEL "Relation between communication service provider and
connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {Address}
  COMPONENTS
  {
    ConnectionPoint_Foundation_H1{ AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 1;
}

```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI® server and FDI® Communication Server to create an instance of type ServerCommunicationServiceType as described in IEC 62769-7.

5.5.4 Network definition

According to IEC 62769-7 each FDI® Communication Package shall contain at least one EDD element describing one Network for each of the protocols that are supported by the Communication Device. The definition supports the network topology engineering.

```
COMPONENT Network_Foundation_H1
{
  LABEL "Foundation H1 Network";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK;
  PROTOCOL Foundation_H1
  COMPONENT_RELATIONS
  {
    Foundation_H1_Network_Connection_Point_Relation
  }
}

COMPONENT_RELATION Foundation_H1_Network_Connection_Point_Relation
{
  LABEL "Relation between network and connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {Address}
  COMPONENTS
  {
    ConnectionPoint_Foundation_H1
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 32;
}
```

Semantics of the EDDL constructs shown with the EDDL source code above are described in IEC 62769-7. The EDDL COMPONENT will be utilized by the FDI® server and FDI® Communication Server to create an instance of type NetworkType as described in IEC 62541-100.

5.6 Methods

5.6.1 Methods for FDI® Communication Servers

5.6.1.1 General

The FDI® Communication Server shall implement the services according to the method signatures described in 5.6.1 and according to the Information Model.

5.6.1.2 Connect

Table 10 shows the Method Connect arguments. The connect transaction may need a significant amount of time since configuration of communication endpoints is involved. Ensure the OPC UA timeout is configured appropriately (e.g. 30 seconds).

Signature:

```

Connect (
    [in]   ByteString      CommunicationRelationId,
    [in]   UInt16         LinkId
    [in]   byte           Address,
    [in]   Int32          OrdinalNumber
    [in]   Boolean        SIFConnection
    [out]  Int32          ServiceError);

```

Table 10 – Method Connect arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeId of the Device ConnectionPoint representing the connection between a device and a physical network which is directly connected to the FDI® Communication Server hardware. The nodeId allows finding the direct parent-child relation.
LinkId	The argument name shall match with the corresponding BrowseName of the Variable defined as a component of an instance of type ServerCommunicationDeviceType (refer to 5.5.2). The argument value is passed by the parent instance of a ServerCommunicationDeviceType. The value may be obtained by the Scan Method or may be directly configured.
Address	The argument name shall match with the corresponding attribute name defined for the ConnectionPoint which is described by a corresponding EDD element. The argument value holds the device's node address.
OrdinalNumber	The argument name shall match with the corresponding attribute name defined for the ConnectionPoint which is described by a corresponding EDD element specified in 5.5.1. The argument value holds the OrdinalNumber. The OrdinalNumber is the position of the VFD within the SMIB VFD list. If a value 0 is passed with this argument the first FB VFD is selected.
SIFConnection	The argument name shall match with the corresponding attribute name defined for the ConnectionPoint which is described by a corresponding EDD element specified in 5.5.1. The argument value denotes whether a SIF Connection is necessary or not.
ServiceError	<ul style="list-style-type: none"> 0: OK / execution finished, connection established successfully -1: Connect Failed / canceled by caller -2: Call Failed / unknown service ID -3: Connect Failed / device not found -4: Connect Failed / invalid device node address -5: Connect Failed / invalid device identification -6: Connect Failed / invalid LinkId argument -7: Connect Failed / invalid OrdinalNumber argument
<p>NOTE IEC 62769-7 defines the argument AddressData of the Connect Method as an array of Variant. The address arguments defined with the table are represented as entries of the Variant array in the order they are specified above. IEC 62769-7 defines the argument DeviceInformation as a protocol specific argument list in which the Connect Method stores the resulting data. The DeviceInformation argument is defined as an array of Variant. The DeviceInformation argument is not used.</p>	

5.6.1.3 Disconnect

Table 11 shows the Method Disconnect arguments.

Signature:

```

Disconnect(
    [in]  ByteString      CommunicationRelationId,
    [out] UInt32         ServiceError)
    
```

Table 11 – Method Disconnect arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeld of the Device ConnectionPoint representing the connection between a device and a physical network which is directly connected to the FDI® Communication Server hardware. The nodeld allows finding the direct parent-child relation.
ServiceError	0: OK / disconnect finished successfully -1: Disconnect Failed / no existing communication relation -2: Disconnect Failed / invalid communication relation identifier

5.6.1.4 Transfer

Table 12 shows the Method Transfer arguments.

Signature

```

Transfer(
    [in]  ByteString      CommunicationRelationId,
    [in]  String          OPERATION,

    [in]  UInt32          INDEX,
    [in]  UInt32          SUB_INDEX,
    [in]  ByteString      WriteData,
    [out] ByteStringReadData,
    [out] nt32           ServiceError);
    
```

Table 12 – Method Transfer arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeId of the ConnectionPoint representing the connection between a device and a physical network within the Information Model.
OPERATION	The argument value indicates the data transfer operation. The allowed values are "READ", "WRITE", "GETOD", "GETDEVICETYPEINFO" and "VIEW_READ".
	When BlockTag is used, the INDEX argument should be a block related, relative index.
INDEX	OPERATION indicates "READ", "GETOD" or "WRITE": The argument denotes the absolute index of the parameter being addressed. OPERATION indicates "VIEW_READ": The argument denotes the view identifier in a range from 1 to 4. For instance a value of 1 requests that View_1 shall be read. Multiple View_3 or View_4 objects are identified by the INDEX and the SUB_INDEX argument. OPERATION indicates "GETDEVICETYPEINFO": The argument is not relevant.
SUB_INDEX	OPERATION indicates "READ" or "WRITE": The argument denotes the subindex of a member of the parameter being addressed if the parameter is of type RECORD or ARRAY. To address a simple parameter a value of 0 shall be passed with this argument. To address a specific member of a parameter of type RECORD or ARRAY a 1 relative value shall be passed with this argument. To address the parameter of type RECORD or ARRAY as a whole a value of 0 shall be passed with this argument. OPERATION indicates "VIEW_READ": The argument addresses a View_3 or View_4 if multiple views of that type exist. The argument shall be 0 if there are no multiple views of the type addressed with the INDEX argument. Values of 1 up to the number of views of that type address the specific view. OPERATION indicates "GETOD" or "GETDEVICETYPEINFO": The argument is not relevant.
WriteData	Write data encoded as byte array. Encoding of integers shall follow the rules defined in IEC 62541-6. The argument shall be ignored if OPERATION indicates "READ", "GETOD", "GETDEVICETYPEINFO" or a "VIEW_READ".
ReadData	With this argument the read data byte stream is returned as byte array. Encoding of integers shall follow the rules defined in IEC 62541-6. The argument shall be ignored if OPERATION indicates "WRITE".
ServiceError	0: OK / execution finished -1: Transfer Failed / canceled by caller -3: Transfer Failed / no existing communication relation. -4: Transfer Failed / invalid communication relation identifier -5: Transfer Failed / invalid sendData content -6: Transfer Failed / invalid receiveData format -7: Transfer Failed / parameter Check ^a -8: Transfer Failed / exceeds Parameter Limits ^a -9: Transfer Failed / wrong Mode for Request ^a -10: Transfer Failed / write is prohibited by write lock switch or write lock Function Block for SIS devices ^a -11: Transfer Failed / data value is never writeable ^a -13: Invalid INDEX, SUB_INDEX argument provided with a "VIEW_READ" transfer

The FDI[®] Server maintains an Information Model defined in IEC 62541-100. Hence topology elements representing an FFBlockType are separated from actual block instances. An instance called Blocks of a ConfigurableObjectType is used to implement instantiation rules. Instantiation of blocks is further detailed with IEC 62769-5. According to the rules defined in IEC 62769-5, the FDI[®] Server needs to gather information of the FF Directory object in order to be able to create block instances. This information shall be provided by the Scan Method defined in 5.6.1.7.

NOTE 1 IEC 62769-7, defines the argument SendData of the Transfer Method as an array of Variant. The arguments OPERATION, INDEX, SUB_INDEX and WriteData defined in the table are represented as entries of the Variant array in the order they are specified above.

NOTE 2 IEC 62769-7, defines the argument ReceiveData of the Transfer Method as an array of Variant. The argument ReadData defined in the table is represented as an entry of the Variant array in the order specified above.

NOTE 3 Example (for clarification): A block has two views of type View_4. The first view of type View_4 is addressed with the arguments INDEX = 4 and SUB_INDEX = 1. The second view is addressed with the arguments INDEX = 4 and SUB_INDEX = 2.

^a A ServiceError value may be returned with a write operation.

5.6.1.5 GetPublishedData

CP 1/1 alerts represent unsolicited messages as defined in IEC 62769-7. Table 13 shows the Method GetPublishedData arguments.

NOTE CP 1/1 uses the term alerts to refer to alarms and event messages. These are asynchronous, unsolicited messages that deliver state change notifications such as diagnostic conditions. These messages are mapped to the GetPublishedData service. CP 1/1 also uses the term publish to refer to synchronous, network scheduled communication for process values. These published messages are not mapped to the GetPublishedData service.

Signature:

```

GetPublishedData (
    [in] ByteString CommunicationRelationId,
    [out] String BlockTag,
    [out] Byte[] AlarmEventData,
    [out] NodeId AlarmEventType,
    [out] DateTime TimeStamp,
    [out] Int32 ServiceError);
    
```

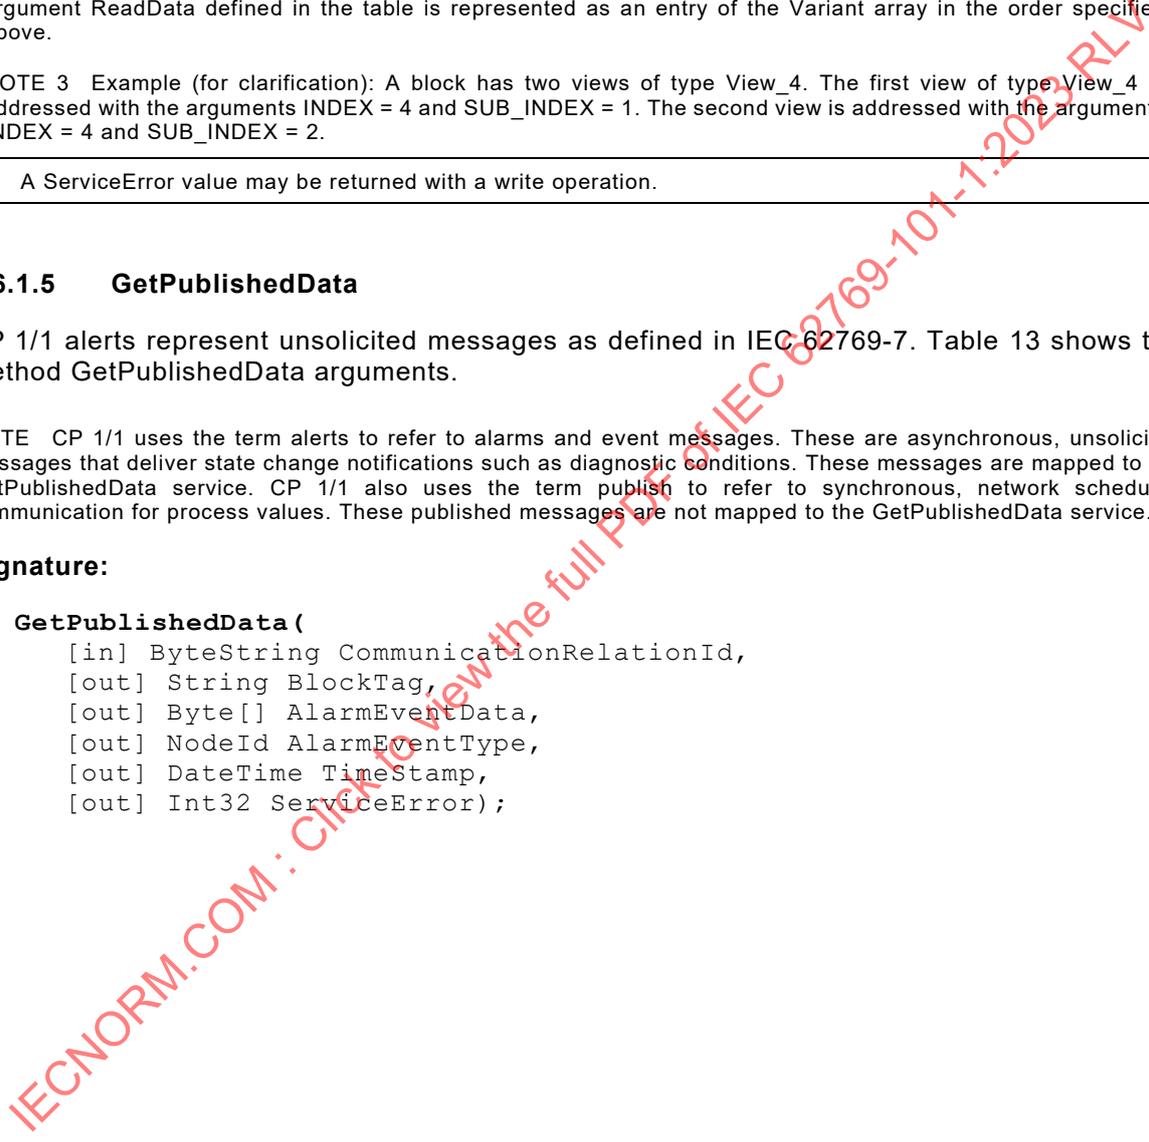


Table 13 – Method GetPublishedData arguments

Argument	Description
CommunicationRelationId	The argument value contains the nodeId of the ConnectionPoint representing the connection between a device and a physical network within the Information Model.
BlockTag	The output argument denotes the Block tag of the block instance that issued the alarm or event.
AlarmEventData	With this argument the alarm/event data byte stream is returned as a byte array. Encoding of integers shall follow the rules defined in IEC 62541-6.
AlarmEventType	NodeId of the alarm or event type node defined within the FDI [®] Information model to decode the alarm / event data stream. The alarm and event types shall be read from the EDD by the FDI [®] Server when creating the Information Model.
TimeStamp	Denotes the time the alarm or event was detected by the device.
ServiceError	0: OK / execution finished. -1: GetPublishedData Failed / canceled by caller -2: Call Failed / unknown service ID -3: GetPublishedData Failed / not supported -4: GetPublishedData Failed / no existing communication relation. -5: GetPublishedData Failed / invalid communication relation identifier -8: GetPublishedData Failed / no alarm/event data published. -9: GetPublishedData Failed / invalid AlarmEventType
<p>The FDI[®] Server maintains an Information Model defined in IEC 62541-100. Hence topology elements representing an FFBlockType are separated from actual block instances. An instance called Blocks of a ConfigurableObjectType is used to implement instantiation rules. Instantiation of blocks is further detailed with IEC 62769-5. According to the rules defined in IEC 62769-5, the FDI[®] Server needs to gather information of the FF Directory object in order to be able to create block instances. This information shall be provided by the Scan Method defined in 5.6.1.7. According to IEC 62769-5, the BlockTag argument denoted above is obtained from the DisplayName attribute of the corresponding Block instance within the FDI[®] Information Model.</p> <p>A ServiceError value may be returned with a write operation.</p> <p>NOTE 1 IEC 62769-7, defines the argument ReceiveData of the GetPublishedData Method as an array of Variant. The arguments BlockTag, AlarmEventData and AlarmEventType defined in the table are represented as entries of the Variant array in the order they are specified above.</p> <p>NOTE 2 IEC 62769-7, defines the argument SendData of the Transfer Method as an array of Variant. The arguments OPERATION, BlockTag, INDEX, SUB_INDEX and WriteData defined in the table are represented as entries of the Variant array in the order they are specified above.</p> <p>NOTE 3 IEC 62769-7, defines the argument ReceiveData of the Transfer Method as an array of Variant. The argument ReadData defined in the table is represented as an entry of the Variant array in the order specified above.</p>	

5.6.1.6 SetAddress

Table 14 shows the Method SetAddress arguments.

NOTE Modifying the address of a device will have an impact on the communications of a distributed control system (DCS) if present. Setting the address of a device will take a significant amount of time.

Signature

```

SetAddress (
    [in] String OPERATION,
    [in] UInt16 LinkId,
    [in] byte OldAddress,
    [in] byte NewAddress,
    [in] String NewPDTag
    [in] UInt32 ServiceId,
    [out] Int32 ServiceError);
    
```

Table 14 – Method SetAddress arguments

Argument	Description
OPERATION ^a	The argument value indicates the type of addressing operation. The allowed values are "SETASSIGNMENT", "CLEARASSIGNMENT". Argument values given with the arguments below may be ignored depending on the value of the OPERATION argument.
LinkId ^a	The argument name shall match with the corresponding BrowseName of the Variable defined as a component of an instance of type ServerCommunicationDeviceType (refer to 5.5.2). The argument value is passed by the parent instance of a ServerCommunicationDeviceType. The value may be obtained by the Scan Method or may be directly configured.
OldAddress ^a	The argument value holds the current address of a device. Allowed values are 16...255.
NewAddress ^b	The argument value holds the new address for a device. Allowed values are 0 and 16...247. The value is 0 if the service is not being used to change the H1 device's address. The argument value is ignored if the OPERATION argument value is "CLEARASSIGNMENT".
NewPDTag ^b	The argument value holds the new PD-Tag to set for the device. The argument value is ignored if the OPERATION argument value is "CLEARASSIGNMENT".
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response
ServiceError	0: OK / execution finished successfully -1: SetAddress Failed / canceled by caller -2: Call Failed / unknown service ID -3: SetAddress Failed / not initialized -4: SetAddress Failed / not connected to a network -5: SetAddress Failed / no device found responding to oldAddress -6: SetAddress Failed / duplicate address error -7: SetAddress Failed / device did not accept new address -8: SetAddress Failed / invalid oldAddress (in terms of syntax, data type, data format, and so on) -9: SetAddress Failed / invalid newAddress (in terms of syntax, data type, data format, and so on) -10: SetAddress Failed / not possible in status connected
^a	IEC 62769-7 defines the argument OldAddress of the SetAddress Method as an array of Variant. The arguments OPERATION, OldAddress and LinkId defined in the table are represented as entries of the Variant array in the order they are specified above.
^b	IEC 62769-7 defines the argument NewAddress of the SetAddress Method as an array of Variant. The arguments NewAddress and NewPDTag defined in the table are represented as entries of the Variant array in the order they are specified above.

5.6.1.7 Scan

The Method signature specified in IEC 62769-7 applies. The corresponding topologyScanResult schema is specified in Annex A.

5.6.1.8 ResetScan

The Method signature specified in IEC 62769-7 applies.

5.6.2 Methods for Gateways

Not supported in this document.

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV

Annex A (normative)

Topology scan schema

A.1 General

The topology scan result schema specified in Annex A describes the CP 1/1 specific format Method Scan argument `topologyScanResult`. The XML document content and structure shall correspond to the Information Model designed concept to describe a topology in order to enable generic matching between physical devices connected to the network and the FDI[®] Server hosted Information Model.

A.2 Target Namespace

The target namespace defined for the scan result is defined by:

```
<xs:schema
  xmlns:ff=" http://fdi-cooperation.com/2021/FDI/PROFILE/FFH1"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://fdi-cooperation.com/2021/FDI/PROFILE/FFH1"
  elementFormDefault="unqualified" version="1.1.0">
```

A.3 FoundationH1AddressT

A simple type that defines the address structure for CP 1/1.

The XML schema for a FoundationH1AddressT type is:

```
<xsd:simpleType name="FoundationH1AddressT">
  <xsd:restriction base="xsd:unsignedByte">
    <xsd:minInclusive value="16"/>
    <xsd:maxInclusive value="255"/>
  </xsd:restriction>
</xsd:simpleType>
```

A.4 FoundationH1ConnectionPointT

A complex type that defines the Connection Point for CP 1/1.

The XML schema for a FoundationH1ConnectionPointT type is:

```
<xsd:complexType name="FoundationH1ConnectionPointT">
  <xsd:sequence>
    <xsd:element name="Identification"
      type="ff:FoundationIdentificationT"/>
    <xsd:element name="BlockScanInstance"
      type="ff:FoundationBlockIdentificationT" minOccurs="0"
      maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="Address" type="ff:FoundationH1AddressT"
    use="required"/>
  <xsd:attribute name="SIFConnection" type="xsd:boolean"
    use="required"/>
</xsd:complexType>
```

```

    <xsd:attribute name="OrdinalNumber" type="xsd:unsignedInt"
      use="required"/>
  </xsd:complexType>

```

The attributes of a FoundationH1ConnectionPointT type are described in Table A.1.

Table A.1 – Attributes of FoundationH1ConnectionPointT

Attribute	Description
Address	The Attribute value holds the address of the network connected device.
SIFConnection	SIFConnection denotes whether a SIF Connection is necessary or not.
OrdinalNumber	The OrdinalNumber property reflects the position of the VFD within the System Management VFD list. Multiple VFDs are mapped to multiple ScanItem elements.

The elements of a FoundationH1ConnectionPointT type are described in Table A.2.

Table A.2 – Elements of FoundationH1ConnectionPointT

Element	Description
Identification	The element data holds the device type identification data. Compared to the Information Model (IEC 62769-5) the ConnectionPoint does not contain or refer to the device type identification data. But in order to support the FDI [®] host system in finding the package that matches the connected device this schema associates the device type identification with the ConnectionPoint.
BlockScanInstance	Block instance information of the scanned device VFD. Used to create Block instances within FDI [®] Server IM. See IEC 62769-5.

A.5 FoundationH1NetworkT

A complex type that defines the network for CP 1/1.

The XML schema for a FoundationH1NetworkT type is:

```

<xsd:complexType name="FoundationH1NetworkT">
  <xsd:sequence>
    <xsd:element name="ConnectionPoint"
      type="ff:FoundationH1ConnectionPointT"
      maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

The elements of a FoundationH1NetworkT type are described in Table A.3.

Table A.3 – Elements of FoundationH1NetworkT

Element	Description
ConnectionPoint	CP 1/1 Connection Point.

A.6 Network

The root element that is used to return the scan result of a CP 1/1 network.

The XML schema for a Network element is:

```
<xsd:element name="Network" type="ff:FoundationH1NetworkT"/>
```

A.7 FoundationBlockIdentificationT

A complex type that defines the block instance information of the scanned device.

The XML schema for a FoundationBlockIdentificationT type is:

```
<xsd:complexType name="FoundationBlockIdentificationT">
  <xsd:attribute name="BlockTag" use="required"/>
  <xsd:attribute name="DDItem" use="required"/>
  <xsd:attribute name="DirectoryPosition" use="required"/>
</xsd:complexType>
```

The attributes of a FoundationBlockIdentificationT type are described in Table A.4.

Table A.4 – Attributes of FoundationBlockIdentificationT

Attribute	Description
BlockTag	The BlockTag attribute shall be mapped to the DisplayName of a block instance to be created within the FDI [®] Server IM.
DDItem	This attribute is used to find the correct block type of a block instance to be created within the FDI [®] Server IM. The block type is looked up within the SupportedTypes Folder in the Blocks component of a DeviceType.
DirectoryPosition	This attribute denotes the relative position of the block instance within the Directory object. The first block instance has a value of 0. See block instantiation rules in IEC 62769-5.

A.8 FoundationIdentificationT

A complex type that defines the content corresponds to the FunctionalGroup Identification.

The XML schema for a FoundationIdentificationT type is:

```
<xsd:complexType name="FoundationIdentificationT">
  <xsd:attribute name="MANUFAC_ID" type="xsd:unsignedInt"
    use="required"/>
  <xsd:attribute name="DEV_TYPE" type="xsd:unsignedShort"
    use="required"/>
  <xsd:attribute name="DEV_REV" type="xsd:unsignedShort"
    use="optional"/>
  <xsd:attribute name="ITK_VER" type="xsd:unsignedShort"
    use="optional"/>
  <xsd:attribute name="HARDWARE_REV" type="xsd:string"
    use="optional"/>
  <xsd:attribute name="SOFTWARE_REV" type="xsd:string"
    use="optional"/>
  <xsd:attribute name="COMPATIBILITY_REV" type="xsd:unsignedInt"
    use="optional"/>
  <xsd:attribute name="CAPABILITY_LEV" type="xsd:unsignedByte"
    use="optional"/>
  <xsd:attribute name="SIF_ITK_VER" type="xsd:unsignedShort"
    use="optional"/>
</xsd:complexType>
```

```

<xsd:attribute name="FD_VER" type="xsd:unsignedShort"
  use="optional"/>
<xs:attribute name="DeviceTag" type="xs:string" use="optional" />
<xs:attribute name="BLOCK_INDEX" type="xs:unsignedShort"
  use="optional" />
</xsd:complexType>

```

The attributes of a FoundationIdentificationT type are described in Table A.5.

Table A.5 – Attributes of FoundationIdentificationT

Attribute	Description
MANUFAC_ID	Manufacturer identification number.
DEV_TYPE	Manufacturer model number associated with the resource.
DEV_REV	Manufacturer revision number associated with the resource. Conditional: Shall be available if the device exposes a Function block VFD.
ITK_VER	ITK Profile Number. Conditional: Shall be available if the device exposes a Function block VFD.
HARDWARE_REV	Manufacturer hardware revision.
SOFTWARE_REV	Manufacturer software revision.
COMPATIBILITY_REV	This parameter is optionally used when replacing field devices. The correct usage of this parameter presumes the COMPATIBILITY_REV value of the replacing device should be equal to or lower than the DEV_REV value of the replaced device.
CAPABILITY_LEV	This parameter may be included in a device to indicate the capability level supported by a device.
SIF_ITK_VER	SIF ITK Profile Number
FD_VER	A parameter equal to the value of the major version of the Field Diagnostics specification that this device was designed for.
DeviceTag	Device Tag
BLOCK_INDEX	Block index

Annex B (normative)

Transfer service parameters

B.1 General

Direct Access Services specified in IEC 62769-2 enable the User Interface Plug-in (UIP) to directly exchange data with the device. Direct data exchange means that data exchanged between a device and a UIP may not be reflected in the Information Model. The IEC 62769-6 defined interface IDirectAccess corresponds to the IEC 62769-2 specified Direct Access Services. Interface IDirectAccess defined functions BeginTransfer and EndTransfer needed to convey protocol specific information. The protocol specifics shall be captured in an XML document.

B.2 receiveData

An element contains data that is returned through IDirectAccess function Transfer defined argument receiveData.

The XML schema for a receiveData element is:

```
<xsd:element name="receiveData">
  <xsd:complexType>
    <xsd:complexContent>
      <xsd:extension base="ff:TransferResultDataT">
        <xsd:sequence>
          <xsd:element name="ResponseCode"
            type="ff:ResponseCodeT" minOccurs="0"/>
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
</xsd:element>
```

The elements of a receiveData element are described in Table B.1.

Table B.1 – Elements of receiveData

Element	Description
ResponseCode	Optional element that holds the return values for a negative service response.

B.3 sendData

An element contains data that is submitted through the IDirectAccess function Transfer defined argument sendData.

The XML schema for a sendData element is:

```
<xsd:element name="sendData" type="ff:TransferSendDataT"/>
```

B.4 OperationT

A simple type that defines service operations.

The XML schema for an OperationT enumeration type is:

```
<xsd:simpleType name="OperationT">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="READ"/>
    <xsd:enumeration value="WRITE"/>
    <xsd:enumeration value="GETOD"/>
  </xsd:restriction>
</xsd:simpleType>
```

The enumeration values of a OperationT enumeration type are described in Table B.2.

Table B.2 – Enumerations of OperationT

Enumeration	Description
READ	Read Service according to IEC 61158-5-9:2014, 6.3.5.3.2
WRITE	Write Service according to IEC 61158-5-9:2014, 6.3.5.3.3
GETOD	GetOD (long form) service according to IEC 61158-5-9:2014, 6.3.2.3.2

B.5 ResponseCodeT

A complex type that defines negative response error information.

The XML schema for a ResponseCodeT type is:

```
<xsd:complexType name="ResponseCodeT">
  <xsd:attribute name="ErrorClass" type="xsd:unsignedShort"
    use="required"/>
  <xsd:attribute name="AdditionalCode" type="xsd:short"
    use="optional"/>
  <xsd:attribute name="AdditionalDescription" type="xsd:string"
    use="optional"/>
</xsd:complexType>
```

The attributes of a ResponseCodeT type are described in Table B.3.

Table B.3 – Attributes of ResponseCodeT

Attribute	Description
ErrorClass	Class of error reported by the negative service response.
AdditionalCode	Optional reason code provided by the function block application.
AdditionalDescription	Optional text description of the negative service response.

B.6 TransferResultDataT

A complex type that defines the service parameter data format that shall be applied to Transfer defined recievedData return value.

The XML schema for a TransferResultDataT type is:

```
<xsd:complexType name="TransferResultDataT">
  <xsd:attribute name="DATA" type="xsd:hexBinary" use="optional"/>
</xsd:complexType>
```

The attributes of a TransferResultDataT type are described in Table B.4.

Table B.4 – Attributes of TransferResultDataT

Attribute	Description
DATA	Data received after the service operation. This attribute is required for the GETOD and READ service operations.

B.7 TransferSendDataT

A complex type that defines the service parameter data format that shall be applied to Transfer defined argument sendData.

The XML schema for a TransferSendDataT type is:

```
<xsd:complexType name="TransferSendDataT">
  <xsd:attribute name="OPERATION" type="ff:OperationT"
    use="required"/>
  <xsd:attribute name="OD_INDEX" type="xsd:unsignedInt"
    use="required"/>
  <xsd:attribute name="OD_SUB_INDEX" type="xsd:unsignedInt"
    use="required"/>
  <xsd:attribute name="DATA" type="xsd:hexBinary" use="optional"/>
</xsd:complexType>
```

The attributes of a TransferSendDataT type are described in Table B.5.

Table B.5 – Attributes of TransferSendDataT

Attribute	Description
OPERATION	Data transfer operation
OD_INDEX	Object dictionary index relative to the Function Block application
OD_SUB_INDEX	To address a simple parameter a value of 0 shall be passed with this attribute. To address a specific member of a parameter of type RECORD or ARRAY a 1-relative value shall be passed with this attribute. To address the parameter of type RECORD or ARRAY as a whole a value of 0 shall be passed with this attribute
DATA	Mandatory attribute for data to be transferred in the service WRITE operation. This attribute is not used for the READ or GETOD service operation.

Annex C (informative)

Communication service arguments for Transfer Method

IEC 62769-3 details that communication service arguments for the Transfer Method (see 5.6.1.4) are obtained from COMMAND elements associated to the VARIABLE element. For variable read or write access the FDI[®] server will obtain the related COMMAND description and obtain the communication service arguments for the Transfer Method from the attributes of the COMMAND description via name matching.

Since the CPF1 EDD profile does not provide a COMMAND EDD item this approach requires additional considerations. In order to keep the FDI[®] Server as generic as possible the following solution is proposed.

The COMMAND construct is introduced but only at a virtual level. This means there will be no means within the CPF1 EDD profile grammar to define a COMMAND item.

The COMMAND item will have the following attributes:

- INDEX
- SUB_INDEX

The COMMAND item is related to the PARAMETER of the block.

The COMMAND item representation will be created automatically (on the fly) for each block parameter by the FDI[®] (EDD) engine when a block is loaded by the engine.

NOTE With today's EDD services the creation of the COMMAND items for PARAMETERS can be accomplished during `ddi_get_item()` for the block when the list of parameters is created.

For parameters of the type RECORD or ARRAY COMMAND DD, items will be created for each member of the RECORD or ARRAY. This is to ease operation for the FDI[®] Server.

When the EDD is loaded by the FDI[®] Server, the BlockTypes are created within the SupportedTypes Folder in the Blocks component of the DeviceType (see IEC 62769-5 and IEC 62541-100). For each parameter of the BlockType, the COMMAND description is provided by the FDI[®] (EDD) engine.

Block instances are created with the result of the Scan Method as described in 5.6.1.7. Block instances are created as (child) components of the Blocks component. According to IEC 62769-5, the DisplayName of the Block instance is the BlockTag.

For variable read or write access the FDI[®] Server will obtain the communication service arguments INDEX and SUB_INDEX from the COMMAND description of the parameter via name matching. For the communication service argument BlockTag the DisplayName of the block instance will be used.

Bibliography

IEC 62769 (all parts), *Field device integration (FDI)*[®]

FIELDBUS FOUNDATION. *FOUNDATION Specification Common File Format*. FF-103, Version 1.9. 4 June 2010

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of IEC 62769-101-1:2023 RLV

SOMMAIRE

AVANT-PROPOS	36
1 Domaine d'application	38
2 Références normatives	38
3 Termes, définitions, abréviations et acronymes	39
3.1 Termes et définitions	39
3.2 Abréviations et acronymes	39
4 Conventions	39
4.1 Syntaxe EDDL	39
4.2 Syntaxe XML	39
4.3 Utilisation de majuscules	40
5 Profil pour CP 1/1 (FOUNDATION™ H1)	40
5.1 Généralités	40
5.2 Profil du catalogue	40
5.2.1 Fichier de prise en charge du protocole (Fichier de capacités)	40
5.2.2 Définition du CommunicationProfile	41
5.2.3 Appareil de profil	41
5.2.4 Informations relatives à la version du protocole	41
5.3 Association d'un Paquetage avec un appareil CP 1/1	41
5.3.1 Mapping d'identification de type d'appareil	41
5.3.2 Mapping de révision de type d'appareil	41
5.4 Mapping du Modèle d'information	42
5.4.1 Définition de ProtocolType	42
5.4.2 Mapping de DeviceType	42
5.4.3 Définition du FunctionalGroup "Identification"	42
5.4.4 Mapping des propriétés du BlockType	43
5.4.5 Mapping sur le ParameterSet du Bloc	43
5.5 Eléments de topologie	44
5.5.1 Définition de ConnectionPoint	44
5.5.2 Définition d'appareil de communication	45
5.5.3 Définition du fournisseur de service de communication	47
5.5.4 Définition du Réseau	48
5.6 Méthodes	49
5.6.1 Méthodes pour les Serveurs de Communication FDI®	49
5.6.2 Méthodes pour les Passerelles	55
Annexe A (normative) Schéma de balayage de la topologie	56
A.1 Généralités	56
A.2 Espace de noms cible	56
A.3 FoundationH1AddressT	56
A.4 FoundationH1ConnectionPointT	56
A.5 FoundationH1NetworkT	57
A.6 Network	58
A.7 FoundationBlockIdentificationT	58
A.8 FoundationIdentificationT	58
Annexe B (normative) Paramètres du service Transfer	60
B.1 Généralités	60
B.2 receiveData	60

B.3	sendData	60
B.4	OperationT.....	61
B.5	ResponseCodeT	61
B.6	TransferResultDataT.....	61
B.7	TransferSendDataT.....	62
Annexe C (informative) Arguments du service de communication pour la Méthode Transfer.....		63
Bibliographie.....		64
Tableau 1	– Partie fichier de capacité	40
Tableau 2	– Définition du CommunicationProfile	41
Tableau 3	– Mapping du catalogue de types d'appareils	41
Tableau 4	– Définition du ProtocolType Foundation_H1	42
Tableau 5	– Mapping des propriétés héritées du DeviceType.....	42
Tableau 6	– Paramètres d'identification	43
Tableau 7	– Mapping des propriétés héritées du BlockType.....	43
Tableau 8	– Définition du ConnectionPointType ConnectionPoint_Foundation_H1	44
Tableau 9	– Définition du ParameterSet d'un appareil de communication.....	47
Tableau 10	– Arguments de la méthode Connect	50
Tableau 11	– Arguments de la méthode Disconnect.....	51
Tableau 12	– Arguments de la méthode Transfer	51
Tableau 13	– Arguments de la méthode GetPublishedData.....	53
Tableau 14	– Arguments de la Méthode SetAddress	54
Tableau A.1	– Attributs de FoundationH1ConnectionPointT	57
Tableau A.2	– Eléments de FoundationH1ConnectionPointT.....	57
Tableau A.3	– Eléments de FoundationH1NetworkT.....	57
Tableau A.4	– Attributs de FoundationBlockIdentificationT.....	58
Tableau A.5	– Attributs de FoundationIdentificationT	59
Tableau B.1	– Eléments de receiveData	60
Tableau B.2	– Enumérations d'OperationT	61
Tableau B.3	– Attributs de ResponseCodeT.....	61
Tableau B.4	– Attributs de TransferResultDataT	62
Tableau B.5	– Attributs de TransferSendDataT	62

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

INTÉGRATION DES APPAREILS DE TERRAIN (FDI®) –

Partie 101-1: Profils – Foundation Fieldbus H1

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets.

L'IEC 62769-101-1 a été établie par le sous-comité 65E: Les dispositifs et leur intégration dans les systèmes de l'entreprise, du comité d'études 65 de l'IEC: Mesure, commande et automation dans les processus industriels. Il s'agit d'une Norme internationale.

Cette troisième édition annule et remplace la deuxième édition parue en 2020. Cette édition constitue une révision technique.

Cette édition inclut les modifications techniques majeures suivantes par rapport à l'édition précédente:

- a) mise à jour du service Transfer;
- b) ajout d'OPERATION "GETOD" et "GETDEVICETYPEINFO";
- c) ajout de DeviceTag et Block_Index à FoundationIdentificationT et Target;

- d) retrait des arguments "BlockTag" et "ServiceId";
- e) modification du type de contenu des fichiers CFF par application/vnd.ff.cff.

Le texte de cette Norme internationale est issu des documents suivants:

Projet	Rapport de vote
65E/860/CDV	65E/917/RVC

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à son approbation.

La langue employée pour l'élaboration de cette Norme internationale est l'anglais.

Ce document a été rédigé selon les Directives ISO/IEC, Partie 2, il a été développé selon les Directives ISO/IEC, Partie 1 et les Directives ISO/IEC, Supplément IEC, disponibles sous www.iec.ch/members_experts/refdocs. Les principaux types de documents développés par l'IEC sont décrits plus en détail sous www.iec.ch/standardsdev/publications.

Une liste de toutes les parties de la série IEC 62769, publiées sous le titre général *Intégration des appareils de terrain (FDI®)*, se trouve sur le site web de l'IEC.

Le comité a décidé que le contenu de ce document ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous webstore.iec.ch dans les données relatives au document recherché. A cette date, le document sera

- reconduit,
- supprimé,
- remplacé par une édition révisée, ou
- amendé.

IECNORM.COM : Click to view the full PDF of IEC 62769-101-1:2023 RLV

INTÉGRATION DES APPAREILS DE TERRAIN (FDI®) –

Partie 101-1: Profils – Foundation Fieldbus H1

1 Domaine d'application

La présente partie de l'IEC 62769 spécifie un profil FDI®¹ de l'IEC 62769 pour le profil de communication CP 1/1 (FOUNDATION™ Fieldbus H1)² défini dans l'IEC 61784-1.

2 Références normatives

Les documents suivants sont cités dans le texte de sorte qu'ils constituent, pour tout ou partie de leur contenu, des exigences du présent document. Pour les références datées, seule l'édition citée s'applique. Pour les références non datées, la dernière édition du document de référence s'applique (y compris les éventuels amendements).

IEC 61158-5-9:2014, *Réseaux de communication industriels – Spécifications des bus de terrain – Partie 5-9: Définition des services de la couche application – Éléments de type 9*

IEC 61784-1, *Réseaux de communication industriels – Profils – Partie 1: Profils de bus de terrain*

IEC 61784-2, *Réseaux de communication industriels – Profils – Partie 2: Profils de bus de terrain supplémentaires pour les réseaux en temps réel basés sur l'ISO/CEI 8802-3*

IEC 61784-3:2021, *Réseaux de communication industriels – Profils – Partie 3: Bus de terrain de sécurité fonctionnelle – Règles générales et définitions de profils*

IEC 61804 (toutes les parties), *Les dispositifs et leur intégration dans les systèmes de l'entreprise – Blocs fonctionnels (FB) pour les procédés industriels et le langage de description électronique de produits (EDDL)*

IEC 62541-100:–2015, *Architecture unifiée OPC – Partie 100: Interface d'appareils*

IEC 62769-2, *Intégration des appareils de terrain (FDI®) – Partie 2: Client*

IEC 62769-3, *Intégration des appareils de terrain (FDI®) – Partie 3: Serveur*

IEC 62769-4, *Intégration des appareils de terrain (FDI®) – Partie 4: Paquetages FDI®*

IEC 62769-5, *Intégration des appareils de terrain (FDI®) – Partie 5: Modèle d'information*

¹ FDI est une marque déposée de l'organisation à but non lucratif Fieldbus Foundation, Inc. Cette information est donnée à l'intention des utilisateurs du présent document et ne signifie nullement que l'IEC approuve le détenteur de la marque ou l'emploi de ses produits. La conformité n'exige pas l'utilisation de la marque. L'utilisation de la marque exige l'autorisation du détenteur de la marque.

² FOUNDATION™ Fieldbus est l'appellation commerciale du consortium Fieldbus Foundation, une organisation à but non lucratif. Cette information est donnée à l'intention des utilisateurs du présent rapport technique et ne signifie nullement que l'IEC approuve le détenteur des appellations commerciales ou l'emploi de ses produits. La conformité n'exige pas l'utilisation de l'appellation commerciale. L'utilisation de l'appellation commerciale exige l'autorisation du détenteur de l'appellation commerciale.

IEC 62769-6, *Intégration des appareils de terrain (FDI®) – Partie 6: Mapping de technologies*

IEC 62769-7, *Intégration des appareils de terrain (FDI®) – Partie 7: Appareils de communication*

3 Termes, définitions, abréviations et acronymes

3.1 Termes et définitions

Pour les besoins du présent document, les termes et les définitions répertoriés dans les références normatives de l'Article 2 s'appliquent.

L'ISO et l'IEC tiennent à jour des bases de données terminologiques destinées à être utilisées en normalisation, consultables aux adresses suivantes:

- IEC Electropedia: disponible à l'adresse <http://www.electropedia.org/>
- ISO Online browsing platform: disponible à l'adresse <http://www.iso.org/obp>

3.2 Abréviations et acronymes

Pour les besoins du présent document, les abréviations suivantes s'appliquent:

CFF (Common File format)	Format de fichier commun
CP (Communication Profile)	Profil de communication (voir l'IEC 61784-1 ou l'IEC 61784-2)
CPF (Communication Profile Family)	Famille de profils de communication (voir l'IEC 61784-1 ou l'IEC 61784-2)
EDD (Electronic Device Description)	Description électronique de produit (voir la série IEC 61804)
EDDL (Electronic Device Description Language)	Langage de description électronique de produit (voir la série IEC 61804)
FB (Function Block)	Bloc fonctionnel
IM (Information Model)	Modèle d'information
SMIB (System Management Information Base)	Base d'informations de gestion du système
VFD (Virtual Field Device)	Appareil de terrain virtuel

4 Conventions

4.1 Syntaxe EDDL

Le présent document spécifie le contenu du composant EDD qui fait partie du paquetage de communication FDI®. La syntaxe EDDL utilise la police `Courier New`. La syntaxe EDDL est utilisée pour les déclarations des signatures de méthodes, des variables, des structures de données et des composants.

4.2 Syntaxe XML

Les exemples de syntaxe XML utilisent la police `Courier New`. La syntaxe XML est utilisée pour décrire le schéma des documents XML.

Exemple: <xsd:simpleType name="Example">.

4.3 Utilisation de majuscules

La série IEC 62769 utilise des termes en majuscules pour souligner que ces termes ont une signification spécifique à la FDI®.

Certains de ces termes utilisent un acronyme comme suffixe, par exemple:

- Client FDI®; ou
- Serveur FDI®.

Certains de ces termes sont des termes composés, par exemple:

- Serveurs de communication; ou
- Paquetage de profil.

Les noms de paramètres ou attributs sont concaténés en un seul terme, dans lequel les différents termes d'origine commencent par une lettre majuscule, par exemple:

- ProtocolSupportFile; ou
- ProtocolType.

Les noms de paramètres ou attributs peuvent aussi être construits en utilisant le caractère de soulignement pour concaténer au moins deux termes, par exemple:

- PROFILE_ID; ou
- Profibus_PA_Network.

5 Profil pour CP 1/1 (FOUNDATION™ H1)

5.1 Généralités

Ce profil spécifie les spécificités du protocole nécessaires aux Paquetages FDI® pour la description des serveurs de communication, des passerelles et des appareils.

L'Annexe B définit le schéma XML des Services d'accès direct. L'Annexe C fournit une vue d'ensemble du mapping des paramètres normalisés PROFIBUS avec le PA DIM.

5.2 Profil du catalogue

5.2.1 Fichier de prise en charge du protocole (Fichier de capacités)

Chaque Paquetage d'Appareil FDI® CP 1/1 doit contenir un fichier de capacité. La partie fichier de capacité est décrite dans le Tableau 1.

Tableau 1 – Partie fichier de capacité

Paramètre	Description
Type de contenu:	application/vnd.ff.cff
Espace de noms racine:	Non applicable
Relation source:	http://fdi-cooperation.com/2010/relationships/attachment-protocol
Nom de fichier:	Utiliser l'extension de fichier .CFF

5.2.2 Définition du CommunicationProfile

L'IEC 62769-4 définit un type de chaîne CommunicationProfileT pour le schéma XML Catalog. Le Tableau 2 définit les valeurs propres à CP 1/1 pour cette chaîne.

Tableau 2 – Définition du CommunicationProfile

CommunicationProfile	Description
foundation_h1	Type d'appareil CP 1/1 avec une application de bloc fonctionnel

5.2.3 Appareil de profil

Non pris en charge dans le présent document.

5.2.4 Informations relatives à la version du protocole

L'IEC 62769-4 définit un type d'élément nommé InterfaceT pour le schéma XML Catalog. Le type d'élément InterfaceT contient un élément appelé Version, qui a pour objet de fournir des informations de version concernant le profil du protocole de communication appliqué. La valeur respecte le schéma d'informations de version de l'IEC 62769-4 défini dans le type d'élément VersionT.

La partie version majeure de VersionT doit être définie sur le paramètre ITK_VER. Les parties version mineure et numéro de compilation (build) doivent être mises à 0.

EXEMPLE Pour ITK_VER 5, la valeur pour InterfaceT est 5.0.0.

5.3 Association d'un Paquetage avec un appareil CP 1/1

5.3.1 Mapping d'identification de type d'appareil

Les types d'appareils CP 1/1 sont identifiés de manière unique par les paramètres MANUFAC_ID, DEVICE_TYPE et DEV_REV disponibles dans le Bloc de ressources. Ces paramètres sont utilisés pour associer une instance d'appareil donnée à un Paquetage d'Appareil FDI®. Ces paramètres sont mappés avec le Catalogue de Paquetage d'Appareil FDI® conformément au Tableau 3.

Tableau 3 – Mapping du catalogue de types d'appareils

Élément Catalog	Mapping des types d'appareils CP
Élément Manufacturer de InterfaceT (IEC 62769-4)	MANUFAC_ID Format de chaîne "0xddd", où dddd est le numéro MANUFAC_ID au format hexadécimal.
Élément DeviceModel de InterfaceT (IEC 62769-4)	DEVICE_TYPE Format de chaîne "0xddd", où dddd est le numéro DEVICE_TYPE au format hexadécimal.
Élément DeviceRevision de ListOfSupportedDeviceRevisionsT (IEC 62769-4)	DEV_REV Format de chaîne "x.0.0", où x est la DEV_REV au format décimal (pas de zéro de tête).

5.3.2 Mapping de révision de type d'appareil

Chaque type d'appareil est identifié conformément au 5.3.1. Un appareil peut également inclure un paramètre COMPATIBILITY_REV du Bloc de ressources. Ce paramètre spécifie la version d'appareil la plus ancienne (DEV_REV) qu'un nouvel appareil peut remplacer tout en maintenant la compatibilité avec un précédent Paquetage d'Appareil FDI®.

5.4 Mapping du Modèle d'information

5.4.1 Définition de ProtocolType

Le Tableau 4 définit le ProtocolType utilisé pour identifier les communications réseau CP 1/1.

Tableau 4 – Définition du ProtocolType Foundation_H1

Attribut	Valeur				
BrowseName	Foundation_H1				
IsAbstract	False				
Références	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Hérite des propriétés du ProtocolType défini dans l'IEC 62541-100.					

5.4.2 Mapping de DeviceType

Chaque type d'appareil hérite des propriétés du DeviceType. Le mapping des propriétés héritées du DeviceType est défini dans le Tableau 5.

Tableau 5 – Mapping des propriétés héritées du DeviceType

Propriété	Mapping des types d'appareils CP
SerialNumber	DEV_ID (Base d'informations de gestion du système)
RevisionCounter	-1 (non défini)
Manufacturer	Chaîne obtenue à partir du catalogue de paquetages FDI® (ManufacturerName issu de PackageT)
Model	Chaîne obtenue à partir du catalogue de paquetages FDI® (élément Name de DeviceTypeT, qui est un nom localisé)
DeviceManual	Chaîne de texte vide (non prise en charge) ^a
DeviceRevision	DEV_REV (Bloc de ressources)
SoftwareRevision	SOFTWARE_REV (si disponible, sinon chaîne vide)
HardwareRevision	HARDWARE_REV (si disponible, sinon chaîne vide)
^a Les manuels d'appareils sont exposés en tant que pièces jointes du Paquetage d'Appareil FDI®.	

5.4.3 Définition du FunctionalGroup "Identification"

Comme cela est défini dans l'IEC 62541-100, chaque représentation d'appareil dans le Modèle d'information hébergé sur le Serveur FDI® doit contenir un FunctionalGroup spécifique d'un protocole, appelé "Identification". Ce FunctionalGroup organise les variables qui se trouvent dans le Bloc de ressources de l'instance de type d'appareil. Le FunctionalGroup "Identification" pour le CP 1/1 est défini dans le Tableau 6.

Tableau 6 – Paramètres d'identification

BrowseName	DataType	Facultatif/Obligatoire
MANUFAC_ID	UInt32	Obligatoire
DEV_TYPE	UInt16	Obligatoire
DEV_REV	UInt8	Obligatoire
HARDWARE_REV	String	Facultatif
SOFTWARE_REV	String	Facultatif
COMPATIBILITY_REV	UInt8	Facultatif
CAPABILITY_LEV	UInt8	Facultatif
ITK_VER	UInt16	Obligatoire
SIF_ITK_VER	UInt16	Facultatif
FD_VER	UInt16	Facultatif
DeviceTag	String	Facultatif
Block_index	UInt16	Facultatif

5.4.4 Mapping des propriétés du BlockType

Les types d'appareils CP 1/1 sont orientés bloc conformément à l'IEC 62541-100. L'IEC 62769-5 spécifie le mapping des éléments EDDL BLOCK_A aux types et instances de blocs.

Le BLOCK_A est mappé comme un sous-type de l'élément de topologie BlockType et hérite des propriétés indiquées dans l'IEC 62541-100. Le mapping des propriétés héritées du BlockType est spécifié dans le Tableau 7.

Tableau 7 – Mapping des propriétés héritées du BlockType

Propriété	Mapping des types d'appareils CP (ParameterSet du Bloc)
RevisionCounter	ST_REV
ActualMode	MODE_BLK.ACTUAL
PermittedMode	MODE_BLK.PERMITTED
NormalMode	MODE_BLK.NORMAL
TargetMode	MODE_BLK.TARGET

5.4.5 Mapping sur le ParameterSet du Bloc

Le ParameterSet est relatif à chaque Bloc. Le ParameterSet inclut les enregistrements CHARACTERISTICS du bloc et tous les paramètres qui se trouvent dans PARAMETERS, LOCAL_PARAMETERS et LIST_ITEMS.

Le nom d'exploration des paramètres trouvés dans les PARAMETERS et LOCAL_PARAMETERS est le nom de membre dans les listes respectives. Par exemple, ST_REV est le nom d'exploration du paramètre Static Revision. LIST_ITEMS n'a pas de noms de membres; par conséquent, le nom d'exploration de chaque LIST dans LIST_ITEMS est le nom d'article de la liste.

5.5 Eléments de topologie

5.5.1 Définition de ConnectionPoint

Le ConnectionPoint de typeConnectionPoint_Foundation_H1 doit être utilisé pour identifier la communication du réseau CP 1/1; il est défini dans le Tableau 8. Le ConnectionPoint_Foundation_H1 est un sous-type du type abstrait ConnectionPointType défini dans l'IEC 62541-100.

La propriété Address doit être à l'adresse du nœud H1.

La propriété OrdinalNumber reflète la position du VFD dans la liste des VFD du SMIB. Pour les appareils qui exposent plusieurs FB VFD, la propriété OrdinalNumber est obligatoire pour adresser le FB VFD. Pour les appareils ayant un FB VFD unique, la propriété OrdinalNumber peut être omise. Les appareils exposés comme instances du type DeviceType définissent leurs points de connexion comme des composants. Par conséquent, les appareils ayant des FB VFD multiples doivent contenir des Points de connexion multiples, un par FB VFD.

La propriété SIFConnection indique si une connexion de fonction instrumentée de sécurité (SIF, Safety Instrumented Function) est nécessaire ou non, selon le profil de sécurité fonctionnelle (IEC 61784-3:2021, Article 6). Les appareils CP 1/1 qui mettent en œuvre le profil de sécurité fonctionnelle doivent disposer d'un point de connexion défini comme un composant, qui a mis cette propriété sur True. Les appareils qui prennent en charge les connexions normalisées et les connexions SIF doivent exposer deux Points de connexion comme des composants.

Tableau 8 – Définition du ConnectionPointType ConnectionPoint_Foundation_H1

Attribut	Valeur				
BrowseName	ConnectionPoint_Foundation_H1				
IsAbstract	False				
Références	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Hérite des propriétés du ConnectionPointType défini dans l'IEC 62541-100.					
HasProperty	Variable	Address	Byte	PropertyType	Obligatoire
HasProperty	Variable	OrdinalNumber	Int32	PropertyType	Facultatif
HasProperty	Variable	SIFConnection	Boolean	PropertyType	Facultatif

Le type de ConnectionPoint ConnectionPoint_Foundation_H1 doit être décrit par un élément EDD contenu dans un Paquetage FDI® associé à l'Appareil de Communication, en mesure de piloter un réseau CP 1/1. Les propriétés réelles de ConnectionPoint_Foundation_H1 sont déclarées par les constructions VARIABLE regroupées dans une COLLECTION nommée Foundation_H1_ConnectionPoint_Properties.

```

COMPONENT ConnectionPoint_Foundation_H1
{
  LABEL "Foundation H1 Connection point";
  CLASSIFICATION NETWORK_CONNECTION_POINT;
  CAN_DELETE FALSE;
  PROTOCOL Foundation_H1;
  CONNECTION_POINT Foundation_H1_ConnectionPoint_Properties;
}

VARIABLE Address
{
  LABEL "H1 Node address";
  HELP "Address of the H1 Node";
  CLASS DEVICE;

```

```

TYPE UNSIGNED_INTEGER (1)
{
  MIN_VALUE 16;
  MAX_VALUE 255;
}
HANDLING READ & WRITE;
}

VARIABLE OrdinalNumber
{
  LABEL "OrdinalNumber address property";
  HELP "OrdinalNumber property to address the Function Block
Application";
  CLASS DEVICE;
  TYPE UNSIGNED_INTEGER (4);
  HANDLING READ & WRITE;
}

VARIABLE SIFConnection
{
  LABEL "SIFConnection address property";
  HELP "Connection point supports SIF Connections";
  CLASS DEVICE;
  TYPE ENUMERATED (1)
  {
    {0, "NO_SIFCONNECTION"} ,
    {1, "SIFCONNECTION"}
  }
  HANDLING READ & WRITE;
}

COLLECTION Foundation_H1_ConnectionPoint_Properties
{
  LABEL "FF H1 Connection Point data";
  MEMBERS
  {
    CONNECTION_POINT_ADDRESS, Address;
    CONNECTION_POINT_ORDINALNUMBER, OrdinalNumber;
    CONNECTION_POINT_SIFCONNECTION , SIFConnection;
  }
}

```

5.5.2 Définition d'appareil de communication

Conformément à l'IEC 62769-7, chaque Paquetage de communication FDI® doit contenir un élément EDD qui décrit l'appareil. Le code source EDDL ci-après est un exemple décrivant un Serveur de Communication FDI®.

```

COMPONENT Foundation_H1_Communication_Server
{
  LABEL "Foundation H1 communication server",
  PRODUCT_URI "urn:Fieldbus Foundation:Foundation H1 Communication
Server";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Communication_Device_Setup
  }
}

```

```

COMPONENT_RELATION Foundation_H1_Communication_Device_Setup
{
  LABEL "Relation between Device and communication device";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING { LinkId }
  COMPONENTS
  {
    Foundation_H1_Communication_Device{AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 4;
}

```

```

VARIABLE LinkId
{
  LABEL "Link Id address parameter of the Communication device";
  HELP "Link Id address parameter of the Communication device";
  CLASS DEVICE;
  TYPE UNSIGNED_INTEGER (2)
  {
    MIN_VALUE 4096;
    MAX_VALUE 65535;
  }
  HANDLING READ & WRITE;
}

```

La sémantique des constructions EDDL réalisées selon le code source EDDL ci-dessus est décrite dans l'IEC 62769-7. L'EDDL COMPONENT est utilisé par le Serveur FDI® et le Serveur de Communication FDI® pour créer une instance du type CommunicationServerType, comme cela est décrit dans l'IEC 62769-7.

Le LinkId VARIABLE contient la valeur d'adresse d'une instance d'Appareil de Communication. Dans le Modèle d'Information, le LinkId est représenté comme une instance de BaseDataVariableType et comme un composant du ParameterSet de l'Appareil de Communication.

Conformément à l'IEC 62769-7, chaque Paquetage de communication FDI® doit contenir au moins un élément EDD qui décrit au moins un composant Appareil de communication. Le code source EDDL ci-après est un exemple décrivant un appareil de communication.

```

COMPONENT Foundation_H1_Communication_Device
{
  LABEL "Foundation H1 communication device";
  CAN_DELETE TRUE;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    Foundation_H1_Service_Provider_Relation
  }
}

```

```

COMPONENT_RELATION Foundation_H1_Service_Provider_Relation
{
  LABEL "Foundation H1 communication service provider";
  RELATION_TYPE CHILD_COMPONENT;
  COMPONENTS
  {
    Foundation_H1_Service_Provider{AUTO_CREATE 1;}
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER 16;
}

```