



IEC 62769-7

Edition 2.0 2021-02  
REDLINE VERSION

# INTERNATIONAL STANDARD



Field device integration (FDI) –  
Part 7: **FDI** Communication devices

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2021 IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

**IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

**IEC online collection - [oc.iec.ch](http://oc.iec.ch)**

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 61010-7:2021 RVV



IEC 62769-7

Edition 2.0 2021-02  
REDLINE VERSION

# INTERNATIONAL STANDARD



Field device integration (FDI) –  
Part 7: **FDI** Communication devices

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

ICS 25.040.40; 35.100.05

ISBN 978-2-8322-9401-7

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD .....	6
INTRODUCTION .....	2
1 Scope .....	10
2 Normative references .....	11
3 Terms, definitions, abbreviated terms, <del>acronyms</del> and conventions .....	11
3.1 Terms and definitions .....	11
3.2 Abbreviated terms <del>and acronyms</del> .....	12
3.3 Conventions <del>for graphical notation</del> .....	12
4 General .....	12
5 FDI Communication Package .....	14
5.1 General .....	14
5.2 EDD .....	14
5.2.1 General rules .....	14
5.2.2 Device component .....	15
5.2.3 CommunicationDevice component .....	16
5.2.4 Communication service provider component .....	17
5.2.5 Connection Point component .....	18
5.2.6 Connection Point collection .....	19
5.2.7 Network component .....	19
5.2.8 ValidateNetwork .....	21
5.2.9 ValidateModules .....	21
5.2.10 UIP specifics .....	22
5.2.11 Deployment .....	22
6 Communication relations .....	22
7 FDI Communication Server definition .....	24
7.1 General .....	24
7.2 General characteristics .....	24
7.3 Information Model .....	24
7.3.1 General .....	24
7.3.2 CommunicationServerType .....	27
7.3.3 ServerCommunicationDeviceType .....	31
7.3.4 ServerCommunicationServiceType .....	35
7.4 OPC UA Server Profile for FDI Communication Server .....	40
7.5 Mapping the FDI Server IM to the FDI Communication Server IM .....	40
7.5.1 General .....	40
7.5.2 Information Model differences .....	40
7.6 Installer .....	42
7.7 FDI Communication Package .....	42
7.7.1 General .....	42
7.7.2 EDD for Lightweight Communication Server .....	42
7.7.3 EDD for Multi-Channel Communication Server .....	42
7.7.4 <b>COMMANDs in EDDs for FDI Communication Servers</b> .....	43
7.7.5 Documentation .....	44
7.8 Handling and behavior .....	44
7.8.1 General .....	44

7.8.2	Deployment .....	45
7.8.3	Server configuration .....	45
7.8.4	Start up .....	46
7.8.5	Shutdown .....	46
7.8.6	Watchdog .....	46
7.8.7	Establish the OPC UA connection .....	46
7.8.8	Instantiate the Communication Server .....	47
7.8.9	Configure the communication hardware .....	47
7.8.10	Configuring the Network .....	47
7.8.11	Parameterize .....	47
7.8.12	Initialize .....	47
7.8.13	Create the communication service object .....	48
7.8.14	Communication relation .....	48
7.8.15	Connect .....	48
7.8.16	Disconnect .....	49
7.8.17	Abort Indication .....	49
7.8.18	Scan .....	49
7.8.19	SetAddress .....	49
8	FDI Communication Gateway definition .....	49
8.1	General .....	49
8.2	Information Model .....	49
8.2.1	General .....	49
8.2.2	CommunicationGatewayType .....	50
8.2.3	GatewayCommunicationDeviceType .....	51
8.2.4	GatewayCommunicationServiceType .....	54
8.3	FDI Communication Package .....	58
8.3.1	General .....	58
8.3.2	EDD .....	59
8.4	Handling and behavior .....	60
8.4.1	General .....	60
8.4.2	Deployment .....	61
8.4.3	Start up .....	61
8.4.4	Configure the communication hardware .....	61
8.4.5	Configure the Network .....	61
8.4.6	Parameterize .....	61
8.4.7	Communication relation .....	62
8.4.8	Connect .....	62
8.4.9	Disconnect .....	62
8.4.10	Abort indication .....	62
8.4.11	Scan .....	62
8.4.12	Communication Error Handling .....	63
Annex A (informative)	Layered protocols .....	64
A.1	General .....	64
A.2	Convention for protocol-specific annex creation .....	64
A.3	FDI Communication Package definition .....	65
A.3.1	Communication services .....	65
A.3.2	Connection Point .....	65
A.3.3	Network .....	65
A.4	Representation in the IM .....	66

Annex B (normative) Namespace and mappings ..... 67

**Bibliography**.....

Figure 1 – FDI architecture diagram ..... 10

Figure 2 – FDI communication infrastructure architecture ..... 13

Figure 3 – Communication relation ..... 23

Figure 4 – Communication relation state chart ..... 24

Figure 5 – FDI Communication Server AddressSpace ..... 26

Figure 6 – CommunicationServerType ..... 27

Figure 7 – ServerCommunicationDeviceType ..... 31

Figure 8 – ServerCommunicationServiceType ..... 36

Figure 9 – Information Model differences (example) ..... 41

Figure 10 – FDI Communication Server state machine ..... 45

Figure 11 – Communication relation state chart ..... 48

Figure 12 – Gateway information model ..... 50

Figure 13 – CommunicationGatewayType ..... 51

Figure 14 – GatewayCommunicationDeviceType ..... 52

Figure 15 – GatewayCommunicationServiceType ..... 55

Figure 16 – Nested Communication ..... 61

Table 1 – ValidateNetwork Action arguments ..... 21

Table 2 – ValidateModules Action arguments ..... 22

Table 3 – CommunicationServerType definition ..... 27

Table 4 – MethodSet of CommunicationServerType ..... 27

Table 5 – Reset Method arguments ..... 28

Table 6 – Reset Method AddressSpace definition ..... 28

Table 7 – Initialize Method arguments ..... 29

Table 8 – Initialize Method AddressSpace definition ..... 29

Table 9 – AddComponent Method arguments ..... 30

Table 10 – AddComponent Method AddressSpace definition ..... 30

Table 11 – RemoveComponent Method arguments ..... 31

Table 12 – RemoveComponent Method AddressSpace definition ..... 31

Table 13 – ServerCommunicationDeviceType definition ..... 32

Table 14 – MethodSet of ServerCommunicationDeviceType ..... 32

Table 15 – Scan Method arguments ..... 33

Table 16 – Scan Method AddressSpace definition ..... 33

Table 17 – ResetScan Method arguments ..... 33

Table 18 – ResetScan Method AddressSpace definition ..... 34

Table 19 – SetAddress Method arguments ..... 35

Table 20 – ServerCommunicationServiceType definition ..... 36

Table 21 – MethodSet of ServerCommunicationServiceType ..... 36

Table 22 – Connect Method arguments ..... 37

Table 23 – Disconnect Method arguments ..... 38

Table 24 – Transfer Method arguments.....	38
Table 25 – GetPublishedData Method arguments.....	39
Table 26 – FDICommunicationServer_Facet definition .....	40
Table 27 – CommunicationGatewayType definition .....	51
Table 28 – GatewayCommunicationDeviceType definition.....	52
Table 29 – MethodSet of GatewayCommunicationDeviceType .....	52
Table 30 – Scan Method arguments.....	53
Table 31 – Scan Method AddressSpace definition.....	53
Table 32 – ScanNext Method arguments.....	54
Table 33 – ScanNext Method AddressSpace definition .....	54
Table 34 – GatewayCommunicationServiceType definition.....	55
Table 35 – MethodSet of GatewayCommunicationServiceType .....	56
Table 36 – Connect Method arguments.....	57
Table 37 – Transfer Method arguments.....	58

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## FIELD DEVICE INTEGRATION (FDI) –

Part 7: ~~FDI~~ Communication devices

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

**This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 62769-7:2015. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.**

International Standard IEC 62769-7 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) support for generic protocol extension for faster adoption of other technologies;
- b) support of new protocols;
- c) generic protocol extension to allow adoption of other communication protocols;
- d) based on generic protocol extension: Modbus RTU.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
65E/764/FDIS	65E/774/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the 62769 series, published under the general title *Field Device Integration (FDI)*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

~~The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of patents concerning~~

- ~~a) Method for the Supplying and Installation of Device-Specific Functionalities, see Patent Family DE10357276;~~
- ~~b) Method and device for accessing a functional module of automation system, see Patent Family EP2182418;~~
- ~~c) Methods and apparatus to reduce memory requirements for process control system software applications, see Patent Family US2013232186;~~
- ~~d) Extensible Device Object Model, see Patent Family US12/893,680.~~

~~IEC takes no position concerning the evidence, validity and scope of this patent right.~~

~~The holders of these patent rights have assured the IEC that he/she is willing to negotiate licences either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with IEC. Information may be obtained from:~~

- ~~a) ABB Research Ltd  
Claes Rytteft  
Affolterstrasse 4  
Zurich, 8050  
Switzerland~~
- ~~b) Phoenix Contact GmbH & Co KG  
Intellectual Property, Licenses & Standards  
Flachsmarktstrasse 8, 32825 Blomberg  
Germany~~
- ~~c) Fisher Controls International LLC  
John Dilger, Emerson Process Management LLLP  
301 S. 1<sup>st</sup> Avenue, Marshalltown Iowa 50158  
USA~~
- ~~d) Rockwell Automation Technologies, Inc.  
1 Allen Bradley Drive  
Mayfield Heights, Ohio 44124  
USA~~

~~Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.~~

~~ISO ([www.iso.org/patents](http://www.iso.org/patents)) and IEC (<http://patents.iec.ch>) maintain on-line data bases of patents relevant to their standards. Users are encouraged to consult the data bases for the most up to date information concerning patents.~~

The IEC 62769 series has the general title *Field Device Integration (FDI)* and the following parts:

- Part 1: Overview
- Part 2: FDI Client
- Part 3: FDI Server
- Part 4: FDI Packages
- Part 5: FDI Information Model
- Part 6: FDI Technology Mapping
- Part 7: FDI Communication Devices

- Part 100: Profiles – Generic Protocol Extensions
- Part 101-1: Profiles – Foundation Fieldbus H1
- Part 101-2: Profiles – Foundation Fieldbus HSE
- Part 103-1: Profiles – PROFIBUS
- Part 103-4: Profiles – PROFINET
- Part 109-1: Profiles – HART and WirelessHART
- Part 115-2: Profiles – Protocol-specific Definitions for Modbus RTU
- Part 150-1: Profiles – ISA 100.11a

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

# FIELD DEVICE INTEGRATION (FDI) – Part 7: **FDI** Communication devices

## 1 Scope

This part of IEC 62769 specifies the elements implementing communication capabilities called Communication Devices (IEC 62769-5).

The overall FDI architecture is illustrated in Figure 1. The architectural components that are within the scope of this document have been highlighted in this illustration. The document scope with respect to FDI Packages is limited to Communication Devices. The Communication Server shown in Figure 1 is an example of a specific Communication Device.

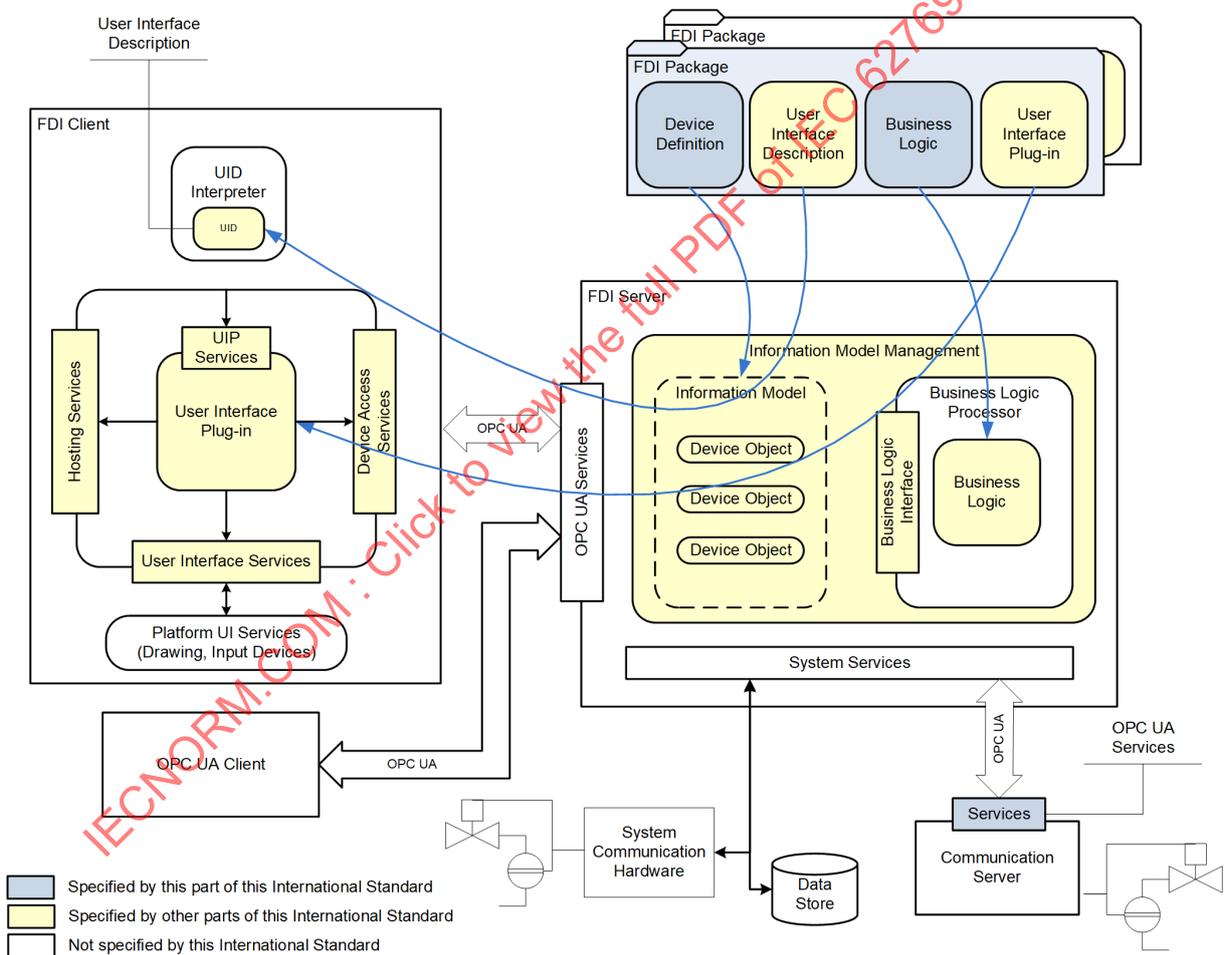


Figure 1 – FDI architecture diagram

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61804-3, *Function blocks (FB) for process control and Electronic Device Description Language (EDDL) – Part 3: EDDL syntax and semantics*

IEC 61804-4, *Function blocks (FB) for process control and Electronic Device Description Language (EDDL) – Part 4: EDD interpretation*

IEC 62541 (all parts), *OPC Unified Architecture*

~~IEC TR 62541-1, *OPC Unified Architecture – Part 1: Overview and Concepts*~~

~~IEC 62541-4, *OPC Unified Architecture – Part 4: Services*~~

~~IEC 62541-6, *OPC Unified Architecture – Part 6: Mappings*~~

~~IEC 62541-7, *OPC Unified Architecture – Part 7: Profiles*~~

~~IEC 62541-100, *OPC Unified Architecture – Part 100: OPC UA for Devices*~~

IEC 62769-1, *Field Device Integration (FDI) – Part 1: Overview*

~~NOTE – IEC 62769-1 is technically identical to FDI-2021.~~

IEC 62769-2, *Field Device Integration (FDI) – Part 2: FDI Client*

~~NOTE – IEC 62769-2 is technically identical to FDI-2022.~~

IEC 62769-3, *Field Device Integration (FDI) – Part 3: FDI Server*

~~NOTE – IEC 62769-3 is technically identical to FDI-2023.~~

IEC 62769-4:2015/2020, *Field Device Integration (FDI) – Part 4: FDI Packages*

~~NOTE – IEC 62769-4 is technically identical to FDI-2024.~~

IEC 62769-5, *Field Device Integration (FDI) – Part 5: FDI Information Model*

~~NOTE – IEC 62769-5 is technically identical to FDI-2025.~~

## 3 Terms, definitions, abbreviated terms, ~~acronyms~~ and conventions

### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62769-1 as well as the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

### 3.1.1 gateway

communication device that enables to bridge between different physical networks or different protocols

## 3.2 Abbreviated terms ~~and acronyms~~

For the purposes of this document, the abbreviated terms ~~and acronyms~~ given in IEC 62769-1 and the following apply.

HTTP	Hypertext Transfer Protocol
IP	Internet Protocol
PHY	Physical communication hardware
SNMP	Simple Network Management Protocol
TCP	Transmission Control Protocol
URI	Uniform Resource Identifier

## 3.3 Conventions ~~for graphical notation~~

For the purposes of this document, the conventions given in IEC 62769-1 apply.


This document uses the graphical notation defined in IEC 62769-5.

## 4 General

The abstract term "FDI Communication Device" represents an entity implementing communication functions over a network using a specific protocol. The group of FDI Communication Devices splits into two main groups.

- a) The FDI Communication Server is a dedicated OPC UA Server providing access to one or more field device networks. The FDI Communication Server is specified in Clause 7.
- b) The FDI Communication Gateway enables to bridge between different physical networks or different protocols. The bridging business logic is implemented in the ~~EED~~ EDD component that is provided with an FDI Communication Package. The FDI Communication Gateway is specified in Clause 8.

NOTE The main differences between a Gateway and a Communication Server are: in terms of FDI, the FDI Communication Server is a dedicated OPC UA Server providing access to one or more field device networks. A Gateway is a communication device that enables to bridge between different physical networks or different protocols. The logical representation of a Gateway device within the FDI Server hosted Information Model enables the FDI Server to process communication in heterogeneous network topologies.

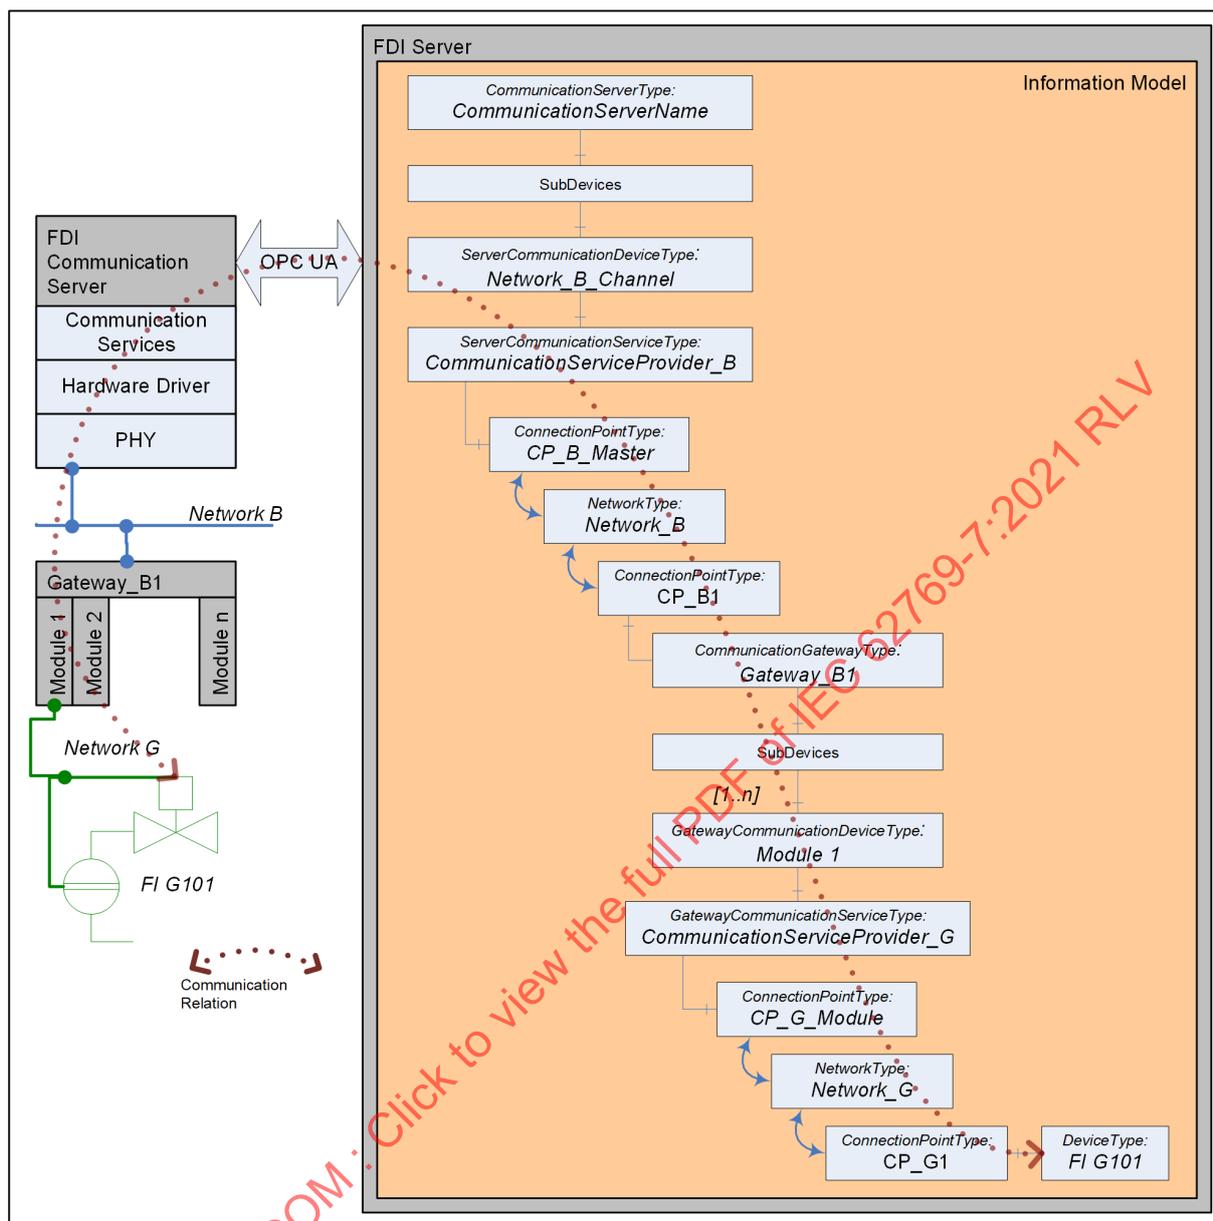

IEC

**Figure 2 – FDI communication infrastructure architecture**

The FDI Server hosted Information Model contains a representation of the network topology. (see also IEC 62769-5). The Information Model shown in Figure 2 is an example excerpt to illustrate how the used elements of the Information Model reflect the actual network topology.

- 1) The instance of `CommunicationServerType` (named `CommunicationServerName`) represents the FDI Communication Server. The FDI Communication Server implements physical communication network access (Communication hardware). Clause 7 describes related Information Model specifics, required FDI Communication Package content and handling of elements therein. For sub-devices, see IEC 62769-5.
- 2) The instance of `ServerCommunicationDeviceType` and `ServerCommunication-ServiceType` (named `Network_B_Channel`) maps to the FDI Communication Server implemented communication services. The `ServerCommunicationDeviceType` is specified in 7.3.3. The `ServerCommunicationServiceType` is specified in 7.3.4.

- 3) The instance of `CommunicationGatewayType` (named `Gateway_B1`) represents the physical Gateway. Clause 8 describes the related Information Model specifics, the required FDI Package content and the handling of elements therein.
- 4) The instance of `GatewayCommunicationDeviceType` (named `Module 1`) maps to a physical or logical module enabling communication to the network to which this module is connected. The `GatewayCommunicationDeviceType` is specified in 8.3.2.3. The related Gateway specifics are described in Clause 8.
- 5) The instance of `GatewayCommunicationServiceType` (named `CommunicationServiceProvider_G`) represents the Gateways' ability to process communication services. The Gateway-specific implementation of `GatewayCommunicationServiceType` is based on Business Logic that enables to run communication services in heterogeneous communication networks.
- 6) A communication relation (more details are described in Clause 6) between a physical device and the device representation managed by the FDI Server is always associated to communication service objects that are instances of a `GatewayCommunicationServiceType` or `ServerCommunicationServiceType`. The ability of instantiating multiple communication service objects supports protocols enables to operate multiple logical connections between a bus master and a device.
- 7) The Information Model represents the connections between the physical devices shown on the left side of Figure 2 based on instances of `ConnectionPointType` `NetworkType` and the depicted relations. `ConnectionPointType` and `NetworkType` are specified in IEC 62769-5.

## 5 FDI Communication Package

### 5.1 General

The FDI Server imports the FDI Communication Package like any other FDI Device Package. Clause 5 specifies the FDI Communication Package details.

### 5.2 EDD

#### 5.2.1 General rules

The FDI Communication Package contained EDD is not restricted, but bound to a protocol-specific annex (IEC 62769-4:2015/2020, Annex F).

The EDD elements as specified in IEC 62769-4:2015/2020, Annex F, and provided with an FDI Communication Package shall describe:

- a) Parameter and parameter structures. Mandatory protocol-specific parameter definitions are found in IEC 62769-4:2015/2020, Annex F. The parameters shall contain any parameter that requires adjustment for proper communication service operation.
- b) Physical Layer identification. Protocol-specific definitions are found in IEC 62769-4:2015/2020, Annex F.

Communication devices' modularity: The modularity information shall be based on using the EDDL constructs `COMPONENT` (see IEC 61804-3).

FDI envisions communication device modularity to cope with communication hardware providing multiple physical or logical communication channels to access multiple logical or physical communication networks. Each module element of the whole communication device shall be described by a separate EDD element.

- c) The `COMPONENT` definition shall be used to support the system implemented topology configuration. Protocol-specific definitions are found in IEC 62769-4:2015/2020, Annex F. The related `COMPONENT` definitions are described in 5.2.2, 5.2.3, 5.2.4, and 5.2.7.
- d) The Business Logic shall contain a method enabled to validate the network (see 5.2.8). The validation function considers the elements only directly connected to the network. The validation function shall be referred by the EDDL specified `CHECK_CONFIGURATION` attribute.

- e) The Business Logic can contain a method enabled to validate the module configuration (see 5.2.9) or the network configuration (see 5.2.8). The validation function considers the elements only directly connected to the related parent element in the topology. The validation function shall be referred by the EDDL specified CHECK\_CONFIGURATION attribute.
- f) Connection Point data: The Connection Point (see 5.2.4 and 5.2.6) shall be described through EDDL constructs COMPONENT, COLLECTION and VARIABLE. The COMPONENT definition associates the Connection Point element to the Communication Device. The VARIABLE definitions represent the properties of a specific Connection Point. The COLLECTION represents the Connection Point structure as such. Protocol-specific definitions are found in IEC 62769-4:2015/2020 Annex F.
- g) MENU:
- The Menu structure shall follow the Menu conventions for PC-based applications in accordance with IEC 61804-4, which enables access to:
- 1) FDI Communication Device Type (Bus) parameters: These parameters shall be made accessible by means of "offline\_root\_menu".
  - 2) Topology Configuration Dialogs shall be made available by means of the menu entry point "topology\_configuration". ~~Protocol specific definitions are found in IEC 62769-4:2015, Annex F.~~

## 5.2.2 Device component

Each FDI Communication Package shall contain an EDD element describing the device.

```
COMPONENT <DeviceComponentId>
{
    LABEL "<Label>";
    CAN_DELETE TRUE;
    CHECK_CONFIGURATION <ValidateModules>;
    CLASSIFICATION NETWORK_COMPONENT;
    COMPONENT_RELATIONS
    {
        <CommunicationDeviceRelationId>
    }
}

COMPONENT_RELATION <CommunicationDeviceRelationId>
{
    LABEL "Relation type description";
    RELATION_TYPE CHILD_COMPONENT;
    ADDRESSING {<AddressVar>}
    COMPONENTS
    {
        <CommunicationDeviceComponentId>
        {
            AUTO_CREATE <autoCreate>;
            REQUIRED_RANGES
            {
                <AddressVar>{ MIN_VALUE <AddrMin>; MAX_VALUE <AddrMax>;}
            }
        }
    }
    MINIMUM_NUMBER <minNumber>;
    MAXIMUM_NUMBER <maxNumber>;
}
```

<DeviceComponentId>: The COMPONENT identifier identifies the component description for the device type.

<Label>: The string value shall contain a string that allows a human user to determine the function of the FDI Communication Server object.

<ValidateModules>: The Value refers to the METHOD implementing the module topology configuration validation function. Implementation details are specified in 5.2.9.

The attribute COMPONENT\_RELATIONS allows to describe how modules can be connected. The definition of the COMPONENT\_RELATIONS is optional. If used, it shall describe the relations to the CommunicationDevice definitions. The construct enables generic FDI Server-driven (device) topology configuration to be performed. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

<CommunicationDeviceRelationId>: The attribute value identifies the COMPONENT\_RELATION definition describing the relation between the device component and the CommunicationDevice component.

<CommunicationDeviceComponentId>: The attribute value has to match with a COMPONENT identifier used in a COMPONENT declaration that describes a CommunicationDevice (see 5.2.3).

<autoCreate>: The attribute value describes the number of CommunicationDevice components that can be automatically instantiated with the Device component.

<minNumber>/<maxNumber>/<autoCreate>: The attribute values define the instantiation constraints. The definition of these attributes is optional. The attribute values can contain conditional expressions.

The RELATION\_TYPE shall be set to CHILD\_COMPONENT\_~~CHILD~~.

<AddressVar>: The attribute value is a reference to a VARIABLE declaration. This VARIABLE holds the address value for a CommunicationDevice instance. The definition of this attribute is optional.

<AddrMin>/<AddrMax>: Values define the address value range for a CommunicationDevice instance. The value ~~may~~ can for example correspond to a physical slot number. Usage of attributes ADDRESSING and REQUIRED\_RANGES enables generic configuration routines.

### 5.2.3 CommunicationDevice component

Each FDI Communication Package shall contain at least one EDD element describing at least one CommunicationDevice component. A modular communication hardware structure shall be described by multiple CommunicationDevice COMPONENT descriptions:

```
COMPONENT <CommunicationDeviceComponentId>
{
  LABEL "<Label>";
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    <CommunicationServiceProviderRelationId>
  }
}
```

```
COMPONENT_RELATION <CommunicationServiceProviderRelationId>
{
  LABEL "Relation between CommunicationDevice and communication service provider";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS
  {
    <CommunicationServiceProviderId>
    {
      AUTO_CREATE <autoCreate>;
    }
  }
}
```

```

    }
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER <maxNumber>;
}

```

<CommunicationDeviceComponentId>: The COMPONENT identifier identifies the CommunicationDevice component.

<Label>: The string value shall contain a human-readable string that allows a user to easily determine the function of the CommunicationDevice component.

<CanDelete>: Allowed values are TRUE or FALSE. It depends on whether a CommunicationDevice needs explicit configuration or whether the related communication service provider object shall be automatically instantiated with the CommunicationDevice. If the attribute CAN\_DELETE is set to FALSE, the CommunicationDevice configuration is static.

The definition of the COMPONENT\_RELATIONS is mandatory. It describes the relation to the communication service provider definition. The construct enables the FDI Server to instantiate communication service provider components in accordance with communication processing demands. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

<CommunicationServiceProviderRelationId>: The attribute value identifies the COMPONENT\_RELATION definition as such.

<CommunicationServiceProviderId>: The attribute value has to match with a COMPONENT identifier used in a COMPONENT declaration that describes a communication service provider (5.2.4).

<autoCreate>: The attribute value describes the number of communication service providers that can be automatically instantiated with the CommunicationDevice component.

The RELATION\_TYPE shall be set to CHILD\_COMPONENT\_~~CHILD~~.

The PROTOCOL attribute shall not be set.

#### 5.2.4 Communication service provider component

Each FDI Communication Package describing a Communication Device shall contain at least one EDD element describing the communication service provider. The EDD component shall not define any configuration parameter.

```

COMPONENT <CommunicationServiceProviderId>
{
  LABEL "<Label>";
  BYTE_ORDER <byteOrder>;
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMMUNICATION_SERVICE_PROVIDER;
  COMPONENT_RELATIONS <CommunicationServiceProvidersConnectionPointRelationId>
  {
    <ConnectionPointRelationId>
  }
}

```

```

COMPONENT_RELATION <CommunicationServiceProvidersConnectionPointRelationId>
{
  LABEL "Relation between communication service provider and connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS

```

```

{
  < ConnectionPointId>
  {
    AUTO_CREATE 1;
  }
}
MINIMUM_NUMBER 1;
MAXIMUM_NUMBER 1;
}

```

<CommunicationServiceProviderId>: The COMPONENT identifier identifies the communication service provider.

<Label>: The string value shall contain a human-readable string that allows a user to easily determine the function of the communication service provider object.

<CanDelete>: Allowed values are TRUE or FALSE. It depends on whether a communication service provider can be flexibly instantiated according to the communication processing demands. If the attribute CAN\_DELETE is set to FALSE, the number of communication service provider component instantiations is static. The instantiation constraints declared through the attributes AUTO\_CREATE, MINIMUM\_NUMBER and MAXIMUM\_NUMBER correspond to the capabilities of currently supported protocols.

<byteOrder>: The value enables generic integration of n-byte data types (e.g. 4-byte integer) into the communication message payload. The attribute value describes the byte order and shall be either BIG\_ENDIAN or LITTLE\_ENDIAN.

The definition of the COMPONENT\_RELATIONS is mandatory. It describes the relation to the Connection Point definition. The construct enables to perform generic, FDI Server-driven topology configuration. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

The Connection Point shall automatically be instantiated with the communication service provider and there shall be exactly one (1) Connection Point instance connected to the communication service provider. The instantiation constraints declared through the attributes AUTO\_CREATE, MINIMUM\_NUMBER and MAXIMUM\_NUMBER correspond to the capabilities of currently supported protocols.

<CommunicationServiceProvidersConnectionPointRelationId>: the attribute value identifies the COMPONENT\_RELATION declaration as such.

<ConnectionPointId>: the attribute value has to match with a COMPONENT identifier used for a COMPONENT declaration that describes a Connection Point (see 5.2.5).

The RELATION\_TYPE shall be set to CHILD\_COMPONENT\_~~CHILD~~.

The PROTOCOL attribute shall not be set.

### 5.2.5 Connection Point component

Each FDI Communication Package describing a Communication Device shall contain one EDD element describing one Connection Point for each of the protocols that are supported by the Communication Device:

```

COMPONENT <ConnectionPointId>
{
  LABEL "<Label>";
  CAN_DELETE FALSE;
  CLASSIFICATION NETWORK_CONNECTION_POINT;
}

```

```

    PROTOCOL <ProtocolId>;
    CONNECTION_POINT <ConnectionPointCollectionId>;
}

```

<ConnectionPointId>: the COMPONENT identifier identifies the Connection Point component declaration.

<Label>: the string value shall contain a string that allows a human user to determine the function of the Connection Point component.

<ProtocolID>: the value of this attribute indicates the communication capability, which allows the FDI Server to find other device types that can be connected to the network using the same type of protocol. For standardized protocols, the value is defined by the related fieldbus organization.

<ConnectionPointCollectionId>: the attribute value is a reference to a COLLECTION declaration that describes the data structure of the Connection Point as described in 5.2.6.

### 5.2.6 Connection Point collection

Each EDD describing the Connection Point of a communication device shall describe the COLLECTION element that describes the attributes that shall appear in the Information Model representation of the Connection Point. The protocol specific data exposed by the Connection Point identifies the device type and its network address.

```

COLLECTION <ConnectionPointCollectionId>
{
    LABEL "<Label>";
    MEMBERS
    {
        <AddressAttributeName>, <AddressAttributeVariableId>;
        VALID <VALID_VariableId>;
    }
}

```

<ConnectionPointCollectionId>: the identifier of the COLLECTION is referred by the CONNECTION\_POINT attribute value defined in 7.7.3.5.

<Label>: the label identifies the Connection Point in a human readable way.

<AddressAttributeName>/<AddressAttributeVariableId>: the MEMBER section refers to the VARIABLE definitions describing the address attributes implemented by a Connection Point. The content of the MEMBER section is protocol-specific.

<VALID>/<VALID\_VariableId> is a Collection member referring a Boolean VARIABLE holding the validation status that shall be set by the ValidateNetwork Action (see 5.2.8).

### 5.2.7 Network component

Each FDI Communication Package describing a Communication Device shall contain one EDD element describing one Network for each of the protocols that are supported by the Communication Device. The definition supports the network topology engineering:

```

COMPONENT <NetworkComponentId>
{
    LABEL "<Label>";
    CAN_DELETE TRUE;
    CHECK_CONFIGURATION <Validate>;
    CLASSIFICATION NETWORK;
    PROTOCOL <ProtocolId>;
    COMPONENT_RELATIONS
    {
        <NetworksConnectionPointRelationId>
    }
}

```

```

    }
}

COMPONENT_RELATION <NetworksConnectionPointRelationId>
{
    LABEL "Relation between network and connection point";
    RELATION_TYPE CHILD_COMPONENT;
    ADDRESSING {<AddressVar>}
    COMPONENTS
    {
        <ConnectionPointId>
        {
            REQUIRED_RANGES
            {
                <BusAddressVar>{ MIN_VALUE <BusAddrMin>; MAX_VALUE <BusAddrMax>;}
            }
        }
    }
    MINIMUM_NUMBER 1;
    MAXIMUM_NUMBER <maxNumber>;
}

```

<NetworkComponentId>: the COMPONENT identifier identifies the Network component declaration.

<Label>: the string value shall contain a human-readable string that allows a user to easily determine the function of the Network component.

<Validate>: the value refers to the METHOD implementing the network topology configuration validation function (see 5.2.8).

<ProtocolID>: the value of this attribute allows the FDI Server to find other device types that can be connected to the network using the same type of protocol. For standardized protocols, the value is defined by the related fieldbus organization.

The definition of the COMPONENT\_RELATIONS is mandatory. It describes the relation to the Connection Point definition and by that the capabilities of a network. The construct enables generic FDI Server-driven network topology configuration to be performed. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

<NetworksConnectionPointRelationId>: the attribute value identifies the COMPONENT\_RELATION definition.

<ConnectionPointId>: The attribute value has to match with a COMPONENT identifier used for a COMPONENT declaration that describes a Connection Point (see 5.2.4).

<maxNumber>: The attribute value limits the number of Connection Points that can be connected to the network. The attribute values can contain conditional expressions.

The RELATION\_TYPE shall be set to CHILD\_COMPONENT\_~~CHILD~~.

<BusAddressVar>: The attribute value is a reference to a VARIABLE declaration. This VARIABLE holds the network address value for any device that is connected to the network.

<BusAddrMin>/<BusAddrMax>: Values define the network address value range.

### 5.2.8 ValidateNetwork

The method `ValidateNetwork` represents the Communication Device implemented Business Logic that validates a current network topology. The `ValidateNetwork` method handles any necessary dependencies related to bus parameters. The implementation of related EDDL logic is based on the EDDL Built-in function `ObjectReference`, which enables the analysis of a set of child instances (Connection Point instances). The validation logic shall set the `<VALID>` attribute of the Connection Point instance that has passed the validation.

The implementation of `ValidateModules` is optional if the module setup is either static or if the configuration rules defined in the `COMPONENT` construct are sufficient to configure the module setup.

Table 1 shows the `ValidateNetwork` Action Arguments.

#### Signature

```
ValidateNetwork (
    [out] Integer ServiceError,
    [out] String ErrorMessage);
```

**Table 1 – ValidateNetwork Action arguments**

Argument	Description
ServiceError	<p>0: OK</p> <p>-1: Failed / the Connection Point that did not pass the validation is indicated by the <code>&lt;VALID&gt;</code> attribute () value set to false.</p> <p>Remark: The argument values correspond to the error codes specified in IEC 61804-3 named <code>BI_SUCCESS</code> (value = 0) and <code>BI_ERROR</code> (value = -1). The Action returns the <code>ServiceError</code> result using the "return" statement.</p>
ErrorMessage	<p>If the method returns an empty string (NULL), the Action call succeeded. In the case of an error, the Action can return a description of the problem.</p>

### 5.2.9 ValidateModules

The method `ValidateModules` validates the current module setup. The implementation of the related EDDL logic is based on the EDDL Built-in function `ObjectReference`, which enables a set of child instances to be analyzed. The implementation of `ValidateModules` is optional if the module setup is either static or if the configuration rules defined in the `COMPONENT` construct are sufficient to configure the module setup.

NOTE The decision whether `ValidateModules` is needed or not is vendor-specific.

Table 2 shows the `ValidateModules` Action Arguments.

**Signature**

```

ValidateModules (
    [out] Integer serviceError,
    [out] String ErrorMessage);
    
```

**Table 2 – ValidateModules Action arguments**

Argument	Description
ServiceError	0: OK -1: Failed / the Connection Point that did not pass the validation is indicated by the <VALID> attribute () value set to false. Remark: The Argument values correspond to the error codes specified in IEC 61804-3 named BI_SUCCESS (value = 0) and BI_ERROR (value = -1). The Action returns the ServiceError result using the "return" statement
ErrorMessage	If the Action returns an empty string (NULL), the method call succeeded. In the case of an error, the Action can return a problem description.

**5.2.10 UIP specifics**


The FDI Communication Package can contain the UIP to support, for example, diagnostics and parameterization.


**5.2.11 Deployment**

The FDI Server imports the FDI Communication Package. The handling of EDD and UIP parts matches with the import procedure performed for the FDI Package (see IEC 62769-2 and IEC 62769-3).

**6 Communication relations**

The purpose of a communication device and its communication services is to exchange information between the physical device and the device representation managed by the FDI Server. The information exchange is managed via communication relations, see Figure 3. An established communication relation represents the capability to exchange information between the FDI Server-managed device representation and the physical device. The use of a Communication Relation allows abstracting from protocol specifics typically used to manage connections.

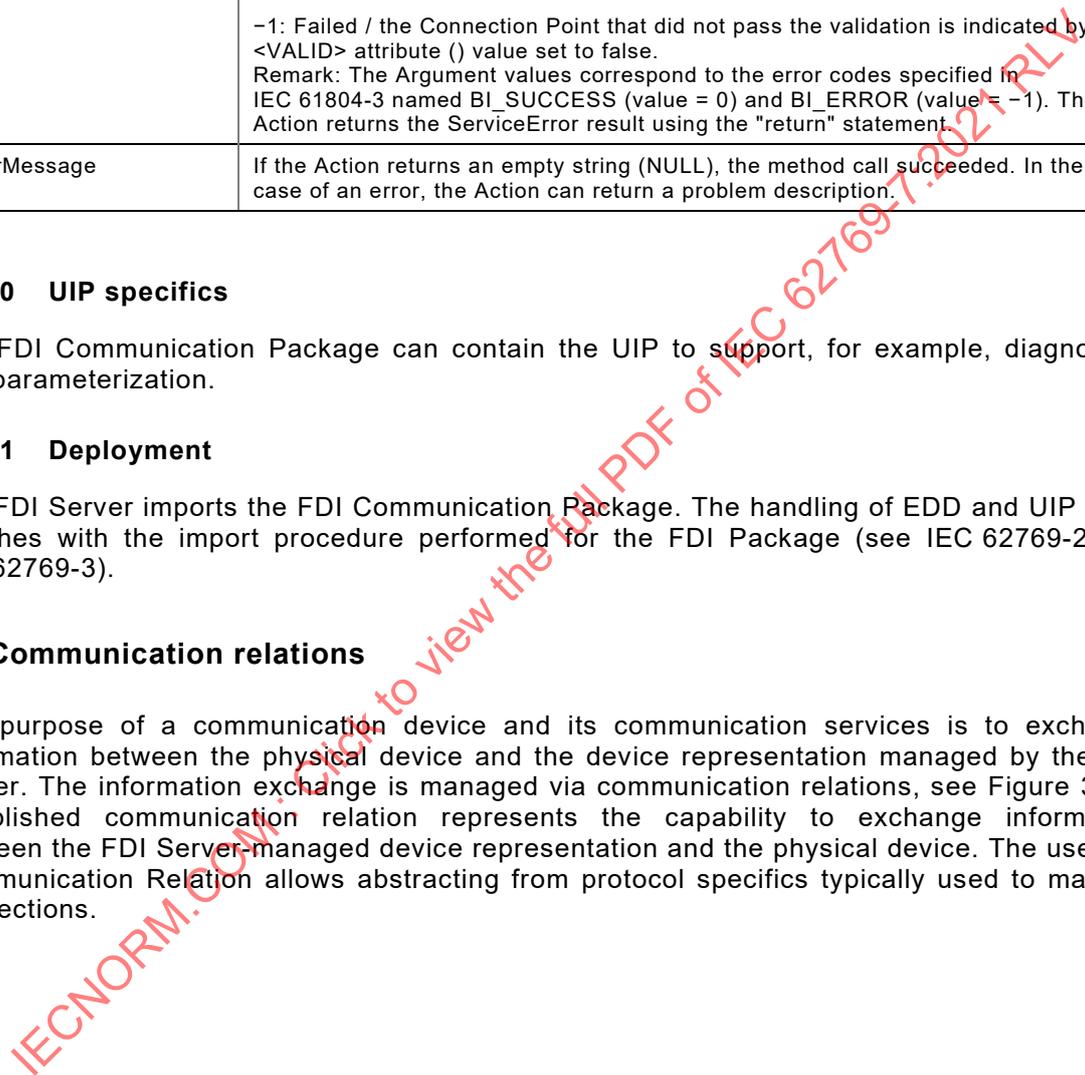

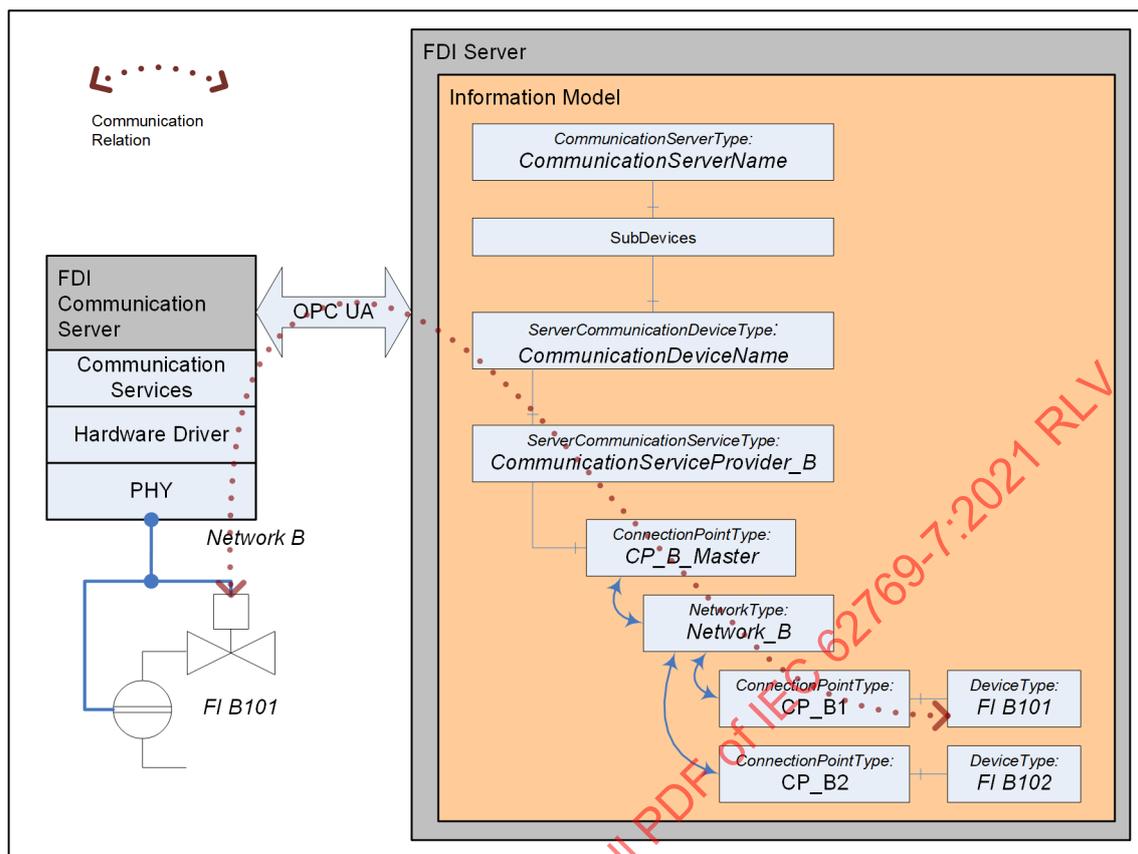


IEC

**Figure 3 – Communication relation**

NOTE 1 The core of information exchange happens between the device connected to the physical network and the corresponding instance within the Information Model but does not cover the complete device application.

The following state chart (Figure 4) describes the general state flow for a single communication relation. The diagram also shows which communication services can be invoked during a "CR Online" state.

The "AbortIndication" shown in Figure 4 can be detected in different protocol-specific ways. The one specified for any communication device is bound to the serviceErrors returned by the specified communication services. Even the Scan method can determine a connection loss, when the device for which a communication relation has been activated does not appear in a scan result.

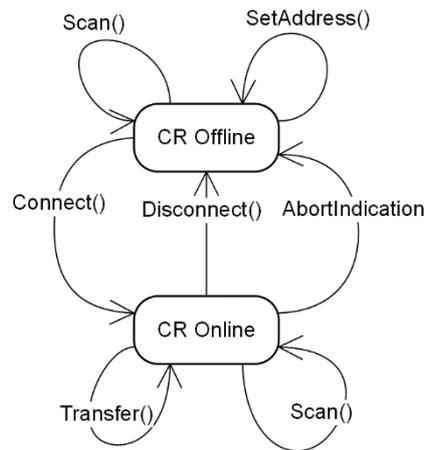

IEC

**Figure 4 – Communication relation state chart**

NOTE 2 The management of communication relations is optional.

## 7 FDI Communication Server definition

### 7.1 General

In terms of FDI, the FDI Communication Server is a dedicated OPC UA Server providing access to one or more field device networks. Each FDI Communication Server is modelled as a Modular Device where each module (also called CommunicationDevice in the sequence) represents the access point to one network.

The Modular Device itself represents the FDI Communication Server as a whole.

### 7.2 General characteristics

The FDI Communication Server implements characteristics for each of its CommunicationDevices specified in 7.3.3. Additionally, an FDI Communication Server implements the following characteristics:

- The FDI Server always synchronizes (see 7.5, 7.8.8, and 7.8.11) the FDI Communication Server hosted Information Model from the FDI Server hosted Information Model content.
- CommunicationDevices can be statically instantiated or they can be created/deleted by the FDI Server.
- Communication between the FDI Server and the FDI Communication Server is based on OPC UA. OPC UA specifies a wire protocol for its services that can be implemented on arbitrary platforms and runtime environments.
- To avoid race conditions, the FDI Communication Server only allows one FDI Server being connected at a time. With this restriction an FDI Communication Server can refrain from any synchronization (locking) mechanism. The FDI specification does not enforce FDI Communication Servers implementing any interlocking mechanism to manage concurrent access to a single device connected to the physical network.

### 7.3 Information Model

#### 7.3.1 General


Subclause 7.3 specifies the FDI Communication Server hosted Information Model.

An FDI Communication Server is an OPC UA Server that encapsulates communication hardware and provides standardized communication ability. The FDI Server connects to the FDI Communication Server as an OPC UA Client and accesses the networks supported by the FDI Communication Server via the FDI Communication Server information model. The task of the FDI Communication Server is to expose this information model. The FDI Communication Server shall not maintain Device Instances or network topology information. All interaction with FDI devices is done through the FDI Server and just transferred by the FDI Communication Server.

For the FDI Server, an FDI Communication Server looks like a device that supports FDI Communication Services and uses OPC UA to communicate. The FDI Communication Server may run locally on the same PC as the FDI Server (loop-back adapter) or remote in the field (e.g. embedded into a controller). Like a device, each FDI Communication Server has an associated FDI Package. This FDI Package is used to create communication devices in the Information Model of the FDI Server that represent access to the networks implemented by the FDI Communication Server.

The Information Model of an FDI Communication Server is based on the Information Model defined in IEC 62769-5. Figure 5 replicates the Modular Device structure and illustrates how it maps into the overall AddressSpace. The modules represent the communication channels of the FDI Communication Server.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 (RLV)

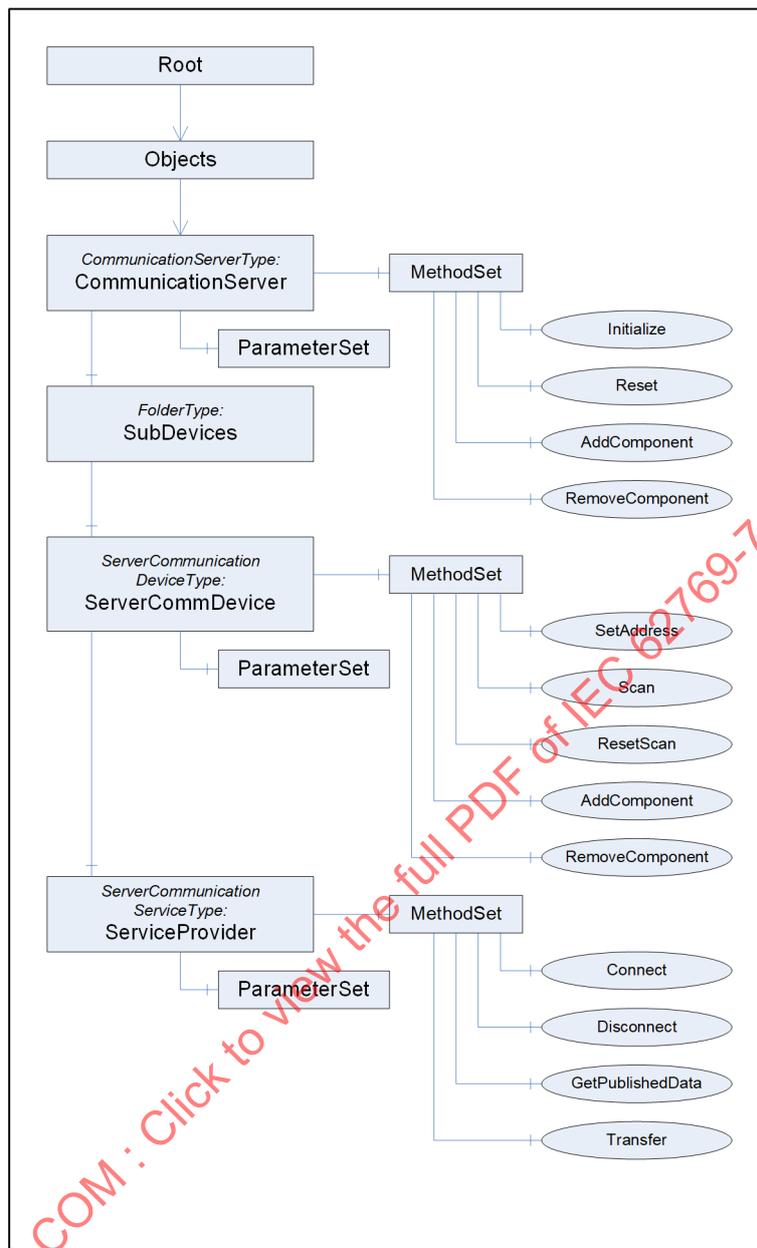

IEC

**Figure 5 – FDI Communication Server AddressSpace**

The CommunicationServerType (the root of the Modular Device) is a subtype of the DeviceType. The MethodSet contains the methods Initialize, Reset, AddComponent and RemoveComponent. The methods AddComponent and RemoveComponent are optionally present if the FDI Communication Server supports the dynamic instantiation of elements in the folder SubDevices.


All sub-devices are instances of the ServerCommunicationDeviceType defined in 7.3.3. The instances of the ServerCommunicationDeviceType (ServerCommDevice) have a MethodSet that can implement the methods SetAddress, Scan, AddComponent, RemoveComponent. AddComponent and RemoveComponent are optionally present if the FDI Communication Server supports a variable number of instances of the ServerCommunicationServiceType.

Formal definitions are found in 7.3.2, 7.3.3 and 7.3.4.

### 7.3.2 CommunicationServerType

#### 7.3.2.1 General

The CommunicationServerType is a subtype of the DeviceType and provides the methods needed to manage the instances ServerCommunicationDeviceType. Figure 6 shows the CommunicationServerType definition that is formally defined in Table 3 and Table 4.

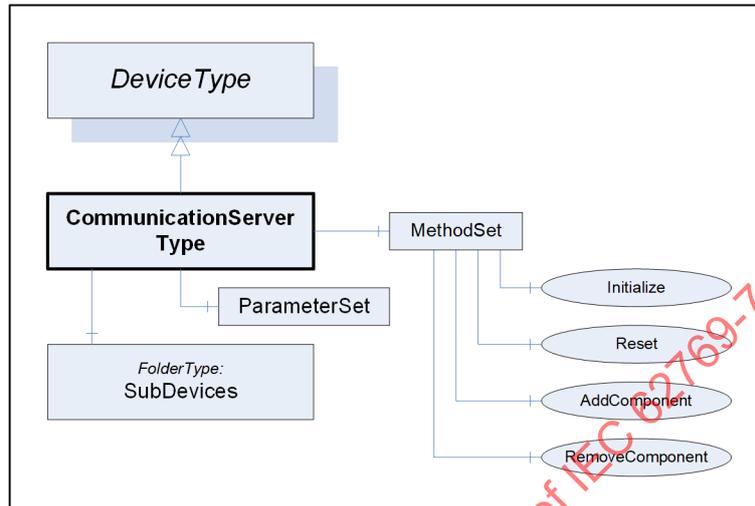

IEC

Figure 6 – CommunicationServerType

Table 3 – CommunicationServerType definition

Attribute	Value				
BrowseName	CommunicationServerType				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in IEC 62541-100.					
HasComponent	Object	MethodSet		BaseObjectType	Mandatory
HasComponent	Object	ParameterSet		BaseObjectType	Optional
HasComponent	Object	SubDevices		FolderType	Mandatory

Table 4 – MethodSet of CommunicationServerType

Attribute	Value				
BrowseName	MethodSet				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Initialize			Mandatory
HasComponent	Method	Reset			Mandatory
HasComponent	Method	AddComponent			Optional
HasComponent	Method	RemoveComponent			Optional

The CommunicationServerType and each instance of this Type share the same Methods. The Nodeld of these Methods will be fixed and defined in this document (see Annex B). FDI Communication Server clients therefore do not have to browse for these Methods. They can use the fixed Nodeld as the MethodId of the Call Service.

The additional Methods AddComponent and RemoveComponent add the ability to add or remove instances of ServerCommunicationDeviceType according to the communication hardware's structure. These services are not applicable if the FDI Communication Server implements a static communication hardware structure.

The SubDevices folder contains instances of ServerCommunicationDeviceType that represent the communication modules.

NOTE The indication for a static communication hardware layout is indicated in the FDI Package with COMPONENT attribute CAN\_DELETE set to FALSE in COMPONENT declarations.

**7.3.2.2 Reset Method**

Reset is used to reset the communication hardware and related driver software. Any ongoing communication will be stopped immediately. All communication channels enter the closed status.

The Method Reset shall not be present in the FDI Server-hosted Information Model. The FDI Server shall be able to handle the shut-down procedure automatically according to communication demands.

Typically, the FDI Communication Server operation includes some hardware and protocol driver handling that can be independent from any modular structure. Because of this possibility, the Reset method is arranged underneath the CommunicationServerType. For the purpose of reducing the complexity of FDI Communication Server operation, only one Reset method has been specified.

The signature of this Method is specified below. Table 5 and Table 6 specify the arguments and AddressSpace representation, respectively.

**Signature**

```
Reset (
    [out] Integer      serviceError);
```

**Table 5 – Reset Method arguments**

Argument	Description
serviceError	0: OK -1: Failed

**Table 6 – Reset Method AddressSpace definition**

Attribute	Value				
BrowseName	Reset				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 7.3.2.3 Initialize Method

Initialize is used to initialize the communication hardware. The initialization function of the FDI Communication Server shall use the parameterization data hosted by the ParameterSet that is contained within the instance of the CommunicationServerType and all instances of ServerCommunicationDeviceType.

In order to enable parameter changes during operation, the Initialize method can be re-invoked. If the FDI Communication Server needs to reset its communication hardware, it shall automatically restore any communication relation that existed. A modular FDI Communication Server can flexibly initialize only those ServerCommunicationDeviceType instances for which configuration changes have been detected.

The Method Initialize shall not be present in the FDI Server-hosted Information Model. The FDI Server shall be able to handle the start procedure automatically according to human-driven communication requests.

The FDI Communication Server operation can include some hardware and protocol driver handling that can be independent from any modular structure. Because of this possibility, the Initialize method is arranged underneath the CommunicationServerType. For the purpose of reducing the complexity of the FDI Communication Server's operation, only one Initialize method has been specified.

The signature of this Method is specified below. Table 7 and Table 8 specify the arguments and AddressSpace representation, respectively.

#### Signature

```
Initialize (
    [out] Integer      serviceError)
```

**Table 7 – Initialize Method arguments**

Argument	Description
serviceError	0: OK -1: Failed

**Table 8 – Initialize Method AddressSpace definition**

Attribute	Value				
BrowseName	Initialize				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 7.3.2.4 AddComponent Method

AddComponent shall be used to configure the modular setup of an FDI Communication Server when the FDI Communication Server has no statically defined communication hardware setup. This method shall be used to add a module (Instance of ServerCommunicationDeviceType).

The signature of this Method is specified below. Table 9 and Table 10 specify the arguments and AddressSpace representation, respectively.

**Signature**

```

AddComponent (
    [in] String      ModuleTypeName,
    [in] String      InstanceName,
    [in] String      InstanceLabel,
    [out] NodeId     InstanceNodeId,
    [out] Integer    ServiceError);
    
```

**Table 9 – AddComponent Method arguments**

Argument	Description
ModuleTypeName	Type of module to be created as defined in the FDI Package. The module type name shall correspond to one of the COMPONENT identifier definitions (see 5.2.3).
InstanceName	Non-localized name of the module's Device Node of the created element. This name has to be unique within the scope of the FDI Communication Server's Information Model.
InstanceLabel	Human-readable label for the root Node of the created module.
InstanceNodeId	Callee-assigned identifier for the module's Device Node.
ServiceError	0 – OK -1 – E_InvalidType – a module for the specified Type can not (not anymore) be added -2 – E_DuplicateName – there exists already a module with the same name as specified with the InstanceName argument -3 – E_UnknownType – an unknown ModuleTypeName has been specified -4 – E_LimitExceeded – the total number of modules is exceeded (this might be caused by power constraints or other resource limitations)

**Table 10 – AddComponent Method AddressSpace definition**

Attribute	Value				
BrowseName	AddComponent				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	InputArguments	Argument[]	PropertyType	Mandatory
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.2.5 RemoveComponent Method**

RemoveComponent shall be used to remove a module (Instance of ServerCommunicationDeviceType). Implementation of RemoveComponent is optional if the communication hardware setup is static.

The signature of this Method is specified below. Table 11 and Table 12 specify the arguments and AddressSpace representation, respectively.

## Signature

```
RemoveComponent (
    [in] NodeId          ModuleNodeId,
    [out] Integer        ServiceError);
```

**Table 11 – RemoveComponent Method arguments**

Argument	Description
ModuleNodeId	The value is the identification of the existing instance in the Information Model.
ServiceError	0: OK -1: Failed, the specified node does not exist


**Table 12 – RemoveComponent Method AddressSpace definition**

Attribute	Value				
BrowseName	RemoveComponent				
References	NodeClass	BrowseName	Data Type	Type Definition	Modelling Rule
HasProperty	Variable	InputArguments	Argument[]	PropertyType	Mandatory
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 7.3.3 ServerCommunicationDeviceType

#### 7.3.3.1 General

The ServerCommunicationDeviceType represents a communication channel for a particular network. The ServerCommunicationDeviceType is a subtype of the DeviceType. The ParameterSet for each instance of a ServerCommunicationDevice will contain Parameters necessary to configure the operation of the network. ~~The protocol specific, mandatory bus parameters are specified in IEC 62769 4:2015, Annex F.~~ Figure 7 shows the ServerCommunicationDeviceType definition that is formally defined in Table 13 and Figure 14.

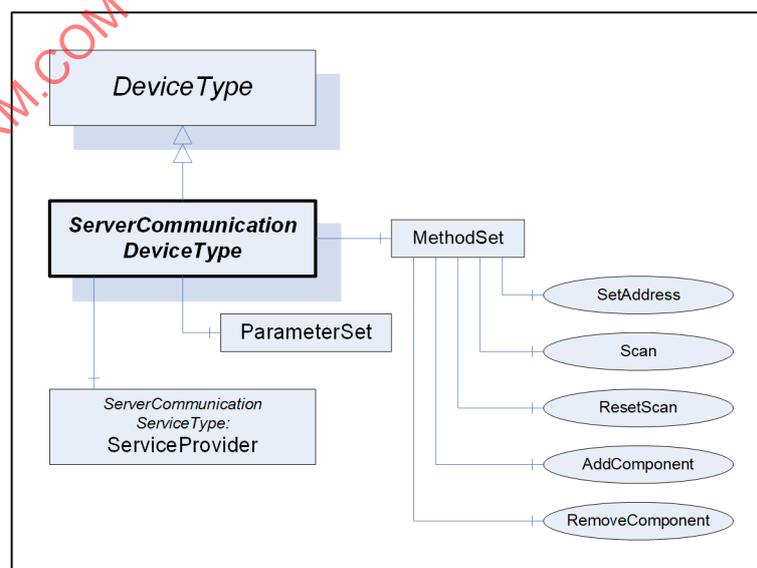

IEC

**Figure 7 – ServerCommunicationDeviceType**

**Table 13 – ServerCommunicationDeviceType definition**

Attribute	Value				
BrowseName	ServerCommunicationDeviceType				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Optional
HasComponent	Object	ParameterSet		BaseObjectType	Optional
HasComponent	Object	ServiceProvider		ServerCommunicationServiceType	Mandatory
HasProperty	Variable	ListOfCommunicationProfiles	String[]	PropertyType	Mandatory

The Property ListOfCommunicationProfiles contains a list of communication profiles supported by the ServerCommunicationDevice. Valid strings are defined in IEC 62769-4:2020, Annex F.

**Table 14 – MethodSet of ServerCommunicationDeviceType**

Attribute	Value				
BrowseName	MethodSet				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Scan			Optional
HasComponent	Method	ResetScan			Optional
HasComponent	Method	SetAddress			Optional
HasComponent	Method	AddComponent			Optional
HasComponent	Method	RemoveComponent			Optional

**7.3.3.2 Scan Method**

Scan shall be used to start discovering devices connected to the physical network. The associations between the method Scan and the corresponding physical network connection enables the FDI Communication Server to access the correct physical network connection. The Scan method is implemented by the Communication Server runtime module.

The signature of this Method is specified below. Table 15 and Table 16 specify the arguments and AddressSpace representation, respectively.

NOTE 1 Communication Servers can run the network scan in a background task, so the invocation of the function Scan will return cached network scan results.

NOTE 2 If the SCAN takes very long, the FDI Communication Server might return an empty TopologyScanResult and the ServiceError 1 identifying that the scan is still running.

**Signature**

```

Scan (
    [out] XmlElement      TopologyScanResult,
    [out] Integer         ServiceError)

```

**Table 15 – Scan Method arguments**

Argument	Description
TopologyScanResult	The argument value is an XML formatted string representing a list of devices connected to the physical network. Each of the devices connected to the physical network is represented by a data structure matching with a Connection Point node. Connection Point attributes are protocol-specific. The corresponding topologyScanResult schema is specified in IEC 62769-4:2015/2020, Annex F. Returns an empty string for TopologyScanResult in the case of any error.
ServiceError	0: OK / scan completed 1: OK / get complete scan result by calling Scan again -1: Failed / not initialized -2: Failed / not connected to a network -3: Failed / no device found, the topologyScanResult is empty

**Table 16 – Scan Method AddressSpace definition**

Attribute	Value				
BrowseName	Scan				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.3.3 ResetScan Method**

ResetScan shall be used to reset the internal cache of scan results. It will also cancel a running scan if the FDI Communication Server scan mechanism supports this.

The signature of this Method is specified below. Table 17 and Table 18 specify the arguments and AddressSpace representation, respectively.

**Signature**

```

ResetScan (
    [out] Integer         ServiceError)

```

**Table 17 – ResetScan Method arguments**

Argument	Description
ServiceError	0: OK / scan reset  -1: Failed / not initialized -2: Failed / not connected to a network

**Table 18 – ResetScan Method AddressSpace definition**

Attribute	Value				
BrowseName	ResetScan				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.3.4 SetAddress Method**

SetAddress shall be used to change the network address (communication address) of a device. The Communication Device shall ensure unique network address values. If the argument value of newAddress is already assigned to a device connected to the physical network, the Communication Device shall return the argument serviceError value "-4: Failed/duplicate Address error".

It depends on the protocol whether the address assignment service shall work even when a communication relation is already established.

The signature of this Method is specified below. The arguments for SetAddress Method are described in Table 19.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## Signature

```

SetAddress (
  [in]   BaseDataType[] <OldAddress>,
  [in]   BaseDataType[] <NewAddress>,
  [out]  Int32           ServiceError);

```

**Table 19 – SetAddress Method arguments**

Argument	Description
OldAddress	The argument represents 1..n protocol-specific values representing the existing protocol-specific network address of the physical network connected device. Values that represent a network address are specified in IEC 62769-4:2015, Annex F.
NewAddress	The argument represents 1..n protocol-specific arguments representing the new protocol-specific network address that shall be assigned to a physical network connected device. Values that represent a network address arguments are specified in IEC 62769-4:2015, Annex F.
ServiceError	0: OK / execution finished successfully -1: SetAddress Failed / not initialized -2: SetAddress Failed / not connected to a network -3: SetAddress Failed / no device found responding to oldAddress -4: SetAddress Failed / duplicate address error -5: SetAddress Failed / device did not accept new address -6: SetAddress Failed / invalid oldAddress (in terms of syntax, data type, data format, and so on) -7: SetAddress Failed / invalid newAddress (in terms of syntax, data type, data format, and so on) -8: SetAddress Failed / not possible in status connected

Argument	Description
<OldAddress>	This is a placeholder for a 1..n protocol-specific arguments representing the existing protocol-specific network address of the device connected to the physical network. Values that represent a network address are specified in IEC 62769-4:2020, Annex F.
<NewAddress>	This is a placeholder for 1..n protocol-specific arguments representing the new protocol-specific network address that shall be assigned to a device connected to the physical network. Values that represent a network address's arguments are specified in IEC 62769-4:2020, Annex F.
ServiceError	0: OK/execution finished successfully Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

### 7.3.4 ServerCommunicationServiceType

#### 7.3.4.1 General

Communication services provide the means to communicate with a Device or to, for example, execute a Scan on a Network. Communication services are represented through Methods in the Information Model (see IEC 62769-5).


The formal definition of ServerCommunicationServiceType is found in Figure 8, Table 20 and Table 21.

The NodeId of these Methods will be fixed and defined in this document. FDI Clients therefore do not have to browse for these Methods. They can use the fixed NodeId as the MethodId of the Call Service.

Communication methods that include their NodeIds are uniquely defined in this document. FDI Clients can use the Methods directly (without browsing). The OPC UA Call Service shall be used as follows:

- the MethodId argument shall contain the fixed NodeId of the Method;
- the ObjectId argument shall contain the NodeId of the MethodSet.

The OPC UA StatusCode Bad\_MethodInvalid shall be returned from the Call Service for elements where the communication methods are not supported.

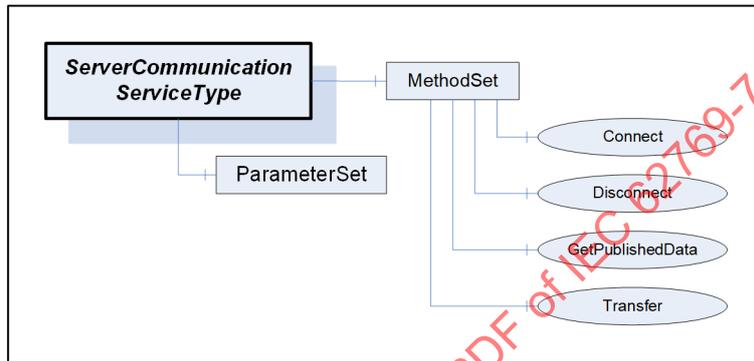

IEC

Figure 8 – ServerCommunicationServiceType

Table 20 – ServerCommunicationServiceType definition

Attribute	Value				
BrowseName	ServerCommunicationServiceType				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Mandatory
HasComponent	Object	ParameterSet		BaseObjectType	Optional

Table 21 – MethodSet of ServerCommunicationServiceType

Attribute	Value				
BrowseName	MethodSet				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Connect			Optional
HasComponent	Method	Disconnect			Optional
HasComponent	Method	Transfer			Mandatory
HasComponent	Method	GetPublishedData			Optional

### 7.3.4.2 Connect Method

Connect shall be used to establish a communication relation to a device that is physically connected to the Network. Establishing the communication relation may imply checks of identification data that are part of the addressData with data inside the physical device. The Communication Device performs this DeviceType match verification in accordance with a corresponding network protocol standard. Related details are specified in IEC 62769-4:2015/2020, Annex F.

The devices' address is contained in the Connection Point of the corresponding Device Instance within the Information Model (Device Connection Point). The communication relation between the Information Model-associated device application and the physical device is further on identified by the communication relation identifier. Details about how to manage the status of a communication relation is described in Clause 6. Connection Point descriptions may be layered as described in Annex A.

NOTE 1 As the NodellD is a unique identifier within the Information Model scope, the NodellD of the Device Connection Point can be a unique identifier for any communication relation in the scope of a communication device.

NOTE 2 The term communication relation is introduced to describe the status of an infrastructure that enables data exchange between Information Model hosted data and a physical device. If the communication relation is established, data exchange is possible.

The signature of this Method is specified below. Table 22 specifies the arguments.

#### Signature

```
Connect (
  [in]   ByteString      CommunicationRelationId,
  [in]   BaseDataType[] <AddressData>,
  [out]  BaseDataType[] <DeviceInformation>,
  [out]  Int32           ServiceError);
```

**Table 22 – Connect Method arguments**

Argument	Description
CommunicationRelationId	This is a client generated ID that is used to uniquely identify this connection. This could be an index (e.g. a NodellD) that the client (= FDI Server) needs in order to identify entries in its topology.
<AddressData>	This is a placeholder for a protocol-specific argument list that is used for the address and optional device identification data (details described in IEC 62769-4:2015/2020, Annex F).
<DeviceInformation>	This is a placeholder for a protocol-specific argument list in which the connect result data are stored.
ServiceError	0: OK/execution finished, connection established successfully -1: Connect Failed / device not found -2: Connect Failed / invalid device address -3: Connect Failed / invalid device identification Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

### 7.3.4.3 Disconnect method

Disconnect shall be used to terminate a communication relation to a Device.

The signature of this Method is specified below. Attributes of the Disconnect method are specified in Table 23. Disconnect is a synchronous method call.

**Signature**

```
Disconnect (
    [in]   ByteString      CommunicationRelationId,
    [out]  Int32           ServiceError);
```

**Table 23 – Disconnect Method arguments**

Argument	Description
CommunicationRelationId	Same ID as used in method Connect specified in 7.3.4.2.
ServiceError	1: OK/disconnect finished successfully -1: Disconnect Failed / no existing communication relation -2: Disconnect Failed / invalid communication relation identifier Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

**7.3.4.4 Transfer method**

Transfer shall be used to perform information exchange with a Device.

The signature of this Method is specified below. All arguments are specified in Table 24.

**Signature**

```
Transfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   BaseDataType[]  <SendData>,
    [out]  BaseDataType[]  <ReceiveData>,
    [out]  Int32           ServiceError);
```

**Table 24 – Transfer Method arguments**

Argument	Description
CommunicationRelationId	See 7.3.4.2.
<SendData>	This is a placeholder for a protocol-specific list of values arguments as described in IEC 62769-4:20152020, Annex F. The argument values represent the protocol-specific communication service request that is sent to the device.
<ReceiveData>	This is a placeholder for a protocol-specific list of values arguments as described in IEC 62769-4:20152020, Annex F. The argument values represent the protocol-specific communication service response that is received from the device.
ServiceError	0: OK / execution finished, ReceivedData contains the result -1: Transfer Failed / No existing communication relation -2: Transfer Failed / Invalid communication relation identifier -3: Transfer Failed / Invalid sendData content -4: Transfer Failed / Invalid receiveData format Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

### 7.3.4.5 GetPublishedData Method

The FDI Server sends GetPublishedData requests to the FDI Communication Server to receive data that is submitted by unsolicited data messages. The data contained in the argument SendData prepares the exchange of "unsolicited" data messages from the device. The content of SendData is protocol-specific. The FDI Communication Server queues GetPublishedData requests in a queue associated with the Communication Relation defined through the argument CommunicationRelationId. The argument PublishId identifies the related queue entry. Each time the FDI Communication Server receives unsolicited data messages, it saves the received data in association with the existing queue entry that has been created for the GetPublishedData. Depending on the underlying network technology (performance), the method GetPublishedData can immediately return with data coming from an "unsolicited" data message.

Subsequent pulling of data that is submitted by unsolicited data messages works through the same method GetPublishedData. In this case, the argument SendData is empty. The argument PublishId matches with the value that has been provided with the initial call GetPublishedData that has established the transmission of exchange of "unsolicited" data messages.

In order to stop the device sending the "unsolicited" data, the method GetPublishedData shall be used again but the argument SendData contained data terminates the exchange of "unsolicited" data messages from the device. Table 25 shows the GetPublishedData Method Arguments.

#### Signature

```

GetPublishedData (
  [in]   ByteString           CommunicationRelationId,
  [in]   BaseDataType[]      <SendData>,
  [out]  BaseDataType[]      <ReceiveData>,
  [out]  DateTime            TimeStamp
  [in]   UInt32              PublishId,
  [out]  Int32                ServiceError);

```

**Table 25 – GetPublishedData Method arguments**

Argument	Description
CommunicationRelationId	See 7.3.4.2.
<SendData>	This is a placeholder for a protocol-specific list of <b>values</b> arguments as described in IEC 62769-4:20152020, Annex F. The argument values control the exchange of unsolicited messages.
<ReceiveData>	This is a placeholder for a protocol-specific list of <b>values</b> arguments as described in IEC 62769-4:20152020, Annex F. The argument values convey data that comes from unsolicited messages.
TimeStamp	Time when the data was published by the device.
PublishId	The number identifies an established subscription that conveys data that comes from unsolicited messages.

ServiceError	0: OK / execution finished <del>-2: Call Failed / unknown PublishId</del> <del>-3: GetPublishedData Failed / not supported</del> <del>-4: GetPublishedData Failed / no existing communication relation.</del> <del>-5: GetPublishedData Failed / invalid communication relation identifier</del> <del>-6: GetPublishedData Failed / invalid sendData content</del> <del>-7: GetPublishedData Failed / invalid receiveData format</del> <del>-8: GetPublishedData Failed / no data published that fits to the SendData argument</del> Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.
--------------	--

#### 7.4 OPC UA Server Profile for FDI Communication Server

Profiles are named groupings of ConformanceUnits as defined in IEC 62541-6 and IEC 62541-7. The term "Facet" in the title of a Profile indicates that this Profile is expected to be part of another larger Profile or concerns a specific aspect of OPC UA. Profiles with the term "Facet" in their title are expected to be combined with other Profiles to define the complete functionality of an OPC UA Server or Client. The minimum required OPC UA Server Profile is the "Micro Embedded Device Server Profile".

The following table specifies the facet for an OPC UA Server that acts as an FDI Communication Server. Table 26 describes Conformance Units included in this facet.

**Table 26 – FDICommunicationServer\_Facet definition**

Conformance Unit	Description	Optional/Mandatory
FDI Communication Server Information Model	Support at least one instance of CommunicationServerType.	M


#### 7.5 Mapping the FDI Server IM to the FDI Communication Server IM

##### 7.5.1 General

The representation of an FDI Communication Server in the AddressSpace of an FDI Server is almost identical to the AddressSpace that exists in the FDI Communication Server. This refers in particular to the Modular Device hierarchy and the Parameters of all Devices. However, the Nodes in the FDI Server are built from the device description imported via the FDI Communication Package.

##### 7.5.2 Information Model differences

Because of their different tasks, however, there are a few differences and a set of synchronization rules. The Information Model example shown in Figure 9 depicts the commonalities and the differences between the Information Models hosted by the FDI Communication Server and the FDI Server. In general, the FDI Communication Server-hosted Information Model is a subset of the FDI Server-hosted Information Model. The Device Instances in the FDI Server and the FDI Communication Server adhere to the same type definitions. Thus, browse names of common Information Model elements shall have the same browse name.

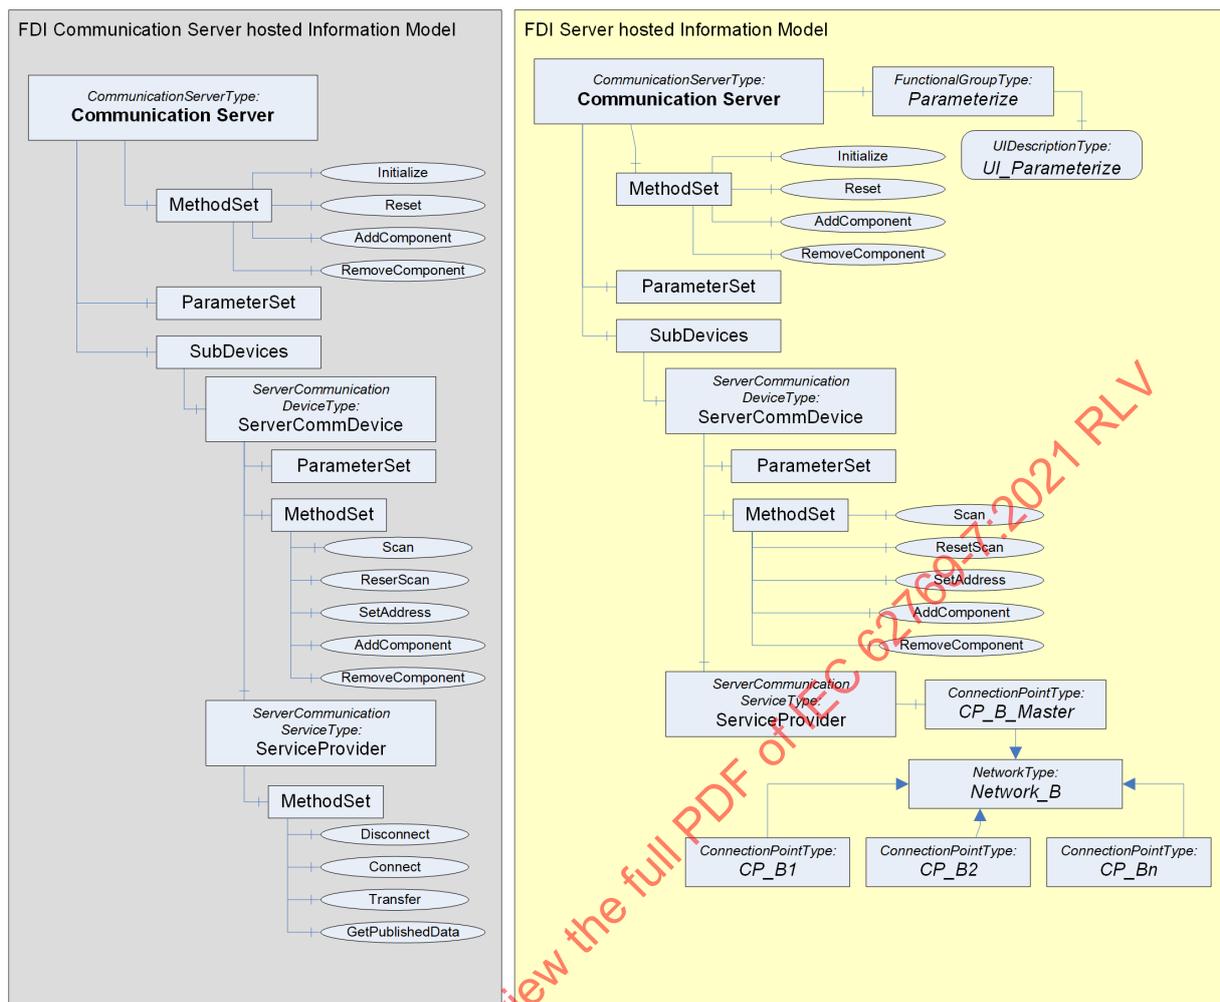

IEC

**Figure 9 – Information Model differences (example)**

The list of differences in the IMs is as follows:

- The FDI Server supports online and offline versions of the Modular Device; the FDI Communication Server supports just an online version. The online version of the FDI Server represents the version in the FDI Communication Server, i.e. if Parameter Values are read or written to the online model of the FDI Server, these operations are passed through to the FDI Communication Server. This happens both for public and for private Parameters.

NOTE The key is a match between the browse names present in the FDI Server-hosted Information Model and the FDI Communication Server-hosted Information Model. This allows generic synchronization of both information models.

- UIPs, UIIDs, Actions and Functional Groups exist only in the FDI Server.
- Modules in the FDI Server-hosted Information Model have a Connection Point component that is used to connect this module to a network when creating the Device Topology. The FDI Communication Server-hosted Information Model does not show Connection Point elements. The Device Topology is managed by the FDI Server only (see IEC 62769-5).
- The FDI Server can represent the ServiceProvider without exposing the MethodSet in order to prevent an FDI Client from invoking communication services.

The mapping of the Module Management functionality is as follows:

- AddComponent and RemoveComponent are exposed in the FDI Communication Server Information Model via the FDI Communication Server Object (the root of the Modular Device). They exist only if there are modules to be configured, i.e. they will not be available if the Communication Server does not support modular communication hardware configuration. AddComponent and RemoveComponent replace the generic Node Management service defined by OPC UA.

The FDI Server handles module topology related configuration based on the Node Management Service Set (see IEC 62769-3 and IEC 61804-4). On any module-configuration related activity, the FDI Server first calls the ValidateModules Action. The EDD Action can run through various states and even perform user dialogs (see description about Actions in IEC 62769-2 and IEC 62769-5). The EDD Methods can maintain (private) information that is global to the Modular Device. The EDD Action can access the module that shall be created.

## 7.6 Installer

The Installer for the FDI Communication Server executable is optional. Since the FDI specification does not prescribe the implementation platform for FDI Communication Server executables, the FDI Communication Server executable can be also preinstalled on dedicated hardware.

The installer used for the FDI Communication Server executable shall be separated from the FDI Package. Importing the FDI package is a separate procedure (see 7.7.1).

## 7.7 FDI Communication Package

### 7.7.1 General

The FDI Server imports the FDI Communication Package like any other FDI Package. Subclause 7.7 specifies the FDI Communication Package details.

With respect to the EDD element of the Package, FDI differentiates between a simple (lightweight) CommunicationServer (see 7.7.2) and a regular (multi-channel) Communication Server (see 7.7.3).

### 7.7.2 EDD for Lightweight Communication Server

A lightweight Communication Server provides access to a single field device network. It shall provide all configuration capabilities in its main EDD, not in the sub-modules used to expose the connection points. This allows FDI hosts not supporting modular devices to parameterize an FDI Communication Server using the standard FDI user interface mechanisms.

The EDD describing a "lightweight" Communication Server shall follow the IEC 61804-3 specified profile for the Communication Server. But it shall not use the following EDDL syntax constructs:

- COMPONENT,
- COMPONENT\_RELATION,
- COMPONENT\_FOLDER,
- COMPONENT\_REFERENCE,
- EDDL Built-in function ObjectReference

~~NOTE COMPONENT defines an attribute PRODUCT\_URI that can be used for automatic discovery of the matching CommunicationServer. Since we are not using the COMPONENT construct for lightweight CommunicationServers, systems have to provide manual discovery.~~

### 7.7.3 EDD for Multi-Channel Communication Server

#### 7.7.3.1 General

The required content for an FDI Communication Package EDD element describing an FDI Communication Device is specified in Clause 5. Specific EDD element content for an FDI Communication Server is described in 7.7.3.

The rules defined in 5.2.2 apply.

The PROTOCOL attribute shall not be set.

The COMPONENT declaration shall have an additional attribute PRODUCT\_URI. The attribute value holds a string describing the FDI Communication Server's product URI that enables the FDI Server to identify the FDI Communication Server based on the OPC UA Discovery service (see IEC 61804-3). The attribute value corresponds to the RegisterServer argument RegisteredServer:serverUri. The product URI shall contain the company name and the product name.

Example: PRODUCT\_URI "urn:Company:ProductName".

#### 7.7.3.2 CommunicationDevice component

The rules defined in 5.2.3 apply.

#### 7.7.3.3 Communication Service component

The rules defined in 5.2.4 apply.

#### 7.7.3.4 Connection Point component

The rules defined in 5.2.5 apply.

#### 7.7.3.5 Connection Point collection

The rules defined in 5.2.6 apply.

### 7.7.4 COMMANDs in EDDs for FDI Communication Servers

An EDD for an FDI Communication Server shall follow the communication profile CS defined in IEC 61804-3. Because the synchronization between the VARIABLES of the EDD represented as parameters in the FDI servers information model and the actual configuration of the FDI communication server (represented as parameters in the information model of the FDI communication server) is done by the FDI server, there is no need to define COMMANDs in the EDD in order to access the data of the FDI communication server.

However, the communication profile CS allows the definition of COMMANDs in an EDD. This allows an EDD developer to explicitly trigger communication to the FDI communication server. This may be needed in complex EDD methods that require to directly write to the FDI communication server or directly read the actual value before proceeding with the method execution.

The COMMAND does not require addressing information (like NUMBER, SLOT, INDEX, see IEC 61804-3) since the addressing is done via the BrowseName of the FDI communication server and the EDD identifier of the VARIABLE. Instead, the RESPONSE of a READ COMMAND shall contain the VARIABLES to be read and the REQUEST of a WRITE COMMAND shall contain all the VARIABLES to be written.

If such a COMMAND is called by ReadCommand or WriteCommand built-ins in the EDD, the FDI server shall read or write respectively all the VARIABLES defined in the COMMAND.

Since COMMANDs also group access to VARIABLES, an FDI server shall always handle VARIABLES defined in a COMMAND as a unit. For example, when a WRITE COMMAND contains the two VARIABLES, VarA and VarB, and the FDI server needs to write VarA because it was changed by the user, the FDI server also needs to write VarB in the same OPC UA service call, although VarB might not have been changed. The same applies for reading VARIABLES.

OPC UA READ and WRITE service calls return different status codes (see IEC 62541-4). First, they return one service result code per call. Then, they return one operation level result code per parameter to be read or written. Since an EDD COMMAND only supports one RESPONSE\_CODE per call, the following mapping applies.

The first status code that is not GOOD shall be used as RESPONSE\_CODE with the following order:

- 1) investigate the service result code, then
- 2) investigate the operation level result codes in the order the VARIABLES appear in the COMMAND definition.

If all status codes are GOOD, the RESPONSE\_CODE is GOOD.

### **7.7.5 Documentation**

The FDI Communication Package shall provide documentation describing:

- a) the software installation related environment requirements and procedures;
- b) the OPC UA Server configuration if needed.

## **7.8 Handling and behavior**

### **7.8.1 General**

Subclause 7.8 defines the FDI Communication Server handling and behavior rules along the lifecycle beginning with the deployment, start up, bus commissioning, until the communication services' processing. The diagram (see Figure 10) shows the FDI Server-maintained FDI Communication Server status.

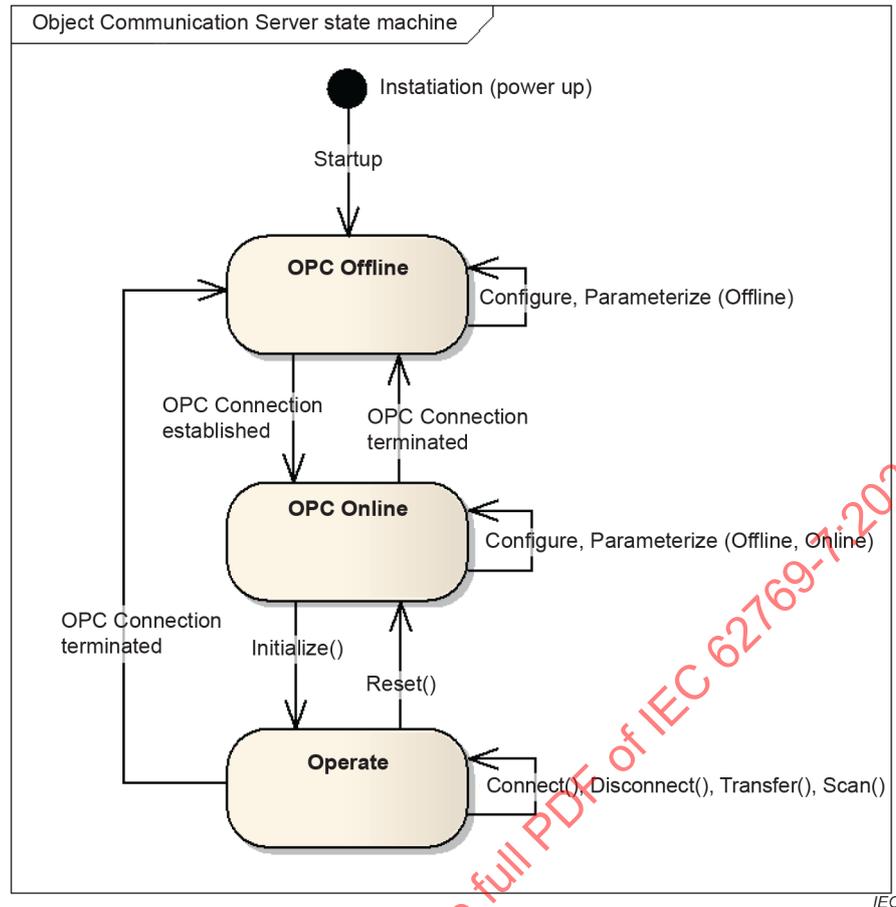


Figure 10 – FDI Communication Server state machine

### 7.8.2 Deployment

The FDI Server imports the FDI Communication Package. The handling of EDD and UIP parts matches with the import procedure performed for the FDI Package (see IEC 62769-2 and IEC 62769-3). The FDI Communication Package represents the Communication Server Type.

The installation procedure described in the following is optional. (An embedded FDI Communication Server need not provide an installation procedure.)

The FDI Communication Server Installer (see 7.6) is a separate element. The installation procedure is started manually.

Depending on the operating systems, the execution of installation programs could require administration rights.

### 7.8.3 Server configuration

The FDI Communication Server shall implement the means enabling the OPC UA Server-specific configuration setting the link to the Discovery Server and the name of the FDI Communication Server. In accordance with 7.8.4, the FDI Communication Server needs to know the address information about the Discovery Server. The document does not prescribe the way of how to do this.

The bootstrap process needed to establish the connection between an OPC UA Client and an OPC UA Server requires some administration work. A simple plug and play does not seem possible.

#### 7.8.4 Start up

The following definitions about the Server discovery mechanism refer to the definitions found in IEC 62541-4.

The FDI Communication Server executable shall be started in accordance with one of the following described ways:

- a) The FDI Communication Server executable is loaded by means of the configured operating system function. If the FDI Communication Server is installed on a hardware separated from the FDI Server, the FDI Communication Server executable shall be loaded by means of the configured operating system function (auto-start).
- b) The FDI Server invokes the FDI Communication Server executable process. The related functions are specific to the operating system and the system vendor implementations.

The starting FDI Communication Server process shall register itself at a Discovery Server using the service RegisterServer. This enables OPC UA Clients to obtain information about the connected FDI Communication Server including the application description, existing endpoints and security information. The related OPC UA Services are FindServers and GetEndPoints. The Discovery Server is a process running outside the FDI Communication Server.

After starting up, the FDI Communication Server has the status "OPC Offline".

#### 7.8.5 Shutdown

The following definitions about the Server discovery mechanism refer to the definitions found in IEC 62541-4.

The shutdown of the FDI Communication Server process shall unregister itself at the Discovery Server using the service RegisterServer by setting argument isOnline value FALSE.

#### 7.8.6 Watchdog

The following definitions about the Server discovery mechanism refer to the definitions found in IEC 62541-4.

The FDI Communication Server shall periodically use the service RegisterServer to state its ability to receive a connection from the FDI Server. The frequency is 10 min. The FDI Communication Server can envision a VARIABLE for configuration purposes.

#### 7.8.7 Establish the OPC UA connection

The FDI Server connects as an OPC UA Client to the FDI Communication Server in accordance with the IEC 62541 series.

The FDI Server (OPC UA Client) establishes a secure connection to the FDI Communication Server (OPC UA Server) using the SecureChannel service set defined in IEC TR 62541-1. The functional principles are defined in IEC TR 62541-1.

The communication between the FDI Server (OPC UA client) and the FDI Communication Server (OPC UA server) shall be based on the OPC UA TCP transport protocol with the OPC UA Binary Encoding and OPC UA Secure Conversation.

After successfully establishing the OPC UA connection, the FDI Communication Server enters the status "OPC Online".

### 7.8.8 Instantiate the Communication Server

The creation of a CommunicationServer instance in the FDI Server-hosted Information Model works the same way as the instantiation of a Device.

### 7.8.9 Configure the communication hardware

As described in 7.3.1 the FDI Communication Server can support the configuration of modular communication hardware. The modular communication hardware configuration shall be performed via the services AddComponent and RemoveComponent (7.3.2.4, 7.3.2.5).

If the Action ValidateModules (see 5.2.9) is implemented, the FDI Server shall invoke this method. If the Action result is OK, the FDI Server shall then perform the synchronization ~~using the sub-device browse name matching and the invocation of the FDI Communication Server-hosted module management services~~ by matching the sub-device's browse name and by invoking the FDI Communication Server-hosted module's management services.

If the FDI Communication Server supports modular communication hardware configurations, the correct communication hardware configuration is a prerequisite for successful initialization, as described in 7.8.12.

### 7.8.10 Configuring the Network

The COMPONENT declaration defined in 5.2.2, 5.2.3, 5.2.4, and 5.2.7 enables a description-based approach for the FDI Server to configure the network connections. The FDI Communication Server's ValidateNetwork Action (see 5.2.8) can be added to support the network topology validation function as described in 5.2.8. The network topology is only present in the FDI Server-hosted Information Model (see 7.5).

### 7.8.11 Parameterize

The FDI Communication Server can require proper bus parameter adjustment prior to any communication service processing. The FDI Communication Package-contained user dialogs (UIP or UID) enable interactive bus parameter adjustment. The FDI Communication Package can contain additional Business Logic for bus parameterization purposes. The editing of FDI Communication Server parameters changes the content of the FDI Server-hosted Information Model. The FDI Server shall perform synchronization using the parameters' browse ~~name matching~~ names. The FDI Server copies the modified values from the FDI Server-hosted Information Model to the FDI Communication Server-hosted Information Model.

A simple FDI Communication Server shall provide all its configuration capabilities in its main EDD, not in the sub-modules used to expose the Connection Points. This allows FDI hosts not supporting modular devices to parameterize an FDI Communication Server using the standard FDI user interface mechanisms.

NOTE The FDI Server can change Parameter values in an arbitrary order.

### 7.8.12 Initialize

On invocation of the method Initialize (see 7.3.2.3), the FDI Communication Server shall use the current parameter settings and communication hardware configuration for communication hardware initialization purposes.

After successful Initialization, the FDI Communication Server enters the status "Operate".


**7.8.13 Create the communication service object**

Prior to running any data exchange, at least one instance of type ServerCommunicationServiceType has to be present or created. One instance of ServerCommunicationServiceType shall be always present. Further instances of ServerCommunicationServiceType can be created if the instance of ServerCommunicationDeviceType implements the method AddComponent.

**7.8.14 Communication relation**

The definitions of Clause 6 apply. The FDI Communication Server specifics are defined in the subsequent text.

The state chart in Figure 11 describes the state flow of a single communication relation with added status changes that are related to OPC UA specifics. Beside the specific aspects, the definitions in Clause 6 apply as well.

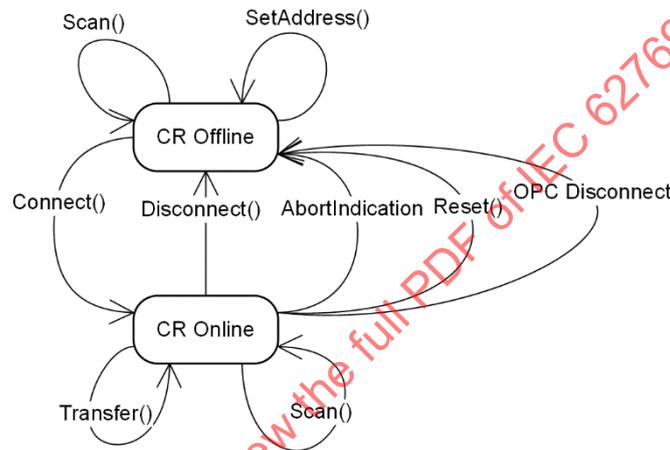

IEC

**Figure 11 – Communication relation state chart**

On invocation of the method Reset or the OPC Connection termination (OPC Connection loss) the FDI Communication Server shall terminate all communication relations.

The FDI Communication Server shall reject any parameterization or configuration change attempt in the status "Operate".

The FDI Communication Server shall reject any communication relation related operation if the FDI Communication Server status is different than "Operate".

If the Communication Server supports multiple instances of ServerCommunicationServiceType, these instances need to share information about existing communication relations.

**7.8.15 Connect**

Prior to running any information exchange related communication, the FDI Communication Server requires the establishment of a communication relation between the device application and the device connected to the physical network. This happens through invocation of the method Connect.

The FDI Communication Server shall be able to manage multiple communication relations. After successful execution of the method Connect the corresponding communication relation enters the status "CR Online".

Because of the direct association of method Connect to a single communication service provider instance the communication device knows the corresponding physical network connection.

#### **7.8.16 Disconnect**

Invocation of the method Disconnect terminates a communication relation, which inhibits further information exchange related communication with the device connected to the physical network.

After execution of the method Disconnect, the corresponding communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### **7.8.17 Abort Indication**

Depending on protocol specifics, the FDI Communication Server can detect communication aborts. Such communication abort indications are returned as communication service results during processing of the methods Transfer or Scan. After the FDI Communication Server has returned an Abort Indication, the current communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### **7.8.18 Scan**

The topology scan function can be invoked independently from an existing communication relation. Scan service details are specified in 7.3.3.2.

#### **7.8.19 SetAddress**

It depends on the protocol whether the address assignment service shall work even when a communication relation is already established.

## **8 FDI Communication Gateway definition**


### **8.1 General**

A Gateway is a communication device that enables bridging between different physical networks or different protocols. The logical representation of a Gateway device within the FDI Server-hosted Information Model enables the FDI Server to process communication in heterogeneous network topologies.

### **8.2 Information Model**

#### **8.2.1 General**

The Information Model of a Gateway is based on the Information Model defined in IEC 62769-5. Figure 12 replicates the Modular Device structure and its integration in the overall FDI Server-hosted Information Model.

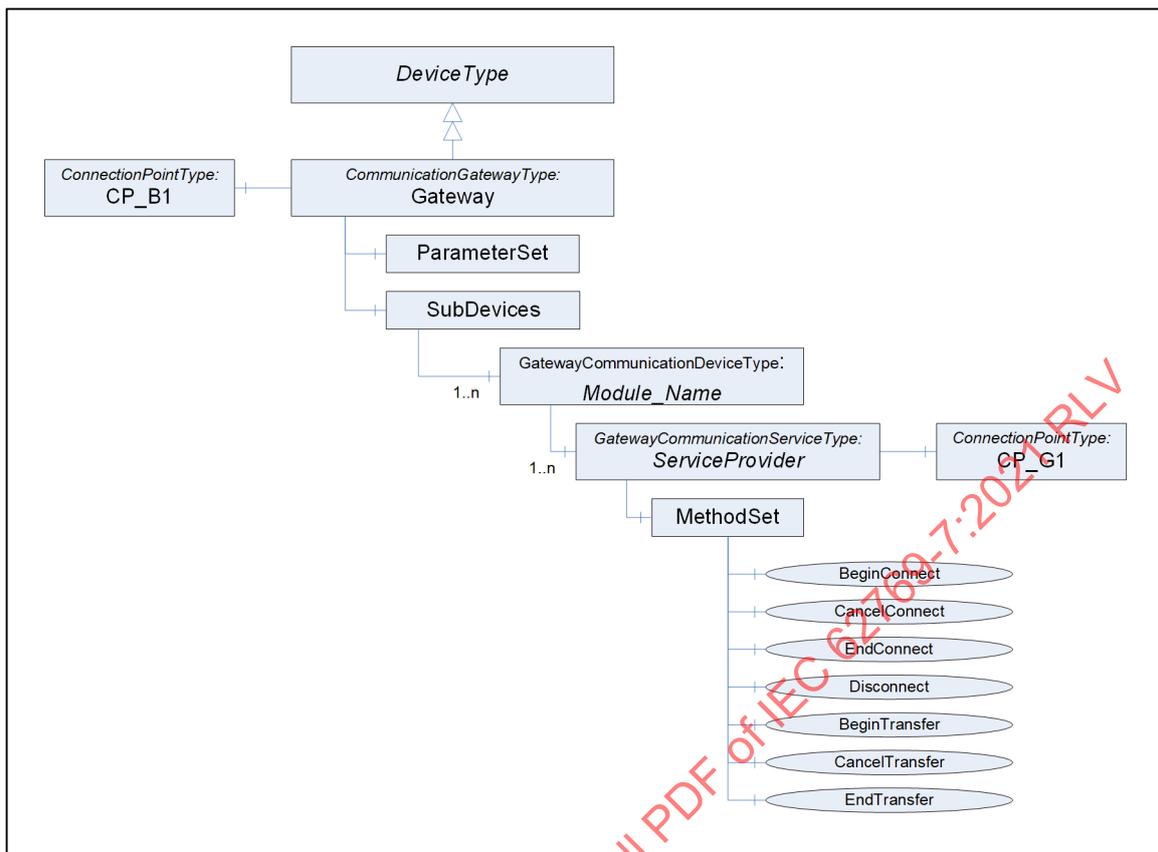

IEC

**Figure 12 – Gateway information model**

The Gateway is connected to the Network (see IEC 62769-5) through an instance of a ConnectionPointType (CP\_B1). CP\_B1 represents the FDI Server-assigned object (see IEC 62769-5) identification (name).

The Gateway is an instance of DeviceType. The optionally available ParameterSet (see IEC 62769-5) shall contain all device parameters that parameterize the communication interface used for Gateway-initiated communication service requests.


The elements underneath SubDevices represent the physical or logical access to the network media of the Gateway. The attribute Module\_Name represents the FDI Server-assigned object (see IEC 62769-5) identification (browse name).

The Gateway's communication service processing capabilities are accessible through multiple communication service provider instances created from GatewayCommunicationServiceType. The Business Logic behind the service methods implements the protocol translation function that is associated with the communication service interface.

NOTE Compared to the FDI CommunicationServer, the Gateway does not support the transport of unsolicited messages, see 7.3.4.5.

### 8.2.2 CommunicationGatewayType

The CommunicationGatewayType is a subtype of the DeviceType. Figure 13 shows the CommunicationGatewayType definition. It is formally defined in Table 27.

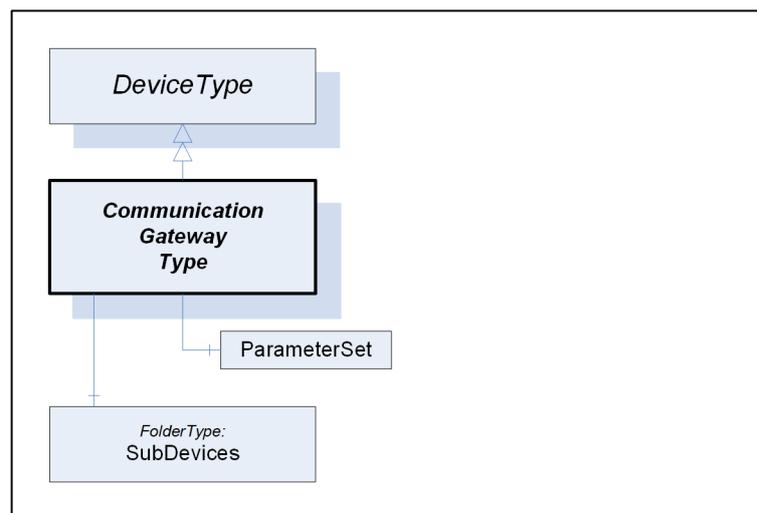

IEC

Figure 13 – CommunicationGatewayType

Table 27 – CommunicationGatewayType definition

Attribute	Value				
BrowseName	CommunicationGatewayType				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in IEC 62541-100.					
HasComponent	Object	SubDevices		FolderType	Mandatory
HasComponent	Object	ParameterSet			Optional


The module management needed to support a configurable communication hardware structure is based on the COMPONENT definitions for the entire CommunicationGatewayType. The COMPONENT definitions provide sufficient information to run the generic module setup configuration.

NOTE The indication for a static communication hardware layout is present with the COMPONENT attribute CAN\_DELETE set to FALSE for all COMPONENT declarations related to the sub-devices of the entire device.

### 8.2.3 GatewayCommunicationDeviceType

#### 8.2.3.1 General

The GatewayCommunicationDeviceType represents a communication module or channel connected to a particular network. The GatewayCommunicationDeviceType is a subtype of the DeviceType. The ParameterSet for each GatewayCommunicationDeviceType will contain Parameters necessary to configure the operation of the network. The protocol-specific, mandatory bus parameters are specified in IEC 62769-4:2015/2020, Annex F. Figure 14 shows the GatewayCommunicationDeviceType definition that is formally defined in Table 28 and Table 29.

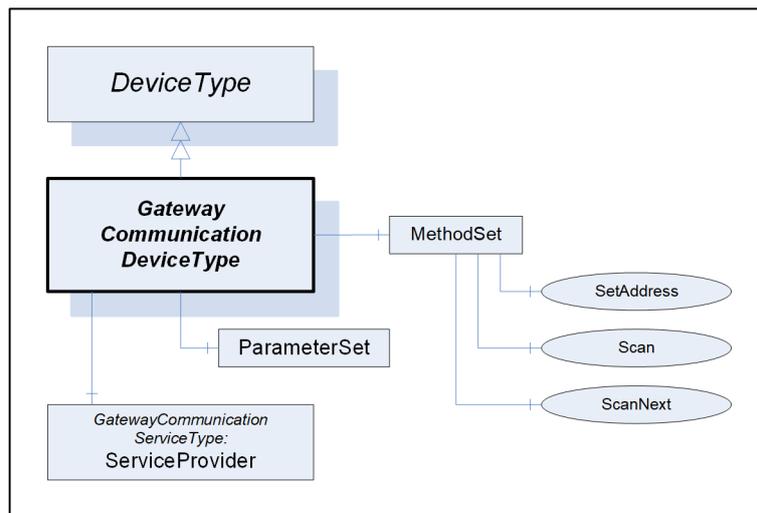

IEC

Figure 14 – GatewayCommunicationDeviceType

Table 28 – GatewayCommunicationDeviceType definition

Attribute	Value				
BrowseName	GatewayCommunicationDeviceType				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Optional
HasComponent	Object	ParameterSet		BaseObjectType	Optional
HasComponent	Object	ServiceProvider		Gateway Communication ServiceType	Mandatory

Table 29 – MethodSet of GatewayCommunicationDeviceType

Attribute	Value				
BrowseName	MethodSet				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Scan			Optional
HasComponent	Method	ScanNext			Optional
HasComponent	Method	SetAddress			Optional

### 8.2.3.2 Scan method

Scan shall be used to start discovering devices connected to the physical network. The associations between the method Scan and the corresponding physical network connection enables the FDI Communication Server to access the correct physical network connection. The Scan method is implemented by an EDDL-based method.

Because EDDL logic is not designed to handle XML documents, the Scan service signature deviates from the definition given in 7.3.3.2. The scan service implementation returns the discovered devices using the LIST construct containing the COLLECTION instances. Details are specified in 8.2.3.4. The COLLECTION instances represent the Connection Point instances.

The signature of this Method is specified below. Table 30 and Table 31 specify the arguments and AddressSpace representation, respectively.

### Signature

```
Scan([out] Integer ServiceError)
```

**Table 30 – Scan Method arguments**

Argument	Description
ServiceError	0: OK 1: OK/get complete scan result by calling ScanNext -1: Failed/not initialized -2: Failed/not connected to a network -3: Failed/no device found the topologyScanResult is empty

**Table 31 – Scan Method AddressSpace definition**

Attribute	Value				
BrowseName	Scan				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 8.2.3.3 ScanNext method:

ScanNext shall be used to continue discovering devices connected to the physical network. The associations between the method Scan and the corresponding physical network connection enables the FDI Communication Server to access the correct physical network connection. The Scan method is implemented by an EDDL-based method.

Because EDDL logic is not designed to handle XML documents, the Scan service signature deviates from the definition given in 7.3.3.2. The scan service implementation returns the discovered devices using the LIST construct containing COLLECTION instances. Details are specified in 8.2.3.4. The COLLECTION instances represent the Connection Point instances.

The signature of this Method is specified below. Table 32 and Table 33 specify the arguments and AddressSpace representation, respectively.

**Signature**

**ScanNext** ([out] Integer ServiceError)

**Table 32 – ScanNext Method arguments**

Argument	Description
ServiceError	0: OK 1: OK/get complete scan result by recalling ScanNext -1: Failed/not initialized -2: Failed/not connected to a network -3: Failed/no device found the topologyScanResult is empty

**Table 33 – ScanNext Method AddressSpace definition**

Attribute	Value				
BrowseName	ScanNext				
References	NodeClass	BrowseName	Data Type	Type Definition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**8.2.3.4 Scan List**

Each EDD describing the Connection Point of a Gateway shall describe the LIST element that holds the list of discovered devices after the successful execution of the Scan service.

```
LIST <Id>
{
    TYPE <ListEntry>;
}
```

<ID>: The identifier shall match with the SCAN\_LIST attribute value described in 8.3.2.4.

<ListEntry>: The attribute value shall refer to the COLLECTION definition that describes the Connection Point as defined in 8.3.2.4.

**8.2.3.5 SetAddress Method**

For definitions, see 7.3.3.4.

**8.2.4 GatewayCommunicationServiceType**

**8.2.4.1 General**

Communication services provide the means to communicate with a Device or to, for example, execute a Scan on a Network. Communication services are represented through EDDL-based methods (business logic) provided with the FDI Device Package-contained EDD.

The implementation of all communication services except the Disconnect service follows an asynchronous pattern. This implies that each communication service is split into three methods. This allows the FDI Server to execute communication services in parallel as well as cancel operations that last too long.


Begin<name>: this method starts the execution of the service. The method returns either the execution state of <name> or the result if it is immediately present.

End<name>: this methods checks, if the result of the service is already available, that it was started using a preceding Begin<name> call. Like Begin<name>, this method returns either the execution state or the result if available.

Cancel<name>: this method cancels a started service execution.

A service identification number (ServiceId) enables the Communication Gateway to keep track of the relation between the method calls that belong to a single communication service process. If the Communication Gateway supports multiple instances of GatewayCommunicationServiceType, these instances share information about currently used ServiceIds. Thus, a communication service has to be executed on a single instance of GatewayCommunicationServiceType.

To reduce unnecessary poll cycles both methods Begin<name> End<name> return a delay time value (DelayForNextCall). The method caller shall delay the invocation of the method End<name> according to the returned argument value.

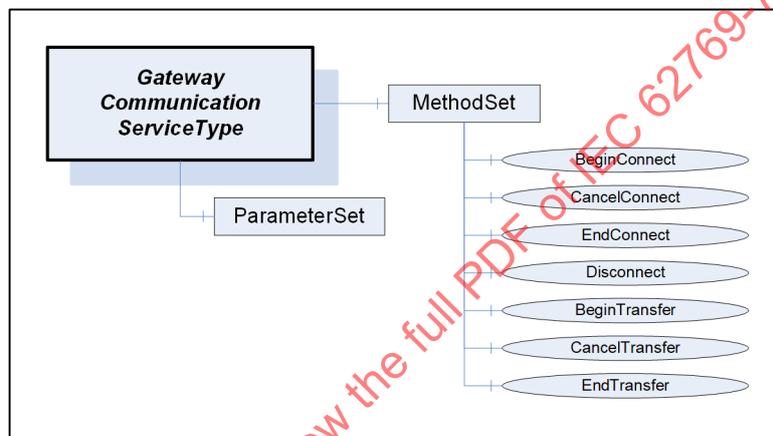

IEC

Figure 15 – GatewayCommunicationServiceType

Table 34 – GatewayCommunicationServiceType definition

Attribute	Value				
BrowseName	GatewayCommunicationServiceType				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Mandatory
HasComponent	Object	ParameterSet		BaseObjectType	Optional

**Table 35 – MethodSet of GatewayCommunicationServiceType**

Attribute	Value				
BrowseName	MethodSet				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	BeginConnect			Optional
HasComponent	Method	CancelConnect			Optional
HasComponent	Method	EndConnect			Optional
HasComponent	Method	Disconnect			Optional
HasComponent	Method	BeginTransfer			Mandatory
HasComponent	Method	CancelTransfer			Mandatory
HasComponent	Method	EndTransfer			Mandatory

**8.2.4.2 Connect service**

The Connect service shall be used to establish a communication relation to a device that is physically connected to the Network. Establishing the communication relation may imply checks of identification data that are part of the addressData with data inside the physical device. The service performs this DeviceType match verification in accordance with a corresponding network protocol standard. Related details are specified in IEC 62769-4:2015/2020, Annex F.

The devices' address is contained in the ConnectionPoint of the corresponding Device Instance within the Information Model (Device Connection Point). The communication relation between the Information Model associated-device application and the physical device is further on identified by the communication-relation identifier. Details about how to manage the status of a communication relation are described in Clause 6.

NOTE 1 As the NodeId is a unique identifier within the Information Model scope, the NodeId of the Device Connection Point can be a unique identifier for any communication relation in the scope of a communication device.

NOTE 2 The term "communication relation" is introduced to describe the status of an infrastructure that enables data exchange between the information model-hosted data and a physical device. If the communication relation is established, data exchange is possible.

The signatures of the connect service methods are specified below. Table 36 specifies the arguments.

**Signature**

```

BeginConnect (
  [in]   ByteString      CommunicationRelationId,
  [in]   BaseDataType[] <AddressData>,
  [out]  BaseDataType[] <DeviceInformation>,
  [in]   UInt32          ServiceID,
  [out]  UInt32          DelayForNextCall,
  [out]  Int32           ServiceError);

EndConnect (
  [in]   ByteString      CommunicationRelationId,
  [out]  BaseDataType[] <DeviceInformation>,
  [in]   UInt32          ServiceID,
  [out]  UInt32          DelayForNextCall,
  [out]  Int32           ServiceError);

CancelConnect (
  [in]   ByteString      CommunicationRelationId,
  [in]   UInt32          ServiceID,
  [out]  Int32           ServiceError);

```

**Table 36 – Connect Method arguments**

Argument	Description
CommunicationRelationId	This is a client generated ID that is used to uniquely identify this connection. This could be an index (e.g. a NodeId) that the client (= FDI Server) needs in order to identify entries in its topology.
<AddressData>	This is a placeholder for a protocol-specific argument list that is used for the address and optional device identification data (details are described in IEC 62769-4:2015/2020, Annex F.
<DeviceInformation>	A protocol-specific argument list in which the connect routine stores the resulting data.
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response.
DelayForNextCall	The value specifies a delay time in ms the caller shall wait before the next invocation of EndConnect.
ServiceError	0: OK/function started asynchronously, result has to be polled with EndConnect 1: OK/execution finished, connection established successfully -1: Connect Failed/cancelled by caller -2: Call Failed/unknown service ID -3: Connect Failed/device not found -4: Connect Failed/invalid device address -5: Connect Failed/invalid device identification

**8.2.4.3 Disconnect method**

Specified in 7.3.4.3.

**8.2.4.4 Transfer service**

Transfer shall be used to perform information exchange with a Device.

The signatures of the Transfer service methods are specified below. All arguments are specified in Table 37.

**Signature**

```

BeginTransfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   BaseDataType[] <SendData>,
    [out]  BaseDataType[] <ReceiveData>,
    [in]   UInt32          ServiceId,
    [out]  UInt32          DelayForNextCall,
    [out]  Int32           ServiceError);

EndTransfer (
    [in]   ByteString      CommunicationRelationId,
    [out]  BaseDataType[] <ReceiveData>,
    [in]   UInt32          ServiceId,
    [out]  UInt32          DelayForNextCall,
    [out]  Int32           ServiceError);

CancelTransfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   UInt32          ServiceId,
    [out]  Int32           ServiceError);
    
```

**Table 37 – Transfer Method arguments**

Argument	Description
CommunicationRelationId	See 8.2.4.2.
<SendData>	This is a placeholder for a protocol-specific list of values arguments as described in IEC 62769-4:2015/2020, Annex F. The argument values represent the protocol-specific communication service request that is sent to the device.
<ReceiveData>	This is a placeholder for a protocol-specific list of values arguments as described in IEC 62769-4:2015/2020, Annex F. The argument values represent the protocol-specific communication service response that is received from the device.
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response.
DelayForNextCall	The value specifies a delay time in ms the caller shall wait before the next invocation of EndTransfer.
ServiceError	0: OK/function started asynchronously, result has to be polled with EndTransfer 1: OK/execution finished, ReceivedData contains the result -1: Transfer Failed/cancelled by caller -2: Call Failed/unknown service ID -3: Transfer Failed/no existing communication relation -4: Transfer Failed/invalid communication relation identifier -5: Transfer Failed/invalid sendData content -6: Transfer Failed/invalid receiveData format

**8.3 FDI Communication Package**

**8.3.1 General**

Subclause 8.3 specifies the FDI Communication Package details that are specific for Gateways. The definitions given in 5.1 apply also.

### 8.3.2 EDD

#### 8.3.2.1 General

The definitions in 5.2 apply. Additionally, the EDD elements as specified in IEC 62769-4 and provided with a Gateway-specific FDI Communication Package shall contain:

- a) A PROFILE (IEC 61804-3): the PROFILE Definition shall be chosen according to the protocol used for communication service requests.
- b) A Business Logic: the communication service provider related EDD COMPONENTs shall implement the methods specified in IEC 61804-3. These methods implement the protocol bridging logic. The translation procedures open out into outbound communication requests via the EDDL Built-in library function invocation or the writing of data into an online node. The set of usable EDDL Built-in library functions is bound to the PROFILE.
- c) A Module management: the Gateway related Component can implement the ValidateModules (see 5.2.9). The implemented logic shall validate individual changes and handle any parameter-related dependencies for the whole Gateway device. The implementation of ValidateModules is optional when the actual product-specific COMPONENT declaration is sufficient to configure the module setup without any additional Business Logic.

#### 8.3.2.2 Gateway Component

Each FDI Communication Package describing a Gateway shall contain an EDD element describing the Gateway, as defined in 5.2.2. Gateway specifics are described in the following:

```
COMPONENT <DeviceComponentId>
{
    LABEL "<Label>";
    CAN_DELETE TRUE;
    CHECK_CONFIGURATION <ValidateModules>;
    CLASSIFICATION NETWORK_COMPONENT;
    COMPONENT_RELATIONS
    {
        <CommunicationDeviceRelationId>
    }
    PROTOCOL <ProtocolId>;
}
```

<ProtocolID>: the existence of this attribute indicates the connectivity of the Gateway regarding outbound communication. It allows the FDI Server to find the network using the same type of protocol to which this Gateway can be connected. For standardized protocols, the value is defined by the related fieldbus organization.

#### 8.3.2.3 Gateway CommunicationDevice Component

Each FDI Communication Package describing a Gateway shall contain at least one EDD element describing at least one CommunicationDevice component, as defined in 5.2.3.

NOTE A Gateway is sometimes referred to as "Remote IO". Remote IO is a Modular Device supporting multiple various module types that can be flexibly assigned to any slot. Thus it is possible to create multiple different Remote IO configurations ( $n$  – slots  $\times$   $m$  – module types).

The rules about COMPONENT attribute settings shown in 5.2.3 apply. Gateway specifics are described in the following:

```

COMPONENT <CommunicationDeviceComponentId>
{
  LABEL "<Label>";
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    <CommunicationServiceProviderRelationId>
  }
  SCAN <Scan>;
  SCAN_LIST <ScanList>;
}

```

<Scan>: the attribute refers to the METHOD implementing the device discovery service. The reference works because the identifier value of the METHOD matches with the attribute value. Implementation details are specified in 8.2.3.2.

<ScanList>: the attribute value refers to the LIST describing the topology scan results. This list shall contain all devices discovered during execution of the device discovery service. Implementation details are specified in 8.2.3.4.

#### 8.3.2.4 Communication Service component

The rules defined in 5.2.4 apply.

Additionally, the file describing the component contains the implementations of the methods defined in 8.2.4.2, 8.2.4.3 and 8.2.4.4. The identifier used for the related METHOD constructs matches with the method names specified in Table 35.

#### 8.3.2.5 Connection Point Component

The rules defined in 5.2.5 apply.


#### 8.3.2.6 Connection Point Collection

The rules defined in 5.2.6 apply.

### 8.4 Handling and behavior

#### 8.4.1 General

A Gateway provides functionality to communicate between two communication protocols. Gateways are used to communicate from one network of the automation system to another (subordinated) network. Figure 16 shows a typical example where a HART device is connected to a PROFIBUS Remote I/O. In order to communicate to the HART device, the Remote I/O receives a communication request via the PROFIBUS network (see Figure 16, key 1). The communication request contains the necessary information that allows the gateway to create the according HART Command and send it to the HART device (see Figure 16, key 2). The way the HART Command is wrapped into the PROFIBUS communication request may be standard or Gateway-specific. The HART response (see Figure 16, key 3) from the device is embedded as a PROFIBUS communication response (see Figure 16, key 4). The way the Gateway wraps the response may either be standard or Gateway-specific.

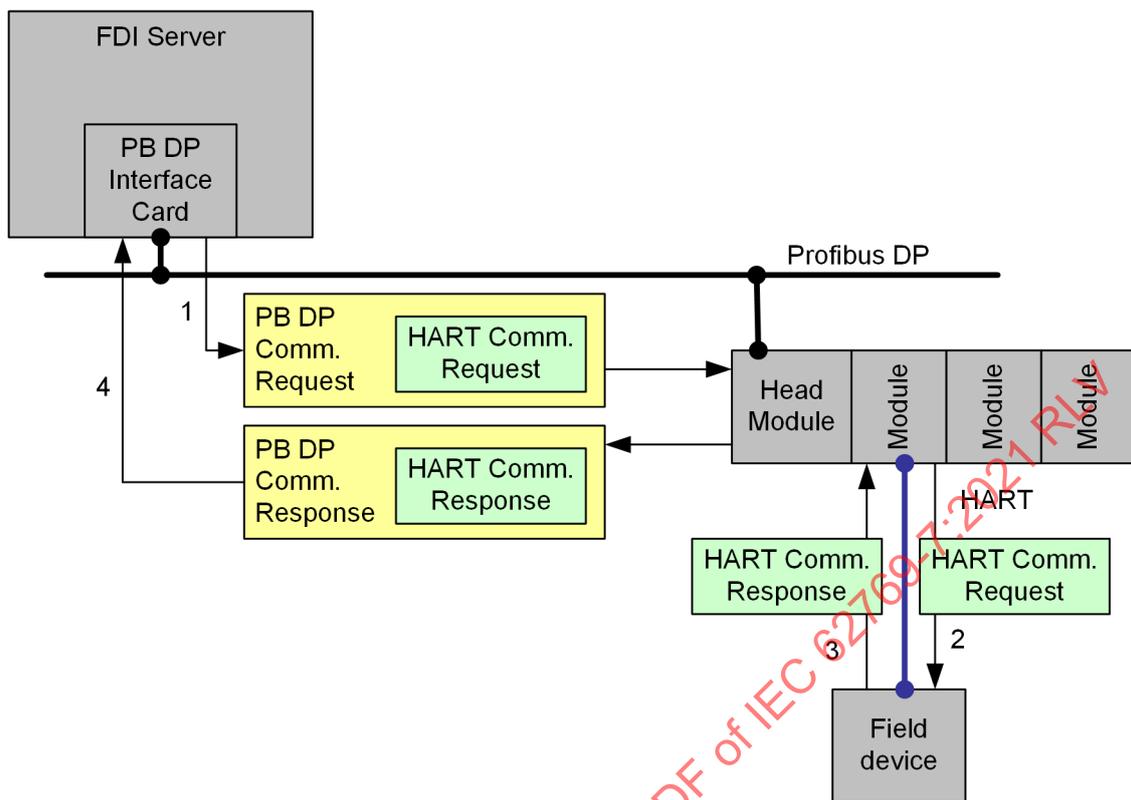

IEC

**Figure 16 – Nested Communication**

Subclause 8.4 defines the Gateway handling and behavior rules along the lifecycle beginning with the deployment, start up, bus commissioning, until the processing of communication services.

#### 8.4.2 Deployment

The definitions of 5.2.11 apply.

#### 8.4.3 Start up

The Information Model and the FDI Package EDD element-based Gateway representation does not require any start-up procedures.

#### 8.4.4 Configure the communication hardware

The handling and behavior matches with the specification in 7.8.9. The only difference is in the channel setup that is represented in the FDI Server-hosted Information Model only.

#### 8.4.5 Configure the Network

The handling and behavior matches with the specification in 7.8.10.

#### 8.4.6 Parameterize

The Gateway can require proper parameter adjustment prior to any communication service processing. The FDI Communication Package-contained user dialogs (UID or UIP) enable interactive bus parameter adjustment. The FDI Communication Package can provide additional Business Logic for bus parameterization purposes.

#### 8.4.7 Communication relation

The status machine definitions in Clause 6 apply.

If the Communication Gateway supports multiple instances of GatewayCommunicationServiceType, these instances need to share information about existing communication relations.

#### 8.4.8 Connect

Prior to running any information exchange-related communication, the Gateway requires the establishment of a communication relation between the device application and the device connected to the physical network. This happens through the invocation of the method Connect. This enables the Gateway to perform an optional outbound communication service request, which might be needed for a specific Gateway device to establish a communication relation.

The Gateway shall be able to manage multiple communication relations. After successful execution of the method Connect the corresponding communication relation enters the status "CR Online".

Invocation of the services Transfer and Scan is allowed in the status "Online" only.

#### 8.4.9 Disconnect

Invocation of the method Disconnect terminates a communication relation, which inhibits further information exchange related communication with the device connected to the physical network.

After execution of the method Disconnect, the corresponding communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### 8.4.10 Abort indication

Depending on protocol specifics, the Gateway can detect communication aborts. Such communication abort indications are returned as communication service results during the processing of the methods Transfer or Scan. After the Gateway has returned an Abort Indication, the current communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### 8.4.11 Scan

Gateways declare their device discovery service capability based on the EDDL construct COMPONENT – the attributes SCAN and SCAN\_LIST. Related definitions are defined in IEC 61804-3. The SCAN attribute setting is mandatory within the EDD element describing the Gateway CommunicationDevice. The attribute value refers to the METHOD executing the topology scan function. The SCAN\_LIST attribute setting is mandatory within the Gateway CommunicationDevice COMPONENT. The attribute value refers to the element that contains the topology scan result created by the method referenced by the attribute value SCAN. The SCAN\_LIST shall refer to a LIST containing COLLECTION elements describing the detected devices (Scan-List-Item). The protocol-specific content of a Scan-List-Item is described in IEC 62769-4:2015/2020, Annex F.

The invocation of the functions Scan and ScanNext results in outbound communication service requests.

#### 8.4.12 Communication Error Handling

The communication service processing shall use the EDDL Built-in function provided for aborting in accordance with the EDDL Profiles:

- during the creation of communication messages,
- during the processing of the response from the communication request.

The communication service processing does not trigger communication errors based on communication timeouts.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## Annex A (informative)

### Layered protocols

#### A.1 General

Ethernet-based protocols commonly consist of a stack of different protocols based on the ISO/OSI model. Looking at the growing number of Ethernet-based fieldbus protocols, it is crucial to have a common layered modeling concept for Connection Points based on the ISO/OSI model also.

Connection Points are the elements that contain the address information accessed by the Communication Devices to collect the information needed for communication. The semantics of Connection Point attributes need to be standardized.

The PROFINET device may concurrently support PROFINET, SNMP and HTTP. The information stored in the Connection Point of a device is different for each protocol due to different application layers. The information for layers 1 to 4 shall consistently hold the same information. Therefore, Connection Points shall inherit Connection Point information from lower network layers.

The problem is about how to ensure that address information from lower layers is named in a consistent way throughout all protocols that are built upon the lower layers.

#### A.2 Convention for protocol-specific annex creation

##### A.2.1 ~~Connection Point~~

Since Connection Point description is based on EDDL, an actual inheritance approach known from object-oriented programming languages doesn't seem applicable. The approach described in Clause A.2 is based more on conventions. The naming convention shall ensure that the address value attribute names defined for a "lower-level" protocol are reused in the Connection Point definitions for higher-level protocols. The same holds true for the COLLECTION referred VARIABLES. VARIABLE declarations for higher-level protocols shall be copies from the VARIABLE declarations for lower-level protocols. The convention described here is applicable for the creation of protocol-specific annexes. The following shows some EDDL examples of how Connection Point declarations follow this naming convention.

```

COLLECTION ConnectionPoint_MAC
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        VALID
    }
}

COLLECTION ConnectionPoint_IPv4
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IPv4,
        VALID
    }
}

```

```
COLLECTION ConnectionPoint_TCPUDP
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IP,
        PORT,
        VALID
    }
}

COLLECTION ConnectionPoint_PROFINET
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IP,
        PORT,
        DNSNAME,
        VALID
    }
}

COLLECTION ConnectionPoint_HTTP
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IP,
        PORT,
        URL,
        VALID
    }
}
```

### A.3 FDI Communication Package definition

#### A.3.1 Communication services

The actual communication service is always implemented in accordance with the specific protocol. This is reflected by the different semantic of the communication service arguments specified by the protocol-specific annexes. So, the actual implementation of a ServerCommunicationDeviceType or GatewayCommunicationDeviceType can support just one protocol. Thus, if an FDI Communication Server or Gateway is able to support multiple different protocols, it shall describe separate GatewayCommunicationDeviceTypes or ServerCommunicationDeviceTypes. The need to define protocol-specific service sets represents the demand to separate the Connection Point and Network-related COMPONENT definitions described in A.3.2 and A.3.3.

#### A.3.2 Connection Point

The FDI Communication Package shall contain separate Connection Point descriptions for each supported protocol.

#### A.3.3 Network

The relation between the COMPONENT describing the network and the COMPONENT describing the Connection Point enables generic communication path detection and generic topology configuration. Thus, the FDI Communication Package shall contain a separate COMPONENT definition for each supported Network (protocol).

#### **A.4 Representation in the IM**

Connection Points sharing a certain set of address formation may contain redundant address information, for example the IP address is the same for the SNMP and PROFINET I/O.

If a Device and an FDI Communication Server share a set of protocols, then that Device and FDI Communication Server are associated through multiple separate networks.

A Device supporting multiple protocols can be connected to different FDI Communication Devices that support only one protocol.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## Annex B (normative)

### Namespace and mappings

This annex defines the numeric identifiers for all of the numeric *NodeIds* defined in this document. The identifiers are specified in a CSV file with the following syntax:

<SymbolName>, <Identifier>, <NodeClass>

Where the *SymbolName* is either the *BrowseName* of a *Type Node* or the *BrowsePath* for an *Instance Node* that appears in the specification and the *Identifier* is the numeric value for the *NodeId*.

The *BrowsePath* for an *Instance Node* is constructed by appending the *BrowseName* of the instance *Node* to the *BrowseName* for the containing instance or type. An underscore character is used to separate each *BrowseName* in the path.

The *NamespaceUri* <http://fdi-cooperation.com/OpcUa/FDI7/> is applied to *NodeIds* defined here.

~~The CSV released with this version of the standard can be found here:~~

~~[http://www.fdi-cooperation.com/tl\\_files/Specification/1.0/Schemas/Opc.Ua.Fdi7.NodeIds.csv](http://www.fdi-cooperation.com/tl_files/Specification/1.0/Schemas/Opc.Ua.Fdi7.NodeIds.csv)~~

~~An electronic version of the complete Information Model defined in this standard is also provided. It follows the XML Information Model Schema syntax defined in IEC 62541-6.~~

~~The Information Model Schema released with this version of the standard can be found here:~~

~~[http://www.fdi-cooperation.com/tl\\_files/Specification/1.0/Schemas/Opc.Ua.Fdi7.NodeSet2.xml](http://www.fdi-cooperation.com/tl_files/Specification/1.0/Schemas/Opc.Ua.Fdi7.NodeSet2.xml)~~

The CSV released with this version of the document is provided by FieldComm Group™, see <https://www.fieldcommgroup.org>. An electronic version of the complete Information Model defined in this document is also provided. It follows the XML Information Model Schema syntax defined in IEC 62541-6.

The Information Model Schema released with this version of the document is provided by FieldComm Group™.

## Bibliography

~~FDI-2021, FDI Project Technical Specification – Part 1: Overview  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

~~FDI-2022, FDI Project Technical Specification – Part 2: FDI Client  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

~~FDI-2023, FDI Project Technical Specification – Part 3: FDI Server  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

~~FDI-2024, FDI Project Technical Specification – Part 4: FDI Packages  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

~~FDI-2025, FDI Project Technical Specification – Part 5: FDI Information Model  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

~~FDI-2026, FDI Project Technical Specification – Part 6: FDI Technology Mapping  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

~~FDI-2027, FDI Project Technical Specification – Part 7: FDI Communication Devices  
<available at [www.fdi-cooperation.com](http://www.fdi-cooperation.com)>~~

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

# INTERNATIONAL STANDARD

# NORME INTERNATIONALE



**Field device integration (FDI) –  
Part 7: Communication devices**

**Intégration des appareils de terrain (FDI) –  
Partie 7: Appareils de communication**

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
2 Normative references .....	10
3 Terms, definitions, abbreviated terms and conventions.....	10
3.1 Terms and definitions.....	10
3.2 Abbreviated terms.....	10
3.3 Conventions.....	11
4 General .....	11
5 FDI Communication Package.....	13
5.1 General.....	13
5.2 EDD.....	13
5.2.1 General rules.....	13
5.2.2 Device component.....	14
5.2.3 CommunicationDevice component.....	15
5.2.4 Communication service provider component.....	16
5.2.5 Connection Point component.....	17
5.2.6 Connection Point collection.....	18
5.2.7 Network component.....	18
5.2.8 ValidateNetwork .....	20
5.2.9 ValidateModules .....	20
5.2.10 UIP specifics .....	21
5.2.11 Deployment.....	21
6 Communication relations .....	21
7 FDI Communication Server definition.....	23
7.1 General.....	23
7.2 General characteristics .....	23
7.3 Information Model.....	23
7.3.1 General.....	23
7.3.2 CommunicationServerType.....	26
7.3.3 ServerCommunicationDeviceType .....	30
7.3.4 ServerCommunicationServiceType .....	33
7.4 OPC UA Server Profile for FDI Communication Server.....	37
7.5 Mapping the FDI Server IM to the FDI Communication Server IM.....	38
7.5.1 General .....	38
7.5.2 Information Model differences.....	38
7.6 Installer.....	39
7.7 FDI Communication Package.....	39
7.7.1 General .....	39
7.7.2 EDD for Lightweight Communication Server.....	40
7.7.3 EDD for Multi-Channel Communication Server.....	40
7.7.4 COMMANDs in EDDs for FDI Communication Servers.....	41
7.7.5 Documentation .....	41
7.8 Handling and behavior .....	41
7.8.1 General .....	41

7.8.2	Deployment .....	42
7.8.3	Server configuration .....	42
7.8.4	Start up .....	43
7.8.5	Shutdown .....	43
7.8.6	Watchdog .....	43
7.8.7	Establish the OPC UA connection .....	43
7.8.8	Instantiate the Communication Server .....	44
7.8.9	Configure the communication hardware .....	44
7.8.10	Configuring the Network .....	44
7.8.11	Parameterize .....	44
7.8.12	Initialize .....	44
7.8.13	Create the communication service object .....	45
7.8.14	Communication relation .....	45
7.8.15	Connect .....	45
7.8.16	Disconnect .....	46
7.8.17	Abort Indication .....	46
7.8.18	Scan .....	46
7.8.19	SetAddress .....	46
8	FDI Communication Gateway definition .....	46
8.1	General .....	46
8.2	Information Model .....	46
8.2.1	General .....	46
8.2.2	CommunicationGatewayType .....	47
8.2.3	GatewayCommunicationDeviceType .....	48
8.2.4	GatewayCommunicationServiceType .....	51
8.3	FDI Communication Package .....	55
8.3.1	General .....	55
8.3.2	EDD .....	56
8.4	Handling and behavior .....	57
8.4.1	General .....	57
8.4.2	Deployment .....	58
8.4.3	Start up .....	58
8.4.4	Configure the communication hardware .....	58
8.4.5	Configure the Network .....	58
8.4.6	Parameterize .....	58
8.4.7	Communication relation .....	59
8.4.8	Connect .....	59
8.4.9	Disconnect .....	59
8.4.10	Abort indication .....	59
8.4.11	Scan .....	59
8.4.12	Communication Error Handling .....	60
Annex A (informative)	Layered protocols .....	61
A.1	General .....	61
A.2	Convention for protocol-specific annex creation .....	61
A.3	FDI Communication Package definition .....	62
A.3.1	Communication services .....	62
A.3.2	Connection Point .....	62
A.3.3	Network .....	62
A.4	Representation in the IM .....	63

Annex B (normative) Namespace and mappings .....	64
Figure 1 – FDI architecture diagram .....	9
Figure 2 – FDI communication infrastructure architecture .....	12
Figure 3 – Communication relation.....	22
Figure 4 – Communication relation state chart .....	23
Figure 5 – FDI Communication Server AddressSpace .....	25
Figure 6 – CommunicationServerType .....	26
Figure 7 – ServerCommunicationDeviceType.....	30
Figure 8 – ServerCommunicationServiceType.....	34
Figure 9 – Information Model differences (example).....	38
Figure 10 – FDI Communication Server state machine.....	42
Figure 11 – Communication relation state chart .....	45
Figure 12 – Gateway information model .....	47
Figure 13 – CommunicationGatewayType .....	48
Figure 14 – GatewayCommunicationDeviceType .....	49
Figure 15 – GatewayCommunicationServiceType .....	52
Figure 16 – Nested Communication .....	58
Table 1 – ValidateNetwork Action arguments .....	20
Table 2 – ValidateModules Action arguments.....	21
Table 3 – CommunicationServerType definition .....	26
Table 4 – MethodSet of CommunicationServerType.....	26
Table 5 – Reset Method arguments .....	27
Table 6 – Reset Method AddressSpace definition .....	27
Table 7 – Initialize Method arguments.....	28
Table 8 – Initialize Method AddressSpace definition .....	28
Table 9 – AddComponent Method arguments.....	29
Table 10 – AddComponent Method AddressSpace definition.....	29
Table 11 – RemoveComponent Method arguments .....	30
Table 12 – RemoveComponent Method AddressSpace definition .....	30
Table 13 – ServerCommunicationDeviceType definition .....	31
Table 14 – MethodSet of ServerCommunicationDeviceType .....	31
Table 15 – Scan Method arguments.....	32
Table 16 – Scan Method AddressSpace definition.....	32
Table 17 – ResetScan Method arguments.....	32
Table 18 – ResetScan Method AddressSpace definition.....	33
Table 19 – SetAddress Method arguments.....	33
Table 20 – ServerCommunicationServiceType definition.....	34
Table 21 – MethodSet of ServerCommunicationServiceType .....	34
Table 22 – Connect Method arguments.....	35
Table 23 – Disconnect Method arguments .....	36
Table 24 – Transfer Method arguments.....	36

Table 25 – GetPublishedData Method arguments.....	37
Table 26 – FDICommunicationServer_Facet definition .....	37
Table 27 – CommunicationGatewayType definition .....	48
Table 28 – GatewayCommunicationDeviceType definition.....	49
Table 29 – MethodSet of GatewayCommunicationDeviceType .....	49
Table 30 – Scan Method arguments.....	50
Table 31 – Scan Method AddressSpace definition.....	50
Table 32 – ScanNext Method arguments.....	51
Table 33 – ScanNext Method AddressSpace definition .....	51
Table 34 – GatewayCommunicationServiceType definition.....	52
Table 35 – MethodSet of GatewayCommunicationServiceType .....	53
Table 36 – Connect Method arguments.....	54
Table 37 – Transfer Method arguments.....	55

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIELD DEVICE INTEGRATION (FDI) –****Part 7: Communication devices****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62769-7 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) support for generic protocol extension for faster adoption of other technologies;
- b) support of new protocols;
- c) generic protocol extension to allow adoption of other communication protocols;
- d) based on generic protocol extension: Modbus RTU.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
65E/764/FDIS	65E/774/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the 62769 series, published under the general title *Field Device Integration (FDI)*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## INTRODUCTION

The IEC 62769 series has the general title *Field Device Integration (FDI)* and the following parts:

- Part 1: Overview
- Part 2: FDI Client
- Part 3: FDI Server
- Part 4: FDI Packages
- Part 5: FDI Information Model
- Part 6: FDI Technology Mapping
- Part 7: FDI Communication Devices
- Part 100: Profiles – Generic Protocol Extensions
- Part 101-1: Profiles – Foundation Fieldbus H1
- Part 101-2: Profiles – Foundation Fieldbus HSE
- Part 103-1: Profiles – PROFIBUS
- Part 103-4: Profiles – PROFINET
- Part 109-1: Profiles – HART and WirelessHART
- Part 115-2: Profiles – Protocol-specific Definitions for Modbus RTU
- Part 150-1: Profiles – ISA 100.11a

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

# FIELD DEVICE INTEGRATION (FDI) – Part 7: Communication devices

## 1 Scope

This part of IEC 62769 specifies the elements implementing communication capabilities called Communication Devices (IEC 62769-5).

The overall FDI architecture is illustrated in Figure 1. The architectural components that are within the scope of this document have been highlighted in this illustration. The document scope with respect to FDI Packages is limited to Communication Devices. The Communication Server shown in Figure 1 is an example of a specific Communication Device.

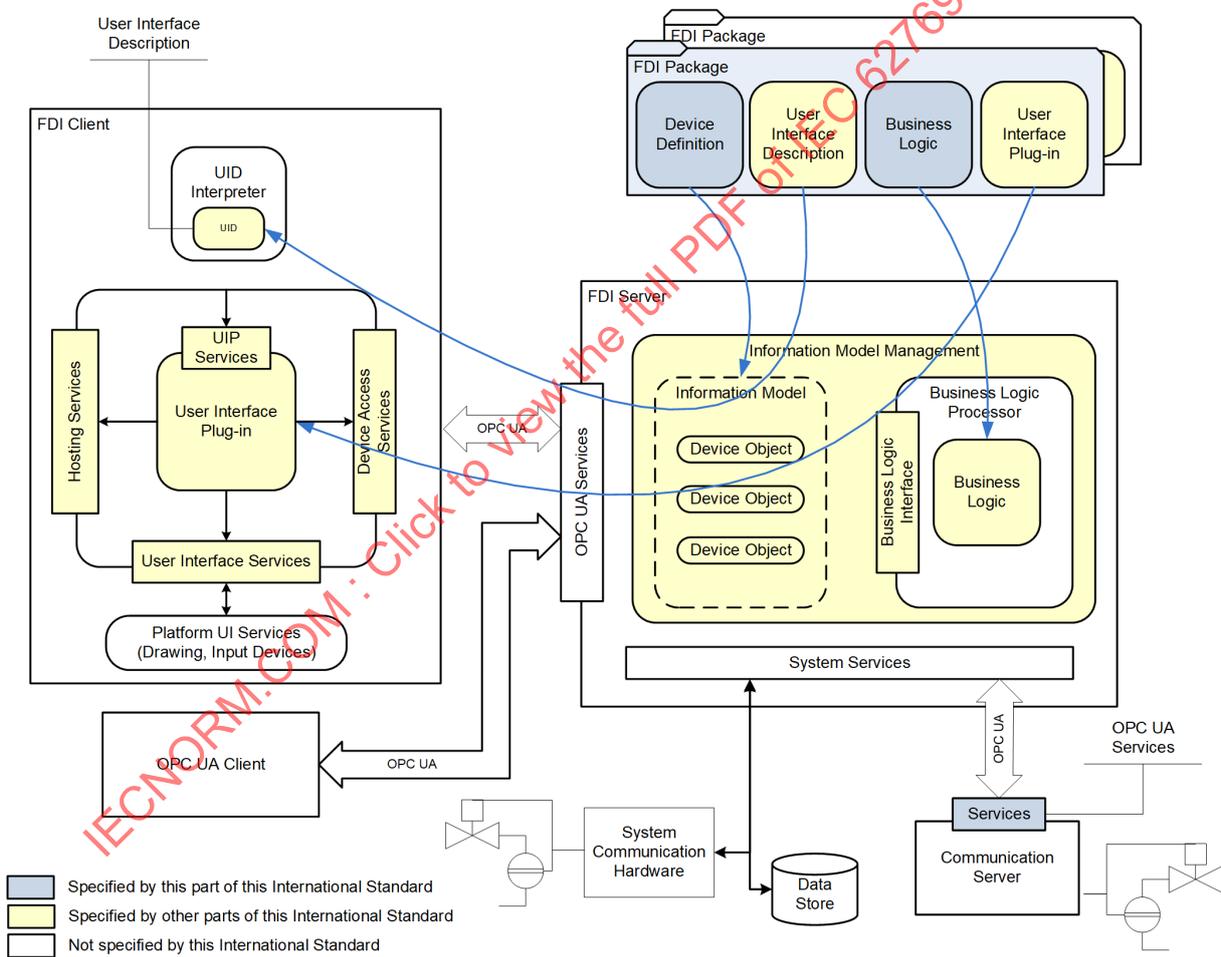


Figure 1 – FDI architecture diagram

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61804-3, *Function blocks (FB) for process control and Electronic Device Description Language (EDDL) – Part 3: EDDL syntax and semantics*

IEC 61804-4, *Function blocks (FB) for process control and Electronic Device Description Language (EDDL) – Part 4: EDD interpretation*

IEC 62541 (all parts), *OPC Unified Architecture*

IEC 62769-1, *Field Device Integration (FDI) – Part 1: Overview*

IEC 62769-2, *Field Device Integration (FDI) – Part 2: FDI Client*

IEC 62769-3, *Field Device Integration (FDI) – Part 3: FDI Server*

IEC 62769-4:2020, *Field Device Integration (FDI) – Part 4: FDI Packages*

IEC 62769-5, *Field Device Integration (FDI) – Part 5: FDI Information Model*

## 3 Terms, definitions, abbreviated terms and conventions

### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62769-1 as well as the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

#### 3.1.1

##### gateway

communication device that enables to bridge between different physical networks or different protocols

### 3.2 Abbreviated terms

For the purposes of this document, the abbreviated terms given in IEC 62769-1 and the following apply.

HTTP	Hypertext Transfer Protocol
IP	Internet Protocol
PHY	Physical communication hardware
SNMP	Simple Network Management Protocol
TCP	Transmission Control Protocol
URI	Uniform Resource Identifier

### 3.3 Conventions

For the purposes of this document, the conventions given in IEC 62769-1 apply.

This document uses the graphical notation defined in IEC 62769-5.


## 4 General

The abstract term "FDI Communication Device" represents an entity implementing communication functions over a network using a specific protocol. The group of FDI Communication Devices splits into two main groups.

- a) The FDI Communication Server is a dedicated OPC UA Server providing access to one or more field device networks. The FDI Communication Server is specified in Clause 7.
- b) The FDI Communication Gateway enables to bridge between different physical networks or different protocols. The bridging business logic is implemented in the EDD component that is provided with an FDI Communication Package. The FDI Communication Gateway is specified in Clause 8.

NOTE The main differences between a Gateway and a Communication Server are: in terms of FDI, the FDI Communication Server is a dedicated OPC UA Server providing access to one or more field device networks. A Gateway is a communication device that enables to bridge between different physical networks or different protocols. The logical representation of a Gateway device within the FDI Server hosted Information Model enables the FDI Server to process communication in heterogeneous network topologies.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021-PLV

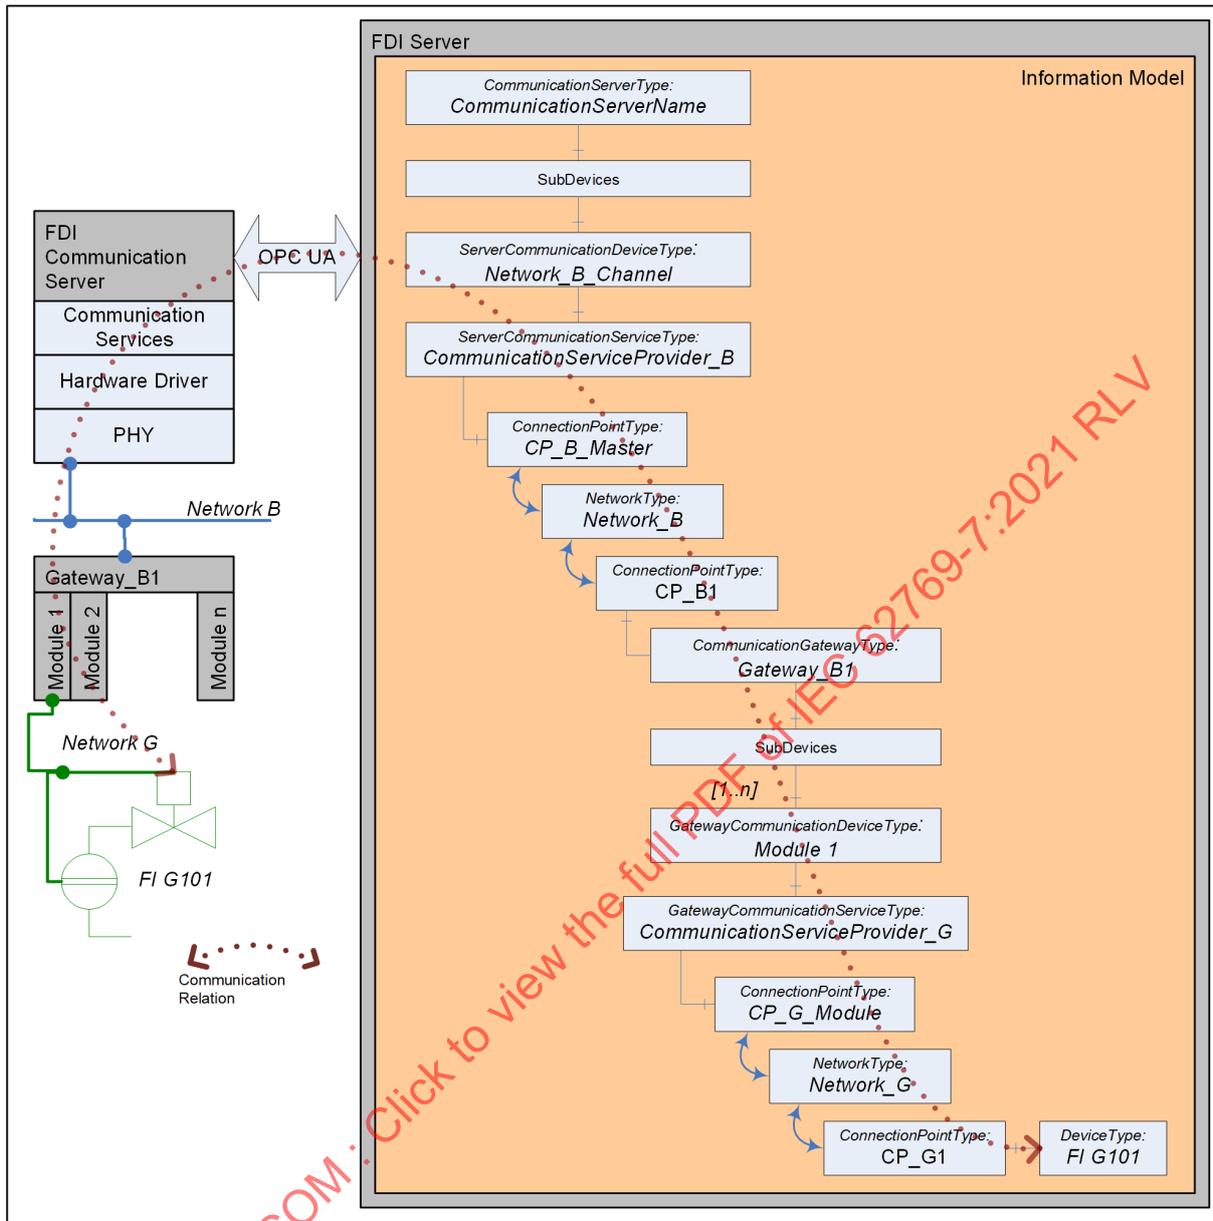

IEC

**Figure 2 – FDI communication infrastructure architecture**

The FDI Server hosted Information Model contains a representation of the network topology. (see also IEC 62769-5). The Information Model shown in Figure 2 is an example excerpt to illustrate how the used elements of the Information Model reflect the actual network topology.

- 1) The instance of CommunicationServerType (named CommunicationServerName) represents the FDI Communication Server. The FDI Communication Server implements physical communication network access (Communication hardware). Clause 7 describes related Information Model specifics, required FDI Communication Package content and handling of elements therein. For sub-devices, see IEC 62769-5.
- 2) The instance of ServerCommunicationDeviceType and ServerCommunication-ServiceType (named Network\_B\_Channel) maps to the FDI Communication Server implemented communication services. The ServerCommunicationDeviceType is specified in 7.3.3. The ServerCommunicationServiceType is specified in 7.3.4.

- 3) The instance of `CommunicationGatewayType` (named `Gateway_B1`) represents the physical Gateway. Clause 8 describes the related Information Model specifics, the required FDI Package content and the handling of elements therein.
- 4) The instance of `GatewayCommunicationDeviceType` (named `Module 1`) maps to a physical or logical module enabling communication to the network to which this module is connected. The `GatewayCommunicationDeviceType` is specified in 8.3.2.3. The related Gateway specifics are described in Clause 8.
- 5) The instance of `GatewayCommunicationServiceType` (named `CommunicationServiceProvider_G`) represents the Gateways' ability to process communication services. The Gateway-specific implementation of `GatewayCommunicationServiceType` is based on Business Logic that enables to run communication services in heterogeneous communication networks.
- 6) A communication relation (more details are described in Clause 6) between a physical device and the device representation managed by the FDI Server is always associated to communication service objects that are instances of a `GatewayCommunicationServiceType` or `ServerCommunicationServiceType`. The ability of instantiating multiple communication service objects supports protocols enables to operate multiple logical connections between a bus master and a device.
- 7) The Information Model represents the connections between the physical devices shown on the left side of Figure 2 based on instances of `ConnectionPointType` `NetworkType` and the depicted relations. `ConnectionPointType` and `NetworkType` are specified in IEC 62769-5.

## 5 FDI Communication Package

### 5.1 General

The FDI Server imports the FDI Communication Package like any other FDI Device Package. Clause 5 specifies the FDI Communication Package details.

### 5.2 EDD

#### 5.2.1 General rules

The FDI Communication Package contained EDD is not restricted, but bound to a protocol-specific annex (IEC 62769-4:2020, Annex F).

The EDD elements as specified in IEC 62769-4:2020, Annex F, and provided with an FDI Communication Package shall describe:

- a) Parameter and parameter structures. Mandatory protocol-specific parameter definitions are found in IEC 62769-4:2020, Annex F. The parameters shall contain any parameter that requires adjustment for proper communication service operation.
- b) Physical Layer identification. Protocol-specific definitions are found in IEC 62769-4:2020, Annex F.

Communication devices' modularity: The modularity information shall be based on using the EDDL constructs `COMPONENT` (see IEC 61804-3).

FDI envisions communication device modularity to cope with communication hardware providing multiple physical or logical communication channels to access multiple logical or physical communication networks. Each module element of the whole communication device shall be described by a separate EDD element.

- c) The `COMPONENT` definition shall be used to support the system implemented topology configuration. Protocol-specific definitions are found in IEC 62769-4:2020, Annex F. The related `COMPONENT` definitions are described in 5.2.2, 5.2.3, 5.2.4, and 5.2.7.
- d) The Business Logic shall contain a method enabled to validate the network (see 5.2.8). The validation function considers the elements only directly connected to the network. The validation function shall be referred by the EDDL specified `CHECK_CONFIGURATION` attribute.

- e) The Business Logic can contain a method enabled to validate the module configuration (see 5.2.9) or the network configuration (see 5.2.8). The validation function considers the elements only directly connected to the related parent element in the topology. The validation function shall be referred by the EDDL specified CHECK\_CONFIGURATION attribute.
- f) Connection Point data: The Connection Point (see 5.2.4 and 5.2.6) shall be described through EDDL constructs COMPONENT, COLLECTION and VARIABLE. The COMPONENT definition associates the Connection Point element to the Communication Device. The VARIABLE definitions represent the properties of a specific Connection Point. The COLLECTION represents the Connection Point structure as such. Protocol-specific definitions are found in IEC 62769-4:2020 Annex F.
- g) MENU:
 

The Menu structure shall follow the Menu conventions for PC-based applications in accordance with IEC 61804-4, which enables access to:

  - 1) FDI Communication Device Type (Bus) parameters: These parameters shall be made accessible by means of "offline\_root\_menu".
  - 2) Topology Configuration Dialogs shall be made available by means of the menu entry point "topology\_configuration".

### 5.2.2 Device component

Each FDI Communication Package shall contain an EDD element describing the device.

```

COMPONENT <DeviceComponentId>
{
    LABEL "<Label>";
    CAN_DELETE TRUE;
    CHECK_CONFIGURATION <ValidateModules>;
    CLASSIFICATION NETWORK_COMPONENT;
    COMPONENT_RELATIONS
    {
        <CommunicationDeviceRelationId>
    }
}

COMPONENT_RELATION <CommunicationDeviceRelationId>
{
    LABEL "Relation type description";
    RELATION_TYPE CHILD_COMPONENT;
    ADDRESSING {<AddressVar>}
    COMPONENTS
    {
        <CommunicationDeviceComponentId>
        {
            AUTO_CREATE <autoCreate>;
            REQUIRED_RANGES
            {
                <AddressVar>{ MIN_VALUE <AddrMin>; MAX_VALUE <AddrMax>;}
            }
        }
    }
    MINIMUM_NUMBER <minNumber>;
    MAXIMUM_NUMBER <maxNumber>;
}
    
```

<DeviceComponentId>: The COMPONENT identifier identifies the component description for the device type.

<Label>: The string value shall contain a string that allows a human user to determine the function of the FDI Communication Server object.

<ValidateModules>: The Value refers to the METHOD implementing the module topology configuration validation function. Implementation details are specified in 5.2.9.

The attribute COMPONENT\_RELATIONS allows to describe how modules can be connected. The definition of the COMPONENT\_RELATIONS is optional. If used, it shall describe the relations to the CommunicationDevice definitions. The construct enables generic FDI Server-driven (device) topology configuration to be performed. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

<CommunicationDeviceRelationId>: The attribute value identifies the COMPONENT\_RELATION definition describing the relation between the device component and the CommunicationDevice component.

<CommunicationDeviceComponentId>: The attribute value has to match with a COMPONENT identifier used in a COMPONENT declaration that describes a CommunicationDevice (see 5.2.3).

<autoCreate>: The attribute value describes the number of CommunicationDevice components that can be automatically instantiated with the Device component.

<minNumber>/<maxNumber>/<autoCreate>: The attribute values define the instantiation constraints. The definition of these attributes is optional. The attribute values can contain conditional expressions.

The RELATION\_TYPE shall be set to CHILD\_COMPONENT.

<AddressVar>: The attribute value is a reference to a VARIABLE declaration. This VARIABLE holds the address value for a CommunicationDevice instance. The definition of this attribute is optional.

<AddrMin>/<AddrMax>: Values define the address value range for a CommunicationDevice instance. The value can for example correspond to a physical slot number. Usage of attributes ADDRESSING and REQUIRED\_RANGES enables generic configuration routines.

### 5.2.3 CommunicationDevice component

Each FDI Communication Package shall contain at least one EDD element describing at least one CommunicationDevice component. A modular communication hardware structure shall be described by multiple CommunicationDevice COMPONENT descriptions:

```
COMPONENT <CommunicationDeviceComponentId>
{
  LABEL "<Label>";
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    <CommunicationServiceProviderRelationId>
  }
}
```

```
COMPONENT_RELATION <CommunicationServiceProviderRelationId>
{
  LABEL "Relation between CommunicationDevice and communication service provider";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS
  {
    <CommunicationServiceProviderId>
    {
      AUTO_CREATE <autoCreate>;
    }
  }
}
```

```

    }
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER <maxNumber>;
}

```

<CommunicationDeviceComponentId>: The COMPONENT identifier identifies the CommunicationDevice component.

<Label>: The string value shall contain a human-readable string that allows a user to easily determine the function of the CommunicationDevice component.

<CanDelete>: Allowed values are TRUE or FALSE. It depends on whether a CommunicationDevice needs explicit configuration or whether the related communication service provider object shall be automatically instantiated with the CommunicationDevice. If the attribute CAN\_DELETE is set to FALSE, the CommunicationDevice configuration is static.

The definition of the COMPONENT\_RELATIONS is mandatory. It describes the relation to the communication service provider definition. The construct enables the FDI Server to instantiate communication service provider components in accordance with communication processing demands. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

<CommunicationServiceProviderRelationId>: The attribute value identifies the COMPONENT\_RELATION definition as such.

<CommunicationServiceProviderId>: The attribute value has to match with a COMPONENT identifier used in a COMPONENT declaration that describes a communication service provider (5.2.4).

<autoCreate>: The attribute value describes the number of communication service providers that can be automatically instantiated with the CommunicationDevice component.

The RELATION\_TYPE shall be set to CHILD\_COMPONENT.

The PROTOCOL attribute shall not be set.

#### 5.2.4 Communication service provider component

Each FDI Communication Package describing a Communication Device shall contain at least one EDD element describing the communication service provider. The EDD component shall not define any configuration parameter.

```

COMPONENT <CommunicationServiceProviderId>
{
  LABEL "<Label>";
  BYTE_ORDER <byteOrder>;
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMMUNICATION_SERVICE_PROVIDER;
  COMPONENT_RELATIONS <CommunicationServiceProvidersConnectionPointRelationId>
  {
    <ConnectionPointRelationId>
  }
}

```

```

COMPONENT_RELATION <CommunicationServiceProvidersConnectionPointRelationId>
{
  LABEL "Relation between communication service provider and connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS

```

```

{
  < ConnectionPointId>
  {
    AUTO_CREATE 1;
  }
}
MINIMUM_NUMBER 1;
MAXIMUM_NUMBER 1;
}

```

<CommunicationServiceProviderId>: The COMPONENT identifier identifies the communication service provider.

<Label>: The string value shall contain a human-readable string that allows a user to easily determine the function of the communication service provider object.

<CanDelete>: Allowed values are TRUE or FALSE. It depends on whether a communication service provider can be flexibly instantiated according to the communication processing demands. If the attribute CAN\_DELETE is set to FALSE, the number of communication service provider component instantiations is static. The instantiation constraints declared through the attributes AUTO\_CREATE, MINIMUM\_NUMBER and MAXIMUM\_NUMBER correspond to the capabilities of currently supported protocols.

<byteOrder>: The value enables generic integration of n-byte data types (e.g. 4-byte integer) into the communication message payload. The attribute value describes the byte order and shall be either BIG\_ENDIAN or LITTLE\_ENDIAN.

The definition of the COMPONENT\_RELATIONS is mandatory. It describes the relation to the Connection Point definition. The construct enables to perform generic, FDI Server-driven topology configuration. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

The Connection Point shall automatically be instantiated with the communication service provider and there shall be exactly one (1) Connection Point instance connected to the communication service provider. The instantiation constraints declared through the attributes AUTO\_CREATE, MINIMUM\_NUMBER and MAXIMUM\_NUMBER correspond to the capabilities of currently supported protocols.

<CommunicationServiceProvidersConnectionPointRelationId>: the attribute value identifies the COMPONENT\_RELATION declaration as such.

<ConnectionPointId>: the attribute value has to match with a COMPONENT identifier used for a COMPONENT declaration that describes a Connection Point (see 5.2.5).

The RELATION\_TYPE shall be set to CHILD\_COMPONENT.

The PROTOCOL attribute shall not be set.

### 5.2.5 Connection Point component

Each FDI Communication Package describing a Communication Device shall contain one EDD element describing one Connection Point for each of the protocols that are supported by the Communication Device:

```

COMPONENT <ConnectionPointId>
{
  LABEL "<Label>";
  CAN_DELETE FALSE;
  CLASSIFICATION NETWORK_CONNECTION_POINT;
}

```

```

    PROTOCOL <ProtocolId>;
    CONNECTION_POINT <ConnectionPointCollectionId>;
}

```

<ConnectionPointId>: the COMPONENT identifier identifies the Connection Point component declaration.

<Label>: the string value shall contain a string that allows a human user to determine the function of the Connection Point component.

<ProtocolID>: the value of this attribute indicates the communication capability, which allows the FDI Server to find other device types that can be connected to the network using the same type of protocol. For standardized protocols, the value is defined by the related fieldbus organization.

<ConnectionPointCollectionId>: the attribute value is a reference to a COLLECTION declaration that describes the data structure of the Connection Point as described in 5.2.6.

### 5.2.6 Connection Point collection

Each EDD describing the Connection Point of a communication device shall describe the COLLECTION element that describes the attributes that shall appear in the Information Model representation of the Connection Point. The protocol specific data exposed by the Connection Point identifies the device type and its network address.

```

COLLECTION <ConnectionPointCollectionId>
{
    LABEL "<Label>";
    MEMBERS
    {
        <AddressAttributeName>, <AddressAttributeVariableId>;
        VALID <VALID_VariableId>;
    }
}

```

<ConnectionPointCollectionId>: the identifier of the COLLECTION is referred by the CONNECTION\_POINT attribute value defined in 7.7.3.5.

<Label>: the label identifies the Connection Point in a human readable way.

<AddressAttributeName>/<AddressAttributeVariableId>: the MEMBER section refers to the VARIABLE definitions describing the address attributes implemented by a Connection Point. The content of the MEMBER section is protocol-specific.

<VALID>/<VALID\_VariableId> is a Collection member referring a Boolean VARIABLE holding the validation status that shall be set by the ValidateNetwork Action (see 5.2.8).

### 5.2.7 Network component

Each FDI Communication Package describing a Communication Device shall contain one EDD element describing one Network for each of the protocols that are supported by the Communication Device. The definition supports the network topology engineering:

```

COMPONENT <NetworkComponentId>
{
    LABEL "<Label>";
    CAN_DELETE TRUE;
    CHECK_CONFIGURATION <Validate>;
    CLASSIFICATION NETWORK;
    PROTOCOL <ProtocolId>;
    COMPONENT_RELATIONS
    {
        <NetworksConnectionPointRelationId>
    }
}

```

```

    }
}

COMPONENT_RELATION <NetworksConnectionPointRelationId>
{
    LABEL "Relation between network and connection point";
    RELATION_TYPE CHILD_COMPONENT;
    ADDRESSING {<AddressVar>}
    COMPONENTS
    {
        <ConnectionPointId>
        {
            REQUIRED_RANGES
            {
                <BusAddressVar>{ MIN_VALUE <BusAddrMin>; MAX_VALUE <BusAddrMax>;}
            }
        }
    }
    MINIMUM_NUMBER 1;
    MAXIMUM_NUMBER <maxNumber>;
}

```

<NetworkComponentId>: the COMPONENT identifier identifies the Network component declaration.

<Label>: the string value shall contain a human-readable string that allows a user to easily determine the function of the Network component.

<Validate>: the value refers to the METHOD implementing the network topology configuration validation function (see 5.2.8).

<ProtocolID>: the value of this attribute allows the FDI Server to find other device types that can be connected to the network using the same type of protocol. For standardized protocols, the value is defined by the related fieldbus organization.

The definition of the COMPONENT\_RELATIONS is mandatory. It describes the relation to the Connection Point definition and by that the capabilities of a network. The construct enables generic FDI Server-driven network topology configuration to be performed. Syntax details are described in IEC 61804-3. The subsequent text describes the semantic use of the COMPONENT\_RELATION construct.

<NetworksConnectionPointRelationId>: the attribute value identifies the COMPONENT\_RELATION definition.

<ConnectionPointId>: The attribute value has to match with a COMPONENT identifier used for a COMPONENT declaration that describes a Connection Point (see 5.2.4).

<maxNumber>: The attribute value limits the number of Connection Points that can be connected to the network. The attribute values can contain conditional expressions.

The RELATION\_TYPE shall be set to CHILD\_COMPONENT.

<BusAddressVar>: The attribute value is a reference to a VARIABLE declaration. This VARIABLE holds the network address value for any device that is connected to the network.

<BusAddrMin>/<BusAddrMax>: Values define the network address value range.

### 5.2.8 ValidateNetwork

The method ValidateNetwork represents the Communication Device implemented Business Logic that validates a current network topology. The ValidateNetwork method handles any necessary dependencies related to bus parameters. The implementation of related EDDL logic is based on the EDDL Built-in function ObjectReference, which enables the analysis of a set of child instances (Connection Point instances). The validation logic shall set the <VALID> attribute of the Connection Point instance that has passed the validation.

The implementation of ValidateModules is optional if the module setup is either static or if the configuration rules defined in the COMPONENT construct are sufficient to configure the module setup.

Table 1 shows the ValidateNetwork Action Arguments.

#### Signature

```
ValidateNetwork (
    [out] Integer ServiceError,
    [out] String ErrorMessage);
```

**Table 1 – ValidateNetwork Action arguments**

Argument	Description
ServiceError	0: OK -1: Failed / the Connection Point that did not pass the validation is indicated by the <VALID> attribute () value set to false. Remark: The argument values correspond to the error codes specified in IEC 61804-3 named BI_SUCCESS (value = 0) and BI_ERROR (value = -1). The Action returns the ServiceError result using the "return" statement.
ErrorMessage	If the method returns an empty string (NULL), the Action call succeeded. In the case of an error, the Action can return a description of the problem.

### 5.2.9 ValidateModules

The method ValidateModules validates the current module setup. The implementation of the related EDDL logic is based on the EDDL Built-in function ObjectReference, which enables a set of child instances to be analyzed. The implementation of ValidateModules is optional if the module setup is either static or if the configuration rules defined in the COMPONENT construct are sufficient to configure the module setup.

NOTE The decision whether ValidateModules is needed or not is vendor-specific.

Table 2 shows the ValidateModules Action Arguments.

## Signature

```

ValidateModules (
    [out] Integer serviceError,
    [out] String ErrorMessage);

```

**Table 2 – ValidateModules Action arguments**

Argument	Description
ServiceError	0: OK -1: Failed / the Connection Point that did not pass the validation is indicated by the <VALID> attribute () value set to false. Remark: The Argument values correspond to the error codes specified in IEC 61804-3 named BI_SUCCESS (value = 0) and BI_ERROR (value = -1). The Action returns the ServiceError result using the "return" statement.
ErrorMessage	If the Action returns an empty string (NULL), the method call succeeded. In the case of an error, the Action can return a problem description.

### 5.2.10 UIP specifics


The FDI Communication Package can contain the UIP to support, for example, diagnostics and parameterization.

### 5.2.11 Deployment

The FDI Server imports the FDI Communication Package. The handling of EDD and UIP parts matches with the import procedure performed for the FDI Package (see IEC 62769-2 and IEC 62769-3).

## 6 Communication relations

The purpose of a communication device and its communication services is to exchange information between the physical device and the device representation managed by the FDI Server. The information exchange is managed via communication relations, see Figure 3. An established communication relation represents the capability to exchange information between the FDI Server-managed device representation and the physical device. The use of a Communication Relation allows abstracting from protocol specifics typically used to manage connections.

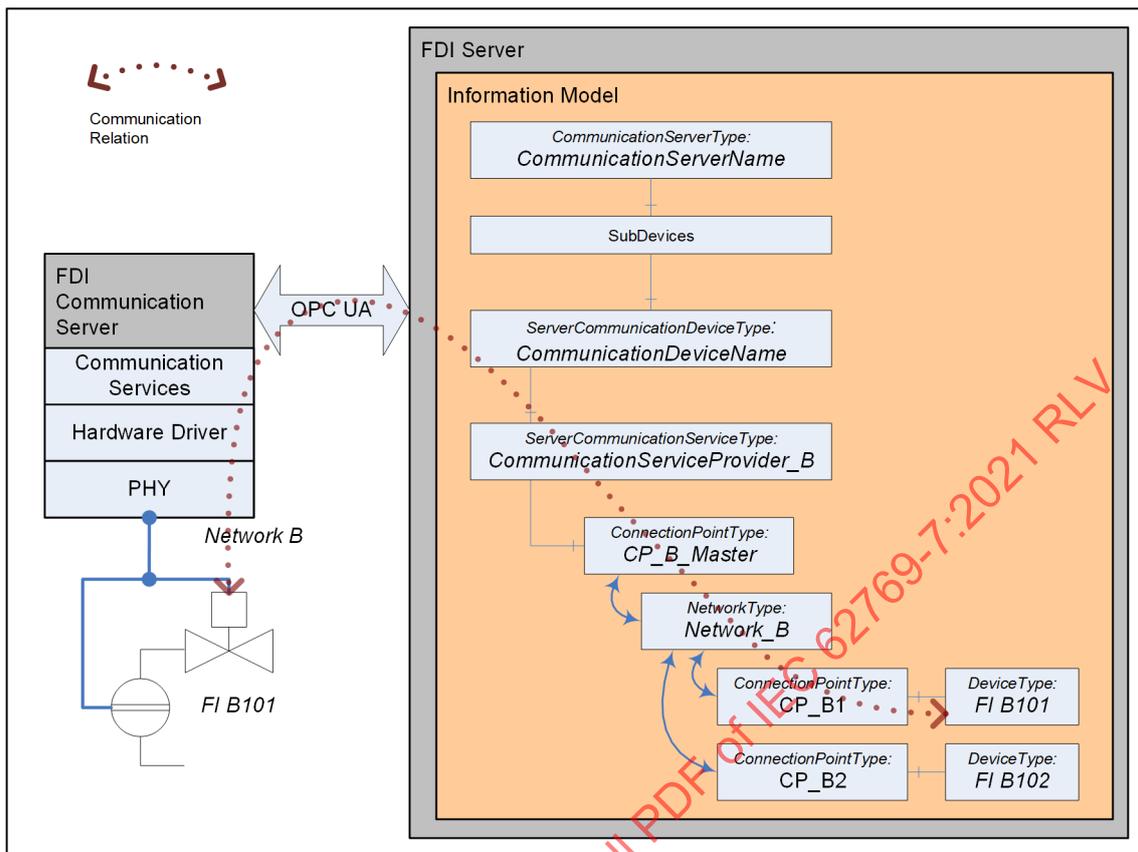


IEC

**Figure 3 – Communication relation**

NOTE 1 The core of information exchange happens between the device connected to the physical network and the corresponding instance within the Information Model but does not cover the complete device application.

The following state chart (Figure 4) describes the general state flow for a single communication relation. The diagram also shows which communication services can be invoked during a "CR Online" state.

The "AbortIndication" shown in Figure 4 can be detected in different protocol-specific ways. The one specified for any communication device is bound to the serviceErrors returned by the specified communication services. Even the Scan method can determine a connection loss, when the device for which a communication relation has been activated does not appear in a scan result.

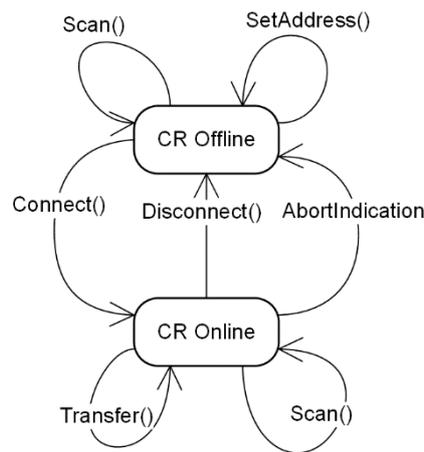

IEC

**Figure 4 – Communication relation state chart**

NOTE 2 The management of communication relations is optional.

## 7 FDI Communication Server definition

### 7.1 General

In terms of FDI, the FDI Communication Server is a dedicated OPC UA Server providing access to one or more field device networks. Each FDI Communication Server is modelled as a Modular Device where each module (also called CommunicationDevice in the sequence) represents the access point to one network.

The Modular Device itself represents the FDI Communication Server as a whole.

### 7.2 General characteristics

The FDI Communication Server implements characteristics for each of its CommunicationDevices specified in 7.3.3. Additionally, an FDI Communication Server implements the following characteristics:

- The FDI Server always synchronizes (see 7.5, 7.8.8, and 7.8.11) the FDI Communication Server hosted Information Model from the FDI Server hosted Information Model content.
- CommunicationDevices can be statically instantiated or they can be created/deleted by the FDI Server.
- Communication between the FDI Server and the FDI Communication Server is based on OPC UA. OPC UA specifies a wire protocol for its services that can be implemented on arbitrary platforms and runtime environments.
- To avoid race conditions, the FDI Communication Server only allows one FDI Server being connected at a time. With this restriction an FDI Communication Server can refrain from any synchronization (locking) mechanism. The FDI specification does not enforce FDI Communication Servers implementing any interlocking mechanism to manage concurrent access to a single device connected to the physical network.

### 7.3 Information Model

#### 7.3.1 General


Subclause 7.3 specifies the FDI Communication Server hosted Information Model.

An FDI Communication Server is an OPC UA Server that encapsulates communication hardware and provides standardized communication ability. The FDI Server connects to the FDI Communication Server as an OPC UA Client and accesses the networks supported by the FDI Communication Server via the FDI Communication Server information model. The task of the FDI Communication Server is to expose this information model. The FDI Communication Server shall not maintain Device Instances or network topology information. All interaction with FDI devices is done through the FDI Server and just transferred by the FDI Communication Server.

For the FDI Server, an FDI Communication Server looks like a device that supports FDI Communication Services and uses OPC UA to communicate. The FDI Communication Server may run locally on the same PC as the FDI Server (loop-back adapter) or remote in the field (e.g. embedded into a controller). Like a device, each FDI Communication Server has an associated FDI Package. This FDI Package is used to create communication devices in the Information Model of the FDI Server that represent access to the networks implemented by the FDI Communication Server.

The Information Model of an FDI Communication Server is based on the Information Model defined in IEC 62769-5. Figure 5 replicates the Modular Device structure and illustrates how it maps into the overall AddressSpace. The modules represent the communication channels of the FDI Communication Server.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 (PDF)

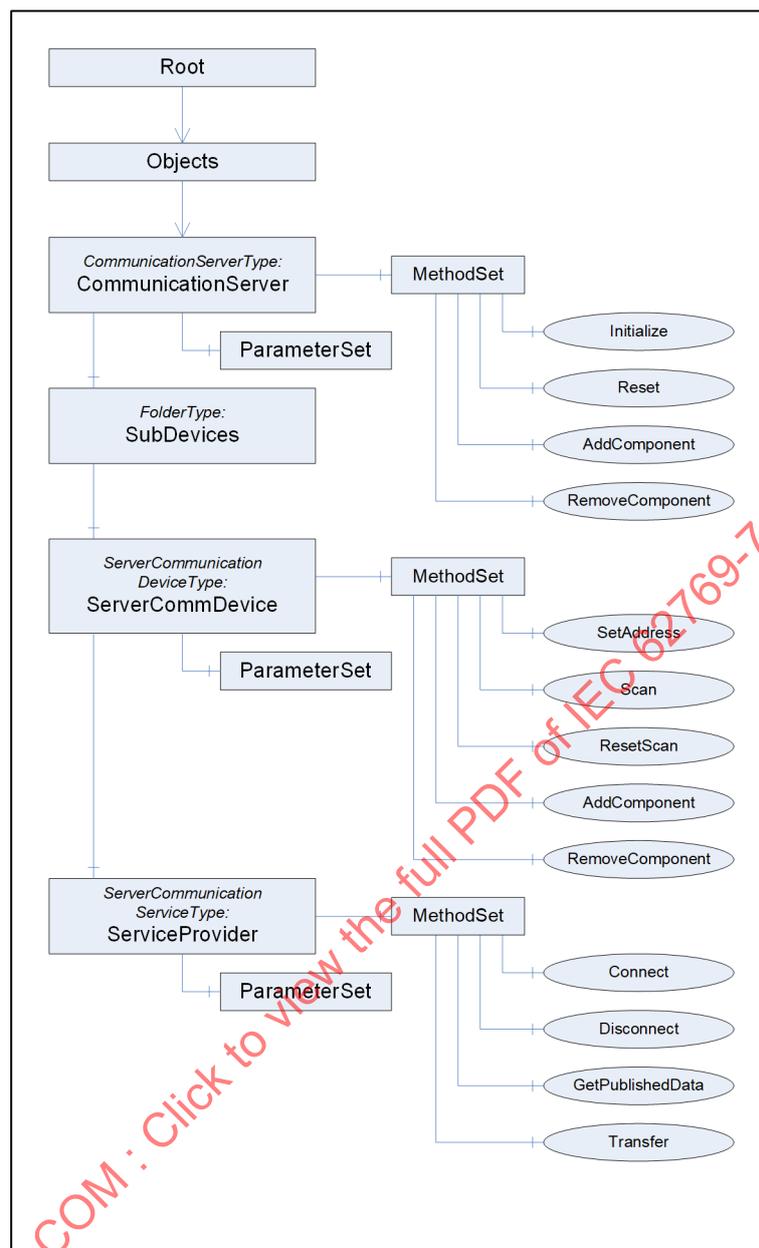

IEC

**Figure 5 – FDI Communication Server AddressSpace**

The CommunicationServerType (the root of the Modular Device) is a subtype of the DeviceType. The MethodSet contains the methods Initialize, Reset, AddComponent and RemoveComponent. The methods AddComponent and RemoveComponent are optionally present if the FDI Communication Server supports the dynamic instantiation of elements in the folder SubDevices.


All sub-devices are instances of the ServerCommunicationDeviceType defined in 7.3.3. The instances of the ServerCommunicationDeviceType (ServerCommDevice) have a MethodSet that can implement the methods SetAddress, Scan, AddComponent, RemoveComponent. AddComponent and RemoveComponent are optionally present if the FDI Communication Server supports a variable number of instances of the ServerCommunicationServiceType.

Formal definitions are found in 7.3.2, 7.3.3 and 7.3.4.

### 7.3.2 CommunicationServerType

#### 7.3.2.1 General

The CommunicationServerType is a subtype of the DeviceType and provides the methods needed to manage the instances ServerCommunicationDeviceType. Figure 6 shows the CommunicationServerType definition that is formally defined in Table 3 and Table 4.

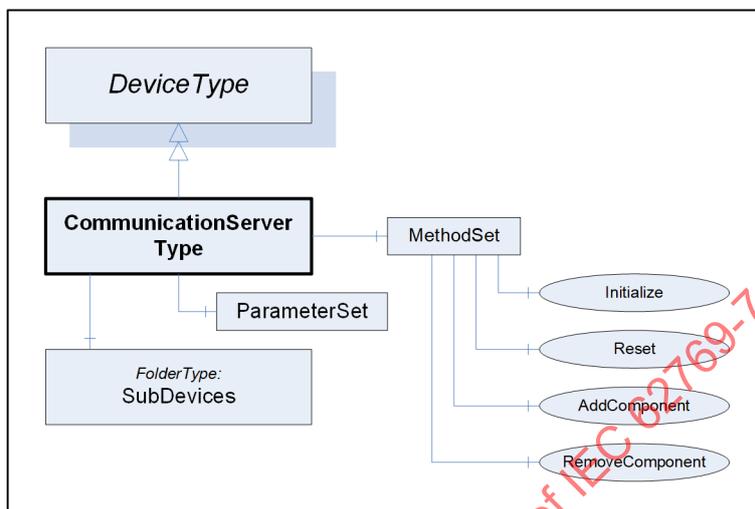

IEC

Figure 6 – CommunicationServerType

Table 3 – CommunicationServerType definition

Attribute	Value				
BrowseName	CommunicationServerType				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in IEC 62541-100.					
HasComponent	Object	MethodSet		BaseObjectType	Mandatory
HasComponent	Object	ParameterSet		BaseObjectType	Optional
HasComponent	Object	SubDevices		FolderType	Mandatory

Table 4 – MethodSet of CommunicationServerType

Attribute	Value				
BrowseName	MethodSet				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Initialize			Mandatory
HasComponent	Method	Reset			Mandatory
HasComponent	Method	AddComponent			Optional
HasComponent	Method	RemoveComponent			Optional

The CommunicationServerType and each instance of this Type share the same Methods. The NodeId of these Methods will be fixed and defined in this document (see Annex B). FDI Communication Server clients therefore do not have to browse for these Methods. They can use the fixed NodeId as the MethodId of the Call Service.

The additional Methods AddComponent and RemoveComponent add the ability to add or remove instances of ServerCommunicationDeviceType according to the communication hardware's structure. These services are not applicable if the FDI Communication Server implements a static communication hardware structure.

The SubDevices folder contains instances of ServerCommunicationDeviceType that represent the communication modules.

NOTE The indication for a static communication hardware layout is indicated in the FDI Package with COMPONENT attribute CAN\_DELETE set to FALSE in COMPONENT declarations.

### 7.3.2.2 Reset Method

Reset is used to reset the communication hardware and related driver software. Any ongoing communication will be stopped immediately. All communication channels enter the closed status.

The Method Reset shall not be present in the FDI Server-hosted Information Model. The FDI Server shall be able to handle the shut-down procedure automatically according to communication demands.

Typically, the FDI Communication Server operation includes some hardware and protocol driver handling that can be independent from any modular structure. Because of this possibility, the Reset method is arranged underneath the CommunicationServerType. For the purpose of reducing the complexity of FDI Communication Server operation, only one Reset method has been specified.

The signature of this Method is specified below. Table 5 and Table 6 specify the arguments and AddressSpace representation, respectively.

#### Signature

```
Reset (
    [out] Integer      serviceError);
```

**Table 5 – Reset Method arguments**

Argument	Description
serviceError	0: OK -1: Failed

**Table 6 – Reset Method AddressSpace definition**

Attribute	Value				
BrowseName	Reset				
References	NodeClass	BrowseName	Data Type	Type Definition	Modelling Rule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.2.3 Initialize Method**

Initialize is used to initialize the communication hardware. The initialization function of the FDI Communication Server shall use the parameterization data hosted by the ParameterSet that is contained within the instance of the CommunicationServerType and all instances of ServerCommunicationDeviceType.

In order to enable parameter changes during operation, the Initialize method can be re-invoked. If the FDI Communication Server needs to reset its communication hardware, it shall automatically restore any communication relation that existed. A modular FDI Communication Server can flexibly initialize only those ServerCommunicationDeviceType instances for which configuration changes have been detected.

The Method Initialize shall not be present in the FDI Server-hosted Information Model. The FDI Server shall be able to handle the start procedure automatically according to human-driven communication requests.

The FDI Communication Server operation can include some hardware and protocol driver handling that can be independent from any modular structure. Because of this possibility, the Initialize method is arranged underneath the CommunicationServerType. For the purpose of reducing the complexity of the FDI Communication Server's operation, only one Initialize method has been specified.

The signature of this Method is specified below. Table 7 and Table 8 specify the arguments and AddressSpace representation, respectively.

**Signature**

```
Initialize(
    [out] Integer      serviceError)
```

**Table 7 – Initialize Method arguments**

Argument	Description
serviceError	0: OK -1: Failed

**Table 8 – Initialize Method AddressSpace definition**

Attribute	Value				
BrowseName	Initialize				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.2.4 AddComponent Method**

AddComponent shall be used to configure the modular setup of an FDI Communication Server when the FDI Communication Server has no statically defined communication hardware setup. This method shall be used to add a module (Instance of ServerCommunicationDeviceType).

The signature of this Method is specified below. Table 9 and Table 10 specify the arguments and AddressSpace representation, respectively.

## Signature

```

AddComponent (
    [in] String      ModuleTypeName,
    [in] String      InstanceName,
    [in] String      InstanceLabel,
    [out] NodeId     InstanceNodeId,
    [out] Integer    ServiceError);
  
```

**Table 9 – AddComponent Method arguments**

Argument	Description
ModuleTypeName	Type of module to be created as defined in the FDI Package. The module type name shall correspond to one of the COMPONENT identifier definitions (see 5.2.3).
InstanceName	Non-localized name of the module's Device Node of the created element. This name has to be unique within the scope of the FDI Communication Server's Information Model.
InstanceLabel	Human-readable label for the root Node of the created module.
InstanceNodeId	Callee-assigned identifier for the module's Device Node.
ServiceError	0 – OK -1 – E_InvalidType – a module for the specified Type can not (not anymore) be added -2 – E_DuplicateName – there exists already a module with the same name as specified with the InstanceName argument -3 – E_UnknownType – an unknown ModuleTypeName has been specified -4 – E_LimitExceeded – the total number of modules is exceeded (this might be caused by power constraints or other resource limitations)

**Table 10 – AddComponent Method AddressSpace definition**

Attribute	Value				
BrowseName	AddComponent				
References	NodeClass	BrowseName	Data Type	Type Definition	Modelling Rule
HasProperty	Variable	InputArguments	Argument[]	PropertyType	Mandatory
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 7.3.2.5 RemoveComponent Method

RemoveComponent shall be used to remove a module (Instance of ServerCommunicationDeviceType). Implementation of RemoveComponent is optional if the communication hardware setup is static.

The signature of this Method is specified below. Table 11 and Table 12 specify the arguments and AddressSpace representation, respectively.

**Signature**

```
RemoveComponent (
    [in] NodeId          ModuleNodeId,
    [out] Integer        ServiceError);
```

**Table 11 – RemoveComponent Method arguments**

Argument	Description
ModuleNodeId	The value is the identification of the existing instance in the Information Model.
ServiceError	0: OK -1: Failed, the specified node does not exist


**Table 12 – RemoveComponent Method AddressSpace definition**

Attribute	Value				
BrowseName	RemoveComponent				
References	NodeClass	BrowseName	Data Type	Type Definition	Modelling Rule
HasProperty	Variable	InputArguments	Argument[]	PropertyType	Mandatory
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.3 ServerCommunicationDeviceType**

**7.3.3.1 General**

The ServerCommunicationDeviceType represents a communication channel for a particular network. The ServerCommunicationDeviceType is a subtype of the DeviceType. The ParameterSet for each instance of a ServerCommunicationDevice will contain Parameters necessary to configure the operation of the network. Figure 7 shows the ServerCommunicationDeviceType definition that is formally defined in Table 13 and Figure 14.

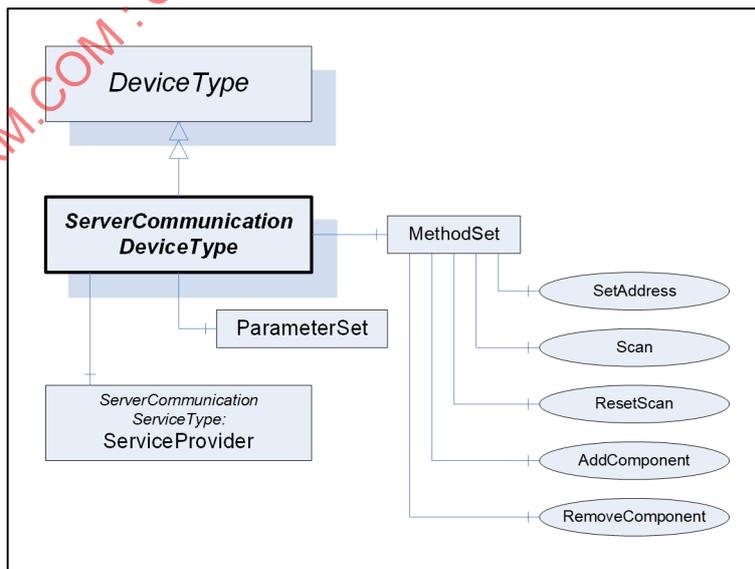

IEC

**Figure 7 – ServerCommunicationDeviceType**

**Table 13 – ServerCommunicationDeviceType definition**

Attribute	Value				
BrowseName	ServerCommunicationDeviceType				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Optional
HasComponent	Object	ParameterSet		BaseObjectType	Optional
HasComponent	Object	ServiceProvider		ServerCommunicationServiceType	Mandatory
HasProperty	Variable	ListOfCommunicationProfiles	String[]	PropertyType	Mandatory

The Property ListOfCommunicationProfiles contains a list of communication profiles supported by the ServerCommunicationDevice. Valid strings are defined in IEC 62769-4:2020, Annex F.

**Table 14 – MethodSet of ServerCommunicationDeviceType**

Attribute	Value				
BrowseName	MethodSet				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Scan			Optional
HasComponent	Method	ResetScan			Optional
HasComponent	Method	SetAddress			Optional
HasComponent	Method	AddComponent			Optional
HasComponent	Method	RemoveComponent			Optional

### 7.3.3.2 Scan Method

Scan shall be used to start discovering devices connected to the physical network. The associations between the method Scan and the corresponding physical network connection enables the FDI Communication Server to access the correct physical network connection. The Scan method is implemented by the Communication Server runtime module.

The signature of this Method is specified below. Table 15 and Table 16 specify the arguments and AddressSpace representation, respectively.

NOTE 1 Communication Servers can run the network scan in a background task, so the invocation of the function Scan will return cached network scan results.

NOTE 2 If the SCAN takes very long, the FDI Communication Server might return an empty TopologyScanResult and the ServiceError 1 identifying that the scan is still running.

**Signature**

```

Scan (
    [out] XmlElement      TopologyScanResult,
    [out] Integer         ServiceError)
    
```

**Table 15 – Scan Method arguments**

Argument	Description
TopologyScanResult	The argument value is an XML formatted string representing a list of devices connected to the physical network. Each of the devices connected to the physical network is represented by a data structure matching with a Connection Point node. Connection Point attributes are protocol-specific. The corresponding topologyScanResult schema is specified in IEC 62769-4:2020, Annex F. Returns an empty string for TopologyScanResult in the case of any error.
ServiceError	0: OK / scan completed 1: OK / get complete scan result by calling Scan again -1: Failed / not initialized -2: Failed / not connected to a network -3: Failed / no device found, the topologyScanResult is empty

**Table 16 – Scan Method AddressSpace definition**

Attribute	Value				
BrowseName	Scan				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**7.3.3.3 ResetScan Method**

ResetScan shall be used to reset the internal cache of scan results. It will also cancel a running scan if the FDI Communication Server scan mechanism supports this.

The signature of this Method is specified below. Table 17 and Table 18 specify the arguments and AddressSpace representation, respectively.

**Signature**

```

ResetScan (
    [out] Integer         ServiceError)
    
```

**Table 17 – ResetScan Method arguments**

Argument	Description
ServiceError	0: OK / scan reset  -1: Failed / not initialized -2: Failed / not connected to a network

**Table 18 – ResetScan Method AddressSpace definition**

Attribute	Value				
BrowseName	ResetScan				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 7.3.3.4 SetAddress Method

SetAddress shall be used to change the network address (communication address) of a device. The Communication Device shall ensure unique network address values. If the argument value of newAddress is already assigned to a device connected to the physical network, the Communication Device shall return the argument serviceError value "-4: Failed/duplicate Address error".

It depends on the protocol whether the address assignment service shall work even when a communication relation is already established.

The signature of this Method is specified below. The arguments for SetAddress Method are described in Table 19.

#### Signature

```

SetAddress (
    [in]          <OldAddress>,
    [in]          <NewAddress>,
    [out] Int32   ServiceError);

```

**Table 19 – SetAddress Method arguments**

Argument	Description
<OldAddress>	This is a placeholder for a 1..n protocol-specific arguments representing the existing protocol-specific network address of the device connected to the physical network. Values that represent a network address are specified in IEC 62769-4:2020, Annex F.
<NewAddress>	This is a placeholder for 1..n protocol-specific arguments representing the new protocol-specific network address that shall be assigned to a device connected to the physical network. Values that represent a network address's arguments are specified in IEC 62769-4:2020, Annex F.
ServiceError	0: OK/execution finished successfully Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

### 7.3.4 ServerCommunicationServiceType

#### 7.3.4.1 General

Communication services provide the means to communicate with a Device or to, for example, execute a Scan on a Network. Communication services are represented through Methods in the Information Model (see IEC 62769-5).


The formal definition of ServerCommunicationServiceType is found in Figure 8, Table 20 and Table 21.

The NodeId of these Methods will be fixed and defined in this document. FDI Clients therefore do not have to browse for these Methods. They can use the fixed NodeId as the MethodId of the Call Service.

Communication methods that include their NodeIds are uniquely defined in this document. FDI Clients can use the Methods directly (without browsing). The OPC UA Call Service shall be used as follows:

- the MethodId argument shall contain the fixed NodeId of the Method;
- the ObjectId argument shall contain the NodeId of the MethodSet.

The OPC UA StatusCode Bad\_MethodInvalid shall be returned from the Call Service for elements where the communication methods are not supported.

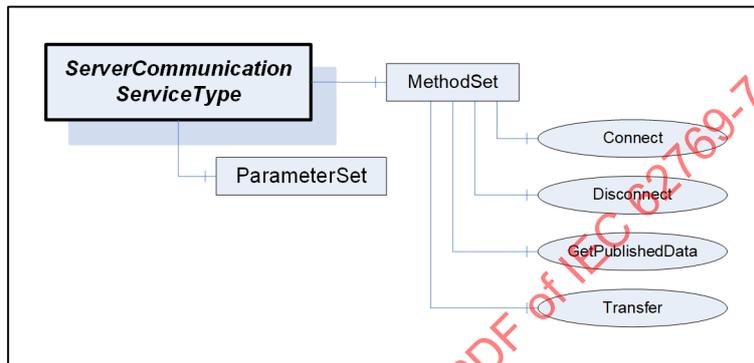

IEC

Figure 8 – ServerCommunicationServiceType

Table 20 – ServerCommunicationServiceType definition

Attribute	Value				
BrowseName	ServerCommunicationServiceType				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Mandatory
HasComponent	Object	ParameterSet		BaseObjectType	Optional

Table 21 – MethodSet of ServerCommunicationServiceType

Attribute	Value				
BrowseName	MethodSet				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Connect			Optional
HasComponent	Method	Disconnect			Optional
HasComponent	Method	Transfer			Mandatory
HasComponent	Method	GetPublishedData			Optional

### 7.3.4.2 Connect Method

Connect shall be used to establish a communication relation to a device that is physically connected to the Network. Establishing the communication relation may imply checks of identification data that are part of the addressData with data inside the physical device. The Communication Device performs this DeviceType match verification in accordance with a corresponding network protocol standard. Related details are specified in IEC 62769-4:2020, Annex F.

The devices' address is contained in the Connection Point of the corresponding Device Instance within the Information Model (Device Connection Point). The communication relation between the Information Model-associated device application and the physical device is further on identified by the communication relation identifier. Details about how to manage the status of a communication relation is described in Clause 6. Connection Point descriptions may be layered as described in Annex A.

NOTE 1 As the NodeId is a unique identifier within the Information Model scope, the NodeId of the Device Connection Point can be a unique identifier for any communication relation in the scope of a communication device.

NOTE 2 The term communication relation is introduced to describe the status of an infrastructure that enables data exchange between Information Model hosted data and a physical device. If the communication relation is established, data exchange is possible.

The signature of this Method is specified below. Table 22 specifies the arguments.

#### Signature

```
Connect (
    [in]   ByteString      CommunicationRelationId,
    [in]   <AddressData>,
    [out]  <DeviceInformation>,
    [out]  Int32           ServiceError);
```

**Table 22 – Connect Method arguments**

Argument	Description
CommunicationRelationId	This is a client generated ID that is used to uniquely identify this connection. This could be an index (e.g. a NodeId) that the client (= FDI Server) needs in order to identify entries in its topology.
<AddressData>	This is a placeholder for a protocol-specific argument list that is used for the address and optional device identification data (details described in IEC 62769-4:2020, Annex F).
<DeviceInformation>	This is a placeholder for a protocol-specific argument list in which the connect result data are stored.
ServiceError	0: OK/execution finished, connection established successfully Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

### 7.3.4.3 Disconnect method

Disconnect shall be used to terminate a communication relation to a Device.

The signature of this Method is specified below. Attributes of the Disconnect method are specified in Table 23. Disconnect is a synchronous method call.

**Signature**

```

Disconnect (
    [in]   ByteString      CommunicationRelationId,
    [out]  Int32           ServiceError);
    
```

**Table 23 – Disconnect Method arguments**

Argument	Description
CommunicationRelationId	Same ID as used in method Connect specified in 7.3.4.2.
ServiceError	1: OK/disconnect finished successfully Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

**7.3.4.4 Transfer method**

Transfer shall be used to perform information exchange with a Device.

The signature of this Method is specified below. All arguments are specified in Table 24.

**Signature**

```

Transfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   <SendData>,
    [out]  <ReceiveData>,
    [out]  Int32           ServiceError);
    
```

**Table 24 – Transfer Method arguments**

Argument	Description
CommunicationRelationId	See 7.3.4.2.
<SendData>	This is a placeholder for a protocol-specific list of arguments as described in IEC 62769-4:2020, Annex F. The argument values represent the protocol-specific communication service request that is sent to the device.
<ReceiveData>	This is a placeholder for a protocol-specific list of arguments as described in IEC 62769-4:2020, Annex F. The argument values represent the protocol-specific communication service response that is received from the device.
ServiceError	0: OK / execution finished, ReceivedData contains the result Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

**7.3.4.5 GetPublishedData Method**

The FDI Server sends GetPublishedData requests to the FDI Communication Server to receive data that is submitted by unsolicited data messages. The data contained in the argument SendData prepares the exchange of "unsolicited" data messages from the device. The content of SendData is protocol-specific. The FDI Communication Server queues GetPublishedData requests in a queue associated with the Communication Relation defined through the argument CommunicationRelationId. The argument PublishId identifies the related queue entry. Each time the FDI Communication Server receives unsolicited data messages, it saves the received data in association with the existing queue entry that has been created for the GetPublishedData. Depending on the underlying network technology (performance), the method GetPublishedData can immediately return with data coming from an "unsolicited" data message.

Subsequent pulling of data that is submitted by unsolicited data messages works through the same method `GetPublishedData`. In this case, the argument `SendData` is empty. The argument `PublishId` matches with the value that has been provided with the initial call `GetPublishedData` that has established the transmission of exchange of "unsolicited" data messages.

In order to stop the device sending the "unsolicited" data, the method `GetPublishedData` shall be used again but the argument `SendData` contained data terminates the exchange of "unsolicited" data messages from the device. Table 25 shows the `GetPublishedData` Method Arguments.

### Signature

```

GetPublishedData (
    [in]   ByteString      CommunicationRelationId,
    [in]   <SendData>,
    [out]  <ReceiveData>,
    [out]  DateTime        TimeStamp
    [in]   UInt32          PublishId,
    [out]  Int32           ServiceError);
  
```

**Table 25 – GetPublishedData Method arguments**

Argument	Description
CommunicationRelationId	See 7.3.4.2.
<SendData>	This is a placeholder for a protocol-specific list of arguments as described in IEC 62769-4:2020, Annex F. The argument values control the exchange of unsolicited messages.
<ReceiveData>	This is a placeholder for a protocol-specific list of arguments as described in IEC 62769-4:2020, Annex F. The argument values convey data that comes from unsolicited messages.
TimeStamp	Time when the data was published by the device.
PublishId	The number identifies an established subscription that conveys data that comes from unsolicited messages.
ServiceError	0: OK / execution finished Other values that represent ServiceErrors are specified in IEC 62769-4:2020, Annex F.

## 7.4 OPC UA Server Profile for FDI Communication Server

Profiles are named groupings of ConformanceUnits as defined in IEC 62541-6 and IEC 62541-7. The term "Facet" in the title of a Profile indicates that this Profile is expected to be part of another larger Profile or concerns a specific aspect of OPC UA. Profiles with the term "Facet" in their title are expected to be combined with other Profiles to define the complete functionality of an OPC UA Server or Client. The minimum required OPC UA Server Profile is the "Micro Embedded Device Server Profile".

The following table specifies the facet for an OPC UA Server that acts as an FDI Communication Server. Table 26 describes Conformance Units included in this facet.

**Table 26 – FDICommunicationServer\_Facet definition**

Conformance Unit	Description	Optional/Mandatory
FDI Communication Server Information Model	Support at least one instance of CommunicationServerType.	M

## 7.5 Mapping the FDI Server IM to the FDI Communication Server IM

### 7.5.1 General

The representation of an FDI Communication Server in the AddressSpace of an FDI Server is almost identical to the AddressSpace that exists in the FDI Communication Server. This refers in particular to the Modular Device hierarchy and the Parameters of all Devices. However, the Nodes in the FDI Server are built from the device description imported via the FDI Communication Package.

### 7.5.2 Information Model differences

Because of their different tasks, however, there are a few differences and a set of synchronization rules. The Information Model example shown in Figure 9 depicts the commonalities and the differences between the Information Models hosted by the FDI Communication Server and the FDI Server. In general, the FDI Communication Server-hosted Information Model is a subset of the FDI Server-hosted Information Model. The Device Instances in the FDI Server and the FDI Communication Server adhere to the same type definitions. Thus, browse names of common Information Model elements shall have the same browse name.

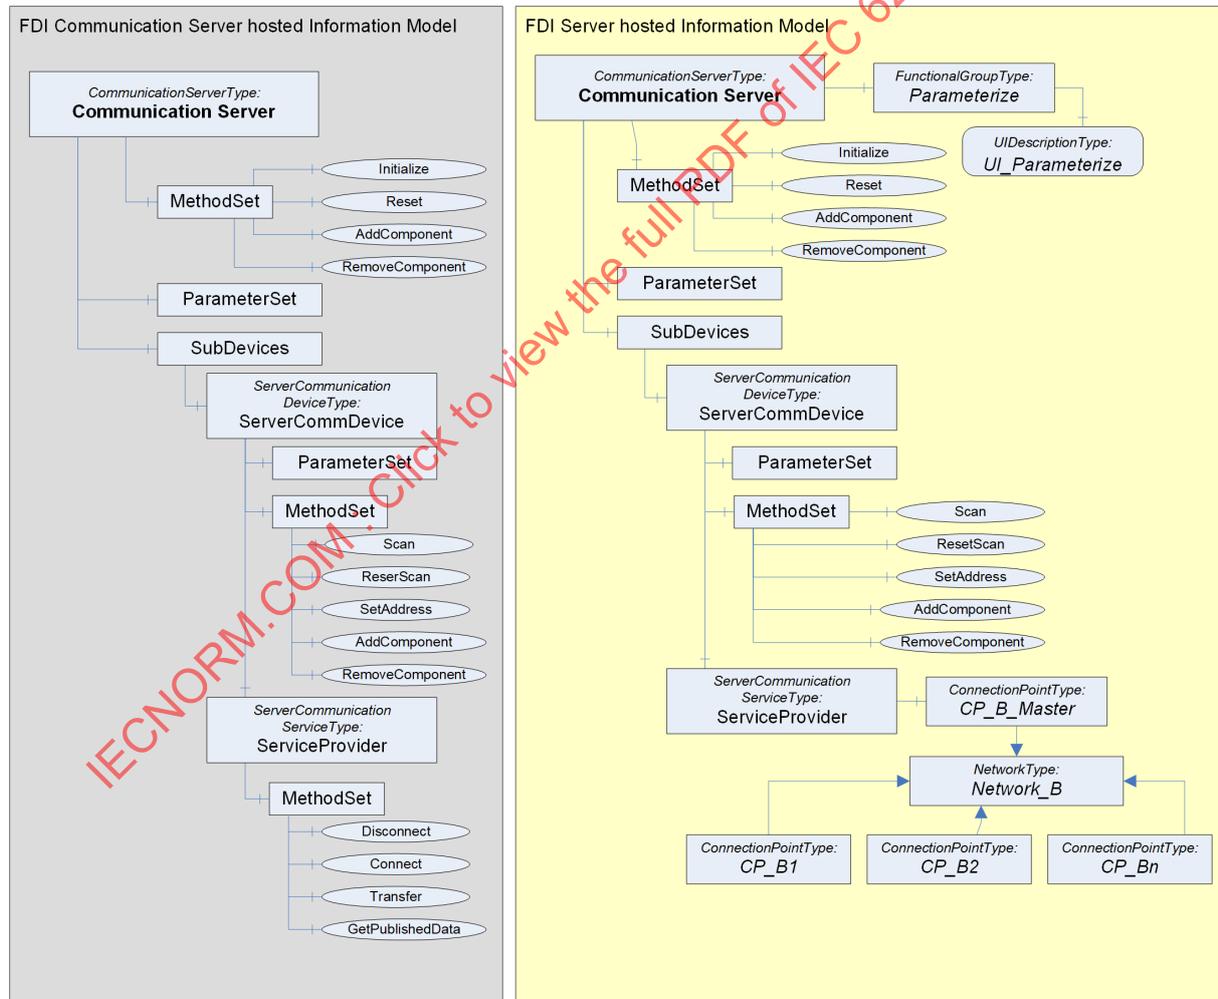


Figure 9 – Information Model differences (example)

The list of differences in the IMs is as follows:

- The FDI Server supports online and offline versions of the Modular Device; the FDI Communication Server supports just an online version. The online version of the FDI Server represents the version in the FDI Communication Server, i.e. if Parameter Values are read or written to the online model of the FDI Server, these operations are passed through to the FDI Communication Server. This happens both for public and for private Parameters.

NOTE The key is a match between the browse names present in the FDI Server-hosted Information Model and the FDI Communication Server-hosted Information Model. This allows generic synchronization of both information models.

- UIPs, UIIDs, Actions and Functional Groups exist only in the FDI Server.
- Modules in the FDI Server-hosted Information Model have a Connection Point component that is used to connect this module to a network when creating the Device Topology. The FDI Communication Server-hosted Information Model does not show Connection Point elements. The Device Topology is managed by the FDI Server only (see IEC 62769-5).
- The FDI Server can represent the ServiceProvider without exposing the MethodSet in order to prevent an FDI Client from invoking communication services.

The mapping of the Module Management functionality is as follows:

- AddComponent and RemoveComponent are exposed in the FDI Communication Server Information Model via the FDI Communication Server Object (the root of the Modular Device). They exist only if there are modules to be configured, i.e. they will not be available if the Communication Server does not support modular communication hardware configuration. AddComponent and RemoveComponent replace the generic Node Management service defined by OPC UA.

The FDI Server handles module topology related configuration based on the Node Management Service Set (see IEC 62769-3 and IEC 61804-4). On any module-configuration related activity, the FDI Server first calls the ValidateModules Action. The EDD Action can run through various states and even perform user dialogs (see description about Actions in IEC 62769-2 and IEC 62769-5). The EDD Methods can maintain (private) information that is global to the Modular Device. The EDD Action can access the module that shall be created.

## 7.6 Installer

The Installer for the FDI Communication Server executable is optional. Since the FDI specification does not prescribe the implementation platform for FDI Communication Server executables, the FDI Communication Server executable can be also preinstalled on dedicated hardware.

The installer used for the FDI Communication Server executable shall be separated from the FDI Package. Importing the FDI package is a separate procedure (see 7.7.1).

## 7.7 FDI Communication Package

### 7.7.1 General

The FDI Server imports the FDI Communication Package like any other FDI Package. Subclause 7.7 specifies the FDI Communication Package details.

With respect to the EDD element of the Package, FDI differentiates between a simple (lightweight) CommunicationServer (see 7.7.2) and a regular (multi-channel) Communication Server (see 7.7.3).

### 7.7.2 EDD for Lightweight Communication Server

A lightweight Communication Server provides access to a single field device network. It shall provide all configuration capabilities in its main EDD, not in the sub-modules used to expose the connection points. This allows FDI hosts not supporting modular devices to parameterize an FDI Communication Server using the standard FDI user interface mechanisms.

The EDD describing a "lightweight" Communication Server shall follow the IEC 61804-3 specified profile for the Communication Server. But it shall not use the following EDDL syntax constructs:

- COMPONENT,
- COMPONENT\_RELATION,
- COMPONENT\_FOLDER,
- COMPONENT\_REFERENCE,
- EDDL Built-in function ObjectReference.

### 7.7.3 EDD for Multi-Channel Communication Server

#### 7.7.3.1 General

The required content for an FDI Communication Package EDD element describing an FDI Communication Device is specified in Clause 5. Specific EDD element content for an FDI Communication Server is described in 7.7.3.

The rules defined in 5.2.2 apply.

The PROTOCOL attribute shall not be set.

The COMPONENT declaration shall have an additional attribute PRODUCT\_URI. The attribute value holds a string describing the FDI Communication Server's product URI that enables the FDI Server to identify the FDI Communication Server based on the OPC UA Discovery service (see IEC 61804-3). The attribute value corresponds to the RegisterServer argument RegisteredServer:serverUri. The product URI shall contain the company name and the product name.

Example: PRODUCT\_URI "urn:Company:ProductName".

#### 7.7.3.2 CommunicationDevice component

The rules defined in 5.2.3 apply.

#### 7.7.3.3 Communication Service component

The rules defined in 5.2.4 apply.

#### 7.7.3.4 Connection Point component

The rules defined in 5.2.5 apply.

#### 7.7.3.5 Connection Point collection

The rules defined in 5.2.6 apply.

#### 7.7.4 COMMANDs in EDDs for FDI Communication Servers

An EDD for an FDI Communication Server shall follow the communication profile CS defined in IEC 61804-3. Because the synchronization between the VARIABLES of the EDD represented as parameters in the FDI servers information model and the actual configuration of the FDI communication server (represented as parameters in the information model of the FDI communication server) is done by the FDI server, there is no need to define COMMANDs in the EDD in order to access the data of the FDI communication server.

However, the communication profile CS allows the definition of COMMANDs in an EDD. This allows an EDD developer to explicitly trigger communication to the FDI communication server. This may be needed in complex EDD methods that require to directly write to the FDI communication server or directly read the actual value before proceeding with the method execution.

The COMMAND does not require addressing information (like NUMBER, SLOT, INDEX, see IEC 61804-3) since the addressing is done via the BrowseName of the FDI communication server and the EDD identifier of the VARIABLE. Instead, the RESPONSE of a READ COMMAND shall contain the VARIABLES to be read and the REQUEST of a WRITE COMMAND shall contain all the VARIABLES to be written.

If such a COMMAND is called by ReadCommand or WriteCommand built-ins in the EDD, the FDI server shall read or write respectively all the VARIABLES defined in the COMMAND.

Since COMMANDs also group access to VARIABLES, an FDI server shall always handle VARIABLES defined in a COMMAND as a unit. For example, when a WRITE COMMAND contains the two VARIABLES, VarA and VarB, and the FDI server needs to write VarA because it was changed by the user, the FDI server also needs to write VarB in the same OPC UA service call, although VarB might not have been changed. The same applies for reading VARIABLES.

OPC UA READ and WRITE service calls return different status codes (see IEC 62541-4). First, they return one service result code per call. Then, they return one operation level result code per parameter to be read or written. Since an EDD COMMAND only supports one RESPONSE\_CODE per call, the following mapping applies.

The first status code that is not GOOD shall be used as RESPONSE\_CODE with the following order:

- 1) investigate the service result code, then
- 2) investigate the operation level result codes in the order the VARIABLES appear in the COMMAND definition.

If all status codes are GOOD, the RESPONSE\_CODE is GOOD.

#### 7.7.5 Documentation

The FDI Communication Package shall provide documentation describing:

- a) the software installation related environment requirements and procedures;
- b) the OPC UA Server configuration if needed.

### 7.8 Handling and behavior

#### 7.8.1 General

Subclause 7.8 defines the FDI Communication Server handling and behavior rules along the lifecycle beginning with the deployment, start up, bus commissioning, until the communication services' processing. The diagram (see Figure 10) shows the FDI Server-maintained FDI Communication Server status.

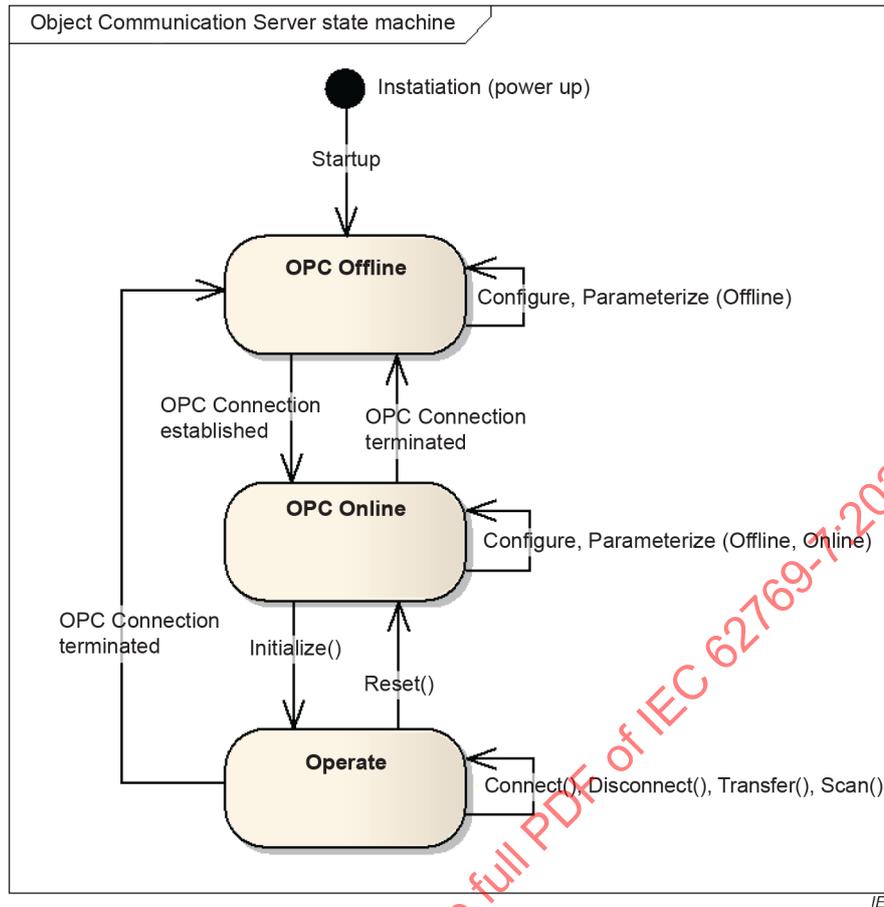


Figure 10 – FDI Communication Server state machine

### 7.8.2 Deployment

The FDI Server imports the FDI Communication Package. The handling of EDD and UIP parts matches with the import procedure performed for the FDI Package (see IEC 62769-2 and IEC 62769-3). The FDI Communication Package represents the Communication Server Type.

The installation procedure described in the following is optional. (An embedded FDI Communication Server need not provide an installation procedure.)

The FDI Communication Server Installer (see 7.6) is a separate element. The installation procedure is started manually.

Depending on the operating systems, the execution of installation programs could require administration rights.

### 7.8.3 Server configuration

The FDI Communication Server shall implement the means enabling the OPC UA Server-specific configuration setting the link to the Discovery Server and the name of the FDI Communication Server. In accordance with 7.8.4, the FDI Communication Server needs to know the address information about the Discovery Server. The document does not prescribe the way of how to do this.

The bootstrap process needed to establish the connection between an OPC UA Client and an OPC UA Server requires some administration work. A simple plug and play does not seem possible.

#### 7.8.4 Start up

The following definitions about the Server discovery mechanism refer to the definitions found in IEC 62541-4.

The FDI Communication Server executable shall be started in accordance with one of the following described ways:

- a) The FDI Communication Server executable is loaded by means of the configured operating system function. If the FDI Communication Server is installed on a hardware separated from the FDI Server, the FDI Communication Server executable shall be loaded by means of the configured operating system function (auto-start).
- b) The FDI Server invokes the FDI Communication Server executable process. The related functions are specific to the operating system and the system vendor implementations.

The starting FDI Communication Server process shall register itself at a Discovery Server using the service RegisterServer. This enables OPC UA Clients to obtain information about the connected FDI Communication Server including the application description, existing endpoints and security information. The related OPC UA Services are FindServers and GetEndPoints. The Discovery Server is a process running outside the FDI Communication Server.

After starting up, the FDI Communication Server has the status "OPC Offline".

#### 7.8.5 Shutdown

The following definitions about the Server discovery mechanism refer to the definitions found in IEC 62541-4.

The shutdown of the FDI Communication Server process shall unregister itself at the Discovery Server using the service RegisterServer by setting argument isOnline value FALSE.

#### 7.8.6 Watchdog

The following definitions about the Server discovery mechanism refer to the definitions found in IEC 62541-4.

The FDI Communication Server shall periodically use the service RegisterServer to state its ability to receive a connection from the FDI Server. The frequency is 10 min. The FDI Communication Server can envision a VARIABLE for configuration purposes.

#### 7.8.7 Establish the OPC UA connection

The FDI Server connects as an OPC UA Client to the FDI Communication Server in accordance with the IEC 62541 series.

The FDI Server (OPC UA Client) establishes a secure connection to the FDI Communication Server (OPC UA Server) using the SecureChannel service set defined in IEC TR 62541-1. The functional principles are defined in IEC TR 62541-1.

The communication between the FDI Server (OPC UA client) and the FDI Communication Server (OPC UA server) shall be based on the OPC UA TCP transport protocol with the OPC UA Binary Encoding and OPC UA Secure Conversation.

After successfully establishing the OPC UA connection, the FDI Communication Server enters the status "OPC Online".

#### **7.8.8 Instantiate the Communication Server**

The creation of a CommunicationServer instance in the FDI Server-hosted Information Model works the same way as the instantiation of a Device.

#### **7.8.9 Configure the communication hardware**

As described in 7.3.1 the FDI Communication Server can support the configuration of modular communication hardware. The modular communication hardware configuration shall be performed via the services AddComponent and RemoveComponent (7.3.2.4, 7.3.2.5).

If the Action ValidateModules (see 5.2.9) is implemented, the FDI Server shall invoke this method. If the Action result is OK, the FDI Server shall then perform the synchronization by matching the sub-device's browse name and by invoking the FDI Communication Server-hosted module's management services.

If the FDI Communication Server supports modular communication hardware configurations, the correct communication hardware configuration is a prerequisite for successful initialization, as described in 7.8.12.

#### **7.8.10 Configuring the Network**

The COMPONENT declaration defined in 5.2.2, 5.2.3, 5.2.4, and 5.2.7 enables a description-based approach for the FDI Server to configure the network connections. The FDI Communication Server's ValidateNetwork Action (see 5.2.8) can be added to support the network topology validation function as described in 5.2.8. The network topology is only present in the FDI Server-hosted Information Model (see 7.5).

#### **7.8.11 Parameterize**

The FDI Communication Server can require proper bus parameter adjustment prior to any communication service processing. The FDI Communication Package-contained user dialogs (UIP or UID) enable interactive bus parameter adjustment. The FDI Communication Package can contain additional Business Logic for bus parameterization purposes. The editing of FDI Communication Server parameters changes the content of the FDI Server-hosted Information Model. The FDI Server shall perform synchronization using the parameters' browse names. The FDI Server copies the modified values from the FDI Server-hosted Information Model to the FDI Communication Server-hosted Information Model.

A simple FDI Communication Server shall provide all its configuration capabilities in its main EDD, not in the sub-modules used to expose the Connection Points. This allows FDI hosts not supporting modular devices to parameterize an FDI Communication Server using the standard FDI user interface mechanisms.

NOTE The FDI Server can change Parameter values in an arbitrary order.

#### **7.8.12 Initialize**

On invocation of the method Initialize (see 7.3.2.3), the FDI Communication Server shall use the current parameter settings and communication hardware configuration for communication hardware initialization purposes.

After successful Initialization, the FDI Communication Server enters the status "Operate".


### 7.8.13 Create the communication service object

Prior to running any data exchange, at least one instance of type `ServerCommunicationServiceType` has to be present or created. One instance of `ServerCommunicationServiceType` shall be always present. Further instances of `ServerCommunicationServiceType` can be created if the instance of `ServerCommunicationDeviceType` implements the method `AddComponent`.

### 7.8.14 Communication relation

The definitions of Clause 6 apply. The FDI Communication Server specifics are defined in the subsequent text.

The state chart in Figure 11 describes the state flow of a single communication relation with added status changes that are related to OPC UA specifics. Beside the specific aspects, the definitions in Clause 6 apply as well.

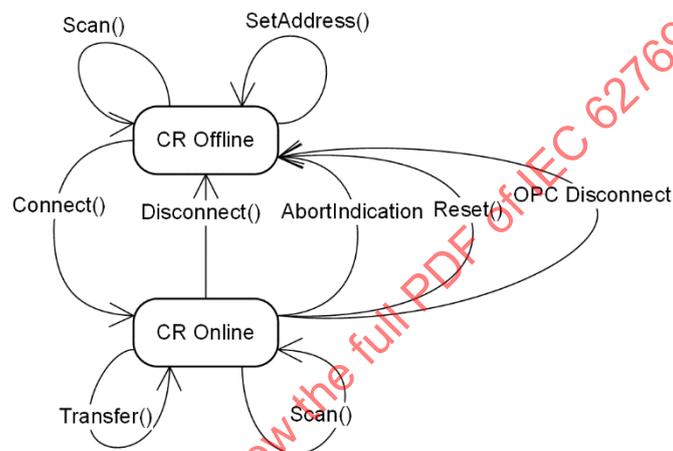

IEC

**Figure 11 – Communication relation state chart**

On invocation of the method `Reset` or the OPC Connection termination (OPC Connection loss) the FDI Communication Server shall terminate all communication relations.

The FDI Communication Server shall reject any parameterization or configuration change attempt in the status "Operate".

The FDI Communication Server shall reject any communication relation related operation if the FDI Communication Server status is different than "Operate".

If the Communication Server supports multiple instances of `ServerCommunicationServiceType`, these instances need to share information about existing communication relations.

### 7.8.15 Connect

Prior to running any information exchange related communication, the FDI Communication Server requires the establishment of a communication relation between the device application and the device connected to the physical network. This happens through invocation of the method `Connect`.

The FDI Communication Server shall be able to manage multiple communication relations. After successful execution of the method Connect the corresponding communication relation enters the status "CR Online".

Because of the direct association of method Connect to a single communication service provider instance the communication device knows the corresponding physical network connection.

#### **7.8.16 Disconnect**

Invocation of the method Disconnect terminates a communication relation, which inhibits further information exchange related communication with the device connected to the physical network.

After execution of the method Disconnect, the corresponding communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### **7.8.17 Abort Indication**

Depending on protocol specifics, the FDI Communication Server can detect communication aborts. Such communication abort indications are returned as communication service results during processing of the methods Transfer or Scan. After the FDI Communication Server has returned an Abort Indication, the current communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### **7.8.18 Scan**

The topology scan function can be invoked independently from an existing communication relation. Scan service details are specified in 7.3.3.2.

#### **7.8.19 SetAddress**

It depends on the protocol whether the address assignment service shall work even when a communication relation is already established.

## **8 FDI Communication Gateway definition**


### **8.1 General**

A Gateway is a communication device that enables bridging between different physical networks or different protocols. The logical representation of a Gateway device within the FDI Server-hosted Information Model enables the FDI Server to process communication in heterogeneous network topologies.

### **8.2 Information Model**

#### **8.2.1 General**

The Information Model of a Gateway is based on the Information Model defined in IEC 62769-5. Figure 12 replicates the Modular Device structure and its integration in the overall FDI Server-hosted Information Model.

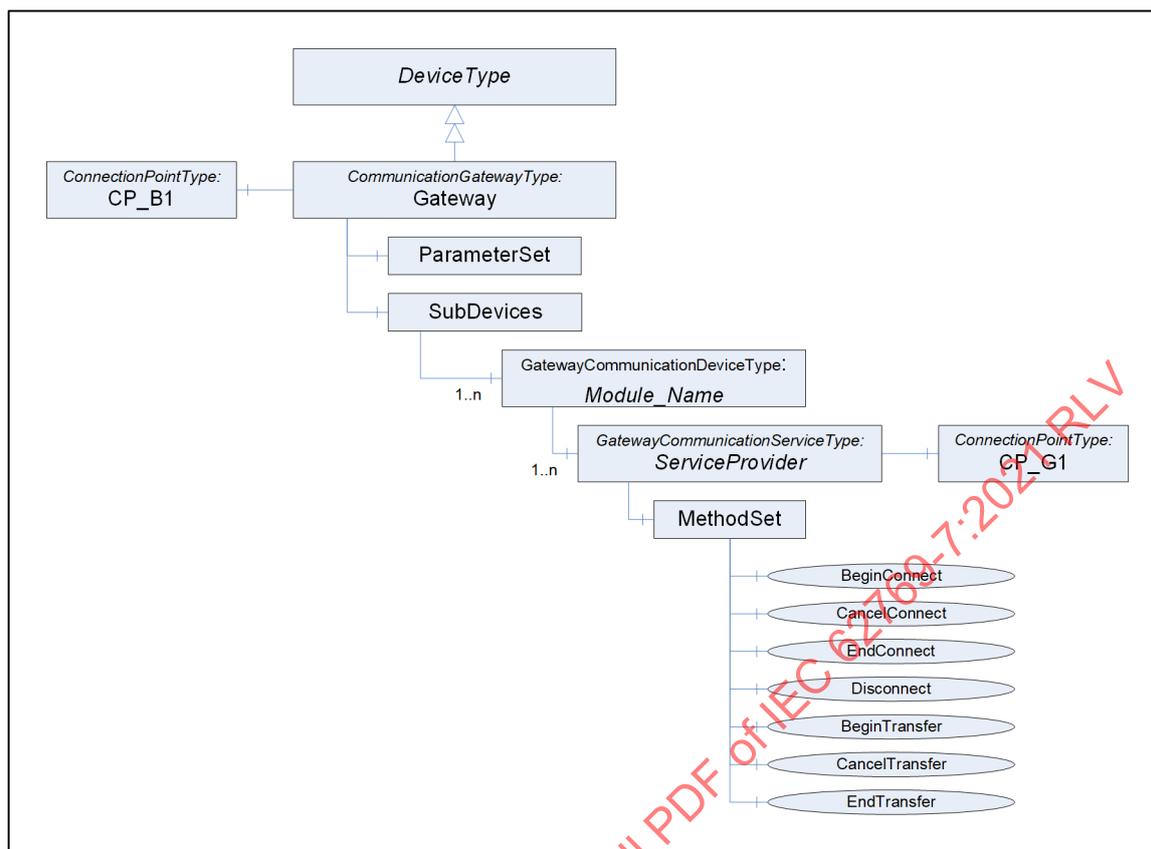

IEC

**Figure 12 – Gateway information model**

The Gateway is connected to the Network (see IEC 62769-5) through an instance of a ConnectionPointType (CP\_B1). CP\_B1 represents the FDI Server-assigned object (see IEC 62769-5) identification (name).

The Gateway is an instance of DeviceType. The optionally available ParameterSet (see IEC 62769-5) shall contain all device parameters that parameterize the communication interface used for Gateway-initiated communication service requests.


The elements underneath SubDevices represent the physical or logical access to the network media of the Gateway. The attribute Module\_Name represents the FDI Server-assigned object (see IEC 62769-5) identification (browse name).

The Gateway's communication service processing capabilities are accessible through multiple communication service provider instances created from GatewayCommunicationServiceType. The Business Logic behind the service methods implements the protocol translation function that is associated with the communication service interface.

NOTE Compared to the FDI CommunicationServer, the Gateway does not support the transport of unsolicited messages, see 7.3.4.5.

### 8.2.2 CommunicationGatewayType

The CommunicationGatewayType is a subtype of the DeviceType. Figure 13 shows the CommunicationGatewayType definition. It is formally defined in Table 27.

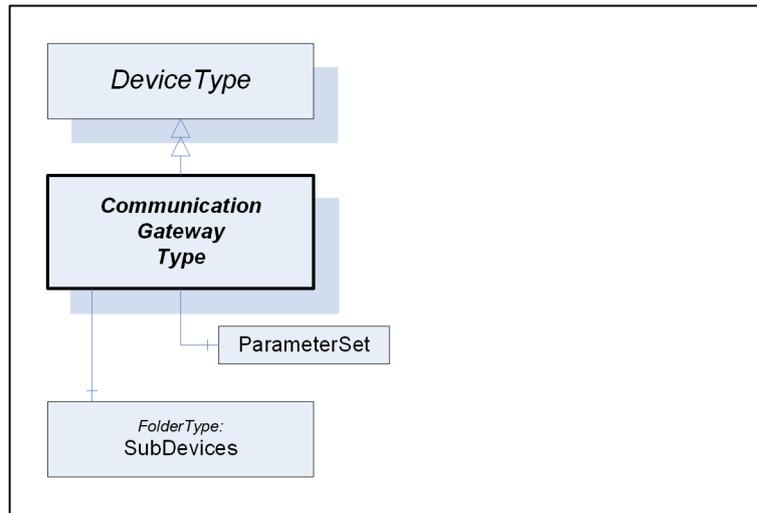

IEC

Figure 13 – CommunicationGatewayType

Table 27 – CommunicationGatewayType definition

Attribute	Value				
BrowseName	CommunicationGatewayType				
IsAbstract	False				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in IEC 62541-100.					
HasComponent	Object	SubDevices		FolderType	Mandatory
HasComponent	Object	ParameterSet			Optional


The module management needed to support a configurable communication hardware structure is based on the COMPONENT definitions for the entire CommunicationGatewayType. The COMPONENT definitions provide sufficient information to run the generic module setup configuration.

NOTE The indication for a static communication hardware layout is present with the COMPONENT attribute CAN\_DELETE set to FALSE for all COMPONENT declarations related to the sub-devices of the entire device.

### 8.2.3 GatewayCommunicationDeviceType

#### 8.2.3.1 General

The GatewayCommunicationDeviceType represents a communication module or channel connected to a particular network. The GatewayCommunicationDeviceType is a subtype of the DeviceType. The ParameterSet for each GatewayCommunicationDeviceType will contain Parameters necessary to configure the operation of the network. The protocol-specific, mandatory bus parameters are specified in IEC 62769-4:2020, Annex F. Figure 14 shows the GatewayCommunicationDeviceType definition that is formally defined in Table 28 and Table 29.

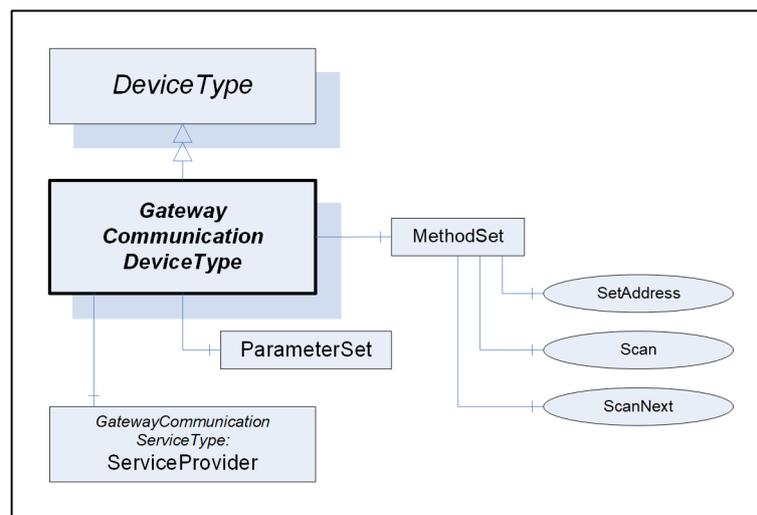

IEC

Figure 14 – GatewayCommunicationDeviceType

Table 28 – GatewayCommunicationDeviceType definition

Attribute	Value				
BrowseName	GatewayCommunicationDeviceType				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Optional
HasComponent	Object	ParameterSet		BaseObjectType	Optional
HasComponent	Object	ServiceProvider		Gateway Communication ServiceType	Mandatory

Table 29 – MethodSet of GatewayCommunicationDeviceType

Attribute	Value				
BrowseName	MethodSet				
IsAbstract	True				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	Scan			Optional
HasComponent	Method	ScanNext			Optional
HasComponent	Method	SetAddress			Optional

### 8.2.3.2 Scan method

Scan shall be used to start discovering devices connected to the physical network. The associations between the method Scan and the corresponding physical network connection enables the FDI Communication Server to access the correct physical network connection. The Scan method is implemented by an EDDL-based method.

Because EDDL logic is not designed to handle XML documents, the Scan service signature deviates from the definition given in 7.3.3.2. The scan service implementation returns the discovered devices using the LIST construct containing the COLLECTION instances. Details are specified in 8.2.3.4. The COLLECTION instances represent the Connection Point instances.

The signature of this Method is specified below. Table 30 and Table 31 specify the arguments and AddressSpace representation, respectively.

**Signature**

`Scan([out] Integer ServiceError)`

**Table 30 – Scan Method arguments**

Argument	Description
ServiceError	0: OK 1: OK/get complete scan result by calling ScanNext -1: Failed/not initialized -2: Failed/not connected to a network -3: Failed/no device found the topologyScanResult is empty

**Table 31 – Scan Method AddressSpace definition**

Attribute	Value				
BrowseName	Scan				
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

**8.2.3.3 ScanNext method:**

ScanNext shall be used to continue discovering devices connected to the physical network. The associations between the method Scan and the corresponding physical network connection enables the FDI Communication Server to access the correct physical network connection. The Scan method is implemented by an EDDL-based method.

Because EDDL logic is not designed to handle XML documents, the Scan service signature deviates from the definition given in 7.3.3.2. The scan service implementation returns the discovered devices using the LIST construct containing COLLECTION instances. Details are specified in 8.2.3.4. The COLLECTION instances represent the Connection Point instances.

The signature of this Method is specified below. Table 32 and Table 33 specify the arguments and AddressSpace representation, respectively.

## Signature

**ScanNext** ([out] Integer ServiceError)

**Table 32 – ScanNext Method arguments**

Argument	Description
ServiceError	0: OK 1: OK/get complete scan result by recalling ScanNext -1: Failed/not initialized -2: Failed/not connected to a network -3: Failed/no device found the topologyScanResult is empty

**Table 33 – ScanNext Method AddressSpace definition**

Attribute	Value				
BrowseName	ScanNext				
References	NodeClass	BrowseName	Data Type	Type Definition	ModellingRule
HasProperty	Variable	OutputArguments	Argument[]	PropertyType	Mandatory

### 8.2.3.4 Scan List

Each EDD describing the Connection Point of a Gateway shall describe the LIST element that holds the list of discovered devices after the successful execution of the Scan service.

```
LIST <Id>
{
  TYPE <ListEntry>;
}
```

<ID>: The identifier shall match with the SCAN\_LIST attribute value described in 8.3.2.4.

<ListEntry>: The attribute value shall refer to the COLLECTION definition that describes the Connection Point as defined in 8.3.2.4.

### 8.2.3.5 SetAddress Method

For definitions, see 7.3.3.4.

## 8.2.4 GatewayCommunicationServiceType

### 8.2.4.1 General

Communication services provide the means to communicate with a Device or to, for example, execute a Scan on a Network. Communication services are represented through EDDL-based methods (business logic) provided with the FDI Device Package-contained EDD.

The implementation of all communication services except the Disconnect service follows an asynchronous pattern. This implies that each communication service is split into three methods. This allows the FDI Server to execute communication services in parallel as well as cancel operations that last too long.


Begin<name>: this method starts the execution of the service. The method returns either the execution state of <name> or the result if it is immediately present.

End<name>: this methods checks, if the result of the service is already available, that it was started using a preceding Begin<name> call. Like Begin<name>, this method returns either the execution state or the result if available.

Cancel<name>: this method cancels a started service execution.

A service identification number (ServiceId) enables the Communication Gateway to keep track of the relation between the method calls that belong to a single communication service process. If the Communication Gateway supports multiple instances of GatewayCommunicationServiceType, these instances share information about currently used ServiceIds. Thus, a communication service has to be executed on a single instance of GatewayCommunicationServiceType.

To reduce unnecessary poll cycles both methods Begin<name> End<name> return a delay time value (DelayForNextCall). The method caller shall delay the invocation of the method End<name> according to the returned argument value.

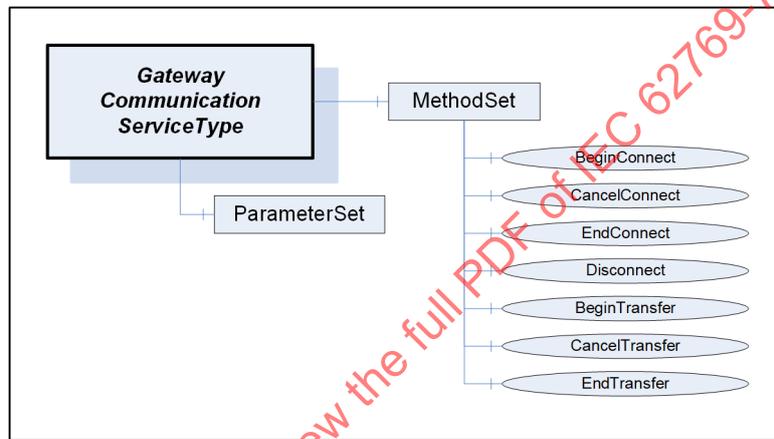

IEC

Figure 15 – GatewayCommunicationServiceType

Table 34 – GatewayCommunicationServiceType definition

Attribute	Value				
BrowseName	GatewayCommunicationServiceType				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
Subtype of the DeviceType defined in OPC UA Part DI.					
HasComponent	Object	MethodSet		BaseObjectType	Mandatory
HasComponent	Object	ParameterSet		BaseObjectType	Optional

**Table 35 – MethodSet of GatewayCommunicationServiceType**

Attribute	Value				
BrowseName	MethodSet				
IsAbstract					
References	NodeClass	BrowseName	Data Type	TypeDefinition	ModellingRule
HasComponent	Method	BeginConnect			Optional
HasComponent	Method	CancelConnect			Optional
HasComponent	Method	EndConnect			Optional
HasComponent	Method	Disconnect			Optional
HasComponent	Method	BeginTransfer			Mandatory
HasComponent	Method	CancelTransfer			Mandatory
HasComponent	Method	EndTransfer			Mandatory

#### 8.2.4.2 Connect service

The Connect service shall be used to establish a communication relation to a device that is physically connected to the Network. Establishing the communication relation may imply checks of identification data that are part of the addressData with data inside the physical device. The service performs this DeviceType match verification in accordance with a corresponding network protocol standard. Related details are specified in IEC 62769-4:2020, Annex F.

The devices' address is contained in the ConnectionPoint of the corresponding Device Instance within the Information Model (Device Connection Point). The communication relation between the Information Model associated-device application and the physical device is further on identified by the communication-relation identifier. Details about how to manage the status of a communication relation are described in Clause 6.

NOTE 1 As the NodeId is a unique identifier within the Information Model scope, the NodeId of the Device Connection Point can be a unique identifier for any communication relation in the scope of a communication device.

NOTE 2 The term "communication relation" is introduced to describe the status of an infrastructure that enables data exchange between the information model-hosted data and a physical device. If the communication relation is established, data exchange is possible.

The signatures of the connect service methods are specified below. Table 36 specifies the arguments.

**Signature**

```

BeginConnect (
    [in]   ByteString      CommunicationRelationId,
    [in]
    [out]  <AddressData>,
    [in]   UInt32          <DeviceInformation>,
    [out]  UInt32          ServiceID,
    [out]  UInt32          DelayForNextCall,
    [out]  Int32           ServiceError);
    
```

```

EndConnect (
    [in]   ByteString      CommunicationRelationId,
    [out]  <DeviceInformation>,
    [in]   UInt32          ServiceID,
    [out]  UInt32          DelayForNextCall,
    [out]  Int32           ServiceError);
    
```

```

CancelConnect (
    [in]   ByteString      CommunicationRelationId,
    [in]   UInt32          ServiceID,
    [out]  Int32           ServiceError);
    
```

**Table 36 – Connect Method arguments**

Argument	Description
CommunicationRelationId	This is a client generated ID that is used to uniquely identify this connection. This could be an index (e.g. a NodeId) that the client (= FDI Server) needs in order to identify entries in its topology.
<AddressData>	This is a placeholder for a protocol-specific argument list that is used for the address and optional device identification data (details are described in IEC 62769-4:2020, Annex F.
<DeviceInformation>	A protocol-specific argument list in which the connect routine stores the resulting data.
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response.
DelayForNextCall	The value specifies a delay time in ms the caller shall wait before the next invocation of EndConnect.
ServiceError	0: OK/function started asynchronously, result has to be polled with EndConnect 1: OK/execution finished, connection established successfully -1: Connect Failed/cancelled by caller -2: Call Failed/unknown service ID -3: Connect Failed/device not found -4: Connect Failed/invalid device address -5: Connect Failed/invalid device identification

**8.2.4.3 Disconnect method**

Specified in 7.3.4.3.

**8.2.4.4 Transfer service**

Transfer shall be used to perform information exchange with a Device.

The signatures of the Transfer service methods are specified below. All arguments are specified in Table 37.

**Signature**

```

BeginTransfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   <SendData>,
    [out]  <ReceiveData>,
    [in]   UInt32          ServiceId,
    [out]  UInt32          DelayForNextCall,
    [out]  Int32           ServiceError);

EndTransfer (
    [in]   ByteString      CommunicationRelationId,
    [out]  <ReceiveData>,
    [in]   UInt32          ServiceId,
    [out]  UInt32          DelayForNextCall,
    [out]  Int32           ServiceError);

CancelTransfer (
    [in]   ByteString      CommunicationRelationId,
    [in]   UInt32          ServiceId,
    [out]  Int32           ServiceError);

```

**Table 37 – Transfer Method arguments**

Argument	Description
CommunicationRelationId	See 8.2.4.2.
<SendData>	This is a placeholder for a protocol-specific list of arguments as described in IEC 62769-4:2020, Annex F. The argument values represent the protocol-specific communication service request that is sent to the device.
<ReceiveData>	This is a placeholder for a protocol-specific list of arguments as described in IEC 62769-4:2020, Annex F. The argument values represent the protocol-specific communication service response that is received from the device.
ServiceId	The service transaction code establishes the relation between the service request and the corresponding response.
DelayForNextCall	The value specifies a delay time in ms the caller shall wait before the next invocation of EndTransfer.
ServiceError	0: OK/function started asynchronously, result has to be polled with EndTransfer 1: OK/execution finished, ReceivedData contains the result -1: Transfer Failed/cancelled by caller -2: Call Failed/unknown service ID -3: Transfer Failed/no existing communication relation -4: Transfer Failed/invalid communication relation identifier -5: Transfer Failed/invalid sendData content -6: Transfer Failed/invalid receiveData format

**8.3 FDI Communication Package****8.3.1 General**

Subclause 8.3 specifies the FDI Communication Package details that are specific for Gateways. The definitions given in 5.1 apply also.

### 8.3.2 EDD

#### 8.3.2.1 General

The definitions in 5.2 apply. Additionally, the EDD elements as specified in IEC 62769-4 and provided with a Gateway-specific FDI Communication Package shall contain:

- a) A PROFILE (IEC 61804-3): the PROFILE Definition shall be chosen according to the protocol used for communication service requests.
- b) A Business Logic: the communication service provider related EDD COMPONENTs shall implement the methods specified in IEC 61804-3. These methods implement the protocol bridging logic. The translation procedures open out into outbound communication requests via the EDDL Built-in library function invocation or the writing of data into an online node. The set of usable EDDL Built-in library functions is bound to the PROFILE.
- c) A Module management: the Gateway related Component can implement the ValidateModules (see 5.2.9). The implemented logic shall validate individual changes and handle any parameter-related dependencies for the whole Gateway device. The implementation of ValidateModules is optional when the actual product-specific COMPONENT declaration is sufficient to configure the module setup without any additional Business Logic.

#### 8.3.2.2 Gateway Component

Each FDI Communication Package describing a Gateway shall contain an EDD element describing the Gateway, as defined in 5.2.2. Gateway specifics are described in the following:

```

COMPONENT <DeviceComponentId>
{
    LABEL "<Label>";
    CAN_DELETE TRUE;
    CHECK_CONFIGURATION <ValidateModules>;
    CLASSIFICATION NETWORK_COMPONENT;
    COMPONENT_RELATIONS
    {
        <CommunicationDeviceRelationId>
    }
    PROTOCOL <ProtocolId>;
}
    
```

<ProtocolID>: the existence of this attribute indicates the connectivity of the Gateway regarding outbound communication. It allows the FDI Server to find the network using the same type of protocol to which this Gateway can be connected. For standardized protocols, the value is defined by the related fieldbus organization.

#### 8.3.2.3 Gateway CommunicationDevice Component

Each FDI Communication Package describing a Gateway shall contain at least one EDD element describing at least one CommunicationDevice component, as defined in 5.2.3.

NOTE A Gateway is sometimes referred to as "Remote IO". Remote IO is a Modular Device supporting multiple various module types that can be flexibly assigned to any slot. Thus it is possible to create multiple different Remote IO configurations ( $n - \text{slots} \times m - \text{module types}$ ).

The rules about COMPONENT attribute settings shown in 5.2.3 apply. Gateway specifics are described in the following:

```
COMPONENT <CommunicationDeviceComponentId>
{
  LABEL "<Label>";
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    <CommunicationServiceProviderRelationId>
  }
  SCAN <Scan>;
  SCAN_LIST <ScanList>;
}
```

<Scan>: the attribute refers to the METHOD implementing the device discovery service. The reference works because the identifier value of the METHOD matches with the attribute value. Implementation details are specified in 8.2.3.2.

<ScanList>: the attribute value refers to the LIST describing the topology scan results. This list shall contain all devices discovered during execution of the device discovery service. Implementation details are specified in 8.2.3.4.

#### 8.3.2.4 Communication Service component

The rules defined in 5.2.4 apply.

Additionally, the file describing the component contains the implementations of the methods defined in 8.2.4.2, 8.2.4.3 and 8.2.4.4. The identifier used for the related METHOD constructs matches with the method names specified in Table 35.

#### 8.3.2.5 Connection Point Component

The rules defined in 5.2.5 apply.


#### 8.3.2.6 Connection Point Collection

The rules defined in 5.2.6 apply.

### 8.4 Handling and behavior

#### 8.4.1 General

A Gateway provides functionality to communicate between two communication protocols. Gateways are used to communicate from one network of the automation system to another (subordinated) network. Figure 16 shows a typical example where a HART device is connected to a PROFIBUS Remote I/O. In order to communicate to the HART device, the Remote I/O receives a communication request via the PROFIBUS network (see Figure 16, key 1). The communication request contains the necessary information that allows the gateway to create the according HART Command and send it to the HART device (see Figure 16, key 2). The way the HART Command is wrapped into the PROFIBUS communication request may be standard or Gateway-specific. The HART response (see Figure 16, key 3) from the device is embedded as a PROFIBUS communication response (see Figure 16, key 4). The way the Gateway wraps the response may either be standard or Gateway-specific.

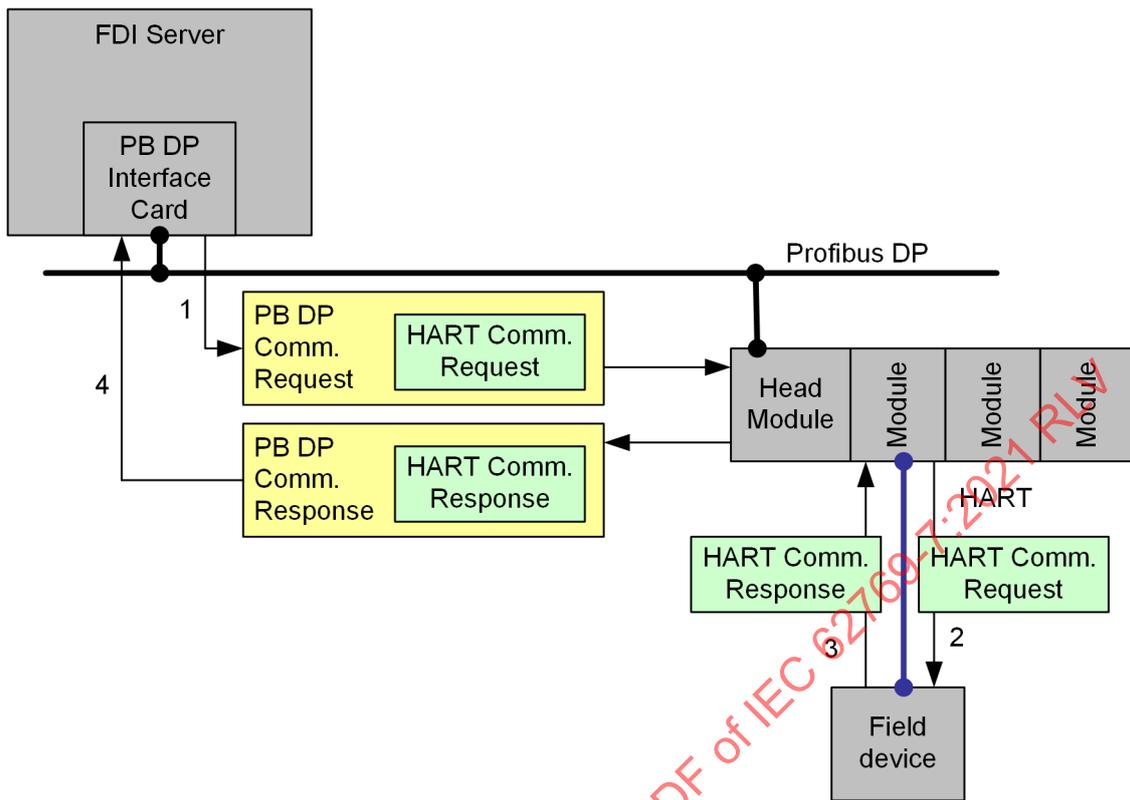

IEC

**Figure 16 – Nested Communication**

Subclause 8.4 defines the Gateway handling and behavior rules along the lifecycle beginning with the deployment, start up, bus commissioning, until the processing of communication services.

**8.4.2 Deployment**

The definitions of 5.2.11 apply.

**8.4.3 Start up**

The Information Model and the FDI Package EDD element-based Gateway representation does not require any start-up procedures.

**8.4.4 Configure the communication hardware**

The handling and behavior matches with the specification in 7.8.9. The only difference is in the channel setup that is represented in the FDI Server-hosted Information Model only.

**8.4.5 Configure the Network**

The handling and behavior matches with the specification in 7.8.10.

**8.4.6 Parameterize**

The Gateway can require proper parameter adjustment prior to any communication service processing. The FDI Communication Package-contained user dialogs (UID or UIP) enable interactive bus parameter adjustment. The FDI Communication Package can provide additional Business Logic for bus parameterization purposes.

#### 8.4.7 Communication relation

The status machine definitions in Clause 6 apply.

If the Communication Gateway supports multiple instances of GatewayCommunicationServiceType, these instances need to share information about existing communication relations.

#### 8.4.8 Connect

Prior to running any information exchange-related communication, the Gateway requires the establishment of a communication relation between the device application and the device connected to the physical network. This happens through the invocation of the method Connect. This enables the Gateway to perform an optional outbound communication service request, which might be needed for a specific Gateway device to establish a communication relation.

The Gateway shall be able to manage multiple communication relations. After successful execution of the method Connect the corresponding communication relation enters the status "CR Online".

Invocation of the services Transfer and Scan is allowed in the status "Online" only.

#### 8.4.9 Disconnect

Invocation of the method Disconnect terminates a communication relation, which inhibits further information exchange related communication with the device connected to the physical network.

After execution of the method Disconnect, the corresponding communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### 8.4.10 Abort indication

Depending on protocol specifics, the Gateway can detect communication aborts. Such communication abort indications are returned as communication service results during the processing of the methods Transfer or Scan. After the Gateway has returned an Abort Indication, the current communication relation enters the status "CR Offline". The communication relation becomes invalid.

#### 8.4.11 Scan

Gateways declare their device discovery service capability based on the EDDL construct COMPONENT – the attributes SCAN and SCAN\_LIST. Related definitions are defined in IEC 61804-3. The SCAN attribute setting is mandatory within the EDD element describing the Gateway CommunicationDevice. The attribute value refers to the METHOD executing the topology scan function. The SCAN\_LIST attribute setting is mandatory within the Gateway CommunicationDevice COMPONENT. The attribute value refers to the element that contains the topology scan result created by the method referenced by the attribute value SCAN. The SCAN\_LIST shall refer to a LIST containing COLLECTION elements describing the detected devices (Scan-List-Item). The protocol-specific content of a Scan-List-Item is described in IEC 62769-4:2020, Annex F.

The invocation of the functions Scan and ScanNext results in outbound communication service requests.

#### **8.4.12 Communication Error Handling**

The communication service processing shall use the EDDL Built-in function provided for aborting in accordance with the EDDL Profiles:

- during the creation of communication messages,
- during the processing of the response from the communication request.

The communication service processing does not trigger communication errors based on communication timeouts.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## Annex A (informative)

### Layered protocols

#### A.1 General

Ethernet-based protocols commonly consist of a stack of different protocols based on the ISO/OSI model. Looking at the growing number of Ethernet-based fieldbus protocols, it is crucial to have a common layered modeling concept for Connection Points based on the ISO/OSI model also.

Connection Points are the elements that contain the address information accessed by the Communication Devices to collect the information needed for communication. The semantics of Connection Point attributes need to be standardized.

The PROFINET device may concurrently support PROFINET, SNMP and HTTP. The information stored in the Connection Point of a device is different for each protocol due to different application layers. The information for layers 1 to 4 shall consistently hold the same information. Therefore, Connection Points shall inherit Connection Point information from lower network layers.

The problem is about how to ensure that address information from lower layers is named in a consistent way throughout all protocols that are built upon the lower layers.

#### A.2 Convention for protocol-specific annex creation

Since Connection Point description is based on EDDL, an actual inheritance approach known from object-oriented programming languages doesn't seem applicable. The approach described in Clause A.2 is based more on conventions. The naming convention shall ensure that the address value attribute names defined for a "lower-level" protocol are reused in the Connection Point definitions for higher-level protocols. The same holds true for the COLLECTION referred VARIABLES. VARIABLE declarations for higher-level protocols shall be copies from the VARIABLE declarations for lower-level protocols. The convention described here is applicable for the creation of protocol-specific annexes. The following shows some EDDL examples of how Connection Point declarations follow this naming convention.

```
COLLECTION ConnectionPoint_MAC
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        VALID
    }
}
```

```
COLLECTION ConnectionPoint_IPv4
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IPv4,
        VALID
    }
}
```

```
COLLECTION ConnectionPoint_TCPUDP
```

```

{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IP,
        PORT,
        VALID
    }
}

COLLECTION ConnectionPoint_PROFINET
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IP,
        PORT,
        DNSNAME,
        VALID
    }
}

COLLECTION ConnectionPoint_HTTP
{
    LABEL "<Label>";
    MEMBERS
    {
        MAC,
        IP,
        PORT,
        URL,
        VALID
    }
}

```

### A.3 FDI Communication Package definition

#### A.3.1 Communication services

The actual communication service is always implemented in accordance with the specific protocol. This is reflected by the different semantic of the communication service arguments specified by the protocol-specific annexes. So, the actual implementation of a ServerCommunicationDeviceType or GatewayCommunicationDeviceType can support just one protocol. Thus, if an FDI Communication Server or Gateway is able to support multiple different protocols, it shall describe separate GatewayCommunicationDeviceTypes or ServerCommunicationDeviceTypes. The need to define protocol-specific service sets represents the demand to separate the Connection Point and Network-related COMPONENT definitions described in A.3.2 and A.3.3.

#### A.3.2 Connection Point

The FDI Communication Package shall contain separate Connection Point descriptions for each supported protocol.

#### A.3.3 Network

The relation between the COMPONENT describing the network and the COMPONENT describing the Connection Point enables generic communication path detection and generic topology configuration. Thus, the FDI Communication Package shall contain a separate COMPONENT definition for each supported Network (protocol).

#### **A.4 Representation in the IM**

Connection Points sharing a certain set of address formation may contain redundant address information, for example the IP address is the same for the SNMP and PROFINET I/O.

If a Device and an FDI Communication Server share a set of protocols, then that Device and FDI Communication Server are associated through multiple separate networks.

A Device supporting multiple protocols can be connected to different FDI Communication Devices that support only one protocol.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## Annex B (normative)

### Namespace and mappings

This annex defines the numeric identifiers for all of the numeric *NodeIds* defined in this document. The identifiers are specified in a CSV file with the following syntax:

<SymbolName>, <Identifier>, <NodeClass>

Where the *SymbolName* is either the *BrowseName* of a *Type Node* or the *BrowsePath* for an *Instance Node* that appears in the specification and the *Identifier* is the numeric value for the *NodeId*.

The *BrowsePath* for an *Instance Node* is constructed by appending the *BrowseName* of the instance *Node* to the *BrowseName* for the containing instance or type. An underscore character is used to separate each *BrowseName* in the path.

The *NamespaceUri* <http://fdi-cooperation.com/OpcUa/FDI7/> is applied to *NodeIds* defined here.

The CSV released with this version of the document is provided by FieldComm Group™, see <https://www.fieldcommgroup.org>. An electronic version of the complete Information Model defined in this document is also provided. It follows the XML Information Model Schema syntax defined in IEC 62541-6.

The Information Model Schema released with this version of the document is provided by FieldComm Group™.

---

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RL1

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of IEC 62769-7:2021 RLV

## SOMMAIRE

AVANT-PROPOS.....	70
INTRODUCTION.....	72
1 Domaine d'application .....	73
2 Références normatives.....	74
3 Termes, définitions, termes abrégés et conventions .....	74
3.1 Termes et définitions .....	74
3.2 Termes abrégés.....	74
3.3 Conventions.....	74
4 Généralités.....	75
5 Paquetage de Communication FDI.....	76
5.1 Généralités .....	76
5.2 Description d'Appareil Électronique (EDD).....	76
5.2.1 Règles générales.....	76
5.2.2 Composant Appareil .....	77
5.2.3 Composant CommunicationDevice.....	79
5.2.4 Composant fournisseur de services de communication .....	80
5.2.5 Composant Point de Connexion.....	81
5.2.6 Collection du Point de Connexion .....	82
5.2.7 Composant réseau.....	82
5.2.8 ValidateNetwork .....	83
5.2.9 ValidateModules .....	84
5.2.10 Éléments spécifiques de l'UIP.....	84
5.2.11 Déploiement .....	84
6 Relations de communication .....	85
7 Définition du Serveur de Communication FDI.....	86
7.1 Généralités .....	86
7.2 Caractéristiques générales .....	86
7.3 Modèle d'Information.....	86
7.3.1 Généralités.....	86
7.3.2 CommunicationServerType.....	89
7.3.3 ServerCommunicationDeviceType .....	93
7.3.4 ServerCommunicationServiceType .....	96
7.4 Profil de Serveur OPC UA pour le Serveur de Communication FDI.....	100
7.5 Mapping du Modèle d'Information du Serveur FDI au Modèle d'Information du Serveur de Communication FDI.....	101
7.5.1 Généralités.....	101
7.5.2 Différences des Modèles d'Information .....	101
7.6 Programme d'installation.....	103
7.7 Paquetage de Communication FDI.....	103
7.7.1 Généralités.....	103
7.7.2 EDD pour le Serveur de Communication léger .....	103
7.7.3 EDD pour le Serveur de Communication multivoie .....	103
7.7.4 COMMAND dans les EDD pour les Serveurs de Communication FDI.....	104
7.7.5 Documentation .....	105

7.8	Traitement et comportement .....	105
7.8.1	Généralités .....	105
7.8.2	Déploiement .....	106
7.8.3	Configuration du Serveur .....	106
7.8.4	Démarrage .....	107
7.8.5	Arrêt .....	107
7.8.6	Chien de garde .....	107
7.8.7	Établissement de la connexion OPC UA .....	107
7.8.8	Instanciation du Serveur de Communication .....	107
7.8.9	Configuration du matériel de communication.....	108
7.8.10	Configuration du Réseau .....	108
7.8.11	Paramétrage.....	108
7.8.12	Initialisation .....	108
7.8.13	Création de l'objet de service de communication .....	108
7.8.14	Relation de communication.....	108
7.8.15	Connect.....	109
7.8.16	Disconnect .....	109
7.8.17	Indication d'abandon .....	109
7.8.18	Scan.....	110
7.8.19	SetAddress.....	110
8	Définition de la Passerelle de Communication FDI.....	110
8.1	Généralités .....	110
8.2	Modèle d'Information.....	110
8.2.1	Généralités .....	110
8.2.2	CommunicationGatewayType .....	111
8.2.3	GatewayCommunicationDeviceType .....	112
8.2.4	GatewayCommunicationServiceType .....	114
8.3	Paquetage de Communication FDI .....	118
8.3.1	Généralités .....	118
8.3.2	EDD .....	118
8.4	Traitement et comportement .....	120
8.4.1	Généralités .....	120
8.4.2	Déploiement .....	121
8.4.3	Démarrage .....	121
8.4.4	Configuration du matériel de communication.....	121
8.4.5	Configuration du Réseau .....	121
8.4.6	Paramétrage.....	121
8.4.7	Relation de communication.....	121
8.4.8	Connect.....	122
8.4.9	Disconnect .....	122
8.4.10	Indication d'abandon .....	122
8.4.11	Scan.....	122
8.4.12	Traitement des Erreurs de Communication .....	122
Annexe A (informative)	Protocoles hiérarchisés .....	123
A.1	Généralités .....	123
A.2	Convention relative à la création de l'annexe spécifique au protocole .....	123

A.3	Définition du Paquetage de Communication FDI .....	124
A.3.1	Services de communication .....	124
A.3.2	Point de Connexion .....	124
A.3.3	Réseau .....	124
A.4	Représentation dans le Modèle d'Information .....	125
Annexe B (normative)	Espace de noms et mappings .....	126
Figure 1	– Diagramme de l'architecture FDI .....	73
Figure 2	– Architecture de l'infrastructure de communication FDI .....	75
Figure 3	– Relation de communication .....	85
Figure 4	– Diagramme états-transitions de la relation de communication .....	86
Figure 5	– AddressSpace du Serveur de Communication FDI .....	88
Figure 6	– CommunicationServerType .....	89
Figure 7	– ServerCommunicationDeviceType .....	93
Figure 8	– ServerCommunicationServiceType .....	97
Figure 9	– Différences des Modèles d'Information (exemple) .....	101
Figure 10	– Diagramme d'états du Serveur de Communication FDI .....	106
Figure 11	– Diagramme états-transitions de la relation de communication .....	109
Figure 12	– Modèle d'Information de la Passerelle .....	110
Figure 13	– CommunicationGatewayType .....	111
Figure 14	– GatewayCommunicationDeviceType .....	112
Figure 15	– GatewayCommunicationServiceType .....	115
Figure 16	– Communication imbriquée .....	121
Tableau 1	– Arguments de l'Action ValidateNetwork .....	84
Tableau 2	– Arguments de l'Action ValidateModules .....	84
Tableau 3	– Définition de CommunicationServerType .....	89
Tableau 4	– MethodSet de CommunicationServerType .....	89
Tableau 5	– Arguments de la Méthode Reset .....	90
Tableau 6	– Définition de l'AddressSpace de la Méthode Reset .....	90
Tableau 7	– Arguments de la Méthode Initialize .....	91
Tableau 8	– Définition de l'AddressSpace de la Méthode Initialize .....	91
Tableau 9	– Arguments de la Méthode AddComponent .....	92
Tableau 10	– Définition de l'AddressSpace de la Méthode AddComponent .....	92
Tableau 11	– Arguments de la Méthode RemoveComponent .....	93
Tableau 12	– Définition de l'AddressSpace de la Méthode RemoveComponent .....	93
Tableau 13	– Définition de ServerCommunicationDeviceType .....	94
Tableau 14	– MethodSet de ServerCommunicationDeviceType .....	94
Tableau 15	– Arguments de la Méthode Scan .....	95
Tableau 16	– Définition de l'AddressSpace de la Méthode Scan .....	95
Tableau 17	– Arguments de la Méthode ResetScan .....	95
Tableau 18	– Définition de l'AddressSpace de la Méthode ResetScan .....	96
Tableau 19	– Arguments de la Méthode SetAddress .....	96
Tableau 20	– Définition de ServerCommunicationServiceType .....	97

Tableau 21 – MethodSet de ServerCommunicationServiceType.....	97
Tableau 22 – Arguments de la Méthode Connect.....	98
Tableau 23 – Arguments de la Méthode Disconnect.....	99
Tableau 24 – Arguments de la Méthode Transfer.....	99
Tableau 25 – Arguments de la Méthode GetPublishedData.....	100
Tableau 26 – Définition de <i>FDICommunicationServer_Facet</i> .....	100
Tableau 27 – Définition de CommunicationGatewayType.....	111
Tableau 28 – Définition de GatewayCommunicationDeviceType.....	112
Tableau 29 – MethodSet de GatewayCommunicationDeviceType.....	113
Tableau 30 – Arguments de la Méthode Scan.....	113
Tableau 31 – Définition de l'AddressSpace de la Méthode Scan.....	113
Tableau 32 – Arguments de la Méthode ScanNext.....	114
Tableau 33 – Définition de l'AddressSpace de la Méthode ScanNext.....	114
Tableau 34 – Définition de GatewayCommunicationServiceType.....	116
Tableau 35 – MethodSet de GatewayCommunicationServiceType.....	116
Tableau 36 – Arguments de la Méthode Connect.....	117
Tableau 37 – Arguments de la Méthode Transfer.....	118

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

## COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

## INTÉGRATION DES APPAREILS DE TERRAIN (FDI) –

## Partie 7: Appareils de communication

## AVANT-PROPOS

- 1) La Commission Électrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. À cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets et de ne pas avoir signalé leur existence.

La Norme internationale IEC 62769-7 a été établie par le sous-comité 65E: Les dispositifs et leur intégration dans les systèmes de l'entreprise, du comité d'études 65 de l'IEC: Mesure, commande et automation dans les processus industriels.

Cette deuxième édition annule et remplace la première édition parue en 2015. Cette édition constitue une révision technique.

Cette édition inclut les modifications techniques majeures suivantes par rapport à l'édition précédente:

- a) prise en charge de l'extension de protocoles génériques qui visent à accélérer l'adoption d'autres technologies;
- b) prise en charge de nouveaux protocoles;
- c) extension de protocoles génériques qui permettent l'adoption d'autres protocoles de communication;
- d) d'après l'extension de protocoles génériques: Modbus RTU.

Le texte de cette Norme internationale est issu des documents suivants:

FDIS	Rapport de vote
65E/764/FDIS	65E/774/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à l'approbation de cette Norme internationale.

Ce document a été rédigé selon les Directives ISO/IEC, Partie 2.

Une liste de toutes les parties de la série 62769, publiées sous le titre général *Intégration des appareils de terrain (FDI)*, peut être consultée sur le site web de l'IEC.

Le comité a décidé que le contenu de ce document ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous "<http://webstore.iec.ch>" dans les données relatives au document recherché. À cette date, le document sera

- reconduit,
- supprimé,
- remplacé par une édition révisée, ou
- amendé.

**IMPORTANT – Le logo 'colour inside' qui se trouve sur la page de couverture de cette publication indique qu'elle contient des couleurs qui sont considérées comme utiles à une bonne compréhension de son contenu. Les utilisateurs devraient, par conséquent, imprimer cette publication en utilisant une imprimante couleur.**

## INTRODUCTION

La série IEC 62769 est publiée sous le titre général "*Intégration des appareils de terrain (FDI)*" et comporte les parties suivantes:

- Partie 1: Vue d'ensemble
- Partie 2: Client FDI
- Partie 3: Serveur FDI
- Partie 4: Paquetages FDI
- Partie 5: Modèle d'Information FDI
- Partie 6: Mapping de technologies FDI
- Partie 7: Appareils de Communication FDI
- Partie 100: Profils – Extensions de protocoles génériques
- Partie 101-1: Profils – Foundation Fieldbus H1
- Partie 101-2: Profils – Foundation Fieldbus HSE
- Partie 103-1: Profils – PROFIBUS
- Partie 103-4: Profils – PROFINET
- Partie 109-1: Profils – HART et WirelessHART
- Partie 115-2: Profils – Définitions spécifiques au protocole pour Modbus-RTU
- Partie 150-1: Profils – ISA 100.11a

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV


# INTÉGRATION DES APPAREILS DE TERRAIN (FDI) –

## Partie 7: Appareils de communication

### 1 Domaine d'application

La présente partie de l'IEC 62769 spécifie les éléments de mise en œuvre des fonctions de communication, appelés Appareils de Communication (IEC 62769-5).

L'architecture FDI complète est représentée à la Figure 1. Les composants architecturaux qui relèvent du domaine d'application du présent document ont été mis en évidence dans cette représentation. Le domaine d'application du document relatif aux Paquetages FDI est limité aux Appareils de Communication. Le Serveur de communication représenté à la Figure 1 est un exemple d'Appareil de Communication spécifique.

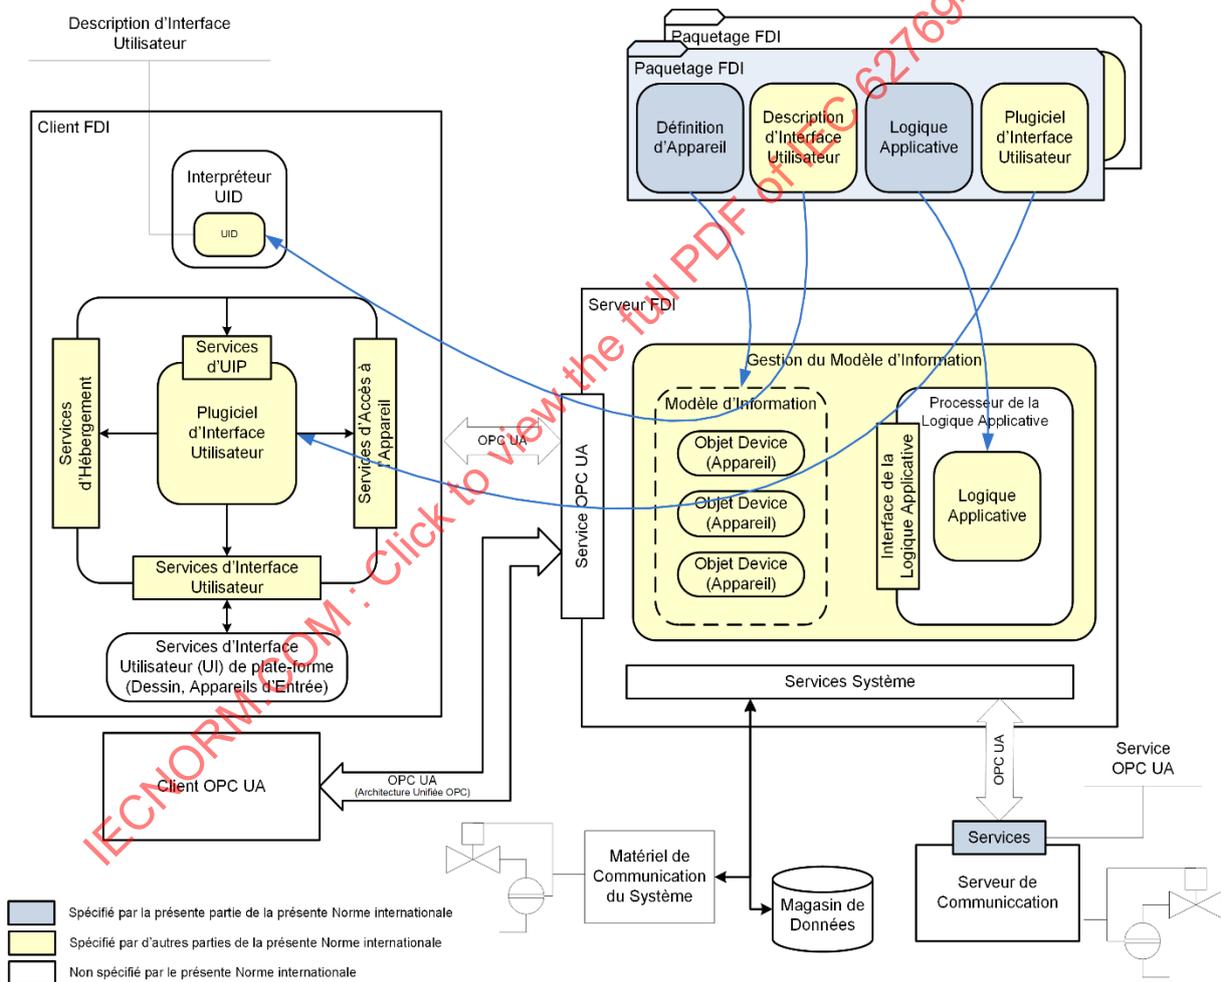

**Figure 1 – Diagramme de l'architecture FDI**

## 2 Références normatives

Les documents ci-après, dans leur intégralité ou non, sont des références normatives indispensables à l'application du présent document. Pour les références datées, seule l'édition citée s'applique. Pour les références non datées, la dernière édition du document de référence s'applique (y compris les éventuels amendements).

IEC 61804-3, *Blocs Fonctionnels (FB) pour les procédés industriels et le Langage de Description Electronique de Produit (EDDL) – Partie 3: Sémantique et syntaxe EDDL*

IEC 61804-4, *Blocs fonctionnels (FB) pour les procédés industriels et le langage de description électronique de produit (EDDL) – Partie 4: Interprétation EDD*

IEC 62541 (toutes les parties), *Architecture unifiée OPC*

IEC 62769-1, *Intégration des appareils de terrain (FDI) – Partie 1: Vue d'ensemble*

IEC 62769-2, *Intégration des appareils de terrain (FDI) – Partie 2: Client FDI*

IEC 62769-3, *Intégration des appareils de terrain (FDI) – Partie 3: Serveur FDI*

IEC 62769-4:2020, *Intégration des appareils de terrain (FDI) – Partie 4: Paquetages FDI*

IEC 62769-5, *Intégration des appareils de terrain (FDI) – Partie 5: Modèle d'Information FDI*

## 3 Termes, définitions, termes abrégés et conventions

### 3.1 Termes et définitions

Pour les besoins du présent document, les termes et définitions de l'IEC 62769-1, ainsi que les suivants s'appliquent.

L'ISO et l'IEC tiennent à jour des bases de données terminologiques destinées à être utilisées en normalisation, consultables aux adresses suivantes:

- IEC Electropedia: disponible à l'adresse <http://www.electropedia.org/>
- ISO Online browsing platform: disponible à l'adresse <http://www.iso.org/obp>

#### 3.1.1

##### **passerelle**

appareil de communication qui permet de relier différents réseaux physiques ou différents protocoles

### 3.2 Termes abrégés

Pour les besoins du présent document, les termes abrégés de l'IEC 62769-1, ainsi que les suivants s'appliquent.

HTTP	Hypertext Transfer Protocol (protocole de transfert hypertexte)
IP	Internet Protocol (protocole Internet)
PHY	Matériel de communication physique
SNMP	Simple Network Management Protocol (protocole de gestion de réseau simple)
TCP	Transmission Control Protocol (protocole de contrôle de transmission)
URI	Uniform Resource Identifier (identificateur uniforme de ressource)

### 3.3 Conventions

Pour les besoins du présent document, les conventions de l'IEC 62769-1 s'appliquent.

Le présent document utilise la notation graphique définie dans l'IEC 62769-5.

## 4 Généralités

Le terme abstrait "Appareil de Communication FDI" représente une entité qui met en œuvre les fonctions de communication sur un réseau au moyen d'un protocole spécifique. Le groupe des Appareils de Communication FDI se divise en deux groupes principaux.

- Le Serveur de Communication FDI est un Serveur dédié de l'architecture unifiée OPC (OPC UA) qui fournit l'accès à un ou plusieurs réseaux d'appareils de terrain. Le Serveur de Communication FDI est spécifié à l'Article 7.
- La Passerelle de Communication FDI permet de relier différents réseaux physiques ou différents protocoles. La logique applicative du pontage est mise en œuvre dans le composant EDD qui est fourni avec un Paquetage de Communication FDI. La Passerelle de Communication FDI est spécifiée à l'Article 8.

NOTE Les principales différences entre une Passerelle et un Serveur de Communication sont les suivantes: En matière de FDI, le Serveur de Communication FDI est un Serveur OPC UA dédié qui fournit l'accès à un ou plusieurs réseaux d'appareils de terrain. Une Passerelle est un Appareil de Communication qui permet de relier différents réseaux physiques ou différents protocoles. La représentation logique d'un appareil Passerelle dans le Modèle d'Information hébergé par le Serveur FDI permet au Serveur FDI de traiter la communication dans des topologies hétérogènes de réseau.

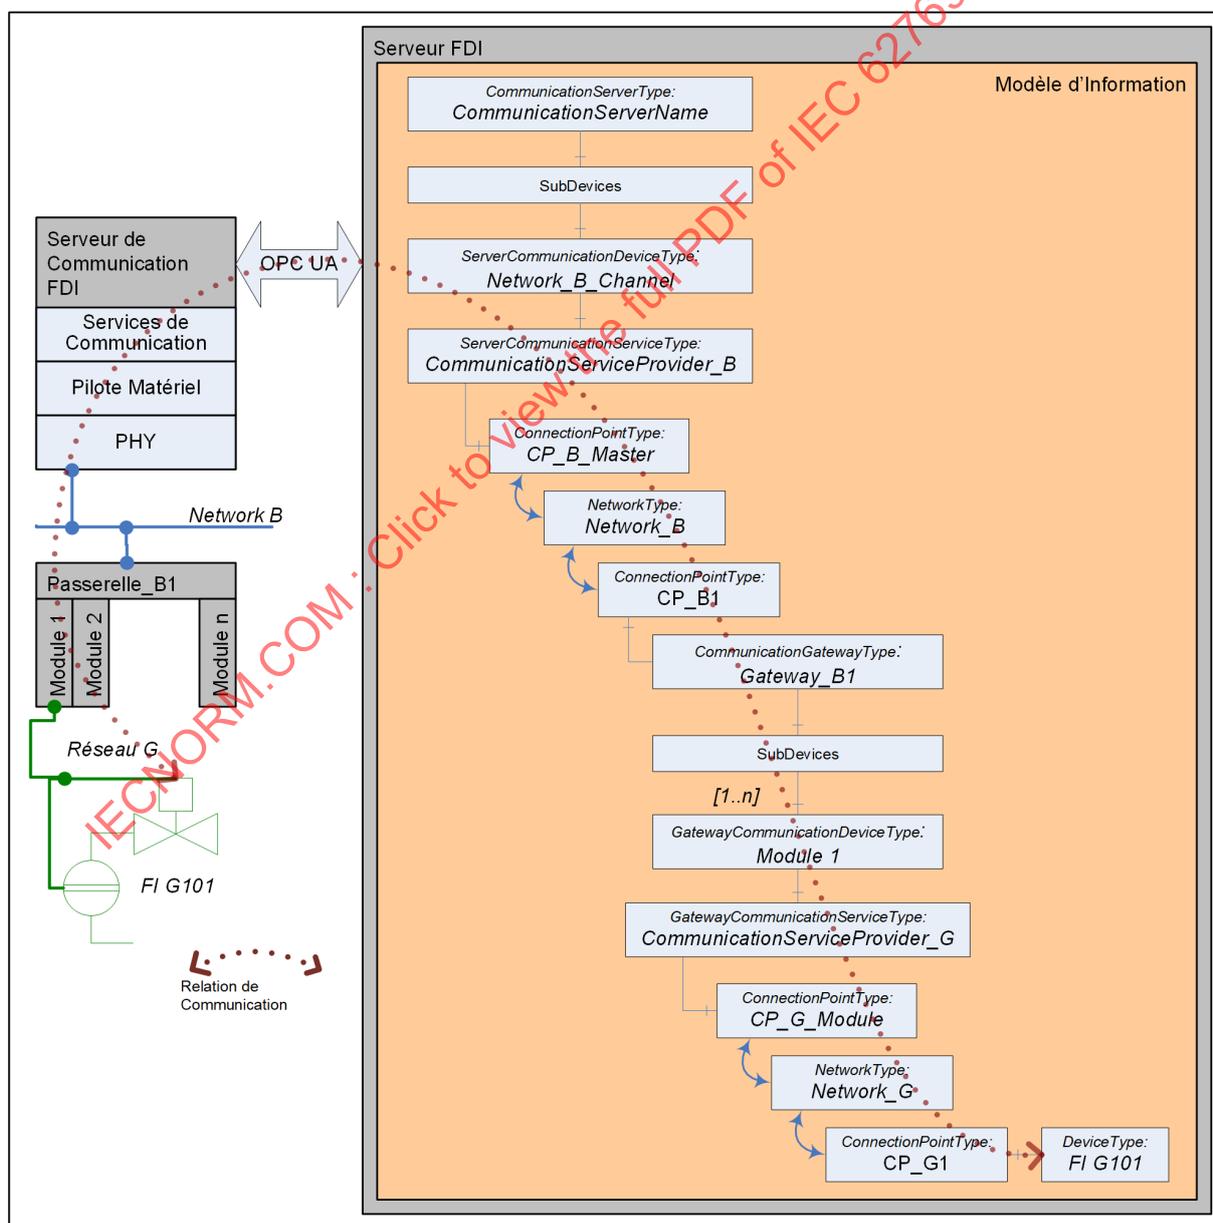


Figure 2 – Architecture de l'infrastructure de communication FDI

Le Modèle d'Information hébergé par le Serveur FDI contient une représentation de la topologie du réseau (voir également l'IEC 62769-5). Le Modèle d'Information représenté à la Figure 2 est un exemple extrait pour représenter la manière dont les éléments utilisés du Modèle d'Information reflètent la topologie réelle du réseau.

- 1) L'instance de `CommunicationServerType` (dénommée `CommunicationServerName`) représente le Serveur de Communication FDI. Le Serveur de Communication FDI met en œuvre l'accès au réseau de communication physique (matériel de communication). L'Article 7 décrit les éléments spécifiques du Modèle d'Information, le contenu exigé pour le Paquetage de Communication FDI et le traitement des éléments qui s'y trouvent. Pour les sous-appareils, voir l'IEC 62769-5.
- 2) L'instance de `ServerCommunicationDeviceType` et de `ServerCommunication-ServiceType` (dénommée `Network_B_Channel`) est mappée aux services de communication mis en œuvre par le Serveur de Communication FDI. Le `ServerCommunicationDeviceType` est spécifié en 7.3.3. Le `ServerCommunicationServiceType` est spécifié en 7.3.4.
- 3) L'instance de `CommunicationGatewayType` (dénommée `Gateway_B1`) représente la Passerelle physique. L'Article 8 décrit les éléments spécifiques associés du Modèle d'Information, le contenu exigé pour le Paquetage FDI et le traitement des éléments qui s'y trouvent.
- 4) L'instance de `GatewayCommunicationDeviceType` (dénommée Module 1) est mappée à un module physique ou logique, ce qui permet la communication au réseau auquel ce module est connecté. Le `GatewayCommunicationDeviceType` est spécifié en 8.3.2.3. Les éléments spécifiques associés de la Passerelle sont décrits à l'Article 8.
- 5) L'instance de `GatewayCommunicationServiceType` (dénommée `CommunicationServiceProvider_G`) représente la capacité des Passerelles à traiter les services de communication. La mise en œuvre spécifique de la Passerelle de `GatewayCommunicationServiceType` est fondée sur la Logique Applicative qui permet d'exécuter les services de communication dans les réseaux hétérogènes de communication.
- 6) Une relation de communication (de plus amples informations sont données à l'Article 6) entre un appareil physique et la représentation de l'appareil gérée par le Serveur FDI est toujours associée aux objets du service de communication qui sont des instances d'un `GatewayCommunicationServiceType` ou d'un `ServerCommunicationServiceType`. La capacité d'instanciation de plusieurs protocoles de supports d'objets du service de communication permet de traiter plusieurs connexions logiques entre un maître bus et un appareil.
- 7) Le Modèle d'Information représente les connexions entre les appareils physiques représentés sur le côté gauche de la Figure 2 d'après les instances du `NetworkType` `ConnectionPointType` et les relations décrites. `ConnectionPointType` et `NetworkType` sont spécifiés dans l'IEC 62769-5.

## 5 Paquetage de Communication FDI

### 5.1 Généralités

Le Serveur FDI importe le Paquetage de Communication FDI comme tout autre Paquetage d'Appareil FDI. L'Article 5 spécifie les informations détaillées du Paquetage de Communication FDI.

### 5.2 Description d'Appareil Électronique (EDD)

#### 5.2.1 Règles générales

L'élément EDD contenu dans le Paquetage de Communication FDI n'est pas limité, mais est associé à une annexe spécifique de protocole (IEC 62769-4:2020, Annexe F).

Les éléments EDD tels que spécifiés dans l'IEC 62769-4:2020, Annexe F et fournis avec un Paquetage de Communication FDI doivent décrire:

- a) Le paramètre et les structures de paramètre. Les définitions des paramètres obligatoires spécifiques au protocole se trouvent dans l'IEC 62769-4:2020, Annexe F. Les paramètres doivent contenir tout paramètre qui exige un ajustement pour le fonctionnement approprié du service de communication.
- b) L'identification de la Couche Physique. Les définitions spécifiques au protocole se trouvent dans l'IEC 62769-4:2020, Annexe F.

La modularité des Appareils de communication: Les informations de modularité doivent être fondées sur l'utilisation du COMPONENT des constructions EDDL (voir l'IEC 61804-3).

La FDI représente la modularité d'un Appareil de Communication susceptible de s'adapter au matériel de communication qui fournit plusieurs voies de communication physiques ou logiques pour accéder aux multiples réseaux de communication logiques ou physiques. Chaque élément de module de l'ensemble de l'Appareil de Communication doit être décrit par un élément EDD distinct.

- c) La définition du COMPONENT doit être utilisée pour prendre en charge la configuration de topologie mise en œuvre dans le système. Les définitions spécifiques au protocole se trouvent dans l'IEC 62769-4:2020, Annexe F. Les définitions du COMPONENT associées sont décrites en 5.2.2, 5.2.3, 5.2.4 et 5.2.7.
- d) La Logique Applicative doit contenir une méthode qui permet de valider le réseau (voir 5.2.8). La fonction de validation ne prend en considération que les éléments directement connectés au réseau. Elle doit être référencée par l'attribut CHECK\_CONFIGURATION spécifié par le langage de description d'appareil électronique (EDDL).
- e) La Logique Applicative peut contenir une méthode qui permet de valider la configuration du module (voir 5.2.9) ou la configuration du réseau (voir 5.2.8). La fonction de validation ne prend en considération que les éléments directement connectés à l'élément parent concerné dans la topologie. Elle doit être référencée par l'attribut CHECK\_CONFIGURATION spécifié par l'EDDL.
- f) Données relatives au Point de Connexion: Le Point de Connexion (voir 5.2.4 et 5.2.6) doit être décrit par les constructions EDDL COMPONENT, COLLECTION et VARIABLE. La définition du COMPONENT associe l'élément Point de Connexion à l'Appareil de Communication. Les définitions de la VARIABLE représentent les propriétés d'un Point de Connexion spécifique. La COLLECTION représente la structure du Point de Connexion comme telle. Les définitions spécifiques au protocole se trouvent dans l'IEC 62769-4:2020, Annexe F.
- g) MENU:

La structure Menu doit suivre les conventions Menu pour les applications PC conformément à l'IEC 61804-4 qui permettent l'accès aux éléments suivants:

- 1) Paramètres de type d'Appareil de Communication FDI (bus): Ces paramètres doivent être rendus accessibles par le biais de "offline\_root\_menu".
- 2) Les Dialogues de Configuration de la topologie doivent être rendus accessibles par le biais du point d'entrée du menu "topology\_configuration".

### 5.2.2 Composant Appareil

Chaque Paquetage de Communication FDI doit contenir un élément EDD qui décrit l'appareil.

```
COMPONENT <DeviceComponentId>
{
  LABEL "<Label>";
  CAN_DELETE TRUE;
  CHECK_CONFIGURATION <ValidateModules>;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    <CommunicationDeviceRelationId>
  }
}
```

```

}

COMPONENT_RELATION <CommunicationDeviceRelationId>
{
  LABEL "Relation type description";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS
  {
    <CommunicationDeviceComponentId>
    {
      AUTO_CREATE <autoCreate>;
      REQUIRED_RANGES
      {
        <AddressVar>{ MIN_VALUE <AddrMin>; MAX_VALUE <AddrMax>;}
      }
    }
  }
  MINIMUM_NUMBER <minNumber>;
  MAXIMUM_NUMBER <maxNumber>;
}

```

<DeviceComponentId>: L'identificateur du COMPONENT identifie la description du composant pour le type d'appareil.

<Label>: La chaîne de valeur doit contenir une chaîne qui permet à un utilisateur humain de déterminer la fonction de l'objet du Serveur de Communication FDI.

<ValidateModules>: La Valeur désigne la METHOD qui met en œuvre la fonction de validation de la configuration de topologie du module. Les informations détaillées de mise en œuvre sont spécifiées en 5.2.9.

L'attribut COMPONENT\_RELATIONS permet de décrire comment les modules peuvent être connectés. La définition de COMPONENT\_RELATIONS est facultative. Si elle est utilisée, elle doit décrire les relations avec les définitions de CommunicationDevice. La construction permet d'effectuer la configuration de topologie actionnée par le Serveur FDI (appareil). Les informations détaillées de syntaxe sont décrites dans l'IEC 61804-3. Le texte suivant décrit l'usage sémantique de la construction COMPONENT\_RELATION.

<CommunicationDeviceRelationId>: La valeur d'attribut identifie la définition COMPONENT\_RELATION qui décrit la relation entre le composant Device et le composant CommunicationDevice.

<CommunicationDeviceComponentId>: La valeur d'attribut doit correspondre à l'identificateur du COMPONENT utilisé dans une déclaration COMPONENT qui décrit un Appareil de Communication (voir 5.2.3).

<autoCreate>: La valeur d'attribut décrit le nombre de composants CommunicationDevice qui peuvent être automatiquement instanciés avec le composant Device.

<minNumber>/<maxNumber>/<autoCreate>: Les valeurs des attributs définissent les contraintes d'instanciation. La définition de ces attributs est facultative. Les valeurs des attributs peuvent contenir des expressions conditionnelles.

Le RELATION\_TYPE doit être défini sur CHILD\_COMPONENT.

<AddressVar>: La valeur d'attribut est une référence à une déclaration de VARIABLE. Cette VARIABLE contient la valeur d'adresse pour une instance CommunicationDevice. La définition de cet attribut est facultative.

<AddrMin>/<AddrMax>: Les valeurs définissent la plage de valeurs d'adresse pour une instance CommunicationDevice. La valeur peut par exemple correspondre à un numéro de position physique. L'utilisation des attributs ADDRESSING et REQUIRED\_RANGES active les routines de configuration générique.

### 5.2.3 Composant CommunicationDevice

Chaque Paquetage de Communication FDI doit contenir au moins un élément EDD qui décrit au moins un composant CommunicationDevice. La structure d'un matériel de communication modulaire doit être décrite par des descriptions COMPONENT CommunicationDevice multiples:

```

COMPONENT <CommunicationDeviceComponentId>
{
  LABEL "<Label>";
  CAN_DELETE <CanDelete>;
  CLASSIFICATION NETWORK_COMPONENT;
  COMPONENT_RELATIONS
  {
    <CommunicationServiceProviderRelationId>
  }
}

COMPONENT_RELATION <CommunicationServiceProviderRelationId>
{
  LABEL "Relation between CommunicationDevice and communication service provider";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS
  {
    <CommunicationServiceProviderId>
    {
      AUTO_CREATE <autoCreate>;
    }
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER <maxNumber>;
}

```

<CommunicationDeviceComponentId>: L'identificateur du COMPONENT identifie le composant CommunicationDevice.

<Label>: La chaîne de valeur doit contenir une chaîne en langage humain qui permet à un utilisateur de déterminer facilement la fonction du composant CommunicationDevice.

<CanDelete>: Les valeurs permises sont TRUE ou FALSE selon qu'un CommunicationDevice nécessite une configuration explicite ou que l'objet du fournisseur de services de communication concerné doit être automatiquement instancié avec le CommunicationDevice. Lorsque l'attribut CAN\_DELETE est défini sur FALSE, la configuration de CommunicationDevice est statique.

La définition de `COMPONENT_RELATIONS` est obligatoire. Elle décrit la relation à la définition du fournisseur de services de communication. La construction permet au Serveur FDI d'instancier les composants du fournisseur de services de communication conformément aux demandes de traitement de la communication. Les informations détaillées de syntaxe sont décrites dans l'IEC 61804-3. Le texte suivant décrit l'usage sémantique de la construction `COMPONENT_RELATION`.

`<CommunicationServiceProviderRelationId>`: La valeur d'attribut identifie la définition de `COMPONENT_RELATION` comme telle.

`<CommunicationServiceProviderId>`: La valeur d'attribut doit correspondre à l'identificateur du `COMPONENT` utilisé dans une déclaration `COMPONENT` qui décrit un fournisseur de services de communication (5.2.4).

`<autoCreate>`: La valeur d'attribut décrit le nombre de fournisseurs de services de communication qui peuvent être automatiquement instanciés avec le composant `CommunicationDevice`.

Le `RELATION_TYPE` doit être défini sur `CHILD_COMPONENT`.

L'attribut `PROTOCOL` ne doit pas être défini.

#### 5.2.4 Composant fournisseur de services de communication

Chaque Paquetage de Communication FDI qui décrit un Appareil de Communication doit contenir au moins un élément EDD qui décrit le fournisseur de services de communication. Le composant EDD ne doit définir aucun paramètre de configuration.

```
COMPONENT <CommunicationServiceProviderId>
{
    LABEL "<Label>";
    BYTE_ORDER <byteOrder>;
    CAN_DELETE <CanDelete>;
    CLASSIFICATION NETWORK_COMMUNICATION_SERVICE_PROVIDER;
    COMPONENT_RELATIONS <CommunicationServiceProvidersConnectionPointRelationId>
    {
        <ConnectionPointRelationId>
    }
}

COMPONENT_RELATION <CommunicationServiceProvidersConnectionPointRelationId>
{
    LABEL "Relation between communication service provider and connection point";
    RELATION_TYPE CHILD_COMPONENT;
    ADDRESSING {<AddressVar>}
    COMPONENTS
    {
        < ConnectionPointId>
        {
            AUTO_CREATE 1;
        }
    }
    MINIMUM_NUMBER 1;
    MAXIMUM_NUMBER 1;
}
```

`<CommunicationServiceProviderId>`: L'identificateur du `COMPONENT` identifie le fournisseur de services de communication.

`<Label>`: La chaîne de valeur doit contenir une chaîne en langage humain qui permet à un utilisateur de déterminer facilement la fonction de l'objet du fournisseur de services de communication.

<CanDelete>: Les valeurs permises sont TRUE ou FALSE selon qu'un fournisseur de services de communication peut être instancié de façon souple conformément aux demandes de traitement de la communication ou non. Lorsque l'attribut CAN\_DELETE est défini sur FALSE, le nombre d'instanciations du composant du fournisseur de services de communication est statique. Les contraintes d'instanciation déclarées par les attributs AUTO\_CREATE, MINIMUM\_NUMBER et MAXIMUM\_NUMBER correspondent aux capacités des protocoles actuellement pris en charge.

<byteOrder>: La valeur permet l'intégration générique des types de données de n octets (par exemple, un nombre entier de 4 octets) dans les données utiles du message de communication. La valeur d'attribut décrit l'ordre des octets et doit être BIG\_ENDIAN ou LITTLE\_ENDIAN.

La définition de COMPONENT\_RELATIONS est obligatoire. Elle décrit la relation à la définition du Point de Connexion. La construction permet d'effectuer la configuration de topologie actionnée par le Serveur FDI. Les informations détaillées de syntaxe sont décrites dans l'IEC 61804-3. Le texte suivant décrit l'usage sémantique de la construction COMPONENT\_RELATION.

Le Point de Connexion doit automatiquement être instancié avec le fournisseur de services de communication et il doit y avoir exactement une (1) instance de Point de Connexion connectée au fournisseur de services de communication. Les contraintes d'instanciation déclarées par les attributs AUTO\_CREATE, MINIMUM\_NUMBER et MAXIMUM\_NUMBER correspondent aux capacités des protocoles actuellement pris en charge.

<CommunicationServiceProvidersConnectionPointRelationId>: La valeur d'attribut identifie la déclaration de COMPONENT\_RELATION comme telle.

<ConnectionPointId>: la valeur d'attribut doit correspondre à l'identificateur du COMPONENT utilisé dans une déclaration COMPONENT qui décrit un Point de Connexion (voir 5.2.5).

Le RELATION\_TYPE doit être défini sur CHILD\_COMPONENT.

L'attribut PROTOCOL ne doit pas être défini.

### 5.2.5 Composant Point de Connexion

Chaque Paquetage de Communication FDI qui décrit un Appareil de Communication doit contenir un élément EDD qui décrit un Point de Connexion pour chacun des protocoles pris en charge par l'Appareil de Communication:

```
COMPONENT <ConnectionPointId>
{
  LABEL "<Label>";
  CAN_DELETE FALSE;
  CLASSIFICATION NETWORK_CONNECTION_POINT;
  PROTOCOL <ProtocolId>;
  CONNECTION_POINT <ConnectionPointCollectionId>;
}
```

<ConnectionPointId>: l'identificateur du COMPONENT identifie la déclaration de composant du Point de Connexion.

<Label>: La chaîne de valeur doit contenir une chaîne qui permet à un utilisateur humain de déterminer la fonction du composant de Point de Connexion.

<ProtocolID>: la valeur de cet attribut indique la capacité de communication qui permet au Serveur FDI de trouver d'autres types d'appareils qui peuvent être connectés au réseau au moyen du même type de protocole. Pour les protocoles normalisés, la valeur est définie par l'organisation de bus de terrain concernée.

<ConnectionPointCollectionId>: la valeur d'attribut est une référence à la déclaration de COLLECTION qui décrit la structure des données du Point de Connexion, comme décrit en 5.2.6.

### 5.2.6 Collection du Point de Connexion

Chaque EDD qui décrit le Point de Connexion d'un Appareil de Communication doit décrire l'élément COLLECTION qui décrit les attributs qui doivent apparaître dans la représentation du Modèle d'Information du Point de Connexion. Les données spécifiques à un protocole exposées par le Point de Connexion identifient le type d'appareil et son adresse réseau.

```
COLLECTION <ConnectionPointCollectionId>
{
  LABEL "<Label>";
  MEMBERS
  {
    <AddressAttributeName>, <AddressAttributeVariableId>;
    VALID <VALID_VariableId>;
  }
}
```

<ConnectionPointCollectionId>: l'identificateur de la COLLECTION est référencé par la valeur d'attribut CONNECTION\_POINT définie en 7.7.3.5.

<Label>: l'étiquette identifie le Point de Connexion dans un langage humain.

<AddressAttributeName>/<AddressAttributeVariableId>: la section MEMBRE désigne les définitions de VARIABLE qui décrivent les attributs d'adresse mis en œuvre par un Point de Connexion. Le contenu de la section MEMBRE est spécifique au protocole.

<VALID>/<VALID\_VariableId> est un membre de Collection qui désigne une VARIABLE booléenne qui contient l'état de validation qui doit être défini par l'Action ValidateNetwork (voir 5.2.8).

### 5.2.7 Composant réseau

Chaque Paquetage de Communication FDI qui décrit un Appareil de Communication doit contenir un élément EDD qui décrit un Réseau pour chacun des protocoles pris en charge par l'Appareil de Communication. La définition prend en charge l'ingénierie topologique du réseau.

```
COMPONENT <NetworkComponentId>
{
  LABEL "<Label>";
  CAN_DELETE TRUE;
  CHECK_CONFIGURATION <Validate>;
  CLASSIFICATION NETWORK;
  PROTOCOL <ProtocolId>;
  COMPONENT_RELATIONS
  {
    <NetworksConnectionPointRelationId>
  }
}

COMPONENT_RELATION <NetworksConnectionPointRelationId>
{
  LABEL "Relation between network and connection point";
  RELATION_TYPE CHILD_COMPONENT;
  ADDRESSING {<AddressVar>}
  COMPONENTS
  {
    <ConnectionPointId>
    {
      REQUIRED_RANGES
      {
        <BusAddressVar>{ MIN_VALUE <BusAddrMin>; MAX_VALUE <BusAddrMax>;}
      }
    }
  }
  MINIMUM_NUMBER 1;
  MAXIMUM_NUMBER <maxNumber>;
}
```

<NetworkComponentId>: l'identificateur du COMPONENT identifie la déclaration du composant Réseau.

<Label>: la chaîne de valeur doit contenir une chaîne en langage humain qui permet à un utilisateur de déterminer facilement la fonction du composant Réseau.

<Validate>: la valeur désigne la METHOD qui met en œuvre la fonction de validation de la configuration de topologie du réseau (voir 5.2.8).

<ProtocolID>: la valeur de cet attribut permet au Serveur FDI de trouver d'autres types d'appareils qui peuvent être connectés au réseau par le même type de protocole. Pour les protocoles normalisés, la valeur est définie par l'organisation de bus de terrain concernée.

La définition de COMPONENT\_RELATIONS est obligatoire. Elle décrit la relation à la définition du Point de Connexion et, par conséquent, les capacités d'un réseau. La construction permet d'effectuer la configuration générique de topologie réseau actionnée par le Serveur FDI. Les informations détaillées de syntaxe sont décrites dans l'IEC 61804-3. Le texte suivant décrit l'usage sémantique de la construction COMPONENT\_RELATION.

<NetworksConnectionPointRelationId>: la valeur d'attribut identifie la définition de COMPONENT\_RELATION.

<ConnectionPointId>: La valeur d'attribut doit correspondre à l'identificateur du COMPONENT utilisé dans une déclaration COMPONENT qui décrit un Point de Connexion (voir 5.2.4).

<maxNumber>: La valeur d'attribut limite le nombre de Points de Connexion qui peuvent être connectés au réseau. Les valeurs des attributs peuvent contenir des expressions conditionnelles.

Le RELATION\_TYPE doit être défini sur CHILD COMPONENT.

<BusAddressVar>: La valeur d'attribut est une référence à une déclaration de VARIABLE. Cette VARIABLE contient la valeur de l'adresse réseau pour tout appareil connecté au réseau.

<BusAddrMin>/<BusAddrMax>: Les valeurs définissent la plage de valeurs d'adresse réseau.

### 5.2.8 ValidateNetwork

La méthode ValidateNetwork représente la Logique Applicative mise en œuvre dans l'Appareil de Communication qui valide une topologie réseau réelle. La méthode ValidateNetwork gère toutes les dépendances nécessaires relatives aux paramètres du bus. La mise en œuvre de la logique EDDL concernée est fondée sur la fonction ObjectReference intégrée à l'EDDL, qui permet l'analyse d'un ensemble d'instances enfants (instances du Point de Connexion). La logique de validation doit définir l'attribut <VALID> de l'instance du Point de Connexion qui a concluante la validation.

La mise en œuvre de ValidateModules est facultative lorsque l'installation du module est statique ou lorsque les règles de configuration définies dans la construction COMPONENT sont suffisantes pour configurer l'installation du module.

Le Tableau 1 présente les arguments de l'Action ValidateNetwork.

## Signature

```

ValidateNetwork (
    [out] Integer ServiceError,
    [out] String ErrorMessage);
    
```

**Tableau 1 – Arguments de l'Action ValidateNetwork**

Argument	Description
ServiceError	0: OK -1: Échec/le Point de Connexion qui n'a pas réussi la validation est indiqué par la valeur () d'attribut <VALID> définie sur false. Remarque: Les valeurs d'argument correspondent aux codes d'erreur spécifiés dans l'IEC 61804-3, dénommés BI_SUCCESS (valeur = 0) et BI_ERROR (valeur = -1). L'Action retourne le résultat ServiceError au moyen de la déclaration de "return".
ErrorMessage	Lorsque la méthode retourne une chaîne vide (NULL), l'appel de l'Action a réussi. En cas d'erreur, l'Action peut retourner une description du problème.

### 5.2.9 ValidateModules

La méthode ValidateModules valide l'installation actuelle du module. La mise en œuvre de la logique EDDL concernée est fondée sur la fonction ObjectReference intégrée à l'EDDL, qui permet d'analyser un ensemble d'instances enfants. La mise en œuvre de ValidateModules est facultative si l'installation du module est statique ou si les règles de configuration définies dans la construction COMPONENT sont suffisantes pour configurer l'installation du module.

NOTE La décision qui consiste à déterminer si ValidateModules est nécessaire ou non dépend du fournisseur.

Le Tableau 2 présente les arguments de l'Action ValidateModules.

## Signature

```

ValidateModules (
    [out] Integer serviceError,
    [out] String ErrorMessage);
    
```

**Tableau 2 – Arguments de l'Action ValidateModules**

Argument	Description
ServiceError	0: OK -1: Échec/le Point de Connexion qui n'a pas réussi la validation est indiqué par la valeur () d'attribut <VALID> définie sur false. Remarque: Les valeurs d'argument correspondent aux codes d'erreur spécifiés dans l'IEC 61804-3 dénommés BI_SUCCESS (valeur = 0) et BI_ERROR (valeur = -1). L'Action retourne le résultat ServiceError en utilisant la déclaration de "return".
ErrorMessage	Lorsque l'Action retourne une chaîne vide (NULL), l'appel de la méthode a réussi. En cas d'erreur, l'Action peut retourner une description du problème.

### 5.2.10 Éléments spécifiques de l'UIP


Le Paquetage de Communication FDI peut contenir l'UIP pour prendre en charge les diagnostics et le paramétrage, par exemple.

### 5.2.11 Déploiement

Le Serveur FDI importe le Paquetage de Communication FDI. Le traitement d'éléments EDD et UIP correspond à la procédure d'importation exécutée pour le Paquetage FDI (voir l'IEC 62769-2 et l'IEC 62769-3).

## 6 Relations de communication

L'objectif d'un Appareil de communication et de ses services de communication est d'échanger les informations entre l'appareil physique et la représentation de l'appareil gérée par le Serveur FDI. L'échange d'informations est géré par les relations de communication (voir la Figure 3). Une relation de communication établie représente la capacité d'échanger des informations entre la représentation de l'appareil gérée par le Serveur FDI et l'appareil physique. L'utilisation de la Relation de Communication permet de faire abstraction des éléments spécifiques du protocole généralement utilisés pour gérer les connexions.

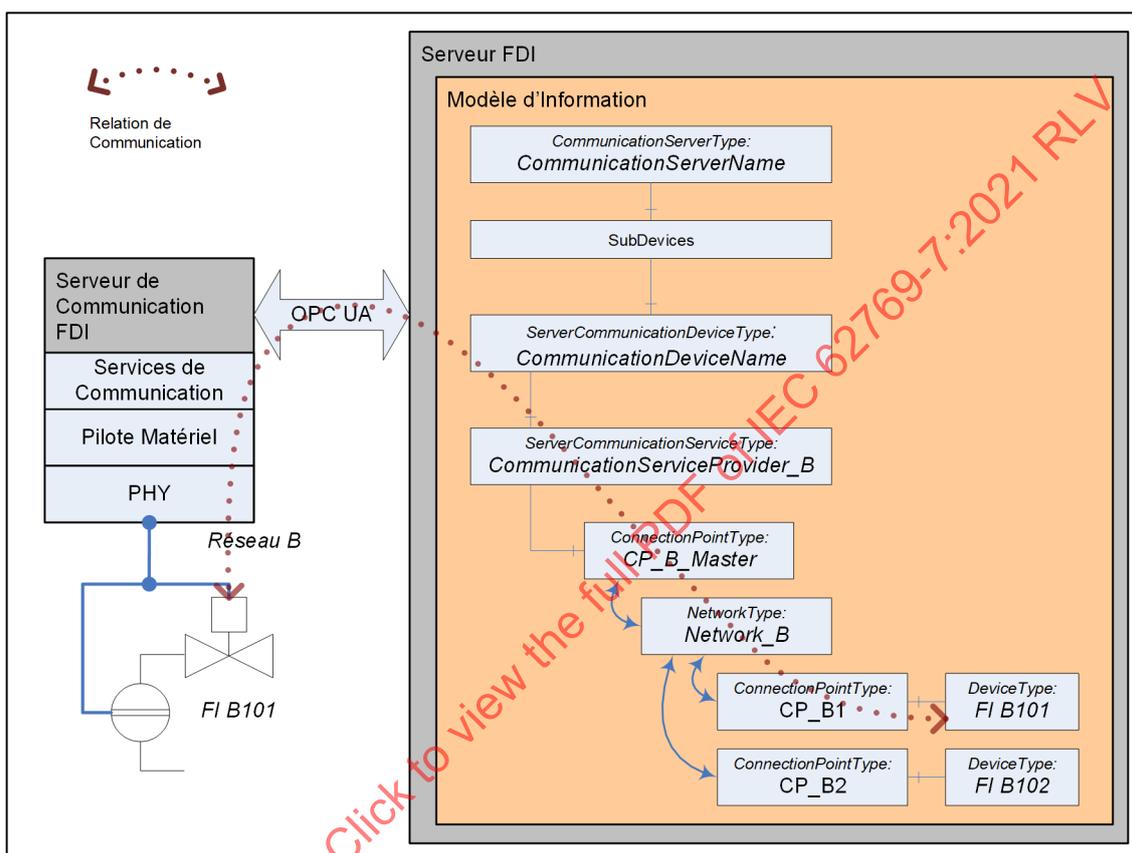


**Figure 3 – Relation de communication**

NOTE 1 L'essentiel de l'échange d'informations a lieu entre l'appareil connecté au réseau physique et l'instance correspondante dans le Modèle d'Information, mais ne couvre pas l'application complète de l'appareil.

Le diagramme états-transitions suivant (Figure 4) décrit le flux d'état général d'une relation de communication unique. Le diagramme représente également les services de communication qui peuvent être invoqués pendant un état "CR Online".

L'état "AbortIndication" représenté à la Figure 4 peut être détecté de différentes façons spécifiques au protocole. La façon spécifiée pour un appareil de communication donné est liée aux serviceError retournées par les services de communication spécifiés. Même la méthode de balayage (Scan) peut déterminer une perte de connexion quand l'appareil pour lequel une relation de communication a été activée n'apparaît pas dans le résultat du balayage.

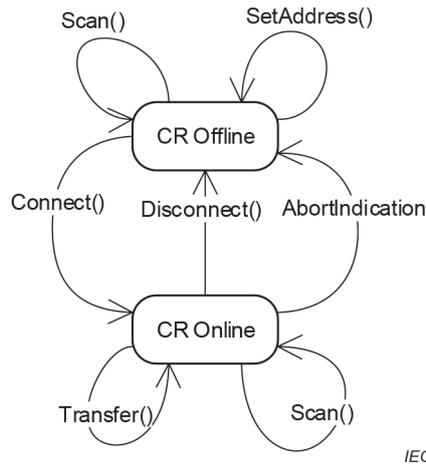

IEC

**Figure 4 – Diagramme états-transitions de la relation de communication**

NOTE 2 La gestion des relations de communication est facultative.

## 7 Définition du Serveur de Communication FDI

### 7.1 Généralités

En matière de FDI, le Serveur de Communication FDI est un Serveur OPC UA dédié qui fournit l'accès à un ou plusieurs réseaux d'appareils de terrain. Chaque Serveur de Communication FDI est conçu comme un Appareil Modulaire dans lequel chaque module (appelé également CommunicationDevice dans la séquence) représente le point d'accès à un réseau.

L'Appareil Modulaire lui-même représente le Serveur de Communication FDI comme un ensemble.

### 7.2 Caractéristiques générales

Le Serveur de Communication FDI met en œuvre les caractéristiques de chacun de ses CommunicationDevice spécifiés en 7.3.3. En outre, le Serveur de Communication FDI met en œuvre les caractéristiques suivantes:

- Le Serveur FDI synchronise en permanence (voir 7.5, 7.8.8 et 7.8.11) le Modèle d'Information hébergé par le Serveur de Communication FDI depuis le contenu du Modèle d'Information hébergé par le Serveur FDI.
- Les CommunicationDevice peuvent être instanciés statiquement ou peuvent être créés/supprimés par le Serveur FDI.
- La communication entre le Serveur FDI et le Serveur de Communication FDI est fondée sur OPC UA. OPC UA spécifie un protocole filaire pour ses services qui peuvent être mis en œuvre sur les plates-formes arbitraires et les environnements d'exécution.
- Pour éviter les accrochages, le Serveur de Communication FDI permet la connexion d'un seul Serveur FDI à la fois. Avec cette restriction, un Serveur de Communication FDI peut s'abstenir de tout mécanisme de synchronisation (verrouillage). La spécification FDI n'exécute pas les Serveurs de Communication FDI qui mettent en œuvre un mécanisme de verrouillage pour gérer l'accès concomitant à un appareil unique connecté au réseau physique.

### 7.3 Modèle d'Information

#### 7.3.1 Généralités

Le paragraphe 7.3 spécifie le Modèle d'Information hébergé par le Serveur de Communication FDI.


Un Serveur de Communication FDI est un Serveur OPC UA qui encapsule le matériel de communication et fournit la capacité normalisée de communication. Le Serveur FDI se connecte au Serveur de Communication FDI comme Client OPC UA et accède aux réseaux pris en charge

par le Serveur de Communication FDI par le biais du Modèle d'Information du Serveur de Communication FDI. La tâche du Serveur de Communication FDI consiste à exposer ce Modèle d'Information. Le Serveur de Communication FDI ne doit pas conserver les Instances d'Appareil ni les informations de topologie du réseau. Toute interaction avec les appareils FDI a lieu par le biais du Serveur FDI et est juste transférée par le Serveur de Communication FDI.

Pour le Serveur FDI, un Serveur de Communication FDI ressemble à un appareil qui prend en charge les services de Communication FDI et utilise OPC UA pour communiquer. Le Serveur de Communication FDI peut s'exécuter localement sur le même PC que le Serveur FDI (adaptateur de boucle de retour) ou à distance sur le terrain (par exemple, intégré à un contrôleur). Comme un appareil, chaque Serveur de Communication FDI a un Paquetage FDI associé. Ce Paquetage FDI est utilisé pour créer des appareils de communication dans le Modèle d'Information du Serveur FDI qui représentent l'accès aux réseaux mis en œuvre par le Serveur de Communication FDI.

Le Modèle d'Information d'un Serveur de Communication FDI est fondé sur le Modèle d'Information défini dans l'IEC 62769-5. La Figure 5 reproduit la structure de l'Appareil Modulaire et représente la manière dont elle est mappée dans l'AddressSpace (espace d'adressage) complet. Les modules représentent les voies de communication du Serveur de Communication FDI.

IECNORM.COM : Click to view the full PDF of IEC 62769-7:2021 RLV

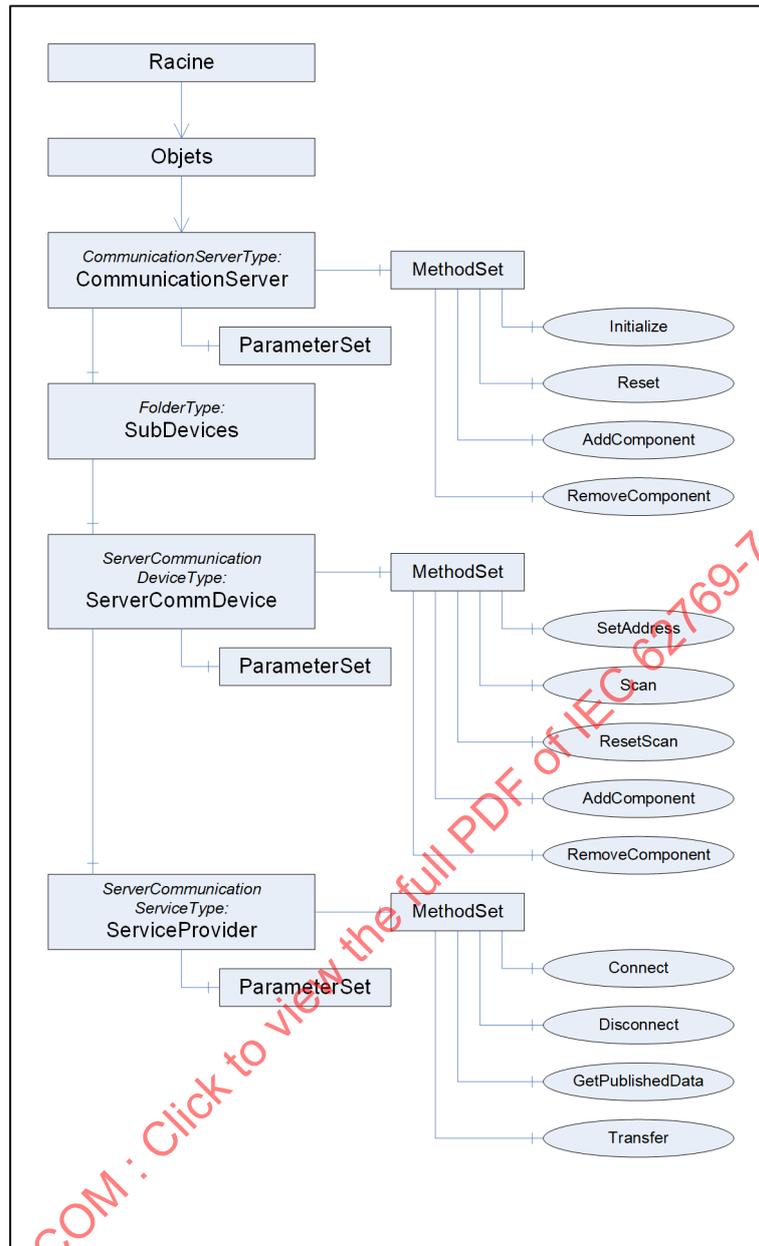

**Figure 5 – AddressSpace du Serveur de Communication FDI**

Le CommunicationServerType (la racine de l'Appareil Modulaire) est un sous-type de DeviceType. Le MethodSet contient les méthodes Initialize, Reset, AddComponent et RemoveComponent. Les méthodes AddComponent et RemoveComponent sont facultativement présentes lorsque le Serveur de Communication FDI prend en charge l'instanciation dynamique des éléments dans le dossier SubDevices.

Tous les sous-appareils sont des instances de ServerCommunicationDeviceType définies en 7.3.3. Les instances de ServerCommunicationDeviceType (ServerCommDevice) ont un MethodSet qui peut mettre en œuvre les méthodes SetAddress, Scan, AddComponent, RemoveComponent. AddComponent et RemoveComponent sont facultativement présents lorsque le Serveur de Communication FDI prend en charge un nombre variable des instances de ServerCommunicationServiceType.

Les définitions formelles se trouvent en 7.3.2, 7.3.3 et 7.3.4.