

TECHNICAL REPORT



**Fibre optic interconnecting devices and passive components –
Part 08: Study of optical power blocking measurement methods for adaptors
with an optical power blocking shutter**

IECNORM.COM : Click to view the full PDF of IEC TR 62627-08:2016



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 62108:2016

TECHNICAL REPORT



**Fibre optic interconnecting devices and passive components –
Part 08: Study of optical power blocking measurement methods for adaptors
with an optical power blocking shutter**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.20

ISBN 978-2-8322-3119-7

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	7
4 Background to the measurement method of blocking characteristics for adaptors with an optical power blocking shutter	7
4.1 Laser safety requirement for optical fibre communication systems	7
4.2 Required performance of the power blocking shutter.....	8
4.3 Standard measurement conditions used to determine laser safety for optical fibre communication systems	8
5 Measurement methods used in this Technical Report	8
5.1 Background.....	8
5.2 Test.....	8
5.2.1 Measurement set-up	8
5.2.2 Study of dynamic range	9
5.2.3 Light source and optical detector	9
5.2.4 Measurement environment.....	10
5.3 Measurement of the maximum emitted optical power	10
5.4 Measuring system dynamic range	10
5.5 Measuring the level of optical power blocking	10
6 Demonstration of measurement	11
6.1 Common measurement conditions	11
6.2 Measurement set-up	11
6.2.1 Method 1	11
6.2.2 Method 2	13
6.3 Dynamic range.....	14
6.3.1 Method 1	14
6.3.2 Method 2	15
6.3.3 Samples measured	15
6.4 Measurement results.....	15
6.5 Study of the factors affecting measurement uncertainty	17
7 Summary.....	18
Annex A (informative) Observation of emitted light using a visible light source.....	19
Annex B (informative) Detailed measured levels of blocking characteristics (Measured values of light quantity shielded by adaptors with an optical power blocking shutter).....	20
Bibliography.....	24
Figure 1 – Example of measurement set-up for Method 1	9
Figure 2 – Example of measurement set-up for Method 2	9
Figure 3 – Measurement set-up, Method 1	13
Figure 4 – Measurement set-up, Method 2.....	14
Figure 5 – Comparison between average of optical power blocking and the standard deviations (Type SC, wavelength of 1 310 nm)	16

Figure 6 – Comparison between average of optical power blocking and the standard deviations (Type SC, wavelength of 1 550 nm)	16
Figure 7 – Comparison between average of optical power blocking and the standard deviations (Type LC, wavelength of 1 310 nm).....	17
Figure 8 – Comparison between average of optical power blocking and the standard deviations (Type LC, wavelength of 1 550 nm).....	17
Figure A.1 – Example of off-axis emitted visible light (Type LC duplex adaptor with an optical power blocking shutter).....	19
Table 1 – Common measurement conditions.....	11
Table 2 – Details of apparatus used for Method 1	12
Table 3 – Details of apparatus used for Method 2	14
Table 4 – Adaptors with an optical power blocking shutter	15
Table B.1 – Measured values of optical power blocking (Type SC, measured wavelength of 1 310 nm).....	20
Table B.2 – Measured values of optical power blocking (Type SC, measured wavelength of 1 550 nm).....	21
Table B.3 – Measured values of optical power blocking (Type LC, measured wavelength of 1 310 nm) for non-angled PC end face	21
Table B.4 – Measured values of optical power blocking (Type LC, measured wavelength of 1 310 nm) for 8 degree-angled PC end face	22
Table B.5 – Measured values of optical power blocking (Type LC, measured wavelength of 1 550 nm) for non-angled PC end face	22
Table B.6 – Measured values of optical power blocking (Type LC, measured wavelength of 1 550 nm) for 8 degree-angled PC end face	23

IECNORM.COM : Click to view the full text of IEC TR 62627-08:2016

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING
DEVICES AND PASSIVE COMPONENTS –****Part 08: Study of optical power blocking measurement
methods for adaptors with an optical power blocking shutter**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 62627-08, which is a Technical Report, has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

The text of this Technical Report is based on the following documents:

Enquiry draft	Report on voting
86B/3931/DTR	86B/3945/RVC

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62627 series, published under the general title *Fibre optic interconnecting devices and passive components*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

In recent years, optical communication networks have made greater use of optical fibre amplifiers and distributed Raman amplifiers. Optical communication equipment usually has an adaptor on the front of the board as an optical input/output terminal. These adaptors sometimes emit 100 mW or higher optical power. For the purpose of blocking such optical power, an adaptor with an optical power blocking shutter is sometimes used.

This Technical Report details the proposed methods to evaluate the efficacy of these adaptor shutters.

This Technical Report is based on Optoelectronic Industry and Technology Development Association (OITDA) – Technical Paper (TP), TP19/CN-2014, *Investigation of examinations and measurements – Light-blocking performance of optical adaptor with shutter*.

IECNORM.COM : Click to view the full PDF of IEC TR 62627-08:2016

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS –

Part 08: Study of optical power blocking measurement methods for adaptors with an optical power blocking shutter

1 Scope

This part of IEC 62627, which is a Technical Report, describes two methods used to measure the blocking characteristics of adaptors with an optical power blocking shutter. This document focuses on singlemode fibre (SMF) and two wavelengths, 1 310 nm and 1 550 nm.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Void.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

adaptor with an optical power blocking shutter

adaptor defined in IEC 61274-1 that has a shutter to block optical power emitted from its aperture

Note 1 to entry: An adaptor with a shutter may have a structure such that the shutter automatically moves to block the aperture when the outer plug is removed. There are two commercially available types of optical adaptors with shutters: one type blocks optical power and the other type blocks dust ingress. Products that focus on optical power blocking may have a metal shutter.

3.2

optical power blocking

attenuation a_b calculated by measuring the maximum emitted optical power when the shutter is fully open (or the shutter is removed) (P_{0max}) and the maximum emitted optical power when the shutter is closed (P_{1max})

$$a_b = -10 \log_{10} \left(\frac{P_{1max}}{P_{0max}} \right) \text{ (dB)} \quad (1)$$

4 Background to the measurement method of blocking characteristics for adaptors with an optical power blocking shutter

4.1 Laser safety requirement for optical fibre communication systems

The safety of laser products are defined in IEC 60825-1 which prescribes the acceptable optical power as the laser safety class. IEC 60825-2, a subdivision standard, provides the safety standards for optical fibre communication systems. Optical communication equipment

manufacturers sometimes use an adaptor with an optical power blocking shutter to comply with these laser safety standards.

4.2 Required performance of the power blocking shutter

IEC 60825-2, hazard level 3B, limits optical power at 1 550 nm to 500 mW. However, hazard level 1, the optical power allowed to be seen by the naked eye or with a magnifying scope, is limited to 10,2 mW. If equipment manufacturers ensure laser safety only by using an adaptor with an optical power blocking shutter, the required level of optical power blocking for the shutter is 17 dB, i.e. the ratio of 500 mW to 10,2 mW.

4.3 Standard measurement conditions used to determine laser safety for optical fibre communication systems

IEC 60825-2 defines the measurement conditions used to determine the hazard level of optical fibre communication systems. For wavelengths greater than 1 400 nm, an aperture diameter of 7 mm is used at a measurement distance of 28 mm from the radiating end of the optical fibre. For wavelengths less than or equal to 1 400 nm, the aperture diameter is also 7 mm, but the measurement distance is 70 mm from the radiating end of the optical fibre.

5 Measurement methods used in this Technical Report

5.1 Background

The following two methods have been studied.

Method 1: measuring with an aperture diameter of 7 mm, an integrating sphere and an optical detector.

Method 2: measuring with an optical detector only, having an aperture diameter of less than 7 mm.

In this Technical Report only the 1 310 nm and 1 550 nm wavelengths have been focused upon as these are the ones most commonly used for optical fibre communication systems.

5.2 Test

5.2.1 Measurement set-up

The measurement set-up for Method 1 and Method 2 is as follows.

a) Method 1

Figure 1 shows an example of measurement set-up for Method 1. Light emitted from an adaptor with an optical power blocking shutter arrives at the aperture plate, diameter d , in front of the integrating sphere, and passes through into the integrating sphere. Distance, l , and aperture diameter, d , are as follows:

- distance, l : 70 mm (at the wavelength of 1 310 nm);
28 mm (at the wavelength of 1 550 nm);
- aperture diameter, d : 7mm.

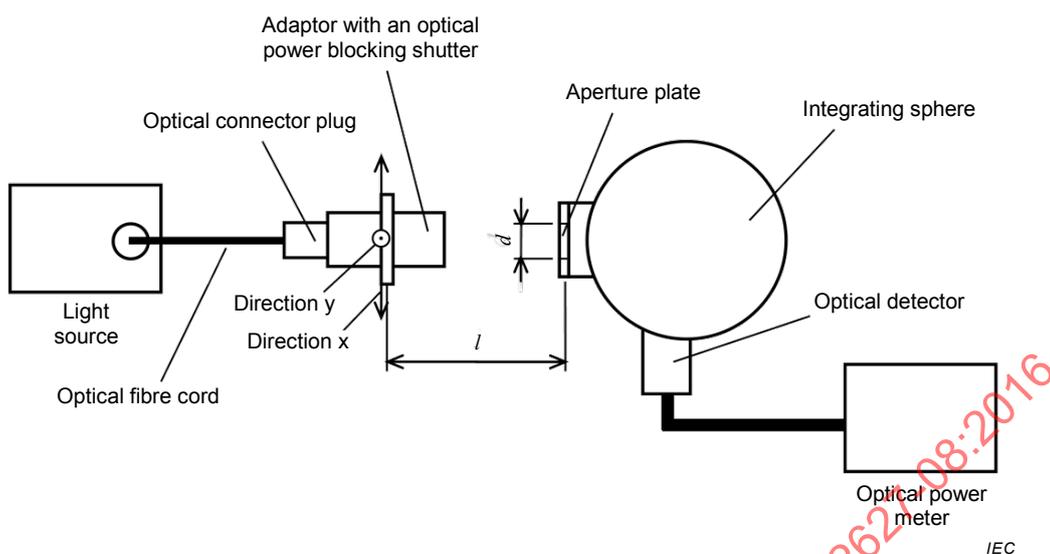


Figure 1 – Example of measurement set-up for Method 1

b) Method 2

Figure 2 shows an example of the measurement set-up for Method 2. Light emitted from the adaptor with an optical power blocking shutter arrives at the aperture plate attached directly to the optical detector. The size of the aperture diameter is different for each of the two chosen wavelengths, and in each case is calculated in order to maintain the same ratio of distance l to the aperture diameter d as is used in Method 1.

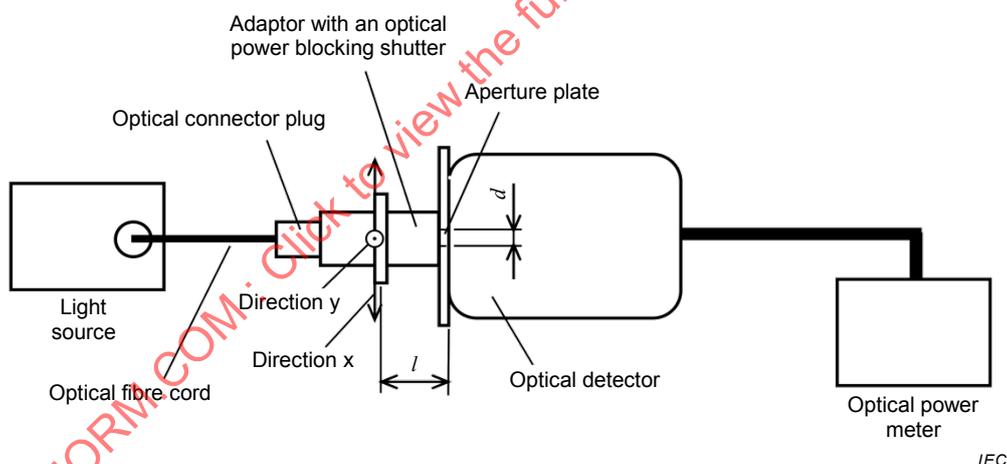


Figure 2 – Example of measurement set-up for Method 2

5.2.2 Study of dynamic range

The optical power of the light source, the sensitivity of the optical detector and any background noise should all be taken into account to achieve an adequate dynamic range for the measurement of optical power blocking greater than 17 dB with a small measurement uncertainty. A dynamic range greater than 30 dB is therefore recommended.

5.2.3 Light source and optical detector

In the case of Method 1, a typical integrating sphere has an attenuation of approximately 40 dB. Therefore, it is recommended that the sensitivity of the optical detector used together with the integrating sphere is -80 dBm or better, and the optical output from the light source is -10 dBm or more in order to achieve the suggested dynamic range of 30 dB minimum.

In the case of Method 2, as attenuation by the aperture plate is a few decibels, it is recommended that the sensitivity of the optical detector is –50 dBm or better, and the optical output from the light source is –10 dBm or more to achieve the suggested dynamic range of 30 dB minimum.

An FP-LD light source is considered to be a better choice than an LED which commonly has a lower optical power, and therefore may not yield a sufficiently large overall system dynamic range.

5.2.4 Measurement environment

In order to reduce the levels of any background optical power, it is recommended that the measurements are made in a dark environment. A space separated by shielding curtains may also be used in order to improve the system dynamic range.

5.3 Measurement of the maximum emitted optical power

When the shutter is open (or the shutter is removed), the maximum emitted power is located approximately on the optical axis (recorded as $P_{0\max}$). However, when the shutter is closed the point of maximum emitted power is unlikely to be on the optical axis but in a peripheral area as demonstrated in Annex A. It is therefore necessary to adjust the position of the adaptor in the x and y directions, whilst maintaining dimension l , to find the point at which the emitted optical power is at its maximum. The optical power can then be recorded ($P_{1\max}$).

5.4 Measuring system dynamic range

The dynamic ranges for both Method 1 and Method 2 are measured using the six steps a) to f) below.

- a) Fix the adaptor with the optical power blocking shutter in the open position, or removed position.
- b) Configure the measurement set-up as described in 5.2.1 having regard to the variables associated with the wavelength being measured, and the connector series in Method 2.
- c) Measure the maximum emitted optical power from the adaptor $P_{0\max}$.
- d) Turn off the light source.
- e) The value measured by the optical power meter is $P_{0\max}^{\text{off}}$. If the measured value is not stable it may be necessary to use the averaging function of the optical power meter.
- f) Calculate the dynamic range DR (dB) using Formula (2) below.

$$DR = -10 \log_{10} \left(\frac{P_{0\max}^{\text{off}}}{P_{0\max}} \right) \text{ (dB)} \quad (2)$$

- g) Confirm the dynamic range DR is large enough for the required optical power blocking level to be measured.

5.5 Measuring the level of optical power blocking

The levels of optical power blocking for both Method 1 and Method 2 are measured using the six steps a) to f) below.

- a) Fix the adaptor with optical power blocking shutter in the open position, or removed position.
- b) Configure the measurement set-up described in 5.2.1 having regard to the variables associated with the wavelength being measured, and the connector series in Method 2.
- c) Measure the maximum optical power from the adaptor, $P_{0\max}$.
- d) Close the shutter or replace and close the shutter if it was removed in step a) above.

- e) Adjust the position of the adaptor in the x and y directions, whilst maintaining dimension l , to find the point at which the emitted optical power is at its maximum. The optical power can then be recorded ($P_{1\max}$). If the measured value is not stable it may be necessary to use the averaging function of the optical power meter.
- f) Calculate the optical power blocking level a_b (dB) using Formula (1).

6 Demonstration of measurement

6.1 Common measurement conditions

For the purpose of ensuring the validity of two measurement methods proposed in 5.1, multiple measurements were conducted.

The measurement conditions that are common to both Methods 1 and 2 are shown in Table 1.

Table 1 – Common measurement conditions

Item	Conditions
Wavelengths of light source	– 1 310 nm – 1 550 nm
Type of optical fibre	IEC 60793-2-50, B1.1
Types of adaptor with an optical power blocking shutter	– Type SC (IEC 61754-4) – Type LC (IEC 61754-20)
End-face of optical connector plug	– Non-angled PC end-face – 8 degree-angled PC end-face

6.2 Measurement set-up

6.2.1 Method 1

Details of the apparatus used in Method 1 are shown in Table 2, and photographs showing the measurement set-up are shown in Figure 3.

Distance l and aperture diameter d are in accordance with those shown in 5.2.1 a):

- distance, l : 70 mm (wavelength of 1 310 nm);
28 mm (wavelength of 1 550 nm);
- aperture diameter, d : 7 mm.

Table 2 – Details of apparatus used for Method 1

Apparatus	Details
Light source	Anritsu Corporation <ul style="list-style-type: none"> – MG9002A Stabilized Light Source (Frame) – MG0937C LD Source 1,31 μm SM (Unit) Light source: FP-LD Wavelength: 1 310 nm ± 20 nm ^a Optical output power level: from -4 dBm to -2,5 dBm ^a – MG0938C LD Source 1,55 μm SM (Unit) Light source: FP-LD Wavelength: 1 550 nm ± 20 nm ^a Optical output power level: from -4 dBm to -2 dBm ^a
Aperture plate	Thickness: 1 mm Aperture diameter <i>d</i> : 7 mm
Integrating sphere	Agilent Technologies <ul style="list-style-type: none"> – 81002FF Integrating Sphere Aperture size: 9 mm ^a Attenuation: from 41 dB to 42 dB ^a
Optical power meter and optical detector	Hewlett-Packard <ul style="list-style-type: none"> – 8153A Lightwave Multimeter (Frame) – 81533B Optical Head Interface (Unit) – 82521B Optical Head (Optical detector) Optical detector: Ge-PD, 5 mm ^a Wavelength range: from 900 nm to 1 700 nm ^a Power range: from -80 dBm to +3 dBm ^a
^a This information is given for the convenience of users of this document and does not constitute an endorsement by IEC. Equivalent products may be used if they can be shown to lead to the same results.	

IECNORM.COM : Click to view the full PDF of IEC TR 62627-08:2016

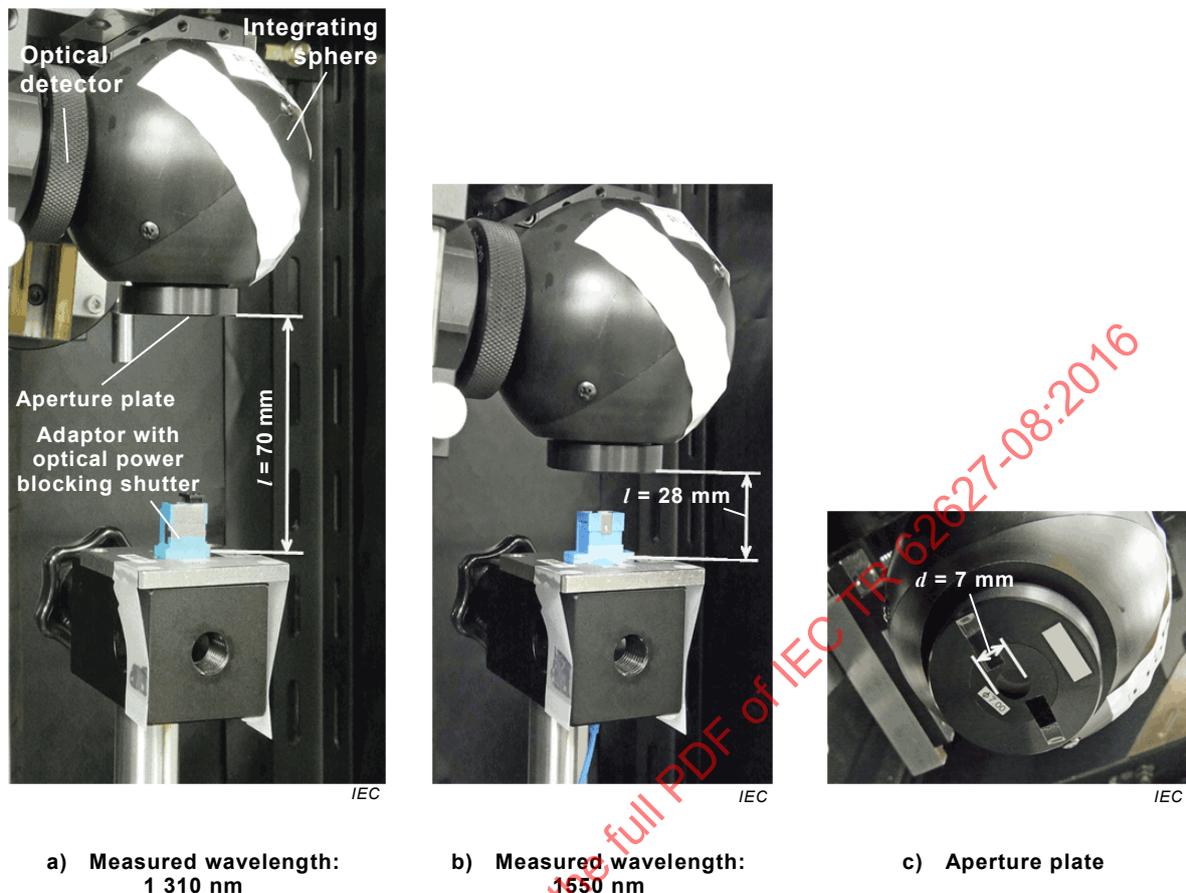


Figure 3 – Measurement set-up, Method 1

6.2.2 Method 2

Details of the measurement set-up for Method 2 are shown in Table 3, and a photograph of the measurement set-up is shown in Figure 4.

Distance l is the total of the distance from the optical reference plane of the adaptor to the end face plus the thickness of the aperture plate, as shown below:

- Type SC adaptor: 14,7 mm
- Type LC adaptor: 15,6 mm

Aperture diameter d is calculated as follows.

- Wavelength of 1 310 nm
Type SC: $7 \text{ (mm)} / 70 \text{ (mm)} \times 14,7 \text{ (mm)} = 1,47 \text{ (mm)}$
Type LC: $7 \text{ (mm)} / 70 \text{ (mm)} \times 15,6 \text{ (mm)} = 1,56 \text{ (mm)}$
- Wavelength of 1 550 nm
Type SC: $7 \text{ (mm)} / 28 \text{ (mm)} \times 14,7 \text{ (mm)} = 3,675 \text{ (mm)}$
Type LC: $7 \text{ (mm)} / 28 \text{ (mm)} \times 15,6 \text{ (mm)} = 3,9 \text{ (mm)}$

Aperture diameters used are as follows.

- Wavelength of 1 310 nm
Type SC: 1,5 (mm)

- Type LC: 1,5 (mm)
- Wavelength of 1 550 nm
- Type SC: 3,7 (mm)
- Type LC: 3,9 (mm)

Table 3 – Details of apparatus used for Method 2

Apparatus	Details
Light source	Ando Electric Co., Ltd. – AQ2140 Optical Multimeter (Optical multimeter frame) – AQ4213 1,31/1,55 LD Unit (Light source unit) Light source: FP-LD Main wavelength: 1 310 nm ± 20 nm ^a 1 550 nm ± 20 nm ^a Optical output power level: -1 dBm or more ^a
Aperture plate	Thickness: 1 mm Aperture diameter: 1,5 mm (wavelength of 1 310 nm) 3,7 mm (wavelength of 1 550 nm) 3,9 mm (wavelength of 1 550 nm)
Optical power meter and optical detector	Ando Electric Co., Ltd. – AQ2140 Optical Multimeter (Optical multimeter frame) – AQ2730 OPM Interface Unit (Unit) – AQ2742 Power Sensor (Optical detector) Optical detector: Ge-PD, 5 mm ^a Wavelength range: from 750 nm to 1 800 nm ^a Power range: from -60 dBm to +10 dBm ^a
^a This information is given for the convenience of users of this document and does not constitute an endorsement by IEC. Equivalent products may be used if they can be shown to lead to the same results.	

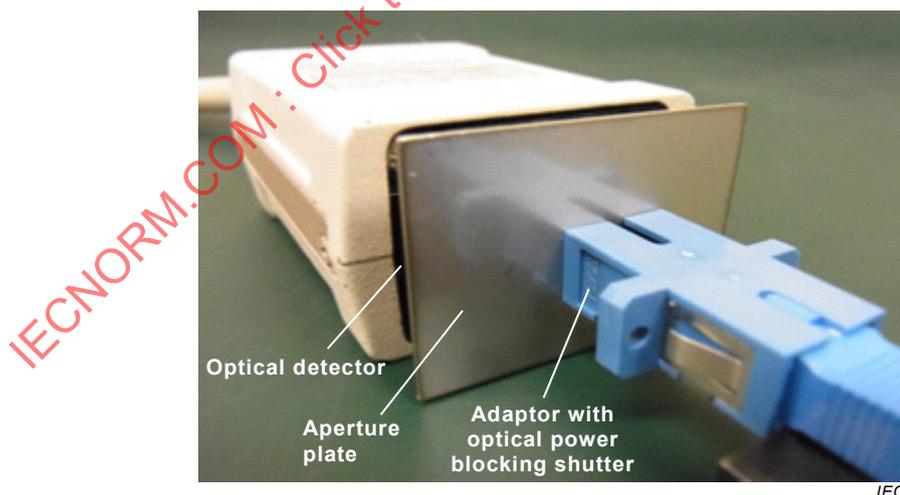


Figure 4 – Measurement set-up, Method 2

6.3 Dynamic range

6.3.1 Method 1

The dynamic range obtained in the measurement set-up of Method 1 was from 38 dB to 40 dB, which was considered to be a sufficient dynamic range.

6.3.2 Method 2

The dynamic range obtained in the measurement set-up of Method 2 was more than 50 dB, which was also considered to be a sufficient dynamic range.


6.3.3 Samples measured

Adaptors with an optical power blocking shutter used for the measurements were of two types: Type SC adaptors and Type LC adaptors, both of which are widely adopted in the market. Samples (i) to (v) shown below were used. All of these samples are made by Japanese optical connector manufacturers and are widely available.

- Type-SC simplex adaptor (IEC 61754-4)
 - Sample (i): Leaf spring type metallic plate shutter.
 - Sample (ii): Shutter where the metallic plate rotates about a hinge.
- Type LC duplex adaptor (IEC 61754-20)
 - Sample (iii): Leaf spring type metallic plate shutter.
 - Sample (iv): Leaf spring type metallic plate shutter.
 - Sample (v): Leaf spring type metallic plate.

Photographs of adaptors with an optical power blocking shutter are shown below in Table 4.

Table 4 – Adaptors with an optical power blocking shutter

Type SC simplex adaptor		Type LC duplex adaptor		
Sample (i)	Sample (ii)	Sample (iii)	Sample (vi)	Sample (v)
				
IEC	IEC	IEC	IEC	IEC

6.4 Measurement results

Annex B contains four tables showing the results obtained using SC and LC adaptors with power blocking shutters. For each measurement combination, as shown in Table 1, five power blocking results are given. These allowed averages and standard deviations to be calculated.

Figures 5 to 8 show the measurement results of the average of optical power blocking in Method 1 and Method 2, and the comparison of standard deviations of repeated measurements.

The summary of the measurement results are as follows.

- Optical power blocking measured in Methods 1 and 2 show the same trend in each sample.
- The measured values in Method 1 are from 25,6 dB to 38 dB, and those in Method 2 are from 23,0 dB to 35,7 dB.
- The average of measured values in Method 2 is different from that in Method 1 with the range of +0,7 dB to –4,8 dB.
- The standard deviations of measured values in repeated measurement are from 0 dB to 1,34 dB in Method 1 and from 0,02 dB to 0,77 dB in Method 2, respectively.

- The difference in the averages of measured values for Method 1 and Method 2 is larger than the standard deviation of measured values in repeated measurements.

Therefore, it is considered that the measurement method used as well as the measurement uncertainties influence the results.

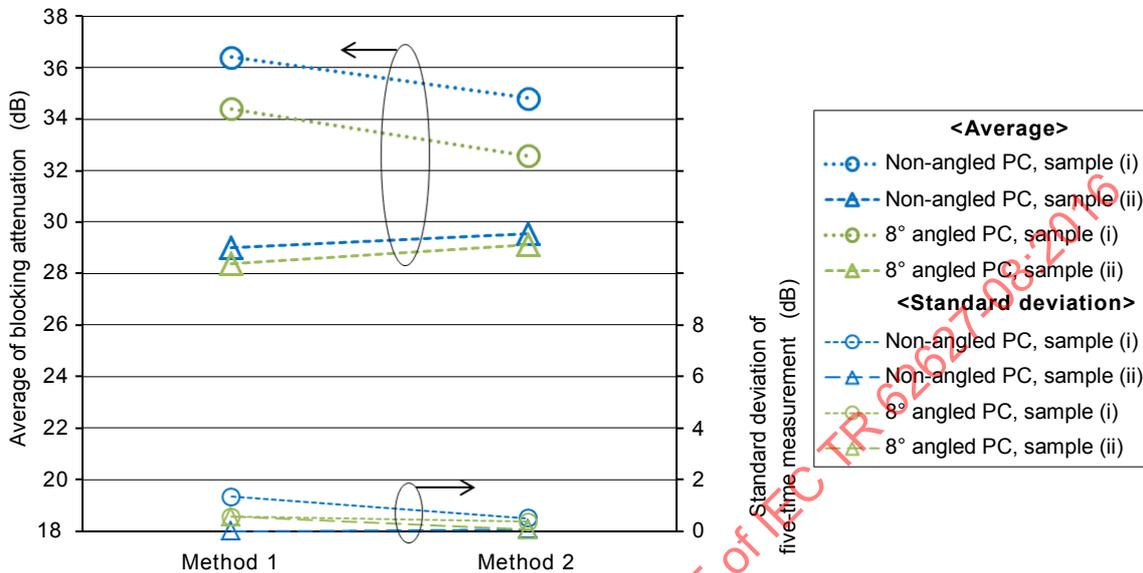


Figure 5 – Comparison between average of optical power blocking and the standard deviations (Type SC, wavelength of 1 310 nm)



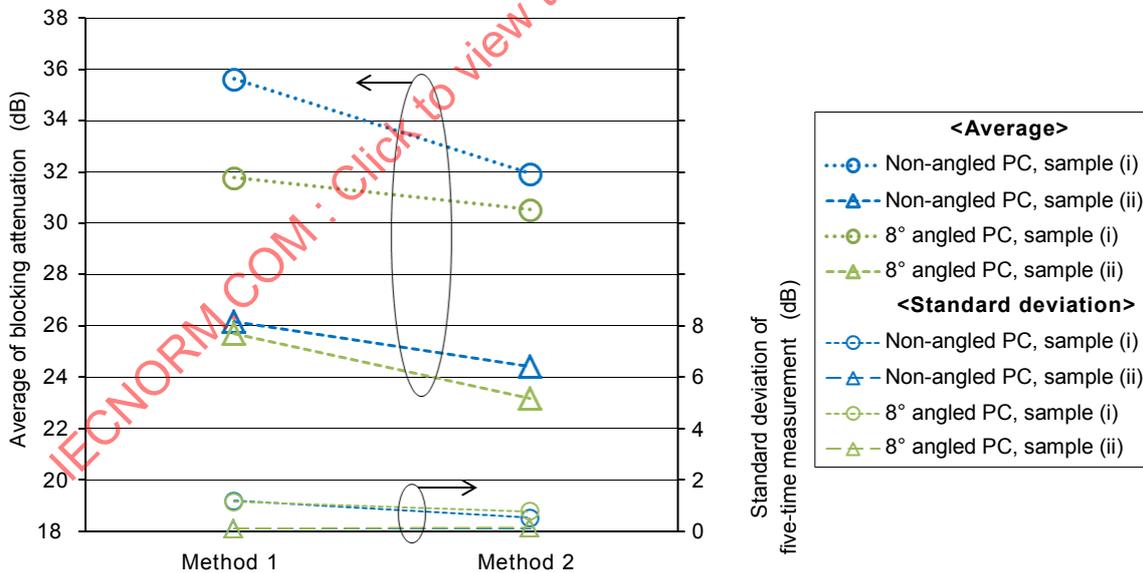


Figure 6 – Comparison between average of optical power blocking and the standard deviations (Type SC, wavelength of 1 550 nm)

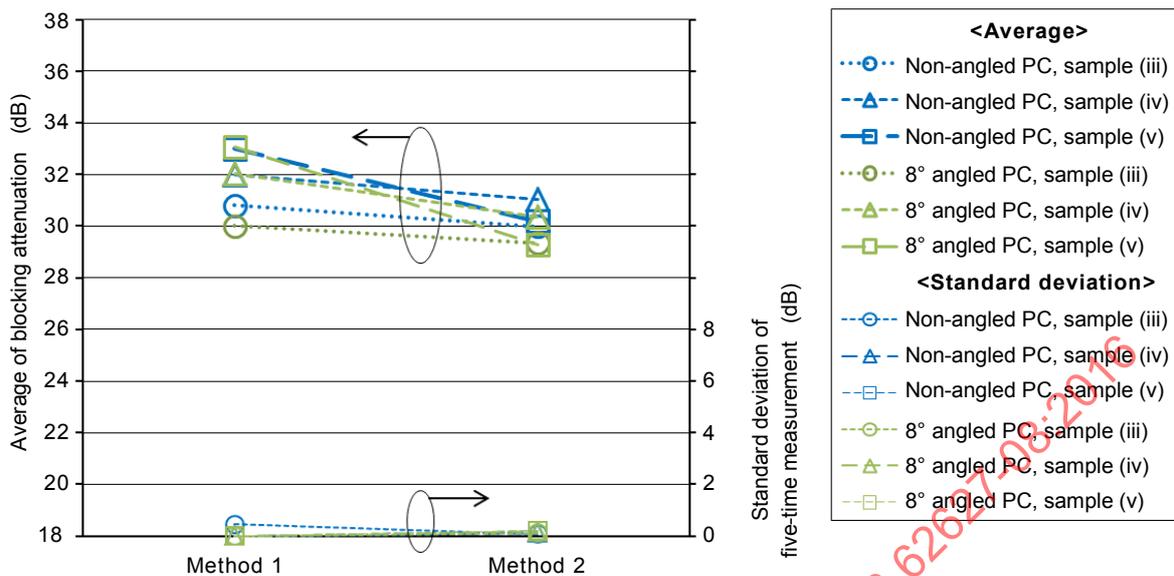

IEC

Figure 7 – Comparison between average of optical power blocking and the standard deviations (Type LC, wavelength of 1 310 nm)

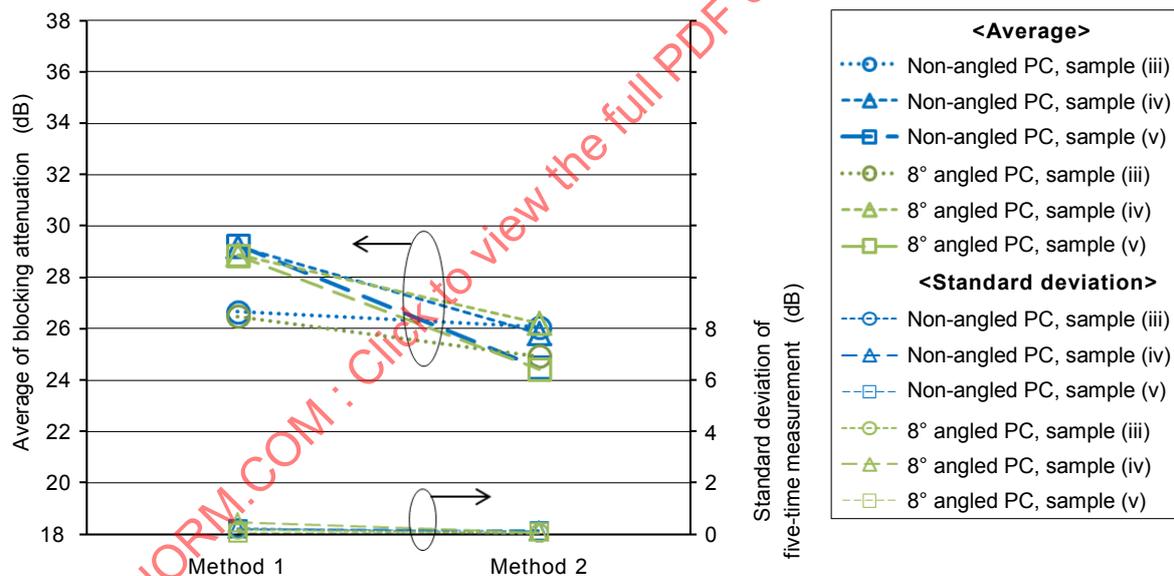

IEC

Figure 8 – Comparison between average of optical power blocking and the standard deviations (Type LC, wavelength of 1 550 nm)

6.5 Study of the factors affecting measurement uncertainty

It was confirmed that the measurement set-ups shown in 6.2 are capable of measuring the optical power blocking of 17 dB or more in both Method 1 and Method 2. However, the difference in measured values between Method 1 and Method 2 was larger than the standard deviation obtained through repeated measurements which indicates measurement uncertainty. Possible factors for such measurement uncertainty are as follows:

- inability to find the maximum power position when measuring the maximum optical power;
- size of diameter of the aperture in the aperture plate;
- thickness and shape of aperture plate;

- incident angle of emitted light to the aperture plate;
- polarization dependence of sensitivity of optical detector;
- sensitivity distribution of the detection area of optical detector;
- incident angle of incident of emitted light to the optical detector;
- background light noise in the measurement environment.

7 Summary

- a) The need for adaptors with an optical power blocking shutter was explained, as was the necessity of the standardization of measurement methods to determine the level of optical power blocking for adaptors with an optical power blocking shutter, which is one of the significant performance issues to ensure laser safety in optical fibre communication systems.
- b) Required performance of the power blocking shutter, based on the laser safety standards was suggested.
- c) Two measurement methods have been applied.
- d) It was confirmed that the two measurement methods had sufficient dynamic range to measure the level of optical power blocking.
- e) Measurement of the commercial samples was carried out.
- f) Measurement uncertainty factors were addressed.
- g) The measurement results show that the two test methods cannot be interchanged and could lead to different results.

IECNORM.COM : Click to view the full PDF of IEC TR 62627-08:2016

Annex A (informative)


Observation of emitted light using a visible light source

The light emitted from an adaptor with an optical power blocking shutter is the result of multiple reflections from the diverse parts of the adaptor and shutter. It was assumed that the emitted optical power would not be uniformly distributed around the optical axis but would have a bias in a certain direction. In order to confirm this assumption, visible light was used to enable direct observation of the light emitted from an adaptor with an optical power blocking shutter.

The observation conditions are as follows:

- light source: He-Ne laser (wavelength of 633 nm);
- type of optical fibre: IEC 60793-2-50, B1.1;
- end-face of optical connector plug: non-angled PC end-face.

Figure A.1 shows the off-axis light being emitted from the Type LC adaptor with an optical power blocking shutter when illuminated using a 633 nm red light laser source.

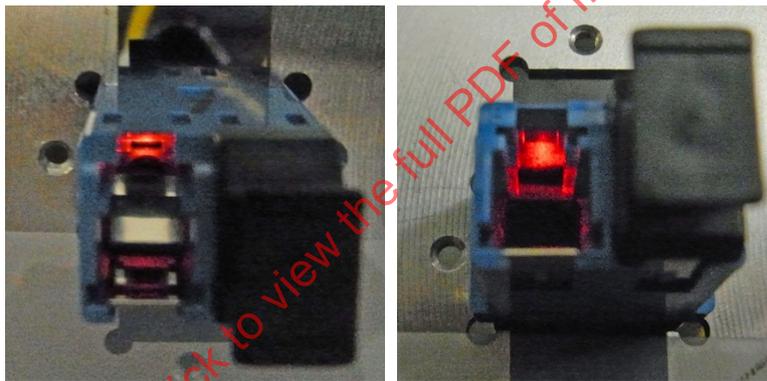

**Figure A.1 – Example of off-axis emitted visible light
(Type LC duplex adaptor with an optical power blocking shutter)**

Annex B
(informative)

**Detailed measured levels of blocking characteristics
(Measured values of light quantity shielded by adaptors
with an optical power blocking shutter)**

Tables B.1 and B.2 show the measured levels of optical power blocking with wavelengths of 1 310 nm and 1 550 nm respectively for Type SC adaptors with an optical power blocking shutter.

Tables B.3 and B.4 show the measured levels of optical power blocking with wavelengths of 1 310 nm for Type LC adaptors (non-angled PC end face/8 degree-angled PC end face) with an optical power blocking shutter.

Tables B.5 and B.6 show the measured levels of optical power blocking with wavelengths of 1 550 nm for Type LC adaptors (non-angled PC end face/8 degree-angled PC end face) with an optical power blocking shutter.

Each measurement combination was conducted five times.

NOTE In Tables B.1 and B.3 the measured values with a wavelength of 1 310 nm using Method 1 were not stable to one decimal place even after using the averaging function of the measuring equipment. It was decided therefore to only use integer results for these combinations. For all other combinations (Method 1, 1 550 nm wavelength and Method 2, both wavelengths) stable figures to one decimal place were possible.

**Table B.1 – Measured values of optical power blocking
(Type SC, measured wavelength of 1 310 nm)**

Unit: dB

	Non-angled PC end face				8 degree-angled PC end face			
	Sample (i)		Sample (ii)		Sample (i)		Sample (ii)	
	Method 1	Method 2	Method 1	Method 2	Method 1	Method 2	Method 1	Method 2
1	37	35,7	29	29,6	35	33,2	28	29,1
2	35	34,6	29	29,5	35	32,3	29	29,1
3	37	34,5	29	29,5	34	32,6	28	29,1
4	35	34,6	29	29,7	34	32,4	28	29,2
5	38	34,8	29	29,6	34	32,3	29	29,1
Maximum	38	35,7	29	29,7	35	33,2	29	29,2
Minimum	35	34,5	29	29,5	34	32,3	28	29,1
Average	36,4	34,8	29,0	29,6	34,4	32,6	28,4	29,1
Standard deviation	1,34	0,49	0,00	0,08	0,55	0,37	0,55	0,05