


# INTERNATIONAL STANDARD

AMENDMENT 2

---

**Information technology – Generic cabling for customer premises**

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amd 2:2010

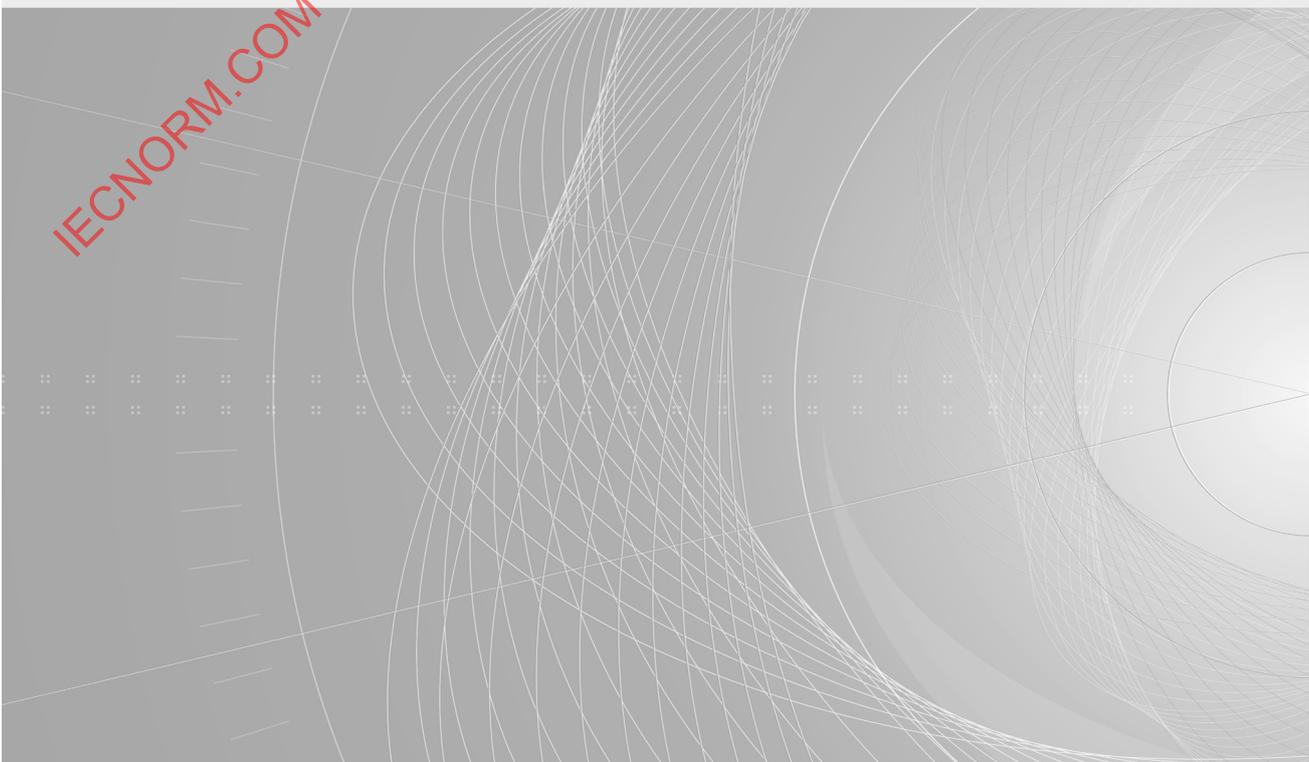



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2010 ISO/IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### **About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### **About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)  
Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amd 2:2010



ISO/IEC 11801

Edition 2.0 2010-04

# INTERNATIONAL STANDARD

AMENDMENT 2

---

Information technology – Generic cabling for customer premises

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE

**XA**

---

ICS 35.200

ISBN 978-2-88910-819-0

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amd 2:2010

## FOREWORD

Amendment 2 to International Standard ISO/IEC 11801 was prepared by subcommittee 25: Interconnection of information technology, of ISO/IEC joint technical committee 1: Information technology.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

---

## INTRODUCTION

*Add, at the end of the existing introductions the following text:*

### INTRODUCTION to Amendment 2

Amendment 2 of ISO/IEC 11801:2002 provides balanced cabling models, requirements and normative references for Category 6<sub>A</sub> and Category 7<sub>A</sub> components, requirements for Class E<sub>A</sub> and Class F<sub>A</sub> links, together with amendments to the requirements for optical fibre cabling.

Global change:

*Replace, throughout ISO/IEC 11801:2002 and Amendment 1:2008 “optical fibre channel” by “optical fibre cabling channel”.*

## 2 Normative references

*Replace the entire existing Clause 2 of both ISO/IEC 11801:2002, as well Amendment 1:2008, by the following:*

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

The provisions of the referenced specifications other than ISO/IEC, IEC, ISO and ITU documents, as identified in this clause, are valid within the context of this International Standard. The reference to such a specification within this International Standard does not give it any further status within ISO or IEC. In particular, it does not give the referenced specification the status of an International Standard.

IEC 60352 (all parts), *Solderless connections*

IEC 60352-3, *Solderless connections – Part 3: Solderless accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-4, *Solderless connections – Part 4: Solderless non-accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-5, *Solderless connections – Part 5: Press-in connections – General requirements, test methods and practical guidance*

IEC 60352-6, *Solderless connections – Part 6: Insulation piercing connections – General requirements, test methods and practical guidance*

IEC 60352-7, *Solderless connections – Part 7: Spring clamp connections – General requirements, test methods and practical guidance*

IEC 60352-8, *Solderless connections – Part 8: Compression mount connections – General requirements, test methods and practical guidance*<sup>1</sup>

IEC 60364-1, *Low-voltage electrical installations – Part 1: Fundamental principles, assessment of general characteristics, definitions*

IEC 60512-2-1, *Connectors for electronic equipment – Tests and measurements – Part 2-1: Electrical continuity and contact resistance tests – Test 2a: Contact resistance – Millivolt level method*

IEC 60512-3-1, *Connectors for electronic equipment – Tests and measurements – Part 3-1: Insulation tests – Test 3a: Insulation resistance*

IEC 60512-4-1, *Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof*

IEC 60512-5-2, *Connectors for electronic equipment – Tests and measurements – Part 5-2: Current-carrying capacity tests – Test 5b: Current-temperature derating*

IEC 60512-25-1, *Connectors for electronic equipment – Tests and measurements – Part 25-1: Test 25a – Crosstalk ratio*

IEC 60512-25-2:2002, *Connectors for electronic equipment – Tests and measurements – Part 25-2: Test 25b – Attenuation (insertion loss)*

IEC 60512-25-4:2001, *Connectors for electronic equipment – Tests and measurements – Part 25-4: Test 25d – Propagation delay*

IEC 60512-25-5, *Connectors for electronic equipment – Tests and measurements – Part 25-5: Test 25e – Return loss*

IEC 60512-25-9:2008, *Connectors for electronic equipment – Tests and measurements – Part 25-9: Signal integrity tests – Test 25i: Alien crosstalk*

IEC 60512-26-100, *Connectors for electronic equipment – Tests and measurements – Part 26-100: Measurement setup, test and reference arrangements and measurements for connectors according to IEC 60603-7 – Tests 26a to 26g*

IEC 60603-7, *Connectors for electronic equipment – Part 7: Detail specification for 8-way, unshielded, free and fixed connectors*

IEC 60603-7-1, *Connectors for electronic equipment – Part 7-1: Detail specification for 8-way, shielded free and fixed connectors*

IEC 60603-7-2:–, *Connectors for electronic equipment – Part 7-2: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 100 MHz<sup>2</sup>*

---

<sup>1</sup> To be published.

<sup>2</sup> Second edition to be published.

IEC 60603-7-3:–, *Connectors for electronic equipment – Part 7-3: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 100 MHz*<sup>3</sup>

IEC 60603-7-4:–, *Connectors for electronic equipment – Part 7-4: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*<sup>4</sup>

IEC 60603-7-5:–, *Connectors for electronic equipment – Part 7-5: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*<sup>5</sup>

IEC 60603-7-7:–, *Connectors for electronic equipment – Part 7-7: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 600 MHz*<sup>6</sup>

IEC 60603-7-41:–, *Connectors for electronic equipment – Part 7-41: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*

IEC 60603-7-51:–, *Connectors for electronic equipment – Part 7-51: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*

IEC 60603-7-71:–, *Connectors for electronic equipment – Part 7-71: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 1 000 MHz*<sup>7</sup>

IEC 60793-1-40, *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*

IEC 60793-1-44, *Optical fibres – Part 1-44: Measurement methods and test procedures – Cut-off wavelength*

IEC 60793-1-49, *Optical fibres – Part 1-49: Measurement methods and test procedures – Differential mode delay*

IEC 60793-2:2007, *Optical fibres – Part 2: Product specifications – General*

IEC 60793-2-10, *Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres*

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 60794 (all parts), *Optical fibre cables*

IEC 60794-2, *Optical fibre cables – Part 2: Indoor cables – Sectional specification*

---

<sup>3</sup> Second edition to be published.

<sup>4</sup> Second edition to be published.

<sup>5</sup> Second edition to be published.

<sup>6</sup> Third edition to be published.

<sup>7</sup> To be published.

IEC 60825 (all parts), *Safety of laser products*

IEC 60874-19-1:2007, *Fibre optic interconnecting devices and passive components Connectors for optical fibres and cables – Part 19-1: Fibre optic patch cord connector type SC-PC (floating duplex) standard terminated on multimode fibre type A1a, A1b – Detail specification*

IEC 60874-19-2:1999, *Connectors for optical fibres and cables – Part 19-2: Fibre optic adaptor (duplex) type SC for single-mode fibre connectors – Detail specification*

IEC 60874-19-3:2007, *Fibre optic interconnecting devices and passive components – Connectors for optical fibres and cables – Part 19-3 Fibre optic adaptor (duplex) type SC for multimode fibre connectors – Detail specification*

IEC 61073-1, *Fibre optic interconnecting devices and passive components – Mechanical splices and fusion splice protectors for optical fibres and cables – Part 1: Generic specification*

IEC 61076-3-104, *Connectors for electronic equipment – Part 3-104: Detail specification for 8-way, shielded free and fixed connectors for data transmissions with frequencies up to 1 000 MHz*

IEC 61076-3-110, *Connectors for electronic equipment – Part 3-110: Detail specification for shielded, free and fixed connectors for data transmission with frequencies up to 1 000 MHz*

IEC 61156 (all parts), *Multicore and symmetrical pair/quad cables for digital communications*

IEC 61156-1:2007, *Multicore and symmetrical pair/quad cables for digital communications – Part 1: Generic specification*

Amendment 1 (2009)

IEC 61156-2:, *Multicore and symmetrical pair/quad cables for digital communications – Part 2: Symmetrical pair/quad cables with transmission characteristics up to 100 MHz – Horizontal floor cable – Sectional specification*

IEC 61156-3:2008, *Multicore and symmetrical pair/quad cables for digital communications – Part 3: Work area wiring – Sectional specification*

IEC 61156-4:2009, *Multicore and symmetrical pair/quad cables for digital communications – Part 4: Riser cables – Sectional specification*

IEC 61156-5:2009, *Multicore and symmetrical pair/quad cables for digital communications – Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz – Horizontal floor wiring – Sectional specification*

IEC 61156-6, *Multicore and symmetrical pair/quad cables for digital communications – Part 6: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz – Work area wiring – Sectional specification<sup>8</sup>*

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

IEC 61300-2-2:1995, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-2: Tests – Mating durability*

---

<sup>8</sup> Refers to the third edition which is currently in preparation

IEC 61300-3-6:1997, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-6: Examinations and measurements – Return loss*  
Amendment 1:1998  
Amendment 2:1999

IEC 61300-3-34:2001, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-34: Examinations and measurements – Attenuation of random mated connectors*

IEC 61754-20:2002, *Fibre optic connector interfaces – Part 20: Type LC connector family*

IEC 61935-1, *Specification for the testing of balanced communication cabling in accordance with ISO/IEC 11801 – Part 1: Installed cabling*

IEC 61935-2, *Testing of balanced communication cabling in accordance with ISO/IEC 11801 – Part 2: Patch cords and work area cords*

IEC 62153-4-12, *Metallic communication cable test methods – Part 4-12: Electromagnetic compatibility (EMC) – Coupling attenuation or screened attenuation of connecting hardware – Absorbing clamp method*

ISO/IEC TR 14763-2:2000, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

ISO/IEC 14763-3, *Information technology – Implementation and operation of customer premises cabling – Part 3: Testing of optical fibre cabling*

ISO/IEC 15018, *Information technology – Generic cabling for homes*

ISO/IEC 18010, *Information technology – Pathways and spaces for customer premises cabling*

ISO/IEC TR 24750:2007, *Information technology – Assessment and mitigation of installed balanced cabling channels in order to support 10GBASE-T*

ITU-T Recommendation O.9: *Measuring arrangements to assess the degree of unbalance about earth*

### 3.1 Terms and definitions

Add the following new terms and definitions:

#### 3.1.84

##### **cabled optical fibre category**

system of defining requirements for the cabled optical fibre performance within optical fibre cabling channels and links

NOTE Also referred to as performance codes in some standards.<sup>9</sup>

#### 3.1.85

##### **equipment interface**

location where a connection between equipment and the cabling system occurs

<sup>9</sup> Standards developed by IEC subcommittee 86C use this definition in support of JTC 1/SC25 standards.

**3.1.86****test interface**

location where a connection between test equipment and the cabling to be tested occurs

**3.1.74**

*Replace, in ISO/IEC 11801:2002, the existing definition 3.1.56 for the term “small form factor connector” (renumbered as 3.1.74 by Amendment 1:2008) by the following:*

**3.1.74****small form factor connector**

optical fibre connector designed to accommodate two or more optical fibres with at least the same mounting density as achievable within the IEC 60603-7 series

**3.2 Abbreviations**

*Add the following new abbreviations:*

EI      Equipment interface

TI      Test interface

**4 Conformance<sup>10</sup>**

*Replace, in Amendment 1:2008, point 2) of item b) by the following:*

- 2) attachment of appropriate components to a permanent link or CP link design meeting the prescribed performance class of Clause 6 and Annex A. Channel performance shall be ensured where a channel is created by adding more than one cord to either end of a link meeting the requirements of Annex A;

*Delete, in Amendment 1:2008, the following text and referenced footnote:*

Until amendment 2<sup>4</sup> of ISO/IEC 11801:2002 has been published:

- conformance for Classes D, E and F with regards to TCL, ELTCTL and coupling attenuation can only be achieved by option 1) above;
- conformance for Classes E<sub>A</sub> and F<sub>A</sub> can only be achieved by option 1) above.

*Add, after bullet h), the following text:*

Test methods to assess conformance with the channel and link requirements of Clause 6 and Annex A respectively are specified in IEC 61935-1 for balanced cabling and ISO/IEC 14763-3 for optical fibre cabling. The treatment of measured results that fail to meet the requirements of Clause 6 and Annex A respectively, or lie within the relevant measurement accuracy, shall be clearly documented within a quality plan as described in ISO/IEC 14763-2.

Installation and administration of cabling in accordance with this International Standard shall be undertaken in accordance with ISO/IEC 14763-2.

This International Standard does not specify which tests and sampling levels should be adopted. The test parameters to be measured and the sampling levels to be applied for a particular installation shall be defined in the installation specification and quality plans for that installation prepared in accordance with ISO/IEC 14763-2.

---

<sup>10</sup> The entire Clause 4 of ISO/IEC 11801:2002, has been replaced by Amendment 1:2008.



Replace the last paragraph by the following:

For balanced cables, 2 pairs per TO may be used as an alternative to 4 pairs. However, this may require pair reassignment and will not support some applications (see Annex F). Care should be taken that the initial pair assignment, and all subsequent changes, are recorded (see ISO/IEC 14763-2 for details of administration requirements. Until ISO/IEC 14763-2 (first edition) is published, relevant information can be found in ISO/IEC TR 14763-2). Pair reassignment by means of inserts is allowed.

**5.7.6 Consolidation point**

Replace, in ISO/IEC 11801:2002, the existing text of bullet point d) by “void”.

**6.2 Layout**


Delete, in Amendment 1:2008, the NOTE which reads:

NOTE Component performance requirements for Category 6<sub>A</sub> and Category 7<sub>A</sub> will be available in Amendment 2 to ISO/IEC 11801:2002.

Delete, in ISO/IEC 11801:2002, the entire fourth paragraph beginning with “Most Class F channels...”.

Replace, in ISO/IEC 11801:2002, the existing paragraph prior to Figure 11, as well as Figure 11 by the following:

Figure 11 shows an example of terminal equipment in the work area connected to transmission equipment using two different media channels which are cascaded. In fact, there is an optical fibre cabling channel (see Clause 8) connected via an active component in the FD to a balanced cabling channel. There are four channel interfaces; one at each end of the balanced channel and one at each end of the optical fibre cabling channel.

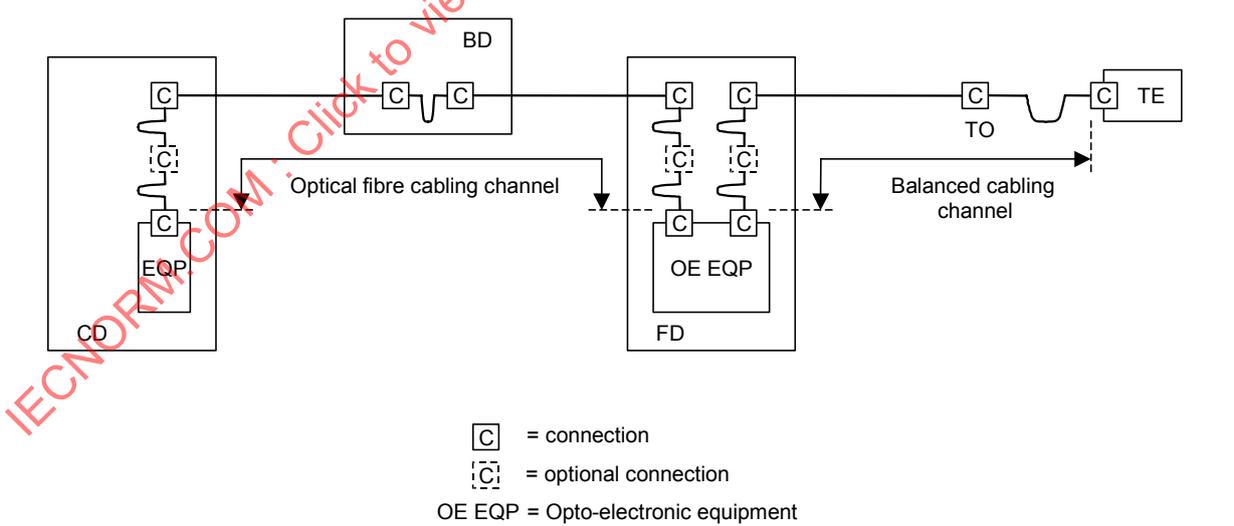

**Figure 11 – Example of a system showing the location of cabling interfaces and extent of associated channels**

Delete, in Amendment 1:2008, the NOTE which reads:

NOTE Permanent link and CP link requirements for Class E<sub>A</sub> and Class F<sub>A</sub> will be available in amendment 2 to ISO/IEC 11801:2002.

Delete, in ISO/IEC 11801:2002, the entire last paragraph beginning with “Most Class F channels...”.

### 6.3 Classification of balanced cabling

Replace, in ISO/IEC 11801:2002, the second sentence of the second paragraph by the following:

Similarly, Class B, C, D, E, E<sub>A</sub>, F and F<sub>A</sub> channels provide the transmission performance to support Class B, C, D, E, E<sub>A</sub>, F and F<sub>A</sub> applications respectively.

#### 6.4.2 Return loss

Replace, in ISO/IEC 11801:2002, the existing first paragraph by the following:

The return loss requirements are applicable to Classes C, D, E, E<sub>A</sub>, F and F<sub>A</sub> only.

#### 6.4.3 Insertion loss/attenuation

Replace, in ISO/IEC 11801:2002, the last paragraph before Table 4 by the following:

When required, the insertion loss shall be measured according to IEC 61935-1.

##### 6.4.5.1 General

Replace, in Amendment 1:2008, the entire text of this subclause by the following:

ACR-N and PS ACR-N requirements are applicable to Classes D, E, E<sub>A</sub>, F and F<sub>A</sub> only.

Except for the name, the definition and equations for ACR-N and PS ACR-N are identical to those used for ACR and PS ACR, respectively, in prior editions of this standard.

##### 6.4.6.1 General

Replace, in Amendment 1:2008, the first paragraph by the following:

ACR-F and PS ACR-F requirements are applicable to Classes D, E, E<sub>A</sub>, F and F<sub>A</sub> only.

#### 6.4.9 Current carrying capacity

Replace, in ISO/IEC 11801:2002, the existing subclause by the following:

The minimum current carrying capacity for channels of Classes D, E, E<sub>A</sub>, F and F<sub>A</sub> shall be 0,175 A d.c. per conductor for all temperatures at which the cabling will be used. This shall be achieved by an appropriate design.

For information on current carrying capacity in respect to applications using remote power supplied over balanced cabling, see ISO/IEC TR 29125.

#### **6.4.13 Delay skew**

*Replace, in ISO/IEC 11801:2002, the existing second paragraph by the following:*

When required, the delay skew shall be calculated according to IEC 61935-1.

#### **6.4.15.5 PS AFEXT for Class E<sub>A</sub> channels**

*Replace, in Amendment 1:2008, the existing third paragraph by the following:*

The measured pair-to-pair *AFEXT* values of a wire pair *k* in a disturbed channel from the disturbing channel *l* are normalized by the difference of the insertion losses of disturbing and disturbed channels.

### **7.1 General**

*Replace, in ISO/IEC 11801:2002, the existing text by the following:*

This clause describes implementations of generic balanced cabling that utilise components and assemblies referenced in Clauses 9, 10 and 13. These reference implementations meet the requirements of Clause 5, and when installed in accordance with ISO/IEC 14763-2 (until ISO/IEC 14763-2 is published, relevant information can be found in ISO/IEC TR 14763-2), comply with the channel performance requirements of Clause 6.

#### **7.2.1 General**

*Replace, in ISO/IEC 11801:2002, the first paragraph by the following:*

Balanced components referenced in Clauses 9 and 10 are defined in terms of impedance and category. In the reference implementations of this clause, the components used in each cabling channel shall have the same nominal impedance in accordance with 9.2.

##### **7.2.2.1 Component choice**


*Replace, in Amendment 1 to ISO/IEC 11801:2008, the existing bullet points for Category 6<sub>A</sub> and Category 7<sub>A</sub> by the following:*

- Category 6<sub>A</sub> components provide Class E<sub>A</sub> balanced cabling performance;
- Category 7<sub>A</sub> components provide Class F<sub>A</sub> balanced cabling performance;


##### **7.2.2.2 Dimensions**

*Replace, in ISO/IEC 11801:2002, the existing Figure 12 by the following:*


a) Interconnect - TO Model

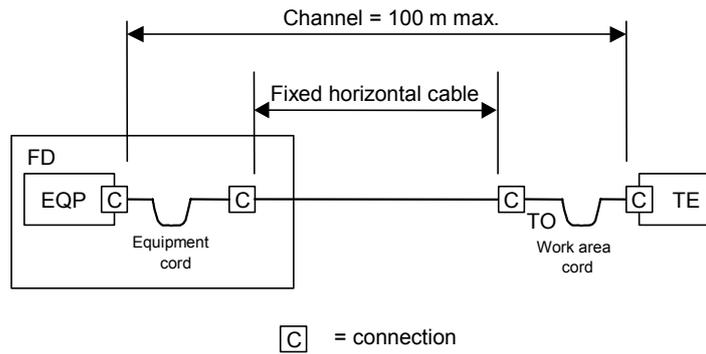

b) Crossconnect - TO Model

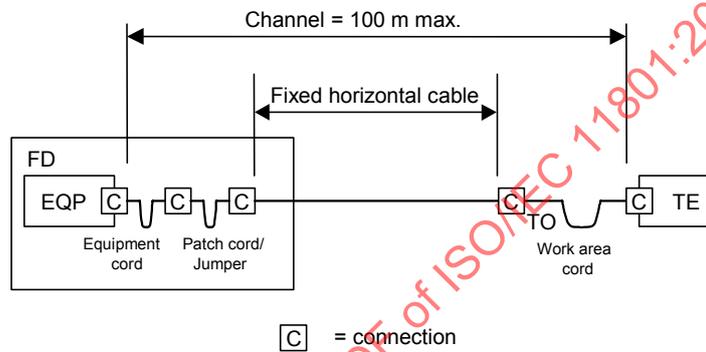

c) Interconnect - CP - TO Model

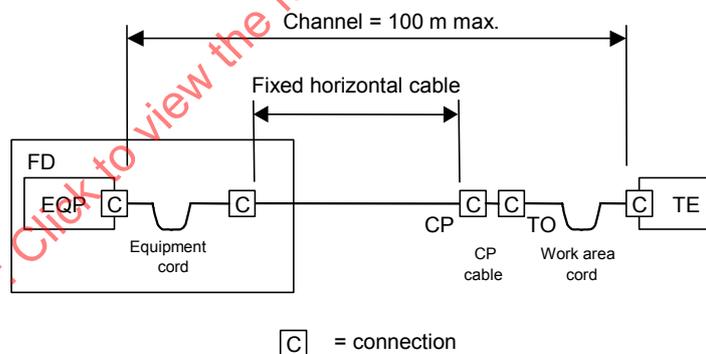

d) Crossconnect - CP - TO Model

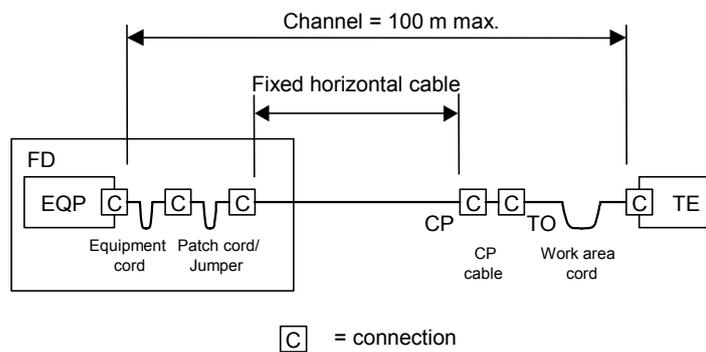


Figure 12 – Horizontal cabling models

### 7.2.2.2 Dimensions

Replace, in Amendment 1:2008, the existing paragraph before Table 31 by the following:

Table 31 contains the length assumptions of the mathematical model used to validate channel performance using components of Clauses 9, 10 and 13. They do not represent absolute restrictions on the implementation of channels and permanent links, but may be used for guidance in reference implementations.

#### Table 31<sup>11</sup>

Replace, in Amendment 1:2008, the table title by the following:

#### Table 31 – Length assumptions used in the mathematical modelling of balanced horizontal cabling

Add, in Amendment 1:2008, the following text before Table 32:

In addition to the cords, the channels shown in Figure 12c and Figure 12d contain a CP cable. The insertion loss specification for the CP cable may differ from that of both the fixed horizontal cable and the cords. In order to accommodate cables used for work area cords, CP cables, patch cords, jumpers and equipment cords with different insertion loss, the length of the cables used within a channel shall be determined by the equations shown in Table 32.

Replace, in Amendment 1:2008, Table 32 by the following:

(Note that Table 21 in ISO/IEC 11801:2002 has been replaced and renumbered by Amendment 1:2008 as Table 32.)

**Table 32 – Horizontal channel length equations**

Model	Figure	Implementation equation		
		Class D	Class E and E <sub>A</sub>	Class F and F <sub>A</sub>
Interconnect - TO	12a	$H = 109 - FX$	$H = 107 - 3^a - FX$	$H = 107 - 2^a - FX$
Cross-connect - TO	12b	$H = 107 - FX$	$H = 106 - 3^a - FX$	$H = 106 - 3^a - FX$
Interconnect - CP -TO	12c	$H = 107 - FX - CY$	$H = 106 - 3^a - FX - CY$	$H = 106 - 3^a - FX - CY$
Cross-connect - CP - TO	12d	$H = 105 - FX - CY$	$H = 105 - 3^a - FX - CY$	$H = 105 - 3^a - FX - CY$
<i>H</i> the maximum length of the fixed horizontal cable (m) <i>F</i> combined length of patch cords/jumpers, equipment and work area cords (m) <i>C</i> the length of the CP cable (m) <i>X</i> the ratio of cord cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m) <i>Y</i> the ratio of CP cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m)				
NOTE For operating temperatures above 20 °C, H should be reduced by 0,2 % per °C for screened cables; 0,4 % per °C (20 °C to 40 °C) and 0,6 % per °C (>40 °C to 60 °C) for unscreened cables.				
<sup>a</sup> This length reduction is to provide an allocated margin to accommodate insertion loss deviation.				

Move, in Amendment 1:2008, after Table 32 the following text above the bulleted list:

For the purpose of calculation in Table 32 it is assumed that:


<sup>11</sup> Refers to Table 31 as added by Amendment 1 and not Table 31 (renumbered as Table 42 by Amendment 1:2008) in ISO/IEC 11801:2002.

**7.2.3.2 Dimensions**

Replace, in ISO/IEC 11801:2002, the last sentence of the first paragraph by the following:

This represents the maximum configuration for a Class D, E, E<sub>A</sub>, F or F<sub>A</sub> backbone channel.

Replace, in ISO/IEC 11801:2002, the existing Figure 13 of by the following:

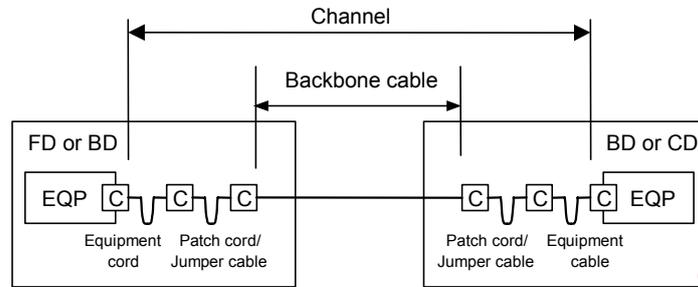

EQP = equipment; C = connection (mated pair)

**Figure 13 – Backbone cabling model**

Replace, in ISO/IEC 11801:2002, the introductory sentence of the second paragraph with bullet points by the following:

The following general restrictions apply for Classes D, E, E<sub>A</sub>, F and F<sub>A</sub>:

Replace, in Amendment 1:2008, Table 33 by the following:

(Note that Table 22 in ISO/IEC 11801:2002 has been replaced and renumbered by Amendment 1:2008 as Table 33.)

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amd 2:2010

**Table 33 – Backbone channel length equations**

Component Category	Implementation equations <sup>a</sup>							
	Class A	Class B	Class C	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
5	2 000	$B = 250 - FX$	$B = 170 - FX$	$B = 105 - FX$	–	–	–	–
6	2 000	$B = 260 - FX$	$B = 185 - FX$	$B = 111 - FX$	$B = 105 - 3^b - FX$	–	–	–
6 <sub>A</sub>	2 000	$B = 260 - FX$	$B = 189 - FX$	$B = 114 - FX$	$B = 108 - 3^b - FX$	$B = 105 - 3^b - FX$	–	–
7	2 000	$B = 260 - FX$	$B = 190 - FX$	$B = 115 - FX$	$B = 109 - 3^b - FX$	$B = 107 - 3^b - FX$	$B = 105 - 3^b - FX$	–
7 <sub>A</sub>	2 000	$B = 260 - FX$	$B = 192 - FX$	$B = 117 - FX$	$B = 111 - 3^b - FX$	$B = 105 - 3^b - FX$	$B = 105 - 3^b - FX$	$B = 105 - 3^b - FX$
<p><i>B</i> the maximum length of the backbone cable (m)</p> <p><i>F</i> combined length of patch cords/jumpers and equipment cords (m)</p> <p><i>X</i> the ratio of cord cable insertion loss (dB/m) to backbone cable insertion loss (dB/m)</p> <p>NOTE 1 Where channels contain a different number of connections than in the model shown in Figure 13, the fixed cable length is reduced (where more connections exist) or increased (where fewer connections exist) by 2 m per connection for Category 5 cables and 1 m per connection for Category 6, 6<sub>A</sub>, 7 and 7<sub>A</sub> cables. Additionally, the NEXT, return loss (RL) and ACR-F performance should be verified.</p> <p>NOTE 2 For operating temperatures above 20 °C, <i>B</i> should be reduced by 0,2 % per °C for screened cables; 0,4 % per °C (20 °C to 40 °C) and 0,6 % per °C (&gt;40 °C to 60 °C) for unscreened cables.</p> <p><sup>a</sup> Applications limited by propagation delay or delay skew may not be supported if channel lengths exceed 100 m.</p> <p><sup>b</sup> This length reduction is to provide an allocated margin to accommodate insertion loss deviation.</p>								

### 8.1 General

Replace, in ISO/IEC 11801:2002, the entire text of this subclause by the following:

The selection of an optical fibre cabling channel design for use within a generic cabling system should be made with reference to Annex F. This standard specifies the following classes for optical fibre cabling:

Class OF-300 channels support applications over the cabled optical fibre Categories referenced in Clause 9 to a minimum of 300 m

Class OF-500 channels support applications over the cabled optical fibre Categories referenced in Clause 9 to a minimum of 500 m

Class OF-2 000 channels support applications over the cabled optical fibre Categories referenced in Clause 9 to a minimum of 2 000 m

Optical fibre cabling channels shall be comprised of components that comply with Clauses 9 and 10. These clauses specify physical construction (core/cladding diameter and numerical aperture) and transmission performance. Within the reference implementations of this clause, the cabled optical fibres used in each cabling channel shall be of the same specification.

## 8.2 Component choice

*Replace, in ISO/IEC 11801:2002, the existing first paragraph by the following:*

The selection of optical fibre components shall take into account the initial class of applications to be supported, and the required channel lengths, and should take into account any predicted changes to the class of applications to be supported during the expected life of the cabling.

## 8.3 Channel attenuation

*Replace, in ISO/IEC 11801:2002, the existing last sentence of the first paragraph by the following:*

The attenuation of channels and permanent links at a specified wavelength shall not exceed the sum of the specified attenuation values for the components at that wavelength (where the attenuation of a length of cabled optical fibre is calculated from its attenuation coefficient multiplied by its length).


## 8.4 Channel topology

*Replace, in ISO/IEC 11801:2002, the existing first sentence of the second paragraph by the following:*


The delivery of cabled optical fibre to the TO would not generally require transmission equipment at the FD (unless the design of optical fibre in the backbone cabling subsystem differs from that in the horizontal cabling subsystem).

Replace, in ISO/IEC 11801:2002, the existing Figure 14 by the following:

a) "Patched" combined channel

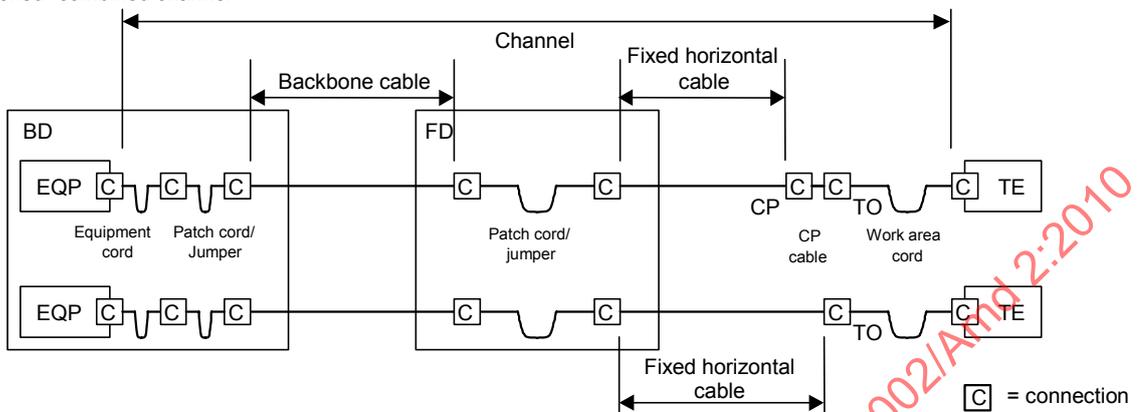

b) "Spliced" combined channel

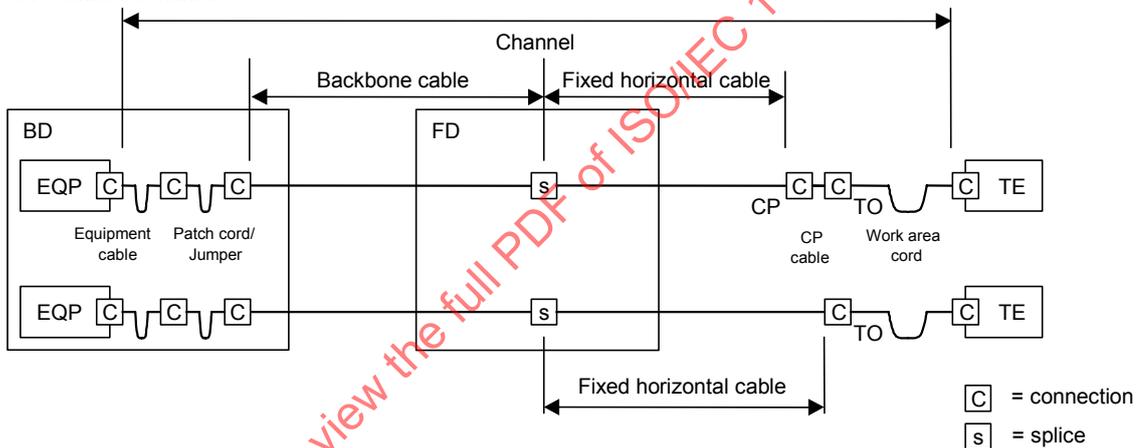

c) "Direct" combined channel

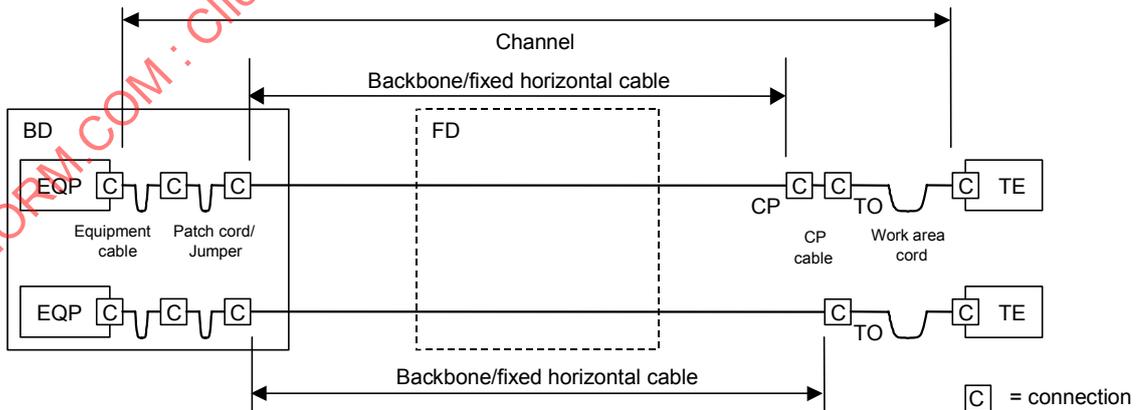


Figure 14 – Combined backbone/horizontal channels

## 8.5 Propagation delay

Replace, in ISO/IEC 11801:2002, the existing text of this subclause by the following:

For some applications, knowledge of the delay of optical fibre cabling channels is important. This ensures compliance with end-to-end delay requirements of complex networks consisting of multiple cascaded channels. For this reason, it is important to know the lengths of the optical fibre cabling channels. It is possible to calculate propagation delay based on cable performance (see Clause 9).

### 9.1 General

Replace, in ISO/IEC 11801:2002, the existing first paragraph by the following:

This clause specifies the minimum cable performance requirements for the reference implementations in Clause 7. The requirements in this clause are specified at a temperature of 20 °C. They include:

### 9.2 Balanced cables

#### 9.2.1 Basic performance requirements

Replace, in ISO/IEC 11801:2002, the existing title of this subclause as follows:

#### 9.2.1 Performance for balanced cables

Replace, in ISO/IEC 11801:2002, Table 24 (renumbered as Table 35 by Amendment 1:2008) by the following new title and Table 35:

**Table 35 – Performance for balanced cables**

IEC 61156-2, third edition <sup>a</sup>	Sectional specification for multicore and symmetrical pair/quad cables for digital communications – Horizontal wiring
IEC 61156-3, third edition <sup>a</sup>	Sectional specification for multicore and symmetrical pair/quad cables for digital communications – Work area wiring
IEC 61156-4, third edition <sup>a</sup>	Sectional specification for multicore and symmetrical pair/quad cables for digital communications – Riser cables
IEC 61156-5, second edition <sup>a</sup>	Symmetrical pair/quad cables for digital communications with transmission characteristics up to 1 000 MHz – Part 5: Horizontal wiring
IEC 61156-6, third edition <sup>a</sup>	Symmetrical pair/quad cables for digital communications with transmission characteristics up to 1 000 MHz – Part 6: Work area wiring
<sup>a</sup> In preparation, see Clause 2.	

#### 9.2.2.3 Mean characteristic impedance

Replace, in ISO/IEC 11801:2002, the title and the text of the entire subclause by the following:

#### 9.2.2.3 Characteristic impedance

Refer to 6.3.10 of IEC 61156-5:2009, measured according to 6.3.10.1.1 of IEC 61156-1:2007, on a standard length of 100 m. The nominal impedance shall be 100 Ω.

Alternative test methodologies that have been shown to correlate with these requirements may also be used.

### 9.2.2.4 Attenuation

Replace, in ISO/IEC 11801:2002, the first paragraph by the following:

For the attenuation of Category 5 cable the constants specified in 6.3.3.2 of IEC 61156-5:2009 shall be used. They result in a lower attenuation than given in Table 4 of 6.3.3.1 of IEC 61156-5:2009, for example in 21,3 dB/100 m at 100 MHz.

### 9.2.2.5 ELFEXT and PS ELFEXT

Replace, in ISO/IEC 11801:2002, the title and text of the entire subclause by the following:

#### 9.2.2.5 ACR-F and PS ACR-F

##### 9.2.2.5.1 ACR-F

The ACR-F of each pair combination shall meet the requirements derived by the equation in Table 60.

**Table 60 – ACR-F for cables**

Frequency MHz	Minimum ACR-F <sup>a, b</sup> dB				
	Cable category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
$1 \leq f \leq 100$	$63,8 - 20 \lg(f)$	–	–	–	–
$1 \leq f \leq 250$	–	$67,8 - 20 \lg(f)$	–	–	–
$1 \leq f \leq 500$	–	–	$67,8 - 20 \lg(f)$	–	–
$1 \leq f \leq 600$	–	–	–	$94,0 - 20 \lg(f)$	–
$1 \leq f \leq 1\,000$	–	–	–	–	$105,3 - 20 \lg(f)$

<sup>a</sup> ACR-F at frequencies that correspond to measured FEXT values of greater than 70 dB, are for information only.

<sup>b</sup> ACR-F at frequencies that correspond to calculated values of greater than 75,0 dB shall revert to a minimum requirement of 75,0 dB.

**Table 61 – Informative ACR-F values for cables at key frequencies**

Frequency MHz	Minimum ACR-F dB				
	Cable category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	63,8	67,8	67,8	75,0	75,0
100	23,8	27,8	27,8	54,0	65,3
250	–	19,8	19,8	46,0	57,3
500	–	–	13,8	40,0	51,3
600	–	–	–	38,4	49,7
1 000	–	–	–	–	45,3

##### 9.2.2.5.2 PS ACR-F

The PS ACR-F of each pair combination shall meet the requirements derived by the equation in Table 62.

**Table 62 – PS ACR-F for cables**

Frequency MHz	Minimum PS ACR-F <sup>a, b</sup>				
	dB				
	Cable category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
$1 \leq f \leq 100$	$60,8 - 20 \lg(f)$	–	–	–	–
$1 \leq f \leq 250$	–	$64,8 - 20 \lg(f)$	–	–	–
$1 \leq f \leq 500$	–	–	$64,8 - 20 \lg(f)$	–	–
$1 \leq f \leq 600$	–	–	–	$91,0 - 20 \lg(f)$	–
$1 \leq f \leq 1\,000$	–	–	–	–	$102,3 - 20 \lg(f)$

<sup>a</sup> PS ACR-F at frequencies that correspond to measured PS FEXT values of greater than 67 dB, are for information only.

<sup>b</sup> PS ACR-F at frequencies that correspond to calculated values of greater than 72,0 dB shall revert to a minimum requirement of 72,0 dB.

**Table 63 – Informative PS ACR-F values for cables at key frequencies**

Frequency MHz	Minimum PS ACR-F				
	dB				
	Cable category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	60,8	64,8	64,8	72,0	72,0
100	20,8	24,8	24,8	51,0	62,3
250	–	16,8	16,8	43,0	54,3
500	–	–	10,8	37,0	48,3
600	–	–	–	35,4	46,7
1 000	–	–	–	–	42,3

**9.2.2.6 Current carrying capacity**

Replace, in ISO/IEC 11801:2002, the entire text of this subclause by the following:

Minimum d.c. current carrying capacity per conductor shall be as indicated in Table 64.

**Table 64 – Minimum current carrying capacity**

Minimum current A d.c.	Operating temperature $t$ °C
0,300	$t \leq (T_R - 10)$
0,175	$(T_R - 10) < t \leq T_R$

NOTE  $T_R$  is the lowest specified operating temperature (maximum) of the cables comprising the cabling subsystem.

Conformance shall be achieved by design.

Refer to ISO/IEC TR 29125 for additional information on current carrying capacity under different installation conditions.

#### **9.2.2.7 Coupling attenuation**

*Replace, in ISO/IEC 11801:2002, the entire text of this subclause by the following:*

Screened cables shall meet the requirements of Type II as described in IEC 61156-5.

#### **9.2.2.8 Transfer impedance**

*Replace, in ISO/IEC 11801:2002, the entire text of this subclause by the following:*

Screened cables shall meet the grade 2 transfer impedance requirements as described in IEC 61156-5.

*Insert, after 9.2.2.8, the following new subclause:*

#### **9.2.2.9 Unbalance attenuation, near-end**

Unscreened cables shall meet the requirements of level 2 as described in IEC 61156-5.

### **9.3 Additional crosstalk considerations for cable sharing in balanced cables**

#### **9.3.1 General**

*Replace, in ISO/IEC 11801:2002, the titles of 9.3 and 9.3.1 as follows:*

### **9.3 Additional crosstalk considerations for balanced cables**

#### **9.3.1 Cable sharing**

*Delete the first paragraph of 9.3.1.*

#### **9.3.2 Power summation in backbone cables**

*Replace the last sentence of the first paragraph of by the following:*

These cables shall additionally meet the *PS NEXT* requirements for crosstalk in bundled cable, i.e. 3.3.10 of IEC 61156-5:2002<sup>12</sup>.

*Insert, after subclause 9.3.3, the following new subclause:*

#### **9.3.4 Alien crosstalk**

Cables used in class E<sub>A</sub> and class F<sub>A</sub> channels shall meet alien crosstalk requirements for category 6<sub>A</sub> and category 7<sub>A</sub> cables respectively, as specified in IEC 61156-5 and IEC 61156-6.

---

<sup>12</sup> IEC 61156-5:2002, *Multicore and symmetrical pair/quad cables for digital communications – Part 5: Symmetrical pair/quad cables with transmission characteristics up to 600 MHz – Horizontal floor wiring – Sectional specification*

**9.4 Optical fibre cables**

Replace, in ISO/IEC 11801:2002, the title of this subclause as follows:

**9.4 Optical fibre cable (cabled optical fibres)**

**9.4.1 Optical fibre types**

Replace, in ISO/IEC 11801:2002, the title and the entire subclause by the following:

**9.4.1 Cabled optical fibre Categories**

Six cabled optical fibre Categories are specified to support various classes of applications, four multimode Categories (OM1, OM2, OM3 and OM4) and two single-mode Categories (OS1 and OS2).

Replace, in ISO/IEC 11801:2002, Table 26 (renumbered as Table 37 by Amendment 1:2008) by the following:

**Table 37 – Cabled optical fibre attenuation**

Cabled optical fibre attenuation (maximum) dB/km						
	OM1, OM2 OM3 and OM4 multimode		OS1 single-mode		OS2 single-mode	
Wavelength	850 nm	1 300 nm	1 310 nm	1 550 nm	1 310 nm	1 383 nm 1 550 nm
Attenuation	3,5	1,5	1,0	1,0	0,4	0,4 0,4

**9.4.3 Multimode optical fibre cable**

Replace, in ISO/IEC 11801:2002, the entire text and table of this subclause by the following: (Note that Table 27 was renumbered as Table 38 by Amendment 1:2008.)

Requirements of multimode optical fibre cables include compliance to

- a) the cabled optical fibre performance,
- b) the type of fibre,
- c) the physical cable performance.

The cabled optical fibre Category designated as OM1 and OM2 is achieved using a multimode, graded-index optical fibre waveguide with nominal 50/125 µm or 62,5/125 µm core/cladding diameter and numerical aperture complying with A1b or A1a.1 optical fibre, respectively, of IEC 60793-2-10.

The cabled optical fibre Category designated as OM3 and OM4 is achieved using a multimode, graded-index optical fibre waveguide with nominal 50/125 µm core/cladding diameter and numerical aperture complying with A1a.2 and A1a.3 optical fibre respectively of IEC 60793-2-10.

The limits to be met for cabled optical fibre transmission performance are specified in Table 37 and Table 38. Attenuation shall be measured in accordance with IEC 60793-1-40.

The optical fibre cable shall meet mechanical and environmental requirements of the relevant specification of the IEC 60794 series.

**Table 38 – Multimode optical fibre modal bandwidth**

Wavelength		Minimum modal bandwidth MHz × km		
		Overfilled launch bandwidth		Effective modal bandwidth
		850 nm	1 300 nm	850 nm
Category	Nominal core diameter µm			
OM1	50 or 62,5	200	500	Not specified
OM2	50 or 62,5	500	500	Not specified
OM3	50	1 500	500	2 000
OM4	50	3 500	500	4 700

NOTE Modal bandwidth requirements apply to the optical fibre used to produce the relevant cabled optical fibre category and are assured by the parameters and test methods specified in IEC 60793-2-10. Optical fibres that meet only the overfilled launch modal bandwidth may not support some applications specified in Annex F.

#### 9.4.4 Single-mode optical fibre cables

Replace, in ISO/IEC 11801:2002, the entire text by the following:

Requirements of single-mode optical fibre cables include compliance to

- the cabled optical fibre performance,
- the type of fibre,
- the physical cable performance.

The cabled optical fibre category designated as OS1 is achieved using a single-mode, fibre complying with B1.1, B1.3 or B6\_a, respectively, of IEC 60793-2-50.

The cabled optical fibre category designated as OS2 is achieved using a single-mode, fibre complying with B1.1, B1.3 or B6\_a, respectively, of IEC 60793-2-50.

NOTE 1 If concatenating different OSx cabled optical fibres manufactured with different optical fibre types, refer to IEC/TR 62000:2010<sup>13</sup> for additional guidance.

The requirements for cabled optical fibre transmission performance are specified:

- for the attenuation in Table 37 when measured in accordance with IEC 60793-1-40;
- for the cut-off wavelength being less than 1 260 nm when measured in accordance with IEC 60793-1-44.

The optical fibre cable shall meet mechanical and environmental requirements of the relevant specification of the IEC 60794 series.

NOTE 2 Channels with a specified attenuation at 1 383 nm can only be created using B1.3 or B6\_a optical fibres.

NOTE 3 B1.1 optical fibre is not recommended where channels may contain both category OS1 and OS2 cabled optical fibre.

NOTE 4 B6\_a optical fibre is recommended when it is expected that the optical fibre or the cable will have to support smaller bend radii than 25 mm.

<sup>13</sup> The second edition is planned to be published in 2010.

### 10.1.1 Applicability

*Replace, in ISO/IEC 11801:2002, the last sentence of the first paragraph by the following:*

The requirements of the detail specifications for free connectors and fixed connectors referenced in this clause shall also be met.

### 10.1.6 Installation practices

*Replace, in ISO/IEC 11801:2002, the existing third paragraph by the following:*

The connecting hardware shall be identified according to the requirements of ISO/IEC 14763-2 (until ISO/IEC 14763-2 is published, relevant information can be found in ISO/IEC TR 14763-1). Planning and installation of connecting hardware should be carried out in accordance with ISO/IEC 14763-2 (until ISO/IEC 14763-2 is published, relevant information can be found in ISO/IEC TR 14763-2).

### 10.2.1 General requirements

*Replace, in ISO/IEC 11801:2002, the entire text by the following:*

The following requirements apply to all connecting hardware used to provide electrical connections with balanced cables that comply with the requirements of Clause 9. It is desirable that hardware used to directly terminate balanced cable elements be of the insulation piercing connection (IPC) type or the insulation displacement connection (IDC) type. In addition to these requirements, connecting hardware used with screened cabling shall be in full compliance with Clause 11.

The requirements of 10.2.3 and 10.2.4 are based upon the categories of connecting hardware specified in the reference implementations of Clause 7. For channel, permanent link, and CP link design routes to conformance, as specified in Clause 4, other connecting hardware can be used at places other than the TO.

### 10.2.3 Mechanical characteristics

*Replace, in ISO/IEC 11801:2002, Table 28 (renumbered as Table 39 by Amendment 1:2008) by the following:*

IECNORM.COM : Click to view the PDF of ISO/IEC 11801:2002/Amend. 2:2010

**Table 39 – Mechanical characteristics of connecting hardware for use with balanced cabling**

Mechanical characteristics		Requirement	Component or test standard	
a)	Physical dimensions (TO only)	Category 5 unscreened	Mating dimensions and gauging	IEC 60603-7-2
		Category 5 screened	Mating dimensions and gauging	IEC 60603-7-3
		Category 6 unscreened	Mating dimensions and gauging	IEC 60603-7-4
		Category 6 screened	Mating dimensions and gauging	IEC 60603-7-5
		Category 6 <sub>A</sub> unscreened	Mating dimensions and gauging	IEC 60603-7-41
		Category 6 <sub>A</sub> screened	Mating dimensions and gauging	IEC 60603-7-51
		Category 7 screened	Mating dimensions and gauging	IEC 60603-7-7 <sup>h</sup>
	Category 7 <sub>A</sub> screened	Mating dimensions and gauging	IEC 60603-7-71 <sup>h,i</sup>	
Cable termination compatibility				
	Nominal conductor diameter – mm	0,5 to 0,65 <sup>a</sup>	–	
b)	Cable type	Patching <sup>d</sup>	Stranded or solid conductors	
		Jumpers	Stranded or solid conductors	
		Other	Solid conductors	–
Nominal diameter of insulated conductor mm	Categories 5 and 6	0,7 to 1,4 <sup>b, c</sup>	–	
	Categories 6 <sub>A</sub> , 7, and 7 <sub>A</sub>	0,7 to 1,6 <sup>b, c</sup>	–	
Number of conductors	Telecommunications outlet	8	Visual inspection	
	Other	≥2 × n (n = 1, 2, 3, ...)		
Cable outer diameter mm	Outlet	≤20	–	
	Free connector (plug)	≤9 <sup>e</sup>		
Means to connect screen <sup>f</sup>		Mechanical and environmental performance	Annex C and Clause 11	
Mechanical operation (durability)				
c)	Cable termination (cycles)	Non-reusable IDC	1	IEC 60352-3 or IEC 60352-4
		Reusable IDC	≥20	IEC 60352-3 or IEC 60352-4
		Non-reusable IPC	1	IEC 60352-6
Jumper termination (cycles)		≥200 <sup>g</sup>	IEC 60352-3 or IEC 60352-4	
TO-type interface (cycles)		≥750	IEC 60603-7 (unscreened) or IEC 60603-7-1 (screened)	
Other connections		≥200	Annex C	
<p><sup>a</sup> It is not required that connecting hardware be compatible with cables outside of this range. However, when cables with conductor diameters as low as 0,4 mm or as high as 0,8 mm are used, special care shall be taken to ensure compatibility with connecting hardware to which they connect.</p> <p><sup>b</sup> Use of the free connector (plug) specified in series IEC 60603-7 is typically limited to cables having insulated conductor diameters in the range of 0,8 mm to 1,0 mm.</p> <p><sup>c</sup> It is not required that connecting hardware be compatible with cables outside of this range. However, when cables with insulated conductor diameters as high as 1,6 mm are used, special care shall be taken to ensure compatibility with connecting hardware to which they connect.</p> <p><sup>d</sup> Free connectors (plugs) shall be compatible with the solid or stranded cable selected for work area or equipment cords.</p> <p><sup>e</sup> Applicable only to individual cable units.</p> <p><sup>f</sup> If it is intended to use screened cabling, care should be taken that the connector is designed to terminate the screen. There may be a difference between connectors designed to terminate balanced cables with overall screens only, as opposed to cables having both individually screened elements and an overall screen (see ANNEX E).</p> <p><sup>g</sup> This durability requirement is only applicable to connections designed to administer cabling system changes (i.e., at a distributor).</p> <p><sup>h</sup> In installations where other factors, such as BCT applications (see ISO/IEC 15018), take preference over the backward compatibility offered with IEC 60603-7-7 and IEC 60603-7-71, the interface specified in IEC 61076-3-104 may be used.</p> <p><sup>i</sup> If backwards compatibility is not required, the free connector (plug) specified in IEC 61076-3-110 may be used.</p>				

**10.2.4.1 General**

Replace, in ISO/IEC 11801:2002, the first paragraph by the following:

Connecting hardware intended for use with balanced cabling shall meet the following performance requirements. Connecting hardware shall be tested with terminations and test

leads that match the nominal characteristic impedance of the types of cable that they are intended to terminate (see 9.2).

#### 10.2.4.2 Telecommunications outlets

Replace, in ISO/IEC 11801:2002, Table 29 (renumbered as Table 40 by Amendment 1:2008) by the following:

**Table 40 – Electrical characteristics of TOs intended for use with balanced cabling**

Electrical characteristics of the telecommunications outlet		Requirement	Component or test standard
Interface type	Frequency range MHz		
Category 5 unshielded	d.c., 1 to 100	All	IEC 60603-7-2
Category 5 shielded	d.c., 1 to 100	All	IEC 60603-7-3
Category 6 unshielded	d.c., 1 to 250	All	IEC 60603-7-4
Category 6 shielded	d.c., 1 to 250	All	IEC 60603-7-5
Category 6 <sub>A</sub> unshielded	d.c., 1 to 500	All	IEC 60603-7-41
Category 6 <sub>A</sub> shielded	d.c., 1 to 500	All	IEC 60603-7-51
Category 7 shielded	d.c., 1 to 600	All	IEC 60603-7-7 <sup>a</sup>
Category 7 <sub>A</sub> shielded	d.c., 1 to 1 000	All	IEC 60603-7-71 <sup>a</sup>

<sup>a</sup> In installations where other factors, such as BCT applications (see ISO/IEC 15018), take preference over the backward compatibility offered with IEC 60603-7-7, the interface specified in IEC 61076-3-104 may also be used.

#### 10.2.4.3 Connecting hardware for use in distributors and consolidation points

Replace, in ISO/IEC 11801:2002, the first paragraph by the following:

Connecting hardware for use in distributors and consolidation points of a given category shall meet the corresponding performance requirements specified in the following tables irrespective of the mating interface used. All two-piece connections that are not covered by 10.2.4.2 shall comply with the mechanical and environmental performance requirements specified in Annex C for unshielded and shielded connectors. All electrical requirements shall be met before and after mechanical and environmental performance testing, as prescribed in Annex C.

Add, in ISO/IEC 11801:2002, the following new paragraph, after the first paragraph:  
(Note that Tables 32 and 33 were renumbered as Tables 43 and 44 by Amendment 1:2008.)

If the CP link portion of a Class F<sub>A</sub> 3 connector permanent link (PL3 in Figure A.1) uses cable in accordance with IEC 61156-5, the connecting hardware at the CP requires NEXT and PSNEXT performance that is 6 dB better than the Category 7<sub>A</sub> requirements specified in Table 43 and Table 44.

Replace, in ISO/IEC 11801:2002, Table 30 (renumbered as Table 41 by Amendment 1:2008) by the following:

**Table 41 – Return loss for connector**

Frequency MHz	Minimum return loss <sup>a</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$60 - 20 \lg(f)$	–	–	–	–	IEC 60512-25-5
$1 \leq f \leq 250$	–	$64 - 20 \lg(f)$	–	–	–	
$1 \leq f \leq 500$	–	–	$68 - 20 \lg(f)$	–	–	
$1 \leq f \leq 600$	–	–	–	$68 - 20 \lg(f)$	–	
$1 \leq f \leq 1\ 000$	–	–	–	–	$68 - 20 \lg(f)$ <sup>b</sup>	
<sup>a</sup> Return loss at frequencies that correspond to calculated values of greater than 30,0 dB shall revert to a minimum requirement of 30,0 dB. <sup>b</sup> Calculated values below 10,0 dB revert to a 10,0 dB plateau.						

Insert, in ISO/IEC 11801:2002, between Tables 30 and 31 (renumbered as Tables 41 and 42, by Amendment 1:2008) the following new Table 65:

**Table 65 – Informative return loss values for connector at key frequencies**

Frequency MHz	Minimum return loss dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	30,0	30,0	30,0	30,0	30,0
100	20,0	24,0	28,0	28,0	28,0
250	–	16,0	20,0	20,0	20,0
500	–	–	14,0	14,0	14,0
600	–	–	–	12,4	12,4
1 000	–	–	–	–	10,0

Replace, in ISO/IEC 11801:2002, Table 31 (renumbered as Table 42 by Amendment 1:2008) by the following:

**Table 42 – Insertion loss for connector**

Frequency MHz	Maximum insertion loss <sup>a</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$0,04\sqrt{f}$	-	-	-	-	IEC 60512-25-2
$1 \leq f \leq 250$	-	$0,02\sqrt{f}$	-	-	-	
$1 \leq f \leq 500$	-	-	$0,02\sqrt{f}$	-	-	
$1 \leq f \leq 600$	-	-	-	$0,02\sqrt{f}$	-	
$1 \leq f \leq 1\ 000$	-	-	-	-	$0,02\sqrt{f}$	
<sup>a</sup> Insertion loss at frequencies that correspond to calculated values of less than 0,1 dB shall revert to a requirement of 0,1 dB maximum.						

Insert, in ISO/IEC 11801:2002, between Tables 31 and 32 (renumbered as Tables 42 and 43 by Amendment 1:2008) the following new Table 66:

**Table 66 – Informative insertion loss values for connector at key frequencies**

Frequency MHz	Maximum insertion loss dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	0,10	0,10	0,10	0,10	0,10
100	0,40	0,20	0,20	0,20	0,20
250	-	0,32	0,32	0,32	0,32
500	-	-	0,45	0,45	0,45
600	-	-	-	0,49	0,49
1 000	-	-	-	-	0,63

Replace, in ISO/IEC 11801:2002, Table 32 (renumbered as Table 43 by Amendment 1:2008) by the following:

**Table 43 – Near end crosstalk (NEXT) for connector**

Frequency MHz	Minimum NEXT <sup>a</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$83 - 20 \lg(f)$	–	–	–	–	IEC 60512-25-1
$1 \leq f \leq 250$	–	$94 - 20 \lg(f)$	$94 - 20 \lg(f)$	–	–	
$250 < f \leq 500$	–	–	$46,04 - 30 \lg(f/250)$	–	–	
$1 \leq f \leq 600$	–	–	–	$102,4 - 15 \lg(f)$	$116,3 - 20 \lg(f)$	
$600 < f \leq 1\ 000$	–	–	–	–	$60,73 - 40 \lg(f/600)$	

<sup>a</sup> NEXT at frequencies that correspond to calculated values of greater than 75,0 dB shall revert to a minimum requirement of 75,0 dB.

Insert, in ISO/IEC 11801:2002, between Tables 32 and 33 (renumbered as Tables 43 and 44 by Amendment 1:2008) the following new Table 67:

**Table 67 – Informative NEXT values for connector at key frequencies**

Frequency MHz	Minimum NEXT dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	75,0	75,0	75,0	75,0	75,0
100	43,0	54,0	54,0	72,4	75,0
250	–	46,0	46,0	66,4	68,3
500	–	–	37,0	61,9	62,3
600	–	–	–	60,7	60,7
1 000	–	–	–	–	51,9

Replace, in ISO/IEC 11801:2002, Table 33 (renumbered as Table 44 by Amendment 1:2008) by the following:

**Table 44 – Power sum near end crosstalk (PS NEXT) for connector (for information only)**

Frequency MHz	Minimum PS NEXT <sup>a</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$80 - 20 \lg(f)$	–	–	–	–	IEC 60512-25-1
$1 \leq f \leq 250$	–	$90 - 20 \lg(f)$	$90 - 20 \lg(f)$	–	–	
$250 < f \leq 500$	–	–	$42,04 - 30 \lg(f/250)$	–	–	
$1 \leq f \leq 600$	–	–	–	$99,4 - 15 \lg(f)$	$113,3 - 20 \lg(f)$	
$600 < f \leq 1\,000$	–	–	–	–	$57,73 - 40 \lg(f/600)$	

<sup>a</sup> PS NEXT at frequencies that correspond to calculated values of greater than 72,0 dB shall revert to a minimum requirement of 72,0 dB.

Insert, in ISO/IEC 11801:2002, between Tables 33 and 34 (renumbered as Tables 44 and 45 by Amendment 1:2008) the following new Table 68.

**Table 68 – Informative PS NEXT values for connector at key frequencies**

Frequency MHz	Minimum PS NEXT dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	72,0	72,0	72,0	72,0	72,0
100	40,0	50,0	50,0	69,4	72,0
250	–	42,0	42,0	63,4	65,3
500	–	–	33,0	58,9	59,3
600	–	–	–	57,7	57,7
1 000	–	–	–	–	48,9

Replace, in ISO/IEC 11801:2002, Table 34 (renumbered as Table 45 by Amendment 1:2008) by the following:

**Table 45 – Far end crosstalk (FEXT) for connector**

Frequency MHz	Minimum FEXT <sup>a, b</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$75,1 - 20 \lg(f)$	–	–	–	–	IEC 60512-25-1
$1 \leq f \leq 250$	–	$83,1 - 20 \lg(f)$	–	–	–	
$1 \leq f \leq 500$	–	–	$83,1 - 20 \lg(f)$	–	–	
$1 \leq f \leq 600$	–	–	–	$90 - 15 \lg(f)$	–	
$1 \leq f \leq 1\,000$	–	–	–	–	$103,9 - 20 \lg(f)$	

<sup>a</sup> FEXT at frequencies that correspond to calculated values of greater than 75,0 dB shall revert to a minimum requirement of 75,0 dB.

<sup>b</sup> For connectors, the difference between FEXT and ACR-F is minimal. Therefore, connector FEXT requirements are used to model ACR-F performance for links and channels.

Insert, in ISO/IEC 11801:2002, between Tables 34 and 35 (renumbered as Tables 45 and 46 by Amendment 1:2008) the following new Table 69.

**Table 69 – Informative FEXT values for connector at key frequencies**

Frequency MHz	Minimum FEXT dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	75,0	75,0	75,0	75,0	75,0
100	35,1	43,1	43,1	60,0	63,9
250	–	35,1	35,1	54,0	55,9
500	–	–	29,1	49,5	49,9
600	–	–	–	48,3	48,3
1 000	–	–	–	–	43,9

Replace, in ISO/IEC 11801:2002, Table 35 (renumbered as Table 46 by Amendment 1:2008) by the following:

**Table 46 – Power sum far end crosstalk (PS FEXT) for connector (for information only)**

Frequency MHz	Minimum PS FEXT <sup>a, b</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$72,1 - 20 \lg(f)$	–	–	–	–	IEC 60512-25-1
$1 \leq f \leq 250$	–	$80,1 - 20 \lg(f)$	–	–	–	
$1 \leq f \leq 500$	–	–	$80,1 - 20 \lg(f)$	–	–	
$1 \leq f \leq 600$	–	–	–	$87 - 15 \lg(f)$	–	
$1 \leq f \leq 1\ 000$	–	–	–	–	$100,9 - 20 \lg(f)$	

<sup>a</sup> PS FEXT at frequencies that correspond to calculated values of greater than 72,0 dB shall revert to a minimum requirement of 72,0 dB.

<sup>b</sup> For connectors, the difference between PS FEXT and PS ACR-F is minimal. Therefore, connector PS FEXT requirements are used to model PS ACR-F performance for links and channels.

Insert, in ISO/IEC 11801:2002, between Tables 35 and 36 (renumbered as Tables 45 and 46 by Amendment 1:2008) the following new Table 70.

**Table 70 – Informative PS FEXT values for connector at key frequencies**

Frequency MHz	Minimum PS FEXT dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	72,0	72,0	72,0	72,0	72,0
100	32,1	40,1	40,1	57,0	60,9
250	–	32,1	32,1	51,0	52,9
500	–	–	26,1	46,5	46,9
600	–	–	–	45,3	45,3
1 000	–	–	–	–	40,9

Replace, in ISO/IEC 11801:2002, Table 36 (renumbered as Table 47 by Amendment 1:2008) by the following:

**Table 47 – Input to output resistance**

Frequency	Maximum input to output resistance mΩ					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
d.c.	200	200	200	200	200	IEC 60512-2-1 Test 2a

Replace, in ISO/IEC 11801:2002, Table 37 (renumbered as Table 48 by Amendment 1:2008) by the following:

**Table 48 – Input to output resistance unbalance**

Frequency	Maximum input to output resistance unbalance mΩ					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
d.c.	50	50	50	50	50	IEC 60512-2-1 Test 2a

Replace, in ISO/IEC 11801:2002, Table 38 (renumbered as Table 49 by Amendment 1:2008) by the following:

**Table 49 – Current carrying capacity**

Frequency	Minimum current carrying capacity <sup>a, b</sup> A					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
d.c.	0,75	0,75	0,75	0,75	0,75	IEC 60512-5-2 Test 5b
<sup>a</sup> Applicable for an ambient temperature of 60 °C. <sup>b</sup> Applicable to each conductor including the screen, if present.						

Replace, in ISO/IEC 11801:2002, Table 39 (renumbered as Table 50 by Amendment 1:2008) by the following:

**Table 50 – Propagation delay**

Frequency MHz	Maximum propagation delay ns					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	2,5	–	–	–	–	IEC 60512-25-4
$1 \leq f \leq 250$	–	2,5	–	–	–	
$1 \leq f \leq 500$	–	–	2,5	–	–	
$1 \leq f \leq 600$	–	–	–	2,5	–	
$1 \leq f \leq 1\,000$	–	–	–	–	2,5	
This parameter shall be met by design.						

Replace, in ISO/IEC 11801:2002, Table 40 (renumbered as Table 51 by Amendment 1:2008) by the following:

**Table 51 – Delay skew**

Frequency MHz	Maximum delay skew ns					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	1,25	–	–	–	–	IEC 60512-25-4
$1 \leq f \leq 250$	–	1,25	–	–	–	
$1 \leq f \leq 500$	–	–	1,25	–	–	
$1 \leq f \leq 600$	–	–	–	1,25	–	
$1 \leq f \leq 1\ 000$	–	–	–	–	1,25	
This parameter shall be met by design.						

Replace, in ISO/IEC 11801:2002, Table 41 (renumbered as Table 52 by Amendment 1:2008) by the following:

**Table 52 – Transverse conversion loss (TCL)**

Frequency MHz	Minimum transverse conversion loss (TCL) <sup>a</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$66 - 20 \lg(f)$	–	–	–	–	ITU-T Recommendation O.9
$1 \leq f \leq 250$	–	$68 - 20 \lg(f)$	–	–	–	
$1 \leq f \leq 500$	–	–	$68 - 20 \lg(f)$	–	–	
$1 \leq f \leq 600$	–	–	–	$68 - 20 \lg(f)$	–	
$1 \leq f \leq 1\ 000$	–	–	–	–	$68 - 20 \lg(f)$	
<sup>a</sup> TCL at frequencies that correspond to calculated values of greater than 50,0 dB shall revert to a minimum requirement of 50,0 dB.						

Insert, in ISO/IEC 11801:2002, after Table 41 (renumbered as Table 52 by Amendment 1:2008), the following new Tables 71, 72, and 73:

**Table 71 – Informative TCL values for connector at key frequencies**

Frequency MHz	Minimum transverse conversion loss (TCL) dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	50,0	50,0	50,0	50,0	50,0
100	26,0	28,0	28,0	28,0	28,0
250	–	20,0	20,0	20,0	20,0
500	–	–	14,0	14,0	14,0
600	–	–	–	12,4	12,4
1 000	–	–	–	–	8,0

**Table 72 – Transverse conversion transfer loss (TCTL)**

Frequency MHz	Minimum transverse conversion transfer loss (TCTL) <sup>a</sup> dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 100$	$66 - 20 \lg(f)$	–	–	–	–	ITU-T Recommendation O.9
$1 \leq f \leq 250$	–	$68 - 20 \lg(f)$	–	–	–	
$1 \leq f \leq 500$	–	–	$68 - 20 \lg(f)$	–	–	
$1 \leq f \leq 600$	–	–	–	$68 - 20 \lg(f)$	–	
$1 \leq f \leq 1\,000$	–	–	–	–	$68 - 20 \lg(f)$	

<sup>a</sup> TCTL at frequencies that correspond to calculated values of greater than 50,0 dB shall revert to a minimum requirement of 50,0 dB.

**Table 73 – Informative TCTL values for connector at key frequencies**

Frequency MHz	Minimum transverse conversion loss (TCTL) dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	50,0	50,0	50,0	50,0	50,0
100	26,0	28,0	28,0	28,0	28,0
250	–	20,0	20,0	20,0	20,0
500	–	–	14,0	14,0	14,0
600	–	–	–	12,4	12,4
1 000	–	–	–	–	8,0

Replace, in ISO/IEC 11801:2002, Table 42 (renumbered as Table 53 by Amendment 1:2008) by the following:

**Table 53 – Transfer impedance (screened connectors only)**

Frequency MHz	Maximum transfer impedance $\Omega$					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$1 \leq f \leq 10$	$0,1 f^{0,3}$	$0,1 f^{0,3}$	$0,1 f^{0,3}$	$0,05 f^{0,3}$	$0,05 f^{0,3}$	IEC 60512-26-100
$10 < f \leq 80$	$0,02 f$	$0,02 f$	$0,02 f$	$0,01 f$	$0,01 f$	Test 26e

Insert, in ISO/IEC 11801:2002, after Table 42 (renumbered as Table 53 by Amendment 1: 2008), the following new Tables 74, 75, and 76:

**Table 74 – Informative transfer impedance values (screened connectors only) at key frequencies**

Frequency MHz	Maximum transfer impedance $\Omega$				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	0,10	0,10	0,10	0,05	0,05
10	0,20	0,20	0,20	0,10	0,10
80	1,60	1,60	1,60	0,80	0,80

**Table 75 – Coupling attenuation (screened connectors only)**

Frequency MHz	Minimum coupling attenuation dB					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
$30 \leq f \leq 100$	$\geq 45,0$	$\geq 45,0$	$\geq 45,0$	$\geq 45,0$	$\geq 45,0$	IEC 62153-4-12
$100 < f \leq \text{NOTE}$	–	$85-20 \lg(f)$	$85-20 \lg(f)$	$85-20 \lg(f)$	$85-20 \lg(f)$	
NOTE Coupling attenuation is measured to 1 000 MHz but the limit applies to the upper frequency of the Category under test.						

**Table 76 – Informative coupling attenuation values (screened connectors only) at key frequencies**

Frequency MHz	Minimum coupling attenuation dB				
	Connector category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
30	45,0	45,0	45,0	45,0	45,0
100	45,0	45,0	45,0	45,0	45,0
250	–	37,0	37,0	37,0	37,0
500	–	–	31,0	31,0	31,0
600	–	–	–	29,4	29,4
1 000	–	–	–	–	25,0

Replace, in ISO/IEC 11801:2002, Tables 43 and 44 (renumbered as Tables 54 and 55 by Amendment 1:2008) by the following:

**Table 54 – Insulation resistance**

Frequency	Minimum insulation resistance MΩ					Test standard
	Connector category					
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
d.c.	100	100	100	100	100	IEC 60512-3-1 Test 3a, Method C 500 V d.c.

**Table 55 – Voltage proof**

Electrical characteristics	Frequency	Minimum voltage proof V					Test standard
		Connector category					
		5	6	6 <sub>A</sub>	7	7 <sub>A</sub>	
Conductor to conductor	d.c.	1 000	1 000	1 000	1 000	1 000	IEC 60512-4-1 Test 4a
Conductor to test panel (and screen, if present)	d.c.	1 500	1 500	1 500	1 500	1 500	

Insert, in ISO/IEC 11801:2002, after Table 44 (renumbered as Table 55 by Amendment 1:2008), the following new Tables 77, 78, 79, and 80:

**Table 77 – Power sum alien near end crosstalk (PS ANEXT)**

Frequency MHz	Minimum power sum alien near end crosstalk (PS ANEXT) <sup>a</sup> dB		Test standard
	Connector category		
	6 <sub>A</sub>	7 <sub>A</sub>	
$1 \leq f \leq 500$	$110,5 - 20\lg(f)$	–	IEC 60512-25-9
$1 \leq f \leq 1\,000$	–	$125,5 - 20\lg(f)$	

<sup>a</sup> PS ANEXT at frequencies that correspond to calculated values of greater than 72,0 dB shall revert to a minimum requirement of 72,0 dB.

**Table 78 – Informative PS ANEXT values at key frequencies**

Frequency MHz	Minimum power sum alien near end crosstalk (PS ANEXT) dB	
	Connector category	
	6 <sub>A</sub>	7 <sub>A</sub>
1	72,0	72,0
100	70,5	72,0
250	62,5	72,0
500	56,5	71,5
1 000	–	65,5

**Table 79 – Power sum alien far end crosstalk (PS AFEXT)**

Frequency MHz	Minimum power sum alien far end crosstalk (PS AFEXT) <sup>a, b</sup> dB		Test standard
	Connector category		
	6 <sub>A</sub>	7 <sub>A</sub>	
$1 \leq f \leq 500$	$107 - 20 \lg(f)$	–	IEC 60512-25-9
$1 \leq f \leq 1\ 000$	–	$122 - 20 \lg(f)$	

<sup>a</sup> PS AFEXT at frequencies that correspond to calculated values of greater than 72,0 dB shall revert to a minimum requirement of 72,0 dB.

<sup>b</sup> For connectors, the difference between PS AFEXT and PS AACR-F is minimal. Therefore, connector PS AFEXT requirements are used to model PS AACR-F performance for links and channels.

**Table 80 – Informative PS AFEXT values at key frequencies**


Frequency MHz	Minimum power sum alien far end crosstalk (PS AFEXT) dB	
	Connector category	
	6 <sub>A</sub>	7 <sub>A</sub>
1	72,0	72,0
100	67,0	72,0
250	59,0	72,0
500	53,0	68,0
1 000	–	62,0

**10.2.5 Telecommunications outlet requirements**


Replace, in ISO/IEC 11801:2002, the title and the entire text including Figure 15 and Table 45 (renumbered as Table 56 by Amendment 1:2008) by the following:

**10.2.5 TO requirements**

For all cabling classes, each horizontal balanced cable shall be terminated at the telecommunications outlet with an unkeyed fixed connector (jack) that meets the specifications of 10.2.3 and 10.2.4. Pin and pair grouping assignments shall be as shown in Figures 15, 18 or 19.

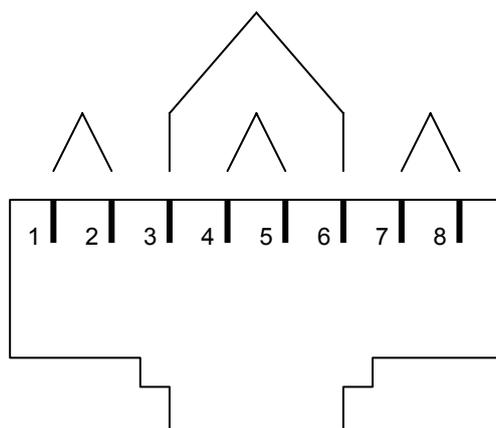


**Figure 15 – Pin grouping and pair assignments for IEC 60603-7 series interface for Categories 5, 6 and 6<sub>A</sub> (front view of fixed connector (jack), not to scale)**

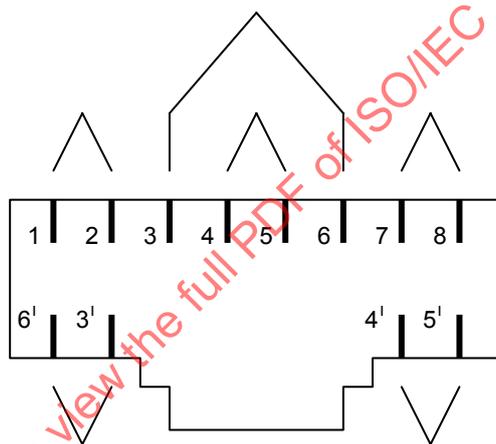

NOTE 1 Pin designations 1, 2, 3', 4', 5', 6', 7 and 8 are used for Categories 7 and 7<sub>A</sub> and correspond to pin designations 1, 2, 3, 4, 5, 6, 7 and 8 for categories 5, 6, and 6<sub>A</sub>.

NOTE 2 Figure 18 shows front view of fixed connector (jack), not to scale.

**Figure 18 – Pin grouping and pair assignment for the IEC 60603-7 series interface for Categories 7 and 7<sub>A</sub>**

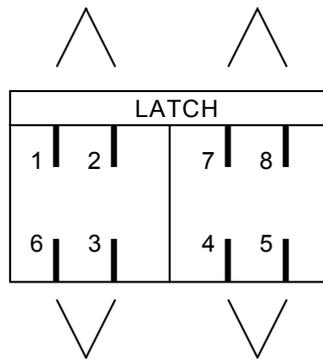

NOTE 1 Pin designations correspond to those of the IEC 60603-7 series interface.

NOTE 2 Figure 19 shows front view of fixed connector (jack), not to scale.

**Figure 19 – Pin grouping and pair assignments for Categories 7 and 7<sub>A</sub> (IEC 61076-3-104) interface**

If different connecting hardware types are used at a distributor, CP or TO in the same link or channel the cabling connections shall be configured with consistent pin/pair assignments to ensure end-to-end connectivity. Pair rearrangement at the telecommunications outlet should not involve modification of the horizontal cable terminations. If pair rearrangement is used at the telecommunications outlet, the configuration of the outlet terminations shall be clearly identified.

Free and fixed connectors (plugs and jacks) that are intermateable shall be backward compatible with those of different performance categories. Backward compatibility means that the mated connections with free and fixed connectors (plugs and jacks) from different categories shall meet all of the requirements for the lower category component. See Table 56 for a matrix of backward compatible mated free and fixed connectors (plug and jack) performance that is representative of backward compatible connectivity.

**Table 56 – Matrix of backward compatible mated free and fixed connector (plug and jack) performance**

		Fixed connector (jack) performance at the TO				
		Category 5	Category 6	Category 6 <sub>A</sub>	Category 7	Category 7 <sub>A</sub>
Free connector (plug)	Category 5	Category 5	Category 5	Category 5	Category 5	Category 5
	Category 6	Category 5	Category 6	Category 6	Category 6	Category 6
	Category 6 <sub>A</sub>	Category 5	Category 6	Category 6 <sub>A</sub>	Category 6 <sub>A</sub>	Category 6 <sub>A</sub>
	Category 7	Category 5	Category 6	Category 6 <sub>A</sub>	Category 7	Category 7
	Category 7 <sub>A</sub>	Category 5	Category 6	Category 6 <sub>A</sub>	Category 7	Category 7 <sub>A</sub>

NOTE 1 When two physically similar cabling links are used in the same installation, special precautions are required to ensure that they are properly identified at the telecommunications outlet. Examples of when such identification is necessary would include different performance classes or cables with different nominal impedance. See also Clause 12.

NOTE 2 For proper connectivity, care is needed to ensure that pairs are terminated consistently at the telecommunications outlet and floor distributor. If pairs are terminated on different positions at the two ends of a

link, although DC continuity may be maintained, through connectivity will be lost. See Clause 12 for cabling system administration.

### 10.3.1 General requirements

Replace, in ISO/IEC 11801:2002, the existing NOTE by the following paragraph:

Optical fibre adapters and connectors should be protected from dust and other contaminants, specifically while they are in an unmated state. End faces of connectors shall be inspected according to ISO/IEC 14763-3 and subsequently cleaned when necessary, prior to connection.

### 10.3.2 Marking and colour coding

Replace, in ISO/IEC 11801:2002, the entire text by the following:

Consistent coding of connectors and adapters, for example by colour, should be used to identify connections between:

- different cabled multimode optical fibre types;
- incompatible single-mode connecting hardware (e.g. blue for connectors with PC ferrules and green for connectors with APC ferrules).

In addition, keying and the identification of optical fibre positions may be used to ensure that correct polarity is maintained for duplex links.

NOTE 1 These markings are in addition to, and do not replace, other markings specified in Clause 12, or those required by local codes or regulations.

NOTE 2 The following colour codes apply to IEC 60874-19-1 SC duplex and IEC 60874-14<sup>14</sup> SC simplex connectors but may also be used for other connector types:

Multimode 50 µm and 62,5 µm:	Beige or black
Single-mode PC:	Blue
Single-mode APC:	Green

Replace, in ISO/IEC 11801:2002, Table 46 (renumbered as Table 57 by Amendment 1:2008) by the following:

<sup>14</sup> IEC 60874-14, *Connectors for optical fibres and cables – Part 14: Sectional specification for fibre optic connector – Type SC*. This publication has been withdrawn in 2002, but can still be ordered if needed.

**Table 57 – Mechanical and optical characteristics of optical fibre connecting hardware**

Mechanical and optical characteristics		Requirement	Component or test standard	
a)	Physical dimensions (only at telecommunications outlet) <sup>a</sup>	Mating dimensions and gauging	IEC 61754-20, interface 5	
b)	Cable termination compatibility			
	Nominal cladding diameter $\mu\text{m}$	125	IEC 60793-2, Clause 5 (A1a, A1b) and 32.2 (B1)	
	Nominal buffer diameter mm	–	IEC 60794-2, 6.1	
	Cable outer diameter mm	–	IEC 60794-2, 6.1	
c)	Mechanical endurance (durability) cycles	$\geq 500$	IEC 61300-2-2	
d)	Mated pair transmission performance			
	Maximum insertion loss <sup>b</sup> dB	Other	100% $\leq 0,75$ dB	IEC 61300-3-34
			95% $\leq 0,50$ dB	
			50% $\leq 0,35$ dB	
		Splice	0,3	IEC 61073-1
Minimum return loss dB	Multimode	20	IEC 61300-3-6	
	Single-mode	35		
<sup>a</sup> See 10.3.4.				
<sup>b</sup> Insertion loss of splices and connectors shall be met with the referenced test method where the optical source produces a controlled launch condition. The required metric to qualify the source is encircled flux. The required launch condition is specified in IEC 61300-1 and shall be based on LED. Under filling sources such as lasers will produce lower insertion loss values.				

**10.3.4 Telecommunications outlet requirements**

Replace, in ISO/IEC 11801:2002, the title and the entire text of this subclause by the following:

**10.3.4 TO requirements**

The optical fibre cables in the work area shall be connected to horizontal cabling at the TO with a duplexable LC connector that complies with IEC 61754-20.

Networks having an installed base of IEC 60874-19-1 (SC-D) connectors and adapters may remain with the SC-D connector and adaptor for both existing and future additions to their optical fibre network. (For mating dimensions and gauging of multimode, see IEC 60874-19-3, and of single-mode, see IEC 60874-19-2.)

The optical fibre connector used at the TO shall meet the requirements of 10.3.3.

**10.3.5.1 General**

Replace, in ISO/IEC 11801:2002, the existing third and fourth paragraphs by the following:

On the work area side of TOs and the interconnect/cross-connect side of distributor panels, a duplex presentation maintains the correct polarity of transmit and receive optical fibres in two optical fibre transmission systems while still allowing transmission systems using other optical fibre counts. At the distributor, this presentation is preferably a duplex adapter that maintains the spacing and alignment as specified in IEC 61754-20 interface 5.


Polarity is defined at the TO for optical fibre positions A and B. To extend this polarity throughout the cabling system, it is important that the same orientation, colour coding, marking, and optical fibre configuration be applied consistently. Once the system is installed and correct polarity is verified, the correct polarity of transmit and receive optical fibres within the optical fibre cabling system will be maintained.

### 10.3.5.2 Connectivity options at the TO

Replace, in ISO/IEC 11801:2002, the entire text and Figure 16 by the following:


Where there is no installed base of optical fibre cabling, the LC connectivity is specified at the TO and should provide a means to identify the polarity by any combination of latching, keying, or labelling. See an example in Figure 20.

Where premises have an installed base of SC-D connectivity, additional TO connections may be made using SC-D connectivity provided their keys are oriented as in Figure 16.

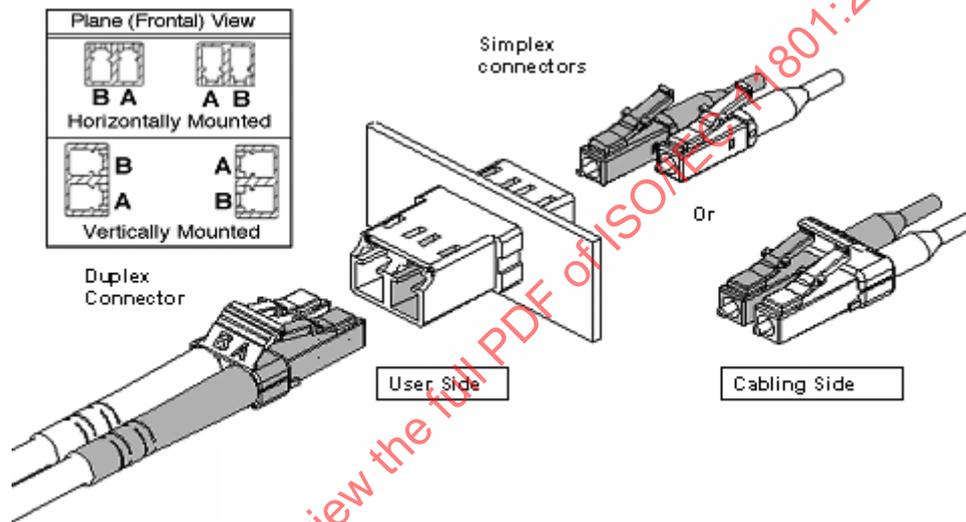

NOTE Shading and A/B markings are for information only.

**Figure 20 – Duplex-able LC connectivity configuration with an example of polarity identification**

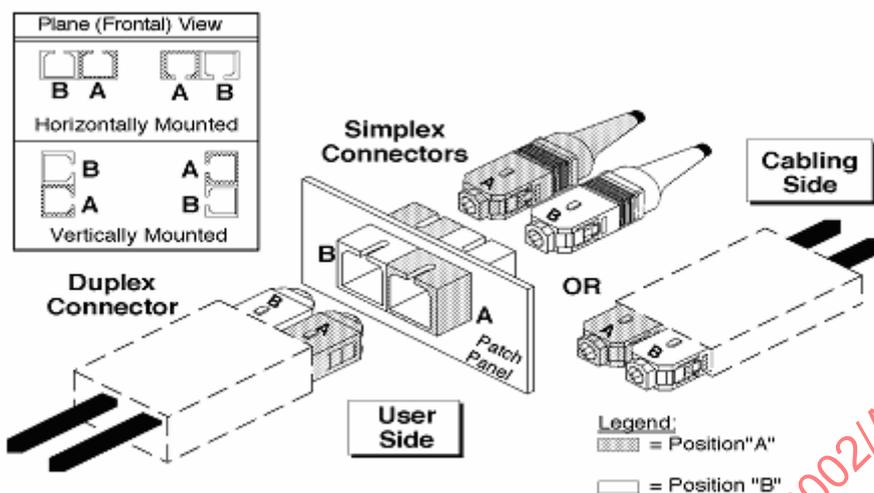

NOTE Shading and A/B markings are for information only.

Figure 16 – Duplex SC connectivity configuration

#### 10.3.5.4 Other duplex connectors

Replace, in ISO/IEC 11801:2002, the two existing paragraphs by the following:

Alternative connector designs shall employ similar labelling and identification schemes to the duplex LC and SC. Position A and B on alternative duplex connector designs shall be in the same position as in Figure 16. For alternative connector designs utilising latches, the latch defines the positioning in the same manner as the key and keyways.

#### 10.3.5.5 Cord termination configuration

Replace, in ISO/IEC 11801:2002, the existing Figure 17, by the following:



Figure 17 – Optical fibre cord

## 11 Screening practices

Add, in ISO/IEC 11801:2002, the following NOTE below the title of Clause 11 title:

NOTE When ISO/IEC 14763-2 is published the content of Clause 11 will be obsolete, and superseded by the content included in ISO/IEC 14763-2.

## 11.1 General

*Replace, in ISO/IEC 11801:2002, the existing text of this subclause by the following:*

This clause applies when screened cables or cables with screened elements or units are used. Only basic guidance is provided. The procedures necessary to provide adequate earthing for both electrical safety and EM performance are subject to national and local regulations, always to proper workmanship in accordance with ISO/IEC 14763-2 (until ISO/IEC 14763-2 is published, relevant information can be found in ISO/IEC TR 14763-2), and in certain cases to installation specific engineering. Some cabling employs components that utilise screening for additional crosstalk performance and is therefore also subject to screening practices. Note that a proper handling of screens in accordance with ISO/IEC 14763-2 (until ISO/IEC 14763-2 is published, relevant information can be found in ISO/IEC TR 14763-2) and suppliers' instructions will increase performance and safety.

## 12 Administration

*Replace, in ISO/IEC 11801:2002, the existing second paragraph, and add the following NOTE:*

Telecommunications cabling administration shall comply with ISO/IEC 14763-2 (until ISO/IEC 14763-2 is published, relevant information can be found in ISO/IEC TR 14763-1).

NOTE When ISO/IEC 14763-2 is published, the content of Clause 12 will be obsolete, and superseded by the content of ISO/IEC 14763-2.

## 13 Balanced cords

### 13.1 Introduction

*Replace, in ISO/IEC 11801:2002, the existing first paragraph by the following:*

This clause covers balanced cords constructed with balanced cables as specified in the IEC 61156 series and two free connectors (plugs) as specified in Clause 10. The components used in these cords shall meet the requirements of Clauses 9 and 10 respectively. The cable used to make balanced cords shall meet the requirements of IEC 61156-5 or IEC 61156-6 for the corresponding category. The purpose of cords is to connect to connecting hardware that utilises fixed connectors (jacks) that are also defined in Clause 10. Compliance to transmission parameters that are not specified in this clause are considered to be met by design.

*Replace, in ISO/IEC 11801:2002, the existing subclauses 13.3 and 13.4 by the following: (Note that Table 49 was renumbered as Table 60 by Amendment 1:2008 and is superseded by this Amendment.<sup>15</sup>)*

### 13.3 Return loss

Balanced cords shall meet *RL* requirements specified in Table 58. The cords shall meet the electrical and mechanical requirements of IEC 61935-2.

---

<sup>15</sup> Number 60 has been reused in this Amendment.

**Table 58 – Minimum return loss for balanced cords**

Frequency MHz	Return Loss <sup>a</sup> MHz				
	Cord category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1 ≤ f ≤ 25	19,8 + 3 lg(f)	19,8 + 3 lg(f)	19,8 + 3 lg(f)	19,8 + 3 lg(f)	19,8 + 3 lg(f)
25 < f ≤ 100	38,0 - 10 lg(f)	38,0 - 10 lg(f)	38,0 - 10 lg(f)	38,0 - 10 lg(f)	38,0 - 10 lg(f)
100 < f ≤ 250	-	38,0 - 10 lg(f)	38,0 - 10 lg(f)	38,0 - 10 lg(f)	38,0 - 10 lg(f)
250 < f ≤ 500	-	-	14 - 15 lg(f/250)	38,0 - 10 lg(f)	38,0 - 10 lg(f)
500 < f ≤ 600	-	-	-	38,0 - 10 lg(f)	38,0 - 10 lg(f)
600 < f ≤ 1 000	-	-	-	-	38,0 - 10 lg(f) <sup>b</sup>

<sup>a</sup> Return loss values at frequencies below 4 MHz are for information only.  
<sup>b</sup> Calculated values below 10,0 dB revert to a 10,0 dB plateau.

**Table 59 – Informative values of return loss for balanced cords at key frequencies**

Frequency MHz	Return Loss dB				
	Cord category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	19,8	19,8	19,8	19,8	19,8
100	18,0	18,0	18,0	18,0	18,0
250	-	14,0	14,0	14,0	14,0
500	-	-	9,5	11,0	11,0
600	-	-	-	10,2	10,2
1 000	-	-	-	-	10,0

**13.4 NEXT**

Balanced cords shall meet the requirement of Equation (9) when measured in accordance with IEC 61935-2.

$$NEXT_{cord} = -10 \lg \left( \frac{-NEXT_{connectors}}{10} + 10 \frac{-(NEXT_{cable,L} + 2 \cdot IL_{connector})}{10} \right) - RFEXT \quad (9)$$

where

- $NEXT_{cord}$  is the *NEXT* of the cord;
- $NEXT_{connectors}$  is the *NEXT* of both connectors in the cord, taking insertion loss into account;
- $NEXT_{cable,L}$  is the *NEXT* of the cable adjusted for length;
- $IL_{connector}$  is the insertion loss of one connector;
- $RFEXT$  is the reflected *FEXT*.

NOTE All variables are expressed in dB.

with

$$NEXT_{\text{connectors}} = -20 \lg \left[ 10^{\frac{-NEXT_{\text{local}}}{20}} + 10^{\frac{-\left( NEXT_{\text{remote}} + 2 \left( \frac{IL_{\text{cable}} + IL_{\text{connector}}}{20} \right) \right)}{20}} \right] \quad (10)$$

$$NEXT_{\text{local}} = NEXT_{\text{remote}} = NEXT_{\text{connector}} \quad (11)$$

$$IL_{\text{cable}} \approx \alpha_{\text{cable}, 100 \text{ m}} \left( \frac{L}{100} \right) \quad (12)$$

where

$NEXT_{\text{local}}$	is the <i>NEXT</i> of the connector at the local end of the cord;
$NEXT_{\text{remote}}$	is the <i>NEXT</i> of the connector at the remote end of the cord;
$IL_{\text{cable}}$	is the insertion loss of the cable;
$IL_{\text{connector}}$	is the insertion loss of the connector;
$NEXT_{\text{connector}}$	is the <i>NEXT</i> of each connector as specified in Table 43, with the exception of category 5 which is equal to $87 - 20 \lg(f)$ ;
$\alpha_{\text{cable}, 100 \text{ m}}$	is the insertion loss of 100 m of the cable used for the cord;
$L$	is the length of the cable in the cord.

NOTE All variables are expressed in dB, except “L”, expressed in meters.

The length corrected near-end crosstalk of the cable of the cord is given by:

$$NEXT_{\text{cable}, L} = NEXT_{\text{cable}, 100 \text{ m}} - 10 \lg \left[ \frac{1 - 10^{\frac{L}{100} \left( \frac{-\alpha_{\text{cable}, 100 \text{ m}}}{5} \right)}}{1 - 10^{\left( \frac{-\alpha_{\text{cable}, 100 \text{ m}}}{5} \right)}} \right] \quad (13)$$

where

$NEXT_{\text{cable}, 100 \text{ m}}$  is the *NEXT* of a 100 m long cable section.

Calculations yielding *NEXT* limits in excess of 65 dB shall revert to a minimum requirement of 65 dB. Tables 81 to 83 list informative values of *NEXT* at key frequencies for different length cords using the variable values outlined in Table 80.

**Table 80 – Assumptions for cabling components used in the calculation of NEXT informative values**

Variable	Component category <sup>a, b</sup>				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
$\alpha_{\text{cable, 100 m}}$	$1,5 \cdot (1,910 8 \sqrt{f} + 0,022 2 f + \frac{0,2}{\sqrt{f}})$	$1,5 \cdot (1,82 \sqrt{f} + 0,017 f + \frac{0,25}{\sqrt{f}})$	$1,5 \cdot (1,82 \sqrt{f} + 0,009 1 f + \frac{0,25}{\sqrt{f}})$	$1,5 \cdot (1,8 \sqrt{f} + 0,01 f + \frac{0,2}{\sqrt{f}})$	$1,5 \cdot (1,8 \sqrt{f} + 0,005 f + \frac{0,25}{\sqrt{f}})$
NEXT cable, 100 m	65,3 - 15 lg(f)	74,3 - 15 lg(f)		102,4 - 15 lg(f)	105,4 - 15 lg(f)
IL connector	0,04 $\sqrt{f}$	0,02 $\sqrt{f}$			
NEXT connector	87 - 20 lg(f)	94 - 20 lg(f)	94-20 lg(f), f ≤ 250 MHz 46,04 - 30 lg(f/250) f > 250 MHz	102,4-15 lg(f)	116,3-20 lg(f) f ≤ 600 MHz 60,73 - 40 lg(f/600) f > 600 MHz
RFEXT	0	0,5			
<sup>a</sup> All equations apply from 1 MHz to the upper frequency of the category unless otherwise indicated. <sup>b</sup> Values used for calculations may differ from the values specified in IEC 61156-5 and IEC 61156-6.					

**Table 81 – Informative values of NEXT for 2 m balanced cords at key frequencies**

Frequency MHz	NEXT dB				
	Cord category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	65,0	65,0	65,0	65,0	65,0
100	39,0	46,2	46,2	65,0	65,0
250	-	38,7	38,7	60,7	62,6
500	-	-	31,0	56,5	57,1
600	-	-	-	55,4	55,6
1 000	-	-	-	-	47,4

**Table 82 – Informative values of NEXT for 5 m balanced cords at key frequencies**

Frequency MHz	NEXT dB				
	Cord category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	65,0	65,0	65,0	65,0	65,0
100	37,4	45,1	45,1	65,0	65,0
250	-	38,0	38,0	61,2	63,3
500	-	-	31,3	57,2	58,0
600	-	-	-	56,2	56,7
1 000	-	-	-	-	48,9

**Table 83 – Informative values of NEXT for 10 m balanced cords at key frequencies**

Frequency MHz	NEXT dB				
	Cord Category				
	5	6	6 <sub>A</sub>	7	7 <sub>A</sub>
1	65,0	65,0	65,0	65,0	65,0
100	36,4	44,2	44,2	65,0	65,0
250	–	37,6	37,6	61,9	64,1
500	–	–	31,7	58,0	59,1
600	–	–	–	57,0	57,8
1 000	–	–	–	–	50,2

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amend 2:2010

## **Annex A** (normative)

### **Balanced permanent link and CP link performance**

*Replace, in ISO/IEC 11801:2002, the entire text, including figures and tables, of this annex by the following:*

#### **A.1 General**

This annex contains performance requirements for balanced permanent links and CP links as shown in Figure A.1.


The cabling under test in configurations PL1, PL2 and PL3 is termed the permanent link. The configurations PL1 and PL2 comprise fixed cabling only. Configuration PL3 comprises fixed cabling and a CP cable between the CP and the TO. If the CP cable is changed, performance of this configuration will change. The cabling under test in configuration CP1 contains fixed cabling only and is termed the CP link. The difference between the CP link and the PL2 link is that the CP link is assumed to be extended, in the future, to a permanent link by the addition of cabling components. The difference between PL2 and PL3 specifications are related to the mathematical model length assumptions of Table 31<sup>16</sup>, and the addition of cords to create a channel.

In all configurations the test reference plane of a permanent link or CP link is within the test cord. The test cord connector which mates with the termination point of the permanent link or CP link under test is part of the link under test.

Consideration should be given to calculating worst case performance at the worst case temperatures, when measuring performance at other temperatures.

---

<sup>16</sup> Refers to Table 31 as added by Amendment 1 and not Table 31 (Insertion loss, renumbered as Table 42 by Amendment 1:2008) in ISO/IEC 11801:2002.

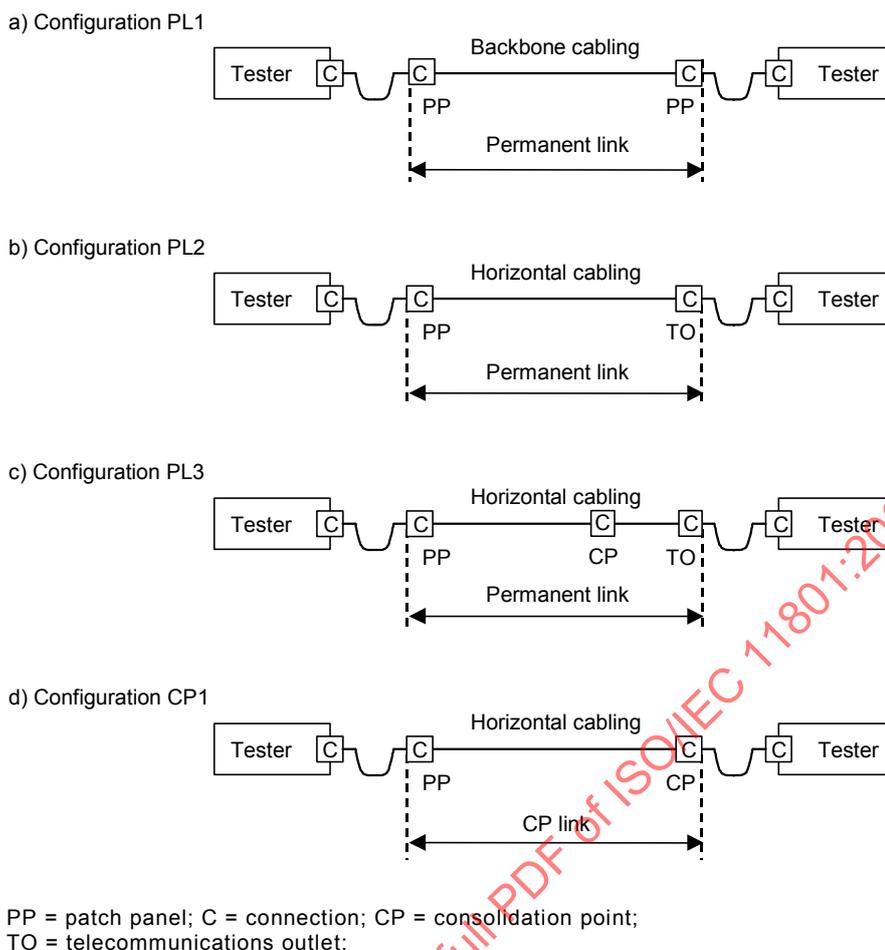

**Figure A.1 – Link options**

## A.2 Balanced cabling

### A.2.1 General

The parameters specified in this annex apply to balanced permanent links and CP links with screened or unshielded cable elements, with or without an overall screen, unless explicitly stated otherwise. When required, permanent link and CP link measurements (including those required for permanent link and CP link calculations) shall be measured according to IEC 61935-1, unless otherwise specified in this annex.

The nominal impedance of balanced permanent links and CP links is 100  $\Omega$ . This impedance is achieved by suitable design, and an appropriate choice of cabling components (irrespective of their nominal impedance).

The requirements in this annex are given by limits computed, to one decimal place, using the equation for a defined frequency range. The limits for the propagation delay and delay skew are computed to three decimal places. Where relevant, in the informative tables for maximum implementation at key frequencies, the values of  $L$ ,  $Y$  and  $n$  are:  $L = 90$ ,  $Y = 1$  and  $n = 3$ . Permanent link and CP link requirements for unbalance attenuation and coupling attenuation are f.f.s.

### A.2.2 Return loss

The  $RL$  of each pair of a permanent link or CP link shall meet the requirements derived by the equation in Table A.1.

The *RL* of each pair of a permanent link at key frequencies is given in Table A.2 for information only.

The *RL* requirements shall be met at both ends of the cabling.

Terminations of 100 Ω shall be connected to the cabling elements under test at the remote end of the link.

**Table A.1 – Return loss for permanent link or CP link**

Class	Frequency MHz	Minimum return loss <sup>a</sup> dB
C	$1 \leq f \leq 16$	15,0
D	$1 \leq f \leq 20$	19,0
	$20 < f \leq 100$	$32 - 10 \lg(f)$
E	$1 \leq f \leq 10$	21,0
	$10 < f \leq 40$	$26 - 5 \lg(f)$
	$40 < f \leq 250$	$34 - 10 \lg(f)$
E <sub>A</sub>	$1 \leq f \leq 10$	21,0
	$10 < f \leq 40$	$26 - 5 \lg(f)$
	$40 < f \leq 398,1$	$34 - 10 \lg(f)$
	$398,1 < f \leq 500$	8,0
F	$1 \leq f \leq 10$	21,0
	$10 < f \leq 40$	$26 - 5 \lg(f)$
	$40 < f \leq 251,2$	$34 - 10 \lg(f)$
	$251,2 < f \leq 600$	10,0
F <sub>A</sub>	$1 \leq f \leq 10$	21,0
	$10 < f \leq 40$	$26 - 5 \lg(f)$
	$40 < f \leq 251,2$	$34 - 10 \lg(f)$
	$251,2 < f \leq 631$	10,0
	$631 < f \leq 1\ 000$	$38 - 10 \lg(f)$
<sup>a</sup> <i>RL</i> values at frequencies where the insertion loss is below 3,0 dB are for information only.		

**Table A.2 – Informative return loss values for permanent link at key frequencies**

Frequency MHz	Minimum return loss dB					
	Class C	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
1	15,0	19,0	21,0	21,0	21,0	21,0
16	15,0	19,0	20,0	20,0	20,0	20,0
100	–	12,0	14,0	14,0	14,0	14,0
250	–	–	10,0	10,0	10,0	10,0
500	–	–	–	8,0	10,0	10,0
600	–	–	–	–	10,0	10,0
1 000	–	–	–	–	–	8,0

### A.2.3 Insertion loss/attenuation

The insertion loss of each pair of a permanent link or CP link shall meet the requirements derived by the equation in Table A.3.

A method of establishing conformant link performance is to demonstrate that the margin between the measured value and the channel limits of Table 4 are adequate to accommodate any additional cabling components used to create a channel.

The insertion loss of each pair of a permanent link, with maximum implementation, at key frequencies is given in Table A.4 for information only.

**Table A.3 – Insertion loss for permanent link or CP link**

Class	Frequency MHz	Maximum insertion loss <sup>a</sup> dB
A	$f = 0,1$	16,0
B	$f = 0,1$	5,5
	$f = 1$	5,8
C	$1 \leq f \leq 16$	$0,9 \times (3,23\sqrt{f}) + 3 \times 0,2$
D	$1 \leq f \leq 100$	$(L/100) \times (1,910 \ 8\sqrt{f} + 0,0222 \times f + 0,2/\sqrt{f}) + n \times 0,04 \times \sqrt{f}$
E	$1 \leq f \leq 250$	$(L/100) \times (1,82\sqrt{f} + 0,0169 \times f + 0,25/\sqrt{f}) + n \times 0,02 \times \sqrt{f}$
E <sub>A</sub>	$1 \leq f \leq 500$	$(L/100) \times (1,82\sqrt{f} + 0,0091 \times f + 0,25/\sqrt{f}) + n \times 0,02 \times \sqrt{f}$
F	$1 \leq f \leq 600$	$(L/100) \times (1,8\sqrt{f} + 0,01 \times f + 0,2/\sqrt{f}) + n \times 0,02 \times \sqrt{f}$
F <sub>A</sub>	$1 \leq f \leq 1\ 000$	$(L/100) \times (1,8\sqrt{f} + 0,005 \times f + 0,25/\sqrt{f}) + n \times 0,02 \times \sqrt{f}$
NOTE		
$L = L_{FC} + L_{CP} \ Y$		
$L_{FC}$ = length of fixed cable (m)		
$L_{CP}$ = length of CP cord (where present) (m)		
$Y$ = the ratio of CP cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m) (see 7.2.2.2)		
$n = 2$ for configurations PL1, PL2 and CP1 (see Figure A.1, section a, b, and d)		
$n = 3$ for configuration PL3 (see Figure A.1, section c)		
<sup>a</sup> Insertion loss ( $IL$ ) at frequencies that correspond to calculated values of less than 4,0 dB shall revert to a maximum requirement of 4,0 dB.		

**Table A.4 – Informative insertion loss values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Maximum insertion loss dB							
	Class A	Class B	Class C	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
0,1	16,0	5,5	–	–	–	–	–	–
1	–	5,8	4,0	4,0	4,0	4,0	4,0	4,0
16	–	–	12,2	7,7	7,1	7,0	6,9	6,8
100	–	–	–	20,4	18,5	17,8	17,7	17,3
250	–	–	–	–	30,7	28,9	28,8	27,7
500	–	–	–	–	–	42,1	42,1	39,8
600	–	–	–	–	–	–	46,6	43,9
1 000	–	–	–	–	–	–	–	57,6

**A.2.4 NEXT**

**A.2.4.1 Pair-to-pair NEXT**

The NEXT of each pair combination of a permanent link or CP link shall meet the requirements derived by the equation in Table A.5.

The NEXT of each pair combination of a permanent link, with maximum implementation, at key frequencies is given in Table A.6 for information only.

The NEXT requirements shall be met at both ends of the cabling.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amd 2:2010

Table A.5 – NEXT for permanent link or CP link

Class	Frequency MHz	Minimum NEXT <sup>a, b, h</sup> dB
A	$f = 0,1$	27,0
B	$0,1 \leq f \leq 1$	$25 - 5 \lg(f)$
C	$1 \leq f \leq 16$	$40,1 - 15,8 \lg(f)$
D	$1 \leq f \leq 100$	$-20 \lg \left( 10^{\frac{65,3 - 15 \lg(f)}{-20}} + 10^{\frac{83 - 20 \lg(f)}{-20}} \right)$
E	$1 \leq f \leq 250$	$-20 \lg \left( 10^{\frac{74,3 - 15 \lg(f)}{-20}} + 10^{\frac{94 - 20 \lg(f)}{-20}} \right)$
$E_A^h$	$1 \leq f \leq 300$	$-20 \lg \left( 10^{\frac{74,3 - 15 \lg(f)}{-20}} + 10^{\frac{94 - 20 \lg(f)}{-20}} \right)$
	$300 < f \leq 500$	$87,46 - 21,57 \lg(f)^{c, d}$
F	$1 \leq f \leq 600$	$-20 \lg \left( 10^{\frac{102,4 - 15 \lg(f)}{-20}} + 10^{\frac{102,4 - 15 \lg(f)}{-20}} \right)$
$F_A^g$	$1 \leq f \leq 600$	$106,1 - 18,5 \lg(f)$
	$600 < f \leq 1\,000$	$124,85 - 25,25 \lg(f)^{e, f}$

<sup>a</sup> NEXT at frequencies that correspond to calculated values of greater than 65,0 dB shall revert to a minimum requirement of 65,0 dB.

<sup>b</sup> NEXT values at frequencies where the insertion loss (IL) is below 4,0 dB are for information only.

<sup>c</sup> For configuration PL3 (see Figure A.1, section c) this equation is  $102,22 - 27,54 \lg(f)$

<sup>d</sup> For configurations PL1, PL2, and CP1, whenever the class  $E_A$  permanent link insertion loss at 450 MHz is less than 12 dB, subtract the term  $1,4((f - 450)/50)$  to the equation stated above for the range of 450 MHz to 500 MHz.

<sup>e</sup> For configuration PL3 (see Figure A.1, section c) this equation is  $139,7 - 30,6 \lg(f)$

<sup>f</sup> For configurations PL1, PL2, and CP1, whenever the class  $F_A$  permanent link insertion loss at 900 MHz is less than 17 dB, subtract the term  $2,8((f - 900)/100)$  to the equation stated above for the range of 900 MHz to 1 000 MHz.

<sup>g</sup> When using connecting hardware with enhanced performance at the CP (see 10.2.4.3), the CP link limits do not represent appropriate minimum performance requirements, and therefore do not apply. In this case, the PL3 shall be tested for compliance instead.

<sup>h</sup> The terms in the equations are not intended to imply component performance.

**Table A.6 – Informative NEXT values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Minimum NEXT dB							
	Class A	Class B	Class C	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
0,1	27,0	40,0	–	–	–	–	–	–
1	–	25,0	40,1	64,2	65,0	65,0	65,0	65,0
16	–	–	21,1	45,2	54,6	54,6	65,0	65,0
100	–	–	–	32,3	41,8	41,8	65,0	65,0
250	–	–	–	–	35,3	35,3	60,4	61,7
500	–	–	–	–	–	29,2 (27,9) <sup>a</sup>	55,9	56,1
600	–	–	–	–	–	–	54,7	54,7
1 000	–	–	–	–	–	–	–	49,1 (47,9) <sup>a</sup>

<sup>a</sup> Value applicable to configuration PL3 (see Figure A.1, section c).

**A.2.4.2 Power sum NEXT (PS NEXT)**

The PS NEXT requirements are applicable only to classes D, E, E<sub>A</sub>, F and F<sub>A</sub>.

The PS NEXT of each pair of a permanent link or CP link shall meet the requirements derived by the equation in Table A.7.

The PS NEXT of each pair of a permanent link, with maximum implementation, at key frequencies is given in Table A.8 for information only.

The PS NEXT requirements shall be met at both ends of the cabling.

PS NEXT<sub>k</sub> of pair k is computed as follows:

$$PS\ NEXT_k = -10 \lg \sum_{i=1, i \neq k}^n 10^{\frac{-NEXT_{ik}}{10}} \tag{A.1}$$

where

*i* is the number of the disturbing pair;

*k* is the number of the disturbed pair;

*n* is the total number of pairs;

NEXT<sub>ik</sub> is the near end crosstalk loss coupled from pair *i* into pair *k*.

**Table A.7 – PS NEXT for permanent link or CP link**

Class	Frequency MHz	Minimum PS NEXT <sup>a, b, h</sup> dB
D	$1 \leq f \leq 100$	$-20 \lg \left( 10^{\frac{62,3 - 15 \lg(f)}{-20}} + 10^{\frac{80 - 20 \lg(f)}{-20}} \right)$
E	$1 \leq f \leq 250$	$-20 \lg \left( 10^{\frac{72,3 - 15 \lg(f)}{-20}} + 10^{\frac{90 - 20 \lg(f)}{-20}} \right)$
$E_A^h$	$1 \leq f \leq 300$	$-20 \lg \left( 10^{\frac{72,3 - 15 \lg(f)}{-20}} + 10^{\frac{90 - 20 \lg(f)}{-20}} \right)$
	$300 < f \leq 500$	$87,56 - 22,67 \lg(f)^{c, d}$
F	$1 \leq f \leq 600$	$-20 \lg \left( 10^{\frac{99,4 - 15 \lg(f)}{-20}} + 10^{\frac{99,4 - 15 \lg(f)}{-20}} \right)$
$F_A^g$	$1 \leq f \leq 600$	$103,1 - 18,5 \lg(f)$
	$600 < f \leq 1\ 000$	$121,85 - 25,25 \lg(f)^{e, f}$

<sup>a</sup> PS NEXT at frequencies that correspond to calculated values of greater than 62,0 dB shall revert to a minimum requirement of 62,0 dB.

<sup>b</sup> PS NEXT values at frequencies where the insertion loss (IL) is below 4,0 dB are for information only.

<sup>c</sup> For configuration PL3 (see Figure A.1, section c) this equation is  $104,65 - 29,57 \lg(f)$ .

<sup>d</sup> For Configurations PL1, PL2, and CP1, whenever the class  $E_A$  permanent link insertion loss at 450 MHz is less than 12 dB, subtract the term  $1,4((f \cdot 450)/50)$  to the equation stated above for the range of 450 MHz to 500 MHz.

<sup>e</sup> For configuration PL3 (see Figure A.1, section c) this equation is  $136,7 - 30,6 \lg(f)$ .

<sup>f</sup> For Configurations PL1, PL2, and CP1, whenever the class  $F_A$  permanent link insertion loss at 900 MHz is less than 17 dB, subtract the term  $2,8((f \cdot 900)/100)$  to the equation stated above for the range of 900 MHz to 1 000 MHz.

<sup>g</sup> When using connecting hardware with enhanced performance at the CP (see 10.2.4.3), the CP link limits do not represent appropriate minimum performance requirements, and therefore do not apply. In this case, the PL3 shall be tested for compliance instead.

<sup>h</sup> The terms in the equations are not intended to imply component performance.

**Table A.8 – Informative PS NEXT values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Minimum PS NEXT dB				
	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
1	57,0	62,0	62,0	62,0	62,0
16	42,2	52,2	52,2	62,0	62,0
100	29,3	39,3	39,3	62,0	62,0
250	–	32,7	32,7	57,4	58,7
500	–	–	26,4 (24,8) <sup>a</sup>	52,9	53,1
600	–	–	–	51,7	51,7
1 000	–	–	–	–	46,1 (44,9) <sup>a</sup>

<sup>a</sup> Value applicable to configuration PL3 (see Figure A.1, section c).

**A.2.5 Attenuation to crosstalk ratio at the near-end (ACR-N)**

**A.2.5.1 General**

The *ACR-N* requirements are applicable only to Classes D, E, E<sub>A</sub>, F, and F<sub>A</sub>.

**A.2.5.2 Pair-to-pair ACR-N**

Pair-to-pair *ACR-N* is the difference between the pair-to-pair *NEXT* and the insertion loss of the cabling in dB.

The *ACR-N* of each pair combination of a permanent link or CP link shall meet the difference of the *NEXT* requirement of Table A.5 and the insertion loss requirement of Table A.3 of the respective class.

The *ACR-N* of each pair combination of a permanent link, with maximum implementation, at key frequencies is given in Table A.9 for information only.

The *ACR-N* requirements shall be met where the *NEXT* requirements apply, and at both ends of the cabling.

*ACR-N<sub>ik</sub>* of pairs *i* and *k* is computed as follows:

$$ACR-N_{ik} = NEXT_{ik} - IL_k \tag{A.2}$$

where

*i* is the number of the disturbing pair;

*k* is the number of the disturbed pair;

*NEXT<sub>ik</sub>* is the near end crosstalk loss coupled from pair *i* into pair *k*;

*IL<sub>k</sub>* is the insertion loss of pair *k*.

**Table A.9 – Informative ACR-N values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Minimum ACR-N dB				
	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
1	60,2	61,0	61,0	61,0	61,0
16	37,5	47,5	47,6	58,1	58,2
100	11,9	23,3	24,0	47,3	47,7
250	–	4,7	6,4	31,6	34,0
500	–	–	–12,9 (–14,2) <sup>a</sup>	13,8	16,4
600	–	–	–	8,1	10,8
1 000	–	–	–	–	–8,5 (–9,7) <sup>a</sup>

<sup>a</sup> Value applicable to Configuration PL3 (see Figure A.1, section c).

**A.2.5.3 Power sum ACR-N (PS ACR-N)**

The *PS ACR-N* of each pair of a permanent link or CP link shall meet the difference of the *PS NEXT* requirement of Table A.7 and the insertion loss requirement of Table A.3 of the respective class.

The *PS ACR-N* of each pair of a permanent link, with maximum implementation, at key frequencies is given in Table A.10 for information only.

The *PS ACR-N* requirements shall be met where the *PS NEXT* requirements apply, and at both ends of the cabling.

*PS ACR-N<sub>k</sub>* of pair *k* is computed as follows:

$$PS\ ACR-N_k = PS\ NEXT_k - IL_k \quad (A.3)$$

where

*k* is the number of the disturbed pair;

*PS NEXT<sub>k</sub>* is the power sum near end crosstalk loss of pair *k*;

*IL<sub>k</sub>* is the insertion loss of pair *k*.

**Table A.10 – Informative PS ACR-N values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Minimum PS ACR-N dB				
	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
1	53,0	58,0	58,0	58,0	58,0
16	34,5	45,1	45,2	55,1	55,2
100	8,9	20,8	21,5	44,3	44,7
250	–	2,0	3,8	28,6	31,0
500	–	–	–15,7 (–16,3) <sup>a</sup>	10,8	13,4
600	–	–	–	5,1	7,8
1 000	–	–	–	–	–11,5 (–12,7) <sup>a</sup>

<sup>a</sup> Value applicable to Configuration PL3 (see Figure A.1, section c).

**A.2.6 Attenuation to crosstalk ratio at the far-end (ACR-F)**

**A.2.6.1 General**

The ACR-F requirements are applicable only to Classes D, E, E<sub>A</sub>, F, and F<sub>A</sub>.

**A.2.6.2 Pair-to-pair ACR-F**

The ACR-F of each pair combination of a permanent link or CP link shall meet the requirements derived by the Equation (A.4).

The ACR-F of each pair combination of a permanent link, with maximum implementation, at key frequencies is given in Table A.12 for information only.

ACR-F<sub>ik</sub> of pairs *i* and *k* is computed as follows:

$$ACR-F_{ik} = FEXT_{ik} - IL_k \tag{A.4}$$

where

*i* is the number of the disturbing pair;

*k* is the number of the disturbed pair;

FEXT<sub>ik</sub> is the far end crosstalk loss coupled from pair *i* into pair *k*;

IL<sub>k</sub> is the insertion loss of pair *k*.

NOTE The difference of input-to-output FEXT and the insertion loss of the disturbed pair is relevant to the signal-to-noise consideration. The results computed to the formal definition above cover all possible combinations of insertion loss of pairs and corresponding input-to-output FEXT.

**Table A.11 – ACR-F for permanent link or CP link**

Class	Frequency MHz	Minimum ACR-F <sup>a, b, c</sup> dB
D	$1 \leq f \leq 100$	$-20 \lg \left( 10^{\frac{63,8 - 20 \lg(f)}{-20}} + n \times 10^{\frac{75,1 - 20 \lg(f)}{-20}} \right)$
E	$1 \leq f \leq 250$	$-20 \lg \left( 10^{\frac{67,8 - 20 \lg(f)}{-20}} + n \times 10^{\frac{83,1 - 20 \lg(f)}{-20}} \right)$
E <sub>A</sub>	$1 \leq f \leq 500$	$-20 \lg \left( 10^{\frac{67,8 - 20 \lg(f)}{-20}} + n \times 10^{\frac{83,1 - 20 \lg(f)}{-20}} \right)$
F	$1 \leq f \leq 600$	$-20 \lg \left( 10^{\frac{94 - 20 \lg(f)}{-20}} + n \times 10^{\frac{90 - 15 \lg(f)}{-20}} \right)$
F <sub>A</sub>	$1 \leq f \leq 1\ 000$	$-20 \lg \left( 10^{\frac{95,3 - 20 \lg(f)}{-20}} + n \times 10^{\frac{103,9 - 20 \lg(f)}{-20}} \right)$
NOTE $n = 2$ for configurations PL1, PL2 and CP1 (see Figure A.1, sections a, b, and d) $n = 3$ for configuration PL3 (see Figure A.1, sections c).		
<sup>a</sup> ACR-F at frequencies that correspond to measured FEXT values of greater than 70,0 dB are for information only.		
<sup>b</sup> ACR-F at frequencies that correspond to calculated values of greater than 65,0 dB shall revert to a minimum requirement of 65,0 dB.		
<sup>c</sup> The terms in the equations are not intended to imply component performance.		

**Table A.12 – Informative ACR-F values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Minimum ACR-F dB				
	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
1	58,6	64,2	64,2	65,0	65,0
16	34,5	40,1	40,1	59,3	64,7
100	18,6	24,2	24,2	46,0	48,8
250	–	16,2	16,2	39,2	40,8
500	–	–	10,2	34,0	34,8
600	–	–	–	32,6	33,2
1 000	–	–	–	–	28,8

**A.2.6.3 Power sum ACR-F (PS ACR-F)**

The *PS ACR-F* of each pair of a permanent link or CP link shall meet the requirements derived by the equations in Table A.13.

The *PS ACR-F* of each pair of a permanent link, with maximum implementation, at key frequencies is given in Table A.14 for information only.

PS ACR- $F_k$  of pair  $k$  is computed as follows:

$$PS\ ACR - F_k = (-10 \lg \sum_{i=1, i \neq k}^n 10^{\frac{-FEXT_{ik}}{10}}) - IL_k \quad (A.5)$$

where

$i$  is the number of the disturbing pair;

$k$  is the number of the disturbed pair;

$n$  is the total number of pairs;

$FEXT_{ik}$  is the far end crosstalk loss coupled from pair  $i$  into pair  $k$ ;

$IL_k$  is the insertion loss of pair  $k$ .

**Table A.13 – PS ACR-F for permanent link or CP link**

Class	Frequency MHz	Minimum PS ACR-F <sup>a, b, c</sup> dB
D	$1 \leq f \leq 100$	$-20 \lg \left( 10^{\frac{60,8 - 20 \lg(f)}{-20}} + n \times 10^{\frac{72,1 - 20 \lg(f)}{-20}} \right)$
E	$1 \leq f \leq 250$	$-20 \lg \left( 10^{\frac{64,8 - 20 \lg(f)}{-20}} + n \times 10^{\frac{80,1 - 20 \lg(f)}{-20}} \right)$
E <sub>A</sub>	$1 \leq f \leq 500$	$-20 \lg \left( 10^{\frac{64,8 - 20 \lg(f)}{-20}} + n \times 10^{\frac{80,1 - 20 \lg(f)}{-20}} \right)$
F	$1 \leq f \leq 600$	$-20 \lg \left( 10^{\frac{91 - 20 \lg(f)}{-20}} + n \times 10^{\frac{87 - 15 \lg(f)}{-20}} \right)$
F <sub>A</sub>	$1 \leq f \leq 1\ 000$	$-20 \lg \left( 10^{\frac{92,3 - 20 \lg(f)}{-20}} + n \times 10^{\frac{100,9 - 20 \lg(f)}{-20}} \right)$
NOTE $n = 2$ for configurations PL1, PL2 and CP1 (see Figure A.1, sections a, b, and d) $n = 3$ for configuration PL3 (see Figure A.1, section c)		
<sup>a</sup> PS ACR-F at frequencies that correspond to measured PS FEXT values of greater than 70,0 dB are for information only.		
<sup>b</sup> PS ACR-F at frequencies that correspond to calculated values of greater than 62,0 dB shall revert to a minimum requirement of 62,0 dB.		
<sup>c</sup> The terms in the equations are not intended to imply component performance.		

**Table A.14 – Informative PS ACR-F values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Minimum PS ACR-F dB				
	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
1	55,6	61,2	61,2	62,0	62,0
16	31,5	37,1	37,1	56,3	61,7
100	15,6	21,2	21,2	43,0	45,8
250	–	13,2	13,2	36,2	37,8
500	–	–	7,2	31,0	31,8
600	–	–	–	29,6	30,2
1 000	–	–	–	–	25,8

**A.2.7 Direct current (d.c.) loop resistance**

The d.c. loop resistance of each pair of a permanent link or CP link shall meet the requirements derived by the equation in Table A.15.

A method of establishing conformant link performance is to demonstrate that the margin between the measured value and the channel limits of Table 16 are adequate to accommodate any additional cabling components used to create a channel. This is fulfilled if the insertion loss requirement and the delay skew requirement for the permanent link or CP link are met and test verification of a d.c. connection for each cabling conductor have been performed.

The d.c. loop resistance of each pair of a permanent link with maximum implementation length is given in Table A.16.

**Table A.15 – Direct current (d.c.) loop resistance for permanent link or CP link**

Class	Maximum d.c. loop resistance $\Omega$
A	530
B	140
C	34
D	$(L/100) \times 22 + n \times 0,4$
E	$(L/100) \times 22 + n \times 0,4$
E <sub>A</sub>	$(L/100) \times 22 + n \times 0,4$
F	$(L/100) \times 22 + n \times 0,4$
F <sub>A</sub>	$(L/100) \times 22 + n \times 0,4$
where	
$L$	$L_{FC} + L_{CP} \times Y$
$L_{FC}$	length of fixed cable (m)
$L_{CP}$	length of CP cord (where present) (m)
$Y$	the ratio of CP cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m) (see 7.2.2.2.)
$n$	2 for Configurations PL1, PL2 and CP1 (see Figure A.1, sections a, b, and d)
$n$	3 for Configuration PL3 (see Figure A.1, section c)

**Table A.16 – Informative d.c. loop resistance for permanent link with maximum implementation**

Maximum d.c. loop resistance Ω							
Class A	Class B	Class C	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
530	140	34	21	21	21	21	21

**A.2.8 Direct current (d.c.) resistance unbalance**

The d.c. resistance unbalance between the two conductors within each pair of a permanent link or CP link shall not exceed the greater of 3 % or 0,150 Ω for all Classes. This shall be achieved by design.

**A.2.9 Propagation delay**

The propagation delay of each pair of a permanent link or CP link shall meet the requirements derived by the equations in Table A.17.

A method of establishing conformant link performance is to demonstrate that the margin between the measured value and the channel limits of Table 17 are adequate to accommodate any additional cabling components used to create a channel. This is fulfilled if the insertion loss requirement and the delay skew requirement for the permanent link or CP link are met.

The propagation delay of each pair of a permanent link, with maximum implementation, at key frequencies is given in Table A.18 for information only.

**Table A.17 – Propagation delay for permanent link or CP link**

Class	Frequency MHz	Maximum propagation delay μs
A	$f = 0,1$	19,400
B	$0,1 \leq f \leq 1$	4,400
C	$1 \leq f \leq 16$	$(L/100) \times (0,534 + 0,036/\sqrt{f}) + n \times 0,0025$
D	$1 \leq f \leq 100$	$(L/100) \times (0,534 + 0,036/\sqrt{f}) + n \times 0,0025$
E	$1 \leq f \leq 250$	$(L/100) \times (0,534 + 0,036/\sqrt{f}) + n \times 0,0025$
E <sub>A</sub>	$1 \leq f \leq 500$	$(L/100) \times (0,534 + 0,036/\sqrt{f}) + n \times 0,0025$
F	$1 \leq f \leq 600$	$(L/100) \times (0,534 + 0,036/\sqrt{f}) + n \times 0,0025$
F <sub>A</sub>	$1 \leq f \leq 1\,000$	$(L/100) \times (0,534 + 0,036/\sqrt{f}) + n \times 0,0025$
where $L = L_{FC} + L_{CP}$ $L_{FC}$ length of fixed cable (m) $L_{CP}$ length of CP cord (where present) (m) $n = 2$ for configurations PL1, PL2 and CP1 (see Figure A.1, sections a, b, and d) $n = 3$ for configuration PL3 (see Figure A.1, section c)		

**Table A.18 – Informative propagation delay values for permanent link with maximum implementation at key frequencies**

Frequency MHz	Maximum propagation delay $\mu\text{s}$							
	Class A	Class B	Class C	Class D	Class E	Class E <sub>A</sub>	Class F	Class F <sub>A</sub>
0,1	19,400	4,400	–	–	–	–	–	–
1	–	4,400	0,521	0,521	0,521	0,521	0,521	0,521
16	–	–	0,496	0,496	0,496	0,496	0,496	0,496
100	–	–	–	0,491	0,491	0,491	0,491	0,491
250	–	–	–	–	0,490	0,490	0,490	0,490
500	–	–	–	–	–	0,490	0,490	0,490
600	–	–	–	–	–	–	0,489	0,489
1 000	–	–	–	–	–	–	–	0,489

**A.2.10 Delay skew**

The delay skew between all pairs of a permanent link or CP link shall meet the requirements derived by the equations in Table A.19.

A method of establishing a conformant link performance is to demonstrate that the margin between the measured value and the channel limits of Table 19 are adequate to accommodate any additional cabling components used to create a channel. This is fulfilled if the insertion loss requirement and the propagation delay requirement for the permanent link or CP link are met.

The delay skew between all pairs of a permanent link, with maximum implementation, at key frequencies is given in Table A.20 for information only.

**Table A.19 – Delay skew for permanent link or CP link**

Class	Frequency MHz	Maximum delay skew µs
A	$f = 0,1$	N/A
B	$0,1 \leq f \leq 1$	N/A
C	$1 \leq f \leq 16$	$(L/100) \times 0,045 + n \times 0,001\ 25$
D	$1 \leq f \leq 100$	$(L/100) \times 0,045 + n \times 0,001\ 25$
E	$1 \leq f \leq 250$	$(L/100) \times 0,045 + n \times 0,001\ 25$
E <sub>A</sub>	$1 \leq f \leq 500$	$(L/100) \times 0,045 + n \times 0,001\ 25$
F	$1 \leq f \leq 600$	$(L/100) \times 0,025 + n \times 0,001\ 25$
F <sub>A</sub>	$1 \leq f \leq 1\ 000$	$(L/100) \times 0,025 + n \times 0,001\ 25$
where $L = L_{FC} + L_{CP}$ $L_{FC}$ length of fixed cable (m) $L_{CP}$ length of CP cord (where present) (m) $n = 2$ for configurations PL1, PL2 and CP1 (see Figure A.1, sections a, b, and d) $n = 3$ for configuration PL3 (see Figure A.1, section c)		

**Table A.20 – Informative delay skew for permanent link with maximum implementation**

Class	Frequency MHz	Maximum delay skew µs
A	$f = 0,1$	N/A
B	$0,1 \leq f \leq 1$	N/A
C	$1 \leq f \leq 16$	0,044 <sup>a</sup>
D	$1 \leq f \leq 100$	0,044 <sup>a</sup>
E	$1 \leq f \leq 250$	0,044 <sup>a</sup>
E <sub>A</sub>	$1 \leq f \leq 500$	0,044 <sup>a</sup>
F	$1 \leq f \leq 600$	0,026 <sup>b</sup>
F <sub>A</sub>	$1 \leq f \leq 1\ 000$	0,026 <sup>b</sup>
<sup>a</sup> This is the result of the calculation $0,9 \times 0,045 + 3 \times 0,001\ 25$ . <sup>b</sup> This is the result of the calculation $0,9 \times 0,025 + 3 \times 0,001\ 25$ .		

**A.2.11 Alien crosstalk**

**A.2.11.1 General**

The following alien crosstalk requirements are applicable to Classes E<sub>A</sub> and F<sub>A</sub> only. Alien crosstalk of Class F is considered to be as good as the alien crosstalk performance specified for Class E<sub>A</sub>. For information on alien crosstalk performance of Class E cabling, see ISO/IEC TR 24750.

If the coupling attenuation of Class E<sub>A</sub> or F permanent links or CP links is at least 10 dB better than the corresponding channel coupling attenuation requirements (see Clause 6), and Class F<sub>A</sub> permanent links or CP links are at least 25 dB better than the corresponding channel

coupling attenuation requirements (see Clause 6), then the requirements of A.2.11 are met by design.

### A.2.11.2 Power sum alien NEXT (PS ANEXT)

The *PS ANEXT* of each pair of a permanent link or CP link shall meet the requirements derived by the equations in Table A.21.

The *PS ANEXT* requirements shall be met at both ends of the cabling.

*PS ANEXT<sub>k</sub>* of pair *k* is computed as follows:

$$PS ANEXT_k = -10 \lg \left[ \sum_{l=1}^N \sum_{i=1}^n 10^{\frac{-ANEXT_{l,i,k}}{10}} \right] \quad (A.7)$$

where

*k* is the number of the disturbed pair in the disturbed link;

*i* is the number of the disturbing pair in a disturbing link *l*;

*l* is the number of the disturbing link;

*N* is the total number of disturbing links;

*n* is the number of disturbing pairs in disturbing link *l*;

*ANEXT<sub>l,i,k</sub>* is the alien near end crosstalk loss coupled from pair *i* of disturbing link *l* to the pair *k* of the disturbed link.

**Table A.21 – PS ANEXT for permanent link or CP link**

Class	Frequency MHz	Minimum PS ANEXT <sup>a</sup> dB
E <sub>A</sub> <sup>b</sup>	1 ≤ <i>f</i> < 100	80 – 10lg ( <i>f</i> )
	100 ≤ <i>f</i> ≤ 500	90 – 15lg ( <i>f</i> )
F <sub>A</sub>	1 ≤ <i>f</i> < 100	95 – 10lg ( <i>f</i> )
	100 ≤ <i>f</i> ≤ 1 000	105 – 15lg ( <i>f</i> )

<sup>a</sup> *PS ANEXT* at frequencies that correspond to calculated values of greater than 67,0 dB shall revert to a minimum requirement of 67,0 dB.

<sup>b</sup> If the average insertion loss of all disturbed pairs at 100 MHz, *IL<sub>100MHz,avg</sub>* is less than 7 dB, then subtract the following for *f* ≥ 100 MHz:

$$\text{minimum} \left\{ 7 \times \frac{f-100}{400} \times \frac{7-IL_{100MHz,avg}}{IL_{100MHz,avg}}, 6 \times \frac{f-100}{400} \right\}$$

where

*f* is the frequency in MHz;

$$IL_{100MHz,avg} = \frac{1}{4} \sum_{i=1}^4 IL_{100MHz,i};$$

*IL<sub>100MHz,i</sub>* is the insertion loss of a pair *i* at 100 MHz.

**Table A.22 – Informative PS ANEXT values for permanent link at key frequencies**

Frequency MHz	Minimum PS ANEXT dB	
	Class E <sub>A</sub>	Class F <sub>A</sub>
1	67,0	67,0
100	60,0	67,0
250	54,0	67,0
500	49,5	64,5
1 000	–	60,0

**A.2.11.3 PS ANEXT<sub>avg</sub>**

The  $PS\ ANEXT_{avg}$  of each permanent link or CP link shall meet the requirements derived by the equations in Table A.23.

The  $PS\ ANEXT_{avg}$  requirements shall be met at both ends of the cabling.

$PS\ ANEXT_{avg}$  is computed as follows:

$$PS\ ANEXT_{avg} = \frac{1}{n} \left[ \sum_{k=1}^n PS\ ANEXT_k \right] \quad (A.8)$$

where

$k$  is the number of the disturbed pair in the disturbed link;

$n$  is the number of pairs in the disturbed link.

**Table A.23 – PS ANEXT<sub>avg</sub> for permanent link or CP link**

Class	Frequency MHz	Minimum PS ANEXT <sub>avg</sub> <sup>a, b, c</sup> dB
E <sub>A</sub>	$1 \leq f < 100$	$82,25 - 10 \lg(f)$
	$100 \leq f \leq 500$	$92,25 - 15 \lg(f)$

<sup>a</sup> PS ANEXT<sub>avg</sub> at frequencies that correspond to calculated values of greater than 67,0 dB shall revert to a minimum requirement of 67,0 dB.

<sup>b</sup> If the average insertion loss of all disturbed pairs at 100 MHz,  $IL_{100\text{MHz,avg}}$ , is less than 7 dB, then subtract the following for  $f \geq 100$  MHz:

$$\text{minimum} \left\{ 7 \times \frac{f-100}{400} \times \frac{7-IL_{100\text{MHz,avg}}}{IL_{100\text{MHz,avg}}}, 6 \times \frac{f-100}{400} \right\}$$

where

$f$  is the frequency in MHz;

$$IL_{100\text{MHz, avg}} = \frac{1}{4} \sum_{i=1}^4 IL_{100\text{MHz}, i};$$

$IL_{100\text{MHz}, i}$  is the insertion loss of a pair  $i$  at 100 MHz.

<sup>c</sup> PS ANEXT<sub>avg</sub> for Class F<sub>A</sub> links is met if the Class F<sub>A</sub> PS ANEXT specification limits in Table A.21 are met.

**Table A.24 – Informative PS ANEXT<sub>avg</sub> values for permanent link at key frequencies**

Frequency MHz	Minimum Class E <sub>A</sub> PS ANEXT <sub>avg</sub> dB
1	67,0
100	62,3
250	56,3
500	51,8

**A.2.11.4 PS AFEXT for Class E<sub>A</sub> permanent links or CP links**

The PS AFEXT for Class E<sub>A</sub> is computed as follows:

AFEXT<sub>norm</sub> is computed from Equations A.9 to A.12 as follows

If

$$IL_k - IL_{l,i} > 0 \quad (\text{A.9})$$

then

$$AFEXT_{\text{norm},l,i,k} = AFEXT_{l,i,k} - IL_{l,i} + IL_k - 10 \lg \left( \frac{IL_k}{IL_{l,i}} \right) \quad (\text{A.10})$$

The measured pair-to-pair alien FEXT values of a pair  $k$  in a disturbed link from the disturbing link  $l$  are normalized by the difference of the insertion losses of disturbing and disturbed link.

If

$$IL_k - IL_{l,i} \leq 0 \quad (A.11)$$

then

$$AFEXT_{\text{norm},l,i,k} = AFEXT_{l,i,k} \quad (A.12)$$

where

- $k$  is the number of the disturbed pair in the disturbed link;
- $i$  is the number of the disturbing pair in a disturbing link  $l$ ;
- $l$  is the number of the disturbing link;
- $AFEXT_{l,i,k}$  is the alien far end crosstalk loss coupled from pairs  $i$  into pair  $k$ ;
- $IL_k$  is the measured insertion loss of pair  $k$  in the disturbed link;
- $IL_{l,i}$  is the measured insertion loss of pair  $i$  of disturbing link  $l$ .

The  $PS AFEXT$  is determined according to Equation (A.13).

$$PS AFEXT_k = -10 \lg \left( \sum_{l=1}^N \sum_{i=1}^n \frac{-(AFEXT_{\text{norm},l,i,k})}{10} \right) \quad (A.13)$$

where

- $N$  is the total number of disturbing links;
- $n$  is the number of disturbing pairs in disturbing link  $l$ ;
- $k$  is the number of the disturbed pair in the disturbed link;
- $i$  is the number of the disturbing pair in a disturbing link  $l$ ;
- $l$  is the number of the disturbing link.

#### A.2.11.5 PS AFEXT for Class F<sub>A</sub> permanent links or CP links

The  $PS AFEXT$  is determined according to Equation A.14.

$$PS AFEXT_k = -10 \lg \left( \sum_{l=1}^N \sum_{i=1}^n \frac{-(AFEXT_{l,i,k})}{10} \right) \quad (A.14)$$

where

- $N$  is the total number of disturbing links;
- $n$  is the number of disturbing pairs in disturbing link  $l$ ;
- $k$  is the number of the disturbed pair in the disturbed link;
- $i$  is the number of the disturbing pair in a disturbing link  $l$ ;
- $l$  is the number of the disturbing link.

#### A.2.11.6 Power sum alien ACR-F (PS AACR-F) for Class E<sub>A</sub> and Class F<sub>A</sub> permanent links or CP links

The *PS AACR-F* of each pair of a permanent link or CP link shall meet the requirements derived by the equation in Table A.25.

The *PS AACR-F* shall be met at both ends of the cabling.

The *PS AACR-F* is computed based on *AFEXT*, and insertion losses of disturbing and disturbed links.

The *PS AACR-F*<sub>*k*</sub> of disturbed pair *k* is determined according to Equation (A.15).

$$PS\ AACR-F_k = PS\ AFEXT_k - IL_k \quad (A.15)$$

**Table A.25 – PS AACR-F for permanent link or CP link**

Class	Frequency MHz	Minimum PS AACR-F <sup>a, b</sup> dB
E <sub>A</sub>	$1 \leq f \leq 500$	$77 - 20\lg(f)$
F <sub>A</sub>	$1 \leq f \leq 1\ 000$	$92 - 20\lg(f)$

<sup>a</sup> *PS AACR-F* at frequencies that correspond to calculated PS AFEXT values of greater than 67,0 dB or  $102 - 15\lg(f)$  dB shall be for information only.

<sup>b</sup> *PS AACR-F* at frequencies that correspond to calculated values of greater than 67,0 dB shall revert to a minimum requirement of 67,0 dB.

**Table A.26– Informative PS AACR-F values for permanent link at key frequencies**

Frequency MHz	Minimum PS AACR-F dB	
	Class E <sub>A</sub>	Class F <sub>A</sub>
1	67,0	67,0
100	37,0	52,0
250	29,0	44,0
500	23,0	38,0
1 000	–	32,0

#### A.2.11.7 PS AACR-F<sub>avg</sub> for Class E<sub>A</sub> and Class F<sub>A</sub> permanent links or CP links

The *PS AACR-F*<sub>avg</sub> of each permanent link or CP link shall meet the requirements derived by the equations in Table A.27.

The *PS AACR-F*<sub>avg</sub> requirements shall be met at both ends of the cabling.

*PS AACR-F*<sub>avg</sub> is computed as follows:

$$PS\ AACR-F_{avg} = \frac{1}{n} \left[ \sum_{k=1}^n PS\ AACR-F_k \right] \quad (A.16)$$

where

*k* is the number of the disturbed pair in the disturbed link;

*n* is the number of pairs in the disturbed link.

**Table A.27 – PS AACR- $F_{avg}$  for permanent link or CP link**

Class	Frequency MHz	Minimum PS AACR- $F_{avg}$ dB
$E_A$	$1 \leq f \leq 500$	$81 - 20\lg(f)$
<p><sup>a</sup> PS AACR-<math>F_{avg}</math> at frequencies that correspond to calculated PS AFEXT<math>_{avg}</math> values of greater than 67,0 dB or <math>102 - 15 \lg(f)</math> dB shall be for information only.</p> <p><sup>b</sup> PS AACR-<math>F_{avg}</math> at frequencies that correspond to calculated values of greater than 67,0 dB shall revert to a minimum requirement of 67,0 dB.</p> <p><sup>c</sup> PS AACR-<math>F_{avg}</math> for Class <math>F_A</math> links is met if the Class <math>F_A</math> PS AACR-<math>F</math> specification limits in Table 25 are met.</p>		

**Table A.28– Informative PS AACR- $F_{avg}$  values for permanent link at key frequencies**

Frequency MHz	Minimum Class $E_A$ PS AACR- $F_{avg}$ dB
1	67,0
100	41,0
250	33,0
500	27,0

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amend 2:2010

## **Annex B** (normative)

### **Test procedures**

*Replace, in ISO/IEC 11801:2002, the entire text, including tables and NOTES, of this annex by the following:*

#### **B.1 General**

This annex contains requirements and recommendations for testing of channels, permanent links and CP links in order to determine their conformance to this International Standard.

#### **B.2 Channel and link performance testing**

##### **B.2.1 General**

Performance testing can be undertaken either

- in a laboratory, where channels, permanent links or CP links contain specific cabling components in a specific implementation, or
- in the field, after installation, using test equipment.

This testing is independent from any requirements for acceptance testing contained within an installation specification, as in ISO/IEC 14763-2.

There are two kinds of conformance testing:

a) reference conformance testing;

This testing is performed on a sample of installed cabling in a laboratory where an assessment against the conformance criteria of Clause 4 is required. The assessment documentation will include details of the number of channels or links tested, test evaluation criteria, supplier's declarations and certification, laboratory accreditation and calibration certification, etc.

This testing can also be used for

- the comparison of measurements performed with laboratory and field test instruments,
- assessing cabling models in a laboratory environment,
- assessing parameters that cannot be tested in an installation.

b) installation conformance testing;

This testing is performed on a complete installation of cabling in the field where an assessment against the conformance criteria of Clause 4 is required.

Conformance testing of both kinds may be performed by independent or third party organisations in order to give greater guarantees of compliance. Reference testing is also known as type testing.

##### **B.2.2 Installation conformance testing of balanced cabling channels, permanent links and CP links**

Testing to determine conformance with the requirements of Clause 6 is optional. Testing should be performed in the following cases:

- a) channels, permanent links, or CP links with lengths exceeding, or having more components than, those specified in reference implementations of Clause 7;

- b) permanent links or CP links using components whose transmission performance is lower than those described in Clauses 9 and 10;
- c) channels using components whose transmission performance is lower than those described in Clauses 9, 10 and 13;
- d) channels created by adding more than one cord to either end of a link meeting the requirements of Clause 6 and Annex A;
- e) evaluation of cabling to determine its capacity to support a certain group of applications;
- f) confirmation of performance of cabling designed in accordance with Clause 7, using Clauses 9, 10 and 13.
- g) Channels containing cable segments with lengths that are outside the assumed ranges in Table 31<sup>17</sup>.

The test procedures for balanced cabling channels, permanent links and CP links are specified in IEC 61935-1.

### **B.2.3 Installation conformance testing of optical fibre cabling channels**

Testing to determine conformance with the requirements of Clause 8 is optional. Testing should be performed in the following cases:

- a) evaluation of cabling to determine its ability to support a certain group of applications;
- b) confirmation of performance of cabling designed in accordance with Clauses 8, 9 and 10.

The test procedures for optical fibre cabling channels and permanent links are specified in ISO/IEC 14763-3.

### **B.3 Overview of test regimes**

A test regime for each of the two kinds of conformance testing (see B.2.1) is defined for each transmission parameter. The test regime for balanced cabling reference conformance and installation conformance testing is shown in Table B.1. The test regime for optical fibre cabling reference conformance and installation conformance testing is shown in Table B.2.

---

<sup>17</sup> Refers to Table 31 as added by Amendment 1 and not Table 31 (Insertion loss, renumbered as Table 42 by Amendment 1:2008) in ISO/IEC 11801:2002.

**Table B.1 – Test regime for reference conformance and installation conformance – Balanced cabling**

Transmission parameter <sup>b</sup>	Reference conformance testing	Installation conformance testing
Return loss	N	N
Insertion loss	N	N
Pair-to-pair NEXT	N	N
PS NEXT	C	C
Pair-to-pair ACR-N	C	C
PS ACR-N	C	C
Pair-to-pair ACR-F	N	N
PS ACR-F	C	C
Direct current (d.c.) loop resistance	N	N
Direct current (d.c.) resistance unbalance	N	I
Propagation delay	N	N
Delay skew	N	N
Unbalance attenuation, near-end (TCL)	N	I
Unbalance attenuation, far-end (ELTCTL)	N	I
Coupling attenuation	N	I
PS ANEXT	N	N <sub>S</sub>
PS ANEXT <sub>avg</sub>	C	C
PS AACR-F	N	N <sub>S</sub>
PS AACR-F <sub>avg</sub>	C	C
Wire-map	N	N
Continuity: <ul style="list-style-type: none"> <li>• signal conductors;</li> <li>• screen conductors (if present);</li> <li>• short circuits;</li> <li>• open circuits.</li> </ul>	N	N
Length <sup>a</sup>	I	I
<p>where</p> <p>C is the calculated value;</p> <p>I is the informative (optional) testing;</p> <p>N is the normative (100 %) testing, if not met by design;</p> <p>N<sub>S</sub> is the normative (sampled) testing, if not met by design. The sample size to be tested should be in accordance with ISO/IEC 14763-2.</p>		
<p>NOTE The term “met by design” refers to a requirement which may be met by the selection of appropriate materials and installation techniques.</p>		
<p><sup>a</sup> Length is not a pass/fail criterion.</p>		
<p><sup>b</sup> Only those parameters specified for each Class of cabling need to be tested, as required in Amendment 1:2008 and Annex A.</p>		

**Table B.2 – Test regime for reference conformance and installation conformance – Optical fibre cabling**

Transmission parameter	Reference conformance testing	Installation conformance testing
Attenuation	N	N
Propagation delay <sup>a</sup>	I	I
Polarity	N	N
Length	I	I
Return loss	N	N
where I = Informative (optional) testing. N = Normative (100 %) testing.		
<sup>a</sup> Propagation delay is not a pass/fail criterion.		

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amd 2:2010

## Annex C (normative)

### Mechanical and environmental performance testing of connecting hardware for balanced cabling

Replace, in ISO/IEC 11801:2002, the entire text, including tables, of this annex by the following:

#### C.1 Overview

The mechanical and environmental performance of connecting hardware is vital to the cabling system. Changes in contact resistance because of operational and environmental stress can negatively affect the transmission characteristics of the cabling system. Product acceptance testing is accomplished by subjecting the product to a number of mechanical and environmental conditions and measuring any resistance deviations at prescribed intervals and after completion of each conditioning sequence. In addition, the product shall not show evidence of degradation with respect to the ease of mechanical termination, safety or other functional attributes during or after environmental conditioning.

Connecting hardware often contains a combination of solderless connections and a separable contact interface (free connector/fixed connector interface). All connections shall be tested. Where a combination of connections and/or separable contact interfaces are tested together, care should be taken to ensure the use of the most stringent test schedule as the test schedules vary by type of connection.

This annex provides mechanical connection performance requirements for connections that are not covered by a specific IEC connector standard. This annex is intended to be replaced by reference to international standards, as soon as they become available.

NOTE Connection interfaces that conform to the mechanical and environmental performance requirements of IEC 60603-7 (unscreened) or IEC 60603-7-1 (screened) comply with this annex as these standards specify appropriate tests. Connection interfaces that are covered by international standards other than the IEC 60603-7 series must comply with at least the equivalent mechanical and environmental performance requirements specified in this annex.

#### C.2 Solderless connections

To ensure reliable solderless terminations of balanced cable with insulated conductors, and to ensure reliable solderless connections between component parts within connecting hardware, solderless connections shall meet the requirements of the applicable standards specified in Table C.1.

**Table C.1 – Standards for solderless connections**

Connection type	Standard
Crimped connection	IEC 60352-2
Accessible IDC	IEC 60352-3
Non-accessible IDC	IEC 60352-4
Press-in connection	IEC 60352-5
IPC	IEC 60352-6
Spring clamp connection	IEC 60352-7
Compression mount	IEC 60352-8

The default criteria and conditions in the relevant standards in Table C.1 apply, except as specified in the remainder of this clause.

The maximum initial contact resistance for an insulation displacement connection shall be 2,5 mΩ and the maximum change in contact resistance during and after conditioning shall be 5 mΩ from the initial value.

The following test conditions are specified, as detailed by the type test requirements of the IEC 60352 series of standards.

- Vibration test severity: 10 Hz to 500 Hz.
- Low temperature (LCT): -40 °C.
- Electrical load and temperature, test current: 1 A d.c.

### C.3 Free and fixed connectors (modular plugs and jacks)

Fixed and free connectors (modular plugs and jacks) shall comply with the reliability requirements of the applicable standard specified in Table C.2.

**Table C.2 – Standards for free and fixed connectors (modular plugs and jacks)**

Category and type	Standard
Category 3, unscreened	IEC 60603-7
Category 3, screened	IEC 60603-7-1
Category 5, unscreened	IEC 60603-7-2
Category 5, screened	IEC 60603-7-3
Category 6, unscreened	IEC 60603-7-4
Category 6, screened	IEC 60603-7-5
Category 6 <sub>A</sub> , unscreened	IEC 60603-7-41
Category 6 <sub>A</sub> , screened	IEC 60603-7-51
Category 7, screened	IEC 60603-7-7
Category 7 <sub>A</sub> , screened	IEC 60603-7-71, IEC 61076-3-104 or IEC 61076-3-110 as appropriate

The default criteria and conditions in the relevant standards in Table C.2 apply, except as specified in the remainder of this clause.

The number of mating cycles (insertions and withdrawals) for free and fixed connectors (modular plugs and jacks), and the number of conductor re-terminations per solderless connection shall comply with the specifications in Table C.3.

**Table C.3 – Free and fixed connectors (modular plugs and jacks) operations matrix**

Connecting hardware type	Insertion and withdrawal, and conductor re-termination, operations	Minimum number of operations
Free connector (modular plug)	Insertion / withdrawal with fixed connector (modular jack)	750
	Cable re-termination	0
Fixed connector (modular jack)	Insertion / withdrawal with free connector (modular plug)	750
	Cable re-termination	20 <sup>a, b</sup>
<sup>a</sup> Unless not intended for re-termination, in which case this value equals 0.		
<sup>b</sup> The range of conductor size and type shall be in accordance with the manufacturer's instructions.		

Between terminations, the solderless connection should be inspected for debris and extraneous material should be removed.

#### C.4 Other connecting hardware

Examples of other connecting hardware include:

- cross-connect blocks and plugs;
- pin and socket connectors.

The reliability of connecting hardware, other than free and fixed connectors (modular plugs and jacks), shall be demonstrated by complying with the applicable requirements of the standards specified in Table C.4. The connecting hardware shall be terminated, mounted, and operated in accordance with the manufacturer's instructions for use. A minimum of 100 individual electrical contact paths (e.g. connecting hardware, input to output) shall be tested without failure.

The following tests shall be as per the manufacturer's specification:

- examination of dimensions and mass;
- insertion and withdrawal force requirements;
- effectiveness of any connector coupling device requirements;
- gauging and gauging continuity requirements;
- arrangement for contact resistance test;
- arrangement for vibration (dynamic stress) test.

**Table C.4 – Reference for reliability testing of other connecting hardware**

Category and type	Standard	
All Categories, unscreened	IEC 60603-7	Clause 6 and Clause 7 <sup>a</sup>
All Categories, screened	IEC 60603-7 and IEC 60603-7-1	
<sup>a</sup> Excluding subclauses addressing pin and pair grouping assignment, creepage and clearance distances, transmission characteristics, transfer impedance, and test group EP (transmission testing).		

The default criteria and conditions in the relevant standards in Table C.4 apply, unless otherwise specified in this clause.

The number of mating cycles (insertions and withdrawals) for other connecting hardware, and the number of conductor re-terminations per solderless connection shall comply with the specifications in Table C.5.

**Table C.5 – Other connecting hardware operations matrix**

Connecting hardware type	Insertion and withdrawal, and conductor re-termination, operations	Minimum number of operations
Other connecting hardware "free connector"	Insertion / withdrawal operations with "fixed connector"	200
	Cable re-termination	0
Other connecting hardware "fixed connector"	Insertion / withdrawal operations with "free connector"	200
	Cable re-termination	20 a, b
	Jumper re-termination	200
<p><sup>a</sup> Unless not intended for re-termination, in which case this value equals 0.</p> <p><sup>b</sup> The range of conductor size and type shall be in accordance with the manufacturer's instructions.</p>		


Between terminations, the solderless connection should be inspected for debris and extraneous material should be removed.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11801:2002/Amendment 2:2010

## Annex E (informative)

### Acronyms for balanced cables

Replace, in ISO/IEC 11801:2002, the existing Figure E.1, including example text, by the following:

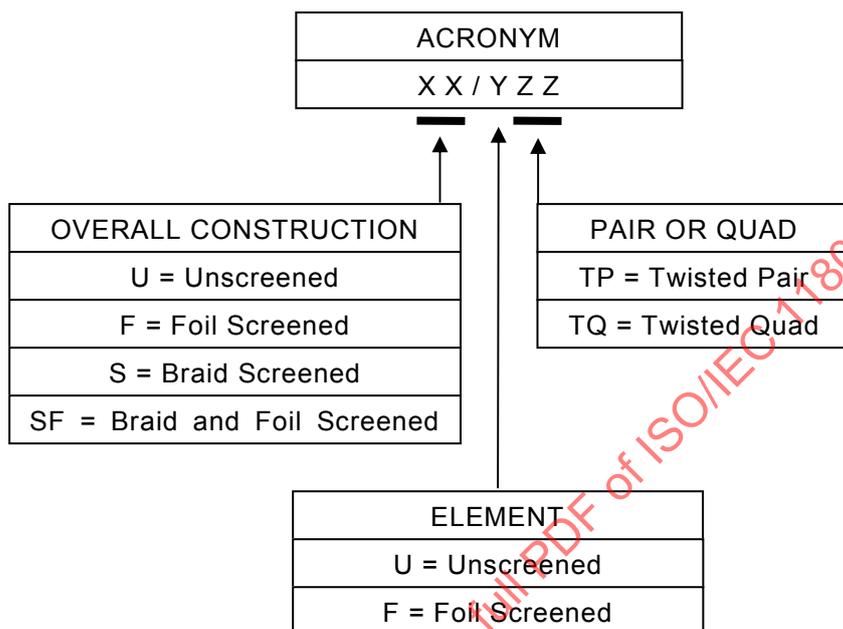

For example:

U/UTP = overall unscreened cable with unscreened twisted pairs (often referred to as UTP)

F/UTP = overall screened cable with unscreened twisted pairs (often referred to as FTP)

S/FTP = overall braid screened cable with foil screened twisted pairs (often referred to as STP or PiMF)

SF/UTP = overall braid and foil screened cable with unscreened twisted pairs

**Figure E.1 – Cable naming schema**

Replace, in ISO/IEC 11801:2002, the existing Figure E.2 by the following:

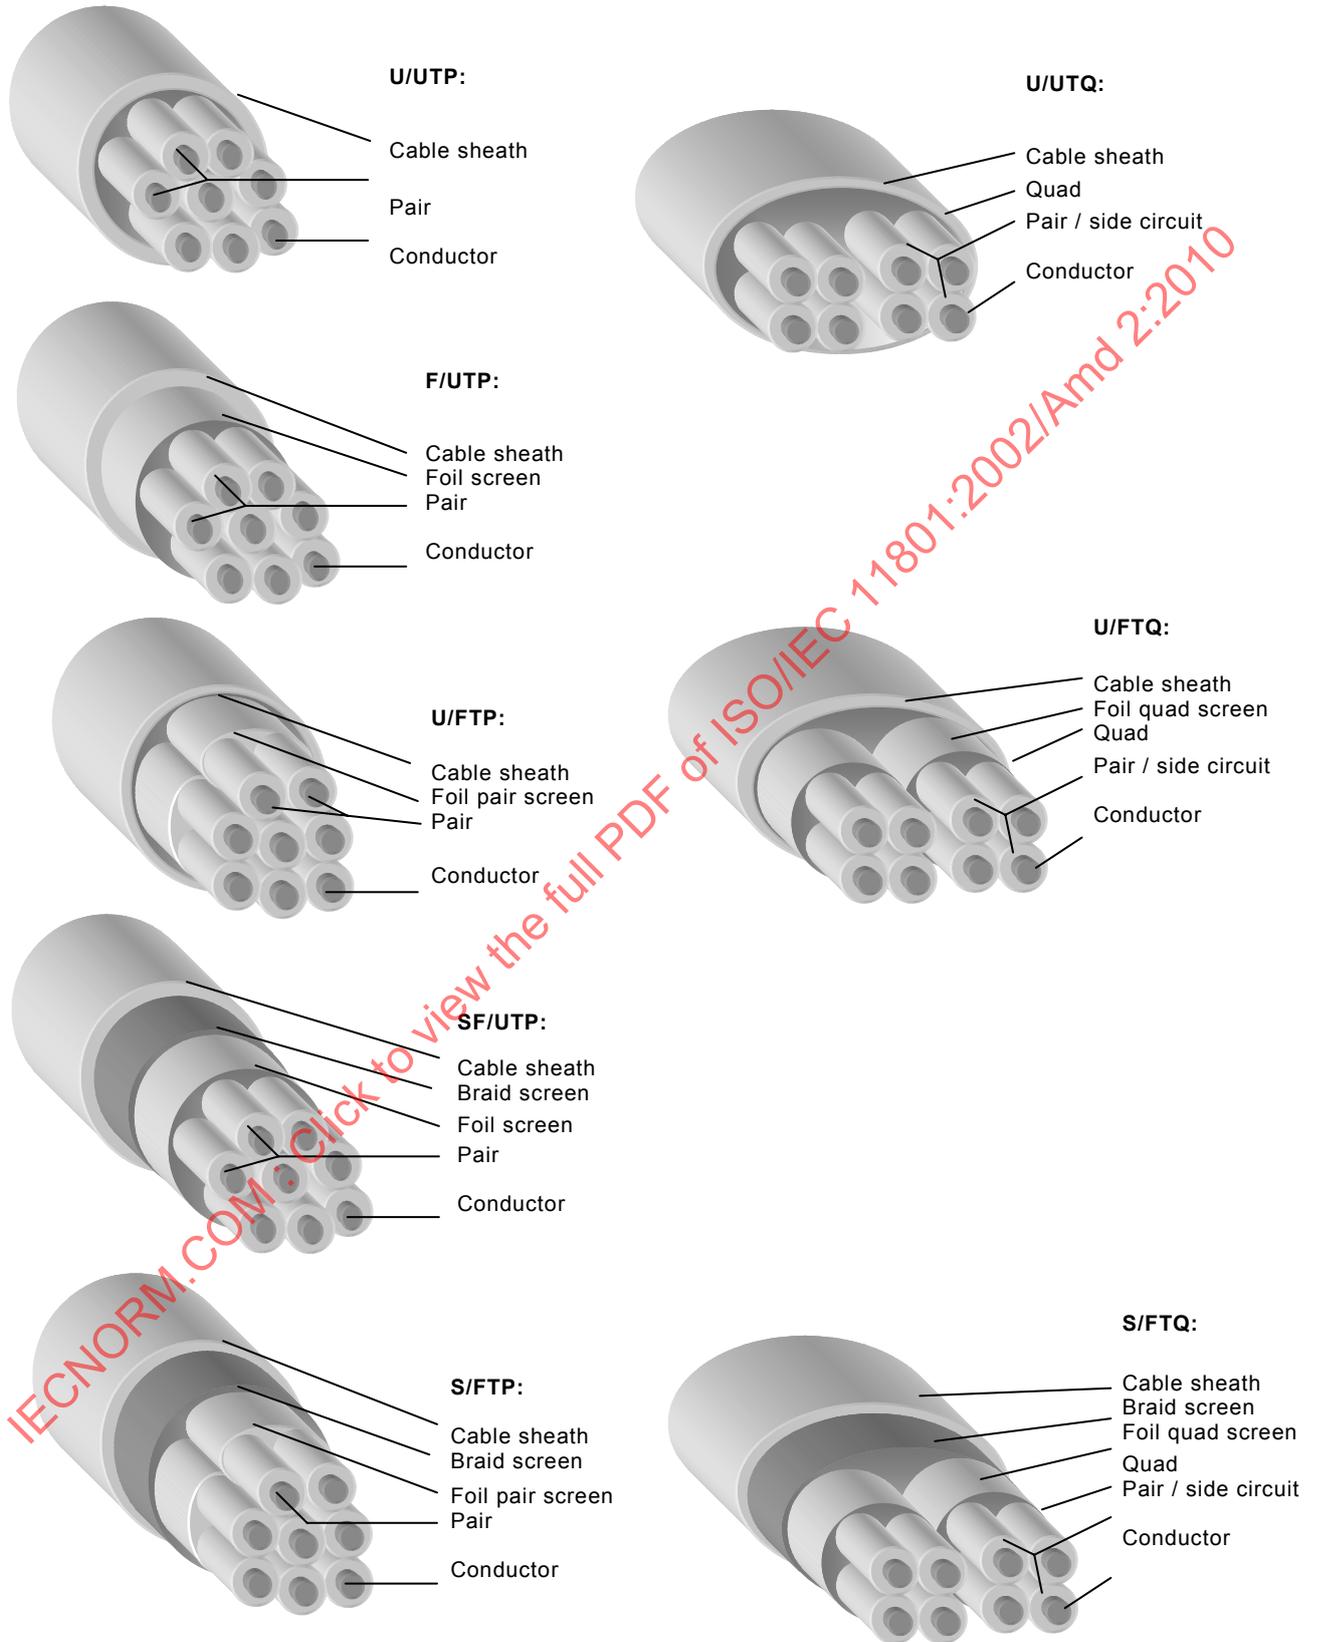


Figure E.2 – Examples of cable types