

INTERNATIONAL
STANDARD

ISO/IEC
13874

First edition
1995-11-01

**Information technology —
Telecommunications and information
exchange between systems — Private
Integrated Services Network —
Inter-exchange signalling protocol — Path
replacement additional network feature**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseau privé à intégration de
services — Protocole de signalisation d'interéchange — Facilité de réseau
additionnelle de remplacement de chemin*



Reference number
ISO/IEC 13874:1995(E)

Contents

	Page
Foreword	iii
Introduction	iv
1 Scope	1
2 Conformance	1
3 Normative references	1
4 Definitions	2
4.1 External definitions	2
4.2 Other definitions	3
5 List of acronyms	3
6 Signalling protocol for the support of ANF-PR	3
6.1 ANF-PR description	3
6.2 ANF-PR operational requirements	4
6.3 ANF-PR coding requirements	5
6.4 ANF-PR state definitions	9
6.5 ANF-PR signalling procedures	10
6.6 ANF-PR optional signalling procedures for retention of part of the old connection	12
6.7 ANF-PR impact of interworking with public ISDNs	15
6.8 ANF-PR impact of interworking with non-ISDNs	15
6.9 Protocol interactions between ANF-PR and other supplementary services and ANFs	15
6.10 ANF-PR parameter values (timers)	17
Annex A - Protocol Implementation Conformance Statement (PICS) proforma	18
Annex B - Imported ASN.1 definitions	25
Annex C - Examples of message sequences	26
Annex D - Specification and Description Language (SDL) representation of procedures	32

© ISO/IEC 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 13874 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

Annex A forms an integral part of this International Standard. Annexes B to D are for information only.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

Introduction

This International Standard is one of a series of International Standards defining services and signalling protocols applicable to Private Integrated Services Networks (PISNs). The series uses ISDN concepts as developed by ITU-T and conforms to the framework of International Standards for Open Systems Interconnection as defined by ISO/IEC.

This particular International Standard specifies the signalling protocol for use at the Q reference point in support of the Path Replacement additional network feature.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Path replacement additional network feature

1 Scope

This International Standard specifies the signalling protocol for the support of the Path Replacement additional network feature (ANF-PR) at the Q reference point between Private Integrated Services Network Exchanges (PINXs) connected together within a Private Integrated Services Network (PISN).

ANF-PR is a feature which applies to an established call, allowing that call's connection between PINXs to be replaced by a new connection.

The Q reference point is defined in ISO/IEC 11579-1.

Service specifications are produced in three stages and according to the method specified in CCITT Recommendation I.130. This International Standard contains the stage 3 specification for the Q reference point and satisfies the requirements identified by the stage 1 and stage 2 specifications in ISO/IEC 13863.

The signalling protocol for ANF-PR operates on top of the signalling protocol for basic circuit switched call control, as specified in ISO/IEC 11572, and uses certain aspects of the generic procedures for the control of supplementary services specified in ISO/IEC 11582.

This International Standard also specifies additional signalling protocol requirements for the support of interactions at the Q reference point between ANF-PR and other supplementary services and ANFs.

This International Standard is applicable to PINXs which can interconnect to form a PISN.

2 Conformance

In order to conform to this International Standard, a PINX shall satisfy the requirements identified in the Protocol Implementation Conformance Statement (PICS) proforma in annex A.

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 11571:1994, *Information technology - Telecommunications and information exchange between systems - Numbering and sub-addressing in Private Integrated Services Networks.*

ISO/IEC 11572:1994, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Circuit-mode bearer services - Inter-exchange signalling procedures and protocol.*

ISO/IEC 11574:1994, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Circuit-mode 64 kbit/s bearer services - Service description, functional capabilities and information flows.*

ISO/IEC 11579-1:1994, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Part 1: Reference configuration for PISN Exchanges (PINX).*

ISO/IEC 11582:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Generic functional protocol for the support of supplementary services - Inter-exchange signalling procedures and protocol.*

ISO/IEC 13863:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Specification, functional model and information flows - Path replacement additional network feature.*

ISO/IEC 13869:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Call transfer supplementary services.*

CCITT Rec. I.112(1988), *Vocabulary of terms for ISDNs (Blue Book).*

CCITT Rec. I.130(1988), *Method for the characterization of telecommunication services supported by an ISDN and network capabilities of an ISDN (Blue Book).*

CCITT Rec. I.210(1988), *Principles of telecommunication services supported by an ISDN and the means to describe them (Blue Book).*

CCITT Rec. Z.100(1988), *Specification and Description Language (Blue Book).*

ITU-T Rec. Q.950(1993), *Digital Subscriber Signalling System No. 1 (DSS1) - Supplementary services protocols, structure and general principles.*

4 Definitions

For the purposes of this International Standard, the following definitions apply.

4.1 External definitions

This International Standard uses the following terms defined in other documents:

- | | |
|---|--------------------|
| - ANF-PR user | (ISO/IEC 13863) |
| - Application Protocol Data Unit (APDU) | (ISO/IEC 11582) |
| - Basic Service | (CCITT Rec. I.210) |
| - Call, Basic Call | (ISO/IEC 11582) |
| - Connection | (ISO/IEC 13863) |
| - Incoming Gateway PINX | (ISO/IEC 11572) |
| - Interpretation APDU | (ISO/IEC 11582) |
| - Network Facility Extension (NFE) | (ISO/IEC 11582) |
| - New Connection | (ISO/IEC 13863) |
| - Old Connection | (ISO/IEC 13863) |
| - Originating PINX | (ISO/IEC 11572) |
| - Outgoing Gateway PINX | (ISO/IEC 11572) |
| - Private Integrated Services Network (PISN) | (ISO/IEC 11579-1) |
| - Private Integrated Services Network Exchange (PINX) | (ISO/IEC 11579-1) |
| - Signalling | (CCITT Rec. I.112) |
| - Supplementary Service | (CCITT Rec. I.210) |
| - Supplementary Services Control Entity | (ISO/IEC 11582) |
| - Terminating PINX | (ISO/IEC 11572) |
| - Transit PINX | (ISO/IEC 11572) |
| - Trombone Connection | (ISO/IEC 13863) |
| - User (except in the context of ANF-PR user) | (ISO/IEC 11574) |

4.2 Other definitions

4.2.1 branching PINX: The Transit PINX at which the retained connection finishes and the new connection starts.

4.2.2 cooperating PINX: The end PINX which initiates the establishment of the new connection towards other end PINX involved in the call.

4.2.3 end PINX: Within the context of a call, a PINX which is not acting as a Transit PINX, i.e., an Originating PINX, a Terminating PINX, an Incoming Gateway PINX or an Outgoing Gateway PINX.

4.2.4 preceding PINX: The adjacent PINX in the direction of the cooperating PINX, relative to a particular PINX involved in the old connection.

NOTE 1 — This can be the cooperating PINX itself or a Transit PINX.

4.2.5 replaced connection: That part of the old connection which is not retained and is replaced by the new connection.

4.2.6 requesting PINX: The end PINX which invokes ANF-PR and towards which the new connection is routed.

4.2.7 retained connection: That part of the old connection which is retained and not replaced by the new connection.

4.2.8 subsequent PINX: The adjacent PINX in the direction of the requesting PINX, relative to a particular PINX involved in the old connection.

NOTE 2 — This can be the requesting PINX itself or a Transit PINX.

5 List of acronyms

ANF	Additional Network Feature
ANF-PR	Path Replacement additional network feature
APDU	Application Protocol Data Unit
ASN.1	Abstract Syntax Notation no. 1
ISDN	Integrated Services Digital Network
NFE	Network Facility Extension
PICS	Protocol Implementation Conformance Statement
PINX	Private Integrated Services Network Exchange
PISN	Private Integrated Services Network
SDL	Specification and Description Language
SS-CT	Call Transfer supplementary service

6 Signalling protocol for the support of ANF-PR

6.1 ANF-PR description

ANF-PR is invoked by an ANF-PR user for an established call, allowing that call's connection through the PISN to be replaced by a new connection. If the new connection is required to satisfy certain criteria, ANF-PR should be used in conjunction with other supplementary services and/or ANFs. In the absence of specific criteria, the new connection should be established using the routing rules which apply to basic call establishment.

NOTE 3 — Annex A of ISO/IEC 13863 gives examples of the circumstances under which ANF-PR can be used and criteria which can govern the selection of the new connection.

The requesting PINX shall request the cooperating PINX to attempt the establishment of a new connection from the cooperating PINX to the requesting PINX. If successful, the new connection shall replace the old connection.

NOTE 4 — The requesting PINX can be either end PINX involved in a call, i.e., the Originating PINX or the Terminating PINX or, in the case of interworking with another network, the Incoming Gateway PINX or Outgoing Gateway PINX.

Optional procedures and coding are specified for allowing the retention of one or more elements of the old connection, starting from the cooperating PINX and continuing as far as a Transit PINX, subject to any given criteria being achievable in that way. A new connection is established from the Transit PINX to the requesting PINX instead of from the cooperating PINX to the requesting PINX.

6.2 ANF-PR operational requirements

6.2.1 Requirements on the cooperating PINX

ANF-PR shall be applicable to a call whose protocol control state, as defined in ISO/IEC 11572, is Active.

NOTE 5 — State Active will have been reached as a result of ISO/IEC 11572 call establishment procedures, possibly in conjunction with supplementary service and/or ANF procedures.

ISO/IEC 11572 protocol control procedures for call establishment at the outgoing side of an inter-PINX link shall apply to the establishment of the new connection. ISO/IEC 11572 protocol control procedures for call clearing shall apply to the release of the old connection in the event of successful switch over to the new connection.

Generic procedures for the call-related control of supplementary services, as specified in ISO/IEC 11582 for an end PINX, shall apply.

6.2.2 Requirements on the requesting PINX

ANF-PR shall be applicable to a call whose protocol control state, as defined in ISO/IEC 11572, is Active.

NOTE 6 — State Active will have been reached as a result of ISO/IEC 11572 call establishment procedures, possibly in conjunction with supplementary service and/or ANF procedures.

ISO/IEC 11572 protocol control procedures for call establishment at the incoming side of an inter-PINX link shall apply to the establishment of the new connection. ISO/IEC 11572 protocol control procedures for call clearing shall apply to the release of the old connection in the event of successful switch over to the new connection.

Generic procedures for the call-related control of supplementary services, as specified in ISO/IEC 11582 for an end PINX, shall apply.

6.2.3 Requirements on a Transit PINX

6.2.3.1 Transit PINX involved in the replaced connection

ANF-PR shall be applicable to a call whose protocol control state, as defined in ISO/IEC 11572, on each of the two links (incoming and outgoing) is Active and whose call control state, as defined in ISO/IEC 11572 is TCC_Call_Active.

NOTE 7 — State Active will have been reached as a result of ISO/IEC 11572 call establishment procedures, possibly in conjunction with supplementary service and/or ANF procedures.

ISO/IEC 11572 protocol control and call control procedures for call clearing at a Transit PINX shall apply to the release of the old connection in the event of successful switch over to the new connection.

Generic procedures for the call-related control of supplementary services, as specified in ISO/IEC 11582 for a Transit PINX, shall apply. For ANF-PR the requirements are limited to the passing on of Facility information elements for which the destination, as indicated in the Network Facility Extension (NFE), is not the Transit PINX.

6.2.3.2 Transit PINX involved in the new connection

ISO/IEC 11572 protocol control and call control procedures for call establishment at a Transit PINX shall apply to the establishment of the new connection.

ISO/IEC 11572 protocol control and call control procedures for call clearing at a Transit PINX shall apply to the release of the new connection in the event of failure to complete ANF-PR successfully.

Generic procedures for the call-related control of supplementary services, as specified in ISO/IEC 11582 for a Transit PINX, shall apply. For ANF-PR the requirements are limited to the passing on of Facility information elements for which the destination, as indicated in the Network Facility Extension (NFE), is not the Transit PINX.

6.2.3.3 Transit PINX involved in the retained connection

The procedures below are applicable only if the optional procedures for retention of part of the old connection (6.6) are supported.

ANF-PR shall be applicable to a call whose protocol control state, as defined in ISO/IEC 11572, on each of the two links (incoming and outgoing) is Active and whose call control state, as defined in ISO/IEC 11572 is TCC_Call_Active.

NOTE 8 — State Active will have been reached as a result of ISO/IEC 11572 call establishment procedures, possibly in conjunction with supplementary service and/or ANF procedures.

Generic procedures for the call-related control of supplementary services, as specified in ISO/IEC 11582 for a Transit PINX, shall apply.

6.2.3.4 Branching PINX

The procedures below are applicable only if the optional procedures for retention of part of the old connection (6.6) are supported.

ANF-PR shall be applicable to a call whose protocol control state, as defined in ISO/IEC 11572, on each of the two links (incoming and outgoing) is Active and whose call control state, as defined in ISO/IEC 11572 is TCC_Call_Active.

NOTE 9 — State Active will have been reached as a result of ISO/IEC 11572 call establishment procedures, possibly in conjunction with supplementary service and/or ANF procedures.

ISO/IEC 11572 protocol control procedures for call establishment at the outgoing side of an inter-PINX link shall apply to the establishment of the new connection. ISO/IEC 11572 protocol control procedures for call clearing shall apply to the release of the replaced connection in the event of successful switch over to the new connection.

Generic procedures for the call-related control of supplementary services, as specified in ISO/IEC 11582 for a Transit PINX, shall apply.

6.3 ANF-PR coding requirements

6.3.1 Operations

The operations defined in Abstract Syntax Notation number 1 (ASN.1) in Table 1 shall apply.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

Table 1 - Operations in support of ANF-PR

```

Path-Replacement-Operations
    {iso standard pss1-path-replacement (13874) pr-operations (0)}

DEFINITIONS EXPLICIT TAGS ::=

BEGIN

IMPORTS
    OPERATION, ERROR FROM Remote-Operation-Notation
        {joint-iso-ccitt(2) remote-operations(4) notation (0)}
    Extension FROM Manufacturer-specific-service-extension-definition
        {iso standard
        pss1-generic-procedures (11582) msi-definition (0)}
    notAvailable, supplementaryServiceInteractionNotAllowed
    FROM General-Errors-List
        {ccitt recommendation q 950 general-error-list (1)}
    PartyNumber FROM Addressing-Data-Elements
        { iso(1) standard(0) pss1-generic-procedures(11582) addressing-data-elements(9)
};

PathReplacePropose ::= OPERATION
    ARGUMENT PRProposeArg
    ERRORS {
        notAvailable,
        temporarilyUnavailable,
        supplementaryServiceInteractionNotAllowed,
        criteriaPermanentlyUnachievable,
        criteriaTemporarilyUnachievable,
        invalidRerouteingNumber,
        unrecognizedCallIdentity,
        establishmentFailure,
        collision,
        unspecified
    }

PathReplaceSetup ::= OPERATION
    ARGUMENT PRSetupArg
    RESULT DummyResult
    ERRORS {
        criteriaPermanentlyUnachievable,
        criteriaTemporarilyUnachievable,
        invalidRerouteingNumber,
        unrecognizedCallIdentity,
        temporarilyUnavailable,
        unspecified
    }

```

Table 1 (continued)

PathReplaceRetain	::=	OPERATION ARGUMENT PRRetainArg RESULT DummyResult ERRORS { notAvailable, temporarilyUnavailable, supplementaryServiceInteractionNotAllowed, criteriaPermanentlyUnachievable, criteriaTemporarilyUnachievable, invalidRerouteingNumber, unrecognizedCallIdentity, establishmentFailure, unspecified }
PRProposeArg	::=	SEQUENCE { callIdentity CallIdentity, rerouteingNumber PartyNumber, extension CHOICE { [1] IMPLICIT Extension, [2] IMPLICIT SEQUENCE OF Extension } OPTIONAL }
PRSetupArg	::=	SEQUENCE { callIdentity CallIdentity, extension CHOICE { [1] IMPLICIT Extension, [2] IMPLICIT SEQUENCE OF Extension } OPTIONAL }
PRRetainArg	::=	SEQUENCE { callIdentity CallIdentity, rerouteingNumber PartyNumber, extension CHOICE { [1] IMPLICIT Extension, [2] IMPLICIT SEQUENCE OF Extension } OPTIONAL }
DummyResult	::=	CHOICE { NULL, [1] IMPLICIT Extension, [2] IMPLICIT SEQUENCE OF Extension }
CallIdentity	::=	NumericString (SIZE(1..4))

Table 1 (continued)

pathReplacePropose	PathReplacePropose ::= 4
pathReplaceSetup	PathReplaceSetup ::= 5
pathReplaceRetain	PathReplaceRetain ::= 6
temporarilyUnavailable	<p>ERROR ::= 1000</p> <p>-- used when the operation is temporarily not available and none of</p> <p>-- the other errors applies - a later attempt could be successful</p>
collision	<p>ERROR ::= 1001</p> <p>-- used when a pathReplacePropose invoke APDU is received by a PINX</p> <p>-- which has sent a pathReplacePropose invoke APDU</p>
criteriaPermanentlyUnachievable	<p>ERROR ::= 1002</p> <p>-- used when the special criteria requested cannot be achieved</p> <p>-- because the necessary resources are permanently unavailable</p>
criteriaTemporarilyUnachievable	<p>ERROR ::= 1003</p> <p>-- used when the special criteria requested cannot be achieved</p> <p>-- because the necessary resources are temporarily unavailable</p> <p>-- a later attempt could be successful</p>
invalidRerouteingNumber	<p>ERROR ::= 1004</p> <p>-- used when the establishment of the new connection fails because the</p> <p>-- Called party number information element is not a valid number for</p> <p>-- routing the new connection to</p>
unrecognizedCallIdentity	<p>ERROR ::= 1005</p> <p>-- used when establishment of the new connection fails because it could</p> <p>-- not be associated with the old connection at the requesting PINX</p>
establishmentFailure	<p>ERROR ::= 1006</p> <p>-- used when establishment of the new connection fails and no other error</p> <p>-- applies</p>
Unspecified unspecified	<p>ERROR PARAMETER Extension</p> <p>Unspecified ::= 1008</p> <p>-- used to convey a manufacturer specific error, possibly with other</p>
information	
END	-- of Path-Replacement-Operations

6.3.2 Information elements

6.3.2.1 Facility information element

APDUs of the operations defined in 6.3.1 shall be coded in the Facility information element in accordance with ISO/IEC 11582.

When conveying APDUs of operations pathReplacePropose and pathReplaceSetup, the NFE shall be included.

When conveying the invoke APDU of operation pathReplacePropose, the destinationEntity data element of the NFE shall contain value endPINX.

When conveying the invoke APDU of operation pathReplaceSetup, the destinationEntity data element of the NFE shall contain value endPINX.

When conveying the invoke APDU of operation pathReplaceRetain, the NFE shall be omitted.

When conveying the invoke APDU of operation pathReplaceSetup, the Interpretation APDU shall be included and shall have the value clearCallIfAnyInvokePduNotRecognised. When conveying any other Remote Operations APDU, the Interpretation APDU shall either be omitted or have the value rejectAnyUnrecognisedInvokePdu.

6.3.2.2 Other information elements

The following information elements used during establishment of the new connection and release of the old connection shall be coded as specified in ISO/IEC 11572:

- Bearer capability
- Called party number
- Cause
- Sending complete

6.3.3 Messages

Except for cases where a basic call message is to be conveyed at the same time, the Facility information shall be conveyed in a FACILITY message as specified in ISO/IEC 11582.

The following messages used during establishment of the new connection and release of the old connection shall be as specified in ISO/IEC 11572:

- CALL PROCEEDING
- CONNECT
- CONNECT ACKNOWLEDGE
- DISCONNECT
- RELEASE
- RELEASE COMPLETE
- SETUP

6.4 ANF-PR state definitions

6.4.1 States at the requesting PINX

The procedures for the requesting PINX are written in terms of the following conceptual states existing within the ANF-PR functional entity in that PINX in association with a particular call.

6.4.1.1 State PR-Req-Idle

ANF-PR is not operating.

6.4.1.2 State PR-Req-Initiated

A pathReplacePropose invoke APDU has been sent to the cooperating PINX.

6.4.1.3 State PR-Req-Completing

The new connection has been established and a pathReplaceSetup return result APDU has been sent to the cooperating PINX.

6.4.2 States at the cooperating PINX

The procedures for the cooperating PINX are written in terms of the following conceptual states existing within the ANF-PR functional entity in that PINX in association with a particular call.

6.4.2.1 State PR-Coop-Idle

ANF-PR is not operating.

6.4.2.2 State PR-Coop-Establishment

A pathReplaceSetup invoke APDU has been sent in conjunction with the establishment of the new connection.

6.4.2.3 State PR-Coop-Retain

A pathReplaceRetain invoke APDU has been sent to the subsequent PINX.

6.4.3 States at a Transit PINX on the retained path, including the branching PINX

The procedures for a Transit PINX on the retained path are written in terms of the following conceptual states existing within the ANF-PR functional entity in that PINX in association with a particular call.

6.4.3.1 State PR-Transit-Idle

ANF-PR is not operating.

6.4.3.2 State PR-Transit-Establishment

A pathReplaceSetup invoke APDU has been sent in conjunction with the establishment of the new connection.

6.4.3.3 State PR-Transit-Retain

A pathReplaceRetain invoke APDU has been sent to the subsequent PINX.

6.5 ANF-PR signalling procedures

The signalling procedures specified below are in support of replacement of the entire connection. Additional optional procedures for retention of part of the old connection are specified in 6.6.

Examples of message sequences are shown in C.1 and C.2 of annex C.

6.5.1 Actions at the requesting PINX

The SDL representation of procedures at the requesting PINX is shown in D.1 of annex D.

6.5.1.1 Normal procedures

On determining that ANF-PR is to be invoked during a call whose protocol control state is Active, the requesting PINX shall send a pathReplacePropose invoke APDU in a FACILITY message to the cooperating PINX and enter state PR-Req-Initiated. Within the argument, the rerouteingNumber data element shall contain a number from one of the native numbering plans of the PISN (see ISO/IEC 11571). The number, when used as the contents of information element Called party number in a SETUP message, shall be sufficient to cause routeing of the new connection to the requesting PINX. The callIdentity data element shall contain a number which, in conjunction with the rerouteingNumber data element, identifies the particular ANF-PR entity, and therefore the call on which ANF-PR is being invoked. This number need not have significance outside the requesting PINX.

NOTE 10 — The number in the callIdentity data element should be sufficient to distinguish the call concerned from any other call for which the PINX is acting as an ANF-PR requesting PINX at that time.

Having agreed the B-channel and sent back a CALL PROCEEDING message in response to an incoming SETUP message, in accordance with the procedures of ISO/IEC 11572, if the SETUP contains a pathReplaceSetup invoke APDU the requesting PINX shall proceed as follows. If the callIdentity data element in the argument of pathReplaceSetup, in conjunction with the number information in the Called party number information element, identifies an ANF-PR entity in state PR-Req-Initiated, the requesting PINX shall associate the new connection (as requested by the SETUP message) with the call on whose behalf that ANF-PR entity is acting.

The requesting PINX shall connect the calling / called user to the B-channel of the new connection and terminate the B-channel of the old connection in a suitable manner (pending its release).

NOTE 11 — The method of terminating the old connection's B-channel is an implementation matter. Annex B of ISO/IEC 13863 contains more information on this.

A pathReplaceSetup return result APDU shall be sent in a CONNECT message using the call reference of the new connection and state PR-Req-Completing shall be entered.

NOTE 12 — On sending CONNECT, the protocol control state for the new connection will become Active.

While in state PR-Req-Completing, if a DISCONNECT message is received using the call reference of the old connection, the requesting PINX shall complete the release of the old connection in accordance with the procedures of ISO/IEC 11572, and enter state PR-Req-Idle. The call shall continue as an active call using the new connection.

6.5.1.2 Exceptional procedures

Receipt of a FACILITY message containing a pathReplacePropose return error APDU or reject APDU during state PR-Req-Initiated shall cause entry to state PR-Req-Idle, thereby abandoning ANF-PR. The call shall continue to use the old connection.

NOTE 13 — Depending on the error, it may be appropriate to invoke ANF-PR again later. If the error is collision, steps should be taken to reduce the probability of a further collision, e.g., by using a random delay before invoking again.

Failure to associate an incoming SETUP message containing a pathReplaceSetup invoke APDU with an ANF-PR entity in state PR-Req-Initiated shall result in the sending of a DISCONNECT message to initiate the clearing of the new connection. Depending on implementation, the DISCONNECT message shall contain either:

- a suitable cause number in the Cause information element, e.g., 1 "unallocated (unassigned) number"; or
- cause number 29 "facility rejected" in the Cause information element and a return error APDU containing error invalidRerouteingNumber; or
- cause number 29 "facility rejected" in the Cause information element and a return error APDU containing error unrecognizedCallIdentity.

If the incoming SETUP message containing a pathReplaceSetup invoke APDU is successfully associated with an ANF-PR entity in state PR-Req-Initiated but the new connection is unsuitable for some reason, e.g., criteria not satisfied, a DISCONNECT message shall be sent to initiate clearing of the new connection. The DISCONNECT message shall contain cause number 29 "facility rejected" in the Cause information element and a return error APDU containing an appropriate error. The ANF-PR entity shall remain in state PR-Req-Initiated.

NOTE 14 — Receipt of a pathReplacePropose return error APDU can be expected.

On receipt of a FACILITY message containing a pathReplacePropose invoke APDU while in state PR-Req-Initiated, a pathReplacePropose return error APDU containing error collision shall be returned. No state change shall occur.

NOTE 15 — Receipt of a pathReplacePropose return error APDU containing error collision can be expected.

While in state PR-Req-Completing, if a DISCONNECT message is received using the call reference of the new connection, the requesting PINX shall complete the release of the new connection in accordance with the procedures of ISO/IEC 11572, reconnect the calling / called user to the B-channel of the old connection, and enter state PR-Req-Idle.

6.5.2 Actions at the cooperating PINX

The SDL representation of procedures at the cooperating PINX is shown in D.2 of annex D.

6.5.2.1 Normal procedures

On receipt of a FACILITY message containing a pathReplacePropose invoke APDU while in protocol control state Active and ANF-PR state PR-Coop-Idle, the cooperating PINX shall determine whether it can proceed with ANF-PR. If so, it shall attempt to establish a new connection by selecting an outgoing B-channel on a route determined by the contents of the rerouteingNumber data element within the received argument. If a B-channel is available, a SETUP message shall be sent using a new call reference in accordance with the procedures of ISO/IEC 11572. The SETUP shall contain a new call reference and the following information elements.

- Bearer capability, containing bearer capability information as for the old connection;
- Called party number, containing the number received in the rerouteingNumber data element within the received argument;
- Sending complete;
- Facility.

The Facility information element shall contain a pathReplaceSetup invoke APDU. Within the argument, data element callIdentity shall have the same contents as the corresponding data element in the argument of the received pathReplacePropose invoke APDU.

The cooperating PINX shall terminate the new connection's B-channel suitably.

NOTE 16 — The method of terminating the new connection's B-channel is an implementation matter. Annex B of ISO/IEC 13863 contains more information on this.

State PR-Coop-Establishment shall be entered.

The protocol control procedures of ISO/IEC 11572 shall apply during the establishment of the new connection.

NOTE 17 — Initially protocol control will enter state Call Initiated. On receipt of a CALL PROCEEDING message, state Outgoing Call Proceeding will be entered and on receipt of CONNECT, state Active will be entered.

On receipt of a CONNECT message (using the call reference of the new connection) containing a pathReplaceSetup return result APDU, the cooperating PINX shall disconnect the B-channel of the old connection and connect the calling / called user instead to the B-channel of the new connection. A DISCONNECT message shall be sent using the call reference of the old connection, thereby initiating the clearing procedures of ISO/IEC 11572 for the old connection. State PR-Coop-Idle shall be entered. The call shall continue as an active call using the new connection.

6.5.2.2 Exceptional procedures

If the cooperating PINX is unable to comply with the pathReplacePropose invoke APDU, it shall send back a FACILITY message containing a pathReplacePropose return error APDU with a suitable error.

If the new connection fails to be established for any reason, the cooperating PINX shall send using the old connection a FACILITY message containing a pathReplacePropose return error APDU with a suitable error. Reasons can include:

- unable to select a B-channel for the new connection;
- receipt of a call clearing message using the new connection's call reference without a pathReplaceSetup return error APDU or reject APDU;
- receipt of a call clearing message using the new connection's call reference with a pathReplaceSetup return error APDU or reject APDU;
- timer expiry at the cooperating PINX.

In each case state PR-Coop-Idle shall be entered and the call shall continue as an active call using the old connection.

6.5.3 Actions at a cooperating/requesting PINX in the case of a trombone connection

On receipt of a FACILITY message containing a pathReplacePropose invoke APDU, the cooperating PINX can determine from the reroutingNumber data element in the argument whether the requesting PINX is the same as the cooperating PINX, i.e., whether a trombone connection exists.

In the case of a trombone connection, establishment of the new connection and switching over to it will be intra-PINX matters. The only further signalling which will occur at the Q reference point will be the clearing of the old connection.

6.5.4 Actions at a Transit PINX

No special actions are required in support of ANF-PR.

6.6 ANF-PR optional signalling procedures for retention of part of the old connection

Examples of message sequences are shown in C.3 to C.5 of annex C

6.6.1 Actions at the requesting PINX

The procedures of 6.5.1 shall apply, with the following addition.

If the requesting PINX receives a FACILITY message containing a pathReplaceRetain invoke APDU from the preceding PINX, it shall send back a FACILITY message containing a pathReplaceRetain return result APDU and enter state PR-Req-Idle.

6.6.2 Actions at the cooperating PINX

The SDL representation of procedures at the cooperating PINX, including optional retention of part of the old connection, is shown in D.2 of annex D.

6.6.2.1 Normal procedures

On receipt of a FACILITY message containing a pathReplacePropose invoke APDU while in protocol control state Active and ANF-PR state PR-Coop-Idle, the cooperating PINX shall determine whether it can proceed with ANF-PR, and whether it can retain that part of the old connection as far as the subsequent PINX while still meeting any given criteria. If so, it shall send a FACILITY message containing a pathReplaceRetain invoke APDU to the subsequent PINX and enter state PR-Coop-Retain. The reroutingNumber and callIdentity data elements shall have the same contents as the corresponding data elements received in the pathReplacePropose invoke APDU.

NOTE 18 — The omission of the NFE from the Facility information element ensures that the APDU will be processed by the subsequent PINX. If the subsequent PINX does not support these optional procedures it will send back a reject APDU.

If it cannot retain that part of the old connection as far as the subsequent PINX it shall proceed according to the provisions of 6.5.2.

On receipt of a FACILITY message containing a pathReplaceRetain return result APDU from the subsequent PINX, the cooperating PINX shall enter state PR-Coop-Idle.

6.6.2.2 Exceptional procedures

On receipt of a FACILITY message containing a pathReplaceRetain return error APDU or reject APDU from the subsequent PINX while in state PR-Coop-Retain, the cooperating PINX shall either, depending on the reason for the error or reject APDU:

- proceed according to the provisions of 6.5.2, as if there had been no attempt to retain part of the old connection; or
- send back a FACILITY message containing a pathReplacePropose return error APDU with a suitable error to the requesting PINX and enter state PR-Coop-Idle.

6.6.3 Actions at a Transit PINX on the retained connection

The SDL representation of procedures at a Transit PINX on the retained Connection is shown in D.3 of annex D.

On receipt of a FACILITY message containing a pathReplaceRetain invoke APDU from the preceding PINX while in protocol control state Active and ANF-PR state PR-Transit-Idle, the Transit PINX shall determine whether it can retain that part of the old connection as far as the subsequent PINX while still meeting any given criteria.

6.6.3.1 Able to retain old connection as far as subsequent PINX

6.6.3.1.1 Normal procedures

If the Transit PINX determines that it can retain that part of the old connection as far as the subsequent PINX, it shall send a FACILITY message containing a pathReplaceRetain invoke APDU to the subsequent PINX and enter state PR-Transit-Retain. The reroutingNumber and callIdentity data elements shall have the same contents as the corresponding data elements in the received pathReplaceRetain invoke APDU.

NOTE 19 — The omission of the NFE from the Facility information element ensures that the APDU will be processed by the subsequent PINX. If the subsequent PINX does not support these optional procedures it will send back a reject APDU.

On receipt of a FACILITY message containing a pathReplaceRetain return result APDU from the subsequent PINX while in state PR-Transit-Retain, the Transit PINX shall send a pathReplaceRetain return result APDU to the preceding PINX and enter state PR-Transit-Idle.

6.6.3.1.2 Exceptional procedures

On receipt of a FACILITY message containing a pathReplaceRetain return error APDU or reject APDU from the subsequent PINX while in state PR-Transit-Retain, the Transit PINX shall either, depending on the reason for the error or reject APDU:

- proceed according to the provisions of 6.6.3.2, as if there had been no attempt to retain the old connection as far as the subsequent PINX; or
- send a pathReplaceRetain return error APDU to the preceding PINX and enter state PR-Transit-Idle.

6.6.3.2 Unable to retain old connection as far as subsequent PINX

6.6.3.2.1 Normal procedures

If the Transit PINX determines that it is unable to retain that part of the old connection as far as the subsequent PINX, it shall attempt to establish a new connection by selecting an outgoing B-channel on a route determined by the contents of the rerouteingNumber data element within the received argument. If a B-channel is available, a SETUP message shall be sent using a new call reference in accordance with the procedures of ISO/IEC 11572. The SETUP shall contain a new call reference and the following information elements.

- Bearer capability, containing bearer capability information as for the old connection;
- Called party number, containing the number received in the rerouteingNumber data element within the received argument;
- Sending complete;
- Facility.

The Facility information element shall contain a pathReplaceSetup invoke APDU. Within the argument, data element callIdentity shall have the same contents as the corresponding data element in the argument of the received pathReplaceRetain invoke APDU.

The Transit PINX shall terminate the new connection's B-channel suitably.

NOTE 20 — The method of terminating the new connection's B-channel is an implementation matter. Annex B of ISO/IEC 13863 contains more information on this.

State PR-Transit-Establishment shall be entered.

The protocol control procedures of ISO/IEC 11572 shall apply during the establishment of the new connection.

NOTE 21 — Initially protocol control will enter state Call Initiated. On receipt of a CALL PROCEEDING message, state Outgoing Call Proceeding will be entered and on receipt of CONNECT, state Active will be entered.

On receipt of a CONNECT message (using the call reference of the new connection) containing a pathReplaceSetup return result APDU, the Transit PINX shall disconnect the B-channel of the replaced connection and connect the B-channel of the retained connection instead to the B-channel of the new connection. A DISCONNECT message shall be sent using the call reference of the replaced connection, thereby initiating the clearing procedures of ISO/IEC 11572 for the replaced connection. The Transit PINX shall send a FACILITY message containing a pathReplaceRetain return result APDU to the preceding PINX and enter state PR-Transit-Idle. The call shall continue as an active call using the new connection.

6.6.3.2.2 Exceptional procedures

If the Transit PINX is unable to comply with the pathReplaceRetain invoke APDU, it shall send back to the preceding PINX a FACILITY message containing a pathReplaceRetain return error APDU with a suitable error.

If the new connection fails to be established for any reason, the Transit PINX shall send back to the preceding PINX a FACILITY message containing a pathReplaceRetain return error APDU with a suitable error. Reasons can include:

- unable to select a B-channel for the new connection;
- receipt of a call clearing message using the new connection's call reference without a pathReplaceSetup return error APDU or reject APDU;
- receipt of a call clearing message using the new connection's call reference with a pathReplaceSetup return error APDU or reject APDU;
- timer expiry at the Transit PINX.

In each case state PR-Transit-Idle shall be entered and the call shall continue as an active call using the old connection.

6.6.4 Actions at a Transit PINX on the new connection or replaced connection

No special actions are required in support of ANF-PR.

6.7 ANF-PR impact of interworking with public ISDNs

When interworking with a public ISDN which does not support an equivalent feature, the incoming or outgoing gateway PINX can act as the cooperating PINX or requesting PINX in order to perform ANF-PR within the PISN.

NOTE 22 — At the time of publication of this International Standard, no equivalent feature in public ISDNs was envisaged.

6.8 ANF-PR impact of interworking with non-ISDNs

When interworking with a non-ISDN which does not support an equivalent feature, the incoming or outgoing gateway PINX can act as the cooperating PINX or requesting PINX in order to perform ANF-PR within the PISN.

When interworking with a non-ISDN which supports an equivalent feature, the two networks may cooperate in the operation of ANF-PR. In this case, either cooperating PINX functionality or requesting PINX functionality will be provided in the non-ISDN. The incoming or outgoing gateway PINXs on the old and new paths shall provide conversion between the signalling specified in this International Standard and the signalling protocol of the non-ISDN.

When interworking with a non-ISDN which supports an equivalent feature, the requesting PINX shall be able to limit the length of the value of element callIdentity in accordance with the capabilities of the non-ISDN.

6.9 Protocol interactions between ANF-PR and other supplementary services and ANFs

This subclause specifies protocol interactions with other supplementary services and ANFs for which stage 3 International Standards had been published at the time of publication of this International Standard. For interactions with supplementary services and ANFs for which stage 3 International Standards are published subsequent to the publication of this International Standard, see those other stage 3 International Standards.

NOTE 23 — Additional interactions that have no impact on the signalling protocol at the Q reference point can be found in the relevant stage 1 specifications.

NOTE 24 — Simultaneous conveyance of APDUs for ANF-PR and another supplementary service or ANF in the same message, each in accordance with the requirements of its respective stage 3 International Standard, does not, on its own, constitute a protocol interaction.

6.9.1 Interaction with Calling Name Identification Presentation (SS-CNIP)

No protocol interaction.

6.9.2 Interaction with Connected Name Identification Presentation (SS-CONP)

No protocol interaction.

6.9.3 Interaction with Completion of Calls to Busy Subscriber (SS-CCBS)

No protocol interaction.

6.9.4 Interaction with Completion of Calls on No Reply (SS-CCNR)

No protocol interaction.

6.9.5 Interaction with Call Transfer (SS-CT)

The following protocol interaction shall apply if SS-CT is supported in accordance with ISO/IEC 13869.

6.9.5.1 Actions at an ANF-PR requesting PINX

6.9.5.1.1 Invocation of Call Transfer

For the purpose of the requirements below, the following events shall be considered as invocation of SS-CT:

- receipt of callTransferComplete invoke APDU;
- receipt of callTransferIdentify invoke APDU;
- receipt of callTransferInitiate invoke APDU;
- invocation of Call Transfer by the local user.

SS-CT shall be allowed to proceed normally if invoked while the PINX is acting as a requesting PINX for ANF-PR. If SS-CT is invoked while in ANF-PR state PR-Req-Initiating, all signalling for SS-CT shall occur on the old path. If SS-CT is invoked while in ANF-PR state PR-Req-Completing, all subsequent signalling for SS-CT shall be sent on the new path and received SS-CT signals shall be accepted from either path.

A pathReplaceSetup invoke APDU shall be responded to with a return error APDU containing error temporarilyUnavailable if, since sending the pathReplacePropose invoke APDU, SS-CT has been invoked.

NOTE 25 — This will prevent switching over to the new path, so that all signalling for SS-CT can take place on the old path without risk of loss during switch over.

6.9.5.1.2 Initiation of ANF-PR during Call Transfer

ANF-PR shall not be initiated while the PINX is acting as a Transferring PINX, a Primary PINX or a Secondary PINX during SS-CT.

6.9.5.2 Actions at an ANF-PR cooperating PINX

6.9.5.2.1 Invocation of Call Transfer

On receipt of a callTransferComplete, callTransferIdentify or callTransferInitiate invoke APDU while acting as an ANF-PR cooperating PINX in ANF-PR state PR-Coop-Establishment or PR-Coop-Retain, SS-CT shall be allowed to proceed normally using the old path for further signalling, except that if the old path is released as a result of successful ANF-PR, signalling shall continue using the new path.

NOTE 26 — The requesting PINX will normally abandon ANF-PR by sending back a pathReplaceSetup return error APDU because SS-CT has been invoked. Therefore switch over to a new path will not normally occur.

While acting as an ANF-PR cooperating PINX in ANF-PR state PR-Coop-Establishment, an SS-CT invocation request from the local user shall be treated in one of the following ways:

- reject the request for SS-CT; or
- wait until ANF-PR is complete before processing the request for SS-CT; or
- abort ANF-PR and proceed with SS-CT.

To abort ANF-PR while in state PR-Coop-Establishment, the cooperating PINX shall send a DISCONNECT message using the call reference of the new connection, thereby initiating the clearing procedures of ISO/IEC 11572 for the new connection, send a pathReplacePropose return error APDU with error value supplementaryServiceInteraction-NotAllowed using the call reference of the old connection, and enter state PR-Coop-Idle.

While acting as an ANF-PR cooperating PINX in ANF-PR state PR-Coop-Retain, an SS-CT invocation request from the local user shall be treated in one of the following ways:

- reject the request for SS-CT; or
- wait until ANF-PR is complete before processing the request for SS-CT.

6.9.5.2.2 Initiation of ANF-PR during Call Transfer

On receipt of a pathReplacePropose invoke APDU while acting as a Transferring PINX, a Primary PINX or a Secondary PINX during SS-CT, a pathReplacePropose return error APDU shall be sent. The error shall be temporarilyUnavailable.

6.9.6 Interaction with Call Forwarding Unconditional (SS-CFU)

No protocol interaction.

6.9.7 Interaction with Call Forwarding Busy (SS-CFB)

No protocol interaction.

6.9.8 Interaction with Call Forwarding No Reply (SS-CFNR)

No protocol interaction.

6.9.9 Interaction with Call Deflection (SS-CD)

The protocol interaction with Call Deflection Immediate shall be as specified in 6.9.6 for interaction with SS-CFU.

The protocol interaction with Call Deflection from Alert shall be as specified in 6.9.8 for interaction with SS-CFNR.

6.10 ANF-PR parameter values (timers)

6.10.1 Timer T1

Timer T1 shall operate at the requesting PINX during state PR-Req-Initiated. Its purpose is to protect against the absence of a response to the pathReplacePropose invoke APDU. A response can be either a pathReplacePropose return error APDU or a pathReplaceSetup invoke APDU.

Timer T1 shall be started on entering state PR-Req-Initiated and stopped on leaving that state.

On expiry of timer T1, the requesting PINX shall return to state PR-Req-Idle. The call shall continue as an active call using the old connection.

Timer T1 shall have a value not less than 30s.

6.10.2 Timer T2

Timer T2 shall operate at the requesting PINX during state PR-Req-Completing. Its purpose is to protect against failure to release the old connection.

Timer T2 shall be started on entering state PR-Req-Completing and stopped on leaving that state.

On expiry of timer T2, the requesting PINX shall initiate clearing of the old connection by sending a DISCONNECT message with cause number 31 "normal, unspecified" and return to state PR-Req-Idle. The call shall continue as an active call using the new connection.

Timer T2 shall have a value not less than 15s.

6.10.3 Timer T3

Timer T3 may optionally operate at the cooperating PINX or a Transit PINX during state PR-Coop-Establishment or PR-Transit-Establishment respectively. Its purpose is to protect against failure to establish the new connection.

NOTE 27 — Alternatively an implementation can rely on basic call timers for this protection.

Timer T3 shall be started on entering state PR-Coop-Establishment or PR-Transit-Establishment and stopped on leaving that state.

On expiry of timer T3, the PINX shall clear the new connection using the procedures of DIS 11572, and continue according to the procedures of 6.5.2.2 or 6.6.3.2.2 of this International Standard respectively.

Timer T3 shall have a value not less than protocol control timer T310.

6.10.4 Timer T4

Timer T4 shall operate at the cooperating PINX or a Transit PINX during state PR-Coop-Retain or PR-Transit-Retain respectively. Its purpose is to protect against the absence of a response to the pathReplaceRetain invoke APDU.

Timer T4 shall be started on entering state PR-Coop-Retain or PR-Transit-Retain and stopped on leaving that state.

On expiry of timer T4, the PINX shall continue according to the procedures of 6.6.2.2 or 6.6.3.1.2 of this International Standard respectively.

Timer T4 shall have a value not less than 30s.

Annex A
(normative)

Protocol Implementation Conformance Statement (PICS) proforma

A.1 Introduction

The supplier of a protocol implementation which is claimed to conform to this International Standard shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A completed PICS proforma is the PICS for the implementation in question. The PICS is a statement of which capabilities and options of the protocol have been implemented. The PICS can have a number of uses, including use:

- by the protocol implementor, as a check list to reduce the risk of failure to conform to the International Standard through oversight;
- by the supplier and acquirer, or potential acquirer, of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the International Standard's PICS proforma;
- by the user or potential user of the implementation, as a basis for initially checking the possibility of interworking with another implementation - while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible PICS's;
- by a protocol tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A.2 Instructions for completing the PICS proforma

A.2.1 General structure of the PICS proforma

The PICS proforma is a fixed format questionnaire divided into sub-clauses each containing a group of individual items. Each item is identified by an item number, the name of the item (question to be answered), and the reference(s) to the clause(s) that specifies (specify) the item in the main body of this International Standard.

The "Status" column indicates whether an item is applicable and if so whether support is mandatory or optional. The following terms are used:

- | | |
|----------|---|
| m | mandatory (the capability is required for conformance to the protocol); |
| o | optional (the capability is not required for conformance to the protocol, but if the capability is implemented it is required to conform to the protocol specifications); |
| o.<n> | optional, but support of at least one of the group of options labelled by the same numeral <n> is required; |
| x | prohibited; |
| c.<cond> | conditional requirement, depending on support for the item or items listed in condition <cond>; |
| <item>;m | simple conditional requirement, the capability being mandatory if item number <item> is supported, otherwise not applicable; |
| <item>;o | simple conditional requirement, the capability being optional if item number <item> is supported, otherwise not applicable. |

Answers to the questionnaire items are to be provided either in the "Support" column, by simply marking an answer to indicate a restricted choice (Yes or No), or in the "Not Applicable" column (N/A).

A.2.2 Additional information

Items of Additional Information allow a supplier to provide further information intended to assist the interpretation of the PICS. It is not intended or expected that a large quantity will be supplied, and a PICS can be considered complete without any such information. Examples might be an outline of the ways in which a (single) implementation can be set up to operate in a variety of environments and configurations.

References to items of Additional Information may be entered next to any answer in the questionnaire, and may be included in items of Exception information.

A.2.3 Exception information

It may occasionally happen that a supplier will wish to answer an item with mandatory or prohibited status (after any conditions have been applied) in a way that conflicts with the indicated requirement. No pre-printed answer will be found in the Support column for this. Instead, the supplier is required to write into the support column an x.<i> reference to an item of Exception Information, and to provide the appropriate rationale in the Exception item itself.

An implementation for which an Exception item is required in this way does not conform to this International Standard. A possible reason for the situation described above is that a defect in the International Standard has been reported, a correction for which is expected to change the requirement not met by the implementation.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

A.3 PICS proforma**A.3.1 Implementation identification**

Supplier	
Contact point for queries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification, e.g., name(s) and version(s) for machines and/or operating systems; system name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirement for full identification.

The terms Name and Version should be interpreted appropriately to correspond with a suppliers terminology (e.g., Type, Series, Model).

A.3.2 Protocol summary

Protocol version	1.0
Addenda Implemented (if applicable)	
Amendments Implemented	
Have any exception items been required (see A.2.3)?	No <input type="checkbox"/> Yes <input type="checkbox"/> (The answer Yes means that the implementation does not conform to this International Standard)
Date of statement	

A.3.3 General

Item	Question/feature	References		N/A	Support
A1	Behaviour as cooperating PINX for ANF-PR		o.1		Yes [] No []
A2	Behaviour as requesting PINX for ANF-PR		o.1		Yes [] No [] Conditions for invoking ANF-PR should be given as Additional Information
A3	Behaviour as Transit PINX for ANF-PR		o.1		Yes [] No []
A4	Behaviour as gateway PINX to another network which provides cooperating PINX functionality	6.8	o.1		Yes [] No []
A5	Behaviour as gateway PINX to another network which provides requesting PINX functionality	6.8	o.1		Yes [] No []
A6	Procedures for retaining part or all of the old connection		o		Yes [] No []

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

A.3.4 Procedures

Item	Question/feature	References	Status		Support
B1	Support of relevant ISO/IEC 11572 and ISO/IEC 11582 procedures at a cooperating PINX	6.2.1	A1:m	[]	m:Yes[]
B2	Support of relevant ISO/IEC 11572 and ISO/IEC 11582 procedures at a requesting PINX	6.2.2	A2:m	[]	m:Yes[]
B3	Support of relevant ISO/IEC 11572 and ISO/IEC 11582 procedures at a Transit PINX	6.2.3.1, 6.2.3.2	A3:m	[]	m:Yes[]
B4	Support of relevant ISO/IEC 11572 and ISO/IEC 11582 procedures at a Transit PINX on a retained connection	6.2.3.3, 6.2.3.4	c.1	[]	m:Yes[]
B5	Signalling procedures at a cooperating PINX	6.5.2	A1:m	[]	m:Yes[]
B6	Signalling procedures at a requesting PINX	6.5.1	A2:m	[]	m:Yes[]
B7	Signalling procedures at a cooperating/-requesting PINX in the case of a trombone connection	6.5.3	c.2	[]	m:Yes[]
B8	Additional signalling procedures at a requesting PINX when whole of old connection is retained	6.6.1	c.4	[]	m:Yes[]
B9	Additional signalling procedures at a cooperating PINX for retention of part or all of the old connection	6.6.2	c.3	[]	m:Yes[]
B10	Additional signalling procedures at a Transit PINX for retention of part or all of the old connection	6.6.3	c.1	[]	m:Yes[]

- c.1 if A3 and A6 then m
else N/A
- c.2: if A1 and A2 then m
else N/A
- c.3 if A1 and A6 then m
else N/A
- c.4 if A2 and A6 then m
else N/A

A.3.5 Coding

Item	Question/feature	References	Status	N/A	Support
C1	Sending of pathReplacePropose invoke APDU and receipt of return error APDU	6.3.1, 6.3.2.1	c.1	[]	m:Yes[]
C2	Sending of pathReplaceSetup invoke APDU and receipt of return result and return error APDUs	6.3.1, 6.3.2.1	c.2	[]	m:Yes[]
C3	Sending of pathReplaceRetain invoke APDU and receipt of return result and return error APDUs	6.3.1, 6.3.2.1	c.3	[]	m:Yes[]
C4	Receipt of pathReplacePropose invoke APDU and sending of return error APDU	6.3.1, 6.3.2.1	c.2	[]	m:Yes[]
C5	Receipt of pathReplaceSetup invoke APDU and sending of return result and return error APDUs	6.3.1, 6.3.2.1	c.1	[]	m:Yes[]
C6	Receipt of pathReplaceRetain invoke APDU and sending of return result and return error APDUs	6.3.1, 6.3.2.1	c.4	[]	m:Yes[]

c.1: if A2 or A5 then m
else N/A

c.2: if A1 or A4 then m
else N/A

c.3: if (A1 or A3 or A4) and A6 then m
else N/A

c.4: if (A2 or A3 or A5) and A6 then m
else N/A

A.3.6 Timers

Item	Question/feature	References	Status	N/A	Support
D1	Support of timer T1	6.10.1	A2:m	[]	m:Yes[]
D2	Support of timer T2	6.10.2	A2:m	[]	m:Yes[]
D3	Support of timer T3	6.10.3	c.1	[]	o:Yes[] No []
D4	Support of timer T4	6.10.4	c.2	[]	m:Yes[]

c.1: if A1 or (A3 and A6) then o
else N/A

c.2: if (A1 or A3) and A6 then m
else N/A

A.3.7 Protocol interactions with SS-CT

Item	Question/feature	References	Status	N/A	Support
E1	Support of SS-CT		o		Yes [] No []
E2	Interactions between SS-CT and ANF-PR at an ANF-PR requesting PINX	6.9.5.1	c.1	[]	m: Yes []
E3	Interactions between SS-CT and ANF-PR at an ANF-PR cooperating PINX	6.9.5.2	c.2	[]	m: Yes []

c.1: if E1 and A2 then m, else N/A

c.2: if E1 and A1 then m, else N/A

Annex B
(informative)

Imported ASN.1 definitions

This annex shows ASN.1 definitions of types and values that are imported from other ISO/IEC or ITU-T publications. However, definitions that are specified or reproduced in ISO/IEC 11582 are omitted.

Table B.1 is an extract from module General-Error-List in CCITT recommendation Q.950 showing the definition of imported error values.

Table B.1 - Imported ASN.1 definitions of error values

notAvailable	ERROR ::= 3
supplementaryServiceInteractionNotAllowed	ERROR ::= 10

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

Annex C
(informative)

Examples of message sequences

This annex describes some typical message flows for ANF-PR. The following conventions are used in the figures of this annex.

1. The following notation is used:

	Basic call message containing ANF-PR information
	Basic call message without ANF-PR information
xxx.inv	Invoke APDU for operation xxx
xxx.rtr	Return result APDU for operation xxx
xxx.re	Return error APDU for operation xxx

2. The figures show messages exchanged via Protocol Control between PINXs involved in ANF-PR. Only messages relevant to ANF-PR are shown.
3. Only the relevant information content (i.e., remote operation APDUs) is listed below each message name. The Facility information elements containing remote operation APDUs are not explicitly shown. Information with no impact on ANF-PR is not shown.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13874:1995

C.1 Example message sequence for normal operation

Figure C.1 shows an example of normal operation of ANF-PR. The old connection and the new connection are each shown passing through two Transit PINXs.

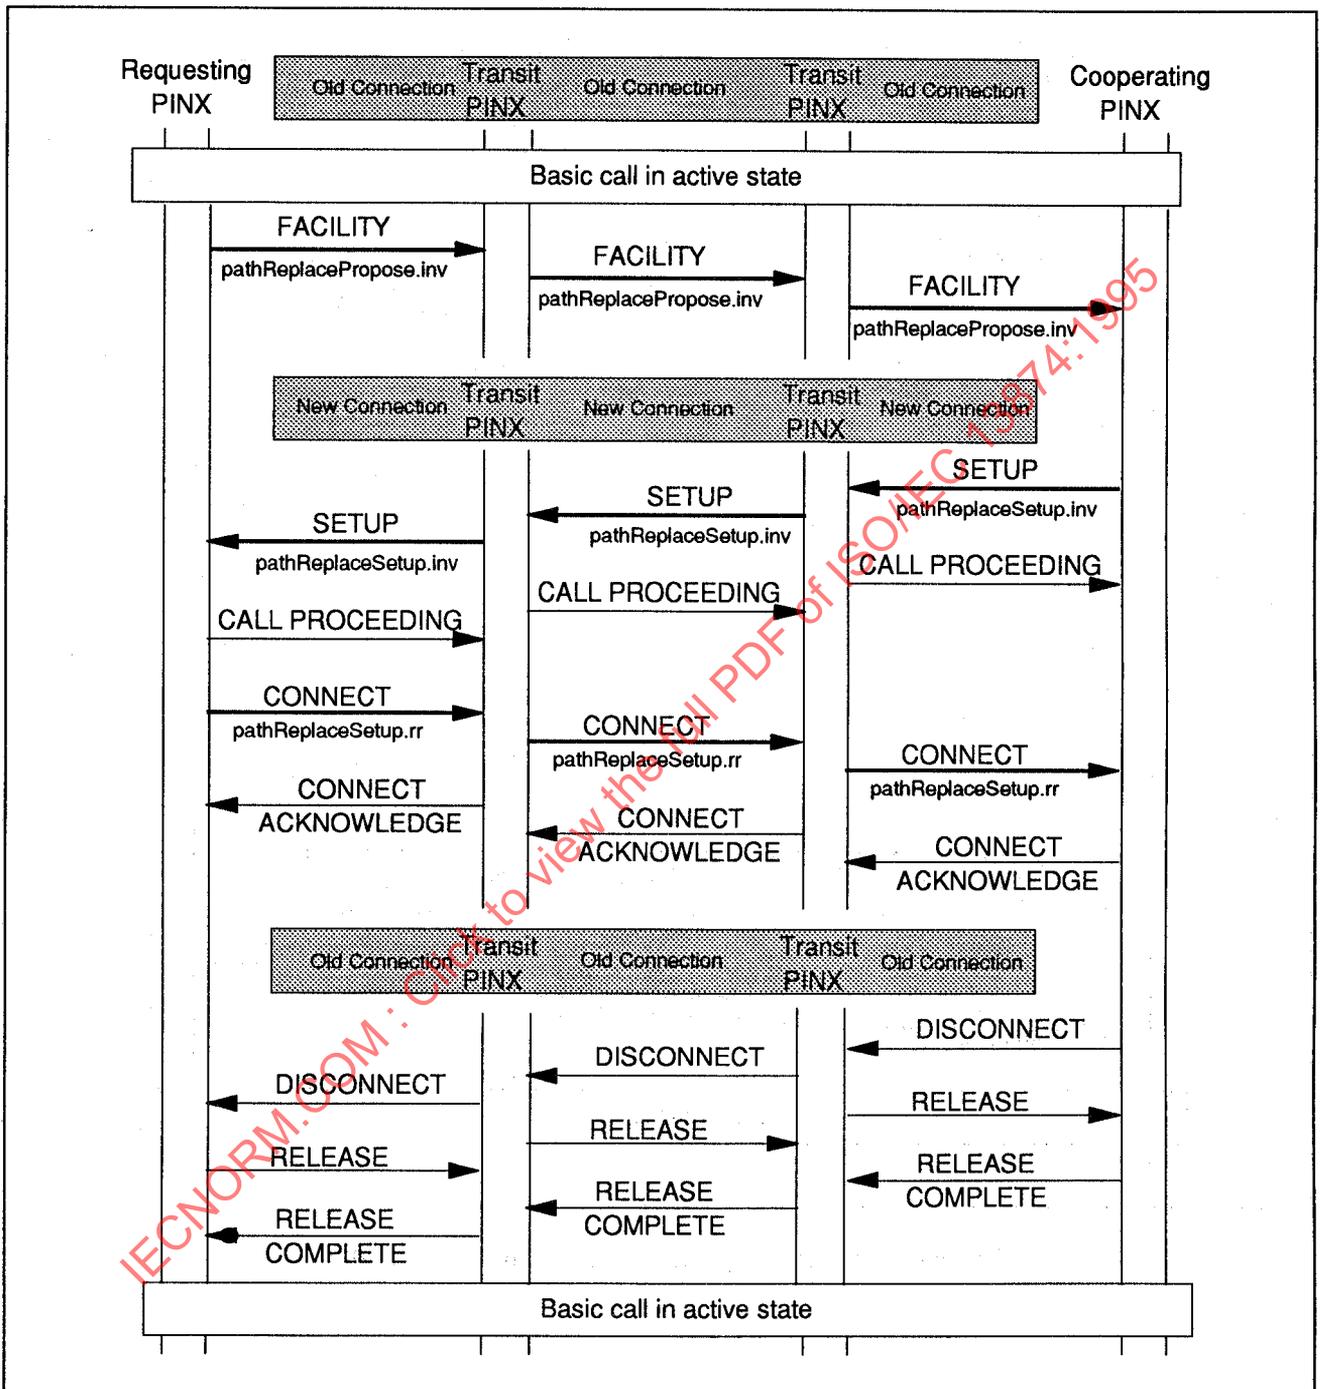


Figure C.1 - Message sequence for normal operation of ANF-PR

C.2 Example message sequence for case of congestion encountered at Transit PINX

Figure C.2 shows an example of the operation of ANF-PR for the case where a Transit PINX on the new connection is unable to proceed with connection establishment, e.g., because of congestion. Consequently ANF-PR fails.

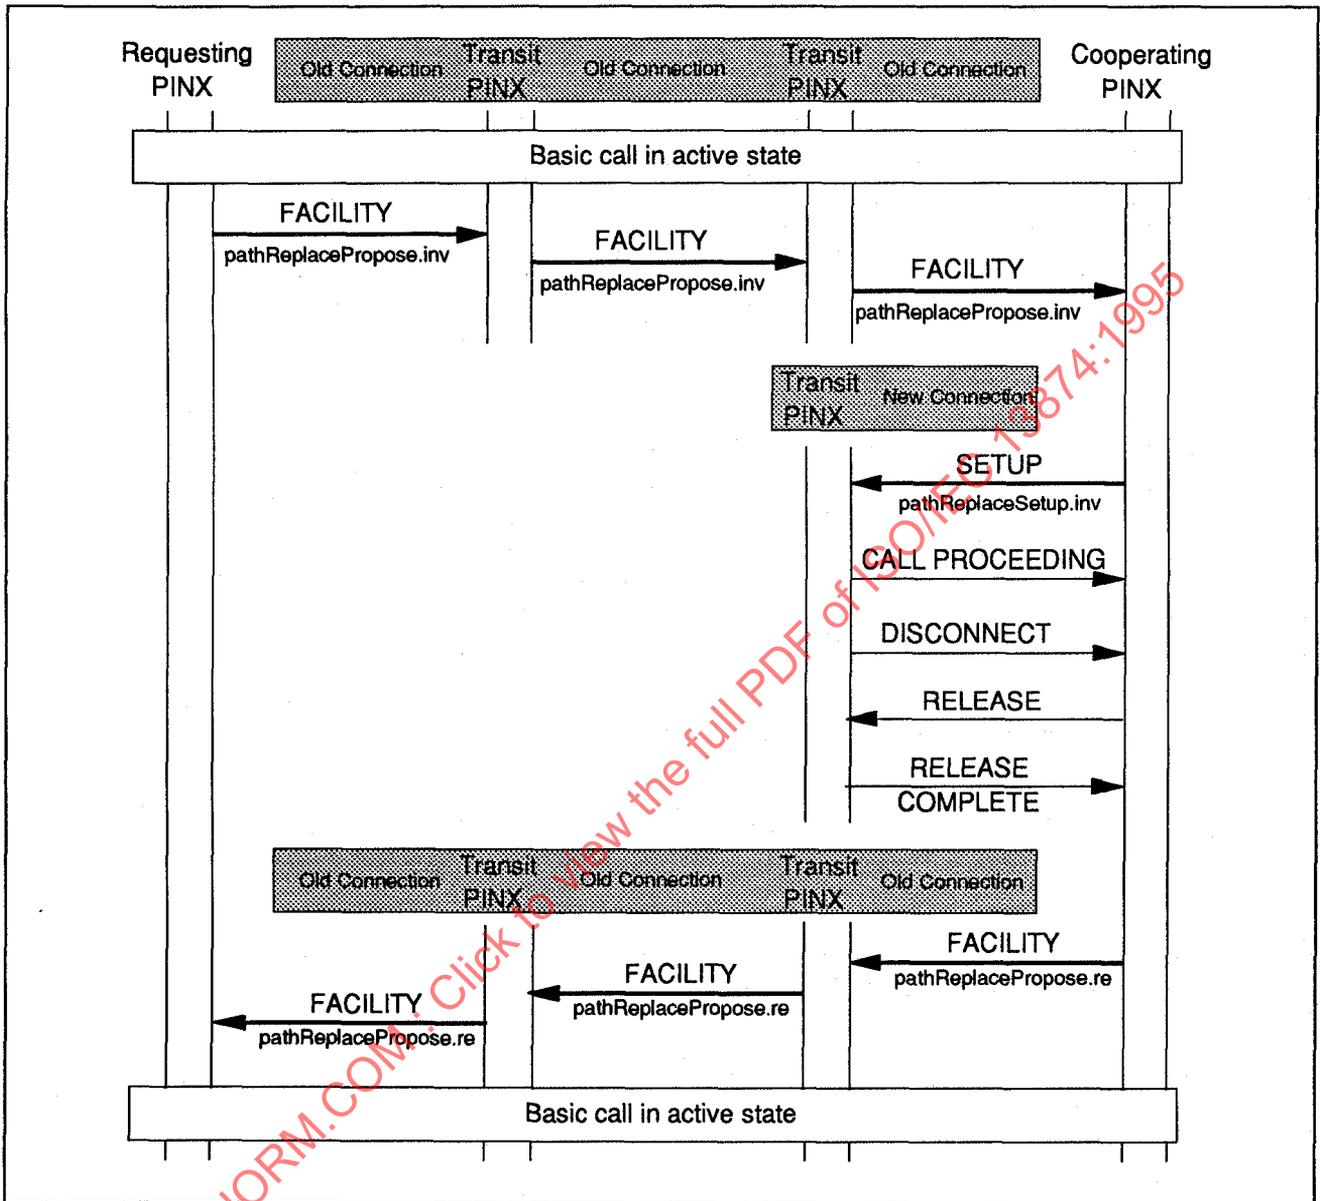


Figure C.2 - Message sequence for congestion case of ANF-PR