

---

---

**Radiofrequency identification of  
animals —**

**Part 4:  
Evaluation of performance of RFID  
transceivers conforming with ISO  
11784 and ISO 11785**

*Identification des animaux par radiofréquence —*

*Partie 4: Évaluation de la performance des émetteurs-récepteurs  
RFID conformes à l'ISO 11784 et à l'ISO 11785*

STANDARDSISO.COM : Click to view the full PDF of ISO 24631-4:2017



STANDARDSISO.COM : Click to view the full PDF of ISO 24631-4:2017



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
Foreword .....	iv
Introduction .....	v
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Conformance</b> .....	<b>3</b>
<b>5 Abbreviated terms</b> .....	<b>3</b>
<b>6 Application</b> .....	<b>4</b>
<b>7 Test procedures</b> .....	<b>5</b>
7.1 Test apparatus .....	5
7.2 Test conditions .....	5
7.3 Measurement of reading distance diagram .....	5
7.3.1 Purpose .....	5
7.3.2 Transponder orientation .....	5
7.3.3 Test geometry .....	6
7.3.4 Procedure .....	7
7.4 Measurement of transceiver response time .....	7
7.4.1 Purpose .....	7
7.4.2 Test geometry .....	8
7.4.3 Procedure .....	8
<b>Annex A (normative) Test application form (ISO 24631-4)</b> .....	<b>9</b>
<b>Annex B (normative) Transponder emulation circuit (TEC) design specifications (ISO 24631-4)</b> .....	<b>10</b>
<b>Annex C (informative) Example of distance diagram (ISO 24631-4)</b> .....	<b>14</b>
<b>Bibliography</b> .....	<b>15</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 19, *Agricultural electronics*.

This second edition cancels and replaces the first edition (ISO 24631-4:2009), which has been technically revised.

The main change to the previous edition is as follows:

- [Figure C.1](#) has been updated.

A list of all parts in the ISO series can be found on the ISO website.

## Introduction

ISO has appointed a registration authority (RA) competent to register manufacturer codes used in the radiofrequency identification (RFID) of animals in accordance with ISO 11784 and ISO 11785.

The registration authority for ISO 11784 and ISO 11785 can found under:

[http://www.iso.org/iso/home/standards\\_development/list\\_of\\_iso\\_technical\\_committees/maintenance\\_agencies.htm](http://www.iso.org/iso/home/standards_development/list_of_iso_technical_committees/maintenance_agencies.htm)

This document deals with the performance of RFID transceivers. Measurements are made using transponder emulation circuits, ensuring that the transceiver testing is always performed against the same, known stimuli.

STANDARDSISO.COM : Click to view the full PDF of ISO 24631-4:2017

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 24631-4:2017

# Radiofrequency identification of animals —

## Part 4:

# Evaluation of performance of RFID transceivers conforming with ISO 11784 and ISO 11785

## 1 Scope

This document provides the means of evaluating the performance of ISO 11784- and ISO 11785-conformant RFID (radiofrequency identification) transceivers used in the individual identification of animals.

The test procedures specified in this document are recognized by the Federation of European Companion Animals Veterinary Association (FECAVA) and World Small Animal Veterinarian Association (WSAVA) and, as such, can be applied also to companion animals.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3166-1, *Codes for the representation of names of countries and their subdivisions — Part 1: Country codes*

ISO 11784, *Radio frequency identification of animals — Code structure*

ISO 11785:1996, *Radio frequency identification of animals — Technical concept*

ISO 24631-2, *Radiofrequency identification of animals — Part 2: Evaluation of conformance of RFID transceivers with ISO 11784 and ISO 11785*

ISO 24631-5, *Radio frequency identification of animals — Part 5: Procedure for testing the capability of RFID transceivers of reading ISO 11784 and ISO 11785 transponders*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

### 3.1

#### accreditation

third-party attestation related to a conformity assessment body conveying formal demonstration of its competence to carry out specific conformity assessment tasks

[SOURCE: ISO/IEC 17000]

**3.2**

**registration reference number**

number issued to the manufacturer of a registered transceiver by the registration authority

EXAMPLE ISO 24631-2 2017-02-001

Note 1 to entry: It comprises the reference of the International Standard for which registration is made, the year of issue (4 digits), the type of device tested ("02" for transceivers according to this document) and the running number (3 digits) referencing the transceivers tested successfully during that year.

**3.3**

**country code**

three-digit numeric code representing a country in accordance with ISO 3166-1

**3.4**

**ISO 11784 and ISO 11785 transceiver**

transceiver that reads at least both FDX-B and HDX transponders as defined in ISO 11784 and ISO 11785

**3.5**

**ISO 11784 and ISO 11785 transponder**

radiofrequency identification (RFID) device that transmits its transponder code according to ISO 11784 and ISO 11785 when activated by a transceiver

**3.6**

**manufacturer**

company that submits an application for testing transceivers for conformance with ISO 11784 and ISO 11785

**3.7**

**manufacturer code**

**MFC**

three-digit number granted by the RA to a manufacturer under the conditions set forth in ISO 24631-1:2017, Annex E, whose range and placement within the code structure are in accordance with ISO 11784

Note 1 to entry: Only one manufacturer code is granted to the same manufacturer.

**3.8**

**RA-recognized test centre**

accredited test centre meeting the criteria of the registration authority

**3.9**

**RA-registered transponder**

transponder registered by the registration authority

**3.10**

**reference transponder**

transponder used to test a transceiver, selected from the different RA-registered transponder types

**3.11**

**registration authority**

**RA**

entity that approves test laboratories and issues and registers manufacturer and product codes

**3.12**

**transceiver**

device used to communicate with the transponder

**3.13****transponder**

radiofrequency identification (RFID) device that transmits its stored information when activated by a transceiver and that may be able to store new information

Note 1 to entry: See ISO 24631-1 for definitions of the main types.

**3.14****transponder code**

code programmed in the transponder, as defined in ISO 11784 and in ISO 11785

**3.15****transponder emulation circuit**

circuit used to substitute for a transponder, built from well-defined components and an arbitrary waveform generator (AWG)

**3.16****transceiver under test****TUT**

mobile transceiver that has passed conformance testing in accordance with ISO 24631-2

**4 Conformance**

The procedure in this document includes options for RA registration of the transceiver equipment and shall be followed if a company wants RA registration of a transceiver.

Test centres recognized by the registration authority (RA) shall perform transceiver testing using the procedures specified in [Clause 7](#) and shall report the test results to the RA. These tests are in accordance with the technical requirements of ISO 11784 and ISO 11785. The manufacturer shall apply for transceiver testing by completing and submitting to the RA the application form provided in [Annex A](#). Only transceivers that have been issued a registration reference number by the RA (see ISO 24631-2 and ISO 24631-5) may be tested. A transceiver test report shall be accorded to a manufacturer whose product has been tested according to [Clause 7](#).

**5 Abbreviated terms**

AWG	advanced waveform generator
FDX-B	full duplex communication protocol (conforming to ISO 11785, excluding protocols mentioned in ISO 11785:1996, Annex A)
FSK	frequency shift keying
HDX	half duplex communication protocol
MFC	manufacturer code
NP0	negative positive zero
NRZ	non-return to zero
RA	registration authority
RF	radiofrequency

RFID	radiofrequency identification
TEC	transponder emulation circuit
TUT	transceiver under test

## 6 Application

**6.1** The application submitted to the RA for testing the performance of a transceiver shall consist of a cover letter and the application form provided in [Annex A](#). The RA shall confirm receipt of the application to the manufacturer within two weeks. By signing the application form, the manufacturer agrees to fulfil the provisions of this document.

**6.2** Test centres that are ISO/IEC 17025-accredited for the measurements defined in this document can be recognized by the RA.

**6.3** The RA maintains a list of recognized test centres from which the manufacturer may choose the centre that will test his transceiver product.

**6.4** A performance test application alone shall only be accepted for a transceiver type and model already issued a registration reference number by the RA. If a transceiver product does not have a registration reference number, the test shall only be performed in combination with transceiver conformance testing in accordance with ISO 24631-2 or ISO 24631-5.

**6.5** The manufacturer shall send a transceiver and all the necessary accessories to the RA-recognized test centre. It is permitted to request the RA-recognized test centre to use a transceiver already used for conformance testing. The manufacturer shall ensure that the equipment is able to display or store the transponder codes during testing.

**6.6** The RA-recognized test centre shall verify the transceivers using the test procedures specified in [Clause 7](#).

**6.7** The RA-recognized test centre shall prepare a confidential report of the results and shall send two copies (or an electronic version) of the report to the chairman of the RA.

**6.8** The RA chairman shall inform the manufacturer of the test results in a letter together with a copy of the report.

**6.9** The tested transceivers shall be kept by the RA-recognized test centre, under the ownership of the RA.

**6.10** The RA shall make publicly available the main results of the test, including a photograph of the registered transceiver. A manufacturer shall have the right to refuse that the results be made publicly available or to request their withdrawal from public availability. In the first case, the manufacturer shall send a request to the RA not to publish, within two weeks of having received the test report. In the second, the manufacturer shall send a request to the RA and the RA shall remove the results from public availability within four weeks of receipt of this request.

**6.11** The RA shall do everything within its power to protect the integrity of this procedure with regard to ISO 11784 and ISO 11785.

## 7 Test procedures

### 7.1 Test apparatus

#### 7.1.1 Transponder emulation circuit (TEC), designed in accordance with [Annex B](#).

The TEC shall be used in the place of a FDX-B or HDX transponder in order to guarantee comparability of results between the different tests and ensure that results will be reproducible in every laboratory, whenever needed. Built from standard components, it also serves to avoid deviations that can occur due to progress in technology or the spread in production of commercially available transponders.

### 7.2 Test conditions

The test conditions shall be as follows.

Ambient temperature: minimum 15 °C and maximum 30 °C

Ambient humidity: minimum 40 % RH and maximum 80 % RH

Ambient noise floor: <70 dB $\mu$ V/m (bandwidth 2,7 kHz)  
80 kHz to 200 kHz

The ambient noise is measured with a spectrum analyser and calibrated antenna in 80 kHz to 200 kHz band before measurements. Special attention shall be given to spurious emissions which can be emitted, for example, by insufficiently shielded computer monitors. The electromagnetic test conditions of the measurements shall be checked by carrying out the measurements both with and without a transponder in the field.

### 7.3 Measurement of reading distance diagram

#### 7.3.1 Purpose

The purpose of this test is to determine the reading test distance as a function of the transponder coil position relative to the transceiver antenna, and also called *antenna pattern*. It is applied to the following paths:

- transceiver to transponder (downlink), which is the activation field strength parameter;
- transponder to transceiver (uplink), which is the sensitivity parameter.

#### 7.3.2 Transponder orientation

The *optimum* orientation for the different antenna types are as follows.

##### a) TUT with loop antenna

- 1) Air-coil transponder, as used with the TEC: the transponder shall be orientated parallel to the antenna plane.
- 2) Ferrite-coil transponder: it shall be orientated perpendicular to the antenna plane.

##### b) TUT with ferrite antenna

- 1) Air-coil transponder, as used with the TEC: the antenna plane shall be orientated perpendicular to the axis of the ferrite antenna of the TUT.
- 2) Ferrite-coil transponder: measurements shall be performed in the optimum orientation, in which the transponder is orientated in parallel with the antenna axis of the TUT's ferrite coil,

as well as in a *minimum* orientation, in which the transponder is oriented perpendicular to the optimum orientation.

**7.3.3 Test geometry**

The measurements shall be performed on a test plane. Within that plane, the origin or reference point is well-defined in respect to the housing of the transceiver antenna.


- a) Transceiver loop antenna: the test plane shall be perpendicular to the antenna.
- b) Ferrite antenna: the axis of the ferrite shall lie within the test plane.

Polar coordinates shall be applied for the position of the air-coil of the TEC. The measurements shall be taken in 10° steps, as shown in [Figure 1](#).

The TEC coil shall be aligned, as appropriate, in accordance with [7.3.2](#).


For a symmetric antenna design, only 10 measurements are required to define the complete three-dimensional reading range of the transceiver.

However, if the transceiver antenna has been designed so as not to emit a symmetric field around its axis, or if it has a non-symmetric sensitivity characteristic, 20 measurements shall be performed in two orthogonal test planes, such as X-Y and X-Z. See [Figures 1](#) and [2](#).

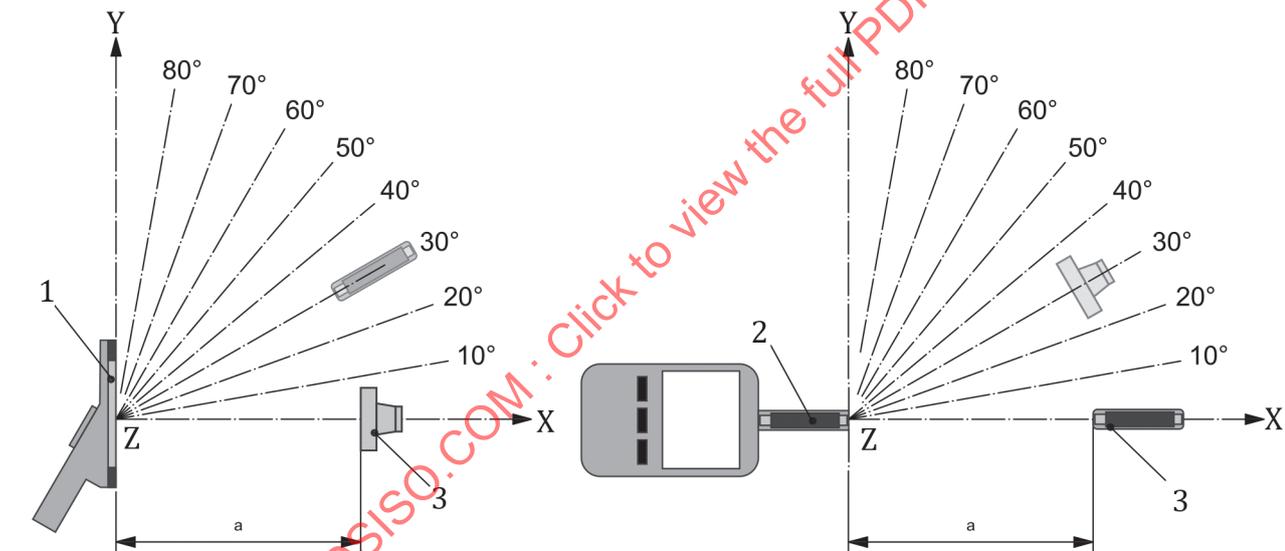

- Key**
- 1 TUT transceiver antenna air coil
  - 2 TUT transceiver antenna ferrite coil
  - 3 TEC air coil and ferrite coil
  - a Distance measurement.

**Figure 1 — X-Y measurement plane of transceiver vs. TEC**

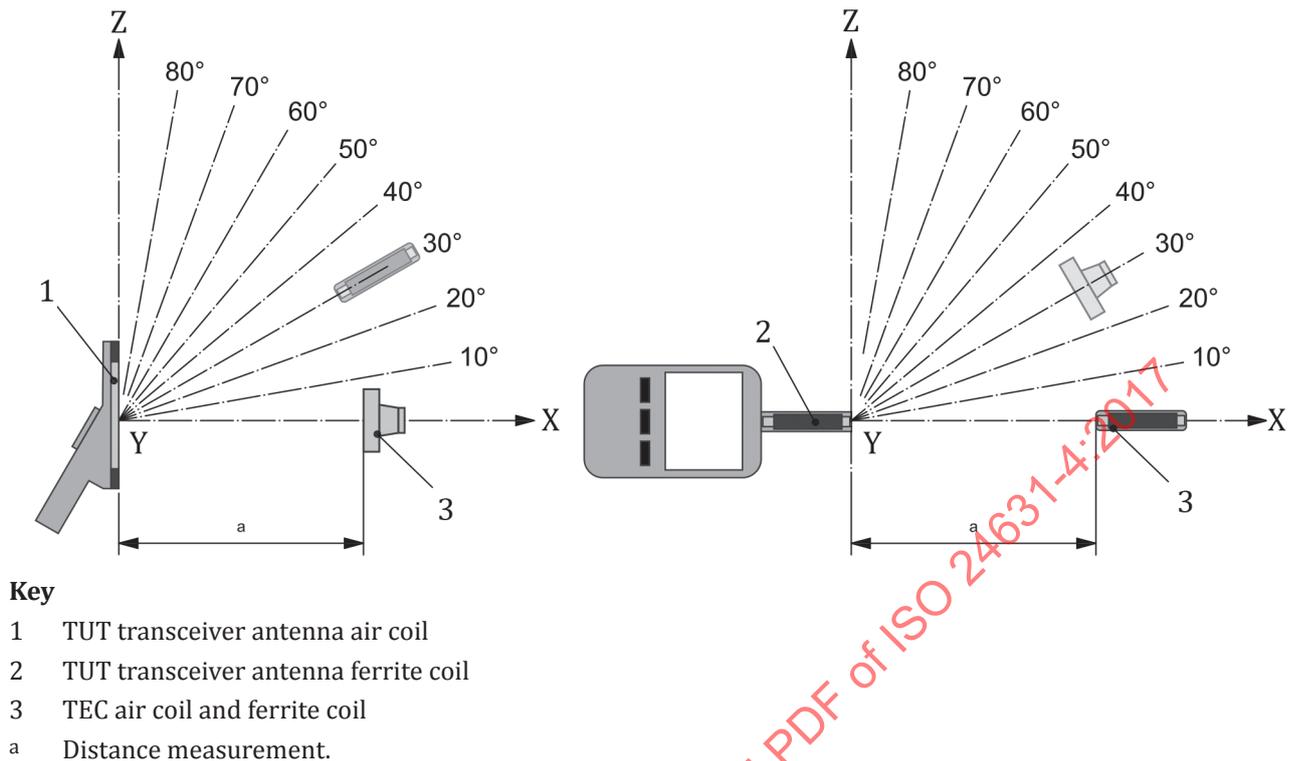

**Figure 2 — X-Z measurement plane of transceiver vs. TEC**

### 7.3.4 Procedure

The purpose of this test is to find a curve that shows the reading distance obtained with the two defined TEC. In each direction, determine the reading distance when the transceiver is triggered for a reading period of 1 s when within that time period the reading was successful. The envelope of the maximum reading distances reflects a transceiver's performance. If the number of test points is not sufficient to draw the envelope curve, test additional direction points between the 10° steps. For an example, see [Annex C](#).

Record the following for each measurement.

- Test type: type of transponder (FDX-B, HDX)
- Test plane: orientation of plane relative to housing of TUT; reference point, X-Y or X-Z
- Test direction: 0° to 90°
- Measured maximum distance: in centimetres
- Ambient temperature: in degrees Celsius
- Ambient humidity (relative value): as a percentage

## 7.4 Measurement of transceiver response time

### 7.4.1 Purpose

The purpose of this measurement is to determine the time elapsed between pressing the trigger at the transceiver and the appearance of the successfully read number on the display.

#### 7.4.2 Test geometry

The TEC shall be placed at the axis of the reader antenna, with the transponder's air coil orientated parallel to the reader antenna coil. The distance from the reader antenna shall be 70 % of the maximum reading distance (see [7.3](#)).

#### 7.4.3 Procedure

Trigger the TUT manually. An auxiliary receiver shall pick up the downlink signal from the transceiver. This receiver shall trigger a clock. The appearance of the successful reading shall be detected by an optical sensor, which shall stop the clock.

No separate output is required at the reader.

Alternatively, if the TUT is equipped with a suitable data interface, this may be used.

Record the following for each measurement.

- Distance between TEC air coil and TUT antenna housing
- Time elapsed between detection of downlink signal and appearance on-screen of correct code; 30 samples shall be taken and the average given in the test protocol
- Ambient temperature in degrees Celsius
- Ambient humidity (relative value) as a percentage

See [Annex B](#) for the test set-up parameters (threshold voltage at the AWG trigger).

STANDARDSISO.COM : Click to view the full PDF of ISO 24631-4:2017

## Annex A (normative)

### Test application form (ISO 24631-4)

<b>RA registration date:</b>		<b>Date:</b>	
<b>Company name:</b>		<b>Address:</b>	
<b>Device type:</b>	Portable reader with integrated antenna	<input type="checkbox"/>	
	Portable reader with external antenna	<input type="checkbox"/>	
	Portable reader with integrated and optional external antenna	<input type="checkbox"/>	
	Other	<input type="checkbox"/>	
The document of a notified body stating conformance with EN 300-330 document is enclosed			<input type="checkbox"/>
<b>Device name:</b>		<b>RA registration reference number:</b>	
<b>Device serial number:</b>			
<b>Physical characteristics:</b>			
Dimensions (l × w × h):		Mass:	
Separate antenna:	No <input type="checkbox"/> Yes <input type="checkbox"/>		
Communication (not to be tested)	No <input type="checkbox"/> Yes <input type="checkbox"/>	If yes, provide specifications:	
<b>Photograph of the device:</b>			
<b>Date:</b>	<b>Name of contact person:</b>	<b>Position:</b>	

## Annex B (normative)

### Transponder emulation circuit (TEC) design specifications (ISO 24631-4)

#### B.1 Reference air coil

See [Table B.1](#) for the values of the component characteristics. The reference air coil can be supplied by the manufacturer of the corresponding coil manufacturer.


**Table B.1 — Reference air coil component characteristics values**

Characteristic	Value	Description/comment
$L_S$	6,5 mH	Reference air coil inductance
$Q_L$	30	Reference air-coil Q (quality) factor
Inner coil diameter	15,7 mm	Reference air-coil dimension
Outer coil diameter	18,4 mm	Reference air-coil dimension
Coil thickness	a	Reference air-coil dimension
Coil wire	4 mm × 0,8 mm	Reference air coil component
$C_L$	<5 pF	Reference air-coil stray capacitance
a To be decided.		

#### B.2 FDX-B TEC

##### B.2.1 General

The FDX-B transponder emulation circuit can be built from standard components that are commercially available. The circuit diagram is shown in [Figure B.1](#) and the component characteristic values are specified in [Table B.2](#).

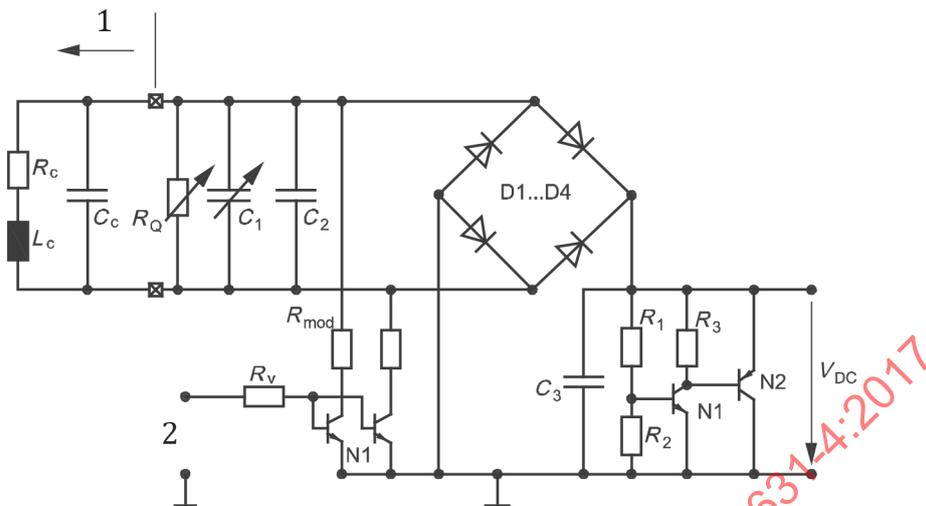
**Key**

- 1 coil  
 2 antenna pattern  
 D1...D4 diodes, 1N4148  
 N1 transistor, BC 546B  
 N2 transistor, BC 556B  
 NOTE See [Table B.2](#).

**Figure B.1 — FDX-B transponder emulation circuit diagram**
**Table B.2 — TEC component values**

Component	Value	Description/comment
$C_1$	3,5 pF to 22 pF	Trimmer for adjusting resonance frequency
$C_2$	200 pF (2//100)	Use NPO capacitors
$C_3$	10 nF	
$R_1$	430 k $\Omega$	
$R_2$	51 k $\Omega$	
$R_3$	20 k $\Omega$	
$R_{MOD}$	1,8 k $\Omega$	
$R_V$	1 k $\Omega$	
$R_Q$	100 k $\Omega$ to 220 k $\Omega$	Trimmer for a resulting $Q_{LC}$ of 30

**B.2.2 Set up and trimming procedure for the FDX-B emulation**

Place the TEC in a continuous RF field and measure the voltage,  $V_{DC}$ , with a high-impedance (>10 M $\Omega$ ) voltmeter. The distance between the transceiver coil and the reference air coil shall be fixed so that a  $V_{DC}$  value of around 2 V is obtained. Adjust trimmer,  $R_Q$ , for a resulting quality factor,  $Q_{LC}$ , of 30 and trimmer  $C_1$  to obtain the maximum  $V_{DC}$  during the resonance frequency trimming.

The aim is to simulate the worst-case situation for the FDX-B reading distance, corresponding to operation at close to minimum activation field strength. This minimum field strength generates a threshold voltage at  $V_{DC}$ . The field strength parameter is defined as a *reading distance* curve whenever the threshold voltage is reached.