
Road vehicles — Fuse-links —

Part 10:

**Fuse-links with tabs Type L (high
current miniature)**

Véhicules routiers — Liaisons fusibles —

Partie 10: Liaison fusible à languette type L (courant fort miniature)

STANDARDSISO.COM : Click to view the full PDF of ISO 8820-10:2020



STANDARDSISO.COM : Click to view the full PDF of ISO 8820-10:2020



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Marking, labelling and colour coding	1
5 Tests and requirements	2
5.1 General	2
5.2 Test sequence	2
5.3 Test cable sizes	3
5.4 Voltage drop	3
5.4.1 Tests	3
5.4.2 Requirements	5
5.5 Transient current cycling	5
5.5.1 Test	5
5.5.2 Requirements	5
5.6 Environmental conditions	6
5.7 Operating time rating	6
5.7.1 Test	6
5.7.2 Requirements	6
5.8 Current steps	6
5.8.1 Test	6
5.8.2 Requirement	6
5.9 Breaking capacity	6
5.9.1 Test	6
5.9.2 Requirement	7
5.10 Strength of terminals	7
5.10.1 Test	8
5.10.2 Requirements	8
5.11 Temperature rise	8
6 Dimensions	9
6.1 Designation example	10
Annex A (informative) Temperature rise test	11
Bibliography	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 32, *Electrical and electronic components and general system aspects*.

This second edition cancels and replaces the first edition (ISO 8820-10:2015), which has been technically revised.

The main changes compared to the previous edition are as follows:

- in [5.7](#), [Table 5](#) has been modified,
- in [5.9](#), [Figure 3](#) has been corrected,
- in [5.3](#), [Table 3](#) has been modified,
- in [Clause 6](#), [Figure 5](#) has been corrected,
- in [Clause 6](#), [Table 7](#) has been modified,
- [Annex A](#) has been revised.

A list of all parts in the ISO 8820 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Road vehicles — Fuse-links —

Part 10:

Fuse-links with tabs Type L (high current miniature)

1 Scope

This document specifies fuse-links with tabs (blade-type) Type L (high current miniature) for use in road vehicles. It establishes, for this fuse-link type, the rated current, test procedures, performance requirements and dimensions.

This document is applicable for fuse-links with a rated voltage of 32 V, a current rating of ≤ 60 A and a breaking capacity of 1 000 A intended for use in road vehicles.

This document is intended to be used in conjunction with ISO 8820-1 and ISO 8820-2. The numbering of its clauses corresponds to that of ISO 8820-1 whose requirements are applicable, except where modified by requirements particular to this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 8820-1, *Road vehicles — Fuse-links — Part 1: Definitions and general test requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8820-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Marking, labelling and colour coding

See ISO 8820-1 and [Table 1](#).

Table 1 — Fuse-link colour coding

Rated current, I_R A	Colour
20	yellow
25	white
30	green
35	dark green

Table 1 (continued)

Rated current, I_R A	Colour
40	orange
50	red
60	blue

5 Tests and requirements

5.1 General

In addition to carrying out the test procedures in accordance with ISO 8820-1, the following criteria shall apply.

Tests shall be performed following the test sequences in [Table 2](#).

The test fixtures for electrical tests shall be designed in accordance with [Figure 1](#). The connection resistance shall be 0,5 mΩ maximum for Type L fuse links to ensure the proper function of the test fixture.

Fuse-links according to this part of ISO 8820 shall provide for visible evidence of an open fuse-element.

5.2 Test sequence

Table 2 — Test sequence

No	Test	Clause/subclause	Sample groups							
			1	2	3	4	5	6	7	
1	Dimensions	6	X	X	X	—	—	—	—	
2	Marking, labelling and colour coding	4	X	X	X	X	X	X	X	
3	Fuse-link voltage drop	5.4	X	X	X	—	—	—	—	
4	Strength of terminals	5.10	X	X	X	—	—	—	—	
5	Environmental conditions	Climatic load	—	—	—	X	—	—	—	
6		Chemical load	—	—	—	—	X	—	—	
7		Mechanical load	—	—	—	—	—	X	—	
8	Transient current cycling	5.5	—	—	—	—	—	—	X	
9	Fuse-link voltage drop	5.4	—	—	—	X	X	X	X	
10	Current steps	5.8	—	—	X	—	—	—	—	
11	Breaking capacity	5.9	X	—	—	—	—	—	—	
12	Operating time rating test	5.7	I_R^a	—	X	—	X	X	X	X
			$1,35 I_R$	—	Y	—	Y	Y	Y	Y
			$1,60 I_R$	—	Y	—	Y	Y	Y	Y
			$2,00 I_R$	—	Y	—	Y	Y	Y	Y
			$3,50 I_R$	—	Y	—	Y	Y	Y	Y
			$6,00 I_R$	—	Y	—	Y	Y	Y	Y

Each sample group shall contain a minimum of 10 fuse-links for each rated current.

For the operating time rating tests marked “Y”, the sample groups 2, 4, 5, 6 and 7 shall be divided equally. These fuse-links are intended to be subjected to a single operating time rating test only.

NOTE A dash (—) indicates that the test is not required.

^a Not required for 60 A fuse-link.

Table 2 (continued)

No	Test	Clause/subclause	Sample groups						
			1	2	3	4	5	6	7
1	Dimensions	6	X	X	X	—	—	—	—
2	Marking, labelling and colour coding	4	X	X	X	X	X	X	X
3	Fuse-link voltage drop	5.4	X	X	X	—	—	—	—
4	Strength of terminals	5.10	X	X	X	—	—	—	—
13	Strength of terminals	5.10	X	X	X	X	X	X	X

Each sample group shall contain a minimum of 10 fuse-links for each rated current.

For the operating time rating tests marked “Y”, the sample groups 2, 4, 5, 6 and 7 shall be divided equally. These fuse-links are intended to be subjected to a single operating time rating test only.

NOTE A dash (—) indicates that the test is not required.

^a Not required for 60 A fuse-link.

5.3 Test cable sizes

Test cable sizes shall be as given in Table 3. All tests for a particular fuse-link rating shall be performed using the same cable size.

Test cable sizes are specified to allow comparative fuse-link tests to be carried out. The cable size specified herein does not necessarily indicate the size of cable to be used in the vehicle application.

Table 3 — Test cable sizes


Rated current, I_R A	Conductor cross-sectional area ^a mm ²	Length mm
20	1,5	>450
25	2,5	
30		
35	4,0	
40		
50	6,0	
60		

^a Conductor material according to ISO 6722-1.

5.4 Voltage drop

5.4.1 Tests

The voltage drop U_{AB} shall be measured at points A and B across the fuse-link tabs as shown in Figure 1

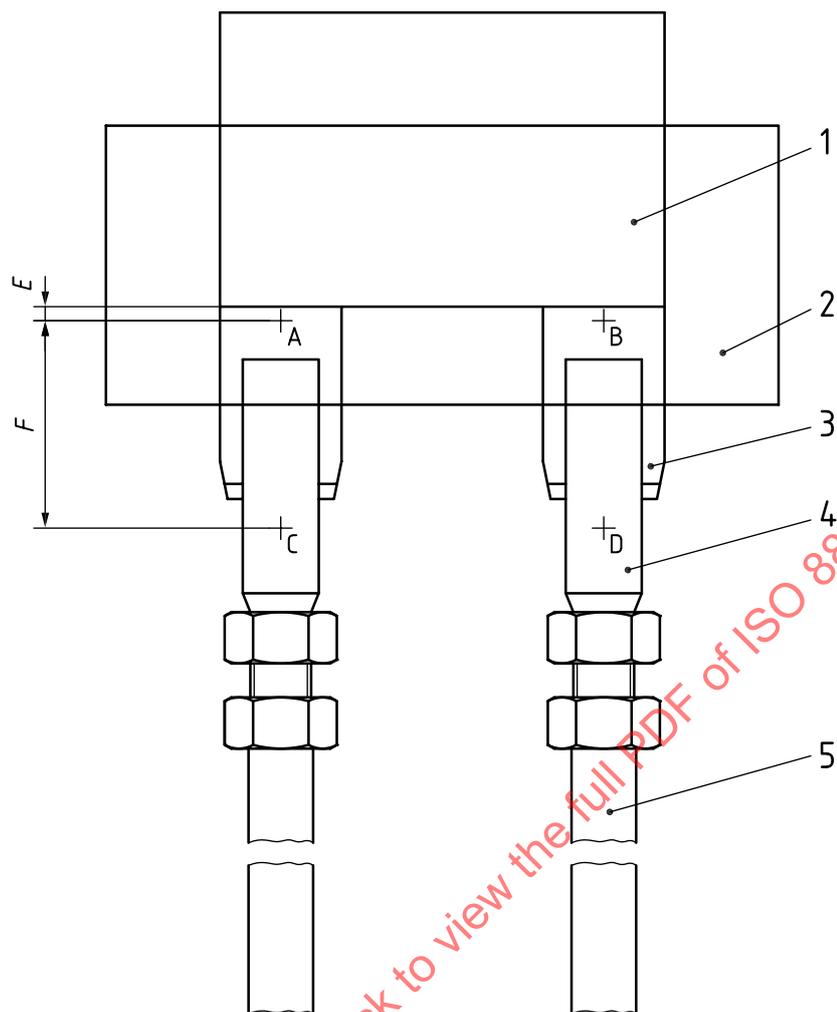

Key

- 1 fuse-link
- 2 test fixture
- 3 fuse blade
- 4 test clip (cantilevered contact system, receptacle to accept tabs as defined in [Table 7](#))
- 5 cable size according to [Table 3](#)
- E $(1,5 \pm 0,5)$ mm
- F $(15,5 \pm 1)$ mm

NOTE Points A and B are the measuring points for the voltage drop. Points A-C and B-D are the measuring points for connection resistance.

Figure 1 — Test schematic

5.4.2 Requirements

See [Table 4](#).


Table 4 — Voltage drop

Rated current, I_R A	Maximum voltage drop, U_{AB} mV
20	125
25	
30	
35	120
40	
50	
60	

5.5 Transient current cycling

5.5.1 Test

See [Figure 2](#) and ISO 8820-1. At an elapsed time of 0,025 s on-time, the current shall fall to a value between $1,65 I_R$ and $2,5 I_R$. At no time during the first 4,5 s of each cycle the steady state current shall fall below $0,9 I_R$.

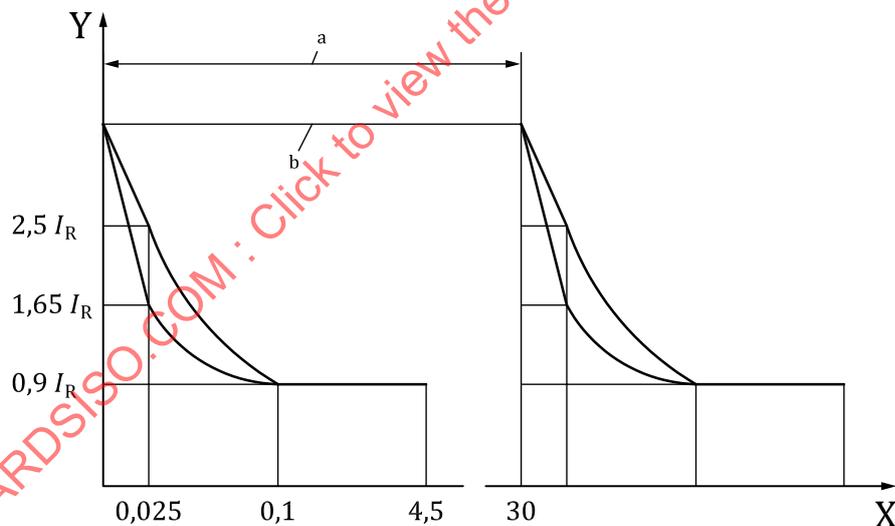

Key

- X time (s)
- Y current
- a One cycle.
- b $(5,6 \dots 6) I_R$

Figure 2 — Transient current cycling

5.5.2 Requirements

See ISO 8820-1.

5.6 Environmental conditions

See ISO 8820-1.

5.7 Operating time rating

5.7.1 Test

See ISO 8820-1. For I_R the test duration is 100 h.

5.7.2 Requirements

See [Table 5](#).

After activation, the current through the fuse-link shall not exceed 0,5 mA at the rated voltage of the fuse-link.

Table 5 — Operating times

Test current A	Operating time s	
	min.	max.
I_R^a	360 000	∞
$1,35 I_R$	60	900
$1,6 I_R$	10	200
$2,0 I_R$	2	60
$3,5 I_R$	0,2	7,0
$6 I_R$	0,04	1,0

^a Not required for 60 A fuse-link.

5.8 Current steps

5.8.1 Test

See ISO 8820-1.

5.8.2 Requirement

See ISO 8820-1. After activation, the current through the fuse-link shall not exceed 0,5 mA at the rated voltage of the fuse-link.

5.9 Breaking capacity


5.9.1 Test

See ISO 8820-1.

Test at 1 000 A with cable sizes as shown in [Table 3](#).

Use appropriate test dummy according to [Figure 3](#).

Dimensions in millimetres

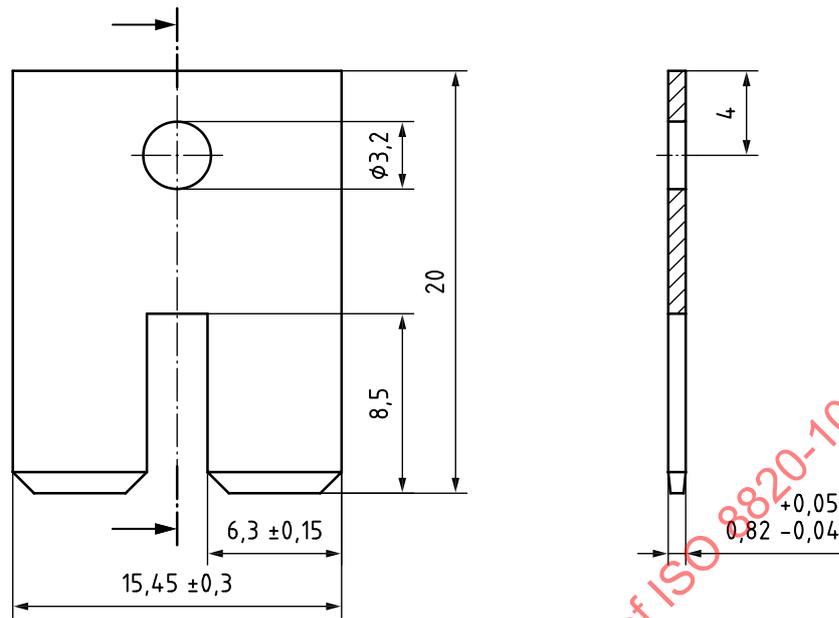

Where not specified in the figure, the common tolerances shall be in accordance with tolerance class m as specified in ISO 2768-1.

Figure 3 — Test dummy for Type L fuse-links

5.9.2 Requirement

See ISO 8820-1.


After the test, the current through the fuse-link shall not exceed 0,5 mA at the rated voltage of the fuse-link.

5.10 Strength of terminals

See [Table 6](#).

Table 6 — Terminal forces

F_1 N	F_2 N	F_3 N
70 ± 1	15 ± 1	$7,5 \pm 1$

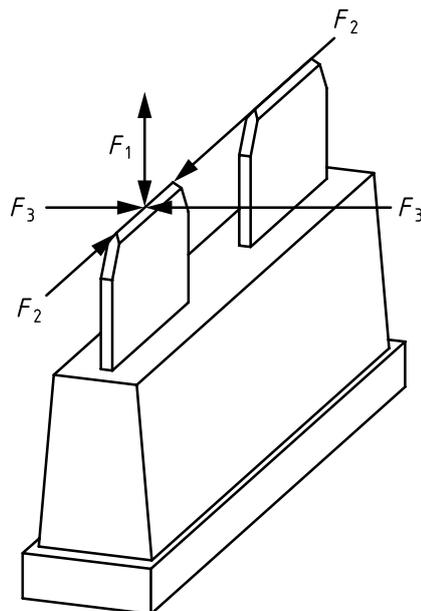

NOTE The arrows indicate the directions of applied forces $F_1 \dots F_3$.

Figure 4 — Application of forces

5.10.1 Test

A force ($F_1 \dots F_3$) shall be applied to each of the tabs of the fuse-link in accordance with [Figure 4](#). The force shall be held for 2 s. The test force shall not be applied abruptly.

5.10.2 Requirements


The deformation of the test sample shall not exceed 0,5 mm. After the test, the insulator shall be intact and the terminals shall not be removed from the insulator.

5.11 Temperature rise

See [Annex A](#).

6 Dimensions

Dimensions in millimetres

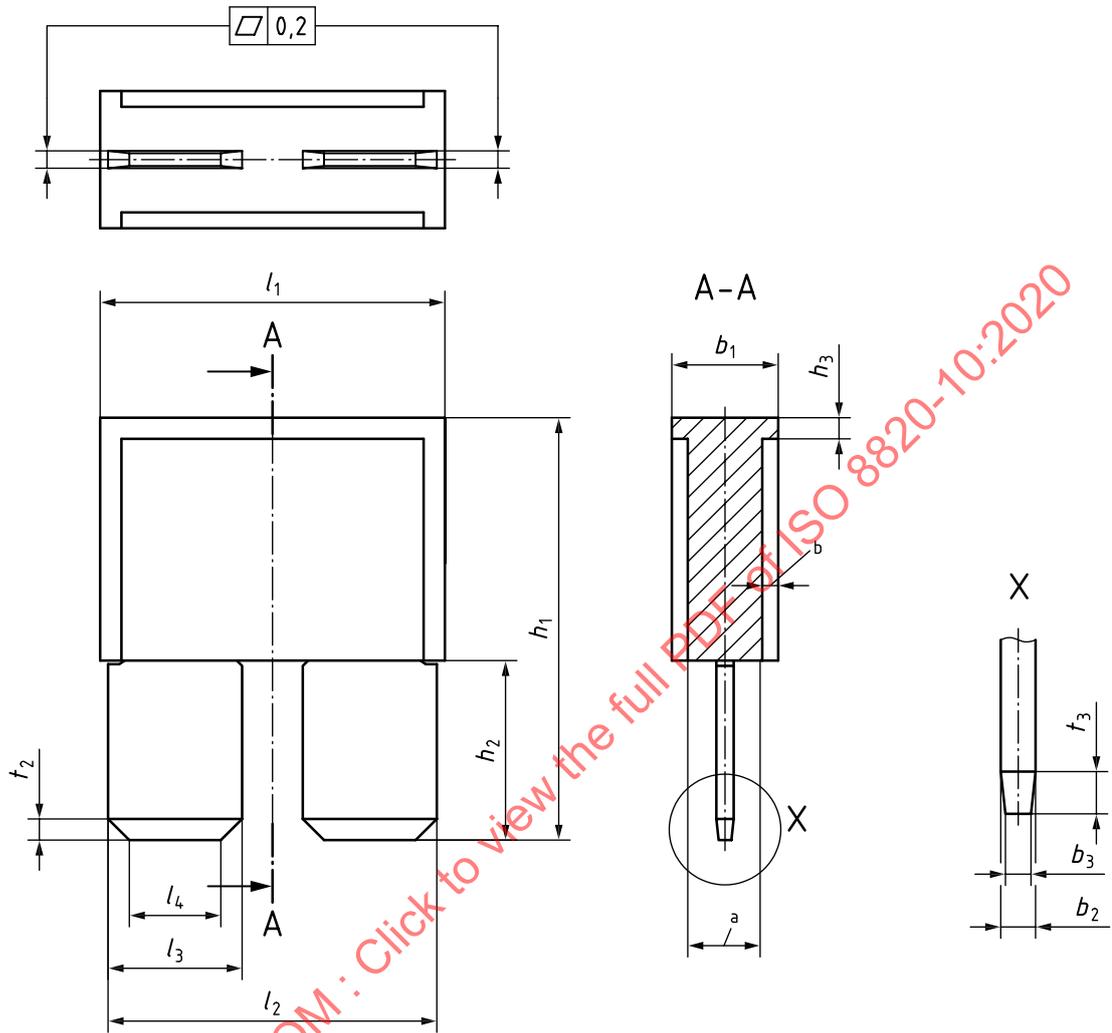

Key

t_2, t_3 taper

a Within the outline of fuse-link housing, the tabs shall be insulated.

b Access area for the extraction tool according to the manufacturer's choice.

Figure 5 — Fuse-link Type L

Table 7 — Dimensions of fuse-links with tabs, Type L

Dimension	Value	Tolerance
l_1	16,2	$\pm 0,3$
l_2	15,45	$\pm 0,3$
l_3	6,3	$\pm 0,2$
l_4	4,3	$\pm 0,5$
b_1	6,5	$\pm 0,3$
b_2	0,82	$\pm 0,05$
b_3	0,6	max.
h_1	19	$\pm 1,5$
h_2	8,5	+0,2 -0,5
h_3	1	$\pm 0,5$

6.1 Designation example

Designation of a fuse-link Type L in accordance with this document for the rated current of 30 A:

Fuse-link ISO 8820 - L - 30