

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

**Information technology equipment – Safety –  
Part 1: General requirements**

**Matériels de traitement de l'information – Sécurité –  
Partie 1: Exigences générales**

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2005 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

### A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: [www.iec.ch/searchpub/cur\\_fut-f.htm](http://www.iec.ch/searchpub/cur_fut-f.htm)

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: [www.iec.ch/webstore/custserv/custserv\\_entry-f.htm](http://www.iec.ch/webstore/custserv/custserv_entry-f.htm)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00



IEC 60950-1

Edition 2.0 2005-12

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

---

**Information technology equipment – Safety –  
Part 1: General requirements**

**Matériels de traitement de l'information – Sécurité –  
Partie 1: Exigences générales**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

PRICE CODE  
CODE PRIX

**XH**

ICS 35.020; 35.260

ISBN 2-8318-8237-0

## CONTENTS

|                                                                            |     |
|----------------------------------------------------------------------------|-----|
| FOREWORD.....                                                              | 8   |
| INTRODUCTION.....                                                          | 10  |
| 0 Principles of safety .....                                               | 10  |
| 0.1 General principles of safety .....                                     | 10  |
| 0.2 Hazards .....                                                          | 11  |
| 0.3 Materials and components .....                                         | 15  |
| 1 General .....                                                            | 16  |
| 1.1 Scope.....                                                             | 16  |
| 1.2 Definitions .....                                                      | 18  |
| 1.3 General requirements .....                                             | 34  |
| 1.4 General conditions for tests .....                                     | 35  |
| 1.5 Components .....                                                       | 40  |
| 1.6 Power interface .....                                                  | 47  |
| 1.7 Markings and instructions .....                                        | 47  |
| 2 Protection from hazards.....                                             | 56  |
| 2.1 Protection from electric shock and energy hazards .....                | 56  |
| 2.2 SELV circuits.....                                                     | 65  |
| 2.3 TNV circuits.....                                                      | 67  |
| 2.4 Limited current circuits.....                                          | 72  |
| 2.5 Limited power sources .....                                            | 73  |
| 2.6 Provisions for earthing and bonding .....                              | 75  |
| 2.7 Overcurrent and earth fault protection in primary circuits .....       | 83  |
| 2.8 Safety interlocks .....                                                | 86  |
| 2.9 Electrical insulation .....                                            | 89  |
| 2.10 Clearances, creepage distances and distances through insulation ..... | 94  |
| 3 Wiring, connections and supply.....                                      | 122 |
| 3.1 General.....                                                           | 122 |
| 3.2 Connection to a mains supply .....                                     | 125 |
| 3.3 Wiring terminals for connection of external conductors .....           | 132 |
| 3.4 Disconnection from the mains supply .....                              | 135 |
| 3.5 Interconnection of equipment .....                                     | 138 |
| 4 Physical requirements .....                                              | 140 |
| 4.1 Stability.....                                                         | 140 |
| 4.2 Mechanical strength.....                                               | 141 |
| 4.3 Design and construction .....                                          | 145 |
| 4.4 Protection against hazardous moving parts .....                        | 154 |
| 4.5 Thermal requirements.....                                              | 155 |
| 4.6 Openings in enclosures .....                                           | 159 |
| 4.7 Resistance to fire.....                                                | 166 |
| 5 Electrical requirements and simulated abnormal conditions .....          | 175 |
| 5.1 Touch current and protective conductor current.....                    | 175 |
| 5.2 Electric strength .....                                                | 184 |
| 5.3 Abnormal operating and fault conditions.....                           | 188 |

|                        |                                                                                                                                                              |     |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 6                      | Connection to telecommunication networks .....                                                                                                               | 193 |
| 6.1                    | Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment.....           | 193 |
| 6.2                    | Protection of equipment users from overvoltages on telecommunication networks .....                                                                          | 195 |
| 6.3                    | Protection of the telecommunication wiring system from overheating .....                                                                                     | 198 |
| 7                      | Connection to cable distribution systems.....                                                                                                                | 199 |
| 7.1                    | General.....                                                                                                                                                 | 199 |
| 7.2                    | Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment..... | 199 |
| 7.3                    | Protection of equipment users from overvoltages on the cable distribution system .....                                                                       | 199 |
| 7.4                    | Insulation between primary circuits and cable distribution systems.....                                                                                      | 200 |
| Annex A (normative)    | Tests for resistance to heat and fire .....                                                                                                                  | 202 |
| Annex B (normative)    | Motor tests under abnormal conditions .....                                                                                                                  | 205 |
| Annex C (normative)    | Transformers.....                                                                                                                                            | 211 |
| Annex D (normative)    | Measuring instruments for touch current tests .....                                                                                                          | 215 |
| Annex E (normative)    | Temperature rise of a winding .....                                                                                                                          | 217 |
| Annex F (normative)    | Measurement of clearances and creepage distances .....                                                                                                       | 218 |
| Annex G (normative)    | Alternative method for determining minimum clearances .....                                                                                                  | 226 |
| Annex H (normative)    | Ionizing radiation .....                                                                                                                                     | 234 |
| Annex J (normative)    | Table of electrochemical potentials (see 2.6.5.6).....                                                                                                       | 235 |
| Annex K (normative)    | Thermal controls.....                                                                                                                                        | 236 |
| Annex L (normative)    | Normal load conditions for some types of electrical business equipment .....                                                                                 | 238 |
| Annex M (normative)    | Criteria for telephone ringing signals.....                                                                                                                  | 240 |
| Annex N (normative)    | Impulse test generators .....                                                                                                                                | 245 |
| Annex P (normative)    | Normative references.....                                                                                                                                    | 247 |
| Annex Q (normative)    | Voltage dependent resistors (VDRs) .....                                                                                                                     | 251 |
| Annex R (informative)  | Examples of requirements for quality control programmes .....                                                                                                | 252 |
| Annex S (informative)  | Procedure for impulse testing.....                                                                                                                           | 255 |
| Annex T (informative)  | Guidance on protection against ingress of water .....                                                                                                        | 257 |
| Annex U (normative)    | Insulated winding wires for use without interleaved insulation .....                                                                                         | 259 |
| Annex V (normative)    | AC power distribution systems .....                                                                                                                          | 262 |
| Annex W (informative)  | Summation of touch currents .....                                                                                                                            | 269 |
| Annex X (informative)  | Maximum heating effect in transformer tests.....                                                                                                             | 272 |
| Annex Y (normative)    | Ultraviolet light conditioning test.....                                                                                                                     | 274 |
| Annex Z (informative)  | Overvoltage categories (see 2.10.3.2 and Clause G.2).....                                                                                                    | 275 |
| Annex AA (normative)   | Mandrel test (see 2.10.5.8).....                                                                                                                             | 276 |
| Annex BB (informative) | Changes in the second edition .....                                                                                                                          | 279 |

|                                                                                                                   |     |
|-------------------------------------------------------------------------------------------------------------------|-----|
| Bibliography .....                                                                                                | 282 |
| Index .....                                                                                                       | 284 |
| Figure 2A – Test finger .....                                                                                     | 58  |
| Figure 2B – Test pin .....                                                                                        | 59  |
| Figure 2C – Test probe .....                                                                                      | 59  |
| Figure 2D - Accessibility of internal conductive parts .....                                                      | 60  |
| Figure 2E – Voltages in SELV circuits under single fault conditions.....                                          | 66  |
| Figure 2F – Maximum voltages permitted after a single fault.....                                                  | 68  |
| Figure 2G – Test generator .....                                                                                  | 72  |
| Figure 2H – Examples of application of insulation .....                                                           | 93  |
| Figure 2J – Thermal ageing time .....                                                                             | 119 |
| Figure 2K – Abrasion resistance test for coating layers.....                                                      | 120 |
| Figure 4A – Impact test using a steel ball .....                                                                  | 143 |
| Figure 4B – Examples of cross-sections of designs of openings preventing vertical access.....                     | 160 |
| Figure 4C – Examples of louvre design .....                                                                       | 160 |
| Figure 4D – Enclosure openings.....                                                                               | 161 |
| Figure 4E – Typical bottom of a fire enclosure for partially enclosed component or assembly.....                  | 162 |
| Figure 4F – Baffle plate construction .....                                                                       | 163 |
| Figure 5A – Test circuit for touch current of single-phase equipment on a star TN or TT power supply system ..... | 177 |
| Figure 5B – Test circuit for touch current of three-phase equipment on a star TN or TT power supply system .....  | 177 |
| Figure 6A – Test for separation between a telecommunication network and earth.....                                | 195 |
| Figure 6B – Application points of test voltage .....                                                              | 196 |
| Figure B.1 – Determination of arithmetic average temperature .....                                                | 206 |
| Figure C.1 – Determination of arithmetic average temperature .....                                                | 212 |
| Figure D.1 – Measuring instrument.....                                                                            | 215 |
| Figure D.2 – Alternative measuring instrument .....                                                               | 216 |
| Figure F.1 – Narrow groove .....                                                                                  | 219 |
| Figure F.2 – Wide groove.....                                                                                     | 219 |
| Figure F.3 – V-shaped groove .....                                                                                | 219 |
| Figure F.4 – Rib.....                                                                                             | 219 |
| Figure F.5 – Uncemented joint with narrow groove .....                                                            | 220 |
| Figure F.6 – Uncemented joint with wide groove.....                                                               | 220 |
| Figure F.7 – Uncemented joint with narrow and wide grooves .....                                                  | 220 |
| Figure F.8 – Narrow recess.....                                                                                   | 221 |
| Figure F.9 – Wide recess .....                                                                                    | 221 |
| Figure F.10 – Coating around terminals.....                                                                       | 222 |
| Figure F.11 – Coating over printed wiring .....                                                                   | 222 |

|                                                                                       |     |
|---------------------------------------------------------------------------------------|-----|
| Figure F.12 – Measurements through openings in enclosures .....                       | 223 |
| Figure F.13 – Intervening, unconnected conductive part .....                          | 223 |
| Figure F.14 – Solid insulating material.....                                          | 224 |
| Figure F.15 – Thin sheet insulating material .....                                    | 224 |
| Figure F.16 – Cemented joints in multi-layer printed board.....                       | 224 |
| Figure F.17 – Component filled with insulating compound .....                         | 225 |
| Figure F.18 – Partitioned bobbin .....                                                | 225 |
| Figure M.1 – Definition of ringing period and cadence cycle .....                     | 241 |
| Figure M.2 – $I_{TS1}$ limit curve for cadenced ringing signal .....                  | 242 |
| Figure M.3 – Peak and peak-to-peak currents.....                                      | 242 |
| Figure M.4 – Ringing voltage trip criteria .....                                      | 244 |
| Figure N.1 – ITU-T impulse test generator circuit.....                                | 245 |
| Figure N.2 – IEC 60065 impulse test generator circuit .....                           | 246 |
| Figure S.1 – Waveform on insulation without surge suppressors and no breakdown .....  | 255 |
| Figure S.2 – Waveforms on insulation during breakdown without surge suppressors ..... | 256 |
| Figure S.3 – Waveforms on insulation with surge suppressors in operation .....        | 256 |
| Figure S.4 – Waveform on short-circuited surge suppressor and insulation .....        | 256 |
| Figure V.1 – Examples of TN-S power distribution systems.....                         | 264 |
| Figure V.2 – Example of TN-C-S power distribution system.....                         | 265 |
| Figure V.3 – Example of TN-C power distribution system.....                           | 265 |
| Figure V.4 – Example of single-phase, three-wire TN-C power distribution system ..... | 266 |
| Figure V.5 – Example of three line and neutral TT power distribution system.....      | 266 |
| Figure V.6 – Example of three line TT power distribution system.....                  | 267 |
| Figure V.7 – Example of three line (and neutral) IT power distribution system .....   | 267 |
| Figure V.8 – Example of three line IT power distribution system.....                  | 268 |
| Figure W.1 – Touch current from a floating circuit.....                               | 269 |
| Figure W.2 – Touch current from an earthed circuit .....                              | 270 |
| Figure W.3 – Summation of touch currents in a PABX.....                               | 270 |
| Figure AA.1 – Mandrel .....                                                           | 276 |
| Figure AA.2 – Initial position of mandrel .....                                       | 277 |
| Figure AA.3 – Final position of mandrel .....                                         | 277 |
| Table 1A – Voltage ranges of SELV and TNV circuits .....                              | 26  |
| Table 1B – Equivalence of flammability classes .....                                  | 30  |
| Table 1C – Capacitor ratings according to IEC 60384-14 .....                          | 42  |
| Table 1D – Informative examples of application of capacitors .....                    | 43  |
| Table 2A – Distance through insulation of internal wiring .....                       | 61  |
| Table 2B – Limits for power sources without an overcurrent protective device .....    | 74  |
| Table 2C – Limits for power sources with an overcurrent protective device.....        | 74  |

|                                                                                                                   |     |
|-------------------------------------------------------------------------------------------------------------------|-----|
| Table 2D – Minimum size of protective bonding conductors .....                                                    | 78  |
| Table 2E – Test duration, a.c. mains supplies.....                                                                | 79  |
| Table 2F – Informative examples of protective devices in single-phase equipment or subassemblies.....             | 85  |
| Table 2G – Informative examples of protective devices in three-phase equipment .....                              | 85  |
| Table 2H – Examples of application of insulation .....                                                            | 91  |
| Table 2J – AC mains transient voltages.....                                                                       | 99  |
| Table 2K – Minimum clearances for insulation in primary circuits and between primary and secondary circuits ..... | 100 |
| Table 2L – Additional clearances in primary circuits.....                                                         | 101 |
| Table 2M – Minimum clearances in secondary circuits .....                                                         | 102 |
| Table 2N – Minimum creepage distances .....                                                                       | 107 |
| Table 2P – Tests for insulation in non-separable layers .....                                                     | 111 |
| Table 2Q – Minimum separation distances for coated printed boards .....                                           | 116 |
| Table 2R – Insulation in printed boards .....                                                                     | 117 |
| Table 3A – Sizes of cables and conduits for equipment having a rated current not exceeding 16 A.....              | 127 |
| Table 3B – Sizes of conductors .....                                                                              | 129 |
| Table 3C – Physical tests on power supply cords .....                                                             | 131 |
| Table 3D – Range of conductor sizes to be accepted by terminals .....                                             | 133 |
| Table 3E – Sizes of terminals for mains supply conductors and protective earthing conductors .....                | 134 |
| Table 4A – Minimum property retention limits after UV exposure.....                                               | 151 |
| Table 4B – Temperature limits, materials and components.....                                                      | 157 |
| Table 4C – Touch temperature limits .....                                                                         | 158 |
| Table 4D – Size and spacing of openings in metal bottoms of fire enclosures.....                                  | 164 |
| Table 4E – Summary of material flammability requirements .....                                                    | 174 |
| Table 5A – Maximum current.....                                                                                   | 179 |
| Table 5B – Test voltages for electric strength tests based on peak working voltages Part 1..                      | 186 |
| Table 5B – Test voltages for electric strength tests based on peak working voltages Part 2..                      | 187 |
| Table 5C – Test voltages for electric strength tests based on required withstand voltages ..                      | 188 |
| Table 5D – Temperature limits for overload conditions.....                                                        | 192 |
| Table B.1 – Temperature limits for motor windings (except for running overload test) .....                        | 206 |
| Table B.2 – Permitted temperature limits for running overload tests .....                                         | 207 |
| Table C.1 – Temperature limits for transformer windings.....                                                      | 212 |
| Table F.1 – Value of X .....                                                                                      | 218 |
| Table G.1 – AC mains transient voltages .....                                                                     | 227 |



|                                                                             |     |
|-----------------------------------------------------------------------------|-----|
| Table G.2 – Minimum clearances up to 2 000 m above sea level.....           | 232 |
| Table J.1 – Electrochemical potentials (V).....                             | 235 |
| Table N.1 – Component values for Figures N.1 and N.2.....                   | 246 |
| Table R.1 – Rules for sampling and inspection – coated printed boards ..... | 253 |
| Table R.2 – Rules for sampling and inspection – reduced clearances.....     | 254 |
| Table T.1 – Extract from IEC 60529 .....                                    | 258 |
| Table U.1 – Mandrel diameter .....                                          | 260 |
| Table U.2 – Oven temperature .....                                          | 260 |
| Table X.1 – Test steps .....                                                | 273 |
| Table Z.1 – Overvoltage categories.....                                     | 275 |

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

## INFORMATION TECHNOLOGY EQUIPMENT – SAFETY –

### Part 1: General requirements

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60950-1 has been prepared by IEC technical committee 108: Safety of electronic equipment within the field of audio/video, information technology and communication technology.

This second edition of IEC 60950-1 cancels and replaces the first edition of IEC 60950-1, issued in 2001, and constitutes a technical revision. The principal changes in this edition as compared with the first edition of IEC 60950-1 are given in Annex BB, including a list of changed subclause, table and figure numbers.

The text of this standard is based on the following documents:

| FDIS          | Report on voting |
|---------------|------------------|
| 108/135A/FDIS | 108/147/RVD      |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

Additional parts of IEC 60950-1 will cover specific safety requirements for information technology equipment having limited applications or having special features as follows:

Part 21: Remote feeding (published);

Part 22: Equipment installed outdoors (planned);

Part 23: Large data storage equipment (planned);

Except for notes, all text within a normative figure, or in a box under a normative table, is also normative. Text with a superscript reference is linked to a particular item in the table. Other text in a box under a table applies to the whole table.

Informative annexes and text beginning with the word "NOTE" are not normative. They are provided only to give additional information.

"Country" notes are also informative but call attention to requirements that are normative in those countries.

In this standard, the following print types are used:

- Requirements proper and normative annexes: roman type.
- Compliance statements and test specifications: italic type.
- Notes in the text and in tables: smaller roman type.
- Terms that are defined in 1.2: SMALL CAPITALS.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

The contents of the corrigendum of August 2006 and August 2013 have been included in this copy.

## INTRODUCTION

### 0 Principles of safety

The following principles have been adopted by technical committee 108 in the development of this standard.

These principles do not cover performance or functional characteristics of equipment.

Words printed in SMALL CAPITALS are terms that are defined in 1.2 of this standard.

#### 0.1 General principles of safety

It is essential that designers understand the underlying principles of safety requirements in order that they can engineer safe equipment.

These principles are not an alternative to the detailed requirements of this standard, but are intended to provide designers with an appreciation of the basis of these requirements. Where the equipment involves technologies and materials or methods of construction not specifically covered, the design of the equipment should provide a level of safety not less than those described in these principles of safety.

Designers shall take into account not only normal operating conditions of the equipment but also likely fault conditions, consequential faults, foreseeable misuse and external influences such as temperature, altitude, pollution, moisture, overvoltages on the MAINS SUPPLY and overvoltages on a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM. Dimensioning of insulation spacings should take account of possible reductions by manufacturing tolerances, or where deformation could occur due to handling, shock and vibration likely to be encountered during manufacture, transport and normal use.

The following priorities should be observed in determining what design measures to adopt:

- where possible, specify design criteria that will eliminate, reduce or guard against hazards;
- where the above is not practicable because the functioning of the equipment would be impaired, specify the use of protective means independent of the equipment, such as personal protective equipment (which is not specified in this standard);
- where neither of the above measures is practicable, or in addition to those measures, specify the provision of markings and instructions regarding the residual risks.

There are two types of persons whose safety needs to be considered, USERS (or OPERATORS) and SERVICE PERSONS.

USER is the term applied to all persons other than SERVICE PERSONS. Requirements for protection should assume that USERS are not trained to identify hazards, but will not intentionally create a hazardous situation. Consequently, the requirements will provide protection for cleaners and casual visitors as well as the assigned USERS. In general, USERS

should not have access to hazardous parts, and to this end, such parts should only be in SERVICE ACCESS AREAS or in equipment located in RESTRICTED ACCESS LOCATIONS.

When USERS are admitted to RESTRICTED ACCESS LOCATIONS they shall be suitably instructed.

SERVICE PERSONS are expected to use their training and skill to avoid possible injury to themselves and others due to obvious hazards that exist in SERVICE ACCESS AREAS of the equipment or on equipment located in RESTRICTED ACCESS LOCATIONS. However, SERVICE PERSONS should be protected against unexpected hazards. This can be done by, for example, locating parts that need to be accessible for servicing away from electrical and mechanical hazards, providing shields to avoid accidental contact with hazardous parts, and providing labels or instructions to warn personnel about any residual risk.

Information about potential hazards can be marked on the equipment or provided with the equipment, depending on the likelihood and severity of injury, or made available for SERVICE PERSONS. In general, USERS shall not be exposed to hazards likely to cause injury, and information provided for USERS should primarily aim at avoiding misuse and situations likely to create hazards, such as connection to the wrong power source and replacement of fuses by incorrect types.

MOVABLE EQUIPMENT is considered to present a slightly increased risk of shock, due to possible extra strain on the supply cord leading to rupture of the earthing conductor. With HAND-HELD EQUIPMENT, this risk is increased; wear on the cord is more likely, and further hazards could arise if the units were dropped. TRANSPORTABLE EQUIPMENT introduces a further factor because it can be used and carried in any orientation; if a small metallic object enters an opening in the ENCLOSURE it can move around inside the equipment, possibly creating a hazard.

## 0.2 Hazards

Application of a safety standard is intended to reduce the risk of injury or damage due to the following:

- electric shock;
- energy related hazards;
- fire;
- heat related hazards;
- mechanical hazards;
- radiation;
- chemical hazards.

### 0.2.1 Electric shock

Electric shock is due to current passing through the human body. The resulting physiological effects depend on the value and duration of the current and the path it takes through the body. The value of the current depends on the applied voltage, the impedance of the source and the impedance of the body. The body impedance depends in turn on the area of contact, moisture in the area of contact and the applied voltage and frequency. Currents of approximately half a milliampere can cause a reaction in persons in good health and may cause injury indirectly due to involuntary reaction. Higher currents can have more direct effects, such as burn or muscle tetanization leading to inability to let go or to ventricular fibrillation.

Steady state voltages up to 42,4 V peak, or 60 V d.c., are not generally regarded as hazardous under dry conditions for an area of contact equivalent to a human hand. Bare parts that have to be touched or handled should be at earth potential or properly insulated.

Some equipment will be connected to telephone and other external networks. Some TELECOMMUNICATION NETWORKS operate with signals such as voice and ringing superimposed on a steady d.c. supply voltage; the total may exceed the values given above for steady-state voltages. It is common practice for the SERVICE PERSONS of telephone companies to handle parts of such circuits bare-handed. This has not caused serious injury, because of the use of cadenced ringing and because there are limited areas of contact with bare conductors normally handled by SERVICE PERSONS. However, the area of contact of a part accessible to the USER, and the likelihood of the part being touched, should be further limited (for example, by the shape and location of the part).

It is normal to provide two levels of protection for USERS to prevent electric shock. Therefore, the operation of equipment under normal conditions and after a single fault, including any consequential faults, should not create a shock hazard. However, provision of additional protective measures, such as protective earthing or SUPPLEMENTARY INSULATION, is not considered a substitute for, or a relief from, properly designed BASIC INSULATION.

#### Harm may result from:

Contact with bare parts normally at HAZARDOUS VOLTAGES.

Breakdown of insulation between parts normally at HAZARDOUS VOLTAGES and accessible conductive parts.

#### Examples of measures to reduce risks:

Prevent USER access to parts at HAZARDOUS VOLTAGES by fixed or locked covers, SAFETY INTERLOCKS, etc. Discharge accessible capacitors that are at HAZARDOUS VOLTAGES.

Provide BASIC INSULATION and connect the accessible conductive parts and circuits to earth so that exposure to the voltage which can develop is limited because overcurrent protection will disconnect the parts having low impedance faults within a specified time; or provide a metal screen connected to protective earth between the parts, or provide DOUBLE INSULATION or REINFORCED INSULATION between the parts, so that breakdown to the accessible part is not likely to occur.

Contact with circuits connected to TELECOMMUNICATION NETWORKS that exceed 42,4 V peak or 60 V d.c.

Limit the accessibility and area of contact of such circuits, and separate them from unearthed parts to which access is not limited.

Breakdown of USER-accessible insulation.

Insulation that is accessible to the USER should have adequate mechanical and electrical strength to reduce the likelihood of contact with HAZARDOUS VOLTAGES.

TOUCH CURRENT (leakage current) flowing from parts at HAZARDOUS VOLTAGES to accessible parts, or failure of a protective earthing connection. TOUCH CURRENT may include current due to EMC filter components connected between PRIMARY CIRCUITS and accessible parts.

Limit TOUCH CURRENT to a specified value, or provide a high integrity protective earthing connection.

### 0.2.2 Energy related hazards

Injury or fire may result from a short-circuit between adjacent poles of high current supplies or high capacitance circuits, causing:

- burns;
- arcing;
- ejection of molten metal.

Even circuits whose voltages are safe to touch may be hazardous in this respect.

Examples of measures to reduce risks include:

- separation;
- shielding;
- provision of SAFETY INTERLOCKS.

### 0.2.3 Fire

Risk of fire may result from excessive temperatures either under normal operating conditions or due to overload, component failure, insulation breakdown or loose connections. Fires originating within the equipment should not spread beyond the immediate vicinity of the source of the fire, nor cause damage to the surroundings of the equipment.

Examples of measures to reduce risks include:

- providing overcurrent protection;
- using constructional materials having appropriate flammability properties for their purpose;
- selection of parts, components and consumable materials to avoid high temperature which might cause ignition;
- limiting the quantity of combustible materials used;

- shielding or separating combustible materials from likely ignition sources;
- using ENCLOSURES or barriers to limit the spread of fire within the equipment;
- using suitable materials for ENCLOSURES so as to reduce the likelihood of fire spreading from the equipment.

#### **0.2.4 Heat related hazards**

Injury may result from high temperatures under normal operating conditions, causing:

- burns due to contact with hot accessible parts;
- degradation of insulation and of safety-critical components;
- ignition of flammable liquids.

Examples of measures to reduce risks include:

- taking steps to avoid high temperature of accessible parts;
- avoiding temperatures above the ignition point of liquids;
- provision of markings to warn USERS where access to hot parts is unavoidable.

#### **0.2.5 Mechanical hazards**

Injury may result from:

- sharp edges and corners;
- moving parts that have the potential to cause injury;
- equipment instability;
- flying particles from imploding cathode ray tubes and exploding high pressure lamps.

Examples of measures to reduce risks include:

- rounding of sharp edges and corners;
- guarding;
- provision of SAFETY INTERLOCKS;
- providing sufficient stability to free-standing equipment;
- selecting cathode ray tubes and high pressure lamps that are resistant to implosion and explosion respectively;
- provision of markings to warn USERS where access is unavoidable.



### 0.2.6 Radiation

Injury to USERS and to SERVICE PERSONS may result from some forms of radiation emitted by equipment. Examples are sonic (acoustic), radio frequency, infra-red, ultraviolet and ionizing radiation, and high intensity visible and coherent light (lasers).

Examples of measures to reduce risks include:

- limiting the energy level of potential radiation sources;
- screening radiation sources;
- provision of SAFETY INTERLOCKS;
- provision of markings to warn USERS where exposure to the radiation hazard is unavoidable.

### 0.2.7 Chemical hazards

Injury may result from contact with some chemicals or from inhalation of their vapours and fumes.

Examples of measures to reduce risks include:

- avoiding the use of constructional and consumable materials likely to cause injury by contact or inhalation during intended and normal conditions of use;
- avoiding conditions likely to cause leakage or vaporization;
- provision of markings to warn USERS about the hazards.

## 0.3 Materials and components

Materials and components used in the construction of equipment should be so selected and arranged that they can be expected to perform in a reliable manner for the anticipated life of the equipment without creating a hazard, and would not contribute significantly to the development of a serious fire hazard. Components should be selected so that they remain within their manufacturers' ratings under normal operating conditions, and do not create a hazard under fault conditions.

# INFORMATION TECHNOLOGY EQUIPMENT – SAFETY –

## Part 1: General requirements

### 1 General

#### 1.1 Scope

##### 1.1.1 Equipment covered by this standard

This standard is applicable to mains-powered or battery-powered information technology equipment, including electrical business equipment and associated equipment, with a RATED VOLTAGE not exceeding 600 V.

This standard is also applicable to such information technology equipment:

- designed for use as telecommunication terminal equipment and TELECOMMUNICATION NETWORK infrastructure equipment, regardless of the source of power;
- designed and intended to be connected directly to, or used as infrastructure equipment in, a CABLE DISTRIBUTION SYSTEM, regardless of the source of power;
- designed to use the AC MAINS SUPPLY as a communication transmission medium (see Clause 6, Note 4 and 7.1, Note 4).

This standard is also applicable to components and subassemblies intended for incorporation in information technology equipment. It is not expected that such components and subassemblies comply with every aspect of the standard, provided that the complete information technology equipment, incorporating such components and subassemblies, does comply.

NOTE 1 Examples of aspects with which uninstalled components and subassemblies may not comply include the marking of the power rating and access to hazardous parts.

NOTE 2 This standard may be applied to the electronic parts of equipment even if that equipment does not wholly fall within its Scope, such as large-scale air conditioning systems, fire detection systems and fire extinguishing systems. Different requirements may be necessary for some applications.

This standard specifies requirements intended to reduce risks of fire, electric shock or injury for the OPERATOR and layman who may come into contact with the equipment and, where specifically stated, for a SERVICE PERSON.

This standard is intended to reduce such risks with respect to installed equipment, whether it consists of a system of interconnected units or independent units, subject to installing, operating and maintaining the equipment in the manner prescribed by the manufacturer.

Examples of equipment that is in the scope of this standard are:

| Generic product type                                       | Specific example of generic type                                                                                                                                                                                                                                                      |
|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| banking equipment                                          | monetary processing machines including automated teller (cash dispensing) machines (ATM)                                                                                                                                                                                              |
| data and text processing machines and associated equipment | data preparation equipment, data processing equipment, data storage equipment, personal computers, plotters, printers, scanners, text processing equipment, visual display units                                                                                                      |
| data network equipment                                     | bridges, data circuit terminating equipment, data terminal equipment, routers                                                                                                                                                                                                         |
| electrical and electronic retail equipment                 | cash registers, point of sale terminals including associated electronic scales                                                                                                                                                                                                        |
| electrical and electronic office machines                  | calculators, copying machines, dictation equipment, document shredding machines, duplicators, erasers, micrographic office equipment, motor-operated files, paper trimmers (punchers, cutting machines, separators), paper jogging machines, pencil sharpeners, staplers, typewriters |
| other information technology equipment                     | photoprinting equipment, public information terminals, multimedia equipment                                                                                                                                                                                                           |
| postage equipment                                          | mail processing machines, postage machines                                                                                                                                                                                                                                            |
| telecommunication network infrastructure equipment         | billing equipment, multiplexers, network powering equipment, network terminating equipment, radio basestations, repeaters, transmission equipment, telecommunication switching equipment                                                                                              |
| telecommunication terminal equipment                       | facsimile equipment, key telephone systems, modems, PABXs, pagers, telephone answering machines, telephone sets (wired and wireless)                                                                                                                                                  |

NOTE 3 The requirements of IEC 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, *Guide on the safety of multimedia equipment*.

This list is not intended to be comprehensive, and equipment that is not listed is not necessarily excluded from the Scope.

Equipment complying with the relevant requirements in this standard is considered suitable for use with process control equipment, automatic test equipment and similar systems requiring information processing facilities. However, this standard does not include requirements for performance or functional characteristics of equipment.

### 1.1.2 Additional requirements

Requirements additional to those specified in this standard may be necessary for:

- equipment intended for operation in special environments (for example, extremes of temperature; excessive dust, moisture or vibration; flammable gases; and corrosive or explosive atmospheres);
- electromedical applications with physical connections to the patient;
- equipment intended to be used in vehicles, on board ships or aircraft, in tropical countries, or at altitudes greater than 2 000 m;
- equipment intended for use where ingress of water is possible; for guidance on such requirements and on relevant testing, see Annex T.

NOTE Attention is drawn to the fact that authorities of some countries impose additional requirements.

### 1.1.3 Exclusions

This standard does not apply to:

- power supply systems which are not an integral part of the equipment, such as motor-generator sets, battery backup systems and transformers;
- building installation wiring;
- devices requiring no electric power.

### 1.2 Definitions

For the purpose of this International Standard the following definitions apply. Where the terms "voltage" and "current" are used, they imply the r.m.s. values, unless otherwise specified.

#### Definitions in alphabetical order of nouns

|                                         |           |
|-----------------------------------------|-----------|
| AREA, OPERATOR ACCESS .....             | 1.2.7.1   |
| AREA, SERVICE ACCESS .....              | 1.2.7.2   |
| BODY .....                              | 1.2.7.5   |
| CABLE, INTERCONNECTING .....            | 1.2.11.6  |
| CABLE DISTRIBUTION SYSTEM .....         | 1.2.13.14 |
| CHEESECLOTH .....                       | 1.2.13.15 |
| CIRCUIT, ELV .....                      | 1.2.8.7   |
| CIRCUIT, LIMITED CURRENT .....          | 1.2.8.9   |
| CIRCUIT, PRIMARY .....                  | 1.2.8.4   |
| CIRCUIT, SECONDARY .....                | 1.2.8.5   |
| CIRCUIT, SELV .....                     | 1.2.8.8   |
| CIRCUIT, TNV .....                      | 1.2.8.11  |
| CIRCUIT, TNV-1 .....                    | 1.2.8.12  |
| CIRCUIT, TNV-2 .....                    | 1.2.8.13  |
| CIRCUIT, TNV-3 .....                    | 1.2.8.14  |
| CLEARANCE .....                         | 1.2.10.1  |
| CONDUCTOR, PROTECTIVE BONDING .....     | 1.2.13.11 |
| CONDUCTOR, PROTECTIVE EARTHING .....    | 1.2.13.10 |
| CORD, DETACHABLE POWER SUPPLY .....     | 1.2.5.5   |
| CORD, NON-DETACHABLE POWER SUPPLY ..... | 1.2.5.6   |
| CREEPAGE DISTANCE .....                 | 1.2.10.2  |
| CURRENT, PROTECTIVE CONDUCTOR .....     | 1.2.13.13 |
| CURRENT, RATED .....                    | 1.2.1.3   |
| CURRENT, TOUCH .....                    | 1.2.13.12 |
| CUT-OUT, THERMAL .....                  | 1.2.11.3  |
| CUT-OUT, THERMAL, AUTOMATIC RESET ..... | 1.2.11.4  |
| CUT-OUT, THERMAL, MANUAL RESET .....    | 1.2.11.5  |
| EARTHING, FUNCTIONAL .....              | 1.2.13.9  |
| ENCLOSURE .....                         | 1.2.6.1   |
| ENCLOSURE, ELECTRICAL .....             | 1.2.6.4   |
| ENCLOSURE, FIRE .....                   | 1.2.6.2   |
| ENCLOSURE, MECHANICAL .....             | 1.2.6.3   |
| ENERGY LEVEL, HAZARDOUS .....           | 1.2.8.10  |
| EQUIPMENT, CLASS I .....                | 1.2.4.1   |
| EQUIPMENT, CLASS II .....               | 1.2.4.2   |
| EQUIPMENT, CLASS III .....              | 1.2.4.3   |
| EQUIPMENT, DIRECT PLUG-IN .....         | 1.2.3.6   |
| EQUIPMENT FOR BUILDING-IN .....         | 1.2.3.5   |

|                                              |           |
|----------------------------------------------|-----------|
| EQUIPMENT, HAND-HELD .....                   | 1.2.3.2   |
| EQUIPMENT, MOVABLE .....                     | 1.2.3.1   |
| EQUIPMENT, PERMANENTLY CONNECTED .....       | 1.2.5.4   |
| EQUIPMENT, PLUGGABLE .....                   | 1.2.5.3   |
| EQUIPMENT, PLUGGABLE, TYPE A .....           | 1.2.5.1   |
| EQUIPMENT, PLUGGABLE, TYPE B .....           | 1.2.5.2   |
| EQUIPMENT, STATIONARY .....                  | 1.2.3.4   |
| EQUIPMENT, TRANSPORTABLE .....               | 1.2.3.3   |
| FREQUENCY, RATED .....                       | 1.2.1.4   |
| INSULATION, BASIC .....                      | 1.2.9.2   |
| INSULATION, DOUBLE .....                     | 1.2.9.4   |
| INSULATION, FUNCTIONAL .....                 | 1.2.9.1   |
| INSULATION, REINFORCED .....                 | 1.2.9.5   |
| INSULATION, SOLID .....                      | 1.2.10.4  |
| INSULATION, SUPPLEMENTARY .....              | 1.2.9.3   |
| INTERLOCK, SAFETY .....                      | 1.2.7.6   |
| LIMIT, EXPLOSION .....                       | 1.2.12.15 |
| LIMITER, TEMPERATURE .....                   | 1.2.11.2  |
| LOAD, NORMAL .....                           | 1.2.2.1   |
| LOCATION, RESTRICTED ACCESS .....            | 1.2.7.3   |
| MATERIALS, FLAMMABILITY CLASSIFICATION ..... | 1.2.12.1  |
| MATERIAL, 5VA CLASS .....                    | 1.2.12.5  |
| MATERIAL, 5VB CLASS .....                    | 1.2.12.6  |
| MATERIAL, HB40 CLASS .....                   | 1.2.12.10 |
| MATERIAL, HB75 CLASS .....                   | 1.2.12.11 |
| MATERIAL, HBF CLASS FOAMED .....             | 1.2.12.9  |
| MATERIAL, HF-1 CLASS FOAMED .....            | 1.2.12.7  |
| MATERIAL, HF-2 CLASS FOAMED .....            | 1.2.12.8  |
| MATERIAL, V-0 CLASS .....                    | 1.2.12.2  |
| MATERIAL, V-1 CLASS .....                    | 1.2.12.3  |
| MATERIAL, V-2 CLASS .....                    | 1.2.12.4  |
| MATERIAL, VTM-0 CLASS .....                  | 1.2.12.12 |
| MATERIAL, VTM-1 CLASS .....                  | 1.2.12.13 |
| MATERIAL, VTM-2 CLASS .....                  | 1.2.12.14 |
| NETWORK, TELECOMMUNICATION .....             | 1.2.13.8  |
| OPERATOR .....                               | 1.2.13.7  |
| PART, DECORATIVE .....                       | 1.2.6.5   |
| PERSON, SERVICE .....                        | 1.2.13.5  |
| RANGE, RATED FREQUENCY .....                 | 1.2.1.5   |
| RANGE, RATED VOLTAGE .....                   | 1.2.1.2   |
| RATING, PROTECTIVE CURRENT .....             | 1.2.13.17 |
| SUPPLY, AC MAINS .....                       | 1.2.8.1   |
| SUPPLY, DC MAINS .....                       | 1.2.8.2   |
| SUPPLY, MAINS .....                          | 1.2.8.3   |
| SURFACE, BOUNDING .....                      | 1.2.10.3  |
| TEST, ROUTINE .....                          | 1.2.13.3  |
| TEST, SAMPLING .....                         | 1.2.13.2  |
| TEST, TYPE .....                             | 1.2.13.1  |
| THERMOSTAT .....                             | 1.2.11.1  |
| TIME, RATED OPERATING .....                  | 1.2.2.2   |
| TIME, RATED RESTING .....                    | 1.2.2.3   |
| TISSUE, WRAPPING .....                       | 1.2.13.16 |

|                                                   |          |
|---------------------------------------------------|----------|
| TOOL .....                                        | 1.2.7.4  |
| USER.....                                         | 1.2.13.6 |
| VOLTAGE, DC.....                                  | 1.2.13.4 |
| VOLTAGE, HAZARDOUS .....                          | 1.2.8.6  |
| VOLTAGE, MAINS TRANSIENT .....                    | 1.2.9.10 |
| VOLTAGE, PEAK WORKING .....                       | 1.2.9.8  |
| VOLTAGE, RATED .....                              | 1.2.1.1  |
| VOLTAGE, REQUIRED WITHSTAND .....                 | 1.2.9.9  |
| VOLTAGE, RMS WORKING.....                         | 1.2.9.7  |
| VOLTAGE, TELECOMMUNICATION NETWORK TRANSIENT..... | 1.2.9.11 |
| VOLTAGE, WORKING .....                            | 1.2.9.6  |

## 1.2.1 Equipment electrical ratings

### 1.2.1.1

#### **RATED VOLTAGE**

supply voltage (for a three-phase AC MAINS SUPPLY, the line-to-line voltage) as declared by the manufacturer

### 1.2.1.2

#### **RATED VOLTAGE RANGE**

supply voltage range as declared by the manufacturer, expressed by its lower and upper RATED VOLTAGES

### 1.2.1.3

#### **RATED CURRENT**

input current of the equipment as declared by the manufacturer

### 1.2.1.4

#### **RATED FREQUENCY**

supply frequency as declared by the manufacturer

### 1.2.1.5

#### **RATED FREQUENCY RANGE**

supply frequency range as declared by the manufacturer, expressed by its lower and upper RATED FREQUENCIES

## 1.2.2 Operating conditions

### 1.2.2.1

#### **NORMAL LOAD**

mode of operation, used for testing purposes, which represents as closely as possible the most severe conditions of normal use which can reasonably be expected

If the conditions of actual use can reasonably be expected to be more severe than the maximum load conditions recommended by the manufacturer, including RATED OPERATING TIME and RATED RESTING TIME, a mode of operation is used that represents these more severe conditions.

NOTE NORMAL LOAD conditions for some types of equipment are given in Annex L.

**1.2.2.2****RATED OPERATING TIME**

maximum operating time assigned to the equipment by the manufacturer

**1.2.2.3****RATED RESTING TIME**

minimum time, assigned by the manufacturer, during which the equipment is switched off or running idle between periods of RATED OPERATING TIME

**1.2.3 Equipment mobility****1.2.3.1****MOVABLE EQUIPMENT**

equipment which is either:

- 18 kg or less in mass and not fixed; or
- equipment with wheels, castors or other means to facilitate movement by the OPERATOR as required to perform its intended use

**1.2.3.2****HAND-HELD EQUIPMENT**

MOVABLE EQUIPMENT, or a part of any kind of equipment, that is intended to be held in the hand during normal use

**1.2.3.3****TRANSPORTABLE EQUIPMENT**

MOVABLE EQUIPMENT that is intended to be routinely carried by a USER

NOTE Examples include laptop and notebook personal computers, pen-based tablet computers, and their portable accessories such as printers and CD-ROM drives.

**1.2.3.4****STATIONARY EQUIPMENT**

equipment that is not MOVABLE EQUIPMENT

**1.2.3.5****EQUIPMENT FOR BUILDING-IN**

equipment intended to be installed in a prepared recess, such as in a wall, or similar situation

NOTE In general, EQUIPMENT FOR BUILDING-IN does not have an ENCLOSURE on all sides, as some of the sides will be protected after installation.

**1.2.3.6****DIRECT PLUG-IN EQUIPMENT**

equipment that is intended to be used without a power supply cord; the mains plug forms an integral part of the equipment ENCLOSURE so that the weight of the equipment is taken by the socket-outlet

**1.2.4 Classes of equipment – Protection against electric shock**

NOTE Some information technology equipment cannot be identified as conforming to one of the following classes.

**1.2.4.1****CLASS I EQUIPMENT**

equipment where protection against electric shock is achieved by

- using BASIC INSULATION and

- providing a means of connection to the PROTECTIVE EARTHING CONDUCTOR in the building wiring those conductive parts that are otherwise capable of assuming HAZARDOUS VOLTAGES if the BASIC INSULATION fails

NOTE CLASS I EQUIPMENT may have parts with DOUBLE INSULATION or REINFORCED INSULATION.

#### 1.2.4.2

##### **CLASS II EQUIPMENT**

equipment in which protection against electric shock does not rely on BASIC INSULATION only, but in which additional safety precautions, such as DOUBLE INSULATION or REINFORCED INSULATION are provided, there being no reliance on protective earthing

#### 1.2.4.3

##### **CLASS III EQUIPMENT**

equipment in which protection against electric shock relies upon supply from SELV CIRCUITS and in which HAZARDOUS VOLTAGES are not generated

NOTE For CLASS III EQUIPMENT, although there is no requirement for protection against electric shock, all other requirements of the standard apply.

### 1.2.5 Connection to the supply

#### 1.2.5.1

##### **PLUGGABLE EQUIPMENT TYPE A**

equipment that is intended for connection to a MAINS SUPPLY via a non-industrial plug and socket-outlet or a non-industrial appliance coupler, or both

#### 1.2.5.2

##### **PLUGGABLE EQUIPMENT TYPE B**

equipment that is intended for connection to a MAINS SUPPLY via an industrial plug and socket-outlet or an appliance coupler, or both, complying with IEC 60309 or with a comparable national standard

#### 1.2.5.3

##### **PLUGGABLE EQUIPMENT**

equipment that is either **PLUGGABLE EQUIPMENT TYPE A** or **PLUGGABLE EQUIPMENT TYPE B**

#### 1.2.5.4

##### **PERMANENTLY CONNECTED EQUIPMENT**

equipment that is intended for connection to the building installation wiring using screw terminals or other reliable means

#### 1.2.5.5

##### **DETACHABLE POWER SUPPLY CORD**

flexible cord, for supply purposes, intended to be connected to the equipment by means of a suitable appliance coupler

#### 1.2.5.6

##### **NON-DETACHABLE POWER SUPPLY CORD**

flexible cord, for supply purposes, fixed to or assembled with the equipment

Such a cord may be either:

Ordinary: a flexible cord that can be easily replaced without special preparation of the cord or special TOOLS; or

Special: a flexible cord that is specially prepared, or requires the use of specially designed TOOLS for replacement, or is such that it cannot be replaced without damage to the equipment.



The term "specially prepared" includes provision of an integral cord guard, the use of cable lugs, formation of eyelets, etc., but not the reshaping of the conductor before introduction into a terminal or the twisting of a stranded conductor to consolidate the end.

## **1.2.6 Enclosures**

### **1.2.6.1**

#### **ENCLOSURE**

part of the equipment providing one or more of the functions described in 1.2.6.2, 1.2.6.3 or 1.2.6.4

NOTE One type of ENCLOSURE can be inside another type (for example, an ELECTRICAL ENCLOSURE inside a FIRE ENCLOSURE or a FIRE ENCLOSURE inside an ELECTRICAL ENCLOSURE). Also, a single ENCLOSURE can provide the functions of more than one type (for example, the functions of both an ELECTRICAL ENCLOSURE and a FIRE ENCLOSURE).

### **1.2.6.2**

#### **FIRE ENCLOSURE**

part of the equipment intended to minimize the spread of fire or flames from within

### **1.2.6.3**

#### **MECHANICAL ENCLOSURE**

part of the equipment intended to reduce the risk of injury due to mechanical and other physical hazards

### **1.2.6.4**

#### **ELECTRICAL ENCLOSURE**

part of the equipment intended to limit access to parts that may be at HAZARDOUS VOLTAGES or HAZARDOUS ENERGY LEVELS or are in TNV CIRCUITS

### **1.2.6.5**

#### **DECORATIVE PART**

part of the equipment, outside the ENCLOSURE, which has no safety function

## **1.2.7 Accessibility**

### **1.2.7.1**

#### **OPERATOR ACCESS AREA**

part of the equipment to which, under normal operating conditions, one of the following applies:

- access can be gained without the use of a TOOL;
- the means of access is deliberately provided to the OPERATOR;
- the OPERATOR is instructed to enter regardless of whether or not a TOOL is needed to gain access

The terms "access" and "accessible", unless qualified, relate to an OPERATOR ACCESS AREA as defined above.

### **1.2.7.2**

#### **SERVICE ACCESS AREA**

part of the equipment, other than an OPERATOR ACCESS AREA, where it is necessary for SERVICE PERSONS to have access even with the equipment switched on

### 1.2.7.3

#### **RESTRICTED ACCESS LOCATION**

location for equipment where both of the following apply:

- access can only be gained by SERVICE PERSONS or by USERS who have been instructed about the reasons for the restrictions applied to the location and about any precautions that shall be taken; and
- access is through the use of a TOOL or lock and key, or other means of security, and is controlled by the authority responsible for the location

NOTE The requirements for equipment intended for installation in RESTRICTED ACCESS LOCATIONS are the same as for OPERATOR ACCESS AREAS, except as given in 1.7.14, 2.1.3, 4.5.4, 4.6.2 and 5.1.7.

### 1.2.7.4

#### **TOOL**

screwdriver or any other object that may be used to operate a screw, latch or similar fixing means

### 1.2.7.5

#### **BODY**

all accessible conductive parts, shafts of handles, knobs, grips and the like, and metal foil in contact with all accessible surfaces of insulating material

### 1.2.7.6

#### **SAFETY INTERLOCK**

means either of preventing access to a hazardous area until the hazard is removed, or of automatically removing the hazardous condition when access is gained

## 1.2.8 Circuits and circuit characteristics

### 1.2.8.1

#### **AC MAINS SUPPLY**

a.c. power distribution system external to the equipment for supplying power to a.c. powered equipment

These power sources include public or private utilities and, unless otherwise specified in the standard (for example, 1.4.5), equivalent sources such as motor-driven generators and uninterruptible power supplies.

NOTE See Annex V for typical examples of a.c. power distribution systems.

### 1.2.8.2

#### **DC MAINS SUPPLY**

d.c. power distribution system, with or without batteries, external to the equipment, for supplying power to d.c. powered equipment, excluding the following:

- a d.c. supply providing power over TELECOMMUNICATION NETWORK wiring to remote equipment;
- a limited power source (see 2.5) whose open circuit voltage is less than or equal to 42,4 V d.c.;
- a d.c. supply whose open circuit voltage is greater than 42,4 V d.c. and less than or equal to 60 V d.c., and whose available power output is less than 240 VA

Circuitry connected to a DC MAINS SUPPLY is considered to be a SECONDARY CIRCUIT (for example, an SELV CIRCUIT, a TNV CIRCUIT or a HAZARDOUS VOLTAGE SECONDARY CIRCUIT) in the meaning of this standard.

NOTE See ITU-T Recommendation K.27 for bonding configurations and earthing inside a telecommunication building.

### 1.2.8.3

#### MAINS SUPPLY

power distribution system that is either an AC MAINS SUPPLY or a DC MAINS SUPPLY

### 1.2.8.4

#### PRIMARY CIRCUIT

circuit that is directly connected to the AC MAINS SUPPLY

It includes, for example, the means for connection to the AC MAINS SUPPLY, the primary windings of transformers, motors and other loading devices.

NOTE Conductive parts of an INTERCONNECTING CABLE may be part of a PRIMARY CIRCUIT as stated in 1.2.11.6.

### 1.2.8.5

#### SECONDARY CIRCUIT

circuit that has no direct connection to a PRIMARY CIRCUIT and derives its power from a transformer, converter or equivalent isolation device, or from a battery

NOTE Conductive parts of an INTERCONNECTING CABLE may be part of a SECONDARY CIRCUIT as stated in 1.2.11.6.

### 1.2.8.6

#### HAZARDOUS VOLTAGE

voltage exceeding 42,4 V peak, or 60 V d.c., existing in a circuit that does not meet the requirements for either a LIMITED CURRENT CIRCUIT or a TNV CIRCUIT

### 1.2.8.7

#### ELV CIRCUIT

SECONDARY CIRCUIT with voltages between any two conductors of the circuit, and between any one such conductor and earth (see 1.4.9), not exceeding 42,4 V peak, or 60 V d.c., under normal operating conditions, which is separated from HAZARDOUS VOLTAGE by BASIC INSULATION, and which neither meets all of the requirements for an SELV CIRCUIT nor meets all of the requirements for a LIMITED CURRENT CIRCUIT

### 1.2.8.8

#### SELV CIRCUIT

SECONDARY CIRCUIT that is so designed and protected that under normal operating conditions and single fault conditions, its voltages do not exceed a safe value

NOTE 1 The limit values of voltages under normal operating conditions and single fault conditions (see 1.4.14) are specified in 2.2. See also Table 1A.

NOTE 2 This definition of an SELV CIRCUIT differs from the term "SELV system" as used in IEC 61140.

### 1.2.8.9

#### LIMITED CURRENT CIRCUIT

circuit that is so designed and protected that, under both normal operating conditions and single fault conditions, the current that can be drawn is not hazardous

NOTE The limit values of currents under normal operating conditions and single fault conditions (see 1.4.14) are specified in 2.4.

#### 1.2.8.10

##### HAZARDOUS ENERGY LEVEL

available power level of 240 VA or more, having a duration of 60 s or more, or a stored energy level of 20 J or more (for example, from one or more capacitors), at a potential of 2 V or more

#### 1.2.8.11

##### TNV CIRCUIT

circuit that is in the equipment and to which the accessible area of contact is limited and that is so designed and protected that, under normal operating conditions and single fault conditions (see 1.4.14), the voltages do not exceed specified limit values

A TNV CIRCUIT is considered to be a SECONDARY CIRCUIT in the meaning of this standard.

NOTE 1 The specified limit values of voltages under normal operating conditions and single fault conditions (see 1.4.14) are given in 2.3.1. Requirements regarding accessibility of TNV CIRCUITS are given in 2.1.1.1.

NOTE 2 Conductive parts of an INTERCONNECTING CABLE may be part of a TNV CIRCUIT as stated in 1.2.11.6.

TNV CIRCUITS are classified as TNV-1 CIRCUITS, TNV-2 CIRCUITS and TNV-3 CIRCUITS as defined in 1.2.8.12, 1.2.8.13 and 1.2.8.14.

NOTE 3 The voltage relationships between SELV and TNV CIRCUITS are shown in Table 1A.

**Table 1A – Voltage ranges of SELV and TNV circuits**

| Overvoltages from<br>TELECOMMUNICATION<br>NETWORKS<br>possible? | Overvoltages from<br>CABLE DISTRIBUTION<br>SYSTEMS possible ? | Normal operating voltages     |                                                                   |
|-----------------------------------------------------------------|---------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------|
|                                                                 |                                                               | Within SELV CIRCUIT<br>limits | Exceeding SELV CIRCUIT<br>limits but within<br>TNV CIRCUIT limits |
| Yes                                                             | Yes                                                           | TNV-1 CIRCUIT                 | TNV-3 CIRCUIT                                                     |
| No                                                              | Not applicable                                                | SELV CIRCUIT                  | TNV-2 CIRCUIT                                                     |

#### 1.2.8.12

##### TNV-1 CIRCUIT

##### TNV CIRCUIT

- whose normal operating voltages do not exceed the limits for an SELV CIRCUIT under normal operating conditions and
- on which overvoltages from TELECOMMUNICATION NETWORKS and CABLE DISTRIBUTION SYSTEMS are possible

#### 1.2.8.13

##### TNV-2 CIRCUIT

##### TNV CIRCUIT

- whose normal operating voltages exceed the limits for an SELV CIRCUIT under normal operating conditions and
- which is not subject to overvoltages from TELECOMMUNICATION NETWORKS

#### 1.2.8.14

##### TNV-3 CIRCUIT

##### TNV CIRCUIT

- whose normal operating voltages exceed the limits for an SELV CIRCUIT under normal operating conditions and

- on which overvoltages from TELECOMMUNICATION NETWORKS and CABLE DISTRIBUTION SYSTEMS are possible

## **1.2.9 Insulation**

### **1.2.9.1**

#### **FUNCTIONAL INSULATION**

insulation that is necessary only for the correct functioning of the equipment

NOTE FUNCTIONAL INSULATION by definition does not protect against electric shock. It may, however, reduce the likelihood of ignition and fire.

### **1.2.9.2**

#### **BASIC INSULATION**

insulation to provide basic protection against electric shock

### **1.2.9.3**

#### **SUPPLEMENTARY INSULATION**

independent insulation applied in addition to BASIC INSULATION in order to reduce the risk of electric shock in the event of a failure of the BASIC INSULATION

### **1.2.9.4**

#### **DOUBLE INSULATION**

insulation comprising both BASIC INSULATION and SUPPLEMENTARY INSULATION

### **1.2.9.5**

#### **REINFORCED INSULATION**

single insulation system that provides a degree of protection against electric shock equivalent to DOUBLE INSULATION under the conditions specified in this standard

NOTE The term "insulation system" does not imply that the insulation has to be in one homogeneous piece. It may comprise several layers that cannot be tested as BASIC INSULATION and SUPPLEMENTARY INSULATION.

### **1.2.9.6**

#### **WORKING VOLTAGE**

highest voltage to which the insulation or the component under consideration is, or can be, subjected when the equipment is operating under conditions of normal use

Overvoltages that originate outside the equipment are not taken into account.

### **1.2.9.7**

#### **RMS WORKING VOLTAGE**

r.m.s. value of a WORKING VOLTAGE, including any d.c. component

NOTE For the purpose of determining RMS WORKING VOLTAGES, the rules of 2.10.2.2 apply, and where relevant those of 1.4.8.

### **1.2.9.8**

#### **PEAK WORKING VOLTAGE**

peak value of a WORKING VOLTAGE, including any d.c. component and any repetitive peak impulses generated in the equipment

Where peak-to-peak ripple exceeds 10 % of the average value, the requirements related to peak or a.c. voltages are applicable.

NOTE For the purpose of determining PEAK WORKING VOLTAGES, the rules of 2.10.2.3 apply, and where relevant those of 1.4.8.

### **1.2.9.9**

#### **REQUIRED WITHSTAND VOLTAGE**

peak voltage that the insulation under consideration is required to withstand

### **1.2.9.10**

#### **MAINS TRANSIENT VOLTAGE**

highest peak voltage expected at the power input to the equipment, arising from external transients on the MAINS SUPPLY

### **1.2.9.11**

#### **TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE**

highest peak voltage expected at the TELECOMMUNICATION NETWORK connection point of the equipment, arising from external transients on the network

NOTE The effect of transients from CABLE DISTRIBUTION SYSTEMS is not taken into account.

## **1.2.10 Properties of insulation**

### **1.2.10.1**

#### **CLEARANCE**

shortest distance between two conductive parts, or between a conductive part and the BOUNDING SURFACE of the equipment, measured through air

### **1.2.10.2**

#### **CREEPAGE DISTANCE**

shortest path between two conductive parts, or between a conductive part and the BOUNDING SURFACE of the equipment, measured along the surface of the insulation

### **1.2.10.3**

#### **BOUNDING SURFACE**

outer surface of the ELECTRICAL ENCLOSURE, considered as though metal foil were pressed into contact with accessible surfaces of insulating material

### **1.2.10.4**

#### **SOLID INSULATION**

material that provides electrical insulation between two opposite surfaces, not along an outer surface

NOTE The required properties of SOLID INSULATION are specified either as

- the actual minimum distance through the insulation (see 2.10.5.2), or by
- other requirements and tests in this standard instead of a minimum distance.

## **1.2.11 Components**

### **1.2.11.1**

#### **THERMOSTAT**

cycling temperature-sensing control intended to keep a temperature between two particular values under normal operating conditions and that may have provision for setting by the OPERATOR

### **1.2.11.2**

#### **TEMPERATURE LIMITER**

temperature-sensing control intended to keep a temperature below or above one particular value during normal operating conditions and that may have provision for setting by the OPERATOR

NOTE A TEMPERATURE LIMITER may be of the automatic reset or of the manual reset type.

**1.2.11.3****THERMAL CUT-OUT**

temperature-sensing control intended to operate under abnormal operating conditions and that has no provision for the OPERATOR to change the temperature setting

NOTE A THERMAL CUT-OUT may be of the automatic reset or of the manual reset type.

**1.2.11.4****THERMAL CUT-OUT, AUTOMATIC RESET**

THERMAL CUT-OUT that automatically restores the current after the relevant part of the equipment has cooled down sufficiently

**1.2.11.5****THERMAL CUT-OUT, MANUAL RESET**

THERMAL CUT-OUT that requires resetting by hand, or replacement of a part, in order to restore the current

**1.2.11.6****INTERCONNECTING CABLE**

cable used to

- electrically connect an accessory to a unit of information technology equipment,
- interconnect units in a system, or
- connect a unit to a TELECOMMUNICATION NETWORK or to a CABLE DISTRIBUTION SYSTEM

Such a cable may carry any type of circuit from one unit to another.

NOTE A power supply cord for connection to the MAINS SUPPLY is not an INTERCONNECTING CABLE.

**1.2.12 Flammability****1.2.12.1****FLAMMABILITY CLASSIFICATION OF MATERIALS**

recognition of the burning behaviour of materials and their ability to extinguish if ignited

Materials are classified as in 1.2.12.2 to 1.2.12.14 when tested in accordance with IEC 60695-11-10, IEC 60695-11-20, ISO 9772 or ISO 9773.

NOTE 1 When applying the requirements in this standard, HF-1 CLASS FOAMED MATERIAL is regarded as better than HF-2 CLASS, and HF-2 CLASS better than HBF CLASS.

NOTE 2 Similarly, material of 5VA CLASS is regarded as better than 5VB CLASS, 5VB CLASS better than V-0 CLASS, V-0 CLASS better than V-1 CLASS, V-1 CLASS better than V-2 CLASS, V-2 CLASS better than HB40 CLASS and HB40 CLASS better than HB75 CLASS.

NOTE 3 Similarly, MATERIAL of VTM-0 CLASS is regarded as better than VTM-1 CLASS and VTM-1 CLASS better than VTM-2 CLASS.

NOTE 4 VTM-0 CLASS, VTM-1 CLASS and VTM-2 CLASS MATERIALS are considered to be equivalent to V-0 CLASS, V-1 CLASS and V-2 CLASS MATERIALS, respectively, but only for their flammability properties. Their electrical and mechanical properties are not necessarily equivalent.

NOTE 5 Certain flammability classes have replaced the classes used in earlier editions of this standard. The equivalence of the old and the new classes is shown in Table 1B.

**Table 1B – Equivalence of flammability classes**

| Old class | New class           | Equivalence                                                                                                                                                                                       |
|-----------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| –         | 5VA<br>(1.2.12.5)   | 5VA is not required in this standard.                                                                                                                                                             |
| 5V        | 5VB<br>(1.2.12.6)   | Materials that pass the tests for class 5V in Clause A.9 of earlier editions of this standard are equivalent to 5VB or better.                                                                    |
| HB        | HB40<br>(1.2.12.10) | Samples of materials in a thickness of 3 mm that pass the tests of Clause A.8 in earlier editions of this standard (maximum burning rate 40 mm/min during test) are equivalent to HB40.           |
|           | HB75<br>(1.2.12.11) | Samples of materials in a thickness of less than 3 mm that pass the tests of Clause A.8 in earlier editions of this standard (maximum burning rate 75 mm/min during test) are equivalent to HB75. |

**1.2.12.2****V-0 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified v-0 according to IEC 60695-11-10

**1.2.12.3****V-1 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified v-1 according to IEC 60695-11-10

**1.2.12.4****V-2 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified v-2 according to IEC 60695-11-10

**1.2.12.5****5VA CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified 5VA according to IEC 60695-11-20

**1.2.12.6****5VB CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified 5VB according to IEC 60695-11-20

**1.2.12.7****HF-1 CLASS FOAMED MATERIAL**

foamed material tested in the thinnest significant thickness used and classified HF-1 according to ISO 9772

**1.2.12.8****HF-2 CLASS FOAMED MATERIAL**

foamed material tested in the thinnest significant thickness used and classified HF-2 according to ISO 9772

**1.2.12.9****HBF CLASS FOAMED MATERIAL**

foamed material tested in the thinnest significant thickness used and classified HBF according to ISO 9772



**1.2.12.10****HB40 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified HB40 according to IEC 60695-11-10

**1.2.12.11****HB75 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified HB75 according to IEC 60695-11-10

**1.2.12.12****VTM-0 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified VTM-0 according to ISO 9773

**1.2.12.13****VTM-1 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified VTM-1 according to ISO 9773

**1.2.12.14****VTM-2 CLASS MATERIAL**

material tested in the thinnest significant thickness used and classified VTM-2 according to ISO 9773

**1.2.12.15****EXPLOSION LIMIT**

lowest concentration of a combustible material in a mixture containing any of the following: gases, vapours, mists or dusts, in which a flame is able to propagate after removal of the ignition source

**1.2.13 Miscellaneous****1.2.13.1****TYPE TEST**

test on a representative sample with the objective of determining if, as designed and manufactured, it can meet the requirements of this standard

**1.2.13.2****SAMPLING TEST**

test on a number of samples taken at random from a batch

**1.2.13.3****ROUTINE TEST**

test to which each individual sample is subjected during or after manufacture to check if the sample complies with certain criteria

**1.2.13.4****DC VOLTAGE**

average value of a voltage having a peak-to-peak ripple not exceeding 10 % of the average value

NOTE Where peak-to-peak ripple exceeds 10 % of the average value, the requirements related to peak voltage are applicable.

#### **1.2.13.5**

##### **SERVICE PERSON**

person having appropriate technical training and experience necessary to be aware of hazards to which that person may be exposed in performing a task and of measures to minimize the risks to that person or other persons

#### **1.2.13.6**

##### **USER**

any person, other than a SERVICE PERSON

The term USER in this standard is the same as the term OPERATOR and the two terms can be interchanged.

#### **1.2.13.7**

##### **OPERATOR**

see USER (1.2.13.6)

#### **1.2.13.8**

##### **TELECOMMUNICATION NETWORK**

metallically terminated transmission medium intended for communication between equipment that may be located in separate buildings, excluding:

- the mains system for supply, transmission and distribution of electrical power, if used as a telecommunication transmission medium;
- CABLE DISTRIBUTION SYSTEMS;
- SELV CIRCUITS connecting units of information technology equipment

NOTE 1 The term TELECOMMUNICATION NETWORK is defined in terms of its functionality, not its electrical characteristics. A TELECOMMUNICATION NETWORK is not itself defined as being either an SELV CIRCUIT or a TNV CIRCUIT. Only the circuits in the equipment are so classified.

NOTE 2 A TELECOMMUNICATION NETWORK may be:

- publicly or privately owned;
- subject to transient overvoltages due to atmospheric discharges and faults in power distribution systems;
- subject to longitudinal (common mode) voltages induced from nearby power lines or electric traction lines.

NOTE 3 Examples of TELECOMMUNICATION NETWORKS are:

- a public switched telephone network;
- a public data network;
- an Integrated Services Digital Network (ISDN);
- a private network with electrical interface characteristics similar to the above.

#### **1.2.13.9**

##### **FUNCTIONAL EARTHING**

earthing of a point in equipment or in a system, which is necessary for a purpose other than safety

#### **1.2.13.10**

##### **PROTECTIVE EARTHING CONDUCTOR**

conductor in the building installation wiring, or in the power supply cord, connecting a main protective earthing terminal in the equipment to an earth point in the building installation

NOTE In some countries, the term "grounding conductor" is used instead of "PROTECTIVE EARTHING CONDUCTOR".

#### **1.2.13.11**

##### **PROTECTIVE BONDING CONDUCTOR**

conductor in the equipment, or a combination of conductive parts in the equipment, connecting a main protective earthing terminal to a part of the equipment that is required to be earthed for safety purposes

**1.2.13.12****TOUCH CURRENT**

electric current through a human body when it touches one or more accessible parts

NOTE TOUCH CURRENT was previously included in the term "leakage current".

**1.2.13.13****PROTECTIVE CONDUCTOR CURRENT**

current flowing through the PROTECTIVE EARTHING CONDUCTOR under normal operating conditions

NOTE PROTECTIVE CONDUCTOR CURRENT was previously included in the term "leakage current".

**1.2.13.14****CABLE DISTRIBUTION SYSTEM**

metallically terminated transmission medium using coaxial cable, mainly intended for transmission of video and/or audio signals between separate buildings or between outdoor antennas and buildings, excluding:

- the mains system for supply, transmission and distribution of electric power, if used as a communication transmission medium;
- TELECOMMUNICATION NETWORKS;
- SELV CIRCUITS connecting units of information technology equipment

NOTE 1 Examples of CABLE DISTRIBUTION SYSTEMS are:

- local area cable networks, community antenna television systems and master antenna television systems providing video and audio signal distribution;
- outdoor antennas including satellite dishes, receiving antennas, and other similar devices.

NOTE 2 CABLE DISTRIBUTION SYSTEMS may be subjected to greater transients than TELECOMMUNICATION NETWORKS (see 7.4.1).

**1.2.13.15****CHEESECLOTH**

bleached cotton cloth of approximately 40 g/m<sup>2</sup>

**1.2.13.16****WRAPPING TISSUE**

soft and strong, lightweight wrapping paper of grammage generally between 12 g/m<sup>2</sup> and 30 g/m<sup>2</sup>, primarily intended for protective packaging of delicate articles and for gift wrapping

[ISO 4046-4:2002, definition 4.215]

**1.2.13.17****PROTECTIVE CURRENT RATING**

rating of an overcurrent protective device that is known or assumed to be in place to protect a circuit

NOTE Rules to determine the value of the PROTECTIVE CURRENT RATING are in 2.6.3.3.

### 1.3 General requirements

#### 1.3.1 Application of requirements

The requirements detailed in this standard shall be applied only if safety is involved.

In order to establish whether or not safety is involved, the circuits and construction shall be carefully investigated to take into account the consequences of possible failures.

#### 1.3.2 Equipment design and construction

Equipment shall be so designed and constructed that, under all conditions of normal use and under likely abnormal use or single fault conditions (see 1.4.14), protection is provided to reduce the risk of personal injury from electric shock and other hazards, and against spread of fire originating in the equipment.

*Compliance is checked by inspection and by the relevant tests.*

#### 1.3.3 Supply voltage

Equipment shall be designed to be safe at any supply voltage to which it is intended to be connected.

*Compliance is checked by inspection and by carrying out the relevant tests of this standard using a supply voltage as specified in the corresponding subclause. If the subclause does not specify the supply voltage (explicitly or by reference to 1.4.5), then the value of the RATED VOLTAGE or any value in the RATED VOLTAGE RANGE shall be used.*

#### 1.3.4 Constructions not specifically covered

Where the equipment involves technologies and materials or methods of construction not specifically covered in this standard, the equipment shall provide a level of safety not less than that generally afforded by this standard and the principles of safety contained herein.

NOTE The need for additional detailed requirements to cope with a new situation should be brought promptly to the attention of the appropriate committee.

#### 1.3.5 Equivalent materials

Where the standard specifies a particular grade of insulation, the use of a better grade of insulation is permitted. Similarly, where the standard requires material of a particular FLAMMABILITY CLASS, the use of a better class is permitted.

#### 1.3.6 Orientation during transport and use

Where it is clear that the orientation of the equipment is likely to have a significant effect on the application of the requirements or the results of tests, all orientations of use permitted in the installation or operating instructions shall be taken into account. For TRANSPORTABLE EQUIPMENT, all orientations of transport and use shall be taken into account.

NOTE The above may apply to 4.1, 4.2, 4.3.8, 4.5, 4.6 and 5.3.

### 1.3.7 Choice of criteria

Where the standard permits a choice between different criteria for compliance, or between different methods or conditions of test, the choice is specified by the manufacturer.

### 1.3.8 Examples mentioned in the standard

Where examples of equipment, parts, methods of construction, design techniques and faults are given in the standard, prefaced by "for example" or "such as", other examples, situations and solutions are not excluded.

### 1.3.9 Conductive liquids

For the electrical requirements of this standard, conductive liquids shall be treated as conductive parts.

## 1.4 General conditions for tests

### 1.4.1 Application of tests

The tests detailed in this standard shall be conducted only if safety is involved.

If it is evident from the design and construction of the equipment that a particular test is not applicable, the test is not made.

Unless otherwise stated, upon conclusion of the tests, the equipment need not be operational.

### 1.4.2 Type tests

Except where otherwise stated, the tests specified in this standard are TYPE TESTS.

### 1.4.3 Test samples

Unless otherwise specified, the sample or samples under test shall be representative of the equipment the USER would receive, or shall be the actual equipment ready for shipment to the USER.

As an alternative to carrying out tests on the complete equipment, tests may be conducted separately on circuits, components or subassemblies outside the equipment, provided that inspection of the equipment and circuit arrangements indicates that the results of such testing will be representative of the results of testing the assembled equipment. If any such test indicates a likelihood of non-conformance in the complete equipment, the test shall be repeated in the equipment.

If a test specified in this standard could be destructive, it is permitted to use a model to represent the condition to be evaluated.

NOTE 1 The tests should be conducted in the following order:

- component or material pre-selection;
- component or subassembly bench tests;
- tests where the equipment is not energized;
- live tests:
  - under normal operating conditions;
  - under abnormal operating conditions;
  - involving likely destruction.

NOTE 2 In view of the resources involved in testing and in order to minimize waste, it is recommended that all parties concerned jointly consider the test programme, the test samples and the test sequence.

#### 1.4.4 Operating parameters for tests

Except where specific test conditions are stated elsewhere in the standard and where it is clear that there is a significant impact on the results of the test, the tests shall be conducted under the most unfavourable combination within the manufacturer's operating specifications of the following parameters:

- supply voltage (see 1.4.5);
- supply frequency (see 1.4.6);
- operating temperature (see 1.4.12);
- physical location of equipment and position of movable parts;
- operating mode;
- adjustment of THERMOSTATS, regulating devices or similar controls in OPERATOR ACCESS AREAS, which are:
  - adjustable without the use of a TOOL; or
  - adjustable using a means, such as a key or a TOOL, deliberately provided for the OPERATOR.

#### 1.4.5 Supply voltage for tests

In determining the most unfavourable voltage for the power to energize the equipment under test (EUT), the following variables shall be taken into account:

- multiple RATED VOLTAGES;
- tolerances on RATED VOLTAGE as specified below;
- extremes of RATED VOLTAGE RANGES.

If the equipment is intended for direct connection to an AC MAINS SUPPLY, the tolerances on RATED VOLTAGE shall be taken as +6 % and –10 %, unless:

- the RATED VOLTAGE is 230 V single-phase or 400 V three-phase, in which case the tolerance shall be taken as +10 % and –10 %; or
- a wider tolerance is declared by the manufacturer, in which case the tolerance shall be taken as this wider value.

If the equipment is intended only for connection to an a.c. mains equivalent source, such as a motor-driven generator or an uninterruptible power supply (see 1.2.8.1), or a source other than a MAINS SUPPLY, the tolerances on RATED VOLTAGE shall be declared by the manufacturer.

If equipment is intended for connection to a DC MAINS SUPPLY, the tolerance shall be taken as +20 % and –15 %, unless declared otherwise by the manufacturer.

When testing equipment designed for d.c. only, the possible influence of polarity shall be taken into account.

#### 1.4.6 Supply frequency for tests

In determining the most unfavourable frequency for the power to energize the EUT, different RATED FREQUENCIES within the RATED FREQUENCY RANGE shall be taken into account (for example, 50 Hz and 60 Hz) but consideration of the tolerance on a RATED FREQUENCY (for example, 50 Hz  $\pm$  0,5 Hz) is not normally necessary.

#### 1.4.7 Electrical measuring instruments

Electrical measuring instruments shall have adequate bandwidth to provide accurate readings, taking into account all components (d.c., AC MAINS SUPPLY frequency, high frequency and harmonic content) of the parameter being measured. If the r.m.s. value is measured, care shall be taken that measuring instruments give true r.m.s. readings of non-sinusoidal waveforms as well as sinusoidal waveforms.

#### 1.4.8 Normal operating voltages

For the purposes of:

- determining WORKING VOLTAGES (see 1.2.9.6); and
- classifying circuits in the equipment as ELV CIRCUITS, SELV CIRCUITS, TNV-1 CIRCUITS, TNV-2 CIRCUITS, TNV-3 CIRCUITS, or HAZARDOUS VOLTAGE circuits;

the following voltages shall be considered:

- normal operating voltages generated in the equipment, including repetitive peak voltages such as those associated with switch mode power supplies;
- normal operating voltages generated outside the equipment, including ringing signals received from TELECOMMUNICATION NETWORKS.

For these purposes, unwanted, externally generated, non-repetitive transient voltages (for example, MAINS TRANSIENT VOLTAGES and TELECOMMUNICATION NETWORK TRANSIENT VOLTAGES) induced by power distribution system switching and lightning surges, shall not be considered:

- when determining WORKING VOLTAGES, because such transients have been taken into account in the procedures for determining minimum CLEARANCES (see 2.10.3 and Annex G);
- when classifying circuits in the equipment, except when distinguishing between SELV CIRCUITS and TNV-1 CIRCUITS and between TNV-2 CIRCUITS and TNV-3 CIRCUITS (see 1.2.8.11, Table 1A).

NOTE 1 The effects of unwanted steady-state voltages generated outside the equipment (for example, earth potential differences and voltages induced on TELECOMMUNICATION NETWORKS by electric train systems) are controlled by installation practices or by appropriate isolation in the equipment. Such measures are application dependent and are not dealt with by this standard.

NOTE 2 In Canada and the United States, additional requirements apply for protection against overvoltages (see Clause 6 Note 5).

#### 1.4.9 Measurement of voltage to earth

Where the standard specifies a voltage between a conductive part and earth, all of the following earthed parts are considered:

- the main protective earthing terminal (if any); and
- any other conductive part required to be connected to protective earth (for examples see 2.6.1); and

- any conductive part that is earthed within the equipment for functional reasons.

Parts that will be earthed in the application by connection to other equipment, but are unearthed in the equipment as tested, shall be connected to earth at the point by which the highest voltage is obtained. When measuring a voltage between earth and a conductor in a circuit that will not be earthed in the intended application of the equipment, a non-inductive resistor of  $5\,000\ \Omega \pm 10\%$  shall be connected across the voltage measuring instrument.

Voltage drop in the PROTECTIVE EARTHING CONDUCTOR of the power supply cord, or in an earthed conductor in other external wiring, is not included in the measurements.

#### 1.4.10 Loading configuration of the EUT

In determining the input current (see 1.6.2), and where other test results could be affected, the following variables shall be considered and adjusted to give the most unfavourable results:

- loads due to optional features, offered or provided by the manufacturer for inclusion in or with the EUT;
- loads due to other units of equipment intended by the manufacturer to draw power from the EUT;
- loads that could be connected to any standard supply outlets in OPERATOR ACCESS AREAS on the equipment, up to the value indicated in the marking required by 1.7.5.

It is permitted to use artificial loads to simulate such loads during testing.

#### 1.4.11 Power from a telecommunication network

For the purpose of this standard, the power available from a TELECOMMUNICATION NETWORK is considered to be limited to 15 VA.

#### 1.4.12 Temperature measurement conditions

##### 1.4.12.1 General

Temperatures measured on the EUT shall conform to 1.4.12.2 or 1.4.12.3, as applicable, all temperatures being in degrees Celsius ( $^{\circ}\text{C}$ ); where

- $T$  is the temperature of the given part measured under the prescribed test conditions;
- $T_{\text{max}}$  is the maximum temperature specified for compliance with the test;
- $T_{\text{amb}}$  is the ambient temperature during test;
- $T_{\text{ma}}$  is the maximum ambient temperature permitted by the manufacturer's specification, or  $25\ ^{\circ}\text{C}$ , whichever is greater.



#### 1.4.12.2 Temperature dependent equipment

For equipment where the amount of heating or cooling is designed to be dependent on temperature (for example, the equipment contains a fan that has a higher speed at a higher temperature), the temperature measurement is made at the least favourable ambient temperature within the manufacturer's specified operating range. In this case:

$T$  shall not exceed  $T_{\max}$ .

NOTE 1 In order to find the highest value of  $T$  for each component, it may be necessary to conduct several tests at different values of  $T_{\text{amb}}$ .

NOTE 2 The least favourable value of  $T_{\text{amb}}$  may be different for different components.

#### 1.4.12.3 Non-temperature dependent equipment

For equipment where the amount of heating or cooling is not designed to be dependent on ambient temperature, it is permitted to use the method in 1.4.12.2. Alternatively, the test is performed at any value of  $T_{\text{amb}}$  within the manufacturer's specified operating range. In this case:

$T$  shall not exceed  $(T_{\max} + T_{\text{amb}} - T_{\text{ma}})$ .

During the test,  $T_{\text{amb}}$  should not exceed  $T_{\text{ma}}$  unless agreed by all parties involved.

#### 1.4.13 Temperature measurement methods

Unless a particular method is specified, the temperatures of windings shall be determined either by the thermocouple method or by the resistance method (see Annex E). The temperatures of parts other than windings shall be determined by the thermocouple method. Any other suitable method of temperature measurement which does not noticeably influence the thermal balance and which achieves an accuracy sufficient to show compliance is also permitted. The choice of and position of temperature sensors shall be made so that they have minimum effect on the temperature of the part under test.

#### 1.4.14 Simulated faults and abnormal conditions

Where it is required to apply simulated faults or abnormal operating conditions, these shall be applied in turn and one at a time. Faults that are the direct consequence of a simulated fault or abnormal operating condition are considered to be part of that simulated fault or abnormal operating condition.

When applying simulated faults or abnormal operating conditions, parts, supplies, consumable materials, media and recording materials shall be in place if they are likely to have an effect on the outcome of the test.

Where there is a specific reference to a single fault, the single fault consists of a single failure of any insulation (excluding DOUBLE INSULATION or REINFORCED INSULATION) or a single failure of any component (excluding components with DOUBLE INSULATION or REINFORCED INSULATION). The failure of FUNCTIONAL INSULATION is simulated only when required by 5.3.4 c).

The equipment, circuit diagrams and component specifications are examined to determine those fault conditions that might reasonably be expected to occur. Examples include:

- short-circuits and open circuits of semiconductor devices and capacitors;
- faults causing continuous dissipation in resistors designed for intermittent dissipation;
- internal faults in integrated circuits causing excessive dissipation;
- failure of BASIC INSULATION between current-carrying parts of the PRIMARY CIRCUIT and
  - accessible conductive parts;
  - earthed conductive screens (see Clause C.2);
  - parts of SELV CIRCUITS;
  - parts of LIMITED CURRENT CIRCUITS.

#### 1.4.15 Compliance by inspection of relevant data

Where in this standard compliance of materials, components or subassemblies is checked by inspection or by testing of properties, it is permitted to confirm compliance by reviewing any relevant data or previous test results that are available instead of carrying out the specified TYPE TESTS.

### 1.5 Components

#### 1.5.1 General

Where safety is involved, components shall comply either with the requirements of this standard or with the safety aspects of the relevant IEC component standards.

NOTE 1 An IEC component standard is considered relevant only if the component in question clearly falls within its Scope.

NOTE 2 In Sweden, switches containing mercury are not permitted.

NOTE 3 In Switzerland, switches containing mercury such as THERMOSTATS, relays and level controllers are not allowed.

#### 1.5.2 Evaluation and testing of components

*Evaluation and testing of components shall be conducted as follows:*

- *a component that has been demonstrated to comply with a standard harmonized with the relevant IEC component standard shall be checked for correct application and use in accordance with its rating. It shall be subjected to the applicable tests of this standard as part of the equipment with the exception of those tests which are part of the relevant IEC component standard;*
- *a component that has not been demonstrated to comply with a relevant standard as above shall be checked for correct application and use in accordance with its specified rating. It shall be subjected to the applicable tests of this standard, as part of the equipment, and to the applicable tests of the component standard, under the conditions occurring in the equipment;*

NOTE The applicable test for compliance with a component standard is, in general, conducted separately.

- *where no relevant IEC component standard exists, or where components are used in circuits not in accordance with their specified ratings, the components shall be tested under the conditions occurring in the equipment. The number of samples required for test is, in general, the same as required by an equivalent standard.*

### 1.5.3 Thermal controls

*Thermal controls shall be tested in accordance with Annex K.*

### 1.5.4 Transformers

Transformers shall comply with the relevant requirements of this standard, including those of Annex C.

### 1.5.5 Interconnecting cables

INTERCONNECTING CABLES provided as part of the equipment shall comply with the relevant requirements of this standard and shall not present a hazard in the meaning of this standard whether they are detachable or non-detachable.

For INTERCONNECTING CABLES supplied alone (for example, printer cables), it is permitted to apply the requirements of this subclause at the option of the manufacturer.

It is permitted to treat cables, or those parts of cables that are within an equipment ENCLOSURE, either as INTERCONNECTING CABLES or as internal wiring.

### 1.5.6 Capacitors bridging insulation

A capacitor connected between two line conductors in a PRIMARY CIRCUIT, or between one line conductor and the neutral conductor or between the PRIMARY CIRCUIT and protective earth shall comply with one of the subclasses of IEC 60384-14 and shall be used in accordance with its rating. This requirement also applies to a capacitor bridging DOUBLE INSULATION or REINFORCED INSULATION elsewhere in the equipment. The details of the damp heat, steady state test as specified in 4.12 of IEC 60384-14 shall be as follows:

- Temperature:  $40\text{ °C} \pm 2\text{ °C}$ ;
- Humidity:  $93\% \pm 3\%$  relative humidity;
- Test duration: 21 days.

NOTE 1 Capacitors that have been subjected to a test duration longer than 21 days are considered to have met the test duration criteria.

The above requirement does not apply to a capacitor connected between a HAZARDOUS VOLTAGE SECONDARY CIRCUIT and protective earth, where only BASIC INSULATION is required.

NOTE 2 The test of 5.2.2 still applies between the HAZARDOUS VOLTAGE SECONDARY CIRCUIT and protective earth.

The appropriate capacitor subclass shall be selected from those listed in Table 1C, according to the rules of application in the table.

**Table 1C – Capacitor ratings according to IEC 60384-14**

| Capacitor subclass according to IEC 60384-14 | RATED VOLTAGE of the capacitor<br>V r.m.s. | TYPE TEST voltage of the capacitor<br>kV peak |
|----------------------------------------------|--------------------------------------------|-----------------------------------------------|
| Y1                                           | Up to and including 500                    | 8                                             |
| Y2                                           | Over 150 up to and including 300           | 5                                             |
| Y4                                           | Up to and including 150                    | 2,5                                           |
| X1                                           | -                                          | 4 <sup>a</sup>                                |
| X2                                           | -                                          | 2,5 <sup>a</sup>                              |

**Rules for the application of Table 1C**

- Capacitors used to bridge BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION shall be class Y except that it is permitted to bridge BASIC INSULATION in a SECONDARY CIRCUIT by a class X capacitor.
- The voltage rating of the capacitor shall be at least equal to the RMS WORKING VOLTAGE across the insulation being bridged, determined according to 2.10.2.2.
- For a single capacitor bridging FUNCTIONAL INSULATION, BASIC INSULATION or SUPPLEMENTARY INSULATION, the peak test voltage of the capacitor shall be at least equal to the REQUIRED WITHSTAND VOLTAGE.
- For a single capacitor bridging DOUBLE INSULATION or REINFORCED INSULATION, the peak test voltage of the capacitor shall be at least equal to twice the REQUIRED WITHSTAND VOLTAGE.
- It is permitted to use a higher grade capacitor than the one specified, as follows:
  - subclass Y1 if subclass Y2 is specified;
  - subclass Y1 or Y2 if subclass Y4 is specified;
  - subclass Y1 or Y2 if subclass X1 is specified;
  - subclass X1, Y1 or Y2 if subclass X2 is specified.
- It is permitted to use two or more capacitors in series in place of the single capacitor specified, as follows:
  - subclass Y1 or Y2 if subclass Y1 is specified;
  - subclass Y2 or Y4 if subclass Y2 is specified;
  - subclass X1 or X2 if subclass X1 is specified.
- If two or more capacitors are used in series, they shall
  - all have the same nominal capacitance value;
  - each be rated for the total RMS WORKING VOLTAGE across the insulation; and
  - comply with the other rules above.

<sup>a</sup> For capacitance values of more than 1 µF, this test voltage is reduced by a factor equal to  $\sqrt{C}$ , where C is the capacitance value in µF.

Table 1D gives a number of informative examples of the application of capacitors selected in accordance with Table 1C. Other examples are possible.

**Table 1D – Informative examples of application of capacitors**

| AC MAINS SUPPLY<br>VOLTAGE<br>up to and including<br>V r.m.s.                                                                                                        | Overvoltage<br>Category | MAINS<br>TRANSIENT<br>VOLTAGE<br>kV | Bridged<br>insulation | Capacitor<br>type | Number of<br>capacitors |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------|-----------------------|-------------------|-------------------------|
| 150                                                                                                                                                                  | II                      | 1,5                                 | B or S                | Y4                | 1                       |
|                                                                                                                                                                      | II                      | 1,5                                 | D or R                | Y2                | 1                       |
|                                                                                                                                                                      | II                      | 1,5                                 | D or R                | Y4                | 2                       |
|                                                                                                                                                                      | III                     | 2,5                                 | F                     | X2                | 1                       |
|                                                                                                                                                                      | III                     | 2,5                                 | B or S                | Y4                | 1                       |
|                                                                                                                                                                      | III                     | 2,5                                 | D or R                | Y1                | 1                       |
|                                                                                                                                                                      | IV                      | 4,0                                 | F                     | X1                | 1                       |
|                                                                                                                                                                      | IV                      | 4,0                                 | B or S                | Y2                | 1                       |
|                                                                                                                                                                      | IV                      | 4,0                                 | D or R                | Y1                | 1                       |
| 250                                                                                                                                                                  | II                      | 2,5                                 | F                     | X2                | 1                       |
| 300                                                                                                                                                                  | II                      | 2,5                                 | B or S                | Y2                | 1                       |
|                                                                                                                                                                      | II                      | 2,5                                 | D or R                | Y1                | 1                       |
|                                                                                                                                                                      | II                      | 2,5                                 | D or R                | Y2                | 2                       |
| 250                                                                                                                                                                  | III                     | 4,0                                 | F                     | X1                | 1                       |
| 300                                                                                                                                                                  | III                     | 4,0                                 | D or R                | Y1                | 1                       |
|                                                                                                                                                                      | III                     | 4,0                                 | D or R                | Y2                | 2                       |
|                                                                                                                                                                      | IV                      | 6,0                                 | B or S                | Y1                | 1                       |
|                                                                                                                                                                      | IV                      | 6,0                                 | D or R                | Y1                | 2                       |
| 500                                                                                                                                                                  | II                      | 4,0                                 | B or S                | Y1                | 1                       |
|                                                                                                                                                                      | II                      | 4,0                                 | D or R                | Y1                | 1                       |
|                                                                                                                                                                      | III                     | 6,0                                 | B or S                | Y1                | 1                       |
|                                                                                                                                                                      | III                     | 6,0                                 | D or R                | Y1                | 2                       |
|                                                                                                                                                                      | IV                      | 8,0                                 | B or S                | Y1                | 1                       |
|                                                                                                                                                                      | IV                      | 8,0                                 | D or R                | Y1                | 2                       |
| The values in the table apply to FUNCTIONAL INSULATION (F), BASIC INSULATION (B), SUPPLEMENTARY INSULATION (S), DOUBLE INSULATION (D) and REINFORCED INSULATION (R). |                         |                                     |                       |                   |                         |

If an accessible conductive part or circuit is separated from another part by DOUBLE INSULATION or REINFORCED INSULATION that is bridged by a capacitor or capacitors, the accessible part or circuit shall comply with the requirements for a LIMITED CURRENT CIRCUIT in 2.4. This requirement applies after electric strength testing of the insulation with the bridging capacitor or capacitors in place.

NOTE 3 A circuit is a LIMITED CURRENT CIRCUIT if the current through the bridging components complies with 2.4 and other requirements of 2.4 are met.

*Compliance is checked by inspection and measurement.*

## 1.5.7 Resistors bridging insulation

### 1.5.7.1 Resistors bridging functional insulation, basic insulation or supplementary insulation

There are no special requirements for resistors bridging FUNCTIONAL INSULATION, BASIC INSULATION or SUPPLEMENTARY INSULATION, but the relevant requirements of 2.10.3 (or Annex G) and 2.10.4 apply, and in some cases those of 2.4.

NOTE In Finland, Norway and Sweden resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2.

### 1.5.7.2 Resistors bridging double insulation or reinforced insulation between the a.c. mains supply and other circuits

It is permitted to bridge DOUBLE INSULATION or REINFORCED INSULATION by one resistor or by a group of two or more resistors in series under the following conditions. For conditions applicable to circuits connected to an antenna or coaxial cable, see 1.5.7.3.

The resistor or group of resistors shall comply with the minimum CLEARANCES of 2.10.3 or Annex G and the minimum CREEPAGE DISTANCES of 2.10.4 for REINFORCED INSULATION for the total WORKING VOLTAGE across the resistor or group of resistors. For a group of resistors, see also Figure F.13.

If a single resistor is used, it shall pass the resistor test below.

If a group of resistors is used, the CLEARANCE and CREEPAGE DISTANCES are assessed as if each resistor were short-circuited in turn, unless the group passes the resistor test below.

If an accessible conductive part or circuit is separated from another part by DOUBLE INSULATION or REINFORCED INSULATION that is bridged by a resistor or group of resistors, the accessible part or circuit shall comply with the requirements for a LIMITED CURRENT CIRCUIT in 2.4. If a group of resistors is used, the current measurement in 2.4.2 is made with each resistor short-circuited in turn, unless the group passes the resistor test below. This current is measured after electric strength testing of the insulation with the bridging resistor or group of resistors in place.

*Compliance is checked by inspection and measurement and, if specified above, by the following resistor test on ten samples. A sample is a single resistor if used alone, or a group of resistors in series.*

#### *Resistor Test*

*Before the test, the resistance of each sample is measured.*

*The samples are subjected to the damp heat test according to IEC 60068-2-78, with the following details:*

- *Temperature: 40 °C ± 2 °C;*
- *Humidity: 93 % ± 3 % relative humidity;*
- *Test duration: 21 days.*

NOTE Resistors that have been subjected to a test duration longer than 21 days are considered to have met the test duration criteria.

*Each sample is then subjected to ten impulses of alternating polarity, using the impulse test generator reference 2 of Table N.1. The interval between successive impulses is 60 s, and  $U_c$  is equal to the applicable REQUIRED WITHSTAND VOLTAGE.*

*After the test, the resistance of each sample shall not have changed by more than 10 %.*

*No failure is permitted.*

### **1.5.7.3 Resistors bridging double insulation or reinforced insulation between the a.c. mains supply and circuits connected to an antenna or coaxial cable**

The requirements and tests of 1.5.7.2 apply except the impulse test generator is as specified in reference 3 of Table N.1 if the circuit is connected to an antenna or reference 1 of Table N.1 if the circuit is connected to a coaxial cable.

*After the test, the resistance of each sample shall not have changed by more than 20 % and no failure is permitted.*

NOTE If a resistor or a group of resistors is connected between the PRIMARY CIRCUIT and a CABLE DISTRIBUTION SYSTEM, 7.4 also applies.

## **1.5.8 Components in equipment for IT power distribution systems**

For equipment to be connected to IT power distribution systems, components connected between line and earth shall be capable of withstanding the stress due to the line-to-line voltage. However, capacitors rated for the applicable line-to-neutral voltage are permitted in such applications if they comply with subclass Y1, Y2 or Y4 of IEC 60384-14.

NOTE 1 The above capacitors are endurance tested at 170 % of the voltage rating of the capacitor.

NOTE 2 In Norway, due to the IT power distribution system used (see Annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).

*Compliance is checked by inspection.*

## **1.5.9 Surge suppressors**

### **1.5.9.1 General**

It is permitted to use any type of surge suppressor, including a voltage dependent resistor (VDR), in a SECONDARY CIRCUIT.

If a surge suppressor is used in a PRIMARY CIRCUIT, it shall be a VDR and it shall comply with Annex Q.

NOTE 1 A VDR is sometimes referred to as a varistor or a metal oxide varistor (MOV). Devices such as gas discharge tubes, carbon blocks and semiconductor devices with non-linear voltage/current characteristics are not considered as VDRs in this standard.

NOTE 2 It is not a requirement of this standard to comply with any particular component standard for surge suppressors used in SECONDARY CIRCUITS. However, attention is drawn to the IEC 61643 series of standards, in particular:

- IEC 61643-21 (surge suppressors in telecommunications application)
- IEC 61643-311 (gas discharge tubes)
- IEC 61643-321 (avalanche breakdown diodes)
- IEC 61643-331 (metal oxide varistors).

*Compliance is checked by inspection and application of Annex Q as appropriate.*

### **1.5.9.2 Protection of VDRs**

For protection against

- temporary overvoltages above the maximum continuous voltage,
- thermal overload due to leakage current within the VDR, and
- burning and bursting of the VDR in the event of a short-circuit fault,

an interrupting means having an adequate breaking capacity shall be connected in series with the VDR. This requirement does not apply to a VDR in a LIMITED CURRENT CIRCUIT.

NOTE 1 For temporary overvoltages from the AC MAINS SUPPLY, see IEC 60664-1.

NOTE 2 During the lifetime of a VDR the leakage current increases with the number of switching cycles in the VDR. This leakage current causes a permanent and continuously increasing temperature stress, which can cause the VDR to burn or burst.

*Compliance is checked by inspection.*

### **1.5.9.3 Bridging of functional insulation by a VDR**

It is permitted to bridge FUNCTIONAL INSULATION by a VDR.

*Compliance is checked by inspection.*

### **1.5.9.4 Bridging of basic insulation by a VDR**

It is permitted to bridge BASIC INSULATION by a VDR provided that one side of the VDR is earthed in accordance with 2.6.1 a).

Equipment with such a VDR bridging BASIC INSULATION shall be one of the following:

- PLUGGABLE EQUIPMENT TYPE B; or
- PERMANENTLY CONNECTED EQUIPMENT; or
- equipment that has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor.

NOTE In Finland, Norway and Sweden, the third dashed item is applicable only to equipment as defined in the Note to 6.1.2.2.

*Compliance is checked by inspection.*

### **1.5.9.5 Bridging of supplementary, double or reinforced insulation by a VDR**

It is not permitted to bridge SUPPLEMENTARY INSULATION, DOUBLE INSULATION OR REINFORCED INSULATION by a VDR.

*Compliance is checked by inspection.*



## 1.6 Power interface

### 1.6.1 AC power distribution systems

AC power distribution systems are classified as TN-C, TN-C-S, TN-S, TT or IT (see Annex V).

### 1.6.2 Input current

The steady state input current of the equipment shall not exceed the RATED CURRENT by more than 10 % under NORMAL LOAD.

NOTE See also 1.4.10.

*Compliance is checked by measuring the input current of the equipment at NORMAL LOAD under the following conditions:*

- *where an equipment has more than one RATED VOLTAGE, the input current is measured at each RATED VOLTAGE;*
- *where an equipment has one or more RATED VOLTAGE RANGES, the input current is measured at each end of each RATED VOLTAGE RANGE. Where a single value of RATED CURRENT is marked (see 1.7.1), it is compared with the higher value of input current measured in the associated voltage range. Where two values of RATED CURRENT are marked, separated by a hyphen, they are compared with the two values measured in the associated voltage range.*

*In each case, the readings are taken when the input current has stabilized. If the current varies during the normal operating cycle, the steady-state current is taken as the mean indication of the value, measured on a recording r.m.s. ammeter, during a representative period.*

### 1.6.3 Voltage limit of hand-held equipment

The RATED VOLTAGE of HAND-HELD EQUIPMENT shall not exceed 250 V.

*Compliance is checked by inspection.*

### 1.6.4 Neutral conductor

The neutral conductor, if any, shall be insulated from earth and from the BODY throughout the equipment as if it were a line conductor. Components connected between neutral and earth shall be rated for the line-to-neutral voltage (however, see also 1.5.8).

*Compliance is checked by inspection.*

## 1.7 Markings and instructions

NOTE Additional requirements for markings and instructions are contained in the following subclauses:

|            |                             |         |                              |
|------------|-----------------------------|---------|------------------------------|
| 2.1.1.2    | Battery compartments        | 3.2.1.2 | DC MAINS SUPPLY              |
| 2.1.1.8    | Energy hazards              | 3.3.7   | Grouping of wiring terminals |
| 2.3.2.3    | Protection by earthing      | 3.4.3   | Disconnect devices           |
| 2.6.1      | Unearthed parts             | 3.4.6   | Two-pole disconnect devices  |
| 2.6.2      | FUNCTIONAL EARTHING         | 3.4.7   | Four-pole disconnect devices |
| 2.6.3.4 c) | Bonding conductors          | 3.4.9   | Plugs as disconnect devices  |
| 2.6.5.1    | Bonding conductors          | 3.4.10  | Interconnected equipment     |
| 2.7.1      | External protective devices |         |                              |
| 2.7.6      | Neutral fusing              |         |                              |
| 2.10.3.2   | Overvoltage Categories      |         |                              |

|                |                        |                   |                                                |
|----------------|------------------------|-------------------|------------------------------------------------|
| 3.4.11         | Multiple power sources | 4.6.2             | Equipment on non-combustible floors            |
| 4.1            | Equipment stability    | 4.6.3             | Removable doors and covers                     |
| 4.2.5          | Impact test            | 5.1.7.1           | TOUCH CURRENT exceeding 3,5 mA                 |
| 4.3.3          | Adjustable controls    | 5.1.8.2           | Summation of TOUCH CURRENTS                    |
| 4.3.5          | Plugs and sockets      | 6.1.1 and 6.1.2.2 | Earthing for a TELECOMMUNICATION NETWORK       |
| 4.3.13.4       | UV radiation           | 7.2 and 7.4.1     | Earthing for a CABLE DISTRIBUTION SYSTEM       |
| 4.3.13.5       | Lasers                 | G.2.1             | Equipment in Overvoltage Categories III and IV |
| 4.4.2          | Hazardous moving parts |                   |                                                |
| 4.5.3 Table 4C | Marking of hot parts   |                   |                                                |
| 4.5.4          | Touch temperatures     |                   |                                                |

*Compliance with each subclause of 1.7 is checked by inspection unless otherwise specified (see 1.7.11).*

### 1.7.1 Power rating

Equipment shall be provided with a power rating marking, the purpose of which is to specify a supply of correct voltage and frequency, and of adequate current-carrying capacity.

If a unit is not provided with a means for direct connection to a MAINS SUPPLY, it need not be marked with any electrical rating, such as its RATED VOLTAGE, RATED CURRENT or RATED FREQUENCY.

For equipment intended to be installed by an OPERATOR, the marking shall be readily visible in an OPERATOR ACCESS AREA, including any area that is directly visible only after an OPERATOR has opened a door or cover. If a manual voltage selector is not OPERATOR-accessible, the marking shall indicate the RATED VOLTAGE for which the equipment is set during manufacture; a temporary marker is permitted for this purpose. Marking is permitted on any outer surface of the equipment, except the bottom of equipment having a mass exceeding 18 kg. Additionally, on STATIONARY EQUIPMENT, the marking shall be visible after the equipment has been installed as in normal use.

For equipment intended to be installed by a SERVICE PERSON, and if the marking is in a SERVICE ACCESS AREA, the location of the permanent marking shall be indicated in the installation instructions or on a readily visible marker on the equipment. It is permitted to use a temporary marker for this purpose.

The marking shall include the following:

- RATED VOLTAGE(S) or RATED VOLTAGE RANGE(S), in volts;
  - the voltage range shall have a hyphen (-) between the minimum and maximum RATED VOLTAGES and when multiple RATED VOLTAGES or RATED VOLTAGE RANGES are given, they shall be separated by a solidus (/);

NOTE 1 Some examples of RATED VOLTAGE markings are:

- RATED VOLTAGE RANGE: 220-240 V. This means that the equipment is designed to be connected to an AC MAINS SUPPLY having any voltage between 220 V and 240 V.
- Multiple RATED VOLTAGE: 120/230/240 V. This means that the equipment is designed to be connected to an AC MAINS SUPPLY having a voltage of 120 V or 230 V or 240 V, usually after internal adjustment.

- if equipment is to be connected to both of the line conductors and to the neutral conductor of a single-phase, three-wire power distribution system, the marking shall give the line-to-neutral voltage and the line-to-line voltage, separated by a solidus (/), with the added notation "Three wires plus protective earth", "3W + PE" or equivalent.

NOTE 2 Some examples of the above system rating markings are:

120/240 V; 3 wire + PE

120/240 V; 3W +  (60417-IEC-5019)

100/200 V; 2W + N + PE

- symbol for nature of supply, for d.c. only;
- RATED FREQUENCY OR RATED FREQUENCY RANGE, in hertz, unless the equipment is designed for d.c. only;
- RATED CURRENT, in milliamperes or amperes;
  - for equipment with multiple RATED VOLTAGES, the corresponding RATED CURRENTS shall be marked such that the different current ratings are separated by a solidus (/) and the relation between RATED VOLTAGE and associated RATED CURRENT appears distinctly;
  - equipment with a RATED VOLTAGE RANGE shall be marked with either the maximum RATED CURRENT or with the current range;
  - the marking for RATED CURRENT of a group of units having a single supply connection shall be placed on the unit which is directly connected to a MAINS SUPPLY. The RATED CURRENT marked on that unit shall be the total maximum current that can be on circuit at the same time and shall include the combined currents to all units in the group that can be supplied simultaneously through the unit and that can be operated simultaneously.

NOTE 3 Some examples of RATED CURRENT markings are:

- for equipment with multiple RATED VOLTAGES:

120/240 V; 2,4/1,2 A

- for equipment with a RATED VOLTAGE RANGE:

100-240 V; 2,8 A

100-240 V; 2,8-1,4 A

100-120 V; 2,8 A

200-240 V; 1,4 A

It is recognized that in some regions it is customary to use a point (.) as a decimal marker instead of a comma.

- manufacturer's name or trade-mark or identification mark;
- manufacturer's model identification or type reference;
- symbol  (IEC 60417-5172 (DB:2003-02)), for CLASS II EQUIPMENT only, except where this is forbidden by 2.6.2.

Additional markings are permitted, provided that they do not give rise to misunderstanding.

Where symbols are used, they shall conform to ISO 7000 or IEC 60417 where appropriate symbols exist.

## 1.7.2 Safety instructions and marking

### 1.7.2.1 General

Sufficient information shall be provided to the USER concerning any condition necessary to ensure that, when used as prescribed by the manufacturer, the equipment is unlikely to present a hazard within the meaning of this standard.

If it is necessary to take special precautions to avoid the introduction of hazards when operating, installing, servicing, transporting or storing equipment, the necessary instructions shall be made available.

NOTE 1 Special precautions may be necessary, for example, for connection of the equipment to the supply and for the interconnection of separate units, if any.

NOTE 2 Where appropriate, installation instructions should include reference to national wiring rules.

NOTE 3 In many countries, instructions and equipment marking related to safety are required to be in a language that is acceptable in the country in which the equipment is to be installed. Servicing instructions are normally made available only to SERVICE PERSONS and are generally acceptable in the English language only.

NOTE 4 In Germany, safety-related information, even for SERVICE PERSONS, has to be in the German language.

NOTE 5 In Canada, the instructions and markings should be in French and English.

NOTE 6 In Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network, must, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.

The operating instructions, and the installation instructions for PLUGGABLE EQUIPMENT intended for USER installation, shall be made available to the USER.

### 1.7.2.2 Disconnect devices

Where the disconnect device is not incorporated in the equipment (see 3.4.3) or where the plug on the power supply cord is intended to serve as the disconnect device, the installation instructions shall state that:

- for PERMANENTLY CONNECTED EQUIPMENT, a readily accessible disconnect device shall be incorporated external to the equipment;
- for PLUGGABLE EQUIPMENT, the socket-outlet shall be installed near the equipment and shall be easily accessible.

### 1.7.2.3 Overcurrent protective devices

For PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, the installation instructions shall specify the maximum rating of an overcurrent protective device to be provided external to the equipment, unless there are appropriate overcurrent protective devices in the equipment [see also 2.6.3.3 b)].

NOTE The specified maximum rating may not be one of the protective device ratings available in the country of installation. Allowance should be made for the use of a device with a smaller rating that will still be adequate for the equipment RATED CURRENT plus any necessary allowance for inrush current.

#### 1.7.2.4 IT power distribution systems

If the equipment has been designed or, when required, modified for connection to an IT power distribution system, the equipment installation instructions shall so state.

#### 1.7.2.5 Operator access with a tool

If a TOOL is necessary to gain access to an OPERATOR ACCESS AREA, either all other compartments within that area containing a hazard shall be inaccessible to the OPERATOR by the use of the same TOOL, or such compartments shall be marked to discourage OPERATOR access.

An acceptable marking for an electric shock hazard is  (ISO 3864, No. 5036).

#### 1.7.2.6 Ozone

For equipment that may produce ozone, the installation and operating instructions shall refer to the need to take precautions to ensure that the concentration of ozone is limited to a safe value.

NOTE The present recommended long term exposure limit for ozone is  $0,1 \times 10^{-6}$  ( $0,2 \text{ mg/m}^3$ ) calculated as an 8 h time-weighted average concentration. It should be noted that ozone is heavier than air.

#### 1.7.3 Short duty cycles

Equipment not intended for continuous operation shall be marked with its RATED OPERATING TIME, and RATED RESTING TIME unless the operating time is limited by the construction.

The marking of RATED OPERATING TIME shall correspond to normal use.

The marking of the RATED OPERATING TIME shall precede the marking of the RATED RESTING TIME (if given), the two markings being separated by a solidus (/).

#### 1.7.4 Supply voltage adjustment

For equipment intended for connection to multiple RATED VOLTAGES or FREQUENCIES, the method of adjustment shall be fully described in the servicing or installation instructions.

Unless the means of adjustment is a simple control near the power rating marking, and the setting of this control is obvious by inspection, the following instruction or a similar one shall appear in or near the power rating marking:

**SEE INSTALLATION INSTRUCTIONS  
BEFORE CONNECTING TO THE SUPPLY**

#### 1.7.5 Power outlets on the equipment

If any standard power supply outlet in the equipment is accessible to the OPERATOR, a marking shall be placed in the vicinity of the outlet to show the maximum load that is permitted to be connected to it.

Socket-outlets conforming to IEC 60083 are examples of standard power supply outlets.

### 1.7.6 Fuse identification

Marking shall be located adjacent to each fuse or fuseholder, or on the fuseholder, or in another location provided that it is obvious to which fuse the marking applies, giving the fuse current rating and, where fuses of different voltage rating value could be fitted, the fuse voltage rating.

Where fuses with special fusing characteristics such as time delay or breaking capacity are necessary, the type shall also be indicated.

For fuses not located in OPERATOR ACCESS AREAS and for soldered-in fuses located in OPERATOR ACCESS AREAS, it is permitted to provide an unambiguous cross-reference (for example, F1, F2, etc.) to the servicing instructions that shall contain the relevant information.

NOTE See 2.7.6 regarding other warnings to SERVICE PERSONS.

### 1.7.7 Wiring terminals

#### 1.7.7.1 Protective earthing and bonding terminals

A wiring terminal intended for connection of a PROTECTIVE EARTHING CONDUCTOR shall be indicated by the symbol  $\oplus$  (IEC 60417-5019 (DB:2002-10)). This symbol shall not be used for other earthing terminals.

It is not a requirement to mark terminals for PROTECTIVE BONDING CONDUCTORS, but where such terminals are marked, the symbol  $\perp$  (IEC 60417-5017 (DB:2002-10)) shall be used.

The following situations are exempt from the above requirements:

- where terminals for the connection of a supply are provided on a component (for example, a terminal block) or subassembly (for example, a power supply unit), the symbol  $\perp$  is permitted for the protective earthing terminal instead of  $\oplus$ ;
- on subassemblies or components, the symbol  $\oplus$  is permitted in place of the symbol  $\perp$  provided that it does not give rise to confusion.

These symbols shall not be located on screws, or other parts that might be removed when conductors are being connected.

These requirements are applicable to terminals for connection of a PROTECTIVE EARTHING CONDUCTOR whether run as an integral part of a power supply cord or with supply conductors.

#### 1.7.7.2 Terminals for a.c. mains supply conductors

For PERMANENTLY CONNECTED EQUIPMENT and equipment with ordinary NON-DETACHABLE POWER SUPPLY CORDS:

- terminals intended exclusively for connection of the AC MAINS SUPPLY neutral conductor, if any, shall be indicated by the capital letter N; and

- on three-phase equipment, if incorrect phase rotation could cause overheating or other hazard, terminals intended for connection of the AC MAINS SUPPLY line conductors shall be marked in such a way that, in conjunction with any installation instructions, the sequence of phase rotation is unambiguous.

These indications shall not be located on screws, or other parts that might be removed when conductors are being connected.

#### **1.7.7.3 Terminals for d.c. mains supply conductors**

For PERMANENTLY CONNECTED EQUIPMENT and equipment with ordinary NON-DETACHABLE POWER SUPPLY CORDS, terminals intended exclusively for connection of a DC MAINS SUPPLY shall be marked to indicate polarity.

If a single terminal is provided, both as a main protective earthing terminal in the equipment and for the connection to one pole of the DC MAINS SUPPLY, it shall be marked as specified in 1.7.7.1, in addition to polarity marking.

These indications shall not be located on screws or other parts that might be removed when conductors are being connected.

#### **1.7.8 Controls and indicators**

##### **1.7.8.1 Identification, location and marking**

Unless it is obviously unnecessary, indicators, switches and other controls affecting safety shall be identified or located so as to indicate clearly which function they control.

Markings and indications for switches and other controls shall be located either:

- on or adjacent to the switch or control, or
- elsewhere, provided that it is obvious to which switch or control the marking applies.

Indications used for this purpose shall, wherever practicable, be comprehensible without a knowledge of languages, national standards, etc.

##### **1.7.8.2 Colours**

Where safety is involved, colours of controls and indicators shall comply with IEC 60073. Where colours are used for functional controls or indicators, any colour, including red, is permitted provided that it is clear that safety is not involved.

##### **1.7.8.3 Symbols**

Where symbols are used on or near controls (for example, switches and push buttons) to indicate "ON" and "OFF" conditions, they shall be the line | for "ON" and circle ○ for "OFF" (IEC 60417-5007 (DB:2002-10)) and IEC 60417-5008 (DB:2002-10). For push-push type switches the symbol ① shall be used (IEC 60417-5010 (DB:2002-10)).

It is permitted to use the symbols ○ and | to indicate the "OFF" and "ON" positions of any primary or secondary power switches, including isolating switches.

A "STAND-BY" condition shall be indicated by the symbol  (IEC 60417-5009 (DB:2002-10)).

#### 1.7.8.4 Markings using figures

If figures are used for indicating different positions of any control, the "OFF" position shall be indicated by the figure 0 (zero) and higher figures shall be used to indicate greater output, input, etc.

#### 1.7.9 Isolation of multiple power sources

Where there is more than one connection supplying HAZARDOUS VOLTAGES or HAZARDOUS ENERGY LEVELS to equipment, a prominent marking, located close to the entry point provided for a SERVICE PERSON to gain access to the hazardous parts, shall be provided to indicate which disconnect device or devices isolate the equipment completely and which disconnect devices can be used to isolate each section of the equipment.

#### 1.7.10 Thermostats and other regulating devices

THERMOSTATS and similar regulating devices intended to be adjusted during installation or in normal use shall be provided with an indication for the direction of adjustment to increase or decrease the value of the characteristic being adjusted. Indication by the symbols + and – is permitted.

#### 1.7.11 Durability

Any marking required by this standard shall be durable and legible. In considering the durability of the marking, the effect of normal use shall be taken into account.

*Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit. After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.*

*The petroleum spirit to be used for the test is aliphatic solvent hexane having a maximum aromatics content of 0,1 % by volume, a kauributenol value of 29, an initial boiling point of approximately 65 °C, a dry point of approximately 69 °C and a mass per unit volume of approximately 0,7 kg/l.*

*As an alternative, it is permitted to use a reagent grade hexane with a minimum of 85 % as n-hexane.*

NOTE The designation "n-hexane" is chemical nomenclature for a "normal" or straight chain hydrocarbon. This petroleum spirit may further be identified as a certified ACS (American Chemical Society) reagent grade hexane (CAS# 110-54-3).

#### 1.7.12 Removable parts

Marking required by this standard shall not be placed on removable parts that can be replaced in such a way that the marking would become misleading.



### 1.7.13 Replaceable batteries

If an equipment is provided with a replaceable battery, and if replacement by an incorrect type could result in an explosion (for example, with some lithium batteries), the following applies:

- if the battery is placed in an OPERATOR ACCESS AREA, there shall be a marking close to the battery or a statement in both the operating and the servicing instructions;
- if the battery is placed elsewhere in the equipment, there shall be a marking close to the battery or a statement in the servicing instructions.

This marking or statement shall include the following or similar text:

**CAUTION**  
**RISK OF EXPLOSION IF BATTERY IS REPLACED**  
**BY AN INCORRECT TYPE.**  
**DISPOSE OF USED BATTERIES ACCORDING**  
**TO THE INSTRUCTIONS**

### 1.7.14 Equipment for restricted access locations

For equipment intended only for installation in a RESTRICTED ACCESS LOCATION, the installation instructions shall contain a statement to this effect.

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

## 2 Protection from hazards

### 2.1 Protection from electric shock and energy hazards

#### 2.1.1 Protection in operator access areas

This subclause specifies requirements for protection against electric shock from energized parts based on the principle that the OPERATOR is permitted to have access to:

- bare parts of SELV CIRCUITS; and
- bare parts of LIMITED CURRENT CIRCUITS; and
- TNV CIRCUITS under the conditions specified in 2.1.1.1.

Access to other energized parts, and to their insulation, is restricted as specified in 2.1.1.1.

Additional requirements are specified in 2.1.1.5 and 2.1.1.8 for protection against energy hazards.

##### 2.1.1.1 Access to energized parts

The equipment shall be so constructed that in OPERATOR ACCESS AREAS there is adequate protection against contact with:

- bare parts of ELV CIRCUITS; and
- bare parts at HAZARDOUS VOLTAGES; and
- SOLID INSULATION providing FUNCTIONAL INSULATION or BASIC INSULATION of parts or wiring in ELV CIRCUITS, except as permitted in 2.1.1.3; and
- SOLID INSULATION providing functional insulation or basic insulation of parts or wiring at hazardous voltages; and

NOTE 1 FUNCTIONAL INSULATION includes, but is not limited to, insulation, such as lacquer, solvent-based enamel, ordinary paper, cotton and oxide film, or displaceable insulation such as beads and sealing compounds other than self-hardening resin.

- unearthed conductive parts separated from ELV CIRCUITS or from parts at HAZARDOUS VOLTAGES by FUNCTIONAL INSULATION or BASIC INSULATION only; and
- bare parts of TNV CIRCUITS, except that access is permitted to:
  - contacts of connectors that cannot be touched by the test probe (Figure 2C);
  - bare conductive parts in the interior of a battery compartment that complies with 2.1.1.2;
  - bare conductive parts of TNV-1 CIRCUITS that have any point connected in accordance with 2.6.1 d) to a protective earthing terminal;
  - bare conductive parts of connectors in TNV-1 CIRCUITS that are separated from unearthed accessible conductive parts of the equipment in accordance with 6.2.1.

NOTE 2 A typical application is the shell for a coaxial connector.

NOTE 3 Access to TNV-1 CIRCUITS and TNV-3 CIRCUITS via other circuits is also restricted by 6.2.1 in some cases.

Unrestricted access is permitted to LIMITED CURRENT CIRCUITS.

These requirements apply for all positions of the equipment when it is wired and operated as in normal use.

Protection shall be achieved by insulation or by guarding or by the use of interlocks.

*Compliance is checked by all of the following.*

*a) Inspection.*

*b) A test with the test finger, Figure 2A, which shall not contact parts described above when applied to openings in the ENCLOSURES after removal of parts that can be detached by an OPERATOR, including fuseholders, and with OPERATOR access doors and covers open. It is permitted to leave lamps in place for this test. Connectors that can be separated by an OPERATOR, other than those complying with IEC 60083, IEC 60309, IEC 60320, IEC 60906-1 or IEC 60906-2, shall also be tested during disconnection.*

*c) A test with the test pin, Figure 2B, which shall not contact bare parts at HAZARDOUS VOLTAGES when applied to openings in an external ELECTRICAL ENCLOSURE. Parts that can be detached by an OPERATOR, including fuseholders and lamps, are left in place, and OPERATOR access doors and covers are closed during this test.*

*d) A test with the test probe, Figure 2C, where appropriate.*

*The test finger, the test pin and the test probe are applied as above, without appreciable force, in every possible position, except that floor-standing equipment having a mass exceeding 40 kg is not tilted.*

*Equipment intended for building-in or rack-mounting, or for incorporation in larger equipment, is tested with access to the equipment limited according to the method of mounting detailed in the installation instructions.*


*Openings preventing the entry of the test finger, test b) above, are further tested by means of a straight unjointed version of the test finger applied with a force of 30 N. If the unjointed finger enters, test b) is repeated except that the finger is pushed through the opening using any necessary force up to 30 N.*

NOTE 4 If an electrical contact indicator is used to show contact, care should be taken to ensure that the application of the test does not damage components of electronic circuits.

*Where contact between the test tool and the part is not permitted in the above tests, there is no requirement for a minimum air gap for voltages not exceeding 1 000 V a.c. or 1 500 V d.c. For higher voltages, there shall be an air gap between the part at HAZARDOUS VOLTAGE and the test finger, Figure 2A, or the test pin, Figure 2B, placed in its most unfavourable position. This air gap, see Figure 2D, shall either*

- have a minimum length equal to the minimum CLEARANCE for BASIC INSULATION specified in 2.10.3 (or Annex G), or*
- shall withstand the relevant electric strength test in 5.2.2.*

*If components are movable, for instance, for the purpose of belt tensioning, the test with the test finger is made with each component in its most unfavourable position within the range of adjustment, the belt being removed, if necessary, for this purpose.*

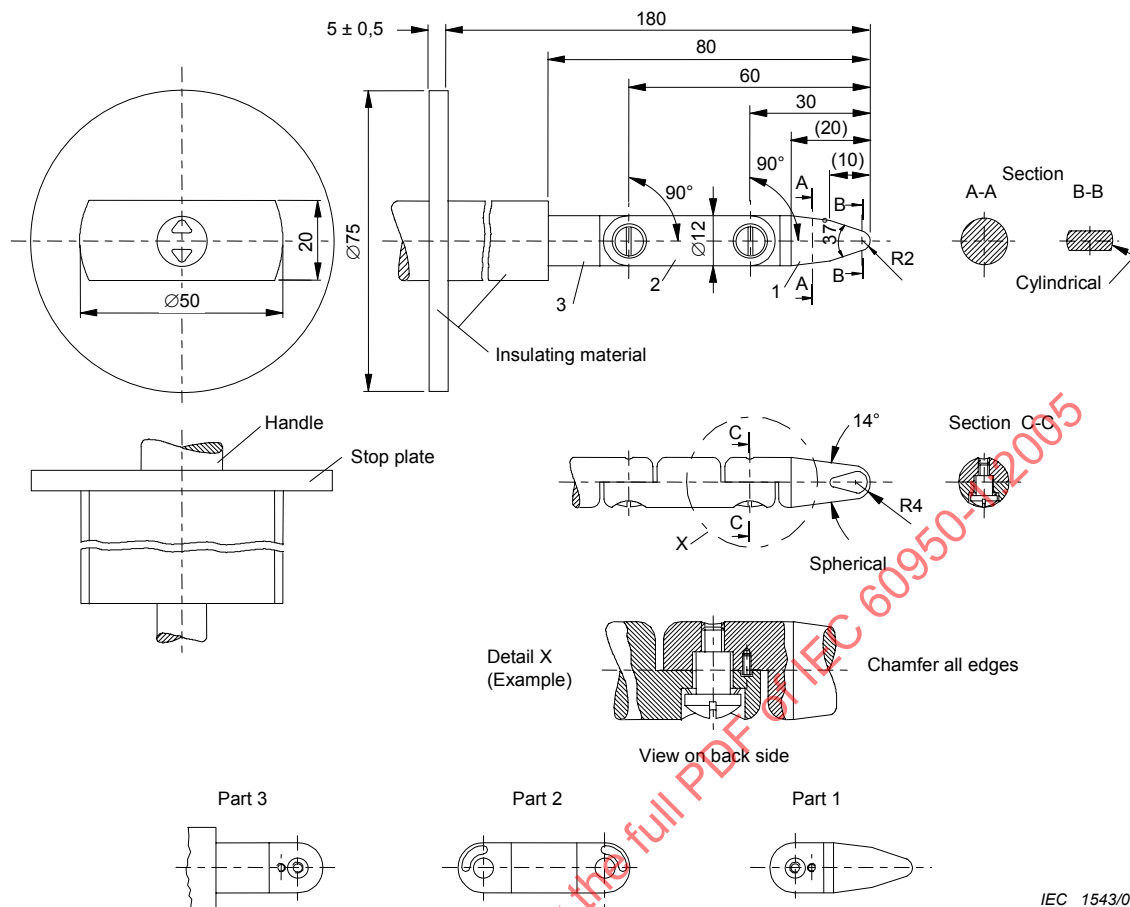

*Linear dimensions in millimetres*

Tolerances on dimensions without specific tolerances:

- 14° and 37° angles:  $\pm 15'$
- on radii:  $\pm 0,1 \text{ mm}$
- on linear dimensions:
  - $\leq 15 \text{ mm}$ :  $\begin{matrix} 0 \\ -0,1 \end{matrix} \text{ mm}$
  - $>15 \text{ mm} \leq 25 \text{ mm}$ :  $\pm 0,1 \text{ mm}$
  - $>25 \text{ mm}$ :  $\pm 0,3 \text{ mm}$

Material of finger: heat-treated steel, for example.


Both joints of this finger can be bent through an angle of  $90^\circ + \begin{smallmatrix} 10^\circ \\ 0 \end{smallmatrix}$  but in one and the same direction only.

NOTE 1 Using the pin and groove solution is only one of the possible approaches in order to limit the bending angle to 90°. For this reason, dimensions and tolerances of these details are not given in the drawing. The actual design must ensure a 90° bending angle with a 0° to +10° tolerance.

NOTE 2 Dimensions in parentheses are for information only.

NOTE 3 The test finger is taken from Figure 2, test probe B of IEC 61032. In some cases, the tolerances are different.

### Figure 2A – Test finger

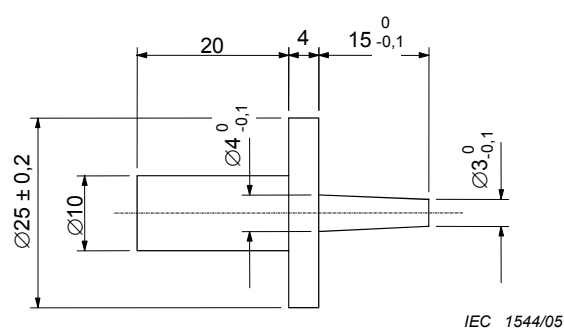


*Dimensions in millimetres*

The handle dimensions ( $\varnothing 10$  and 20) are not critical.

NOTE The test pin dimensions are those given in Figure 9, test probe 13 of IEC 61032. In some cases the tolerances are different.

**Figure 2B – Test pin**

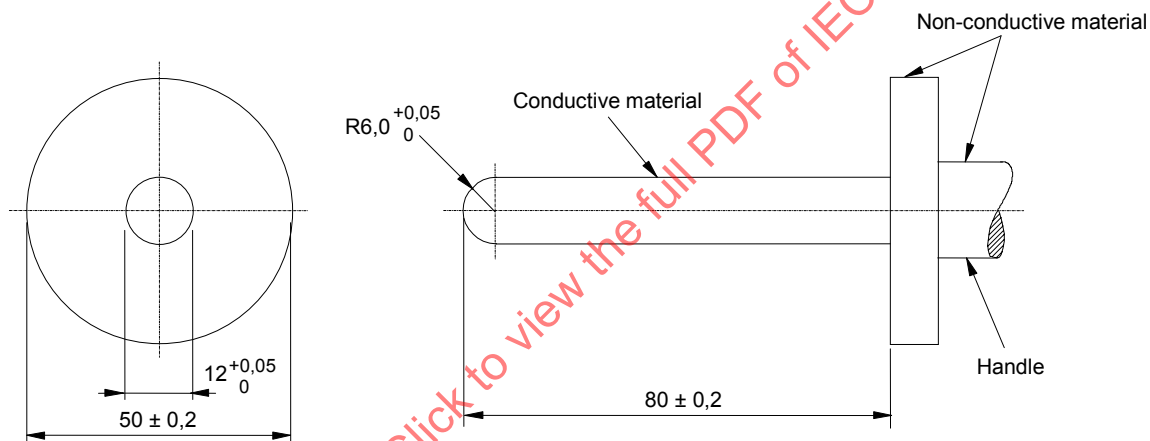

*Dimensions in millimetres*

**Figure 2C – Test probe**

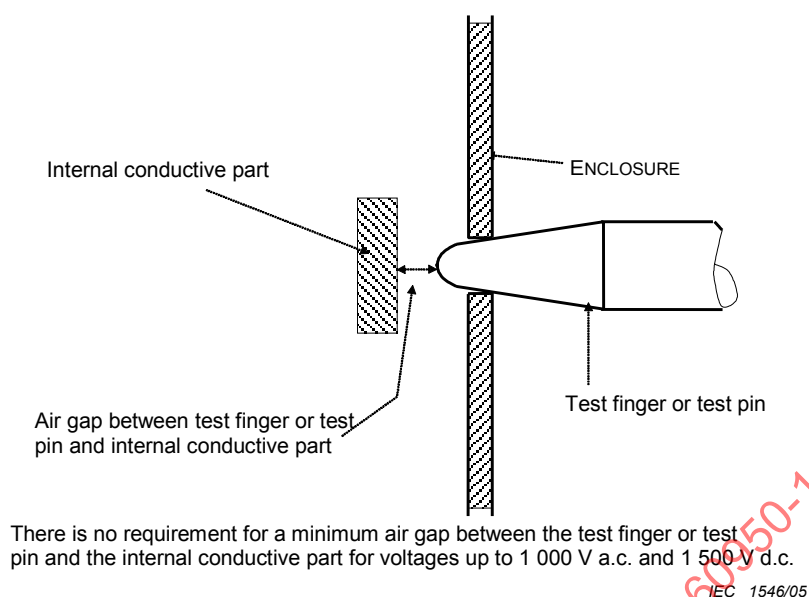


**Figure 2D - Accessibility of internal conductive parts**

### 2.1.1.2 Battery compartments

Access by an OPERATOR to bare conductive parts of TNV CIRCUITS within a battery compartment in the equipment is permitted if all of the following conditions are met:

- the compartment has a door that requires a deliberate technique to open, such as the use of a TOOL or latching device; and
- the TNV CIRCUIT is not accessible when the door is closed; and
- there is a marking next to the door or on the door if the door is secured to the equipment, with instructions for protection of the USER once the door is opened.

Information stating that the telephone cord is to be disconnected prior to opening the door is an example of an acceptable instruction.

*Compliance is checked by inspection.*

### 2.1.1.3 Access to ELV wiring

Insulation of internal wiring in an ELV CIRCUIT is permitted to be accessible to an OPERATOR provided that:

- a) the insulation meets the requirements for SUPPLEMENTARY INSULATION detailed in 3.1.4; or
- b) all of the following apply:
  - the wiring does not need to be handled by the OPERATOR and is so placed that the OPERATOR is unlikely to pull on it, or is so fixed that the connecting points are relieved from strain; and
  - the wiring is routed and fixed so as not to touch unearthed accessible conductive parts; and

- the insulation passes the electric strength test of 5.2.2 for SUPPLEMENTARY INSULATION; and
- the distance through the insulation is not less than that given in Table 2A.

**Table 2A – Distance through insulation of internal wiring**

| WORKING VOLTAGE<br>(in case of failure of BASIC INSULATION) |                                 | Minimum distance<br>through insulation<br>mm |
|-------------------------------------------------------------|---------------------------------|----------------------------------------------|
| V peak or d.c.                                              | V r.m.s. (sinusoidal)           |                                              |
| Over 71 up to and including 350                             | Over 50 up to and including 250 | 0,17                                         |
| Over 350                                                    | Over 250                        | 0,31                                         |

*Compliance is checked by inspection and measurement, and by the test of 5.2.2.*

#### **2.1.1.4 Access to hazardous voltage circuit wiring**

Where the insulation of internal wiring at HAZARDOUS VOLTAGE is accessible to an OPERATOR, or is not routed and fixed to prevent it from touching unearthed accessible conductive parts, it shall meet the requirements of 3.1.4 for DOUBLE INSULATION or REINFORCED INSULATION.

*Compliance is checked by inspection and measurement and, if necessary, by test.*

#### **2.1.1.5 Energy hazards**

There shall be no risk of injury due to an energy hazard in an OPERATOR ACCESS AREA.

*Compliance is checked by inspection and measurement and, if necessary, by tests.*

- A risk of injury due to an energy hazard exists if it is likely that two or more bare parts (one of which may be earthed) between which a HAZARDOUS ENERGY LEVEL exists, will be bridged by a metallic object.*
- The likelihood of bridging the parts under consideration is determined by means of the test finger, Figure 2A (see 2.1.1.1), in a straight position. It shall not be possible to bridge the parts with this test finger, applied without appreciable force.*
- The existence of a HAZARDOUS ENERGY LEVEL is determined as follows:*
  - with the equipment operating under normal operating conditions, a variable resistive load is connected to the parts under consideration and adjusted to obtain a level of 240 VA. Further adjustment is made, if necessary, to maintain 240 VA for a period of 60 s. If the voltage is 2 V or more, the output power is at a HAZARDOUS ENERGY LEVEL, unless an overcurrent protective device opens during the above test, or for any other reason the power cannot be maintained at 240 VA for 60 s;*
  - the stored energy in a capacitor is at a HAZARDOUS ENERGY LEVEL if the voltage, U, is 2 V or more, and the stored energy, E, calculated from the following equation, exceeds 20 J:*

$$E = 0,5 CU^2 \times 10^{-6}$$

where

*E is the energy, in joules (J);*

*C is the capacitance, in microfarads ( $\mu\text{F}$ );*

*U is the measured voltage on the capacitor, in volts (V).*

#### 2.1.1.6 Manual controls

Conductive shafts of operating knobs, handles, levers and the like in OPERATOR ACCESS AREAS shall not be connected to parts at HAZARDOUS VOLTAGES, to ELV CIRCUITS or to TNV CIRCUITS.

In addition, conductive operating knobs, handles, levers and the like that are manually moved in normal use and that are earthed only through a pivot or bearing, shall either:

- be separated from parts at HAZARDOUS VOLTAGES by DOUBLE INSULATION or REINFORCED INSULATION; or
- have their accessible parts covered by SUPPLEMENTARY INSULATION for a HAZARDOUS VOLTAGE and by BASIC INSULATION for a TNV CIRCUIT.

*Compliance is checked by inspection and measurement, and by the applicable electric strength tests of 5.2.2.*

#### 2.1.1.7 Discharge of capacitors in equipment

Equipment shall be so designed that, at an OPERATOR-accessible external point of disconnection of a MAINS SUPPLY, the risk of electric shock from stored charge on capacitors connected in the equipment is reduced. No test for shock hazard is required unless the nominal voltage of the MAINS SUPPLY exceeds 42,4 V peak or 60 V d.c.

*Compliance is checked by inspection of the equipment and relevant circuit diagrams, taking into account the possibility of disconnection of the supply with any on/off switch in either position.*

*Equipment is considered to comply if any capacitor having a marked or nominal capacitance exceeding 0,1  $\mu\text{F}$  and in a circuit connected to the MAINS SUPPLY has a means of discharge resulting in a time constant not exceeding:*

- 1 s for PLUGGABLE EQUIPMENT TYPE A; and
- 10 s for PLUGGABLE EQUIPMENT TYPE B.

*The relevant time constant is the product of the effective capacitance in microfarads and the effective discharge resistance in megohms. If it is difficult to determine the effective capacitance and resistance values, a measurement of voltage decay at the point of external disconnection can be used. When conducting the voltage decay measurement, the result is referred to an instrument having an input impedance consisting of a resistance of  $100\text{ M}\Omega \pm 5\text{ M}\Omega$  in parallel with an input capacitance of  $20\text{ pF} \pm 5\text{ pF}$ .*

NOTE During an interval equal to one time constant, the voltage will have decayed to 37 % of its original value.



### 2.1.1.8 Energy hazards - d.c. mains supplies

Equipment shall be so designed that at an OPERATOR-accessible external point of disconnection of a DC MAINS SUPPLY, either

- there is no HAZARDOUS ENERGY LEVEL (for example, due to stored charge on a capacitor or a battery in the equipment, or to a redundant DC MAINS SUPPLY for backup), or
- the HAZARDOUS ENERGY LEVEL is removed within 2 s of the disconnection.

External points of disconnection include the plugs of PLUGGABLE EQUIPMENT and isolating switches external to the equipment.

*Compliance is checked by inspection of the equipment and relevant circuit diagrams, taking into account the possibility of disconnection of the supply with any on/off switch in either position.*

*If necessary, the existence of a HAZARDOUS ENERGY LEVEL is determined as follows:*

#### **a) Capacitor connected to the DC MAINS SUPPLY**

*A test is conducted when the equipment is operating normally. The DC MAINS SUPPLY is then disconnected and the voltage across the capacitor (U) is measured 2 s after disconnection.*

*The stored energy is calculated from the following formula:*

$$E = 0,5 CU^2 \times 10^{-6}$$

*where*

*E is the energy, in joules (J);*

*C is the capacitance, in microfarads (μF);*

*U is the measured voltage on the capacitor, in volts (V).*

*A HAZARDOUS ENERGY LEVEL exists if the voltage, U, is 2 V or more, and the stored energy, E, exceeds 20 J.*

#### **b) Internal battery connected to the DC MAINS SUPPLY**

*A test is conducted with the DC MAINS SUPPLY disconnected and a variable resistive load connected to the input terminals where the DC MAINS SUPPLY is normally connected. The EUT is operated from its internal battery. The variable load is adjusted so that it draws 240 VA. Further adjustment is made, if necessary, to maintain 240 VA for a period of 60 s.*

*If U is more than 2 V, the output power is at a HAZARDOUS ENERGY LEVEL unless an overcurrent protective device opens during the above test, or for any other reason the power cannot be maintained at 240 VA for a period of 60 s.*

*If the output power is at a HAZARDOUS ENERGY LEVEL, a further test is conducted with the variable load disconnected and the EUT operated from the DC MAINS SUPPLY.*

*The supply is disconnected and the energy level at the input terminals, 2 s after disconnection, shall not be at a HAZARDOUS ENERGY LEVEL.*

NOTE It is assumed that it will be possible to bridge the parts accidentally external to the equipment. There is no test to determine the likelihood of bridging the parts.

### **2.1.1.9 Audio amplifiers in information technology equipment**

Accessible circuits, terminals and parts of audio amplifiers and associated circuits shall comply with either

- 2.1.1.1 of this standard, or
- 9.1.1 of IEC 60065.

*Compliance is checked by inspection and, if necessary, by the tests of 9.1.1 of IEC 60065, during which the audio amplifiers are operated in accordance with 4.2.4 of IEC 60065.*

### **2.1.2 Protection in service access areas**

In a SERVICE ACCESS AREA, the following requirements apply.

The requirements of 2.1.1.7 apply to all types of equipment and for PERMANENTLY CONNECTED EQUIPMENT, the time constant limit is 10 s. In addition, the requirements of 2.1.1.8 apply.

Bare parts at HAZARDOUS VOLTAGES shall be located or guarded so that unintentional contact with such parts is unlikely during service operations involving other parts of the equipment.

Bare parts at HAZARDOUS VOLTAGE shall be located or guarded so that accidental shorting to SELV CIRCUITS or to TNV CIRCUITS (for example, by TOOLS or test probes used by a SERVICE PERSON) is unlikely.

No requirement is specified regarding access to ELV CIRCUITS or to TNV CIRCUITS. However, bare parts that present a HAZARDOUS ENERGY LEVEL shall be located or guarded so that unintentional bridging by conductive materials that might be present is unlikely during service operations involving other parts of the equipment.

Any guards required for compliance with 2.1.2 shall be easily removable and replaceable if removal is necessary for servicing.

*Compliance is checked by inspection and measurement. In deciding whether or not unintentional contact is likely, account is taken of the way a SERVICE PERSON needs to gain access past, or near to, the bare parts in order to service other parts. For determination of a HAZARDOUS ENERGY LEVEL, see 2.1.1.5 c).*

### **2.1.3 Protection in restricted access locations**

For equipment to be installed in a RESTRICTED ACCESS LOCATION, the requirements for OPERATOR ACCESS AREAS apply, except as permitted in the following four paragraphs.

In general, the requirements of 2.1.1.7 and 2.1.1.8 apply except that they do not apply to PERMANENTLY CONNECTED EQUIPMENT. However, appropriate markings and instructions shall be provided for protection against energy hazards if a HAZARDOUS ENERGY LEVEL exists.

If a SECONDARY CIRCUIT at HAZARDOUS VOLTAGE is used to supply a ringing signal generator that complies with 2.3.1 b), contact with bare parts of the circuit is permitted with the test finger, Figure 2A (see 2.1.1.1). However, such parts shall be so located or guarded that unintentional contact is unlikely.

Bare parts that present a HAZARDOUS ENERGY LEVEL shall be located or guarded so that unintentional bridging by conductive materials that might be present is unlikely.

No requirement is specified regarding contact with bare parts of TNV-1 CIRCUITS, TNV-2 CIRCUITS and TNV-3 CIRCUITS.

*Compliance is checked by inspection and measurement. In deciding whether or not unintentional contact is likely, account is taken of the need to gain access past, or near to, the bare parts. For determination of a HAZARDOUS ENERGY LEVEL, see 2.1.1.5 c).*

## **2.2 SELV circuits**

### **2.2.1 General requirements**

SELV CIRCUITS shall exhibit voltages that are safe to touch both under normal operating conditions and after a single fault (see 1.4.14). If no external load is applied to the SELV CIRCUIT (open circuit), the voltage limits of 2.2.2 and 2.2.3 shall not be exceeded.

*Compliance with 2.2.1 to 2.2.4 is checked by inspection and relevant tests.*

### **2.2.2 Voltages under normal conditions**

In a single SELV CIRCUIT or in interconnected SELV CIRCUITS, the voltage between any two conductors of the SELV CIRCUIT or CIRCUITS, and between any one such conductor and earth (see 1.4.9), shall not exceed 42,4 V peak, or 60 V d.c., under normal operating conditions.


NOTE 1 A circuit that meets the above requirements, but that is subject to overvoltages from a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM, is a TNV-1 CIRCUIT.

NOTE 2 For normal conditions, the SELV CIRCUIT voltage limit is the same for an ELV CIRCUIT; an SELV CIRCUIT may be regarded as an ELV CIRCUIT with additional protection under fault conditions.

### **2.2.3 Voltages under fault conditions**

Except as permitted in 2.3.2.1 b), in the event of a single fault (see 1.4.14), the voltages between any two conductors of the SELV CIRCUIT or CIRCUITS and between any one such conductor and earth (see 1.4.9) shall not exceed 42,4 V peak, or 60 V d.c. ( $V_1$  in Figure 2E) for longer than 200 ms. Moreover, the voltage shall not exceed 71 V peak or 120 V d.c. ( $V_2$  in Figure 2E).

NOTE In Canada and the United States, the exception mentioned in 2.3.2.1 b) is not permitted.

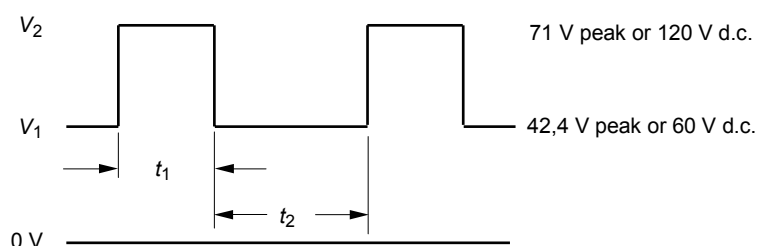

IEC 1547/05

**Figure 2E – Voltages in SELV circuits under single fault conditions**

For voltages having a repetitive nature after a fault (for example, from power supplies in "hiccup" mode), additional pulses exceeding  $V_1$  (but not exceeding  $V_2$ ) are permitted under the following conditions:

- if  $t_1 \leq 20$  ms,  $t_2$  shall be greater than 1 s;
- if  $t_1 > 20$  ms,  $t_2$  shall be greater than 3 s; and
- $t_1$  shall not exceed 200 ms.

Only one pulse is permitted to exceed  $V_1$  during time period  $t_1$ , but it can have any waveform.

Except as permitted in 2.2.4, an SELV CIRCUIT shall be separated from a part at a HAZARDOUS VOLTAGE by one or more of the constructions specified in 2.9.4.

It is permitted for some parts of a circuit (for example, a transformer-rectifier circuit) to comply with all of the requirements for SELV CIRCUITS and to be OPERATOR-accessible, while other parts of the same circuit do not comply with all of the requirements for SELV CIRCUITS and are therefore not permitted to be OPERATOR-accessible.

#### **2.2.4 Connection of SELV circuits to other circuits**

An SELV CIRCUIT is permitted to be connected to other circuits provided that, when the SELV CIRCUIT is so connected, all of the following conditions are met:

- except as permitted by 1.5.7 and 2.4.3, the SELV CIRCUIT is separated by BASIC INSULATION from any PRIMARY CIRCUIT (including the neutral) within the equipment; and
- the SELV CIRCUIT meets the limits of 2.2.2 under normal operating conditions; and
- except as specified in 2.3.2.1 b), the SELV CIRCUIT meets the limits of 2.2.3 in the event of a single fault (see 1.4.14) in the SELV CIRCUIT or in the SECONDARY CIRCUIT to which the SELV CIRCUIT is connected.

If an SELV CIRCUIT is connected to one or more other circuits, the SELV CIRCUIT is that part which complies with the requirements of 2.2.2 and 2.2.3.

If an SELV CIRCUIT obtains its supply conductively from a SECONDARY CIRCUIT that is separated from a HAZARDOUS VOLTAGE circuit by either:

- DOUBLE INSULATION OR REINFORCED INSULATION; or

- an earthed conductive screen that is separated from the HAZARDOUS VOLTAGE circuit by BASIC INSULATION,

the SELV CIRCUIT shall be considered as being separated from the HAZARDOUS VOLTAGE circuit by the same method.

NOTE For requirements in Norway, see 1.7.2.1 Note 6, 6.1.2.1 Note 2 and 6.1.2.2 Note.

If an SELV CIRCUIT is derived from a HAZARDOUS VOLTAGE SECONDARY CIRCUIT, and the HAZARDOUS VOLTAGE SECONDARY CIRCUIT is separated from the PRIMARY CIRCUIT by DOUBLE INSULATION or REINFORCED INSULATION, the SELV CIRCUIT shall remain within the limits given in 2.2.3 under single fault conditions (see 1.4.14). In such a case, the short-circuiting of the insulation in a transformer that provides the separation between the HAZARDOUS VOLTAGE SECONDARY CIRCUIT and the SELV CIRCUIT is considered to be a single fault, for the purpose of applying the single fault conditions, provided the insulation in the transformer passes an electrical strength test for BASIC INSULATION in accordance with 5.2.2.

## 2.3 TNV circuits

### 2.3.1 Limits

In a single TNV CIRCUIT or interconnected TNV CIRCUITS, the voltage between any two conductors of the TNV CIRCUIT or CIRCUITS and between any one such conductor and earth (see 1.4.9) shall comply with the following.

#### a) TNV-1 CIRCUITS

The voltages do not exceed the following:

- the voltage limits in 2.2.2 for an SELV CIRCUIT under normal operating conditions;
- the voltage limits of Figure 2F measured across a  $5\,000\ \Omega \pm 2\%$  resistor in the event of a single fault (see 1.4.14) within the equipment.

NOTE 1 In the event of a single insulation or component failure, the limit after 200 ms is the limit in 2.3.1 b) for a TNV-2 CIRCUIT or TNV-3 CIRCUIT for normal operating conditions.

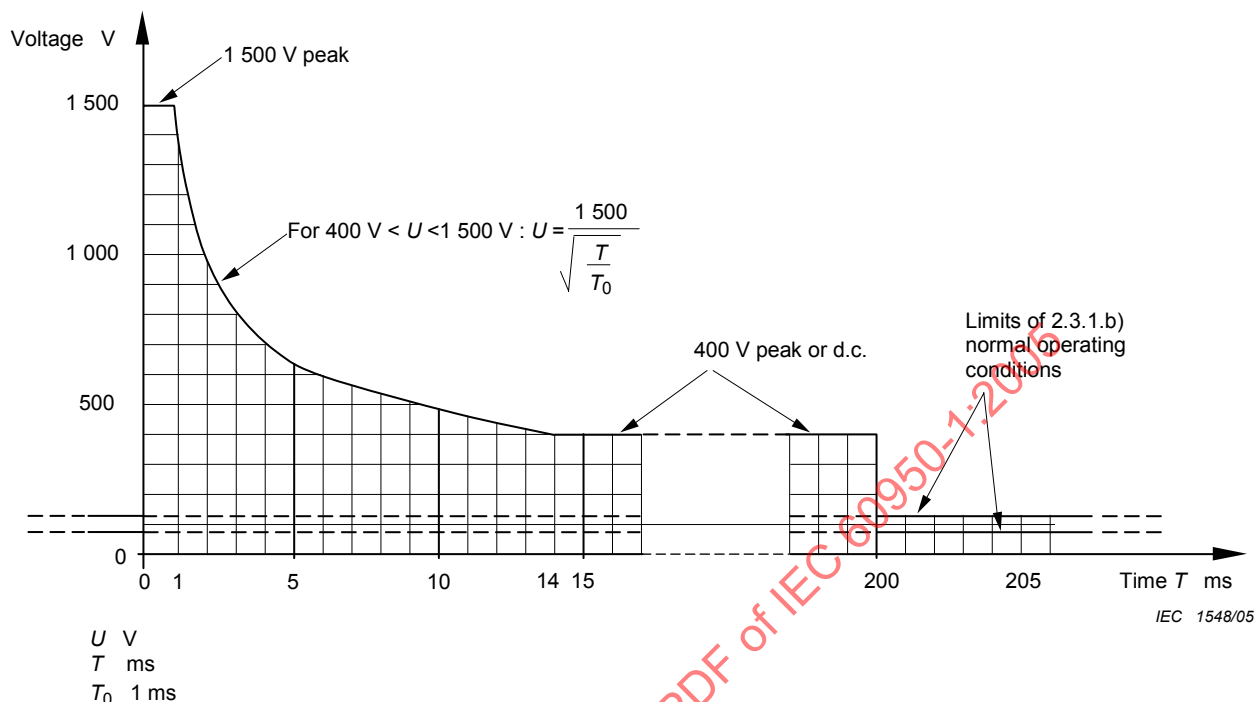


**Figure 2F – Maximum voltages permitted after a single fault**

**b) TNV-2 CIRCUITS and TNV-3 CIRCUITS**

The voltages exceed the limits in 2.2.2 for an SELV CIRCUIT but do not exceed the following:

- when telephone ringing signals are present, voltages such that the signal complies with the criteria of either Clause M.2 or Clause M.3;
- when telephone ringing signals are not present:
  - a combination of voltages, a.c. and d.c., such that under normal operating conditions:

$$\frac{U_{ac}}{71} + \frac{U_{dc}}{120} \leq 1$$

where

$U_{ac}$  is the peak value of the a.c. voltage (V) at any frequency;

$U_{dc}$  is the value of the DC VOLTAGE (V)

NOTE 2 When  $U_{dc}$  is zero,  $U_{ac}$  can be up to 71 V peak.

NOTE 3 When  $U_{ac}$  is zero,  $U_{dc}$  can be up to 120 V.

and

- the voltage limits of Figure 2F measured across a  $5\,000\,\Omega \pm 2\%$  resistor in the event of a single fault (see 1.4.14) within the equipment.

*Compliance is checked by inspection and measurement.*

NOTE 4 Telegraph and teletypewriter signals may be present on existing TELECOMMUNICATION NETWORKS. However, these signals are considered to be obsolescent and their characteristics are not considered in this standard.

## **2.3.2 Separation of TNV circuits from other circuits and from accessible parts**

NOTE In Finland, Norway and Sweden, there are additional requirements for the insulation, see 6.1.2.1 Note 2 and 6.1.2.2 Note.

### **2.3.2.1 General requirements**

NOTE 1 See also 6.1.2, 6.2 and 7.3.

SELV-CIRCUITS, TNV-1 CIRCUITS and accessible conductive parts shall be separated from TNV-2 CIRCUITS and TNV-3 CIRCUITS in such a way that in the event of a single fault (see 1.4.14) both of the following conditions are met:

- a) the voltages of TNV-1 CIRCUITS do not exceed the limits of Figure 2F; and
- b) the voltages of the SELV CIRCUITS and accessible conductive parts do not exceed the limits specified in 2.3.1 b) for TNV-2 CIRCUITS and TNV-3 CIRCUITS under normal operating conditions.

NOTE 2 In Canada and the United States, in the event of a single fault as described above, the limits of 2.2.3 apply to SELV CIRCUITS and to accessible conductive parts.

NOTE 3 Under normal operating conditions, the limits of 2.2.2 always apply to each SELV CIRCUIT and accessible conductive part.

NOTE 4 The limits of 2.3.1 always apply to each TNV CIRCUIT.

At the choice of the manufacturer, it is permitted to treat a TNV-1 CIRCUIT or a TNV-2 CIRCUIT as a TNV-3 CIRCUIT. In this case, the TNV-1 CIRCUIT or TNV-2 CIRCUIT shall meet all the separation requirements for a TNV-3 CIRCUIT.

One of the methods specified in 2.3.2.2, 2.3.2.3, 2.3.2.4 and 2.10.5.13 shall be used.

*Compliance is checked as specified in 2.3.2.2, 2.3.2.3, 2.3.2.4 or 2.10.5.13.*

### **2.3.2.2 Protection by basic insulation**

The requirements of 2.3.2.1 are met if the parts are separated by BASIC INSULATION.

*Compliance is checked by inspection, measurement and electric strength testing of the BASIC INSULATION and, if necessary, by simulation of failures of components and the BASIC INSULATION (see 1.4.14). However, if it is clear from a study of the circuit diagrams that the specified limits of 2.3.1 b) will not be exceeded, failure of components and the BASIC INSULATION need not be simulated.*

NOTE 1 The test of 2.3.5 is not required.

NOTE 2 Where BASIC INSULATION is provided and 6.2.1 also applies to this insulation, the test voltage prescribed in 6.2.2 is in most cases higher than that for BASIC INSULATION.

### **2.3.2.3 Protection by earthing**

The requirements of 2.3.2.1 are considered to be met if the SELV CIRCUIT, TNV-1 CIRCUIT or accessible conductive part is connected to the main protective earthing terminal in accordance with 2.6.1 c) or d); and one of the following, a), b), c) or d) applies.

- a) For PLUGGABLE EQUIPMENT, a separate protective earthing terminal is provided in addition to the main protective earthing terminal, if any (see 2.6.4.1). The installation instructions shall specify that this separate protective earthing terminal be permanently connected to earth.

- b) For PLUGGABLE EQUIPMENT TYPE B, having connections to TELECOMMUNICATION NETWORKS or to CABLE DISTRIBUTION SYSTEMS that are all pluggable, a marking on the equipment and a statement in the installation instructions shall be provided. These shall specify that the USER is to disconnect all TELECOMMUNICATION NETWORK connectors and CABLE DISTRIBUTION SYSTEM connectors before disconnecting the POWER SUPPLY CORD.
- c) For PLUGGABLE EQUIPMENT TYPE A, the requirements of b) above apply, and in addition the installation instructions shall specify that it be installed by a SERVICE PERSON and connected to a socket-outlet with a protective earthing contact.
- d) For PERMANENTLY CONNECTED EQUIPMENT there is no additional requirement.

NOTE If earthing is provided that is not in accordance with a), b), c) or d), see 2.3.2.4.

*Compliance is checked by inspection and, if necessary, by simulation of failures of components and insulation such as are likely to occur in the equipment (see 1.4.14). The voltage limits specified in 2.3.2.1 shall be met.*

*Additionally, the test of 2.3.5 shall be conducted if the TNV-2 CIRCUIT or TNV-3 CIRCUIT is intended to receive signals or power that are generated externally during normal operation (for example, in a TELECOMMUNICATION NETWORK). Single faults are not simulated while conducting the test of 2.3.5.*

*Prior to the above tests, insulation that does not meet the requirements for BASIC INSULATION is short-circuited. However, if simulation of failures would be more severe if conducted without short-circuiting the insulation, the test is conducted without short-circuiting.*

#### **2.3.2.4 Protection by other constructions**

Other constructions are permitted if they ensure that the voltage limits specified in 2.3.2.1 are met, but do not rely on BASIC INSULATION or earthing, or by separation as specified in 2.10.5.13.

*Compliance is checked by simulation of failures of components and insulation such as are likely to occur in the equipment (see 1.4.14).*

*If earthing is provided that is not in accordance with 2.3.2.3 a), b), c) or d), the tests are conducted with the EUT not connected to earth. The voltage limits specified in 2.3.2.1 shall be met.*

*Additionally, the test of 2.3.5 shall be conducted if the TNV-2 CIRCUIT or TNV-3 CIRCUIT is intended to receive signals or power that are generated externally during normal operation (for example, in a TELECOMMUNICATION NETWORK). Single faults are not simulated while conducting the test of 2.3.5.*

*Prior to the above tests, insulation that does not meet the requirements for BASIC INSULATION is short-circuited. However, if simulation of failures would be more severe if conducted without short-circuiting the insulation, the test is conducted without short-circuiting.*

#### **2.3.3 Separation from hazardous voltages**

Except as permitted in 2.3.4, a TNV CIRCUIT shall be separated from circuits at HAZARDOUS VOLTAGE by one or more of the constructions specified in 2.9.4.

*Compliance is checked by inspection and measurement.*



### 2.3.4 Connection of TNV circuits to other circuits

Except as permitted in 1.5.7, a TNV CIRCUIT is permitted to be connected to other circuits, provided that it is separated by BASIC INSULATION from any PRIMARY CIRCUIT (including the neutral) within the equipment.

NOTE 1 The limits of 2.3.1 always apply to TNV CIRCUITS.

If a TNV CIRCUIT is connected to one or more other circuits, the TNV CIRCUIT is that part which complies with 2.3.1.

If a TNV CIRCUIT obtains its supply conductively from a SECONDARY CIRCUIT that is separated from a HAZARDOUS VOLTAGE circuit by:

- DOUBLE INSULATION or REINFORCED INSULATION; or
- the use of an earthed conductive screen that is separated from a HAZARDOUS VOLTAGE circuit by BASIC INSULATION;

the TNV CIRCUIT shall be considered as being separated from the HAZARDOUS VOLTAGE circuit by the same method.

If a TNV CIRCUIT is derived from a HAZARDOUS VOLTAGE SECONDARY CIRCUIT, and the HAZARDOUS VOLTAGE SECONDARY CIRCUIT is separated from the PRIMARY CIRCUIT by DOUBLE INSULATION or REINFORCED INSULATION, the TNV CIRCUIT shall remain within the limits given in 2.3.1 under single fault conditions (see 1.4.14). In such a case, the short-circuiting of the insulation in a transformer that provides the separation between the HAZARDOUS VOLTAGE SECONDARY CIRCUIT and the TNV CIRCUIT is considered to be a single fault, for the purpose of applying the single fault conditions, provided the insulation in the transformer passes an electrical strength test for BASIC INSULATION in accordance with 5.2.2.

*Compliance is checked by inspection, and by simulation of single faults (see 1.4.14) such as are likely to occur in the equipment. No such simulated fault shall cause the voltage across a  $5\,000\,\Omega \pm 2\%$  resistor, connected between any two conductors of the TNV CIRCUIT or between one such conductor and earth, to fall outside the shaded area of Figure 2F (see 2.3.1). Observation is continued until stable conditions have existed for at least 5 s.*

NOTE 2 For requirements in Norway, see 1.7.2.1 Note 6, 6.1.2.1 Note 2 and 6.1.2.2 Note.

### 2.3.5 Test for operating voltages generated externally

*This test is only conducted if specified in 2.3.2.3 or 2.3.2.4.*

*A test generator specified by the manufacturer is used, representing the maximum normal operating voltage expected to be received from the external source. In the absence of such a specification, a test generator is used that provides  $120\text{ V} \pm 2\text{ V a.c.}$  at 50 Hz or 60 Hz and has an internal impedance of  $1\,200\,\Omega \pm 2\%$ .*

NOTE The above test generator is not intended to represent the actual voltages on the TELECOMMUNICATION NETWORK but to stress the circuit of the EUT in a repeatable manner.

*The test generator is connected between the TELECOMMUNICATION NETWORK terminals of the equipment. One pole of the test generator is also connected to the earthing terminal of the equipment (see Figure 2G). The test voltage is applied for a maximum of 30 min. If it is clear that no further deterioration will take place, the test is terminated earlier.*

During the test, the SELV CIRCUIT, TNV-1 CIRCUIT or accessible conductive part shall continue to comply with 2.2.2.

The test is repeated after reversing the connections to the TELECOMMUNICATION NETWORK terminals of the equipment.

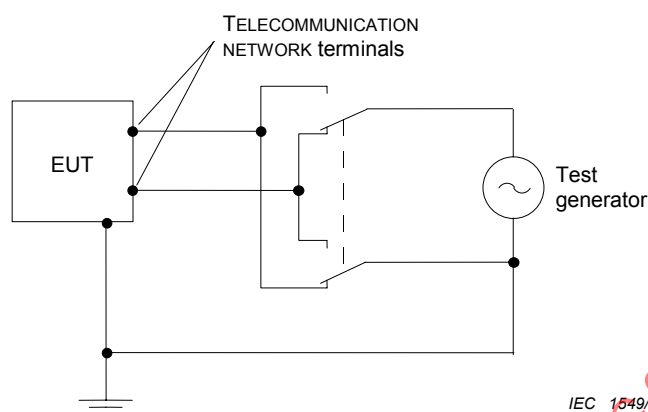


Figure 2G – Test generator

## 2.4 Limited current circuits

### 2.4.1 General requirements

LIMITED CURRENT CIRCUITS shall be so designed that the limits specified in 2.4.2 are not exceeded under normal operating conditions and in the event of a single failure within the equipment (see 1.4.14 and 1.5.7).

Except as permitted in 2.4.3, segregation of accessible parts of LIMITED CURRENT CIRCUITS from other circuits shall be as described in 2.2 for SELV CIRCUITS.

*Compliance with 2.4.1 to 2.4.3 is checked by inspection, measurement and, when necessary, by test.*

NOTE An accessible conductive part or circuit separated from another part by DOUBLE INSULATION or REINFORCED INSULATION that is bridged by a resistor or group of resistors is treated as a LIMITED CURRENT CIRCUIT (see 1.5.7).

### 2.4.2 Limit values

For frequencies not exceeding 1 kHz, the steady-state current drawn through a non-inductive resistor of  $2\,000\ \Omega \pm 10\%$  connected between any two parts of a LIMITED CURRENT CIRCUIT, or between any such part and earth (see 1.4.9), shall not exceed 0,7 mA peak, or 2 mA d.c.

For frequencies above 1 kHz, the limit of 0,7 mA is multiplied by the value of the frequency in kilohertz but shall not exceed 70 mA peak.

Alternatively, it is permitted to use the measuring instruments of Annex D instead of the non-inductive resistor of  $2\,000\ \Omega \pm 10\%$  mentioned above.

When using the measuring instrument of Figure D.1, the voltage,  $U_2$ , is measured and the current is calculated by dividing the measured voltage,  $U_2$ , by 500. The calculated value shall not exceed 0,7 mA peak.

NOTE 1 If one side of the LIMITED CURRENT CIRCUIT has a conductive connection to earth, point B of the measuring instrument of Figure D.1 should be connected to that side.

When using the measuring instrument of Figure D.2, the measured value of the current shall not exceed 0,7 mA peak.

For parts not exceeding 450 V peak or d.c., the circuit capacitance shall not exceed 0,1  $\mu$ F.

For parts whose voltage,  $U$ , exceeds 0,45 kV peak or d.c., but does not exceed 15 kV peak or d.c., the circuit capacitance shall not exceed  $45/U$  nF, where  $U$  is expressed in kilovolts.

NOTE 2 The limit of  $45/U$  corresponds to an available stored charge of 45  $\mu$ C.

For parts whose voltage,  $U$ , exceeds 15 kV peak or d.c., the circuit capacitance shall not exceed  $700/U^2$  nF, where  $U$  is expressed in kilovolts.

NOTE 3 The limit of  $700/U^2$  corresponds to an available energy of 350 mJ.

### 2.4.3 Connection of limited current circuits to other circuits

LIMITED CURRENT CIRCUITS are permitted to be supplied from or connected to other circuits, provided that the following conditions are met:

- the LIMITED CURRENT CIRCUIT meets the limits of 2.4.2 under normal operating conditions;
- the LIMITED CURRENT CIRCUIT continues to meet the limits of 2.4.2 in the event of a single failure of any component or insulation in the LIMITED CURRENT CIRCUIT, or of any component or insulation in the other circuit to which it is connected.

If a LIMITED CURRENT CIRCUIT is connected to one or more other circuits, the LIMITED CURRENT CIRCUIT is that part which complies with the requirements of 2.4.1.

## 2.5 Limited power sources

A limited power source shall comply with one of the following, a), b), c) or d):

- a) the output is inherently limited in compliance with Table 2B; or
- b) a linear or non-linear impedance limits the output in compliance with Table 2B. If a positive temperature coefficient device is used, it shall pass the tests specified in IEC 60730-1, Clauses 15, 17, J.15 and J.17; or
- c) a regulating network limits the output in compliance with Table 2B, both with and without a simulated single fault (see 1.4.14) in the regulating network (open circuit or short-circuit); or
- d) an overcurrent protective device is used and the output is limited in compliance with Table 2C.

Where an overcurrent protective device is used, it shall be a fuse or a non-adjustable, non-autoreset, electromechanical device.

A limited power source operated from an AC MAINS SUPPLY, or a battery-operated limited power source that is recharged from an AC MAINS SUPPLY while supplying the load, shall incorporate an isolating transformer.

Compliance is checked by inspection and measurement and, where appropriate, by examination of the manufacturer's data for batteries. Batteries shall be fully charged when conducting the measurements for  $U_{oc}$  and  $I_{sc}$  according to Tables 2B and 2C.

The non-capacitive load referred to in Tables 2B and 2C is adjusted to give the maximum measured value of  $I_{sc}$  or  $S$ .

Simulated faults in a regulating network, required according to item c) above, are applied under the above maximum measured values of  $I_{sc}$  or  $S$ .

**Table 2B – Limits for power sources without an overcurrent protective device**

| Output voltage <sup>a</sup><br>( $U_{oc}$ ) |                       | Output current <sup>b d</sup><br>( $I_{sc}$ ) | Apparent power <sup>c d</sup><br>( $S$ ) |
|---------------------------------------------|-----------------------|-----------------------------------------------|------------------------------------------|
| V a.c.                                      | V d.c.                | A                                             | VA                                       |
| $\leq 30$                                   | $\leq 30$             | $\leq 8,0$                                    | $\leq 100$                               |
| –                                           | $30 < U_{oc} \leq 60$ | $\leq 150/U_{oc}$                             | $\leq 100$                               |

<sup>a</sup>  $U_{oc}$ : Output voltage measured in accordance with 1.4.5 with all load circuits disconnected. Voltages are for substantially sinusoidal a.c. and ripple free d.c. For non-sinusoidal a.c. and d.c. with ripple greater than 10 % of the peak, the peak voltage shall not exceed 42,4 V.  
<sup>b</sup>  $I_{sc}$ : Maximum output current with any non-capacitive load, including a short-circuit.  
<sup>c</sup>  $S$  (VA): Maximum output VA with any non-capacitive load.  
<sup>d</sup> Measurement of  $I_{sc}$  and  $S$  are made 5 s after application of the load if protection is by an electronic circuit or a positive temperature coefficient device, and 60 s in other cases.

**Table 2C – Limits for power sources with an overcurrent protective device**

| Output voltage <sup>a</sup><br>( $U_{oc}$ ) |                       | Output current <sup>b d</sup><br>( $I_{sc}$ ) | Apparent power <sup>c d</sup><br>( $S$ ) | Current rating of overcurrent protective device <sup>e</sup> |
|---------------------------------------------|-----------------------|-----------------------------------------------|------------------------------------------|--------------------------------------------------------------|
| V a.c.                                      | V d.c.                | A                                             | VA                                       | A                                                            |
| $\leq 20$                                   | $\leq 20$             | $\leq 1\,000/U_{oc}$                          | $\leq 250$                               | $\leq 5,0$                                                   |
| $20 < U_{oc} \leq 30$                       | $20 < U_{oc} \leq 30$ |                                               |                                          | $\leq 100/U_{oc}$                                            |
|                                             | $30 < U_{oc} \leq 60$ |                                               |                                          | $\leq 100/U_{oc}$                                            |

<sup>a</sup>  $U_{oc}$ : Output voltage measured in accordance with 1.4.5 with all load circuits disconnected. Voltages are for substantially sinusoidal a.c. and ripple free d.c. For non-sinusoidal a.c. and for d.c. with ripple greater than 10 % of the peak, the peak voltage shall not exceed 42,4 V.  
<sup>b</sup>  $I_{sc}$ : Maximum output current with any non-capacitive load, including a short-circuit, measured 60 s after application of the load.  
<sup>c</sup>  $S$  (VA): Maximum output VA with any non-capacitive load measured 60 s after application of the load.  
<sup>d</sup> Current limiting impedances remain in the circuit during measurement, but overcurrent protective devices are bypassed.  
 NOTE The reason for making measurements with overcurrent protective devices bypassed is to determine the amount of energy that is available to cause possible overheating during the operating time of the overcurrent protective devices.  
<sup>e</sup> The current ratings of overcurrent protective devices are based on fuses and circuit-breakers that break the circuit within 120 s with a current equal to 210 % of the current rating specified in the table.

## 2.6 Provisions for earthing and bonding

NOTE For additional requirements with regard to earthing of equipment to be connected to TELECOMMUNICATION NETWORKS, see 2.3.2.3, 2.3.2.4, 2.3.3, 2.3.4, 6.1.1 and 6.1.2; and for CABLE DISTRIBUTION SYSTEMS, see 7.2 and 7.4.1.

### 2.6.1 Protective earthing

The following parts of equipment shall be reliably connected to the main protective earthing terminal of the equipment.

- a) Accessible conductive parts that might assume a HAZARDOUS VOLTAGE in the event of a single fault (see 1.4.14).
- b) Parts to be earthed as required by 2.9.4 d) or e).
- c) SELV CIRCUITS, TNV CIRCUITS and accessible conductive parts required to be earthed by 2.3.2.3 or 2.3.2.4, if the power source is not a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM.
- d) SELV CIRCUITS, TNV CIRCUITS and accessible conductive parts required to be earthed by 2.3.2.3, if the power source is a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM.
- e) Circuits, transformer screens and components (such as surge suppressors) that could not assume a HAZARDOUS VOLTAGE in the event of a single fault (see 1.4.14) but are required to be earthed in order to reduce transients that might affect insulation (for example, see 6.2.1 and 7.4.1).
- f) SELV CIRCUITS and TNV CIRCUITS that are required to be earthed in order to reduce or eliminate TOUCH CURRENT to a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM (see 5.1.8.1).

NOTE Parts a), b) and c) are likely to carry fault currents intended to operate overcurrent protective devices. Parts d), e) and f) carry other currents.

In SERVICE ACCESS AREAS, where conductive parts, such as motor frames, electronic chassis, etc., might assume a HAZARDOUS VOLTAGE in the event of a single fault (see 1.4.14), either these conductive parts shall be connected to the main protective earthing terminal or, if this is impossible or impracticable, a suitable marking shall indicate to a SERVICE PERSON that such parts are not earthed and should be checked for HAZARDOUS VOLTAGE before being touched.

*Compliance is checked by inspection and, where appropriate, by the test specified in 2.6.3.*

### 2.6.2 Functional earthing

If FUNCTIONAL EARTHING of accessible or inaccessible conductive parts is necessary, all of the following apply to the FUNCTIONAL EARTHING circuit:

- the FUNCTIONAL EARTHING circuit shall be separated from parts at HAZARDOUS VOLTAGES in the equipment by either:
  - DOUBLE INSULATION or REINFORCED INSULATION; or
  - a protectively earthed screen or another protectively earthed conductive part, separated from parts at HAZARDOUS VOLTAGES by at least BASIC INSULATION; and
- it is permitted to connect the FUNCTIONAL EARTHING circuit to a protective earth terminal or to a PROTECTIVE BONDING CONDUCTOR; and

- wiring terminals to be used only for FUNCTIONAL EARTHING shall not be marked by the symbol  $\perp$  (60417-IEC-5017) or by the symbol  $\oplus$  (60417-IEC-5019), except that, where a wiring terminal is provided on a component (for example, a terminal block) or subassembly, the symbol  $\perp$  is permitted; and

NOTE Other markings such as one of the symbols,  $\perp$  (IEC 60417-5018 (DB:2002-10)) or  $\perp$  (IEC 60417-5020 (DB:2002-10)), if appropriate, are permitted.

- for internal FUNCTIONAL EARTHING conductors, the colour combination green-and-yellow shall not be used except in multipurpose preassembled components (for example, multi-conductor cables or EMC filters); and
- in a power supply cord where a conductor having green-and-yellow insulation is used only to provide a FUNCTIONAL EARTHING connection:
  - the equipment shall not be marked with the symbol  $\square$  (IEC 60417-5172 (DB:2003:02)); and
  - there are no requirements other than those in 3.1.9 regarding the termination of this conductor at the equipment end.

*Compliance is checked by inspection.*

## 2.6.3 Protective earthing conductors and protective bonding conductors

### 2.6.3.1 General

PROTECTIVE EARTHING CONDUCTORS and PROTECTIVE BONDING CONDUCTORS shall have sufficient current-carrying capacity.

The requirements of 2.6.3.2, 2.6.3.3 and 2.6.3.4 apply to PROTECTIVE EARTHING CONDUCTORS and PROTECTIVE BONDING CONDUCTORS provided to comply with 2.6.1 a), b) and c).

For PROTECTIVE EARTHING CONDUCTORS and PROTECTIVE BONDING CONDUCTORS provided to comply with 2.6.1 d), the requirements and test of 2.6.3.4 e) apply.

For PROTECTIVE EARTHING CONDUCTORS and PROTECTIVE BONDING CONDUCTORS provided to comply with 2.6.1 e) and 2.6.1 f), and for FUNCTIONAL EARTHING conductors, the current-carrying capacity shall be adequate for the actual current under normal operating conditions, in accordance with 3.1.1, that is the conductors are not required to carry fault currents to earth.

### 2.6.3.2 Size of protective earthing conductors

PROTECTIVE EARTHING CONDUCTORS in power supply cords supplied with the equipment shall comply with the minimum conductor sizes in Table 3B (see 3.2.5).

*Compliance is checked by inspection and measurement.*

### 2.6.3.3 Size of protective bonding conductors

PROTECTIVE BONDING CONDUCTORS shall comply with one of the following:

- the minimum conductor sizes in Table 3B (see 3.2.5); or
- the requirements of 2.6.3.4 and also, if the PROTECTIVE CURRENT RATING of the circuit is more than 16 A, with the minimum conductor sizes in Table 2D; or
- for components only, be not smaller than the conductors supplying power to the component.

The PROTECTIVE CURRENT RATING of the circuit (used in Table 2D and in the test of 2.6.3.4) depends on the provision and location of overcurrent protective devices. It shall be taken as the smallest of a) or b) or c), as applicable.

- a) For PLUGGABLE EQUIPMENT TYPE A, the PROTECTIVE CURRENT RATING is the rating of an overcurrent protective device provided external to the equipment (for example, in the building wiring, in the mains plug or in an equipment rack) to protect the equipment, with a minimum of 16 A.

NOTE 1 In most countries, 16 A is considered to be suitable as the PROTECTIVE CURRENT RATING of the circuit.

NOTE 2 In Canada and the United States, the PROTECTIVE CURRENT RATING of the circuit is taken as 20 A.

NOTE 3 In the United Kingdom, the current rating of the circuit shall be taken as 13 A, not 16 A.

- b) For PLUGGABLE EQUIPMENT TYPE B and PERMANENTLY CONNECTED EQUIPMENT (see 2.7.1), the PROTECTIVE CURRENT RATING is the maximum rating of the overcurrent protective device specified in the equipment installation instructions to be provided external to the equipment (see 1.7.2.3).
- c) For any of the above equipment, the PROTECTIVE CURRENT RATING is the rating of an overcurrent protective device, if provided in or as part of the equipment, that protects the circuit or part required to be earthed.

*Compliance is checked by inspection and measurement.*

**Table 2D – Minimum size of protective bonding conductors**

| PROTECTIVE CURRENT RATING of the<br>circuit<br>under consideration<br><br>Up to and including<br><br>A                                                                                                                                                                                                                                                                                                     | Minimum conductor sizes                 |                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|---------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                            | Cross-sectional area<br>mm <sup>2</sup> | AWG or kcmil<br>(cross-sectional area<br>in mm <sup>2</sup> ) |
| 16                                                                                                                                                                                                                                                                                                                                                                                                         | Size not specified                      | Size not specified                                            |
| 25                                                                                                                                                                                                                                                                                                                                                                                                         | 1,5                                     | 14 (2)                                                        |
| 32                                                                                                                                                                                                                                                                                                                                                                                                         | 2,5                                     | 12 (3)                                                        |
| 40                                                                                                                                                                                                                                                                                                                                                                                                         | 4,0                                     | 10 (5)                                                        |
| 63                                                                                                                                                                                                                                                                                                                                                                                                         | 6,0                                     | 8 (8)                                                         |
| 80                                                                                                                                                                                                                                                                                                                                                                                                         | 10                                      | 6 (13)                                                        |
| 100                                                                                                                                                                                                                                                                                                                                                                                                        | 16                                      | 4 (21)                                                        |
| 125                                                                                                                                                                                                                                                                                                                                                                                                        | 25                                      | 2 (33)                                                        |
| 160                                                                                                                                                                                                                                                                                                                                                                                                        | 35                                      | 1 (42)                                                        |
| 190                                                                                                                                                                                                                                                                                                                                                                                                        | 50                                      | 0 (53)                                                        |
| 230                                                                                                                                                                                                                                                                                                                                                                                                        | 70                                      | 000 (85)                                                      |
| 260                                                                                                                                                                                                                                                                                                                                                                                                        | 95                                      | 0000 (107)                                                    |
| 300                                                                                                                                                                                                                                                                                                                                                                                                        | 120                                     | 250 kcmil (126)                                               |
| 340                                                                                                                                                                                                                                                                                                                                                                                                        | 150                                     | 300 kcmil (152)                                               |
| 400                                                                                                                                                                                                                                                                                                                                                                                                        | 185                                     | 400 kcmil (202)                                               |
| 460                                                                                                                                                                                                                                                                                                                                                                                                        | 240                                     | 500 kcmil (253)                                               |
| NOTE AWG and kcmil sizes are provided for information only. The associated cross-sectional areas have been rounded to show significant figures only. AWG refers to the American Wire Gage and the term "cmil" refers to circular mils where 1 cmil is the area of a circle having a diameter of 1 mil (one thousandth of an inch). These terms are commonly used to designate wire sizes in North America. |                                         |                                                               |

#### 2.6.3.4 Resistance of earthing conductors and their terminations

Earthing conductors and their terminations shall not have excessive resistance.

PROTECTIVE EARTHING CONDUCTORS are considered to comply without test.

PROTECTIVE BONDING CONDUCTORS that meet the minimum conductor sizes in Table 3B (see 3.2.5) throughout their length and whose terminals all meet the minimum sizes in Table 3E (see 3.3.5) are considered to comply without test.

*Compliance is checked by inspection, measurement and, for PROTECTIVE BONDING CONDUCTORS that do not meet the minimum conductor sizes in Table 3B (see 3.2.5) throughout their length or whose terminals do not all meet the minimum sizes in Table 3E (see 3.3.5), by the following test.*

*The voltage drop in a PROTECTIVE BONDING CONDUCTOR is measured after conducting the test current for the time period specified below. The test current can be either a.c. or d.c. and the test voltage shall not exceed 12 V. The measurement is made between the main protective earthing terminal and the point in the equipment that is required by 2.6.1 to be earthed. The resistance of the PROTECTIVE EARTHING CONDUCTOR is not included in the measurement. However, if the PROTECTIVE EARTHING CONDUCTOR is supplied with the equipment, it is permitted to include the conductor in the test circuit but the measurement of the voltage drop is made only from the main protective earthing terminal to the part required to be earthed.*



On equipment where the protective earth connection to a subassembly or to a separate unit is by means of one core of a multicore cable that also supplies mains power to that subassembly or unit, the resistance of the PROTECTIVE BONDING CONDUCTOR in that cable is not included in the measurement. However, this option is only permitted if the cable is protected by a suitably rated protective device that takes into account the size of the conductor.

If the protection of an SELV CIRCUIT or a TNV CIRCUIT is achieved by earthing the protected circuit itself in accordance with 2.9.4 e), the resistance and the voltage drop limits apply between the earthed side of the protected circuit and the main protective earthing terminal.

If the circuit is protected by earthing the winding of a transformer supplying the protected circuit, the resistance and the voltage drop limits apply between the unearthed side of the winding and the main protective earthing terminal. The BASIC INSULATION between the primary and secondary windings is not subjected to the single fault testing required by 5.3.7 and 1.4.14.

Care is taken that the contact resistance between the tip of the measuring probe and the conductive part under test does not influence the test results.

The test current, duration of the test and test results are as follows:

- a) For equipment powered from a MAINS SUPPLY, if the PROTECTIVE CURRENT RATING of the circuit under test (see 2.6.3.3) is 16 A or less, the test current is 200 % of the PROTECTIVE CURRENT RATING applied for 120 s.

The resistance of the PROTECTIVE BONDING CONDUCTOR, calculated from the voltage drop, shall not exceed 0,1  $\Omega$ . After the test, the PROTECTIVE BONDING CONDUCTOR shall not be damaged.

- b) For equipment powered from an AC MAINS SUPPLY, if the PROTECTIVE CURRENT RATING of the circuit under test exceeds 16 A, the test current is 200 % of the PROTECTIVE CURRENT RATING and the duration of the test is as shown in Table 2E.

**Table 2E – Test duration, a.c. mains supplies**

| PROTECTIVE CURRENT RATING of the circuit<br>( $I_{pc}$ )<br>A | Duration of the test<br>min |
|---------------------------------------------------------------|-----------------------------|
| $\leq 30$                                                     | 2                           |
| $30 < I_{pc} \leq 60$                                         | 4                           |
| $60 < I_{pc} \leq 100$                                        | 6                           |
| $100 < I_{pc} \leq 200$                                       | 8                           |
| $> 200$                                                       | 10                          |

The voltage drop in the PROTECTIVE BONDING CONDUCTOR shall not exceed 2,5 V. After the test the PROTECTIVE BONDING CONDUCTOR shall not be damaged.

- c) *As an alternative to b) above, the tests are based on the time-current characteristic of the overcurrent protective device that limits the fault current in the PROTECTIVE BONDING CONDUCTOR. This device is either one provided in the EUT or specified in the installation instructions to be provided external to the equipment. The tests are conducted at 200 % of the PROTECTIVE CURRENT RATING, for the duration corresponding to 200 % on the time-current characteristic. If the duration for 200 % is not given, the nearest point on the time-current characteristic is used.*

*The voltage drop in the PROTECTIVE BONDING CONDUCTOR shall not exceed 2,5 V. After the test the PROTECTIVE BONDING CONDUCTOR shall not be damaged.*

- d) *For equipment powered from a DC MAINS SUPPLY, if the PROTECTIVE CURRENT RATING of the circuit under test exceeds 16 A, the test current and duration are as specified by the manufacturer.*

*The voltage drop in the PROTECTIVE BONDING CONDUCTOR shall not exceed 2,5 V. After the test the PROTECTIVE BONDING CONDUCTOR shall not be damaged.*

- e) *For PROTECTIVE BONDING CONDUCTORS provided to comply with 2.6.1 d), the test current is 150 % of the maximum current available under normal operating conditions from the TELECOMMUNICATION NETWORK or CABLE DISTRIBUTION SYSTEM (if known) with a minimum of 2 A, applied for 120 s. The voltage drop in the PROTECTIVE BONDING CONDUCTOR shall not exceed 2,5 V.*

### **2.6.3.5 Colour of insulation**

The insulation of the PROTECTIVE EARTHING CONDUCTOR in a power supply cord supplied with the equipment shall be green-and-yellow.

If a PROTECTIVE BONDING CONDUCTOR is insulated, the insulation shall be green-and-yellow except in the following two cases:

- for an earthing braid, the insulation shall be either green-and-yellow or transparent;
- for a PROTECTIVE BONDING CONDUCTOR in assemblies such as ribbon cables, busbars, printed wiring, etc., any colour is permitted provided that no misinterpretation of the use of the conductor is likely to arise.

Except as permitted in 2.6.2, the colour combination green-and-yellow shall be used only to identify PROTECTIVE EARTHING CONDUCTORS and PROTECTIVE BONDING CONDUCTORS.

*Compliance is checked by inspection.*

## **2.6.4 Terminals**

### **2.6.4.1 General**

The requirements of 2.6.4.2 and 2.6.4.3 apply only to protective earthing terminals provided to comply with 2.6.1 a), b) and c).

NOTE For additional requirements concerning terminals, see 3.3.

For protective earthing provided to comply with 2.6.1 d), e) and f), it is sufficient for the terminals to comply with 3.3.

### 2.6.4.2 Protective earthing and bonding terminals

Equipment required to have protective earthing shall have a main protective earthing terminal. For equipment with a DETACHABLE POWER SUPPLY CORD, the earthing terminal in the appliance inlet is regarded as the main protective earthing terminal.

If equipment is provided with more than one supply connection (for example, with different voltages or frequencies or as backup power), it is permitted to have a main protective earthing terminal associated with each supply connection. In such a case, the terminals shall be sized according to the rating of the associated supply input.

Terminals shall be designed to resist accidental loosening of the conductor. In general, the designs commonly used for current-carrying terminals, other than some terminals of the pillar type, provide sufficient resilience to comply with this requirement; for other designs, special provisions, such as the use of an adequately resilient part that is not likely to be removed inadvertently, shall be used.

Except as noted below, all pillar, stud or screw type protective earthing and protective bonding terminals shall comply with the minimum size requirements of Table 3E (see 3.3.5).

Where a terminal for a PROTECTIVE BONDING CONDUCTOR does not comply with Table 3E (see 3.3.5), the test of 2.6.3.4 shall be applied to the PROTECTIVE BONDING CONDUCTOR path in which the terminal is used.

The main protective earthing terminal for PERMANENTLY CONNECTED EQUIPMENT shall be

- located so that it is readily accessible while making the supply connections, and
- provided with factory installed pillar terminals, studs, screws, bolts or similar terminals, together with the necessary fixing hardware, if a PROTECTIVE EARTHING CONDUCTOR larger than 7 mm<sup>2</sup> (3 mm diameter) is required.

*Compliance is checked by inspection and measurement.*

### 2.6.4.3 Separation of the protective earthing conductor from protective bonding conductors

Separate wiring terminals, which may be on the same busbar, shall be provided, one for the PROTECTIVE EARTHING CONDUCTOR, or one for each PROTECTIVE EARTHING CONDUCTOR if more than one is provided, and one or more for PROTECTIVE BONDING CONDUCTORS.

However, it is permitted to provide a single wiring terminal of the screw or stud type in PERMANENTLY CONNECTED EQUIPMENT having a NON-DETACHABLE POWER SUPPLY CORD, and in PLUGGABLE EQUIPMENT having a special NON-DETACHABLE POWER SUPPLY CORD, provided that the wiring termination of the PROTECTIVE EARTHING CONDUCTOR is separated by a nut from that of the PROTECTIVE BONDING CONDUCTORS. The order of stacking of the terminations of the PROTECTIVE EARTHING CONDUCTOR and the PROTECTIVE BONDING CONDUCTORS is not specified.

It is also permitted to provide a single wiring terminal in equipment with an appliance inlet.

*Compliance is checked by inspection.*

## **2.6.5 Integrity of protective earthing**

### **2.6.5.1 Interconnection of equipment**

In a system of interconnected equipment, the protective earthing connection shall be ensured for all equipment requiring a protective earthing connection, regardless of the arrangement of equipment in the system.

Equipment that contains a PROTECTIVE BONDING CONDUCTOR to maintain continuity of protective earthing circuits to other equipment in the system, shall not be marked with the symbol  (IEC 60417-5172 (DB:2003-02)).

Such equipment shall also provide power to the other equipment in the system (see 2.6.5.3).

*Compliance is checked by inspection.*

### **2.6.5.2 Components in protective earthing conductors and protective bonding conductors**

PROTECTIVE EARTHING CONDUCTORS and PROTECTIVE BONDING CONDUCTORS shall not contain switches or overcurrent protective devices.

*Compliance is checked by inspection.*

### **2.6.5.3 Disconnection of protective earth**

Protective earthing connections shall be such that disconnection of a protective earth at one point in a unit or a system does not break the protective earthing connection to other parts or units in a system, unless the relevant hazard is removed at the same time.

*Compliance is checked by inspection.*

### **2.6.5.4 Parts that can be removed by an operator**

Protective earthing connections shall make earlier and break later than the supply connections in each of the following:

- the connector of a part that can be removed by an OPERATOR;
- a plug on a power supply cord;
- an appliance coupler.

*Compliance is checked by inspection.*

### **2.6.5.5 Parts removed during servicing**

Protective earthing connections shall be so designed that they do not have to be disconnected for servicing other than for the removal of the part that they protect unless the relevant hazard is removed at the same time.

*Compliance is checked by inspection.*

### 2.6.5.6 Corrosion resistance

Conductive parts in contact at protective earthing terminals and connections shall not be subject to significant corrosion due to electrochemical action in any working, storage or transport environment conditions as specified in the instructions supplied with the equipment. Combinations above the line in Annex J shall be avoided. Corrosion resistance can be achieved by a suitable plating or coating process.

*Compliance is checked by inspection and by reference to the table of electrochemical potentials (Annex J).*

### 2.6.5.7 Screws for protective bonding

NOTE The following requirements are additional to those in 3.1.6.

Self-tapping (thread-cutting and thread-forming) and spaced thread (sheet metal) screws are permitted to provide protective bonding but it shall not be necessary to disturb the connection during servicing.

In any case, the thickness of the metal part at the point where a screw is threaded into it shall be not less than twice the pitch of the screw thread. It is permitted to use local extrusion of a metal part to increase the effective thickness.

At least two screws shall be used for each connection. However, it is permitted to use a single self-tapping screw provided that the thickness of the metal part at the point where the screw is threaded into it is a minimum of 0,9 mm for a screw of the thread-forming type and 1,6 mm for a screw of the thread-cutting type.

*Compliance is checked by inspection.*

### 2.6.5.8 Reliance on telecommunication network or cable distribution system

Protective earthing shall not rely on a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM.

*Compliance is checked by inspection.*

## 2.7 Overcurrent and earth fault protection in primary circuits

### 2.7.1 Basic requirements

Protection in PRIMARY CIRCUITS against overcurrents, short-circuits and earth faults shall be provided, either as an integral part of the equipment or as part of the building installation.

If PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT relies on protective devices external to the equipment for protection, the equipment installation instructions shall so state and shall also specify the requirements for short-circuit protection or overcurrent protection or, where necessary, for both.

NOTE In the member countries of CENELEC, the protective devices necessary to comply with the requirements of 5.3 must, with certain exceptions, be included as part of the equipment.

*Compliance is checked by inspection.*

### 2.7.2 Faults not simulated in 5.3.7

Protection against faults not simulated in 5.3.7 (for example, short-circuits to protective earth from wiring in a PRIMARY CIRCUIT) need not be fitted as an integral part of the equipment.

*Compliance is checked by inspection.*

### 2.7.3 Short-circuit backup protection

Unless appropriate short-circuit backup protection is provided, protective devices shall have adequate breaking (rupturing) capacity to interrupt the maximum fault current (including short-circuit current) which can flow.

For PERMANENTLY CONNECTED EQUIPMENT or PLUGGABLE EQUIPMENT TYPE B, it is permitted for short-circuit backup protection to be in the building installation.

For PLUGGABLE EQUIPMENT TYPE A, the building installation is considered as providing short-circuit backup protection.

NOTE If fuses complying with IEC 60127 are used in PRIMARY CIRCUITS, they should have high breaking capacity (1 500 A) if the prospective short-circuit current exceeds 35 A or ten times the current rating of the fuse, whichever is greater.

*Compliance is checked by inspection and by the tests of 5.3.*

### 2.7.4 Number and location of protective devices

Protective systems or devices in PRIMARY CIRCUITS shall be in such a number and located so as to detect and to interrupt the overcurrent flowing in any possible fault current path (for example, line-to-line, line-to-neutral, line to protective earth conductor or line to PROTECTIVE BONDING CONDUCTOR).

No protection is required against earth faults in equipment that either:

- has no connection to earth; or
- has DOUBLE INSULATION or REINFORCED INSULATION between the PRIMARY CIRCUIT and all parts connected to earth.

NOTE 1 Where DOUBLE INSULATION or REINFORCED INSULATION is provided, a short-circuit to earth would be considered to be two faults.

In a supply using more than one line conductor to a load, if a protective device interrupts the neutral conductor, it shall also interrupt all other supply conductors. Single-pole protective devices, therefore, shall not be used in such cases.

*Compliance is checked by inspection and, where necessary, by simulation of single fault conditions (see 1.4.14).*

NOTE 2 For protective devices that are an integral part of the equipment, examples of the number and location of fuses or circuit-breaker poles necessary to provide fault current interruption in commonly encountered supply systems are given in informative Table 2F for single-phase equipment or subassemblies and in informative Table 2G for three-phase equipment. The examples are not necessarily valid for protective devices external to the equipment.

**Table 2F – Informative examples of protective devices in single-phase equipment or subassemblies**

| Equipment supply connections                                                                                                                            | Protection against | Minimum number of fuses or circuit-breaker poles | Location                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------------------------|------------------------------|
| Case A:<br>Equipment to be connected to power distribution systems with earthed neutral reliably identified, except for case C below                    | Earth faults       | 1                                                | Line conductor               |
|                                                                                                                                                         | Overcurrent        | 1                                                | Either of the two conductors |
| Case B:<br>Equipment to be connected to any supply, including IT power distribution systems and supplies with reversible plugs, except for case C below | Earth faults       | 2                                                | Both conductors              |
|                                                                                                                                                         | Overcurrent        | 1                                                | Either of the two conductors |
| Case C:<br>Equipment to be connected to three-wire power distribution systems with earthed neutral reliably identified                                  | Earth faults       | 2                                                | Each line conductor          |
|                                                                                                                                                         | Overcurrent        | 2                                                | Each line conductor          |

**Table 2G – Informative examples of protective devices in three-phase equipment**

| Power distribution system       | Number of supply conductors | Protection against | Minimum number of fuses or circuit-breaker poles | Location             |
|---------------------------------|-----------------------------|--------------------|--------------------------------------------------|----------------------|
| Three-phase without neutral     | 3                           | Earth faults       | 3                                                | All three conductors |
|                                 |                             | Overcurrent        | 2                                                | Any two conductors   |
| With earthed neutral (TN or TT) | 4                           | Earth faults       | 3                                                | Each line conductor  |
|                                 |                             | Overcurrent        | 3                                                | Each line conductor  |
| With unearthed neutral          | 4                           | Earth faults       | 4                                                | All four conductors  |
|                                 |                             | Overcurrent        | 3                                                | Each line conductor  |

### 2.7.5 Protection by several devices

Where protective devices are used in more than one pole of a supply to a given load, those devices shall be located together. It is permitted to combine two or more protective devices in one component.

*Compliance is checked by inspection.*

## 2.7.6 Warning to service persons


Suitable marking shall be provided on the equipment or a statement shall be provided in the servicing instructions to alert a SERVICE PERSON to a possible hazard, where both of the following conditions exist:

- fuse is used in the neutral of single-phase equipment either permanently connected or provided with a non-reversible plug; and
- after operation of the fuse, parts of the equipment that remain energized might represent a hazard during servicing.

The following or similar wording is regarded as suitable:

### **CAUTION DOUBLE POLE/NEUTRAL FUSING**

As an alternative to the above wording, use of the following combination of representative symbols, which includes the electric shock hazard symbol ISO 3864, No. 5036, the fuse symbol IEC-60417- 5016 (DB:2002-10), and an indication that the fuse is in the neutral N, is permitted. However in this case, the statement shall also be provided in the servicing instructions.



*Compliance is checked by inspection.*

## 2.8 Safety interlocks

### 2.8.1 General principles

SAFETY INTERLOCKS shall be provided where OPERATOR access involves areas normally presenting hazards in the meaning of this standard.

*Compliance is checked by inspection.*

### 2.8.2 Protection requirements

SAFETY INTERLOCKS shall be so designed that the hazard will be removed before the covers, doors, etc., are in any position that will permit contact with hazardous parts by the test finger, Figure 2A (see 2.1.1.1).

For protection against electric shock, radiation and energy hazards, removal, opening or withdrawal of the cover, door, etc., shall either:

- necessitate previous de-energization of such parts; or
- automatically initiate disconnection of the supply to such parts, and reduce within 2 s the voltage to 42,4 V peak, or 60 V d.c., or less, and the energy level to less than 20 J.

For a moving part that will continue to move through momentum and will continue to present a mechanical hazard (for example, a spinning print drum), removal, opening or withdrawal of the cover, door, etc., shall either:

- necessitate previous reduction of movement to an acceptable safe level; or
- automatically initiate reduction of the movement to an acceptable safe level.

*Compliance is checked by inspection, measurement and use of the test finger, Figure 2A (see 2.1.1.1).*



### 2.8.3 Inadvertent reactivation

SAFETY INTERLOCKS shall be designed so that inadvertent reactivation of the hazard cannot occur when covers, guards, doors, etc., are not in the closed position.

Any accessible SAFETY INTERLOCK that can be operated by means of the test finger, Figure 2A (see 2.1.1.1), is considered to be likely to cause inadvertent reactivation of the hazard.

SAFETY INTERLOCK switches shall be selected taking into account the mechanical shock and vibration experienced in normal operation, so that this does not cause inadvertent switching to an unsafe condition.

*Compliance is checked by inspection and, where necessary, by a test with the test finger, Figure 2A (see 2.1.1.1).*

### 2.8.4 Fail-safe operation

A SAFETY INTERLOCK system shall be so designed and constructed that either:

- a failure of the SAFETY INTERLOCK system during the normal life of the equipment is not likely to occur and, even if a failure should occur, it shall not create an extreme hazard; or
- a failure of the SAFETY INTERLOCK system during the normal life of the equipment is possible, the probable failure mode(s) will not create a hazard for which protection is required.

*Compliance is checked by inspection of the SAFETY INTERLOCK system, circuit diagrams and available data and, if necessary, by simulation of single faults (see 1.4.14) (for example, failure of a semi-conductor device or an electromechanical component). Moving mechanical parts in mechanical and electromechanical systems are not subjected to simulated single faults if they comply with 2.8.5 and 2.8.7.*

*It is permitted to use simulated SAFETY INTERLOCK systems for tests.*

### 2.8.5 Moving parts

Moving mechanical parts in mechanical and electromechanical SAFETY INTERLOCK systems shall have adequate endurance.

*Compliance is checked by inspection of the SAFETY INTERLOCK system, available data and, if necessary, by cycling the SAFETY INTERLOCK system through 10 000 operating cycles without failure other than in a safe mode.*

NOTE The above test is conducted to check the endurance of moving parts other than those in SAFETY INTERLOCK switches and relays. SAFETY INTERLOCK switches and relays, if any, are subject to 2.8.7. If the test of 2.8.7.3 is required in addition to the above test, the tests should be combined.

### 2.8.6 Overriding

Where it may be necessary for a SERVICE PERSON to override a SAFETY INTERLOCK, the override system shall comply with all of the following:

- require an intentional effort to operate; and
- reset automatically to normal operation when servicing is complete, or prevent normal operation unless the SERVICE PERSON has reset the SAFETY INTERLOCK; and

- require a TOOL for operation when in an OPERATOR ACCESS AREA and not be operable with the test finger, Figure 2A (see 2.1.1.1); and
- not bypass a SAFETY INTERLOCK for an extreme hazard unless another reliable means of safety protection becomes effective when the SAFETY INTERLOCK is thus bypassed. The equipment shall be designed such that the SAFETY INTERLOCK cannot be bypassed until the other means of protection is fully in place and operational.

*Compliance is checked by inspection.*

### **2.8.7 Switches and relays**

A switch in a SAFETY INTERLOCK system shall:

- conform to IEC 61058-1, with evaluation for 10 000 operating cycles in accordance with 7.1.4.4 of IEC 61058-1; or
- comply with 2.8.7.1 and pass the tests of 2.8.7.3 and 2.8.7.4; or
- pass the tests of 2.8.7.2, 2.8.7.3 and 2.8.7.4.

A relay in a SAFETY INTERLOCK system shall:

- comply with 2.8.7.1 and pass the tests of 2.8.7.3 and 2.8.7.4; or
- pass the tests of 2.8.7.2, 2.8.7.3 and 2.8.7.4.

*Compliance is checked by inspection and by the relevant tests of 2.8.7.1 to 2.8.7.4.*

#### **2.8.7.1 Contact gaps**

If the contact gap is located in the PRIMARY CIRCUIT, the contact gap shall not be less than that for a disconnect device (see 3.4.2). If the contact gap is located in a circuit other than a PRIMARY CIRCUIT, the contact gap shall be not less than the relevant minimum CLEARANCE value for BASIC INSULATION in a SECONDARY CIRCUIT specified in 2.10.3 (or Annex G).

*Compliance is checked by inspection of the available data and, if necessary, by measurement.*

#### **2.8.7.2 Overload test**

*The contact of the SAFETY INTERLOCK switch or relay is subjected to an overload test consisting of 50 cycles of operation at the rate of 6 to 10 cycles per minute, making and breaking 150 % of the current imposed in the application, except that where a contact switches a motor load, the test is conducted with the rotor of the motor in a locked condition. After the test, the switch or relay shall still be functional.*

#### **2.8.7.3 Endurance test**

*The contact of the SAFETY INTERLOCK switch or relay is subjected to an endurance test, making and breaking 100 % of the current imposed in the application at a rate of 6 to 10 cycles of operation per minute. A higher rate of cycling is permitted if requested by the manufacturer. For reed switches in ELV CIRCUITS, SELV CIRCUITS and TNV-1 CIRCUITS, the test is 100 000 operating cycles. For other switches and relays, the test is 10 000 operating cycles. After the test, the switch or relay shall still be functional.*

#### 2.8.7.4 Electric strength test

*Except for reed switches in ELV CIRCUITS, SELV CIRCUITS and TNV-1 CIRCUITS, an electric strength test as specified in 5.2.2, is applied between the contacts after the tests of 2.8.7.2 and 2.8.7.3. If the contact is in a PRIMARY CIRCUIT, the test voltage is as specified for REINFORCED INSULATION. If the contact is in a circuit other than a PRIMARY CIRCUIT, the test voltage is as specified for BASIC INSULATION in a PRIMARY CIRCUIT.*

#### 2.8.8 Mechanical actuators

Where the actuating part in a mechanical SAFETY INTERLOCK system is relied upon for safety, precautions shall be taken to ensure that it is not overstressed. If this requirement is not covered by the design of the component, the over-travel beyond the operating position of the actuator shall be limited to 50 % of the maximum, for example, by its mounting or location, or by adjustment.

*Compliance is checked by inspection and measurement.*

### 2.9 Electrical insulation

#### 2.9.1 Properties of insulating materials

The choice and application of insulating materials shall take into account the needs for electrical, thermal and mechanical strength, frequency of the WORKING VOLTAGE and the working environment (temperature, pressure, humidity and pollution).

Natural rubber, hygroscopic materials and materials containing asbestos shall not be used as insulation.

Driving belts and couplings shall not be relied upon to ensure electrical insulation, unless the belt or coupling is of a special design that removes the risk of inappropriate replacement.

*Compliance is checked by inspection and, where necessary, by evaluation of the data for the material.*

*Where necessary, if the data does not confirm that the material is non-hygroscopic, the hygroscopic nature of the material is determined by subjecting the component or subassembly employing the insulation in question to the humidity treatment of 2.9.2. The insulation is then subjected to the relevant electric strength test of 5.2.2 while still in the humidity cabinet, or in the room in which the samples were brought to the prescribed temperature.*

#### 2.9.2 Humidity conditioning

*Where required by 2.9.1, 2.10.8.3, 2.10.10 or 2.10.11, humidity conditioning is conducted for 48 h in a cabinet or room containing air with a relative humidity of 91 % to 95 %. The temperature of the air, at all places where samples can be located, is maintained within 1 °C of any convenient value  $t$  between 20 °C and 30 °C such that condensation does not occur. During this conditioning the component or subassembly is not energized.*

*With the concurrence of the manufacturer, it is permitted to increase the 48 h time duration.*

*Before the humidity conditioning the sample is brought to a temperature between  $t$  and  $t + 4$  °C.*

### 2.9.3 Grade of insulation

Insulation shall be considered to be FUNCTIONAL INSULATION, BASIC INSULATION, SUPPLEMENTARY INSULATION, REINFORCED INSULATION OR DOUBLE INSULATION.

The application of insulation in many common situations is described in Table 2H and illustrated in Figure 2H, but other situations and solutions are possible. These examples are informative; in some cases the necessary grade of insulation may be higher or lower. Where a different grade may be necessary, or if a particular configuration of energized parts is not represented in the examples, the necessary grade of insulation should be determined by considering the effect of a single fault (see 1.4.14). This should leave the requirements for protection against electric shock intact.

In certain cases, insulation may be bridged by a conductive path (for example, where 1.5.6, 1.5.7, 2.2.4, 2.3.4 or 2.4.3 applies) provided that the level of safety is maintained.

For DOUBLE INSULATION it is permitted to interchange the BASIC INSULATION and SUPPLEMENTARY INSULATION elements. Where DOUBLE INSULATION is used, ELV CIRCUITS or unearthed conductive parts are permitted between the BASIC INSULATION and the SUPPLEMENTARY INSULATION provided that the overall level of insulation is maintained.

A BOUNDING SURFACE is treated as an unearthed SELV CIRCUIT if it is part of either:

- an unearthed conductive ENCLOSURE; or
- a non-conductive ENCLOSURE.


*Compliance is checked by inspection.*

Table 2H – Examples of application of insulation

| Grade of insulation     | Location of insulation                                     |                                                                                                                                                                                                                                                   | Key to Figure 2H                                               |
|-------------------------|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|                         | between                                                    | and                                                                                                                                                                                                                                               |                                                                |
| FUNCTIONAL <sup>a</sup> | unearthed SELV CIRCUIT or double-insulated conductive part | <ul style="list-style-type: none"> <li>– earthed conductive part</li> <li>– double-insulated conductive part</li> <li>– unearthed SELV CIRCUIT</li> <li>– earthed SELV CIRCUIT</li> <li>– earthed TNV-1 CIRCUIT</li> </ul>                        | F1<br>F2<br>F2<br>F1<br>F10 <sup>f</sup>                       |
|                         | earthed SELV CIRCUIT                                       | <ul style="list-style-type: none"> <li>– earthed SELV CIRCUIT</li> <li>– earthed conductive part</li> <li>– unearthed TNV-1 CIRCUIT</li> <li>– earthed TNV-1 CIRCUIT</li> </ul>                                                                   | F11<br>F11<br>F12 <sup>f</sup><br>F13 <sup>f</sup>             |
|                         | ELV CIRCUIT or basic-insulated conductive part             | <ul style="list-style-type: none"> <li>– earthed conductive part</li> <li>– earthed SELV CIRCUIT</li> <li>– basic-insulated conductive part</li> <li>– ELV CIRCUIT</li> </ul>                                                                     | F3<br>F3<br>F4<br>F4                                           |
|                         | earthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT                | earthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT                                                                                                                                                                                                       | F5                                                             |
|                         | TNV-1 CIRCUIT                                              | TNV-1 CIRCUIT                                                                                                                                                                                                                                     | F7                                                             |
|                         | TNV-2 CIRCUIT                                              | TNV-2 CIRCUIT                                                                                                                                                                                                                                     | F8                                                             |
|                         | TNV-3 CIRCUIT                                              | TNV-3 CIRCUIT                                                                                                                                                                                                                                     | F9                                                             |
|                         | series-parallel sections of a transformer winding          |                                                                                                                                                                                                                                                   | F6                                                             |
| BASIC                   | PRIMARY CIRCUIT                                            | <ul style="list-style-type: none"> <li>– earthed or unearthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT</li> <li>– earthed conductive part</li> <li>– earthed SELV CIRCUIT</li> <li>– basic-insulated conductive part</li> <li>– ELV CIRCUIT</li> </ul> | B1<br>B2<br>B2<br>B3<br>B3                                     |
|                         | earthed or unearthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT   | <ul style="list-style-type: none"> <li>– unearthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT</li> <li>– earthed conductive part</li> <li>– earthed SELV CIRCUIT</li> <li>– basic-insulated conductive part</li> <li>– ELV CIRCUIT</li> </ul>            | B4<br>B5<br>B5<br>B6<br>B6                                     |
|                         | unearthed SELV CIRCUIT or double-insulated conductive part | <ul style="list-style-type: none"> <li>– unearthed TNV-1 CIRCUIT</li> <li>– TNV-2 CIRCUIT</li> <li>– TNV-3 CIRCUIT</li> </ul>                                                                                                                     | B7 <sup>f</sup><br>B8 <sup>d</sup><br>B9 <sup>d e</sup>        |
|                         | earthed SELV CIRCUIT                                       | <ul style="list-style-type: none"> <li>– TNV-2 CIRCUIT</li> <li>– TNV-3 CIRCUIT</li> </ul>                                                                                                                                                        | B10 <sup>d</sup><br>B11 <sup>d e</sup>                         |
|                         | TNV-2 CIRCUIT                                              | <ul style="list-style-type: none"> <li>– unearthed TNV-1 CIRCUIT</li> <li>– earthed TNV-1 CIRCUIT</li> <li>– TNV-3 CIRCUIT</li> </ul>                                                                                                             | B12 <sup>d e</sup><br>B13 <sup>d e f</sup><br>B14 <sup>f</sup> |
|                         | TNV-3 CIRCUIT                                              | <ul style="list-style-type: none"> <li>– unearthed TNV-1 CIRCUIT</li> <li>– earthed TNV-1 CIRCUIT</li> </ul>                                                                                                                                      | B12<br>B13 <sup>d</sup>                                        |
| SUPPLEMENTARY           | basic-insulated conductive part or ELV CIRCUIT             | <ul style="list-style-type: none"> <li>– double-insulated conductive part</li> <li>– unearthed SELV CIRCUIT</li> </ul>                                                                                                                            | S1 <sup>b</sup><br>S1 <sup>b</sup>                             |
|                         | TNV CIRCUIT                                                | <ul style="list-style-type: none"> <li>– basic-insulated conductive part</li> <li>– ELV CIRCUIT</li> </ul>                                                                                                                                        | S2 <sup>d</sup><br>S2                                          |

**Table 2H (concluded)**

| Grade of insulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Location of insulation                        |                                                                                                                                               | Key to Figure 2H                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | between                                       | and                                                                                                                                           |                                                             |
| SUPPLEMENTARY or REINFORCED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | unearthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT | <ul style="list-style-type: none"> <li>– double-insulated conductive part</li> <li>– unearthed SELV CIRCUIT</li> <li>– TNV CIRCUIT</li> </ul> | S/R1 <sup>c</sup><br>S/R1 <sup>c</sup><br>S/R2 <sup>c</sup> |
| REINFORCED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | PRIMARY CIRCUIT                               | <ul style="list-style-type: none"> <li>– double-insulated conductive part</li> <li>– unearthed SELV CIRCUIT</li> <li>– TNV CIRCUIT</li> </ul> | R1<br>R1<br>R2                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | earthed HAZARDOUS VOLTAGE SECONDARY CIRCUIT   | <ul style="list-style-type: none"> <li>– double-insulated conductive part</li> <li>– unearthed SELV CIRCUIT</li> <li>– TNV CIRCUIT</li> </ul> | R3<br>R3<br>R4                                              |
| <p>The term "conductive part" refers to an electrically conductive part that is</p> <ul style="list-style-type: none"> <li>– not normally energized, and</li> <li>– not connected to any of the following:                             <ul style="list-style-type: none"> <li>• a circuit at HAZARDOUS VOLTAGE, or</li> <li>• an ELV CIRCUIT, or</li> <li>• a TNV CIRCUIT, or</li> <li>• an SELV CIRCUIT, or</li> <li>• a LIMITED CURRENT CIRCUIT.</li> </ul> </li> </ul> <p>Examples of such a conductive part are the BODY of equipment, a transformer core, and in some cases a conductive screen in a transformer.</p> <p>If such a conductive part is protected from a part at HAZARDOUS VOLTAGE by:</p> <ul style="list-style-type: none"> <li>– DOUBLE INSULATION or REINFORCED INSULATION, it is termed a "double-insulated conductive part";</li> <li>– BASIC INSULATION plus protective earthing, it is termed an "earthed conductive part";</li> <li>– BASIC INSULATION but is not earthed, that is it has no second level of protection, it is termed a "basic-insulated conductive part".</li> </ul> <p>A circuit or conductive part is termed "earthed" if it is connected to a protective earthing terminal or contact in such a way as to meet the requirements in 2.6 (although it will not necessarily be at earth potential). Otherwise the circuit or conductive part is termed "unearthed".</p>                                                                                                                                                                                                                                                  |                                               |                                                                                                                                               |                                                             |
| <p><sup>a</sup> For requirements for FUNCTIONAL INSULATION, see 5.3.4.</p> <p><sup>b</sup> The WORKING VOLTAGE of the SUPPLEMENTARY INSULATION between an ELV CIRCUIT or a basic-insulated conductive part and an unearthed accessible conductive part is equal to the most onerous WORKING VOLTAGE for the BASIC INSULATION. The most onerous WORKING VOLTAGE may be due to a PRIMARY CIRCUIT or SECONDARY CIRCUIT and the insulation is specified accordingly.</p> <p><sup>c</sup> Insulation between an unearthed SECONDARY CIRCUIT at HAZARDOUS VOLTAGE and an unearthed accessible conductive part of circuit (S/R, S/R1 or S/R2 in Figure 2H) shall satisfy the more onerous of the following:</p> <ul style="list-style-type: none"> <li>– REINFORCED INSULATION whose WORKING VOLTAGE is equal to the HAZARDOUS VOLTAGE; or</li> <li>– SUPPLEMENTARY INSULATION whose WORKING VOLTAGE is equal to the voltage between the SECONDARY CIRCUIT at HAZARDOUS VOLTAGE and                             <ul style="list-style-type: none"> <li>• another SECONDARY CIRCUIT at HAZARDOUS VOLTAGE, or</li> <li>• a PRIMARY CIRCUIT.</li> </ul> </li> </ul> <p>These examples apply if:</p> <ul style="list-style-type: none"> <li>– there is only BASIC INSULATION between the SECONDARY CIRCUIT and the PRIMARY CIRCUIT; and</li> <li>– there is only BASIC INSULATION between the SECONDARY CIRCUIT and earth.</li> </ul> <p><sup>d</sup> BASIC INSULATION is not always required (see 2.3.2.1 and 2.10.5.13).</p> <p><sup>e</sup> The requirements of 2.10 apply, see also 6.2.1.</p> <p><sup>f</sup> The requirements of 2.10 do not apply, however see 6.2.1.</p> |                                               |                                                                                                                                               |                                                             |

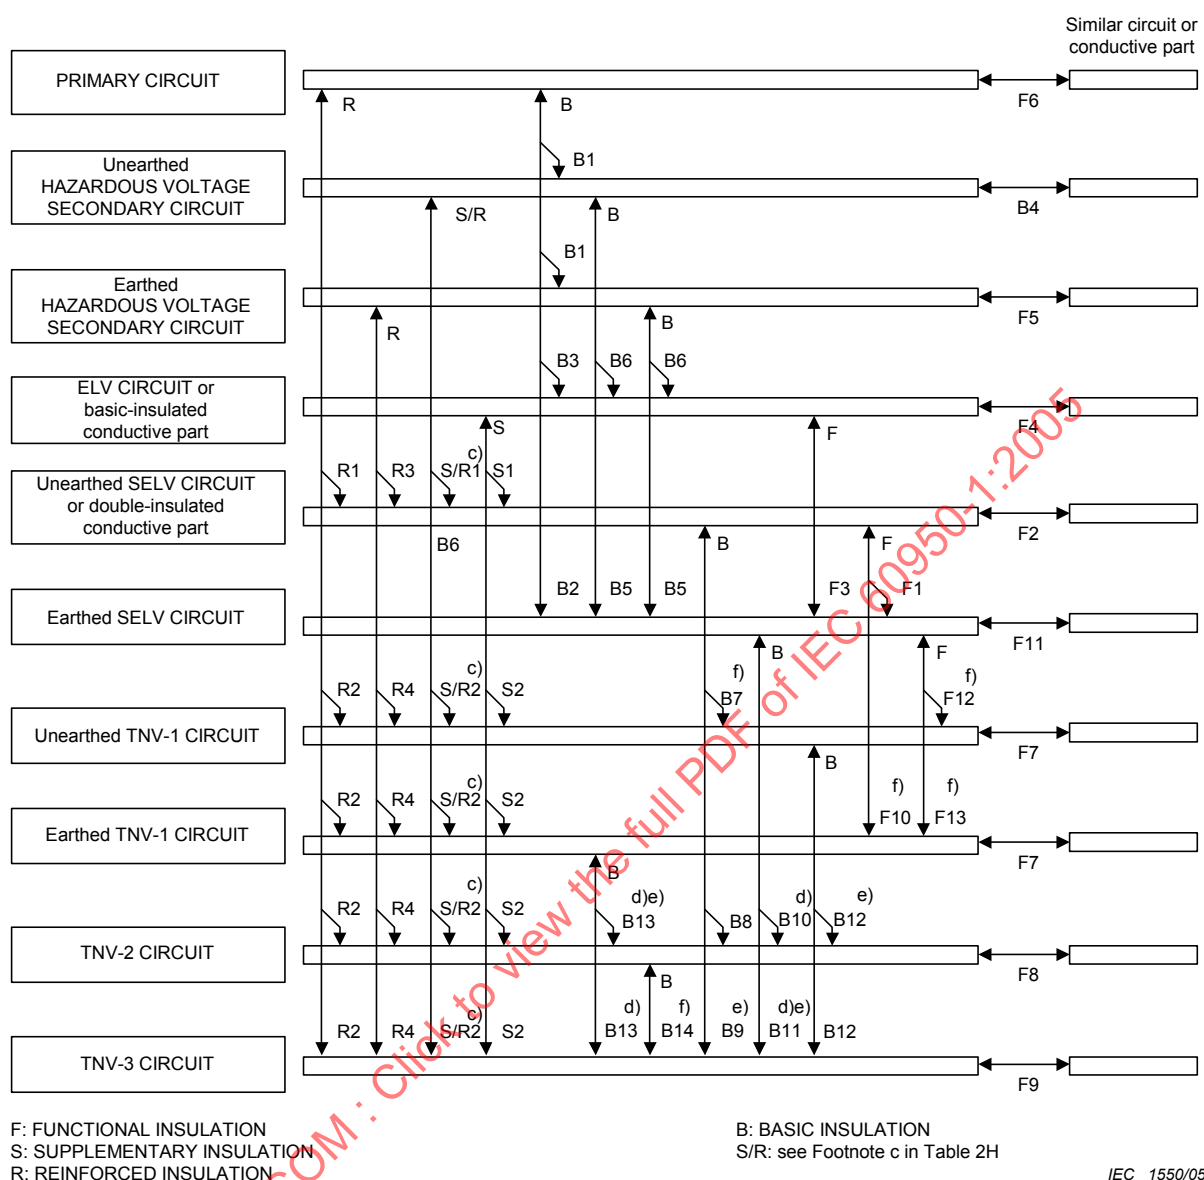

NOTE The references c), d), e) and f) refer to the corresponding footnotes in Table 2H.

**Figure 2H – Examples of application of insulation**

#### 2.9.4 Separation from hazardous voltages

Where accessible conductive parts, including SELV CIRCUITS, TNV CIRCUITS and their related windings, are separated from parts at HAZARDOUS VOLTAGE, the following constructions are permitted. The insulation, including each element of DOUBLE INSULATION, shall be rated for the WORKING VOLTAGE, or if applicable the REQUIRED WITHSTAND VOLTAGE, between the parts. The different methods of separation fall into three groups, methods 1, 2 and 3.

- (Method 1) DOUBLE INSULATION or REINFORCED INSULATION providing permanent separation, assured by barriers, routing or fixing; or
- (Method 1) DOUBLE INSULATION or REINFORCED INSULATION on or between the parts to be separated; or

- c) (Method 1) DOUBLE INSULATION, consisting of BASIC INSULATION on one of the parts to be separated and SUPPLEMENTARY INSULATION on the other part; or
- d) (Method 2) BASIC INSULATION on the part at a HAZARDOUS VOLTAGE, together with protective screening connected to the main protective earthing terminal in accordance with 2.6.1 b); or
- e) (Method 3) BASIC INSULATION on the part at a HAZARDOUS VOLTAGE, together with connection of the other part to the main protective earthing terminal in accordance with 2.6.1 b), such that the voltage limits for the accessible part are maintained by relative circuit impedances or by the operation of a protective device; or
- f) any other construction providing equivalent separation.

NOTE 1 For examples of other constructions providing equivalent separation, see Table 2H and Figure 2H.

For e), it is permitted to protect a circuit by earthing a part other than the protected circuit itself, for example, the secondary winding of a transformer supplying the protected circuit.

NOTE 2 The consequences of the circuit possibly being earthed at a second point, for example, by connection to other equipment, should be considered.

*Compliance is checked by inspection.*

## **2.10 Clearances, creepage distances and distances through insulation**

### **2.10.1 General**

*In general, compliance with 2.10.1 is checked by inspection and, when necessary, by measurement.*

#### **2.10.1.1 Frequency**

The insulation requirements given in 2.10 are for frequencies up to 30 kHz. It is permitted to use the same requirements for insulation operating at frequencies over 30 kHz until additional data is available.

NOTE For information on insulation behaviour in relation to frequency see IEC 60664-1 and IEC 60664-4.

#### **2.10.1.2 Pollution degrees**

Pollution degrees are classified as follows:

- Pollution Degree 1 applies where there is no pollution or only dry, non-conductive pollution. The pollution has no influence. Normally, this is achieved by having components and subassemblies adequately enclosed by enveloping or hermetic sealing so as to exclude dust and moisture (see 2.10.12).
- Pollution Degree 2 applies where there is only non-conductive pollution that might temporarily become conductive due to occasional condensation. It is generally appropriate for equipment covered by the scope of this standard.
- Pollution Degree 3 applies where a local environment within the equipment is subject to conductive pollution, or to dry non-conductive pollution that could become conductive due to expected condensation.



### 2.10.1.3 Reduced values for functional insulation

There is no minimum CLEARANCE or CREEPAGE DISTANCE for FUNCTIONAL INSULATION unless it is required by 5.3.4 a).

NOTE If CLEARANCES and CREEPAGE DISTANCES for FUNCTIONAL INSULATION are smaller than those specified in 2.10.3, 2.10.4 and Annex G, they are subject to the requirements of 5.3.4 b) or 5.3.4 c).

### 2.10.1.4 Intervening unconnected conductive parts

It is permitted for CLEARANCES and CREEPAGE DISTANCES to be divided by intervening, unconnected (floating) conductive parts, such as unused contacts of a connector, provided that the sum of the individual distances meets the specified minimum requirements, see Table F.1 and Figure F.13.

### 2.10.1.5 Insulation with varying dimensions

If the insulation of a transformer has different WORKING VOLTAGES along the length of the winding, it is permitted to vary CLEARANCES, CREEPAGE DISTANCES and distances through insulation accordingly.

NOTE An example of such a construction is a 30 kV winding, consisting of multiple bobbins connected in series, and earthed at one end.

### 2.10.1.6 Special separation requirements

The requirements of 2.10 and Annex G do not apply to separation provided to comply with 2.3.2 unless BASIC INSULATION is used, nor to separation provided to comply with 6.1.2 or 6.2.1.

NOTE See also Footnote f of Table 2H.

### 2.10.1.7 Insulation in circuits generating starting pulses

For a circuit generating starting pulses to ignite a discharge lamp, and if the circuit is a LIMITED CURRENT CIRCUIT complying with 2.4, the requirements for FUNCTIONAL INSULATION apply between the circuit and other conductive parts (see 5.3.4).

If the circuit is not a LIMITED CURRENT CIRCUIT, the requirements for BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION apply to CREEPAGE DISTANCES and distances through insulation. For CLEARANCES, see 2.10.3.5.

NOTE For WORKING VOLTAGES in the above cases, see 2.10.2.1 i).

## 2.10.2 Determination of working voltage

*In general, compliance with 2.10.2 is checked by inspection and, when necessary, by measurement.*

### 2.10.2.1 General

In determining WORKING VOLTAGES, all of the following requirements apply (see also 1.4.8).

- a) Unearthed accessible conductive parts shall be assumed to be earthed.
- b) If a transformer winding or other part is floating (it is not connected to a circuit that establishes its potential relative to earth), it shall be assumed to be earthed at the point by which the highest WORKING VOLTAGE is obtained.

- c) Except as permitted in 2.10.1.5, for insulation between two transformer windings, the highest voltage between any two points in the two windings shall be used, taking into account external voltages to which the windings will be connected.
- d) Except as permitted in 2.10.1.5, for insulation between a transformer winding and another part, the highest voltage between any point on the winding and the other part shall be used.
- e) Where DOUBLE INSULATION is used, the WORKING VOLTAGE across the BASIC INSULATION shall be determined by imagining a short-circuit across the SUPPLEMENTARY INSULATION, and vice versa. For DOUBLE INSULATION between transformer windings, the short-circuit shall be assumed to take place at the point by which the highest WORKING VOLTAGE is produced in the other insulation.
- f) When the WORKING VOLTAGE is determined by measurement, the input power supplied to the EUT shall be at the RATED VOLTAGE or the voltage within the RATED VOLTAGE RANGE that results in the highest measured value.

NOTE Tolerances on the RATED VOLTAGE or RATED VOLTAGE RANGE are not taken into account.

- g) The WORKING VOLTAGE between any point in the PRIMARY CIRCUIT and earth, and between any point in the PRIMARY CIRCUIT and a SECONDARY CIRCUIT, shall be assumed to be the greater of the following:
  - the RATED VOLTAGE or the upper voltage of the RATED VOLTAGE RANGE; and
  - the measured voltage.
- h) When determining the WORKING VOLTAGE for a TNV CIRCUIT connected to a TELECOMMUNICATION NETWORK, the normal operating voltages shall be taken into account. If these are not known, they shall be assumed to be the following values:
  - 60 V d.c. for TNV-1 CIRCUITS;
  - 120 V d.c. for TNV-2 CIRCUITS and TNV-3 CIRCUITS.

Telephone ringing signals shall not be taken into account for this purpose.
- i) If starting pulses are used to ignite discharge lamps, the PEAK WORKING VOLTAGE is the peak value of the pulses with the lamp connected but before the lamp ignites. The RMS WORKING VOLTAGE to determine minimum CREEPAGE DISTANCES is the voltage measured after the ignition of the lamp.

### 2.10.2.2 RMS working voltage

Minimum CREEPAGE DISTANCES depend on RMS WORKING VOLTAGES.

When determining an RMS WORKING VOLTAGE, the following rules shall be used:

- the measured r.m.s. value shall be used for all waveforms;
- short-term conditions (for example, cadenced telephone ringing signals in TNV CIRCUITS) shall not be taken into account;
- non-repetitive transients (due, for example, to atmospheric disturbances) shall not be taken into account.

NOTE The resultant r.m.s. value of a waveform having an a.c. r.m.s. voltage "A" and a d.c. offset voltage "B" is given by the following formula:

$$\text{r.m.s. value} = (A^2 + B^2)^{1/2}$$

### 2.10.2.3 Peak working voltage

Minimum CLEARANCES and electric strength test voltages depend on PEAK WORKING VOLTAGES.

When determining a PEAK WORKING VOLTAGE, the following rules shall be used:

- the measured peak value shall be used for all waveforms; the peak value of any ripple (up to 10 %) on a DC VOLTAGE, shall be included;
- non-repetitive transients (due, for example, to atmospheric disturbances) shall not be taken into account;
- when determining the PEAK WORKING VOLTAGE between PRIMARY CIRCUITS and SECONDARY CIRCUITS, the voltage of any ELV CIRCUIT, SELV CIRCUIT or TNV CIRCUIT (including telephone ringing signals) shall be regarded as zero.

### 2.10.3 Clearances

#### 2.10.3.1 General

CLEARANCES shall be so dimensioned that overvoltages, including transients that may enter the equipment, and peak voltages that may be generated within the equipment, do not break down the CLEARANCE.

It is permitted to use either the requirements of 2.10.3 for Overvoltage Category I or Overvoltage Category II, using the PEAK WORKING VOLTAGE, or the requirements in Annex G for Overvoltage Category I, Overvoltage Category II, Overvoltage Category III or Overvoltage Category IV, using the REQUIRED WITHSTAND VOLTAGE, for a particular component or subassembly or for the whole equipment.

These requirements apply for equipment to be operated up to 2 000 m above sea level. For equipment to be operated at more than 2 000 m above sea level, the minimum CLEARANCES shall be multiplied by the factor given in Table A.2 of IEC 60664-1. Linear interpolation is permitted between the nearest two points in Table A.2. The calculated minimum CLEARANCE using this multiplication factor shall be rounded up to the next higher 0,1 mm increment.

NOTE 1 It is considered to be good practice to design SOLID INSULATION for higher transient overvoltages than the associated CLEARANCE.

The specified minimum CLEARANCES are subject to the following minimum values:

- 10 mm for an air gap serving as REINFORCED INSULATION between a part at HAZARDOUS VOLTAGE and an accessible conductive part of the ENCLOSURE of floor-standing equipment or of the non-vertical top surface of desk top equipment;
- 2 mm for an air gap serving as BASIC INSULATION between a part at HAZARDOUS VOLTAGE and an earthed accessible conductive part of the ENCLOSURE of PLUGGABLE EQUIPMENT TYPE A.

NOTE 2 The above two minimum CLEARANCES do not apply between a part at a HAZARDOUS VOLTAGE and the BOUNDING SURFACE of a non-conductive ENCLOSURE.

Except as required by 2.8.7.1 the specified minimum CLEARANCES do not apply to the air gap between the contacts of THERMOSTATS, THERMAL CUT-OUTS, overload protection devices, switches of microgap construction, and similar components where the air gap varies with the contacts.

NOTE 3 For air gaps between contacts of interlock switches, see 2.8.7.1. For air gaps between contacts of disconnect switches, see 3.4.2.

The CLEARANCES between the BOUNDING SURFACE of a connector and conductive parts within the connector that are connected to a HAZARDOUS VOLTAGE shall comply with the requirements for REINFORCED INSULATION. As an exception, for connectors that are

- fixed to the equipment; and
- located internal to the outer ENCLOSURE of the equipment; and are
- only accessible after removal of a USER-replaceable subassembly that is required to be in place during normal operation,

these CLEARANCES shall comply with the requirements for BASIC INSULATION.

NOTE 4 The tests of 2.1.1.1 for access to hazardous parts apply to such connectors after removal of the subassembly.

For all other CLEARANCES in connectors, including connectors that are not fixed to the equipment, the minimum values specified in 2.10.3.3 or 2.10.3.4 apply.

The above minimum CLEARANCES for connectors do not apply to connectors that comply with a standard harmonized with IEC 60083, IEC 60309, IEC 60320, IEC 60906-1 or IEC 60906-2, see also 1.5.2.

*Compliance with 2.10.3.3 and 2.10.3.4 is checked by measurement, taking into account Annex F. The following conditions apply:*

- *movable parts shall be placed in the most unfavourable position;*
- *for equipment incorporating ordinary NON-DETACHABLE POWER SUPPLY CORDS, CLEARANCE measurements are made with supply conductors of the largest cross-sectional area specified in 3.3.4, and also without conductors.*

NOTE 5 The force tests of 4.2.2, 4.2.3 and 4.2.4 apply.

- *when measuring CLEARANCES from the BOUNDING SURFACE of an ENCLOSURE of insulating material through a slot or opening in the ENCLOSURE or through an opening in an accessible connector, the accessible surface shall be considered to be conductive as if it were covered by metal foil wherever it can be touched by the test finger shown in Figure 2A (see 2.1.1.1), applied without appreciable force (see Figure F.12, point X).*

*There is no electric strength test to verify CLEARANCES except as required in Footnote c in Table 2M and in 5.3.4 b).*

### **2.10.3.2 Mains transient voltages**

#### **a) AC MAINS SUPPLY**

For equipment to be supplied from an AC MAINS SUPPLY, the value of the MAINS TRANSIENT VOLTAGE depends on the Overvoltage Category and the AC MAINS SUPPLY voltage. In general, CLEARANCES in equipment intended to be connected to the AC MAINS SUPPLY shall be designed for Overvoltage Category II.

NOTE 1 See Annex Z for further guidance on the determination of Overvoltage Category.

Equipment that is likely, when installed, to be subjected to transient overvoltages that exceed those for its design Overvoltage Category will require additional protection to be provided external to the equipment. In this case, the installation instructions shall state the need for such external protection.

The applicable value of the MAINS TRANSIENT VOLTAGE shall be determined from the Overvoltage Category and the AC MAINS SUPPLY voltage, using Table 2J.

**Table 2J – AC mains transient voltages**

| AC MAINS SUPPLY voltage <sup>a</sup><br>up to and including | MAINS TRANSIENT VOLTAGE <sup>b</sup><br>V peak |       |
|-------------------------------------------------------------|------------------------------------------------|-------|
|                                                             | Overvoltage Category                           |       |
| V r.m.s.                                                    | I                                              | II    |
| 50                                                          | 330                                            | 500   |
| 100                                                         | 500                                            | 800   |
| 150 <sup>c</sup>                                            | 800                                            | 1 500 |
| 300 <sup>d</sup>                                            | 1 500                                          | 2 500 |
| 600 <sup>e</sup>                                            | 2 500                                          | 4 000 |

<sup>a</sup> For equipment designed to be connected to a three-phase, three-wire supply, where there is no neutral conductor, the AC MAINS SUPPLY voltage is the line-to-line voltage. In all other cases, where there is a neutral conductor, it is the line-to-neutral voltage.

<sup>b</sup> The MAINS TRANSIENT VOLTAGE is always one of the values in the table. Interpolation is not permitted.

<sup>c</sup> Including 120/208 V and 120/240 V.

<sup>d</sup> Including 230/400 V and 277/480 V.

<sup>e</sup> Including 400/690 V.

NOTE 2 For Japan, the value of the MAINS TRANSIENT VOLTAGES for the nominal AC MAINS SUPPLY voltage of 100 V is determined from the row applicable to an AC MAINS SUPPLY voltage of 150 V.

#### **b) Earthed DC MAINS SUPPLIES**

If a DC MAINS SUPPLY is connected to protective earth and is entirely within a single building, the MAINS TRANSIENT VOLTAGE shall be assumed to be 71 V peak. If this connection is within the EUT, it shall be in accordance with 2.6.1 d).

NOTE 3 The connection to protective earth can be at the source of the DC MAINS SUPPLY or at the equipment location, or both (see ITU-T Recommendation K.27).

#### **c) Unearthed DC MAINS SUPPLIES**

If a DC MAINS SUPPLY is not earthed and located as in b) above, the MAINS TRANSIENT VOLTAGE shall be assumed to be equal to the MAINS TRANSIENT VOLTAGE in the AC MAINS SUPPLY from which the DC MAINS SUPPLY is derived.

#### **d) Battery operation**

If equipment is supplied from a dedicated battery that has no provision for charging from an external MAINS SUPPLY, the MAINS TRANSIENT VOLTAGE shall be assumed to be 71 V peak.

### **2.10.3.3 Clearances in primary circuits**

For insulation in PRIMARY CIRCUITS, between PRIMARY CIRCUITS and earth and between PRIMARY CIRCUITS and SECONDARY CIRCUITS, the following rules apply.

For an AC MAINS SUPPLY not exceeding 300 V r.m.s. (420 V peak):

- a) if the PEAK WORKING VOLTAGE does not exceed the peak value of the AC MAINS SUPPLY voltage, minimum CLEARANCES are determined from Table 2K;
- b) if the PEAK WORKING VOLTAGE exceeds the peak value of the AC MAINS SUPPLY voltage, the minimum CLEARANCE is the sum of the following two values:
  - the minimum CLEARANCE from Table 2K; and
  - the appropriate additional CLEARANCE from Table 2L.

NOTE A minimum CLEARANCE obtained by the use of Table 2L lies between the values required for homogeneous and inhomogeneous fields. As a result, it may not pass the appropriate electric strength test if the field is substantially inhomogeneous.

For an AC MAINS SUPPLY exceeding 300 V r.m.s. (420 V peak), minimum CLEARANCES are determined from Table 2K.

**Table 2K – Minimum clearances for insulation in primary circuits  
and between primary and secondary circuits**

CLEARANCES in mm

| PEAK WORKING<br>VOLTAGE <sup>a</sup><br><br>up to and including<br><br>V | MAINS TRANSIENT VOLTAGE         |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
|--------------------------------------------------------------------------|---------------------------------|--------------|--------------|-----|--------------|--------------|----------------------|--------------|--------------|-----|--------------|--------------|-------------------------|--------------|--------------|
|                                                                          | 1 500 V <sup>c</sup>            |              |              |     |              |              | 2 500 V <sup>c</sup> |              |              |     |              |              | 4 000 V <sup>c</sup>    |              |              |
|                                                                          | Pollution degree                |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
|                                                                          | 1 and 2 <sup>b</sup>            |              |              | 3   |              |              | 1 and 2 <sup>b</sup> |              |              | 3   |              |              | 1, 2 <sup>b</sup> and 3 |              |              |
|                                                                          | F                               | B/S          | R            | F   | B/S          | R            | F                    | B/S          | R            | F   | B/S          | R            | F                       | B/S          | R            |
| 71                                                                       | 0,4                             | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8 | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,0                  | 2,0<br>(1,5) | 4,0<br>(3,0) | 1,3 | 2,0<br>(1,5) | 4,0<br>(3,0) | 2,0                     | 3,2<br>(3,0) | 6,4<br>(6,0) |
| 210                                                                      | 0,5                             | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8 | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,4                  | 2,0<br>(1,5) | 4,0<br>(3,0) | 1,5 | 2,0<br>(1,5) | 4,0<br>(3,0) | 2,0                     | 3,2<br>(3,0) | 6,4<br>(6,0) |
| 420                                                                      | F 1,5 B/S 2,0 (1,5) R 4,0 (3,0) |              |              |     |              |              |                      |              |              |     |              |              | 2,5                     | 3,2<br>(3,0) | 6,4<br>(6,0) |
| 840                                                                      | F 3,0 B/S 3,2 (3,0) R 6,4 (6,0) |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 1 400                                                                    | F/B/S 4,2 R 6,4                 |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 2 800                                                                    | F/B/S/R 8,4                     |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 7 000                                                                    | F/B/S/R 17,5                    |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 9 800                                                                    | F/B/S/R 25                      |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 14 000                                                                   | F/B/S/R 37                      |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 28 000                                                                   | F/B/S/R 80                      |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |
| 42 000                                                                   | F/B/S/R 130                     |              |              |     |              |              |                      |              |              |     |              |              |                         |              |              |

The values in the table are applicable to FUNCTIONAL INSULATION (F) if required by 5.3.4 a) (see 2.10.1.3), BASIC INSULATION (B), SUPPLEMENTARY INSULATION (S) and REINFORCED INSULATION (R).

The values in parentheses apply to BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION only if manufacturing is subjected to a quality control programme that provides at least the same level of assurance as the example given in Clause R.2. DOUBLE INSULATION and REINFORCED INSULATION shall be subjected to ROUTINE TESTS for electric strength.

If the PEAK WORKING VOLTAGE exceeds the peak value of the AC MAINS SUPPLY voltage, linear interpolation is permitted between the nearest two points, the calculated minimum CLEARANCE being rounded up to the next higher 0,1 mm increment.

<sup>a</sup> If the PEAK WORKING VOLTAGE exceeds the peak value of the AC MAINS SUPPLY voltage, see 2.10.3.3 b) regarding additional CLEARANCES.

<sup>b</sup> It is not required to pass the tests of 2.10.10 for Pollution Degree 1.

<sup>c</sup> The relationship between MAINS TRANSIENT VOLTAGE and AC MAINS SUPPLY voltage is given in Table 2J.

**Table 2L – Additional clearances in primary circuits**

CLEARANCES in mm

| MAINS TRANSIENT VOLTAGE                                                                                               |                    |                                                           |                       |                                            |                                                           |                       |
|-----------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------------------------|-----------------------|
| 1 500 V <sup>c</sup>                                                                                                  |                    |                                                           |                       | 2 500 V <sup>c</sup>                       |                                                           |                       |
| Pollution Degrees 1 and 2 <sup>b</sup>                                                                                | Pollution Degree 3 | FUNCTIONAL <sup>a</sup> BASIC or SUPPLEMENTARY INSULATION | REINFORCED INSULATION | Pollution Degrees 1, 2 and 3 <sup>b</sup>  | FUNCTIONAL <sup>a</sup> BASIC or SUPPLEMENTARY INSULATION | REINFORCED INSULATION |
| PEAK WORKING VOLTAGE up to and including V                                                                            |                    |                                                           |                       | PEAK WORKING VOLTAGE up to and including V |                                                           |                       |
| 210 (210)                                                                                                             | 210 (210)          | 0,0                                                       | 0,0                   | 420 (420)                                  | 0,0                                                       | 0,0                   |
| 298 (288)                                                                                                             | 294 (293)          | 0,1                                                       | 0,2                   | 493 (497)                                  | 0,1                                                       | 0,2                   |
| 386 (366)                                                                                                             | 379 (376)          | 0,2                                                       | 0,4                   | 567 (575)                                  | 0,2                                                       | 0,4                   |
| 474 (444)                                                                                                             | 463 (459)          | 0,3                                                       | 0,6                   | 640 (652)                                  | 0,3                                                       | 0,6                   |
| 562 (522)                                                                                                             | 547 (541)          | 0,4                                                       | 0,8                   | 713 (729)                                  | 0,4                                                       | 0,8                   |
| 650 (600)                                                                                                             | 632 (624)          | 0,5                                                       | 1,0                   | 787 (807)                                  | 0,5                                                       | 1,0                   |
| 738 (678)                                                                                                             | 715 (707)          | 0,6                                                       | 1,2                   | 860 (884)                                  | 0,6                                                       | 1,2                   |
| 826 (756)                                                                                                             | 800 (790)          | 0,7                                                       | 1,4                   | 933 (961)                                  | 0,7                                                       | 1,4                   |
| 914 (839)                                                                                                             |                    | 0,8                                                       | 1,6                   | 1 006 (1 039)                              | 0,8                                                       | 1,6                   |
| 1 002 (912)                                                                                                           |                    | 0,9                                                       | 1,8                   | 1 080 (1 116)                              | 0,9                                                       | 1,8                   |
| 1 090 (990)                                                                                                           |                    | 1,0                                                       | 2,0                   | 1 153 (1 193)                              | 1,0                                                       | 2,0                   |
|                                                                                                                       |                    | 1,1                                                       | 2,2                   | 1 226 (1 271)                              | 1,1                                                       | 2,2                   |
|                                                                                                                       |                    | 1,2                                                       | 2,4                   | 1 300 (1 348)                              | 1,2                                                       | 2,4                   |
|                                                                                                                       |                    | 1,3                                                       | 2,6                   | (1 425)                                    | 1,3                                                       | 2,6                   |
| The additional CLEARANCES in the table apply if required by 2.10.3.3 b).                                              |                    |                                                           |                       |                                            |                                                           |                       |
| The values in parentheses shall be used:                                                                              |                    |                                                           |                       |                                            |                                                           |                       |
| - if the values in parentheses in Table 2K are used; and                                                              |                    |                                                           |                       |                                            |                                                           |                       |
| - for FUNCTIONAL INSULATION if required by 5.3.4 a).                                                                  |                    |                                                           |                       |                                            |                                                           |                       |
| For voltage values above the PEAK WORKING VOLTAGE values given in the table, linear extrapolation is permitted.       |                    |                                                           |                       |                                            |                                                           |                       |
| <sup>a</sup> There is no minimum CLEARANCE for FUNCTIONAL INSULATION unless it is required by 5.3.4 a). See 2.10.1.3. |                    |                                                           |                       |                                            |                                                           |                       |
| <sup>b</sup> It is not required to pass the tests of 2.10.10 for Pollution Degree 1.                                  |                    |                                                           |                       |                                            |                                                           |                       |
| <sup>c</sup> The relationship between MAINS TRANSIENT VOLTAGE and AC MAINS SUPPLY voltage is given in Table 2J.       |                    |                                                           |                       |                                            |                                                           |                       |

**2.10.3.4 Clearances in secondary circuits**

Minimum CLEARANCES in SECONDARY CIRCUITS are determined from Table 2M.

The PEAK WORKING VOLTAGE for use in Table 2M is:

- the peak value of a sinusoidal voltage;
- the measured peak value of a non-sinusoidal voltage.

The highest transient overvoltage for use in Table 2M is either

- the highest transient from the MAINS SUPPLY, determined in accordance with 2.10.3.6 or 2.10.3.7; or
- the highest transient from a TELECOMMUNICATION NETWORK, determined in accordance with 2.10.3.8,

whichever is the higher value.



CLEARANCES in mm

| PEAK WORKING VOLTAGE                                                                                                                                                                                                                                                                                                                                                         | Highest transient overvoltage in the SECONDARY CIRCUIT (V peak) |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|--------------|--------------|-------------------------------------|--------------|--------------|---------------------------|--------------|--------------|----------------------------------------|--------------|--------------|-------------------------------------------------------|--------------|--------------|-------------------------|--------------|--------------|
|                                                                                                                                                                                                                                                                                                                                                                              | Up to and including 71 V                                        |              |              | Over 71 V up to and including 800 V |              |              | Up to and including 800 V |              |              | Over 800 V up to and including 1 500 V |              |              | Over 1 500 V up to and including 2 500 V <sup>a</sup> |              |              |                         |              |              |
|                                                                                                                                                                                                                                                                                                                                                                              | Pollution Degree                                                |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
|                                                                                                                                                                                                                                                                                                                                                                              | 1 and 2 <sup>b</sup>                                            |              |              |                                     |              |              | 3                         |              |              | 1 and 2 <sup>b</sup>                   |              |              | 3                                                     |              |              | 1, 2 <sup>b</sup> and 3 |              |              |
| V                                                                                                                                                                                                                                                                                                                                                                            | F                                                               | B/S          | R            | F                                   | B/S          | R            | F                         | B/S          | R            | F                                      | B/S          | R            | F                                                     | B/S          | R            | F                       | B/S          | R            |
| 71                                                                                                                                                                                                                                                                                                                                                                           | 0,2                                                             | 0,4<br>(0,2) | 0,8<br>(0,4) | 0,2                                 | 0,7<br>(0,2) | 1,4<br>(0,4) | 0,8                       | 1,3<br>(0,8) | 2,6<br>(1,6) | 0,5                                    | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8                                                   | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,5<br>(1,5)            | 2,0<br>(3,0) | 4,0<br>(3,0) |
| 140                                                                                                                                                                                                                                                                                                                                                                          | 0,2                                                             | 0,7<br>(0,2) | 1,4<br>(0,4) | 0,2                                 | 0,7<br>(0,2) | 1,4<br>(0,4) | 0,8                       | 1,3<br>(0,8) | 2,6<br>(1,6) | 0,5                                    | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8                                                   | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,5<br>(1,5)            | 2,0<br>(3,0) | 4,0<br>(3,0) |
| 210                                                                                                                                                                                                                                                                                                                                                                          | 0,2                                                             | 0,7<br>(0,2) | 1,4<br>(0,4) | 0,2                                 | 0,9<br>(0,2) | 1,8<br>(0,4) | 0,8                       | 1,3<br>(0,8) | 2,6<br>(1,6) | 0,5                                    | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8                                                   | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,5<br>(1,5)            | 2,0<br>(3,0) | 4,0<br>(3,0) |
| 280                                                                                                                                                                                                                                                                                                                                                                          | 0,2                                                             | 1,1<br>(0,2) | 2,2<br>(0,4) | F 0,8 B/S 1,4 (0,8) R 2,8 (1,6)     |              |              |                           |              |              |                                        |              |              |                                                       |              |              | 1,5                     | 2,0<br>(1,5) | 4,0<br>(3,0) |
| 420                                                                                                                                                                                                                                                                                                                                                                          | 0,2                                                             | 1,4<br>(0,2) | 2,8<br>(0,4) | F 1,0 B/S 1,9 (1,0) R 3,8 (2,0)     |              |              |                           |              |              |                                        |              |              |                                                       |              |              | 1,5                     | 2,0<br>(1,5) | 4,0<br>(3,0) |
| 700                                                                                                                                                                                                                                                                                                                                                                          | F/B/S 2,5 R 5,0                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 840                                                                                                                                                                                                                                                                                                                                                                          | F/B/S 3,2 R 5,0                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 1 400                                                                                                                                                                                                                                                                                                                                                                        | F/B/S 4,2 R 5,0                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 2 800                                                                                                                                                                                                                                                                                                                                                                        | F/B/S/R 8,4 See <sup>c</sup>                                    |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 7 000                                                                                                                                                                                                                                                                                                                                                                        | F/B/S/R 7,5 See <sup>c</sup>                                    |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 9 800                                                                                                                                                                                                                                                                                                                                                                        | F/B/S/R 25 See <sup>c</sup>                                     |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 14 000                                                                                                                                                                                                                                                                                                                                                                       | F/B/S/R 37 See <sup>c</sup>                                     |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 28 000                                                                                                                                                                                                                                                                                                                                                                       | F/B/S/R 80 See <sup>c</sup>                                     |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| 42 000                                                                                                                                                                                                                                                                                                                                                                       | F/B/S/R 130 See <sup>c</sup>                                    |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| The values in the table apply to FUNCTIONAL INSULATION (F) if required by 5.3.4 a) (see 2.10.1.3), BASIC INSULATION (B), SUPPLEMENTARY INSULATION (S) and REINFORCED INSULATION (R).                                                                                                                                                                                         |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| Linear interpolation is permitted between the nearest two points, the calculated minimum CLEARANCE being rounded up to the next higher 0,1 mm increment.                                                                                                                                                                                                                     |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| If the CLEARANCE path is partly along the surface of insulation that is not Material Group I, the test voltage is applied across the air gap and Material Group I only. The part of the path along the surface of any other insulating material is bypassed.                                                                                                                 |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| The values in parentheses apply to BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION if manufacturing is subjected to a quality control programme that provides at least the same level of assurance as the example given in Clause R.2 of Annex R. DOUBLE INSULATION and REINFORCED INSULATION shall be subjected to ROUTINE TESTS for electric strength. |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| <sup>a</sup> For transient overvoltages higher than 2 500 V peak, either Table 2K shall be used or the minimum CLEARANCE shall be determined using Annex G.                                                                                                                                                                                                                  |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| <sup>b</sup> It is not required to pass the tests of 2.10.10 for Pollution Degree 1.                                                                                                                                                                                                                                                                                         |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| <sup>c</sup> In a SECONDARY CIRCUIT, for PEAK WORKING VOLTAGES above 1 400 V, the minimum CLEARANCE is 5 mm provided that the CLEARANCE path passes an electric strength test according to 5.2.2 using:                                                                                                                                                                      |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| - an a.c. test voltage whose r.m.s. value is 106 % of the PEAK WORKING VOLTAGE (peak value is 150 % of the PEAK WORKING VOLTAGE), or                                                                                                                                                                                                                                         |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |
| - a d.c. test voltage equal to 150 % of the PEAK WORKING VOLTAGE.                                                                                                                                                                                                                                                                                                            |                                                                 |              |              |                                     |              |              |                           |              |              |                                        |              |              |                                                       |              |              |                         |              |              |



### 2.10.3.5 Clearances in circuits having starting pulses

For a circuit generating starting pulses to ignite a discharge lamp, and if the circuit is not a LIMITED CURRENT CIRCUIT complying with 2.4 (see 2.10.1.7), the adequacy of CLEARANCES is determined by one of the following methods:

- a) *Determine the minimum CLEARANCE in accordance with Annex G; or*
- b) *Conduct electric strength tests, using one of the following procedures. During the tests, the lamp terminals are shorted together.*
  - *Test in accordance with 5.2.2, using an a.c. peak or d.c. test voltage equal to 150 % of the PEAK WORKING VOLTAGE; or*
  - *Apply 30 pulses having amplitude equal to 150 % the PEAK WORKING VOLTAGE from an external pulse generator. The pulse width shall be equal to or greater than that of the internally generated starting pulse.*

NOTE For WORKING VOLTAGES see 2.10.2.1 i).

### 2.10.3.6 Transients from an a.c. mains supply

Except as permitted below, the highest transient in a SECONDARY CIRCUIT due to transients on the AC MAINS SUPPLY is the value measured in accordance with 2.10.3.9 a).

Alternatively, for certain SECONDARY CIRCUITS it is permitted to assume that the highest transient is either of the following:

- the value measured in accordance with 2.10.3.9 a); or
- one step lower in the following list than the MAINS TRANSIENT VOLTAGE from Table 2J in the PRIMARY CIRCUIT:

330, 500, 800, 1 500, 2 500 and 4 000 V peak.

This is permitted in the following cases:

- a SECONDARY CIRCUIT, derived from an AC MAINS SUPPLY, that is connected to the main protective earthing terminal in accordance with 2.6.1;
- a SECONDARY CIRCUIT, derived from an AC MAINS SUPPLY and separated from the PRIMARY CIRCUIT by a metal screen that is connected to the main protective earthing terminal in accordance with 2.6.1.

### 2.10.3.7 Transients from a d.c. mains supply

NOTE 1 A circuit connected to a DC MAINS SUPPLY is considered to be a SECONDARY CIRCUIT (see 1.2.8.2).

The highest transient in a SECONDARY CIRCUIT due to transients on a DC MAINS SUPPLY is

- the MAINS TRANSIENT VOLTAGE, if the SECONDARY CIRCUIT is directly connected to the DC MAINS SUPPLY; or
- the value measured in accordance with 2.10.3.9 a) in other cases except as given in 2.10.3.2 b) and 2.10.3.2 c).

NOTE 2 Both of the above options depend on the value of the MAINS TRANSIENT VOLTAGE. In some cases, this value is assumed to be 71 V peak [see 2.10.3.2 b) or d)]. The appropriate column of Table 2K is used and no measurement is necessary.

### 2.10.3.8 Transients from telecommunication networks and cable distribution systems

If the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE is known for the TELECOMMUNICATION NETWORK in question, it is permitted to use the known value in 2.10.3.4.

If the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE is not known, the following value shall be used:

- 1 500 V peak if the circuit connected to the TELECOMMUNICATION NETWORK is a TNV-1 CIRCUIT or a TNV-3 CIRCUIT; and
- 800 V peak if the circuit connected to the TELECOMMUNICATION NETWORK is an SELV CIRCUIT or a TNV-2 CIRCUIT.

If incoming transients are attenuated within the equipment, it is permitted to use the value measured in accordance with 2.10.3.9 b).

The effect of a telephone ringing signal is not taken into account.

The effect of transients from a CABLE DISTRIBUTION SYSTEM is not taken into account (however, see 7.4.1).

### 2.10.3.9 Measurement of transient voltages

*The following tests are conducted only if it is required to determine whether or not the transient voltage across the CLEARANCE in any circuit is lower than normal (for example, due to the effect of a filter in the equipment). The transient voltage across the CLEARANCE is measured using the following test procedure.*

*During the tests, the equipment is connected to its separate power supply unit, if any, but is not connected to the MAINS SUPPLY or to any TELECOMMUNICATION NETWORKS, and any surge suppressors in PRIMARY CIRCUITS are disconnected.*

*A voltage-measuring device is connected across the CLEARANCE in question.*

#### a) Transients from a MAINS SUPPLY

*To measure a transient voltage across a CLEARANCE due to transients on a MAINS SUPPLY, the impulse test generator reference 2 of Table N.1 is used to generate 1,2/50  $\mu$ s impulses.  $U_c$  is equal to the MAINS TRANSIENT VOLTAGE given in Table 2J.*

*Three to six impulses of alternating polarity, with intervals of at least 1 s between impulses, are applied between each of the following points where relevant:*

#### **For an AC MAINS SUPPLY**

- line-to-line;
- all line conductors joined together and neutral;
- all line conductors joined together and protective earth;
- neutral and protective earth.

**For a DC MAINS SUPPLY**

- the positive and negative supply connection points;
- all supply connection points joined together and protective earth.

**b) Transients from a TELECOMMUNICATION NETWORK**

To measure the transient voltage across a CLEARANCE due to transients on a TELECOMMUNICATION NETWORK, the impulse test generator reference 1 of Table N.1 is used to generate 10/700  $\mu$ s impulses.  $U_c$  is equal to the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE determined in 2.10.3.8.

Three to six impulses of alternating polarity, with intervals of at least 1 s between impulses, are applied between each of the following TELECOMMUNICATION NETWORK connection points of a single interface type:

- each pair of terminals (for example, A and B or tip and ring) in an interface;
- all terminals of a single interface type joined together and earth.

Where there are several identical circuits, only one is tested.

**2.10.4 Creepage distances****2.10.4.1 General**

CREEPAGE DISTANCES shall be so dimensioned that, for a given RMS WORKING VOLTAGE and pollution degree, no flashover or breakdown of insulation (for example, due to tracking) will occur.

**2.10.4.2 Material group and comparative tracking index**

Material groups depend on the comparative tracking index (CTI) and are classified as follows:

|                     |                      |
|---------------------|----------------------|
| Material Group I    | $CTI \geq 600$       |
| Material Group II   | $400 \leq CTI < 600$ |
| Material Group IIIa | $175 \leq CTI < 400$ |
| Material Group IIIb | $100 \leq CTI < 175$ |

The material group is verified by evaluation of the test data for the material according to IEC 60112 using 50 drops of solution A.

If the material group is not known, Material Group IIIb shall be assumed.

If a CTI of 175 or greater is needed, and the data is not available, the material group can be established with a test for proof tracking index (PTI) as detailed in IEC 60112. A material may be included in a group if its PTI established by these tests is equal to, or greater than, the lower value of the CTI specified for the group.

### 2.10.4.3 Minimum creepage distances

CREEPAGE DISTANCES shall be not less than the appropriate minimum values specified in Table 2N.

If the minimum CREEPAGE DISTANCE derived from Table 2N is less than the applicable minimum CLEARANCE, that value of minimum CLEARANCE shall be applied as the minimum CREEPAGE DISTANCE.

For glass, mica, glazed ceramic, or similar inorganic materials, if the minimum CREEPAGE DISTANCE is greater than the applicable minimum CLEARANCE, it is permitted to apply that value of minimum CLEARANCE as the minimum CREEPAGE DISTANCE.

The CREEPAGE DISTANCE between the BOUNDING SURFACE of a connector and conductive parts within the connector that are connected to a HAZARDOUS VOLTAGE shall comply with the requirements for REINFORCED INSULATION. As an exception, for connectors that are

- fixed to the equipment; and
- located internal to the outer ENCLOSURE of the equipment; and
- only accessible after removal of a USER-replaceable subassembly that is required to be in place during normal operation,

this CREEPAGE DISTANCE shall comply with the requirements for BASIC INSULATION.

NOTE The tests of 2.1.1.1 for access to hazardous parts apply to such connectors after removal of the subassembly.

For all other CREEPAGE DISTANCES in connectors, including connectors that are not fixed to the equipment, the minimum values specified in Table 2N apply.

The above minimum CREEPAGE DISTANCES for connectors do not apply to connectors that comply with a standard harmonized with IEC 60083, IEC 60309, IEC 60320, IEC 60906-1 or IEC 60906-2, see also 1.5.2.

*Compliance is checked by measurement, taking into account Annex F. The following conditions apply:*

- *movable parts are placed in their most unfavourable positions;*
- *for equipment incorporating ordinary NON-DETACHABLE POWER SUPPLY CORDS, CREEPAGE DISTANCE measurements are made with supply conductors of the largest cross-sectional area specified in 3.3.4 for the terminal in question, and also without conductors; and*
- *when measuring CREEPAGE DISTANCES from the BOUNDING SURFACE of an ENCLOSURE of insulating material through a slot or opening in the ENCLOSURE or through an opening in an accessible connector, the accessible surface is considered to be conductive as if it were covered by metal foil wherever it can be touched by the test finger, Figure 2A (see 2.1.1.1), applied without appreciable force (see Figure F.12, point X).*

Table 2N – Minimum creepage distances

CREEPAGE DISTANCES in mm

| RMS WORKING VOLTAGE<br><br>up to and including<br><br>V | Pollution degree        |                |                         |      |      |               |      |      |                             |
|---------------------------------------------------------|-------------------------|----------------|-------------------------|------|------|---------------|------|------|-----------------------------|
|                                                         | 1 <sup>a</sup>          | 2              | 1 <sup>a</sup>          | 2    |      | 3             |      |      |                             |
|                                                         | Material group          |                |                         |      |      |               |      |      |                             |
|                                                         | Printed boards          |                | Other materials         |      |      |               |      |      |                             |
|                                                         | I, II,<br>IIIa,<br>IIIb | I, II,<br>IIIa | I, II,<br>IIIa,<br>IIIb | I    | II   | IIIa,<br>IIIb | I    | II   | IIIa, IIIb<br>(see<br>Note) |
| 10                                                      | 0,025                   | 0,04           | 0,08                    | 0,4  | 0,4  | 0,4           | 1,0  | 1,0  | 1,0                         |
| 12,5                                                    | 0,025                   | 0,04           | 0,09                    | 0,42 | 0,42 | 0,42          | 1,05 | 1,05 | 1,05                        |
| 16                                                      | 0,025                   | 0,04           | 0,1                     | 0,45 | 0,45 | 0,45          | 1,1  | 1,1  | 1,1                         |
| 20                                                      | 0,025                   | 0,04           | 0,11                    | 0,48 | 0,48 | 0,48          | 1,2  | 1,2  | 1,2                         |
| 25                                                      | 0,025                   | 0,04           | 0,125                   | 0,5  | 0,5  | 0,5           | 1,25 | 1,25 | 1,25                        |
| 32                                                      | 0,025                   | 0,04           | 0,14                    | 0,53 | 0,53 | 0,53          | 1,3  | 1,3  | 1,3                         |
| 40                                                      | 0,025                   | 0,04           | 0,16                    | 0,56 | 0,8  | 1,1           | 1,4  | 1,6  | 1,8                         |
| 50                                                      | 0,025                   | 0,04           | 0,18                    | 0,6  | 0,85 | 1,2           | 1,5  | 1,7  | 1,9                         |
| 63                                                      | 0,04                    | 0,063          | 0,2                     | 0,63 | 0,9  | 1,25          | 1,6  | 1,8  | 2,0                         |
| 80                                                      | 0,063                   | 0,10           | 0,22                    | 0,67 | 0,9  | 1,3           | 1,7  | 1,9  | 2,1                         |
| 100                                                     | 0,1                     | 0,16           | 0,25                    | 0,71 | 1,0  | 1,4           | 1,8  | 2,0  | 2,2                         |
| 125                                                     | 0,16                    | 0,25           | 0,28                    | 0,75 | 1,05 | 1,5           | 1,9  | 2,1  | 2,4                         |
| 160                                                     | 0,25                    | 0,40           | 0,32                    | 0,8  | 1,1  | 1,6           | 2,0  | 2,2  | 2,5                         |
| 200                                                     | 0,4                     | 0,63           | 0,42                    | 1,0  | 1,4  | 2,0           | 2,5  | 2,8  | 3,2                         |
| 250                                                     | 0,56                    | 1,0            | 0,56                    | 1,25 | 1,8  | 2,5           | 3,2  | 3,6  | 4,0                         |
| 320                                                     | 0,75                    | 1,6            | 0,75                    | 1,6  | 2,2  | 3,2           | 4,0  | 4,5  | 5,0                         |
| 400                                                     | 1,0                     | 2,0            | 1,0                     | 2,0  | 2,8  | 4,0           | 5,0  | 5,6  | 6,3                         |
| 500                                                     | 1,3                     | 2,5            | 1,3                     | 2,5  | 3,6  | 5,0           | 6,3  | 7,1  | 8,0                         |
| 630                                                     | 1,8                     | 3,2            | 1,8                     | 3,2  | 4,5  | 6,3           | 8,0  | 9,0  | 10                          |
| 800                                                     | 2,4                     | 4,0            | 2,4                     | 4,0  | 5,6  | 8,0           | 10   | 11   | 12,5                        |
| 1 000                                                   | 3,2                     | 5,0            | 3,2                     | 5,0  | 7,1  | 10            | 12,5 | 14   | 16                          |
| 1 250                                                   |                         |                | 4,2                     | 6,3  | 9,0  | 12,5          | 16   | 18   | 20                          |
| 1 600                                                   |                         |                | 5,6                     | 8,0  | 11   | 16            | 20   | 22   | 25                          |
| 2 000                                                   |                         |                | 7,5                     | 10   | 14   | 20            | 25   | 28   | 32                          |
| 2 500                                                   |                         |                | 10                      | 12,5 | 18   | 25            | 32   | 36   | 40                          |
| 3 200                                                   |                         |                | 12,5                    | 16   | 22   | 32            | 40   | 45   | 50                          |
| 4 000                                                   |                         |                | 16                      | 20   | 28   | 40            | 50   | 56   | 63                          |
| 5 000                                                   |                         |                | 20                      | 25   | 36   | 50            | 63   | 71   | 80                          |
| 6 300                                                   |                         |                | 25                      | 32   | 45   | 63            | 80   | 90   | 100                         |
| 8 000                                                   |                         |                | 32                      | 40   | 56   | 80            | 100  | 110  | 125                         |
| 10 000                                                  |                         |                | 40                      | 50   | 71   | 100           | 125  | 140  | 160                         |
| 12 500                                                  |                         |                | 50                      | 63   | 90   | 125           |      |      |                             |
| 16 000                                                  |                         |                | 63                      | 80   | 110  | 160           |      |      |                             |
| 20 000                                                  |                         |                | 80                      | 100  | 140  | 200           |      |      |                             |
| 25 000                                                  |                         |                | 100                     | 125  | 180  | 250           |      |      |                             |
| 32 000                                                  |                         |                | 125                     | 160  | 220  | 320           |      |      |                             |
| 40 000                                                  |                         |                | 160                     | 200  | 280  | 400           |      |      |                             |
| 50 000                                                  |                         |                | 200                     | 250  | 360  | 500           |      |      |                             |
| 63 000                                                  |                         |                | 250                     | 320  | 450  | 600           |      |      |                             |

The values in the table apply to FUNCTIONAL INSULATION if required by 5.3.4 a) (see 2.10.1.3), BASIC INSULATION and SUPPLEMENTARY INSULATION. For REINFORCED INSULATION the values are twice those in the table.

Linear interpolation is permitted between the nearest two points, the calculated minimum CREEPAGE DISTANCE being rounded to the next higher 0,1 mm increment. For REINFORCED INSULATION, the calculated value for BASIC INSULATION shall be doubled first before applying the rounding off.

NOTE Material Group IIIb is not recommended for applications in Pollution Degree 3 with an RMS WORKING VOLTAGE above 630 V.

<sup>a</sup> It is permitted to use the values for Pollution Degree 1 if one sample passes the tests of 2.10.10.

## 2.10.5 Solid insulation

### 2.10.5.1 General

In 2.10.5, the requirements for SOLID INSULATION (except those for thin sheet material) and for insulating compound also apply to gel materials, used for this purpose.

SOLID INSULATION shall be:

- so dimensioned that overvoltages, including transients, that enter the equipment, and peak voltages that may be generated within the equipment, do not break down the SOLID INSULATION; and
- so arranged that the likelihood of breakdown occurring due to the presence of pinholes in thin layers of insulation is limited.

Solvent-based enamel is accepted only on winding wire as described in 2.10.5.13.

Except for printed boards, SOLID INSULATION shall either

- comply with minimum distances through insulation in accordance with 2.10.5.2; or
- meet the requirements and pass the tests in 2.10.5.3 to 2.10.5.13, as applicable.

NOTE 1 For printed boards, see 2.10.6.

NOTE 2 For SOLID INSULATION on internal wiring, see 3.1.4.

*Compliance with the requirements of 2.10.5.2 to 2.10.5.14 for the adequacy of SOLID INSULATION is verified by inspection and measurement, taking into account Annex F, by the electric strength tests of 5.2 and by any additional tests required in 2.10.5.4 to 2.10.5.14.*

### 2.10.5.2 Distances through insulation

If a design is based on distances through insulation, these distances shall be dimensioned according to the application of the insulation (see 2.9) and as follows (see Figure F.14):

- if the PEAK WORKING VOLTAGE does not exceed 71 V, there is no requirement for distance through insulation;
- if the PEAK WORKING VOLTAGE exceeds 71 V, the following rules apply:
  - for FUNCTIONAL INSULATION and BASIC INSULATION there is no minimum distance through insulation;
  - SUPPLEMENTARY INSULATION or REINFORCED INSULATION shall have a distance through insulation that is 0,4 mm or greater, provided by a single layer.

*For compliance criteria, see 2.10.5.1.*

### 2.10.5.3 Insulating compound as solid insulation

NOTE 1 For printed boards, see 2.10.6 and for wound components, see 2.10.5.11, 2.10.5.12, 2.10.5.13 and 2.10.5.14.

There is no minimum internal CLEARANCE or CREEPAGE DISTANCE if insulating compound completely fills the casing of a component or subassembly, provided that each distance through insulation in the component or subassembly meets the requirements of 2.10.5.2 and a single sample passes the tests of 2.10.10.

NOTE 2 Some examples of such treatment are variously known as potting, encapsulation and vacuum impregnation.

NOTE 3 Such constructions may contain cemented joints, in which case 2.10.5.5 also applies.

*For compliance criteria, see 2.10.5.1.*

#### **2.10.5.4 Semiconductor devices**

There is no minimum distance through insulation for SUPPLEMENTARY INSULATION or REINFORCED INSULATION consisting of an insulating compound completely filling the casing of a semiconductor component (for example, an optocoupler, see Figure F.17), provided that the component satisfies one of the following, a) or b):

- a) – passes the TYPE TESTS and inspection criteria of 2.10.11; and
  - passes ROUTINE TESTS for electric strength during manufacturing, using the appropriate value of the test voltage in 5.2.2; or
- b) for an optocoupler only, complies with the requirements of IEC 60747-5-5<sup>1)</sup>, where the test voltages as specified in 5.2.6 (of IEC 60747-5-5):
  - the voltage  $V_{\text{ini,a}}$  for TYPE TESTING and
  - the voltage  $V_{\text{ini,b}}$  for ROUTINE TESTING,
 shall be the appropriate value of the test voltage in 5.2.2 of this standard.

NOTE The above constructions may contain cemented joints, in which case 2.10.5.5 also applies.

As an alternative to a) and b) above, it is permitted to treat a semiconductor according to 2.10.5.3, if applicable.

*For compliance criteria, see 2.10.5.1.*

#### **2.10.5.5 Cemented joints**

Where the path between conductive parts is filled with insulating compound, and the insulating compound forms a cemented joint between two non-conductive parts (see Figure F.18) or between a non-conductive part and itself (see Figures F.16 and F.17), one of the following, a), b) or c) applies.

- a) The distance along the path between the two conductive parts shall not be less than the minimum CLEARANCES and CREEPAGE DISTANCES for Pollution Degree 2. The requirements for distance through insulation of 2.10.5.2 do not apply along the joint.
- b) The distance along the path between the two conductive parts shall not be less than the minimum CLEARANCES and CREEPAGE DISTANCES for Pollution Degree 1. Additionally, one sample shall pass the test of 2.10.10. The requirements for distance through insulation of 2.10.5.2 do not apply along the joint.
- c) The requirements for distance through insulation of 2.10.5.2 apply between the conductive parts along the joint. Additionally, three samples shall pass the test of 2.10.11.

<sup>1)</sup> To be published.

For a) and b) above, if the insulating materials involved have different material groups, the worst case is used. If a material group is not known, Material Group IIIb shall be assumed.

For b) and c) above, the tests of 2.10.10 and 2.10.11 are not applied to a printed board made using pre-preg if the temperature of the printed board measured during the test of 4.5.2 does not exceed 90 °C.

NOTE 1 No actual CLEARANCE or CREEPAGE DISTANCE exists unless the joint comes apart, for example, due to ageing. To cover this possibility, the requirements and tests of c) apply if the minimum CLEARANCES and CREEPAGE DISTANCES according to a) or b) are not met.

NOTE 2 Some examples of cemented joints are as follows:

- between two non-conductive parts cemented together, for example, two layers of a multilayer printed board (see Figure F.16) or the split bobbin of a transformer where the partition is secured by adhesive (see Figure F.18);
- between spirally wrapped layers of insulation on winding wire, sealed by adhesive;
- between the non-conductive casing of an optocoupler and insulating compound filling the casing (see Figure F.17).

*For compliance criteria, see 2.10.5.1.*

#### **2.10.5.6 Thin sheet material - General**

There is no dimensional or constructional requirement for insulation in thin sheet material used as FUNCTIONAL INSULATION or BASIC INSULATION.

Insulation in thin sheet materials permitted for SUPPLEMENTARY INSULATION and REINFORCED INSULATION (see Figure F.15), irrespective of the distance through insulation, provided that all of the following apply:

- two or more layers are used;
- the insulation is within the equipment ENCLOSURE;
- the insulation is not subject to handling or abrasion during OPERATOR servicing; and
- the requirements and tests of 2.10.5.7 (for separable layers) or 2.10.5.8 (for non-separable layers) are met.

It is not required for the two or more layers to be fixed to the same conductive part. The two or more layers can be

- fixed to one of the conductive parts requiring separation, or
- shared between the two conductive parts, or
- not fixed to either conductive part.

#### **2.10.5.7 Separable thin sheet material**

For insulation in separable thin sheet layers, in addition to the requirements of 2.10.5.6,

- SUPPLEMENTARY INSULATION shall consist of at least two layers of material, each of which will pass the electric strength test for SUPPLEMENTARY INSULATION; or
- SUPPLEMENTARY INSULATION shall consist of three layers of material for which all combinations of two layers together will pass the electric strength test for SUPPLEMENTARY INSULATION; or
- REINFORCED INSULATION shall consist of at least two layers of material, each of which will pass the electric strength test for REINFORCED INSULATION; or
- REINFORCED INSULATION shall consist of three layers of material for which all combinations of two layers together will pass the electric strength test for REINFORCED INSULATION.



It is permitted for different layers of insulation to be of different materials or different thicknesses, or both.

*Compliance is checked by inspection and by the electric strength test of 2.10.5.9 or 2.10.5.10.*

#### **2.10.5.8 Non-separable thin sheet material**

For insulation consisting of non-separable thin sheet materials, in addition to the requirements of 2.10.5.6, the test procedures in Table 2P are applied.

It is permitted for different layers of insulation to be of different materials or different thicknesses, or both.

*Compliance is checked by inspection and by the tests specified in Table 2P.*

**Table 2P – Tests for insulation in non-separable layers**

| Number of layers                                                                                                                                                                                                                                                                                                                                                                                    | Test procedure                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| SUPPLEMENTARY INSULATION                                                                                                                                                                                                                                                                                                                                                                            |                                                                        |
| Two or more layers:                                                                                                                                                                                                                                                                                                                                                                                 | The test procedure of 2.10.5.9 is applied. <sup>a</sup>                |
| REINFORCED INSULATION                                                                                                                                                                                                                                                                                                                                                                               |                                                                        |
| Two layers:                                                                                                                                                                                                                                                                                                                                                                                         | The test procedure of 2.10.5.9 is applied. <sup>a</sup>                |
| Three or more layers:                                                                                                                                                                                                                                                                                                                                                                               | The test procedures of 2.10.5.9 and Annex AA are applied. <sup>a</sup> |
| <sup>a</sup> The alternative test procedure of 2.10.5.10 cannot be used for non-separable layers<br>NOTE The purpose of the tests in Annex AA is to ensure that the material has adequate strength to resist damage when hidden in inner layers of insulation. Therefore, the tests are not applied to insulation in two layers. The tests in Annex AA are not applied to SUPPLEMENTARY INSULATION. |                                                                        |

#### **2.10.5.9 Thin sheet material - standard test procedure**

*For separable or non-separable layers, electric strength tests are applied in accordance with 5.2.2 to all layers together. The test voltage is:*

- 200 % of  $U_{\text{test}}$  if two layers are used; or
- 150 % of  $U_{\text{test}}$  if three or more layers are used,

*where  $U_{\text{test}}$  is the test voltage specified in 5.2.2 for SUPPLEMENTARY INSULATION or REINFORCED INSULATION as appropriate.*

NOTE Unless all the layers are of the same material and have the same thickness, there is a possibility that the test voltage will be shared unequally between layers, causing breakdown of a layer that would have passed if tested separately.

#### **2.10.5.10 Thin sheet material - alternative test procedure**

*If layers can be separated for individual testing, the following alternative to the standard test procedure in 2.10.5.9 is permitted.*

*Electric strength tests are applied in accordance with 5.2.2, using test voltages equal to the test voltage specified in 5.2.2 for SUPPLEMENTARY INSULATION or REINFORCED INSULATION as appropriate.*

*If two layers are used, each layer shall pass the test.*

*If three or more layers are used, each combination of two layers together shall pass the test.*

*If three or more layers are used, it is permitted to divide these layers into two or three groups for testing purposes. In the above electric strength tests, two or three groups are tested instead of two or three layers.*

*A test on a layer or group of layers is not repeated on an identical layer or group.*

#### **2.10.5.11 Insulation in wound components**

Planar transformers are not considered to be wound components.

NOTE 1 Planar transformers are subject to the requirements covering the construction of printed boards, see 2.10.6.

There is no dimensional or constructional requirement for FUNCTIONAL INSULATION in a wound component.

It is permitted for BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION in a wound component to be provided by

- the insulation on winding wire or other wire (see 2.10.5.12 or 2.10.5.13); or
- other insulation (see 2.10.5.14); or
- a combination of the two.

NOTE 2 Wound components may contain cemented joints, in which case 2.10.5.5 also applies.

For DOUBLE INSULATION between the conductor of a wire and another conductive part, it is permitted for BASIC INSULATION to be provided by insulation complying with 2.10.5.12 on one of the wires and SUPPLEMENTARY INSULATION by additional insulation complying with 2.10.5.14, or vice versa.

*For compliance criteria see 2.10.5.1.*

*Additionally, BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION in finished wound components shall pass ROUTINE TESTS for electric strength in accordance with 5.2.2.*

#### **2.10.5.12 Wire in wound components**

The following requirements apply to winding wire and other wire whose insulation provides BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION, as required.

Solvent-based enamel is not considered to provide BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION. Solvent-based enamel is only accepted if used as winding wire insulation as described in 2.10.5.13.

NOTE 1 For insulation provided in addition to insulation on winding wire, see 2.10.5.14.

If the PEAK WORKING VOLTAGE does not exceed 71 V, there is no dimensional or constructional requirement.

If the PEAK WORKING VOLTAGE exceeds 71 V, one of the following, a), b), or c), applies:

- a) For BASIC INSULATION that is not under stress (for example, from winding tension), there is no dimensional or constructional requirement. For BASIC INSULATION that is under such stress, b), or c) applies.

NOTE 2 The exception in a) does not apply to SUPPLEMENTARY INSULATION or REINFORCED INSULATION.

- b) For BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION, the insulation on the wire shall either:
- have a thickness of at least of 0,4 mm provided by a single layer; or
  - comply with 2.10.5.6 and with Annex U.
- c) The winding wire shall comply with Annex U. In addition, the minimum number of overlapping layers of spirally wrapped tape or extruded layers of insulation shall be as follows:
- for BASIC INSULATION: one layer;
  - for SUPPLEMENTARY INSULATION: two layers;
  - for REINFORCED INSULATION: three layers.

For insulation between two adjacent winding wires, one layer on each conductor is considered to provide SUPPLEMENTARY INSULATION.

Spirally wrapped tape wound with less than 50 % overlap is considered to constitute one layer.

Spirally wrapped tape wound with more than 50 % overlap is considered to constitute two layers.

Spirally wrapped tape shall be sealed and pass the tests of 2.10.5.5 a), b), or c).

NOTE 3 For wires insulated by an extrusion process, sealing is inherent to the process.

Where two winding wires, or one winding wire and another wire, are in contact inside the wound component, crossing each other at an angle between 45° and 90° and subject to winding tension, protection against mechanical stress shall be provided. This protection can be achieved, for example, by providing physical separation in the form of insulating sleeving or sheet material, or by using double the required number of insulation layers.

*For compliance criteria see 2.10.5.1. If the tests of Annex U are required, they are not repeated if the material data sheets confirm compliance.*

### **2.10.5.13 Wire with solvent-based enamel in wound components**

It is permitted to use solvent-based enamel on winding wire to provide electrical separation that is considered to meet the requirements of 2.3.2.1.

NOTE 1 Solvent-based enamel is not considered to provide BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION, see 2.10.5.12.

The insulation on all conductors shall be enamel complying with the requirements of a grade 2 winding wire in compliance with one of the IEC 60317 series of standards with the TYPE TEST conducted at a test voltage that is not less than required by 5.2.2.

*Compliance is checked by inspection and by the following tests.*

*The finished component is subjected to a TYPE TEST for electric strength (between windings; and between windings and the core (see Clause C.2) in accordance with 5.2.2.*

*The finished component is also subjected to ROUTINE TESTS for the electric strength of the electrical separation in accordance with 5.2.2, using a test voltage of 1 000 V.*

*The dimensional and constructional requirements of 2.10 and Annex G do not apply for compliance with 2.10.5.13.*

NOTE 2 In some cases, 6.1.2.1 also applies.

NOTE 3 In Finland, Norway and Sweden, there are additional requirements for the insulation, see 6.1.2.1 Note 2 and 6.1.2.2 Note.

#### **2.10.5.14 Additional insulation in wound components**

The following requirements apply to insulation in a wound component, provided in addition to the insulation on winding wire or other wire. This includes, for example:

- insulation between windings; and
- insulation between a winding wire or other wire and any other conductive part in the wound component.

NOTE For insulation on the winding wire itself, see 2.10.5.12.

If the PEAK WORKING VOLTAGE does not exceed 71 V, there is no dimensional or constructional requirement.

If the PEAK WORKING VOLTAGE exceeds 71 V,

- for BASIC INSULATION that is not under mechanical stress, there is no dimensional or constructional requirement;
- SUPPLEMENTARY INSULATION or REINFORCED INSULATION shall either
  - have a thickness of at least 0,4 mm, provided by single layer; or
  - comply with 2.10.5.6.

#### **2.10.6 Construction of printed boards**

NOTE 2.10.6 also applies to the windings of a planar transformer and a ceramic transformer.

##### **2.10.6.1 Uncoated printed boards**

The insulation between conductors on the outer surfaces of an uncoated printed board shall comply with the minimum CLEARANCE requirements of 2.10.3 (or Annex G) and the minimum CREEPAGE DISTANCE requirements of 2.10.4.

*Compliance is checked by inspection and measurement.*

### 2.10.6.2 Coated printed boards

For printed boards whose outer surfaces are to be coated with a suitable coating material, the following requirements apply to conductive parts before they are coated:

- the minimum separation distances of Table 2Q shall be met; and
- manufacturing is subjected to a quality control programme that provides at least the same level of assurance as the example given in Clause R.1 of Annex R. DOUBLE INSULATION and REINFORCED INSULATION shall pass ROUTINE TESTS for electric strength.

One or both conductive parts and at least 80 % of the distances over the surface between the conductive parts shall be coated.

The coating process, the coating material and the base material shall be such that uniform quality is assured and the separation distances under consideration are effectively protected.

The minimum CLEARANCES of 2.10.3 (or Annex G) and the minimum CREEPAGE DISTANCES of 2.10.4 apply

- if the above conditions are not met;
- between any two uncoated conductive parts; and
- over the outside of the coating.

*Compliance is checked by inspection and measurement, taking Figure F.11 into account, and by the tests of 2.10.8.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

**Table 2Q – Minimum separation distances for coated printed boards**

| PEAK WORKING VOLTAGE<br>up to and including<br>V peak                                                                                                                                                                                                                                                                                  | FUNCTIONAL, BASIC OR<br>SUPPLEMENTARY INSULATION<br>mm | REINFORCED INSULATION<br>mm |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------------|
| 90                                                                                                                                                                                                                                                                                                                                     | 0,1                                                    | 0,2                         |
| 180                                                                                                                                                                                                                                                                                                                                    | 0,2                                                    | 0,4                         |
| 230                                                                                                                                                                                                                                                                                                                                    | 0,3                                                    | 0,6                         |
| 285                                                                                                                                                                                                                                                                                                                                    | 0,4                                                    | 0,8                         |
| 355                                                                                                                                                                                                                                                                                                                                    | 0,6                                                    | 1,2                         |
| 455                                                                                                                                                                                                                                                                                                                                    | 0,8                                                    | 1,6                         |
| 570                                                                                                                                                                                                                                                                                                                                    | 1,0                                                    | 2,0                         |
| 710                                                                                                                                                                                                                                                                                                                                    | 1,3                                                    | 2,6                         |
| 895                                                                                                                                                                                                                                                                                                                                    | 1,8                                                    | 3,6                         |
| 1 135                                                                                                                                                                                                                                                                                                                                  | 2,4                                                    | 3,8                         |
| 1 450                                                                                                                                                                                                                                                                                                                                  | 2,8                                                    | 4,0                         |
| 1 800                                                                                                                                                                                                                                                                                                                                  | 3,4                                                    | 4,2                         |
| 2 300                                                                                                                                                                                                                                                                                                                                  | 4,1                                                    | 4,6                         |
| 2 850                                                                                                                                                                                                                                                                                                                                  | 5,0                                                    | 5,0                         |
| 3 550                                                                                                                                                                                                                                                                                                                                  | 6,3                                                    | 6,3                         |
| 4 550                                                                                                                                                                                                                                                                                                                                  | 8,2                                                    | 8,2                         |
| 5 700                                                                                                                                                                                                                                                                                                                                  | 10                                                     | 10                          |
| 7 100                                                                                                                                                                                                                                                                                                                                  | 13                                                     | 13                          |
| 8 950                                                                                                                                                                                                                                                                                                                                  | 16                                                     | 16                          |
| 11 350                                                                                                                                                                                                                                                                                                                                 | 20                                                     | 20                          |
| 14 200                                                                                                                                                                                                                                                                                                                                 | 26                                                     | 26                          |
| 18 000                                                                                                                                                                                                                                                                                                                                 | 33                                                     | 33                          |
| 23 000                                                                                                                                                                                                                                                                                                                                 | 43                                                     | 43                          |
| 28 500                                                                                                                                                                                                                                                                                                                                 | 55                                                     | 55                          |
| 35 500                                                                                                                                                                                                                                                                                                                                 | 70                                                     | 70                          |
| 45 500                                                                                                                                                                                                                                                                                                                                 | 86                                                     | 86                          |
| <p>Linear interpolation is permitted between the nearest two points, the calculated minimum separation distance being rounded up to the next higher 0,1 mm increment.</p> <p>If the minimum CREEPAGE DISTANCE specified in Table 2N is smaller than the minimum separation distance specified above, the smaller distance applies.</p> |                                                        |                             |

### 2.10.6.3 Insulation between conductors on the same inner surface of a printed board

On an inner surface of a multi-layer printed board (see Figure F.16), the path between any two conductors shall comply with the requirements for a cemented joint in 2.10.5.5

### 2.10.6.4 Insulation between conductors on different surfaces of a printed board

SUPPLEMENTARY INSULATION or REINFORCED INSULATION between conductive parts on different surfaces in double-sided single-layer printed boards, multi-layer printed boards and metal core printed boards, shall either:

- have a minimum thickness of 0,4 mm; or
- conform with one of the specifications and pass the relevant tests in Table 2R.

There is no corresponding requirement for FUNCTIONAL INSULATION or BASIC INSULATION.

*Compliance is checked by inspection and measurement and by tests where required.*

**Table 2R – Insulation in printed boards**

| Specification of insulation                                                                                       | TYPE TESTS <sup>a</sup> | ROUTINE TESTS<br>for electric strength <sup>c</sup> |
|-------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------------------------------|
| Two layers of sheet insulating material including pre-preg <sup>b</sup>                                           | No                      | Yes                                                 |
| Three or more layers of sheet insulating material including pre-preg <sup>b</sup>                                 | No                      | No                                                  |
| An insulation system with ceramic coating over a metallic substrate, cured at $\geq 500$ °C                       | No                      | Yes                                                 |
| An insulation system, with two or more coatings other than ceramic over a metallic substrate, cured at $< 500$ °C | Yes                     | Yes                                                 |
| NOTE 1 Pre-preg is the term used for a layer of glass cloth impregnated with a partially cured resin.             |                         |                                                     |
| NOTE 2 For definition of ceramic, see IEC 60950-1:2005.                                                           |                         |                                                     |
| <sup>a</sup> Thermal conditioning of 2.10.8.2 followed by the electric strength test of 5.2.2.                    |                         |                                                     |
| <sup>b</sup> Layers are counted before curing.                                                                    |                         |                                                     |
| <sup>c</sup> Electric strength testing is conducted on the finished printed board.                                |                         |                                                     |

### 2.10.7 Component external terminations

It is permitted to use coatings over external terminations of components to increase effective CLEARANCES and CREEPAGE DISTANCES (see Figure F.10). The minimum separation distances of Table 2Q apply to the component before coating, and the coating shall meet all the requirements of 2.10.6.2, including quality control provisions.

The mechanical arrangement and rigidity of the terminations shall be adequate to ensure that, during normal handling, assembly into equipment and subsequent use, the terminations will not be subject to deformation that would crack the coating or reduce the separation distances between conductive parts below the values in Table 2Q (see 2.10.6.2).

*Compliance is checked by inspection taking into account Figure F.10 and by applying the sequence of tests covered by 2.10.8.1, 2.10.8.2 and 2.10.8.3. These tests are conducted on a completed assembly including the component(s).*

*Also, the abrasion resistance test of 2.10.8.4 is conducted on a specially prepared sample printed board as described for sample 3 in 2.10.8.1, except that the separation between the conductive parts shall be representative of the minimum separations and maximum potential gradients used in the assembly.*

## **2.10.8 Tests on coated printed boards and coated components**

### **2.10.8.1 Sample preparation and preliminary inspection**

*Three sample printed boards (or, for coated components in 2.10.7, two components and one board) identified as samples 1, 2 and 3 are required. It is permitted to use either actual boards or specially produced samples with representative coating and minimum separations. Each sample board shall be representative of the minimum separations used, and coated. Each sample is subjected to the full sequence of manufacturing processes, including soldering and cleaning, to which it is normally subjected during equipment assembly.*

*When visually inspected, the boards shall show no evidence of pinholes or bubbles in the coating or breakthrough of conductive tracks at corners.*

### **2.10.8.2 Thermal conditioning**

*Sample 1 (see 2.10.8.1) is subjected to the thermal cycling sequence of 2.10.9.*

*Sample 2 is aged in a full draught oven at a temperature and for a time duration chosen from the graph of Figure 2J using the temperature index line that corresponds to the maximum operating temperature of the coated board. The temperature of the oven is maintained at the specified temperature  $\pm 2$  °C. The temperature used to determine the temperature index line is the highest temperature on the board where safety is involved.*

*When using Figure 2J, interpolation is permitted between the nearest two temperature index lines.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005



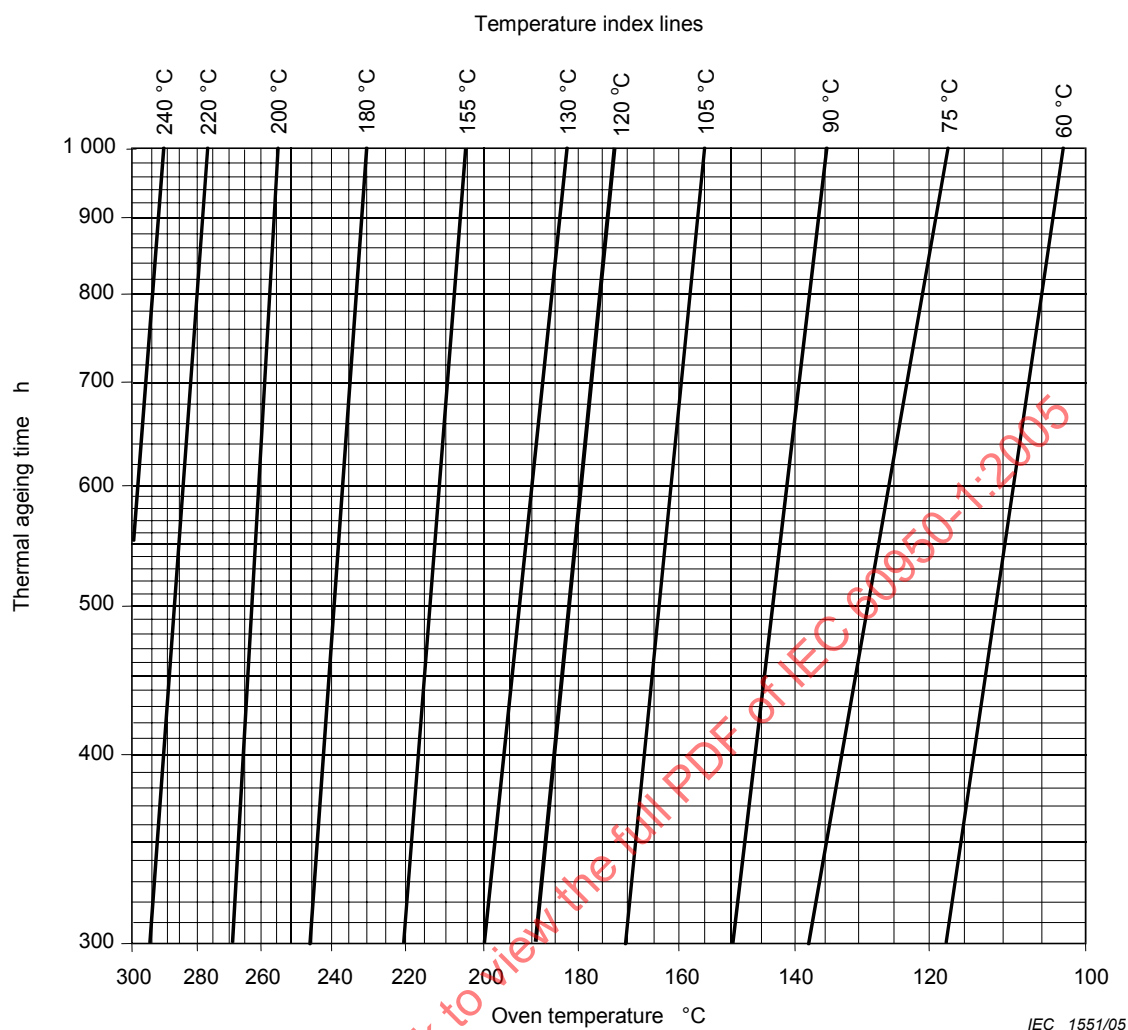


**Figure 2J – Thermal ageing time**

#### 2.10.8.3 Electric strength test

Samples 1 and 2 (see 2.10.8.1) are then subjected to the humidity conditioning of 2.9.2 and shall withstand the relevant electric strength test of 5.2.2 between conductors.

#### 2.10.8.4 Abrasion resistance test


Sample 3 (see 2.10.8.1) is subjected to the following test.

Scratches are made across five pairs of conducting parts and the intervening separations at points where the separations will be subject to the maximum potential gradient during the tests.

The scratches are made by means of a hardened steel pin, the end of which has the form of a cone having a tip angle of  $40^\circ$ , its tip being rounded and polished, with a radius of  $0,25 \text{ mm} \pm 0,02 \text{ mm}$ .

Scratches are made by drawing the pin along the surface in a plane perpendicular to the conductor edges at a speed of  $20 \text{ mm/s} \pm 5 \text{ mm/s}$  as shown in Figure 2K. The pin is so loaded that the force exerted along its axis is  $10 \text{ N} \pm 0,5 \text{ N}$ . The scratches shall be at least 5 mm apart and at least 5 mm from the edge of the specimen.

After this test, the coating layer shall neither have loosened nor have been pierced, and it shall withstand an electric strength test as specified in 5.2.2 between conductors. In the case of metal core printed boards, the substrate is one of the conductors.

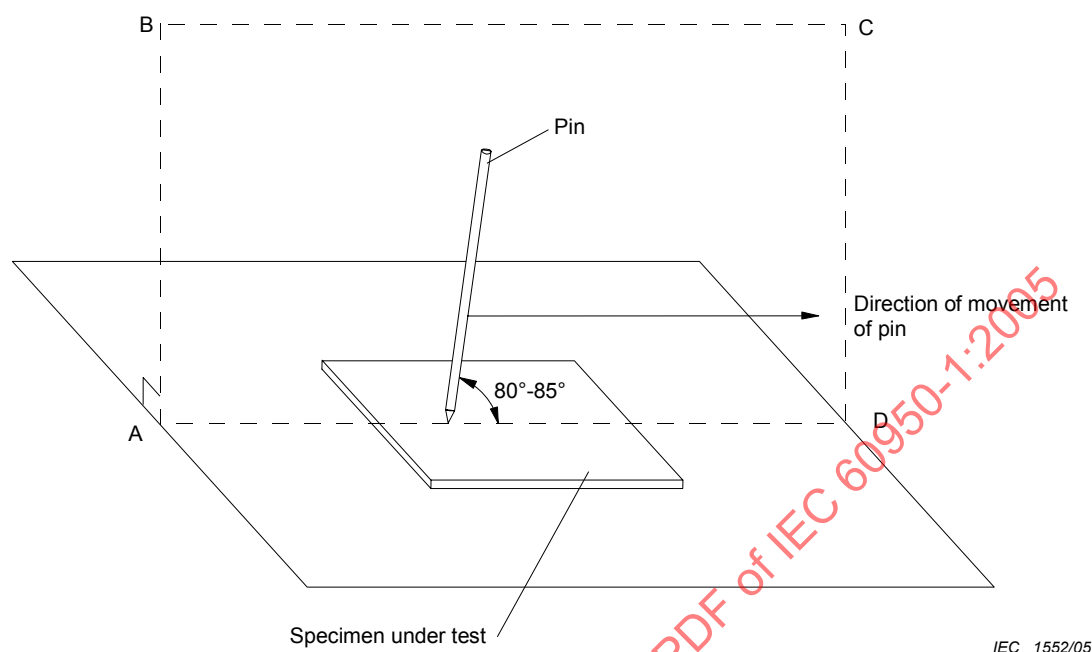

NOTE The pin is in the plane ABCD which is perpendicular to the specimen under test.

**Figure 2K – Abrasion resistance test for coating layers**

### 2.10.9 Thermal cycling

The following thermal cycling sequence is used if required by 2.10.8.2, 2.10.10 or 2.10.11.

A sample of a component or subassembly is subjected to the following sequence of tests. For transformers, magnetic couplers and similar devices, if insulation is relied upon for safety, a voltage of 500 V r.m.s. at a frequency of 50 Hz or 60 Hz is applied between windings, and also between windings and other conductive parts during the following thermal cycling.

The sample is subjected ten times to the following sequence of thermal cycling:

|                      |                                 |
|----------------------|---------------------------------|
| 68 h at              | $T_1 \pm 2\text{ °C};$          |
| 1 h at               | $25\text{ °C} \pm 2\text{ °C};$ |
| 2 h at               | $0\text{ °C} \pm 2\text{ °C};$  |
| not less than 1 h at | $25\text{ °C} \pm 2\text{ °C}.$ |

$T_1 = T_2 + T_{ma} - T_{amb} + 10\text{ K}$ , measured in accordance with 1.4.5 and, where relevant, 1.4.13, or  $85\text{ °C}$ , whichever is the higher. However, the 10 K margin is not added if the temperature is measured by an embedded thermocouple or by the resistance method.

$T_2$  is the temperature of the parts measured during the test of 4.5.2.

The significance of  $T_{ma}$  and  $T_{amb}$  are as given in 1.4.12.1.

*The period of time taken for the transition from one temperature to another is not specified, but the transition is permitted to be gradual.*

*There shall be no evidence of insulation breakdown during this conditioning.*

#### **2.10.10 Test for Pollution Degree 1 environment and for insulating compound**

*This test is conducted when it is required to verify a Pollution Degree 1 environment [when using Table 2N, 2.10.5.5 b) or Table G.2] or when required by 2.10.5.3 or 2.10.12.*

NOTE It is not required to pass this test in connection with Tables 2K, 2L and 2M, where the requirements for Pollution Degree 1 are the same as for Pollution Degree 2.

*A sample is subjected to the thermal cycling sequence of 2.10.9. The sample is permitted to cool to room temperature and is then subjected to the humidity conditioning of 2.9.2, followed immediately by the electric strength tests of 5.2.2.*

*The tests are followed by inspection and measurement. There shall be no cracks in the insulating material. For compliance with 2.10.5.3, the sample is also sectioned, and there shall be no voids in the insulating material.*

#### **2.10.11 Tests for semiconductor devices and for cemented joints**

*If required by 2.10.5.4 or 2.10.5.5 c), three samples are subjected to the thermal cycling sequence of 2.10.9. Before testing a cemented joint, any winding of solvent-based enamelled wire used in the component is replaced by metal foil or by a few turns of bare wire, placed close to the cemented joint.*

*The three samples are then tested as follows:*

- *one of the samples is subjected to the relevant electric strength test of 5.2.2, immediately after the last period at  $T_1$  °C during thermal cycling, except that the test voltage is multiplied by 1,6;*
- *the other samples are subjected to the relevant electric strength test of 5.2.2 after the humidity conditioning of 2.9.2, except that the test voltage is multiplied by 1,6.*

*The tests are followed by inspection, including sectioning, and measurement. There shall be no voids or gaps or cracks in the insulating material. In the case of multilayer printed boards, there shall be no delamination.*

#### **2.10.12 Enclosed and sealed parts**

For components or subassemblies that are adequately enclosed by enveloping or hermetic sealing to prevent ingress of dirt and moisture, the values for Pollution Degree 1 apply to internal CLEARANCES and CREEPAGE DISTANCES.

NOTE Some examples of such construction include parts in boxes that are hermetically sealed by adhesive or otherwise, and parts enveloped in a dip coat.

*Compliance is checked by inspection from the outside, measurement and, if necessary, by test. A component or subassembly is considered to be adequately enclosed if a sample passes the tests of 2.10.10.*

### 3 Wiring, connections and supply

#### 3.1 General

##### 3.1.1 Current rating and overcurrent protection

The cross-sectional area of internal wires and INTERCONNECTING CABLES shall be adequate for the current they are intended to carry when the equipment is operating under NORMAL LOAD such that the maximum permitted temperature of conductor insulation is not exceeded.

All internal wiring (including busbars) and INTERCONNECTING CABLES used in the distribution of PRIMARY CIRCUIT power shall be protected against overcurrent and short-circuit by suitably rated protective devices.

Wiring not directly involved in the distribution path does not require protection if it can be shown that creation of hazards is unlikely (for example, indicating circuits).

NOTE 1 Devices for overload protection of components may also provide protection of associated wiring.

NOTE 2 Internal circuits connected to a MAINS SUPPLY may require individual protection depending on reduced wire size and length of conductors.

*Compliance is checked by inspection and, as appropriate, by the tests of 4.5.2 and 4.5.3.*

##### 3.1.2 Protection against mechanical damage

Wireways shall be smooth and free from sharp edges. Wires shall be protected so that they do not come into contact with burrs, cooling fins, moving parts, etc., which could cause damage to the insulation of conductors. Holes in metal, through which insulated wires pass, shall have smooth well-rounded surfaces or shall be provided with bushings.

It is permitted for wires to be in close contact with wire wrapping posts and the like if any breakdown of insulation will not create a hazard, or if adequate mechanical protection is provided by the insulation system.

*Compliance is checked by inspection.*

##### 3.1.3 Securing of internal wiring

Internal wiring shall be routed, supported, clamped or secured in a manner that reduces the likelihood of:

- excessive strain on wire and on terminal connections; and
- loosening of terminal connections; and
- damage of conductor insulation.

*Compliance is checked by inspection.*

### 3.1.4 Insulation of conductors

Except as covered in 2.1.1.3 b), insulation of individual conductors of internal wiring shall fulfil the requirements of 2.10.5 and be capable of withstanding the applicable electric strength test specified in 5.2.2.

Where a power supply cord, whose insulating properties comply with those of the cord types of 3.2.5, is used inside the equipment, either as an extension of the external power supply cord or as an independent cable, the sheath of the power supply cord is considered to be adequate SUPPLEMENTARY INSULATION for the purpose of 3.1.4.

NOTE Requirements regarding colours of insulation are in 2.6.3.5.

*Compliance is checked by inspection and evaluation of test data showing that the insulation withstands the relevant test voltage.*

*If such applicable test data is not available, compliance is checked by applying the electric strength test using a sample of approximately 1 m in length and by applying the relevant test voltage as follows:*

- *for insulation of a conductor: by the voltage test method given in Clause 3 of IEC 60885-1, using the relevant test voltage in 5.2.2 in this standard for the grade of insulation under consideration; and*
- *for SUPPLEMENTARY INSULATION (for example, sleeving around a group of conductors): between a conductor inserted into the sleeve and metal foil wrapped tightly round the sleeve for a length of at least 100 mm.*

### 3.1.5 Beads and ceramic insulators

Beads and similar ceramic insulators on conductors shall:

- be so fixed or supported that they cannot change their position in such a way that a hazard would be created; and
- not rest on sharp edges or sharp corners.

If beads are located inside flexible metal conduits, they shall be contained within an insulating sleeve, unless the conduit is mounted or secured in such a way that movement in normal use would not create a hazard.

*Compliance is checked by inspection and, where necessary, by the following test.*

*A force of 10 N is applied to the insulators or to the conduit. The resulting movement, if any, shall not create a hazard in the meaning of this standard.*

### 3.1.6 Screws for electrical contact pressure

Where electrical contact pressure is required, a screw shall engage at least two complete threads into a metal plate, a metal nut or a metal insert.

Screws of insulating material shall not be used where electrical connections, including protective earthing, are involved, or where their replacement by metal screws could impair SUPPLEMENTARY INSULATION or REINFORCED INSULATION.

Where screws of insulating material contribute to other safety aspects, they shall be engaged by at least two complete threads.

NOTE See also 2.6.5.7 for screws used for protective earthing continuity.

*Compliance is checked by inspection.*

### 3.1.7 Insulating materials in electrical connections

Electrical connections, including those for protective earthing functions (see 2.6), shall be so designed that contact pressure is not transmitted through insulating material unless there is sufficient resilience in the metallic parts to compensate for any possible shrinkage or distortion of the insulating material.

*Compliance is checked by inspection.*

### 3.1.8 Self-tapping and spaced thread screws

Spaced thread (sheet metal) screws shall not be used for the connection of current-carrying parts, unless they clamp these parts directly in contact with each other and are provided with a suitable means of locking.

Self-tapping (thread-cutting or thread-forming) screws shall not be used for the electrical connection of current-carrying parts, unless they generate a full form standard machine screw thread. Moreover, such screws shall not be used if they are operated by the USER or installer unless the thread is formed by a swaging action.

NOTE See also 2.6.5.7 for screws used for protective earthing continuity.

*Compliance is checked by inspection.*

### 3.1.9 Termination of conductors

Conductors shall be provided with a means (for example, barriers or fixing), or be so terminated, that they and their terminators (for example, ring terminals and flat quick-connect terminals) cannot, in normal use, become so displaced that CLEARANCES or CREEPAGE DISTANCES are reduced below the values specified in 2.10 (or Annex G).

It is permitted to use soldered, welded, crimped, screwless (push-in) and similar terminations for the connection of conductors. For soldered terminations, the conductor shall be positioned or fixed so that reliance is not placed upon the soldering alone to maintain the conductor in position.

In multiway plugs and sockets, and wherever shorting could otherwise occur, means shall be provided to prevent contact between parts in SELV CIRCUITS or TNV CIRCUITS and parts at HAZARDOUS VOLTAGE due to loosening of a terminal or breaking of a wire at a termination.

*Compliance is checked by inspection, by measurement and, where necessary, by the following test.*

*A force of 10 N is applied to the conductor near its termination point. The conductor shall not break away or pivot on its terminal to the extent that CLEARANCES or CREEPAGE DISTANCES are reduced below the values specified in 2.10 (or Annex G).*

*For the purpose of assessing compliance it is assumed that:*

- *two independent fixings will not become loose at the same time; and*
- *parts fixed by means of screws or nuts provided with self-locking washers or other means of locking are not liable to become loose.*

NOTE Spring washers and the like can provide satisfactory locking.

*Examples of constructions regarded as meeting the requirements include:*

- *close-fitting tubing (for example, a heat shrink or rubber sleeve), applied over the wire and its termination;*
- *conductors connected by soldering and held in place near to the termination, independently of the soldered connection;*
- *conductors connected by soldering and "hooked in" before soldering, provided that the hole through which the conductor is passed is not unduly large;*
- *conductors connected to screw terminals, with an additional fixing near to the terminal that clamps, in the case of stranded conductors, the insulation and not only the conductors;*
- *conductors connected to screw terminals and provided with terminators that are unlikely to become free (for example, ring lugs crimped onto the conductors). The pivoting of such terminators is considered;*
- *short rigid conductors that remain in position when the terminal screw is loosened.*

### **3.1.10 Sleeving on wiring**

Where sleeving is used as SUPPLEMENTARY INSULATION on internal wiring, it shall be retained in position by positive means.

*Compliance is checked by inspection.*

*Examples of constructions that are considered to meet the intent of this requirement include:*

- *sleeving that can be removed only by breaking or cutting of either the wiring or sleeving;*
- *sleeving that is clamped at both ends;*
- *heat shrinkable sleeving that tightens against the wire insulation;*
- *sleeving that is of such length that it will not slip.*

## **3.2 Connection to a mains supply**

### **3.2.1 Means of connection**

#### **3.2.1.1 Connection to an a.c. mains supply**

For safe and reliable connection to an AC MAINS SUPPLY, equipment shall be provided with one of the following:

- terminals for permanent connection to the supply;
- a NON-DETACHABLE POWER SUPPLY CORD for permanent connection to the supply, or for connection to the supply by means of a plug;

NOTE In many countries, it is a legal requirement to provide a plug that complies with the national wiring rules.

- an appliance inlet for connection of a DETACHABLE POWER SUPPLY CORD;
- a mains plug that is part of DIRECT PLUG-IN EQUIPMENT.

*Compliance is checked by inspection.*

### **3.2.1.2 Connection to a d.c. mains supply**

For safe and reliable connection to a DC MAINS SUPPLY, equipment shall be provided with one of the following:

- terminals for permanent connection to the supply;
- a NON-DETACHABLE POWER SUPPLY CORD for permanent connection to the supply, or for connection to the supply by means of a plug;
- an appliance inlet for connection of a DETACHABLE POWER SUPPLY CORD.

Plugs and appliance inlets shall not be of a type that is used for AC MAINS SUPPLIES if a hazard could be created by their use. Plugs and appliance inlets shall be so designed that reverse polarity connections are prevented if a hazard could be created by such connection.

It is permitted for one pole of the DC MAINS SUPPLY to be connected both to an equipment mains input terminal and to the main protective earthing terminal of the equipment, if any, provided the equipment installation instructions detail the proper earthing for the system.

*Compliance is checked by inspection.*

### **3.2.2 Multiple supply connections**

If equipment is provided with more than one supply connection (for example, with different voltages or frequencies or as backup power), the design shall be such that all of the following conditions are met:

- separate means of connection are provided for different circuits; and
- supply plug connections, if any, are not interchangeable if a hazard could be created by incorrect plugging; and
- bare parts of an ELV CIRCUIT or parts at HAZARDOUS VOLTAGES, such as plug contacts, are not accessible to an OPERATOR when one or more connectors are disconnected.

*Compliance is checked by inspection and for accessibility, where necessary, by a test with the test finger, Figure 2A (see 2.1.1.1).*

### **3.2.3 Permanently connected equipment**

PERMANENTLY CONNECTED EQUIPMENT shall be provided with either:

- a set of terminals as specified in 3.3; or
- a NON-DETACHABLE POWER SUPPLY CORD.

PERMANENTLY CONNECTED EQUIPMENT having a set of terminals shall:

- permit the connection of the supply wires after the equipment has been fixed to its support; and



- be provided with cable entries, conduit entries, knock-outs or glands, which allow connection of the appropriate types of cables or conduits.

For equipment having a RATED CURRENT not exceeding 16 A, the cable entries shall be suitable for cables and conduits having an overall diameter as shown in Table 3A.

Conduit and cable entries and knock-outs for supply connections shall be so designed or located that the introduction of the conduit and cable does not affect the protection against electric shock, or reduce CLEARANCES and CREEPAGE DISTANCES below the values specified in 2.10 (or Annex G).

*Compliance is checked by inspection, by a practical installation test and by measurement.*

**Table 3A – Sizes of cables and conduits for equipment having a rated current not exceeding 16 A**

| Number of conductors,<br>including the<br>PROTECTIVE EARTHING CONDUCTOR<br>where provided                                                                                      | Overall diameter<br>mm |             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------|
|                                                                                                                                                                                | Cable                  | Conduit     |
| 2                                                                                                                                                                              | 13,0                   | 16,0 (22,2) |
| 3                                                                                                                                                                              | 14,0                   | 16,0 (22,2) |
| 4                                                                                                                                                                              | 14,5                   | 20,0 (27,8) |
| 5                                                                                                                                                                              | 15,5                   | 20,0 (27,8) |
| NOTE In Canada and the United States the dimensions in parentheses are the size of conduit opening required for terminating nominal 1/2 inch and 3/4 inch trade size conduits. |                        |             |

### 3.2.4 Appliance inlets

Appliance inlets shall meet all of the following:

- be so located or enclosed that parts at HAZARDOUS VOLTAGE are not accessible during insertion or removal of the connector (appliance inlets complying with IEC 60309 or with IEC 60320 are considered to comply with this requirement); and
- be so located that the connector can be inserted without difficulty; and
- be so located that, after insertion of the connector, the equipment is not supported by the connector for any position of normal use on a flat surface.

*Compliance is checked by inspection and, for accessibility, by means of the test finger, Figure 2A (see 2.1.1.1).*

NOTE For Switzerland, see 3.2.1.1 Note.

### 3.2.5 Power supply cords

#### 3.2.5.1 AC power supply cords

A power supply cord for connection to the AC MAINS SUPPLY shall comply with all of the following, as appropriate:

- if rubber insulated, be not lighter than ordinary tough rubber-sheathed flexible cord according to IEC 60245 (designation 60245 IEC 53); and
- if PVC insulated:
  - for equipment provided with a NON-DETACHABLE POWER SUPPLY CORD and having a mass not exceeding 3 kg, be not lighter than light PVC sheathed flexible cord according to IEC 60227 (designation 60227 IEC 52);
  - for equipment provided with a NON-DETACHABLE POWER SUPPLY CORD and having a mass exceeding 3 kg, be not lighter than ordinary PVC sheathed flexible cord according to IEC 60227 (designation 60227 IEC 53);
  - for equipment provided with a DETACHABLE POWER SUPPLY CORD, be not lighter than light PVC sheathed flexible cord according to IEC 60227 (designation 60227 IEC 52); and

NOTE 1 There is no limit on the mass of the equipment if the equipment is intended for use with a DETACHABLE POWER SUPPLY CORD.

- include, for equipment required to have protective earthing, a PROTECTIVE EARTHING CONDUCTOR having green-and-yellow insulation; and
- have conductors with cross-sectional areas not less than those specified in Table 3B.

NOTE 2 In Australia and New Zealand, conductor sizes for some current ranges are different from those specified in Table 3B.

*Compliance is checked by inspection and by measurement. In addition, for screened cords, compliance is checked by the tests of IEC 60227 (all parts). However, flexing tests need be applied only to screened power supply cords for MOVABLE EQUIPMENT.*

NOTE 3 Although screened cords are not covered in the Scope of IEC 60227, the relevant tests of IEC 60227 are used.

*Damage to the screen is acceptable provided that*

- *during the flexing test the screen does not make contact with any conductor, and*
- *after the flexing test, the sample withstands the electric strength test between the screen and all other conductors.*

**Table 3B – Sizes of conductors**

| RATED CURRENT of equipment<br>A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Minimum conductor sizes                                |                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|---------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Nominal<br>cross-sectional area<br><br>mm <sup>2</sup> | AWG or kcmil<br>[cross-sectional area<br>in mm <sup>2</sup> ]<br><br>see Note 2 |
| Up to and including 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0,75 <sup>a</sup>                                      | 18 [0,8]                                                                        |
| Over 6 up to and including 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | (0,75) <sup>b</sup> 1,00                               | 16 [1,3]                                                                        |
| Over 10 up to and including 13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | (1,0) <sup>c</sup> 1,25                                | 16 [1,3]                                                                        |
| Over 13 up to and including 16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | (1,0) <sup>c</sup> 1,5                                 | 14 [2]                                                                          |
| Over 16 up to and including 25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2,5                                                    | 12 [3]                                                                          |
| Over 25 up to and including 32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4                                                      | 10 [5]                                                                          |
| Over 32 up to and including 40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6                                                      | 8 [8]                                                                           |
| Over 40 up to and including 63                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10                                                     | 6 [13]                                                                          |
| Over 63 up to and including 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 16                                                     | 4 [21]                                                                          |
| Over 80 up to and including 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 25                                                     | 2 [33]                                                                          |
| Over 100 up to and including 125                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 35                                                     | 1 [42]                                                                          |
| Over 125 up to and including 160                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 50                                                     | 0 [53]                                                                          |
| Over 160 up to and including 190                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 70                                                     | 000 [85]                                                                        |
| Over 190 up to and including 230                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 95                                                     | 0000 [107]                                                                      |
| Over 230 up to and including 260                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 120                                                    | 250 kcmil [126]                                                                 |
| Over 260 up to and including 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 150                                                    | 300 kcmil [152]                                                                 |
| Over 300 up to and including 340                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 185                                                    | 400 kcmil [202]                                                                 |
| Over 340 up to and including 400                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 240                                                    | 500 kcmil [253]                                                                 |
| Over 400 up to and including 460                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 300                                                    | 600 kcmil [304]                                                                 |
| <p>NOTE 1 IEC 60320 specifies acceptable combinations of appliance couplers and flexible cords, including those covered by Footnotes a, b and c above. However, several countries have indicated that they do not accept all of the values listed in Table 3B, particularly those covered by Footnotes a, b and c above.</p> <p>NOTE 2 AWG and kcmil sizes are provided for information only. The associated cross-sectional areas, in square brackets, have been rounded to show significant figures only. AWG refers to the American Wire Gauge and the term "cmil" refers to circular mils where 1 cmil is the area of a circle having a diameter of 1 mil (one thousandth of an inch). These terms are commonly used to designate wire sizes in North America.</p> |                                                        |                                                                                 |
| <p><sup>a</sup> For RATED CURRENT up to 3 A, a nominal cross-sectional area of 0,5 mm<sup>2</sup> is permitted in some countries provided that the length of the cord does not exceed 2 m.</p> <p><sup>b</sup> The value in parentheses applies to DETACHABLE POWER SUPPLY CORDS fitted with the connectors rated 10 A in accordance with IEC 60320 (types C13, C15, C15A and C17) provided that the length of the cord does not exceed 2 m.</p> <p><sup>c</sup> The value in parentheses applies to DETACHABLE POWER SUPPLY CORDS fitted with the connectors rated 16 A in accordance with IEC 60320 (types C19, C21 and C23) provided that the length of the cord does not exceed 2 m.</p>                                                                           |                                                        |                                                                                 |

**3.2.5.2 DC power supply cords**

A power supply cord for connection to the DC MAINS SUPPLY shall be suitable for the voltage, current and the physical abuses it is likely to encounter.

*Compliance is checked by inspection.*

### 3.2.6 Cord anchorages and strain relief

For equipment with a NON-DETACHABLE POWER SUPPLY CORD, a cord anchorage shall be supplied such that

- the connecting points of the cord conductors are relieved from strain, and
- the outer covering of the cord is protected from abrasion.

It shall not be possible to push the cord back into the equipment to such an extent that the cord or its conductors, or both, could be damaged or internal parts of the equipment could be displaced.

For NON-DETACHABLE POWER SUPPLY CORDS containing a PROTECTIVE EARTHING CONDUCTOR, the construction shall be such that if the cord should slip in its anchorage, placing a strain on conductors, the PROTECTIVE EARTHING CONDUCTOR will be the last to take the strain.

The cord anchorage shall either be made of insulating material or have a lining of insulating material complying with the requirements for SUPPLEMENTARY INSULATION. However, where the cord anchorage is a bushing that includes the electrical connection to the screen of a screened power cord, this requirement shall not apply. The construction of the cord anchorage shall be such that:

- cord replacement does not impair the safety of the equipment; and
- for ordinary replacement cords, it is clear how relief from strain is to be obtained; and
- the cord is not clamped by a screw that bears directly on the cord, unless the cord anchorage, including the screw, is made of insulating material and the screw is of comparable size to the diameter of the cord being clamped; and
- methods such as tying the cord into a knot or tying the cord with string are not used; and
- the cord cannot rotate in relation to the BODY of the equipment to such an extent that mechanical strain is imposed on the electrical connections.

*Compliance is checked by inspection and by applying the following tests that are made with the type of power supply cord supplied with the equipment.*

*The cord is subjected to a steady pull of the value shown in Table 3C, applied in the most unfavourable direction. The test is conducted 25 times, each time for a duration of 1 s.*

*During the tests, the power supply cord shall not be damaged. This is checked by visual inspection, and by an electric strength test between the power cord conductors and accessible conductive parts, at the test voltage appropriate for REINFORCED INSULATION.*

*After the tests, the power supply cord shall not have been longitudinally displaced by more than 2 mm nor shall there be appreciable strain at the connections, and CLEARANCES and CREEPAGE DISTANCES shall not be reduced below the values specified in 2.10 (or Annex G).*

**Table 3C – Physical tests on power supply cords**

| <b>Mass (M) of the equipment</b><br>kg | <b>Pull</b><br>N |
|----------------------------------------|------------------|
| Up to and including 1                  | 30               |
| Over 1 up to and including 4           | 60               |
| Over 4                                 | 100              |

### 3.2.7 Protection against mechanical damage

Power supply cords shall not be exposed to sharp points or cutting edges within or on the surface of the equipment, or at the inlet opening or inlet bushing.

The overall sheath of a NON-DETACHABLE POWER SUPPLY CORD shall continue into the equipment through any inlet bushing or cord guard and shall extend by at least half the cord diameter beyond the clamp of the cord anchorage.

Inlet bushings, where used, shall

- be reliably fixed, and
- not be removable without the use of a TOOL.

A metallic inlet bushing shall not be used in a non-metallic ENCLOSURE.

An inlet bushing or cord guard secured to a conductive part that is not protectively earthed shall meet the requirements for SUPPLEMENTARY INSULATION.

*Compliance is checked by inspection and measurement.*

### 3.2.8 Cord guards

A cord guard shall be provided at the power supply cord inlet opening of equipment that has a NON-DETACHABLE POWER SUPPLY CORD, and which is HAND-HELD EQUIPMENT or is intended to be moved while in operation. Alternatively, the inlet or bushing shall be provided with a smoothly rounded bell-mouthed opening having a radius of curvature equal to at least 150 % of the overall diameter of the cord with the largest cross-sectional area to be connected.

Cord guards shall

- be so designed as to protect the cord against excessive bending where it enters the equipment,
- be of insulating material,
- be fixed in a reliable manner, and
- project outside the equipment beyond the inlet opening for a distance of at least five times the overall diameter or, for flat cords, at least five times the major overall cross-sectional dimension of the cord.

*Compliance is checked by inspection, by measurement and, where necessary, by the following test with the cord as delivered with the equipment.*

*The equipment is so placed that the axis of the cord guard, where the cord leaves it, projects at an angle of 45° when the cord is free from stress. A mass equal to  $10 \times D^2$  g is then attached to the free end of the cord, where  $D$  is the overall diameter of, or for flat cords, the minor overall dimension of the cord, in millimetres.*

*If the cord guard is of temperature-sensitive material, the test is made at  $23 \text{ °C} \pm 2 \text{ °C}$ .*

*Flat cords are bent in the plane of least resistance.*

*Immediately after the mass has been attached, the radius of curvature of the cord shall nowhere be less than 1,5  $D$ .*

### **3.2.9 Supply wiring space**

The supply wiring space provided inside, or as part of, the equipment for permanent connection or for connection of an ordinary NON-DETACHABLE POWER SUPPLY CORD shall be designed:

- to allow the conductors to be introduced and connected easily; and
- so that the uninsulated end of a conductor is unlikely to become free from its terminal, or, should it do so, cannot come into contact with:
  - an accessible conductive part that is not protectively earthed; or
  - an accessible conductive part of HAND-HELD EQUIPMENT; and
- to permit checking before fitting the cover, if any, that the conductors are correctly connected and positioned; and
- so that covers, if any, can be fitted without risk of damage to the supply conductors or their insulation; and
- so that covers, if any, giving access to the terminals can be removed with a commonly available TOOL.

*Compliance is checked by inspection and by an installation test with cords of the largest cross-sectional area of the appropriate range specified in 3.3.4.*

## **3.3 Wiring terminals for connection of external conductors**

### **3.3.1 Wiring terminals**

PERMANENTLY CONNECTED EQUIPMENT and equipment with ordinary NON-DETACHABLE POWER SUPPLY CORDS shall be provided with terminals in which connection is made by means of screws, nuts or equally effective devices (see also 2.6.4).

*Compliance is checked by inspection.*

### **3.3.2 Connection of non-detachable power supply cords**

For equipment with special NON-DETACHABLE POWER SUPPLY CORDS, the connection of the individual conductors to the internal wiring of the equipment shall be accomplished by any means that will provide a reliable electrical and mechanical connection without exceeding the permitted temperature limits while the equipment is operated under NORMAL LOAD (see also 3.1.9).

*Compliance is checked by inspection and by measuring the temperature of the connection which shall not exceed the values of 4.5.3, Table 4B.*

### 3.3.3 Screw terminals

Screws and nuts that clamp external MAINS SUPPLY conductors shall have a thread conforming to ISO 261 or ISO 262, or a thread comparable in pitch and mechanical strength (for example, unified threads). The screws and nuts shall not serve to fix any other component, except that they are permitted also to clamp internal conductors provided that the internal conductors are so arranged that they are unlikely to be displaced when fitting the supply conductors. For protective earthing terminals and protective bonding terminals, see also 2.6.4.2.

The terminals of a component (for example, a switch) built into the equipment are permitted for use as terminals for external MAINS SUPPLY conductors, provided that they comply with the requirements of 3.3.

*Compliance is checked by inspection.*

### 3.3.4 Conductor sizes to be connected

Terminals shall allow the connection of conductors having nominal cross-sectional areas as shown in Table 3D.

Where heavier gauge conductors are used, the terminals shall be sized accordingly.

*Compliance is checked by inspection, by measurement and by fitting cords of the smallest and largest cross-sectional areas of the appropriate range shown in Table 3D.*

**Table 3D – Range of conductor sizes to be accepted by terminals**

| RATED CURRENT of equipment<br>A | Nominal cross-sectional area<br>mm <sup>2</sup> |              |
|---------------------------------|-------------------------------------------------|--------------|
|                                 | Flexible cords                                  | Other cables |
| Up to and including 3           | 0,5 to 0,75                                     | 1 to 2,5     |
| Over 3 up to and including 6    | 0,75 to 1                                       | 1 to 2,5     |
| Over 6 up to and including 10   | 1 to 1,5                                        | 1 to 2,5     |
| Over 10 up to and including 13  | 1,25 to 1,5                                     | 1,5 to 4     |
| Over 13 up to and including 16  | 1,5 to 2,5                                      | 1,5 to 4     |
| Over 16 up to and including 25  | 2,5 to 4                                        | 2,5 to 6     |
| Over 25 up to and including 32  | 4 to 6                                          | 4 to 10      |
| Over 32 up to and including 40  | 6 to 10                                         | 6 to 16      |
| Over 40 up to and including 63  | 10 to 16                                        | 10 to 25     |

### 3.3.5 Wiring terminal sizes

Pillar, stud or screw type terminals shall comply with the minimum sizes in Table 3E.

*Compliance is checked by inspection and measurement.*

**Table 3E – Sizes of terminals for mains supply conductors and protective earthing conductors <sup>a</sup>**

| RATED CURRENT of equipment<br>A                                                                                                                                                                                                                             | Minimum nominal thread diameter<br>mm |                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------|
|                                                                                                                                                                                                                                                             | Pillar type or stud type              | Screw type <sup>b</sup> |
| Up to and including 10                                                                                                                                                                                                                                      | 3,0                                   | 3,5                     |
| Over 10 up to and including 16                                                                                                                                                                                                                              | 3,5                                   | 4,0                     |
| Over 16 up to and including 25                                                                                                                                                                                                                              | 4,0                                   | 5,0                     |
| Over 25 up to and including 32                                                                                                                                                                                                                              | 4,0                                   | 5,0                     |
| Over 32 up to and including 40                                                                                                                                                                                                                              | 5,0                                   | 5,0                     |
| Over 40 up to and including 63                                                                                                                                                                                                                              | 6,0                                   | 6,0                     |
| <sup>a</sup> This table is also used for the sizes of terminals for PROTECTIVE BONDING CONDUCTORS if specified in 2.6.4.2.<br><sup>b</sup> "Screw type" refers to a terminal that clamps the conductor under the head of a screw, with or without a washer. |                                       |                         |

### 3.3.6 Wiring terminal design

Wiring terminals shall be so designed that they clamp the conductor between metal surfaces with sufficient contact pressure and without damage to the conductor.

Terminals shall be so designed or located that the conductor cannot slip out when the clamping screws or nuts are tightened.

Terminals shall be provided with appropriate fixing hardware for the conductors (for example, nuts and washers).

Terminals shall be so fixed that, when the means of clamping the conductor is tightened or loosened, all of the following apply:

- the terminal itself does not work loose;
- internal wiring is not subjected to stress; and
- CLEARANCES and CREEPAGE DISTANCES are not reduced below the values specified in 2.10 (or Annex G).

*Compliance is checked by inspection and measurement.*

### 3.3.7 Grouping of wiring terminals

For ordinary NON-DETACHABLE POWER SUPPLY CORDS and for PERMANENTLY CONNECTED EQUIPMENT, all associated AC MAINS SUPPLY terminals shall be located in proximity to each other and to the main protective earthing terminal, if any.

For ordinary NON-DETACHABLE POWER SUPPLY CORDS and for PERMANENTLY CONNECTED EQUIPMENT, all associated DC MAINS SUPPLY terminals shall be located in proximity to each other. They need not be located in proximity to the main protective earthing terminal, if any, provided the installation instructions detail the proper earthing of the system.

*Compliance is checked by inspection.*



### 3.3.8 Stranded wire

The end of a stranded conductor shall not be consolidated by soft soldering at places where the conductor is subject to contact pressure unless the method of clamping is designed so as to reduce the likelihood of a bad contact due to cold flow of the solder.

Spring terminals that compensate for the cold flow are deemed to satisfy this requirement.

Preventing the clamping screws from rotating is not considered to be adequate.

Terminals shall be located, guarded or insulated so that, should a strand of a flexible conductor escape when the conductor is fitted, there is no likelihood of accidental contact between such a strand and

- accessible conductive parts, or
- unearthed conductive parts separated from accessible conductive parts by SUPPLEMENTARY INSULATION only.

*Compliance is checked by inspection and, unless a special cord is prepared in such a way as to prevent the escape of strands, by the following test.*

*A piece of insulation approximately 8 mm long is removed from the end of a flexible conductor having the appropriate nominal cross-sectional area. One wire of the stranded conductor is left free and the other wires are fully inserted into, and clamped in the terminal.*

*Without tearing the insulation back, the free wire is bent in every possible direction, but without making sharp bends around the guard.*

*If the conductor is at HAZARDOUS VOLTAGE, the free wire shall not touch any conductive part that is accessible or is connected to an accessible conductive part or, in the case of DOUBLE INSULATED equipment, any conductive part that is separated from accessible conductive parts by SUPPLEMENTARY INSULATION only.*

*If the conductor is connected to an earthing terminal, the free wire shall not touch any part at HAZARDOUS VOLTAGE.*

## 3.4 Disconnection from the mains supply

### 3.4.1 General requirement

A disconnect device or devices shall be provided to disconnect the equipment from the MAINS SUPPLY for servicing.

NOTE Instructions may be provided to allow servicing parts of the equipment with or without opening the disconnect device.

*Compliance is checked by inspection.*

### 3.4.2 Disconnect devices

For equipment intended to be powered from an AC MAINS SUPPLY that is Overvoltage Category I, Overvoltage Category II or Overvoltage Category III, or from a DC MAINS SUPPLY that is at a HAZARDOUS VOLTAGE, a disconnect device shall have a contact separation of at least 3 mm. For an AC MAINS SUPPLY that is Overvoltage Category IV, refer to IEC 60947-1.

For equipment intended to be powered from a DC MAINS SUPPLY that is not at a HAZARDOUS VOLTAGE, a disconnect device shall have a contact separation at least equal to the minimum CLEARANCE for BASIC INSULATION.

NOTE For a DC MAINS SUPPLY, additional measures may be necessary to prevent arcing in the disconnect device, depending on the circuit.

If a disconnect device is incorporated in the equipment, it shall be connected as closely as practicable to the incoming supply.

Functional switches are permitted as disconnect devices provided that they comply with all the requirements for disconnect devices. However, these requirements do not apply to functional switches where other means of isolation are provided.

The following types of disconnect devices are permitted:

- the MAINS SUPPLY plug on the power supply cord;
- a MAINS SUPPLY plug that is part of DIRECT PLUG-IN EQUIPMENT;
- an appliance coupler;
- an isolating switch;
- a circuit-breaker;
- for a DC MAINS SUPPLY that is not at a HAZARDOUS VOLTAGE, a removable fuse, provided that it is accessible only to a SERVICE PERSON;
- any equivalent device.

*Compliance is checked by inspection.*

### **3.4.3 Permanently connected equipment**

For PERMANENTLY CONNECTED EQUIPMENT, the disconnect device shall be incorporated in the equipment, unless the equipment is accompanied by installation instructions in accordance with 1.7.2.1, stating that an appropriate disconnect device shall be provided external to the equipment.

NOTE External disconnect devices will not necessarily be supplied with the equipment.

*Compliance is checked by inspection.*

### **3.4.4 Parts which remain energized**

Parts on the supply side of a disconnect device in the equipment which remain energized when the disconnect device is switched off shall be guarded so as to reduce the likelihood of accidental contact by a SERVICE PERSON.

*Compliance is checked by inspection.*

### **3.4.5 Switches in flexible cords**

Isolating switches shall not be fitted in flexible cords.

*Compliance is checked by inspection.*

### 3.4.6 Number of poles - single-phase and d.c. equipment

A disconnect device, if provided in or as part of the equipment, shall disconnect both poles simultaneously, except that

- if it is possible to rely on the identification of the earthed conductor in the DC MAINS SUPPLY, or an earthed neutral in an AC MAINS SUPPLY, it is permitted to use a single-pole disconnect device that disconnects the unearthed (line) conductor, or
- if it is not possible to rely on the identification of the earthed conductor in the DC MAINS SUPPLY, or an earthed neutral in an AC MAINS SUPPLY, and the equipment is not provided with a two-pole disconnect device, the installation instructions shall specify that a two-pole disconnect device is to be provided external to the equipment.

NOTE Some examples of cases where a two-pole disconnect device is required (because identification of an earthed conductor in the MAINS SUPPLY is not possible) are:

- on equipment supplied from an IT power system;
- on PLUGGABLE EQUIPMENT supplied through a reversible appliance coupler or a reversible plug (unless the appliance coupler or plug itself is used as the disconnect device);
- on equipment supplied from a socket-outlet with unidentified or indeterminate polarity.

*Compliance is checked by inspection.*

### 3.4.7 Number of poles – three-phase equipment

For three-phase equipment, the disconnect device shall disconnect simultaneously all line conductors of the AC MAINS SUPPLY.

For equipment requiring a neutral connection to an IT power distribution system, the disconnect device shall be a four-pole device and shall disconnect all line conductors and the neutral conductor. If this four-pole device is not provided in the equipment, the installation instructions shall specify the need for the provision of the device external to the equipment.

If a disconnect device interrupts the neutral conductor, it shall simultaneously interrupt all line conductors.

*Compliance is checked by inspection.*

### 3.4.8 Switches as disconnect devices

Where the disconnect device is a switch incorporated in the equipment, its "ON" and "OFF" positions shall be marked in accordance with 1.7.8.

*Compliance is checked by inspection.*

### 3.4.9 Plugs as disconnect devices

Where a plug on the power supply cord is used as the disconnect device, the installation instructions shall comply with 1.7.2.1.

*Compliance is checked by inspection.*

### 3.4.10 Interconnected equipment

Where a group of units having individual supply connections is interconnected in such a way that it is possible for HAZARDOUS VOLTAGE or HAZARDOUS ENERGY LEVELS to be transmitted between units, a disconnect device shall be provided to disconnect hazardous parts likely to be contacted while the unit under consideration is being serviced, unless these parts are guarded and marked with appropriate warning labels. In addition a prominent label shall be provided on each unit giving adequate instructions for the removal of all such power from the unit.

*Compliance is checked by inspection.*

### 3.4.11 Multiple power sources

Where a unit receives power from more than one source (for example, different voltages or frequencies or as backup power), there shall be a prominent marking at each disconnect device giving adequate instructions for the removal of all power from the unit.

*Compliance is checked by inspection.*

## 3.5 Interconnection of equipment

### 3.5.1 General requirements

Where an equipment is intended to be electrically connected to another equipment, to an accessory or to a TELECOMMUNICATION NETWORK, interconnection circuits shall be selected to provide continued conformance to the requirements of 2.2 for SELV CIRCUITS, and with the requirements of 2.3 for TNV CIRCUITS, after making connections.

NOTE 1 This is normally achieved by connecting SELV CIRCUITS to SELV CIRCUITS, and TNV CIRCUITS to TNV CIRCUITS.

Additionally, SELV CIRCUITS of data ports for connection to other equipment or accessories shall limit the risk of fire in the connected equipment as specified in 3.5.4.

NOTE 2 It is permitted for an INTERCONNECTING CABLE to contain more than one type of circuit (for example, SELV CIRCUIT, LIMITED CURRENT CIRCUIT, TNV CIRCUIT, ELV CIRCUIT or HAZARDOUS VOLTAGE circuit) provided that they are separated as required by this standard.

*Compliance is checked by inspection.*

### 3.5.2 Types of interconnection circuits

Each interconnection circuit shall be one of the following types:

- an SELV CIRCUIT or a LIMITED CURRENT CIRCUIT; or
- a TNV-1 CIRCUIT, TNV-2 CIRCUIT or TNV-3 CIRCUIT; or
- a HAZARDOUS VOLTAGE circuit.

Except as permitted in 3.5.3, interconnection circuits shall not be ELV CIRCUITS.

*Compliance is checked by inspection.*

### 3.5.3 ELV circuits as interconnection circuits

Where additional equipment is specifically complementary to the host (first) equipment (for example, a collator for a copying machine) ELV CIRCUITS are permitted as interconnection circuits between the equipments, provided that the equipments continue to meet the requirements of this standard when connected together.

*Compliance is checked by inspection.*

### 3.5.4 Data ports for additional equipment

To limit the risk of fire in an additional equipment or accessory (for example, a scanner, mouse, keyboard, DVD drive, CD ROM drive or joystick), SELV CIRCUITS of a data port for connection of such equipment shall be supplied by a limited power source that complies with 2.5. This requirement does not apply if it is known that the additional equipment complies with 4.7.

NOTE It is recommended that manufacturers of accessories and their INTERCONNECTING CABLES include protection against fault currents up to 8 A at 100 VA, the maximum available from a limited power source in compliance with Table 2B.

*Compliance is checked by inspection and, if necessary, by test.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

## 4 Physical requirements

### 4.1 Stability

Under conditions of normal use, units and equipment shall not become physically unstable to the degree that they could become a hazard to an OPERATOR or to a SERVICE PERSON.

If units are designed to be fixed together on site and not used individually, the stability of each individual unit is exempt from the requirements of 4.1.

The requirements of 4.1 are not applicable if the installation instructions for a unit specify that the equipment is to be secured to the building structure before operation.

Under conditions of OPERATOR use, a stabilizing means, if needed, shall be automatic in operation when drawers, doors, etc., are opened.

During operations performed by a SERVICE PERSON, the stabilizing means, if needed, shall either be automatic in operation, or a marking shall be provided to instruct the SERVICE PERSON to deploy the stabilizing means.

*Compliance is checked by the following tests, where relevant. Each test is conducted separately. During the tests, containers are to contain the amount of substance within their rated capacity producing the most disadvantageous condition. All castors and jacks, if used in normal operation, are placed in their most unfavourable position, with wheels and the like locked or blocked. However, if the castors are intended only to transport the unit, and if the installation instructions require jacks to be lowered after installation, then the jacks (and not the castors) are used in this test; the jacks are placed in their most unfavourable position, consistent with reasonable levelling of the unit.*

- *A unit having a mass of 7 kg or more shall not fall over when tilted to an angle of 10° from its normal upright position. Doors, drawers, etc., are closed during this test. A unit provided with multi-positional features shall be tested in the least favourable position permitted by the construction.*
- *A floor-standing unit having a mass of 25 kg or more shall not fall over when a force equal to 20 % of the weight of the unit, but not more than 250 N, is applied in any direction except upwards, at a height not exceeding 2 m from the floor. Doors, drawers, etc., which may be moved for servicing by the OPERATOR or by a SERVICE PERSON, are placed in their most unfavourable position, consistent with the installation instructions.*
- *A floor-standing unit shall not fall over when a constant downward force of 800 N is applied at the point of maximum moment to any horizontal surface of at least 125 mm by at least 200 mm, at a height up to 1 m from the floor. Doors, drawers, etc., are closed during this test. The 800 N force is applied by means of a suitable test tool having a flat surface of approximately 125 mm by 200 mm. The downward force is applied with the complete flat surface of the test tool in contact with the EUT; the test tool need not be in full contact with uneven surfaces (for example, corrugated or curved surfaces).*

## 4.2 Mechanical strength

### 4.2.1 General

Equipment shall have adequate mechanical strength and shall be so constructed that no hazard is created in the meaning of this standard when subjected to handling as may be expected.

Mechanical strength tests are not required on an internal barrier, screen or the like, provided to meet the requirements of 4.6.2, if the ENCLOSURE provides mechanical protection.

A MECHANICAL ENCLOSURE shall be sufficiently complete to contain or deflect parts, which because of failure or for other reasons, might become loose, separated or thrown from a moving part.

NOTE Examples of equipment where such precautions may be necessary include CD-ROM or DVD drives whose rotational speed is greater than 8 000 r.p.m.

*Compliance is checked by inspection of the construction and available data and, where necessary, by the relevant tests of 4.2.2 to 4.2.7 as specified.*

*The tests are not applied to handles, levers, knobs, the face of cathode ray tubes (see 4.2.8) or to transparent or translucent covers of indicating or measuring devices, unless parts at HAZARDOUS VOLTAGE are accessible by means of the test finger, Figure 2A (see 2.1.1.1), if the handle, lever, knob or cover is removed.*

*During the tests of 4.2.2, 4.2.3 and 4.2.4, earthed or unearthed conductive ENCLOSURES shall not bridge parts between which a HAZARDOUS ENERGY LEVEL exists and shall not contact a bare part at HAZARDOUS VOLTAGE. For voltages exceeding 1 000 V a.c. or 1 500 V d.c., contact is not permitted and there shall be an air gap between the part at HAZARDOUS VOLTAGE and the ENCLOSURE. This air gap shall either have a minimum length equal to the minimum CLEARANCE specified in 2.10.3 (or Annex G) for BASIC INSULATION or withstand the relevant electric strength test in 5.2.2.*

*After the tests of 4.2.2 to 4.2.7, the sample shall continue to comply with the requirements of 2.1.1, 2.6.1, 2.10, 3.2.6 and 4.4.1. It shall show no signs of interference with the operation of safety features such as THERMAL CUT-OUTS, overcurrent protection devices or interlocks. In case of doubt, SUPPLEMENTARY INSULATION or REINFORCED INSULATION is subjected to an electric strength test as specified in 5.2.2.*

*Damage to finish, cracks, dents and chips are disregarded if they do not adversely affect safety.*

NOTE If a separate ENCLOSURE or part of an ENCLOSURE is used for a test, it may be necessary to reassemble such parts on the equipment in order to check compliance.

### 4.2.2 Steady force test, 10 N

*Components and parts, other than parts serving as an ENCLOSURE (see 4.2.3 and 4.2.4), are subjected to a steady force of 10 N  $\pm$  1 N.*

*Compliance criteria are in 4.2.1.*

### 4.2.3 Steady force test, 30 N

*Parts of an ENCLOSURE located in an OPERATOR ACCESS AREA, which are protected by a cover or door meeting the requirements of 4.2.4, are subjected to a steady force of  $30\text{ N} \pm 3\text{ N}$  for a period of 5 s, applied by means of a straight unjointed version of the test finger, Figure 2A (see 2.1.1.1), to the part on or within the equipment.*

*Compliance criteria are in 4.2.1.*

### 4.2.4 Steady force test, 250 N

*External ENCLOSURES are subjected to a steady force of  $250\text{ N} \pm 10\text{ N}$  for a period of 5 s, applied in turn to the top, bottom and sides of the ENCLOSURE fitted to the equipment, by means of a suitable test tool providing contact over a circular plane surface 30 mm in diameter. However, this test is not applied to the bottom of an ENCLOSURE of equipment having a mass of more than 18 kg.*

*Compliance criteria are in 4.2.1.*

### 4.2.5 Impact test

*Except for equipment identified in 4.2.6, external surfaces of ENCLOSURES, the failure of which would give access to hazardous parts, are tested as follows.*

*A sample consisting of the complete ENCLOSURE, or a portion thereof representing the largest unreinforced area, is supported in its normal position. A solid smooth steel ball, approximately 50 mm in diameter and with a mass of  $500\text{ g} \pm 25\text{ g}$ , is permitted to fall freely from rest through a vertical distance (H) of 1,3 m (see Figure 4A) onto the sample. (Vertical surfaces are exempt from this test.)*

*In addition, the steel ball is suspended by a cord and swung as a pendulum in order to apply a horizontal impact, dropping through a vertical distance (H) of 1,3 m (see Figure 4A) onto the sample. (Horizontal surfaces are exempt from this test.) Alternatively, the sample is rotated  $90^\circ$  about each of its horizontal axes and the ball dropped as in the vertical impact test.*

*The bottoms of ENCLOSURES are also tested if the operating instructions permit an orientation in which the bottom of the ENCLOSURE becomes the top or a side of the ENCLOSURE.*

*The test is not applied to the following:*

- a flat panel display;
- the face of a cathode ray tube (see 4.2.8);
- the platen glass of equipment (for example, on a copying machine);
- the surface of the ENCLOSURE of STATIONARY EQUIPMENT, including EQUIPMENT FOR BUILDING-IN, which is inaccessible and protected after installation.

*Compliance criteria are in 4.2.1.*



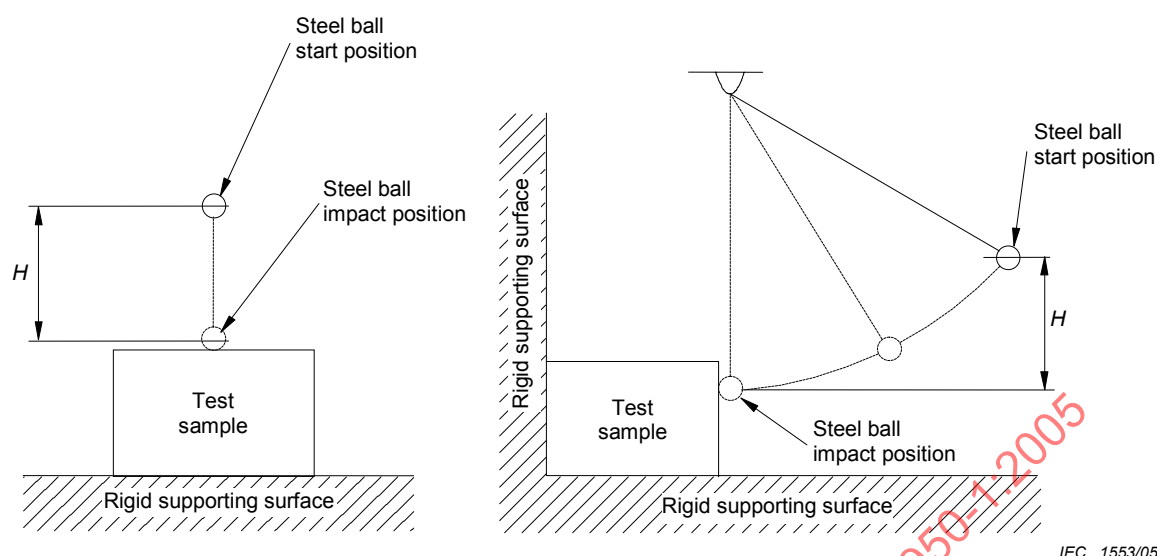


**Figure 4A – Impact test using a steel ball**

#### 4.2.6 Drop test

The following equipment is subjected to a drop test:

- HAND-HELD EQUIPMENT;
- DIRECT PLUG-IN EQUIPMENT;
- TRANSPORTABLE EQUIPMENT;
- desk-top equipment having a mass of 5 kg or less that is intended for use with any one of the following:
  - a cord-connected telephone handset, or
  - another cord-connected hand-held accessory with an acoustic function, or
  - a headset;
- MOVABLE EQUIPMENT requiring lifting or handling by the USER as part of its intended use.

NOTE An example of such equipment is a paper shredder that rests on a waste container, requiring its removal to empty the container.

*To determine compliance, a sample of the complete equipment is subjected to three impacts that result from being dropped onto a horizontal surface in positions likely to produce the most adverse results.*

*The height of the drop shall be:*

- 750 mm  $\pm$  10 mm for desk-top equipment as described above;
- 750 mm  $\pm$  10 mm for MOVABLE EQUIPMENT as described above;
- 1 000 mm  $\pm$  10 mm for HAND-HELD EQUIPMENT, DIRECT PLUG-IN EQUIPMENT and TRANSPORTABLE EQUIPMENT.

*The horizontal surface consists of hardwood at least 13 mm thick, mounted on two layers of plywood each 19 mm to 20 mm thick, all supported on a concrete or equivalent non-resilient floor.*

*Compliance criteria are in 4.2.1.*

#### 4.2.7 Stress relief test

*ENCLOSURES of moulded or formed thermoplastic materials shall be so constructed that any shrinkage or distortion of the material due to release of internal stresses caused by the moulding or forming operation does not result in the exposure of hazardous parts or in the reduction of CLEARANCES or CREEPAGE DISTANCES below the values specified in 2.10 (or Annex G).*

*Compliance is checked by the test procedure described below or by the inspection of the construction and the available data where appropriate.*

*One sample consisting of the complete equipment, or of the complete ENCLOSURE together with any supporting framework, is placed in a circulating air oven (according to IEC 60216-4-1) at a temperature 10 K higher than the maximum temperature observed on the ENCLOSURE during the test of 4.5.2, but not less than 70 °C, for a period of 7 h, then permitted to cool to room temperature.*

*With the concurrence of the manufacturer, it is permitted to increase the above time duration.*

*For large equipment where it is impractical to condition a complete ENCLOSURE, it is permitted to use a portion of the ENCLOSURE representative of the complete assembly with regard to thickness and shape, including any mechanical support members.*

NOTE Relative humidity need not be maintained at a specific value during this test.

*If the above test is conducted, the compliance criteria of 4.2.1 apply.*

#### 4.2.8 Cathode ray tubes

If a cathode ray tube having a maximum face dimension exceeding 160 mm is included in the equipment, either the cathode ray tube or the ENCLOSURE with the cathode ray tube correctly installed shall comply with the requirements of Clause 18 of IEC 60065 for mechanical strength of cathode ray tubes.

NOTE Clause 18 of IEC 60065 requires cathode ray tubes either to pass the tests specified in 18.1 or to comply with IEC 61965. In the future amendment 2 to IEC 60065:2001, anticipated for 2006 at the earliest, it is intended that intrinsically-protected cathode ray tubes will be required to comply with IEC 61965, with no option as presently permitted in the seventh edition. The test now in 18.3 of IEC 60065 will continue to apply to non-intrinsically-protected tubes, which are not in the Scope of IEC 61965.

*Compliance is checked by inspection, by measurement and, if necessary, by the relevant requirements and tests of Clause 18 of IEC 60065.*

#### 4.2.9 High pressure lamps

The MECHANICAL ENCLOSURE of a high pressure lamp shall have adequate strength to contain an explosion of the lamp so as to reduce the likelihood of harm to an OPERATOR or person near the equipment during normal use or OPERATOR servicing.

For the purpose of this standard, a "high pressure lamp" means one in which the pressure exceeds 0,2 MPa when cold or 0,4 MPa when operating.

*Compliance is checked by inspection.*

NOTE 2.10.3.5 may also apply in some cases.

#### 4.2.10 Wall or ceiling mounted equipment

The mounting means of equipment intended for wall or ceiling mounting shall be adequate.

*Compliance is checked by inspection of the construction and of available data, or where necessary, by the following test.*

*The equipment is mounted in accordance with the installation instructions. A force, in addition to the weight of the equipment, is applied downwards through the centre of gravity of the equipment, for 1 min. The additional force shall be equal to three times the weight of the equipment but not less than 50 N. The equipment and its associated mounting means shall remain secure during the test. After the test, the equipment, including any associated mounting plate, shall not be damaged.*

### 4.3 Design and construction

#### 4.3.1 Edges and corners

Where edges or corners could be hazardous to OPERATORS because of location or application in the equipment, they shall be rounded or smoothed.

This requirement does not apply to edges or corners that are required for proper functioning of the equipment.

*Compliance is checked by inspection.*

#### 4.3.2 Handles and manual controls

Handles, knobs, grips, levers and the like shall be reliably fixed so that they will not work loose in normal use, if this might create a hazard. Sealing compounds and the like, other than self-hardening resins, shall not be used to prevent loosening.

If handles, knobs and the like are used to indicate the position of switches or similar components, it shall not be possible to fix them in a wrong position if this might create a hazard.

*Compliance is checked by inspection, by manual test and by trying to remove the handle, knob, grip or lever by applying for 1 min an axial force as follows.*

*If the shape of these parts is such that an axial pull is unlikely to be applied in normal use, the force is:*

- 15 N for the operating means of electrical components; and
- 20 N in other cases.

*If the shape is such that an axial pull is likely to be applied, the force is:*

- 30 N for the operating means of electrical components; and
- 50 N in other cases.

### 4.3.3 Adjustable controls

Equipment shall be so constructed that manual adjustment of a control device, such as a device for selection of different AC MAINS SUPPLY voltages, requires the use of a TOOL if incorrect setting or inadvertent adjustment might create a hazard.

NOTE Marking requirements for supply voltage adjustment are in 1.7.4.

*Compliance is checked by manual test.*

### 4.3.4 Securing of parts

Screws, nuts, washers, springs or similar parts shall be secured so as to withstand mechanical stresses occurring in normal use if loosening would create a hazard, or if CLEARANCES or CREEPAGE DISTANCES for SUPPLEMENTARY INSULATION or REINFORCED INSULATION would be reduced below the values specified in 2.10 (or Annex G).

NOTE 1 Requirements regarding fixing of conductors are in 3.1.9.

*Compliance is checked by inspection, by measurement and by manual test.*

*For the purpose of assessing compliance:*

- *it is assumed that two independent fixings will not become loose at the same time; and*
- *it is assumed that parts fixed by means of screws or nuts provided with self-locking washers or other means of locking are not liable to become loose.*

NOTE 2 Spring washers and the like can provide satisfactory locking.

### 4.3.5 Connection by plugs and sockets

Within a manufacturer's unit or system, plugs and sockets likely to be used by the OPERATOR or by a SERVICE PERSON shall not be employed in a manner likely to create a hazard due to misconnection. In particular, connectors complying with IEC 60083 or IEC 60320 shall not be used for SELV CIRCUITS or TNV CIRCUITS. Keying, location or, in the case of connectors accessible only to a SERVICE PERSON, clear markings are permitted to meet the requirement.

*Compliance is checked by inspection.*

### 4.3.6 Direct plug-in equipment

DIRECT PLUG-IN EQUIPMENT shall not impose undue stress on the socket-outlet. The mains plug part shall comply with the standard for the relevant mains plug.

*Compliance is checked by inspection and, if necessary, by the following test.*

*The equipment is inserted, as in normal use, into a fixed socket-outlet of a configuration as intended by the manufacturer, which can be pivoted about a horizontal axis intersecting the centre lines of the contacts at a distance of 8 mm behind the engagement face of the socket-outlet. The additional torque that has to be applied to the socket-outlet to maintain the engagement face in the vertical plane shall not exceed 0,25 N · m.*

NOTE 1 In Australia and New Zealand, compliance is checked in accordance with AS/NZS 3112.

NOTE 2 In the United Kingdom, the torque test is performed using a socket-outlet complying with BS 1363, and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to the relevant clauses of BS 1363.

#### 4.3.7 Heating elements in earthed equipment

Heating elements in equipment that is earthed for safety purposes shall be protected so that, under earth fault conditions, a fire hazard due to overheating is prevented. In such equipment, temperature sensing devices, if provided, shall be located in all line conductors supplying the heating elements.

The temperature sensing devices shall also disconnect the neutral conductor for each of the following cases:

- a) in equipment supplied from an IT power distribution system;
- b) in PLUGGABLE EQUIPMENT supplied through a reversible appliance coupler or a reversible plug;
- c) in equipment supplied from a socket-outlet with indeterminate polarity.

In cases b) and c), it is permitted to meet this requirement by connecting a THERMOSTAT in one conductor and a THERMAL CUT-OUT in the other conductor.

It is not required to disconnect the conductors simultaneously.

*Compliance is checked by inspection.*

#### 4.3.8 Batteries

NOTE 1 Requirements for markings or instructions are given in 1.7.13.

NOTE 2 Requirements for overcurrent protection are given in 3.1.1 and 5.3.1.

NOTE 3 Requirements for stationary batteries (such as large secondary batteries installed in a fixed installation and external to the equipment) are given in IEC 60896-21, IEC 60896-22 and EN 50272-2.

Equipment containing batteries shall be designed to reduce the risk of fire, explosion and chemical leaks under normal conditions and after a single fault in the equipment (see 1.4.14), including a fault in circuitry within the equipment battery pack. For USER-replaceable batteries, the design shall reduce the likelihood of reverse polarity installation if this would create a hazard.

Battery circuits shall be designed so that:

- the output characteristics of a battery charging circuit are compatible with its rechargeable battery; and
- for non-rechargeable batteries, discharging at a rate exceeding the battery manufacturer's recommendations, and unintentional charging, are prevented; and
- for rechargeable batteries, charging and discharging at a rate exceeding the battery manufacturer's recommendations, and reversed charging, are prevented; and
- OPERATOR-replaceable batteries shall either:
  - have contacts that cannot be shorted with the test finger Figure 2A; or
  - be inherently protected to avoid creating a hazard within the meaning of the standard.

NOTE 4 Reverse charging of a rechargeable battery occurs when the polarity of the charging circuit is reversed, aiding the discharge of the battery.

If a battery contains liquid or gel electrolyte, a battery tray shall be provided that is capable of retaining any liquid that could leak as a result of internal pressure build-up in the battery. The requirement to provide a battery tray does not apply if the construction of the battery is such that leakage of the electrolyte from the battery is unlikely (see also 1.3.6).

NOTE 5 An example of a battery construction where leakage of the electrolyte is considered to be unlikely is the sealed cell valve-regulated type.

If a battery tray is required, its capacity shall be at least equal to the volume of electrolyte of all the cells of the battery, or the volume of a single cell if the design of the battery is such that simultaneous leakage from multiple cells is unlikely.

NOTE 6 If several cells (for example, the six cells in a 12 V lead-acid battery) are in a single casing, its fracture could lead to a greater volume of leakage than from a single cell.

*Compliance is checked by inspection and by evaluation of the data provided by the equipment manufacturer and battery manufacturer.*

*When appropriate data is not available, compliance is checked by test. However, batteries that are inherently safe for the conditions given are not tested under those conditions. Consumer grade, non-rechargeable carbon-zinc or alkaline batteries are considered safe under short-circuiting conditions and therefore are not tested for discharge; nor are such batteries tested for leakage under storage conditions.*

*The battery used for the following tests is either a new non-rechargeable battery or a fully charged rechargeable battery as provided with, or recommended by the manufacturer for use with, the equipment.*

- **Overcharging of a rechargeable battery.** *The battery is charged under each of the following conditions in turn.*
  - *The battery charging circuit is adjusted with the battery disconnected to give 106 % of the rated output voltage of the charger, or the maximum charging voltage available from the charger (without simulation of faults), whichever is the higher attainable value. The battery is then charged for 7 h.*
  - *The battery charging circuit is adjusted, with the battery disconnected, to 100 % of the rated output voltage of the charger. The battery is charged while briefly subjected to the simulation of any single component failure that is likely to occur in the charging circuit and that results in overcharging of the battery. To minimize testing time, the failure is chosen that causes the highest overcharging current. The battery is then charged for a single period of 7 h with that simulated failure in place.*
- **Unintentional charging of a non-rechargeable battery.** *The battery is charged while briefly subjected to the simulation of any single component failure that is likely to occur in the charging circuit and that would result in unintentional charging of the battery. To minimize testing time, the failure is chosen that causes the highest charging current. The battery is then charged for a single period of 7 h with that simulated failure in place.*
- **Reverse charging of a rechargeable battery.** *The battery is reverse charged while briefly subjected to the simulation of any single component failure that is likely to occur in the charging circuit and that would result in reverse charging of the battery. To minimize testing time, the failure is chosen that causes the highest reverse charging current. The battery is then reverse charged for a single period of 7 h with that simulated failure in place.*

- **Excessive discharging rate for any battery.** The battery is subjected to rapid discharge by open-circuiting or short-circuiting any current-limiting or voltage-limiting components in the load circuit of the battery under test.

NOTE 7 Some of the tests specified can be hazardous to the persons carrying them out; all appropriate measures to protect personnel against possible chemical or explosion hazards should be taken.

*These tests shall not result in any of the following:*

- chemical leaks caused by cracking, rupturing or bursting of the battery jacket, if such leakage could adversely affect required insulation; or
- spillage of liquid from any pressure relief device in the battery, unless such spillage is contained by the equipment without risk of damage to the insulation or harm to the USER; or
- explosion of the battery, if such explosion could result in injury to a USER; or
- emission of flame or expulsion of molten metal to the outside of the equipment ENCLOSURE.

*After completion of the tests, the equipment is subjected to the electric strength tests of 5.3.9.2.*

#### **4.3.9 Oil and grease**

Where internal wiring, windings, commutators, slip-rings and the like, and insulation in general, are exposed to oil, grease or similar substances, the insulation shall have adequate properties to resist deterioration under these conditions.

*Compliance is checked by inspection, and by evaluation of the data for the insulating material.*

#### **4.3.10 Dust, powders, liquids and gases**

Equipment producing dust (for example, paper dust) or using powders, liquids or gases shall be so constructed that it is unlikely that either a dangerous concentration of these materials or a hazard in the meaning of this standard will be created by condensation, vaporization, leakage, spillage or corrosion during normal operation, storage, filling or emptying. CLEARANCES and CREEPAGE DISTANCES shall not be reduced below the values specified in 2.10 (or Annex G).

*Compliance is checked by inspection, measurement and, where spillage of liquid could affect electrical insulation during replenishment, by the following test and, for flammable liquids, by the tests of 4.3.12.*

*The equipment shall be ready to use according to its installation instructions, but not energized.*

*The liquid container of the equipment is completely filled with the liquid specified by the manufacturer and a further quantity, equal to 15 % of the capacity of the container is poured in steadily over a period of 1 min. For liquid containers having a capacity not exceeding 250 ml, and for containers without drainage and for which the filling cannot be observed from outside, a further quantity of liquid, equal to the capacity of the container, is poured in steadily over a period of 1 min.*

*Immediately after this treatment, the equipment shall withstand an electric strength test as specified in 5.2.2 on any insulation on which spillage could have occurred and inspection shall show that the liquid has not created a hazard in the meaning of this standard.*



*The equipment is permitted to stand in normal test-room atmosphere for 24 h before being subjected to any further electrical test.*

#### **4.3.11 Containers for liquids or gases**

Equipment that, in normal use, contains liquids or gases shall incorporate adequate safeguards against build-up of excessive pressure.

*Compliance is checked by inspection and, if necessary, by an appropriate test.*

#### **4.3.12 Flammable liquids**

If a flammable liquid is used in equipment, the liquid shall be kept in a closed reservoir, except for the amount needed for the functioning of the equipment. The maximum quantity of flammable liquid stored in an equipment shall in general be not more than 5 l. If, however, the usage of liquid is such that more than 5 l is consumed in 8 h, it is permitted to increase the quantity stored to that required for an 8 h operation.

Oil or equivalent liquids used for lubrication or in a hydraulic system shall have a flash point of 149 °C or higher, and the reservoir shall be of sealed construction. The system shall have provision for expansion of the liquid and shall incorporate means for pressure relief. This requirement is not applicable to lubricating oils that are applied to points of friction in quantities that would contribute negligible fuel to a fire.

Except under conditions given below, replenishable liquids such as printing inks shall have a flash point of 60 °C or higher, and shall not be under sufficient pressure to cause atomization.

Replenishable flammable liquids that have a flash point of less than 60 °C or that are under sufficient pressure to cause atomization are permitted provided inspection shows that there is no likelihood of liquid sprays or build-up of flammable vapour-air mixtures that could cause explosion or create a fire hazard. Under normal operating conditions, equipment using a flammable liquid shall not generate a mixture with a concentration exceeding one quarter of the EXPLOSION LIMIT if the mixture is in proximity to an ignition source, or exceeding half the EXPLOSION LIMIT if the mixture is not in proximity to an ignition source. The investigation shall also take into account the integrity of the liquid handling system. The liquid handling system shall be suitably housed or constructed so that risk of fire or explosion is reduced, even under the test conditions specified in 4.2.5.

*Compliance is checked by inspection and, where necessary, by the following test.*

*The equipment is operated in accordance with 4.5.2 until its temperature stabilizes. In this condition, the equipment is operated in a normal manner, as directed in the operating instructions, and samples of the atmosphere in the vicinity of the electrical components and around the equipment are taken to determine the concentration of flammable vapours present.*

*Samples of the atmosphere are taken at 4 min intervals; four samples to be taken during normal operation, then seven samples after the equipment has stopped.*

*If, after the equipment has stopped, the concentration of flammable vapours appears to be increasing, samples shall continue to be taken at 4 min intervals until the concentration is shown to be decreasing.*



*If an abnormal operation of the equipment is possible with any of its fans not running, this condition is simulated during this compliance test.*

### 4.3.13 Radiation

#### 4.3.13.1 General

Equipment shall be so designed that the risk of harmful effects of radiation to persons, and damage to materials affecting safety, is reduced.

*Compliance is checked by inspection and as detailed in 4.3.13.2, 4.3.13.3, 4.3.13.4, 4.3.13.5 and 4.3.13.6 as appropriate.*

#### 4.3.13.2 Ionizing radiation

*For equipment that generates ionizing radiation, compliance is checked by the test in Annex H.*

#### 4.3.13.3 Effect of ultraviolet (UV) radiation on materials

The following requirements apply only to equipment containing lamps that produce significant UV radiation, that is, having emission predominantly in the spectrum 180 nm to 400 nm, as specified by the lamp manufacturer.

NOTE General-purpose incandescent and fluorescent lamps, with ordinary glass envelopes, are not considered to emit significant UV radiation.

Non-metallic parts (for example, non-metallic ENCLOSURES and internal materials including wire and cable insulation) that are exposed to UV radiation from a lamp in the equipment, shall be sufficiently resistant to degradation to the extent that safety is not affected.

**Table 4A – Minimum property retention limits after UV exposure**

| Parts to be tested                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Property                               | Standard for the test method | Minimum retention after test |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|------------------------------|------------------------------|
| Parts providing mechanical support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Tensile strength <sup>a</sup>          | ISO 527                      | 70 %                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | or<br>Flexural strength <sup>a b</sup> | ISO 178                      | 70 %                         |
| Parts providing impact resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Charpy impact <sup>c</sup>             | ISO 179                      | 70 %                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | or<br>Izod impact <sup>c</sup>         | ISO 180                      | 70 %                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | or<br>Tensile impact <sup>c</sup>      | ISO 8256                     | 70 %                         |
| All parts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Flammability classification            | See 1.2.12 and Annex A       | See <sup>d</sup>             |
| <sup>a</sup> Tensile strength and flexural strength tests are to be conducted on specimens no thicker than the actual thicknesses.<br><sup>b</sup> The side of the sample exposed to UV radiation is to be in contact with the two loading points when using the three point loading method.<br><sup>c</sup> Tests conducted on 3,0 mm thick specimens for Izod impact and Tensile impact tests and 4,0 mm thick specimens for Charpy impact tests are considered representative of other thicknesses, down to 0,8 mm.<br><sup>d</sup> The flammability classification may change as long as it does not fall below that specified in Clause 4. |                                        |                              |                              |

*Compliance is checked by examination of the construction and of available data regarding the UV resistance characteristics of the parts exposed to UV radiation in the equipment. If such data is not available, the tests in Table 4A are conducted on the parts.*

*Samples taken from the parts, or consisting of identical material, are prepared according to the standard for the test to be conducted. They are then conditioned according to Annex Y. After conditioning, the samples shall show no signs of significant deterioration, such as crazing or cracking. They are then kept at room ambient conditions for not less than 16 h and not more than 96 h, after which they are tested according to the standard for the relevant test.*

*In order to evaluate the percent retention of properties after test, samples that have not been conditioned according to Annex Y are tested at the same time as the conditioned samples. The retention shall be as specified in Table 4A.*

#### **4.3.13.4 Human exposure to ultraviolet (UV) radiation**

The following requirements apply only to equipment containing lamps that produce significant UV radiation, that is having emission predominantly in the spectrum 180 nm to 400 nm as specified by the lamp manufacturer.

NOTE 1 General purpose incandescent and fluorescent lamps, with ordinary glass envelopes, are not considered to emit significant UV radiation.

Equipment shall not emit excessive UV radiation.

UV radiation shall either

- be adequately contained by the ENCLOSURE of the UV lamp or the ENCLOSURE of the equipment, or
- not exceed the relevant limits given in IEC 60825-9.

During normal operation, the relevant limit is that for 8 h exposure.

Higher limits are permitted for limited periods of time for maintenance and cleaning operations, if it is necessary for the UV lamp to be on during these operations. The relevant limits are those for the expected time intervals for these operations, which shall be stated in the USER and servicing instructions.

All USER access doors and covers that, if opened, would allow access to higher emissions than those permitted above shall be marked with one of the following (see also 1.7.12):

- "WARNING: TURN OFF THE UV LAMP BEFORE OPENING", or equivalent; or
- the symbol  or equivalent.

It is permitted for the above marking to be beside a door or cover, or on a door provided that the door is secured to the equipment.

The above marking is not required for a door or cover that is provided with a SAFETY INTERLOCK switch (see 2.8) that disconnects power to the UV lamp when the door or cover is opened, or any other mechanism that prevents UV radiation.

If the UV radiation symbol is used on the equipment, both the symbol and a warning similar to the above marking shall appear together in the USER and servicing instructions.

If higher emissions than those permitted above are accessible in a SERVICE ACCESS AREA, and it is necessary for the equipment to remain energized while being serviced, the equipment shall be marked with one of the following:

- "WARNING: USE UV RADIATION EYE AND SKIN PROTECTION DURING SERVICING", or equivalent; or



- the symbol or equivalent.

The marking shall be located where readily visible during the servicing operation (see also 1.7.12).

If the UV radiation symbol is used on the equipment, both the symbol and a warning similar to the above marking shall appear together in the servicing instructions.

*Compliance is checked by inspection and, if necessary, by measurement.*

*UV radiation is measured using a scanning spectrograph or a specific detector having a spectral response equal to the relative spectral effectiveness for the UV range.*

*The UV radiation exposure and effective irradiance during normal operation shall not exceed the limits given in IEC 60825-9 for an 8 h exposure.*

*The UV radiation exposure and effective irradiance during maintenance and cleaning operations shall not exceed the limits in IEC 60825-9 corresponding to the exposure times stated for these operations in the relevant instructions. The maximum permitted radiation is that for 30 min exposure.*

NOTE 2 The permitted radiation is increased as the exposure time is reduced.

*All USER access doors and covers, and parts such as lenses, filters and the like, if their opening or removal could result in an increase in the UV radiation, shall be opened or removed during measurements, unless provided with a SAFETY INTERLOCK switch that disconnects the power to the UV lamp, or any other mechanism that prevents UV radiation.*

NOTE 3 For guidance on measuring techniques, see CIE Publication 63.

#### **4.3.13.5 Lasers (including LEDs)**

Except as permitted below, equipment shall be classified and labelled according to IEC 60825-1, IEC 60825-2 and IEC 60825-12, as applicable.

Equipment that is inherently a Class I laser product, that is the equipment contains no laser or light emitting diode (LED) of a higher class number, is not required to have a laser warning label or other laser statement.

The data for laser or LED components shall confirm that these components comply with the Accessible Emission Limit for Class I when measured according to IEC 60825-1, for the above exception to apply. The data may be obtained from the component manufacturer (see 1.4.15) and can relate to the component alone or to the component in its intended application in the equipment. The lasers or LEDs shall produce radiation only in the wavelength range of 180 nm to 1 mm.

NOTE Some examples of applications of LEDs that will normally comply are those used as:

- indicating lights;
- infra-red devices such as are used in home entertainment devices;
- infra-red devices for data transmission such as are used between computers and computer peripherals;
- optocouplers; and
- other similar low power devices.

*Compliance is checked by inspection, by evaluation of the data provided by the manufacturer and, if necessary, by testing according to IEC 60825-1.*

#### **4.3.13.6 Other types**

*For other types of radiation, compliance is checked by inspection.*

### **4.4 Protection against hazardous moving parts**

#### **4.4.1 General**

Hazardous moving parts of equipment, that is moving parts that have the potential to cause injury, shall be so arranged, enclosed or guarded as to reduce the risk of injury to persons.

AUTOMATIC RESET THERMAL CUT-OUTS or overcurrent protection devices, automatic timer starting, etc., shall not be incorporated if unexpected resetting might create a hazard.

*Compliance is checked by inspection and as detailed in 4.4.2, 4.4.3 and 4.4.4.*

#### **4.4.2 Protection in operator access areas**

In an OPERATOR ACCESS AREA, protection shall be provided by a suitable construction reducing the likelihood of access to hazardous moving parts, or by locating the moving parts in an ENCLOSURE provided with mechanical or electrical SAFETY INTERLOCKS that remove the hazard when access is gained.

Where it is not possible to comply fully with the above access requirements and also allow the equipment to function as intended, access is permitted provided that:

- the hazardous moving part concerned is directly involved in the process (for example, moving parts of a paper cutter); and
- the hazard associated with the part is obvious to the OPERATOR; and
- additional measures are taken as follows:
  - a statement shall be provided in the operating instructions and a marking shall be fixed to the equipment, each containing the following or a similar appropriate wording;

**WARNING**  
**HAZARDOUS MOVING PARTS**  
**KEEP FINGERS AND OTHER BODY PARTS AWAY**

- where the possibility exists that fingers, jewellery, clothing, etc., can be drawn into the moving parts, means shall be provided to enable the OPERATOR to stop the moving part.

The above warning notice and, where relevant, the means provided for stopping the moving part shall be placed in a prominent position, readily visible and accessible from the point where the risk of injury is greatest.

*Compliance is checked by inspection and where necessary by a test with the test finger, Figure 2A (see 2.1.1.1), after removal of OPERATOR-detachable parts, and with OPERATOR access doors and covers open.*

*Unless additional measures have been taken as specified above, it shall not be possible to touch hazardous moving parts with the test finger, applied without appreciable force in every possible position.*

*Openings preventing the entry of the test finger, Figure 2A (see 2.1.1.1), are further tested by means of a straight unjointed version of the test finger applied with a force of 30 N. If the unjointed finger enters, the test with the test finger, Figure 2A (see 2.1.1.1), is repeated, except that the finger is pushed through the opening using any necessary force up to 30 N.*

#### **4.4.3 Protection in restricted access locations**

For equipment to be installed in a RESTRICTED ACCESS LOCATION, the requirements and compliance criteria in 4.4.2 for OPERATOR ACCESS AREAS apply.

#### **4.4.4 Protection in service access areas**

In a SERVICE ACCESS AREA, protection shall be provided such that unintentional contact with hazardous moving parts is unlikely during servicing operations involving other parts of the equipment.

*Compliance is checked by inspection.*

### **4.5 Thermal requirements**

#### **4.5.1 General**

Subclause 4.5 specifies requirements intended to prevent:

- touchable parts from exceeding certain temperatures; and
- components, parts, insulation and plastic materials from exceeding temperatures that may degrade electrical, mechanical, or other properties during normal use over the expected life of the equipment.

Consideration shall be given to the fact that, on a long-term basis, the electrical and mechanical properties of certain insulating materials (see 2.9.1) may be adversely affected (for example, by softeners evaporating at temperatures below the normal softening temperatures of the materials).

During the tests of 4.5.2, audio amplifiers are operated in accordance with 4.2.4 of IEC 60065.

#### 4.5.2 Temperature tests

Materials used in components and in the construction of the equipment shall be selected so that under NORMAL LOAD, temperatures do not exceed safe values in the meaning of this standard.

Components working at high temperature shall be effectively shielded or separated to avoid overheating of their adjacent materials and components.

*Compliance is checked by inspection of material data sheets and by determining and recording the temperatures. The equipment or parts of the equipment are operated in accordance with 1.4.5 under NORMAL LOAD until the temperature has stabilized. For temperature limits, see 4.5.3 and 4.5.4.*

NOTE See also 1.4.4, 1.4.10, 1.4.12 and 1.4.13.

*It is permitted to test components and other parts independently provided that the test conditions applicable to the equipment are followed.*

*Equipment intended for building-in or rack-mounting, or for incorporation in larger equipment, is tested under the most adverse actual or simulated conditions permitted in the installation instructions.*

*The temperature of electrical insulation (other than that of windings, see 1.4.13), the failure of which could create a hazard, is measured on the surface of the insulation at a point close to the heat source (see Footnote a in Table 4B). During the test:*

- *THERMAL CUT-OUTS and overcurrent protection devices shall not operate;*
- *THERMOSTATS are permitted to operate, provided that they do not interrupt the normal operation of the equipment;*
- *TEMPERATURE LIMITERS are permitted to operate;*
- *sealing compounds, if any, shall not flow out.*

#### 4.5.3 Temperature limits for materials

*The temperature of materials and components shall not exceed the values shown in Table 4B.*

**Table 4B – Temperature limits, materials and components**

| Part                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Maximum temperature ( $T_{\max}$ )<br>°C                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation, including winding insulation: <ul style="list-style-type: none"> <li>– of Class 105 material (A)</li> <li>– of Class 120 material (E)</li> <li>– of Class 130 material (B)</li> <li>– of Class 155 material (F)</li> <li>– of Class 180 material (H)</li> <li>– of Class 200 material</li> <li>– of Class 220 material</li> <li>– of Class 250 material</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 100 <sup>a b c</sup><br>115 <sup>a b c</sup><br>120 <sup>a b c</sup><br>140 <sup>a b c</sup><br>165 <sup>a b c</sup><br>180 <sup>a b</sup><br>200 <sup>a b</sup><br>225 <sup>a b</sup> |
| Rubber or PVC insulation of internal and external wiring, including power supply cords: <ul style="list-style-type: none"> <li>– without temperature marking</li> <li>– with temperature marking</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 75 <sup>d</sup><br>Temperature marking                                                                                                                                                 |
| Other thermoplastic insulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | See <sup>e</sup>                                                                                                                                                                       |
| Terminals, including earthing terminals for external earthing conductors of STATIONARY EQUIPMENT, unless provided with a NON-DETACHABLE POWER SUPPLY CORD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 85                                                                                                                                                                                     |
| Parts in contact with a flammable liquid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | See 4.3.12                                                                                                                                                                             |
| Components                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | See 1.5.1                                                                                                                                                                              |
| <sup>a</sup> If the temperature of a winding is determined by thermocouples, these values are reduced by 10 °C, except in the case of <ul style="list-style-type: none"> <li>– a motor, or</li> <li>– a winding with embedded thermocouples.</li> </ul> <sup>b</sup> For each material, account shall be taken of the data for that material to determine the appropriate maximum temperature. <sup>c</sup> The designations A to H, formerly assigned in IEC 60085 to thermal classes 105 to 180, are given in parentheses. <sup>d</sup> If there is no marking on the wire, the marking on the wire spool or the temperature rating assigned by the wire manufacturer is considered acceptable. <sup>e</sup> It is not possible to specify maximum permitted temperatures for thermoplastic materials, due to their wide variety. These shall pass the tests specified in 4.5.5. |                                                                                                                                                                                        |

#### 4.5.4 Touch temperature limits

The temperatures of accessible parts in OPERATOR ACCESS AREAS shall not exceed the values shown in Table 4C.

**Table 4C – Touch temperature limits**

| Parts in OPERATOR ACCESS AREAS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Maximum temperature ( $T_{max}$ ) |                                        |                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|---------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | °C                                |                                        |                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Metal                             | Glass, porcelain and vitreous material | Plastic and rubber <sup>b</sup> |
| Handles, knobs, grips, etc., held or touched for short periods only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 60                                | 70                                     | 85                              |
| Handles, knobs, grips, etc., continuously held in normal use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 55                                | 65                                     | 75                              |
| External surfaces of equipment that may be touched <sup>a</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 70                                | 80                                     | 95                              |
| Parts inside the equipment that may be touched <sup>c</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 70                                | 80                                     | 95                              |
| <p><sup>a</sup> Temperatures up to 100 °C are permitted on the following parts:</p> <ul style="list-style-type: none"> <li>– areas on the external surface of equipment that have no dimension exceeding 50 mm, and that are not likely to be touched in normal use; and</li> <li>– a part of equipment requiring heat for the intended function (for example, a document laminator), provided that this condition is obvious to the USER. A warning shall be marked on the equipment in a prominent position adjacent to the hot part.</li> </ul> <p>The warning shall be either</p> <ul style="list-style-type: none"> <li>• the symbol (IEC 60417-5041 (DB:2002-10)):</li> </ul> <div style="text-align: center;"> <br/> <b>WARNING<br/>HOT SURFACE<br/>DO NOT TOUCH</b> </div> <ul style="list-style-type: none"> <li>• or the following or similar wording</li> </ul> <p><sup>b</sup> For each material, account shall be taken of the data for that material to determine the appropriate maximum temperature.</p> <p><sup>c</sup> Temperatures exceeding the limits are permitted provided that the following conditions are met:</p> <ul style="list-style-type: none"> <li>– unintentional contact with such a part is unlikely; and</li> <li>– the part has a marking indicating that this part is hot. It is permitted to use the following symbol (IEC 60417-5041 (DB:2002-10)) to provide this information.</li> </ul> <div style="text-align: center;">  </div> |                                   |                                        |                                 |

*For equipment intended for installation in a RESTRICTED ACCESS LOCATION, the temperature limits in Table 4C apply, except that for external metal parts that are evidently designed as heat sinks or that have a visible warning, a temperature of 90 °C is permitted.*

#### 4.5.5 Resistance to abnormal heat

Thermoplastic parts on which parts at HAZARDOUS VOLTAGE are directly mounted shall be resistant to abnormal heat.

*Compliance is checked by subjecting the part to the ball pressure test according to IEC 60695-10-2. The test is not made if it is clear from examination of the physical characteristics of the material that it will meet the requirements of this test.*

*The test is made in a heating cabinet at a temperature of  $(T - T_{amb} + T_{ma} + 15 \text{ °C}) \pm 2 \text{ °C}$ .*

*However, a thermoplastic part supporting parts in a PRIMARY CIRCUIT is tested at a minimum of 125 °C.*

*The significances of  $T$ ,  $T_{ma}$  and  $T_{amb}$  are as given in 1.4.12.1.*



## 4.6 Openings in enclosures

NOTE 1 Subclauses 4.6.1 and 4.6.2 do not apply to TRANSPORTABLE EQUIPMENT. Subclause 4.6.4 applies to TRANSPORTABLE EQUIPMENT only.

NOTE 2 Additional requirements concerning openings in ENCLOSURES are in 2.1.1.

### 4.6.1 Top and side openings

For equipment that is intended to be used in more than one orientation (see 1.3.6), the requirements of 4.6.1 apply in each appropriate orientation.

Openings in the top and sides of ENCLOSURES, except for ENCLOSURES of TRANSPORTABLE EQUIPMENT (see 4.6.4), shall be so located or constructed that it is unlikely that objects will enter the openings and create hazards by contacting bare conductive parts.

NOTE 1 Hazards include energy hazards, and those created by bridging of insulation or by OPERATOR access to parts at HAZARDOUS VOLTAGE (for example, via metal jewellery).

Openings, located behind doors, panels, covers, etc., that can be opened or removed by an OPERATOR, are not required to comply provided that the equipment openings comply with the doors, panels and covers closed or in place.

Where a portion of the side of a FIRE ENCLOSURE falls within the area traced out by the 5° angle in Figure 4E, the limitations in 4.6.2 on sizes of openings in bottoms of FIRE ENCLOSURES also apply to this portion of the side.

*Compliance is checked by inspection and measurement. Except for that portion of the side of a FIRE ENCLOSURE that is subject to the requirements of 4.6.2 (see above paragraph), any one of the following is considered to satisfy the requirements (other constructions are not excluded):*

- openings that do not exceed 5 mm in any dimension;
- openings that do not exceed 1 mm in width regardless of length;
- top openings in which vertical entry is prevented (see Figure 4B for examples);
- side openings provided with louvres that are shaped to deflect outwards an external vertically falling object (see Figure 4C for examples);
- top or side openings, as shown in Figure 4D, that are not located vertically, or within a volume  $V$  bounded by a 5° vertical projection up to the size of opening  $L$ , above bare conductive parts:
  - at HAZARDOUS VOLTAGE, or
  - that present an energy hazard within the meaning of 2.1.1.5.

NOTE 2 The examples of Figures 4B, 4C, 4D and 4E are not intended to be used as engineering drawings but are only shown to illustrate the intent of these requirements.

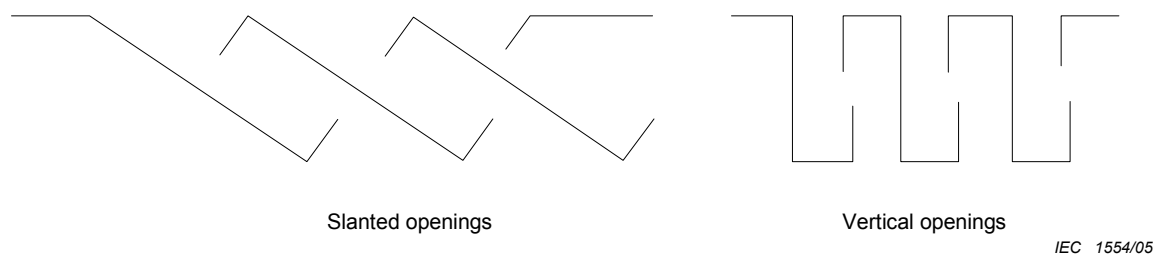


**Figure 4B – Examples of cross-sections of designs of openings preventing vertical access**


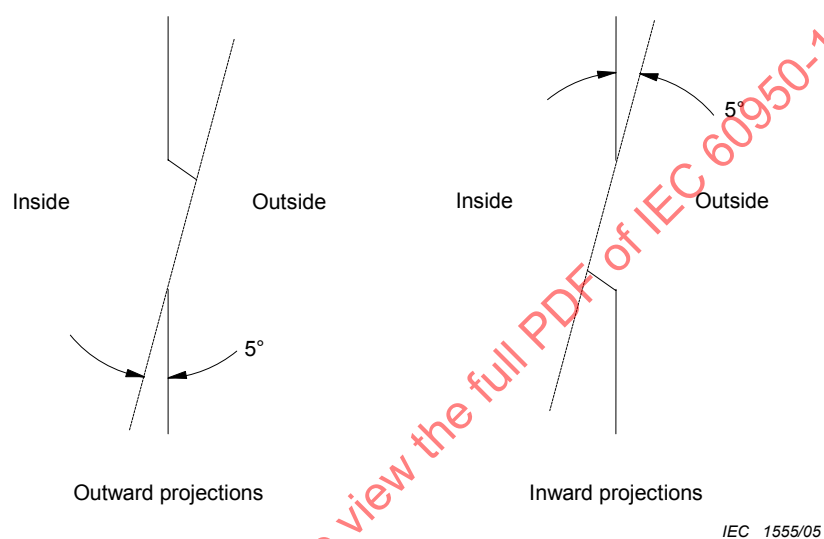


**Figure 4C – Examples of louvre design**

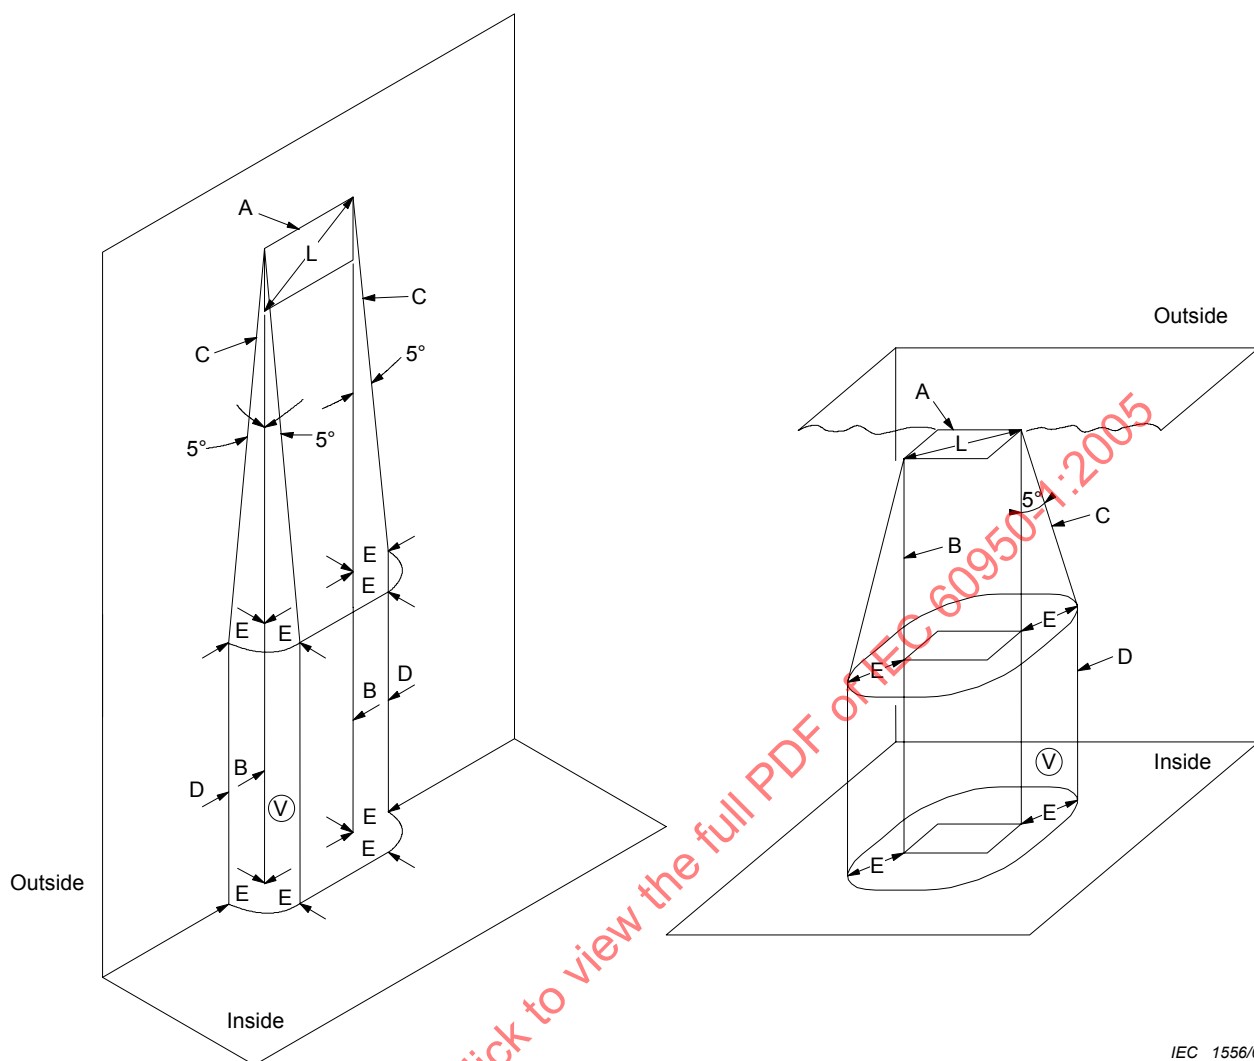

IEC 1556/05

- A ENCLOSURE opening.
- B Vertical projection of the outer edges of the opening.
- C Inclined lines that project at a 5° angle from the edges of the opening to points located E distance from B.
- D Line that is projected straight downward in the same plane as the ENCLOSURE side wall.
- E Projection of the outer edge of the opening (B) and the inclined line (C) (not to be greater than L).
- L Maximum dimension of the ENCLOSURE opening.
- V Volume in which bare parts at HAZARDOUS VOLTAGE, or which are energy hazards (see 4.6.1), are not located.

**Figure 4D – Enclosure openings**

#### 4.6.2 Bottoms of fire enclosures

For equipment that is intended to be used in more than one orientation (see 1.3.6), the requirements of 4.6.2 apply in each appropriate orientation.

The bottom of a FIRE ENCLOSURE (except for the FIRE ENCLOSURE of a TRANSPORTABLE EQUIPMENT) or individual barriers, shall provide protection under all internal parts, including partially enclosed components or assemblies, which, under fault conditions, could emit material likely to ignite the supporting surface.

NOTE See 4.7.2.2 for parts that do not require a FIRE ENCLOSURE.

The bottom or barrier shall be located as, and no smaller in area than, indicated in Figure 4E and be horizontal, lipped or otherwise shaped to provide equivalent protection.

An opening in the bottom shall be protected by a baffle, screen or other means so that molten metal and burning material are unlikely to fall outside the FIRE ENCLOSURE.

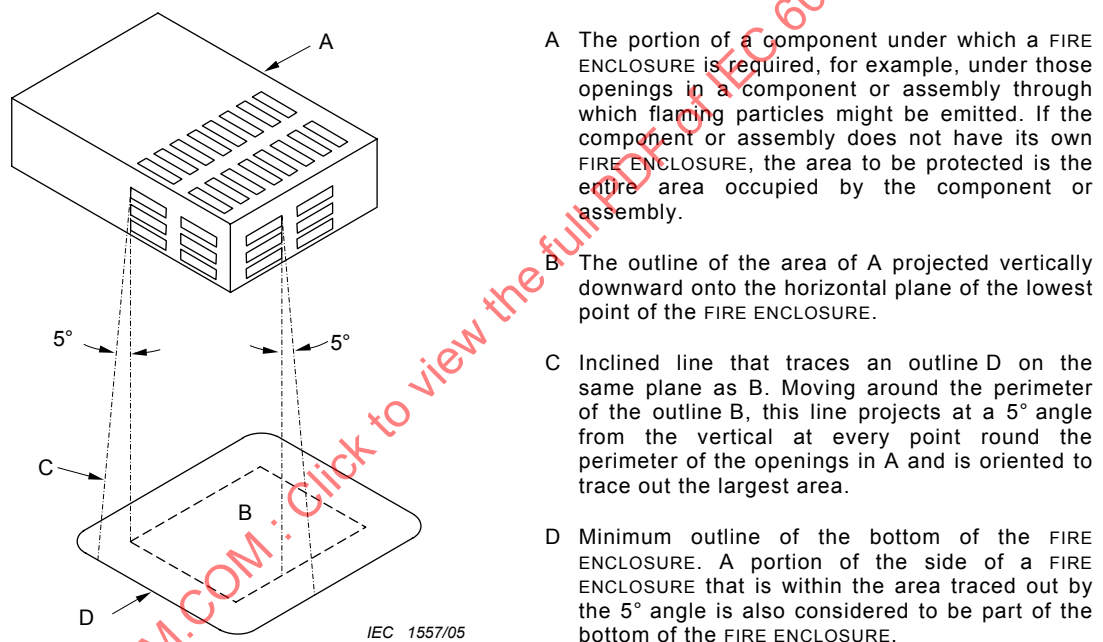


**Figure 4E – Typical bottom of a fire enclosure for partially enclosed component or assembly**

The requirements of 4.6.2 do not apply to STATIONARY EQUIPMENT intended only for use in a RESTRICTED ACCESS LOCATION and to be mounted on a concrete floor or other non-combustible surface. Such equipment shall be marked as follows:

**SUITABLE FOR MOUNTING ON CONCRETE  
OR OTHER NON-COMBUSTIBLE SURFACE ONLY**

Compliance is checked by inspection and, where necessary, by the test of Clause A.3.

The following constructions are considered to satisfy the requirement without test:

- no opening in the bottom of a FIRE ENCLOSURE;
- openings in the bottom of any size under an internal barrier, screen or the like, which itself complies with the requirements for a FIRE ENCLOSURE, see also 4.2.1;
- openings in the bottom, each not larger than  $40 \text{ mm}^2$ , under components and parts meeting the requirements for V-1 CLASS MATERIAL, or HF-1 CLASS FOAMED MATERIAL or under small components that pass the needle-flame test of IEC 60695-11-5 using a 30 s flame application;
- baffle plate construction as illustrated in Figure 4F;
- metal bottoms of FIRE ENCLOSURES conforming to the dimensional limits of any line in Table 4D;
- metal bottom screens having a mesh with nominal openings not greater than 2 mm between centre lines and with wire diameters of not less than 0,45 mm.

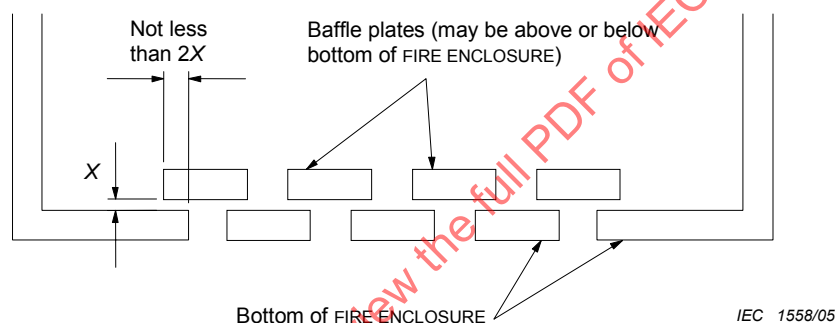


**Figure 4F – Baffle plate construction**

**Table 4D – Size and spacing of openings in metal bottoms of fire enclosures**

| Applicable to circular holes   |                           |                                           | Applicable to other shaped openings |                                              |
|--------------------------------|---------------------------|-------------------------------------------|-------------------------------------|----------------------------------------------|
| Metal bottom minimum thickness | Maximum diameter of holes | Minimum spacing of holes centre to centre | Maximum area                        | Minimum spacing of openings border to border |
| mm                             | mm                        | mm                                        | mm <sup>2</sup>                     | mm                                           |
| 0,66                           | 1,1                       | 1,7                                       | 1,1                                 | 0,56                                         |
| 0,66                           | 1,2                       | 2,3                                       | 1,2                                 | 1,1                                          |
| 0,76                           | 1,1                       | 1,7                                       | 1,1                                 | 0,55                                         |
| 0,76                           | 1,2                       | 2,3                                       | 1,2                                 | 1,1                                          |
| 0,81                           | 1,9                       | 3,1                                       | 2,9                                 | 1,1                                          |
| 0,89                           | 1,9                       | 3,1                                       | 2,9                                 | 1,2                                          |
| 0,91                           | 1,6                       | 2,7                                       | 2,1                                 | 1,1                                          |
| 0,91                           | 2,0                       | 3,1                                       | 3,1                                 | 1,2                                          |
| 1,0                            | 1,6                       | 2,7                                       | 2,1                                 | 1,1                                          |
| 1,0                            | 2,0                       | 3,0                                       | 3,2                                 | 1,0                                          |

#### 4.6.3 Doors or covers in fire enclosures

If part of a FIRE ENCLOSURE consists of a door or cover leading to an OPERATOR ACCESS AREA, it shall comply with one of the following requirements:

- the door or cover shall be interlocked to comply with the requirements in 2.8;
- a door or cover, intended to be routinely opened by the OPERATOR, shall comply with both of the following conditions:
  - it shall not be removable from other parts of the FIRE ENCLOSURE by the OPERATOR; and
  - it shall be provided with a means to keep it closed during normal operation;
- a door or cover intended only for occasional use by the OPERATOR, such as for the installation of accessories, is permitted to be removable provided that the operating instructions include directions for correct removal and reinstallation of the door or cover.

*Compliance is checked by inspection.*

#### 4.6.4 Openings in transportable equipment

The risk of ignition caused by small metallic objects, such as paper clips or staples, moving around inside TRANSPORTABLE EQUIPMENT during transportation shall be reduced by measures to minimize the likelihood of such objects entering the equipment and bridging bare conductive parts that may result in a fire hazard. Except as required in 4.6.4.3, provision of such measures is not required for bare conductive parts between which the power is limited in accordance with 2.5.

NOTE The above requirement only applies to bare conductive parts. Conductive parts covered with conformal or other coatings are not considered to be bare conductive parts.

*Compliance is checked according to 4.6.4.1, 4.6.4.2 and 4.6.4.3 as appropriate. During the inspection and tests, all doors or covers are closed or in place and peripheral devices or assemblies, such as disk drives, batteries, etc., are installed as intended.*

#### **4.6.4.1 Constructional design measures**

Examples of acceptable constructional design measures are:

- providing openings that do not exceed 1 mm in width regardless of length; or
- providing a screen having a mesh with openings not greater than 2 mm between centre lines and constructed with a thread or wire diameter of not less than 0,45 mm; or
- providing internal barriers; or
- other equivalent constructional means.

NOTE Screens provided to limit the entry of small objects form part of the ENCLOSURE and the requirements in 4.7 for FIRE ENCLOSURES may apply, see also 1.3.6.

*Compliance is checked by inspection and measurement and, if necessary, by simulating the entry of objects that could bridge bare conductive parts.*

#### **4.6.4.2 Evaluation measures for larger openings**

Openings larger than specified in 4.6.4.1 are permitted (see also 2.1.1.1), provided that fault testing is conducted to simulate bridging along a direct straight path between bare conductive parts (for metallized parts, see 4.6.4.3) located less than 13 mm away from each other in all areas within the equipment that do not meet the criteria of 4.6.4.1.

*Compliance is checked by inspection and measurement and by simulated fault testing. Bridging is considered to exist between bare conductive parts that can be contacted simultaneously using a straight metal object, 1 mm in diameter and having any length up to 13 mm, applied without appreciable force. During the fault tests, there shall be no ignition of any non-metallic materials and no emission of molten metal.*

#### **4.6.4.3 Use of metallized parts**

Where metallized parts of a plastic barrier or ENCLOSURE are within 13 mm of parts of circuits where the available power is greater than 15 VA, one of the following requirements a) or b) or c) applies:

- a) access by a foreign metallic object shall be limited in accordance with 4.6.4.1, whether or not the available power meets the limits of 2.5; or
- b) there shall be a barrier between the bare conductive parts and the metallized barrier or ENCLOSURE; or
- c) fault testing shall be conducted to simulate bridging along a direct path between a bare conductive part and the nearest metallized part of a barrier or ENCLOSURE that is within 13 mm of the bare conductive part.

NOTE Examples of metallized plastic barriers or ENCLOSURES include those made of conductive composite materials or that are electroplated, vacuum-deposited, painted or foil lined.

*Compliance is checked by inspection and measurement and, where appropriate, by test. If simulated fault testing is conducted, no ignition of the metallized barrier or ENCLOSURE shall occur.*

#### 4.6.5 Adhesives for constructional purposes

If a barrier or screen provided to comply with 4.6.1, 4.6.2 or 4.6.4 is secured with adhesive to the inside of the ENCLOSURE or to other parts inside the ENCLOSURE, the adhesive shall have adequate bonding properties throughout the life of the equipment.

*Compliance is checked by examination of the construction and of the available data. If such data is not available, compliance is checked by the following tests.*

*A sample of the equipment or a part of the ENCLOSURE with the barrier or screen attached is evaluated with the sample placed with the barrier or screen on the underside.*

*Condition the sample in an oven at one of the following temperatures for the time durations specified:*

- 100 °C ± 2 °C for one week; or*
- 90 °C ± 2 °C for three weeks; or*
- 82 °C ± 2 °C for eight weeks.*

*Upon completion of the temperature conditioning, subject the sample to the following:*

- remove the sample from oven and leave it at any convenient temperature between 20 °C and 30 °C for 1 h;*
- place the sample in a freezer at -40 °C ± 2 °C for 4 h;*
- remove and allow the sample to come to any convenient temperature between 20 °C and 30 °C for 8 h;*
- place the sample in a cabinet at 91 % to 95 % relative humidity for 72 h;*
- remove the sample and leave it at any convenient temperature between 20 °C and 30 °C for 1 h;*
- place the sample in an oven at the temperature used for the temperature conditioning for 4 h;*
- remove the sample and allow it to reach any convenient temperature between 20 °C; and 30 °C for 8 h.*

*The sample is then immediately subjected to the tests of 4.2 as applicable. The barrier or screen shall not fall off or partly dislodge as a result of these tests.*

*With the concurrence of the manufacturer, it is permitted to increase any of the above time durations.*

#### 4.7 Resistance to fire

This subclause specifies requirements intended to reduce the risk of ignition and the spread of flame, both within the equipment and to the outside, by the appropriate use of materials and components and by suitable construction.

NOTE 1 The risk of ignition is reduced by limiting the maximum temperature of components under normal operating conditions and after a single fault (see 1.4.14), or by limiting the power available in a circuit.

NOTE 2 The spread of flame in the event of ignition is reduced by the use of flame retardant materials and insulation, or by providing adequate separation.

NOTE 3 For a ranking of materials with respect to flammability, refer to the notes in 1.2.12.1.

NOTE 4 In Australia and New Zealand, an alternative set of fire tests is also accepted.

Metals, ceramic materials and glass shall be considered to comply without test.



#### 4.7.1 Reducing the risk of ignition and spread of flame

For equipment or a portion of equipment, there are two alternative methods of providing protection against ignition and spread of flame that could affect materials, wiring, wound components and electronic components such as integrated circuits, transistors, thyristors, diodes, resistors and capacitors.

Method 1 – Selection and application of components, wiring and materials that reduce the possibility of ignition and spread of flame and, where necessary, by the use of a FIRE ENCLOSURE. The appropriate requirements are detailed in 4.7.2 and 4.7.3. In addition, the simulated faults of 5.3.7 are applied, except for 5.3.7 c), when using this method.

NOTE 1 Method 1 may be preferred for equipment or that portion of equipment with a large number of electronic components.

Method 2 – Application of all of the simulated fault tests in 5.3.7. A FIRE ENCLOSURE is not required for equipment or that portion of equipment for which only Method 2 is used. In particular, 5.3.7 c) applies, which includes testing all relevant components in both PRIMARY CIRCUITS and SECONDARY CIRCUITS.

NOTE 2 Method 2 may be preferred for equipment or that portion of equipment with a small number of electronic components.

#### 4.7.2 Conditions for a fire enclosure

A FIRE ENCLOSURE is required when temperatures of parts under fault conditions could be sufficient for ignition.

##### 4.7.2.1 Parts requiring a fire enclosure

Except where Method 2 of 4.7.1 is used, or as permitted in 4.7.2.2, the following are considered to have a risk of ignition and, therefore, require a FIRE ENCLOSURE:

- components in PRIMARY CIRCUITS;
- components in SECONDARY CIRCUITS supplied by power sources that exceed the limits specified in 2.5;
- components in SECONDARY CIRCUITS supplied by limited power sources as specified in 2.5, but not mounted on V-1 CLASS MATERIAL;
- components within a power supply unit or assembly having a limited power output as specified in 2.5, including overcurrent protective devices, limiting impedances, regulating networks and wiring, up to the point where the limited power source output criteria are met;
- components having unenclosed arcing parts, such as open switch and relay contacts and commutators, in a circuit at HAZARDOUS VOLTAGE or at a HAZARDOUS ENERGY LEVEL; and
- insulated wiring.

##### 4.7.2.2 Parts not requiring a fire enclosure

The following do not require a FIRE ENCLOSURE:

- motors;
- transformers;
- electromechanical components complying with 5.3.5;
- wiring and cables insulated with PVC, TFE, PTFE, FEP, polychloroprene or polyimide;

- plugs and connectors forming part of a power supply cord or INTERCONNECTING CABLE;
- components, including connectors, meeting the requirements of 4.7.3.2, which fill an opening in a FIRE ENCLOSURE;
- connectors in SECONDARY CIRCUITS supplied by power sources that are limited to a maximum of 15 VA (see 1.4.11) under normal operating conditions and after a single fault in the equipment (see 1.4.14);
- connectors in SECONDARY CIRCUITS supplied by limited power sources complying with 2.5;
- other components in SECONDARY CIRCUITS:
  - supplied by limited power sources complying with 2.5 and mounted on V-1 CLASS MATERIAL;
  - supplied by internal or external power sources that are limited to a maximum of 15 VA (see 1.4.11) under normal operating conditions and after a single fault in the equipment (see 1.4.14) and mounted on HB75 CLASS MATERIAL, if the thinnest significant thickness of this material is < 3 mm, or HB40 CLASS MATERIAL, if the thinnest significant thickness of this material is ≥ 3 mm;

NOTE In Canada and the United States, additional requirements may apply, see Clause 6, Note 5.

- complying with Method 2 of 4.7.1;
- equipment, or a part of the equipment, having a momentary contact switch that the USER has to activate continuously, and the release of which removes all power from the equipment or part.

*Compliance with 4.7.2.1 and 4.7.2.2 is checked by inspection and by evaluation of the data provided by the manufacturer. In the case where no data is provided, compliance is determined by tests.*

### 4.7.3 Materials

#### 4.7.3.1 General

ENCLOSURES, components and other parts shall be so constructed, or shall make use of such materials, that the propagation of fire is limited.

VTM-0 CLASS MATERIAL, VTM-1 CLASS MATERIAL and VTM-2 CLASS MATERIAL are considered to be equivalent to V-0 CLASS MATERIAL, V-1 CLASS MATERIAL and V-2 CLASS MATERIAL, respectively, for their flammability properties. Their electrical and mechanical properties are not necessarily equivalent.

Where HB40 CLASS MATERIAL, HB75 CLASS MATERIAL or HBF CLASS FOAMED MATERIAL, is required, material passing the glow-wire test at 550 °C according to IEC 60695-2-11 is acceptable as an alternative.

Where it is not practical to protect components against overheating under fault conditions, the components shall be mounted on V-1 CLASS MATERIAL. Additionally, such components shall be separated from material of a class lower than V-1 CLASS MATERIAL (see 1.2.12.1, Note 2) by at least 13 mm of air, or by a solid barrier of V-1 CLASS MATERIAL.

NOTE 1 See also 4.7.3.5.

NOTE 2 In Canada and the United States, requirements in addition to 4.7.3.2 and 4.7.3.3 apply to ENCLOSURES and DECORATIVE PARTS having an external surface with an exposed area of greater than 0,9 m<sup>2</sup> or a single dimension greater than 1,8 m.

NOTE 3 In considering how to limit propagation of fire, and what are "small parts", account should be taken of the cumulative effect of small parts when they are adjacent to each other, and also of the possible effect of propagating fire from one part to another.

NOTE 4 The material flammability requirements in 4.7.3 are summarized in Table 4E.

*Compliance is checked by inspection and by evaluation of relevant data provided by the manufacturer.*

#### **4.7.3.2 Materials for fire enclosures**

The following requirements apply as appropriate.

The 18 kg mass criterion applies to individual complete equipments, even if they are used in close proximity to each other (for example, one on top of another). However, if a part of the FIRE ENCLOSURE is removed in such a situation (in the same example, the bottom cover of the top equipment), the combined mass of the equipment applies. In determining the total mass of equipment, supplies, consumable materials, media and recording materials used with the equipment shall not be taken into account.

For MOVABLE EQUIPMENT having a total mass not exceeding 18 kg the material of a FIRE ENCLOSURE, in the thinnest significant wall thickness used, shall be of V-1 CLASS MATERIAL or shall pass the test of Clause A.2.

For MOVABLE EQUIPMENT having a total mass exceeding 18 kg and for all STATIONARY EQUIPMENT, the material of a FIRE ENCLOSURE, in the thinnest significant wall thickness used, shall be of 5VB CLASS MATERIAL or shall pass the test of Clause A.1.

Materials for components that fill an opening in a FIRE ENCLOSURE, and that are intended to be mounted in this opening shall:

- be of V-1 CLASS MATERIAL; or
- pass the tests of Clause A.2; or
- comply with the flammability requirements of the relevant IEC component standard.

NOTE Examples of these components are fuseholders, switches, pilot lights, connectors and appliance inlets.

Plastic materials of a FIRE ENCLOSURE shall be located more than 13 mm through air from arcing parts such as unenclosed commutators and unenclosed switch contacts.

Plastic materials of a FIRE ENCLOSURE located less than 13 mm through air from non-arcing parts which, under any condition of normal or abnormal operation, could attain a temperature sufficient to ignite the material, shall be capable of passing the test of IEC 60695-2-20. The average time to ignition of the samples shall be not less than 15 s. If a sample melts through without igniting, the time at which this occurs is not considered to be the time to ignition.

*Compliance is checked by inspection of the equipment and material data sheets and, if necessary, by the appropriate test or tests in Annex A or IEC 60695-2-20.*

#### 4.7.3.3 Materials for components and other parts outside fire enclosures

Except as otherwise noted below, materials for components and other parts (including MECHANICAL ENCLOSURES, ELECTRICAL ENCLOSURES and DECORATIVE PARTS), located outside FIRE ENCLOSURES, shall be of

- HB75 CLASS MATERIAL if the thinnest significant thickness of this material is  $< 3$  mm, or
- HB40 CLASS MATERIAL if the thinnest significant thickness of this material is  $\geq 3$  mm, or
- HBF CLASS FOAMED MATERIAL.

NOTE Where a MECHANICAL ENCLOSURE or an ELECTRICAL ENCLOSURE also serves as a FIRE ENCLOSURE, the requirements for FIRE ENCLOSURES apply.

Requirements for materials in air filter assemblies are in 4.7.3.5 and for materials in high-voltage components in 4.7.3.6.

Connectors shall comply with one of the following:

- be made of V-2 CLASS MATERIAL; or
- pass the tests of Clause A.2; or
- comply with the flammability requirements of the relevant IEC component standard; or
- be mounted on V-1 CLASS MATERIAL and be of a small size; or
- be located in a SECONDARY CIRCUIT supplied by a power source that is limited to a maximum of 15 VA (see 1.4.11) under normal operating conditions and after a single fault in the equipment (see 1.4.14).

The requirement for materials for components and other parts to be of HB40 CLASS MATERIAL, HB75 CLASS MATERIAL, or HBF CLASS FOAMED MATERIAL, does not apply to any of the following:

- electrical components that do not present a fire hazard under abnormal operating conditions when tested according to 5.3.7;
- materials and components within an ENCLOSURE of  $0,06 \text{ m}^3$  or less, consisting totally of metal and having no ventilation openings, or within a sealed unit containing an inert gas;
- meter cases (if otherwise determined to be suitable for mounting of parts at HAZARDOUS VOLTAGE), meter faces and indicator lamps or their jewels;
- components meeting the flammability requirements of a relevant IEC component standard that includes such requirements;
- electronic components, such as integrated circuit packages, optocoupler packages, capacitors and other small parts that are:
  - mounted on V-1 CLASS MATERIAL; or
  - supplied from a power source of no more than 15 VA (see 1.4.11) under normal operating conditions or after a single fault in the equipment (see 1.4.14) and mounted on HB75 CLASS MATERIAL if the thinnest significant thickness of this material is  $< 3$  mm, or HB40 CLASS MATERIAL if the thinnest significant thickness of this material is  $\geq 3$  mm;

- wiring, cables and connectors insulated with PVC, TFE, PTFE, FEP, polychloroprene or polyimide;
- individual clamps (not including helical wraps or other continuous forms), lacing tape, twine and cable ties used with wiring harnesses;
- gears, cams, belts, bearings and other small parts that would contribute negligible fuel to a fire, including DECORATIVE PARTS, labels, mounting feet, key caps, knobs and the like;
- supplies, consumable materials, media and recording materials;
- parts that are required to have particular properties in order to perform intended functions, such as rubber rollers for paper pick-up and delivery, and ink tubes.

*Compliance is checked by inspection of the equipment and material data sheets and, if necessary, by the appropriate test or tests in Annex A.*

#### **4.7.3.4 Materials for components and other parts inside fire enclosures**

Requirements for materials in air filter assemblies are in 4.7.3.5 and requirements for materials in high-voltage components in 4.7.3.6.

Inside FIRE ENCLOSURES, materials for components and other parts, (including MECHANICAL ENCLOSURES and ELECTRICAL ENCLOSURES located inside FIRE ENCLOSURES), shall comply with one of the following:

- be of V-2 CLASS MATERIAL or HF-2 CLASS FOAMED MATERIAL; or
- pass the flammability test described in Clause A.2; or
- meet the flammability requirements of a relevant IEC component standard that includes such requirements.

The above requirement does not apply to any of the following:

- electrical components that do not present a fire hazard under abnormal operating conditions when tested according to 5.3.7;
- materials and components within an ENCLOSURE of 0,06 m<sup>3</sup> or less, consisting totally of metal and having no ventilation openings, or within a sealed unit containing an inert gas;
- one or more layers of thin insulating material, such as adhesive tape, used directly on any surface within a FIRE ENCLOSURE, including the surface of current-carrying parts, provided that the combination of the thin insulating material and the surface of application complies with the requirements of V-2 CLASS MATERIAL, or HF-2 CLASS FOAMED MATERIAL;

NOTE Where the thin insulating material referred to in the above exclusion is on the inner surface of the FIRE ENCLOSURE itself, the requirements in 4.6.2 continue to apply to the FIRE ENCLOSURE.

- meter cases (if otherwise determined to be suitable for mounting of parts at HAZARDOUS VOLTAGE), meter faces and indicator lamps or their jewels;
- electronic components, such as integrated circuit packages, optocoupler packages, capacitors and other small parts that are mounted on V-1 CLASS MATERIAL;
- wiring, cables and connectors insulated with PVC, TFE, PTFE, FEP, polychloroprene or polyimide;
- individual clamps (not including helical wraps or other continuous forms), lacing tape, twine and cable ties used with wiring harnesses;

- the following parts, provided that they are separated from electrical parts (other than insulated wires and cables), which under fault conditions are likely to produce a temperature that could cause ignition, by at least 13 mm of air or by a solid barrier of V-1 CLASS MATERIAL:
  - gears, cams, belts, bearings and other small parts that would contribute negligible fuel to a fire, including, labels, mounting feet, key caps, knobs and the like;
  - supplies, consumable materials, media and recording materials;
  - parts that are required to have particular properties in order to perform intended functions, such as rubber rollers for paper pick-up and delivery, and ink tubes;
  - tubing for air or any fluid systems, containers for powders or liquids and foamed plastic parts, provided that they are of HB75 CLASS MATERIAL if the thinnest significant thickness of the material is < 3 mm, or HB40 CLASS MATERIAL if the thinnest significant thickness of the material is ≥ 3 mm, or HBF CLASS FOAMED MATERIAL.

*Compliance is checked by inspection of the equipment and material data sheets and, if necessary, by the appropriate test or tests of Annex A.*

#### **4.7.3.5 Materials for air filter assemblies**

Air filter assemblies shall be constructed of V-2 CLASS MATERIAL, or HF-2 CLASS FOAMED MATERIAL.

This requirement does not apply to the following constructions:

- air filter assemblies in air circulating systems, whether or not airtight, that are not intended to be vented outside the FIRE ENCLOSURE;
- air filter assemblies located inside or outside a FIRE ENCLOSURE, provided that the filter materials are separated by a metal screen from parts that could cause ignition. This screen may be perforated and shall meet the requirements of 4.6.2 for the bottoms of FIRE ENCLOSURES;
- air filter assemblies constructed of
  - HB75 CLASS MATERIAL if the thinnest significant thickness of this material is < 3 mm, or
  - HB40 CLASS MATERIAL if the thinnest significant thickness of this material is ≥ 3 mm, or
  - HBF CLASS FOAMED MATERIAL,
 provided that they are separated by at least 13 mm of air, or by a solid barrier of V-1 CLASS MATERIAL, from electrical parts (other than insulated wires and cables) which under fault conditions are likely to produce a temperature that could cause ignition.

*Compliance is checked by inspection of the equipment and material data sheets and, if necessary, by appropriate tests.*

#### **4.7.3.6 Materials used in high-voltage components**

High-voltage components operating at peak-to-peak voltages exceeding 4 kV shall either be of V-2 CLASS MATERIAL, or HF-2 CLASS FOAMED MATERIAL, or comply with 14.4 of IEC 60065 or pass the needle flame test according to IEC 60695-11-5.

Compliance is checked by inspection of the equipment and material data sheets and, if necessary, by

- the tests for V-2 CLASS MATERIAL or HF-2 CLASS FOAMED MATERIAL; or
- the test described in 14.4 of IEC 60065; or
- the needle flame test according to IEC 60695-11-5.

In addition, the following details apply, referring to clauses of IEC 60695-11-5:

#### Clause 7 – Severities

The test flame is applied for 10 s. If a self-sustaining flame does not last longer than 30 s, the test flame is applied again for 1 min at the same point or at any other point. If again a self-sustaining flame does not last longer than 30 s, the test flame is then applied for 2 min at the same point or at any other point.

#### Clause 8 – Conditioning

Except for high voltage transformers and high voltage multipliers the samples are stored for 2 h in an oven at a temperature of  $100\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ .

For high voltage transformers, a power of 10 W (d.c. or a.c. at mains frequency) is initially supplied to the high-voltage winding. This power is maintained for 2 min, after which it is increased by successive steps of 10 W at 2 min intervals to 40 W.

The treatment lasts 8 min or is terminated as soon as interruption of the winding or appreciable splitting of the protective covering occurs.

NOTE 1 Certain transformers are so designed that this preconditioning cannot be conducted. In such cases the oven preconditioning applies.

For high-voltage multipliers, a voltage taken from an appropriate high-voltage transformer, is supplied to each sample, its output circuit being short-circuited.

The input voltage is adjusted so that the short-circuit current is initially  $25\text{ mA} \pm 5\text{ mA}$ . This current is maintained for 30 min or is terminated as soon as any interruption of the circuit or appreciable splitting of the protective covering occurs.

NOTE 2 Where the design of a high-voltage multiplier is such that a short-circuit current of 25 mA cannot be obtained, a preconditioning current is used, which represents the maximum attainable current, determined either by the design of the multiplier or by its conditions of use in a particular apparatus.

#### Clause 11 – Evaluation of test results

After the first application of the test flame, the test sample shall not be consumed completely.

After any application of the test flame, any self-sustaining flame shall extinguish within 30 s. No burning of the WRAPPING TISSUE shall occur and the board shall not be scorched.

**Table 4E – Summary of material flammability requirements**

| Part                                                                                                                               |                                                       | Requirement                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FIRE ENCLOSURES<br>4.7.3.2                                                                                                         | MOVABLE EQUIPMENT > 18 kg and<br>STATIONARY EQUIPMENT | <ul style="list-style-type: none"> <li>– 5VB</li> <li>– Test A.1</li> <li>– Hot wire test of IEC 60695-2-20<br/>(If &lt;13 mm of air from parts at high temperatures that could cause ignition)</li> </ul>                                           |
|                                                                                                                                    | MOVABLE EQUIPMENT ≤ 18 kg                             | <ul style="list-style-type: none"> <li>– V-1</li> <li>– Test A.2</li> <li>– Hot wire test of IEC 60695-2-20<br/>(If &lt; 13 mm of air from parts at high temperatures that could cause ignition)</li> </ul>                                          |
|                                                                                                                                    | Parts that fill an opening                            | <ul style="list-style-type: none"> <li>– V-1</li> <li>– Test A.2</li> <li>– Component standard</li> </ul>                                                                                                                                            |
| Components and parts, including MECHANICAL ENCLOSURES and<br>ELECTRICAL ENCLOSURES, outside FIRE ENCLOSURES<br>4.7.3.1 and 4.7.3.3 |                                                       | <ul style="list-style-type: none"> <li>– HB40 for thicknesses ≥ 3 mm</li> <li>– HB75 for thicknesses &lt; 3 mm</li> <li>– HBF</li> <li>– Glow-wire test 550 °C<br/>of IEC 60695-2-11</li> </ul> <p>For connectors and exceptions<br/>see 4.7.3.3</p> |
| Components and parts, including MECHANICAL ENCLOSURES and<br>ELECTRICAL ENCLOSURES, inside FIRE ENCLOSURES<br>4.7.3.4              |                                                       | <ul style="list-style-type: none"> <li>– V-2</li> <li>– HF-2</li> <li>– Test A.2</li> <li>– Component standard</li> </ul> <p>For exceptions see 4.7.3.4</p>                                                                                          |
| Air filter assemblies<br>4.7.3.5                                                                                                   |                                                       | <ul style="list-style-type: none"> <li>– V-2</li> <li>– HF-2</li> <li>– Test A.2</li> </ul> <p>For exceptions see 4.7.3.5</p>                                                                                                                        |
| High voltage (> 4 kV) components<br>4.7.3.6                                                                                        |                                                       | <ul style="list-style-type: none"> <li>– V-2</li> <li>– HF-2</li> <li>– Test of 14.4 of IEC 60065</li> <li>– Needle flame test of IEC 60695-11-5</li> </ul>                                                                                          |



## 5 Electrical requirements and simulated abnormal conditions

### 5.1 Touch current and protective conductor current

In this subclause measurements of current through networks simulating the impedance of the human body are referred to as measurements of TOUCH CURRENT.

Except for application of 5.1.8.2, these requirements do not apply to equipment intended to be supplied by only a DC MAINS SUPPLY.

#### 5.1.1 General

Equipment shall be so designed and constructed that neither TOUCH CURRENT nor PROTECTIVE CONDUCTOR CURRENT is likely to create an electric shock hazard.

*Compliance is checked by testing in accordance with 5.1.2 to 5.1.7 inclusive, and, if relevant, 5.1.8 (see also 1.4.4).*

*However, if it is clear from a study of the circuit diagrams of either STATIONARY PERMANENTLY CONNECTED EQUIPMENT or STATIONARY PLUGGABLE EQUIPMENT TYPE B, that has a PROTECTIVE EARTHING CONDUCTOR, that the TOUCH CURRENT will exceed 3.5 mA r.m.s., but that the PROTECTIVE CONDUCTOR CURRENT will not exceed 5 % of input current, the tests of 5.1.5, 5.1.6 and 5.1.7.1 a) are not made.*

NOTE In the above case, the requirement of 5.1.7.1 b) continues to apply.

#### 5.1.2 Configuration of equipment under test (EUT)

##### 5.1.2.1 Single connection to an a.c. mains supply

*Systems of interconnected equipment with individual connections to the AC MAINS SUPPLY shall have each piece of equipment tested separately. Systems of interconnected equipment with one common connection to the AC MAINS SUPPLY shall be treated as a single piece of equipment. See also 1.4.10 regarding the inclusion of optional features.*

NOTE Systems of interconnected equipment are specified in more detail in Annex A of IEC 60990.

##### 5.1.2.2 Redundant multiple connections to an a.c. mains supply

*Equipment that is designed for multiple connections to the AC MAINS SUPPLY, only one of which is required at a time, shall be tested with only one connection.*

##### 5.1.2.3 Simultaneous multiple connections to an a.c. mains supply

*Equipment requiring power simultaneously from two or more AC MAINS SUPPLIES shall be tested with all AC MAINS SUPPLIES connected.*

*The total TOUCH CURRENT through all PROTECTIVE EARTHING CONDUCTORS that are connected to each other and to earth is measured.*

*A PROTECTIVE EARTHING CONDUCTOR that is not connected within the equipment to other earthed parts in the equipment shall not be included in the above tests. If an a.c. power source has such a PROTECTIVE EARTHING CONDUCTOR it shall be tested separately according to 5.1.2.1 (see also 5.1.7.2).*

### **5.1.3 Test circuit**

*Equipment is tested using the test circuit in Figure 5A (for single-phase equipment to be connected only to a star TN or TT power distribution system) or Figure 5B (for three-phase equipment to be connected only to a star TN or TT power distribution system) or where appropriate, another test circuit from Figures 7, 9, 10, 12, 13 or 14 of IEC 60990.*


*The use of a test transformer for isolation is optional. For maximum protection, a test transformer for isolation (T in Figures 5A and 5B) is used and the main protective earthing terminal of the EUT is earthed. Any capacitive leakage in the transformer shall then be taken into account. As an alternative to earthing the EUT, the test transformer secondary and the EUT are left floating (not earthed) in which case capacitive leakage in the transformer need not be taken into account.*

*If transformer T is not used, the EUT and the test circuitry shall not be earthed. The EUT is mounted on an insulating stand, and appropriate safety precautions are taken in view of the possibility of the BODY of the equipment being at a HAZARDOUS VOLTAGE.*

*Equipment to be connected to an IT power distribution system is tested accordingly (see Figures 9, 10 and 12 of IEC 60990). Such equipment may also be connected to a TN or TT power distribution system without further test.*


*Single-phase equipment intended to be operated between two line conductors is tested using a three-phase test circuit such as Figure 5B.*

*If it is inconvenient to test equipment at the most unfavourable supply voltage (see 1.4.5), it is permitted to test the equipment at any available voltage within the tolerance of RATED VOLTAGE or within the RATED VOLTAGE RANGE, and then calculate the results.*

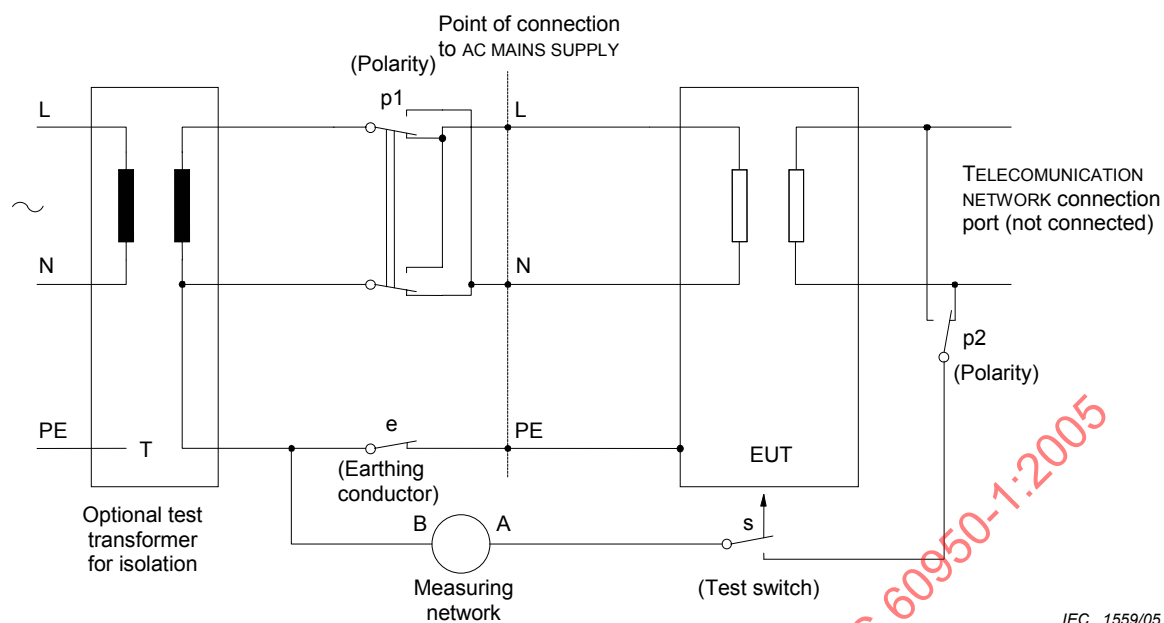

NOTE This figure is derived from Figure 6 of IEC 60990.

**Figure 5A – Test circuit for touch current of single-phase equipment on a star TN or TT power supply system**

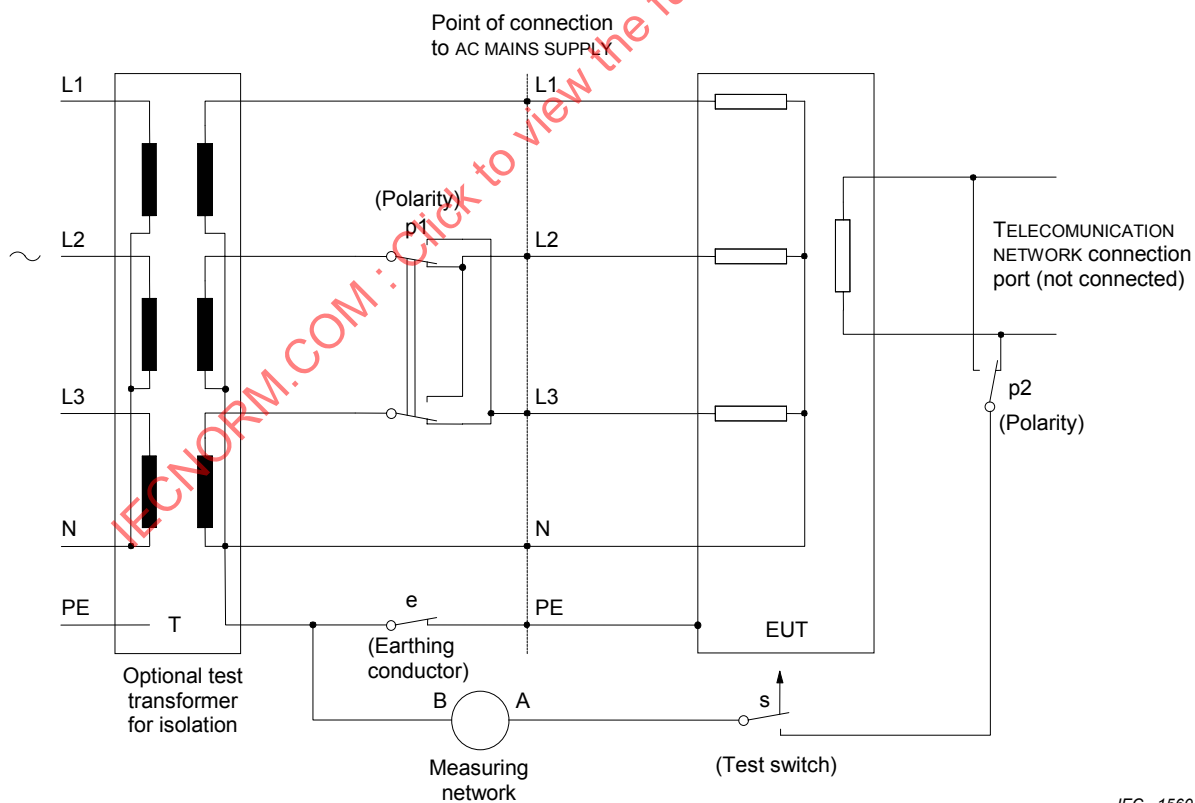

NOTE This figure is derived from Figure 11 of IEC 60990.

**Figure 5B – Test circuit for touch current of three-phase equipment on a star TN or TT power supply system**

#### 5.1.4 Application of measuring instrument

*Tests are conducted using one of the measuring instruments in Annex D, or any other circuit giving the same results.*

*Terminal B of the measuring instrument is connected to the earthed (neutral) conductor of the supply (see Figure 5A or 5B).*

*Terminal A of the measuring instrument is connected as specified in 5.1.5.*

*For an accessible non-conductive part, the test is made to metal foil having dimensions of 100 mm by 200 mm in contact with the part. If the area of the foil is smaller than the surface under test, the foil is moved so as to test all parts of the surface. Where adhesive metal foil is used, the adhesive shall be conductive. Precautions are taken to prevent the metal foil from affecting the heat dissipation of the equipment.*

NOTE 1 The foil test simulates hand contact.

*Accessible conductive parts that are incidentally connected to other parts are tested both as connected and disconnected parts.*

NOTE 2 Incidentally connected parts are described in more detail in Annex C of IEC 60990.

#### 5.1.5 Test procedure

*For equipment having a protective earthing connection or a FUNCTIONAL EARTHING connection, terminal A of the measuring instrument is connected via measurement switch "s" to the main protective earthing terminal of the EUT, with the earthing conductor switch "e" open.*

*The test is also conducted, on all equipment, with terminal A of the measuring network connected via measurement switch "s" to each unearthed or non-conductive accessible part and each unearthed accessible circuit, in turn, with the earthing conductor switch "e" closed.*

*Additionally:*

- for single-phase equipment, the tests are repeated in reverse polarity (switch "p1");*
- for three-phase equipment, the tests are repeated in reverse polarity (switch "p1") unless the equipment is sensitive to phase sequence.*

*When testing three-phase equipment, any components used for EMC purposes and connected between line and earth are disconnected one at a time; for this purpose, groups of components in parallel connected through a single connection are treated as single components. Each time a line-to-earth component is disconnected the sequence of switch operations is repeated.*

NOTE Where filters are normally encapsulated, it may be necessary to provide an unencapsulated unit for test or to simulate the filter network.

*For each placement of the measuring instrument, any switches in the PRIMARY CIRCUIT and likely to be operated in normal use are open and closed in all possible combinations.*

*After applying each test condition, the equipment is restored to its original condition, that is without fault or consequential damage.*

### 5.1.6 Test measurements

*Either the r.m.s. value of the voltage,  $U_2$ , is measured using the measuring instrument of Figure D.1, or the r.m.s. value of the current is measured using the measuring instrument of Figure D.2.*

*The D.1 instrument gives a more accurate measurement than the D.2 instrument if the waveform is non-sinusoidal and the fundamental frequency exceeds 100 Hz.*

*Alternatively, the peak value of the voltage,  $U_2$ , is measured using the measuring instrument described in Clause D.1.*

*If the voltage,  $U_2$ , is measured using the measuring instrument described in Clause D.1, the following calculation is used:*

$$\text{TOUCH CURRENT (A)} = U_2 / 500$$

NOTE Although r.m.s. values of TOUCH CURRENT have traditionally been measured, peak values provide better correlation with the response of the human body to non-sinusoidal current waveforms.

*None of the values measured in accordance with 5.1.6 shall exceed the relevant limits in Table 5A, except as permitted in 2.4 (see also 1.5.6 and 1.5.7) and 5.1.7.*

**Table 5A – Maximum current**

| Type of equipment                                                     | Terminal A of measuring instrument connected to:                             | Maximum TOUCH CURRENT mA r.m.s. <sup>a</sup> | Maximum PROTECTIVE CONDUCTOR CURRENT |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------|--------------------------------------|
| All equipment                                                         | Accessible parts and circuits not connected to protective earth <sup>b</sup> | 0,25                                         | –                                    |
| HAND-HELD                                                             | Equipment main protective earthing terminal (if any)                         | 0,75                                         | –                                    |
| MOVABLE (other than HAND-HELD, but including TRANSPORTABLE EQUIPMENT) |                                                                              | 3,5                                          | –                                    |
| STATIONARY, PLUGGABLE TYPE A                                          |                                                                              | 3,5                                          | –                                    |
| All other STATIONARY EQUIPMENT                                        |                                                                              | 3,5                                          | –                                    |
| – not subject to the conditions of 5.1.7                              |                                                                              | –                                            | 5 % of input current                 |
| – subject to the conditions of 5.1.7                                  |                                                                              | –                                            | 5 % of input current                 |

<sup>a</sup> If peak values of TOUCH CURRENT are measured, the maximum values are obtained by multiplying the r.m.s. values in the table by 1,414.

<sup>b</sup> Some unearthed accessible parts are covered in 1.5.6 and 1.5.7 and the requirements of 2.4 apply. These may be different from those in 5.1.6.

### 5.1.7 Equipment with touch current exceeding 3,5 mA

#### 5.1.7.1 General

TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted for the following equipment having a main protective earthing terminal:

- STATIONARY PERMANENTLY CONNECTED EQUIPMENT;
- STATIONARY PLUGGABLE EQUIPMENT TYPE B;
- STATIONARY PLUGGABLE EQUIPMENT TYPE A with a single connection to the AC MAINS SUPPLY, and provided with a separate protective earthing terminal in addition to the main protective earthing terminal, if any (see 2.6.4.1). The installation instructions shall specify that this separate protective earthing terminal be permanently connected to earth;

NOTE 1 The above equipment is not required to be installed in a RESTRICTED ACCESS LOCATION. However, the requirement to be STATIONARY EQUIPMENT is more onerous than the similar requirements in 2.3.2.3 a) because the potential hazard is greater.

- MOVABLE OR STATIONARY PLUGGABLE EQUIPMENT TYPE A for use in a RESTRICTED ACCESS LOCATION, with a single connection to the AC MAINS SUPPLY, and provided with a separate protective earthing terminal in addition to the main protective earthing terminal, if any (see 2.6.4.1). The installation instructions shall specify that this separate protective earthing terminal be permanently connected to earth;

NOTE 2 The limitation of use to a RESTRICTED ACCESS LOCATION is more onerous than the similar requirements in 2.3.2.3 a) because the potential hazard is greater.

- STATIONARY PLUGGABLE EQUIPMENT TYPE A with simultaneous multiple connections to the AC MAINS SUPPLY, intended to be used in a location having equipotential bonding (such as a telecommunication centre, a dedicated computer room or a RESTRICTED ACCESS LOCATION). A separate additional protective earthing terminal shall be provided on the equipment. The installation instructions shall require all of the following:

- the building installation shall provide a means for connection to protective earth; and
- the equipment is to be connected to that means; and
- a SERVICE PERSON shall check whether or not the socket-outlet from which the equipment is to be powered provides a connection to the building protective earth. If not, the SERVICE PERSON shall arrange for the installation of a PROTECTIVE EARTHING CONDUCTOR from the separate protective earthing terminal to the protective earth wire in the building.

NOTE 3 In Finland, Norway and Sweden, TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment:

- STATIONARY PLUGGABLE EQUIPMENT TYPE A that
  - is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre,
  - has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR, and
  - is provided with instructions for the installation of that conductor by a SERVICE PERSON;
- STATIONARY PLUGGABLE EQUIPMENT TYPE B;
- STATIONARY PERMANENTLY CONNECTED EQUIPMENT.

NOTE 4 In Denmark, TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B.

If the result of the TOUCH CURRENT measurement on any of the above equipments exceeds 3,5 mA r.m.s., the following requirements a) and b) apply, and also, if relevant, those in 5.1.7.2.

- a) The r.m.s. PROTECTIVE CONDUCTOR CURRENT shall not exceed 5 % of the input current per line under normal operating conditions. If the load is unbalanced, the largest of the three line currents shall be used for this calculation.

To measure the PROTECTIVE CONDUCTOR CURRENT, the procedure for measuring TOUCH CURRENT is used but the measuring instrument is replaced by an ammeter of negligible impedance; and

- b) one of the following labels, or a label with similar wording, shall be affixed adjacent to the equipment AC MAINS SUPPLY connection:

**WARNING**  
**HIGH LEAKAGE CURRENT**  
**EARTH CONNECTION ESSENTIAL**  
**BEFORE CONNECTING SUPPLY**

**WARNING**  
**HIGH TOUCH CURRENT**  
**EARTH CONNECTION ESSENTIAL**  
**BEFORE CONNECTING SUPPLY**

*Compliance is checked by inspection and measurement.*

#### **5.1.7.2 Simultaneous multiple connections to the supply**

*The following applies to EUT tested in accordance with 5.1.2.3. If the result of the total TOUCH CURRENT measurement exceeds 3,5 mA r.m.s., the test is repeated with each AC MAINS SUPPLY and its PROTECTIVE EARTHING CONDUCTOR connected one at a time, with the other AC MAINS SUPPLIES, including their PROTECTIVE EARTHING CONDUCTORS, disconnected. However, if two connections to the AC MAINS SUPPLY are inseparable, for example, connections for a motor and its control circuits, they shall both be energized for a repeat test.*

NOTE It is not expected that the EUT will operate normally during this test.

*If the result of the TOUCH CURRENT measurement for any of the repeat tests exceeds 3,5 mA r.m.s., the requirements of 5.1.7.1 a) apply to that connection to the AC MAINS SUPPLY. For calculating 5 % of the input current per line, the input current from the AC MAINS SUPPLY, measured during the repeat test, is used.*

#### **5.1.8 Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks**

NOTE In this subclause, references to "TELECOMMUNICATION NETWORK connection ports" (or telecommunication ports) are intended to cover those connection points to which a TELECOMMUNICATION NETWORK is intended to be attached. Such references are not intended to include other data ports, such as those commonly identified as serial, parallel, keyboard, game, joystick, etc.

##### **5.1.8.1 Limitation of the touch current to a telecommunication network or to a cable distribution system**

The TOUCH CURRENT from equipment supplied from the AC MAINS SUPPLY to a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM shall be limited.

*Compliance is checked using the test circuit detailed in 5.1.3.*

*The tests are not applied to equipment where the circuit to be connected to a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM is connected to a protective earthing terminal in the equipment; the TOUCH CURRENT from the EUT to the TELECOMMUNICATION NETWORK or the CABLE DISTRIBUTION SYSTEM is considered to be zero.*

*For equipment having more than one circuit to be connected to a TELECOMMUNICATION NETWORK or a CABLE DISTRIBUTION SYSTEM, the test is applied to only one example of each type of circuit.*

*For equipment that has no main protective earthing terminal, the earthing conductor switch "e", if connected to a FUNCTIONAL EARTHING terminal on the EUT, is left open. Otherwise it is closed.*

*Terminal B of the measuring instrument is connected to the earthed (neutral) conductor of the supply. Terminal A is connected via the measurement switch "s" and the polarity switch "p2" to the TELECOMMUNICATION NETWORK or CABLE DISTRIBUTION SYSTEM connection port.*

*For single-phase equipment, the test is made in all combinations of the polarity switches "p1" and "p2".*

*For three-phase equipment, the test is made in both positions of polarity switch "p2".*

*After applying each test condition, the equipment is restored to its original operating state.*

*Test measurements are made using one of the measuring instruments of Annex D as described in 5.1.6.*

*None of the values measured in accordance with 5.1.8.1 shall exceed 0,25 mA r.m.s.*

#### **5.1.8.2 Summation of touch currents from telecommunication networks**

NOTE Annex W explains the background to 5.1.8.2.

An EUT that provides TELECOMMUNICATION NETWORK connection ports for connection of multiple items of other telecommunication equipment, shall not create a hazard for USERS and TELECOMMUNICATION NETWORK SERVICE PERSONS due to summation of TOUCH CURRENT.

In these requirements, abbreviations have the following meanings:

- $I_1$  is the TOUCH CURRENT received from other equipment via a TELECOMMUNICATION NETWORK at a telecommunication port of the EUT;
- $\sum I_1$  is the summation of TOUCH CURRENTS received from other equipment at all such telecommunication ports of the EUT;
- $I_2$  is the TOUCH CURRENT due to the AC MAINS SUPPLY of the EUT.

It shall be assumed that each telecommunication port receives 0,25 mA ( $I_1$ ) from the other equipment, unless the actual current from the other equipment is known to be lower.

The following requirements, a) or b) as applicable, shall be met:

##### **a) EUT with earthed telecommunication ports**

For an EUT in which each telecommunication port is connected to the main protective earthing terminal of the EUT, the following items 1), 2) and 3) shall be considered:



- 1) If  $\Sigma I_1$  (not including  $I_2$ ) exceeds 3,5 mA:
  - the equipment shall have provision for a permanent connection to protective earth in addition to the PROTECTIVE EARTHING CONDUCTOR in the power supply cord of PLUGGABLE EQUIPMENT TYPE A or PLUGGABLE EQUIPMENT B; and
  - the installation instructions shall specify the provision of a permanent connection to protective earth with a cross-sectional area of not less than 2,5 mm<sup>2</sup>, if mechanically protected, or otherwise 4,0 mm<sup>2</sup>; and
  - one of the following labels, or a label with similar wording, shall be affixed adjacent to the permanent earth connection. It is permitted to combine this label with the label in 5.1.7.1 b).

**WARNING**  
**HIGH LEAKAGE CURRENT**  
**EARTH CONNECTION ESSENTIAL**  
**BEFORE MAKING**  
**TELECOMMUNICATION NETWORK**  
**CONNECTIONS**

**WARNING**  
**HIGH TOUCH CURRENT**  
**EARTH CONNECTION ESSENTIAL**  
**BEFORE MAKING**  
**TELECOMMUNICATION NETWORK**  
**CONNECTIONS**

- 2)  $\Sigma I_1$  plus  $I_2$  shall comply with the limits in Table 5A (see 5.1.6).
- 3) If relevant, such equipment shall comply with 5.1.7. The value of  $I_2$  shall be used to calculate the 5 % input current limit per phase specified in 5.1.7.

*Compliance with item a) is checked by inspection and, if necessary, by test.*

*If the equipment has provision for a permanent protective earth connection in accordance with item 1) above, it is not necessary to make any measurements, except that  $I_2$  shall comply with the relevant requirements of 5.1.*

*TOUCH CURRENT tests, if necessary, are made using the relevant measuring instrument described in Annex D or any other instrument giving the same results. A capacitively coupled a.c. source of the same line frequency and phase as the AC MAINS SUPPLY is applied to each telecommunication port such that 0,25 mA, or the actual current from other equipment if known to be lower, is available to flow into that telecommunication port. The current flowing in the earthing conductor is then measured.*

**b) EUT whose telecommunication ports have no reference to protective earth**

If the telecommunication ports on the EUT do not have a common connection, each telecommunication port shall comply with 5.1.8.1.

If all telecommunication ports or any groups of such ports have a common connection, the total TOUCH CURRENT from each common connection shall not exceed 3,5 mA.

*Compliance with item b) is checked by inspection and, if necessary, by the tests of 5.1.8.1 or, if there are common connection points, by the following test.*

*A capacitively coupled a.c. source of the same frequency and phase as the AC MAINS SUPPLY is applied to each telecommunication port such that 0,25 mA, or the actual current from the other equipment if known to be lower, is available to flow into that telecommunication port. Common connection points are tested in accordance with 5.1, whether or not the points are accessible.*

## 5.2 Electric strength

NOTE Where specific reference to conducting the electric strength test according to 5.2 is made in other parts of this standard, it is intended that the electric strength test be conducted with the equipment in a well-heated condition according to 5.2.1.

Where specific reference to conducting the electric strength test according to 5.2.2 is made in other parts of this standard, it is intended that the electric strength test be conducted without preheating according to 5.2.1.

### 5.2.1 General

The electric strength of the SOLID INSULATION used in the equipment shall be adequate.

*Compliance is checked in accordance with 5.2.2 while the equipment is still in a well-heated condition immediately following the temperature test in 4.5.2.*

*If a component or subassembly is tested separately outside the equipment, it is brought to the temperature attained by that part during the temperature test in 4.5.2 (for example, by placing it in an oven) prior to performing the electric strength test. However, it is permitted to conduct electric strength testing of thin sheet material for SUPPLEMENTARY INSULATION or REINFORCED INSULATION, according to 2.10.5.9 or 2.10.5.10, at room temperature.*

*No electric strength test applies to insulation in a transformer between any winding and the core or screen, provided that the core or screen is totally enclosed or encapsulated and there is no electrical connection to the core or screen. However, the tests between parts that have terminations continue to apply.*

### 5.2.2 Test procedure

*Unless otherwise specified elsewhere in this standard the insulation is subjected either to a voltage of substantially sine-wave form having a frequency of 50 Hz or 60 Hz, or to a d.c. test voltage equal to the peak voltage of the prescribed a.c. test voltage.*

*The test voltages for electric strength for the appropriate grade of insulation [FUNCTIONAL INSULATION if required by 5.3.4 b), BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION] are as specified in either:*

- *Table 5B using the PEAK WORKING VOLTAGE (U), as determined in 2.10.2; or*
- *Table 5C using the REQUIRED WITHSTAND VOLTAGE, as determined in G.4.*

NOTE 1 In various places in this standard, special electric strength tests or test voltages are specified for certain situations. The test voltages in 5.2.2 do not apply to these situations.

NOTE 2 For consideration of temporary overvoltages, see IEC 60664-1.

*For equipment in Overvoltage Category I and Overvoltage Category II, it is permitted to use either Table 5B or Table 5C. However, for a SECONDARY CIRCUIT that is neither connected to protective earth nor provided with a protective screen in accordance with 2.6.1 e), Table 5C shall be used.*

*For equipment in Overvoltage Category III and Overvoltage Category IV, Table 5C shall be used.*

*The voltage applied to the insulation under test is gradually raised from zero to the prescribed voltage and held at that value for 60 s.*

*Where, elsewhere in this standard, ROUTINE TESTS are required to be conducted in accordance with 5.2.2, it is permitted to reduce the duration of the electric strength test to 1 s and to reduce the test voltage permitted in Table 5C, if used, by 10 %.*

*There shall be no insulation breakdown during the test.*

*Insulation breakdown is considered to have occurred when the current that flows as a result of the application of the test voltage rapidly increases in an uncontrolled manner, that is the insulation does not restrict the flow of the current. Corona discharge or a single momentary flashover is not regarded as insulation breakdown.*

*Insulation coatings are tested with metal foil in contact with the insulating surface. This procedure is limited to places where the insulation is likely to be weak, for example, where there are sharp metal edges under the insulation. If practicable, insulating linings are tested separately. Care is taken that the metal foil is so placed that no flashover occurs at the edges of the insulation. Where adhesive metal foil is used, the adhesive shall be conductive.*

*To avoid damage to components or insulation that are not involved in the test, disconnection of integrated circuits or the like and the use of equipotential bonding are permitted.*

*For equipment incorporating both REINFORCED INSULATION and lower grades of insulation, care is taken that the voltage applied to the REINFORCED INSULATION does not overstress BASIC INSULATION or SUPPLEMENTARY INSULATION.*

NOTE 3 Where there are capacitors across the insulation under test (for example, radio-frequency filter capacitors), it is recommended that d.c. test voltages are used.

NOTE 4 Components providing a d.c. path in parallel with the insulation to be tested, such as discharge resistors for filter capacitors, voltage limiting devices or surge suppressors, should be disconnected.

*Where insulation of a transformer winding varies along the length of the winding in accordance with 2.10.1.5, an electric strength test method is used that stresses the insulation accordingly.*

NOTE 5 An example of such a test method is an induced voltage test that is applied at a frequency sufficiently high to avoid saturation of the transformer. The input voltage is raised to a value that would induce an output voltage equal to the specified test voltage.

*No test is applied to FUNCTIONAL INSULATION, unless 5.3.4 b) has been selected.*

**Table 5B – Test voltages for electric strength tests  
based on peak working voltages  
Part 1**

| Grade of Insulation  | Points of application (as appropriate)                                    |                                                   |                                        |                                                     |                                      |                                                           |                                                                                   |
|----------------------|---------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------|-----------------------------------------------------|--------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------------------------------|
|                      | PRIMARY CIRCUIT to BODY                                                   |                                                   |                                        |                                                     |                                      | SECONDARY CIRCUIT to BODY                                 |                                                                                   |
|                      | PRIMARY CIRCUIT to SECONDARY CIRCUIT<br>between parts in PRIMARY CIRCUITS |                                                   |                                        |                                                     |                                      | between independent<br>SECONDARY CIRCUITS                 |                                                                                   |
|                      | WORKING VOLTAGE $U$ , peak or d.c.                                        |                                                   |                                        |                                                     |                                      | WORKING VOLTAGE $U$                                       |                                                                                   |
|                      | Up to and including 210 V <sup>a</sup>                                    | Over 210 V up to and including 420 V <sup>b</sup> | Over 420 V up to and including 1,41 kV | Over 1,41 kV up to and including 10 kV <sup>c</sup> | Over 10 kV up to and including 50 kV | Up to and including 42,4 V peak or 60 V d.c. <sup>d</sup> | Over 42,4 V peak or 60 V d.c. up to and including 10 kV peak or d.c. <sup>d</sup> |
|                      | Test voltage, volts a.c. r.m.s.                                           |                                                   |                                        |                                                     |                                      |                                                           |                                                                                   |
| FUNCTIONAL           | 1 000                                                                     | 1 500                                             | see $V_a$ in Table 5B, part 2          | see $V_a$ in Table 5B, part 2                       | 1,06 $U$                             | 500                                                       | see $V_a$ in Table 5B, part 2                                                     |
| BASIC, SUPPLEMENTARY | 1 000                                                                     | 1 500                                             | see $V_a$ in Table 5B, part 2          | see $V_a$ in Table 5B, part 2                       | 1,06 $U$                             | No test                                                   | see $V_a$ in Table 5B, part 2                                                     |
| REINFORCED           | 2 000                                                                     | 3 000                                             | 3 000                                  | see $V_b$ in Table 5B, part 2                       | 1,06 $U$                             | No test                                                   | see $V_b$ in Table 5B, part 2                                                     |

For PEAK WORKING VOLTAGES exceeding 10 kV peak or d.c. in SECONDARY CIRCUITS, the same test voltages as for PRIMARY CIRCUITS apply.

a Use this column for unearthed DC MAINS SUPPLIES up to and including 210 V [see 2.10.3.2 c)].

b Use this column for unearthed DC MAINS SUPPLIES over 210 V, up to and including 420 V [see 2.10.3.2 c)].

c Use this column for unearthed DC MAINS SUPPLIES over 420 V [see 2.10.3.2 c)].

d Use these columns for d.c. derived within the equipment from an AC MAINS SUPPLY or for DC MAINS SUPPLIES that are earthed within the same building.

**Table 5B – Test voltages for electric strength tests  
based on peak working voltages**

**Part 2**

| $U$<br>peak<br>or d.c. | $V_a$<br>a.c. r.m.s. | $V_b$<br>a.c. r.m.s. | $U$<br>peak<br>or d.c. | $V_a$<br>a.c. r.m.s. | $V_b$<br>a.c. r.m.s. | $U$<br>peak<br>or d.c. | $V_a$<br>a.c. r.m.s. | $V_b$<br>a.c. r.m.s. |
|------------------------|----------------------|----------------------|------------------------|----------------------|----------------------|------------------------|----------------------|----------------------|
| 34                     | 500                  | 800                  | 250                    | 1 261                | 2 018                | 1 750                  | 3 257                | 3 257                |
| 35                     | 507                  | 811                  | 260                    | 1 285                | 2 055                | 1 800                  | 3 320                | 3 320                |
| 36                     | 513                  | 821                  | 270                    | 1 307                | 2 092                | 1 900                  | 3 444                | 3 444                |
| 38                     | 526                  | 842                  | 280                    | 1 330                | 2 127                | 2 000                  | 3 566                | 3 566                |
| 40                     | 539                  | 863                  | 290                    | 1 351                | 2 162                | 2 100                  | 3 685                | 3 685                |
| 42                     | 551                  | 882                  | 300                    | 1 373                | 2 196                | 2 200                  | 3 803                | 3 803                |
| 44                     | 564                  | 902                  | 310                    | 1 394                | 2 230                | 2 300                  | 3 920                | 3 920                |
| 46                     | 575                  | 920                  | 320                    | 1 414                | 2 263                | 2 400                  | 4 034                | 4 034                |
| 48                     | 587                  | 939                  | 330                    | 1 435                | 2 296                | 2 500                  | 4 147                | 4 147                |
| 50                     | 598                  | 957                  | 340                    | 1 455                | 2 328                | 2 600                  | 4 259                | 4 259                |
| 52                     | 609                  | 974                  | 350                    | 1 474                | 2 359                | 2 700                  | 4 369                | 4 369                |
| 54                     | 620                  | 991                  | 360                    | 1 494                | 2 390                | 2 800                  | 4 478                | 4 478                |
| 56                     | 630                  | 1 008                | 380                    | 1 532                | 2 451                | 2 900                  | 4 586                | 4 586                |
| 58                     | 641                  | 1 025                | 400                    | 1 569                | 2 510                | 3 000                  | 4 693                | 4 693                |
| 60                     | 651                  | 1 041                | 420                    | 1 605                | 2 567                | 3 100                  | 4 798                | 4 798                |
| 62                     | 661                  | 1 057                | 440                    | 1 640                | 2 623                | 3 200                  | 4 902                | 4 902                |
| 64                     | 670                  | 1 073                | 460                    | 1 674                | 2 678                | 3 300                  | 5 006                | 5 006                |
| 66                     | 680                  | 1 088                | 480                    | 1 707                | 2 731                | 3 400                  | 5 108                | 5 108                |
| 68                     | 690                  | 1 103                | 500                    | 1 740                | 2 784                | 3 500                  | 5 209                | 5 209                |
| 70                     | 699                  | 1 118                | 520                    | 1 772                | 2 835                | 3 600                  | 5 309                | 5 309                |
| 72                     | 708                  | 1 133                | 540                    | 1 803                | 2 885                | 3 800                  | 5 507                | 5 507                |
| 74                     | 717                  | 1 147                | 560                    | 1 834                | 2 934                | 4 000                  | 5 702                | 5 702                |
| 76                     | 726                  | 1 162                | 580                    | 1 864                | 2 982                | 4 200                  | 5 894                | 5 894                |
| 78                     | 735                  | 1 176                | 588                    | 1 875                | 3 000                | 4 400                  | 6 082                | 6 082                |
| 80                     | 744                  | 1 190                | 600                    | 1 893                | 3 000                | 4 600                  | 6 268                | 6 268                |
| 85                     | 765                  | 1 224                | 620                    | 1 922                | 3 000                | 4 800                  | 6 452                | 6 452                |
| 90                     | 785                  | 1 257                | 640                    | 1 951                | 3 000                | 5 000                  | 6 633                | 6 633                |
| 95                     | 805                  | 1 288                | 660                    | 1 979                | 3 000                | 5 200                  | 6 811                | 6 811                |
| 100                    | 825                  | 1 319                | 680                    | 2 006                | 3 000                | 5 400                  | 6 987                | 6 987                |
| 105                    | 844                  | 1 350                | 700                    | 2 034                | 3 000                | 5 600                  | 7 162                | 7 162                |
| 110                    | 862                  | 1 379                | 720                    | 2 060                | 3 000                | 5 800                  | 7 334                | 7 334                |
| 115                    | 880                  | 1 408                | 740                    | 2 087                | 3 000                | 6 000                  | 7 504                | 7 504                |
| 120                    | 897                  | 1 436                | 760                    | 2 113                | 3 000                | 6 200                  | 7 673                | 7 673                |
| 125                    | 915                  | 1 463                | 780                    | 2 138                | 3 000                | 6 400                  | 7 840                | 7 840                |
| 130                    | 931                  | 1 490                | 800                    | 2 164                | 3 000                | 6 600                  | 8 005                | 8 005                |
| 135                    | 948                  | 1 517                | 850                    | 2 225                | 3 000                | 6 800                  | 8 168                | 8 168                |
| 140                    | 964                  | 1 542                | 900                    | 2 285                | 3 000                | 7 000                  | 8 330                | 8 330                |
| 145                    | 980                  | 1 568                | 950                    | 2 343                | 3 000                | 7 200                  | 8 491                | 8 491                |
| 150                    | 995                  | 1 593                | 1 000                  | 2 399                | 3 000                | 7 400                  | 8 650                | 8 650                |
| 152                    | 1 000                | 1 600                | 1 050                  | 2 454                | 3 000                | 7 600                  | 8 807                | 8 807                |
| 155                    | 1 000                | 1 617                | 1 100                  | 2 508                | 3 000                | 7 800                  | 8 964                | 8 964                |
| 160                    | 1 000                | 1 641                | 1 150                  | 2 560                | 3 000                | 8 000                  | 9 119                | 9 119                |
| 165                    | 1 000                | 1 664                | 1 200                  | 2 611                | 3 000                | 8 200                  | 9 273                | 9 273                |
| 170                    | 1 000                | 1 688                | 1 250                  | 2 661                | 3 000                | 8 400                  | 9 425                | 9 425                |
| 175                    | 1 000                | 1 711                | 1 300                  | 2 710                | 3 000                | 8 600                  | 9 577                | 9 577                |
| 180                    | 1 000                | 1 733                | 1 350                  | 2 758                | 3 000                | 8 800                  | 9 727                | 9 727                |
| 184                    | 1 000                | 1 751                | 1 400                  | 2 805                | 3 000                | 9 000                  | 9 876                | 9 876                |
| 185                    | 1 097                | 1 755                | 1 410                  | 2 814                | 3 000                | 9 200                  | 10 024               | 10 024               |
| 190                    | 1 111                | 1 777                | 1 450                  | 2 868                | 3 000                | 9 400                  | 10 171               | 10 171               |
| 200                    | 1 137                | 1 820                | 1 500                  | 2 934                | 3 000                | 9 600                  | 10 317               | 10 317               |
| 210                    | 1 163                | 1 861                | 1 550                  | 3 000                | 3 000                | 9 800                  | 10 463               | 10 463               |
| 220                    | 1 189                | 1 902                | 1 600                  | 3 065                | 3 065                | 10 000                 | 10 607               | 10 607               |
| 230                    | 1 214                | 1 942                | 1 650                  | 3 130                | 3 130                |                        |                      |                      |
| 240                    | 1 238                | 1 980                | 1 700                  | 3 194                | 3 194                |                        |                      |                      |

Linear interpolation is permitted between the nearest two points.

<sup>a</sup> At these voltages, the values of  $V_b$  are determined by the general curve  $V_b = 155,86 U^{0,4638}$  and are not  $1,6 V_a$ .

**Table 5C – Test voltages for electric strength tests  
based on required withstand voltages**

| REQUIRED WITHSTAND VOLTAGE<br>up to and including<br>kV peak                                                                                                                                                                                                               | Test voltage for FUNCTIONAL,<br>BASIC OR SUPPLEMENTARY<br>INSULATION | Test voltage for<br>REINFORCED INSULATION |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------|
|                                                                                                                                                                                                                                                                            | kV peak or d.c.                                                      |                                           |
| 0,33                                                                                                                                                                                                                                                                       | 0,35                                                                 | 0,7                                       |
| 0,5                                                                                                                                                                                                                                                                        | 0,55                                                                 | 1,1                                       |
| 0,8                                                                                                                                                                                                                                                                        | 0,9                                                                  | 1,8                                       |
| 1,5                                                                                                                                                                                                                                                                        | 1,5                                                                  | 3                                         |
| 2,5                                                                                                                                                                                                                                                                        | 2,5                                                                  | 5                                         |
| 4,0                                                                                                                                                                                                                                                                        | 4,0                                                                  | 8                                         |
| 6,0                                                                                                                                                                                                                                                                        | 6,0                                                                  | 10                                        |
| 8,0                                                                                                                                                                                                                                                                        | 8,0                                                                  | 13                                        |
| 12                                                                                                                                                                                                                                                                         | 12                                                                   | 19                                        |
| $U^a$                                                                                                                                                                                                                                                                      | $1,0 \times U$                                                       | $1,6 \times U$                            |
| Linear interpolation is permitted between the nearest two points.                                                                                                                                                                                                          |                                                                      |                                           |
| If FUNCTIONAL INSULATION is tested (as required by 5.3.4 b), the test voltage for a WORKING VOLTAGE up to and including 42,4 V peak or 60 V d.c. shall not exceed 707 V peak or d.c. For a higher WORKING VOLTAGE, the test voltage given in Table 5B or Table 5C is used. |                                                                      |                                           |
| <sup>a</sup> $U$ is any REQUIRED WITHSTAND VOLTAGE higher than 12,0 kV.                                                                                                                                                                                                    |                                                                      |                                           |

### 5.3 Abnormal operating and fault conditions

#### 5.3.1 Protection against overload and abnormal operation

Equipment shall be so designed that the risk of fire or electric shock due to mechanical or electrical overload or failure, or due to abnormal operation or careless use, is limited as far as practicable.

After abnormal operation or a single fault (see 1.4.14), the equipment shall remain safe for an OPERATOR in the meaning of this standard, but it is not required that the equipment should still be in full working order. It is permitted to use fusible links, THERMAL CUT-OUTS, overcurrent protection devices and the like to provide adequate protection.

*Compliance is checked by inspection and by the tests of 5.3. Before the start of each test, it is checked that the equipment is operating normally.*

*If a component or subassembly is so enclosed that short-circuiting or disconnection as specified in 5.3 is not practicable or is difficult to perform without damaging the equipment, it is permitted to make the tests on sample parts provided with special connecting leads. If this is not possible or not practical, the component or subassembly as a whole shall pass the tests.*

*Equipment is tested by applying any condition that may be expected in normal use and foreseeable misuse.*

*In addition, equipment that is provided with a protective covering, is tested with the covering in place under normal idling conditions until steady conditions are established.*

### 5.3.2 Motors

Under overload, locked rotor and other abnormal conditions, motors shall not create a hazard due to excessive temperatures.

NOTE Methods of achieving this include the following:

- the use of motors that do not overheat under locked-rotor conditions (protection by inherent or external impedance);
- the use in SECONDARY CIRCUITS of motors that may exceed the permitted temperature limits but that do not create a hazard;
- the use of a device responsive to motor current;
- the use of an integral THERMAL CUT-OUT;
- the use of a sensing circuit that disconnects power from the motor in a sufficiently short time to prevent overheating if, for example, the motor fails to perform its intended function.

*Compliance is checked by the applicable test of Annex B.*

### 5.3.3 Transformers

Transformers shall be protected against overload, for example, by

- overcurrent protection,
- internal THERMAL CUT-OUTS, or
- use of current limiting transformers.

*Compliance is checked by the applicable tests of Clause C.1.*

### 5.3.4 Functional insulation

For FUNCTIONAL INSULATION, CLEARANCES and CREEPAGE DISTANCES shall satisfy one of the following requirements a) or b) or c).

For insulation between a SECONDARY CIRCUIT and an inaccessible conductive part that is earthed for functional reasons, CLEARANCES and CREEPAGE DISTANCES shall satisfy a) or b) or c).

- a) They meet the CLEARANCE and CREEPAGE DISTANCE requirements for FUNCTIONAL INSULATION in 2.10 (or Annex G).
- b) They withstand the electric strength tests for FUNCTIONAL INSULATION in 5.2.2.
- c) They are short-circuited where a short-circuit could cause
  - overheating of any material creating a risk of fire, unless the material that could be overheated is of V-1 CLASS MATERIAL, or
  - thermal damage to BASIC INSULATION, SUPPLEMENTARY INSULATION OR REINFORCED INSULATION, thereby creating a risk of electric shock.

*Compliance criteria for 5.3.4 c) are in 5.3.9.*

### 5.3.5 Electromechanical components

*Where a hazard is likely to occur, electromechanical components other than motors are checked for compliance with 5.3.1 by applying the following conditions:*

- *mechanical movement shall be locked in the most disadvantageous position while the component is energized normally; and*



- *in the case of a component that is normally energized intermittently, a fault shall be simulated in the drive circuit to cause continuous energizing of the component.*

*The duration of each test shall be as follows:*

- *for equipment or components whose failure to operate is not evident to the OPERATOR: as long as necessary to establish steady conditions or up to the interruption of the circuit due to other consequences of the simulated fault condition, whichever is the shorter; and*
- *for other equipment and components: 5 min or up to interruption of the circuit due to a failure of the component (for example, burn-out) or to other consequences of the simulated fault condition, whichever is the shorter.*

*For compliance criteria see 5.3.9.*

### **5.3.6 Audio amplifiers in information technology equipment**

*Equipment having audio amplifiers shall be tested in accordance with 4.3.4 and 4.3.5 of IEC 60065. The equipment shall be operating normally before the tests are conducted.*

### **5.3.7 Simulation of faults**

*For components and circuits other than those covered by 5.3.2, 5.3.3, 5.3.5 and 5.3.6, compliance is checked by simulating single fault conditions (see 1.4.14).*

NOTE 1 In Canada and the United States, additional requirements for overloading and other fault simulation for internal circuit connections apply.

*The following faults are simulated.*

- a) *Short-circuit or disconnection of any components in PRIMARY CIRCUITS.*
- b) *Short-circuit or disconnection of any components where failure could adversely affect SUPPLEMENTARY INSULATION or REINFORCED INSULATION.*
- c) *Short-circuit, disconnection or overloading of all relevant components and parts unless they comply with the requirements of 4.7.3.*

NOTE 2 An overload condition is any condition between NORMAL LOAD and maximum current condition up to short-circuit.

- d) *Faults arising from connection of the most unfavourable load impedance to terminals and connectors that deliver power from the equipment, other than mains power outlets.*
- e) *Other single faults specified in 1.4.14.*

*Where there are multiple outlets having the same internal circuitry, the test is only made on one sample outlet.*

*For components in PRIMARY CIRCUITS associated with the mains input, such as the supply cord, appliance couplers, EMC filtering components, switches and their interconnecting wiring, no fault is simulated, provided that the component complies with 5.3.4 a) or 5.3.4 b).*

NOTE 3 Such components are still subject to other requirements of this standard where applicable, including 1.5.1, 2.10.5, 4.7.3 and 5.2.2.



*In addition to the compliance criteria given in 5.3.9, temperatures in the transformer supplying the component under test shall not exceed those specified in Clause C.1, and account shall be taken of the exception detailed in Clause C.1 regarding transformers that would require replacement.*

### **5.3.8 Unattended equipment**

Equipment intended for unattended use and having THERMOSTATS, TEMPERATURE LIMITERS and THERMAL CUT-OUTS, or having a capacitor not protected by a fuse or the like connected in parallel with the contacts, is subjected to the following tests.

THERMOSTATS, TEMPERATURE LIMITERS and THERMAL CUT-OUTS are also assessed for compliance with the requirements in Clause K.6.

*Equipment is operated under the conditions specified in 4.5.2 and any control that serves to limit the temperature is short-circuited. If the equipment is provided with more than one THERMOSTAT, TEMPERATURE LIMITER or THERMAL CUT-OUT, each is short-circuited, one at a time.*

*If interruption of the current does not occur, the equipment is switched off as soon as steady conditions are established and is permitted to cool down to approximately room temperature.*

*For equipment not intended for continuous operation, the test is repeated until the temperature has stabilized, regardless of any marking of RATED OPERATING TIME or RATED RESTING TIME. For this test the THERMOSTATS, TEMPERATURE LIMITERS and THERMAL CUT-OUTS are not short-circuited.*

*If in any test a MANUAL RESET THERMAL CUT-OUT operates, or if the current is otherwise interrupted before the temperature has stabilized, the heating period is taken to have ended; but if the interruption is due to the rupture of an intentionally weak part, the test is repeated on a second sample. Both samples shall comply with the conditions specified in 5.3.9.*

### **5.3.9 Compliance criteria for abnormal operating and fault conditions**

#### **5.3.9.1 During the tests**

*During the tests of 5.3.4 c), 5.3.5, 5.3.7, 5.3.8 and Clause C.1:*

- if a fire occurs, it shall not propagate beyond the equipment; and*
- the equipment shall not emit molten metal; and*
- ENCLOSURES shall not deform in such a way as to cause non-compliance with 2.1.1, 2.6.1, 2.10.3 (or Annex G) and 4.4.1.*

*Moreover, during the tests of 5.3.7 c), unless otherwise specified, the temperatures of insulating materials other than thermoplastic materials shall not exceed those in Table 5D.*

**Table 5D – Temperature limits for overload conditions**

| Thermal class                                                                                                    |         |         |         |         |     |     |     |
|------------------------------------------------------------------------------------------------------------------|---------|---------|---------|---------|-----|-----|-----|
| 105 (A)                                                                                                          | 120 (E) | 130 (B) | 155 (F) | 180 (H) | 200 | 220 | 250 |
| 150                                                                                                              | 165     | 175     | 200     | 225     | 245 | 265 | 295 |
| The designations A to H, formerly assigned in IEC 60085 to thermal classes 105 to 180, are given in parentheses. |         |         |         |         |     |     |     |

Maximum temperature °C

*If the failure of the insulation would not result in HAZARDOUS VOLTAGES or HAZARDOUS ENERGY LEVELS becoming accessible, a maximum temperature of 300 °C is permitted. Higher temperatures are permitted for insulation made of glass or ceramic material.*

### 5.3.9.2 After the tests

*After the tests of 5.3.4 c), 5.3.5, 5.3.7 and 5.3.8 and Clause C.1, an electric strength test according to 5.2.2 is made on:*

- *REINFORCED INSULATION; and*
- *BASIC INSULATION or SUPPLEMENTARY INSULATION forming part of DOUBLE INSULATION; and*
- *BASIC INSULATION between the PRIMARY CIRCUIT and the main protective earthing terminal;*

*if any of the following applies:*

- *the CLEARANCE or CREEPAGE DISTANCE has been reduced below the value specified in 2.10 (or Annex G); or*
- *the insulation shows visible signs of damage; or*
- *the insulation cannot be inspected.*

## 6 Connection to telecommunication networks

If the equipment is to be connected to a TELECOMMUNICATION NETWORK, the requirements of Clause 6 apply in addition to the requirements of Clauses 1 to 5 in this standard.

NOTE 1 It is assumed that adequate measures according to ITU-T Recommendation K.11 have been taken to reduce the likelihood that the overvoltages presented to the equipment exceed 1,5 kV peak. In installations where overvoltages presented to the equipment may exceed 1,5 kV peak, additional measures such as surge suppression may be necessary.

NOTE 2 Legal requirements may exist regarding the connection of information technology equipment to a TELECOMMUNICATION NETWORK operated by a public network operator.

NOTE 3 The requirements of 2.3.2, 6.1.2 and 6.2 can apply to the same physical insulation or CLEARANCE.

NOTE 4 The AC MAINS SUPPLY system, if used as a communication transmission medium, is not a TELECOMMUNICATION NETWORK (see 1.2.13.8), and Clause 6 does not apply. The other clauses of this standard will apply to coupling components, such as signal transformers, connected between the mains and other circuitry. The requirements for DOUBLE INSULATION or REINFORCED INSULATION will generally apply. See also IEC 60664-1 and Annex Z of this standard for overvoltages to be expected at various points in the AC MAINS SUPPLY system.

NOTE 5 In Canada and the United States, additional requirements apply for TNV CIRCUITS for protection from overvoltage due to power line cross (telecommunication line contact with a power line), induction and earth potential rise from power line fault current.

### 6.1 Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment

#### 6.1.1 Protection from hazardous voltages

Circuitry intended to be directly connected to a TELECOMMUNICATION NETWORK shall comply with the requirements for an SELV CIRCUIT or a TNV CIRCUIT.

Where protection of the TELECOMMUNICATION NETWORK relies on the protective earthing of the equipment, the installation instructions and other relevant literature shall state that integrity of protective earthing shall be ensured, see also 1.7.2.1.

*Compliance is checked by inspection and measurement.*

#### 6.1.2 Separation of the telecommunication network from earth

##### 6.1.2.1 Requirements

Except as specified in 6.1.2.2, there shall be insulation between circuitry intended to be connected to a TELECOMMUNICATION NETWORK and any parts or circuitry that will be earthed in some applications, either within the EUT or via other equipment.

Surge suppressors that bridge the insulation shall have a minimum rated operating voltage  $U_{op}$  (for example, the sparkover voltage of a gas discharge tube) of

$$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$$

where

$U_{peak}$  is one of the following values:

for equipment intended to be installed in an area where the nominal voltage of the AC MAINS SUPPLY exceeds 130 V:  
for all other equipment:

360 V

180 V.

$\Delta U_{sp}$  is the maximum increase of the rated operating voltage due to variations in component production. If this is not specified by the component manufacturer,  $\Delta U_{sp}$  shall be taken as 10 % of the rated operating voltage of the component.

$\Delta U_{sa}$  is the maximum increase of the rated operating voltage due to the component ageing over the expected life of the equipment. If this is not specified by the component manufacturer,  $\Delta U_{sa}$  shall be taken as 10 % of the rated operating voltage of the component.

NOTE 1 ( $\Delta U_{sp} + \Delta U_{sa}$ ) may be a single value provided by the component manufacturer.

*Compliance is checked by inspection and by the following tests. The dimensional and construction requirements of 2.10 and Annex G do not apply for compliance with 6.1.2.*

NOTE 2 In Finland, Norway and Sweden, there are additional requirements for the insulation. For the complete text, see EN 60950-1:200X.

*Insulation is subjected to an electric strength test according to 5.2.2. The a.c. test voltage is as follows:*

- *for equipment intended to be installed in an area where the nominal AC MAINS SUPPLY voltage exceeds 130 V:* 1,5 kV
- *for all other equipment:* 1,0 kV.

*The test voltages apply whether or not the equipment is powered from the AC MAINS SUPPLY.*

*Components bridging the insulation that are left in place during electric strength testing shall not be damaged. There shall be no breakdown of insulation during electric strength testing.*

*It is permitted to remove components that bridge the insulation, other than capacitors, during electric strength testing.*

*If this option is chosen, an additional test with a test circuit according to Figure 6A is performed with all components in place.*

*For equipment powered from an AC MAINS SUPPLY, the test is performed with a voltage equal to the RATED VOLTAGE of the equipment or to the upper voltage of the RATED VOLTAGE RANGE. For equipment powered from a DC MAINS SUPPLY, the test is performed with a voltage equal to the highest nominal voltage of the AC MAINS SUPPLY in the region where the equipment is to be used, for example, 230 V for Europe or 120 V for North America.*

*The current flowing in the test circuit of Figure 6A shall not exceed 10 mA.*

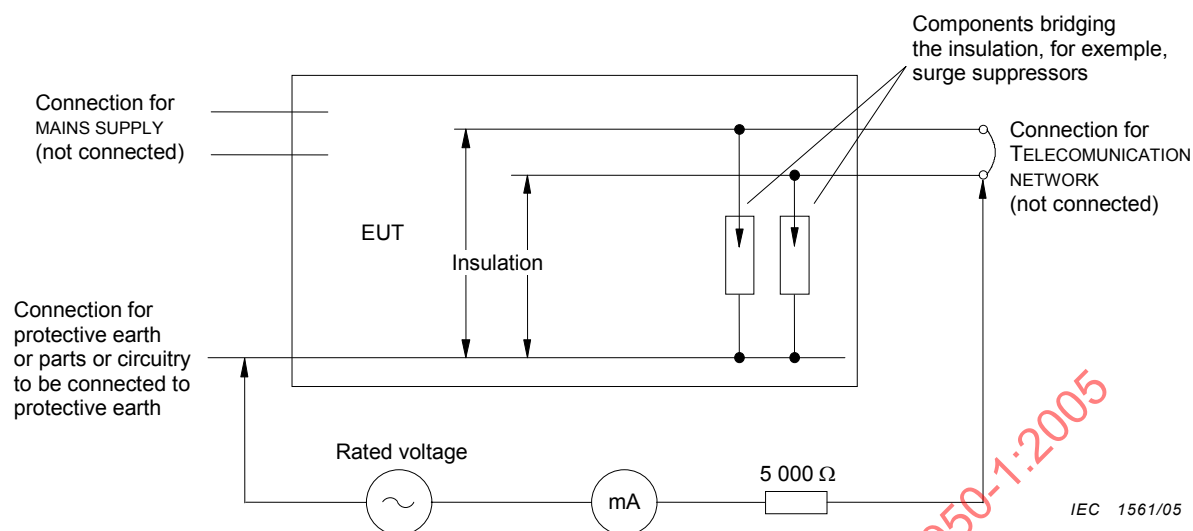


**Figure 6A – Test for separation between a telecommunication network and earth**

### 6.1.2.2 Exclusions

The requirements of 6.1.2.1 do not apply to any of the following:

- PERMANENTLY CONNECTED EQUIPMENT OR PLUGGABLE EQUIPMENT TYPE B;
- equipment that is intended to be installed by a SERVICE PERSON and has installation instructions that require the equipment to be connected to a socket-outlet with a protective earthing connection (see 6.1.1);
- equipment that has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor.

NOTE In Finland, Norway and Sweden, the exclusions are applicable only for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.

## 6.2 Protection of equipment users from overvoltages on telecommunication networks

### 6.2.1 Separation requirements

Equipment shall provide adequate electrical separation between a TNV-1 CIRCUIT or a TNV-3 CIRCUIT and the following parts of the equipment.

- a) Unearthed conductive parts and non-conductive parts of the equipment expected to be held or touched during normal use (for example, a telephone handset a keyboard or the entire exterior surface of a laptop or notebook computer).
- b) Parts and circuitry that can be touched by the test finger, Figure 2A (see 2.1.1.1), except contacts of connectors that cannot be touched by the test probe, Figure 2C (see 2.1.1.1).
- c) An SELV CIRCUIT, a TNV-2 CIRCUIT or a LIMITED CURRENT CIRCUIT provided for connection of other equipment. The requirement for separation applies whether or not this circuit is accessible.

These requirements do not apply where circuit analysis and equipment investigation indicate that adequate protection is assured by other means, for example, between two circuits each of which has a permanent connection to protective earth.

*Compliance is checked by inspection and by the tests of 6.2.2. The dimensional and constructional requirements of 2.10 and Annex G do not apply for compliance with 6.2.1.*

NOTE The requirements of 2.10 and Annex G may apply for compliance with 2.2 and 2.3. See Footnote e and Footnote f of Table 2H.

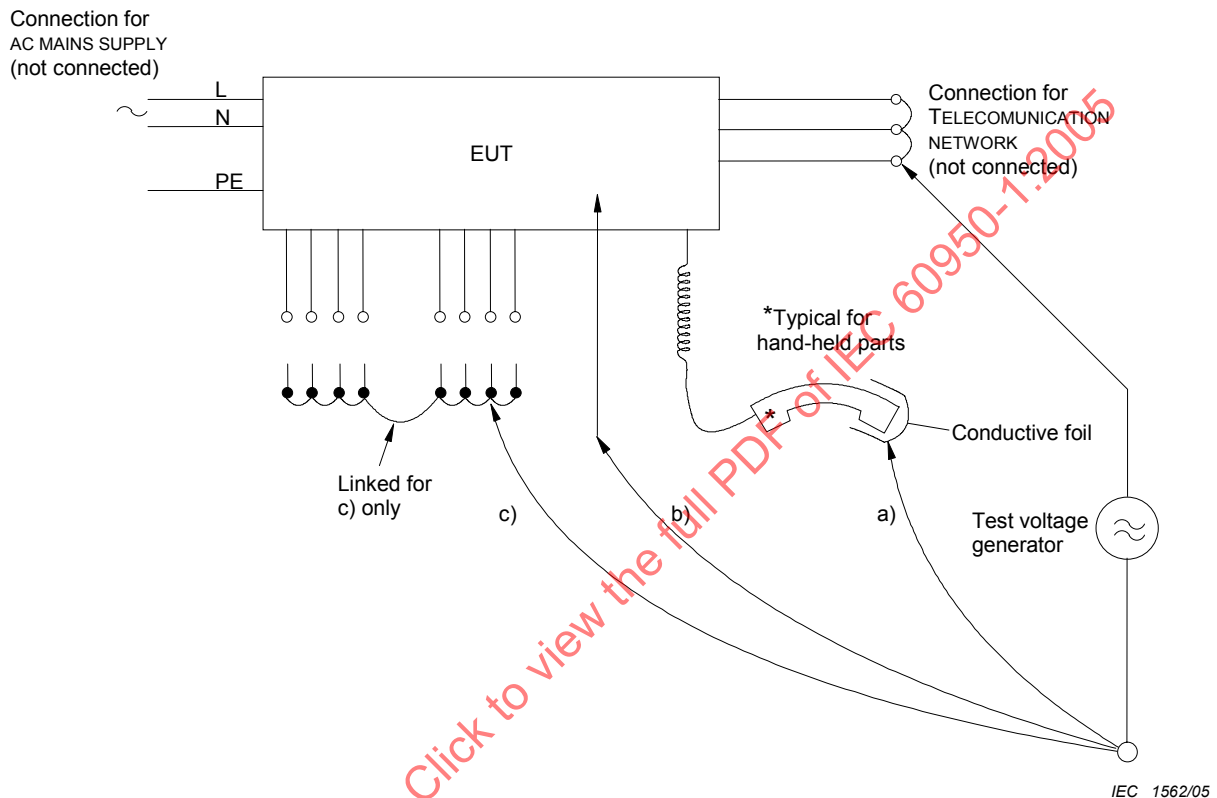


**Figure 6B – Application points of test voltage**

## 6.2.2 Electric strength test procedure

*Compliance with 6.2.1 is checked by the test of either 6.2.2.1 or 6.2.2.2.*

NOTE In Australia, the tests of both 6.2.2.1 and 6.2.2.2 apply.

*If a test is applied to a component (see 1.4.3), for example, a signal transformer, which is clearly intended to provide the separation required, the component shall not be bypassed by other components, mounting devices or wiring, unless these components or wiring also meet the separation requirements of 6.2.*

*For the tests, all conductors intended to be connected to the TELECOMMUNICATION NETWORK are connected together (see Figure 6B), including any conductors required by the TELECOMMUNICATION NETWORK authority to be connected to earth. Similarly, all conductors intended to be connected to other equipment are connected together for testing related to 6.2.1 c).*

*Non-conductive parts are tested with metal foil in contact with the surface. Where adhesive metal foil is used, the adhesive shall be conductive.*

### 6.2.2.1 Impulse test

*The electrical separation is subjected to ten impulses of alternating polarity, using the impulse test generator reference 1 of Table N.1. The interval between successive impulses is 60 s and  $U_c$  is equal to:*

- for 6.2.1 a): 2,5 kV; and
- for 6.2.1 b) and 6.2.1 c): 1,5 kV.

NOTE 1 The value of 2,5 kV for 6.2.1 a) has been chosen primarily to ensure the adequacy of the insulation concerned and it does not necessarily simulate likely overvoltages.

NOTE 2 In Australia, a value of  $U_c = 7,0$  kV is used in 6.2.1 a).

### 6.2.2.2 Steady-state test

*The electrical separation is subjected to an electric strength test according to 5.2.2.*

*The a.c. test voltage is:*

- for 6.2.1 a): 1,5 kV; and
- for 6.2.1 b) and 6.2.1 c): 1,0 kV.

NOTE In Australia, a value of 3,0 kV is used in 6.2.1 a) for hand-held telephones and headsets and 2,5 kV for other equipment, to simulate lightning surges on typical rural and semi rural network lines. A value of 1,5 kV is used in 6.2.1 b) and c).

*For 6.2.1 b) and 6.2.1 c), it is permitted to remove surge suppressors, provided that such devices pass the impulse test of 6.2.2.1 for 6.2.1 b) and 6.2.1 c) when tested as components outside the equipment. For 6.2.1 a), surge suppressors shall not be removed.*

### 6.2.2.3 Compliance criteria

*During the tests of 6.2.2.1 and 6.2.2.2, there shall be no breakdown of insulation.*

*Insulation breakdown is considered to have occurred when the current that flows as a result of the application of the test voltage rapidly increases in an uncontrolled manner, that is the insulation does not restrict the flow of current.*

*If a surge suppressor operates (or sparkover occurs within a gas discharge tube) during the test:*

- for 6.2.1 a), such operation represents a failure; and
- for 6.2.1 b) and 6.2.1 c), such operation is permitted during the impulse test; and
- for 6.2.1 b) and 6.2.1 c), such operation during the electric strength test (by any surge suppressor left in place) represents a failure.

*For impulse tests, damage to insulation is verified in one of two ways, as follows:*

- during the application of the impulses, by observation of oscillograms. Surge suppressor operation or breakdown through insulation is judged from the shape of an oscillogram.

- *after application of all the impulses, by an insulation resistance test. Disconnection of surge suppressors is permitted while insulation resistance is being measured. The test voltage is 500 V d.c. or, if surge suppressors are left in place, a d.c. test voltage that is 10 % less than the surge suppressor operating or striking voltage. The insulation resistance shall not be less than 2 MΩ.*

NOTE A description of procedures to judge whether a surge suppressor operation or breakdown of insulation has occurred, using oscillograms, is given in Annex S.

### 6.3 Protection of the telecommunication wiring system from overheating

Equipment intended to provide power over the telecommunication wiring system to remote equipment shall limit the output current to a value that does not cause damage to the telecommunication wiring system, due to overheating, under any external load condition. The maximum continuous current from equipment shall not exceed a current limit that is suitable for the minimum wire gauge specified in the equipment installation instructions. The current limit is 1,3 A if such wiring is not specified.

NOTE 1 The overcurrent protective device may be a discrete device such as a fuse, or a circuit that performs that function.

NOTE 2 The minimum wire diameter normally used in telecommunication wiring is 0,4 mm, for which the maximum continuous current for a multipair cable is 1,3 A. This wiring is not usually controlled by the equipment installation instructions, since the wiring is often installed independent of the equipment installation.

NOTE 3 Further current limitation may be necessary for equipment intended for connection to networks that are subject to overvoltages, due to operating parameters for protective devices.

*Compliance is checked as follows.*

*If current limiting is due to the inherent impedance of the power source, the output current into any resistive load, including a short-circuit, is measured. The current limit shall not be exceeded after 60 s of test.*

*If current limiting is provided by an overcurrent protective device having a specified time/current characteristic:*

- *the time/current characteristic shall show that a current equal to 110 % of the current limit will be interrupted within 60 min; and*

NOTE 4 Time/current characteristics of type gD and type gN fuses specified in IEC 60269-2-1 comply with the above limit. Type gD or type gN fuses rated 1 A, would meet the 1,3 A current limit.

- *the output current into any resistive load, including a short-circuit, with the overcurrent protective device bypassed, measured after 60 s of test, shall not exceed 1 000/U, where U is the output voltage measured in accordance with 1.4.5 with all load circuits disconnected.*

*If current limiting is provided by an overcurrent protective device that does not have a specified time/current characteristic:*

- *the output current into any resistive load, including a short-circuit, shall not exceed the current limit after 60 s of test; and*
- *the output current into any resistive load, including a short-circuit, with the overcurrent protective device bypassed, measured after 60 s of test, shall not exceed 1 000/U, where U is the output voltage measured in accordance with 1.4.5 with all load circuits disconnected.*



## 7 Connection to cable distribution systems

### 7.1 General

If the equipment is to be connected to a CABLE DISTRIBUTION SYSTEM, the requirements of Clause 7 apply in addition to the requirements of Clauses 1 to 5 of this standard.

NOTE 1 Unless the connection uses coaxial cable, the circuit is not a CABLE DISTRIBUTION SYSTEM, and Clause 6 applies.

NOTE 2 It is assumed that adequate measures have been taken to reduce the likelihood that transient overvoltages presented to the equipment exceed the following values:

- 10 kV for equipment to be connected only to an outdoor antenna;
- 4 kV to other equipment, see ITU-T Recommendations K.20, K.21 and K.45.

In installations where overvoltages presented to the equipment may exceed these values, additional measures such as surge suppression may be necessary.

NOTE 3 Legal requirements may exist regarding the connection of information technology equipment to a CABLE DISTRIBUTION SYSTEM operated by a public network operator.

NOTE 4 The AC MAINS SUPPLY system, if used as a communication medium, is not a CABLE DISTRIBUTION SYSTEM (see 1.2.13.14) and Clause 7 does not apply. For equipment to be connected to such systems, the other clauses of this standard will apply to coupling components, such as signal transformers and capacitors, connected between the mains and other circuitry. The requirements for DOUBLE INSULATION or REINFORCED INSULATION will generally apply. See also Annex Z of this standard and IEC 60664-1 for overvoltages to be expected at various points in the AC MAINS SUPPLY system.

NOTE 5 It is assumed that the cable shield will be earthed in accordance with the installation requirements of IEC 60728-11.

### 7.2 Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment

Circuitry intended to be directly connected to a CABLE DISTRIBUTION SYSTEM shall comply with the requirements for a TNV-1 CIRCUIT, a TNV-3 CIRCUIT or a HAZARDOUS VOLTAGE SECONDARY CIRCUIT, depending on the normal operating voltage.

Where protection of the CABLE DISTRIBUTION SYSTEM relies on protective earthing of the equipment, the installation instructions and other relevant literature shall state that the integrity of the protective earth must be ensured, see also 1.7.2.1.

*Compliance is checked by inspection and by measurement.*

NOTE For requirements in Finland, Norway and Sweden, see 6.1.2.1, Note 2 and 6.1.2.2, Note. The term TELECOMMUNICATION NETWORK in 6.1.2 is replaced by CABLE DISTRIBUTION SYSTEM.

### 7.3 Protection of equipment users from overvoltages on the cable distribution system

The requirements and tests of 6.2 apply except that the term "TELECOMMUNICATION NETWORK" is replaced by "CABLE DISTRIBUTION SYSTEM" throughout 6.2. When applying 6.2 to CABLE DISTRIBUTION SYSTEMS, the separation requirements apply only to those circuit parts that are directly connected to the inner conductor (or conductors) of the coaxial cable; the separation requirements do not apply to those circuit parts that are directly connected to the outer screen or screens.

However, the separation requirements and tests of 6.2.1 a), b) and c) do not apply to a CABLE DISTRIBUTION SYSTEM if all of the following apply:

- the circuit under consideration is a TNV-1 CIRCUIT; and
- the common or earthed side of the circuit is connected to the screen of the coaxial cable and to all accessible parts and circuits (SELV, accessible metal parts and LIMITED CURRENT CIRCUITS, if any); and
- the screen of the coaxial cable is intended to be connected to earth in the building installation.

NOTE 1 In Sweden, there are many buildings where the screen of the coaxial cable is normally not connected to the earth in the building installation.

NOTE 2 For installation conditions in Norway, see IEC 60728-11:2005.

*Compliance is checked by inspection and the application of the relevant requirements and tests of 6.2.*

## 7.4 Insulation between primary circuits and cable distribution systems

### 7.4.1 General

Except as specified below, the insulation between the PRIMARY CIRCUIT and the terminal or lead provided for the connection of a CABLE DISTRIBUTION SYSTEM shall pass either:

- the voltage surge test of 7.4.2 for equipment intended to be connected to outdoor antennas; or
- the impulse test of 7.4.3 for equipment intended to be connected to other CABLE DISTRIBUTION SYSTEMS.

If an equipment is intended for connection to both an outdoor antenna and another CABLE DISTRIBUTION SYSTEM, it shall pass the tests of 7.4.2 and 7.4.3.

The above requirement does not apply to any of the following:

- equipment intended for indoor use only, provided with a built in (integral) antenna and not provided with a connection to a CABLE DISTRIBUTION SYSTEM;
- PERMANENTLY CONNECTED EQUIPMENT or PLUGGABLE EQUIPMENT TYPE B, in which the circuit intended to be connected to the CABLE DISTRIBUTION SYSTEM is also connected to protective earth in accordance with 2.6.1 e);
- PLUGGABLE EQUIPMENT TYPE A, in which the circuit intended to be connected to the CABLE DISTRIBUTION SYSTEM is also connected to protective earth in accordance with 2.6.1 e); and either
  - is intended to be installed by a SERVICE PERSON and has installation instructions that require the equipment to be connected to a socket-outlet with a protective earthing connection; or
  - has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR, including instructions for the installation of that conductor.

*Compliance is checked by inspection and, if necessary, by the voltage surge test of 7.4.2 or the impulse test of 7.4.3.*

NOTE Minimum CLEARANCES are determined by the requirements of 2.10.3 (or Annex G). It may be necessary to increase the CLEARANCES between PRIMARY CIRCUITS and SECONDARY CIRCUITS intended for connection to CABLE DISTRIBUTION SYSTEMS so that the circuits can pass the tests of 7.4.2 or 7.4.3.

### 7.4.2 Voltage surge test

*The test is applied between the supply circuit terminals and the main protective earthing terminal, if any, joined together, and the connection points for the CABLE DISTRIBUTION SYSTEM, excluding any earthed conductor, joined together. All components connected between the connection points for the CABLE DISTRIBUTION SYSTEM and the main protective earthing terminal are disconnected before the test. If an on/off switch is provided, it is in the "ON" position.*

*Conditioning pulses are applied between*

- *the connection points for the CABLE DISTRIBUTION SYSTEM, excluding any earthed conductor, joined together, and*
- *the supply circuit terminals and the main protective earthing terminal, if any, joined together.*

*Fifty discharges are applied from the impulse test generator reference 3 of Table N.1, at a maximum rate of 12 pulses per minute, with  $U_c$  equal to 10 kV.*

*After the above conditioning, the relevant electric strength tests of 5.2.2 are applied.*

### 7.4.3 Impulse test

*The test is applied between the supply circuit terminals and the main protective earthing terminal, if any, joined together, and the connection points for the CABLE DISTRIBUTION SYSTEM, excluding any earthed conductor, joined together. All components connected between the connection points for the CABLE DISTRIBUTION SYSTEM and the main protective earthing terminal are disconnected before the test. If an on/off switch is provided, it is in the "ON" position.*

*Ten conditioning pulses of alternating polarity are applied from the impulse test generator reference 1 of Table N.1. The interval between successive pulses is 60 s, and  $U_c$  is equal to*

- *5 kV for power-fed repeaters;*
- *4 kV for all other terminal and network equipment.*

*After the above conditioning, the relevant electric strength tests of 5.2.2 are applied.*

## **Annex A** (normative)

### **Tests for resistance to heat and fire**

It should be noted that toxic fumes may be given off during the tests. Where appropriate the tests should be conducted either under a ventilated hood or in a well-ventilated room, but free from draughts that could invalidate the tests.

#### **A.1 Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg and of stationary equipment (see 4.7.3.2)**

##### **A.1.1 Samples**

Three samples, each consisting of either a complete FIRE ENCLOSURE or a section of the FIRE ENCLOSURE representing the thinnest significant wall thickness and including any ventilation opening, are tested.

##### **A.1.2 Conditioning of samples**

Prior to being tested, the samples are conditioned in a circulating air oven for a period of 7 days (168 h), at a uniform temperature 10 K higher than the maximum temperature reached by the material measured during the test of 4.5.2, or 70 °C, whichever is the higher, and then cooled to room temperature.

##### **A.1.3 Mounting of samples**

Samples are mounted as they would be in actual use. A layer of untreated surgical cotton is located 300 mm below the point of application of the test flame.

##### **A.1.4 Test flame**

The test flame according to IEC 60695-11-3 is used.

##### **A.1.5 Test procedure**

The test flame is applied to an inside surface of the sample, at a location judged to be likely to become ignited because of its proximity to a source of ignition. If a vertical part is involved, the flame is applied at an angle of approximately 20° from the vertical. If ventilation openings are involved, the flame is applied to an edge of an opening, otherwise to a solid surface. In all cases, the tip of the inner blue cone is to be in contact with the sample. The flame is applied for 5 s and removed for 5 s. This operation is repeated, whether or not the sample is flaming, until the sample has been subjected to five applications of the test flame to the same location.

The test is repeated on the remaining two samples. If more than one part of the FIRE ENCLOSURE is near a source of ignition, each sample is tested with the flame applied to a different location.

### **A.1.6 Compliance criteria**

*During the test, the sample shall not release either flaming drops or particles capable of igniting the surgical cotton. The sample shall not continue to burn for more than 1 min after the fifth application of the test flame, and shall not be consumed completely.*

## **A.2 Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)**

### **A.2.1 Samples**

*Three samples are tested. For FIRE ENCLOSURES, each sample consists of either a complete FIRE ENCLOSURE or a section of the FIRE ENCLOSURE representing the thinnest significant wall thickness and including any ventilation opening. For material to be located within the FIRE ENCLOSURE, each sample of the material consists of one of the following:*

- the complete part; or*
- a section of the part representing the thinnest significant wall thickness; or*
- a test plaque or bar of uniform thickness representing the thinnest significant section of the part.*

*For components to be located within the FIRE ENCLOSURE, each sample is to be a complete component.*

### **A.2.2 Conditioning of samples**

*Prior to being tested, the samples are conditioned in a circulating air oven for a period of 7 days (168 h), at a uniform temperature 10 K higher than the maximum temperature of the part measured during the test of 4.5.2, or 70 °C, whichever is the higher, and then cooled to room temperature.*

### **A.2.3 Mounting of samples**

*Samples are mounted and oriented as they would be in actual use.*

### **A.2.4 Test flame**

*The test flame according to IEC 60695-11-4 is used.*

### **A.2.5 Test procedure**

*The test flame is applied to an inside surface of the sample at a point judged to be likely to become ignited because of its proximity to a source of ignition. For the evaluation of materials located within the FIRE ENCLOSURE, it is permitted to apply the test flame to an external surface of the sample. For the evaluation of components to be located within the FIRE ENCLOSURE, the test flame is applied directly to the component.*

*If a vertical part is involved, the flame is applied at an angle of approximately 20° from the vertical. If ventilation openings are involved, the flame is applied to an edge of an opening, otherwise to a solid surface. In all cases, the tip of the flame is to be in contact with the sample. The flame is applied for 30 s and removed for 60 s, then reapplied to the same location for 30 s, whether or not the sample is flaming.*

*The test is repeated on the remaining two samples. If any part being tested is near a source of ignition at more than one point, each sample is tested with the flame applied to a different point that is near a source of ignition.*

#### **A.2.6 Compliance criteria**

*During the test, the samples shall not continue to burn for more than 1 min after the second application of the test flame, and shall not be consumed completely.*

#### **A.2.7 Alternative test**

*As an alternative to the apparatus and procedure specified in A.2.4 and A.2.5, it is permitted to use the apparatus and procedure specified in Clauses 5 and 9 of IEC 60695-11-5. The manner, duration and number of flame applications are as specified in A.2.5 and compliance is in accordance with A.2.6.*

NOTE Compliance with the method of either A.2.4 and A.2.5 or of A.2.7 is acceptable; it is not required to comply with both methods.

### **A.3 Hot flaming oil test (see 4.6.2)**

#### **A.3.1 Mounting of samples**

*A sample of the complete finished bottom of the FIRE ENCLOSURE is securely supported in a horizontal position. Bleached CHEESECLOTH of approximately 40 g/m<sup>2</sup> is placed in one layer over a shallow, flat-bottomed pan approximately 50 mm below the sample, and is of sufficient size to cover completely the pattern of openings in the sample, but not large enough to catch any of the oil that runs over the edge of the sample or otherwise does not pass through the openings.*

NOTE Use of a metal screen or a wired-glass partition surrounding the test area is recommended.

#### **A.3.2 Test procedure**

*A small metal ladle (preferably no more than 65 mm in diameter), with a pouring lip and a long handle whose longitudinal axis remains horizontal during pouring, is partially filled with 10 ml of a distillate fuel oil that is a medium volatile distillate having a mass per unit volume between 0,845 g/ml and 0,865 g/ml, a flash point between 43,5 °C and 93,5 °C and an average calorific value of 38 MJ/l. The ladle containing the oil is heated and the oil ignited and permitted to burn for 1 min, at which time all of the hot flaming oil is poured at the rate of approximately 1 ml/s in a steady stream onto the centre of the pattern of openings, from a position approximately 100 mm above the openings.*

*The test is repeated twice at 5 min intervals, using clean CHEESECLOTH.*

#### **A.3.3 Compliance criterion**

*During these tests the CHEESECLOTH shall not ignite.*

## **Annex B** (normative)

### **Motor tests under abnormal conditions**

(see 4.7.2.2 and 5.3.2)

#### **B.1 General requirements**

*Motors, other than d.c. motors in SECONDARY CIRCUITS, shall pass the tests of Clauses B.4 and B.5 and, where applicable, Clauses B.8, B.9 and B.10, except that the following motors are not required to pass the test of Clause B.4:*

- *motors that are used for air-handling only and where the air propelling component is directly coupled to the motor shaft; and*
- *shaded pole motors whose values of locked-rotor current and no-load current do not differ by more than 1 A and have a ratio of not more than 2/1.*

*DC motors in SECONDARY CIRCUITS shall pass the tests of Clauses B.6, B.7 and B.10 except that motors, which by their intrinsic operation normally operate under locked-rotor conditions, such as stepper motors, are not tested.*

#### **B.2 Test conditions**

*Unless otherwise specified in this annex, during the test the equipment is operated at RATED VOLTAGE, or at the upper voltage of the RATED VOLTAGE RANGE.*

*The tests are conducted either in the equipment or under simulated conditions on the bench. It is permitted to use separate samples for bench tests. Simulated conditions include:*

- *any protection devices that would protect the motor in the complete equipment; and*
- *use of any mounting means that may serve as a heat sink to the motor frame.*

*Temperatures of windings are measured as specified in 1.4.13. Where thermocouples are used they are applied to the surface of the motor windings. Temperatures are determined at the end of the test period where specified, otherwise when the temperature has stabilized, or at the instant of operation of fuses, THERMAL CUT-OUTS, motor protection devices and the like.*

*For totally enclosed, impedance-protected motors, the temperatures are measured by thermocouples applied to the motor case.*

*When motors without inherent thermal protection are tested under simulated conditions on the bench, the measured winding temperature is adjusted to take into account the ambient temperature in which the motor is normally located within the equipment as measured during the test of 4.5.2.*

### B.3 Maximum temperatures

For the tests in Clauses B.5, B.7, B.8 and B.9, the temperature limits, as specified in Table B.1, shall not be exceeded for each class of insulating material.

**Table B.1 – Temperature limits for motor windings  
(except for running overload test)**

| Method of protection                                                                                             | Thermal class |         |         |         |         |     |     |     |
|------------------------------------------------------------------------------------------------------------------|---------------|---------|---------|---------|---------|-----|-----|-----|
|                                                                                                                  | 105 (A)       | 120 (E) | 130 (B) | 155 (F) | 180 (H) | 200 | 220 | 250 |
| Protection by inherent or external impedance                                                                     | 150           | 165     | 175     | 200     | 225     | 245 | 265 | 295 |
| Protection by protective device that operates during the first hour                                              | 200           | 215     | 225     | 250     | 275     | 295 | 315 | 345 |
| Protection by any protective device:                                                                             |               |         |         |         |         |     |     |     |
| – maximum after first hour                                                                                       | 175           | 190     | 200     | 225     | 250     | 270 | 290 | 320 |
| – arithmetic average during the 2nd hour and during the 72nd hour                                                | 150           | 165     | 175     | 200     | 225     | 245 | 265 | 295 |
| The designations A to H, formerly assigned in IEC 60085 to thermal classes 105 to 180, are given in parentheses. |               |         |         |         |         |     |     |     |

The arithmetic average temperature is determined as follows:


The graph of temperature against time (see Figure B.1), while the power to the motor is cycling on and off, is plotted for the period of test under consideration. The arithmetic average temperature ( $t_A$ ) is determined by the formula:

$$t_A = \frac{t_{\max} + t_{\min}}{2}$$

where

$t_{\max}$  is the average of the maxima;

$t_{\min}$  is the average of the minima.

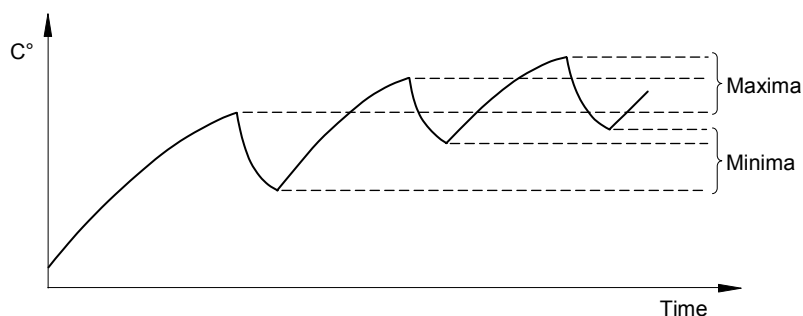

IEC 1563/05

**Figure B.1 – Determination of arithmetic average temperature**



For the tests in Clauses B.4 and B.6, the temperature limits, as specified in Table B.2, shall not be exceeded for each class of insulating material.

#### B.4 Running overload test

A running overload protection test is conducted by operating the motor under NORMAL LOAD. The load is then increased so that the current is increased in appropriate gradual steps, the motor supply voltage being maintained at its original value. When steady conditions are established, the load is again increased. The load is thus progressively increased in appropriate steps but without reaching locked-rotor condition (see Clause B.5), until the overload protection device operates.

The motor winding temperatures are determined during each steady period and the maximum temperature recorded shall not exceed the values specified in Table B.2.

**Table B.2 – Permitted temperature limits for running overload tests**

| Thermal class |         |         |         |         |     |     |     |
|---------------|---------|---------|---------|---------|-----|-----|-----|
| 105 (A)       | 120 (E) | 130 (B) | 155 (F) | 180 (H) | 200 | 220 | 250 |
| 140           | 155     | 165     | 190     | 215     | 235 | 255 | 275 |

Maximum temperature °C

The designations A to H, formerly assigned in IEC 60085 to thermal classes 105 to 180, are given in parentheses.

#### B.5 Locked-rotor overload test

A locked-rotor test is conducted starting at room temperature.

The duration of the test is as follows:

- a motor protected by inherent or external impedance is operated with its rotor locked for 15 days except that testing may be discontinued when the windings of the motor, of either the open or totally enclosed type, reach a constant temperature, provided that the constant temperature is not more than that specified in 4.5.3, Table 4B for the insulation system used;
- a motor with an automatic reset protection device is cycled with its rotor locked for 18 days;
- a motor with a manual reset protection device is cycled with its rotor locked for 60 cycles, the protection device being reset after each operation as soon as possible for it to remain closed, but after not less than 30 s;
- a motor with a non-resettable protection device is operated with its rotor locked until the device operates.

Temperatures are recorded at regular intervals during the first three days for a motor with inherent or external impedance protection or with an automatic reset protection device, or during the first ten cycles for a motor with a manual reset protection device, or at the time of operation of a non-resettable protection device.

*The temperatures shall not exceed the values specified in Table B.1.*

*During the test, protective devices shall operate reliably without breakdown of insulation to the motor frame or permanent damage to the motor, including excessive deterioration of the insulation.*

*Permanent damage to the motor includes:*

- severe or prolonged smoking or flaming;*
- electrical or mechanical breakdown of any associated component part such as a capacitor or starting relay;*
- flaking, embrittlement or charring of insulation.*

*Discoloration of the insulation is permitted but charring or embrittlement to the extent that insulation flakes off or material is removed when the winding is rubbed with the thumb is not permitted.*

*After the period specified for temperature measurement, the motor shall withstand the electric strength test in 5.2.2 after the insulation has cooled to room temperature and with test voltages reduced to 60 % of the specified values. No further electric strength test is required.*

NOTE Continuation of the test of an automatic reset protection device beyond 72 h, and of a manual reset protection device beyond 10 cycles, is for the purpose of demonstrating the capability of the device to make and break locked-rotor current for an extended period of time.

## **B.6 Running overload test for d.c. motors in secondary circuits**

### **B.6.1 General**

*The running overload test is conducted only if a possibility of an overload occurring is determined by inspection or by review of the design. The test need not be conducted, for example, where electronic drive circuits maintain a substantially constant drive current.*

*Motors shall pass the test in B.6.2, except that, if difficulty is experienced in obtaining accurate temperature measurements, due to the small size or unconventional design of the motor, the method of B.6.3 can be used instead. Compliance may be established by either method.*

### **B.6.2 Test procedure**

*The motor is operated under NORMAL LOAD. The load is then increased so that the current is increased in appropriate gradual steps, the motor supply voltage being maintained at its original value. When steady conditions are established the load is again increased. The load is thus progressively increased in appropriate steps until either the overload protection device operates or the winding becomes an open circuit.*

*The motor winding temperatures are determined during each steady period and the maximum temperature recorded shall not exceed the value in Table B.2.*

### **B.6.3 Alternative test procedure**

*The motor is placed on a wooden board that is covered with a single layer of WRAPPING TISSUE, and the motor in turn is covered with a single layer of CHEESECLOTH.*

*At the conclusion of the test, there shall be no ignition of the WRAPPING TISSUE or CHEESECLOTH.*

*Compliance with either method is acceptable; it is not necessary to comply with both methods.*

### **B.6.4 Electric strength test**

*Following the test of B.6.2 or B.6.3, as applicable, if the motor voltage exceeds 42,4 V peak, or 60 V d.c., and after it has cooled to room temperature, the motor shall withstand the electric strength test in 5.2.2, but with test voltages reduced to 60 % of the specified values.*

## **B.7 Locked-rotor overload test for d.c. motors in secondary circuits**

### **B.7.1 General**

*Motors shall pass the test in B.7.2, except that, where difficulty is experienced in obtaining accurate temperature measurements, due to the small size or unconventional design of the motor, the method of B.7.3 can be used instead. Compliance may be established by either method.*

### **B.7.2 Test procedure**

*The motor is operated at the voltage used in its application and with its rotor locked for 7 h or until steady conditions are established, whichever is the longer. Temperatures shall not exceed the values specified in Table B.1.*

### **B.7.3 Alternative test procedure**

*The motor is placed on a wooden board that is covered with a single layer of WRAPPING TISSUE, and the motor in turn covered with a single layer of bleached cotton CHEESECLOTH of approximately 40 g/m<sup>2</sup>.*

*The motor is then operated at the voltage used in its application and with its rotor locked for 7 h or until steady conditions are established, whichever is the longer.*

*At the conclusion of the test there shall be no ignition of the WRAPPING TISSUE or CHEESECLOTH.*

### **B.7.4 Electric strength test**

*Following the test of B.7.2 or B.7.3, as applicable, if the motor voltage exceeds 42,4 V peak, or 60 V d.c., and after it has cooled to room temperature, the motor shall withstand the electric strength test in 5.2.2 but with test voltages reduced to 60 % of the specified values.*

### **B.8 Test for motors with capacitors**

*Motors having phase-shifting capacitors are tested under locked rotor conditions with the capacitor short-circuited or open-circuited (whichever is the more unfavourable).*

*The short-circuit test is not made if the capacitor is so designed that, upon failure, it will not remain short-circuited.*

*Temperatures shall not exceed the values specified in Table B.1.*

NOTE Locked rotor is specified because some motors may not start and variable results could be obtained.

### **B.9 Test for three-phase motors**

*Three-phase motors are tested under NORMAL LOAD, with one line conductor disconnected, unless circuit controls prevent the application of voltage to the motor with one or more supply conductors disconnected.*

*The effect of other loads and circuits within the equipment may necessitate that the motor be tested within the equipment and with each of the three line conductors disconnected one at a time.*

*Temperatures shall not exceed the values specified in Table B.1.*

### **B.10 Test for series motors**

*Series motors are operated at a voltage equal to 130 % of the motor voltage rating for 1 min with the lowest possible load.*

*After the test, windings and connections shall not have worked loose and no hazard shall be present in the meaning of this standard.*

## **Annex C** (normative)

### **Transformers**

(see 1.5.4 and 5.3.3)

#### **C.1 Overload test**

*If the tests in this clause are conducted under simulated conditions on the bench, these conditions shall include any protection device that would protect the transformer in the complete equipment.*

*Transformers for switch mode power supply units are tested in the complete power supply unit or in the complete equipment. Test loads are applied to the output of the power supply unit.*

*A linear transformer or a ferro-resonant transformer has each secondary winding loaded in turn, with any other secondaries loaded between zero and their specified maxima to result in the maximum heating effect.*

*The output of a switch mode power supply unit is loaded to result in the maximum heating effect in the transformer.*

NOTE For examples of loading to give the maximum heating effect, see Annex X.

*Where an overload cannot occur or is unlikely to create a hazard, the above tests are not made.*

*Maximum temperatures of windings shall not exceed the values in Table C.1 when measured as specified in 1.4.12 and 1.4.13, and determined as specified below:*

- *with external overcurrent protection: at the moment of operation, for determination of the time until the overcurrent protection operates, it is permitted to refer to a data sheet of the overcurrent protection device showing the trip time versus the current characteristics;*
- *with an AUTOMATIC RESET THERMAL CUT-OUT: as shown in Table C.1 and after 400 h;*
- *with a MANUAL RESET THERMAL CUT-OUT: at the moment of operation;*
- *for current-limiting transformers: after temperature has stabilized.*

*If the temperature of the windings of a transformer with a ferrite core, measured as specified in 1.4.12, exceeds 180 °C, it shall be retested at maximum rated ambient temperature ( $T_{amb} = T_{ma}$ ), and not as calculated according to 1.4.12.*

NOTE The above procedure is to ensure that deteriorating Curie characteristics of ferrite at temperatures approaching 200 °C do not cause thermal runaway (unpredictable temperature rise).

Secondary windings that exceed the temperature limits but that become open circuit or otherwise require replacement of the transformer do not constitute a failure of this test, provided that no hazard is created in the meaning of this standard.

For compliance criteria see 5.3.9.

**Table C.1 – Temperature limits for transformer windings**

| Method of protection                                                | Maximum temperature °C |         |         |         |         |     |     |     |
|---------------------------------------------------------------------|------------------------|---------|---------|---------|---------|-----|-----|-----|
|                                                                     | Thermal class          |         |         |         |         |     |     |     |
|                                                                     | 105 (A)                | 120 (E) | 130 (B) | 155 (F) | 180 (H) | 200 | 220 | 250 |
| Protection by inherent or external impedance                        | 150                    | 165     | 175     | 200     | 225     | 245 | 265 | 295 |
| Protection by protective device that operates during the first hour | 200                    | 215     | 225     | 250     | 275     | 295 | 315 | 345 |
| Protection by any protective device:                                |                        |         |         |         |         |     |     |     |
| – maximum after first hour                                          | 175                    | 190     | 200     | 225     | 250     | 270 | 290 | 320 |
| – arithmetic average during the 2nd hour and during the 72nd hour   | 150                    | 165     | 175     | 200     | 225     | 245 | 265 | 295 |

The designations A to H, formerly assigned in IEC 60085 to thermal classes 105 to 180, are given in parentheses.

The arithmetic average temperature is determined as follows:


The graph of temperature against time (see Figure C.1), while the power to the transformer is cycling on and off, is plotted for the period of test under consideration. The arithmetic average temperature ( $t_A$ ) is determined by the formula:

$$t_A = \frac{t_{\max} + t_{\min}}{2}$$

where

$t_{\max}$  is the average of the maxima;

$t_{\min}$  is the average of the minima.

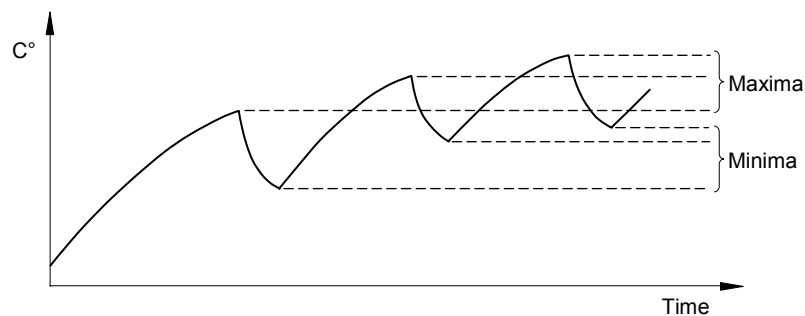

IEC 1563/05

**Figure C.1 – Determination of arithmetic average temperature**

## C.2 Insulation

Insulation in transformers shall comply with the following requirements.

Windings and conductive parts of transformers shall be treated as parts of the circuits to which they are connected, if any. The insulation between them shall comply with the relevant requirements of 2.10 (or Annex G) and pass the relevant tests of 5.2, according to the application of the insulation in the equipment (see 2.9.3).

Precautions shall be taken to prevent the reduction below the specified minimum values of CLEARANCES and CREEPAGE DISTANCE that provide BASIC INSULATION, SUPPLEMENTARY INSULATION or REINFORCED INSULATION by:

- displacement of windings or their turns;
- displacement of internal wiring or wires for external connections;
- undue displacement of parts of windings or internal wiring, in the event of rupture of wires adjacent to connections or loosening of the connections;
- bridging of insulation by wires, screws, washers and the like should they loosen or become free.

It is not expected that two independent fixings will loosen at the same time.

All windings shall have the end turns retained by positive means.

*Compliance is checked by inspection, measurement and, if necessary, by the following tests.*

*If the transformer is fitted with a screen for protective earthing purposes that is separated from the primary winding connected to a HAZARDOUS VOLTAGE circuit by BASIC INSULATION only, the screen shall comply with one of the following:*

- *meet the requirements of 2.6.3.3;*
- *meet the requirements of 2.6.3.4 between the earthed screen and the main protective earthing terminal of the equipment;*
- *pass a test simulating breakdown of BASIC INSULATION between the screen and the associated primary winding. The transformer shall be protected by any protective device used in the end application. The protective earthing path and the screen shall not be damaged.*

*If tests are conducted, a specially prepared sample transformer having an extra lead-out wire from the free end of the screen is used to ensure that the current during the test passes through the screen.*

*Examples of acceptable forms of construction (see 1.3.8) are the following:*

- *windings isolated from each other by placing them on separate limbs of the core, with or without spools;*
- *windings on a single spool with a partition wall, where either the spool and partition wall are pressed or moulded in one piece, or a pushed-on partition wall has an intermediate sheath or covering over the joint between the spool and the partition wall;*

- *concentric windings on a spool of insulating material without flanges, or on insulation applied in thin sheet form to the transformer core;*
- *insulation is provided between windings consisting of sheet insulation extending beyond the end turns of each layer;*
- *concentric windings, separated by an earthed conductive screen that consists of metal foil extending the full width of the windings, with suitable insulation between each winding and the screen. The conductive screen and its lead-out wire have a cross section sufficient to ensure that on breakdown of the insulation an overload device will open the circuit before the screen is destroyed. The overload device may be a part of the transformer.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005




## Annex D (normative)

### Measuring instruments for touch current tests

(see 5.1.4)

#### D.1 Measuring instrument

The measuring instrument of Figure D.1 is from Figure 4 of IEC 60990.

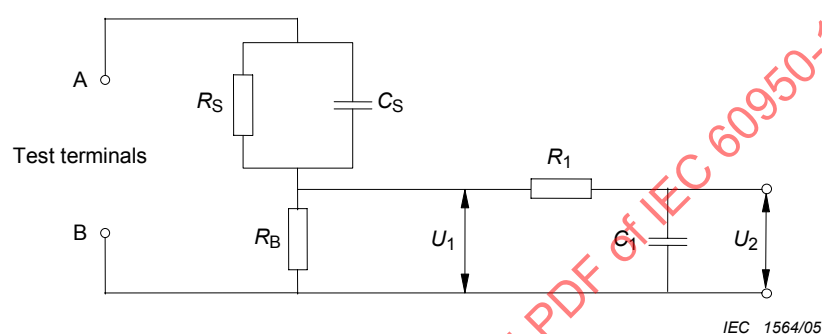


|                                                       |                                                                                                                                                                          |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $R_S$                                                 | 1 500 $\Omega$                                                                                                                                                           |
| $R_B$                                                 | 500 $\Omega$                                                                                                                                                             |
| $R_1$                                                 | 10 k $\Omega$                                                                                                                                                            |
| $C_S$                                                 | 0,22 $\mu\text{F}$                                                                                                                                                       |
| $C_1$                                                 | 0,022 $\mu\text{F}$                                                                                                                                                      |
| Voltmeter or oscilloscope<br>(r.m.s. or peak reading) | Input resistance: >1 M $\Omega$<br>Input capacitance: <200 pF<br>Frequency range: 15 Hz up to 1 MHz<br>(appropriate for the highest frequency of<br>interest, see 1.4.7) |

**Figure D.1 – Measuring instrument**

The measuring instrument is calibrated by comparing the frequency factor of  $U_2$  with the solid line in Figure F.2 of IEC 60990 at various frequencies. A calibration curve is constructed showing the deviation of  $U_2$  from the ideal curve as a function of frequency.

## D.2 Alternative measuring instrument

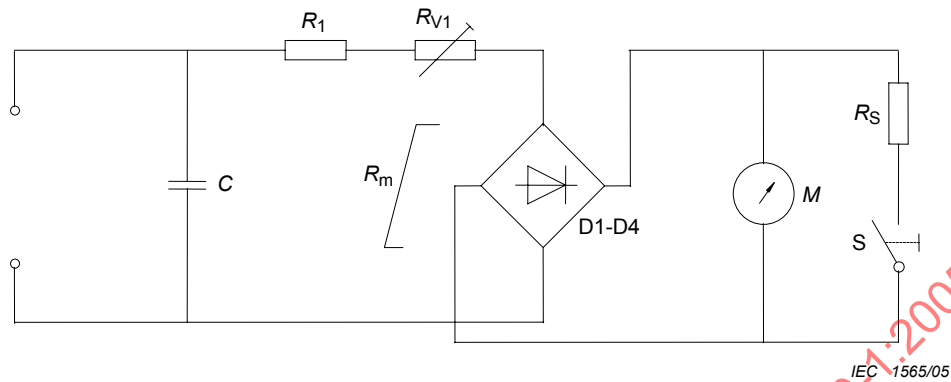

|                                       |                                                                                                                         |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| $M$                                   | 0 mA – 1 mA moving coil movement                                                                                        |
| $R_1 + R_{V1} + R_m$ at 0,5 mA d.c. = | 1 500 $\Omega \pm 1\%$ with $C = 150 \text{ pF} \pm 1\%$ or<br>2 000 $\Omega \pm 1\%$ with $C = 112 \text{ nF} \pm 1\%$ |
| D1-D4                                 | Rectifier                                                                                                               |
| $R_s$                                 | Non-inductive shunt for $\times 10$ range                                                                               |
| S                                     | Sensitivity button (press for maximum sensitivity)                                                                      |

**Figure D.2 – Alternative measuring instrument**

The instrument comprises a rectifier/moving coil meter with additional series resistance, the two being shunted by a capacitor, as shown in Figure D.2. The effect of the capacitor is to reduce the sensitivity to harmonics and other frequencies above the power frequency. The instrument should also include a  $\times 10$  range obtained by shunting the meter coil by a non-inductive resistor. It is also permitted to include overcurrent protection, provided that the method used does not affect the basic characteristics of the instrument.

$R_{V1}$  is adjusted for the desired value of total resistance at 0,5 mA d.c.

The meter is calibrated at the following calibration points on the maximum sensitivity range at 50 Hz to 60 Hz sinusoidal:

0,25 mA, 0,5 mA, 0,75 mA.

The following response is checked at the 0,5 mA calibration point:

Sensitivity at 5 kHz sinusoidal: 3,6 mA  $\pm 5\%$ .

## **Annex E** (normative)

### **Temperature rise of a winding**

(see 1.4.13)

*The value of the temperature rise of a winding is calculated from the formula:*

*for a copper winding*

$$\Delta t = \frac{R_2 - R_1}{R_1} (234,5 + t_1) - (t_2 - t_1)$$

*for an aluminium winding*

$$\Delta t = \frac{R_2 - R_1}{R_1} (225 + t_1) - (t_2 - t_1)$$

where

$\Delta t$  is the temperature rise, in kelvins;

$R_1$  is the resistance of the winding at the beginning of the test, in ohms;

$R_2$  is the resistance of the winding at the end of the test, in ohms;

$t_1$  is the room temperature at the beginning of the test, in degrees Celsius;

$t_2$  is the room temperature at the end of the test, in degrees Celsius.

*At the beginning of the test, the windings are at room temperature.*

*It is recommended that the resistance of windings at the end of the test be determined by taking resistance measurements as soon as possible after switching off, and then at short intervals so that a curve of resistance against time can be plotted for ascertaining the resistance at the instant of switching off.*

*For comparison of winding temperatures determined by the resistance method of this annex with the temperature limits of Table 4B, 25 °C shall be added to the calculated temperature rise.*

## Annex F (normative)

### Measurement of clearances and creepage distances

(see 2.10 and Annex G)

The methods of measuring CLEARANCES and CREEPAGE DISTANCES that are specified in the following figures are used in interpreting the requirements of this standard.

In the following figures, the value of  $X$  is given in Table F.1. Where the distance shown is less than  $X$ , the depth of the gap or groove is disregarded when measuring a CREEPAGE DISTANCE.


Table F.1 is valid only if the specified minimum CLEARANCE is 3 mm or more. If the specified minimum CLEARANCE is less than 3 mm, the value of  $X$  is the lesser of:

- the relevant value in Table F.1; or
- one third of the specified minimum CLEARANCE.

**Table F.1 – Value of  $X$**

| Pollution degree<br>(see 2.10.1.2) | $X$<br>mm |
|------------------------------------|-----------|
| 1                                  | 0,25      |
| 2                                  | 1,0       |
| 3                                  | 1,5       |


IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

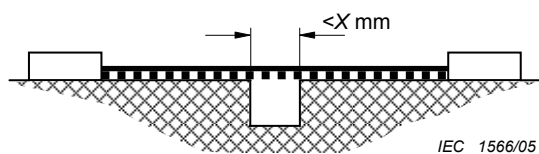

Condition: Path under consideration includes a parallel or converging-sided groove of any depth with width less than  $X$  mm.

Rule: CLEARANCE and CREEPAGE DISTANCE are measured directly across the groove.


**Figure F.1 – Narrow groove**

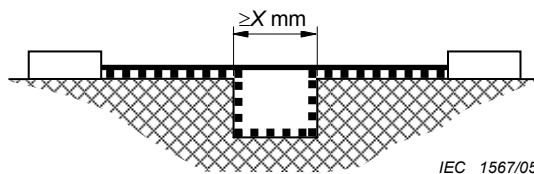

Condition: Path under consideration includes a parallel-sided groove of any depth, and equal to or more than  $X$  mm wide.

Rule: CLEARANCE is the "line of sight" distance. CREEPAGE DISTANCE path follows the contour of the groove.


**Figure F.2 – Wide groove**

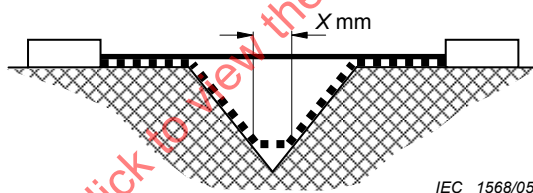

Condition: Path under consideration includes a V-shaped groove with internal angle of less than  $80^\circ$  and a width greater than  $X$  mm.

Rule: CLEARANCE is "line of sight" distance. CREEPAGE DISTANCE path follows the contour of the groove but "short-circuits" the bottom of the groove by a link  $X$  mm long.

**Figure F.3 – V-shaped groove**

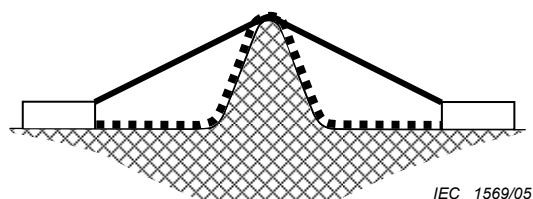


Condition: Path under consideration includes a rib.

Rule: CLEARANCE is the shortest direct air path over the top of the rib. CREEPAGE DISTANCE path follows the contour of the rib.

**Figure F.4 – Rib**


————— CLEARANCE      ■■■■■ CREEPAGE DISTANCE

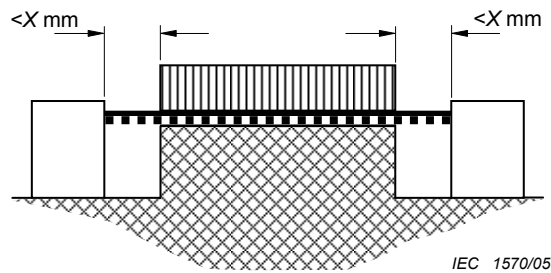

Condition: Path under consideration includes an uncemented joint with grooves less than  $X$  mm wide on either side.

Rule: CLEARANCE and CREEPAGE DISTANCE path is the "line of sight" distance shown.


**Figure F.5 – Uncemented joint with narrow groove**

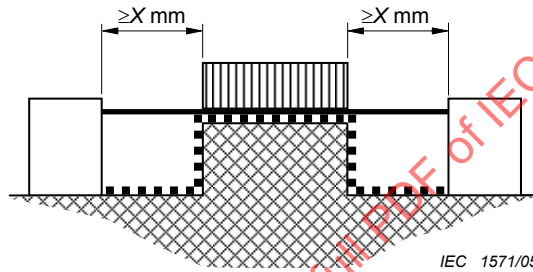

Condition: Path under consideration includes an uncemented joint with a groove equal to or more than  $X$  mm wide each side.

Rule: CLEARANCE is the "line of sight" distance. CREEPAGE DISTANCE path follows the contour of the groove.

**Figure F.6 – Uncemented joint with wide groove**

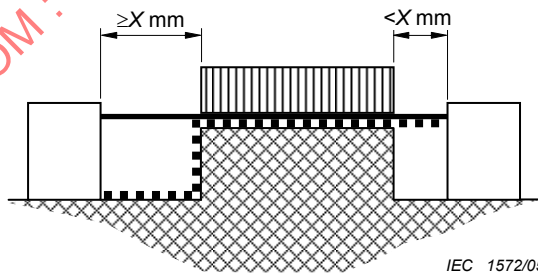


Condition: Path under consideration includes an uncemented joint with a groove on one side less than  $X$  mm wide and a groove on the other equal to or more than  $X$  mm wide.

Rule: CLEARANCE and CREEPAGE DISTANCE path are as shown.


**Figure F.7 – Uncemented joint with narrow and wide grooves**

———— CLEARANCE      ■■■■■ CREEPAGE DISTANCE

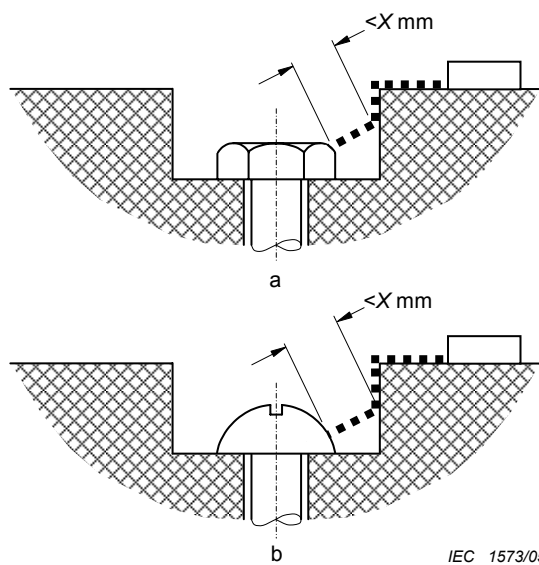

Gap between head of screw and wall of recess too narrow to be taken into account.

**Figure F.8 – Narrow recess**

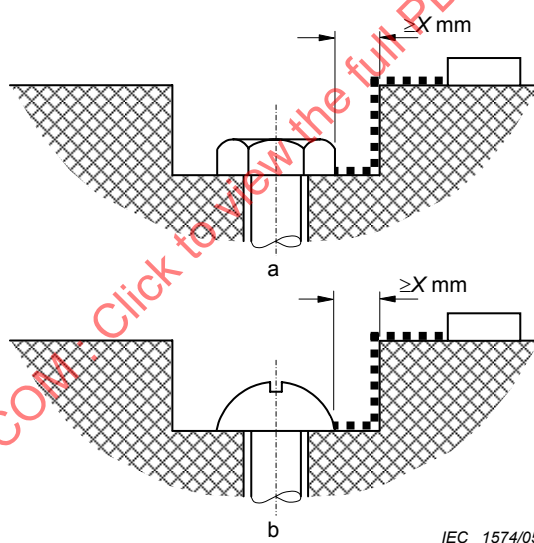

Gap between head of screw and wall of recess wide enough to be taken into account.

**Figure F.9 – Wide recess**

■■■■■■■■■■ CREEPAGE DISTANCE

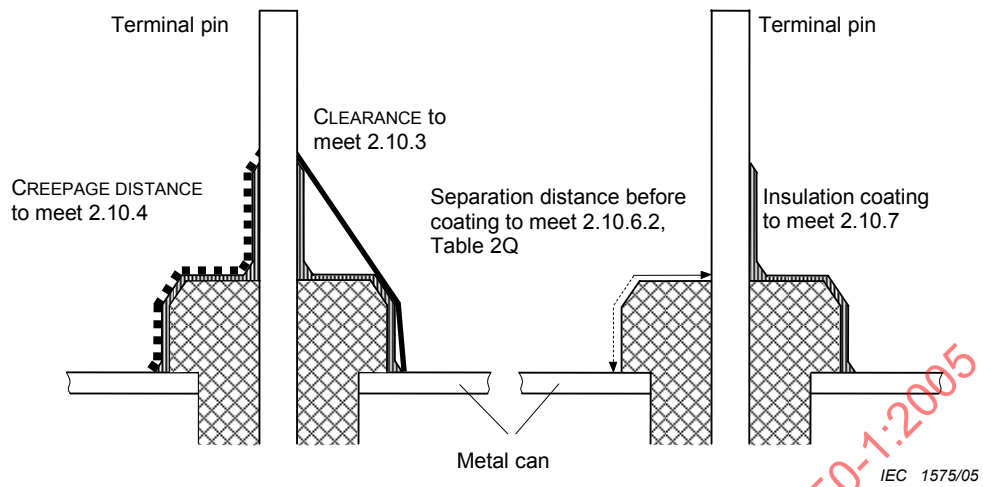


**Figure F.10 – Coating around terminals**


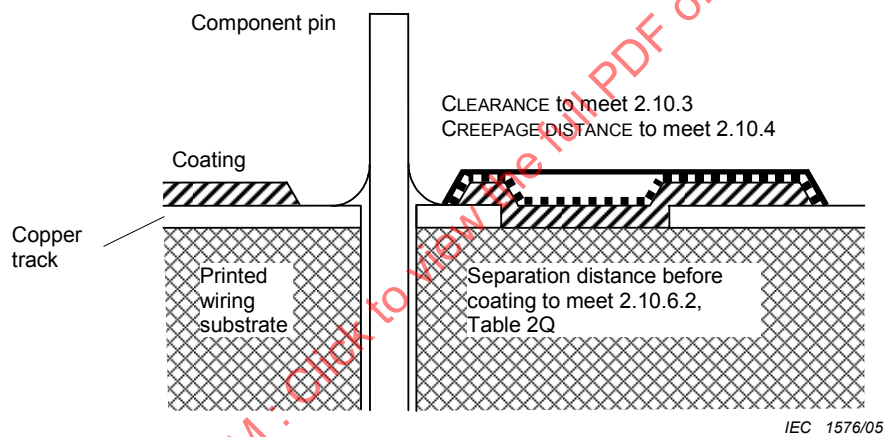


**Figure F.11 – Coating over printed wiring**

———— CLEARANCE      ■■■■■ CREEPAGE DISTANCE




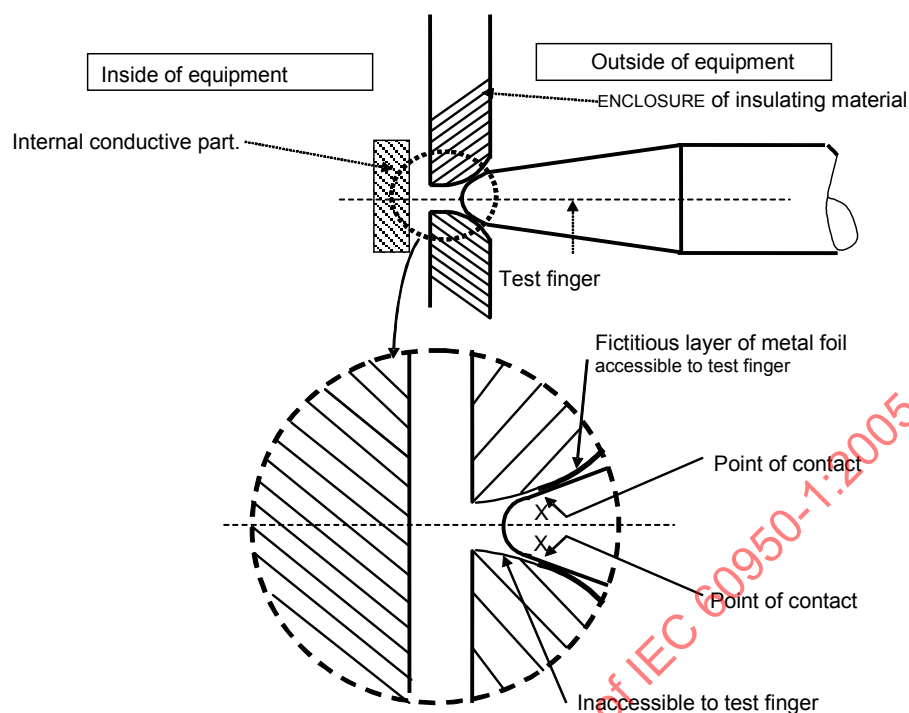

Point X is used for measurements of CLEARANCES and CREEPAGE DISTANCES from the BOUNDING SURFACE of an ENCLOSURE of insulating material to an internal conductive part (see 2.10.3.1 and 2.10.4)

IEC 1577/05

**Figure F.12 – Measurements through openings in enclosures**

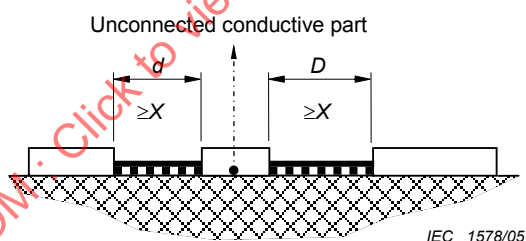

IEC 1578/05

Condition: Insulation distance with intervening, unconnected conductive part.


Rule: CLEARANCE is the distance  $d + D$ .

CREEPAGE DISTANCE is also  $d + D$ .

Where the value of  $d$  or  $D$  is smaller than  $X$ , it shall be considered as zero.

**Figure F.13 – Intervening, unconnected conductive part**


———— CLEARANCE      ■■■■■ CREEPAGE DISTANCE

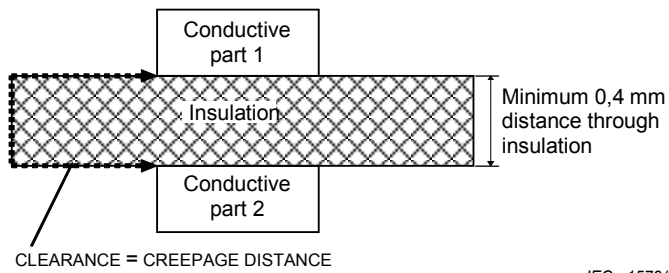

IEC 1579/05

Thick sheet or solid insulating material as SUPPLEMENTARY INSULATION or REINFORCED INSULATION


**Figure F.14 – Solid insulating material**

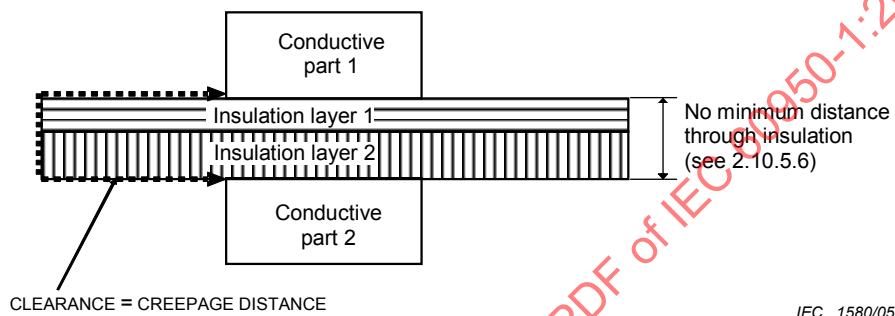

IEC 1580/05

Two layers of thin sheet material as SUPPLEMENTARY INSULATION or REINFORCED INSULATION


**Figure F.15 – Thin sheet insulating material**

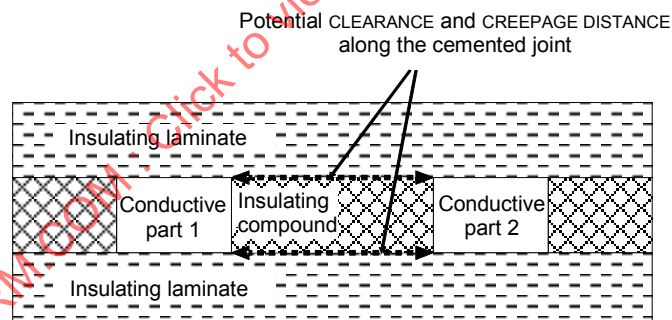

IEC 1581/05


Insulating compound as SUPPLEMENTARY INSULATION or REINFORCED INSULATION

**Figure F.16 – Cemented joints in multi-layer printed board**

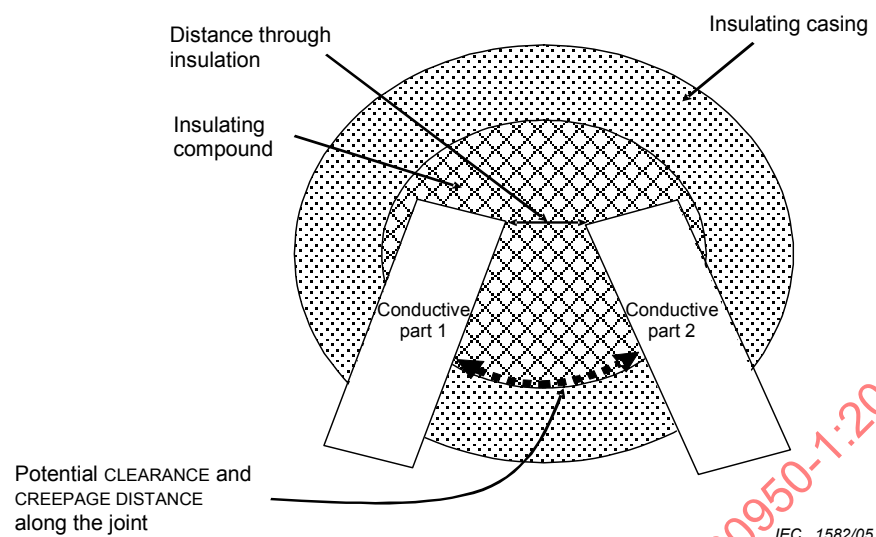

Insulating compound as SUPPLEMENTARY INSULATION or REINFORCED INSULATION inside a component

**Figure F.17 – Component filled with insulating compound**

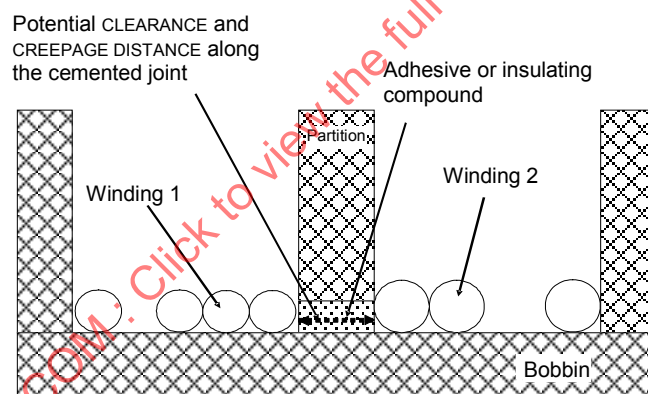

Cemented joint as SUPPLEMENTARY INSULATION or REINFORCED INSULATION

**Figure F.18 – Partitioned bobbin**

## **Annex G** (normative)

### **Alternative method for determining minimum clearances**

#### **G.1 Clearances**

##### **G.1.1 General**

CLEARANCES shall be so dimensioned that overvoltages, including transients, which may enter the equipment, and peak voltages that may be generated within the equipment, do not break down the CLEARANCE.

It is permitted to use either the requirements of 2.10.3 for Overvoltage Category I or Overvoltage Category II, using the PEAK WORKING VOLTAGE, or the requirements in Annex G for Overvoltage Category I, Overvoltage Category II, Overvoltage Category III or Overvoltage Category IV, using the REQUIRED WITHSTAND VOLTAGE, for a particular component or subassembly or for the whole equipment.

NOTE It is considered to be good practice to design SOLID INSULATION for higher transient overvoltages than the associated CLEARANCE.

##### **G.1.2 Summary of the procedure for determining minimum clearances**

NOTE 1 The minimum CLEARANCES for FUNCTIONAL INSULATION, BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION, whether in a PRIMARY CIRCUIT or another circuit, depend on the REQUIRED WITHSTAND VOLTAGE. The REQUIRED WITHSTAND VOLTAGE depends in turn on the combined effect of the normal operating voltage (including repetitive peaks due to internal circuitry such as switch mode power supplies) and non-repetitive overvoltages due to external transients.

To determine the minimum value for each CLEARANCE, the following steps shall be used.

- (1) Measure the PEAK WORKING VOLTAGE across the CLEARANCE in question.
- (2) If the equipment is mains operated:
  - determine the MAINS TRANSIENT VOLTAGE (Clause G.2); and
  - for equipment to be connected to an AC MAINS SUPPLY, calculate the peak value of the nominal AC MAINS SUPPLY voltage.
- (3) Use the rules in G.4.1 and the above voltage values to determine the required withstand voltage for mains transients and internal repetitive peaks. In the absence of transients coming from a telecommunication network, go to step 7.
- (4) If the equipment is to be connected to a telecommunication network, determine the telecommunication network transient voltage (Clause G.3).
- (5) Use the telecommunication network transient voltage and the rules in G.4.2 to determine the required withstand voltage for telecommunication network transients. In the absence of mains and internal repetitive peaks, go to step 7.
- (6) Use the rule in G.4.3 to determine the total required withstand voltage.
- (7) Use the REQUIRED WITHSTAND VOLTAGE to determine the minimum CLEARANCE (Clause G.6).

NOTE 2 The effect of transients from a CABLE DISTRIBUTION SYSTEM is not taken into account (see G.4.4 and 7.4.1).

## G.2 Determination of mains transient voltage

### G.2.1 AC mains supply

For equipment to be supplied from the AC MAINS SUPPLY, the value of the MAINS TRANSIENT VOLTAGE depends on the overvoltage category and the AC MAINS SUPPLY voltage. In general, CLEARANCES in equipment intended to be connected to the AC MAINS SUPPLY shall be designed for Overvoltage Category II.

NOTE 1 See Annex Z for further guidance on the determination of overvoltage category.

Equipment that is likely, when installed, to be subjected to transient overvoltages that exceed those for its design Overvoltage Category II, will require additional protection to be provided external to the equipment. In this case, the installation instructions shall state the need for such external protection.

The applicable value of the MAINS TRANSIENT VOLTAGE shall be determined from the overvoltage category and the AC MAINS SUPPLY voltage, using Table G.1.

**Table G.1 – AC mains transient voltages**

| AC MAINS SUPPLY voltage <sup>a</sup><br><br>V r.m.s.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | MAINS TRANSIENT VOLTAGE <sup>b</sup><br>V peak |       |       |       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-------|-------|-------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Overvoltage Category                           |       |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | I                                              | II    | III   | IV    |
| up to and including 50                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 330                                            | 500   | 800   | 1 500 |
| over 50 up to and including 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 500                                            | 800   | 1 500 | 2 500 |
| over 100 up to and including 150 <sup>c</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 800                                            | 1 500 | 2 500 | 4 000 |
| over 150 up to and including 300 <sup>d</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1 500                                          | 2 500 | 4 000 | 6 000 |
| over 300 up to and including 600 <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2 500                                          | 4 000 | 6 000 | 8 000 |
| <sup>a</sup> For equipment designed to be connected to a three-phase, three-wire supply, where there is no neutral conductor, the AC MAINS SUPPLY voltage is the line-to-line voltage. In all other cases, where there is a neutral conductor, it is the line-to-neutral voltage.<br><sup>b</sup> The MAINS TRANSIENT VOLTAGE is always one of the values in the table. Interpolation is not permitted.<br><sup>c</sup> Including 120/208 V and 120/240 V.<br><sup>d</sup> Including 230/400 V and 277/480 V.<br><sup>e</sup> Including 400/690 V. |                                                |       |       |       |

NOTE 2 For Japan, the value of the MAINS TRANSIENT VOLTAGES for the nominal AC MAINS SUPPLY voltage of 100 V is determined from the row applicable to an AC MAINS SUPPLY voltage of 150 V.

### G.2.2 Earthed d.c. mains supplies

If a DC MAINS SUPPLY is connected to protective earth and is entirely within a single building, the MAINS TRANSIENT VOLTAGE shall be assumed to be 71 V peak. If this connection is within the EUT, it shall be in accordance with 2.6.1 e).

NOTE The connection to protective earth can be at the source of the DC MAINS SUPPLY or at the equipment location, or both (see ITU-T Recommendation K.27).

### G.2.3 Unearthed d.c. mains supplies

If a DC MAINS SUPPLY is not earthed and located as in G.2.2, the MAINS TRANSIENT VOLTAGE shall be assumed to be equal to the MAINS TRANSIENT VOLTAGE in the AC MAINS SUPPLY from which the DC MAINS SUPPLY is derived.

### G.2.4 Battery operation

If equipment is supplied from a dedicated battery that has no provision for charging from an external MAINS SUPPLY, the MAINS TRANSIENT VOLTAGE shall be assumed to be 71 V peak.

## G.3 Determination of telecommunication network transient voltage

If the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE is known for the TELECOMMUNICATION NETWORK in question, it is permitted to use the known value in G.4.2.

If the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE is not known, one of the following values shall be used:

- 1 500 V peak if the circuit connected to the TELECOMMUNICATION NETWORK is a TNV-1 CIRCUIT or a TNV-3 CIRCUIT; or
- 800 V peak if the circuit connected to the TELECOMMUNICATION NETWORK is an SELV CIRCUIT or a TNV-2 CIRCUIT.

The effect of a telephone ringing signal is not taken into account for this purpose.

## G.4 Determination of required withstand voltage

### G.4.1 Mains transients and internal repetitive peaks

In G.4.1, the effect of transients coming from a TELECOMMUNICATION NETWORK is ignored (see G.4.3).

The REQUIRED WITHSTAND VOLTAGE is determined according to Items a), b) or c).

NOTE Items a) and b) apply only for an AC MAINS SUPPLY. Item c) applies only for a DC MAINS SUPPLY.

The following abbreviations are used.

|                               |                                                                                                                                                              |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $U_{pw}$                      | the PEAK WORKING VOLTAGE of the CLEARANCE                                                                                                                    |
| $U_{a.c. \text{ mains peak}}$ | peak value of the AC MAINS SUPPLY voltage in the first column of Table G.1 corresponding to the RATED VOLTAGE or the upper limit of the RATED VOLTAGE RANGE. |
| $U_{\text{mains transient}}$  | the MAINS TRANSIENT VOLTAGE determined in G.2.1 or G.2.2                                                                                                     |
| $U_{\text{measured}}$         | the maximum transient voltage from the mains, determined according to G.5 a)                                                                                 |

**a) PRIMARY CIRCUITS**

It is permitted to use a1) or a2).

**a1)** The following Rules 1) and 2) shall be applied:

**Rule 1)** If  $U_{pw} \leq U_{a.c. \text{ mains peak}}$

$$U_{\text{required withstand}} = U_{\text{mains transient}}.$$

**Rule 2)** If  $U_{pw} > U_{a.c. \text{ mains peak}}$

$$U_{\text{required withstand}} = U_{\text{mains transient}} + U_{pw} - U_{a.c. \text{ mains peak}}.$$

**a2)** The above Rules 1) and 2) shall be applied, but  $U_{\text{mains transient}}$  shall be replaced by  $U_{\text{measured}}$ .

**b) SECONDARY CIRCUITS whose PRIMARY CIRCUIT is supplied from an AC MAINS SUPPLY**

It is permitted to use b1), b2) or b3).

**b1)** The following Rule 3) shall be applied:

**Rule 3)**  $U_{\text{required withstand}} = U_{\text{mains transient}}$  or  $U_{pw}$ , whichever is the greater.

**b2)** The above Rule 3) shall be applied, but with  $U_{\text{mains transient}}$  replaced by  $U_{\text{measured}}$ .

**b3)** The above Rule 3) shall be applied, but with  $U_{\text{mains transient}}$  replaced by a voltage that is one step smaller in the following list from Table G.1:

330, 500, 800, 1 500, 2 500, 4 000, 6 000 and 8 000 V peak.

This is permitted in the following cases:

- a SECONDARY CIRCUIT, derived from an AC MAINS SUPPLY, that is connected to the main protective earthing terminal in accordance with 2.6.1 e);
- a SECONDARY CIRCUIT, derived from an AC MAINS SUPPLY and separated from the PRIMARY CIRCUIT by a metal screen that is connected to the main protective earthing terminal in accordance with 2.6.1 e).

**c) SECONDARY CIRCUIT supplied from a DC MAINS SUPPLY**

The above b1) or b3) shall be applied.

**G.4.2 Transients from telecommunication networks**

In G.4.2, the effect of transients coming from the mains and from internal circuitry is ignored (see G.4.3).

For transients from a TELECOMMUNICATION NETWORK, the REQUIRED WITHSTAND VOLTAGE is:

- the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE determined in Clause G.3;
- or the value measured in accordance with G.5 b);

whichever is less.

**G.4.3 Combination of transients**

If the transients described in G.4.1 and those described in G.4.2 affect the same CLEARANCE, the REQUIRED WITHSTAND VOLTAGE is the larger of the two voltages. The two values shall not be added together.

#### G.4.4 Transients from cable distribution systems

The effect of transients from a CABLE DISTRIBUTION SYSTEM is not taken into account when determining REQUIRED WITHSTAND VOLTAGE (however, see 7.4.1).

#### G.5 Measurement of transient voltages

*The following tests are conducted only if it is required to determine whether or not the maximum transient voltage across the CLEARANCE in any circuit is lower than the MAINS TRANSIENT VOLTAGE determined in Clause G.2 (for example, due to the effect of a filter in the equipment). If these tests are not conducted, the maximum transient voltage across the CLEARANCE shall be assumed to be equal to the MAINS TRANSIENT VOLTAGE. If the situation covered by G.2.2 or the situation covered by G.2.4 applies, the transient voltage across the CLEARANCE shall be assumed to be negligible and no test is conducted.*

*If necessary, the transient voltage across the CLEARANCE is measured using the following test procedure.*

*During the tests, the EUT is connected to its separate power supply unit, if any, but is not connected to the MAINS SUPPLY, nor to any TELECOMMUNICATION NETWORKS, and any surge suppressors in PRIMARY CIRCUITS are disconnected.*

*A voltage measuring device is connected across the CLEARANCE in question.*

##### a) Transients from a MAINS SUPPLY

*To measure the transient voltages across a CLEARANCE due to transients on a MAINS SUPPLY, the impulse test generator reference 2 of Table N.1 is used to generate 1,2/50  $\mu$ s impulses.  $U_c$  is equal to the MAINS TRANSIENT VOLTAGE determined in Clause G.2.*

*Three to six impulses of alternating polarity, with intervals of at least 1 s between impulses, are applied between each of the following points where relevant:*

##### **For an AC MAINS SUPPLY:**

- line-to-line;
- all line conductors conductively joined together and neutral;
- all line conductors conductively joined together and the main protective earthing terminal;
- neutral and the main protective earthing terminal.

##### **For a DC MAINS SUPPLY:**

- the positive and negative supply connection points;
- all supply connection points conductively joined together and the main protective earthing terminal.

##### b) Transients from a TELECOMMUNICATION NETWORK

*To measure the transient voltage across a CLEARANCE due to transients on a TELECOMMUNICATION NETWORK, the impulse test generator reference 1 of Table N.1 is used to generate 10/700  $\mu$ s impulses.  $U_c$  is equal to the TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE determined in Clause G.3.*

*Three to six impulses of alternating polarity, with intervals of at least 1 s between impulses, are applied between each of the following TELECOMMUNICATION NETWORK connection points of each interface type:*



- each pair of terminals (for example, A and B or tip and ring) in an interface;
- all terminals of a single interface joined together and earth.

Where there are several identical circuits, only one is tested.

## G.6 Determination of minimum clearances

For equipment to be operated up to 2 000 m above sea level, each CLEARANCE shall comply with the minimum dimensions given in Table G.2, using the value of REQUIRED WITHSTAND VOLTAGE determined according to G.4.

For equipment to be operated at more than 2 000 m above sea level, the minimum CLEARANCES shall be multiplied by the factor given in Table A.2 of IEC 60664-1. Linear interpolation is permitted between the nearest two points in Table A.2. The calculated minimum CLEARANCE using this multiplication factor shall be rounded up to the next higher 0,1 mm increment.

The specified minimum CLEARANCES are subject to the following minimum values:

- 10 mm for an air gap serving as REINFORCED INSULATION between a part at HAZARDOUS VOLTAGE and an accessible conductive part of the ENCLOSURE of floor-standing equipment or of the non-vertical top surface of desk-top equipment;
- 2 mm for an air gap serving as BASIC INSULATION between a part at HAZARDOUS VOLTAGE and an earthed accessible conductive part of the ENCLOSURE of PLUGGABLE EQUIPMENT TYPE A.

The above two dashed paragraphs do not apply between a part at a HAZARDOUS VOLTAGE and a BOUNDING SURFACE.

Except as required by 2.8.7.1 the specified minimum CLEARANCES do not apply to the air gap between the contacts of THERMOSTATS, THERMAL CUT-OUTS, overload protection devices, switches of microgap construction and similar components where the air gap varies with the contacts.

NOTE 1 For air gaps between contacts of disconnect devices, see 3.4.2. For air gaps between the contacts of interlock switches, see 2.8.7.1.

The CLEARANCES between the BOUNDING SURFACE of a connector and conductive parts within the connector that are connected to a HAZARDOUS VOLTAGE shall comply with the requirements for REINFORCED INSULATION. As an exception, for connectors that are

- fixed to the equipment; and
- located internal to the outer ENCLOSURE of the equipment; and
- only accessible after removal of a USER-replaceable subassembly that is required to be in place during normal operation,

these CLEARANCES shall comply with the requirements for BASIC INSULATION.

NOTE 2 The tests of 2.1.1.1 for access to hazardous parts apply to such connectors after removal of the subassembly.

The above minimum CLEARANCES for connectors do not apply to connectors that comply with a standard harmonized with IEC 60083, IEC 60309, IEC 60320, IEC 60906-1 or IEC 60906-2, see also 1.5.2.

**Table G.2 – Minimum clearances up to 2 000 m above sea level**

| CLEARANCES in mm                      |                                       |     |     |                                                     |     |     |                          |     |     |
|---------------------------------------|---------------------------------------|-----|-----|-----------------------------------------------------|-----|-----|--------------------------|-----|-----|
| REQUIRED<br>WITHSTAND VOLTAGE         | FUNCTIONAL<br>INSULATION <sup>a</sup> |     |     | BASIC INSULATION<br>and SUPPLEMENTARY<br>INSULATION |     |     | REINFORCED<br>INSULATION |     |     |
| V peak or d.c.<br>up to and including | Pollution degree                      |     |     |                                                     |     |     |                          |     |     |
|                                       | 1 <sup>b</sup>                        | 2   | 3   | 1 <sup>b</sup>                                      | 2   | 3   | 1 <sup>b</sup>           | 2   | 3   |
| 400                                   | 0,1                                   | 0,2 | 0,8 | 0,2 (0,1)                                           | 0,2 | 0,8 | 0,4 (0,2)                | 0,4 | 1,6 |
| 800                                   | 0,1                                   | 0,2 | 0,8 | 0,2 (0,1)                                           | 0,2 | 0,8 | 0,4 (0,2)                | 0,4 | 1,6 |
| 1 000                                 | 0,2                                   | 0,2 | 0,8 | 0,3 (0,2)                                           |     | 0,8 | 0,6 (0,4)                |     | 1,6 |
| 1 200                                 | 0,3                                   |     | 0,8 | 0,4 (0,3)                                           |     | 0,8 | 0,8 (0,6)                |     | 1,6 |
| 1 500                                 | 0,5                                   |     | 0,8 | 0,8 (0,5)                                           |     | 0,8 | 1,6 (1,0)                |     | 1,6 |
| 2 000                                 | 1,0                                   |     |     | 1,3 (1,0)                                           |     |     | 2,6 (2,0)                |     |     |
| 2 500                                 | 1,5                                   |     |     | 2,0 (1,5)                                           |     |     | 4,0 (3,0)                |     |     |
| 3 000                                 | 2,0                                   |     |     | 2,6 (2,0)                                           |     |     | 5,2 (4,0)                |     |     |
| 4 000                                 | 3,0                                   |     |     | 4,0 (3,0)                                           |     |     | 6,0                      |     |     |
| 6 000                                 | 5,5                                   |     |     | 7,5 (5,5)                                           |     |     | 11                       |     |     |
| 8 000                                 | 8,0                                   |     |     | 11 (8,0)                                            |     |     | 16                       |     |     |
| 10 000                                | 11                                    |     |     | 15 (11)                                             |     |     | 22                       |     |     |
| 12 000                                | 14                                    |     |     | 19 (14)                                             |     |     | 28                       |     |     |
| 15 000                                | 18                                    |     |     | 24 (18)                                             |     |     | 36                       |     |     |
| 25 000                                | 33                                    |     |     | 44 (33)                                             |     |     | 66                       |     |     |
| 40 000                                | 60                                    |     |     | 80 (60)                                             |     |     | 120                      |     |     |
| 50 000                                | 75                                    |     |     | 100 (75)                                            |     |     | 150                      |     |     |
| 60 000                                | 90                                    |     |     | 120 (90)                                            |     |     | 180                      |     |     |
| 80 000                                | 130                                   |     |     | 173 (130)                                           |     |     | 260                      |     |     |
| 100 000                               | 170                                   |     |     | 227 (170)                                           |     |     | 340                      |     |     |

Linear interpolation is permitted between the nearest two points, the calculated minimum CLEARANCES being rounded up to the next higher 0,1 mm increment.

The values in parentheses apply only if manufacturing is subjected to a quality control programme that provides at least the same level of assurance as the example given in Clause R.2. DOUBLE INSULATION and REINFORCED INSULATION shall be subjected to ROUTINE TESTS for electric strength.

In a SECONDARY CIRCUIT, a minimum CLEARANCE of 5 mm replaces any higher value, provided that the insulation involved passes an electric strength test according to 5.2.2 using:

- an a.c. test voltage whose r.m.s. value is 106 % of the PEAK WORKING VOLTAGE (peak value 150 % of the PEAK WORKING VOLTAGE), or
- a d.c. test voltage equal to 150 % of the PEAK WORKING VOLTAGE.

If the CLEARANCE path is partly along the surface of insulation that is not Material Group I, the test voltage is applied across the air gap and the Material Group I only. The part of the path along the surface of any other insulating material is bypassed.

<sup>a</sup> There is no minimum CLEARANCE for FUNCTIONAL INSULATION unless it is required by 5.3.4 a).

<sup>b</sup> It is permitted to use the values for Pollution Degree 1 if one sample passes the tests of 2.10.10.

*Compliance is checked by measurement, taking into account Annex F. The following conditions apply*

- *movable parts shall be placed in the most unfavourable position;*
- *for equipment incorporating ordinary NON-DETACHABLE POWER SUPPLY CORDS, CLEARANCE measurements are made with supply conductors of the largest cross-sectional area specified in 3.3.4, and also without conductors;*

NOTE 3 The force tests of 4.2.2, 4.2.3 and 4.2.4 apply.

- *when measuring CLEARANCES from the BOUNDING SURFACE of an ENCLOSURE of insulating material through a slot or opening in the ENCLOSURE, or through an opening in an accessible connector, the accessible surface shall be considered to be conductive as if it were covered by metal foil wherever it can be touched by the test finger, Figure 2A (see 2.1.1.1), applied without appreciable force (see Figure F.12, point X).*

*There is no need to conduct an electric strength test to verify CLEARANCES except as required in Table G.2 if a minimum 5 mm CLEARANCE is used.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

## **Annex H** (normative)

### **Ionizing radiation**

(see 4.3.13)

*Equipment that might produce ionizing radiation is checked by measuring the amount of radiation.*

*The amount of radiation is determined by means of a radiation monitor of the ionizing chamber type with an effective area of 1 000 mm<sup>2</sup> or by measuring equipment of other types giving equivalent results.*

*Measurements are made with the equipment on test operating at the most unfavourable supply voltage (see 1.4.5) and with OPERATOR controls and service controls adjusted so as to give maximum radiation whilst maintaining the equipment operative for normal use.*

*Internal preset controls not intended to be adjusted during the lifetime of the equipment are not considered to be service controls.*

*At any point 50 mm from the surface of the OPERATOR ACCESS AREA, the dose-rate shall not exceed 36 pA/kg (5 µSv/h) (0,5 mR/h) (see Note 1). Account is taken of the background level.*

NOTE 1 This value is consistent with ICRP 60.

NOTE 2 In the member countries of CENELEC, the amount of ionizing radiation is regulated by European Council Directive 96/29/Euratom of 13 May 1996. This directive requires that at any point 10 cm from the surface of the equipment, the dose-rate shall not exceed 1 µSv/h (0,1 mR/h) taking account of the background level.

### Table of electrochemical potentials (see 2.6.5.6)

**Table J.1 – Electrochemical potentials (V)**

| Magnesium, magnesium alloys | Zinc, zinc alloys | 80 tin/20 Zn on steel, Zn on iron or steel | Aluminum or steel | Cd on steel | Al/Mg alloy | Mild steel | Duralumin | Lead | Cr on steel, soft solder | Cr on Ni on steel, tin on steel | 12 % Cr stainless steel | High Cr stainless steel | Copper, copper alloys | Silver solder, Austenitic stainless steel | Ni on steel | Silver | Rh on Ag on Cu, silver/gold alloy | Carbon | Gold, platinum                                          |
|-----------------------------|-------------------|--------------------------------------------|-------------------|-------------|-------------|------------|-----------|------|--------------------------|---------------------------------|-------------------------|-------------------------|-----------------------|-------------------------------------------|-------------|--------|-----------------------------------|--------|---------------------------------------------------------|
| 0                           | 0,5               | 0,55                                       | 0,7               | 0,8         | 0,85        | 0,9        | 1,0       | 1,05 | 1,1                      | 1,15                            | 1,25                    | 1,35                    | 1,4                   | 1,45                                      | 1,6         | 1,65   | 1,7                               | 1,75   | Magnesium, magnesium alloys                             |
| 0                           | 0                 | 0,05                                       | 0,2               | 0,3         | 0,35        | 0,4        | 0,5       | 0,55 | 0,6                      | 0,65                            | 0,75                    | 0,85                    | 0,9                   | 0,95                                      | 1,1         | 1,15   | 1,2                               | 1,25   | Zinc, zinc alloys                                       |
| 0                           | 0                 | 0                                          | 0,15              | 0,25        | 0,3         | 0,35       | 0,45      | 0,5  | 0,5                      | 0,6                             | 0,7                     | 0,8                     | 0,85                  | 0,9                                       | 1,05        | 1,1    | 1,15                              | 1,2    | 80 tin/20 Zn on steel, Zn on iron or steel              |
| 0                           | 0                 | 0                                          | 0                 | 0,1         | 0,15        | 0,2        | 0,3       | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,9         | 0,95   | 1,0                               | 1,05   | Aluminum                                                |
| 0                           | 0                 | 0                                          | 0                 | 0,05        | 0,1         | 0,2        | 0,25      | 0,3  | 0,35                     | 0,45                            | 0,55                    | 0,6                     | 0,65                  | 0,8                                       | 0,85        | 0,9    | 0,95                              | 1,05   | Cd on steel                                             |
| Ag                          | Silver            | 0                                          | 0,05              | 0,15        | 0,2         | 0,2        | 0,2       | 0,2  | 0,2                      | 0,3                             | 0,4                     | 0,5                     | 0,55                  | 0,6                                       | 0,75        | 0,8    | 0,85                              | 0,9    | Al/Mg alloy                                             |
| Al                          | Aluminum          | 0                                          | 0,05              | 0,15        | 0,2         | 0,2        | 0,2       | 0,2  | 0,2                      | 0,25                            | 0,35                    | 0,45                    | 0,5                   | 0,55                                      | 0,7         | 0,75   | 0,8                               | 0,85   | Mild steel                                              |
| Cd                          | Cadmium           | 0                                          | 0                 | 0,1         | 0,15        | 0,2        | 0,25      | 0,35 | 0,45                     | 0,5                             | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | Duralumin                                               |
| Cr                          | Chromium          | 0                                          | 0                 | 0,05        | 0,1         | 0,15       | 0,25      | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | Lead                                                    |
| Cu                          | Copper            | 0                                          | 0                 | 0,05        | 0,1         | 0,15       | 0,25      | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | Cr on steel, soft solder                                |
| Mg                          | Magnesium         | 0                                          | 0                 | 0,05        | 0,1         | 0,15       | 0,25      | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | Cr on Ni on steel, tin on steel 12 % Cr stainless steel |
| Ni                          | Nickel            | 0                                          | 0                 | 0,05        | 0,1         | 0,15       | 0,25      | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | High Cr stainless steel                                 |
| Rh                          | Rhodium           | 0                                          | 0                 | 0,05        | 0,1         | 0,15       | 0,25      | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | Copper, copper alloys                                   |
| Zn                          | Zinc              | 0                                          | 0                 | 0,05        | 0,1         | 0,15       | 0,25      | 0,35 | 0,4                      | 0,45                            | 0,55                    | 0,65                    | 0,7                   | 0,75                                      | 0,8         | 0,85   | 0,9                               | 0,95   | Silver solder, Austenitic stainless steel               |

NOTE Corrosion due to electrochemical action between dissimilar metals that are in contact is minimized if the combined electrochemical potential is below about 0,6 V. In the table the combined electrochemical potentials are listed for a number of pairs of metals in common use; combinations above the dividing line should be avoided.

**NOTE** Corrosion due to electrochemical action between dissimilar metals that are in contact is minimized if the combined electrochemical potential is below about 0,6 V. In the table the combined electrochemical potentials are listed for a number of pairs of metals in common use; combinations above the dividing line should be avoided.

## **Annex K** (normative)

### **Thermal controls**

(see 1.5.3 and 5.3.8)

#### **K.1 Making and breaking capacity**

THERMOSTATS and TEMPERATURE LIMITERS shall have adequate making and breaking capacity.

*Compliance is checked by subjecting three samples either to the tests of Clauses K.2 and K.3, or to the tests of K.4, as appropriate. If the component is T-marked, one sample is tested with the switch part at room temperature, and two samples with the switch part at a temperature in accordance with the marking.*

*Components not marked with individual ratings are tested either in the equipment or separately, whichever is more convenient, but, if tested separately, the test conditions are to be similar to those occurring in the equipment.*

*During the tests, no sustained arcing shall occur.*

*After the tests, the samples shall show no damage impairing their further use. Electrical connections shall not have worked loose. The component shall withstand an electric strength test as specified in 5.2.2, except that the test voltage for the insulation between the contacts is twice the voltage applied when the equipment is operated at RATED VOLTAGE or at the upper voltage of the RATED VOLTAGE RANGE.*

*For test purposes the switching frequency can be increased above the normal switching frequency inherent to the equipment, provided that no greater risk of failure is induced.*

*If it is not possible to test the component separately, three samples of the equipment in which it is used are tested.*

#### **K.2 Thermostat reliability**

*THERMOSTATS are caused, thermally, to perform 200 cycles of operation (200 makes and 200 breaks) when the equipment is operated at a voltage equal to 110 % of the RATED VOLTAGE or to 110 % of the upper voltage of the RATED VOLTAGE RANGE, and under NORMAL LOAD.*

#### **K.3 Thermostat endurance test**

*THERMOSTATS are caused, thermally, to perform 10 000 cycles of operation (10 000 makes and 10 000 breaks) when the equipment is operated at RATED VOLTAGE or at the upper voltage of the RATED VOLTAGE RANGE, and under NORMAL LOAD.*

#### **K.4 Temperature limiter endurance**

*TEMPERATURE LIMITERS are caused, thermally, to perform 1 000 cycles of operation (1 000 makes and 1 000 breaks) when the equipment is operated at RATED VOLTAGE, or at the upper voltage of the RATED VOLTAGE RANGE, and under NORMAL LOAD.*

#### **K.5 Thermal cut-out reliability**

THERMAL CUT-OUTS shall operate reliably.

*Compliance is checked while the equipment is operating under the conditions specified in 4.5.2.*

*AUTOMATIC RESET THERMAL CUT-OUTS are caused to operate 200 times; MANUAL RESET THERMAL CUT-OUTS are reset after each operation and thus caused to operate ten times.*

*After the tests, the samples shall show no damage impairing their further use.*

*Forced cooling and resting periods are permitted to prevent damage to the equipment.*

#### **K.6 Stability of operation**

THERMOSTATS, TEMPERATURE LIMITERS and THERMAL CUT-OUTS shall be so constructed that their setting is not changed appreciably by heating, vibration, etc., occurring in normal use.

*Compliance is checked by inspection during the abnormal operation tests of 5.3.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

## Annex L (normative)

### Normal load conditions for some types of electrical business equipment

(see 1.2.2.1 and 4.5.2)

#### L.1 Typewriters

*Typewriters are energized with no load applied until steady conditions are established. Manually keyed machines are then operated at a rate of 200 characters per minute, with a line transport operation after each 60 characters including spaces, until steady conditions are established. Automatically operated machines are operated at the maximum typing speed recommended in the manufacturer's instructions.*

#### L.2 Adding machines and cash registers

*For adding machines and cash registers, four digit numbers are entered or set and the repeat key or operating bar activated 24 times per minute, until steady conditions are established, the four digit number to be used being that which loads the machine most heavily. If the cash register has a drawer that opens every time an item is rung up, the cash register is operated at a rate of 15 operation cycles per minute, the drawer being shut after each operation, until steady conditions are established. For an adding machine or cash register, an operation consists of the OPERATOR setting or inserting the figures with which the machine is to operate and then pressing the operating bar, repeating key or the like for each operation.*

#### L.3 Erasers

*Erasers are operated continuously at no load for 1 h.*

#### L.4 Pencil sharpeners

*For a pencil sharpener, five new pencils are each sharpened eight times according to the following timetable. Except for new pencils, the point is broken off before each sharpening.*

|                                     |                                       |
|-------------------------------------|---------------------------------------|
| <i>Sharpening period</i>            | <i>4 s for a new pencil</i>           |
|                                     | <i>2 s for subsequent sharpenings</i> |
| <i>Interval between sharpenings</i> | <i>6 s</i>                            |
| <i>Interval between pencils</i>     | <i>60 s</i>                           |

*All times are approximate.*



## **L.5 Duplicators and copy machines**

*Duplicators and copy machines are operated continuously at maximum speed until steady conditions are established. It is permitted to introduce a rest period of 3 min after each 500 copies if this is compatible with the design of the machine.*

## **L.6 Motor-operated files**

*Motor-operated files are loaded to simulate a condition of unbalance caused by uneven distribution of the contents. During operation, the unbalanced load is moved approximately one-third of the total carrier travel of the path that will impose maximum loading during each operation. The operation is repeated each 15 s until steady conditions are established.*

*A load caused by the non-uniform distribution of the contents is permitted to be simulated as follows.*

*In the case of vertical transport, three-eighths of the filing area are to be loaded, without leaving clearances, with three-eighths of the admissible load. The entire transport way is to be travelled with this load. The transport cycle is to be repeated, at intervals of 10 s, until the temperature has stabilized.*

*In the case of a different transport, for example, horizontal or circular mode of transport, the total load is moved over the whole transport way. The transport cycle is to be repeated, at intervals of 15 s, until the temperature has stabilized.*

## **L.7 Other business equipment**

*Other business equipment is operated according to the most unfavourable way of operation given in the operating instructions.*

## Annex M (normative)

### Criteria for telephone ringing signals

(see 2.3.1)

#### M.1 Introduction

The two alternative methods described in this annex reflect satisfactory experience in different parts of the world. Method A is typical of analogue telephone networks in Europe, and Method B of those in North America. The two methods result in standards of electrical safety that are broadly equivalent.

#### M.2 Method A

*This method requires that the currents  $I_{TS1}$  and  $I_{TS2}$  flowing through a 5 000  $\Omega$  resistor, between any two conductors or between one conductor and earth do not exceed the limits specified, as follows.*

a) *For normal operation,  $I_{TS1}$ , the current determined from the calculated or measured current for any single active ringing period  $t_1$  (as defined in Figure M.1), does not exceed:*

- 1) for cadenced ringing ( $t_1 < \infty$ ), the current given by the curve of Figure M.2 at  $t_1$ ;*
- 2) for continuous ringing ( $t_1 = \infty$ ), 16 mA.*

*$I_{TS1}$ , in mA, is as given by*

$$I_{TS1} = \frac{I_p}{\sqrt{2}} \quad \text{for } (t_1 \leq 600 \text{ ms})$$

$$I_{TS1} = \frac{t_1 - 600}{600} \times \frac{I_{pp}}{2\sqrt{2}} + \frac{1\,200 - t_1}{600} \times \frac{I_p}{\sqrt{2}} \quad \text{for } (600 \text{ ms} < t_1 < 1\,200 \text{ ms})$$

$$I_{TS1} = \frac{I_{pp}}{2\sqrt{2}} \quad \text{for } (t_1 \geq 1\,200 \text{ ms})$$

*where*

$I_p$  is the peak current, in mA, of the relevant waveform given in Figure M.3;

$I_{pp}$  is the peak-to-peak current, in mA, of the relevant waveform given in Figure M.3;

$t_1$  is expressed in ms.

- b) For normal operation,  $I_{TS2}$ , the average current for repeated bursts of a cadenced ringing signal calculated for one ringing cadence cycle  $t_2$  (as defined in Figure M.1), does not exceed 16 mA r.m.s.

$I_{TS2}$  in mA is as given by

$$I_{TS2} = \left[ \frac{t_1}{t_2} \times I_{TS1}^2 + \frac{t_2 - t_1}{t_2} \times \frac{I_{dc}^2}{3,75^2} \right]^{1/2}$$

where

$I_{TS1}$  in mA, is as given by item a) of Clause M.2;


$I_{dc}$  is the d.c. current in mA flowing through the 5 000  $\Omega$  resistor during the non-active period of the cadence cycle;

$t_1$  and  $t_2$  are expressed in milliseconds.

NOTE The frequencies of telephone ringing voltages are normally within the range of 14 Hz to 50 Hz.

- c) Under single fault conditions, including where cadenced ringing becomes continuous:

- $I_{TS1}$  shall not exceed the current given by the curve of Figure M.2, or 20 mA, whichever is greater;
- $I_{TS2}$  shall not exceed a limit of 20 mA.

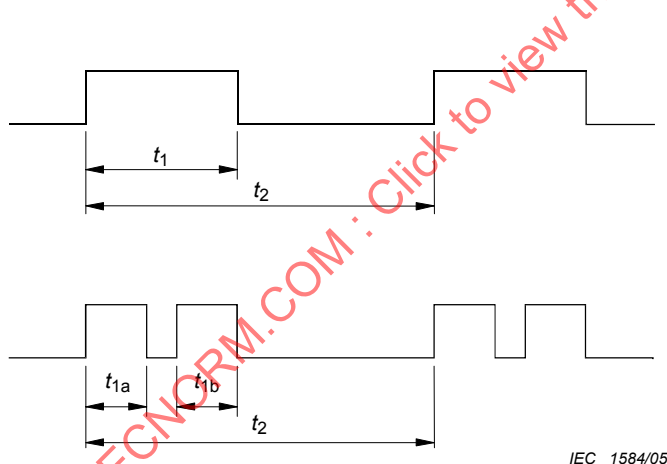


$t_1$  is:

- the duration of a single ringing period, where the ringing is active for the whole of the single ringing period;
- the sum of the active periods of ringing within the single ringing period, where the single ringing period contains two or more discrete active periods of ringing, as in the example shown, for which  $t_1 = t_{1a} + t_{1b}$ .


$t_2$  is the duration of one complete cadence cycle.

Figure M.1 – Definition of ringing period and cadence cycle

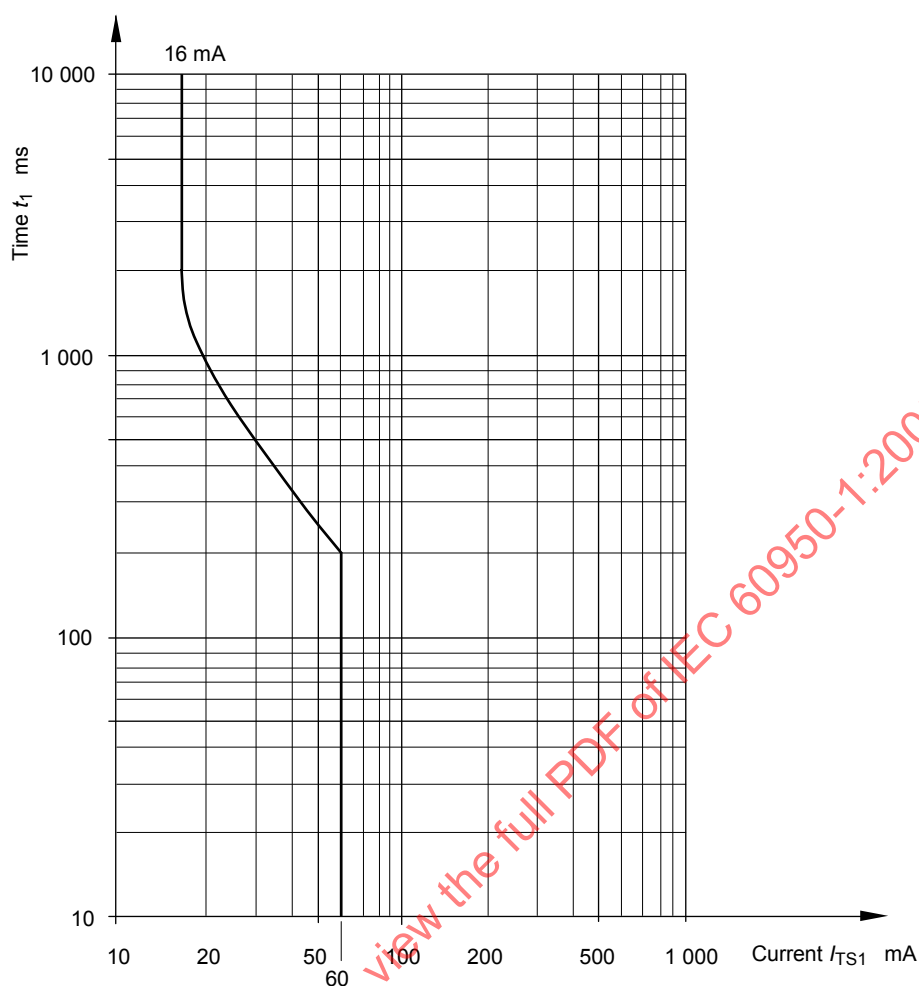

IEC 1585/05

Figure M.2 –  $I_{TS1}$  limit curve for cadenced ringing signal

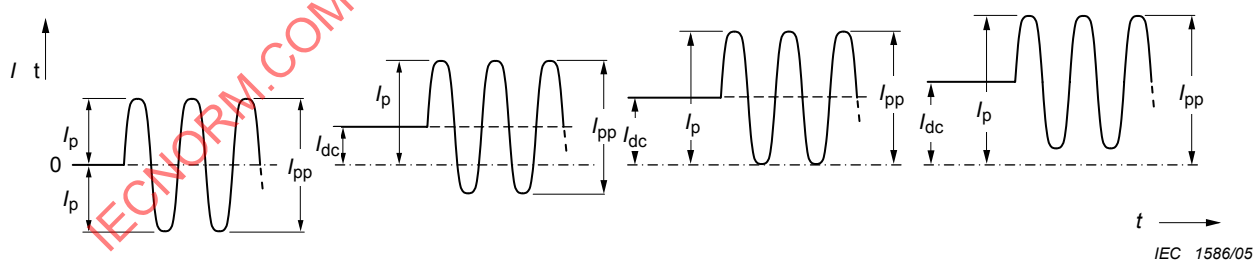

IEC 1586/05

Figure M.3 – Peak and peak-to-peak currents

### M.3 Method B

NOTE This method is aligned with USA CFR 47 ("FCC Rules") Part 68, Sub-part D, with additional requirements that apply under fault conditions.

#### M.3.1 Ringing signal

##### M.3.1.1 Frequency

The ringing signal shall use only frequencies whose fundamental component is equal to or less than 70 Hz.

##### M.3.1.2 Voltage

The ringing voltage shall be less than 300 V peak-to-peak and less than 200 V peak with respect to earth, measured across a resistance of at least 1 M $\Omega$ .

##### M.3.1.3 Cadence

The ringing voltage shall be interrupted to create quiet intervals of at least 1 s duration separated by no more than 5 s. During the quiet intervals, the voltage to earth shall not exceed 60 V d.c.

##### M.3.1.4 Single fault current

Where cadenced ringing becomes continuous as a consequence of a single fault, the current through a 5 000  $\Omega$  resistor connected between any two output conductors or between one output conductor and earth shall not exceed 56.5 mA peak-to-peak, as shown in Figure M.3.

#### M.3.2 Tripping device and monitoring voltage


##### M.3.2.1 Conditions for use of a tripping device or a monitoring voltage

A ringing signal circuit shall include a tripping device as specified in M.3.2.2, or provide a monitoring voltage as specified in M.3.2.3, or both, depending on the current through a specified resistance connected between the ringing signal generator and earth, as follows:

- if the current through any resistor of 500  $\Omega$  or greater, does not exceed 100 mA peak-to-peak, neither a tripping device nor a monitoring voltage is required;
- if the current through any resistor of 1 500  $\Omega$  or greater, exceeds 100 mA peak-to-peak, a tripping device shall be included. If the tripping device meets the trip criteria specified in Figure M.4 with any resistor of  $R = 500 \Omega$  or greater, no monitoring voltage is required. If, however, the tripping device only meets the trip criteria with any resistor of  $R = 1\,500 \Omega$  or greater, a monitoring voltage shall also be provided;
- if the current through any resistor of 500  $\Omega$  or greater, exceeds 100 mA peak-to-peak, but the current through any resistor of 1 500  $\Omega$  or greater, does not exceed this value, either:
  - a tripping device shall be provided, meeting the trip criteria specified in Figure M.4 with any resistor of  $R = 500 \Omega$  or greater, or
  - a monitoring voltage shall be provided.

NOTE 1 Tripping devices are, in general, current-sensitive and do not have a linear response, due to the resistance/current characteristics and time delay/response factor in their design.

NOTE 2 In order to minimize testing time, a variable resistor box should be used.

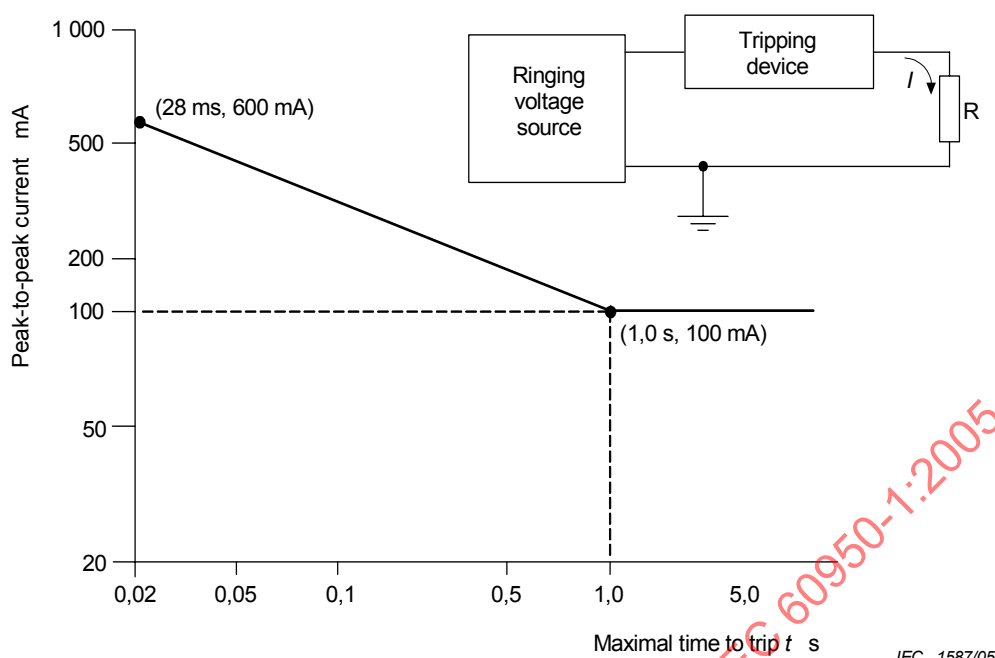

NOTE 1  $t$  is measured from the time of connection of the resistor R to the circuit.

NOTE 2 The sloping part of the curve is defined as  $I = 100 / \sqrt{t}$ .

**Figure M.4 – Ringing voltage trip criteria**

#### **M.3.2.2 Tripping device**

A series current-sensitive tripping device in the ringlead that will trip ringing as specified in Figure M.4.

#### **M.3.2.3 Monitoring voltage**

A voltage to earth on the tip or ring conductor with a magnitude of at least 19 V peak, but not exceeding 60 V d.c., whenever the ringing voltage is not present (idle state).

## Annex N (normative)

### Impulse test generators

(see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.4.2, 7.4.3 and Clause G.5)

NOTE Extreme care is necessary when using these test generators due to the high electric charge stored in the capacitor  $C_1$ .

#### N.1 ITU-T impulse test generators

The circuit in Figure N.1, using the component values in references 1 and 2 of Table N.1, is used to generate impulses, the  $C_1$  capacitor being charged initially to a voltage  $U_c$ .

Circuit reference 1 of Table N.1 generates 10/700  $\mu\text{s}$  impulses (10  $\mu\text{s}$  virtual front time, 700  $\mu\text{s}$  virtual time to half value) as specified in ITU-T Recommendation K.44 to simulate lightning interference in the TELECOMMUNICATION NETWORK.

Circuit reference 2 of Table N.1 generates 1,2/50  $\mu\text{s}$  impulses (1,2  $\mu\text{s}$  virtual front time, 50  $\mu\text{s}$  virtual time to half value) as specified in ITU-T Recommendation K.44 to simulate transients in power distribution systems.

The impulse wave shapes are under open-circuit conditions and can be different under load conditions.

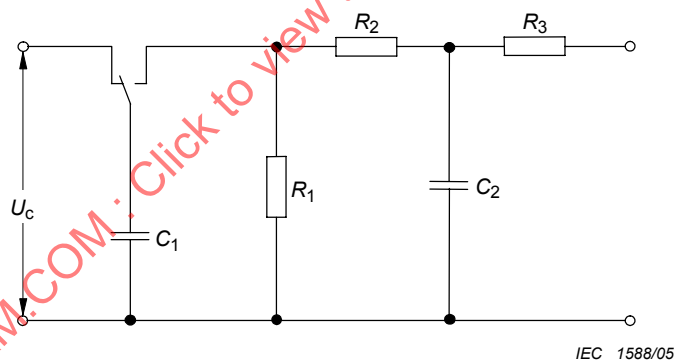


Figure N.1 – ITU-T impulse test generator circuit

## N.2 IEC 60065 impulse test generator

The circuit in Figure N.2, using the component values reference 3 in Table N.1, is used to generate impulses, the  $C_1$  capacitor being charged initially to a voltage  $U_c$ . The switch used in Figure N.2 is a critical part of the circuit. See 10.1 of IEC 60065, for further information.

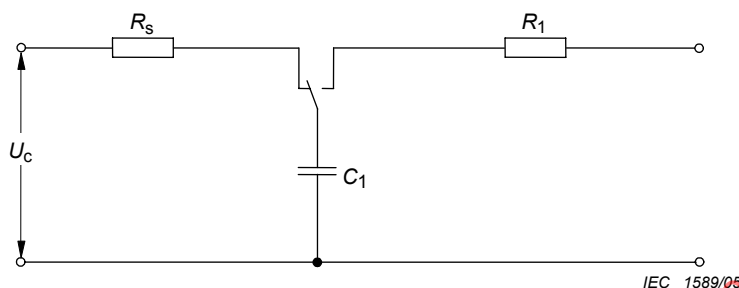


Figure N.2 – IEC 60065 impulse test generator circuit

Table N.1 – Component values for Figures N.1 and N.2

| Reference      | Test impulse   | Figure | $C_1$      | $C_2$       | $R_1$        | $R_2$       | $R_3$       | $R_s$         | See                                                         |
|----------------|----------------|--------|------------|-------------|--------------|-------------|-------------|---------------|-------------------------------------------------------------|
| 1 <sup>a</sup> | 10/700 $\mu$ s | N.1    | 20 $\mu$ F | 0,2 $\mu$ F | 50 $\Omega$  | 15 $\Omega$ | 25 $\Omega$ | –             | 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.4.3 and item b) of Clause G.5 |
| 2 <sup>b</sup> | 1,2/50 $\mu$ s | N.1    | 1 $\mu$ F  | 30 nF       | 76 $\Omega$  | 13 $\Omega$ | 25 $\Omega$ | –             | 1.5.7.2, 2.10.3.9 and item a) of Clause G.5                 |
| 3 <sup>c</sup> | –              | N.2    | 1 nF       | –           | 1 k $\Omega$ | –           | –           | 15 M $\Omega$ | 1.5.7.3 and 7.4.2                                           |

<sup>a</sup> Reference 1 impulse is typical of voltages induced into telephone wires and coaxial cables in long outdoor cable runs by nearby lightning strikes to earth.

<sup>b</sup> Reference 2 impulse is typical of earth potential rises caused either by lightning strikes to power lines or by power line faults.

<sup>c</sup> Reference 3 impulse is typical of voltages induced into antenna system wiring caused by nearby lightning strikes to earth.



## **Annex P** (normative)

### **Normative references**

The following reference documents are indispensable for the application of this standard. If the date of the reference document is given, only that edition applies, excluding any subsequent corrigenda and amendments. For undated references, the latest edition of the referenced document applies, including any corrigenda and amendments.

Further information on the reference documents, including how to obtain copies, can be found on the following internet sites:

<http://www.iec.ch>  
<http://www.iso.org>  
<http://www.itu.int>

For the locations in the standard where these documents are mentioned, see the Index.

IEC 60065:2001, *Audio, video and similar electronic apparatus – Safety requirements*  
Amendment 1<sup>2)</sup>

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60073, *Basic and safety principles for man-machine interface, marking and identification – Coding principles for indicators and actuators*

IEC 60083, *Plugs and socket-outlets for domestic and similar general use standardized in member countries of IEC*

IEC 60085:2004, *Electrical insulation – Thermal classification*

IEC 60112, *Method for determination of the proof and the comparative tracking indices of insulating materials*

IEC 60216-4-1, *Guide for the determination of thermal endurance properties of electrical insulating materials – Part 4: Ageing ovens – Section 1: Single-chamber ovens*

IEC 60227 (all parts), *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V*

IEC 60245 (all parts), *Rubber insulated cables – Rated voltages up to and including 450/750 V*

IEC 60309 (all parts), *Plugs, socket-outlets and couplers for industrial purposes*

IEC 60317 (all parts), *Specifications for particular types of winding wires*

---

<sup>2)</sup> To be published.

IEC 60317-43, *Specifications for particular types of winding wires – Part 43: Aromatic polyimide tape wrapped round copper wire, class 240*

IEC 60320 (all parts), *Appliance couplers for household and similar general purposes*

IEC 60364-1:2001, *Electrical installations of buildings - Part 1: Fundamental principles, assessment of general characteristics, definitions*

IEC 60384-14:1993, *Fixed capacitors for use in electronic equipment – Part 14: Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains*  
Amendment 1 (1995)

IEC 60417-DB:2002<sup>3)</sup>, *Graphical symbols for use on equipment*

IEC 60664-1:1992, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*<sup>4)</sup>  
Amendment 1 (2000)  
Amendment 2 (2002)

IEC 60695-2-11, *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end-products*

IEC 60695-2-20, *Fire hazard testing – Part 2-20: Glowing/hot wire based test methods – Hot-wire coil ignitability - Apparatus, test method and guidance*

IEC 60695-10-2, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test*

IEC 60695-11-3, *Fire hazard testing – Part 11-3: Test flames – 500 W flames – Apparatus and confirmational test methods*

IEC 60695-11-4, *Fire hazard testing – Part 11-4: Test flames – 50 W flames – Apparatus and confirmational test methods*

IEC 60695-11-5:2004, *Fire hazard testing – Part 11-5: Test flames – Needle-flame test method – Apparatus, confirmatory test arrangement and guidance*

IEC 60695-11-10, *Fire hazard testing – Part 11-10: Test flames – 50 W horizontal and vertical flame test methods*

IEC 60695-11-20, *Fire hazard testing – Part 11-20: Test flames – 500 W flame test methods*

IEC 60730-1:1999, *Automatic electrical controls for household and similar use – Part 1: General requirements*<sup>5)</sup>  
Amendment 1 (2003)

<sup>3)</sup> “DB” refers to the IEC on-line database.

<sup>4)</sup> A consolidated edition 1.2 exists, including IEC 60664-1:1992 and its Amendments 1 (2000) and 2 (2002).

<sup>5)</sup> A consolidated edition 3.1 exists, including IEC 60730-1:1999 and its Amendment 1 (2003).

IEC 60747-5-5, <sup>6)</sup> *Discrete semiconductor devices – Part 5-5: Optoelectronic devices – Photocouplers, optocouplers*

IEC 60825-1, *Safety of laser products – Part 1: Equipment classification, requirements and user's guide*

IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems*

IEC 60825-9, *Safety of laser products – Part 9: Compilation of maximum permissible exposure to incoherent optical radiation*

IEC 60825-12, *Safety of laser products - Part 12: Safety of free space optical communication systems used for transmission of information*

IEC 60851-3:1996, *Winding wires – Test methods – Part 3: Mechanical properties*<sup>7)</sup>  
Amendment 1 (1997)

IEC 60851-5:1996, *Winding wires – Test methods – Part 5: Electrical properties*<sup>8)</sup>  
Amendment 1 (1997)  
Amendment 2 (2004)

IEC 60851-6:1996, *Winding wires - Test methods – Part 6: Thermal properties*

IEC 60885-1:1987, *Electrical test methods for electric cables – Part 1: Electrical tests for cables, cords and wires for voltages up to and including 450/750 V*

IEC 60906-1, *IEC system of plugs and socket-outlets for household and similar purposes – Part 1: Plugs and socket-outlets 16 A 250 V a.c.*

IEC 60906-2, *IEC system of plugs and socket-outlets for household and similar purposes – Part 2: Plugs and socket-outlets 15 A 125 V a.c.*

IEC 60947-1:2004, *Low voltage switchgear and control gear - Part 1: General rules*

IEC 60990:1999, *Methods of measurement of touch current and protective conductor current*

IEC 61051-2:1991, *Varistors for use in electronic equipment – Part 2: Sectional specification for surge suppression varistors*

IEC 61058-1:2000, *Switches for appliances – Part 1: General requirements*

ISO 178, *Plastics – Determination of flexural properties*

ISO 179 (all parts), *Plastics – Determination of Charpy impact properties*

ISO 180, *Plastics – Determination of Izod impact strength*

---

6) To be published.

7) A consolidated edition 2.1 exists, including IEC 60851-3:1996 and its Amendment 1 (1997).

8) A consolidated edition 3.2 exists, including IEC 60851-5:1996 and its Amendments 1 (1997) and 2 (2004).

ISO 261, *ISO General-purpose metric screw threads – General plan*

ISO 262, *ISO General-purpose metric screw threads – Selected sizes for screws, bolts and nuts*

ISO 527 (all parts), *Plastics – Determination of tensile properties*

ISO 3864 (all parts), *Graphical symbols – Safety colours and safety signs*

ISO 4892-1, *Plastics – Methods of exposure to laboratory light sources – Part 1: General guidance*

ISO 4892-2, *Plastics – Methods of exposure to laboratory light sources – Part 2: Xenon-arc sources*

ISO 4892-4, *Plastics, Methods of exposure to laboratory light sources – Part 4: Open-flame carbon-arc lamps*

ISO 7000-DB:2004<sup>9)</sup>, *Graphical symbols for use on equipment – Index and synopsis*

ISO 8256, *Plastics – Determination of tensile-impact strength*

ISO 9772, *Cellular plastics – Determination of horizontal burning characteristics of small specimens subjected to a small flame*

ISO 9773, *Plastics – Determination of burning behaviour of thin flexible vertical specimens in contact with a small-flame ignition source*

ITU-T Recommendation K.44, *Resistibility tests for telecommunication equipment exposed to overvoltages and overcurrents – Basic Recommendation*

---

<sup>9)</sup> "DB" refers to the IEC and ISO on-line database.

## **Annex Q** (normative)

### **Voltage dependent resistors (VDRs)**

(see 1.5.9.1)

A VDR used in a PRIMARY CIRCUIT shall comply with IEC 61051-2, with the following details.

**a) Preferred climatic categories (2.1.1 of IEC 61051-2)**

Lower category temperature: - 10 °C

Upper category temperature: + 85 °C

Duration of damp heat, steady state test: 21 days

**b) Maximum continuous voltage (2.1.2 of IEC 61051-2)**

The maximum continuous a.c. voltage is selected from the list of preferred voltages and shall be at least 120 % of

- the RATED VOLTAGE of the equipment or
- the upper voltage of the RATED VOLTAGE RANGE of the equipment.

**c) Pulse current (Table I group 1 of IEC 61051-2)**

*Combination pulses of 6 kV/3 kA of alternating polarity are used, having a pulse shape of 1,2/50 µs for voltage and 8/20 µs for current.*

*In addition to the performance requirements of Table I group 1, the clamping voltage after the test shall not have changed by more than 10 % when measured with the manufacturer's specified current.*

## **Annex R** (informative)

### **Examples of requirements for quality control programmes**

NOTE This annex gives examples of requirements for quality control programmes as specified in 2.10.6.2 for minimum separation distances for coated printed boards and in 2.10.3 and Clause G.2 for reduced CLEARANCES.

#### **R.1 Minimum separation distances for unpopulated coated printed boards** (see 2.10.6.2)

A manufacturer wishing to use the reduced separation distances permitted by 2.10.6.2, Table 2Q, shall implement a quality control programme for those features of the boards that are listed in Table R.1. This programme shall include specific quality controls for the tools and materials that affect conductor spacing, adequate inspection of pattern and spacing, cleanliness, coating thickness, electrical tests for short-circuits, insulation resistance and electric withstand voltage.

The manufacturer shall also identify and plan the protection and, where applicable, installation processes that directly affect quality and shall ensure that these processes are conducted under controlled conditions. Controlled conditions shall include the following:

- documented work instructions defining process, equipment, environment and manner of production where the absence of such instructions would adversely affect quality, use of suitable production and installation equipment, suitable working environment, compliance with reference standards, specifications and quality plans;
- monitoring and control of suitable processes and product characteristics during production and installation in the equipment;
- criteria for workmanship stipulated to the extent necessary in written specifications or by means of representative samples;
- records maintained for qualified processes, equipment and personnel as appropriate.

Table R.1 provides the sampling plan for attributes and tests necessary to conform to the requirements of 2.10.6.2. The number of samples of production boards shall be based on IEC 60410 or ISO 2859-1 or equivalent national standards.

**Table R.1 – Rules for sampling and inspection – coated printed boards**

| Tests                                        | BASIC<br>INSULATION    | SUPPLEMENTARY<br>INSULATION | REINFORCED<br>INSULATION                                      |
|----------------------------------------------|------------------------|-----------------------------|---------------------------------------------------------------|
| Spacing mm <sup>a</sup>                      | Sampling<br>S2 AQL 1,0 | Sampling<br>S2 AQL 1,0      | Sampling<br>S2 AQL 1,0                                        |
| Electric strength test <sup>b</sup>          | Sampling<br>S2 AQL 2,5 | Sampling<br>S2 AQL 2,5      | ROUTINE TEST;<br>one failure requires<br>evaluation for cause |
| Abrasion resistance                          | Sampling<br>S1 AQL 2,5 | Sampling<br>S1 AQL 2,5      | Sampling<br>S1 AQL 2,5                                        |
| Thermal ageing <sup>c</sup>                  | Sampling<br>S3 AQL 4   | Sampling<br>S3 AQL 4        | Sampling<br>S3 AQL 4                                          |
| Thermal cycling <sup>c</sup>                 | Sampling<br>S1 AQL 1,5 | Sampling<br>S1 AQL 1,5      | Sampling<br>S1 AQL 1,5                                        |
| Insulation resistance <sup>d</sup>           | Sampling<br>S2 AQL 2,5 | Sampling<br>S2 AQL 2,5      | Sampling<br>S2 AQL 2,5                                        |
| Visual inspection<br>of coating <sup>e</sup> | ROUTINE TEST           | ROUTINE TEST                | ROUTINE TEST                                                  |

<sup>a</sup> To minimize test and inspection time, it is permitted to replace measurement of separation distances by measurement of breakdown voltage. Initially the breakdown voltage is established for ten uncoated boards for which the correct spacing measurements have been confirmed. The breakdown voltage of subsequent uncoated production boards is then checked against a lower limit equal to the minimum breakdown voltage for the ten initial boards minus 100 V. If breakdown occurs at this lower limit, a board is considered a failure unless direct measurement of the spacing conforms with the requirement.

<sup>b</sup> The electric strength test shall be conducted according to 5.2.2 except that the duration shall be 1 s to 5 s.

<sup>c</sup> The thermal ageing and thermal cycling tests shall be done whenever the type of coating material, printed board material, or the process is changed. It is recommended that it should be done at least once a year.

<sup>d</sup> The insulation resistance shall be not less than 1 000 MΩ.

<sup>e</sup> Visual inspection without optical magnification or automated optical inspection with equivalent resolution shall show no cracks, no bubbles, no pinholes, or detachment of the coating in the area of reduced spacings. Any such defects shall be reason for rejection of the printed board.

## R.2 Reduced clearances (see 2.10.3)

A manufacturer wishing to use reduced CLEARANCES permitted by 2.10.3, Tables 2J, 2K, 2L and G.2, shall implement a quality control programme for those features of the construction listed in Table R.2. This programme shall include specific quality controls for the tools and materials that affect CLEARANCES.

The manufacturer shall also identify and plan the protection and, where applicable, installation processes that directly affect quality and shall ensure that these processes are conducted under controlled conditions. Controlled conditions shall include the following:

- documented work instructions defining process, equipment, environment, and manner of production where the absence of such instructions would adversely affect quality, suitable working environment, compliance with reference standards or specifications and quality plans;
- monitoring and control of suitable processes and product characteristics during production and installation in the equipment;
- criteria for workmanship stipulated to the extent necessary in written specifications or by means of representative samples;
- records maintained for qualified processes, equipment and personnel as appropriate.

Table R.2 provides the sampling plan for attributes and tests necessary to conform to the requirements of 2.10.3. The number of samples of production parts or assemblies shall be based on IEC 60410 or ISO 2859-1 or equivalent national standards.

**Table R.2 – Rules for sampling and inspection – reduced clearances**

| Tests                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | BASIC<br>INSULATION  | SUPPLEMENTARY<br>INSULATION | REINFORCED<br>INSULATION                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------|---------------------------------------------------------------|
| CLEARANCE <sup>a</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Sampling<br>S2 AQL 4 | Sampling<br>S2 AQL 4        | Sampling<br>S2 AQL 4                                          |
| Electric strength test <sup>b</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | No test              | No test                     | ROUTINE TEST;<br>one failure requires<br>evaluation for cause |
| <p><sup>a</sup> To minimize test and inspection time, it is permitted to replace measurement of CLEARANCES by measurement of breakdown voltage. Initially the breakdown voltage is established for ten samples for which the correct CLEARANCE measurements have been confirmed. The breakdown voltage of subsequent parts or assemblies is then checked against a lower limit equal to the minimum breakdown voltage of the initial ten samples minus 100 V. If breakdown occurs at this lower limit, a part or assembly is considered a failure unless direct measurement of the CLEARANCE conforms to the requirement.</p> <p><sup>b</sup> The electric strength test for REINFORCED INSULATION shall consist of one of the following alternatives:</p> <ul style="list-style-type: none"> <li>- six impulses of alternating polarity, using a 1,2/50 µs impulse with a magnitude equal to the peak of the test voltage in accordance with 5.2.2;</li> <li>- a three cycle pulse of a.c. power frequency with a magnitude equal to the test voltage in accordance with 5.2.2;</li> <li>- six impulses of alternating polarity, using 10 ms d.c. impulses with a magnitude equal to the peak of the test voltage in accordance with 5.2.2.</li> </ul> |                      |                             |                                                               |



## **Annex S** (informative)

### **Procedure for impulse testing**

(see 6.2.2.3)

#### **S.1 Test equipment**

Impulse generator according to Annex N.

Storage oscilloscope with a bandwidth of a few MHz.


High voltage probe with compensating elements.

#### **S.2 Test procedure**

*Apply the required number of impulses to the equipment under test and record the waveform patterns.*


*Examples are given in S.3 to assist in judging whether or not a surge suppressor has operated or insulation has broken down.*

#### **S.3 Examples of waveforms during impulse testing**

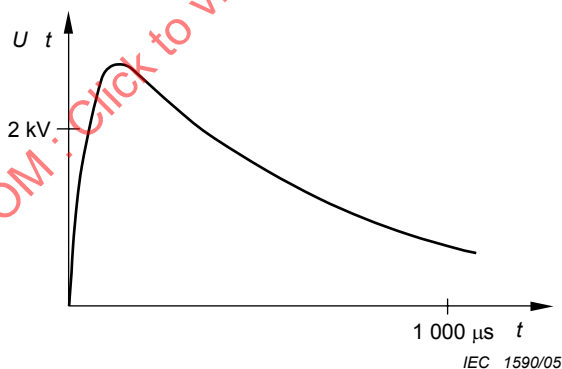


Consecutive impulses are identical in their waveforms.

**Figure S.1 – Waveform on insulation without surge suppressors and no breakdown**

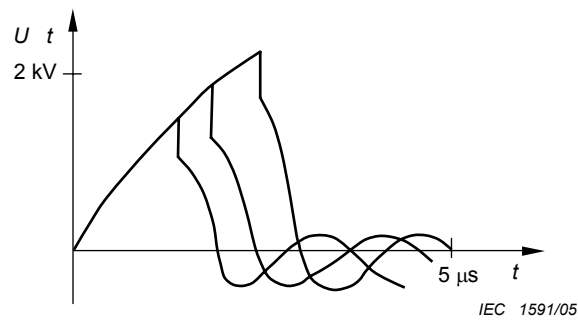

Consecutive impulses are not identical in their waveforms. The pulse shape changes from pulse to pulse until a stable resistance path through the insulation is established. Breakdown can be seen clearly on the shape of the pulse voltage oscillogram.

**Figure S.2 – Waveforms on insulation during breakdown without surge suppressors**

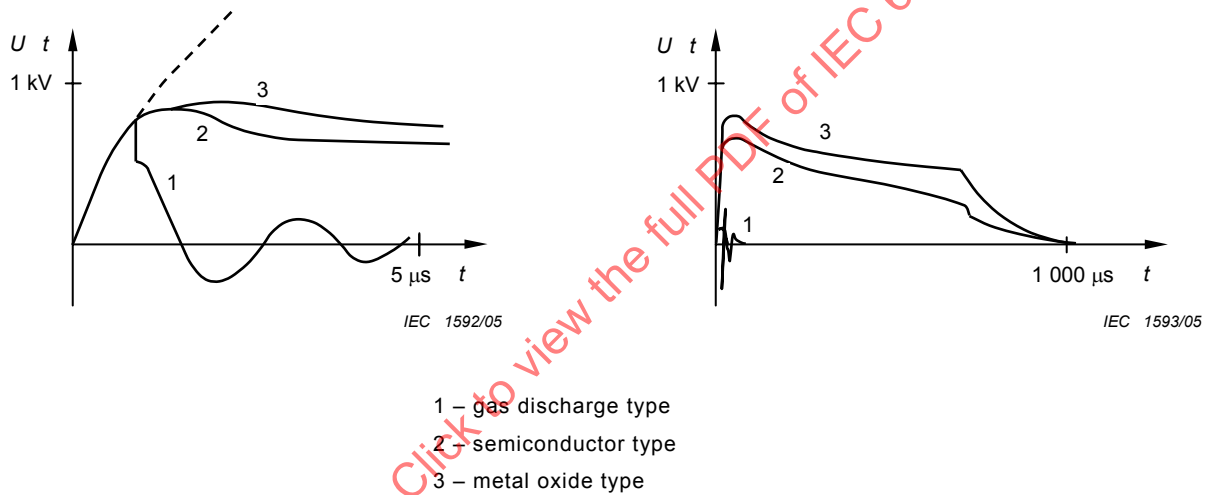

Consecutive impulses are identical in their waveforms.

**Figure S.3 – Waveforms on insulation with surge suppressors in operation**

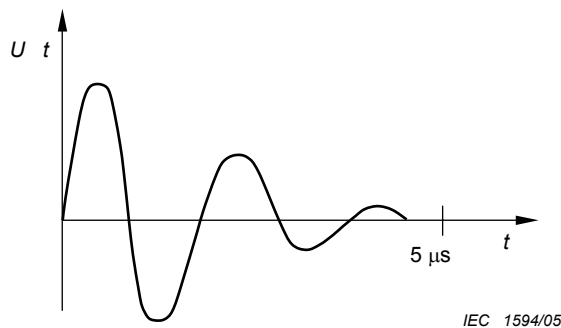


**Figure S.4 – Waveform on short-circuited surge suppressor and insulation**

## **Annex T** (informative)

### **Guidance on protection against ingress of water**

(see 1.1.2)

When the intended application is such that ingress of water is possible, an appropriate degree of protection other than IPX0 should be selected by the manufacturer from IEC 60529, an extract from which is included in this annex.

Additional design features should then be included to ensure that ingress of water does not affect insulation.

IEC 60529 gives test conditions for each degree of protection other than IPX0. The conditions appropriate to the selected degree of protection should be applied to the equipment, immediately followed by an electric strength test as specified in 5.2.2 on any insulation that may have become wet, and inspection should show that water has not created a risk of personal injury or fire. In particular, there should be no trace of water on insulation that is not designed to operate when wet.

If the equipment is provided with drain holes, inspection should show that any water that enters does not accumulate and that it drains away without affecting compliance.

If the equipment is not provided with drain holes, account should be taken of the possibility of build-up of water.

Where equipment is only partly exposed to water, for example, when it is to be installed through an opening in an outside wall, only the exposed parts should be subjected to the IEC 60529 test conditions. For these tests, such equipment should be installed in an appropriate test assembly, simulating actual conditions of installation according to the installation instructions, including the use of a kit of sealing parts where required.

It should not be possible to remove, without the aid of a TOOL, parts that ensure the required degree of protection against ingress of water.

The information in Table T.1 is extracted from IEC 60529.

Table T.1 – Extract from IEC 60529

| Second characteristic numeral | Degree of protection                                                             |                                                                                                                                                                                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | Brief description                                                                | Definition                                                                                                                                                                                                                                             |
| 0                             | Non-protected                                                                    | –                                                                                                                                                                                                                                                      |
| 1                             | Protected against vertically falling water drops                                 | Vertically falling water drops shall have no harmful effects                                                                                                                                                                                           |
| 2                             | Protected against vertically falling water drops when enclosure tilted up to 15° | Vertically falling drops shall have no harmful effects when the enclosure is tilted at any angle up to 15° on either side of the vertical                                                                                                              |
| 3                             | Protected against spraying water                                                 | Water sprayed at an angle up to 60° on either side of the vertical shall have no harmful effects                                                                                                                                                       |
| 4                             | Protected against splashing water                                                | Water splashed against the enclosure from any direction shall have no harmful effects                                                                                                                                                                  |
| 5                             | Protected against water jets                                                     | Water projected in jets against the enclosure from any direction shall have no harmful effects                                                                                                                                                         |
| 6                             | Protected against powerful water jets                                            | Water projected in powerful jets against the enclosure from any direction shall have no harmful effects                                                                                                                                                |
| 7                             | Protected against the effects of temporary immersion in water                    | Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time                                                                    |
| 8                             | Protected against the effects of continuous immersion in water                   | Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be agreed between the manufacturer and user but that are more severe than for numeral 7 |

IECNORM.COM : Click to view the full text of IEC 60950-1:2005

## **Annex U** (normative)

### **Insulated winding wires for use without interleaved insulation**

(see 2.10.5.4)

This annex specifies winding wire whose insulation may be used to provide BASIC INSULATION, SUPPLEMENTARY INSULATION, DOUBLE INSULATION or REINFORCED INSULATION in wound components without interleaved insulation.

This annex covers round winding wires having diameters between 0,05 mm and 5,00 mm.

#### **U.1 Wire construction**

If the wire is insulated with overlapping spirally wrapped tape, the overlap shall be adequate to ensure continued overlap during manufacture of the wound component. The overlaps shall be sufficiently secured to maintain the amount of overlap.

#### **U.2 Type tests**

*The wire shall pass the tests of U.2.1 to U.2.4, conducted at a temperature between 15 °C and 35 °C and a relative humidity between 45 % and 75 %, unless specified otherwise.*

##### **U.2.1 Electric strength**

*The test sample is prepared according to 4.4.1 of IEC 60851-5, (for a twisted pair). The sample is then subjected to the test of 5.2.2 of this standard. The test voltage shall be not less than twice the appropriate voltage in accordance with 5.2.2 of this standard, with a minimum of*

- 3 000 V a.c. r.m.s. for BASIC INSULATION or SUPPLEMENTARY INSULATION, or
- 6 000 V a.c. r.m.s. for REINFORCED INSULATION.

##### **U.2.2 Flexibility and adherence**

*Test 8 in 5.1.1 of IEC 60851-3 is applied using the mandrel diameters of Table U.1. The test sample is then examined in accordance with 5.1.1.4 of IEC 60851-3, followed by the test of 5.2.2 of this standard except that the test voltage is applied between the wire and the mandrel. The test voltage shall be not less than the appropriate voltage in accordance with 5.2.2 of this standard, with a minimum of*

- 1 500 V a.c. r.m.s. for BASIC INSULATION or SUPPLEMENTARY INSULATION, or
- 3 000 V a.c. r.m.s. for REINFORCED INSULATION.

**Table U.1 – Mandrel diameter**

| Nominal conductor diameter<br>mm              | Mandrel diameter<br>mm $\pm$ 0,2 mm                    |
|-----------------------------------------------|--------------------------------------------------------|
| 0,05 – 0,34                                   | 4,0                                                    |
| 0,35 – 0,49                                   | 6,0                                                    |
| 0,50 – 0,74                                   | 8,0                                                    |
| 0,75 – 2,49                                   | 10,0                                                   |
| 2,50 – 5,00                                   | four times the nominal conductor diameter <sup>a</sup> |
| <sup>a</sup> In accordance with IEC 60317-43. |                                                        |

The tension to be applied to the wire during winding on the mandrel is calculated from the wire diameter to be equivalent to  $118 \text{ MPa} \pm 10 \%$  ( $118 \text{ N/mm}^2 \pm 10 \%$ ).

### U.2.3 Heat shock

Test 9 of IEC 60851-6, followed by the electric strength test of 5.2.2 of this standard except that the test voltage is applied between the wire and the mandrel. The voltage shall be not less than the appropriate voltage in accordance with 5.2.2 of this standard, with a minimum of

- 1 500 V a.c. r.m.s. for BASIC INSULATION or SUPPLEMENTARY INSULATION, or
- 3 000 V a.c. r.m.s. for REINFORCED INSULATION.

The oven temperature is the relevant temperature for the thermal class of insulation in Table U.2.

The mandrel diameter and tension applied to the wire during winding on the mandrel are as in U.2.2.

The electric strength test is conducted at room temperature after removal from the oven.

**Table U.2 – Oven temperature**

| Thermal class                                                                                                    | Oven temperature<br>$^{\circ}\text{C} \pm 5 ^{\circ}\text{C}$ |
|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| 105 (A)                                                                                                          | 200                                                           |
| 120 (E)                                                                                                          | 215                                                           |
| 130 (B)                                                                                                          | 225                                                           |
| 155 (F)                                                                                                          | 250                                                           |
| 180 (H)                                                                                                          | 275                                                           |
| 200                                                                                                              | 295                                                           |
| 220                                                                                                              | 315                                                           |
| 250                                                                                                              | 345                                                           |
| The designations A to H, formerly assigned in IEC 60085 to thermal classes 105 to 180, are given in parentheses. |                                                               |

#### **U.2.4 Retention of electric strength after bending**

*Five samples are prepared as in U.2.2 above and tested as follows. Each sample is removed from the mandrel, placed in a container and positioned so that it can be surrounded by at least 5 mm of metal shot. The ends of the conductor in the sample shall be sufficiently long to avoid flash over. The shot shall be not more than 2 mm in diameter and shall consist of balls of stainless steel, nickel or nickel plated iron. The shot is gently poured into the container until the sample under test is covered by at least 5 mm of shot. The shot shall be cleaned periodically with a suitable solvent (for example, 1,1,1-trichloroethane).*

NOTE The above test procedure is reproduced from 4.6.1 c) of IEC 60851-5 (second edition including amendment 1), now withdrawn. It is not included in the third edition of that standard.

*The test voltage shall be not less than the appropriate test voltage in accordance with 5.2.2 of this standard, with a minimum of*

- 1 500 V a.c. r.m.s. for BASIC INSULATION or SUPPLEMENTARY INSULATION, or
- 3 000 V a.c. r.m.s. for REINFORCED INSULATION.

*The test voltage is applied between the shot and the conductor.*

*The mandrel diameter and tension applied to the wire during winding on the mandrel are as in U.2.2.*

#### **U.3 Tests during manufacture**

*The wire shall be subjected by the wire manufacturer to electric strength tests during manufacture as specified in U.3.1 and U.3.2.*

##### **U.3.1 Routine testing**

*The test voltage for ROUTINE TESTING shall be the appropriate test voltage in accordance with 5.2.2 of this standard, with a minimum of*

- 1 500 V a.c. r.m.s. for BASIC INSULATION or SUPPLEMENTARY INSULATION, or
- 3 000 V a.c. r.m.s. for REINFORCED INSULATION.

##### **U.3.2 Sampling tests**

*Twisted pair samples shall be tested in accordance with 4.4.1 of IEC 60851-5. The minimum breakdown voltage shall be twice the appropriate test voltage in accordance with 5.2.2 of this standard, with a minimum of*

- 3 000 V a.c. r.m.s. for BASIC INSULATION or SUPPLEMENTARY INSULATION, or
- 6 000 V a.c. r.m.s. for REINFORCED INSULATION.

## **Annex V** (normative)

### **AC power distribution systems**

(see 1.6.1)

#### **V.1 Introduction**

In 3.1.2 of IEC 60364-1, a.c. power distribution systems are classified TN, TT and IT, depending on the arrangement of current-carrying conductors and the method of earthing. The classes and codes are explained in this annex. Some examples of each class are given in the figures; other configurations also exist.

In the figures:

- in most cases, the power distribution systems apply for single-phase and three-phase equipment, but for simplicity, only single-phase equipment is illustrated;
- the power sources may be transformer secondaries, motor-driven generators or uninterruptible power distribution systems;
- for transformers within a user's building, some of the figures apply, and the building boundary represents a floor of the building;
- some power distribution systems are earthed at additional points, for example, at the power entry points of users' buildings (see 413.1.3.1, Notes 1 and 2 of IEC 60364-4-41).

The following types of equipment connection are taken into account; the numbers of wires mentioned do not include conductors used exclusively for earthing.

Single-phase, two-wire

Single-phase, three-wire

Two-phase, three-wire

Three-phase, three-wire

Three-phase, four-wire

The system codes used have the following meaning:

- First letter: relationship of the power distribution system to earth;
  - T means direct connection of one pole to earth,
  - I means system isolated from earth, or one point connected to earth through an impedance.
- Second letter: earthing of the equipment;
  - T means direct electrical connection of the equipment to earth, independently of the earthing of any point of the power distribution system,
  - N means direct electrical connection of the equipment to the earthed point of the power distribution system (in a.c. systems, the earthed point of the power distribution system is normally the neutral point or, if a neutral point is not available, a phase conductor).



- Subsequent letters if any: arrangement of neutral and protective conductors;
  - S means the protective function is provided by a conductor separate from the neutral or from the earthed line (or in a.c. systems, earthed phase) conductor,
  - C means the neutral and protective functions are combined in a single conductor (PEN conductor).


## V.2 TN power distribution systems

TN power distribution systems are directly earthed, the parts of the equipment required to be earthed being connected by PROTECTIVE EARTHING CONDUCTORS. Three types of TN power distribution systems are considered:


- TN-S power distribution system,
  - in which a separate protective conductor is used through-out the system;
- TN-C-S power distribution system,
  - in which neutral and protective functions are combined in a single conductor in part of the system;
- TN-C power distribution system,
  - in which neutral and protective functions are combined in a single conductor throughout the system.

Some TN power distribution systems are supplied from a secondary winding of a transformer that has an earthed centre tap (neutral). Where the two-phase conductors and the neutral conductor are available, these systems are commonly known as "single-phase, three-wire power distribution systems".

IECNORM.COM : Click to view the full text of IEC 60950-1:2005

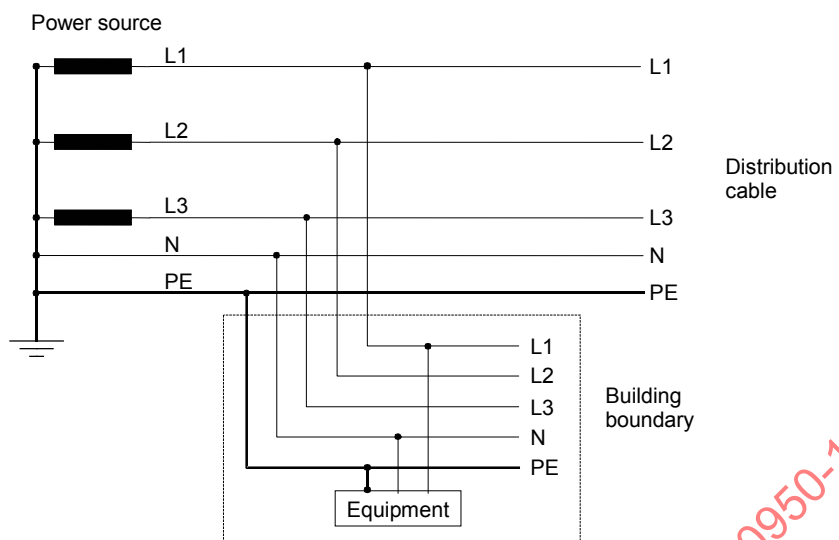


Separate neutral and protective conductors

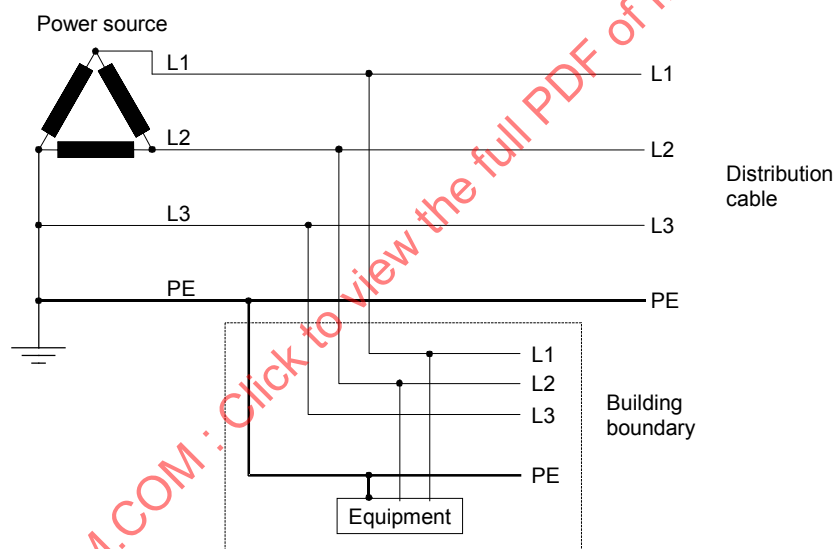

Earthed line conductor

IEC 1595/05

**Figure V.1 – Examples of TN-S power distribution systems**

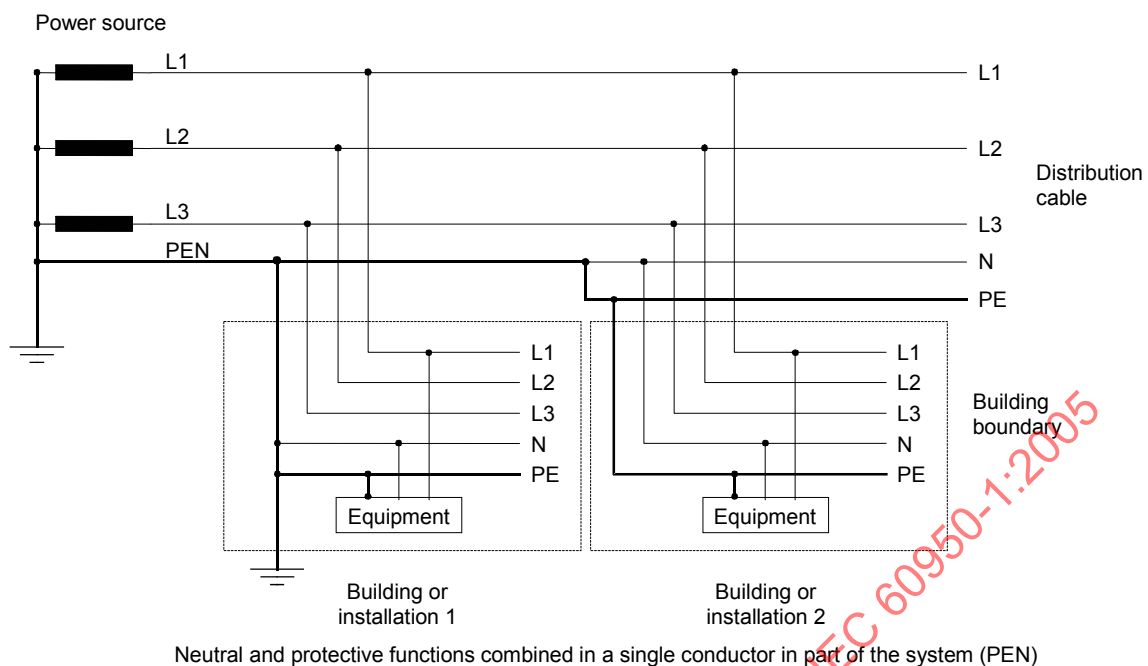

NOTE The point at which the PEN conductor is separated into protective earth and neutral conductors may be at the building entrance or at distribution panels within the building.

**Figure V.2 – Example of TN-C-S power distribution system**


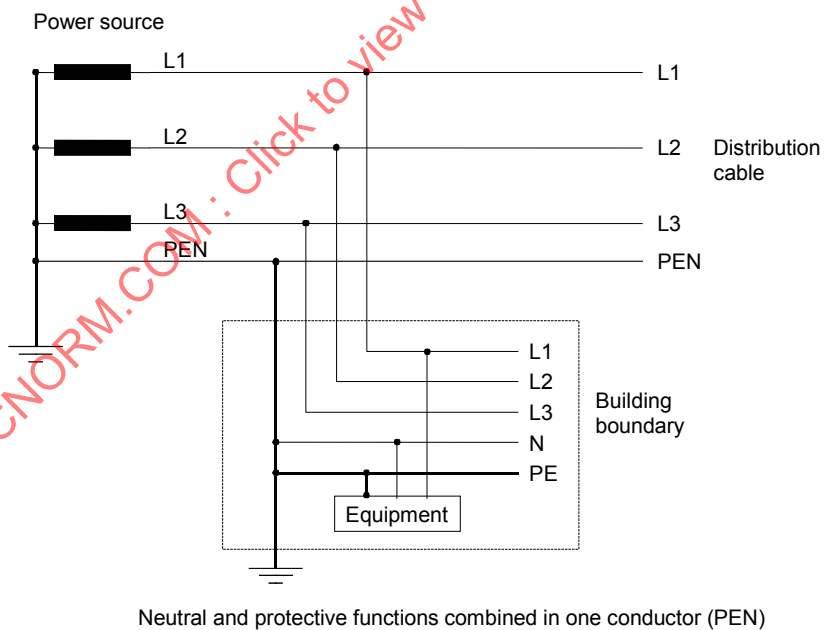


**Figure V.3 – Example of TN-C power distribution system**

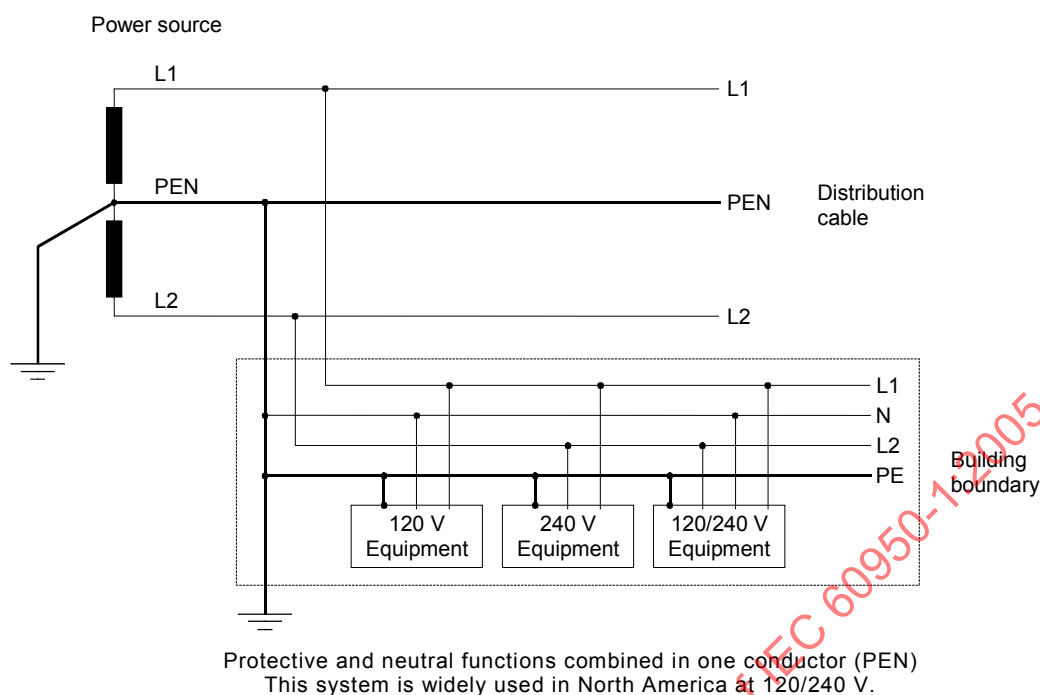


IEC 1598/05

**Figure V.4 – Example of single-phase, three-wire TN-C power distribution system**


### V.3 TT power distribution systems

TT power distribution systems have one point directly earthed, the parts of the equipment required to be earthed being connected at the user's premises to earth electrodes that are electrically independent of the earth electrodes of the power distribution system.

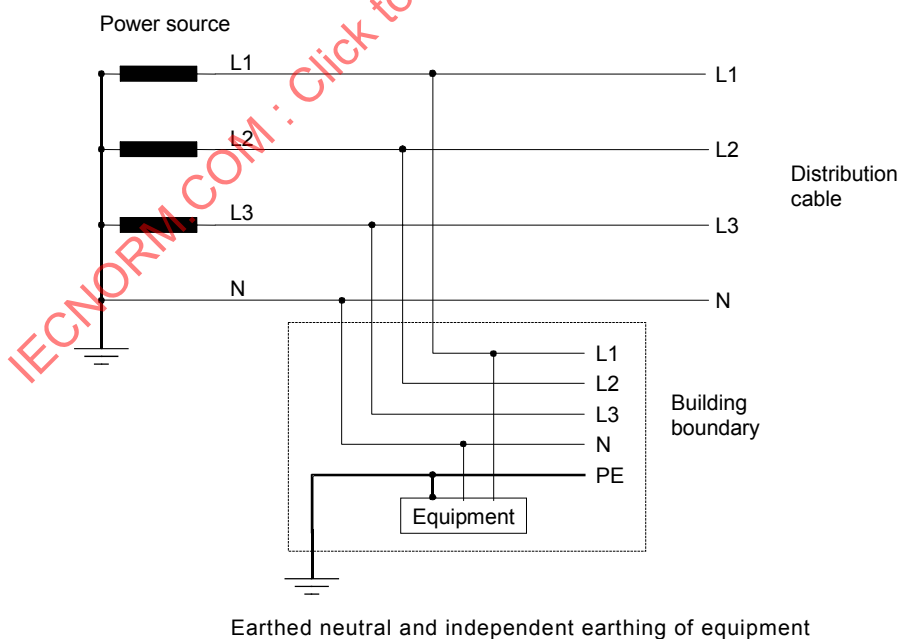

IEC 1599/05

**Figure V.5 – Example of three line and neutral TT power distribution system**

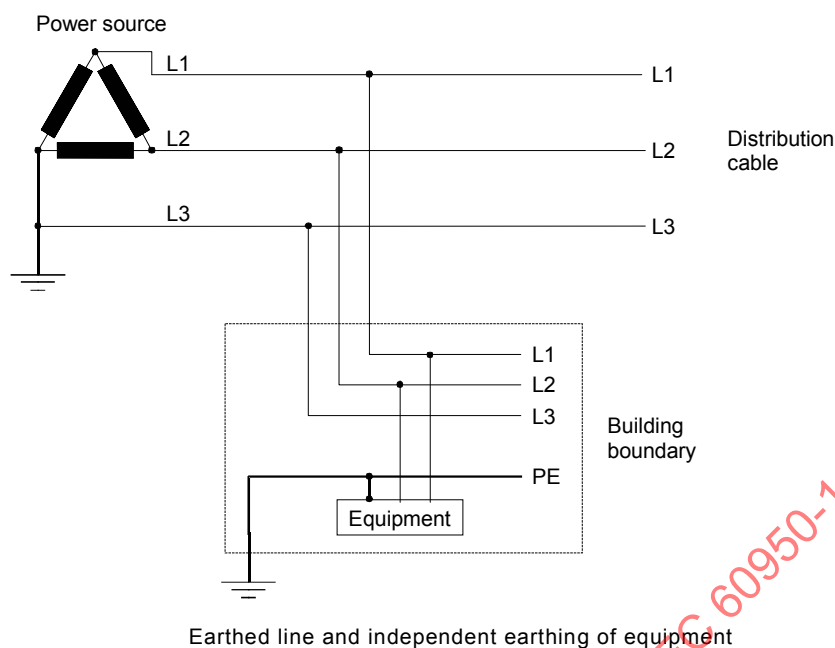


IEC 1600/05

**Figure V.6 – Example of three line TT power distribution system**

#### V.4 IT power distribution systems

IT power distribution systems are isolated from earth, except that one point may be connected to earth through an impedance or a voltage limiter. The parts of the equipment required to be earthed are connected to earth electrodes at the user's premises.

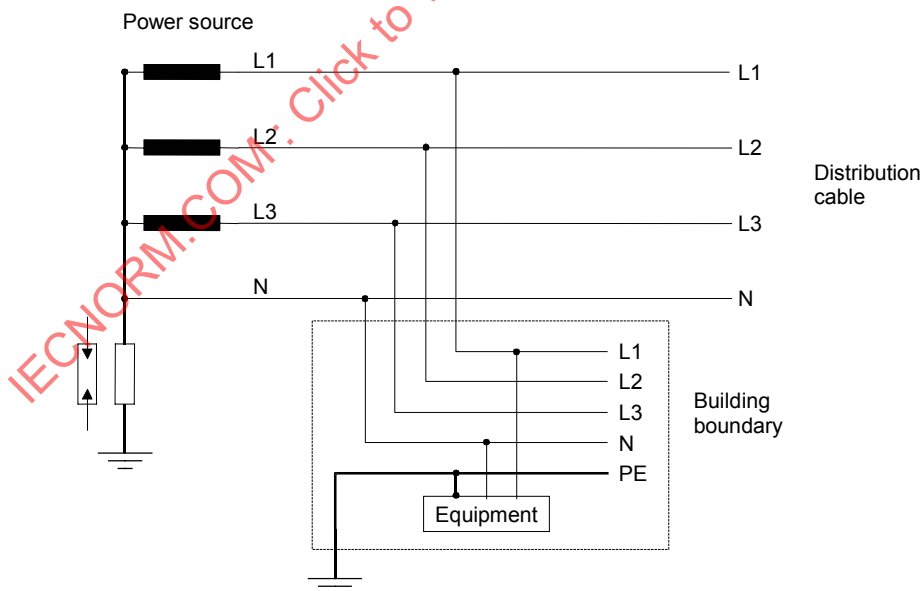


The neutral may be connected to earth through an impedance or voltage limiter, or isolated from earth.

IEC 1627/06

This system is widely used isolated from earth, in some installations in France, with impedance to earth, at 230/400 V, and in Norway, with voltage limiter, neutral not distributed, at 230 V line-to-line.

**Figure V.7 – Example of three line (and neutral) IT power distribution system**

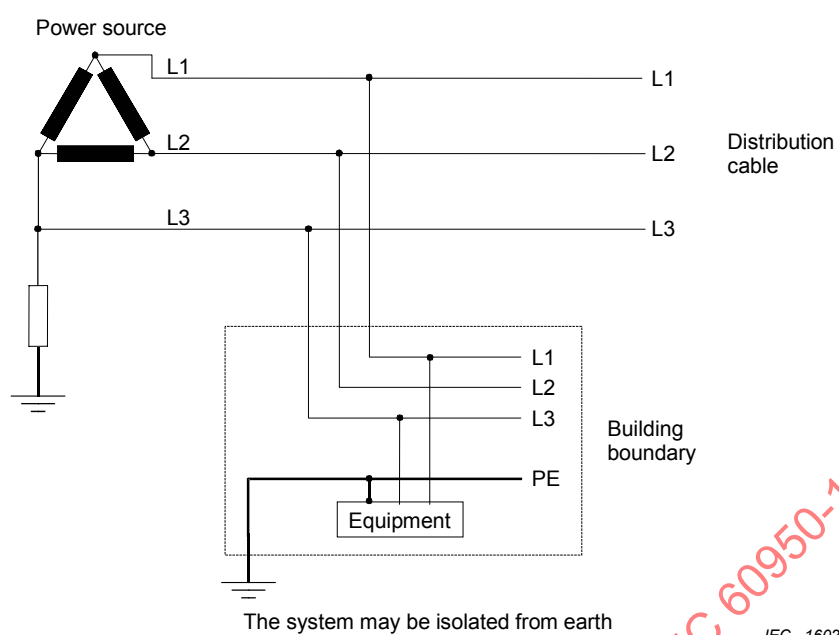

IEC 1602/05

**Figure V.8 – Example of three line IT power distribution system**

## Annex W (informative)

### Summation of touch currents

This annex explains the background to the requirements and tests in 5.1.8.2.

#### W.1 Touch current from electronic circuits

There are two quite different mechanisms that determine the current through a human body that touches an electronic circuit (or power bus), depending on whether or not the circuit is earthed. This distinction between earthed and unearthed (floating) circuits is not the same as between CLASS I EQUIPMENT and CLASS II EQUIPMENT. Floating circuits can exist in CLASS I EQUIPMENT and earthed circuits in CLASS II EQUIPMENT. Floating circuits are commonly, but not exclusively, used in telecommunication equipment and earthed circuits in data processing equipment, also not exclusively.

In order to consider the worst case, it will be assumed in this annex that TELECOMMUNICATION NETWORKS are floating and that the AC MAINS SUPPLY and human bodies (SERVICE PERSONS or USERS) are earthed. It should be noted that a SERVICE PERSON can touch some parts that are not USER-accessible. An "earthed" circuit means that the circuit is either directly earthed or in some way referenced to earth so that its potential with respect to earth is fixed.

##### W.1.1 Floating circuits

If the circuit is not earthed, the current ( $I_C$ ) through the human body is "leakage" through stray or added capacitance (C) across the insulation in the mains transformer (see Figure W.1).

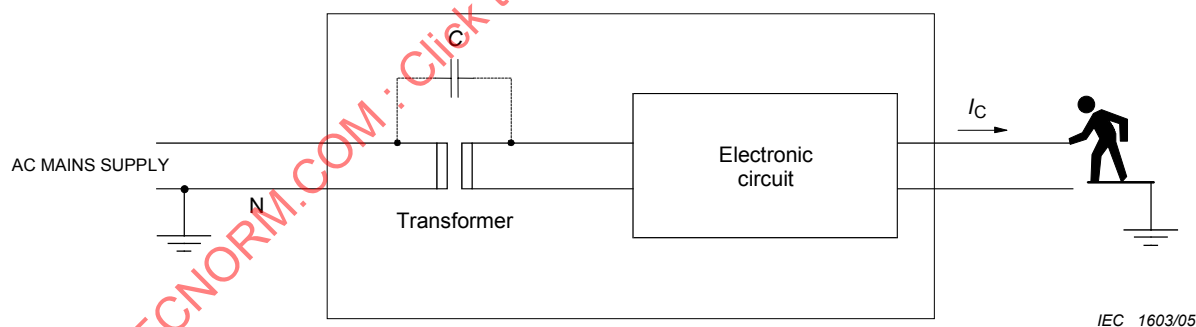


**Figure W.1 – Touch current from a floating circuit**

This current comes from a relatively high voltage, high impedance source, and its value is largely unaffected by the operating voltage on the electronic circuit. In this standard, the body current ( $I_C$ ) is limited by applying a test using the measuring instrument in Annex D, which roughly simulates a human body.

### W.1.2 Earthed circuits

If the electronic circuit is earthed, the current through the human body ( $I_V$ ) is due to the operating voltage ( $V$ ) of the circuit, which is a source of low impedance compared with the body (see Figure W.2). Any leakage current from the mains transformer (see W.1.1), will be conducted to earth and will not pass through the body.

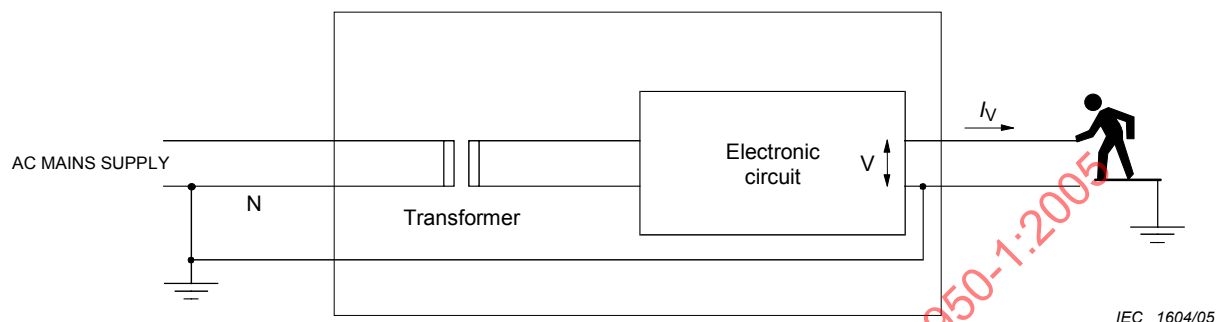


**Figure W.2 – Touch current from an earthed circuit**

In this standard, the body current ( $I_V$ ) is limited by specifying maximum voltage values for the accessible circuit, which shall be an SELV circuit or (with restricted accessibility) a TNV circuit.

### W.2 Interconnection of several equipments

It is a characteristic of information technology equipment, in particular in telecommunication applications, that many equipments may be connected to a single central equipment in a "star" topology. An example is telephone extensions or data terminals connected to a PABX, which may have tens or hundreds of ports. This example is used in the following description (see Figure W.3).

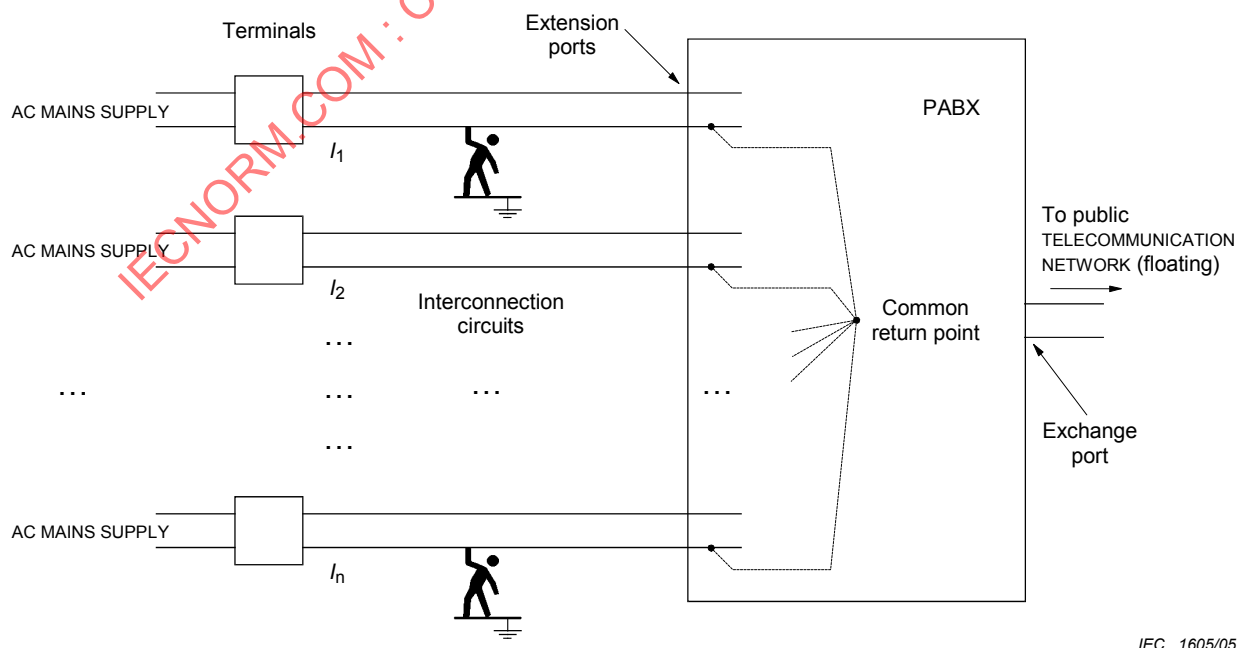


**Figure W.3 – Summation of touch currents in a PABX**



Each terminal equipment can deliver current to a human body touching the interconnecting circuit ( $I_1$ ,  $I_2$ , etc.), added to any current coming from the PABX port circuitry. If several circuits are connected to a common point, their individual TOUCH CURRENTS will add together, and this represents a possible risk to an earthed human body that touches the interconnection circuit.

Various ways of avoiding this risk are considered in the following subclauses.

#### **W.2.1 Isolation**

Isolate all interconnection circuits from each other and from earth, and limit  $I_1$ ,  $I_2$ , etc., as described in W.1.1. This implies either the use in the PABX of a separate power supply for each port, or the provision of an individual line (signal) transformer for each port. Such solutions may not be cost effective.

#### **W.2.2 Common return, isolated from earth**

Connect all interconnection circuits to a common return point that is isolated from earth. (Such connections to a common point may in any case be necessary for functional reasons.) In this case the total current from all interconnection circuits will pass through an earthed human body that touches either wire of any interconnection circuit. This current can only be limited by controlling the values  $I_1$ ,  $I_2$ ,...  $I_n$  in relation to the number of ports on the PABX. However, the value of the total current will probably be less than  $I_1 + I_2 + \dots + I_n$  due to harmonic and other effects.

#### **W.2.3 Common return, connected to protective earth**

Connect all interconnection circuits to a common return point and connect that point to protective earth. The situation described in W.1.2 applies regardless of the number of ports. Since safety depends on the presence of the earth connection, it may be necessary to use high-integrity earthing arrangements, depending on the maximum value of the total current that could flow.

## Annex X (informative)

### Maximum heating effect in transformer tests

(see Clause C.1)

Clause C.1 requires transformers to be loaded in such a way as to give the maximum heating effect. In this annex examples are given of various methods of producing this condition. Other methods are possible and compliance with Clause C.1 is not restricted to these examples.

#### X.1 Determination of maximum input current

*The value of the input current at rated load is established. This is  $I_r$ , see step A of Table X.1. The value may be established by test or from manufacturer's data.*

*A load is applied to the output winding or to the output of the switch mode power supply unit while measuring the input current. The load is adjusted as quickly as possible to provide the maximum value of input current that can be sustained for approximately 10 s of operation. This is  $I_m$ , see step B of Table X.1. The test is then repeated according to step C and, if necessary, steps D to J of Table X.1. The input current at each step is then noted and maintained until either:*

- a) the temperature of the transformer stabilizes without the operation of any component or protective device (inherent protection) in which case no further testing is conducted; or*
- b) component or protective device operates, in which case the winding temperature is noted immediately and the test of Clause X.2 is then conducted depending on the type of protection.*

*If any component or protective device operates within 10 s after the application of the primary voltage,  $I_m$  is the value recorded just before the component or protective device operates.*

*In conducting the tests described in steps C to J of Table X.1, the variable load is adjusted to the required value as quickly as possible and readjusted, if necessary, 1 min after application of the primary voltage. The sequence of steps C to J may be reversed.*

**Table X.1 – Test steps**

| Steps | Input current of the transformer or switch mode power supply unit |
|-------|-------------------------------------------------------------------|
| A     | Input current at rated load = $I_r$                               |
| B     | Maximum value of input current after 10 s of operation = $I_m$    |
| C     | $I_r + 0,75 (I_m - I_r)$                                          |
| D     | $I_r + 0,50 (I_m - I_r)$                                          |
| E     | $I_r + 0,25 (I_m - I_r)$                                          |
| F     | $I_r + 0,20 (I_m - I_r)$                                          |
| G     | $I_r + 0,15 (I_m - I_r)$                                          |
| H     | $I_r + 0,10 (I_m - I_r)$                                          |
| J     | $I_r + 0,05 (I_m - I_r)$                                          |

## X.2 Overload test procedure

If the test of Clause X.1 results in condition X.1 b), the following applies depending on type of protection.

*Electronic protection:*

The current is either reduced in steps of 5 % from the current of condition X.1 b) or increased in steps of 5 % from the rated load to find the maximum overload at which the temperature stabilizes without the operation of any electronic protection.

*Thermal protection:*

An overload is applied such that the operating temperature remains a few degrees below the rated opening temperature of the thermal protection.

*Overcurrent protection:*

An overload is applied such that a current flows in accordance with the current versus time trip curves of the overcurrent protective device.

## **Annex Y** (normative)

### **Ultraviolet light conditioning test**

(see 4.3.13.3)

#### **Y.1 Test apparatus**

*Samples are exposed to ultraviolet light by using one of the following apparatus:*

- *a twin enclosed carbon-arc, (see Clause Y.3), with continuous exposure. The test apparatus shall operate with a black-panel temperature of  $63\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  in a relative humidity of  $50\text{ } \% \pm 5\text{ } \%$ ; or*
- *a xenon-arc (see Clause Y.4), with continuous exposure. The test apparatus shall operate with a 6 500 W, water-cooled xenon-arc lamp, a spectral irradiance of  $0,35\text{ W/m}^2$  at 340 nm, a black-panel temperature of  $63\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  in a relative humidity of  $50\text{ } \% \pm 5\text{ } \%$ .*

#### **Y.2 Mounting of test samples**

*The samples are mounted vertically on the inside of the cylinder of the light exposure apparatus, with the widest portion of the samples facing the arcs. They are mounted so that they do not touch each other.*

#### **Y.3 Carbon-arc light-exposure apparatus**

*The apparatus described in ISO 4892-4, or equivalent, is used in accordance with the procedures given in ISO 4892-1 and ISO 4892-4 using a type 1 filter, without water spray.*

#### **Y.4 Xenon-arc light-exposure apparatus**

*The apparatus described in ISO 4892-2, or equivalent, is used in accordance with the procedures given in ISO 4892-1 and ISO 4892-2 using method A, without water spray.*

NOTE The wording "without water spray" indicates that the samples are not sprayed with water during the test. This should not be confused with water cooling which is necessary for operation of the apparatus.

## Annex Z (informative)

### Overvoltage categories

(see 2.10.3.2 and Clause G.2)

The largest peak value of transient overvoltage likely to be experienced at the power input interface of equipment connected to a MAINS SUPPLY is known as the MAINS TRANSIENT VOLTAGE. In this standard, minimum CLEARANCES for insulation in PRIMARY CIRCUITS are based on the MAINS TRANSIENT VOLTAGE.

According to IEC 60664-1, the value of the MAINS TRANSIENT VOLTAGE of an AC MAINS SUPPLY depends on the AC MAINS SUPPLY voltage and the Overvoltage Category, I to IV, see also Table G.1.

The Overvoltage Category therefore has to be identified for each equipment intended to be connected to the AC MAINS SUPPLY.

The Overvoltage Category depends on the manner of connection of the equipment to the building power supply arrangements. It is normally considered to be as shown in Table Z.1. Where transient limiting measures are provided, such as external filters in the AC MAINS SUPPLY, the equipment can be used in a higher Overvoltage Category.

The term Overvoltage Category is not used in connection with DC MAINS SUPPLIES.

**Table Z.1 – Overvoltage categories**

| Overvoltage Category | Equipment and its point of connection to the AC MAINS SUPPLY                                                         | Examples of equipment                                                                                                |
|----------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| IV                   | Equipment that will be connected to the point where the AC MAINS SUPPLY enters the building                          | Electricity meters<br>Communications information technology equipment for remote electricity metering                |
| III                  | Equipment that will be an integral part of the building wiring                                                       | Socket-outlets, fuse panels and switch panels<br>Power monitoring equipment                                          |
| II                   | PLUGGABLE or PERMANENTLY CONNECTED EQUIPMENT that will be supplied from the building wiring                          | Household appliances, portable tools, home electronics<br>Most information technology equipment used in the building |
| I                    | Equipment that will be connected to a special AC MAINS SUPPLY in which measures have been taken to reduce transients | Information technology equipment supplied via an external filter or a motor driven generator                         |


## Annex AA (normative)

### Mandrel test (see 2.10.5.8)

NOTE This test is based on IEC 61558-1 and will give the same results.



Three test samples, each individual sample consisting of three or more layers of non-separable thin sheet material forming REINFORCED INSULATION, are used. One sample at a time is fixed to the mandrel of the test fixture (Figure AA.1) as shown in Figure AA.2.

Dimensions in millimeters

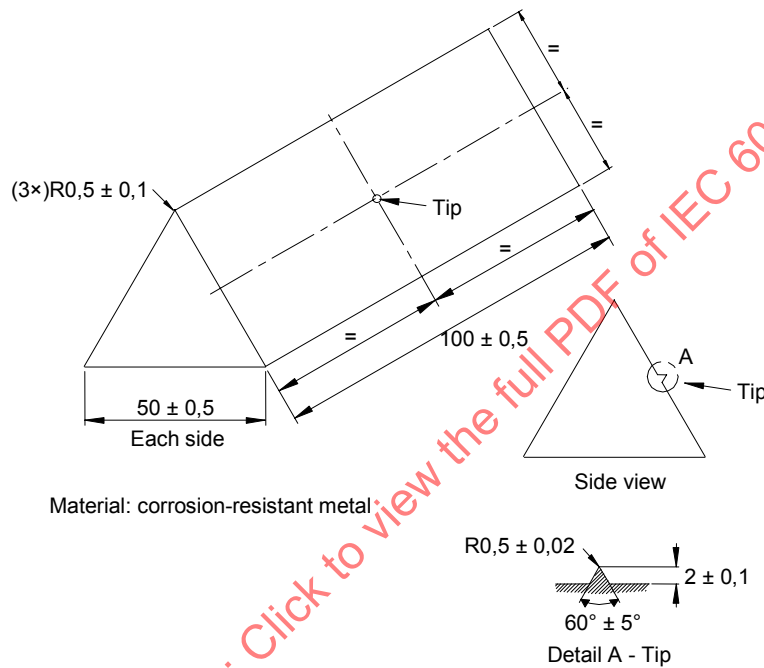

IEC 1606/05

Figure AA.1 – Mandrel

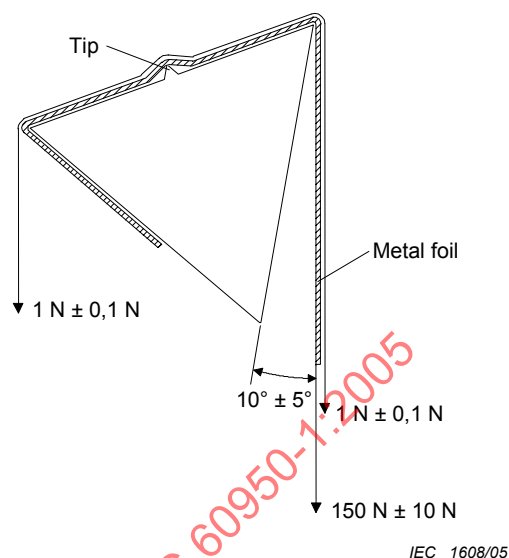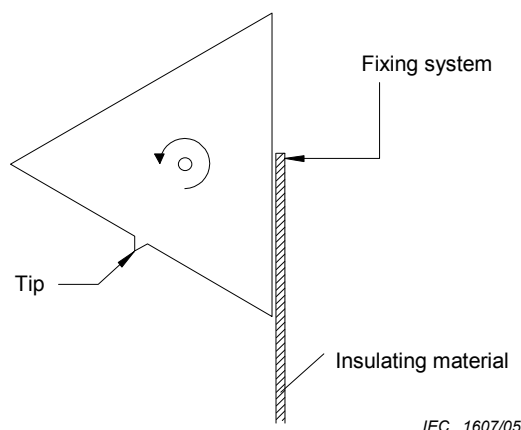

The final position of the mandrel is rotated  $230^\circ \pm 5^\circ$  from the initial position

**Figure AA.2 – Initial position of mandrel**

**Figure AA.3 – Final position of mandrel**


A downward force of  $150\text{ N} \pm 10\text{ N}$  is applied to the free end of the sample (see Figure AA.3), using an appropriate clamping device. The mandrel is rotated

- from the initial position (Figure AA.2) to the final position (Figure AA.3) and back;
- as above for a second time;
- from the initial position to the final position.

If a sample breaks during rotation where it is fixed to the mandrel or to the clamping device, this does not constitute a failure. If a sample breaks at any other place, the test has failed.

After the above test, a sheet of metal foil,  $0,035\text{ mm} \pm 0,005\text{ mm}$  thick, at least 200 mm long, is placed along the surface of the sample, hanging down on each side of the mandrel (see Figure AA.3). The surface of the foil in contact with the sample shall be conductive, not oxidized or otherwise insulated. The foil is positioned so that its edges are not less than 18 mm from the edges of the sample (see Figure AA.4). The foil is then tightened by two equal weights, one at each end, using appropriate clamping devices.

Dimensions in millimeters

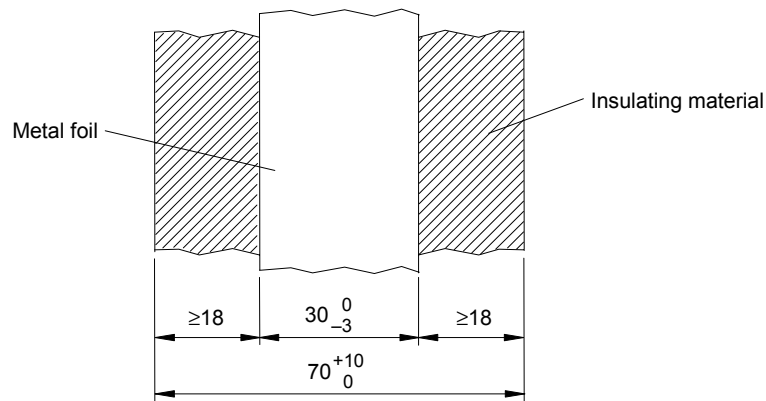

IEC 1609/05

**Figure AA.4 – Position of metal foil on insulating material**

While the mandrel is in its final position, and within the 60 s following the final positioning, an electric strength test is applied between the mandrel and the metal foil in accordance with 5.2.2. The test voltage is 150 % of  $U_{\text{test}}$ , but not less than 5 kV.  $U_{\text{test}}$  is the test voltage specified in 5.2.2 for REINFORCED INSULATION.

The entire test procedure is repeated on the other two samples.



## Annex BB (informative)

### Changes in the second edition

#### BB.1 Numbering changes table

The following subclause, annex, figure and table numbers have changed since the first edition of IEC 60950-1.

| First Edition    | Action                 | This edition     |
|------------------|------------------------|------------------|
| 1.2.2.3          | deleted                |                  |
|                  | new                    | 1.2.2.3          |
| 1.2.2.4          | deleted                |                  |
| 1.2.2.5          | deleted                |                  |
|                  | new                    | 1.2.5.3          |
| 1.2.5.3 to 5     | renumbered             | 1.2.5.4 to 6     |
|                  | new                    | 1.2.8.3          |
| 1.2.8.3 to 13    | renumbered             | 1.2.8.4 to 14    |
|                  | new                    | 1.2.9.7          |
| 1.2.9.7 to 10    | renumbered             | 1.2.9.8 to 11    |
|                  | new                    | 1.2.10.4         |
|                  | new                    | 1.2.13.15        |
|                  | new                    | 1.2.13.16        |
|                  | new                    | 1.2.13.17        |
| 1.5.6, 1.5.7.2   | replaced               | 1.5.6            |
| 1.5.7            | replaced               | 1.5.7            |
|                  | new                    | 1.5.9            |
|                  | new                    | 1.7.2.1 to 3     |
| 1.7.10           | renumbered             | 1.7.2.4          |
| 1.7.11           | renumbered             | 1.7.10           |
| 1.7.12           | deleted                |                  |
| 1.7.13 to 15     | renumbered             | 1.7.11 to 13     |
| 1.7.16           | renumbered             | 1.7.2.5          |
| 1.7.17           | renumbered             | 1.7.14           |
|                  | new                    | 1.7.2.6          |
|                  | new                    | 2.1.1.8          |
|                  | new                    | 2.1.1.9          |
| 2.2.3.1          | deleted                |                  |
| 2.2.3.2          | deleted                |                  |
| 2.2.3.3          | deleted                |                  |
|                  | new                    | 2.3.2.1 to 4     |
| 2.6.1 c)         | combined with 2.6.1 b) |                  |
| 2.6.1 d) to g)   | renumbered             | 2.6.1 c) to f)   |
|                  | new                    | 2.9.4            |
| 2.10             | replaced               | 2.10             |
|                  | new                    | 3.5.4            |
|                  | new                    | 4.5.1            |
| 4.5.1            | renumbered             | 4.5.2            |
| 4.5.2            | renumbered             | 4.5.5            |
|                  | new                    | 4.5.3            |
|                  | new                    | 4.5.4            |
|                  | new                    | 4.6.4.1 to 3     |
|                  | new                    | 5.1.2.1 to 3     |
|                  | new                    | 5.1.7.1 to 2     |
|                  | new                    | 5.3.6            |
| 5.3.6 to 5.3.8.2 | renumbered             | 5.3.7 to 5.3.9.2 |
|                  | new                    | 7.1              |
| 7.1 to 7.2       | renumbered             | 7.2 to 7.3       |

| First Edition          | Action               | This edition           |
|------------------------|----------------------|------------------------|
| 7.3.1 to 7.3.3         | renumbered           | 7.4.1 to 7.4.3         |
|                        | new                  | B.6.1 to 4             |
|                        | new                  | B.7.1                  |
| B.7.1 to B.7.3         | renumbered           | B.7.2 to B.7.4         |
|                        | new                  | G.1.1                  |
| G.1                    | renumbered           | G.1.2                  |
|                        | new                  | G.2.3                  |
|                        | new                  | G.2.4                  |
| G.4 a)                 | renumbered           | G.4.1                  |
| G.4 b)                 | renumbered           | G.4.2                  |
| G.4 c)                 | renumbered           | G.4.3                  |
| G.4 d)                 | renumbered           | G.4.4                  |
|                        | new                  | Annex Q                |
| Annex Q                | renamed              | Bibliography           |
|                        | new                  | Annex Z                |
|                        | new                  | Annex AA               |
|                        | new                  | Annex BB               |
|                        | new                  | Figure 2D              |
|                        | new                  | Figure 2E              |
| Figure 2D to Figure 2H | renumbered           | Figure 2F to Figure 2K |
| Figure F.12            | split and renumbered | Figures 2D and F.12    |
|                        | new                  | Figure F.14 to F.18    |
|                        | new                  | Figure AA.1 to AA.4    |
|                        | new                  | Table 1B               |
|                        | new                  | Table 1C               |
|                        | new                  | Table 1D               |
|                        | new                  | Table 2E               |
| Table 2E to Table 2G   | renumbered           | Table 2F to Table 2H   |
|                        | new                  | Table 2J               |
| Table 2H to Table 2L   | renumbered           | Table 2K to Table 2N   |
|                        | new                  | Table 2P               |
| Table 2M               | renumbered           | Table 2R               |
| Table 2N               | renumbered           | Table 2Q               |
| Table 4B part 1        | renumbered           | Table 4B               |
| Table 4B part 2        | renumbered           | Table 4C               |
| Table 4C               | renumbered           | Table 4D               |
| Table 4D               | renumbered           | Table 4E               |
|                        | new                  | Table 5C               |
|                        | new                  | Table 5D               |
|                        | new                  | Table Z.1              |

## BB.2 Changes to this edition

The principal changes in this edition as compared with the first edition of IEC 60950-1 are as follows. Minor changes are not listed.

Audio amplifiers, requirements added for consistency with IEC 60065 (2.1.1.9, 4.5.1).

Ball pressure test, test procedure corrected, different at high ambients (4.5.5).

Batteries, requirements enhanced (4.3.8).

Bibliography moved to a new section after the Annexes

CABLE DISTRIBUTION SYSTEMS, voltage tests clarified (7.4.2, 7.4.3).

Cathode ray tubes, requirements aligned with IEC 60065 (4.2.8).

Connectors, lower minimum CLEARANCES and CREEPAGE DISTANCES (2.10.3.1, 2.10.4.3, G.6).

Data ports for additional equipment, requirements added to limit power output (3.5.4)

Definitions added:

- CHEESECLOTH (1.2.13.15);
- EQUIPMENT, PLUGGABLE (1.2.5.3);
- INSULATION, SOLID (1.2.10.4);
- RATING, PROTECTIVE CURRENT (1.2.13.17);
- SUPPLY, MAINS (1.2.8.3);
- TIME, RATED RESTING (1.2.2.3);
- TISSUE, WRAPPING (1.2.13.16);
- VOLTAGE, RMS WORKING (1.2.9.7).

DC MAINS SUPPLIES, more detailed requirements regarding:

- CLEARANCES [2.10.3.2 b) and c), 2.10.3.7, 2.10.3.9, G.2.2, G.2.3, G.4.1 c), G.5 a)];
- shock hazard (2.1.1.7, 2.1.1.8).

Distance through insulation, requirements clarified (2.10.5) in particular:

- optocouplers, aligned with IEC 60747 (2.10.5.4, Figure F.17);
- non-separable thin sheet material (2.10.5.8).

"Hiccup" mode of power supplies (2.2.3).

Insulation having starting pulses, requirements added (2.10.1.7, 2.10.2.1, 2.10.3.5).

Insulation in non-separable thin sheets, aligned with IEC 61558-1 (2.10.5.8, 2.10.5.9, Annex AA).

Insulation in wound components, requirements clarified (2.10.5.11, 2.10.5.14, Annex U) including:

- winding wire (2.10.5.12);
- solvent-based enamel on winding wire (2.10.5.1, 2.10.5.13).

Language for marking, requirement for local language removed (1.7.2.1 Note 3).

Limited power sources, tests clarified (2.5).

Mechanical strength, tests clarified (4.2.5, 4.2.6).

Motor test, alternative procedure added (B.6.3).

Non-continuous operation, requirements clarified (1.2.2, 1.7.3, 4.5.2, 5.3.8).

Overcurrent protective devices to be specified if required externally (1.7.2.3).

Overvoltage categories III and IV, requirements added or clarified (2.10.3.1, 5.2.2, G.1.1, Annex Z).

Pollution degrees 2 and 3, CLEARANCES modified to align with IEC 60664-1 (Table G.2).

PROTECTIVE BONDING CONDUCTORS, requirements and test procedure modified (2.6.3.3, 2.6.3.4).

Resistors, bridging insulation (1.5.7).

Ring signals, test procedure for "Part 68" corrected and clarified (M.3).

Scope clarified, this standard can be used for:

- partial compliance of component subassemblies (1.1.1);
- electronic parts of certain other equipment (1.1.1 Note 2).

SELV CIRCUIT and TNV CIRCUIT requirements for separation aligned (2.3.2, 2.3.3, 2.9.4).

Single-pole isolators, rules clarified (3.4.6).

Starting pulses, requirements added (2.10.1.7, 2.10.2.1, 2.10.3.5).

Surge suppressors:

- VDRs in PRIMARY CIRCUITS, requirements clarified (1.5.9);
- more detail to determine minimum rated operating voltage (6.1.2.1).

Thermal classes of insulation, classes 200, 220 and 250 added in line with IEC 60085 (Tables 5D, B.1, B.2, C.1, U.2).

TRANSPORTABLE EQUIPMENT, requirements for openings in ENCLOSURES (4.6.4).

TOUCH CURRENT:

- test procedure clarified for equipment with multiple supply connections (5.1.2, 5.1.7.2);
- requirements extended for PLUGGABLE EQUIPMENT TYPE A (5.1.7.1).

Wall-mounted equipment, test procedure modified (4.2.10).

X and Y capacitors bridging insulation, applications clarified, aligned with IEC 60384-14 (1.5.6).

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

## Bibliography

This Bibliography contains information about documents referred to in notes and informative annexes in the standard. Further information on the listed documents, including how to obtain copies, can be found on the following internet sites:

<http://www.bsonline.techindex.co.uk>  
<http://www.cas.org>  
<http://www.cenelec.org>  
<http://www.cie.co.at>  
<http://www.icrp.org> and (to obtain copies: <http://www.elsevier.nl/locate/icrp>)  
<http://www.iec.ch>  
<http://www.iso.org>  
<http://www.itu.int>  
<http://www.standards.com.au>  
<http://wireless.fcc.gov/rules.htm> (for CFR 47 Part 68)

For the locations in the standard where these documents are mentioned, see the Index.

IEC 60050-212:1990, *International Electrotechnical Vocabulary – Chapter 212: Insulating solids, liquids and gases*

IEC 60127 (all parts), *Miniature fuses*

IEC 60269-2-1, *Low voltage fuses – Part 2-1: Supplementary requirements for fuses for use by authorized persons (fuses mainly for industrial application) – Sections I to VI: Examples of types of standardized fuses*

IEC 60364-4-41, *Electrical installations of buildings – Part 4-41: Protection for safety – Protection against electric shock*

IEC 60410, *Sampling plans and procedures for inspection by attributes*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-4, *Insulation coordination for equipment within low voltage systems – Part 4: Considerations of high-frequency voltage stress*

IEC 60728-11:2005, *Cable networks for television signals, sound signals and interactive services – Part 11: Safety*

IEC 60896-21, *Stationary lead-acid batteries – Part 21: Valve regulated types - Methods of test*

IEC 60896-22, *Stationary lead-acid batteries – Part 22: Valve regulated types - Requirements*

IEC 61032:1997, *Protection of persons and equipment by enclosures – Probes for verification*

IEC 61140, *Protection against electric shock – Common aspects for installation and equipment*

IEC 61558-1, *Safety of power transformers, power supply units and similar - Part 1: General requirements and tests*

IEC 61643-21, *Low voltage surge protective devices – Part 21: Surge protective devices connected to telecommunications and signalling networks – Performance requirements and testing methods*

IEC 61643-311, *Components for low-voltage surge protective devices – Part 311: Specifications for gas discharge tubes (GDT)*

IEC 61643-321, *Components for low-voltage surge protective devices – Part 321: Specifications for avalanche breakdown diode (ABD)*

IEC 61643-331, *Components for low-voltage surge protective devices – Part 331: Specifications for metal oxide varistors (MOV)*

IEC 61965, *Mechanical safety of cathode ray tubes*

IEC Guide 112, *Guide on the safety of multimedia equipment*

ISO 2859-1, *Sampling procedures for inspection by attributes – Part 1: Sampling schemes indexed by acceptance quality limit (AQL) for lot-by-lot inspection*

ISO 4046-4, *Paper, board, pulp and related terms – Vocabulary – Part 4: Paper and board grades and converted products*

ISO 4892 (all parts), *Plastics – Methods of exposure to laboratory light sources*

ITU-T Recommendation K.11 *Principles of protection against overvoltages and overcurrents*

ITU-T Recommendation K.20, *Resistibility of telecommunication equipment installed in a telecommunications centre to overvoltages and overcurrents*

ITU-T Recommendation K.21 *Resistibility of telecommunication equipment installed in customer premises to overvoltages and overcurrents*

ITU-T Recommendation K.27 *Bonding configurations and earthing inside a telecommunication building*

ITU-T Recommendation K.45 *Resistibility of telecommunication equipment installed in the access and trunk networks to overvoltages and overcurrents*

AS/NZS 3112, *Approval and test specification - Plugs and socket-outlets*

BS 1363 (all parts), *13 A plugs, socket-outlets and adaptors*

CAS#110-54-3, American Chemical Society definition

CFR 47, Part 68: *Code of Federal Regulations (USA) Part 68: Connection of terminal equipment to the telephone network (commonly referred to as "FCC Rules, part 68")*

CIE Publication 63, *The spectroradiometric measurement of light sources*

EN 50272-2, *Safety requirements for secondary batteries and battery installations - Part 2: Stationary batteries*

EN 60950-1, *Information technology equipment - Safety - Part 1: General requirements*

ICRP 60, *Recommendations of the International Commission on Radiological Protection*

## INDEX

This index is for information only and does not purport to be a complete guide to the use of this standard. The inclusion or omission of items in the index does not imply any particular importance.

Location references are clause or subclause numbers or annex letters.

In the standard, table numbers and figure numbers are linked to the clause or annex in which they are found, for example:

- Table 2A is the first Table in Clause 2;
- Figure F.2 is the second Figure in Annex F.

Principal references are printed in **bold** type.

If a term is defined in 1.2 of this standard, its definition is indicated in the index by an asterisk, for example:

- RATED VOLTAGE 1.2.1.1\*.

This index is also used to explain some abbreviations, for example:

- EUT EQUIPMENT UNDER TEST.

Country notes are listed, but the contents of country notes are not indexed.

Bib is an abbreviation for Bibliography, which precedes this Index.

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

**A**

|                                                                                                                  |                     |                                                                     |                                                                        |
|------------------------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------|------------------------------------------------------------------------|
| abnormal conditions                                                                                              | 0.1, 1.3.2          | plugs and sockets, by a SERVICE PERSON                              | 4.3.5                                                                  |
| audio amplifiers                                                                                                 | 5.3.6               | SAFETY INTERLOCK, moving part                                       | 2.8.2, 4.4                                                             |
| heat                                                                                                             | 4.5.5               | sharp edge                                                          | 4.3.1                                                                  |
| overload protection                                                                                              | 5.3.1, 5.3.3        | standard outlets                                                    | 1.7.5                                                                  |
| sequence of testing                                                                                              | 1.4.3               | TELECOMMUNICATION NETWORK                                           | 6.2.1                                                                  |
| simulated                                                                                                        |                     | terminals in supply wiring space                                    | 3.2.9                                                                  |
| fan not running                                                                                                  | 4.3.12              | TNV CIRCUIT <i>see</i> TNV CIRCUIT, accessibility                   |                                                                        |
| general                                                                                                          | 4.7.1               | ultraviolet radiation, <i>see</i> ultraviolet radiation             |                                                                        |
| one at a time                                                                                                    | 1.4.14              | with a tool                                                         | 1.7.2.5                                                                |
| test under abnormal conditions of                                                                                |                     | actuators, mechanical, in SAFETY INTERLOCK system                   | 2.8.5, <b>2.8.8</b>                                                    |
| electrical components                                                                                            | 5.3.7               |                                                                     |                                                                        |
| electromechanical components                                                                                     | 5.3.5               | acoustic noise hazard                                               | 0.2.6                                                                  |
| materials                                                                                                        | 4.7.3               | additional requirements to those in this standard                   | 1.1.2                                                                  |
| thermoplastic parts                                                                                              | 4.5.5               | additional equipment                                                | 3.5.4                                                                  |
| motors                                                                                                           | 5.3.2, Annex B      | adhesive                                                            |                                                                        |
| thermostats                                                                                                      | K.6                 | ageing test                                                         | <b>4.6.5</b>                                                           |
| THERMAL CUT-OUT operates                                                                                         | 1.2.11.3            | application                                                         | 2.10.5.5 (note 2), 4.3.2                                               |
| transformers                                                                                                     | 5.3.3, C.1, Annex X | foil                                                                | 5.1.4, 5.2.2, 6.2.2                                                    |
| within FIRE ENCLOSURE                                                                                            | 4.7.3.2             | tape, as insulating material                                        | 4.7.3.4                                                                |
| abnormal operating conditions <i>see</i> abnormal conditions                                                     |                     | adjustment                                                          |                                                                        |
| abrasion resistance test 2.10.7, <b>2.10.8.4</b> , Annex R (Table R.1)                                           |                     | marking                                                             |                                                                        |
| AC MAINS SUPPLY                                                                                                  | 1.2.8.1*, 1.7.1     | for rated voltage                                                   | 1.7.4                                                                  |
| adjustable                                                                                                       | 4.3.3               | for thermostats etc.                                                | 1.7.10                                                                 |
| capacitor                                                                                                        | 1.5.6, 2.1.1.7      | mechanical actuators                                                | 2.8.8                                                                  |
| connections <b>3.2.1.1</b> , 3.2.5.1, 3.4.2, 5.1.2.1, 5.1.2.2, 5.1.2.3                                           |                     | must not create a hazard                                            | 4.3.3                                                                  |
| equivalent source                                                                                                | 1.2.8.1, 1.4.5      | worst case conditions for test                                      | 1.4.4, 1.4.10, 2.1.1.1, 2.1.1.5, 2.1.1.8, 2.5, 4.3.8, Annex H, Annex X |
| for a limited power source                                                                                       | 2.5                 | air gap                                                             |                                                                        |
| for a telecommunications medium                                                                                  |                     | behind conductive ENCLOSURE                                         | 2.10.3.1, 4.2.1, G.6                                                   |
| 1.1.1, Clause 6 (note 4), Clause 7.1 (note 4)                                                                    |                     | CLEARANCE applicable                                                | 2.10.3.1, G.6                                                          |
| frequency                                                                                                        | 1.4.7               | CLEARANCE not applicable                                            | 2.10.3.1, G.6                                                          |
| isolation <i>see</i> disconnection                                                                               |                     | disconnect device                                                   | 3.4.2                                                                  |
| neutral                                                                                                          | 3.4.6, 3.4.7        | mechanical force tests, if over 1 kV                                | 4.2.1                                                                  |
| terminals                                                                                                        | 1.7.7.2, 3.3.7      | SAFETY INTERLOCK switch                                             | 2.8.7.1                                                                |
| <i>see also</i> mains, OVERVOLTAGE CATEGORY, POWER SUPPLY CORD, PRIMARY CIRCUIT, transients and WIRING TERMINALS |                     | tip of test finger if voltage is over 1 kV                          | 2.1.1.1 and Figure 2D                                                  |
| a.c. and d.c. waveform, resultant voltage                                                                        | 2.10.2.2 (note)     | altitude (elevation) during operation                               | 0.1, 1.1.2, 2.10.3.1, G.6                                              |
| a.c. power distribution system                                                                                   |                     | ampacity                                                            |                                                                        |
| <i>see</i> power distribution system, a.c.                                                                       |                     | <i>see</i> current carrying capacity and wiring terminals, ampacity |                                                                        |
| access, accessibility                                                                                            |                     | antenna                                                             | 7.1 (note 2), 7.4.1, N.2 (Table N.1/Footnote c)                        |
| by                                                                                                               |                     | as a CABLE DISTRIBUTION SYSTEM                                      | 1.2.13.14                                                              |
| a SERVICE PERSON <i>see</i> SERVICE ACCESS AREA                                                                  |                     | aperture <i>see</i> opening in an ENCLOSURE                         |                                                                        |
| a USER or OPERATOR <i>see</i> OPERATOR ACCESS AREA                                                               |                     | appliance coupler                                                   | Annex P (IEC 60320)                                                    |
| <i>see also</i> RESTRICTED ACCESS LOCATION                                                                       |                     | as disconnect device <i>see</i> disconnection for servicing         |                                                                        |
| definitions                                                                                                      | <b>1.2.7*</b>       | as means of connection to earth                                     | 2.6.5.4                                                                |
| into a battery compartment                                                                                       | 2.1.1.2             | fault testing                                                       | 5.3.7                                                                  |
| meaning in OPERATOR access (area)                                                                                | 1.2.7.1             | in PLUGGABLE EQUIPMENT                                              | 1.2.5.1, 1.2.5.2                                                       |
| prevention by a SAFETY INTERLOCK                                                                                 | 2.1.1.1             | ON DETACHABLE POWER SUPPLY CORD                                     | 1.2.5.5, 3.2.5.1 (note 1)                                              |
| through an opening in an ENCLOSURE 2.1.1.1 and Figure 2D to                                                      |                     | reversible (unpolarized)                                            | 3.4.6 (note), 4.3.7                                                    |
| CABLE DISTRIBUTION NETWORK                                                                                       | <b>7.2, 7.3</b>     | that fills an aperture in an ENCLOSURE                              | 4.7.3.2                                                                |
| connector shell                                                                                                  | 2.1.1.1             | appliance inlet                                                     | <b>3.2.4</b>                                                           |
| connectors, by a SERVICE PERSON                                                                                  | 4.3.5               | as means of connection to power                                     | 3.2.1.1, 3.2.1.2                                                       |
| controls                                                                                                         | 4.3.3               | earthing terminal                                                   | 2.6.4.2, 2.6.4.3                                                       |
| disconnect device                                                                                                | 1.7.2.2             | <i>see also</i> appliance coupler                                   |                                                                        |
| ELV CIRCUIT <i>see</i> ELV CIRCUIT, accessibility                                                                |                     | applicability                                                       |                                                                        |
| energized part                                                                                                   | 0.1, <b>2.1.1</b>   | of requirements                                                     | 1.3.1                                                                  |
| fuses                                                                                                            | 1.7.6               | of tests                                                            | <b>1.4, 1.5.2</b>                                                      |
| handles, levers, knobs                                                                                           | 2.1.1.6             |                                                                     |                                                                        |
| internal wiring                                                                                                  | 2.1.1.3, 2.1.1.4    |                                                                     |                                                                        |
| laser radiation <i>see</i> laser radiation                                                                       |                     |                                                                     |                                                                        |

|                                                         |                                                           |                                                                                            |                                                               |
|---------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| of this standard                                        | 1.1.1                                                     | replaceable                                                                                | 1.7.13, 4.3.8                                                 |
| to components and subassemblies                         | 1.1.1 (note 1)                                            | requirement                                                                                | 2.1.1.8, <b>4.3.8</b>                                         |
| to electronic parts of equipment                        | 1.1.1 ( <i>and</i> note 2)                                |                                                                                            |                                                               |
| arcing                                                  |                                                           | battery backup systems, not in Scope of this standard                                      | 1.1.3                                                         |
| as energy hazard                                        | 0.2.2                                                     | battery compartment, access to a TNV CIRCUIT                                               | 2.1.1.1, <b>2.1.1.2</b>                                       |
| causing ignition of air filter                          | 4.7.3.5                                                   | bead, ceramic                                                                              | 3.1.5                                                         |
| in DC SUPPLY                                            | 3.4.2                                                     | OPERATOR access                                                                            | 2.1.1.1 (note 1)                                              |
| in FIRE ENCLOSURE                                       | 4.7.2.1, 4.7.3.2                                          | belt                                                                                       | 2.1.1.1, 2.9.1, 4.7.3.3, 4.7.3.4                              |
| in thermostats                                          | K.1                                                       | Bib (Bibliography <i>follows</i> Annex BB)                                                 |                                                               |
| asbestos, not to be used as insulation                  | 2.9.1                                                     | body (human)                                                                               |                                                               |
| attitude <i>see</i> orientation                         |                                                           | current through                                                                            | 0.2.1, 5.1.4 (note 1), 5.1.6, Annex W, Bib                    |
| audio amplifiers                                        | 2.1.1.9, 4.5.1, <b>5.3.6</b>                              | <i>see also</i> TOUCH CURRENT                                                              |                                                               |
| AWG (American Wire Gage)                                |                                                           | BODY (of equipment)                                                                        | 1.2.7.5*                                                      |
| 2.6.3.3 (Table 2D), 3.2.5.1 (Table 3B)                  |                                                           | conductive                                                                                 | 1.6.4, 2.9.3 (Table 2H), 3.2.6, 5.1.3, 5.2.2 (Table 5B)       |
| <b>B</b>                                                |                                                           | effect of ultraviolet radiation                                                            | 4.3.13.4                                                      |
| backup                                                  |                                                           | bonding <i>see</i> PROTECTIVE BONDING CONDUCTOR <i>and</i> protective earthing and bonding |                                                               |
| overcurrent protection                                  | 2.7.3                                                     | BOUNDING SURFACE                                                                           | 1.2.10.1, 1.2.10.2, 1.2.10.3*, 2.9.3, 2.10.3.1, 2.10.4.3, G.6 |
| source of power <i>see</i> multiple power sources       |                                                           | breakdown (of insulation) <i>see</i> failure (of insulation)                               |                                                               |
| baffle in bottom of FIRE ENCLOSURE                      | 4.6.2                                                     | bridging of insulation                                                                     | 1.5.7, 2.9.3, 6.1.2.1                                         |
| ball pressure test on thermoplastic part                | 4.5.5                                                     | by                                                                                         |                                                               |
| bandwidth of measuring instrument                       | 1.4.7, S.1                                                | capacitor                                                                                  | 1.5.6, 1.5.8, 5.2.2 (notes 3 <i>and</i> 4)                    |
| barrier                                                 | 0.2.3                                                     | conductive object                                                                          | 2.1.1.5 b), 2.1.2, 2.1.3, 3.1.9, 4.6.1, 4.6.4, C.2            |
| for electrical separation                               | 2.9.4 a)                                                  | resistor                                                                                   | 1.5.7, 5.2.2 (note 4)                                         |
| for power connection                                    | 3.1.9                                                     | surge suppressor including a VDR                                                           | 1.5.9, 6.1.2.1                                                |
| in bottom of FIRE ENCLOSURE                             | 4.6.2                                                     | components removed for test                                                                |                                                               |
| in TRANSPORTABLE EQUIPMENT                              | 4.6.4                                                     | <i>see</i> components, removal during a test                                               |                                                               |
| no mechanical strength test within MECHANICAL ENCLOSURE | 4.2.1                                                     | in TRANSPORTABLE EQUIPMENT                                                                 | 4.6.4                                                         |
| secured with adhesive                                   | 4.6.5                                                     | <i>see also</i> energy hazard <i>and</i> short-circuit of insulation for test              |                                                               |
| to prevent ignition                                     | 4.6.2, 4.7.3.1, 4.7.3.4, 4.7.3.5                          | building installation (fixed wiring)                                                       | 1.2.4.1, 1.2.5.1, 1.2.5.2, 1.2.5.4, 1.2.13.10                 |
| BASIC INSULATION                                        | 0.2.1, 1.2.9.2*, 1.2.9.3, 1.2.9.4, 1.2.9.5 (note)         | <i>see also</i> IEC 60364, all parts                                                       |                                                               |
| application                                             | 2.1.1.1, 2.9.3                                            | disconnection device in                                                                    | 3.4.6, 3.4.7                                                  |
| in                                                      |                                                           | not in Scope of this standard                                                              | 1.1.3                                                         |
| a contact gap                                           | 2.8.7.1, 3.4.2                                            | short-circuit backup protection                                                            | 2.7.3                                                         |
| an ELV CIRCUIT                                          | 1.2.8.7, 2.1.1.3                                          | special earthing requirements                                                              | 5.1.7.1, Bib (IEC 364-7-707)                                  |
| a FUNCTIONAL EARTHING circuit                           | 2.6.2                                                     | building wiring <i>see</i> building installation                                           |                                                               |
| an SELV CIRCUIT                                         | 2.2.4, 2.9.4                                              | building-in <i>see</i> equipment for building-in                                           |                                                               |
| a TNV CIRCUIT                                           | 2.3.2.2, 2.3.3, 2.3.4                                     | burn hazard                                                                                | 0.2.1, 0.2.2, 0.2.3, 0.2.4                                    |
| a wound component                                       | 2.10.5.11, Annex U                                        | <i>see also</i> flammability                                                               |                                                               |
| on coated printed board                                 | 2.10.6, Annex F (Figure F.11)                             | busbar                                                                                     |                                                               |
| BASIC and SUPPLEMENTARY can be interchanged             | 2.9.3                                                     | as internal wiring                                                                         | 3.1.1                                                         |
| bridging <i>see</i> bridging of insulation              |                                                           | as PROTECTIVE EARTHING CONDUCTOR                                                           | 2.6.4.3                                                       |
| consequences of failure                                 | 2.2.1, 2.2.3, 2.3.2.1, 2.4.1, 2.6.1                       | colour                                                                                     | 2.6.3.5                                                       |
| dimensions                                              | <b>2.10.3, 2.10.4, 2.10.5</b> , Annex F, <b>G.6</b> , R.2 | bushings                                                                                   |                                                               |
| electric strength                                       | <b>5.2</b>                                                | as cord anchorage                                                                          | 3.2.6                                                         |
| failure to be simulated                                 | 1.4.14, 2.3.2.3, 2.6.3.4                                  | in metal                                                                                   | 3.1.2                                                         |
| integrity                                               |                                                           | power cord                                                                                 | 3.2.7, 3.2.8                                                  |
| after a test                                            | 5.3.4, 5.3.9.2                                            |                                                                                            |                                                               |
| in service                                              | 3.3.8                                                     |                                                                                            |                                                               |
| one element of DOUBLE INSULATION                        | 1.2.9.4, 2.10.2.1 e), 5.2.2, 5.3.9.2                      |                                                                                            |                                                               |
| WORKING VOLTAGE                                         | 2.10.2                                                    |                                                                                            |                                                               |
| battery                                                 |                                                           |                                                                                            |                                                               |
| as SECONDARY CIRCUIT                                    | 1.2.8.5                                                   |                                                                                            |                                                               |
| battery-powered equipment                               | 1.1.1, 2.10.3.2 d), G.2.4                                 |                                                                                            |                                                               |
| external to equipment                                   | 1.2.8.2                                                   |                                                                                            |                                                               |
| in a limited power source                               | 2.5                                                       |                                                                                            |                                                               |



|                                                                   |                                                                                     |                                                                                                                                        |                                                    |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| business equipment                                                | 1.1.1                                                                               | ceramic and glass insulation                                                                                                           | 2.10.6.4 (Table 2R/note 2)                         |
| normal load conditions                                            | Annex L                                                                             | CREEPAGE DISTANCE                                                                                                                      | 2.10.4.3                                           |
| <b>C</b>                                                          |                                                                                     | flammability, no test                                                                                                                  | 4.7                                                |
| CABLE DISTRIBUTION SYSTEM                                         | 0.1, 1.1.1, 1.2.13.14*, <b>Clause 7</b>                                             | on printed board                                                                                                                       | 2.10.6.4 (Table 2R)                                |
| coaxial cable                                                     | 1.2.13.14, 7.1 (notes 1 and 5), 7.3                                                 | temperature during a test                                                                                                              | 4.5.4 (Table 4C), 5.3.9.1                          |
| connected to a circuit in equipment                               | 2.2.2 (note 1), <b>7.2</b>                                                          | <i>see also</i> bead, ceramic                                                                                                          |                                                    |
| connections to                                                    | 1.2.11.6, <b>Clause 7</b>                                                           |                                                                                                                                        |                                                    |
| disconnection marking                                             | 2.3.2.3                                                                             | CFR 47, part 68                                                                                                                        | M.3 (note), Bib                                    |
| earthing requirements                                             | 2.6.1 c), d) and f), 2.6.3.4 e), 5.1.8.1, 7.2, 7.3                                  | changes in this edition of the standard                                                                                                | Foreword, Annex BB                                 |
| insulation                                                        | 7.4.1                                                                               | chemical hazard                                                                                                                        | 0.2.7                                              |
| not a reliable earth                                              | 2.6.5.8                                                                             | in battery                                                                                                                             | 4.3.8                                              |
| not a TELECOMMUNICATION NETWORK                                   | 1.2.13.8, 7.1 (note 4)                                                              | ozone                                                                                                                                  | 1.7.2.6                                            |
| TOUCH CURRENT                                                     | 2.6.1 f), 5.1.8.1                                                                   | <i>see also</i> corrosion                                                                                                              |                                                    |
| transients                                                        | 1.2.9.11 (note), 1.2.13.14, 2.10.3.8, G.1.2 (note 2), G.4.4                         | CHEESECLOTH                                                                                                                            | 1.2.13.15*, A.3.1, A.3.2, A.3.3, B.6.3, B.7.3      |
| CABLE, INTERCONNECTING                                            |                                                                                     | CIE (Commission Internationale de l'Eclairage)                                                                                         |                                                    |
| <i>see</i> INTERCONNECTING CABLE                                  |                                                                                     | Publication 63                                                                                                                         | 4.3.13.4 (note 3), Bib                             |
| cable                                                             |                                                                                     | circuit characteristics (definitions)                                                                                                  | 1.2.8*                                             |
| coaxial                                                           | 1.2.13.14, 7.1 (notes 1 and 5), 7.3                                                 | circuit-breaker                                                                                                                        |                                                    |
| earthing conductor, colour of insulation                          | 2.6.2, 2.6.3.5                                                                      | CLEARANCE between contacts not applicable                                                                                              | 2.10.3.1, G.6                                      |
| FIRE ENCLOSURE not required                                       | 4.7.2.2                                                                             | <i>see also</i> fuse and overcurrent and earth fault protection                                                                        |                                                    |
| power                                                             | 3.3.4, 3.3.5, Annex P (IEC 60227, IEC 60245, IEC 60885-1)                           | circuit                                                                                                                                |                                                    |
| sheath is SUPPLEMENTARY INSULATION                                | 3.1.4                                                                               | ELV <i>see</i> ELV CIRCUIT                                                                                                             |                                                    |
| telecommunication, wire size                                      | 6.3 (note 2)                                                                        | interconnection                                                                                                                        | 3.5.1, 3.5.2                                       |
| television distribution                                           | 1.2.13.14                                                                           | LIMITED CURRENT <i>see</i> LIMITED CURRENT CIRCUIT                                                                                     |                                                    |
| ultraviolet radiation, effect of                                  | 4.3.13.3                                                                            | PRIMARY <i>see</i> PRIMARY CIRCUIT                                                                                                     |                                                    |
| calibre of conductor <i>see</i> current carrying capacity         |                                                                                     | SECONDARY <i>see</i> SECONDARY CIRCUIT                                                                                                 |                                                    |
| capacitors                                                        |                                                                                     | SELV <i>see</i> SELV CIRCUIT                                                                                                           |                                                    |
| application                                                       | 1.5.6, (Table 1D)                                                                   | TNV <i>see</i> TNV CIRCUIT                                                                                                             |                                                    |
| bridging insulation                                               | 1.5.6                                                                               | classification of equipment                                                                                                            |                                                    |
| class X (IEC 60384-14)                                            | 1.5.6                                                                               | (for protection against electric shock)                                                                                                | 1.2.4*                                             |
| class Y (IEC 60384-14)                                            | 1.5.6, 1.5.8                                                                        | CLASS I EQUIPMENT                                                                                                                      | 1.2.4.1*, W.1                                      |
| connected to IT power distribution system                         | 1.5.8                                                                               | CLASS II EQUIPMENT                                                                                                                     | 1.2.4.2*, 1.7.1, W.1                               |
| energy hazard                                                     | 1.2.8.10, 2.1.1.5                                                                   | CLASS III EQUIPMENT                                                                                                                    | 1.2.4.3*                                           |
| failure                                                           | 1.4.14                                                                              | CLEARANCE                                                                                                                              | 1.2.10.1*, <b>2.10.3</b> , Annex F, <b>Annex G</b> |
| IEC 60065                                                         | 4.7.3.6                                                                             | as FUNCTIONAL INSULATION                                                                                                               | 2.10.1.3, 5.3.4                                    |
| in filter                                                         | 1.5.6, 1.5.8, 5.2.2 (notes 3 and 4)                                                 | as minimum CREEPAGE DISTANCE                                                                                                           | 2.10.4.3                                           |
| discharging                                                       | 2.1.1.7, 2.1.1.8                                                                    | behind conductive ENCLOSURE                                                                                                            | 2.10.3.1, 4.2.1, G.6                               |
| in FIRE ENCLOSURE                                                 | 4.7.3.4                                                                             | divided by floating part                                                                                                               | 2.10.1.4, Annex F (Figure F.13)                    |
| motor                                                             | B.5, B.8                                                                            | in                                                                                                                                     |                                                    |
| not protected by fuse                                             | 5.3.8                                                                               | coated board                                                                                                                           | 2.10.6.2                                           |
| outside FIRE ENCLOSURE                                            | 4.7.3.3                                                                             | disconnect device                                                                                                                      | 3.4.2                                              |
| ratings                                                           | (Table 1C)                                                                          | encapsulated part                                                                                                                      | 2.10.5.3                                           |
| separate testing <i>see</i> separate testing                      |                                                                                     | enclosed part                                                                                                                          | 2.10.12                                            |
| stored charge                                                     | 2.1.1.7, 2.1.1.8, <b>2.4.2</b>                                                      | uncoated board                                                                                                                         | 2.10.6.1                                           |
| cathode ray tube, mechanical strength                             |                                                                                     | increased by coating                                                                                                                   | 2.10.7                                             |
| 0.2.5, <b>4.2.8</b> , Annex P (IEC 61965)                         |                                                                                     | integrity in service                                                                                                                   | 2.10.3.1, C.2                                      |
| no test                                                           | 4.2.1, 4.2.5                                                                        | measured through an opening                                                                                                            | 2.10.3.1, Annex F (Figure F.12), G.6               |
| CCITT Recommendations <i>see</i> ITU-T Recommendations            |                                                                                     | overvoltage categories                                                                                                                 | 2.10.3.1, G.1.1, <b>Annex Z</b>                    |
| <i>Note</i> - CCITT Recommendations are now ITU-T Recommendations |                                                                                     | reduced                                                                                                                                | R.2                                                |
| ceiling-mounted equipment                                         | <b>4.2.10</b>                                                                       | varying                                                                                                                                | 2.10.1.5                                           |
| cemented joints                                                   |                                                                                     | WORKING VOLTAGE                                                                                                                        | 2.10.2                                             |
| in insulation                                                     | <b>2.10.5.5</b> , 2.10.6.3, 2.10.11, Annex F (Figures F.5, F.6, F.7, F.16 and F.18) | <i>see also</i> IEC 60664 (all parts), interpolation, TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE, transients and separation distances |                                                    |
| in winding wire                                                   | 2.10.5.12                                                                           |                                                                                                                                        |                                                    |

cmil *see* AWG

|                                                           |                                                                                                                                                         |                                              |                                                                                                                |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| coated printed board                                      | 2.10.6.2, Annex F (Figure F.11), R.1                                                                                                                    | consumable supplies                          | 0.2.3, 0.2.7, 1.4.14, 4.7.3.2, 4.7.3.3, 4.7.3.4                                                                |
| colours                                                   |                                                                                                                                                         | contact                                      |                                                                                                                |
| controls and indicators                                   | 1.7.8.2, Annex P (IEC 60073, ISO 3864)                                                                                                                  | gap                                          | see air gap                                                                                                    |
| flexible printed wiring                                   | 2.6.3.5                                                                                                                                                 | pressure                                     | 3.1.6, 3.1.7, 3.3.6, 3.3.8                                                                                     |
| FUNCTIONAL EARTHING conductor                             | 2.6.2                                                                                                                                                   | see also                                     | access                                                                                                         |
| PROTECTIVE EARTHING CONDUCTOR                             | 2.6.3.5, 3.2.5.1                                                                                                                                        | control, quality                             | see quality control                                                                                            |
| comparative tracking index (CTI)                          | see tracking                                                                                                                                            | controls                                     |                                                                                                                |
| compliance checked by inspection of relevant data         | 1.4.15                                                                                                                                                  | manual                                       | 2.1.1.6                                                                                                        |
| see also                                                  | separate testing                                                                                                                                        | accessibility                                | 4.3.3                                                                                                          |
| component                                                 | 1.2.11*                                                                                                                                                 | fixing                                       | 4.3.2                                                                                                          |
| bridging insulation                                       | see bridging of insulation                                                                                                                              | operated during a test                       | 1.4.4, 5.1.5, 5.1.8.1, 5.3.8, Annex H                                                                          |
| electromechanical                                         | see electromechanical component                                                                                                                         | marking                                      | 1.7.8                                                                                                          |
| high voltage                                              | 4.7.3.6                                                                                                                                                 | supply voltage adjustment                    | 1.7.4, 4.3.3                                                                                                   |
| material selection                                        | 4.7.3                                                                                                                                                   | temperature                                  | 4.5.4 (Table 4C)                                                                                               |
| removal during a test                                     | 2.10.3.9, 5.1.5, 5.2.2, 6.1.2.1, 6.2.2.2, 6.2.2.3, 7.4.2, 7.4.3                                                                                         | see also                                     | colours and symbols, informative                                                                               |
| selection                                                 | 0.3, 1.5.1, 1.5.8, 4.7.1                                                                                                                                | cord anchorage, power cord                   | 3.2.6                                                                                                          |
| separate testing                                          | see separate testing                                                                                                                                    | cord guard (for power cord)                  | 3.2.7, 3.2.8                                                                                                   |
| used within its rating                                    | 1.5.2, 1.5.6, 1.6.4                                                                                                                                     | integral with cord                           | 1.2.5.6                                                                                                        |
| wound                                                     | 2.10.5.11, 5.3.5, Annex U                                                                                                                               | cord, telephone                              | 2.1.1.2                                                                                                        |
| see also                                                  | capacitor, resistor, sealed components, semiconductor device and transformers                                                                           | cord, power supply                           | see power supply cord                                                                                          |
| conditioning of test samples                              | 2.9.2, 2.10.6.4 (Table 2R/Footnote a), 2.10.8.2, 2.10.8.3, 2.10.9, 2.10.10, 2.10.11, 4.3.13.3, 4.6.5, 4.7.3.6, 7.4.2, 7.4.3, A.1.2, A.2.2, R.1, Annex Y | corrosion                                    |                                                                                                                |
| conductive liquid                                         | see liquid, conductive                                                                                                                                  | by consumable materials                      | 4.3.10                                                                                                         |
| conductor size                                            | see current carrying capacity                                                                                                                           | by electrochemical action                    | Annex J                                                                                                        |
| conductor                                                 | see busbar and wire, wiring                                                                                                                             | by environment                               | 1.1.2                                                                                                          |
| connection terminals                                      | see wiring terminals                                                                                                                                    | in protective earthing connection            | 2.6.5.6                                                                                                        |
| connections                                               |                                                                                                                                                         | country notes                                | can be found in the following subclauses:                                                                      |
| between circuits                                          | 2.2.4, 2.3.4, 2.4.3                                                                                                                                     | general                                      | 1.1.2, 1.2.13.10, 1.7.2.1, 2.6.3.3 (Table 2D), 3.2.1.1, 3.2.5.1 (Table 3B), 6.1.2.1, M.1, Annex V (Figure V.4) |
| FUNCTIONAL EARTHING                                       | 2.6.2                                                                                                                                                   | Australia                                    | 3.2.5.1, 4.3.6, 4.7, 6.2.2, 6.2.2.1, 6.2.2.2                                                                   |
| to                                                        |                                                                                                                                                         | Canada                                       | 1.4.8, 1.7.2.1, 2.2.3, 2.3.2.1, 2.6.3.3, 3.2.3 (Table 3A), 4.7.2.2, 4.7.3.1, 5.3.7, Clause 6                   |
| CABLE DISTRIBUTION SYSTEM 1.1.1, 2.2.2 (note 1), Clause 7 |                                                                                                                                                         | CENELEC countries                            | 2.7.1, Annex H                                                                                                 |
| multiple power sources                                    | see multiple power sources                                                                                                                              | Denmark                                      | 5.1.7.1                                                                                                        |
| other equipment                                           | see interconnection of equipment                                                                                                                        | France                                       | Annex V (Figure V.7)                                                                                           |
| protective earth                                          | 2.6                                                                                                                                                     | Germany                                      | 1.7.2.1                                                                                                        |
| supply source                                             | 1.2.5*, 3.1, 3.2, 3.3, 5.1.2                                                                                                                            | Finland                                      | 1.5.9.4, 1.7.2.1, 2.3.2, 2.10.5.13, 5.1.7.1, 6.1.2.1, 6.1.2.2, 7.2                                             |
| TELECOMMUNICATION NETWORK                                 | 1.1.1, 1.4.11, 2.2.2 (note 1), Clause 6, Bib (CFR 47, part 68)                                                                                          | Japan                                        | 2.10.3.2                                                                                                       |
| see also                                                  | disconnection and INTERCONNECTING CABLES                                                                                                                | Norway                                       | 1.5.8, 1.5.9.4, 1.7.2.1, 2.2.4, 2.3.2, 2.3.4, 2.10.5.13, 5.1.7.1, 6.1.2.1, 7.2, 7.3                            |
| connectors                                                |                                                                                                                                                         | Sweden                                       | 1.5.1, 1.5.9.4, 1.7.2.1, 2.3.2, 2.10.5.13, 5.1.7.1, 6.1.2.1, 6.1.2.2, 7.2, 7.3                                 |
| contact by test probe                                     | 2.1.1.1, 2.10.4.3, 6.2.1, 6.6                                                                                                                           | Switzerland                                  | 1.5.1                                                                                                          |
| FIRE ENCLOSURE not required                               | 4.7.2.2                                                                                                                                                 | United Kingdom                               | 2.6.3.3, 3.2.1.1, 4.3.6                                                                                        |
| flammability                                              | 4.7.2.2, 4.7.3.2, 4.7.3.3, 4.7.3.4                                                                                                                      | United States of America                     | 1.4.8, 2.2.3, 2.3.2.1, 2.6.3.3, 3.2.3 (Table 3A), 4.7.2.2, 4.7.3.1, 5.3.7, Clause 6                            |
| mismatching, not to create a hazard                       | 4.3.5                                                                                                                                                   | covering, protective, in place during a test | 5.3.1                                                                                                          |
| multiway                                                  | 3.1.9                                                                                                                                                   | covers                                       | see doors and covers                                                                                           |
| power                                                     | 3.2                                                                                                                                                     | CREEPAGE DISTANCE                            | 1.2.10.2*, 2.10.4, Annex F                                                                                     |
| protective earthing contact in                            | 2.6.4.2, 2.6.5.4                                                                                                                                        | as FUNCTIONAL INSULATION                     | 2.10.1.3, 5.3.4                                                                                                |
| see also                                                  | appliance coupler, appliance inlet, mains plug and socket-outlet                                                                                        | divided by floating part                     | 2.10.1.4, Annex F (Figure F.13)                                                                                |
| construction                                              |                                                                                                                                                         | in cemented joints                           | 2.10.5.5                                                                                                       |
| details                                                   | 4.3                                                                                                                                                     | in coated boards                             | 2.10.6.2                                                                                                       |
| general requirements                                      | 1.3.1, 1.3.2                                                                                                                                            | in encapsulated part                         | 2.10.5.3                                                                                                       |
| not covered by this standard                              | 1.3.4                                                                                                                                                   | in enclosed part                             | 2.10.12                                                                                                        |

|                                                                        |                                                    |                                                                                                        |                                               |
|------------------------------------------------------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| in groups of resistors                                                 | 1.5.7.2                                            | d.c. voltage                                                                                           |                                               |
| increased by coating                                                   | 2.10.7                                             | for test, instead of a.c.                                                                              |                                               |
| integrity in service                                                   | 2.10.3.1, C.2                                      | <i>Note</i> – where electric strength testing is required, a d.c. test voltage is permitted, see 5.2.2 |                                               |
| measured through an opening                                            |                                                    | for testing a capacitor                                                                                | 5.2.2 (note 3)                                |
|                                                                        | 2.10.4.3, Annex F (Figure F.12)                    | see also ripple                                                                                        |                                               |
| not less than CLEARANCE                                                | 2.10.4.3                                           | DC VOLTAGE                                                                                             | 0.2.1, 1.2.13.4*                              |
| varying                                                                | 2.10.1.5                                           | DECORATIVE PART                                                                                        | 1.2.6.5*, 4.7.3.1 (note 2), 4.7.3.3           |
| WORKING VOLTAGE                                                        | 2.10.2, 2.10.4.3                                   | see also ENCLOSURE                                                                                     |                                               |
| see also IEC 60664, interpolation, and separation distances            |                                                    | definitions                                                                                            | <b>1.2*</b>                                   |
| CTI (comparative tracking index) see tracking                          |                                                    | miscellaneous                                                                                          | 1.2.13*                                       |
| current                                                                |                                                    | design, general requirements                                                                           | 0.1, 1.3, 4.3, 4.7.1, 5.3.1                   |
| in human body                                                          | 0.2.1, 5.1                                         | DETACHABLE POWER SUPPLY CORD see power supply cord                                                     |                                               |
| input, determination                                                   | 1.4.10                                             | different criteria and tests in this standard, manufacturer's choice                                   | 1.3.7, 1.5.6, 2.3.2.1, R.1, R.2               |
| input, maximum                                                         | 1.6.2                                              | DIRECT PLUG-IN EQUIPMENT                                                                               | 1.2.3.6*, 3.2.1.1, 3.4.2, 4.2.6, <b>4.3.6</b> |
| limiter                                                                | 2.5                                                | disconnection                                                                                          |                                               |
| locked rotor                                                           | B.1, B.5                                           | automatic                                                                                              | <b>2.7</b> , 5.3.2 (note)                     |
| maximum ringing signal                                                 | M.2, M.3                                           | by a SAFETY INTERLOCK                                                                                  | 2.8.2                                         |
| r.m.s. value implied unless otherwise specified                        | 1.2                                                | for servicing (isolation)                                                                              | <b>3.4</b>                                    |
| to telecommunication wiring                                            | 6.3                                                | from CABLE DISTRIBUTION SYSTEM                                                                         | 2.3.2.3 b)                                    |
| see also PROTECTIVE CONDUCTOR CURRENT, TOUCH CURRENT and RATED CURRENT |                                                    | from protective earth                                                                                  | 2.6.5.3, 2.6.5.5                              |
| current-carrying capacity                                              |                                                    | from TELECOMMUNICATION NETWORK                                                                         | 2.1.1.2, 2.3.2.3 b)                           |
| INTERCONNECTING CABLE                                                  | 3.1.1                                              | marking                                                                                                | 1.7.2.2, 1.7.9                                |
| internal wiring                                                        | 3.1.1                                              | of components, during a test                                                                           |                                               |
| power supply cord                                                      | 3.2.5.1, 3.2.5.2                                   | see component, removal during a test                                                                   |                                               |
| PROTECTIVE BONDING CONDUCTOR                                           | 2.6.3.3                                            | of heating element                                                                                     | 4.3.7                                         |
| PROTECTIVE EARTHING CONDUCTOR                                          | 2.6.3.2                                            | distance through insulation                                                                            | <b>2.10.5.2</b> , 2.10.5.3                    |
| telecommunication wiring                                               | 6.3                                                | printed board                                                                                          | 2.10.6.4                                      |
| wiring terminals                                                       |                                                    | varying                                                                                                | 2.10.1.5, 5.2.2                               |
| see wiring terminals, current carrying capacity                        |                                                    | wiring in an ELV CIRCUIT                                                                               | 2.1.1.3                                       |
| CUT-OUT, THERMAL see THERMAL CUT-OUT                                   |                                                    | doors and covers                                                                                       | 4.2.3, 4.6.1, 4.6.3                           |
| <b>D</b>                                                               |                                                    | access through                                                                                         |                                               |
| data port                                                              | 3.5.4                                              | see opening in an ENCLOSURE, access                                                                    |                                               |
| d.c. component of waveform                                             | 1.2.9.7, 1.2.9.8, 1.4.7, 2.3.1 b)                  | marking on or near                                                                                     | 1.7.1, 2.1.1.2, 4.3.13.4                      |
| see also ripple                                                        |                                                    | of supply wiring space                                                                                 | 3.2.9                                         |
| d.c. current for test                                                  | 2.6.3.4                                            | position during a test                                                                                 | 2.1.1.1, 4.1, 4.3.13.4, 4.4.2, 4.6.4          |
| DC MAINS SUPPLY                                                        | 1.2.8.2*, 1.2.8.3                                  | transparent, no mechanical strength test                                                               | 4.2.1                                         |
| capacitor                                                              | 2.1.1.7, 2.1.1.8                                   | DOUBLE INSULATION                                                                                      | 0.2.1, 1.2.9.4*, 1.2.9.5                      |
| circuitry considered to be a SECONDARY CIRCUIT                         | 1.2.8.2                                            | application                                                                                            | 2.9.3                                         |
| connections                                                            | <b>3.2.1.2</b> , 3.2.5.2                           | in                                                                                                     |                                               |
| energy hazard                                                          | 2.1.1.8                                            | a FUNCTIONAL EARTHING circuit                                                                          | 2.6.2                                         |
| isolation see disconnection                                            |                                                    | a HAZARDOUS VOLTAGE circuit                                                                            | 2.1.1.4                                       |
| marking                                                                | 1.7.1                                              | manual control                                                                                         | 2.1.1.6                                       |
| overvoltage category not applicable                                    | Annex Z                                            | an SELV CIRCUIT                                                                                        | 2.2.4, 2.9.4                                  |
| polarity                                                               | 1.4.5, 1.7.7.3                                     | a TNV CIRCUIT                                                                                          | 2.3.3, 2.3.4                                  |
| power cord                                                             | 3.2.5.2                                            | a wound component                                                                                      | 2.10.5.11, Annex U                            |
| protective conductor sizing                                            | 2.6.3.4                                            | BASIC and SUPPLEMENTARY can be interchanged                                                            | 2.9.3                                         |
| terminals                                                              | 1.7.7.3, 3.3.7                                     | bridging see bridging of insulation                                                                    |                                               |
| test voltage                                                           | 5.2.2 (Table 5B/Footnotes a, b, c and d)           | care during electric strength tests                                                                    | 5.2.2                                         |
| TOUCH CURRENT requirements not applicable                              | 5.1                                                | dimensions                                                                                             |                                               |
| tolerance                                                              | 1.4.5                                              | see BASIC INSULATION and SUPPLEMENTARY INSULATION                                                      |                                               |
| transients                                                             | 2.10.3.2, 2.10.3.7, 2.10.3.9, G.2.2, G.2.3, G.5 a) | integrity                                                                                              |                                               |
| see also mains and PRIMARY CIRCUIT                                     |                                                    | after a test                                                                                           | 5.3.9.2                                       |
| d.c. power supply distribution system                                  |                                                    | in service                                                                                             | 3.3.8                                         |
| see power distribution system, d.c.                                    |                                                    | protective device not needed                                                                           | 2.7.4                                         |
| d.c. motor, testing                                                    | B.1, B.6, B.7, B.10                                | unearthed parts within                                                                                 | 2.9.3                                         |
|                                                                        |                                                    | WORKING VOLTAGE                                                                                        | 2.10.2                                        |
|                                                                        |                                                    | meaning, for DOUBLE INSULATION                                                                         | 2.10.2.1 e)                                   |

|                                                                                                                                  |                                                                       |                                                                                                          |                                         |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------|
| drop test                                                                                                                        | <b>4.2.6</b>                                                          | elevation                                                                                                | see altitude                            |
| dust                                                                                                                             |                                                                       | ELV CIRCUIT                                                                                              | 1.2.8.7*                                |
| additional requirements if present                                                                                               | 1.1.2, <b>4.3.10</b>                                                  | accessibility                                                                                            | 2.1.1.1, 2.1.1.6, 3.2.2                 |
| excluded in pollution degree 1                                                                                                   | 2.10.1.2                                                              | in a SERVICE ACCESS AREA                                                                                 | 2.1.2                                   |
| explosion limit                                                                                                                  | 1.2.12.15*                                                            | of insulation                                                                                            | 2.1.1.3                                 |
| duty cycle, marking                                                                                                              |                                                                       | as an interconnection circuit                                                                            | 3.5.2, 3.5.3                            |
| see RATED OPERATING TIME and RATED RESTING TIME                                                                                  | <b>1.7.3</b>                                                          | insulation                                                                                               | 2.9.3                                   |
| <b>E</b>                                                                                                                         |                                                                       | operating voltage                                                                                        | 1.4.8                                   |
| earth, earthing                                                                                                                  | 0.2.1, <b>2.6</b>                                                     | reed switch in                                                                                           | 2.8.7.3                                 |
| a.c. power distribution system                                                                                                   | Annex V                                                               | similar to an SELV CIRCUIT                                                                               | 2.2.2 (notes 1 and 2)                   |
| functional earthing                                                                                                              | 1.2.13.9*, <b>2.6.2</b>                                               | e.m.c.                                                                                                   | see electrical filters                  |
| permanent connection to earth                                                                                                    | 1.5.9.4, 2.3.2.3 a), 2.6.4.2, 5.1.7.1, 5.1.8.2, 6.1.2.2, 6.2.1, 7.4.1 | enamel, solvent-based                                                                                    |                                         |
| see also permanently connected equipment                                                                                         |                                                                       | as FUNCTIONAL INSULATION                                                                                 | 2.1.1.1 (note 1)                        |
| protective                                                                                                                       |                                                                       | as insulation for safety                                                                                 | 2.10.5.12, 2.10.5.13, 2.10.11           |
| see protective bonding conductor, protective earthing and bonding, protective earthing conductor and screen, conductive, earthed |                                                                       | encapsulated part                                                                                        | 2.10.5.3, 5.1.5 (note)                  |
| rise of earth potential, not covered by this standard                                                                            | 1.4.8 (note 1)                                                        | enclosed part                                                                                            | <b>2.10.12</b> , B.2, B.5, 5.3.9.2      |
| special requirements                                                                                                             | Bib (IEC 60364-7-707)                                                 | ENCLOSURE                                                                                                | 1.2.6.1*, 5.3.9.1                       |
| voltage measurement to earth                                                                                                     | <b>1.4.9</b>                                                          | bottom                                                                                                   | 4.2.4, 4.2.5, 4.6.1, <b>4.6.2</b> , A.3 |
| earth fault protection                                                                                                           | <b>2.7</b>                                                            | definition                                                                                               | 1.2.6*                                  |
| see also overcurrent protection devices                                                                                          |                                                                       | ELECTRICAL ENCLOSURE                                                                                     | 1.2.6.4*, 2.1.1.1, 4.7.3.3, 4.7.3.4     |
| earth leakage current                                                                                                            | see TOUCH CURRENT                                                     | FIRE ENCLOSURE                                                                                           | see FIRE ENCLOSURE                      |
| electric shock                                                                                                                   | <b>0.2.1</b> , 1.3.2                                                  | flammability                                                                                             | 4.7.3.2, A.1, A.2                       |
| caused by                                                                                                                        |                                                                       | MECHANICAL ENCLOSURE                                                                                     | 1.2.6.3*, <b>4.2</b> , <b>4.4</b>       |
| stored charge                                                                                                                    | 2.1.1.7, 2.1.1.8                                                      | mechanical strength                                                                                      | 4.2                                     |
| touching bare conductive part                                                                                                    | 2.1.1.5.1                                                             | metallized plastic, in TRANSPORTABLE EQUIPMENT                                                           | 4.6.4                                   |
| classes of equipment                                                                                                             | 1.2.4*                                                                | see also air gap behind conductive ENCLOSURE, DECORATIVE PART, water ingress and opening in an ENCLOSURE |                                         |
| protection                                                                                                                       | <b>2.1</b>                                                            | endurance testing                                                                                        |                                         |
| by insulation                                                                                                                    | 1.2.9*                                                                | capacitors                                                                                               | 1.5.8 (note 1)                          |
| by a SAFETY INTERLOCK                                                                                                            | 2.8.2                                                                 | SAFETY INTERLOCK switch                                                                                  | 2.8.5, <b>2.8.7.3</b>                   |
| by an SELV CIRCUIT                                                                                                               | 2.2                                                                   | thermal control                                                                                          | Annex K                                 |
| by a TNV CIRCUIT                                                                                                                 | 2.3                                                                   | energy hazard                                                                                            | 0.2.2, 5.3.9.1                          |
| two levels                                                                                                                       | 0.2.1                                                                 | AC MAINS SUPPLY                                                                                          | 2.1.1.7                                 |
| see also symbols, warning                                                                                                        |                                                                       | DC MAINS SUPPLY                                                                                          | 2.1.1.7, 2.1.1.8                        |
| electric strength test                                                                                                           | 5.2                                                                   | disconnection                                                                                            | 3.4.10                                  |
| not for verifying CLEARANCE                                                                                                      | 2.10.3.1, G.6                                                         | in                                                                                                       |                                         |
| test voltage, based on                                                                                                           |                                                                       | ENCLOSURE                                                                                                | 4.2.1, 4.6.1 (note 1)                   |
| PEAK WORKING VOLTAGE                                                                                                             | 5.2.2 (Table 5B)                                                      | FIRE ENCLOSURE                                                                                           | 4.7.2.1                                 |
| REQUIRED WITHSTAND VOLTAGE                                                                                                       | 5.2.2 (Table 5C)                                                      | OPERATOR ACCESS AREA                                                                                     | 2.1.1, <b>2.1.1.5</b> , <b>2.1.1.8</b>  |
| used for verifying SOLID INSULATION                                                                                              | 2.10.5.1                                                              | RESTRICTED ACCESS LOCATION                                                                               | <b>2.1.3</b>                            |
| with or without pre-heating                                                                                                      | 5.2 (note), 5.2.1                                                     | SERVICE ACCESS AREA                                                                                      | <b>2.1.2</b>                            |
| WORKING VOLTAGE                                                                                                                  | <b>2.10.2</b>                                                         | multiple sources                                                                                         | 1.7.9                                   |
| Note - electric strength tests are required in numerous places in this standard                                                  |                                                                       | reduced by a SAFETY INTERLOCK                                                                            | 2.8.2                                   |
| ELECTRICAL ENCLOSURE                                                                                                             |                                                                       | ENERGY LEVEL, HAZARDOUS                                                                                  |                                         |
| see ENCLOSURE and opening in an ENCLOSURE                                                                                        |                                                                       | see energy hazard and HAZARDOUS ENERGY LEVEL                                                             |                                         |
| electrical filter                                                                                                                |                                                                       | environment of equipment                                                                                 |                                         |
| effect of                                                                                                                        | 2.10.3.2, 2.10.3.4, 2.10.3.9, G.5                                     | manufacturing                                                                                            | R.1, R.2                                |
| electric strength test                                                                                                           | 5.2.2 (notes 3 and 4)                                                 | special                                                                                                  | 1.1.2                                   |
| fault testing                                                                                                                    | 5.3.7                                                                 | to be taken into account in design                                                                       | 2.6.5.6, 2.9.1                          |
| three-phase, during a TOUCH CURRENT test                                                                                         | 5.1.5 (note)                                                          | see also corrosion, humidity, pollution degree, and temperature                                          |                                         |
| electrochemical potential                                                                                                        | 2.6.5.6, Annex J                                                      | equipment                                                                                                |                                         |
| electromechanical component                                                                                                      | 2.5, 2.8.4, 2.8.5, 4.7.2.2, <b>5.3.5</b>                              | electrical ratings (definitions)                                                                         | 1.2.1*                                  |
|                                                                                                                                  |                                                                       | not operational after a test                                                                             | 1.4.1                                   |
|                                                                                                                                  |                                                                       | EQUIPMENT FOR BUILDING-IN                                                                                | 1.2.3.5*, 2.1.1.1, 4.2.5, 4.5.2         |

|                                                                                   |                                                      |
|-----------------------------------------------------------------------------------|------------------------------------------------------|
| equivalent level of safety                                                        | 1.3.4                                                |
| equivalent materials permitted                                                    | 1.3.5                                                |
| equivalent sources of power                                                       | 1.2.8.1, 1.4.5                                       |
| EUT (equipment under test)                                                        |                                                      |
| examples given in this standard, others not excluded                              | 1.3.8                                                |
| explosion                                                                         |                                                      |
| EXPLOSION LIMIT                                                                   | 1.2.12.15*, 4.3.12                                   |
| external to the equipment                                                         |                                                      |
| batteries                                                                         | 4.3.8 (note 3)                                       |
| (implosion) of cathode ray tube                                                   | 0.2.5, 4.2.8                                         |
| of battery                                                                        | 1.7.13, 4.3.8                                        |
| of high pressure lamp                                                             | 0.2.5, 4.2.9                                         |
| see also transients                                                               |                                                      |
| external to the equipment                                                         |                                                      |
| batteries, explosion                                                              | 4.3.8 (note 3)                                       |
| disconnect devices                                                                | 1.7.2.2, 3.4.3, 3.4.6, 3.4.7                         |
| overcurrent protective devices                                                    | 2.6.3.3, 2.6.3.4, 2.7.1, 2.7.4, 2.10.3.2, 3.4.7, C.1 |
| protection for high overvoltage categories                                        | 2.10.3.2                                             |
| see also building installation, disconnection, and overcurrent protective devices |                                                      |

## F

failure see fault or failure

|                                                                    |                                                                                                   |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| fault or failure                                                   | 1.3.2, <b>5.3.1</b>                                                                               |
| component                                                          | 0.1, 0.2.1, 0.2.3, 2.2.3, 5.3.7                                                                   |
| in a battery circuit                                               | 4.3.8                                                                                             |
| in a LIMITED CURRENT CIRCUIT                                       | 1.2.8.9, 2.4.1, 2.4.3                                                                             |
| in an SELV CIRCUIT                                                 | 1.2.8.8, 2.2.1, 2.2.4                                                                             |
| in a TNV CIRCUIT                                                   | 1.2.8.11, 2.3                                                                                     |
| consequences                                                       | 1.3.1, 2.9.3                                                                                      |
| consequential                                                      | 0.1, 0.2.1, 1.4.14, 5.3.5                                                                         |
| earth fault protection                                             | 2.7, 4.3.7                                                                                        |
| earthed equipment                                                  | 2.6.1                                                                                             |
| ENCLOSURE                                                          | 4.2.5, 4.7                                                                                        |
| metallized ENCLOSURE                                               | 4.6.4                                                                                             |
| equipment not operational, evident to an OPERATOR                  | 5.3.5                                                                                             |
| mechanical                                                         | 5.3.5                                                                                             |
| motor capacitor                                                    | B.8                                                                                               |
| moving part                                                        | 4.2.1                                                                                             |
| not covered in subclause 5.3                                       | 2.7.2                                                                                             |
| power distribution system                                          | 1.2.13.8 (note 2)                                                                                 |
| protective earthing connection                                     | 5.1                                                                                               |
| ringing signal circuit                                             | M.2, M.3                                                                                          |
| SAFETY INTERLOCK system                                            | 2.8.4                                                                                             |
| screwed connection                                                 | 4.3.4                                                                                             |
| simulated fault condition or abnormal condition                    |                                                                                                   |
|                                                                    | 1.4.14, 2.3.2.2, 2.3.2.3, 2.3.2.4, 2.3.4, 2.5 c), 2.7.4, 2.8.4, 4.3.8, 5.1.5, 5.3.5, <b>5.3.7</b> |
| single fault                                                       | 0.2.1, 1.4.14                                                                                     |
| see also abnormal condition                                        |                                                                                                   |
| fault current                                                      | 2.7                                                                                               |
| in protective earthing conductor                                   | 2.6.1 (note), 2.6.3                                                                               |
| FCC Rule, Part 68                                                  | M.3 (note), Bib                                                                                   |
| FEP (fluoro ethylene propylene)                                    | 4.7.2.2, 4.7.3.3, 4.7.3.4                                                                         |
| filter, air, flammability                                          | 4.7.3.5                                                                                           |
| filter, electrical see electrical filter and capacitors in filters |                                                                                                   |

|                                                   |                                                         |
|---------------------------------------------------|---------------------------------------------------------|
| FIRE ENCLOSURE                                    | 1.2.6.2*                                                |
| air filter in                                     | 4.7.3.5                                                 |
| construction                                      | 4.6.2, 4.6.3, 4.7.1, 4.7.2, A.1, A.2                    |
| material                                          | <b>4.7.3.2</b>                                          |
| not required                                      | 1.4.11 (note), 4.7.2.2                                  |
| required                                          | 4.7.2                                                   |
| screen may be part of FIRE ENCLOSURE              | 4.6.4.1 (note)                                          |
| see also ENCLOSURE and opening in an ENCLOSURE    |                                                         |
| fire hazard                                       | 0.3, 1.1.1, 1.3.2, <b>4.7</b> , Annex P (IEC 60695)     |
| caused by                                         |                                                         |
| battery                                           | 4.3.8                                                   |
| breakdown of FUNCTIONAL INSULATION                | 1.2.9.1 (note), 5.3.4, 5.3.9                            |
| flammable liquid                                  | 4.3.10, 4.3.12                                          |
| heating element                                   | 4.3.7                                                   |
| overload                                          | 5.3.1                                                   |
| water ingress                                     | Annex T                                                 |
| see also flammability                             |                                                         |
| fixed wiring see building installation            |                                                         |
| fixing (securing) of                              |                                                         |
| equipment                                         | 1.2.3.4, 1.2.3.5                                        |
| units, fixed together                             | 4.1                                                     |
| parts                                             |                                                         |
| adhesive                                          | 4.6.5                                                   |
| conductors see wiring terminals                   |                                                         |
| controls                                          | 4.3.2                                                   |
| cord guard                                        | 3.2.8                                                   |
| insulation                                        | 3.1.5                                                   |
| inlet bushing                                     | 3.2.7                                                   |
| minor part                                        | 4.3.4                                                   |
| terminal hardware                                 | 3.3.6                                                   |
| two fixings not loose at the same time            | 3.1.9, 4.3.4, C.2                                       |
| wiring                                            | 2.1.1.3, 2.1.1.4, 3.1.3, 2.9.4 a)                       |
| flammability                                      | 0.2.3, 0.2.4, 1.2.12*, <b>4.7</b>                       |
| better class permitted                            | 1.3.5                                                   |
| exemption from flammability requirement           | 4.7.3.3, 4.7.3.4                                        |
| of fluids                                         | 4.3.10, 4.3.12                                          |
| ranking (one class better than another)           | 1.2.12.1 (notes and Table 1B), 1.3.5                    |
| summary of flammability requirements              | Table 4E                                                |
| tests                                             | Annex A, Annex P (IEC 60695 series, ISO 9772, ISO 9773) |
| FLAMMABILITY CLASSES                              | 1.2.12.1*, 1.3.5, Table 4E                              |
| equivalence of V-series and VTM-series            | 4.7.3.1                                                 |
| 5VA                                               | 1.2.12.1 (notes 2 and 5), 1.2.12.5*                     |
| Note - 5VA CLASS is not required in this standard |                                                         |
| 5VB                                               | 1.2.12.1 (notes 2 and 5), 1.2.12.6*                     |
| application                                       | 4.7.3.2                                                 |
| HB40                                              | 1.2.12.1 (notes 2 and 5), 1.2.12.10*                    |
| application                                       | 4.7.2.2, 4.7.3.3, 4.7.3.4, 4.7.3.5                      |
| glow-wire test acceptable                         | 4.7.3.1                                                 |
| HB75                                              | 1.2.12.1 (notes 2 and 5), 1.2.12.11*                    |
| application                                       | 4.7.2.2, 4.7.3.3, 4.7.3.4, 4.7.3.5                      |
| glow-wire test acceptable                         | 4.7.3.1                                                 |
| HBF (foamed material)                             | 1.2.12.1 (note 1), 1.2.12.9*                            |
| application                                       | 4.7.2.2, 4.7.3.3, 4.7.3.4, 4.7.3.5                      |
| glow-wire test acceptable                         | 4.7.3.1                                                 |
| HF-1 (foamed material)                            | 1.2.12.1 (note 1), 1.2.12.7*                            |
| application                                       | 4.6.2                                                   |
| HF-2 (foamed material)                            | 1.2.12.1 (note 1), 1.2.12.8*                            |
| application                                       | 4.7.3.4, 4.7.3.5, 4.7.3.6                               |



|                                                                                           |                                                                             |                                                 |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------|
| V-0                                                                                       | 1.2.12.1 (notes 2 and 4), 1.2.12.2*                                         | see also overcurrent and earth fault protection |
| <i>Note - V-0 CLASS is not required in this standard</i>                                  |                                                                             |                                                 |
| V-1                                                                                       | 1.2.12.1 (notes 2 and 4), 1.2.12.3*                                         |                                                 |
| application                                                                               | 4.6.2, 4.7.2.1, 4.7.2.2, 4.7.3.1, 4.7.3.2, 4.7.3.3, 4.7.3.4, 4.7.3.5, 5.3.4 |                                                 |
| V-2                                                                                       | 1.2.12.1 (notes 2 and 4), 1.2.12.4*                                         |                                                 |
| application                                                                               | 4.7.3.3, 4.7.3.4, 4.7.3.5, 4.7.3.6                                          |                                                 |
| VTM-0                                                                                     | 1.2.12.1 (note 3), 1.2.12.12*                                               |                                                 |
| equivalent to V-0                                                                         | 1.2.12.1 (note 4), 4.7.3.1                                                  |                                                 |
| <i>Note - VTM-0 and V-0 CLASSES are not required in this standard</i>                     |                                                                             |                                                 |
| VTM-1                                                                                     | 1.2.12.1 (note 3), 1.2.12.13*                                               |                                                 |
| equivalent to V-1                                                                         | 1.2.12.1 (note 4), 4.7.3.1                                                  |                                                 |
| VTM-2                                                                                     | 1.2.12.1 (note 3), 1.2.12.14*                                               |                                                 |
| equivalent to V-2                                                                         | 1.2.12.1 (note 4), 4.7.3.1                                                  |                                                 |
| floating parts and windings                                                               |                                                                             |                                                 |
| see unearthed parts and windings                                                          |                                                                             |                                                 |
| foil (conductive)                                                                         |                                                                             |                                                 |
| in definitions                                                                            | 1.2.7.5, 1.2.10.3                                                           |                                                 |
| in test                                                                                   |                                                                             |                                                 |
| mandrel test                                                                              | Annex AA                                                                    |                                                 |
| on a non-conductive surface                                                               | 2.10.3.1, 2.10.4.3, 2.10.11, 5.1.4, 5.2.2, 6.2.2, G.6                       |                                                 |
| on wire                                                                                   | 3.1.4                                                                       |                                                 |
| metallized plastic                                                                        | 4.6.4.3 (note)                                                              |                                                 |
| frequency                                                                                 |                                                                             |                                                 |
| higher than 50/60 Hz                                                                      | 0.2.6, 1.4.7, 5.1.6, 5.2.2 (note 5)                                         |                                                 |
| in a LIMITED CURRENT CIRCUIT                                                              | 2.4.2                                                                       |                                                 |
| in a TNV CIRCUIT                                                                          | 2.3.1 b), 6.2.2.1                                                           |                                                 |
| of electric strength test voltage                                                         | 5.2.2, R.1, R.2                                                             |                                                 |
| of ringing signal                                                                         | M.2 (note), M.3.1.1                                                         |                                                 |
| of supply                                                                                 | 1.7.1, 3.2.2, 3.4.11                                                        |                                                 |
| during a test                                                                             | 1.4.4, 1.4.6                                                                |                                                 |
| of WORKING VOLTAGE                                                                        | 2.9.1, 2.10.1.1                                                             |                                                 |
| <i>see also RATED FREQUENCY and RATED FREQUENCY RANGE</i>                                 |                                                                             |                                                 |
| FUNCTIONAL EARTHING                                                                       | 1.2.13.9*, 2.6.2, 2.6.3, 5.1.5, 5.1.8.1                                     |                                                 |
| FUNCTIONAL INSULATION                                                                     | 1.2.9.1*, 5.3.4                                                             |                                                 |
| application                                                                               | 2.1.1.1, 2.9.3, 2.10.1.7                                                    |                                                 |
| bridging see bridging of insulation                                                       |                                                                             |                                                 |
| dimensions                                                                                | 2.10.3, 2.10.4, Annex F                                                     |                                                 |
| coated printed board                                                                      | 2.10.6, Annex F (Figure F.11)                                               |                                                 |
| distance through insulation, no requirement                                               | 2.10.5.2                                                                    |                                                 |
|                                                                                           | 2.10.5.6, 2.10.5.11                                                         |                                                 |
| electric strength                                                                         | 5.2, 5.3.4 b)                                                               |                                                 |
| failure simulated                                                                         | 1.4.14, 5.3.4 c)                                                            |                                                 |
| integrity after a test                                                                    | 5.3.4                                                                       |                                                 |
| no protection against electric shock                                                      | 1.2.9.1 (note)                                                              |                                                 |
| smaller spacing permitted                                                                 | 2.10.1.3, 5.3.4                                                             |                                                 |
| WORKING VOLTAGE                                                                           | 2.10.2                                                                      |                                                 |
| <i>Note - the term FUNCTIONAL INSULATION has replaced the term OPERATIONAL INSULATION</i> |                                                                             |                                                 |
| fuse                                                                                      |                                                                             |                                                 |
| as disconnect device for DC MAINS SUPPLY                                                  | 3.4.2                                                                       |                                                 |
| current rating                                                                            | 1.7.6, 2.7.3 (note), 6.3 (note), Bib (IEC 60127, IEC 60269-2-1)             |                                                 |
| high breaking capacity                                                                    | 2.7.3 (note)                                                                |                                                 |
| marking                                                                                   | 1.7.6                                                                       |                                                 |
| operating during motor test                                                               | B.2                                                                         |                                                 |
| protecting a capacitor                                                                    | 5.3.8                                                                       |                                                 |
| protecting a limited power source                                                         | 2.5                                                                         |                                                 |
| protecting telecommunication wiring                                                       | 6.3 (notes 1 and 4)                                                         |                                                 |
| warning to SERVICE PERSON                                                                 | 2.7.6                                                                       |                                                 |
| fuseholder                                                                                | 2.1.1.1 b), 2.1.1.1 c), 4.7.3.2 (note)                                      |                                                 |
| <b>G</b>                                                                                  |                                                                             |                                                 |
| gap see air gap                                                                           |                                                                             |                                                 |
| gas                                                                                       |                                                                             |                                                 |
| flammable                                                                                 | 1.1.2, 1.2.12.15, 4.3.10                                                    |                                                 |
| inert, in a sealed unit                                                                   | 4.7.3.3, 4.7.3.4                                                            |                                                 |
| produced by equipment                                                                     | 4.3.10                                                                      |                                                 |
| under pressure                                                                            | 4.3.11                                                                      |                                                 |
| gas discharge tube see surge suppressor                                                   |                                                                             |                                                 |
| gas flame for flammability testing                                                        | A.1.4, A.2.4                                                                |                                                 |
| gel dielectric                                                                            | 2.10.5.1                                                                    |                                                 |
| gel electrolyte                                                                           | 4.3.8                                                                       |                                                 |
| glass                                                                                     |                                                                             |                                                 |
| cloth, prepreg                                                                            | 2.10.6.4 (Table 2R/note 1)                                                  |                                                 |
| flammability, no test                                                                     | 4.7                                                                         |                                                 |
| platen, no impact test                                                                    | 4.2.5                                                                       |                                                 |
| touch temperature                                                                         | 4.5.4 (Table 4C)                                                            |                                                 |
| <i>see also ceramic and glass insulation</i>                                              |                                                                             |                                                 |
| glow-wire test                                                                            | Annex P (IEC 60695-2-1/1)                                                   |                                                 |
| acceptable for HB40, HB75 and HBF                                                         | 4.7.3.1                                                                     |                                                 |
| grease see oil and grease                                                                 |                                                                             |                                                 |
| green-and-yellow see colours                                                              |                                                                             |                                                 |
| grips see handles and levers                                                              |                                                                             |                                                 |
| ground, grounding, see earth, earthing                                                    |                                                                             |                                                 |
| guard, guarding, against hazards                                                          | 0.2.5, 2.1.1.1, 2.1.2, 2.1.3, 2.8.3, 3.3.8, 3.4.4, 3.4.10, 4.4.1            |                                                 |
| <i>see also cord guard</i>                                                                |                                                                             |                                                 |
| <b>H</b>                                                                                  |                                                                             |                                                 |
| hand, human see body, human                                                               |                                                                             |                                                 |
| HAND-HELD EQUIPMENT                                                                       | 0.1, 1.2.3.2*, 3.2.8, 3.2.9                                                 |                                                 |
| maximum RATED VOLTAGE 250 V                                                               | 1.6.3                                                                       |                                                 |
| mechanical strength                                                                       | 4.2.6                                                                       |                                                 |
| power supply cord                                                                         | 3.2.5.1                                                                     |                                                 |
| TOUCH CURRENT                                                                             | 5.1.6 (Table 5A)                                                            |                                                 |
| handles and levers                                                                        | 4.3.2                                                                       |                                                 |
| conductive                                                                                | 2.1.1.6                                                                     |                                                 |
| no mechanical strength test                                                               | 4.2.1                                                                       |                                                 |
| part of BODY                                                                              | 1.2.7.5                                                                     |                                                 |
| shaft of                                                                                  | 2.1.1.6                                                                     |                                                 |
| temperature                                                                               | 4.5.4 (Table 4C)                                                            |                                                 |
| hazard                                                                                    | Clause 0                                                                    |                                                 |
| access using a TOOL                                                                       | 1.7.2.5                                                                     |                                                 |
| acoustic                                                                                  | 0.2.6                                                                       |                                                 |
| basis of design                                                                           | 0.1, 1.3.2                                                                  |                                                 |
| energy see energy hazard                                                                  |                                                                             |                                                 |
| fire see fire hazard                                                                      |                                                                             |                                                 |
| information to the USER                                                                   | 1.7.2                                                                       |                                                 |
| mechanical see mechanical hazard                                                          |                                                                             |                                                 |
| none after mechanical strength test                                                       | 4.2.1, 5.3.9.2                                                              |                                                 |
| SERVICE PERSON aware of                                                                   | 0.1, 1.2.13.5                                                               |                                                 |
| HAZARDOUS ENERGY LEVEL                                                                    | 1.2.6.4, 1.2.8.10*                                                          |                                                 |
| determination of accessibility                                                            | 2.1.1.8, 2.1.1.5 b)                                                         |                                                 |

|                                                    |                                                                                                                                |                  |                                                                                                                   |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------|
| determination of existence                         | 2.1.1.5 c), d), and e)                                                                                                         | IEC 60216-4-1    | 4.2.7, Annex P                                                                                                    |
| see also energy hazard                             |                                                                                                                                | IEC 60227        | 3.2.5.1, Annex P                                                                                                  |
| HAZARDOUS VOLTAGE                                  | 0.2.1, 1.2.8.6*                                                                                                                | IEC 60245        | 3.2.5.1, Annex P                                                                                                  |
| multiple sources see multiple power sources        |                                                                                                                                | IEC 60269-2-1    | 6.3 (note 4), Bib                                                                                                 |
| not to be accessible                               | 2.1.1.1                                                                                                                        | IEC 60309        | 1.2.5.2, 2.1.1.1, 2.10.3.1, 2.10.4.3, 3.2.4, G.6, Annex P                                                         |
| after mechanical strength test                     | 4.2.1, 5.3.9.2                                                                                                                 | IEC 60317 series | 2.10.5.13, Annex P                                                                                                |
| at an appliance inlet                              | 3.2.4                                                                                                                          | IEC 60317-43     | U.2.2 (Table U.1), Annex P                                                                                        |
| at a connector                                     | 3.1.9, 3.2.2                                                                                                                   | IEC 60320        | 3.2.5.1 (Table 3B/Footnote b, c, and note1), 4.3.5, G.6, Annex P                                                  |
| in an OPERATOR ACCESS AREA                         | 2.1                                                                                                                            | IEC 60364-1      | Annex P, V.1                                                                                                      |
| in a RESTRICTED ACCESS LOCATION                    | 2.1.3                                                                                                                          | IEC 60364-4-41   | Annex P, V.1                                                                                                      |
| in a SERVICE ACCESS AREA                           | 2.1.2                                                                                                                          | IEC 60364-7-707  | 5.1.7.1 (note), Bib                                                                                               |
| on a thermoplastic part                            | 4.5.5                                                                                                                          | IEC 60384-14     | 1.5.6, 1.5.8, Annex P                                                                                             |
| protection by earthing                             | 2.6.1, 2.9.4 e), 6.1.1, 7.2                                                                                                    | IEC 60410        | R.1, R.2, Bib                                                                                                     |
| separation from                                    | 2.9.4                                                                                                                          | IEC 60417-1      | 1.7.1, 1.7.7.1, 1.7.8.3, 2.6.2, 2.6.5.1, 2.7.6, 4.5.4 (Table 4C/Footnotes a and c), Annex P                       |
| ELV CIRCUIT                                        | 1.2.8.7                                                                                                                        | IEC 60529        | Annex T, Bib                                                                                                      |
| FUNCTIONAL EARTHING circuit                        | 2.6.2                                                                                                                          | IEC 60664-1      | 1.5.9.2 (note 1), 2.10.1 (note), 2.10.3.1, 5.2.2 (note 2), Clause 6 (note 4), 7.1 (note 4), G.6, Annex P, Annex Z |
| SELV CIRCUIT                                       | 2.1.2, 2.2.3, 2.2.4                                                                                                            | IEC 60664-4      | 2.10.1.1 (note), Bib                                                                                              |
| TNV CIRCUIT                                        | 2.1.2, 2.3.3, 2.3.4                                                                                                            | IEC 60695-2-2    | 4.6.2, 4.7.3.6, A.2.7, Annex P                                                                                    |
| warning notice                                     | 1.7.9, 2.7.6                                                                                                                   | IEC 60695-2-11   | 4.7.3.1, Annex P                                                                                                  |
| heat                                               |                                                                                                                                | IEC 60695-2-20   | 4.7.3.2, Annex P                                                                                                  |
| ceramic printed board curing temperature           | 2.10.6.4 (Table 2R)                                                                                                            | IEC 60695-10-2   | 4.5.5, Annex P                                                                                                    |
| hazard                                             | 0.2.4                                                                                                                          | IEC 60695-11-3   | A.1.4, Annex P                                                                                                    |
| shock test on winding wire                         | U.2.3                                                                                                                          | IEC 60695-11-4   | A.2.4, Annex P                                                                                                    |
| sink                                               | 4.5.4, B.2                                                                                                                     | IEC 60695-11-10  | 1.2.12.1, 1.2.12.2, 1.2.12.3, 1.2.12.4, 1.2.12.10, 1.2.12.11, Annex P                                             |
| see also fire hazard                               |                                                                                                                                | IEC 60695-11-20  | 1.2.12.1, 1.2.12.5, 1.2.12.6, Annex P                                                                             |
| heating                                            | <b>4.5</b>                                                                                                                     | IEC 60728-11     | 7.1 (note 5), Bib                                                                                                 |
| maximum, during a transformer test                 | Annex X                                                                                                                        | IEC 60730-1      | 2.5, Annex P                                                                                                      |
| heating element                                    | 4.3.7                                                                                                                          | IEC 60747-5      | 2.10.5.4, Annex P                                                                                                 |
| hiccup mode                                        | 2.2.3                                                                                                                          | IEC 60747-5-1    | 2.10.5.4, Annex P                                                                                                 |
| high voltage component                             | 4.7.3.6                                                                                                                        | IEC 60747-5-2    | 2.10.5.4, Annex P                                                                                                 |
| hot flaming oil test                               | 4.6.2, <b>A.3</b>                                                                                                              | IEC 60747-5-3    | 2.10.5.4, Annex P                                                                                                 |
| hot wire ignitability test (IEC 60695-2-20)        | 4.7.3.2                                                                                                                        | IEC 60825-1      | 4.3.13.5, Annex P                                                                                                 |
| human body see body, human                         |                                                                                                                                | IEC 60825-2      | 4.3.13.5, Annex P                                                                                                 |
| humidity                                           | 2.9.1                                                                                                                          | IEC 60825-9      | 4.3.13.4, Annex P                                                                                                 |
| additional requirements if humidity is high        | 1.1.2                                                                                                                          | IEC 60825-12     | 4.3.13.5, Annex P                                                                                                 |
| conditioning (treatment)                           | 1.5.6, 1.5.7.2, <b>2.9.2</b> , 2.10.8.3, 2.10.10, 2.10.11                                                                      | IEC 60851-3      | Annex P, U.2.2                                                                                                    |
| relative (r.h.) during a test                      | 4.2.7 (note), 4.6.5, U.2, Y.1                                                                                                  | IEC 60851-5      | Annex P, U.2.1, U.2.4 (note), U.3.2                                                                               |
| hygroscopic material, not to be used as insulation | 2.9.1                                                                                                                          | IEC 60851-6      | Annex P, U.2.3                                                                                                    |
| <b>I</b>                                           |                                                                                                                                | IEC 60885-1      | 3.1.4, Annex P                                                                                                    |
| ICRP 60                                            | Annex H (note 1), Bib                                                                                                          |                  |                                                                                                                   |
| IEC 60065                                          | 1.1.1 (note 3), 2.1.1.9, 4.2.8, 4.5.1, 4.7.3.6, 5.3.6, N.2, Annex P                                                            |                  |                                                                                                                   |
| IEC 60068-2-78                                     | 1.5.7.2, Annex P                                                                                                               |                  |                                                                                                                   |
| IEC 60073                                          | 1.7.8.2, Annex P                                                                                                               |                  |                                                                                                                   |
| IEC 60083                                          | 1.7.5, 2.1.1.1, 2.10.3.1, 2.10.4.3, 4.3.5, G.6, Annex P                                                                        |                  |                                                                                                                   |
| IEC 60085                                          | 4.5.3 (Table 4B/Footnote c), 5.3.9.1 (Table 5D), B.3 (Table B.1), B.4 (Table B.2), C.1 (Table C.1), Annex P, U.2.3 (Table U.2) |                  |                                                                                                                   |
| IEC 60112                                          | 2.10.4.2, Annex P                                                                                                              |                  |                                                                                                                   |
| IEC 60127                                          | 2.7.3 (note), Bib                                                                                                              |                  |                                                                                                                   |

|                                                                                         |                                                                                                      |                                                                                                     |                                                                                                  |
|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| IEC 60896-21                                                                            | 4.3.8, Bib                                                                                           | disconnect device                                                                                   | 1.7.2.2, 3.4.3, 3.4.6, 3.4.7, 3.4.9                                                              |
| IEC 60906-1                                                                             | 2.1.1.1, 2.10.3.1, 2.10.4.3, G.6                                                                     | orientation                                                                                         | 1.3.6                                                                                            |
| IEC 60906-2                                                                             | 2.1.1.1, 2.10.3.1, 2.10.4.3, G.6                                                                     | ozone emission                                                                                      | 1.7.2.6                                                                                          |
| IEC 60947-1                                                                             | 3.4.2, Annex P                                                                                       | physical                                                                                            | 4.1, 4.2.10, Annex T                                                                             |
| IEC 60950, part 21                                                                      | Foreword                                                                                             | PLUGGABLE EQUIPMENT                                                                                 | 1.7.2.3                                                                                          |
| IEC 60990                                                                               | 5.1.2.1 (note), 5.1.3, 5.1.4 (note 2), D.1, Annex P                                                  | RESTRICTED ACCESS LOCATION                                                                          | 1.7.14                                                                                           |
| IEC 61032                                                                               | 2.1.1.1 (Figure 2A/note 3 and Figure 2B/note), Bib                                                   | wiring                                                                                              |                                                                                                  |
| IEC 61051-2                                                                             | Annex P, Annex Q                                                                                     | earthing                                                                                            | 1.5.9.4, 2.3.2.3, 3.2.1.2, 3.3.7, 5.1.8.2, 6.1.1, 6.1.2.2, 7.2, 7.4.1                            |
| IEC 61058-1                                                                             | 2.8.7, Annex P                                                                                       | power                                                                                               | 1.7.2.4, 1.7.7.2, 2.7.1, G.2.1                                                                   |
| IEC 61140                                                                               | 1.2.8.8 (note 2), Bib                                                                                | telecommunication                                                                                   | 6.3                                                                                              |
| IEC 61558-1                                                                             | Annex AA, Bib                                                                                        | instructions                                                                                        | 0.1, <b>1.7.2</b> , 2.6.5.6                                                                      |
| IEC 61643-21                                                                            | 1.5.9.1 (note 2), Bib                                                                                | language                                                                                            | 1.7.2.1 (note 3)                                                                                 |
| IEC 61643-311                                                                           | 1.5.9.1 (note 2), Bib                                                                                | removal of all power                                                                                | 3.4.10, 3.4.11                                                                                   |
| IEC 61643-321                                                                           | 1.5.9.1 (note 2), Bib                                                                                | <i>see also</i> installation instructions, operating instructions <i>and</i> servicing instructions |                                                                                                  |
| IEC 61643-331                                                                           | 1.5.9.1 (note 2), Bib                                                                                | insulation (electrical)                                                                             | 0.2.1, 1.2.9*, <b>2.9</b>                                                                        |
| IEC 61965                                                                               | 4.2.8 (note), Bib                                                                                    | application                                                                                         | 2.9.1, <b>2.9.3</b>                                                                              |
| IEC Guide 112                                                                           | 1.1.1 (note 3), Bib                                                                                  | BASIC <i>see</i> BASIC INSULATION                                                                   |                                                                                                  |
| IEV (International Electrotechnical Vocabulary)                                         | 2.10.6.4 (Table 2R/note 2), Bib                                                                      | better grade may be necessary                                                                       | 2.9.3                                                                                            |
| ignition                                                                                | 0.2.3, 0.2.4, 4.3.12, 4.6.4, <b>4.7</b> , B.6.3, B.7.3                                               | better grade permitted                                                                              | 1.3.5                                                                                            |
| <i>see also</i> FIRE ENCLOSURE                                                          |                                                                                                      | bridging <i>see</i> bridging of insulation                                                          |                                                                                                  |
| impact test                                                                             | 4.2.1, <b>4.2.5</b> , 4.3.13.3 (Table 4A)                                                            | classification                                                                                      | 4.5.3 (Table 4B)                                                                                 |
| implosion of cathode ray tube                                                           | 0.2.5, <b>4.2.8</b>                                                                                  | colour <i>see</i> colours                                                                           |                                                                                                  |
| impulse test                                                                            | 2.10.3.9, <b>6.2.2.1</b> , 6.2.2.2, 6.2.2.3, <b>7.4.3</b> , G.5, R.2 (Table R.2/Footnote b), Annex S | compliance checked by inspection of relevant data                                                   | 1.4.15                                                                                           |
| test generators                                                                         | Annex N                                                                                              | dimensions                                                                                          | <b>2.10</b>                                                                                      |
| indicator, indicating devices                                                           |                                                                                                      | DOUBLE <i>see</i> DOUBLE INSULATION                                                                 |                                                                                                  |
| colour                                                                                  | 1.7.8.2, Annex P (IEC 60073, ISO 3864)                                                               | fault, simulated                                                                                    | 1.4.14                                                                                           |
| exempt from mechanical strength requirement                                             | 4.2.1                                                                                                | for more than one requirement                                                                       | Clause 6 (note 3)                                                                                |
| lamp exempt from flammability requirements                                              | 4.7.3.3, 4.7.3.4                                                                                     | FUNCTIONAL <i>see</i> FUNCTIONAL INSULATION                                                         |                                                                                                  |
| marking                                                                                 | 1.7.8                                                                                                | operational <i>see</i> FUNCTIONAL INSULATION                                                        |                                                                                                  |
| information technology equipment                                                        |                                                                                                      | printed board <i>see</i> printed board                                                              |                                                                                                  |
| connection                                                                              | 1.2.11.6                                                                                             | REINFORCED <i>see</i> REINFORCED INSULATION                                                         |                                                                                                  |
| to a CABLE DISTRIBUTION SYSTEM                                                          | <b>Clause 7</b>                                                                                      | separate testing <i>see</i> separate testing                                                        |                                                                                                  |
| to a TELECOMMUNICATION NETWORK                                                          | <b>Clause 6</b> , W.2                                                                                | solid <i>see</i> solid insulation                                                                   |                                                                                                  |
| examples in Scope of this standard                                                      | 1.1.1                                                                                                | <i>see also</i> distance through insulation                                                         |                                                                                                  |
| informative reference                                                                   | Bib                                                                                                  | SUPPLEMENTARY <i>see</i> SUPPLEMENTARY INSULATION                                                   |                                                                                                  |
| ingress of water <i>see</i> water ingress                                               |                                                                                                      | with varying dimensions                                                                             | 2.10.1.5, 5.2.2                                                                                  |
| ink                                                                                     | 4.3.12                                                                                               | integrity of protective earthing and bonding                                                        | <b>2.6.5</b>                                                                                     |
| ink tube                                                                                | 4.7.3.3, 4.7.3.4                                                                                     | INTERCONNECTING CABLE                                                                               |                                                                                                  |
| inlet bushing, power cord                                                               | 3.2.7                                                                                                | 1.2.11.6*, 1.5.5, 3.1.1, 3.5.1 (note 2), 3.5.4 (note)                                               |                                                                                                  |
| installation, building <i>see</i> building installation                                 |                                                                                                      | part of a PRIMARY CIRCUIT                                                                           | 1.2.8.4 (note)                                                                                   |
| installation category <i>see</i> overvoltage category                                   |                                                                                                      | part of a SECONDARY CIRCUIT                                                                         | 1.2.8.5 (note)                                                                                   |
| <i>Note - the term overvoltage category has replaced the term installation category</i> |                                                                                                      | part of a TNV CIRCUIT                                                                               | 1.2.8.11 (note 2)                                                                                |
| installation instructions                                                               | 1.7.1, 1.7.2, 1.7.4, 2.1.1.1                                                                         | interconnection of equipment                                                                        | 1.1.1, 1.7.2.1 (note 1), 2.6.5.1, <b>3.4.10</b> , <b>3.5</b> , 5.1.2.1, W.2                      |
|                                                                                         |                                                                                                      | <i>see also</i> connections                                                                         |                                                                                                  |
|                                                                                         |                                                                                                      | interleaved insulation in wound components                                                          | 2.10.5.11, 2.10.5.14, Annex U                                                                    |
|                                                                                         |                                                                                                      | interlock <i>see</i> SAFETY INTERLOCK                                                               |                                                                                                  |
|                                                                                         |                                                                                                      | internal wiring                                                                                     | 2.1.1.3, 2.1.1.4, 2.6.2, 3.1.1, 3.1.3, 3.1.4, 3.1.10, 3.3.2, 3.3.6, 4.3.9, 4.7.3.3, 4.7.3.4, C.2 |
|                                                                                         |                                                                                                      | INTERCONNECTING CABLE, treated as internal wiring                                                   | 1.5.5                                                                                            |
|                                                                                         |                                                                                                      | interpolation                                                                                       |                                                                                                  |
|                                                                                         |                                                                                                      | conditional                                                                                         | 2.10.3.3 (Tables 2K <i>and</i> 2L)                                                               |
|                                                                                         |                                                                                                      | permitted in                                                                                        |                                                                                                  |
|                                                                                         |                                                                                                      | electric strength test voltages                                                                     | 5.2.2 (Tables 5B <i>and</i> 5C)                                                                  |
|                                                                                         |                                                                                                      | IEC 60664-1 Table A.2                                                                               | 2.10.3.1, G.6                                                                                    |
|                                                                                         |                                                                                                      | insulation spacings                                                                                 |                                                                                                  |
|                                                                                         |                                                                                                      | 2.10.3.1 (Tables 2M, 2N, 2Q) <i>and</i> G.6 (Table G2)                                              |                                                                                                  |
|                                                                                         |                                                                                                      | time for thermal ageing                                                                             | 2.10.8.2 (Figure 2J)                                                                             |



|                                            |                                                                                                                        |                |  |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------|--|
| not permitted in                           |                                                                                                                        |                |  |
| insulation spacings                        | 2.10.3.3 (Tables 2K and 2L)                                                                                            |                |  |
| MAINS TRANSIENT VOLTAGE                    | G.2 (Table G.1/Footnote b)                                                                                             |                |  |
| ionizing radiation                         | 0.2.6, <b>4.3.13.2</b> , Annex H                                                                                       |                |  |
| ISDN (Integrated Services Digital Network) | 1.2.13.8 (note 3)                                                                                                      |                |  |
| ISO 178                                    | 4.3.13.3 (Table 4A), Annex P                                                                                           |                |  |
| ISO 179                                    | 4.3.13.3 (Table 4A), Annex P                                                                                           |                |  |
| ISO 180                                    | 4.3.13.3 (Table 4A), Annex P                                                                                           |                |  |
| ISO 261                                    | 3.3.3, Annex P                                                                                                         |                |  |
| ISO 262                                    | 3.3.3, Annex P                                                                                                         |                |  |
| ISO 527                                    | 4.3.13.3 (Table 4A), Annex P                                                                                           |                |  |
| ISO 2859-1                                 | R.1, R.2, Bib                                                                                                          |                |  |
| ISO 3864                                   | 1.7.2.5, 2.7.6, Annex P                                                                                                |                |  |
| ISO 4046                                   | 1.2.13.16, Annex P                                                                                                     |                |  |
| ISO 4892                                   | Y.3, Y.4, Annex P                                                                                                      |                |  |
| ISO 7000                                   | 1.7.1, Annex P                                                                                                         |                |  |
| ISO 8256                                   | 4.3.13.3 (Table 4A), Annex P                                                                                           |                |  |
| ISO 9772                                   | 1.2.12.1, 1.2.12.7, 1.2.12.8, 1.2.12.9, Annex P                                                                        |                |  |
| ISO 9773                                   | 1.2.12.1, 1.2.12.12, 1.2.12.13, 1.2.12.14, Annex P                                                                     |                |  |
| isolation (from the supply)                | see disconnection for servicing                                                                                        |                |  |
| IT power distribution system               | 1.6.1, <b>V.4</b>                                                                                                      |                |  |
| heating element                            | 4.3.7 a)                                                                                                               |                |  |
| marking of equipment                       | 1.7.2.4                                                                                                                |                |  |
| primary power isolation                    |                                                                                                                        |                |  |
| single phase                               | 3.4.6 (note)                                                                                                           |                |  |
| three phase                                | 3.4.7                                                                                                                  |                |  |
| protective device                          | 2.7.4 (tables)                                                                                                         |                |  |
| TOUCH CURRENT                              | 5.1.3                                                                                                                  |                |  |
| voltage rating of component                | 1.5.8                                                                                                                  |                |  |
| ITE                                        | see information technology equipment                                                                                   |                |  |
| ITU-T Recommendation K.11                  | Clause 6 (note 1), Bib                                                                                                 |                |  |
| ITU-T Recommendation K.20                  | 7.1 (note 2), Bib                                                                                                      |                |  |
| ITU-T Recommendation K.21                  | 7.1 (note 2), Bib                                                                                                      |                |  |
| ITU-T Recommendation K.27                  | 1.2.8.2 (note),<br>2.10.3.2 b) (note 3), G.2.2 (note), Bib                                                             |                |  |
| ITU-T Recommendation K.44                  | 7.1 (note 2), Bib                                                                                                      |                |  |
| ITU-T Recommendation K.45                  | Annex N, Annex P                                                                                                       |                |  |
| <b>K</b>                                   |                                                                                                                        |                |  |
| knobs                                      | see handles and levers                                                                                                 |                |  |
| <b>L</b>                                   |                                                                                                                        |                |  |
| label                                      | see warning notice                                                                                                     |                |  |
| lamps                                      |                                                                                                                        |                |  |
| high pressure                              | 0.2.5, <b>4.2.9</b>                                                                                                    |                |  |
| left in place during a test                | 2.1.1.1                                                                                                                |                |  |
| no flammability requirement                | 4.7.3.3, 4.7.3.4                                                                                                       |                |  |
| UV type                                    | 4.3.13.3, 4.3.13.4                                                                                                     |                |  |
|                                            | see also starting pulses                                                                                               |                |  |
| languages for instructions and marking     | 1.7.2.1 (note 3)                                                                                                       |                |  |
| laser radiation (including LEDs)           | 0.2.6, <b>4.3.13.5</b> , Annex P (IEC 60825 series)                                                                    |                |  |
| leakage current                            | 1.2.13.12 (note), 1.2.13.13 (note),<br>1.5.9.2 (and note 2), 5.1.7.1 b), 5.1.8.2 a), W.1.2                             |                |  |
|                                            | see also TOUCH CURRENT                                                                                                 |                |  |
| LED (light emitting diode)                 | see laser radiation                                                                                                    |                |  |
| legal requirements                         | 1.1.2 (note), Clause 6 (note 2),<br>3.2.1.2 (note), 7.1 (note 3)                                                       |                |  |
|                                            | see also country notes                                                                                                 |                |  |
| levers                                     | see handles and levers                                                                                                 |                |  |
| lightning                                  | see transients                                                                                                         |                |  |
| limit                                      | see EXPLOSION LIMIT and maximum                                                                                        |                |  |
| LIMITED CURRENT CIRCUIT                    | 1.2.8.9*, 1.5.6, 1.5.9.2, <b>2.4</b> , 2.10.1.7                                                                        |                |  |
|                                            | connection to other equipment                                                                                          | 3.5.2, 6.2.1   |  |
|                                            | in an OPERATOR ACCESS AREA                                                                                             | 1.5.7.2, 2.1.1 |  |
| limited power source                       | <b>2.5</b> , 4.7.2.1, 4.7.2.2                                                                                          |                |  |
| LIMITER, TEMPERATURE                       | see TEMPERATURE LIMITER                                                                                                |                |  |
| liquid                                     |                                                                                                                        |                |  |
| conductive                                 | <b>1.3.9</b> , 4.3.8, 4.3.10                                                                                           |                |  |
| container                                  | 4.7.3.4                                                                                                                |                |  |
| under pressure                             | 4.3.11                                                                                                                 |                |  |
| flammable                                  | 0.2.3, 0.2.4, 4.3.10, <b>4.3.12</b> , 4.5.3 (Table 4B)                                                                 |                |  |
| parts in contact                           | 4.5.3 (Table 4B)                                                                                                       |                |  |
| loosening                                  | see fixing                                                                                                             |                |  |
| louvre                                     | 4.6.1                                                                                                                  |                |  |
|                                            | see also opening in an ENCLOSURE                                                                                       |                |  |
| <b>M</b>                                   |                                                                                                                        |                |  |
| main                                       |                                                                                                                        |                |  |
| as communication transmission medium       |                                                                                                                        |                |  |
|                                            | 1.1.1, Clause 6 (note 4), 7.1 (note 4)                                                                                 |                |  |
| not a CABLE DISTRIBUTION SYSTEM            | 1.2.13.14                                                                                                              |                |  |
| not a TELECOMMUNICATION NETWORK            | 1.2.13.8                                                                                                               |                |  |
| capacitor                                  | 1.5.6, 1.5.8, 2.1.1.7, 2.1.1.8                                                                                         |                |  |
| frequency                                  | 1.4.6, 1.4.7, 1.7.1                                                                                                    |                |  |
| isolation from                             | see disconnection                                                                                                      |                |  |
| plug                                       | 1.2.3.6, 3.2.1.1, 3.2.1.2                                                                                              |                |  |
| design and selection                       | 2.6.5.4, 3.2.2, 4.3.5, 4.3.6                                                                                           |                |  |
| disconnect device                          | 1.7.2.2, 3.4.2, 3.4.9                                                                                                  |                |  |
| voltage                                    | 1.4.5, 1.5.8, 1.6.4, 1.7.1, 2.10.3.1,<br>G.2.1 (Table G.1)                                                             |                |  |
| adjustment                                 | 1.7.4, 4.3.3                                                                                                           |                |  |
| d.c.                                       | 1.7.1, 5.2.2 (Table 5B/part 2/Footnotes a, b, c and d)                                                                 |                |  |
| line to neutral                            | 1.7.1, 2.10.3.2 (Table 2J), G.2.1 (Table G.1)                                                                          |                |  |
|                                            | see also AC MAINS SUPPLY, DC MAINS SUPPLY, DIRECT<br>PLUG-IN EQUIPMENT, PRIMARY CIRCUIT and wiring<br>terminals        |                |  |
| MAINS SUPPLY                               | 1.2.8.3*                                                                                                               |                |  |
|                                            | see also AC MAINS SUPPLY and DC MAINS SUPPLY                                                                           |                |  |
| MAINS TRANSIENT VOLTAGE                    | 1.2.9.10*, 1.4.8, 1.5.6 (Table 1D),<br>2.10.3.2, 2.10.3.3 (Tables 2K and 2L),<br>2.10.3.7 (note 2), <b>G.2</b> , G.4.1 |                |  |

|                                                        |                                |                                                           |                                                                           |
|--------------------------------------------------------|--------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------|
| related to overvoltage category                        |                                | transient voltage                                         | see transients                                                            |
| 2.10.3.2 (Table 2J), G.2.1 (Table G.1)                 |                                | ultraviolet radiation                                     | 4.3.13.4                                                                  |
| reduced level in SECONDARY CIRCUIT                     | 2.10.3.4                       | measuring instrument, electrical                          |                                                                           |
| measurement                                            | 2.10.3.9, G.1.2, G.4, G.5      | 1.4.7, 1.4.9, 2.1.1.7, 2.4.2, 5.1, Annex D                |                                                                           |
| see also transients                                    |                                | ammeter, negligible impedance                             | 5.1.7.1 a)                                                                |
| mandrel                                                |                                | MECHANICAL ENCLOSURE                                      |                                                                           |
| for wire testing                                       | U.2.2, U.2.3, U.2.4            | see ENCLOSURE and opening in an ENCLOSURE                 |                                                                           |
| test                                                   | Annex AA                       | mechanical hazard                                         | 0.2.5, 2.8.2, 4.1                                                         |
| markings                                               | 0.1, 1.7, 2.1.1.2              | mechanical shock                                          |                                                                           |
| additional marking requirements                        | see 1.7 (note)                 | affecting CLEARANCE                                       | 0.1                                                                       |
| durability                                             | 1.7.11                         | affecting a SAFETY INTERLOCK                              | 2.8.3                                                                     |
| t-marking                                              | 4.5.3 (Table 4B)               | mechanical strength                                       | 4.2                                                                       |
| see also warning notices                               |                                | after ultraviolet radiation                               | 4.3.13.3                                                                  |
| mass                                                   |                                | cathode ray tube                                          | 0.2.5, 4.2.8                                                              |
| of equipment                                           |                                | handles (no test)                                         | 4.2.1                                                                     |
| marking and test not on bottom if over 18 kg           | 1.7.1, 4.2.4                   | high pressure lamp                                        | 4.2.9                                                                     |
| movable equipment                                      | 1.2.3.1                        | in a SAFETY INTERLOCK                                     | 2.8.5, 2.8.8                                                              |
| parameter for requirements and tests                   |                                | insulating materials                                      | 2.9.1                                                                     |
| 2.1.1.1, 3.2.5.1, 3.2.6, 4.1, 4.2.6, 4.7.3.2, A.1, A.2 |                                | no test in a MECHANICAL ENCLOSURE                         | 4.2.1                                                                     |
| of steel ball in impact test                           | 4.2.5                          | screws                                                    | 3.3.3                                                                     |
| material group                                         | see tracking                   | mechanical stress, on insulation                          | 2.10.5.12, 3.2.7, 5.2.2                                                   |
| materials                                              |                                | mechanically operated part                                |                                                                           |
| must be reliable                                       | 0.3                            | in a SAFETY INTERLOCK system                              | 2.8.4, 2.8.5                                                              |
| not covered in this standard                           | 1.3.4                          | mechanically operated switch in a SAFETY INTERLOCK system | 2.8.7                                                                     |
| use of better materials permitted                      | 1.3.5                          | metal                                                     |                                                                           |
| see also insulation and separate testing               |                                | core in printed board                                     | 2.10.6.4, 2.10.8.4                                                        |
| maximum,                                               |                                | foil                                                      | see foil, conductive                                                      |
| amount of flammable liquid                             | 4.3.12                         | molten                                                    | 0.2.2, 4.3.8, 4.6.2, 4.6.4.2, 5.3.9.1                                     |
| current to telecommunication wiring                    | 6.3                            | screen                                                    | see screen, conductive                                                    |
| input current                                          | 1.6.2                          | metal, no flammability test                               | 4.7                                                                       |
| ionizing radiation                                     | see ionizing radiation         | metal oxide varistor                                      | 1.5.9.1 (note 1)                                                          |
| LIMITED CURRENT CIRCUIT levels                         | 2.4.2                          | misuse, foreseeable                                       | 0.1, 5.3.1                                                                |
| limited power source output                            | 2.5                            | mobility of equipment (definitions)                       | 1.2.3*                                                                    |
| normal load (mode of operation)                        | 1.2.2.1                        | moisture                                                  | see humidity and water ingress                                            |
| output load                                            | 1.7.5                          | motor                                                     |                                                                           |
| overvoltage, assumed in this standard                  |                                | requirements                                              | 4.7.2.2, 5.3.2                                                            |
| Clause 6 (note 1), 7.1 (note 2)                        |                                | tests                                                     | Annex B                                                                   |
| see also overvoltage category                          |                                | motor-generator sets, not in Scope of this standard       | 1.1.3                                                                     |
| ozone level                                            | 1.7.2.6                        | MOVABLE EQUIPMENT                                         | 0.1, 1.2.3.1*, 1.2.3.2, 1.2.3.3, 1.2.3.4, 4.2.6, 5.1.6 (Table 5A)         |
| power from TELECOMMUNICATION NETWORK 15 VA             | 1.4.11                         | FIRE ENCLOSURE                                            | 4.7.3.2, A.1, A.2                                                         |
| RATED OPERATING TIME                                   | 1.2.2.2                        | power supply cord flexing test                            | 3.2.5.1                                                                   |
| RATED VOLTAGE                                          |                                | movable part of equipment                                 | 1.4.4, 2.1.1.1, 2.10.3.1, 2.10.4.3, G.6                                   |
| 250 V for HAND-HELD EQUIPMENT                          | 1.6.3                          | see also removable part                                   |                                                                           |
| 600 V in Scope of this standard                        | 1.1.1                          | moving part of                                            |                                                                           |
| ringing signal level                                   | M.2, M.3                       | equipment                                                 | 0.2.5, 2.8.2, 3.1.2, 4.2.1, 4.4                                           |
| ripple, see ripple                                     |                                | SAFETY INTERLOCK system                                   | 2.8.4, 2.8.5                                                              |
| SELV CIRCUIT voltages                                  |                                | multiple power sources                                    | 1.7.9, 2.6.4.2, 3.2.2, 3.4.10, 3.4.11, 5.1.2.2, 5.1.2.3, 5.1.7.1, 5.1.7.2 |
| normal                                                 | 2.2.2                          |                                                           |                                                                           |
| fault condition                                        | 2.2.3                          |                                                           |                                                                           |
| temperature                                            | 1.4.12, 1.4.13, 4.5.3, 4.5.4   |                                                           |                                                                           |
| in an OPERATOR ACCESS AREA                             | 4.5.4 (Table 4C)               |                                                           |                                                                           |
| of                                                     |                                |                                                           |                                                                           |
| conductor                                              | 3.1.1                          |                                                           |                                                                           |
| insulation during a test                               | 5.3.9.1                        |                                                           |                                                                           |
| materials and components                               | 0.2.4, 4.5.3 (Table 4B)        |                                                           |                                                                           |
| motor                                                  | B.3, B.4, B.5, B.7.2, B.8, B.9 |                                                           |                                                                           |
| transformer                                            | C.1, Annex X                   |                                                           |                                                                           |
| winding                                                | 1.4.13, Annex E                |                                                           |                                                                           |
| TNV CIRCUIT voltages                                   |                                |                                                           |                                                                           |
| TNV-1 CIRCUIT                                          | 2.3.1 a)                       |                                                           |                                                                           |
| TNV-2 and TNV-3 CIRCUITS                               | 2.3.1 b)                       |                                                           |                                                                           |
| TOUCH CURRENT                                          | 5.1.1, 5.1.6, 5.1.8.1, 5.1.8.2 |                                                           |                                                                           |

**N**

national requirements *see* country notes and legal requirements

network *see* TELECOMMUNICATION NETWORK

neutral conductor **1.6.4**  
 disconnection by disconnect device 3.4.6, 3.4.7  
 disconnection by protective device 2.7.4, 4.3.7  
 earthed and reliably identified 2.7.4, 3.4.6  
 fuse in neutral, warning required 2.7.6  
 in power distribution system Annex V  
 marking of terminals 1.7.7.2

noise hazard (acoustic) 0.2.6

*Note - there is no requirement in this standard for protection against acoustic noise*

nominal AC MAINS SUPPLY voltages 2.1.1.7, 2.10.3.2  
 (Table 2J), 6.1.2.1, G.1.2, G.2.1 (Table G.1)

NON-DETACHABLE POWER SUPPLY CORD  
*see* power supply cord

NORMAL LOAD condition 1.2.2.1\*, 1.6.2, 4.5.2, Annex L

normative references Annex P

number changes in this edition of the standard Annex BB

**O**

oil and grease **4.3.9**, 4.3.12  
 hot flaming oil test A.3  
*see also* liquids

opening in an ENCLOSURE **4.6**  
 access to  
 electrical hazard 2.1.1.1, 2.1.1.2, 2.8.2  
 mechanical hazard 2.8.2, 4.4.2  
 ultraviolet radiation 2.8.2, 4.3.13.4  
 component which fills 4.7.2.2, 4.7.3.2  
 for power cord 3.2.7, 3.2.8  
 in bottom of an ENCLOSURE 4.6.2  
 in top and sides of an ENCLOSURE 4.6.1  
 in TRANSPORTABLE EQUIPMENT 4.6.4  
 measuring through 2.10.3.1, 2.10.4.3  
 Annex F (Figure F.12), G.6  
 ventilation, in FIRE ENCLOSURE 4.7.3.3, 4.7.3.4,  
 A.1.1, A.1.5, A.2.1, A.2.5

operating conditions (definitions) 1.2.2\*

operating instructions 1.2.7.1, 1.2.7.3, 1.3.6, 1.4.4,  
 1.7.2.1, 1.7.2.6, 1.7.13, 2.1.1.2, 3.4.10, 3.4.11,  
 4.2.5, 4.3.12, 4.3.13.4, 4.3.13.5, 4.4.2, 4.6.3, L.7

OPERATION, CONTINUOUS  
*see* CONTINUOUS OPERATION

operational insulation *see* FUNCTIONAL INSULATION

*Note - the term FUNCTIONAL INSULATION has replaced the term operational insulation*

OPERATOR *see* USER, which has the same meaning

OPERATOR ACCESS AREA 0.1, 1.2.7.1\*, **2.1**  
 access probes 2.1.1.1  
 compared with a RESTRICTED ACCESS LOCATION  
 1.2.7.3 (note), 2.1.3

door in FIRE ENCLOSURE 4.6.3  
 power rating marking to be visible 1.7.1  
 TOOL required for access 1.2.7.1, 1.7.2.5

ordinary NON-DETACHABLE POWER SUPPLY CORD 1.2.5.6\*  
*see also* power supply cord

orientation (attitude) 0.1, 1.3.6, 4.1, 4.2.5, 4.6.1, 4.6.2

overcurrent and earth fault protection  
 0.2.3, **2.7**, 3.1.1, 5.3.1, 6.3, Annex P (ITU-T Rec. K.44)  
 location 2.7.1, 2.7.4  
 not allowed in protective conductor 2.6.5.2  
 performance 2.5 (Table 2C/Footnote e)  
 protection for telecommunication wiring 6.3  
 protection for transformers 5.3.3, C.1, Annex X  
 protective device  
 in limited power source 2.5  
 in neutral conductor 2.7.6  
 minimum number of poles **2.7.4**  
 not allowed to operate during test 4.5.2  
 not to be damaged during a test 4.2.1  
 rating to be specified for PLUGGABLE EQUIPMENT 1.7.2.3  
 unexpected restart 4.4.1

*see also* circuit-breaker and fuse

overriding a SAFETY INTERLOCK 2.8.6

overheating of telecommunication wiring 6.3

overload  
 mechanical 5.3.1  
 motor **5.3.2**, B.4 (Table B.2), B.5, B.6, B.7  
 test **2.8.7.2**, 5.3.7, 5.3.9.1 (Table 5D)  
 transformer **5.3.3**, C.1, Annex X

*see also* overcurrent

overvoltage 0.1, Annex P (ITU-T Rec. K.44),  
 Bib (ITU-T Rec. K.11, K.20, K.21, K.45)  
 maximum level assumed in this standard  
 Clause 6 (note 1), 7.1 (note 2)  
 not considered 1.2.9.6, 1.4.8  
 on a TNV CIRCUIT 1.2.8.11 (Table 1A), 1.2.8.12,  
 1.2.8.13, 1.2.8.14, 2.2.2 (note 1)

on a TELECOMMUNICATION NETWORK, *see*  
 TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE  
*see also* overvoltage category and transients

overvoltage category 1.5.6 (Table 1D), 2.10.3.1, 2.10.3.2,  
 3.4.2, G.1.1, G.2.1, **Annex Z**  
 categories III and IV G.1.1, G.2.1

*Note - the term overvoltage category has replaced the term installation category*

ozone 1.7.2.6

**P**

Part 68, FCC Rule M.3 (note), Bib

passive devices (requiring no power)  
 not in Scope of this standard 1.1.3

PEAK WORKING VOLTAGE 1.2.9.8\*

*Note - PEAK WORKING VOLTAGES are used in numerous places in the standard to determine minimum clearances, separation distances and test voltages.*

|                                                                  |                                    |                                                          |                               |
|------------------------------------------------------------------|------------------------------------|----------------------------------------------------------|-------------------------------|
| PERMANENTLY CONNECTED EQUIPMENT                                  | 1.2.5.4*                           | DETACHABLE POWER SUPPLY CORD                             | 1.2.5.5*, 2.6.4.2, 3.2        |
| discharge of capacitor                                           | 2.1.1.7, 2.1.1.8                   | inside the equipment                                     | 3.1.4                         |
| disconnect device                                                | 3.4.3                              | marking of wiring terminals                              | 1.7.7                         |
| earthing                                                         | 2.6.4.2, 2.6.4.3, 6.1.2.2, 7.4.1   | NON-DETACHABLE POWER SUPPLY CORD                         | 1.2.5.6*, 2.6.4.3,            |
| marking                                                          | 1.7.7.2, 1.7.7.3                   | 2.10.3.1, 2.10.4.3, 3.2, 3.3, 4.5.3 (Table 4B), G.6      |                               |
| overcurrent protection                                           | 2.7.1, 2.7.3, 2.7.6                | PROTECTIVE EARTHING CONDUCTOR                            | 2.6.3.2, 3.2.6                |
| terminals                                                        | 3.2.3, 3.3.1, 3.3.7                | colour of insulation                                     | 2.6.3.5                       |
| TOUCH CURRENT                                                    | 5.1.1, 5.1.7.1                     | voltage drop not measured                                | 1.4.9, 2.6.3.4                |
| permission to connect to a TELECOMMUNICATION NETWORK             |                                    | screened                                                 | 3.2.5.1                       |
| see legal requirements                                           |                                    | pre-preg                                                 | 2.10.5.5, 2.10.6.4 (Table 2R) |
| person, network service see SERVICE PERSON                       |                                    | meaning of "pre-preg"                                    | 2.10.6.4 (Table 2R/note 2)    |
| PERSON, SERVICE see SERVICE PERSON                               |                                    | preselection of materials see separate testing           |                               |
| plating, protective earthing component                           | 2.6.5.6                            | PRIMARY CIRCUIT                                          | 1.2.8.4*, 1.2.8.5             |
| PLUGGABLE EQUIPMENT                                              | 1.2.5.3*, 4.3.7                    | capacitors in                                            | 1.5.6, 2.1.1.7, 2.1.1.8       |
| current rating of protective device to be specified              | 1.7.2.3                            | CLEARANCE in                                             | 2.10.3.3, Annex G             |
| discharging filter capacitor                                     | 2.1.1.7, 2.1.1.8                   | faults in components in                                  | 5.3.7                         |
| earthing                                                         | 2.3.2.3                            | filter in                                                | 0.2.1, 5.1                    |
| isolation                                                        | 3.4.2, 3.4.6                       | internal wiring                                          | 3.1.1                         |
| PLUGGABLE EQUIPMENT TYPE A                                       | 1.2.5.1*, 1.2.5.3, 2.6.3.3,        | marking of switch                                        | 1.7.8                         |
| 2.6.4.3, 2.7.3, 2.10.3.1, 5.1.6 (Table 5A),                      |                                    | marking of terminals                                     | 1.7.7                         |
| 5.1.7.1, 5.1.8.2, 7.4.1, G.6                                     |                                    | protection                                               | 2.7                           |
| PLUGGABLE EQUIPMENT TYPE B                                       | 1.2.5.2*, 1.2.5.3, 1.5.9.4,        | SAFETY INTERLOCK switch, contact gap                     | 2.8.7.1, 2.8.7.4              |
| 1.7.2.3, 2.6.3.3, 2.6.4.3, 2.7.1, 2.7.3,                         |                                    | surge suppressor must be a VDR                           | 1.5.9.1, Annex Q              |
| 5.1.1, 5.1.7, 5.1.7.1, 6.1.2.2, 7.4.1                            |                                    | transients                                               | 2.10.3.6                      |
| plugs see connectors and mains                                   |                                    | WORKING VOLTAGE in                                       | 2.10.2.1                      |
| pollution (degree)                                               | 0.1, 2.9.1, 2.10.1.2, ,            | see also mains                                           |                               |
| 2.10.3.3 (tables), 2.10.4 (Table 2N), 2.10.5.5,                  |                                    | primary power                                            |                               |
| Annex F (Table F.1), Annex G (Table G.2)                         |                                    | see AC MAINS SUPPLY, DC MAINS SUPPLY and PRIMARY CIRCUIT |                               |
| pollution degree 1 applies                                       | 2.10.1.2,                          | principles of safety                                     | Clause 0                      |
| 2.10.3.3 (Table 2K/Footnote b and Table 2L/Footnote b),          |                                    | printed boards                                           | 2.10.6                        |
| 2.10.3.4 (Table 2M/Footnote b, 2.10.4.3 (Table 2N/               |                                    | clearance and creepage distance, uncoated                | 2.10.6.1                      |
| Footnote a), 2.10.5.5 b), 2.10.10, 2.10.12, G.6                  |                                    | coated                                                   | 2.10.6.2                      |
| (Table G.2/Footnote b)                                           |                                    | distance through insulation                              | 2.10.5.2                      |
| polychloroprene (synthetic rubber)                               | 4.7.2.2, 4.7.3.3, 4.7.3.4          | metal core                                               | 2.10.6.4, 2.10.8.4            |
| polyimide insulating material                                    | 4.7.2.2, 4.7.3.3, 4.7.3.4          | multi-layer                                              | 2.10.6.3                      |
| positive temperature coefficient (PTC) device                    |                                    | quality control                                          | R.1                           |
| 2.5, Annex P (IEC 60730-1)                                       |                                    | printed wiring, colour of flexible                       | 2.6.3.5                       |
| powder                                                           | 4.3.10                             | see also printed boards                                  |                               |
| container                                                        | 4.7.3.4                            | proof tracking index (PTI) see tracking                  |                               |
| power                                                            |                                    | protection                                               |                               |
| apparent                                                         | 2.5 (tables)                       | against electric shock and energy hazards                |                               |
| connection to equipment                                          | 1.6, 3.2                           | 2.1, Clause 6, Clause 7                                  |                               |
| from a TELECOMMUNICATION NETWORK 15VA                            | 1.4.11                             | against ingress of water see water ingress               |                               |
| limited see limited power source                                 |                                    | against moving parts of equipment                        |                               |
| no power required, excluded from Scope of this standard          | 1.1.3                              | see moving parts of equipment                            |                               |
| outlet on equipment see socket-outlet on equipment               |                                    | against overcurrent and earth faults                     | 2.7                           |
| rating, marking                                                  | 1.7.1, 1.7.4                       | backup protection                                        | 2.7.3                         |
| sources for equipment                                            |                                    | provided by building installation                        | 2.7.1, 2.7.3                  |
| any, included in Scope                                           | 1.1.1                              | in an OPERATOR ACCESS AREA                               | 2.1.1                         |
| multiple see multiple power sources                              |                                    | in a RESTRICTED ACCESS LOCATION                          | 2.1.3                         |
| supplied to telecommunication wiring                             | 6.3                                | in a SERVICE ACCESS AREA                                 | 2.1.2                         |
| power distribution system, a.c. 1.2.8.1, 1.2.8.3, 1.6.1, Annex V |                                    | of a cable system equipment USER                         | 6.2, 7.2, 7.3                 |
| single phase, three wire                                         | V.2 (Figure V.4)                   | of a service person see service person                   |                               |
| see also IT power distribution system, TN power                  |                                    | of a telecommunication equipment USER                    | 6.1, 6.2                      |
| distribution system and TT power distribution system             |                                    | of telecommunication wiring                              | 6.3                           |
| power distribution system, d.c.                                  | 1.2.8.2, 1.2.8.3                   | PROTECTIVE BONDING CONDUCTOR                             | 1.2.13.11*, 2.6.3             |
| power supply cord                                                | 3.2.1.1, 3.2.1.2, 3.2.5.1, 3.2.5.2 | colour of insulation                                     | 2.6.3.5                       |
|                                                                  |                                    | components not allowed in                                | 2.6.5.2                       |
|                                                                  |                                    | functional earthing                                      | 2.6.2                         |
|                                                                  |                                    | integrity to be assured                                  | 2.6.5                         |
|                                                                  |                                    | resistance                                               | 2.6.3.4                       |

separation from PROTECTIVE EARTHING CONDUCTOR 2.6.4.3  
 size 2.6.3.3, 3.2.5 (Table 3B)  
 terminals 1.7.7.1, 2.6.4.2, 3.3.5

PROTECTIVE CONDUCTOR CURRENT  
 1.2.13.13\*, 5.1.1, 5.1.6, 5.1.7.1 a), Annex P (IEC 60990)

protective covering in place during a test 5.3.1

PROTECTIVE CURRENT RATING 1.2.13.17\*, **2.6.3.3**, 2.6.3.4

protective device  
 see overcurrent and earth fault protection

protective earthing and bonding **2.6**

PROTECTIVE EARTHING CONDUCTOR 1.2.13.10\*, 2.6.3  
 colour of insulation 2.6.3.5  
 components not allowed in 2.6.5.2  
 in power supply cord 3.2.5.1, 3.2.6  
 integrity to be assured 2.3.2.3, **2.6.5**, 5.1.7.1, 5.1.8.2 a), 6.1.1, 6.1.2.2, 7.2  
 resistance 2.6.3.4  
 separation from PROTECTIVE BONDING CONDUCTOR 2.6.4.3  
 size 2.6.3.2, 3.2.5 (Table 3B)  
 terminal 1.7.7.1, 2.3.2.3, 2.6.4.2, 3.3.5  
 tests, not included 5.1.2.3  
 voltage drop not measured 1.4.9, 2.6.3.4

see also PLUGGABLE EQUIPMENT TYPE B

PTC see positive temperature coefficient device

PTFE (polytetrafluoro ethylene) 4.7.2.2, 4.7.3.3, 4.7.3.4

PTI (proof tracking index) see tracking

PVC (polyvinyl chloride) 3.2.5.1, 4.5.3 (Table 4B),  
 4.7.2.2, 4.7.3.3, 4.7.3.4, Annex P (IEC 60227)

## Q

quality control 2.10.3.3 (Table 2K), 2.10.3.4  
 (Table 2M), 2.10.6.2, 2.10.7, G.6 (Table G.2)

quality control programme Annex R

## R

radiation **4.3.13**  
 hazards 0.2.6

ionizing see ionizing radiation  
 laser see laser radiation  
 ultraviolet see ultraviolet radiation

range  
 current marking 1.7.1  
 frequency see RATED FREQUENCY RANGE  
 of conductor size 3.3.4, 3.3.5  
 voltage see RATED VOLTAGE RANGE

RATED CURRENT (of equipment) 1.2.1.3\*  
 input current not to exceed 1.6.2  
 marking 1.7.1  
 power supply cord current carrying capacity 2.6.3.2, 3.2.5.1  
 purpose of marking 1.7.1  
 range 1.7.1  
 terminal sizes 3.2.3, 3.3.4, 3.3.5

rated current of overcurrent protective device  
 see fuse and overcurrent and earth fault protection

RATED FREQUENCY 1.2.1.4\*, 1.4.6, 1.7.1

RATED FREQUENCY RANGE 1.2.1.5\*, 1.4.6, 1.7.1

RATED OPERATING TIME 1.2.2.1, 1.2.2.2\*, 1.2.2.3, 1.7.3, 5.3.8

RATED RESTING TIME 1.2.2.1, 1.2.2.3\*, 1.7.3, 5.3.8

RATED VOLTAGE of equipment 1.2.1.1\*  
 IT power distribution system 1.5.8, V.4 (Figure V.7)  
 marking and instructions 1.7.1, 1.7.4  
 maximum value

250 V for HAND-HELD EQUIPMENT 1.6.3

600 V in Scope of this standard 1.1.1

tolerance 1.4.5

used for test 1.3.3, 1.4.5, 1.6.2, 5.1.3, 6.1.2.1, B.2,  
 G.4, Annex K

when determining WORKING VOLTAGE 2.10.2.1 f) and g)

when measuring input current 1.6.2

RATED VOLTAGE RANGE of equipment 1.2.1.2\*

marking 1.7.1

used for test 1.3.3, 1.4.5, 1.6.2, 5.1.3, 6.1.2.1, B.2,  
 G.4, Annex K

when determining WORKING VOLTAGE 2.10.2.1 f) and g)

when measuring input current 1.6.2

rated voltage of components 1.6.4

capacitor 1.5.6, 1.5.8

fuse 1.7.6

motor, used for test B.6, B.10

surge suppressor 6.1.2.1

redundant power supply see multiple power sources

reed switch, reliability test 2.8.7.3

REINFORCED INSULATION 0.2.1, 1.2.9.5\*

application 2.9.3

in

CABLE DISTRIBUTION SYSTEM 7.1 (note 4)

FUNCTIONAL EARTHING circuit 2.6.2

internal wiring 2.1.1.4

manual control 2.1.1.6

printed board 2.10.6.4, Annex F (Figure F.11)

SELV CIRCUIT 2.2.4, 2.9.4 a) and b)

TELECOMMUNICATION NETWORK Clause 6 (note 4)

TNV CIRCUIT 2.3.3, 2.3.4, 2.9.4 a) and b)

wound component 2.10.5.11, Annex U

bridging see bridging of insulation

dimensions **2.10.3, 2.10.4, 2.10.5**, Annex F, G.6, R.2

electric strength **5.2**

integrity

after a test 4.2.1, 5.3.4, 5.3.7, 5.3.9.2

in service 3.1.6, 4.3.4, C.2

protective device not needed 2.7.4

WORKING VOLTAGE 2.10.2

relative humidity see humidity

relays 1.5.1 (notes 2 and 3)

in a FIRE ENCLOSURE 4.7.2.1

in a SAFETY INTERLOCK switch or relay, contact gap 2.8.7.1

in a SAFETY INTERLOCK system 2.8.5 (note), 2.8.7

motor starting B.5

reliability see endurance testing

remote power feeding (of telecommunication equipment)

Foreword

see also part 21 of this standard, IEC 60950-21

removable part **1.7.12**, 2.1.2, 3.2.7, 3.4.2, 4.6.3



|                                                                                                                                                        |                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| REQUIRED WITHSTAND VOLTAGE                                                                                                                             |                                                                                     |
|                                                                                                                                                        | 1.2.9.9*, 1.5.7, 2.9.4, 5.2.2, G.1, <b>G.4</b> , G.6                                |
| requirements of this standard,                                                                                                                         |                                                                                     |
| applicable only if safety is involved                                                                                                                  | 1.3.1                                                                               |
| resistance, protective conductor                                                                                                                       | 2.6.3.4                                                                             |
| resistance to fire                                                                                                                                     | see fire hazard                                                                     |
| resistor test                                                                                                                                          | 1.5.7                                                                               |
| resistors                                                                                                                                              |                                                                                     |
| bridging                                                                                                                                               | see bridging of insulation                                                          |
| faults in                                                                                                                                              | 1.4.14, 5.3.7                                                                       |
| RESTRICTED ACCESS LOCATION                                                                                                                             | 0.1, 1.2.7.3*, <b>2.1.3</b>                                                         |
| bottoms of FIRE ENCLOSURES                                                                                                                             | 4.6.2                                                                               |
| compared with an OPERATOR ACCESS AREA                                                                                                                  | 1.2.7.3 (note), 2.1.3                                                               |
| installation instructions                                                                                                                              | 1.7.14, 5.1.7                                                                       |
| marking if DC MAINS SUPPLY                                                                                                                             | 2.1.1.8                                                                             |
| maximum temperature, exception for heat sink                                                                                                           | 4.5.4                                                                               |
| mechanical hazard in                                                                                                                                   | 4.4.3                                                                               |
| r.f.i. (radio frequency interference)                                                                                                                  |                                                                                     |
| see electrical filter                                                                                                                                  |                                                                                     |
| ringing signal                                                                                                                                         | see telephone ringing signal                                                        |
| ripple in DC VOLTAGE                                                                                                                                   |                                                                                     |
| definition                                                                                                                                             | 1.2.13.4*                                                                           |
| in a limited power source                                                                                                                              | 2.5 (Table 2B/Footnote a and Table 2C/Footnote a)                                   |
| in PEAK WORKING VOLTAGE                                                                                                                                | 1.2.9.8, 2.10.2.3                                                                   |
| r.m.s. value implied unless otherwise specified                                                                                                        | 1.2                                                                                 |
| RMS WORKING VOLTAGE                                                                                                                                    | 1.2.9.7*, 1.5.6 (Table 1C), <b>2.10.2.2</b> , 2.10.4.1, 2.10.4.3 (Table 2N)         |
| <i>Note - RMS WORKING VOLTAGES are used in numerous places in the standard to determine minimum CLEARANCES, separation distances and test voltages</i> |                                                                                     |
| ROUTINE TEST                                                                                                                                           | 1.2.13.3*                                                                           |
| coated printed board                                                                                                                                   | 2.10.6.2, 2.10.6.4 (Table 2R), R.1 (Table R.1)                                      |
| electric strength test voltage and duration                                                                                                            | 5.2.2                                                                               |
| reduced CLEARANCE requiring ROUTINE TESTS                                                                                                              | 2.10.3.3 (Table 2K), 2.10.3.4, (Table 2M), 2.10.7, G.6 (Table G.2), R.2 (Table R.2) |
| semiconductor devices                                                                                                                                  | 2.10.5.4                                                                            |
| solvent-based enamel                                                                                                                                   | 2.10.5.13                                                                           |
| winding wire                                                                                                                                           | U.3.1                                                                               |
| wound component                                                                                                                                        | 2.10.5.11                                                                           |
| routing of wiring                                                                                                                                      | 2.1.1.3, 2.1.1.4, 2.9.4 a), 3.1.3                                                   |
| rubber                                                                                                                                                 |                                                                                     |
| as cable insulation                                                                                                                                    | Annex P (IEC 60245)                                                                 |
| as insulation                                                                                                                                          | 3.1.9, 3.2.5.1, 4.5.3 (Table 4B)                                                    |
| natural, not to be used as insulation                                                                                                                  | 2.9.1                                                                               |
| parts                                                                                                                                                  | 4.5.3 (Table 4B)                                                                    |
| polychloroprene (synthetic rubber)                                                                                                                     | 4.7.2.2, 4.7.3.3, 4.7.3.4                                                           |
| roller                                                                                                                                                 | 4.7.3.3, 4.7.3.4                                                                    |
| touch temperature limits                                                                                                                               | 4.5.4 (Table 4C)                                                                    |
| running overload tests                                                                                                                                 |                                                                                     |
| a.c. motor                                                                                                                                             | B.4                                                                                 |
| d.c. motor                                                                                                                                             | B.6                                                                                 |

## S

|                                                               |                                                                     |
|---------------------------------------------------------------|---------------------------------------------------------------------|
| SAFETY INTERLOCK                                              | 1.2.7.6*, 2.1.1.1, 2.8, 4.3.13.4, 4.4.2                             |
| not damaged during a mechanical strength test                 | 4.2.1                                                               |
| samples for test                                              |                                                                     |
| components                                                    | 1.5.2                                                               |
| equipment                                                     | 1.2.13.1, 1.2.13.2, 1.2.13.3, <b>1.4.3</b>                          |
| flammability                                                  | A.1.1, A.2.1, A.3.1                                                 |
| SAMPLING TEST                                                 | 1.2.13.2*, R.1, R.2, U.3.2                                          |
| scope of this standard                                        | <b>1.1</b>                                                          |
| screens                                                       |                                                                     |
| bottom of FIRE ENCLOSURE                                      | 4.6.2, 4.7.3.5                                                      |
| conductive                                                    | 2.9.3 (Table 2H)                                                    |
| coaxial cable                                                 | 7.3                                                                 |
| earthed                                                       | 0.2.1, 1.4.14, 2.6.1 e), 2.10.3.6, 5.2.2, C.2, G.4.1 b)             |
| for an SELV CIRCUIT                                           | 2.2.4, 2.9.4 d)                                                     |
| for a TNV CIRCUIT                                             | 2.3.4, 2.9.4 d)                                                     |
| for a FUNCTIONAL EARTHING circuit                             | 2.6.2                                                               |
| in a power supply cord                                        | 3.2.5.1, 3.2.6                                                      |
| unearthed                                                     | 5.2.1                                                               |
| mechanical                                                    | 4.2.1, 4.6.2, 4.6.4, 4.7.3.5                                        |
| secured with adhesive                                         | 4.6.5                                                               |
| screws, screw connections                                     | Annex P (ISO 261, ISO 262)                                          |
| for electrical contact                                        | 3.1.6, 3.1.8, 3.1.9                                                 |
| for protective earthing continuity                            | 2.6.1, 2.6.4.2, 2.6.4.3, 2.6.5.7, 3.3.1, 3.3.3, 3.3.5, 3.3.6, 3.3.8 |
| for securing a part                                           | 4.3.4                                                               |
| into, or made of, insulating material                         | 3.1.7, 3.2.6, C.2                                                   |
| no marking on                                                 | 1.7.7.1, 1.7.7.2, 1.7.7.3                                           |
| self-tapping and spaced thread                                | 2.6.5.7, 3.1.8                                                      |
| terminals                                                     | 1.2.5.4, 2.6.4.2, 2.6.4.3, 3.1.9, 3.3.1, 3.3.3, 3.3.5, 3.3.6, 3.3.8 |
| sealed, sealing                                               |                                                                     |
| components                                                    | 4.7.3.3, 4.7.3.4                                                    |
| compound                                                      | 2.1.1.1 (note 1), 4.3.2, 4.5.2                                      |
| kit (against moisture)                                        | Annex T                                                             |
| layers of insulation tape on winding wire                     | 2.10.5.12, U.1                                                      |
| liquid reservoir                                              | 4.3.12                                                              |
| SECONDARY CIRCUIT                                             |                                                                     |
| 1.2.8.2, 1.2.8.5*, 1.2.8.7, 1.2.8.8, 1.2.8.11, 2.8.7.1, 2.9.3 |                                                                     |
| CLEARANCE in                                                  | 2.10.3.4, 5.3.4, Annex G                                            |
| FIRE ENCLOSURE                                                | 4.7.2.1, 4.7.2.2, 4.7.3.3                                           |
| hazardous voltage                                             | 1.5.6 (note 2), 2.1.3, 2.2.4, 2.3.4, 7.2                            |
| motor in                                                      | 5.3.2, B.1, B.6, B.7                                                |
| switch in                                                     | 1.7.8.3                                                             |
| transients in                                                 | 2.10.3, G.4.1 b), G.4.1 c)                                          |
| TNV CIRCUIT                                                   | 1.2.8.11                                                            |
| WORKING VOLTAGE                                               |                                                                     |
| over 10 kV                                                    | 5.2.2 (Table 5B/part 1)                                             |
| between a PRIMARY CIRCUIT and a SECONDARY CIRCUIT             | 2.10.2.1                                                            |
| secondary winding overload test                               | C.1, Annex X                                                        |
| securing                                                      | see fixing                                                          |
| SELV CIRCUIT                                                  | 1.2.8.8*, <b>2.2</b>                                                |
| accessibility                                                 | <b>2.1.1</b>                                                        |
| barrier in                                                    | 2.9.4 a)                                                            |
| boundary of                                                   | 2.2.2 (note 1), 2.2.4                                               |
| CABLE DISTRIBUTION SYSTEM, excluded from                      | 1.2.13.14                                                           |
| compared with a TNV CIRCUIT                                   | 1.2.8.11 (Table 1A)                                                 |
| connected to a CABLE DISTRIBUTION SYSTEM                      | 7.2                                                                 |

|                                                               |                                               |                                                                                                 |                                                    |
|---------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------|
| connected to a TELECOMMUNICATION NETWORK                      |                                               | ultraviolet radiation warning                                                                   | 4.3.13.4                                           |
|                                                               | 2.2.2 (note 1), 2.10.3.8, <b>6.1.1</b> , G.3  | <i>see also</i> SERVICE PERSON                                                                  |                                                    |
| connection to other equipment                                 | 3.5.1, 3.5.2, 3.5.4                           |                                                                                                 |                                                    |
| connection to other circuits                                  | 2.2.4                                         | sheath (of power supply cord)                                                                   | 3.1.4, 3.2.5.1, 3.2.7                              |
| connectors                                                    | 4.3.5                                         | shield <i>see</i> screens, conductive                                                           |                                                    |
| different from the term "SELV system" in IEC 61140            |                                               | shock, electric <i>see</i> electric shock                                                       |                                                    |
|                                                               | 1.2.8.8 (note 2)                              | shock, mechanical <i>see</i> mechanical shock                                                   |                                                    |
| earthing                                                      | 2.3.2.3, 2.6.1, 2.9.4 e)                      |                                                                                                 |                                                    |
| faults                                                        | 1.2.8.8, 1.4.14, 2.2.1, 2.2.3, 2.3.1, 2.3.2.1 | short-circuit                                                                                   | 2.7                                                |
| FIRE ENCLOSURE not required                                   | 1.4.11, 4.7.2.2                               | of                                                                                              |                                                    |
| insulation                                                    | 2.9.3                                         | battery                                                                                         | 4.3.8                                              |
| maximum voltages                                              |                                               | components, for a test                                                                          | 5.3.7                                              |
| earthing                                                      | 2.6.3.4                                       | during servicing                                                                                | 2.1.2, 2.1.3                                       |
| fault conditions                                              | <b>2.2.3</b> , 2.3.2.1                        | insulation, for test                                                                            | 2.2.4, 2.3.2.3, 2.3.2.4, 2.3.4, 2.10.2.1, 5.3.4 c) |
| normal conditions                                             | 1.4.8, <b>2.2.2</b>                           | limited power source                                                                            | 2.5                                                |
| separation                                                    |                                               | motor capacitor                                                                                 | B.8                                                |
| from an accessible part, no requirement                       | 2.1.1                                         | telecommunication wiring                                                                        | 6.3                                                |
| from a HAZARDOUS VOLTAGE                                      | 2.1.2, <b>2.2.3</b> , <b>2.9.4</b>            | temperature limiter in unattended equipment                                                     | 5.3.8                                              |
| from other circuits                                           | 2.9.3 (Table 2H), 3.1.9, 6.2.1                | transformer                                                                                     | C.1, Annex X                                       |
| TELECOMMUNICATION NETWORK, excluded from                      | 1.2.13.8                                      | protection against                                                                              | 2.7, 3.1.1, 5.3.1                                  |
| WORKING VOLTAGE                                               | 2.10.2.1, 2.10.2.3                            | <i>see also</i> energy hazard                                                                   |                                                    |
| semiconductor devices                                         |                                               | simulated                                                                                       |                                                    |
| faults                                                        | 1.4.14, 5.3.7                                 | body impedance                                                                                  | 5.1, W.1.1                                         |
| filled with insulating compound                               | 2.10.5.3, <b>2.10.5.4</b>                     | conditions for test                                                                             | <b>1.4.14</b> , <b>5.3</b>                         |
| <i>see also</i> components and surge suppressor               |                                               | <i>Note - fault conditions are required to be simulated in numerous places in this standard</i> |                                                    |
| separate testing (of components, sub-assemblies etc.)         |                                               | external voltage                                                                                | 2.3.5                                              |
| components                                                    | 5.2.2, 5.3.7, 6.1.2.1, 6.2.2, 6.2.2.2         | interference                                                                                    | Annex N                                            |
| enclosed parts                                                | 5.3.1                                         | sleeving as additional insulation                                                               | 2.10.5.12, 3.1.4, <b>3.1.10</b>                    |
| motors                                                        | B.2                                           | around insulating beads                                                                         | 3.1.5                                              |
| switch mode power supply unit                                 | C.1, Annex X                                  | as conductor termination                                                                        | 3.1.9                                              |
| transformers                                                  | Annex C                                       | small part, flammability                                                                        | 4.7.3.1 (note 3), 4.7.3.3, 4.7.3.4                 |
| use of previous test results, preselection                    | 1.4.15, 1.5.2, 2.9.1, 4.7.3                   | socket-outlet                                                                                   | Annex P (IEC 60083, IEC 60309, IEC 60906)          |
| separation distance under a coating                           |                                               | in building installation                                                                        |                                                    |
| around a terminal                                             | 2.10.7, Annex F (Figure F.10)                 | for DIRECT PLUG-IN EQUIPMENT                                                                    | 1.2.3.6, 4.3.6                                     |
| coated printed board                                          | 2.10.6.2 (Table 2Q), R.1                      | for PLUGGABLE EQUIPMENT                                                                         | 1.2.5.1, 1.2.5.2, 1.7.2.2, 2.3.2.3 c), 7.4.1       |
| SERVICE ACCESS AREA                                           | 1.2.7.2*                                      | protective earthing connection required                                                         | 5.1.7.1, 6.1.2.2                                   |
| <i>see also</i> RESTRICTED ACCESS LOCATION and SERVICE PERSON |                                               | reversible                                                                                      | 3.4.6, 4.3.7                                       |
| service manual <i>see</i> servicing instructions              |                                               | on equipment                                                                                    |                                                    |
| SERVICE PERSON                                                | 0.1, 1.2.13.5*                                | accessibility                                                                                   | 2.1.1.1                                            |
| connectors accessible to                                      | 4.3.5                                         | load to be taken into account                                                                   | 1.4.10, 5.3.7                                      |
| of a CABLE DISTRIBUTION SYSTEM                                | 7.2                                           | marking                                                                                         | 1.7.5                                              |
| of a TELECOMMUNICATION NETWORK                                | 5.1.8.2, 6.1                                  | socket <i>see</i> connectors and socket-outlet                                                  |                                                    |
| overriding a SAFETY INTERLOCK                                 | 2.8.6                                         | solenoid <i>see</i> wound component                                                             |                                                    |
| protection                                                    | 1.1.1, 2.1.2, 2.2.3                           | SOLID INSULATION                                                                                | 1.2.10.4*, 2.10.3.1 (note 1), <b>2.10.5</b>        |
| from                                                          |                                               | contact                                                                                         | 2.1.1.1                                            |
| mechanical hazard                                             | 4.1, 4.4.3, 4.4.4                             | electric strength                                                                               | 5.2.1                                              |
| unearthed part                                                | 2.6.1                                         | formed by insulating compound                                                                   | 2.10.5.3, Annex F (Figures F.16 and F.17)          |
| unexpected hazard                                             | 2.1.2, 2.1.3, 3.4.4                           | <i>see also</i> DISTANCE THROUGH INSULATION                                                     |                                                    |
| to check earthing                                             | 5.1.7.1                                       | solvent-based enamel <i>see</i> enamel                                                          |                                                    |
| warning notices                                               | 1.7.9, 2.6.1, 2.7.6, 3.4.10                   | special NON-DETACHABLE POWER SUPPLY CORD                                                        | 1.2.5.6*, 3.3.2                                    |
| <i>see also</i> RESTRICTED ACCESS LOCATION                    |                                               | <i>see also</i> power supply cord                                                               |                                                    |
| servicing instructions                                        | 0.1, 1.7.2                                    | stability                                                                                       |                                                    |
| available only to SERVICE PERSON                              | 1.7.2.1 (note 3)                              | of operation, thermal control                                                                   | K.6                                                |
| battery                                                       | 1.7.13                                        | physical                                                                                        | 4.1                                                |
| disconnection                                                 |                                               |                                                                                                 |                                                    |
| 1.7.2, 1.7.9, 2.6.5.5, 3.4.1 (note), 3.4.10, 3.4.11           |                                               |                                                                                                 |                                                    |
| fuse in neutral, warning required                             | 2.7.6                                         |                                                                                                 |                                                    |
| fuse rating                                                   | 1.7.6                                         |                                                                                                 |                                                    |
| languages                                                     | 1.7.2.1 (note 3)                              |                                                                                                 |                                                    |
| supply voltage adjustment                                     | 1.7.4                                         |                                                                                                 |                                                    |

|                                                                 |                                                                                                                                                               |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| stand-by condition, marking                                     | 1.7.8.3                                                                                                                                                       |
| starting pulses                                                 | 2.10.1.7, 2.10.2.1 i), 2.10.3.5                                                                                                                               |
| STATIONARY EQUIPMENT                                            | 1.2.3.4*, 4.5.3 (Table 4B), 5.1.6 (Table 5A)                                                                                                                  |
| ENCLOSURE                                                       | 4.7.3.2                                                                                                                                                       |
| flammability                                                    | A.1                                                                                                                                                           |
| marking                                                         | 1.7.1, 4.6.2                                                                                                                                                  |
| temperature of earthing terminal                                | 4.5.3 (Table 4B)                                                                                                                                              |
| TOUCH CURRENT                                                   | 5.1.7.1                                                                                                                                                       |
| steady force test when measuring CLEARANCE                      | 2.10.3.1 (note 5), G.6 (note 3)                                                                                                                               |
| steady force test, 10 N                                         | 3.1.5, 3.1.9, 4.2.1, <b>4.2.2</b>                                                                                                                             |
| steady force test, 30 N                                         | 4.2.1, <b>4.2.3</b>                                                                                                                                           |
| steady force test, 250 N                                        | 4.2.1, <b>4.2.4</b>                                                                                                                                           |
| steel ball impact test                                          | 4.2.1, <b>4.2.5</b>                                                                                                                                           |
| strain relief                                                   |                                                                                                                                                               |
| on                                                              |                                                                                                                                                               |
| ELV wiring                                                      | 2.1.1.3                                                                                                                                                       |
| fluid container                                                 | 4.3.11                                                                                                                                                        |
| internal wiring                                                 | 3.1.3                                                                                                                                                         |
| power cord (cord anchorage)                                     | 3.2.6                                                                                                                                                         |
| stranded conductor                                              | 1.2.5.6, 3.1.9, <b>3.3.8</b>                                                                                                                                  |
| stress, mechanical, on insulation                               |                                                                                                                                                               |
| see mechanical stress, on insulation                            |                                                                                                                                                               |
| stress relief test on plastic material                          | 4.2.1, <b>4.2.7</b>                                                                                                                                           |
| subassembly, this standard applies                              | 1.1.1                                                                                                                                                         |
| see also separate testing                                       |                                                                                                                                                               |
| SUPPLEMENTARY INSULATION                                        | 0.2.1, 1.2.9.3*, 1.2.9.4, 1.2.9.5 (note)                                                                                                                      |
| application                                                     | 2.1.1.6, 2.9.3                                                                                                                                                |
| as sleeving                                                     | 3.1.4, 3.1.10                                                                                                                                                 |
| in                                                              |                                                                                                                                                               |
| cord anchorage                                                  | 3.2.6                                                                                                                                                         |
| cord guard                                                      | 3.2.7                                                                                                                                                         |
| internal wiring                                                 | 2.1.1.3                                                                                                                                                       |
| manual control                                                  | 2.1.1.6                                                                                                                                                       |
| power supply cord                                               | 3.1.4                                                                                                                                                         |
| printed board                                                   | 2.10.6, Annex F (Figure F.11)                                                                                                                                 |
| SELV CIRCUIT                                                    | 2.2.3                                                                                                                                                         |
| wound component                                                 | 2.10.5.11                                                                                                                                                     |
| BASIC and SUPPLEMENTARY can be interchanged                     | 2.9.3                                                                                                                                                         |
| bridging see bridging of insulation                             |                                                                                                                                                               |
| consequences of failure                                         | 2.2.3,                                                                                                                                                        |
| dimensions                                                      | <b>2.10.3, 2.10.4, 2.10.5</b> , Annex F, G.1.2 (note 1), G.6, R.2                                                                                             |
| electric strength                                               | <b>5.2</b>                                                                                                                                                    |
| integrity                                                       |                                                                                                                                                               |
| after a test                                                    | 4.2.1, 5.3.7, 5.3.9.2                                                                                                                                         |
| in service                                                      | 3.1.6, 3.3.8, 4.3.4                                                                                                                                           |
| one element of DOUBLE INSULATION                                | 2.10.2.1 e), 5.2.2, 5.3.9.2                                                                                                                                   |
| WORKING VOLTAGE                                                 | 2.10.2                                                                                                                                                        |
| surge arrester see surge suppressor                             |                                                                                                                                                               |
| surge suppressor                                                | <b>1.5.9</b> , 2.6.1 e), 2.10.3.9, 5.2.2 (note 4), Clause 6 (note 1), 6.1.2.1 (Figure 6A), 6.2.2.2, 6.2.2.3, 7.1 (note 2), G.5, Annex S, Annex V (Figure V.7) |
| see also components, removal during a test and separate testing |                                                                                                                                                               |

|                                                |                                    |
|------------------------------------------------|------------------------------------|
| switch                                         |                                    |
| arcing                                         | 4.7.3.2                            |
| as disconnect device                           | see disconnection for servicing    |
| for an appliance                               | see IEC 61058-1                    |
| forbidden in PROTECTIVE EARTHING CONDUCTOR and |                                    |
| PROTECTIVE BONDING CONDUCTORS                  | 2.6.5.2                            |
| functional                                     | 3.4.2                              |
| in a FIRE ENCLOSURE                            | 4.7.2.1, 4.7.3.2                   |
| in a PRIMARY CIRCUIT                           | 5.3.7                              |
| isolating                                      | 3.4.2, 3.4.5, 3.4.8                |
| marking                                        | 1.7.8.1, 1.7.8.2, 1.7.8.3, 4.3.2   |
| microgap, CLEARANCE not applicable             | 2.10.3.1, G.6                      |
| momentary contact                              | 4.7.2.2                            |
| reed, reliability test                         | 2.8.7.3                            |
| SAFETY INTERLOCK                               | 2.8.3, 2.8.7, 4.3.13.4             |
| terminals of                                   | 3.3.3                              |
| thermal control                                | Annex K                            |
| switch mode power supply                       | 1.4.8, G.1.2 (note 1)              |
| testing                                        | C.1, Annex X                       |
| see also peak voltage, repetitive              |                                    |
| symbols                                        |                                    |
| informative                                    |                                    |
| class II equipment                             | 1.7.1, 2.6.2                       |
| earthing terminals                             | 1.7.1, 1.7.7.1, 2.6.2              |
| regulating devices                             | 1.7.10                             |
| switches                                       | 1.7.8.3                            |
| warning                                        |                                    |
| electric shock                                 | 1.7.2.5, 2.7.6                     |
| hot part                                       | 4.5.4 (Table 4C/Footnotes a and c) |
| ultraviolet radiation                          | 4.3.13.4                           |
| see also ISO 7000 and IEC 60417                |                                    |

## T

|                                                                      |                                 |
|----------------------------------------------------------------------|---------------------------------|
| TELECOMMUNICATION NETWORK                                            | 1.2.13.8*                       |
| connected to an SELV CIRCUIT or a TNV CIRCUIT                        |                                 |
| 1.2.13.8 (note 1), 1.4.8, 2.2.2 (note 1), 2.6.1, 3.5.1, <b>6.1.1</b> |                                 |
| connections to                                                       | 1.2.11.6, 1.4.11, Clause 6, W.2 |
| earthing requirements                                                | 2.6 (note), 6.1.1               |
| equipment powered from, included in Scope of this                    |                                 |
| standard                                                             | 1.1.1                           |
| not a reliable earth                                                 | 2.6.5.8                         |
| operating voltage generated in                                       | 0.2.1, 2.3.2.3, <b>2.3.5</b> ,  |
| 2.10.2.1 h), 2.10.3.9 b), G.3, G.4.2, G.5 b)                         |                                 |
| see also telephone ringing signals                                   |                                 |
| power limit 15 VA                                                    | 1.4.11                          |
| separation from                                                      |                                 |
| earth                                                                | <b>6.1.2</b>                    |
| hazardous voltage                                                    | <b>6.1.1</b>                    |
| parts of equipment                                                   | <b>6.2</b>                      |
| surge suppression                                                    | 6.1.2.1 (Figure 6A)             |
| TOUCH CURRENT, to and from                                           | 2.6.1 f), 2.6.3, 5.1.8          |
| TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE                          |                                 |
| 1.2.8.11 (Table 1A), 1.2.8.12, 1.2.8.13, 1.2.8.14,                   |                                 |
| 1.2.9.11*, 1.2.13.8 (note 2), 1.4.8, 2.10.3.4,                       |                                 |
| 2.10.3.8, G.1.2, <b>G.3</b> , G.4.2, G.5 b)                          |                                 |
| measuring reduced voltage                                            | 2.10.3.9 b), G.5 b)             |
| telecommunication wiring, protection                                 | 6.3                             |
| telegraph signals, not considered                                    | 2.3.1 (note 4)                  |
| telephone ringing signal                                             | Annex M                         |
| considered as operating voltage                                      | 0.2.1, 1.4.8                    |
| disregarded for CREEPAGE DISTANCE                                    | 2.10.2.1 h)                     |



|                                                                                                       |                                              |                                                           |                                                                                    |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------------------------------|
| frequency                                                                                             | M.2 (note), M.3.1.1                          | resistor                                                  | 1.5.7                                                                              |
| in a RESTRICTED ACCESS LOCATION                                                                       | 2.1.3                                        | stability                                                 | 4.1                                                                                |
| maximum level                                                                                         | 2.3.1 b), M.2, M.3                           | steady force, 10 N                                        | 3.1.5, 3.1.9, 4.2.1, <b>4.2.2</b>                                                  |
| television distribution system                                                                        |                                              | steady force, 30 N                                        | 4.2.1, <b>4.2.3</b>                                                                |
| see cable distribution system                                                                         |                                              | steady force, 250 N                                       | 4.2.1, <b>4.2.4</b>                                                                |
| temperature                                                                                           |                                              | steel ball impact                                         | 4.2.1, <b>4.2.5</b>                                                                |
| ambient during a test                                                                                 | 1.4.4, 1.4.12, 2.9.2,<br>3.2.8, Annex E, U.2 | stress relief on plastic material                         | 4.2.1, <b>4.2.7</b>                                                                |
| applied to part under test                                                                            |                                              | surge                                                     | <b>7.4.2</b>                                                                       |
| 2.9.1, 2.10.8.2, 2.10.9, 4.2.7, 4.5.5, 4.6.5, 5.2.1                                                   |                                              | temperature                                               | 4.5                                                                                |
| conditioning                                                                                          | 4.6.5, A.1.2, A.2.2                          | TOUCH CURRENT                                             | 5.1                                                                                |
| extreme                                                                                               | 1.1.2                                        | transient voltage                                         | 2.10.3.9, G.5                                                                      |
| hazard                                                                                                | 0.2.3, 0.2.4, 2.9.1, 4.5.4 (Table 4C)        | see also conditioning of test samples                     |                                                                                    |
| heat sink                                                                                             | 4.5.4                                        | TFE (tetrafluoro ethylene)                                | 4.7.2.2, 4.7.3.3, 4.7.3.4                                                          |
| maximum see maximum temperature                                                                       |                                              | THERMAL CUTOUT                                            | 1.2.11.3*, 1.5.3, 4.3.7, 5.3.1, 5.3.2,<br>5.3.3, 5.3.8, B.2, C.1, Annex K, Annex X |
| measurement                                                                                           | 1.4.12, 1.4.13, 4.5.2                        | AUTOMATIC RESET                                           | 1.2.11.4*, 4.4.1                                                                   |
| winding                                                                                               | 4.5.3 (Table 4B), Annex E                    | contact gap, CLEARANCE not applicable                     | 2.10.3.1, G.6                                                                      |
| Note - temperature measurements are required in<br>numerous places in this standard                   |                                              | integrity after a test                                    | 4.2.1                                                                              |
| TEMPERATURE LIMITER                                                                                   | 1.2.11.2*, 1.5.3, 1.7.10, 5.3.8, Annex K     | MANUAL RESET                                              | 1.2.11.5*                                                                          |
| operation during a test                                                                               | 4.5.2                                        | not to operate during heating test                        | 4.5.2                                                                              |
| terminals see wiring terminals                                                                        |                                              | thermal requirements                                      | <b>4.5</b>                                                                         |
| test, testing                                                                                         |                                              | thermoplastic part                                        | 4.2.7, 4.5.2, 4.5.3, 4.5.5                                                         |
| see also tests, specific and separate testing                                                         |                                              | THERMOSTAT                                                | 1.2.11.1*, 1.4.4, 1.5.3, 1.7.10, 4.3.7, 5.3.8, Annex K                             |
| applicable only if safety is involved                                                                 | 1.4.1                                        | contact gap, CLEARANCE not applicable                     | 2.10.3.1, G.6                                                                      |
| checking compliance using previous test results                                                       | 1.4.15                                       | not to operate during heating test                        | 4.5.2                                                                              |
| choice of methods of test                                                                             | 1.3.7                                        | thickness (of insulation) see distance through insulation |                                                                                    |
| endurance see endurance testing                                                                       |                                              | thin sheet insulating material                            | <b>2.10.5.6</b> , 2.10.6.4 (Table 2R),<br>C.2, Annex F (Figure F.15)               |
| equipment not operational after a test                                                                | 1.4.1                                        | electric strength testing                                 | 5.2.1                                                                              |
| general conditions                                                                                    | 1.4                                          | non-separable                                             | 2.10.5.8, 2.10.5.9, Annex AA                                                       |
| reliability see endurance testing                                                                     |                                              | prepreg, layers counted before curing                     | 2.10.6.4 (Table 2R/Footnote b)                                                     |
| ROUTINE see ROUTINE TEST                                                                              |                                              | separable                                                 | 2.10.5.7, 2.10.5.9, 2.10.5.10                                                      |
| samples see samples for test                                                                          |                                              | three-phase                                               |                                                                                    |
| SAMPLING see SAMPLING TEST                                                                            |                                              | disconnect device                                         | 3.4.7                                                                              |
| test finger                                                                                           |                                              | motor                                                     | B.9                                                                                |
| 2.1.1.1 (Figures 2A and 2D), Annex F (Figure F.12)                                                    |                                              | overcurrent protection, examples                          | 2.7.4 (Tables)                                                                     |
| Note - the test finger is specified for checking<br>accessibility in numerous places in this standard |                                              | power distribution system                                 | Annex V                                                                            |
| test pin                                                                                              | 2.1.1.1 and Figure 2B                        | rotation, marking if critical                             | 1.7.7.2                                                                            |
| test probe                                                                                            | 2.1.1.1 and Figure 2C, 6.2.1 b)              | TOUCH CURRENT                                             | 5.1.3, 5.1.5, 5.1.7.1 a), 5.1.8.1                                                  |
| TYPE see TYPE TEST                                                                                    |                                              | TN power distribution system                              | 1.6.1, 5.1.3, V.2                                                                  |
| tests, specific                                                                                       |                                              | overcurrent protection                                    | 2.7.4 (Tables)                                                                     |
| abnormal conditions                                                                                   | 5.3                                          | TNV CIRCUIT                                               | 1.2.8.11*, <b>2.3</b>                                                              |
| abrasion resistance                                                                                   | 2.10.7, <b>2.10.8.4</b> , R.1 (Table R.1)    | accessibility                                             | 2.1.1.1, 2.1.1.6, 2.1.2, 2.1.3                                                     |
| adhesive durability                                                                                   | 4.6.5                                        | in battery compartment                                    | 2.1.1.2                                                                            |
| ball pressure                                                                                         | 4.5.5                                        | via another circuit                                       | 6.2.1                                                                              |
| capacitor                                                                                             | 1.5.6                                        | boundary of                                               | 2.3.4                                                                              |
| current supplied to telecommunication wiring                                                          | 6.3                                          | compared with an SELV CIRCUIT                             | 1.2.8.11 (Table 1A)                                                                |
| drop                                                                                                  | 4.2.1, <b>4.2.6</b>                          | connected to a CABLE DISTRIBUTION SYSTEM                  | <b>7.2</b>                                                                         |
| durability of marking                                                                                 | 1.7.11                                       | connected to a TELECOMMUNICATION NETWORK                  | 1.4.11,<br>2.10.3.8, Clause 6 (note 5), <b>6.1.1</b> , G.3                         |
| electric strength see electric strength test                                                          |                                              | connection to other circuits                              | 2.3.4                                                                              |
| flammability                                                                                          | Annex A                                      | connection to other equipment                             | 3.5.1, 3.5.2                                                                       |
| glow-wire                                                                                             | 4.7.3.1, Annex P (IEC 60695-2-11)            | connectors                                                | 4.3.5                                                                              |
| hot flaming oil                                                                                       | 4.6.2, A.3                                   | considered to be a SECONDARY CIRCUIT                      | 1.2.8.11                                                                           |
| hot wire ignitability                                                                                 | 4.7.3.2                                      | earthing                                                  | 2.3.2.3, 2.6.1, 2.6.3.4                                                            |
| ignition                                                                                              | 4.6.4, 4.7, A.3                              | FIRE ENCLOSURE not required                               | 1.4.11, 4.7.2.2                                                                    |
| impact                                                                                                | 4.2.1, <b>4.2.5</b> , 4.3.13.3               | insulation                                                | 2.9.3                                                                              |
| implosion (cathode ray tubes)                                                                         | 4.2.8                                        | maximum voltages                                          | 2.3.1                                                                              |
| impulse see impulse test                                                                              |                                              | normal voltages                                           | 1.4.8                                                                              |
| mandrel                                                                                               | 2.10.5.8, Annex AA                           |                                                           |                                                                                    |
| mechanical strength see mechanical strength                                                           |                                              |                                                           |                                                                                    |
| needle flame                                                                                          | 4.6.2, 4.7.3.6, Annex P (IEC 60695-2-2)      |                                                           |                                                                                    |
| resistance of earthing conductor                                                                      | 2.6.3.4                                      |                                                           |                                                                                    |

separation  
 from accessible part 2.3.2.1  
 from HAZARDOUS VOLTAGE 2.3.3, 2.9.4, 3.1.9  
 from an SELV CIRCUIT and from other TNV CIRCUITS 2.3.2.1, 2.9.3 (Table 2H)  
 WORKING VOLTAGE 2.10.2.1 h), 2.10.2.2, 2.10.2.3

TNV-1 CIRCUIT 1.2.8.12\*, 2.2.2 (note 1), 2.3.1 a)  
 separation from parts of equipment 6.2.1  
 treated as a TNV-3 CIRCUIT 2.3.2.1

TNV-2 CIRCUIT 1.2.8.13\*, 2.3.1 b)  
 treated as a TNV-3 CIRCUIT 2.3.2.1

TNV-3 CIRCUIT 1.2.8.14\*, 2.3.1 b)  
 separation from parts of equipment 6.2.1

tolerances  
 frequency 1.4.6  
 manufacturing 0.1  
 voltage 1.4.5  
 during TOUCH CURRENT tests 5.1.3

TOOL 1.2.7.4\*  
 not required for an OPERATOR ACCESS AREA 1.2.7.1  
 required for  
 access 1.2.7.3, 1.7.2.5, 3.2.9  
 adjustment 1.4.4, 4.3.3  
 replacement of special cord 1.2.5.6  
 required to  
 open a battery compartment 2.1.1.2  
 override a SAFETY INTERLOCK 2.8.6  
 remove a bushing or cord guard 3.2.7  
 remove a guard against water ingress Annex T  
 risk of short-circuit during servicing 2.1.2

TOUCH CURRENT 0.2.1, 1.2.13.12\*, 5.1, Annexes D and W  
 high TOUCH CURRENT 5.1.7, 5.1.8.2 a)  
 measuring instruments Annex D  
 r.m.s or peak current 5.1.6 (note)  
 summation 5.1.8.2, Annex W  
 to and from a TELECOMMUNICATION NETWORK 2.6.1 f), 5.1.8

tracking 2.10.4.1, 2.10.4.2, Annex P (IEC 60112)

transformer 1.5.4, Annex C  
 ceramic 2.10.6 (note)  
 conductive foil as screen C.2  
 core 2.9.3 (Table 2H), C.2  
 ferrite core C.1  
 ferro-resonant C.1, Annex X  
 high voltage 4.7.3.6  
 in FIRE ENCLOSURE 4.7.2.1, 4.7.2.2  
 in TOUCH CURRENT testing 5.1.3  
 insulation 2.9.3, 2.10.2, C.2  
 varying dimensions 2.10.1.5, 5.2.2  
 isolating 1.2.8.5  
 in limited power source 2.5  
 in SELV CIRCUIT 2.2.4  
 in TNV CIRCUIT 2.3.4  
 used for test 5.1.3  
 maximum temperature C.1, Annex X  
 not in Scope of this standard unless integral  
 in equipment 1.1.3  
 overload protection 5.3.3, C.1, Annex X  
 planar 2.10.5.11, 2.10.6 (note)  
 power distribution V.1, V.2  
 screen see screen, conductive  
 signal Clause 6 (note 4), 6.2.2, 7.1 (note 4), W.2.1  
 testing 2.10.9, 5.2.1, 5.3.7, C.1, Annex X

winding wire see winding wire

WORKING VOLTAGE 2.10.2

transients  
 affecting CLEARANCES 2.10.3.1, 2.10.3.4, 2.10.3.9  
 affecting WORKING VOLTAGE 1.2.9.8, 2.10.2  
 attenuated 2.6.1 e), 2.10.3.9, Clause 6 (note 1),  
 7.1 (note 2), G.2.1, G.5, Annex Z  
 CLEARANCES 2.10.3.1, 2.10.3.4, 2.10.3.9  
 disregarded for CREEPAGE DISTANCE 2.10.4  
 in PRIMARY CIRCUIT 1.2.9.10, 2.10.3.2, 2.10.3.3, G.1, G.4.1 a)  
 in SECONDARY CIRCUIT 2.10.3.3, 2.10.3.6, 2.10.3.7,  
 G.1, G.4.1 b)  
 in TNV CIRCUIT 1.2.8.12, 1.2.8.13, 1.2.8.14  
 not part of operating voltage 1.4.8  
 internally generated 2.10.2.3, G.1, G.4.1 a)  
 measurement in a SECONDARY CIRCUIT 2.10.3.3, G.5  
 non-repetitive, not affecting WORKING VOLTAGE 1.4.8, 2.10.2.2, 2.10.2.3  
 on a TELECOMMUNICATION NETWORK  
 see TELECOMMUNICATION NETWORK TRANSIENT VOLTAGE  
 simulated Annex N  
 see also impulse test, MAINS TRANSIENT VOLTAGE and  
 overvoltage category

transport  
 castors 1.2.3.1, 4.1  
 conditions during 2.6.5.6  
 orientation 1.3.6  
 precautions during 0.1, 1.7.2.1, 4.6.4

TRANSPORTABLE EQUIPMENT  
 0.1, 1.2.3.3\*, 4.2.6, 4.3.8, 4.6.1, 4.6.4, 5.1.6 (Table 5A)  
 orientation 1.3.6

TT power distribution system 1.6.1, 5.1.3, V.3  
 protective device 2.7.4 (tables)

TYPE TEST 1.2.13.1\*, 1.4.2, 1.4.15, 1.5.6,  
 2.10.5.4, 2.10.5.13, 2.10.6.4 (Table 2R), U.2

## U

ultraviolet radiation 0.2.6  
 effect on materials 4.3.13.3, Annex Y  
 human exposure 4.3.13.4

unattended equipment, testing 5.3.8

unearthed (floating)  
 conductor in MAINS SUPPLY 2.7.4, 2.10.3.2 c), 3.4.6, G.2.3  
 ENCLOSURE 2.9.3, 4.2.1  
 EUT during TOUCH CURRENT tests 5.1.3  
 meaning of "unearthed" 2.9.3 (Table 2H)  
 parts and windings 1.4.9, 2.6.3.4, 6.2.1, Annex F (Figure F.13)  
 accessibility 0.2.1, 2.1.1.1  
 in determination of WORKING VOLTAGE 2.10.2.1 a), 2.10.2.1 b)  
 separation  
 from internal wiring 2.1.1.3, 2.1.1.4  
 from stranded wire 3.3.8  
 TOUCH CURRENT test 5.1.5, W.1  
 within DOUBLE INSULATION 2.9.3

uninsulated (bare) conductors and parts  
 0.2.1, 2.1.1.1, 2.1.1.2, 2.1.1.5, 2.1.2,  
 2.1.3, 3.2.2, 3.2.9, 4.2.1, 4.6.1, 4.6.4  
 see also busbar

USER 0.1, 0.2.1, 1.2.13.6\*, 1.2.13.7  
 (or OPERATOR which has the same meaning)  
 handling equipment  
 battery 4.3.8  
 high pressure lamp 4.2.9  
 insulation 2.10.5.6  
 MOVABLE EQUIPMENT 4.2.6  
 screws 3.1.8  
 stability 4.1  
 switch, no FIRE ENCLOSURE 4.7.2.2  
 information supplied to see operating instructions  
 of cable distribution equipment 6.2, 7.2, 7.3  
 of telecommunication equipment 6.1, 6.2

## V

vapour 0.2.7, 1.2.12.15, 4.3.12  
 voltage dependent resistor (VDR) **1.5.9, Annex Q**  
 see also surge suppressor

vibration see mechanical shock

VOLTAGE, HAZARDOUS see HAZARDOUS VOLTAGE

VOLTAGE, RATED see RATED VOLTAGE

VOLTAGE, REQUIRED WITHSTAND  
 see REQUIRED WITHSTAND VOLTAGE

VOLTAGE, WORKING see WORKING VOLTAGE

voltage  
 equipment to be safe at any supply voltage 1.3.3  
 for tests 1.4.5  
 generated externally 2.3.5  
 steady-state, not covered by this standard 1.4.8 (note 1)  
 measurement to earth 1.4.9  
 normal operating **1.4.8**  
 rating see rated voltage of components  
 r.m.s. value implied unless otherwise specified 1.2  
 selector 1.7.1, 1.7.4, 4.3.3

## W

wall-mounted equipment 1.2.3.5, **4.2.10**

warning notices  
 battery 1.7.13  
 examples for reduction of hazards 0.1, 0.2.4, 0.2.5, 0.2.6, 0.2.7  
 high TOUCH CURRENT 5.1.7, 5.1.8.2 a)  
 moving part 4.4.2  
 temperature 4.5.4 (Table 4C/Footnotes a and c)  
 to SERVICE PERSON 1.7.9, 2.6.1, 2.7.6, 3.4.10, 4.3.5, 4.3.13.4  
 see also symbols, warning

water ingress 1.1.2, 2.10.1.2, **Annex T**

weight see mass

wire, wiring **Clause 3**  
 access to, in  
 an ELV CIRCUIT 2.1.1.3  
 a HAZARDOUS VOLTAGE circuit 2.1.1.4

fixed see fixing of parts, wiring  
 enamelled see enamel  
 equipment 3.1.4  
 gauge (AWG, cmil) 2.6.3.3 (Table 2D), 3.2.5.1 (Table 3B)  
 insulation  
 colour 2.6.3.5  
 flammability 4.7.3.3, 4.7.3.4  
 in FIRE ENCLOSURE 4.7.2.1, 4.7.2.2  
 resistance to oil 4.3.9  
 UV exposure 4.3.13.3  
 overcurrent protection **2.7**, 3.1.1  
 physical protection **3.1.2**, 3.1.3, 4.3.13.3  
 printed 2.6.3.5, Annex F (Figure F.11)  
 sleeved see sleeving as additional insulation  
 stranded 3.3.8  
 telecommunication 6.3  
 temperature 4.5.3  
 terminals see wiring terminals  
 termination 3.1.9  
 winding 2.10.5.12, 2.10.5.13, Annex U  
 see also current carrying capacity and building installation

wiring terminals **1.7.7**, 2.6.4, **3.1**, 3.2.1, 3.2.3, **3.3**  
 access 3.2.9  
 ampacity 2.6.4.2, 3.3.4, 3.3.5  
 corrosion 2.6.5.6  
 grouping **3.3.7**  
 main protective earthing terminal  
 1.2.13.10, 1.2.13.11, 1.4.9, 2.3.2.3, 2.6.1, 2.6.3.4,  
**2.6.4.2**, 2.6.4.3, 2.9.4 d) and e), 5.1.6 (Table 5A),  
 5.1.7.1, 5.1.8.2, 7.4.2, G.5 a)  
 equipment with 5.1.7.1, 5.1.8.1  
 equipment without 2.6.2, 5.1.8.1  
 marking  
 power supply 1.7.7.2, 1.7.7.3  
 protective earthing 1.7.7.1  
 more than one 2.6.4.2  
 of transformer C.2  
 separate protective earthing terminal 5.1.7.1  
 temperature 4.5.3 (Table 4B)

wound component **2.10.5.11**, 2.10.5.12,  
 2.10.5.13, 2.10.5.14, 4.7.1, Annex U  
 see also motor and transformer

working voltage 1.2.9.6\*  
 determination of 1.4.8, **2.10.2**  
 meaning, for DOUBLE INSULATION 2.10.2.1 e)  
 PEAK see PEAK WORKING VOLTAGE  
 RMS see RMS WORKING VOLTAGE  
 to be considered 1.5.7.2, 2.9.1,  
 2.9.3 (Table 2H/Footnotes b and c)  
 varying 2.10.1.5  
 see also rated voltage of components

WRAPPING TISSUE 1.2.13.16\*, 4.7.3.6, B.6.3, B.7.3

## X

x-ray see ionizing radiation

## SOMMAIRE

|                                                                                                        |     |
|--------------------------------------------------------------------------------------------------------|-----|
| AVANT-PROPOS.....                                                                                      | 312 |
| INTRODUCTION.....                                                                                      | 314 |
| 0 Principes de sécurité .....                                                                          | 314 |
| 0.1 Principes généraux de sécurité .....                                                               | 314 |
| 0.2 Dangers .....                                                                                      | 315 |
| 0.3 Matériaux et composants .....                                                                      | 319 |
| 1 Généralités.....                                                                                     | 320 |
| 1.1 Domaine d'application.....                                                                         | 320 |
| 1.2 Définitions .....                                                                                  | 322 |
| 1.3 Exigences générales .....                                                                          | 338 |
| 1.4 Conditions générales d'essai .....                                                                 | 339 |
| 1.5 Composants .....                                                                                   | 344 |
| 1.6 Adaptation au réseau.....                                                                          | 351 |
| 1.7 Marquages et instructions .....                                                                    | 351 |
| 2 Protection contre les dangers .....                                                                  | 360 |
| 2.1 Protection contre les chocs électriques et les dangers de transfert d'énergie .....                | 360 |
| 2.2 Circuits TBTS .....                                                                                | 369 |
| 2.3 Circuits TRT .....                                                                                 | 371 |
| 2.4 Circuits à limitation de courant.....                                                              | 376 |
| 2.5 Sources à puissance limitée.....                                                                   | 377 |
| 2.6 Dispositions pour la mise à la terre.....                                                          | 379 |
| 2.7 Protection contre les surintensités et les défauts à la terre dans les circuits<br>primaires ..... | 387 |
| 2.8 Verrouillages de sécurité .....                                                                    | 390 |
| 2.9 Isolation électrique .....                                                                         | 393 |
| 2.10 Distances dans l'air, lignes de fuite et distances à travers l'isolation .....                    | 398 |
| 3 Câblage, connexions et alimentation .....                                                            | 426 |
| 3.1 Généralités.....                                                                                   | 426 |
| 3.2 Raccordement à une alimentation du réseau .....                                                    | 429 |
| 3.3 Bornes pour les conducteurs externes.....                                                          | 436 |
| 3.4 Séparation de l'alimentation du réseau.....                                                        | 439 |
| 3.5 Interconnexion des matériels .....                                                                 | 442 |
| 4 Exigences physiques .....                                                                            | 444 |
| 4.1 Stabilité.....                                                                                     | 444 |
| 4.2 Résistance mécanique.....                                                                          | 445 |
| 4.3 Conception et construction.....                                                                    | 449 |
| 4.4 Protection contre les parties mobiles dangereuses .....                                            | 458 |
| 4.5 Exigences thermiques.....                                                                          | 459 |
| 4.6 Ouvertures dans les enveloppes .....                                                               | 463 |
| 4.7 Résistance au feu.....                                                                             | 470 |
| 5 Exigences électriques et simulation de conditions de défauts .....                                   | 479 |
| 5.1 Courant de contact et courant dans le conducteur de protection .....                               | 479 |
| 5.2 Rigidité diélectrique .....                                                                        | 488 |
| 5.3 Fonctionnement anormal et conditions de défaut .....                                               | 492 |

|     |                                                                                                                                                                                    |     |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 6   | Connexion à des réseaux de télécommunications.....                                                                                                                                 | 497 |
| 6.1 | Protection du personnel de maintenance du réseau de télécommunications et des utilisateurs d'autres matériels connectés au réseau contre les risques provenant du matériel .....   | 497 |
| 6.2 | Protection des utilisateurs du matériel contre les surtensions sur les réseaux de télécommunications .....                                                                         | 499 |
| 6.3 | Protection du système de câblage de télécommunication contre les surchauffes .....                                                                                                 | 502 |
| 7   | Connexion aux systèmes de distribution par câbles .....                                                                                                                            | 503 |
| 7.1 | Généralités.....                                                                                                                                                                   | 503 |
| 7.2 | Protection du personnel de maintenance d'un système de distribution par câbles et des utilisateurs d'autres matériels connectés au système, contre les dangers des matériels ..... | 503 |
| 7.3 | Protection des utilisateurs de matériels contre les surtensions sur le système de distribution par câbles .....                                                                    | 503 |
| 7.4 | Isolation entre circuits primaires et systèmes de distribution par câbles .....                                                                                                    | 504 |
|     | Annexe A (normative) Essais de résistance à la chaleur et au feu .....                                                                                                             | 506 |
|     | Annexe B (normative) Essais des moteurs dans les conditions anormales.....                                                                                                         | 509 |
|     | Annexe C (normative) Transformateurs .....                                                                                                                                         | 515 |
|     | Annexe D (normative) Appareils de mesure pour les essais de courant de contact .....                                                                                               | 519 |
|     | Annexe E (normative) Echauffement d'un enroulement .....                                                                                                                           | 521 |
|     | Annexe F (normative) Mesure des distances dans l'air et des lignes de fuite .....                                                                                                  | 522 |
|     | Annexe G (normative) Autre méthode pour la détermination des distances dans l'air minimales .....                                                                                  | 530 |
|     | Annexe H (normative) Rayonnements ionisants .....                                                                                                                                  | 538 |
|     | Annexe J (normative) Tableau des potentiels électrochimiques (voir 2.6.5.6) .....                                                                                                  | 539 |
|     | Annexe K (normative) Dispositifs de commande thermiques .....                                                                                                                      | 540 |
|     | Annexe L (normative) Conditions de charge normale pour quelques types de matériels de bureau électriques .....                                                                     | 542 |
|     | Annexe M (normative) Critères pour les signaux de sonnerie du téléphone .....                                                                                                      | 544 |
|     | Annexe N (normative) Générateur d'impulsions d'essai.....                                                                                                                          | 549 |
|     | Annexe P (normative) Références normatives .....                                                                                                                                   | 551 |
|     | Annexe Q (normative) Résistances sensibles à la tension (Voltage Dependent Resistors – VDR).....                                                                                   | 555 |
|     | Annexe R (informative) Exemple d'exigences pour un programme de contrôle de la qualité... ..                                                                                       | 556 |
|     | Annexe S (informative) Procédure pour les essais en impulsions .....                                                                                                               | 559 |
|     | Annexe T (informative) Guide pour la protection contre la pénétration d'eau.....                                                                                                   | 561 |
|     | Annexe U (normative) Fils de bobinage isolés pour utilisation sans intercouche .....                                                                                               | 563 |
|     | Annexe V (normative) Schémas de distribution de l'alimentation en courant alternatif.....                                                                                          | 566 |
|     | Annexe W (informative) Somme des courants de contact .....                                                                                                                         | 573 |
|     | Annexe X (informative) Echauffement maximal dans les essais de transformateurs .....                                                                                               | 576 |
|     | Annexe Y (normative) Essai de conditionnement à la lumière ultraviolette.....                                                                                                      | 578 |
|     | Annexe Z (informative) Catégories de surtensions (voir 2.10.3.2 et Article G.2).....                                                                                               | 579 |
|     | Annexe AA (normative) Essai de mandrin (voir 2.10.5.8) .....                                                                                                                       | 580 |
|     | Annexe BB (informative) Modifications de la deuxième édition .....                                                                                                                 | 583 |

|                                                                                                                                    |     |
|------------------------------------------------------------------------------------------------------------------------------------|-----|
| Bibliographie .....                                                                                                                | 586 |
| INDEX .....                                                                                                                        | 588 |
| Figure 2A – Doigt d'épreuve.....                                                                                                   | 362 |
| Figure 2B – Broche d'essai .....                                                                                                   | 363 |
| Figure 2C – Calibre d'essai.....                                                                                                   | 363 |
| Figure 2D – Accessibilité des parties conductrices internes .....                                                                  | 364 |
| Figure 2E – Tensions dans les circuits TBTS dans les conditions de premier défaut.....                                             | 370 |
| Figure 2F – Tensions maximales admises après un premier défaut.....                                                                | 372 |
| Figure 2G – Générateur d'essai .....                                                                                               | 376 |
| Figure 2H – Exemples d'application de l'isolation.....                                                                             | 397 |
| Figure 2J – Durée de vieillissement thermique.....                                                                                 | 423 |
| Figure 2K – Essai de résistance à l'abrasion pour les couches de revêtement.....                                                   | 424 |
| Figure 4A – Essai de choc utilisant la sphère d'acier .....                                                                        | 447 |
| Figure 4B – Exemples de coupes d'ouvertures empêchant un accès vertical .....                                                      | 464 |
| Figure 4C – Exemples de volets en grille-écran .....                                                                               | 464 |
| Figure 4D – Ouvertures dans une enveloppe .....                                                                                    | 465 |
| Figure 4E – Fond typique d'une enveloppe contre le feu pour les composants ou ensembles partiellement enfermés .....               | 466 |
| Figure 4F – Construction avec plaque écran.....                                                                                    | 467 |
| Figure 5A – Circuit d'essai pour le courant de contact d'un matériel monophasé sur des schémas d'alimentation TN étoile ou TT..... | 481 |
| Figure 5B – Circuit d'essai pour le courant de contact d'un matériel triphasé sur des schémas d'alimentation TN étoile ou TT ..... | 481 |
| Figure 6A – Essai de la séparation entre le réseau de télécommunications et la terre.....                                          | 499 |
| Figure 6B – Points d'application des tensions d'essai .....                                                                        | 500 |
| Figure B.1 – Détermination de la moyenne arithmétique des températures.....                                                        | 510 |
| Figure C.1 – Détermination de la moyenne arithmétique des températures.....                                                        | 516 |
| Figure D.1 – Appareil de mesure.....                                                                                               | 519 |
| Figure D.2 – Appareil de mesure en variante.....                                                                                   | 520 |
| Figure F.1 – Encoche étroite .....                                                                                                 | 523 |
| Figure F.2 – Encoche large .....                                                                                                   | 523 |
| Figure F.3 – Encoche en forme de V .....                                                                                           | 523 |
| Figure F.4 – Nervure.....                                                                                                          | 523 |
| Figure F.5 – Parties non collées avec encoche étroite .....                                                                        | 524 |
| Figure F.6 – Parties non collées avec encoche large .....                                                                          | 524 |
| Figure F.7 – Parties non collées avec encoches large et étroite .....                                                              | 524 |
| Figure F.8 – Faible retrait.....                                                                                                   | 525 |
| Figure F.9 – Large retrait .....                                                                                                   | 525 |
| Figure F.10 – Revêtement autour des bornes .....                                                                                   | 526 |
| Figure F.11 – Revêtement sur des circuits imprimés .....                                                                           | 526 |



|                                                                                                           |     |
|-----------------------------------------------------------------------------------------------------------|-----|
| Figure F.12 – Mesures à travers des ouvertures dans les enveloppes .....                                  | 527 |
| Figure F.13 – Partie conductrice non connectée intercalée .....                                           | 527 |
| Figure F.14 – Matériau isolant solide.....                                                                | 528 |
| Figure F.15 – Matériau isolant en fines feuilles.....                                                     | 528 |
| Figure F.16 – Joints scellés dans les cartes imprimées multi-couches.....                                 | 528 |
| Figure F.17 – Composant rempli avec un composé isolant.....                                               | 529 |
| Figure F.18 – Bobine cloisonnée .....                                                                     | 529 |
| Figure M.1 – Définition d'une période de sonnerie et du cycle de sonnerie .....                           | 545 |
| Figure M.2 – Courbe limite $I_{TS1}$ pour les signaux cadencés de sonnerie.....                           | 546 |
| Figure M.3 – Courant de crête et courant crête à crête .....                                              | 546 |
| Figure M.4 – Critères de déclenchement de la tension de sonnerie .....                                    | 548 |
| Figure N.1 – Circuit générateur d'impulsions de l'UIT-T .....                                             | 549 |
| Figure N.2 – Circuit générateur d'impulsions de la CEI 60065 .....                                        | 550 |
| Figure S.1 – Forme d'onde pour une isolation sans parasurtenseur et sans rupture d'isolation .....        | 559 |
| Figure S.2 – Formes d'onde pour une isolation pendant une rupture d'isolation sans parasurtenseurs.....   | 560 |
| Figure S.3 – Forme d'onde pour une isolation avec parasurtenseurs en fonctionnement.....                  | 560 |
| Figure S.4 – Forme d'onde pour un parasurtenseur et une isolation court-circuités.....                    | 560 |
| Figure V.1 – Exemples de schémas d'alimentation TN-S.....                                                 | 568 |
| Figure V.2 – Exemple de schéma d'alimentation TN-C-S .....                                                | 569 |
| Figure V.3 – Exemple de schéma d'alimentation TN-C.....                                                   | 569 |
| Figure V.4 – Exemple de schéma d'alimentation TN-C monophasé, trois conducteurs .....                     | 570 |
| Figure V.5 – Exemple de schéma d'alimentation TT triphasé avec neutre.....                                | 570 |
| Figure V.6 – Exemple de schéma d'alimentation TT triphasé sans neutre.....                                | 571 |
| Figure V.7 – Exemple de schéma d'alimentation IT triphasé (et neutre).....                                | 571 |
| Figure V.8 – Exemple de schéma d'alimentation IT triphasé.....                                            | 572 |
| Figure W.1 – Courant de contact venant d'un circuit flottant.....                                         | 573 |
| Figure W.2 – Courant de contact venant d'un circuit mis à la terre .....                                  | 574 |
| Figure W.3 – Somme des courants de contact dans un PABX .....                                             | 574 |
| Figure AA.1 – Mandrin .....                                                                               | 580 |
| Figure AA.2 – Position initiale du mandrin .....                                                          | 581 |
| Figure AA.3 – Position finale du mandrin .....                                                            | 581 |
| Tableau 1A – Plages de tensions des circuits TBTS et TRT .....                                            | 330 |
| Tableau 1B – Equivalence entre classes d'inflammabilité.....                                              | 334 |
| Tableau 1C – Caractéristiques des condensateurs selon la CEI 60384-14.....                                | 346 |
| Tableau 1D – Exemples informatifs d'application de condensateurs .....                                    | 347 |
| Tableau 2A – Distance à travers l'isolation du câblage interne .....                                      | 365 |
| Tableau 2B – Limites des sources de puissance sans dispositif de protection contre les surintensités..... | 378 |
| Tableau 2C – Limites des sources de puissance avec dispositif de protection contre les surintensités..... | 378 |

|                                                                                                                                               |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Tableau 2D – Taille minimale des conducteurs de liaison de protection.....                                                                    | 382 |
| Tableau 2E – Durée de l'essai, réseaux d'alimentation en courant alternatif.....                                                              | 383 |
| Tableau 2F – Exemples informatifs de dispositifs de protection dans les matériels et sous-ensembles monophasés .....                          | 389 |
| Tableau 2G – Exemples informatifs de dispositifs de protection dans les matériels triphasés .....                                             | 389 |
| Tableau 2H – Exemples d'application de l'isolation .....                                                                                      | 395 |
| Tableau 2J – Tensions transitoires du réseau en courant alternatif .....                                                                      | 403 |
| Tableau 2K – Distances dans l'air minimales pour l'isolation dans les circuits primaires et entre circuits primaires et secondaires .....     | 404 |
| Tableau 2L – Distances dans l'air supplémentaire dans les circuits primaires.....                                                             | 405 |
| Tableau 2M – Distances dans l'air minimales dans les circuits secondaires.....                                                                | 406 |
| Tableau 2N – Lignes de fuite minimales .....                                                                                                  | 411 |
| Tableau 2P – Essais pour l'isolation en couches non séparables .....                                                                          | 415 |
| Tableau 2Q – Distances minimales de séparation pour les cartes imprimées avec revêtement .....                                                | 420 |
| Tableau 2R – Isolation dans les cartes imprimées .....                                                                                        | 421 |
| Tableau 3A – Dimensions des câbles et conduits pour les matériels de courant nominal ne dépassant pas 16 A .....                              | 431 |
| Tableau 3B – Dimensions des conducteurs .....                                                                                                 | 433 |
| Tableau 3C – Essais physiques sur les câbles d'alimentation .....                                                                             | 435 |
| Tableau 3D – Plage des dimensions des conducteurs à introduire dans les bornes .....                                                          | 437 |
| Tableau 3E – Dimensions des bornes pour les conducteurs de l'alimentation et pour les conducteurs de mise à la terre de protection .....      | 438 |
| Tableau 4A – Limites minimales de rétention des propriétés après exposition UV.....                                                           | 455 |
| Tableau 4B – Limites de température, matériaux et composants .....                                                                            | 461 |
| Tableau 4C – Limites de températures de contact .....                                                                                         | 462 |
| Tableau 4D – Dimensions et espacements des trous dans les fonds métalliques des enveloppes contre le feu .....                                | 468 |
| Tableau 4E – Résumé des exigences d'inflammabilité des matériaux.....                                                                         | 478 |
| Tableau 5A – Courant maximal .....                                                                                                            | 483 |
| Tableau 5B – Tensions d'essai pour les essais de rigidité diélectrique fondés sur les valeurs de crête des tensions de service Partie 1 ..... | 490 |
| Tableau 5B – Tensions d'essai pour les essais de rigidité diélectrique fondés sur les valeurs de crête des tensions de service Partie 2 ..... | 491 |
| Tableau 5C – Tensions d'essai pour les essais de rigidité diélectrique fondées sur les tensions de tenue prescrite .....                      | 492 |
| Tableau 5D – Limites de température pour les conditions de surcharge .....                                                                    | 496 |
| Tableau B.1 – Limites des températures permises pour les enroulements de moteurs (à l'exception de l'essai de surcharge).....                 | 510 |
| Tableau B.2 – Limites des températures permises pour les essais en surcharge .....                                                            | 511 |
| Tableau C.1 – Limites des températures permises pour les enroulements de transformateurs .....                                                | 516 |
| Tableau F.1 – Valeur de X .....                                                                                                               | 522 |
| Tableau G.1 – Tensions transitoires du réseau en courant alternatif .....                                                                     | 531 |



|                                                                                                  |     |
|--------------------------------------------------------------------------------------------------|-----|
| Tableau G.2 – Distances dans l'air minimales jusqu'à 2 000 m au-dessus du niveau de la mer.....  | 536 |
| Tableau J.1 – Potentiels électrochimiques (V) .....                                              | 539 |
| Tableau N.1 – Valeurs des composants pour les Figures N.1 et N.2.....                            | 550 |
| Tableau R.1 – Règles pour l'échantillonnage et l'examen – cartes imprimées avec revêtement ..... | 557 |
| Tableau R.2 – Règles pour l'échantillonnage et l'examen – distances dans l'air réduites ....     | 558 |
| Tableau T.1 – Extraits de la CEI 60529 .....                                                     | 562 |
| Tableau U.1 – Diamètre du mandrin .....                                                          | 564 |
| Tableau U.2 – Température du four.....                                                           | 564 |
| Tableau X.1 – Etapes d'essais .....                                                              | 577 |
| Tableau Z.1 – Catégories de surtensions .....                                                    | 579 |

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

# COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

## MATÉRIELS DE TRAITEMENT DE L'INFORMATION – SÉCURITÉ –

### Partie 1: Exigences générales

#### AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (CEI) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de la CEI). La CEI a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, la CEI – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de la CEI"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec la CEI, participent également aux travaux. La CEI collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de la CEI concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux intéressés sont représentés dans chaque comité d'études.
- 3) Les publications CEI se présentent sous la forme de recommandations internationales et elles sont agréées comme telles par les Comités nationaux de la CEI. Tous les efforts raisonnables sont entrepris afin que la CEI s'assure de l'exactitude du contenu technique de ses publications; la CEI ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de la CEI s'engagent, dans toute la mesure possible, à appliquer de façon transparente des Publications de la CEI dans leurs publications nationales et régionales. Toute divergence entre toute Publication de la CEI et toute publication nationale ou régionale correspondante doit être indiquée en termes clairs dans cette dernière.
- 5) La CEI n'a prévu aucune procédure de marquage valant indication d'approbation et n'engage pas sa responsabilité pour les équipements déclarés conformes à une de ses Publications.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à la CEI, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de la CEI, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de la CEI ou de toute autre Publication de la CEI, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente publication CEI peuvent faire l'objet de droits de propriété intellectuelle ou de droits analogues. La CEI ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de propriété ou de ne pas avoir signalé leur existence.

La Norme internationale CEI 60950-1 a été établie par le comité d'études 108 de la CEI: Sécurité des appareils électroniques dans le domaine de l'audio, de la vidéo, du traitement de l'information et des technologies de la communication.

Cette seconde édition de la CEI 60950-1 annule et remplace la première édition de la CEI 60950-1, parue en 2001, et constitue une révision technique. Les principales modifications de la présente édition par rapport à la première édition de la CEI 60950-1 sont données à l'Annexe BB, y compris une liste des numéros des paragraphes, des tableaux et des figures modifiés.

Le texte de cette norme est issu des documents suivants:

| FDIS          | Rapport de vote |
|---------------|-----------------|
| 108/135A/FDIS | 108/147/RVD     |

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à l'approbation de cette norme.

La CEI 60950-1 comporte les exigences fondamentales pour la sécurité des matériels de traitement de l'information.

Des parties complémentaires de la CEI 60950-1 couvriront des exigences de sécurité spécifiques pour les matériels de traitement de l'information ayant des applications limitées ou des caractéristiques spéciales, comme suit:

Partie 21: Téléalimentation (publiée);

Partie 22: Matériels installés à l'extérieur (prévue);

Partie 23: Matériels de grande taille pour le stockage des données (prévue);

A l'exception des notes, les textes donnés à l'intérieur d'une figure normative ou d'une cellule sous un tableau normatif ont également une valeur normative. Lorsqu'un texte est accompagné d'une référence en exposant, il est lié à un point particulier du tableau. Les autres textes figurant dans une cellule sous un tableau s'appliquent à l'ensemble du tableau.

Les annexes informatives et les textes commençant par le mot "NOTE" n'ont pas de valeur normative. Ces annexes et ces textes ne sont indiqués que pour donner des informations complémentaires.

Les notes "par pays" sont également informatives mais attirent l'attention sur des exigences qui ont une valeur normative dans les pays concernés.

Dans la présente norme, les caractères d'imprimerie suivants sont employés:

- Exigences proprement dites et annexes normatives: caractères romains.
- Critères de conformité et modalités d'essais: caractères italiques.
- Notes dans le corps du texte et dans les tableaux: petits caractères romains.
- Termes définis en 1.2: PETITES CAPITALES.

Le comité a décidé que le contenu de cette publication ne sera pas modifié avant la date du résultat de la maintenance indiquée sur le site web de la CEI à l'adresse suivante: "<http://webstore.iec.ch>", dans les données liées à la publication spécifique. A cette date, la publication sera

- reconduite,
- supprimée,
- remplacée par une édition révisée, ou
- amendée.

Le contenu du corrigendum d'août 2006 et d'août 2013 a été pris en considération dans cet exemplaire.

## INTRODUCTION

### 0 Principes de sécurité

Les principes suivants ont été adoptés par le comité d'études 108 dans la mise au point de la présente norme.

Ces principes ne prennent pas en compte les performances ou les caractéristiques fonctionnelles des matériels.

Les mots imprimés en PETITES MAJUSCULES sont des termes définis en 1.2 de la présente norme.

#### 0.1 Principes généraux de sécurité

Il est essentiel que les concepteurs comprennent les principes directeurs des exigences de sécurité, de façon à pouvoir réaliser un matériel sûr.

Ce qui suit ne constitue pas une variante aux exigences détaillées de la présente norme, mais a pour but de fournir aux concepteurs une appréciation des principes sur lesquels ces exigences sont fondées. Lorsque les matériels impliquent des technologies et des matériaux ou des méthodes de construction qui ne sont pas explicitement prises en compte, il convient que la conception de ces matériels apporte un niveau de sécurité qui ne soit jamais inférieur à ceux décrits dans les présents principes de sécurité.

Les concepteurs doivent prévoir non seulement les conditions de fonctionnement normales du matériel mais aussi les conditions probables de défaut, les défauts qui en sont la conséquence, un mauvais usage prévisible et les influences externes comme la température, l'altitude, la pollution, l'humidité et les surtensions sur le RÉSEAU D'ALIMENTATION et sur un RÉSEAU DE TÉLÉCOMMUNICATIONS ou un SYSTÈME DE DISTRIBUTION PAR CÂBLES. Il convient que le dimensionnement des espacements d'isolation tienne compte des réductions éventuelles liées aux tolérances de fabrication ou lorsqu'une déformation peut se produire au cours des manipulations, en cas de choc et de vibrations susceptibles de se produire au cours de la fabrication, du transport et de l'usage normal.

Il convient de respecter les priorités suivantes pour déterminer les méthodes de conception à adopter:

- quand cela est possible, spécifier les critères de conception qui élimineront, réduiront les dangers ou protégeront contre ceux-ci;
- quand la mesure ci-dessus n'est pas applicable parce que le fonctionnement du matériel en serait restreint, spécifier l'emploi de moyens de protection indépendants du matériel, comme un matériel personnel de protection (qui n'est pas spécifié dans cette norme);
- quand aucune des mesures ci-dessus n'est utilisable dans la pratique, ou bien en supplément de ces mesures, spécifier l'application d'étiquettes de marquages et d'instructions concernant les risques résiduels.

Il existe deux types de personnes dont la sécurité est à examiner, les UTILISATEURS (ou OPÉRATEURS) et le PERSONNEL DE MAINTENANCE.

UTILISATEUR est le terme appliqué à toute personne autre que le PERSONNEL DE MAINTENANCE. Il convient que les exigences de protection supposent que les UTILISATEURS ne sont pas formés pour identifier les dangers, mais qu'ils n'agissent pas non plus intentionnellement dans le but de créer une situation dangereuse. En conséquence, les exigences assureront la protection des agents chargés du nettoyage et des visiteurs occasionnels aussi bien que des

UTILISATEURS proprement dits. En général, il convient que les UTILISATEURS n'aient pas accès aux parties dangereuses et, pour ce faire, il convient que de telles parties soient situées seulement dans les ZONES D'ACCÈS POUR LA MAINTENANCE ou dans des matériels situés dans des LOCAUX À ACCÈS RESTREINT.

Lorsque les UTILISATEURS sont admis dans les ZONES À ACCÈS RESTREINT, ils doivent être informés de manière adéquate.

Les membres du PERSONNEL DE MAINTENANCE sont censés utiliser leur formation et leur habileté pour éviter pour eux-mêmes et pour des tiers les blessures pouvant résulter de dangers évidents qui existent dans les ZONES D'ACCÈS POUR LA MAINTENANCE des matériels ou dans des matériels situés dans des EMBLEMES À ACCÈS RESTREINT. Toutefois, il convient que le PERSONNEL DE MAINTENANCE soit protégé contre des dangers inattendus. Cela peut se faire, par exemple, en plaçant les parties qui nécessitent d'être accessibles pour la maintenance à des emplacements ne présentant pas de dangers électriques et mécaniques, en fournissant des écrans pour éviter les contacts accidentels avec les parties dangereuses, et en fournissant des étiquettes ou des instructions pour avertir le personnel des risques résiduels.

Les informations sur les dangers potentiels peuvent être marquées sur le matériel ou fournies avec celui-ci, en fonction de la probabilité d'accident et de sa sévérité, ou tenues à la disposition du PERSONNEL DE MAINTENANCE. En général, les UTILISATEURS ne doivent pas être exposés à des dangers susceptibles de causer des blessures, et il convient que les informations fournies aux UTILISATEURS visent principalement à éviter les mauvais usages et les situations susceptibles de créer des dangers, comme un branchement à la mauvaise source de puissance et un remplacement de fusibles par des types incorrects.

Le MATÉRIEL MOBILE est considéré comme présentant un risque de choc légèrement plus élevé en raison d'une contrainte supplémentaire possible sur le câble d'alimentation, pouvant conduire à la rupture du conducteur de terre. Avec le MATÉRIEL PORTATIF, ce risque est augmenté, une usure du câble est plus probable et des dangers ultérieurs peuvent survenir en cas de chute du matériel. Le MATÉRIEL TRANSPORTABLE introduit un risque supplémentaire parce qu'il peut être employé et transporté dans n'importe quelle orientation; si un objet métallique rentre par une ouverture dans l'ENVELOPPE, il peut se déplacer à l'intérieur du matériel en risquant de provoquer un danger.

## **0.2 Dangers**

L'application d'une norme de sécurité a pour but de réduire les risques de blessures ou de dommages dus aux dangers suivants:

- choc électrique;
- dangers liés à l'énergie;
- incendie;
- dangers thermiques;
- dangers mécaniques;
- rayonnements;
- dangers chimiques.

### 0.2.1 Choc électrique

Un choc électrique est dû au passage d'un courant à travers le corps humain. Les effets physiologiques qui en résultent dépendent de la valeur et de la durée du courant et du chemin emprunté à travers le corps humain. La valeur du courant est fonction de la tension appliquée, de l'impédance de la source et de l'impédance du corps humain. L'impédance du corps humain, elle, dépend de la surface de contact, de la présence d'humidité sur la surface de contact et des tensions et fréquences appliquées. Des courants de l'ordre du demi-milliampère peuvent provoquer une réaction chez des sujets en bonne santé et peuvent provoquer indirectement des blessures du fait d'une réaction involontaire. Des courants plus importants peuvent avoir des effets plus directs tels qu'une brûlure, une tétanisation musculaire provoquant une incapacité à s'éloigner ou une fibrillation ventriculaire.

Les tensions permanentes jusqu'à 42,4 V en valeur de crête ou 60 V en tension continue ne sont généralement pas considérées comme dangereuses en condition sèche si elles sont touchées sur une surface équivalente à celle d'une main. Il convient que les parties nues qui doivent être touchées ou manipulées soient au potentiel de terre ou convenablement isolées.

Certains matériels seront reliés à des réseaux téléphoniques et à d'autres réseaux extérieurs. Quelques RÉSEAUX DE TÉLÉCOMMUNICATIONS fonctionnent avec des signaux comme la voix et la sonnerie superposées à une tension d'alimentation continue permanente. Au total, cela peut dépasser les valeurs données ci-dessus pour des tensions permanentes. Pour le PERSONNEL DE MAINTENANCE, manipuler des parties de tels circuits à mains nues est une pratique courante. Cela ne donne pas lieu à des blessures sérieuses grâce à l'usage de signaux de sonnerie cadencés et parce que la zone de contact avec les conducteurs nus normalement manipulés par le PERSONNEL DE MAINTENANCE est limitée. Cependant, il convient que la surface de contact d'une partie accessible à l'UTILISATEUR, et la probabilité que la partie soit touchée, soient encore plus limitées (par exemple par la forme ou la localisation de cette partie).

Il est normal de fournir deux niveaux de protection pour les UTILISATEURS afin de prévenir un choc électrique. En conséquence, le fonctionnement du matériel dans les conditions normales et après un premier défaut, y compris tout défaut qui en résulte, ne doit pas créer un danger de choc électrique. Toutefois, des mesures de protection supplémentaires, telles qu'une protection par mise à la terre ou une ISOLATION SUPPLÉMENTAIRE, ne sont pas considérées comme remplaçant une ISOLATION PRINCIPALE correctement conçue, ou l'en dispensant.

#### Des dommages peuvent résulter de:

Contacts avec des parties nues normalement sous TENSION DANGEREUSE.

Défaillances de l'isolation entre des parties normalement sous TENSION DANGEREUSE et des parties conductrices accessibles.

#### Exemples de mesures à prendre pour réduire les risques:

Empêcher l'accès de l'UTILISATEUR aux parties portées à une TENSION DANGEREUSE par des couvercles fixés ou fermés, des VERROUILLAGES DE SÉCURITÉ, etc. Décharger les condensateurs accessibles sous TENSION DANGEREUSE.

Fournir une ISOLATION PRINCIPALE et relier à la terre les parties conductrices accessibles et les circuits de façon que l'exposition à la tension pouvant apparaître reste limitée par la protection de surintensité qui déconnectera dans un temps spécifié les parties présentant des défauts à basse impédance; ou alors prévoir entre les parties un écran métallique relié à la terre de protection, ou fournir une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE entre ces parties, de façon qu'une défaillance vers la partie accessible ne soit pas susceptible de se produire.

Contacts avec des circuits reliés aux RÉSEAUX DE TÉLÉCOMMUNICATIONS qui dépassent 42,4 V en valeur de crête ou 60 V en tension continue.

Défaillances de l'isolation accessible à l'UTILISATEUR.

COURANTS DE CONTACT (courant de fuite) entre des parties sous TENSION DANGEREUSE et les parties accessibles ou défaut d'une connexion de terre de protection. Le COURANT DE CONTACT peut comprendre le courant dû aux filtres d'anti-parasitage connectés entre CIRCUITS PRIMAIRES et parties accessibles.

Limiter l'accessibilité et la zone de contact de tels circuits et les séparer des parties non reliées à la terre auxquelles l'accès n'est pas limité.

Il convient que l'isolation qui est accessible à l'OPÉRATEUR présente des résistances mécaniques et électriques adéquates pour réduire le risque de contact avec des TENSIONS DANGEREUSES.

Limiter le COURANT DE CONTACT à une valeur spécifiée, ou prévoir une connexion de terre de protection de grande fiabilité.

### 0.2.2 Dangers liés à l'énergie

Des blessures ou un incendie peuvent résulter d'un court-circuit entre des pôles adjacents de sources d'énergie à courant élevé ou de circuits à haute capacité et peuvent provoquer:

- des brûlures;
- des formations d'arcs;
- des émissions de métal fondu.

Même les circuits dont les tensions sont sûres peuvent être dangereux à ce point de vue.

Exemples de mesures à prendre pour réduire les risques:

- la séparation;
- la mise en place d'écrans;
- la mise en place de VERROUILLAGES DE SÉCURITÉ.

### 0.2.3 Incendie

Des risques d'incendie peuvent résulter de températures excessives soit dans les conditions de fonctionnement normal, soit à cause de surcharges, d'une défaillance d'un composant, d'une rupture de l'isolation ou de connexions desserrées. Il convient qu'un incendie prenant naissance dans un matériel ne s'étende pas au-delà du voisinage immédiat de la source d'incendie et ne provoque pas de dommages à l'entourage du matériel.

Exemples de mesures à prendre pour réduire les risques:

- la fourniture d'une protection contre les surintensités;
- l'utilisation de matériaux de construction ayant des caractéristiques d'inflammabilité appropriées;
- le choix des parties, composants et matériaux inflammables pour éviter une température élevée susceptible de provoquer l'inflammation;
- la limitation de la quantité de matériaux combustibles utilisés;

- la mise en place d'écrans ou la séparation des matériaux combustibles des sources possibles d'inflammation;
- l'utilisation d'ENVELOPPES ou de barrières pour limiter la propagation du feu à l'intérieur du matériel;
- l'utilisation de matériaux appropriés pour les ENVELOPPES de façon à réduire le risque d'extension du feu à l'extérieur du matériel.

#### 0.2.4 Dangers thermiques

Des blessures peuvent résulter de hautes températures dans les conditions de fonctionnement normal, provoquant:

- des brûlures dues au contact avec des parties chaudes accessibles;
- une dégradation de l'isolation et de composants critiques pour la sécurité;
- une inflammation de liquides inflammables.

Exemples de mesures à prendre pour réduire les risques:

- la prise de mesures pour éviter des températures élevées sur les parties accessibles;
- le fait d'éviter des températures supérieures au point d'inflammation des liquides;
- la mise en place de marquages pour avertir les UTILISATEURS aux endroits où l'accès aux parties à haute température est inévitable.

#### 0.2.5 Dangers mécaniques

Des blessures peuvent résulter:

- d'arêtes et de coins tranchants;
- de parties mobiles qui peuvent causer des blessures;
- de l'instabilité du matériel;
- d'une projection de particules lors d'implosions de tubes cathodiques ou d'explosions de lampes à haute pression.

Exemples de mesures à prendre pour réduire les risques:

- l'arrondissement des arêtes et des coins tranchants;
- l'installation de protections;
- la mise en place de VERROUILLAGES DE SÉCURITÉ;
- des mesures assurant une stabilité suffisante aux matériels auto-stables;
- la sélection des tubes cathodiques et des lampes à haute pression résistant respectivement aux implosions et aux explosions;
- la mise en place de marquages pour avertir les UTILISATEURS aux endroits où l'accès est inévitable.



### 0.2.6 Rayonnements

Des blessures touchant les UTILISATEURS et le PERSONNEL DE MAINTENANCE peuvent résulter de différentes formes de rayonnements émis par le matériel. Il peut s'agir de fréquences acoustiques, de fréquences radioélectriques, de rayons infrarouges, ultraviolets et ionisants et de lumières de haute intensité visibles et cohérentes (lasers).

Exemples de mesures à prendre pour réduire les risques:

- la limitation du niveau d'énergie des sources de rayonnements;
- l'écrantage des sources de rayonnements;
- la mise en place de VERROUILLAGES DE SÉCURITÉ;
- la mise en place de marquages pour avertir les UTILISATEURS aux endroits où l'exposition au danger de rayonnement est inévitable.

### 0.2.7 Risques chimiques

Des blessures peuvent résulter du contact avec certaines substances chimiques ou de l'inhalation de leurs vapeurs et de leurs fumées.

Exemples de mesures à prendre pour réduire les risques:

- éviter l'utilisation de matériaux de construction ou de consommables susceptibles de causer des dommages par contact ou inhalation dans les conditions normales et pré-visibles d'utilisation.
- éviter les conditions susceptibles de causer des fuites ou des vaporisations;
- mettre des marquages en place pour avertir les UTILISATEURS des dangers.

## 0.3 Matériaux et composants

Il convient de choisir et de disposer les matériaux et les composants utilisés dans la construction des matériels de façon qu'on puisse espérer qu'ils assureront leur fonction de manière sûre pour la durée de vie prévisible du matériel, sans créer de danger et qu'ils ne contribueront pas de façon significative à la propagation d'un danger d'incendie sérieux. Il convient de choisir les composants de façon à ce qu'ils restent dans la plage des caractéristiques spécifiées par leur fabricant en conditions normales, et qu'ils ne créent pas de danger dans les conditions de défaut.

# MATÉRIELS DE TRAITEMENT DE L'INFORMATION – SÉCURITÉ –

## Partie 1: Exigences générales

### 1 Généralités

#### 1.1 Domaine d'application

##### 1.1.1 Matériels couverts par la présente norme

La présente norme est applicable aux matériels de traitement de l'information alimentés par le réseau ou alimentés par batteries, y compris les matériels de bureau électriques et les matériels associés, de TENSION ASSIGNÉE maximale égale à 600 V.

La présente norme est aussi applicable aux matériels de traitement de l'information suivants:

- conçus pour être utilisés comme équipements terminaux de télécommunications et matériels d'infrastructure de RÉSEAUX DE TÉLÉCOMMUNICATIONS, quelle que soit la source d'alimentation;
- conçus et prévus pour être connectés directement à un SYSTÈME DE DISTRIBUTION PAR CÂBLES, ou pour y être utilisés comme matériels d'infrastructure quelle que soit la source d'alimentation;
- destinés à utiliser le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF comme moyen de transmission de télécommunications (voir Article 6, Note 4 et 7.1, Note 4).

Cette norme est également applicable aux composants et aux sous-ensembles destinés à être intégrés dans des matériels de traitement de l'information. Il n'est pas attendu que de tels composants et sous-ensembles soient en tout point conformes à la norme, sous réserve que le matériel de technologie de l'information complet qui intègre de tels composants et sous-ensembles soit conforme.

NOTE 1 Parmi les exemples d'aspects auxquels des composants et des sous-ensembles non installés peuvent ne pas être conformes, on peut citer le marquage des caractéristiques assignées et l'accès aux parties dangereuses.

NOTE 2 La présente norme peut être appliquée aux parties électroniques du matériel même si le matériel n'entre pas complètement dans le domaine d'application de la norme, par exemple gros systèmes de conditionnement de l'air, systèmes de détection incendie et systèmes d'extinction d'incendie. Des exigences différentes peuvent être nécessaires pour certaines applications.

La présente norme spécifie les exigences prévues pour réduire les risques de feu, de chocs électriques ou de blessures pour l'OPÉRATEUR et le personnel non spécialisé qui peut entrer en contact avec le matériel et, lorsque c'est indiqué spécifiquement, pour le PERSONNEL DE MAINTENANCE.

Le but de la présente norme est de réduire de tels risques concernant le matériel installé, qu'il se compose d'un système d'unités interconnectées ou d'unités indépendantes, sous réserve que le matériel soit installé, utilisé et entretenu de la manière prescrite par le fabricant.

Comme exemples de matériels entrant dans le domaine d'application de la présente norme, on peut citer:

| Type générique de produit                                                 | Exemples spécifiques pour un type générique                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| matériels bancaires                                                       | matériels de traitement de l'argent y compris les distributeurs automatiques de billets (DAB)                                                                                                                                                                                    |
| machines de traitement de texte et de données et leurs matériels associés | matériels de préparation de données, matériels de traitement de données, matériels de stockage de données, ordinateurs personnels, traceurs, imprimantes, matériels de numérisation, matériels de traitement de texte, écrans de visualisation                                   |
| matériels de réseaux de données                                           | passerelles de réseaux, matériels de terminaison de circuits de données, terminaux informatiques, routeurs,                                                                                                                                                                      |
| matériels électriques et électroniques du commerce de détail              | caisses enregistreuses, terminaux points de vente y compris les balances électroniques associées                                                                                                                                                                                 |
| machines électriques et électroniques de bureau                           | calculatrices, photocopieuses, dictaphones, broyeurs de documents, duplicateurs, effaceuses, matériels micrographiques, classeurs à moteur, machines à papier (perforatrices, massicots, trieuses), machines débitrices de papier, taille-crayons, agrafeuses, machines à écrire |
| autres matériels de traitement de l'information                           | matériels de photo impression, terminaux publics d'information, matériels multimédias                                                                                                                                                                                            |
| matériels pour le service postal                                          | machines à traiter le courrier, machines à affranchir                                                                                                                                                                                                                            |
| matériels d'infrastructure de réseau de télécommunications                | matériels de facturation, multiplexeurs, matériels d'alimentation de réseau, matériels de terminaison de réseau, stations de base radio, répéteurs, matériels de transmission, matériels de commutation des télécommunications                                                   |
| terminaux de télécommunications                                           | télécopieurs, systèmes de téléphone à touches, modems, PABX, appareils de messagerie, répondeurs téléphoniques, postes téléphoniques (avec ou sans cordon)                                                                                                                       |

NOTE 3 Les exigences de la CEI 60065 peuvent également être utilisées pour satisfaire aux exigences de sécurité des matériels multimédias. Voir le Guide CEI 112, *Guide pour la sécurité des matériels multimédias*.

Cette liste n'est pas exhaustive et les matériels qui ne sont pas cités ne sont pas nécessairement exclus du Domaine d'application.

Les matériels satisfaisant aux exigences appropriées de la présente norme sont considérés comme pouvant être utilisés avec les matériels de commande de processus, les matériels d'essais automatiques et les systèmes analogues nécessitant des dispositifs pour le traitement de l'information. Toutefois, la présente norme ne comprend pas les exigences concernant l'aptitude à la fonction ou les caractéristiques de fonctionnement du matériel.

### 1.1.2 Exigences complémentaires

Des exigences complémentaires à celles qui sont spécifiées dans la présente norme peuvent être nécessaires pour:

- les matériels destinés à fonctionner dans des environnements spéciaux, (par exemple en présence de températures extrêmes, de poussières, d'humidité ou de vibrations excessives, de gaz inflammables ou d'atmosphères corrosives ou explosives);
- les applications électromédicales avec contact physique avec le patient;
- les matériels destinés à être utilisés sur des véhicules, à bord de navires ou d'aéronefs, dans les pays tropicaux ou à des altitudes supérieures à 2 000 m;
- les matériels destinés à être utilisés dans des endroits où la pénétration de l'eau est possible; pour connaître les lignes directrices et les essais applicables, se reporter à l'Annexe T.

NOTE Il convient également de noter que les autorités de certains pays imposent des exigences supplémentaires.

### 1.1.3 Exclusions

La présente norme ne s'applique pas:

- aux systèmes d'alimentation en énergie qui ne font pas partie intégrante du matériel, tels que groupes convertisseurs, batteries de secours et transformateurs;
- à l'installation électrique des bâtiments;
- aux dispositifs fonctionnant sans puissance électrique.

## 1.2 Définitions

Pour les besoins de la présente Norme internationale, les définitions suivantes s'appliquent. Lorsque les termes "tension" et "courant" sont utilisés, il s'agit, sauf spécification contraire, des valeurs efficaces.

### Définitions par ordre alphabétique

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| CÂBLE D'INTERCONNEXION .....                                     | 1.2.11.6  |
| CÂBLE D'ALIMENTATION FIXÉ À DEMEURE .....                        | 1.2.5.6   |
| CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE .....                    | 1.2.5.5   |
| CARACTÉRISTIQUES ASSIGNÉES DU COURANT DE PROTECTION .....        | 1.2.13.17 |
| CHARGE NORMALE.....                                              | 1.2.2.1   |
| CIRCUIT À LIMITATION DE COURANT.....                             | 1.2.8.9   |
| CIRCUIT À TRÈS BASSE TENSION DE SÉCURITÉ, TBTS.....              | 1.2.8.8   |
| CIRCUIT À TRÈS BASSE TENSION, TBT.....                           | 1.2.8.7   |
| CIRCUIT PRIMAIRE .....                                           | 1.2.8.4   |
| CIRCUIT SECONDAIRE .....                                         | 1.2.8.5   |
| CIRCUIT TRT .....                                                | 1.2.8.11  |
| CIRCUIT TRT-1 .....                                              | 1.2.8.12  |
| CIRCUIT TRT-2 .....                                              | 1.2.8.13  |
| CIRCUIT TRT-3 .....                                              | 1.2.8.14  |
| CLASSIFICATION DES MATÉRIAUX VIS-À-VIS DE L'INFLAMMABILITÉ ..... | 1.2.12.1  |
| CONDUCTEUR DE LIAISON (À LA TERRE) DE PROTECTION.....            | 1.2.13.11 |
| CONDUCTEUR DE MISE À LA TERRE DE PROTECTION .....                | 1.2.13.10 |
| COUPE-CIRCUIT THERMIQUE À RÉENCLÈCHEMENT AUTOMATIQUE .....       | 1.2.11.4  |
| COUPE-CIRCUIT THERMIQUE À RÉENCLÈCHEMENT MANUEL .....            | 1.2.11.5  |
| COUPE-CIRCUIT THERMIQUE .....                                    | 1.2.11.3  |
| COURANT ASSIGNÉ .....                                            | 1.2.1.3   |
| COURANT DANS LE CONDUCTEUR DE PROTECTION .....                   | 1.2.13.13 |
| COURANT DE CONTACT .....                                         | 1.2.13.12 |
| DISTANCE DANS L'AIR.....                                         | 1.2.10.1  |
| DOUBLE ISOLATION.....                                            | 1.2.9.4   |
| DURÉE ASSIGNÉE DE FONCTIONNEMENT .....                           | 1.2.2.2   |
| DURÉE ASSIGNÉE DE REPOS .....                                    | 1.2.2.3   |
| EMPLACEMENT À ACCÈS RESTREINT.....                               | 1.2.7.3   |
| ENVELOPPE CONTRE LE FEU .....                                    | 1.2.6.2   |
| ENVELOPPE ÉLECTRIQUE.....                                        | 1.2.6.4   |
| ENVELOPPE MÉCANIQUE.....                                         | 1.2.6.3   |
| ENVELOPPE .....                                                  | 1.2.6.1   |
| ESSAI DE TYPE.....                                               | 1.2.13.1  |
| ESSAI INDIVIDUEL DE SÉRIE .....                                  | 1.2.13.3  |
| ESSAI SUR PRÉLÈVEMENT.....                                       | 1.2.13.2  |
| ÉTAMINE .....                                                    | 1.2.13.15 |

|                                                        |           |
|--------------------------------------------------------|-----------|
| FRÉQUENCE ASSIGNÉE.....                                | 1.2.1.4   |
| ISOLATION FONCTIONNELLE .....                          | 1.2.9.1   |
| ISOLATION PRINCIPALE.....                              | 1.2.9.2   |
| ISOLATION RENFORCÉE .....                              | 1.2.9.5   |
| ISOLATION SOLIDE.....                                  | 1.2.10.4  |
| ISOLATION SUPPLÉMENTAIRE .....                         | 1.2.9.3   |
| LIGNE DE FUITE.....                                    | 1.2.10.2  |
| LIMITE D'EXPLOSION .....                               | 1.2.12.15 |
| LIMITEUR DE TEMPÉRATURE.....                           | 1.2.11.2  |
| MASSE .....                                            | 1.2.7.5   |
| MATÉRIAU DE CLASSE 5VA .....                           | 1.2.12.5  |
| MATÉRIAU DE CLASSE 5VB.....                            | 1.2.12.6  |
| MATÉRIAU DE CLASSE HB40.....                           | 1.2.12.10 |
| MATÉRIAU DE CLASSE HB75.....                           | 1.2.12.11 |
| MATÉRIAU DE CLASSE V-0 .....                           | 1.2.12.2  |
| MATÉRIAU DE CLASSE V-1 .....                           | 1.2.12.3  |
| MATÉRIAU DE CLASSE V-2 .....                           | 1.2.12.4  |
| MATÉRIAU DE CLASSE VTM-0.....                          | 1.2.12.12 |
| MATÉRIAU DE CLASSE VTM-1.....                          | 1.2.12.13 |
| MATÉRIAU DE CLASSE VTM-2.....                          | 1.2.12.14 |
| MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HBF .....      | 1.2.12.9  |
| MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HF-1 .....     | 1.2.12.7  |
| MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HF-2 .....     | 1.2.12.8  |
| MATÉRIEL À ENCASTRER.....                              | 1.2.3.5   |
| MATÉRIEL DE LA CLASSE I.....                           | 1.2.4.1   |
| MATÉRIEL DE LA CLASSE II.....                          | 1.2.4.2   |
| MATÉRIEL DE LA CLASSE III.....                         | 1.2.4.3   |
| MATÉRIEL DU TYPE A RACCORDÉ PAR PRISE DE COURANT ..... | 1.2.5.1   |
| MATÉRIEL DU TYPE B RACCORDÉ PAR PRISE DE COURANT ..... | 1.2.5.2   |
| MATÉRIEL ENFICHABLE DIRECTEMENT.....                   | 1.2.3.6   |
| MATÉRIEL ENFICHABLE .....                              | 1.2.5.3   |
| MATÉRIEL FIXE .....                                    | 1.2.3.4   |
| MATÉRIEL MOBILE.....                                   | 1.2.3.1   |
| MATÉRIEL PORTATIF (À MAIN).....                        | 1.2.3.2   |
| MATÉRIEL RELIÉ À DEMEURE .....                         | 1.2.5.4   |
| MATÉRIEL TRANSPORTABLE .....                           | 1.2.3.3   |
| MISE À LA TERRE FONCTIONNELLE .....                    | 1.2.13.9  |
| NIVEAU D'ÉNERGIE DANGEREUX .....                       | 1.2.8.10  |
| OPÉRATEUR .....                                        | 1.2.13.7  |
| OUTIL .....                                            | 1.2.7.4   |
| PAPIER MOUSSELINE.....                                 | 1.2.13.16 |
| PARTIE DÉCORATIVE .....                                | 1.2.6.5   |
| PERSONNEL DE MAINTENANCE .....                         | 1.2.13.5  |
| PLAGE ASSIGNÉE DE FRÉQUENCES .....                     | 1.2.1.5   |
| PLAGE ASSIGNÉE DE TENSIONS .....                       | 1.2.1.2   |
| RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF .....      | 1.2.8.1   |
| RÉSEAU D'ALIMENTATION EN COURANT CONTINU.....          | 1.2.8.2   |
| RÉSEAU D'ALIMENTATION.....                             | 1.2.8.3   |
| RÉSEAU DE TÉLÉCOMMUNICATIONS .....                     | 1.2.13.8  |
| SURFACE FRONTIÈRE .....                                | 1.2.10.3  |
| SYSTÈMES DE DISTRIBUTION PAR CÂBLES .....              | 1.2.13.14 |
| TENSION ASSIGNÉE .....                                 | 1.2.1.1   |

|                                                               |          |
|---------------------------------------------------------------|----------|
| TENSION CONTINUE .....                                        | 1.2.13.4 |
| TENSION DANGEREUSE .....                                      | 1.2.8.6  |
| TENSION DE SERVICE CRÊTE .....                                | 1.2.9.8  |
| TENSION DE SERVICE EFFICACE .....                             | 1.2.9.7  |
| TENSION DE SERVICE .....                                      | 1.2.9.6  |
| TENSION DE TENUE PRESCRITE .....                              | 1.2.9.9  |
| TENSION TRANSITOIRE SUR LE RÉSEAU DE TÉLÉCOMMUNICATIONS ..... | 1.2.9.11 |
| TENSION TRANSITOIRE SUR LE RÉSEAU .....                       | 1.2.9.10 |
| THERMOSTAT .....                                              | 1.2.11.1 |
| UTILISATEUR .....                                             | 1.2.13.6 |
| VERROUILLAGE DE SÉCURITÉ .....                                | 1.2.7.6  |
| ZONE D'ACCÈS DE L'OPÉRATEUR .....                             | 1.2.7.1  |
| ZONE D'ACCÈS POUR LA MAINTENANCE .....                        | 1.2.7.2  |

## 1.2.1 Caractéristiques électriques des matériels

### 1.2.1.1

#### TENSION ASSIGNÉE

tension d'alimentation (pour un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF triphasée, tension entre phases) déclarée par le fabricant

### 1.2.1.2

#### PLAGE ASSIGNÉE DE TENSIONS

plage de tensions d'alimentation déclarée par le fabricant, exprimée par les TENSIONS ASSIGNÉES inférieure et supérieure

### 1.2.1.3

#### COURANT ASSIGNÉ

courant absorbé par le matériel, déclaré par le fabricant

### 1.2.1.4

#### FRÉQUENCE ASSIGNÉE

fréquence d'alimentation déclarée par le fabricant

### 1.2.1.5

#### PLAGE ASSIGNÉE DE FRÉQUENCES

plage de fréquences d'alimentation déclarée par le fabricant, exprimée par les FRÉQUENCES ASSIGNÉES inférieure et supérieure

## 1.2.2 Conditions de fonctionnement

### 1.2.2.1

#### CHARGE NORMALE

mode de fonctionnement, utilisé à des fins d'essais, qui représente le plus fidèlement possible les conditions les plus sévères de fonctionnement normal qui peuvent être raisonnablement attendues

Si les conditions d'emploi réelles peuvent être à l'évidence plus sévères que les conditions de charge maximale recommandées par le fabricant, y compris la DURÉE ASSIGNÉE DE FONCTIONNEMENT et la DURÉE ASSIGNÉE DE REPOS, un mode de fonctionnement représentatif de ces conditions plus sévères est utilisé.

NOTE Les conditions de CHARGE NORMALE pour quelques types de matériels sont données à l'Annexe L.

**1.2.2.2****DURÉE ASSIGNÉE DE FONCTIONNEMENT**

durée de fonctionnement maximale assignée au matériel par le fabricant

**1.2.2.3****DURÉE ASSIGNÉE DE REPOS**

durée minimale, assignée par le fabricant, pendant laquelle le matériel est déconnecté ou fonctionne à vide entre des périodes de DURÉE ASSIGNÉE DE FONCTIONNEMENT

**1.2.3 Mobilité des matériels****1.2.3.1****MATÉRIEL MOBILE**

matériel qui est:

- soit de masse inférieure ou égale à 18 kg et non installé à poste fixe;
- soit équipé de roues, roulettes ou autres moyens qui en facilitent le déplacement par l'OPÉRATEUR lorsque cela est nécessaire pour assurer sa fonction

**1.2.3.2****MATÉRIEL PORTATIF (À MAIN)**

MATÉRIEL MOBILE, ou partie d'un matériel, qui est prévu pour être tenu à la main en usage normal

**1.2.3.3****MATÉRIEL TRANSPORTABLE**

MATÉRIEL MOBILE qui est destiné à être transporté de manière habituelle par un UTILISATEUR

NOTE Par exemple ordinateurs personnels portables, ordinateurs bloc-notes à stylet et leurs accessoires portables tels qu'imprimantes et lecteurs de CD-ROM.

**1.2.3.4****MATÉRIEL FIXE**

matériel qui n'est pas un MATÉRIEL MOBILE

**1.2.3.5****MATÉRIEL À ENCASTRER**

matériel destiné à être installé dans un logement prévu à cet effet, par exemple dans une paroi, ou dans des conditions analogues

NOTE En général, le MATÉRIEL À ENCASTRER n'a pas d'ENVELOPPE sur tous les côtés car certains côtés seront protégés après l'installation.

**1.2.3.6****MATÉRIEL ENFICHABLE DIRECTEMENT**

matériel destiné à être utilisé sans câble d'alimentation; la fiche de prise de courant forme une partie intégrante de l'ENVELOPPE du matériel si bien que le poids du matériel est supporté par le socle de prise de courant

**1.2.4 Classes de matériels – Protection contre les chocs électriques**

NOTE Certains matériels de traitement de l'information ne peuvent être identifiés comme conformes à l'une des classes suivantes.

**1.2.4.1****MATÉRIEL DE LA CLASSE I**

matériel dans lequel la protection contre les chocs électriques est obtenue

- au moyen d'une ISOLATION PRINCIPALE et aussi

- en fournissant un moyen de raccorder au CONDUCTEUR DE PROTECTION de l'installation du bâtiment les parties conductrices qui sont autrement capables d'être portées à des TENSIONS DANGEREUSES en cas de défaillance de l'ISOLATION PRINCIPALE

NOTE Le MATÉRIEL DE LA CLASSE I peut avoir des parties à DOUBLE ISOLATION ou à ISOLATION RENFORCÉE.

#### 1.2.4.2

##### APPAREIL DE LA CLASSE II

matériel dans lequel la protection contre les chocs électriques ne repose pas uniquement sur l'ISOLATION PRINCIPALE, mais dans lequel des précautions supplémentaires de sécurité ont été prises, telles qu'une ISOLATION DOUBLE ou une ISOLATION RENFORCÉE, celles-ci ne dépendant pas de la mise à la terre de protection

#### 1.2.4.3

##### APPAREIL DE LA CLASSE III

matériel dans lequel la protection contre les chocs électriques repose sur l'alimentation à partir de CIRCUITS TBTS et dans lequel ne sont pas engendrées de TENSIONS DANGEREUSES

NOTE Pour les MATÉRIELS DE LA CLASSE III, bien qu'il n'y ait pas d'exigences pour la protection contre les chocs électriques, toutes les autres exigences de la norme s'appliquent.

### 1.2.5 Raccordement au réseau

#### 1.2.5.1

##### MATÉRIEL DU TYPE A RACCORDÉ PAR PRISE DE COURANT

matériel destiné à être relié à un RÉSEAU D'ALIMENTATION par une prise de courant et un socle de prise non industriels ou un connecteur non industriel ou les deux

#### 1.2.5.2

##### MATÉRIEL DU TYPE B RACCORDÉ PAR PRISE DE COURANT

matériel destiné à être relié à un RÉSEAU D'ALIMENTATION par une prise de courant et un socle de prise industriels ou par un connecteur, ou par les deux, conformes à la CEI 60309 ou à une norme nationale similaire

#### 1.2.5.3

##### MATÉRIEL ENFICHABLE

matériel qui est soit un MATÉRIEL DE TYPE A RACCORDÉ PAR PRISE DE COURANT soit un MATÉRIEL DE TYPE B RACCORDÉ PAR PRISE DE COURANT

#### 1.2.5.4

##### MATÉRIEL RELIÉ À DEMEURE

matériel destiné à être relié à l'installation électrique des bâtiments au moyen de bornes à vis ou par d'autres moyens fiables

#### 1.2.5.5

##### CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE

câble souple d'alimentation destiné à être relié au matériel par un connecteur approprié

#### 1.2.5.6

##### CÂBLE D'ALIMENTATION FIXÉ À DEMEURE

câble souple d'alimentation fixé ou monté sur l'appareil

Ce câble peut être:

Ordinaire: câble souple qui peut être facilement remplacé sans préparation spéciale du câble ni l'aide d'OUTILS spéciaux; ou

Spécial: câble souple qui est spécialement préparé ou qui ne peut être remplacé sans dommage pour le matériel, ou dont le remplacement nécessite des OUTILS spécialement conçus.



L'expression «spécialement préparé» comprend, par exemple, la présence d'un dispositif de garde faisant partie intégrante du câble, l'utilisation de cosses, la confection d'œilletons, etc., mais non la remise en forme d'un conducteur avant son introduction dans une borne ni le retoronnage des brins d'une âme câblée pour consolider l'extrémité.

## **1.2.6 Enveloppes**

### **1.2.6.1**

#### **ENVELOPPE**

partie du matériel assurant une ou plusieurs des fonctions décrites en 1.2.6.2, 1.2.6.3 ou 1.2.6.4

NOTE Une ENVELOPPE d'un type peut être incluse dans une ENVELOPPE d'un autre type, (par exemple une ENVELOPPE ÉLECTRIQUE dans une ENVELOPPE CONTRE LE FEU ou UNE ENVELOPPE CONTRE LE FEU dans une ENVELOPPE ÉLECTRIQUE). Une ENVELOPPE unique peut avoir plusieurs fonctions (par exemple les fonctions d'ENVELOPPE ÉLECTRIQUE et d'ENVELOPPE CONTRE LE FEU).

### **1.2.6.2**

#### **ENVELOPPE CONTRE LE FEU**

partie d'un matériel destinée à minimiser l'extension du feu ou des flammes provenant de l'intérieur

### **1.2.6.3**

#### **ENVELOPPE MÉCANIQUE**

partie du matériel destinée à réduire le risque de blessures dues à des dangers mécaniques ou autres dangers physiques

### **1.2.6.4**

#### **ENVELOPPE ÉLECTRIQUE**

partie du matériel destinée à limiter l'accès à des parties qui peuvent être à des TENSIONS DANGEREUSES ou à des NIVEAUX D'ÉNERGIE DANGEREUX ou qui sont dans des CIRCUITS TRT

### **1.2.6.5**

#### **PARTIE DÉCORATIVE**

partie du matériel, à l'extérieur de l'ENVELOPPE, qui n'a pas de fonction de sécurité

## **1.2.7 Accès**

### **1.2.7.1**

#### **ZONE D'ACCÈS DE L'OPÉRATEUR**

partie du matériel, à laquelle, dans les conditions normales de fonctionnement, une des conditions suivantes s'applique:

- il est possible d'avoir accès sans l'aide d'un OUTIL;
- le moyen d'accès est délibérément fourni à l'OPÉRATEUR;
- l'OPÉRATEUR a des instructions pour accéder, qu'il ait besoin ou non d'un OUTIL pour le faire

Les termes «accès» et «accessible» sans qualificatif s'appliquent à la ZONE D'ACCÈS DE L'OPÉRATEUR telle qu'elle est définie ci-dessus.

### **1.2.7.2**

#### **ZONE D'ACCÈS POUR LA MAINTENANCE**

partie du matériel, autre qu'une ZONE D'ACCÈS DE L'OPÉRATEUR, à laquelle il est nécessaire que le PERSONNEL DE MAINTENANCE ait accès même lorsque le matériel est sous tension

### 1.2.7.3

#### **EMPLACEMENT À ACCÈS RESTREINT**

emplacement pour le matériel dans lequel les deux alinéas suivants s'appliquent:

- l'accès n'est possible qu'au PERSONNEL DE MAINTENANCE et aux UTILISATEURS qui ont reçu des instructions au sujet des raisons pour lesquelles il y a des restrictions d'accès à l'emplacement et au sujet des précautions qui doivent être prises; et
- l'accès nécessite l'usage d'un OUTIL ou d'un verrou avec une clé, ou de tout autre moyen de sécurité, et il est contrôlé par l'autorité responsable de l'emplacement

NOTE Les exigences pour les matériels destinés à être installés dans des EMPLACEMENTS À ACCÈS RESTREINT sont les mêmes que pour les ZONES D'ACCÈS DE L'OPÉRATEUR à l'exception de ce qui est indiqué en 1.7.14, 2.1.3, 4.5.4, 4.6.2 et 5.1.7.

### 1.2.7.4

#### **OUTIL**

tournevis ou tout autre objet qui peut être utilisé pour manœuvrer une vis, un loquet ou des moyens de fixation similaires

### 1.2.7.5

#### **MASSE**

toutes les parties conductrices accessibles, les axes des poignées, boutons, manettes et organes analogues, et une feuille métallique en contact avec toutes les surfaces accessibles en matière isolante

### 1.2.7.6

#### **VERROUILLAGE DE SÉCURITÉ**

moyen d'empêcher l'accès à une partie dangereuse jusqu'à suppression du danger, ou de supprimer automatiquement la condition dangereuse en cas d'accès

## **1.2.8 Circuits et caractéristiques des circuits**

### 1.2.8.1

#### **RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF**

système extérieur de distribution de l'alimentation en courant alternatif alimentant les matériels en courant alternatif

Ces sources de courant comprennent les alimentations publiques ou privées et, sauf indication contraire dans la norme (par exemple 1.4.5), des sources équivalentes telles que des motogénérateurs et des alimentations sans interruption.

NOTE Voir l'Annexe V pour des exemples typiques de systèmes de distribution de l'alimentation en courant alternatif.

### 1.2.8.2

#### **RÉSEAU D'ALIMENTATION EN COURANT CONTINU**

système de distribution de l'alimentation en courant continu extérieur au matériel, équipé ou non de batteries, fournissant l'alimentation en courant continu au matériel, à l'exclusion de ce qui suit:

- des sources à courant continu fournissant l'énergie par le câblage du RÉSEAU DE TÉLÉCOMMUNICATIONS à un matériel distant;
- des sources à puissance limitée (voir 2.5) dont la tension en circuit ouvert est inférieure ou égale à 42,4 V en courant continu;
- des sources à courant continu dont la tension en circuit ouvert est supérieure à 42,4 V et inférieure ou égale à 60 V et dont la puissance disponible est inférieure à 240 VA

Les circuits connectés à un RÉSEAU D'ALIMENTATION EN COURANT CONTINU sont considérés comme des CIRCUITS SECONDAIRES au sens de cette norme (par exemple un CIRCUIT TBTS, un CIRCUIT TRT ou un CIRCUIT SECONDAIRE À TENSION DANGEREUSE).

NOTE Voir la Recommandation UIT-T K.27 pour les configurations de liaisons équipotentielles et de mise à la terre dans les bâtiments de télécommunications.

### 1.2.8.3

#### RÉSEAU D'ALIMENTATION

système de distribution de l'alimentation qui est soit un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF soit un RÉSEAU D'ALIMENTATION EN COURANT CONTINU

### 1.2.8.4

#### CIRCUIT PRIMAIRE

circuit qui est directement connecté au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF

Cela comprend, par exemple, les moyens de connexion au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, les enroulements primaires des transformateurs, les moteurs et les autres dispositifs absorbant de l'énergie.

NOTE Les parties conductrices d'un CÂBLE D'INTERCONNEXION peuvent faire partie d'un CIRCUIT PRIMAIRE comme indiqué en 1.2.11.6.

### 1.2.8.5

#### CIRCUIT SECONDAIRE

circuit qui n'est pas relié directement à un CIRCUIT PRIMAIRE et qui est alimenté par l'intermédiaire d'un transformateur, d'un convertisseur ou d'un dispositif d'isolement équivalent ou par l'intermédiaire d'une batterie

NOTE Les parties conductrices d'un CÂBLE D'INTERCONNEXION peuvent faire partie d'un CIRCUIT SECONDAIRE comme indiqué en 1.2.11.6.

### 1.2.8.6

#### TENSION DANGEREUSE

tension supérieure à 42,4 V en valeur de crête ou à 60 V en tension continue, présente dans un circuit non conforme aux exigences relatives soit à un CIRCUIT À LIMITATION DE COURANT, soit à un CIRCUIT TRT

### 1.2.8.7

#### CIRCUIT TBT

CIRCUIT SECONDAIRE avec des tensions entre deux conducteurs quelconques du circuit, et entre un tel conducteur et la terre (voir 1.4.9), ne dépassant pas 42,4 V en valeur de crête ou 60 V en tension continue, dans les conditions normales de fonctionnement, qui est séparé des TENSIONS DANGEREUSES par une ISOLATION PRINCIPALE, et qui n'est ni conforme à toutes les exigences pour un CIRCUIT TBTS ni conforme à toutes les exigences pour les CIRCUITS À LIMITATION DE COURANT

### 1.2.8.8

#### CIRCUIT TBTS

CIRCUIT SECONDAIRE conçu et protégé de telle manière que, dans des conditions normales et dans des conditions de premier défaut, les tensions ne soient pas supérieures à une valeur sûre

NOTE 1 Les valeurs limites des tensions en fonctionnement normal et dans des conditions de premier défaut (voir 1.4.14) sont spécifiées en 2.2. Voir aussi le Tableau 1A.

NOTE 2 Cette définition du CIRCUIT TBTS diffère du terme «système TBTS» tel qu'il est utilisé dans la CEI 61140.

### 1.2.8.9

#### CIRCUIT À LIMITATION DE COURANT

circuit conçu et protégé de façon que, en fonctionnement normal et dans des conditions de premier défaut, le courant que peut débiter la source ne soit pas dangereux

NOTE Les valeurs limites des courants en fonctionnement normal et dans des conditions de premier défaut (voir 1.4.14) sont spécifiées en 2.4.

#### 1.2.8.10

##### NIVEAU D'ÉNERGIE DANGEREUX

niveau de puissance disponible supérieur ou égal à 240 VA pour une durée supérieure ou égale à 60 s, ou niveau de l'énergie emmagasinée supérieur ou égal à 20 J (par exemple à partir d'un ou plusieurs condensateurs), à un potentiel supérieur ou égal à 2 V

#### 1.2.8.11

##### CIRCUIT TRT

circuit qui est dans le matériel et dont la surface de contact accessible est limitée et qui est conçu et protégé de telle manière que, dans les conditions normales de fonctionnement et dans les conditions de premier défaut (voir 1.4.14), les tensions ne dépassent pas les valeurs limites spécifiées

Un CIRCUIT TRT est considéré comme étant un CIRCUIT SECONDAIRE au sens de la présente norme.

NOTE 1 Les valeurs limites spécifiées des tensions dans les conditions normales de fonctionnement et dans les conditions de premier défaut (voir 1.4.14) sont données en 2.3.1. Les exigences concernant l'accessibilité aux CIRCUITS TRT sont données en 2.1.1.1.

NOTE 2 Les parties conductrices d'un CÂBLE D'INTERCONNEXION peuvent faire partie d'un CIRCUIT TRT comme indiqué en 1.2.11.6.

Les CIRCUITS TRT sont classés comme CIRCUITS TRT-1, CIRCUITS TRT-2 et CIRCUITS TRT-3 comme défini en 1.2.8.12, 1.2.8.13 et 1.2.8.14.

NOTE 3 Les relations de tension entre les CIRCUITS TBTS et TRT sont indiquées dans le Tableau 1A.

**Tableau 1A – Plages de tensions des circuits TBTS et TRT**

|                                                                  |                                                                        | Tensions normales de fonctionnement         |                                                                                         |
|------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------------------|-----------------------------------------------------------------------------------------|
| Surtensions venant des RÉSEAUX DE TÉLÉCOMMUNICATIONS possibles ? | Surtensions venant des SYSTÈMES DE DISTRIBUTION PAR CÂBLES possibles ? | A l'intérieur des limites des CIRCUITS TBTS | Dépassant les limites des CIRCUITS TBTS mais à l'intérieur des limites des CIRCUITS TRT |
| Oui                                                              | Oui                                                                    | CIRCUIT TRT-1                               | CIRCUIT TRT-3                                                                           |
| Non                                                              | Non applicable                                                         | CIRCUIT TBTS                                | CIRCUIT TRT-2                                                                           |

#### 1.2.8.12

##### CIRCUIT TRT-1

##### CIRCUIT TRT

- dont les tensions normales de fonctionnement ne dépassent pas les limites pour un CIRCUIT TBTS dans les conditions normales de fonctionnement et
- sur lequel des surtensions venant des réseaux de télécommunications et des systèmes de distribution par câbles sont possibles

#### 1.2.8.13

##### CIRCUIT TRT-2

##### CIRCUIT TRT

- dont les tensions normales de fonctionnement dépassent les limites pour un CIRCUIT TBTS dans les conditions normales de fonctionnement et
- qui n'est pas sujet à des surtensions venant des RÉSEAUX DE TÉLÉCOMMUNICATIONS

#### 1.2.8.14

##### CIRCUIT TRT-3

##### CIRCUIT TRT

- dont les tensions normales de fonctionnement dépassent les limites pour un CIRCUIT TBTS dans les conditions normales de fonctionnement et

- sur lequel des surtensions venant des réseaux de télécommunications et des systèmes de distribution par câbles sont possibles

## **1.2.9 Isolation**

### **1.2.9.1**

#### **ISOLATION FONCTIONNELLE**

isolation nécessaire seulement pour le fonctionnement correct du matériel

NOTE L'ISOLATION FONCTIONNELLE, par définition, ne protège pas contre les chocs électriques. Elle peut cependant minimiser l'exposition à l'inflammation ou au feu.

### **1.2.9.2**

#### **ISOLATION PRINCIPALE**

isolation pour assurer la protection principale contre les chocs électriques

### **1.2.9.3**

#### **ISOLATION SUPPLÉMENTAIRE**

isolation indépendante appliquée en plus de l'ISOLATION PRINCIPALE afin de réduire le risque de choc électrique en cas de défaut survenant dans l'ISOLATION PRINCIPALE

### **1.2.9.4**

#### **DOUBLE ISOLATION**

isolation comprenant à la fois une ISOLATION PRINCIPALE et une ISOLATION SUPPLÉMENTAIRE

### **1.2.9.5**

#### **ISOLATION RENFORCÉE**

système d'isolation unique qui procure, dans les conditions spécifiées dans la présente norme, un degré de protection contre les chocs électriques équivalant à une DOUBLE ISOLATION

NOTE L'expression «système d'isolation» n'implique pas que l'isolation doit être homogène. Elle peut comprendre plusieurs couches qui ne peuvent pas être essayées séparément comme une ISOLATION PRINCIPALE et une ISOLATION SUPPLÉMENTAIRE.

### **1.2.9.6**

#### **TENSION DE SERVICE**

tension maximale à laquelle sont, ou peuvent être soumis l'isolation ou le composant considérés lorsque le matériel est alimenté dans les conditions d'utilisation normale

Les surtensions dont l'origine est à l'extérieur du matériel ne sont pas prises en compte.

### **1.2.9.7**

#### **TENSION DE SERVICE EFFICACE**

valeur efficace de la TENSION DE SERVICE, y compris toute composante continue

NOTE Pour la détermination de la TENSION DE SERVICE EFFICACE, ce sont les règles de 2.10.2.2 qui s'appliquent et, le cas échéant, celles de 1.4.8.

### **1.2.9.8**

#### **TENSION DE SERVICE CRÊTE**

valeur de crête de la tension de service, y compris toute composante continue et toute impulsion de crête répétitive générée dans le matériel

Lorsque l'ondulation de crête à crête dépasse 10 % de la valeur moyenne, les exigences relatives aux tensions de crête et alternatives sont applicables.

NOTE Pour la détermination des TENSIONS DE SERVICE DE CRÊTE, ce sont les règles de 2.10.2.3 qui s'appliquent et, le cas échéant, celles de 1.4.8.

### 1.2.9.9

#### TENSION DE TENUE PRESCRITE

tension de crête que l'isolation considérée doit supporter

### 1.2.9.10

#### TENSION TRANSITOIRE SUR LE RÉSEAU

valeur la plus élevée de la tension de crête prévisible à l'entrée du matériel, provenant de transitoires externes sur le RÉSEAU D'ALIMENTATION

### 1.2.9.11

#### TENSION TRANSITOIRE SUR LE RÉSEAU DE TÉLÉCOMMUNICATIONS

valeur la plus élevée de la tension de crête prévisible à l'entrée RÉSEAU DE TÉLÉCOMMUNICATIONS du matériel, provenant de transitoires externes sur le réseau

NOTE L'effet des transitoires provenant des SYSTÈMES DE DISTRIBUTION PAR CÂBLES n'est pas pris en compte.

## 1.2.10 Propriétés de l'isolation

### 1.2.10.1

#### DISTANCE DANS L'AIR

plus petite distance entre deux parties conductrices, ou entre une partie conductrice et la SURFACE FRONTIÈRE du matériel, mesurée dans l'air

### 1.2.10.2

#### LIGNE DE FUITE

plus petite distance entre deux parties conductrices, ou entre une partie conductrice et la SURFACE FRONTIÈRE du matériel, mesurée le long de la surface de l'isolant

### 1.2.10.3

#### SURFACE FRONTIÈRE

surface externe de l'ENVELOPPE ÉLECTRIQUE considérée comme si une feuille de métal était appliquée sur les surfaces accessibles en matière isolante

### 1.2.10.4

#### ISOLATION SOLIDE

matériau qui assure une isolation électrique entre deux surfaces opposées, pas le long d'une surface extérieure

NOTE Les propriétés requises pour l'ISOLATION SOLIDE sont spécifiées soit comme

- la distance minimale réelle à travers l'isolation (voir 2.10.5.2), soit par
- d'autres exigences et essais dans la présente norme à la place d'une distance minimale.

## 1.2.11 Composants

### 1.2.11.1

#### THERMOSTAT

dispositif de commande thermosensible à action cyclique destiné à maintenir une température entre deux valeurs particulières dans les conditions normales de fonctionnement et qui peut être prévu pour être réglé par l'OPÉRATEUR

### 1.2.11.2

#### LIMITEUR DE TEMPÉRATURE

dispositif de commande thermosensible destiné à maintenir une température en dessous ou au-dessus d'une valeur particulière dans les conditions de fonctionnement normal et qui peut être prévu pour être réglé par l'OPÉRATEUR

NOTE Un LIMITEUR DE TEMPÉRATURE peut être à réenclenchement automatique ou à réenclenchement manuel.

**1.2.11.3****COUPE-CIRCUIT THERMIQUE**

dispositif de commande thermosensible destiné à fonctionner dans les conditions de fonctionnement anormal et dont le réglage ne peut pas être effectué par l'OPÉRATEUR

NOTE Un COUPE-CIRCUIT THERMIQUE peut être à réenclenchement automatique ou à réenclenchement manuel.

**1.2.11.4****COUPE-CIRCUIT THERMIQUE À RÉENCLENCHEMENT AUTOMATIQUE**

COUPE-CIRCUIT THERMIQUE qui rétablit automatiquement le courant après que la partie correspondante du matériel s'est suffisamment refroidie

**1.2.11.5****COUPE-CIRCUIT THERMIQUE À RÉENCLENCHEMENT MANUEL**

COUPE-CIRCUIT THERMIQUE qui nécessite un réenclenchement manuel, ou le remplacement d'un élément, pour le rétablissement du courant

**1.2.11.6****CÂBLE D'INTERCONNEXION**

câble utilisé pour

- connecter électriquement un accessoire à une unité du matériel de traitement de l'information,
- interconnecter des unités à l'intérieur d'un système, ou
- connecter une unité à un RÉSEAU DE TÉLÉCOMMUNICATIONS ou à un SYSTÈME DE DISTRIBUTION PAR CÂBLES

Un tel câble peut transporter n'importe quel type de circuit d'une unité à une autre.

NOTE Un cordon d'alimentation utilisé pour la connexion au réseau d'alimentation n'est pas un CÂBLE D'INTERCONNEXION.

**1.2.12 Inflammabilité****1.2.12.1****CLASSIFICATION DES MATÉRIAUX VIS-À-VIS DE L'INFLAMMABILITÉ**

moyens de reconnaître le comportement des matériaux vis-à-vis de la combustion et leur capacité à s'éteindre s'ils sont enflammés

Les matériaux sont classés comme indiqué de 1.2.12.2 à 1.2.12.14, lorsqu'ils sont essayés conformément aux normes suivantes: CEI 60695-11-10, CEI 60695-11-20, ISO 9772 ou ISO 9773

NOTE 1 Lors de l'application des exigences de la présente norme, les MATÉRIAUX PLASTIQUES CELLULAIRES de CLASSE HF-1 sont considérés comme meilleurs que ceux de CLASSE HF-2 et les MATÉRIAUX de CLASSE HF-2 meilleurs que ceux de CLASSE HBF.

NOTE 2 De même, le MATÉRIAU de CLASSE 5VA est considéré comme meilleur que celui de CLASSE 5VB, les MATÉRIAUX de CLASSE 5VB meilleurs que ceux de CLASSE V-0, les MATÉRIAUX de CLASSE V0 meilleurs que ceux de CLASSE V-1, les MATÉRIAUX de CLASSE V-1 meilleurs que ceux de CLASSE V-2, LES MATÉRIAUX de CLASSE V-2 meilleurs que ceux de classe HB40 et LES MATÉRIAUX de CLASSE HB40 meilleurs que ceux de classe HB75.

NOTE 3 De même, les MATÉRIAUX de CLASSE VTM-0 sont considérés comme meilleurs que ceux de CLASSE VTM-1 et ceux de CLASSE VTM-1 meilleurs que ceux de CLASSE VTM-2.

NOTE 4 Les matériaux de CLASSE D'INFLAMMABILITÉ VTM-0, VTM-1 et VTM-2 sont considérés comme équivalents aux matériaux de CLASSE D'INFLAMMABILITÉ V-0, V-1 et V-2 respectivement, mais uniquement pour leurs propriétés d'inflammabilité. Leurs propriétés électriques et mécaniques ne sont pas nécessairement équivalentes.

NOTE 5 Certaines classes d'inflammabilité ont remplacé les classes utilisées dans les éditions précédentes de cette norme. Les équivalences entre les anciennes classes et les nouvelles classes sont données dans le Tableau 1B.

**Tableau 1B – Equivalence entre classes d'inflammabilité**

| Ancienne classe | Nouvelle classe     | Equivalence                                                                                                                                                                                                                                   |
|-----------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| –               | 5VA<br>(1.2.12.5)   | La classe 5VA n'est pas demandée dans cette norme.                                                                                                                                                                                            |
| 5V              | 5VB<br>(1.2.12.6)   | Les matériaux qui satisfont aux essais pour la classe 5V de l'Article A.9 des éditions précédentes de cette norme sont équivalents à ceux de la classe 5VB ou sont meilleurs.                                                                 |
| HB              | HB40<br>(1.2.12.10) | Les échantillons des matériaux d'une épaisseur de 3 mm qui satisfont aux essais de l'Article A.8 des éditions précédentes de cette norme (propagation maximale de la flamme de 40 mm/min, pendant l'essai) sont équivalents à la classe HB40. |
|                 | HB75<br>(1.2.12.11) | Les échantillons des matériaux d'une épaisseur de 3 mm qui satisfont aux essais de l'Article A.8 des éditions précédentes de cette norme (propagation maximale de la flamme de 75 mm/min, pendant l'essai) sont équivalents à la classe HB75. |

### 1.2.12.2

#### MATÉRIAU DE CLASSE V-0

matériau essayé dans la plus faible épaisseur significative utilisée et classé V-0 selon la CEI 60695-11-10

### 1.2.12.3

#### MATÉRIAU DE CLASSE V-1

matériau essayé dans la plus faible épaisseur significative utilisée et classé V-1 selon la CEI 60695-11-10

### 1.2.12.4

#### MATÉRIAU DE CLASSE V-2

matériau essayé dans la plus faible épaisseur significative utilisée et classé V-2 selon la CEI 60695-11-10

### 1.2.12.5

#### MATÉRIAU DE CLASSE 5VA

matériau essayé dans la plus faible épaisseur significative utilisée et classé 5VA selon la CEI 60695-11-20

### 1.2.12.6

#### MATÉRIAU DE CLASSE 5VB

matériau essayé dans la plus faible épaisseur significative utilisée et classé 5VB selon la CEI 60695-11-20

### 1.2.12.7

#### MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HF-1

matériau essayé dans la plus faible épaisseur significative utilisée et classé HF-1 selon l'ISO 9772

### 1.2.12.8

#### MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HF-2

matériau essayé dans la plus faible épaisseur significative utilisée et classé HF-2 selon l'ISO 9772

### 1.2.12.9

#### MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HBF

matériau essayé dans la plus faible épaisseur significative utilisée et classé HBF selon l'ISO 9772



**1.2.12.10****MATÉRIAU DE CLASSE HB40**

matériau essayé dans la plus faible épaisseur significative utilisée et classé HB40 selon la CEI 60695-11-10

**1.2.12.11****MATÉRIAU DE CLASSE HB75**

matériau essayé dans la plus faible épaisseur significative utilisée et classé HB75 selon la CEI 60695-11-10

**1.2.12.12****MATÉRIAU DE CLASSE VTM-0**

matériau essayé dans la plus faible épaisseur significative utilisée et classé VTM-0 selon l'ISO 9773

**1.2.12.13****MATÉRIAU DE CLASSE VTM-1**

matériau essayé dans la plus faible épaisseur significative utilisée et classé VTM-1 selon l'ISO 9773

**1.2.12.14****MATÉRIAU DE CLASSE VTM-2**

matériau essayé dans la plus faible épaisseur significative utilisée et classé VTM-2 selon l'ISO 9773

**1.2.12.15****LIMITE D'EXPLOSION**

plus faible concentration d'une matière combustible dans un mélange contenant: des gaz, des vapeurs, des brouillards ou des poussières, dans lequel une flamme est capable de se propager après enlèvement de la source d'inflammation

**1.2.13 Divers****1.2.13.1****ESSAI DE TYPE**

essai effectué sur un échantillon représentatif du matériel pour déterminer si ce matériel, tel qu'il est conçu et fabriqué, peut satisfaire aux exigences de la présente norme

**1.2.13.2****ESSAI SUR PRÉLÈVEMENT**

essai effectué sur un certain nombre d'échantillons prélevés de manière aléatoire dans un lot

**1.2.13.3****ESSAI INDIVIDUEL DE SÉRIE**

essai auquel chaque échantillon est soumis en cours ou en fin de fabrication pour s'assurer qu'il satisfait à certains critères

**1.2.13.4****TENSION CONTINUE**

valeur moyenne d'une tension ayant une ondulation de crête à crête ne dépassant pas 10 % de la valeur moyenne

NOTE Lorsque l'ondulation de crête à crête dépasse 10 % de la valeur moyenne, les exigences relatives à la tension de crête sont applicables.

**1.2.13.5****PERSONNEL DE MAINTENANCE**

personne ayant une formation technique appropriée et l'expérience nécessaire pour être consciente des dangers auxquels elle peut être exposée en effectuant une tâche et des mesures à prendre pour minimiser les risques pour elle-même ou d'autres personnes

**1.2.13.6****UTILISATEUR**

toute personne autre que le PERSONNEL DE MAINTENANCE

Le terme UTILISATEUR dans la présente norme est le même que le terme OPÉRATEUR et les deux termes peuvent s'utiliser indifféremment.

**1.2.13.7****OPÉRATEUR**

voir UTILISATEUR (1.2.13.6).

**1.2.13.8****RÉSEAU DE TÉLÉCOMMUNICATIONS**

moyen de transmission à terminaison métallique destiné à la communication entre matériels qui peuvent être placés dans des bâtiments différents, à l'exclusion:

- des réseaux de production, transport et distribution de l'énergie électrique utilisés comme vecteur de transmission pour les télécommunications;
- des systèmes de distribution par câbles;
- des CIRCUITS TBTS connectant les unités d'un matériel de traitement de l'information

NOTE 1 L'expression RÉSEAU DE TÉLÉCOMMUNICATIONS est définie en termes de sa fonctionnalité, non de ses caractéristiques électriques. Un RÉSEAU DE TÉLÉCOMMUNICATIONS n'est pas lui-même défini comme étant soit un CIRCUIT TBTS soit un CIRCUIT TRT. Seuls les circuits à l'intérieur du matériel sont classés ainsi.

NOTE 2 Un RÉSEAU DE TÉLÉCOMMUNICATIONS peut être:

- public ou privé;
- soumis à des surtensions transitoires dues à des décharges atmosphériques et à des défauts dans les systèmes de distribution de l'énergie;
- soumis à des tensions longitudinales (mode commun) induites par les lignes d'énergie ou les lignes de traction électrique dans le voisinage.

NOTE 3 Exemples de RÉSEAUX DE TÉLÉCOMMUNICATIONS:

- un réseau téléphonique public commuté;
- un réseau de données public;
- un Réseau Numérique à Intégration de Services (RNIS);
- un réseau privé avec des caractéristiques d'interface électriques similaires à celles des réseaux ci-dessus.

**1.2.13.9****MISE À LA TERRE FONCTIONNELLE**

mise à la terre d'un point d'un matériel ou d'un système, nécessaire dans un autre but que la sécurité

**1.2.13.10****CONDUCTEUR DE MISE À LA TERRE DE PROTECTION**

conducteur dans l'installation de câblage du bâtiment, ou dans le câble d'alimentation électrique, reliant la borne principale de mise à la terre de protection du matériel à un point de terre du bâtiment

NOTE Dans certains pays, le terme «conducteur de terre» est utilisé au lieu de «CONDUCTEUR DE MISE À LA TERRE DE PROTECTION».

**1.2.13.11****CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION**

conducteur dans le matériel, ou une combinaison de parties conductrices du matériel, reliant la borne principale de mise à la terre de protection à une partie du matériel qu'il est nécessaire de mettre à la terre pour des raisons de sécurité

**1.2.13.12****COURANT DE CONTACT**

courant électrique traversant le corps humain lorsqu'il est en contact avec une ou plusieurs parties accessibles

NOTE Le COURANT DE CONTACT était précédemment inclus dans le terme «courant de fuite».

**1.2.13.13****COURANT DANS LE CONDUCTEUR DE PROTECTION**

courant circulant dans le CONDUCTEUR DE MISE À LA TERRE DE PROTECTION dans les conditions d'utilisation normale

NOTE Le COURANT DANS LE CONDUCTEUR DE PROTECTION était précédemment inclus dans le terme «courant de fuite».

**1.2.13.14****SYSTÈMES DE DISTRIBUTION PAR CÂBLES**

moyen de transmission à terminaison métallique utilisant du câble coaxial principalement destiné à la transmission des signaux vidéo et/ou audio entre des bâtiments séparés ou entre une antenne extérieure et des bâtiments, à l'exclusion:

- des systèmes d'alimentation, de transmission et de distribution du réseau électrique, s'ils sont utilisés comme vecteur de transmission de communication;
- des RÉSEAUX DE TÉLÉCOMMUNICATIONS;
- des CIRCUITS TBTS connectant les unités d'un matériel de traitement de l'information

NOTE 1 Exemples de SYSTÈMES DE DISTRIBUTION PAR CÂBLES:

- des réseaux câblés locaux, par exemple des systèmes de réseaux communautaires de télévision et des systèmes d'antennes collectives fournissant une distribution de signaux audio et vidéo;
- des antennes extérieures, y compris les paraboles satellites, les antennes de réception et d'autres dispositifs similaires.

NOTE 2 Les SYSTÈMES DE DISTRIBUTION PAR CÂBLES peuvent être soumis à des transitoires plus importants que ceux des RÉSEAUX DE TÉLÉCOMMUNICATIONS (voir 7.4.1)

**1.2.13.15****ÉTAMINE**

tissu de coton blanchi d'environ 40 g/m<sup>2</sup>

**1.2.13.16****PAPIER MOUSSELINE**

papier d'emballage mince, souple et résistant de grammage compris généralement entre 12 g/m<sup>2</sup> et 30 g/m<sup>2</sup>, essentiellement destiné à l'emballage, à la protection ou à la présentation des objets fragiles et des cadeaux

[ISO 4046-4:2002, définition 4.215]

**1.2.13.17****CARACTÉRISTIQUES ASSIGNÉES DU COURANT DE PROTECTION**

caractéristiques assignées d'un dispositif de protection contre les intensités qui est en place ou réputé être en place pour protéger un circuit

NOTE Les règles de détermination de la valeur des CARACTÉRISTIQUES ASSIGNÉES DU COURANT DE PROTECTION sont données en 2.6.3.3.

### 1.3 Exigences générales

#### 1.3.1 Application des exigences

Les exigences détaillées dans la présente norme ne doivent s'appliquer que si la sécurité est impliquée.

Afin d'établir si la sécurité est impliquée ou non, les circuits et la construction doivent être soigneusement analysés, afin de tenir compte des conséquences des défaillances possibles.

#### 1.3.2 Conception et construction du matériel

Le matériel doit être conçu et construit de façon que, dans toutes les conditions d'utilisation normale ou dans des conditions de premier défaut (voir 1.4.14) ou d'emploi anormal vraisemblable, la protection soit assurée pour réduire les risques de blessures aux personnes provoqués par un choc électrique ou par tout autre danger, et contre l'extension de feux prenant naissance à l'intérieur du matériel.

*La vérification est effectuée par examen et par les essais applicables.*

#### 1.3.3 Tension d'alimentation

Le matériel doit être conçu pour être sûr à toutes les tensions auxquelles il est destiné à être relié.

*La vérification est effectuée par examen et par les essais applicables de la présente norme en utilisant une tension d'alimentation telle que spécifiée dans le paragraphe correspondant. Si le paragraphe ne spécifie pas de tension d'alimentation (explicitement ou par référence à 1.4.5), alors la valeur de la TENSION ASSIGNÉE ou toute valeur dans la PLAGE ASSIGNÉE DE TENSIONS doit être utilisée.*

#### 1.3.4 Constructions non spécifiquement couvertes

Lorsque le matériel implique des technologies et des matériaux ou des méthodes de construction qui ne sont pas spécifiquement couverts dans cette norme, le matériel doit procurer un niveau de sécurité au moins égal au niveau généralement garanti par la présente norme et les principes de sécurité qu'elle contient.

NOTE Il convient de porter rapidement à l'attention du comité compétent le besoin en exigences supplémentaires détaillées pour faire face à une situation nouvelle.

#### 1.3.5 Matériaux équivalents

Lorsque la norme spécifie une isolation d'un niveau particulier, l'utilisation d'une isolation d'un niveau supérieur est permise. De la même façon, lorsque la norme prescrit un matériau d'une CLASSE D'INFLAMMABILITÉ particulière, l'utilisation d'une classe ayant de meilleures performances est permise.

#### 1.3.6 Orientation pendant le transport et l'utilisation

Lorsqu'il est clair que l'orientation du matériel est susceptible d'avoir une influence significative sur l'application des exigences ou sur les résultats des essais, toutes les orientations en fonctionnement autorisées dans les instructions d'installation ou le mode d'emploi doivent être prises en compte. Pour un MATÉRIEL TRANSPORTABLE, toutes les orientations pour le transport et l'utilisation doivent être prises en compte.

NOTE Le texte ci-dessus est applicable pour 4.1, 4.2, 4.3.8, 4.5, 4.6 et 5.3.

### 1.3.7 Choix des critères

Quand la norme autorise un choix entre différents critères de conformité, ou entre différentes méthodes ou conditions d'essai, le choix est spécifié par le fabricant.

### 1.3.8 Exemples cités dans la norme

Quand des exemples de matériels, pièces détachées, méthodes de construction, techniques de conception et défauts sont donnés dans la norme, et qu'ils sont précédés de «par exemple» ou «tel que», d'autres exemples de situations et de solutions ne sont pas exclus.

### 1.3.9 Liquides conducteurs

Pour les exigences électriques de la présente norme, les liquides conducteurs doivent être traités comme des parties conductrices.

## 1.4 Conditions générales d'essai

### 1.4.1 Application des essais

Les essais détaillés dans la présente norme ne doivent s'appliquer que si la sécurité est impliquée.

Si la conception et la construction du matériel montrent de façon évidente qu'un essai particulier n'est pas applicable, cet essai n'est pas effectué.

Sauf indication contraire, il n'est pas nécessaire que le matériel soit en état de fonctionner à l'issue des essais.

### 1.4.2 Essais de type

Sauf indication contraire, les essais spécifiés dans la présente norme sont des ESSAIS DE TYPE.

### 1.4.3 Échantillons d'essai

Sauf indication contraire, l'échantillon ou les échantillons à l'essai doivent être représentatifs du matériel que l'UTILISATEUR recevrait ou doivent être le véritable matériel prêt à être expédié à l'UTILISATEUR.

Comme variante à l'exécution des essais sur le matériel complet, des essais peuvent être effectués séparément sur des circuits, des composants ou des sous-ensembles à l'extérieur du matériel, à condition qu'un examen du matériel et des dispositions des circuits montre que le résultat de tels essais sera représentatif des résultats de l'essai du matériel assemblé. Si l'un quelconque de ces essais montre qu'il y a un risque de non-conformité dans le matériel complet, l'essai doit être répété dans le matériel.

Si un essai spécifié dans la présente norme risque d'être destructif, il est permis d'utiliser un modèle pour représenter la condition à évaluer.

NOTE 1 Il convient d'effectuer les essais dans l'ordre suivant:

- présélection des composants et des matériaux;
- essais au banc des composants et des sous-ensembles;
- essais pour lesquels le matériel n'est pas mis sous tension;
- essais sous tension:
  - dans les conditions normales de fonctionnement;
  - dans les conditions de fonctionnement anormal;
  - risquant de provoquer une destruction.

NOTE 2 Compte tenu de l'importance des frais engagés dans les essais et afin de minimiser le gaspillage, l'étude du programme d'essais, des échantillons et des séquences d'essais par toutes les parties concernées est recommandée.

#### 1.4.4 Paramètres de fonctionnement pour les essais

A moins que des conditions particulières d'essais ne soient indiquées ailleurs dans la présente norme, et lorsqu'il est clair que cela a un impact significatif sur les résultats de l'essai, les essais doivent être effectués suivant la combinaison la plus défavorable des paramètres suivants, dans les limites des spécifications de fonctionnement du fabricant:

- tension d'alimentation; (voir 1.4.5);
- fréquence d'alimentation; (voir 1.4.6);
- température de fonctionnement (voir 1.4.12);
- emplacement physique du matériel et position des parties mobiles;
- mode de fonctionnement;
- réglage des THERMOSTATS, des dispositifs de régulation ou des dispositifs de commande similaires situés dans les ZONES D'ACCÈS DE L'OPÉRATEUR et qui sont:
- réglables sans l'aide d'un OUTIL, ou
- réglables par un moyen tel qu'une clé ou un OUTIL délibérément fourni à l'OPÉRATEUR.

#### 1.4.5 Tension d'alimentation pour les essais

En déterminant la tension la plus défavorable pour l'alimentation d'un matériel pour un essai, il doit être tenu compte des variables suivantes:

- tensions assignées multiples;
- tolérances sur la TENSION ASSIGNÉE comme indiqué ci-dessous;
- limites des plages assignées de tensions.

Si le matériel est prévu pour une connexion directe à un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, les valeurs de +6 % et –10 % doivent être prises comme tolérances sur la TENSION ASSIGNÉE, à moins que:

- la TENSION ASSIGNÉE soit 230 V en monophasé ou 400 V en triphasé, auquel cas la tolérance doit être prise comme +10 % et –10 %; ou
- une tolérance plus large soit déclarée par le fabricant, auquel cas la tolérance doit être prise comme cette valeur plus large.

Si le matériel est prévu uniquement pour une connexion à une source équivalant à un réseau en courant alternatif, tel qu'un motogénérateur ou une alimentation sans interruption (voir 1.2.8.1) ou à une source autre qu'un RÉSEAU D'ALIMENTATION, les tolérances sur la TENSION ASSIGNÉE doivent être déclarées par le fabricant.

Si le matériel est prévu pour une connexion à un RÉSEAU D'ALIMENTATION EN COURANT CONTINU, les tolérances doivent être prises entre +20 % et –15 %, à moins que le fabricant ne déclare d'autres valeurs.

Lors de l'essai d'un matériel conçu uniquement pour le courant continu, l'influence possible de la polarité doit être prise en compte.

#### 1.4.6 Fréquence de l'alimentation pour les essais

En déterminant la fréquence la plus défavorable pour l'alimentation d'un matériel à l'essai, différentes FRÉQUENCES ASSIGNÉES à l'intérieur de la PLAGE ASSIGNÉE DE FRÉQUENCES doivent être prises en compte (par exemple 50 Hz et 60 Hz) mais il n'est pas, normalement, nécessaire de prendre en considération la tolérance sur une FRÉQUENCE ASSIGNÉE (par exemple 50 Hz  $\pm$  0,5 Hz).

#### 1.4.7 Appareils de mesure électriques

Les appareils de mesure électriques doivent avoir une largeur de bande appropriée afin de fournir des lectures précises prenant en compte toutes les composantes (courant continu, fréquence du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, haute fréquence et harmoniques) du paramètre à mesurer. Si la valeur efficace est mesurée, on doit s'assurer que les appareils de mesure fournissent la valeur efficace vraie aussi bien en présence d'ondes non sinusoïdales que d'ondes sinusoïdales.

#### 1.4.8 Tensions normales de fonctionnement

Dans le but de:

- déterminer les TENSIONS DE SERVICE (voir 1.2.9.6); et de
- classer les circuits dans un matériel comme CIRCUITS TBT, CIRCUITS TBTS, CIRCUITS TRT-1, CIRCUITS TRT-2, CIRCUITS TRT-3, ou circuits à TENSIONS DANGEREUSES,

on doit considérer les tensions suivantes:

- les tensions normales de fonctionnement produites à l'intérieur du matériel, y compris les pointes de tension répétitives comme celles associées aux alimentations à découpage;
- les tensions normales de fonctionnement produites à l'extérieur du matériel, y compris les tensions de sonnerie reçues des RÉSEAUX DES TÉLÉCOMMUNICATIONS.

A ces fins, les tensions transitoires non désirées, non répétitives, produites à l'extérieur (par exemple les TENSIONS TRANSITOIRES SUR LE RÉSEAU et les TENSIONS TRANSITOIRES SUR LES RÉSEAUX DE TÉLÉCOMMUNICATIONS) induites par les commutations des systèmes d'alimentation et les transitoires dus à la foudre ne doivent pas être prises en compte:

- lors de la détermination des TENSIONS DE SERVICE, ces transitoires ayant été prises en compte dans les procédures pour déterminer les DISTANCES DANS L'AIR minimales (voir 2.10.3 et Annexe G);
- lors de la classification des circuits dans un matériel, excepté lorsque l'on fait la distinction entre les CIRCUITS TBTS et les CIRCUITS TRT-1 et entre les CIRCUITS TRT-2 et les CIRCUITS TRT-3 (voir 1.2.8.11, Tableau 1A).

NOTE 1 Les effets des tensions permanentes non désirées produites à l'extérieur du matériel (par exemple les différences de potentiel de terre et les tensions induites sur les RÉSEAUX DE TÉLÉCOMMUNICATIONS par les systèmes de traction électrique) sont contrôlés par les pratiques d'installation ou par une isolation appropriée dans le matériel. De telles mesures dépendent de l'application et ne sont pas traitées dans cette norme.

NOTE 2 Au Canada et aux Etats-Unis, des exigences supplémentaires pour la protection contre les surtensions s'appliquent (voir Article 6, Note 5).

#### 1.4.9 Mesure de la tension par rapport à la terre

Lorsque la norme spécifie une tension entre une partie conductrice et la terre, toutes les parties suivantes mises à la terre sont considérées:

- la principale borne de mise à la terre de protection (si c'est applicable); et
- toute autre partie conductrice qui nécessite la connexion à la terre de protection (voir, par exemple, 2.6.1); et

- toute partie conductrice qui est mise à la terre à l'intérieur du matériel pour des raisons fonctionnelles.

Les parties qui seront mises à la terre dans l'application par connexion à d'autres matériels mais qui ne sont pas mises à la terre dans le matériel comme essayées doivent être connectées à la terre au point par lequel la plus haute tension est obtenue. Lors de la mesure d'une tension entre la terre et un conducteur dans un circuit qui ne sera pas mis à la terre dans l'application prévue du matériel, une résistance non inductive de  $5\,000\ \Omega \pm 10\%$  doit être branchée en parallèle sur l'appareil de mesure de la tension.

La chute de tension dans le CONDUCTEUR DE MISE À LA TERRE DE PROTECTION du câble d'alimentation, ou dans un conducteur mis à la terre dans un autre câblage externe, n'est pas incluse dans les mesures.

#### 1.4.10 Configuration de la charge du matériel à l'essai

Lors de la détermination du courant absorbé (voir 1.6.2) et lorsque d'autres résultats d'essai peuvent être affectés, les variables suivantes doivent être prises en considération et combinées pour donner les résultats les plus défavorables:

- les charges dues aux différentes configurations possibles, offertes ou fournies par le fabricant pour l'inclusion dans ou avec le matériel à l'essai;
- les charges dues à d'autres unités du matériel qui selon le fabricant utiliseront de l'énergie à partir du matériel à l'essai;
- les charges susceptibles d'être reliées à tous les socles de prise de courant normalisés situés dans les ZONES D'ACCÈS DE L'OPÉRATEUR sur le matériel, jusqu'à la valeur indiquée dans le marquage prescrit en 1.7.5.

Il est permis d'utiliser des charges artificielles pour simuler de telles charges pendant les essais.

#### 1.4.11 Puissance venant d'un réseau de télécommunications

Dans le cadre de la présente norme, la puissance disponible provenant d'un RÉSEAU DE TÉLÉCOMMUNICATIONS est considérée comme limitée à 15 VA.

#### 1.4.12 Conditions de mesure des températures

##### 1.4.12.1 Généralités

Les températures mesurées sur le matériel soumis aux essais doivent satisfaire à 1.4.12.2 ou 1.4.12.3, selon ce qui est applicable, toutes les températures étant exprimées en degrés Celsius (°C), où:

- $T$  est la température de la partie concernée mesurée dans les conditions d'essai prescrites;
- $T_{\max}$  est la température maximale spécifiée pour la conformité à l'essai;
- $T_{\text{amb}}$  est la température de l'air ambiant pendant l'essai;
- $T_{\text{ma}}$  est la température maximale de l'air ambiant autorisée par les spécifications du fabricant ou  $25\text{ °C}$ , suivant la valeur la plus élevée.



#### 1.4.12.2 Matériels dépendant de la température

Pour les matériels dans lesquels l'échauffement ou le refroidissement sont conçus pour dépendre de la température (par exemple le matériel comporte un ventilateur dont la vitesse est plus élevée à haute température), la mesure de la température est effectuée à la température ambiante la plus défavorable dans la plage de fonctionnement spécifiée par le fabricant. Dans ce cas,

$T$  ne doit pas dépasser  $T_{\max}$ .

NOTE 1 Afin de trouver la valeur la plus élevée de  $T$  pour chaque composant, il peut être nécessaire d'effectuer plusieurs essais à différentes valeurs de  $T_{\text{amb}}$ .

NOTE 2 La valeur la plus défavorable de  $T_{\text{amb}}$  peut être différente pour des composants différents.

#### 1.4.12.3 Matériels ne dépendant pas de la température

Pour les matériels dans lesquels l'échauffement ou le refroidissement ne sont pas conçus pour dépendre de la température ambiante, il est permis d'utiliser la méthode spécifiée en 1.4.12.2. En variante, l'essai est effectué à une valeur quelconque de  $T_{\text{amb}}$  dans la plage de fonctionnement spécifiée par le fabricant. Dans ce cas,

$T$  ne doit pas dépasser  $(T_{\max} + T_{\text{amb}} - T_{\text{ma}})$ .

Il convient que, pendant les essais,  $T_{\text{amb}}$  ne dépasse pas  $T_{\text{ma}}$  à moins d'un accord entre toutes les parties concernées.

#### 1.4.13 Méthodes de mesure des températures

A moins qu'une méthode particulière ne soit spécifiée, les températures des enroulements doivent être déterminées soit par la méthode des couples thermoélectriques soit par la méthode de variation de la résistance (voir Annexe E). Les températures des parties autres que les enroulements doivent être déterminées par la méthode des couples thermoélectriques. Il est aussi permis d'utiliser toute autre méthode appropriée de mesure de température qui n'influence pas de façon sensible le bilan thermique et qui donne une précision suffisante pour montrer la conformité. Le choix et la position des sondes thermiques doivent être tels qu'ils aient une influence minimale sur la température de la partie à l'essai.

#### 1.4.14 Défauts simulés et conditions anormales

Lorsqu'il est prescrit d'appliquer des défauts simulés ou des conditions de fonctionnement anormales, ceux-ci doivent être appliqués un par un et l'un après l'autre. Les défauts qui sont la conséquence directe d'un défaut simulé ou d'une condition de fonctionnement anormal sont considérés comme une partie de ce défaut simulé ou de la condition de fonctionnement anormal.

Lors de l'application de défauts simulés ou de conditions de fonctionnement anormal, les accessoires, fournitures, produits consommables, supports et matériels d'enregistrement doivent être mis en place s'il est vraisemblable qu'ils ont un effet sur le résultat de l'essai.

Lorsqu'il est fait référence spécifiquement à un premier défaut, le premier défaut est constitué d'une seule défaillance d'une isolation (à l'exception d'une DOUBLE ISOLATION ou d'une ISOLATION RENFORCÉE) ou d'une seule défaillance d'un composant (à l'exception des composants avec une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE). La défaillance de l'ISOLATION FONCTIONNELLE n'est simulée que si cela est requis en 5.3.4 c).

Le matériel, les schémas et les spécifications concernant les composants sont étudiés pour déterminer quelles conditions de défaut peuvent raisonnablement se produire. Les exemples comprennent:

- les courts-circuits et circuits ouverts des dispositifs à semi-conducteur et condensateurs;
- les défauts provoquant une dissipation continue dans les résistances prévues pour une dissipation intermittente;
- les défauts internes dans les circuits intégrés provoquant une dissipation excessive;
- la défaillance de l'ISOLATION PRINCIPALE entre les parties du CIRCUIT PRIMAIRE transportant le courant et
  - les parties conductrices accessibles;
  - les écrans métalliques mis à la terre (voir l'Article C.2);
  - les parties de CIRCUITS TBTS;
  - les parties de CIRCUITS À LIMITATION DE COURANT.

#### 1.4.15 Vérification par examen des données applicables

Lorsque dans cette norme la vérification des matériaux, des composants ou des sous-ensembles est effectuée par examen ou par essai des propriétés, il est permis de confirmer la conformité par l'examen de toute donnée applicable ou des résultats de l'essai précédent qui seraient disponibles, au lieu d'effectuer les ESSAIS DE TYPE spécifiés.

### 1.5 Composants

#### 1.5.1 Généralités

Lorsque la sécurité est concernée, les composants doivent être conformes soit aux exigences de la présente norme, soit aux aspects de sécurité des normes de la CEI applicables à ces composants.

NOTE 1 Une norme de composant de la CEI est considérée comme applicable uniquement lorsque le composant en question fait clairement partie de son domaine d'application.

NOTE 2 En Suède, les contacteurs contenant du mercure ne sont pas autorisés.

NOTE 3 En Suisse, les contacteurs contenant du mercure tels les THERMOSTATS, les relais et les régulateurs de niveau ne sont pas autorisés.

#### 1.5.2 Evaluation et essais des composants

*L'évaluation et les essais des composants doivent être effectués comme suit:*

- *un composant qui a été démontré conforme à une norme harmonisée avec la norme de composant correspondante de la CEI doit être vérifié pour déterminer si son application et son utilisation sont conformes à ses caractéristiques assignées. Il doit être soumis aux essais de la présente norme, en tant que partie du matériel à l'exception des essais qui font partie de la norme de composant correspondante de la CEI;*
- *un composant qui n'a pas été démontré conforme à une norme correspondante comme ci-dessus doit être vérifié pour déterminer si son application et son utilisation sont conformes à ses caractéristiques assignées. Il doit être soumis aux essais applicables de la présente norme, en tant que partie d'un matériel, et aux essais applicables de la norme de composant dans les conditions se présentant dans le matériel;*

NOTE L'essai applicable de conformité à une norme de composant est, en général, effectué séparément.

- *lorsqu'il n'existe pas de norme de composant correspondante à la CEI, ou lorsque les composants sont utilisés dans des circuits dans des conditions qui ne sont pas en accord avec leurs caractéristiques assignées spécifiées, les composants doivent être soumis aux essais dans les conditions se présentant dans le matériel. Le nombre d'échantillons exigés pour l'essai est, en général, le même que le nombre exigé par une norme équivalente.*

### 1.5.3 Dispositifs de commande thermiques

*Les dispositifs de commande thermiques doivent être essayés conformément à l'Annexe K.*

### 1.5.4 Transformateurs

Les transformateurs doivent satisfaire aux exigences applicables de la présente norme, y compris celles de l'Annexe C.

### 1.5.5 Câbles d'interconnexion

Les CÂBLES D'INTERCONNEXION fournis comme une partie du matériel doivent satisfaire aux exigences applicables de la présente norme et ne doivent pas représenter un danger au sens de la présente norme, qu'ils soient détachables ou non.

Pour les CÂBLES D'INTERCONNEXION fournis séparément (par exemple câbles d'imprimantes), il est permis d'appliquer les exigences du présent paragraphe au choix du fabricant.

Il est permis de traiter les câbles, ou les parties des câbles, qui se trouvent à l'intérieur de l'ENVELOPPE d'un matériel soit comme des CÂBLES D'INTERCONNEXION soit comme un câblage interne.

### 1.5.6 Condensateurs en parallèle sur l'isolation

Un condensateur connecté entre deux conducteurs de ligne d'un CIRCUIT PRIMAIRE ou entre un conducteur de ligne et le conducteur neutre ou entre le CIRCUIT PRIMAIRE et la terre de protection doit être conforme à l'une des sous-classes de la CEI 60384-14 et doit être utilisé conformément à leurs caractéristiques assignées. Cette exigence s'applique également à un condensateur qui est en parallèle sur une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE à un autre endroit dans le matériel. Les détails concernant l'essai continu de chaleur humide spécifié en 4.12 de la CEI 60384-14 doivent être les suivants:

- Température:  $40\text{ °C} \pm 2\text{ °C}$ ;
- Humidité:  $93\% \pm 3\%$  d'humidité relative;
- Durée de l'essai: 21 jours.

NOTE 1 Les condensateurs qui ont été soumis à une durée d'essai supérieure à 21 jours sont considérés avoir rempli les critères de durée d'essai.

L'exigence ci-dessus ne s'applique pas dans le cas d'un condensateur connecté entre un CIRCUIT SECONDAIRE SOUS TENSION DANGEREUSE et la terre de protection lorsque seule une ISOLATION PRINCIPALE est requise.

NOTE 2 L'essai de 5.2.2 s'applique encore entre le CIRCUIT SECONDAIRE SOUS TENSION DANGEREUSE et la terre de protection.

La sous-classe de condensateurs appropriée doit être choisie parmi celles données au Tableau 1C conformément aux règles d'application du tableau.

**Tableau 1C – Caractéristiques des condensateurs selon la CEI 60384-14**

| Sous-classe de condensateurs selon la CEI 60384-14 | TENSION ASSIGNÉE du condensateur<br>V efficace | Tension de l'ESSAI DE TYPE du condensateur<br>kV crête |
|----------------------------------------------------|------------------------------------------------|--------------------------------------------------------|
| Y1                                                 | Jusqu'à 500 inclus                             | 8                                                      |
| Y2                                                 | De 150 à 300 inclus                            | 5                                                      |
| Y4                                                 | Jusqu'à 150 inclus                             | 2,5                                                    |
| X1                                                 | -                                              | 4 <sup>a</sup>                                         |
| X2                                                 | -                                              | 2,5 <sup>a</sup>                                       |

**Règles pour l'application du Tableau 1C**

- 1 Les condensateurs utilisés en parallèle sur l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE doivent être de la classe Y mais il est autorisé de mettre un condensateur de la classe X EN PARALLÈLE SUR l'ISOLATION PRINCIPALE d'un CIRCUIT SECONDAIRE.
- 2 Les caractéristiques assignées d'un condensateur doivent être au moins égales à la VALEUR EFFICACE DE LA TENSION DE SERVICE à travers l'isolation totale, la détermination étant réalisée selon 2.10.2.2.
- 3 Pour un seul condensateur monté en parallèle sur l'ISOLATION FONCTIONNELLE, l'ISOLATION PRINCIPALE ou l'ISOLATION SUPPLÉMENTAIRE, la tension d'essai de crête du condensateur doit être au moins égale à la TENSION DE TENUE PRESCRITE.
- 4 Pour un seul condensateur monté en parallèle sur une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE, la tension d'essai de crête du condensateur doit être au moins égale au double de la TENSION DE TENUE PRESCRITE.
- 5 Il est autorisé d'utiliser un condensateur de qualité supérieure à celle spécifiée, comme suit:
  - sous-classe Y1 si la sous-classe Y2 est spécifiée;
  - sous-classe Y1 ou Y2 si la sous-classe Y4 est spécifiée;
  - sous-classe Y1 ou Y2 si la sous-classe X1 est spécifiée;
  - sous-classe X1, Y1 ou Y2 si la sous-classe X2 est spécifiée.
- 6 Il est autorisé d'utiliser deux ou plus de deux condensateurs en série à la place du condensateur unique spécifié, avec les configurations suivantes:
  - sous-classe Y1 ou Y2 si la sous-classe Y1 est spécifiée;
  - sous-classe Y2 ou Y4 si la sous-classe Y2 est spécifiée;
  - sous-classe X1 ou X2 si la sous-classe X1 est spécifiée.
- 7 Dans le cas où deux ou plus de deux condensateurs sont utilisés en série, ceux-ci doivent
  - tous avoir la même valeur de capacité nominale;
  - avoir chacun les caractéristiques assignées pour la VALEUR EFFICACE totale DE LA TENSION DE SERVICE à travers l'isolation; et
  - être conformes aux autres règles données ci-dessus.

<sup>a</sup> Pour les valeurs de capacité de plus de 1 µF, cette tension d'essai est réduite selon un facteur égal à  $\sqrt{C}$ , où C est la valeur de la capacité en µF.

Le Tableau 1D donne un certain nombre d'exemples à titre informatif pour l'application des condensateurs choisis conformément au Tableau 1C. D'autres exemples sont possibles.

**Tableau 1D – Exemples informatifs d'application de condensateurs**

| TENSION DU RÉSEAU<br>D'ALIMENTATION EN<br>COURANT ALTERNATIF<br>jusqu'à et y compris<br>V efficace                                                                                      | Catégorie de<br>surtension | TENSION<br>TRANSITOIRE<br>DU RÉSEAU<br>kV | Isolation<br>« pontée » par<br>un<br>condensateur | Type de<br>condensateur | Nombre de<br>condensateurs |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------|---------------------------------------------------|-------------------------|----------------------------|
| 150                                                                                                                                                                                     | II                         | 1,5                                       | B ou S                                            | Y4                      | 1                          |
|                                                                                                                                                                                         | II                         | 1,5                                       | D ou R                                            | Y2                      | 1                          |
|                                                                                                                                                                                         | II                         | 1,5                                       | D ou R                                            | Y4                      | 2                          |
|                                                                                                                                                                                         | III                        | 2,5                                       | F                                                 | X2                      | 1                          |
|                                                                                                                                                                                         | III                        | 2,5                                       | B ou S                                            | Y4                      | 1                          |
|                                                                                                                                                                                         | III                        | 2,5                                       | D ou R                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | IV                         | 4,0                                       | F                                                 | X1                      | 1                          |
|                                                                                                                                                                                         | IV                         | 4,0                                       | B ou S                                            | Y2                      | 1                          |
|                                                                                                                                                                                         | IV                         | 4,0                                       | D ou R                                            | Y1                      | 1                          |
| 250                                                                                                                                                                                     | II                         | 2,5                                       | F                                                 | X2                      | 1                          |
| 300                                                                                                                                                                                     | II                         | 2,5                                       | B ou S                                            | Y2                      | 1                          |
|                                                                                                                                                                                         | II                         | 2,5                                       | D ou R                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | II                         | 2,5                                       | D ou R                                            | Y2                      | 2                          |
| 250                                                                                                                                                                                     | III                        | 4,0                                       | F                                                 | X1                      | 1                          |
| 300                                                                                                                                                                                     | III                        | 4,0                                       | D ou R                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | III                        | 4,0                                       | D ou R                                            | Y2                      | 2                          |
|                                                                                                                                                                                         | IV                         | 6,0                                       | B ou S                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | IV                         | 6,0                                       | D ou R                                            | Y1                      | 2                          |
| 500                                                                                                                                                                                     | II                         | 4,0                                       | B ou S                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | II                         | 4,0                                       | D ou R                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | III                        | 6,0                                       | B ou S                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | III                        | 6,0                                       | D ou R                                            | Y1                      | 2                          |
|                                                                                                                                                                                         | IV                         | 8,0                                       | B ou S                                            | Y1                      | 1                          |
|                                                                                                                                                                                         | IV                         | 8,0                                       | D ou R                                            | Y1                      | 2                          |
| Les valeurs du tableau s'appliquent à l'ISOLATION FONCTIONNELLE (F), l'ISOLATION PRINCIPALE (B), l'ISOLATION SUPPLÉMENTAIRE (S), l'ISOLATION DOUBLE (D) et à l'ISOLATION RENFORCÉE (R). |                            |                                           |                                                   |                         |                            |

Si une partie conductrice accessible ou un circuit, est séparé d'une autre partie par une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE, et que un ou plusieurs condensateurs sont montés en parallèle entre ces parties ou circuit, la partie accessible ou le circuit doit être conforme aux exigences pour un CIRCUIT À LIMITATION DE COURANT de 2.4. Cette exigence s'applique après l'essai de rigidité diélectrique de l'isolation avec le ou les condensateurs de court-circuit en place.

NOTE 3 Un circuit est un CIRCUIT À LIMITATION DE COURANT si le courant à travers les composants montés en parallèle est conforme à 2.4 et que les autres exigences de 2.4 sont satisfaites.

*La vérification est effectuée par examen et par des mesures.*

### 1.5.7 Résistances en parallèle sur l'isolation

#### 1.5.7.1 Résistances montées en parallèle sur une isolation fonctionnelle, une isolation principale ou une isolation supplémentaire

Il n'existe pas d'exigences spécifiques pour les résistances montées en parallèle sur une ISOLATION FONCTIONNELLE, UNE ISOLATION PRINCIPALE OU UNE ISOLATION SUPPLÉMENTAIRE, mais les exigences de 2.10.3 (ou de l'Annexe G) et de 2.10.4 s'appliquent et, dans certains cas, celles de 2.4.

NOTE En Finlande, en Norvège et en Suède, il faut que les résistances montées en parallèle sur une isolation de base dans le MATÉRIEL DE LA CLASSE I DE TYPE A RACCORDÉ PAR PRISE DE COURANT soient conformes aux exigences de 1.5.7.2.

#### 1.5.7.2 Résistances montées en parallèle sur une double isolation ou une isolation renforcée entre l'alimentation réseau en courant alternatif et les autres circuits

Il est autorisé de mettre en parallèle sur une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE une résistance ou un groupe de deux ou plus de deux résistances en série, dans les conditions suivantes. Pour les conditions applicables aux circuits connectés à une antenne ou un câble coaxial, voir 1.5.7.3.

La résistance ou le groupe de résistances doit être conforme aux DISTANCES DANS L'AIR minimales de 2.10.3 ou de l'Annexe G et aux LIGNES DE FUITE minimales de 2.10.4 pour l'ISOLATION RENFORCÉE pour la TENSION DE SERVICE totale à travers la résistance ou le groupe de résistances. Dans le cas d'un groupe de résistances, voir aussi la Figure F.13.

Si une résistance unique est utilisée, elle doit passer avec succès l'essai de résistance ci-dessous.

Si un groupe de résistances est utilisé, la distance dans l'air et la ligne de fuite sont évaluées comme si chaque résistance était court-circuitée tour à tour, sauf si le groupe passe avec succès l'essai de résistance ci-dessous.

Si une partie conductrice accessible ou un circuit est séparé d'une autre partie par une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE en parallèle de laquelle sont câblées une ou plusieurs résistances, la partie accessible ou le circuit doit être conforme aux exigences pour un CIRCUIT À LIMITATION DE COURANT de 2.4. Si un groupe de résistances est utilisé, la mesure du courant de 2.4.2 est réalisée avec chaque résistance court-circuitée tour à tour, sauf si le groupe passe avec succès l'essai de résistance ci-dessous. Ce courant est mesuré après l'essai de rigidité diélectrique de l'isolation avec la résistance ou le groupe de résistances en place.

*La vérification est effectuée par examen et par des mesures et, si cela est spécifié ci-dessus, par l'essai de résistance suivant sur dix échantillons. Un échantillon est une résistance unique utilisée seule ou un groupe de résistances en série.*

#### *Essai de résistance*

*Avant l'essai, la résistance de chaque échantillon est mesurée.*

*Les échantillons sont soumis à l'essai de chaleur humide de la CEI 60068-2-78 avec les conditions suivantes:*

- *Température: 40 °C ± 2 °C;*
- *Humidité: 93 % ± 3 % d'humidité relative;*
- *Durée de l'essai: 21 jours.*

NOTE Les résistances qui ont été soumises à une durée d'essai supérieure à 21 jours sont considérées avoir rempli les critères de durée d'essai.

*Chaque échantillon est ensuite soumis à dix impulsions de polarité alternée, en utilisant la référence 2 de générateur d'impulsions d'essai du Tableau N.1. L'intervalle entre impulsions successives est de 60 s, et  $U_c$  est égale à la TENSION DE TENUE PRESCRITE applicable.*

*A l'issue de l'essai, la valeur de la résistance de chaque échantillon ne doit pas s'être modifiée de plus de 10 %.*

*Aucune défaillance n'est autorisée.*

#### **1.5.7.3 Résistances montées en parallèle sur la double isolation ou l'isolation renforcée entre le réseau d'alimentation en courant alternatif et les circuits connectés à une antenne ou un câble coaxial**

Les exigences et les essais de 1.5.7.2 s'appliquent à l'exception du générateur d'impulsions d'essai qui est comme spécifié à la référence 3 du Tableau N.1 si le circuit n'est pas connecté à une antenne ou comme spécifié à la référence 1 du Tableau N.1 si le circuit est connecté à un câble coaxial.

*A l'issue de l'essai, la résistance de chaque échantillon ne doit pas s'être modifiée de plus de 20 % et aucune défaillance n'est autorisée.*

NOTE Si une résistance ou un groupe de résistances est connecté entre le CIRCUIT PRIMAIRE et un SYSTÈME DE DISTRIBUTION PAR CABLES, 7.4 s'applique aussi.

### **1.5.8 Composants dans les matériels pour schémas d'alimentation IT**

Pour les matériels destinés à être raccordés à des schémas d'alimentation IT, les composants connectés entre phase et terre doivent pouvoir supporter les contraintes dues à la tension entre phases. Cependant, les condensateurs marqués pour la tension ligne-neutre applicable sont autorisés pour de telles applications s'ils sont conformes à la CEI 60384-14, sous-classe Y1, Y2 ou Y4.

NOTE 1 Les condensateurs ci-dessus subissent un essai d'endurance à 170 % la tension assignée du condensateur.

NOTE 2 En Norvège, du fait du système d'alimentation IT utilisé (voir Annexe V, Figure V.7), il est prescrit que les condensateurs doivent être spécifiés pour la tension entre phases applicable (230 V).

*La conformité est vérifiée par examen.*

### **1.5.9 Parasurtenseurs**

#### **1.5.9.1 Généralités**

Dans un CIRCUIT SEDONDAIRE, il est autorisé d'utiliser n'importe quel type de parasurtenseur, y compris une résistance dépendant de la tension (voltage dependent resistor – VDR).

Si un parasurtenseur est utilisé dans un CIRCUIT PRIMAIRE, il doit s'agir d'une VDR qui doit être conforme à l'Annexe Q.

NOTE 1 Une VDR est parfois désignée sous le terme varistance ou varistance à oxyde métallique (metal oxide varistor – MOV). Dans la présente norme, les dispositifs tels que les tubes à décharge, les plaquettes de carbone et les dispositifs à semiconducteurs avec caractéristiques de courant/tension non linéaires ne sont pas considérés comme des VDR.

NOTE 2 La présente norme n'exige pas la conformité avec une norme de composants spécifiques pour les parasurtenseurs utilisés dans les CIRCUITS SECONDAIRES. Toutefois, l'attention est attirée sur la série de normes CEI 61643, en particulier:

- CEI 61643-21 (parafoudres dans les applications de télécommunications)
- CEI 61643-311 (tubes à décharge dans un gaz)
- CEI 61643-321 (diodes à avalanche)
- CEI 61643-331 (varistances à oxyde métallique).

*La conformité est vérifiée par examen et par l'application de l'Annexe Q, selon ce qui est approprié.*

#### **1.5.9.2 Protection des VDR**

Pour la protection contre

- les surtensions temporaires supérieures à la tension continue maximale,
- la surcharge thermique due au courant de fuite à l'intérieur de la VDR, et
- la combustion et l'éclatement de la VDR en cas de défaut de court-circuit,

un moyen d'interruption présentant une capacité de coupure adéquate doit être connecté en série avec la VDR. Cette exigence ne s'applique pas à une VDR dans un CIRCUIT À LIMITATION DE COURANT.

NOTE 1 Pour des surtensions temporaires provenant du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, voir la CEI 60664-1.

NOTE 2 Au cours de la durée de vie d'une VDR, le courant de fuite augmente avec le nombre de cycles de commutation dans cette VDR. Ce courant de fuite cause une contrainte de température permanente et en augmentation continue, qui peut provoquer la combustion ou l'éclatement de la VDR.

*La conformité est vérifiée par examen.*

#### **1.5.9.3 VDR mise en parallèle sur une isolation fonctionnelle**

Il est autorisé de câbler une VDR en parallèle sur une ISOLATION FONCTIONNELLE.

*La conformité est vérifiée par examen.*

#### **1.5.9.4 VDR mise en parallèle sur une isolation principale**

Il est autorisé de câbler une VDR en parallèle sur une ISOLATION PRINCIPALE si un côté de la VDR est relié à la terre conformément à 2.6.1 a).

Le matériel avec une telle VDR montée en parallèle sur l'ISOLATION PRINCIPALE doit être de l'un des types suivants:

- MATÉRIEL DU TYPE B RACCORDÉ PAR PRISE DE COURANT; ou
- MATÉRIEL RELIÉ À DEMEURE; ou
- matériels équipés d'un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION fixé à demeure et munis d'instructions pour l'installation de ce conducteur.

NOTE En Finlande, en Norvège et en Suède, le troisième tiret ne s'applique qu'aux équipements tels qu'ils sont définis dans la Note de 6.1.2.2.

*La conformité est vérifiée par examen.*

#### **1.5.9.5 VDR montée en parallèle sur une isolation supplémentaire, une double isolation ou une isolation renforcée**

Il n'est pas autorisé de câbler une VDR en parallèle sur une ISOLATION SUPPLÉMENTAIRE, une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE.

*La conformité est vérifiée par examen.*



## 1.6 Adaptation au réseau

### 1.6.1 Schémas d'alimentation en courant alternatif

Les schémas d'alimentation en courant alternatif sont classifiés TN-C, TN-C-S, TN-S, TT ou IT (voir Annexe V).

### 1.6.2 Courant absorbé

Le courant absorbé en régime permanent par le matériel ne doit pas dépasser le COURANT ASSIGNÉ de plus de 10 % sous la CHARGE NORMALE.

NOTE Voir aussi 1.4.10.

*La vérification est effectuée par la mesure du courant absorbé par le matériel sous la CHARGE NORMALE dans les conditions suivantes:*

- *lorsqu'un matériel a plus d'une TENSION ASSIGNÉE, le courant absorbé est mesuré pour chaque TENSION ASSIGNÉE;*
- *lorsque le matériel a une ou plusieurs PLAGES ASSIGNÉES DE TENSIONS, le courant absorbé est mesuré à chaque extrémité de chaque PLAGE ASSIGNÉE DE TENSIONS. Lorsqu'une seule valeur de COURANT NOMINAL est marquée (voir 1.7.1), elle est comparée avec la valeur de courant absorbé la plus élevée mesurée dans la plage de tensions associée. Lorsque deux valeurs de COURANT ASSIGNÉ sont marquées, séparées par un trait d'union, elles sont comparées aux deux valeurs mesurées dans la plage de tensions associée.*

*Dans chaque cas, les lectures sont effectuées après stabilisation du courant absorbé. Si le courant varie pendant le cycle de fonctionnement normal, le courant absorbé en régime permanent est pris comme la valeur moyenne, mesurée sur un ampèremètre enregistreur, pendant une période représentative.*

### 1.6.3 Limite de tension du matériel portatif (à main)

La TENSION ASSIGNÉE du MATÉRIEL PORTATIF ne doit pas dépasser 250 V.

*La conformité est vérifiée par examen.*

### 1.6.4 Conducteur neutre

Le conducteur neutre, s'il existe, doit être isolé de la terre et de la MASSE dans tout le matériel comme s'il était un conducteur de ligne. Les composants connectés entre le neutre et la terre doivent avoir des caractéristiques assignées correspondant à la tension entre phase et neutre (cependant, voir aussi 1.5.8).

*La conformité est vérifiée par examen.*

## 1.7 Marquages et instructions

NOTE Des exigences supplémentaires pour les marquages et instructions figurent dans les paragraphes suivants:

|            |                                       |         |                                            |
|------------|---------------------------------------|---------|--------------------------------------------|
| 2.1.1.2    | Compartiments pour piles ou batteries | 3.2.1.2 | RÉSEAU D'ALIMENTATION EN COURANT CONTINU   |
| 2.1.1.8    | Dangers liés à l'énergie              | 3.3.7   | Groupe des bornes pour les conducteurs     |
| 2.3.2.3    | Protection par mise à la terre        | 3.4.3   | Dispositifs de sectionnement               |
| 2.6.1      | Parties non mises à la terre          | 3.4.6   | Dispositifs de sectionnement bipolaire     |
| 2.6.2      | MISE À LA TERRE FONCTIONNELLE         | 3.4.7   | Dispositifs de sectionnement quadripolaire |
| 2.6.3.4 c) | Conducteurs de liaison à la terre     | 3.4.9   | Fiches comme dispositifs de sectionnement  |
| 2.6.5.1    | Conducteurs de liaison à la terre     | 3.4.10  | Matériels interconnectés                   |
| 2.7.1      | Dispositifs de protection externes    |         |                                            |
| 2.7.6      | Fusible sur le neutre                 |         |                                            |
| 2.10.3.2   | Catégories de surtensions             |         |                                            |

|          |                                         |                  |                                                            |
|----------|-----------------------------------------|------------------|------------------------------------------------------------|
| 3.4.11   | Alimentations multiples                 | 4.6.2            | Matériel sur des sols non combustibles                     |
| 4.1      | Stabilité du matériel                   | 4.6.3            | Portes et couvercles amovibles                             |
| 4.2.5    | Essai de choc                           | 5.1.7.1          | COURANT DE CONTACT dépassant 3,5 mA                        |
| 4.3.3    | Dispositifs de commande réglables       | 5.1.8.2          | Sommation des COURANTS DE CONTACT                          |
| 4.3.5    | Fiches et socles                        | 6.1.1 et 6.1.2.2 | Mise à la terre pour un RÉSEAU DE TÉLÉCOMMUNICATIONS       |
| 4.3.13.4 | Rayonnements UV                         | 7.2 et 7.4.1     | Mise à la terre pour un SYSTÈME DE DISTRIBUTION PAR CÂBLES |
| 4.3.13.5 | Lasers                                  | G.2.1            | Matériel dans les catégories de surtension III et IV       |
| 4.4.2    | Parties mobiles dangereuses             |                  |                                                            |
| 4.5.3    | Tableau 4C Marquage des parties chaudes |                  |                                                            |
| 4.5.4    | Températures de contact                 |                  |                                                            |

*La vérification de chaque paragraphe de 1.7 est effectuée par examen, sauf spécification contraire (voir 1.7.11).*

### 1.7.1 Caractéristiques assignées de l'alimentation

Le matériel doit comporter un marquage des caractéristiques assignées dont l'objet est de spécifier les conditions correctes d'alimentation en tension et en fréquence ainsi qu'en capacité de passage de courant.

Si une unité ne comporte pas de moyens de raccordement direct à un RÉSEAU D'ALIMENTATION, il n'est pas nécessaire qu'elle porte l'indication de caractéristiques électriques telles que sa TENSION ASSIGNÉE, son COURANT ASSIGNÉ ou sa FRÉQUENCE ASSIGNÉE.

Pour un matériel destiné à être installé par un OPÉRATEUR, le marquage doit être facilement visible dans une ZONE D'ACCÈS DE L'OPÉRATEUR, en incluant toute zone directement visible seulement après l'ouverture d'une porte ou d'un couvercle par un OPÉRATEUR. Si un sélecteur manuel de tension n'est pas accessible à l'OPÉRATEUR, le marquage doit indiquer la TENSION ASSIGNÉE pour laquelle ce matériel est configuré lors de sa fabrication. Un marquage temporaire est autorisé à cet effet. Le marquage est autorisé sur toute surface extérieure du matériel, sauf sur le fond d'un matériel de masse supérieure à 18 kg. De plus, sur un MATÉRIEL FIXE, le marquage doit être visible après l'installation du matériel pour un usage normal.

Pour le matériel destiné à être installé par le PERSONNEL DE MAINTENANCE, et si le marquage se trouve dans une ZONE D'ACCÈS POUR LA MAINTENANCE, l'emplacement du marquage permanent doit être indiqué dans les instructions d'installation ou par un avertissement visible sur le matériel. Il est permis d'utiliser un avertissement temporaire dans ce cas.

Le marquage doit comprendre les indications suivantes:

- la ou les tensions assignées, ou la ou les plages assignées de tensions, en volts.
  - les TENSIONS ASSIGNÉES minimale et maximale de la plage de tensions doivent être séparées par un trait d'union (-) et si des TENSIONS assignées multiples ou des PLAGES ASSIGNÉES DE TENSIONS multiples sont données, elles doivent être séparées par une barre oblique (/).

NOTE 1 Quelques exemples de marquages de TENSIONS ASSIGNÉES sont indiqués ci-dessous:

- PLAGE ASSIGNÉE DE TENSIONS: 220-240 V. Cela signifie que le matériel est conçu pour être relié à un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF ayant une tension comprise entre 220 V et 240 V.
- TENSIONS ASSIGNÉES multiples: 120/230/240 V. Cela signifie que le matériel est conçu pour être relié à un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF ayant une tension égale à 120 V ou 230 V ou 240 V, généralement après un réglage interne.

- si le matériel est destiné à être relié aux deux conducteurs de ligne et au conducteur de neutre d'un schéma d'alimentation monophasé à trois conducteurs, le marquage doit indiquer la tension ligne-neutre et la tension entre lignes séparées par une barre oblique (/) avec l'indication supplémentaire «Trois conducteurs plus terre de protection», «3W + PE» ou l'équivalent.

NOTE 2 Quelques exemples de marquage pour le système ci-dessus sont indiqués ci-après:

120/240 V: 3 conducteurs + PE

120/240 V; 3W +  (60417-IEC-5019)

100/200 V: 2 W + N + PE

- le symbole de la nature du courant, pour courant continu seulement;
- la FRÉQUENCE ASSIGNÉE OU la PLAGE ASSIGNÉE DE FRÉQUENCES, en hertz, à moins que le matériel ne soit conçu pour courant continu seulement;
- le COURANT ASSIGNÉ, en milliampères ou en ampères;
  - pour le matériel à TENSIONS ASSIGNÉES multiples, les COURANTS ASSIGNÉS correspondants doivent être indiqués en séparant les différentes caractéristiques assignées de courant par une barre oblique (/) et en faisant apparaître clairement la relation entre TENSION ASSIGNÉE et COURANT ASSIGNÉ associé;
  - le matériel avec une PLAGE ASSIGNÉE DE TENSIONS doit être marqué soit du COURANT ASSIGNÉ maximal soit de la plage de courants;
  - le marquage du COURANT ASSIGNÉ d'un groupe d'unités ayant une seule connexion à l'alimentation doit être placé sur l'unité qui est directement reliée à un RÉSEAU D'ALIMENTATION. Le COURANT ASSIGNÉ indiqué sur cette unité doit être le courant total maximal qui peut être en circuit en même temps, et il doit inclure les courants combinés de toutes les unités du groupe qui peuvent être alimentées simultanément par l'intermédiaire de cette unité et qui peuvent être mises en fonctionnement simultanément.

NOTE 3 Quelques exemples de marquages de COURANT ASSIGNÉS sont indiqués ci-dessous:

- pour les matériels avec TENSIONS ASSIGNÉES MULTIPLES:  
120/240 V; 2,4/1,2 A
- pour les matériels avec une PLAGE ASSIGNÉE DE TENSIONS:  
100-240 V; 2,8 A  
100-240 V; 2,8-1,4 A  
100-120 V; 2,8 A  
200-240 V; 1,4 A

Il est reconnu que dans certaines régions, il est habituel d'utiliser un point (.) comme marqueur décimal à la place d'une virgule.

- le nom du fabricant ou la marque de fabrique ou la marque d'identification;
- le numéro de modèle ou la référence du type;
- le symbole  (IEC 60417-5172 (DB:2003-02)), pour le matériel de CLASSE II uniquement, à l'exception des cas où cela est interdit par 2.6.2.

Des marquages supplémentaires sont permis, pourvu qu'ils ne soient pas source de confusion.

Lorsqu'il est fait usage de symboles, ceux-ci doivent être conformes à l'ISO 7000 ou à la CEI 60417, lorsque les symboles appropriés existent.

## 1.7.2 Instructions concernant la sécurité et marquage

### 1.7.2.1 Généralités

Des instructions suffisantes doivent être fournies à l'UTILISATEUR concernant toutes les conditions nécessaires pour assurer que, lorsqu'il est utilisé conformément aux instructions du fabricant, le matériel n'est pas susceptible de présenter un danger au sens de cette norme.

S'il est nécessaire de prendre des précautions spéciales pour éviter l'apparition de dangers pendant le fonctionnement, l'installation, la maintenance, le transport et le stockage du matériel, les instructions nécessaires doivent être disponibles.

NOTE 1 Des précautions spéciales peuvent être nécessaires, par exemple pour la liaison du matériel à l'alimentation et l'interconnexion d'unités séparées, le cas échéant.

NOTE 2 Lorsque cela s'applique, il convient que les instructions d'installation fassent référence aux normes nationales d'installation.

NOTE 3 Dans de nombreux pays, les instructions et les marquages des matériels qui concernent la sécurité doivent être rédigés dans une langue acceptable dans le pays où le matériel est installé. Les instructions relatives à la maintenance ne sont normalement disponibles que pour le PERSONNEL DE MAINTENANCE et sont généralement acceptables si elles sont en anglais seulement.

NOTE 4 En Allemagne, les informations relatives à la sécurité, y compris pour le PERSONNEL DE MAINTENANCE, doivent être rédigées en langue allemande.

NOTE 5 Au Canada, il est recommandé que les instructions et les marquages soient en anglais et en français.

NOTE 6 En Finlande, en Norvège et en Suède, il faut que le MATÉRIEL DE LA CLASSE I DE TYPE A RACCORDÉ PAR PRISE DE COURANT, destiné à être raccordé à un autre matériel ou un réseau, porte, si la sécurité repose sur une connexion à la terre de protection ou si des parasurtenseurs sont connectés entre les bornes du réseau et des parties accessibles, un marquage indiquant qu'il faut le connecter à un socle mis à la terre du réseau d'alimentation.

Les instructions pour le fonctionnement et, pour les MATÉRIELS RACCORDÉS PAR PRISE DE COURANT destinés à être installés par l'UTILISATEUR, les instructions d'installation doivent être à la disposition de l'UTILISATEUR.

### 1.7.2.2 Dispositifs de sectionnement

Lorsque le dispositif de sectionnement n'est pas incorporé dans le matériel (voir 3.4.3) ou lorsque la fiche de prise de courant du câble d'alimentation est destinée à servir de dispositif de sectionnement, les instructions d'installation doivent indiquer que:

- pour le MATÉRIEL RELIÉ À DEMEURE AU RESEAU, un dispositif de sectionnement facilement accessible doit être incorporé à l'extérieur du matériel;
- pour le MATÉRIEL RACCORDÉ PAR PRISE DE COURANT, le socle de prise de courant doit être installé à proximité du matériel et doit être aisément accessible.

### 1.7.2.3 Dispositifs de protection contre les surintensités

Pour les MATÉRIELS DU TYPE B RACCORDÉS PAR PRISE DE COURANT OU POUR LES MATÉRIELS RELIÉS À DEMEURE, les instructions d'installation doivent spécifier les caractéristiques assignées maximales d'un dispositif de protection contre les surintensités à prévoir à l'extérieur du matériel sauf lorsqu'il existe des dispositifs de protection contre les surintensités appropriés à l'intérieur du matériel [voir aussi 2.6.3.3 b)].

NOTE Les caractéristiques assignées maximales spécifiées peuvent ne pas être celles du dispositif de protection disponible dans le pays d'installation. Il est recommandé d'autoriser l'utilisation d'un dispositif dont les caractéristiques assignées sont inférieures qui sera toujours approprié pour le COURANT ASSIGNÉ du matériel plus toute marge nécessaire pour le courant d'appel.

#### 1.7.2.4 Schéma d'alimentation IT

Si le matériel a été conçu ou, si nécessaire, modifié pour le raccordement à un schéma d'alimentation IT, les instructions d'installation du matériel doivent l'indiquer.

#### 1.7.2.5 Accès de l'opérateur avec un outil

S'il est nécessaire d'utiliser un OUTIL pour avoir accès à une ZONE D'ACCÈS DE L'OPÉRATEUR, tous les autres compartiments de cette zone qui présentent un danger doivent, soit être inaccessibles à l'OPÉRATEUR par l'utilisation du même OUTIL, soit porter un marquage pour décourager l'accès de l'OPÉRATEUR.

Un marquage acceptable pour les dangers de chocs électriques est  (ISO 3864, n° 5036).

#### 1.7.2.6 Ozone

Pour les matériels qui peuvent produire de l'ozone, les instructions d'installation et de fonctionnement doivent mentionner la nécessité de prendre des précautions pour s'assurer que la concentration d'ozone est limitée à une valeur sûre.

NOTE La limite d'exposition à long terme actuellement recommandée pour l'ozone est de  $0,1 \times 10^{-6}$  (0,2 mg/m<sup>3</sup>) calculée comme une concentration moyenne pondérée dans le temps sur 8 h. Il y a lieu de noter que l'ozone est plus lourd que l'air.

#### 1.7.3 Cycles de fonctionnement courts

Les matériels qui ne sont pas prévus pour le SERVICE CONTINU doivent porter l'indication de la DURÉE ASSIGNÉE DE FONCTIONNEMENT et de la DURÉE ASSIGNÉE DE REPOS, à moins que la durée de fonctionnement ne soit limitée par construction.

Le marquage de la DURÉE ASSIGNÉE DE FONCTIONNEMENT correspond à l'utilisation normale.

Les indications relatives à la DURÉE ASSIGNÉE DE FONCTIONNEMENT doivent précéder la DURÉE ASSIGNÉE DE REPOS, les deux indications étant séparées par une barre oblique (/).

#### 1.7.4 Réglage de la tension d'alimentation

Pour le matériel destiné à être raccordé à des TENSIONS ou FRÉQUENCES ASSIGNÉES multiples, la méthode de réglage doit être entièrement traitée dans les instructions de maintenance ou dans la notice d'installation.

A moins que le dispositif de réglage ne soit une simple commande placée près du marquage de puissance et que le réglage de cette commande ne soit évident par simple examen, l'instruction suivante ou une instruction similaire doit figurer sur le marquage ou à proximité de celui-ci:

**VOIR LA NOTICE D'INSTALLATION  
AVANT DE RACCORDER AU RÉSEAU**

#### 1.7.5 Socles de prise de courant sur le matériel

Si, dans le matériel, un socle de prise de courant normalisé est accessible à l'OPÉRATEUR, l'indication de la charge maximale admissible à raccorder à ce socle de prise de courant doit être marquée à proximité de celui-ci.

Des socles de prises de courant conformes à la CEI 60083 sont des exemples de socles de prises de courant normalisés.

### 1.7.6 Identification des fusibles

Un marquage doit être placé à proximité de chaque fusible ou porte-fusible ou sur le porte-fusible ou à un autre endroit pourvu qu'il soit facile de voir à quel porte-fusible s'applique le marquage, donnant le courant assigné du fusible et, lorsque des fusibles de tensions assignées différentes peuvent être utilisés, la tension assignée du fusible.

Lorsque des éléments fusibles à caractéristiques de fusion spéciales telles qu'une temporisation ou une capacité de coupure sont nécessaires, le type doit également être indiqué.

Pour les fusibles qui ne sont pas dans une ZONE D'ACCÈS DE L'OPÉRATEUR et pour les fusibles soudés situés dans les ZONES D'ACCÈS DE L'OPÉRATEUR, il est permis de fournir une référence croisée sans ambiguïté (par exemple F1, F2, etc.) dans les instructions de maintenance qui doivent contenir les informations correspondantes.

NOTE Voir 2.7.6 pour les avertissements au PERSONNEL DE MAINTENANCE.

### 1.7.7 Bornes de raccordement

#### 1.7.7.1 Bornes de mise à la terre et de liaison à la terre de protection

Une borne prévue pour le raccordement d'un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION doit être marquée par le symbole  $\oplus$  (IEC 60417-5019 (DB:2002-10)). Ce symbole ne doit pas être utilisé pour d'autres bornes de mise à la terre.

Il n'est pas prescrit de marquer les autres bornes pour le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION mais lorsque de telles bornes sont marquées, le symbole  $\perp$  (IEC 60417-5017 (DB: 2002-10)) doit être utilisé.

Les situations suivantes sont exemptées des exigences ci-dessus:

- lorsque les bornes pour le raccordement d'une alimentation sont prévues sur un composant (par exemple un bornier) ou sur un sous-ensemble (par exemple une unité d'alimentation), le symbole  $\perp$  est permis pour la borne de mise à la terre de protection au lieu du symbole  $\oplus$ ;
- sur les sous-ensembles ou les composants, le symbole  $\oplus$  est permis à la place du symbole  $\perp$  pourvu que cela ne donne pas lieu à confusion.

Ces symboles ne doivent être situés ni sur les vis ni sur les autres parties susceptibles d'être enlevées lors du raccordement des conducteurs.

Ces exigences s'appliquent aux bornes pour le raccordement d'un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION qui peut faire partie intégrante d'un câble d'alimentation ou être acheminé avec les conducteurs d'alimentation.

#### 1.7.7.2 Bornes pour les conducteurs du réseau d'alimentation en courant alternatif

Pour les MATÉRIELS RELIÉS À DEMEURE et les matériels avec des CÂBLES D'ALIMENTATION FIXÉS À DEMEURE:

- les bornes prévues uniquement pour le raccordement du conducteur neutre du RÉSEAU L'ALIMENTATION EN COURANT ALTERNATIF, si elles existent, doivent porter l'indication de la lettre majuscule N; et

- pour les matériels triphasés, si une rotation de phase incorrecte risque d'entraîner une augmentation excessive de température ou un autre danger, les bornes destinées à la connexion des conducteurs de ligne du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF doivent être marquées de façon qu'avec les instructions d'installation, il n'y ait pas d'ambiguïté pour la séquence de rotation de phase.

Ces indications ne doivent être situées ni sur les vis, ni sur les autres parties susceptibles d'être enlevées lors du raccordement des conducteurs.

### **1.7.7.3 Bornes pour les conducteurs du réseau d'alimentation en courant continu**

Pour les MATÉRIELS RELIÉS À DEMEURE et les matériels avec des CÂBLES D'ALIMENTATION FIXÉS À DEMEURE, les bornes prévues uniquement pour le raccordement d'un RÉSEAU D'ALIMENTATION EN COURANT CONTINU doivent être marquées pour indiquer la polarité.

S'il existe une borne unique prévue à la fois comme borne principale de mise à la terre de protection dans le matériel et pour la connexion à un pôle du RÉSEAU D'ALIMENTATION EN COURANT CONTINU, elle doit être marquée comme spécifié en 1.7.7.1 en plus de la polarité.

Ces indications ne doivent être situées ni sur les vis, ni sur les autres parties susceptibles d'être enlevées lors du raccordement des conducteurs.

### **1.7.8 Dispositifs de commande et indicateurs**

#### **1.7.8.1 Identification, emplacement et marquage**

A moins que cela ne soit manifestement superflu, les voyants, interrupteurs et autres dispositifs de commande liés à la sécurité doivent être identifiés ou situés de manière à indiquer clairement quelle fonction ils commandent.

Les marques et indications des interrupteurs et autres dispositifs de commande doivent être situées soit:

- sur l'interrupteur ou le dispositif de commande ou à proximité, soit
- ailleurs, de telle manière que la relation entre le marquage et l'interrupteur ou le dispositif de commande auquel il s'applique soit évidente.

Les indications utilisées à cet effet doivent être, autant que possible, compréhensibles sans connaissance de la langue, des normes nationales, etc.

#### **1.7.8.2 Couleurs**

Lorsque la sécurité est impliquée, les couleurs des organes de commande et des voyants doivent être conformes à la CEI 60073. Lorsque des couleurs sont utilisées pour des organes de commande et des voyants fonctionnels, toute couleur, y compris le rouge, est permise pourvu qu'il soit clair que la sécurité n'est pas impliquée.

#### **1.7.8.3 Symboles**

Lorsque des symboles sont utilisés sur ou à proximité des dispositifs de commande, (par exemple interrupteurs et boutons-poussoirs) pour indiquer les positions «MARCHE» et «ARRÊT», ce doit être un trait | pour «MARCHE» ou un cercle ○ pour «ARRÊT» (IEC 60417-5007(DB:2002-10) et IEC 60417-5008 (DB:2002-10)). Pour les interrupteurs du type «poussez-poussez», le symbole ① doit être utilisé (IEC 60417-5010 (DB:2002-10)).



Il est permis d'utiliser les symboles ○ et | pour indiquer les positions «ARRÊT» et «MARCHE» sur tout interrupteur de l'alimentation primaire ou secondaire, y compris les interrupteurs sectionneurs.

Une «POSITION DE VEILLE» doit être indiquée par le symbole approprié  (IEC 60417-5009 (DB:2002-10)).

#### 1.7.8.4 Marquage utilisant des chiffres

Si des chiffres sont utilisés pour indiquer les différentes positions d'un dispositif de commande quelconque, la position «ARRÊT» doit être indiquée par le chiffre 0 (zéro) et les chiffres plus élevés doivent être utilisés pour indiquer une charge, une puissance, etc., plus élevées.

#### 1.7.9 Isolation des sources d'alimentation multiples

Lorsqu'il y a plusieurs connexions alimentant un matériel sous une TENSION DANGEREUSE ou à des NIVEAUX D'ÉNERGIE DANGEREUX, un marquage placé en évidence à proximité de l'accès aux parties dangereuses prévu pour le PERSONNEL DE MAINTENANCE doit indiquer quel est ou quels sont le ou les dispositifs de sectionnement isolant complètement le matériel et quels dispositifs de sectionnement peuvent être utilisés pour isoler chaque section du matériel.

#### 1.7.10 Thermostats et autres dispositifs de réglage

Les THERMOSTATS et autres dispositifs de réglage analogues destinés à être réglés au cours de l'installation ou en usage normal doivent être pourvus d'une indication donnant le sens de l'augmentation ou de la diminution de la valeur de la grandeur réglée. Une indication par les symboles + et – est permise.

#### 1.7.11 Durabilité

Toutes les marques et indications prescrites dans la présente norme doivent être durables et lisibles. Dans l'appréciation de la durabilité du marquage, il doit être tenu compte de l'effet d'une utilisation normale.

*La vérification de la conformité consiste à effectuer un examen et à frotter les marques et indications à la main pendant 15 s avec un chiffon imbibé d'eau et de nouveau pendant 15 s avec un chiffon imbibé d'essence. Après cet essai, les marques et indications doivent être lisibles; il ne doit pas être possible d'enlever facilement les plaques signalétiques et celles-ci ne doivent pas se recroqueviller.*

*L'essence qui doit être utilisée pour l'essai est de l'hexane, un solvant aliphatique avec une teneur maximale en carbures aromatiques de 0,1 % en volume, une teneur en kauributanol de 29, une température initiale d'ébullition d'environ 65 °C, un point sec d'environ 69 °C et une masse volumique d'environ 0,7 kg/l.*

*Sinon, il est autorisé d'utiliser un hexane approprié comme réactif avec un minimum de 85 % comme n-hexane.*

NOTE La désignation "n-hexane" correspond à la nomenclature chimique pour un hydrocarbure "normal" ou à chaîne droite. Cette essence peut aussi être identifiée comme hexane approprié comme réactif (CAS# 110-54-3) certifié par l'ACS (American Chemical Society).



### 1.7.12 Parties amovibles

Les marquages exigés par la présente norme ne doivent pas être placés sur des parties amovibles qui peuvent être remises en place de telle sorte que le marquage devienne trompeur.

### 1.7.13 Batteries remplaçables

Si un matériel est pourvu d'une batterie remplaçable, et si son remplacement par une batterie de type incorrect peut provoquer une explosion (par exemple dans le cas de certains types de batteries au lithium), ce qui suit est applicable:

- si la batterie est placée dans une ZONE D'ACCÈS DE L'OPÉRATEUR, il doit y avoir un marquage à côté de la batterie ou un avis à la fois dans les instructions pour l'utilisation et dans les instructions pour la maintenance;
- si la batterie est placée ailleurs dans le matériel, il doit y avoir un marquage à côté de la batterie ou un avis dans les instructions pour la maintenance.

Ce marquage ou cet avis doit inclure le texte suivant ou un texte similaire:

**ATTENTION**  
**IL Y A RISQUE D'EXPLOSION SI LA BATTERIE EST REMPLACÉE**  
**PAR UNE BATTERIE DE TYPE INCORRECT.**  
**METTRE AU REBUT LES BATTERIES USAGÉES**  
**CONFORMÉMENT AUX INSTRUCTIONS**

### 1.7.14 Matériel pour emplacements à accès restreint

Pour le matériel destiné à être installé uniquement dans un EMBLEMMENT À ACCÈS RESTREINT, les instructions d'installation doivent contenir une indication à cet effet.

## 2 Protection contre les dangers

### 2.1 Protection contre les chocs électriques et les dangers de transfert d'énergie

#### 2.1.1 Protection dans la zone d'accès de l'opérateur

Le présent paragraphe spécifie des exigences pour la protection contre les chocs électriques provenant des parties sous tension, fondées sur le principe que l'OPÉRATEUR est autorisé à avoir accès à:

- des parties nues de CIRCUITS TBTS; et
- des parties nues de circuits à limitation de courant; et
- des CIRCUITS TRT dans les conditions spécifiées en 2.1.1.1.

L'accès à d'autres parties et câblages sous tension, et à leur isolation, est restreint comme spécifié en 2.1.1.1.

Des exigences supplémentaires sont spécifiées en 2.1.1.5 et en 2.1.1.8 pour la protection contre les dangers de transfert d'énergie.

##### 2.1.1.1 Accès aux parties sous tension

Le matériel doit être construit de façon qu'il existe, dans les ZONES D'ACCÈS DE L'OPÉRATEUR, une protection suffisante contre un contact avec:

- des parties nues de CIRCUITS TBT; et
- des parties nues sous TENSIONS DANGEREUSES; et
- l'ISOLATION SOLIDE assurant l'ISOLATION FONCTIONNELLE OU PRINCIPALE de parties ou de câblages dans les CIRCUITS TBT à l'exception de ce qui est permis en 2.1.1.3; et
- l'isolation solide assurant l'isolation fonctionnelle ou l'isolation principale de parties ou de câblages sous tension dangereuse; et

NOTE 1 L'ISOLATION FONCTIONNELLE comprend mais n'est pas limitée à une isolation telle que du vernis, de l'émail à base de solvant, du papier ordinaire, du coton et une pellicule d'oxyde ou une isolation déplaçable telle que des perles isolantes et de la matière de remplissage autre que de la résine autodurcissante.

- des parties conductrices non mises à la terre séparées des CIRCUITS TBT ou des parties sous TENSION DANGEREUSE par une ISOLATION FONCTIONNELLE OU PRINCIPALE seulement; et
- les parties nues des CIRCUITS TRT avec l'exception que l'accès est permis avec:
  - les contacts de connecteurs qui ne peuvent pas être touchés par le calibre d'essai (Figure 2C);
  - les parties conductrices nues à l'intérieur d'un compartiment pour piles ou batteries conforme à 2.1.1.2;
  - les parties nues conductrices des CIRCUITS TRT-1 qui ont un point quelconque connecté, conformément à 2.6.1 d), à une borne de mise à la terre de protection;
  - les parties nues conductrices des connecteurs dans les CIRCUITS TRT-1 qui sont séparées des parties conductrices accessibles non mises à la terre du matériel conformément à 6.2.1.

NOTE 2 Un exemple typique est l'enveloppe d'un connecteur coaxial.

NOTE 3 L'accès aux CIRCUITS TRT-1 et aux CIRCUITS TRT-3 à travers d'autres circuits est également restreint par 6.2.1, dans certains cas.

Il n'y a pas de restriction pour l'accès aux CIRCUITS À LIMITATION DE COURANT.

Ces exigences sont applicables à toutes les positions du matériel, lorsqu'il est équipé de conducteurs et mis en fonctionnement en usage normal.

La protection doit être réalisée par isolation ou par mise en place de dispositifs de garde ou par utilisation de verrouillages.

*La vérification est effectuée par tout ce qui suit:*

- a) *Par un examen.*
- b) *Par un essai avec le doigt d'épreuve, Figure 2A, qui ne doit pas se trouver en contact avec les parties décrites ci-dessus, lorsqu'il est appliqué aux ouvertures dans les ENVELOPPES après enlèvement des parties détachables par l'OPÉRATEUR, y compris les portes fusibles, et avec les portes et couvercles accessibles à l'OPÉRATEUR ouverts. Il est permis de laisser les lampes en place pour cet essai. Les connecteurs détachables par l'OPÉRATEUR, autres que ceux conformes à la CEI 60083, la CEI 60309, la CEI 60320, la CEI 60906-1 ou la CEI 60906-2 doivent également être essayés pendant la déconnexion.*
- c) *Par un essai avec la broche d'essai, Figure 2B, qui ne doit pas se trouver en contact avec des parties nues sous TENSION DANGEREUSE lorsqu'elle est appliquée à travers les ouvertures dans les ENVELOPPES ÉLECTRIQUES externes. Les parties détachables par l'OPÉRATEUR, y compris les portes fusibles et les lampes, sont laissées en place, et les portes et couvercles accessibles à l'OPÉRATEUR sont fermés pendant cet essai.*
- d) *Par un essai avec le calibre d'essai Figure 2C, lorsque cela est approprié.*

*Le doigt d'épreuve, la broche d'essai et le calibre d'essai sont appliqués comme ci-dessus, sans force appréciable, dans toutes les positions possibles, avec l'exception suivante: les matériels à poser sur le sol et de masse supérieure à 40 kg ne sont pas inclinés.*

*Le matériel destiné à être encastré, monté sur des racks ou incorporé dans des matériels plus importants est essayé avec l'accès au matériel limité suivant la méthode de fixation indiquée en détail dans les instructions d'installation.*


*Les ouvertures ne permettant pas l'entrée du doigt d'épreuve, essai b) ci-dessus sont, de plus, essayées au moyen d'un doigt d'épreuve de mêmes dimensions mais droit et sans jointures, qui est appliqué avec une force de 30 N. Si ce dernier doigt d'épreuve pénètre, l'essai b) est répété avec l'exception que le doigt est poussé dans l'ouverture avec toute force nécessaire jusqu'à une valeur de 30 N.*

NOTE 4 Si un indicateur de contact électrique est utilisé pour montrer un contact, il y a lieu de prendre des précautions afin que l'application de l'essai ne détériore pas les composants des circuits électroniques.

*Lorsque le contact entre l'outil d'essai et la partie n'est pas autorisé dans les essais ci-dessus, il n'y a pas d'exigence d'espace minimal pour les tensions inférieures à 1 000 V en courant alternatif et à 1 500 V en courant continu. Pour des tensions supérieures, il doit y avoir un espace entre la partie sous TENSION DANGEREUSE et le doigt d'épreuve, Figure 2A, ou la broche d'essai, Figure 2B, placé dans la position la plus défavorable. Cet espace, voir la Figure 2D, doit soit*

- *avoir une longueur minimale égale à la DISTANCE DANS L'AIR minimale pour l'ISOLATION PRINCIPALE spécifiée en 2.10.3 (ou à l'Annexe G), soit*
- *satisfaire à l'essai de rigidité diélectrique de 5.2.2.*

*Si des composants sont réglables, par exemple pour assurer la tension d'une courroie, l'essai au doigt d'épreuve est effectué avec chaque composant réglé dans la position la plus défavorable de la plage de réglage, la courroie étant enlevée, si nécessaire, à cet effet.*

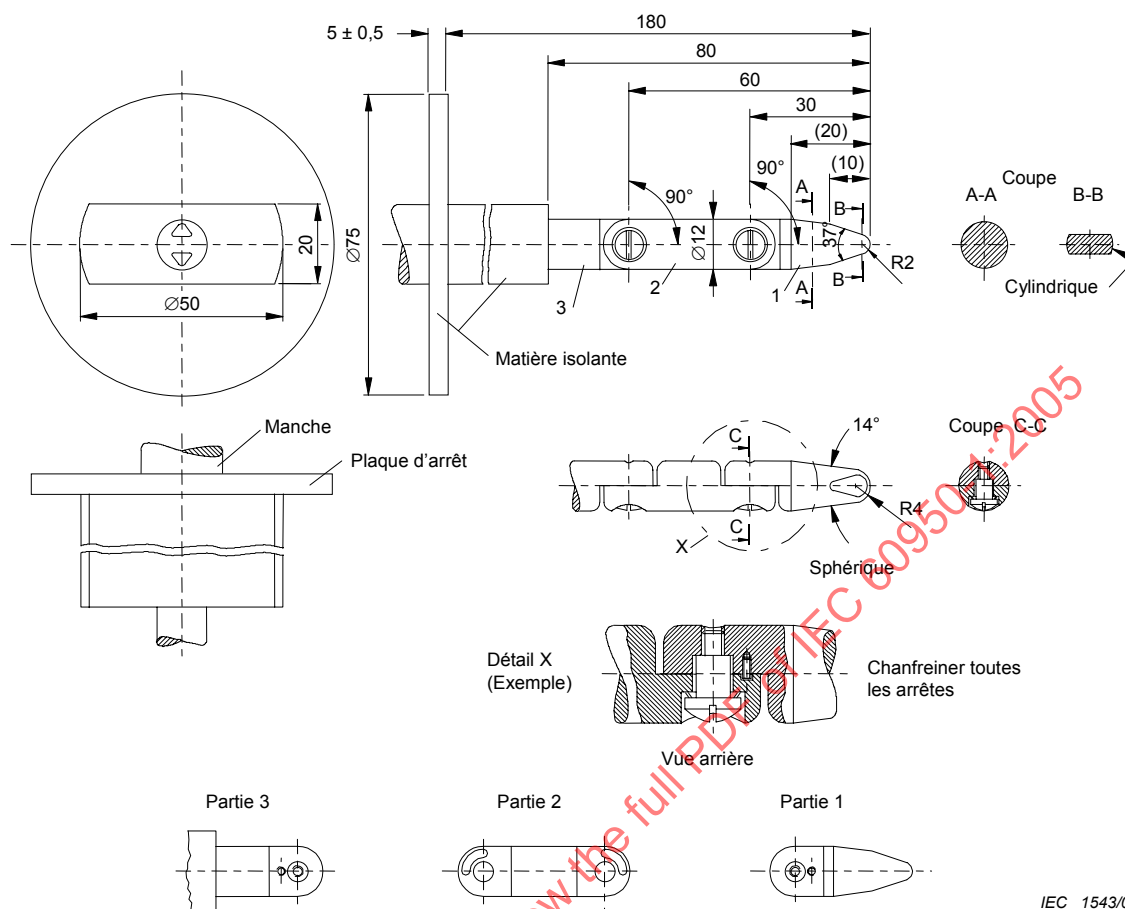

*Dimensions linéaires en millimètres*

Tolérances des dimensions sans indication de tolérances:

- sur les angles de 14° et 37°:  $\pm 15'$
- sur les rayons:  $\pm 0,1 \text{ mm}$
- sur les dimensions linéaires:
 

|                                        |                          |
|----------------------------------------|--------------------------|
| $\leq 15 \text{ mm}$ :                 | $0$<br>$-0,1 \text{ mm}$ |
| $> 15 \text{ mm} \leq 25 \text{ mm}$ : | $\pm 0,1 \text{ mm}$     |
| $> 25 \text{ mm}$ :                    | $\pm 0,3 \text{ mm}$     |

Matériau du doigt: par exemple acier trempé.


Les deux articulations de ce doigt doivent permettre le mouvement dans le même plan et dans la même direction avec un angle de  $90^{\circ} \pm 10^{\circ}$ .

NOTE 1 L'emploi de la solution pointe-rainure n'est qu'une des solutions possibles pour limiter l'angle de pliage à 90°. Pour cette raison, les dimensions et les tolérances de ces détails ne sont pas indiquées dans le dessin. La conception réelle doit assurer un angle de pliage de 90° avec une tolérance de 0° à +10°.

NOTE 2 Les dimensions entre parenthèses sont données uniquement pour information.

NOTE 3 Les dimensions du doigt d'épreuve sont celles données dans la CEI 61032, Figure 2, calibre d'essai B. Dans certains cas, les tolérances sont différentes.

### Figure 2A – Doigt d'épreuve

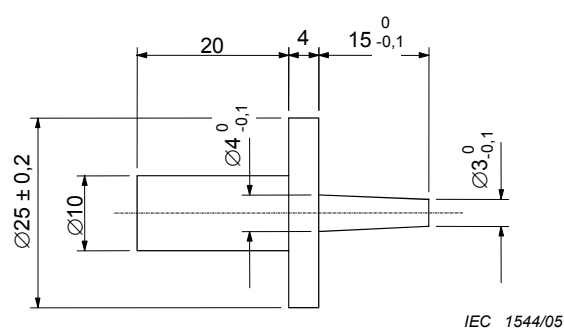


Dimensions en millimètres

Les dimensions de la poignée (Ø 10 et 20) ne sont pas critiques.

NOTE Les dimensions de la broche d'essai sont celles données dans la CEI 61032, Figure 9, calibre d'essai 13. Dans certains cas, les tolérances sont différentes.

Figure 2B – Broche d'essai

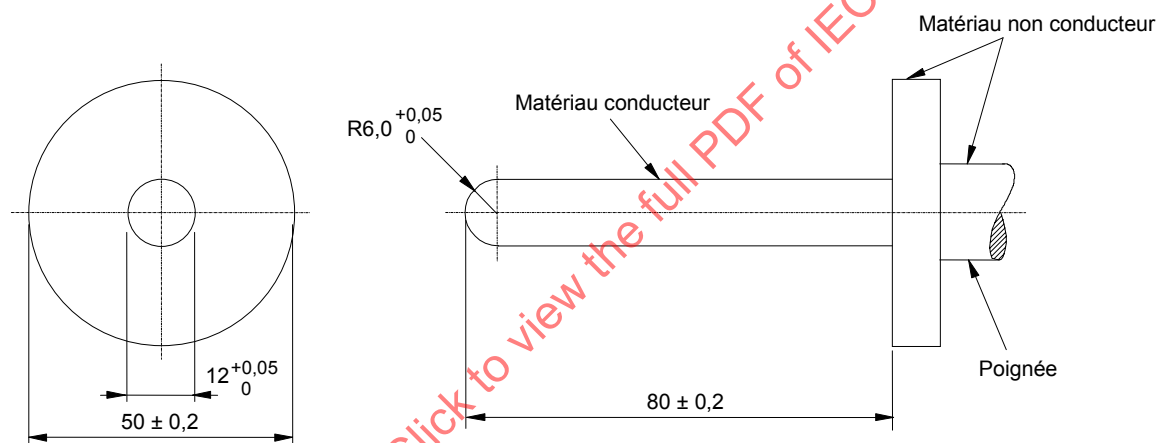

Dimensions en millimètres

Figure 2C – Calibre d'essai

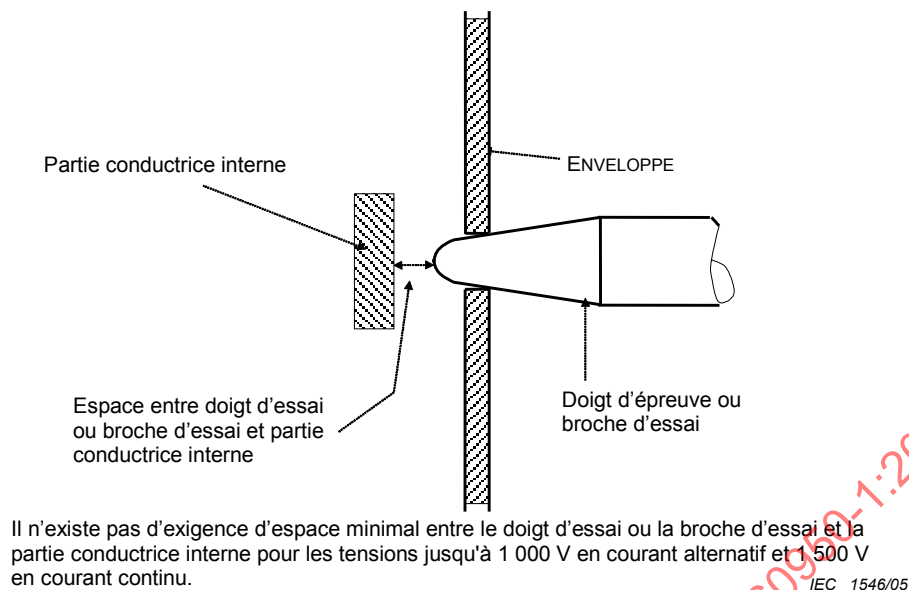


**Figure 2D – Accessibilité des parties conductrices internes**

#### 2.1.1.2 Compartiments pour piles ou batteries

L'accès par un OPÉRATEUR aux parties conductrices nues des CIRCUITS TRT à l'intérieur d'un compartiment de batteries dans le matériel est permis si toutes les conditions suivantes sont remplies:

- le compartiment a une porte qui nécessite une action délibérée pour son ouverture, comme l'emploi d'un OUTIL ou d'un dispositif à verrouillage; et
- le CIRCUIT TRT n'est pas accessible lorsque la porte est fermée; et
- il y a près de la porte ou sur la porte, si celle-ci est fixée au matériel, un marquage donnant les instructions pour la protection de l'UTILISATEUR lorsque la porte est ouverte.

Une information indiquant que le câble téléphonique doit être déconnecté du matériel avant l'ouverture de la porte est un exemple d'instruction acceptable.

*La conformité est vérifiée par examen.*

#### 2.1.1.3 Accès au câblage TBT

L'accessibilité à l'isolation du câblage interne dans un CIRCUIT TBT par l'OPÉRATEUR est autorisée, pourvu que:

- a) l'isolation soit conforme aux exigences d'une ISOLATION SUPPLÉMENTAIRE détaillées en 3.1.4; ou
- b) que toutes les conditions suivantes soient remplies:
  - le câblage ne nécessite pas de manipulation par l'OPÉRATEUR et il est placé de façon que l'OPÉRATEUR n'ait pas la possibilité de tirer dessus ou il est fixé de façon que les points de connexion soient soulagés de toute contrainte; et
  - le câblage est placé et fixé de façon à ne pas toucher des parties conductrices accessibles non mises à la terre; et

- l'isolation satisfait aux essais de rigidité diélectrique de 5.2.2 pour l'ISOLATION SUPPLÉMENTAIRE; et
- la distance à travers l'isolation est supérieure ou égale aux valeurs données dans le Tableau 2A.

**Tableau 2A – Distance à travers l'isolation du câblage interne**

| TENSION DE SERVICE<br>(en cas de défaillance de l'ISOLATION PRINCIPALE) |                          | Distance minimale<br>à travers l'isolation<br>mm |
|-------------------------------------------------------------------------|--------------------------|--------------------------------------------------|
| V crête ou continue                                                     | V efficace (sinusoïdale) |                                                  |
| De 71 à 350 inclus                                                      | De 50 à 250 inclus       | 0,17                                             |
| Supérieure à 350                                                        | Supérieure à 250         | 0,31                                             |

La vérification est effectuée par examen, par des mesures et par les essais de 5.2.2.

#### 2.1.1.4 Accès à des circuits sous tension dangereuse

L'isolation du câblage interne sous TENSION DANGEREUSE qui est accessible à l'OPÉRATEUR ou qui n'est pas placé ou fixé pour l'empêcher de toucher des parties conductrices accessibles non mises à la terre doit satisfaire aux exigences de 3.1.4 pour l'ISOLATION DOUBLE ou l'ISOLATION RENFORCÉE.

La vérification est effectuée par examen, par des mesures et, si nécessaire, par un essai.

#### 2.1.1.5 Dangers de transfert d'énergie

Il ne doit pas y avoir de risque de blessure dû à un transfert d'énergie dans une ZONE D'ACCÈS DE L'OPÉRATEUR.

La vérification est effectuée par examen, par des mesures et, si nécessaire, par essais.

a) Il existe un risque de blessure dû à un transfert d'énergie s'il est probable qu'au moins deux ou plusieurs parties nues (dont l'une peut être mise à la terre), entre lesquelles existe un NIVEAU D'ÉNERGIE DANGEREUX, seront court-circuitées par un objet métallique.

b) La probabilité de court-circuiter les parties considérées est déterminée au moyen du doigt d'épreuve, Figure 2A (voir 2.1.1.1), en position droite. Il ne doit pas être possible de court-circuiter ces parties avec ce doigt d'épreuve, appliqué sans force appréciable.

c) L'existence d'un NIVEAU D'ÉNERGIE DANGEREUX est déterminée comme suit:

- 1) le matériel étant dans les conditions normales de fonctionnement, une charge résistive variable est connectée entre les parties considérées et réglée pour obtenir un niveau de 240 VA. Si nécessaire, on effectue un réglage supplémentaire pour maintenir les 240 VA pendant 60 s. Si la tension est supérieure à 2 V, la puissance de sortie est à un NIVEAU D'ÉNERGIE DANGEREUX, sauf si un dispositif de protection contre les surintensités s'ouvre pendant cet essai ou si, pour toute autre raison, la puissance ne peut être maintenue à 240 VA pendant 60 s;
- 2) l'énergie emmagasinée, E, dans un condensateur est à un NIVEAU D'ÉNERGIE DANGEREUX si la tension U est supérieure ou égale à 2 V, et si E, calculée comme suit; dépasse 20 J:

$$E = 0,5 CU^2 \times 10^{-6}$$

où

*E est l'énergie, en joules (J);*

*C est la capacité, en microfarads ( $\mu\text{F}$ );*

*U est la tension mesurée aux bornes du condensateur, en volts (V).*

#### 2.1.1.6 Organes de commande

Les axes conducteurs des boutons de commande, des poignées, des leviers et des organes de manœuvre analogues situés dans des ZONES D'ACCÈS DE L'OPÉRATEUR ne doivent pas être connectés à des parties sous TENSION DANGEREUSE, des CIRCUITS TBT ou des CIRCUITS TRT.

De plus, les poignées, leviers, boutons de commande et les organes de manœuvres analogues conducteurs qui sont manœuvrés en usage normal et qui sont mis à la terre uniquement par un pivot ou par un roulement doivent être soit:

- séparés des tensions dangereuses par une isolation double ou renforcée; soit
- avoir leurs parties accessibles couvertes par une isolation supplémentaire pour une tension dangereuse et par une isolation principale pour un circuit trt.

*La vérification est effectuée par examen, par des mesures et par les essais de rigidité diélectrique applicables de 5.2.2.*

#### 2.1.1.7 Décharge des condensateurs dans le matériel

Le matériel doit être conçu de façon qu'en un point externe de déconnexion d'un RÉSEAU D'ALIMENTATION accessible à l'OPÉRATEUR, le risque de choc électrique dû à la charge stockée des condensateurs connectés dans le matériel soit réduit. Aucun essai de choc électrique n'est requis à moins que la tension nominale du RÉSEAU D'ALIMENTATION ne dépasse 42,4 V en valeur de crête ou 60 V en courant continu.

*La vérification est effectuée par examen du matériel et des schémas des circuits correspondants en tenant compte de la possibilité de déconnexion de l'alimentation avec l'interrupteur «MARCHE»/«ARRÊT» dans chacune des positions.*

*Le matériel est considéré comme conforme si tout condensateur ayant une valeur de capacité marquée ou nominale supérieure à 0,1  $\mu\text{F}$  et dans un circuit relié au RÉSEAU D'ALIMENTATION a un moyen de décharge entraînant une constante de temps inférieure ou égale à:*

- 1 s pour les MATÉRIELS DU TYPE A RACCORDÉS PAR PRISE DE COURANT; et
- 10 s pour les MATÉRIELS DU TYPE B RACCORDÉS PAR PRISE DE COURANT.

*La constante de temps correspondante est le produit de la capacité effective en microfarads par la résistance effective de décharge en mégohms. S'il est difficile de déterminer les valeurs de la capacité effective et de la résistance effective, une mesure de la décroissance de la tension au point externe de déconnexion peut être utilisée. Lorsqu'on réalise la mesure de la décroissance de la tension, le résultat est rapporté à un appareil ayant une impédance d'entrée comprenant une résistance de  $100\text{ M}\Omega \pm 5\text{ M}\Omega$  en parallèle avec une capacité d'entrée de  $20\text{ pF} \pm 5\text{ pF}$ .*

NOTE Pendant un intervalle égal à une constante de temps, la tension se sera réduite à 37 % de sa valeur initiale.



### 2.1.1.8 Dangers liés à l'énergie – réseaux d'alimentation en courant continu

Le matériel doit être conçu de manière à ce qu'un point extérieur de déconnexion accessible à l'OPÉRATEUR d'un RÉSEAU D'ALIMENTATION EN COURANT CONTINU soit dans une des situations suivantes:

- il n'existe pas de NIVEAU D'ÉNERGIE DANGEREUX (par exemple dû à la charge stockée sur un condensateur ou une batterie dans le matériel ou à un réseau redondant D'ALIMENTATION EN COURANT CONTINU en alimentation de secours), ou
- le NIVEAU D'ÉNERGIE DANGEREUX est éliminé dans les 2 s qui suivent la déconnexion.

Les points extérieurs de déconnexion comprennent les fiches des MATÉRIELS RACCORDÉS PAR PRISE DE COURANT et les interrupteurs sectionneurs extérieurs au matériel.

*La vérification est effectuée par l'examen du matériel et des schémas des circuits correspondants en tenant compte de la possibilité de déconnexion de l'alimentation avec l'interrupteur «MARCHE»/«ARRÊT» dans chacune des positions.*

*Si nécessaire, l'existence d'un NIVEAU D'ÉNERGIE DANGEREUX est déterminée comme suit:*

#### a) Condensateur connecté à un RÉSEAU D'ALIMENTATION EN COURANT CONTINU

*Un essai est réalisé, le matériel fonctionnant normalement. Le RÉSEAU D'ALIMENTATION EN COURANT CONTINU est ensuite déconnecté et la tension à travers le condensateur (U) est mesurée 2 s après la déconnexion.*

*L'énergie stockée est calculée à partir de la formule suivante:*

$$E = 0,5 CU^2 \times 10^{-6}$$

*où*

*E est l'énergie, en joules (J);*

*C est la capacité, en microfarads (μF);*

*U est la tension mesurée aux bornes du condensateur, en volts (V).*

*Un NIVEAU D'ÉNERGIE DANGEREUX existe si la tension, U, est égale à 2 V ou plus et si l'énergie stockée, E, est supérieure à 20 J.*

#### b) Batterie interne connectée à un RÉSEAU D'ALIMENTATION EN COURANT CONTINU

*Un essai est réalisé, le RÉSEAU D'ALIMENTATION EN COURANT CONTINU étant déconnecté et une charge résistive étant connectée aux bornes d'entrée là où le RÉSEAU D'ALIMENTATION EN COURANT CONTINU est normalement connecté. L'appareil en essai est mis en fonctionnement avec alimentation par sa batterie interne. La charge variable est réglée de manière à tirer 240 VA. Si nécessaire, un réglage supplémentaire est réalisé pour maintenir la valeur de 240 VA pendant 60 s.*

*Si U est supérieure à 2 V, la puissance de sortie est à un NIVEAU D'ÉNERGIE DANGEREUX, sauf si un dispositif de protection contre les surintensités s'ouvre au cours de l'essai ci-dessus ou si, pour toute autre raison, la puissance ne peut pas être maintenue à 240 VA pendant 60 s.*

*Si la puissance de sortie présente un NIVEAU D'ÉNERGIE DANGEREUX, un essai supplémentaire est réalisé avec la charge variable déconnectée et l'APPAREIL EN ESSAI mis en fonctionnement à partir du RÉSEAU D'ALIMENTATION EN COURANT CONTINU.*

*L'alimentation est déconnectée et le niveau d'énergie aux bornes d'entrée, 2 s après la déconnexion, ne doit pas être à un NIVEAU D'ÉNERGIE DANGEREUX.*

NOTE On estime qu'il sera possible de court-circuiter les parties accidentellement à l'extérieur du matériel. Il n'existe pas d'essai pour déterminer la probabilité de court-circuiter des parties.

### **2.1.1.9 Amplificateurs audio dans les matériels de traitement de l'information**

Les circuits accessibles, les bornes et les parties des amplificateurs audio et des circuits associés doivent être conformes soit

- à 2.1.1.1 de la présente norme, soit
- à 9.1.1 de la CEI 60065.

*La vérification est effectuée par examen et, si nécessaire, par les essais de 9.1.1 de la CEI 60065, au cours desquels les amplificateurs audio sont mis en fonctionnement conformément à 4.2.4 de la CEI 60065.*

### **2.1.2 Protection dans une zone d'accès pour la maintenance**

Dans une ZONE D'ACCÈS POUR LA MAINTENANCE, les exigences suivantes s'appliquent.

Les exigences de 2.1.1.7 s'appliquent à tous les types de matériels et, pour les MATÉRIELS RELIÉS À DEMEURE AU RÉSEAU, la limite de constante de temps est de 10 s. En outre, les exigences de 2.1.1.8 s'appliquent.

Les parties nues sous des TENSIONS DANGEREUSES doivent être situées ou protégées de sorte que des contacts involontaires avec de telles parties ne soient pas susceptibles de se produire au cours d'opérations de maintenance concernant d'autres parties du matériel.

Les parties nues fonctionnant sous des TENSIONS DANGEREUSES doivent être situées ou protégées de sorte qu'un court-circuit involontaire avec des CIRCUITS TBTS ou des CIRCUITS TRT (par exemple par des OUTILS ou des calibres d'essai utilisés par le PERSONNEL DE MAINTENANCE) soit improbable.

Aucune exigence n'est spécifiée concernant l'accessibilité aux CIRCUITS TBT ou aux CIRCUITS TRT. Toutefois, les parties nues qui présentent un NIVEAU D'ÉNERGIE DANGEREUX doivent être situées ou protégées de telle façon qu'un court-circuit involontaire, par des matériaux conducteurs qui peuvent être présents, ne soit pas susceptible de se produire pendant les opérations de maintenance concernant d'autres parties du matériel.

Toutes les protections prescrites pour la conformité à 2.1.2 doivent être aisément amovibles et remplaçables si leur retrait est nécessaire pour la maintenance.

*La vérification est effectuée par examen et par des mesures. Pour décider si un contact avec des parties nues est ou n'est pas susceptible de se produire, il est tenu compte de la façon dont le PERSONNEL DE MAINTENANCE a besoin d'accéder au-delà, ou à proximité, des parties nues pour intervenir sur d'autres parties. Pour la détermination d'un NIVEAU D'ÉNERGIE DANGEREUX, voir 2.1.1.5 c).*

### **2.1.3 Protection dans un emplacement à accès restreint**

Pour les matériels à installer dans les EMBLEMES À ACCÈS RESTREINT, les exigences pour les ZONES D'ACCÈS DE L'OPÉRATEUR s'appliquent à l'exception de ce qui est permis dans les quatre alinéas suivants.

En général, les exigences de 2.1.1.7 et 2.1.1.8 s'appliquent à tous les types de matériels sauf aux MATÉRIELS RELIÉS A DEMEURE. Toutefois, des marquages et des instructions appropriés doivent être fournis pour protéger contre les dangers de transfert d'énergie en présence d'un NIVEAU D'ÉNERGIE DANGEREUX.

Si un CIRCUIT SECONDAIRE SOUS TENSION DANGEREUSE est utilisé pour alimenter un générateur de signal de sonnerie qui satisfait à 2.3.1 b), le contact avec les parties nues du circuit est permis avec le doigt d'épreuve, Figure 2A (voir 2.1.1.1). Toutefois, de telles parties doivent être situées ou protégées de telle sorte qu'un contact involontaire ne soit pas susceptible de se produire.

Les parties nues qui présentent un NIVEAU D'ÉNERGIE DANGEREUX doivent être situées ou protégées de telle façon qu'un court-circuit involontaire par des matériaux conducteurs qui peuvent être présents ne soit pas susceptible de se produire.

Aucune exigence n'est spécifiée concernant le contact avec les parties nues des CIRCUITS TRT-1, TRT-2 et TRT-3.

*La vérification est effectuée par examen et par des mesures. Pour décider si un contact avec des parties nues est ou n'est pas susceptible de se produire, il faut tenir compte de la façon dont le PERSONNEL DE MAINTENANCE a besoin d'accéder au-delà, ou à proximité, des parties nues pour intervenir sur d'autres parties. Pour la détermination d'un NIVEAU D'ÉNERGIE DANGEREUX, voir 2.1.1.5 c).*

## **2.2 Circuits TBTS**

### **2.2.1 Exigences générales**

Les CIRCUITS TBTS doivent présenter des tensions de contact sûres, à la fois dans les conditions normales de fonctionnement et après un premier défaut (voir 1.4.14). Lorsque aucune charge extérieure n'est appliquée à un CIRCUIT TBTS (circuit ouvert), les limites de tension de 2.2.2 et 2.2.3 ne doivent pas être dépassées.

*La conformité avec 2.2.1 à 2.2.4 est vérifiée par examen et par les essais appropriés.*

### **2.2.2 Tensions dans les conditions normales**

Dans un CIRCUIT TBTS unique ou dans des CIRCUITS TBTS interconnectés, la tension entre deux conducteurs quelconques du CIRCUIT ou des CIRCUITS TBTS et entre un de ces conducteurs quelconques et la terre (voir 1.4.9), ne doit pas dépasser 42,4 V valeur de crête, ou 60 V tension continue, dans les conditions normales de fonctionnement.

NOTE 1 Un circuit qui est conforme aux exigences ci-dessus mais qui est soumis à des surtensions provenant d'un RÉSEAU DE TÉLÉCOMMUNICATIONS ou d'un SYSTÈME DE DISTRIBUTION PAR CÂBLES est un CIRCUIT TRT-1.

NOTE 2 Pour les conditions normales, la limite de tension des CIRCUITS TBTS est la même que pour un CIRCUIT TBT; un CIRCUIT TBTS peut être considéré comme un CIRCUIT TBT avec une protection supplémentaire dans les conditions de défaut.

### **2.2.3 Tensions dans les conditions de défaut**

A l'exception de ce qui est permis en 2.3.2.1 b), dans l'éventualité d'un premier défaut (voir 1.4.14), les tensions entre deux conducteurs quelconques du CIRCUIT ou de CIRCUITS TBTS et entre un de ces conducteurs quelconques et la terre (voir 1.4.9), ne doivent pas être supérieures à 42,4 V valeur de crête, ou 60 V tension continue ( $V_1$  à la Figure 2E) pendant plus de 200 ms. De plus, une limite de 71 V valeur de crête ou 120 V tension continue ( $V_2$  à la Figure 2E) ne doit pas être dépassée.

NOTE Au Canada et aux Etats-Unis, l'exception prévue en 2.3.2.1 b) n'est pas permise.

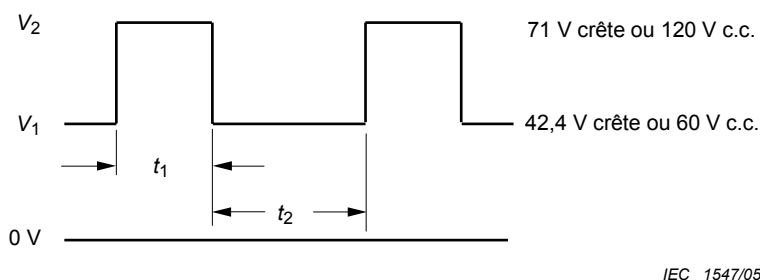


**Figure 2E – Tensions dans les circuits TBTS dans les conditions de premier défaut**

Pour les tensions de nature répétitive après un défaut (par exemple provenant d'alimentation en mode de protection en courant avec réarmement continu), des impulsions supplémentaires supérieures à  $V_1$  (mais inférieures à  $V_2$ ) sont autorisées dans les conditions suivantes:

- si  $t_1 \leq 20$  ms,  $t_2$  doit être supérieur à 1 s;
- si  $t_1 > 20$  ms,  $t_2$  doit être supérieur à 3 s; et
- $t_1$  ne doit pas dépasser 200 ms.

Une seule impulsion supérieure à  $V_1$  est autorisée pendant la période  $t_1$ , mais elle peut avoir n'importe quelle forme d'onde.

A l'exception de ce qui est permis en 2.2.4, un circuit TBTS doit être séparé d'une partie soumise à une TENSION DANGEREUSE par une ou plusieurs des constructions spécifiées en 2.9.4.

Il est permis que certaines parties d'un circuit (par exemple un circuit transformateur-redresseur) satisfassent aux exigences pour les CIRCUITS TBTS et soient accessibles à l'OPÉRATEUR, alors que d'autres parties du même circuit ne satisfont pas à toutes les exigences pour le CIRCUIT TBTS et ne sont donc pas autorisées à être accessibles à l'OPÉRATEUR.

#### 2.2.4 Connexion des circuits TBTS à d'autres circuits

Il est permis qu'un CIRCUIT TBTS soit connecté à d'autres circuits pourvu que, lorsque le CIRCUIT TBTS est ainsi connecté, toutes les conditions suivantes soient remplies:

- à l'exception de ce qui est permis en 1.5.7 et 2.4.3, le CIRCUIT TBTS doit être séparé de tout CIRCUIT PRIMAIRE (y compris le neutre) à l'intérieur du matériel par une ISOLATION PRINCIPALE; et
- le CIRCUIT TBTS satisfait aux limites de 2.2.2 dans les conditions normales de fonctionnement; et
- à l'exception de ce qui est spécifié en 2.3.2.1 b), le CIRCUIT TBTS satisfait aux limites de 2.2.3 dans le cas de premier défaut (voir 1.4.14) dans le CIRCUIT TBTS, ou dans le CIRCUIT SECONDAIRE auquel le CIRCUIT TBTS est connecté.

Si un CIRCUIT TBTS est connecté à un ou plusieurs autres circuits, le CIRCUIT TBTS est la partie qui satisfait aux exigences de 2.2.2 et 2.2.3.

Si un CIRCUIT TBTS est alimenté électriquement par un CIRCUIT SECONDAIRE qui est séparé d'un circuit sous TENSION DANGEREUSE par:

- une double isolation ou une isolation renforcée; ou

- un écran conducteur mis à la terre qui est séparé du circuit SOUS TENSION DANGEREUSE par une ISOLATION PRINCIPALE,

le CIRCUIT TBTS doit être considéré comme étant séparé du circuit sous TENSION DANGEREUSE par la même méthode.

NOTE Pour les exigences applicables en Norvège, voir 1.7.2.1 Note 6, 6.1.2.1 Note 2 et 6.1.2.2 Note.

Si un CIRCUIT TBTS est créé à partir d'un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE, et que le CIRCUIT SECONDAIRE sous TENSION DANGEREUSE est séparé du CIRCUIT PRIMAIRE par UNE DOUBLE ISOLATION ou par une ISOLATION RENFORCÉE, le CIRCUIT TBTS doit rester dans les limites données en 2.2.3 dans les conditions du premier défaut (voir 1.4.14). Dans ce cas, dans le but d'appliquer les conditions de premier défaut, le fait de court-circuiter l'isolation dans un transformateur qui assure la séparation entre le CIRCUIT SECONDAIRE sous TENSION DANGEREUSE et le CIRCUIT TBTS est considéré comme un premier défaut, pourvu que l'isolation dans le transformateur satisfasse à un essai de rigidité diélectrique pour l'ISOLATION PRINCIPALE conformément à 5.2.2.

## 2.3 Circuits TRT

### 2.3.1 Limites

Dans un CIRCUIT TRT unique ou dans des CIRCUITS TRT interconnectés, la tension entre deux conducteurs quelconques du ou des CIRCUITS TRT et entre un de ces conducteurs quelconques et la terre (voir 1.4.9) doit satisfaire à ce qui suit.

#### a) CIRCUITS TRT-1

Les tensions ne dépassent pas ce qui suit:

- les limites de tension de 2.2.2 pour un CIRCUIT TBTS dans les conditions normales de fonctionnement;
- les limites de tensions de la Figure 2F mesurées à travers une résistance de  $5\,000\ \Omega \pm 2\%$  dans l'éventualité d'un premier défaut (voir 1.4.14) dans le matériel.

NOTE 1 Dans l'éventualité d'un premier défaut de l'isolation ou de la défaillance d'un composant, la limite après 200 ms est la limite de 2.3.1 b) pour un CIRCUIT TRT-2 ou TRT-3 pour les conditions normales de fonctionnement.

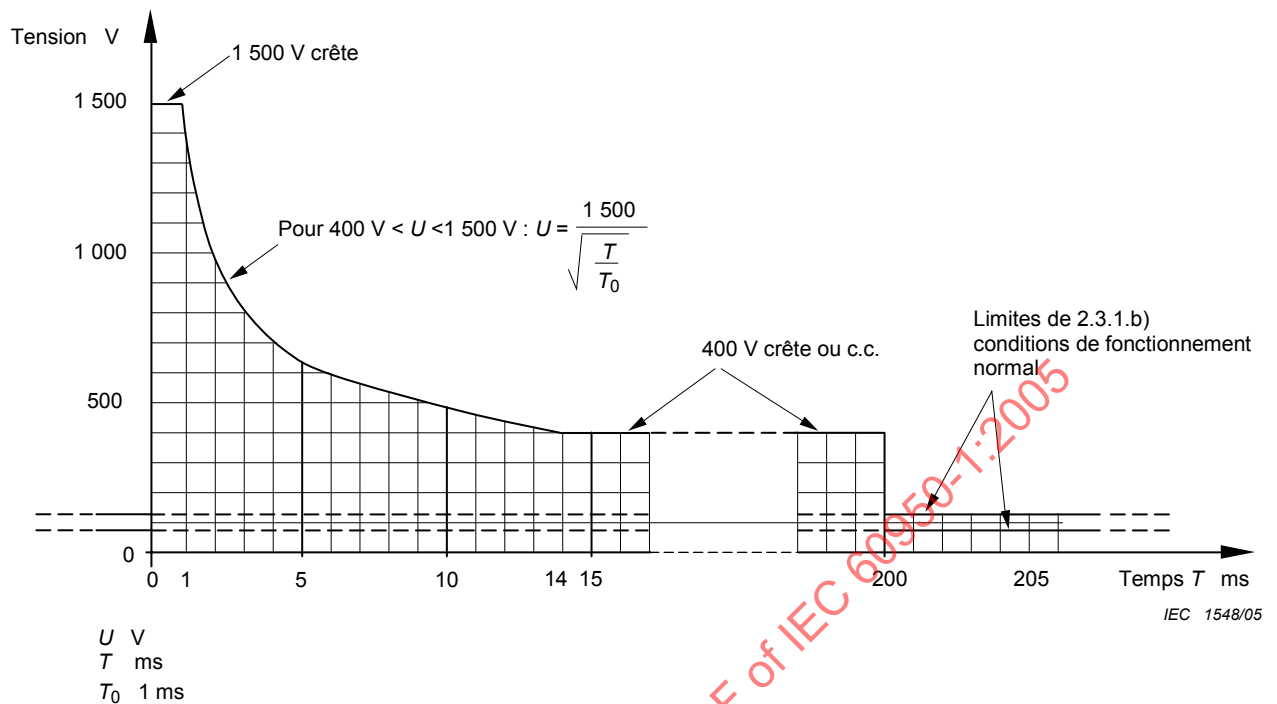


**Figure 2F – Tensions maximales admises après un premier défaut**

**b) CIRCUITS TRT-2 et TRT-3**

Les tensions dépassent les limites de 2.2.2 pour un CIRCUIT TBTS mais ne dépassent pas ce qui suit:

- lorsque les signaux de sonnerie de téléphone sont présents, des tensions telles que le signal satisfait aux critères des Articles M.2 ou M.3;
- en l'absence de signaux de sonnerie de téléphone:
  - une combinaison des TENSIONS CONTINUE et alternative dans les conditions normales de fonctionnement, telle que:

$$\frac{U_{ca}}{71} + \frac{U_{cc}}{120} \leq 1$$

où

$U_{ca}$  est la valeur crête de la tension alternative (V) à n'importe quelle fréquence;

$U_{cc}$  est la valeur de la TENSION CONTINUE (V).

NOTE 2 Si  $U_{cc}$  a la valeur zéro,  $U_{ca}$  peut atteindre 71 V valeur de crête.

NOTE 3 Si  $U_{ca}$  a la valeur zéro,  $U_{cc}$  peut atteindre 120 V.

et

- les limites de tensions de la Figure 2F mesurées à travers une résistance de  $5\,000\,\Omega \pm 2\%$  dans l'éventualité d'un premier défaut (voir 1.4.14) dans le matériel.

*La vérification est effectuée par examen et par des mesures.*

NOTE 4 Les signaux télégraphiques et les signaux de télétype peuvent être présents sur les RÉSEAUX DE TÉLÉCOMMUNICATIONS existants. Toutefois, l'utilisation de ces signaux est considérée comme obsolète et leurs caractéristiques ne sont pas prises en considération dans la présente norme.

## 2.3.2 Séparation des circuits TRT des autres circuits et des parties accessibles

NOTE En Finlande, en Norvège et en Suède, il existe des exigences complémentaires d'isolation, voir 6.1.2.1 Note 2 et 6.1.2.2 Note.

### 2.3.2.1 Exigences générales

NOTE 1 Voir également 6.1.2, 6.2 et 7.3.

Les CIRCUITS TBTS, les CIRCUITS TRT-1 et les parties conductrices accessibles doivent être séparées des CIRCUITS TRT-2 et TRT-3 de telle manière qu'en cas de premier défaut (voir 1.4.14) les deux conditions suivantes soient satisfaites:

- a) les tensions des CIRCUITS TRT-1 ne dépassent pas les limites de la Figure 2F; et
- b) les tensions des CIRCUITS TBTS et des parties conductrices accessibles ne dépassent pas les limites spécifiées en 2.3.1 b) pour les CIRCUITS TRT-2 ET TRT-3 dans les conditions de fonctionnement normal.

NOTE 2 Au Canada et aux Etats Unis, en cas de premier défaut comme décrit ci-dessus, les limites de 2.2.3 s'appliquent aux CIRCUITS TBTS et aux parties conductrices accessibles.

NOTE 3 Dans les conditions normales de fonctionnement, les limites de 2.2.2 s'appliquent toujours à chaque CIRCUIT TBTS et partie conductrice accessible.

NOTE 4 Les limites de 2.3.1 s'appliquent toujours à chaque CIRCUIT TRT.

Au choix du fabricant, il est permis de traiter un CIRCUIT TRT-1 ou TRT-2 comme un circuit TRT-3. Dans ce cas, le CIRCUIT TRT-1 OU TRT-2 doit satisfaire toutes les exigences de séparation pour un CIRCUIT TRT-3.

Une des méthodes spécifiées en 2.3.2.2, 2.3.2.3, 2.3.2.4 et 2.10.5.13 doit être utilisée.

*La vérification est effectuée comme spécifié en 2.3.2.2, 2.3.2.3, 2.3.2.4 ou 2.10.5.13.*

### 2.3.2.2 Protection par l'isolation principale

Les exigences de 2.3.2.1 sont satisfaites si les parties sont séparées par l'ISOLATION PRINCIPALE.

*La vérification est effectuée par un examen, une mesure et l'essai de rigidité diélectrique de l'ISOLATION PRINCIPALE et, si nécessaire, par la simulation des défaillances des composants et de l'ISOLATION PRINCIPALE (voir 1.4.14). Toutefois, si une étude des schémas des circuits montre clairement que les limites spécifiées en 2.3.1 b) ne seront pas dépassées, il n'est pas nécessaire de simuler la défaillance des composants ni de l'ISOLATION PRINCIPALE.*

NOTE 1 L'essai de 2.3.5 n'est pas requis.

NOTE 2 Lorsque l'ISOLATION PRINCIPALE est fournie et lorsque 6.2.1 s'applique aussi à cette isolation, la tension d'essai prescrite en 6.2.2 est, dans la plupart des cas, supérieure à celle pour l'ISOLATION PRINCIPALE.

### 2.3.2.3 Protection par mise à la terre

Les exigences de 2.3.2.1 sont considérées comme satisfaites si le CIRCUIT TBTS, le CIRCUIT TRT-1 ou la partie conductrice accessible est connecté à la borne principale de mise à la terre de protection conformément à 2.6.1 c) ou d); et un des points suivants, a), b), c) ou d) s'applique.

- a) pour les MATÉRIELS RACCORDÉS PAR PRISE DE COURANT, une borne de mise à la terre séparée doit être fournie en plus de la borne principale de mise à la terre de protection, si elle existe (voir 2.6.4.1). Les instructions d'installation doivent spécifier que cette borne séparée de mise à la terre de protection est reliée à la terre de façon permanente.



- b) Pour les MATÉRIELS DE TYPE B RACCORDÉS PAR PRISE DE COURANT ayant des connexions avec les RÉSEAUX DE TÉLÉCOMMUNICATIONS ou les SYSTÈMES DE DISTRIBUTION PAR CÂBLES qui sont tous raccordés par prise de courant, un marquage doit être fourni sur le matériel et une indication doit être fournie dans les instructions d'installation. Ils doivent spécifier que l'UTILISATEUR doit déconnecter tous les connecteurs du RÉSEAU DE TÉLÉCOMMUNICATION et du SYSTÈME DE DISTRIBUTION PAR CÂBLES avant de déconnecter le CÂBLE D'ALIMENTATION.
- c) Pour les MATÉRIELS DE TYPE A RACCORDÉS PAR PRISE DE COURANT, les exigences de b) ci-dessus s'appliquent et, de plus, les instructions d'installation doivent spécifier qu'ils doivent être installés par le PERSONNEL DE MAINTENANCE et connectés à un socle équipé d'un contact de mise à la terre de protection.
- d) Pour les MATÉRIELS RELIÉS À DEMEURE, il n'y a pas d'exigence supplémentaire.

NOTE Si une mise à la terre est prévue et qu'elle n'est pas conforme à a), b), c) ou d), voir 2.3.2.4.

*La vérification est effectuée par examen et, si nécessaire, par simulation des défaillances de composants ou de l'isolation telles qu'elles sont susceptibles de survenir dans le matériel (voir 1.4.14). Les limites de tension spécifiées en 2.3.2.1 doivent être satisfaites.*

*De plus, l'essai de 2.3.5 doit être effectué si le CIRCUIT TRT-2 ou le CIRCUIT TRT-3 est destiné à recevoir des signaux ou de la puissance qui sont générés à l'extérieur pendant le fonctionnement normal (par exemple dans un RÉSEAU DE TÉLÉCOMMUNICATIONS). Des premiers défauts ne sont pas simulés au cours de l'essai de 2.3.5.*

*Avant les essais ci-dessus, une isolation qui ne satisfait pas aux exigences pour l'ISOLATION PRINCIPALE est court-circuitée. Toutefois, si la simulation des défaillances est plus sévère si elle est conduite sans court-circuit de l'isolation, l'essai est réalisé sans le court-circuit.*

#### **2.3.2.4 Protection avec d'autres constructions**

D'autres constructions sont autorisées si elles assurent que les limites de tension spécifiées en 2.3.2.1 sont satisfaites mais ne sont pas fondées sur l'ISOLATION PRINCIPALE ou la mise à la terre ou sur la séparation comme spécifié en 2.10.5.13.

*La vérification est effectuée par simulation des défaillances des composants ou de l'isolation telles qu'elles sont susceptibles de survenir dans le matériel (voir 1.4.14).*

*Si une mise à la terre est prévue et qu'elle n'est pas conforme à 2.3.2.3 a), b), c) ou d), les essais sont réalisés, l'appareil en essai n'étant pas relié à la terre. Les limites de tension spécifiées en 2.3.2.1 doivent être satisfaites.*

*De plus, l'essai de 2.3.5 doit être effectué si le CIRCUIT TRT-2 ou le CIRCUIT TRT-3 est destiné à recevoir des signaux ou de la puissance qui sont générés à l'extérieur pendant le fonctionnement normal (par exemple dans un RÉSEAU DE TÉLÉCOMMUNICATIONS). Des premiers défauts ne sont pas simulés au cours de l'essai de 2.3.5.*

*Avant les essais ci-dessus, une isolation qui ne satisfait pas aux exigences pour l'ISOLATION PRINCIPALE est court-circuitée. Toutefois, si la simulation des défaillances est plus sévère si elle est conduite sans court-circuit de l'isolation, l'essai est réalisé sans le court-circuit.*

#### **2.3.3 Séparation des tensions dangereuses**

A l'exception de ce qui est permis en 2.3.4, un CIRCUIT TRT doit être séparé des circuits soumis à une TENSION DANGEREUSE par une ou plusieurs des constructions spécifiées en 2.9.4.

*La vérification est effectuée par examen et par des mesures.*



### 2.3.4 Connexion des circuits TRT à d'autres circuits

Avec les exceptions indiquées en 1.5.7, il est permis de connecter un CIRCUIT TRT à d'autres circuits à condition qu'il soit séparé par une ISOLATION PRINCIPALE de tout CIRCUIT PRIMAIRE (y compris le neutre) à l'intérieur du matériel.

NOTE 1 Les limites de 2.3.1 s'appliquent toujours aux CIRCUITS TRT.

Si un CIRCUIT TRT est connecté à un ou plusieurs autres circuits, le CIRCUIT TRT est la partie qui satisfait aux limites de 2.3.1.

Si l'alimentation d'un CIRCUIT TRT provient d'un CIRCUIT SECONDAIRE qui lui est relié électriquement, et qui est séparé d'un circuit sous TENSION DANGEREUSE par:

- une double isolation ou une isolation renforcée; ou
- la mise en place d'un écran conducteur relié à la terre, séparé d'un circuit sous TENSION DANGEREUSE par une ISOLATION PRINCIPALE;

le CIRCUIT TRT doit être considéré comme étant séparé du circuit sous TENSION DANGEREUSE par la même méthode.

Si un CIRCUIT TRT est créé à partir d'un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE, et que le CIRCUIT SECONDAIRE sous TENSION DANGEREUSE est séparé du CIRCUIT PRIMAIRE par UNE DOUBLE ISOLATION ou par une ISOLATION RENFORCÉE, le CIRCUIT TRT doit rester dans les limites données en 2.3.1 dans les conditions du premier défaut (voir 1.4.14). Dans ce cas, dans le but d'appliquer les conditions de premier défaut, le fait de court-circuiter l'isolation dans un transformateur qui assure la séparation entre le CIRCUIT SECONDAIRE sous TENSION DANGEREUSE et le CIRCUIT TRT est considéré comme un premier défaut, pourvu que l'isolation dans le transformateur satisfasse à un essai de rigidité diélectrique pour l'ISOLATION PRINCIPALE conformément à 5.2.2.

*La vérification est effectuée par examen et par simulation de premiers défauts (voir 1.4.14) tels qu'ils sont susceptibles de se produire dans le matériel. De telles simulations de défauts ne doivent pas avoir pour effet que les tensions relevées aux bornes d'une résistance de  $5\,000\ \Omega \pm 2\%$  connectée entre deux conducteurs quelconques d'un CIRCUIT TRT, ou entre un quelconque de ces conducteurs et la terre, soient situées en dehors de la surface hachurée de la Figure 2F (voir 2.3.1). L'observation est prolongée jusqu'à ce que les conditions stables aient duré au moins 5 s.*

NOTE 2 Pour les exigences applicables en Norvège, voir 1.7.2.1 Note 6, 6.1.2.1 Note 2 et 6.1.2.2 Note.

### 2.3.5 Essai des tensions de fonctionnement produites extérieurement

Cet essai n'est réalisé que s'il est spécifié en 2.3.2.3 ou en 2.3.2.4.

*On utilise un générateur d'essai spécifié par le fabricant, représentant la tension normale de fonctionnement maximale attendue provenant de la source externe. En l'absence d'une telle spécification, on utilise un générateur d'essai qui fournit  $120\text{ V} \pm 2\text{ V}$  en courant alternatif à 50 Hz ou 60 Hz et qui a une impédance interne de  $1\,200 \pm 2\%$ .*

NOTE Le générateur d'essai mentionné ci-dessus n'est pas destiné à représenter les tensions réelles sur le RÉSEAU DE TÉLÉCOMMUNICATIONS mais à apporter des contraintes sur le circuit du matériel à l'essai d'une façon répétitive.

*Le générateur d'essai est connecté aux bornes du RÉSEAU DE TÉLÉCOMMUNICATIONS du matériel. Un pôle du générateur d'essai est aussi connecté à la borne de mise à la terre du matériel (voir Figure 2G). La tension d'essai est appliquée pendant une durée maximale de 30 min. S'il est clair qu'il n'y aura pas d'autre détérioration, l'essai est terminé plus tôt.*

Pendant l'essai, le CIRCUIT TBTS, le CIRCUIT TRT-1 ou la partie conductrice accessible doit continuer de satisfaire à 2.2.2.

L'essai est répété après inversion des connexions aux bornes du RÉSEAU DE TÉLÉCOMMUNICATIONS du matériel.

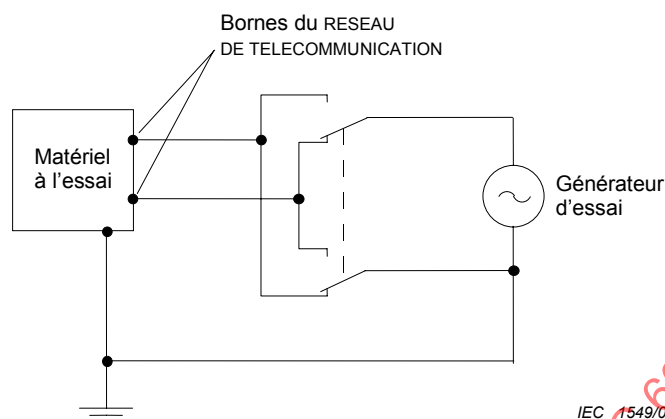


Figure 2G – Générateur d'essai

## 2.4 Circuits à limitation de courant

### 2.4.1 Exigences générales

Les CIRCUITS À LIMITATION DE COURANT doivent être conçus de façon que les limites spécifiées en 2.4.2 ne soient pas dépassées dans les conditions normales de fonctionnement et dans le cas d'un premier défaut dans le matériel (voir 1.4.14 et 1.5.7).

A l'exception de ce qui est permis en 2.4.3, la séparation entre les parties accessibles des CIRCUITS À LIMITATION DE COURANT et les autres circuits doit être conforme à ce qui est décrit en 2.2 pour les CIRCUITS TBTS.

La vérification de la conformité aux Paragraphes 2.4.1 à 2.4.3 est effectuée par examen, par une mesure et, si nécessaire, par un essai.

NOTE Une partie conductrice accessible ou un circuit, séparé d'une autre partie par une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE, sur laquelle est câblée une résistance ou un groupe de résistances, est traitée comme un CIRCUIT À LIMITATION DE COURANT (voir 1.5.7).

### 2.4.2 Valeurs limites

Pour les fréquences ne dépassant pas 1 kHz, le courant permanent mesuré à travers une résistance non inductive de  $2\,000\ \Omega \pm 10\%$  connectée entre deux parties quelconques d'un CIRCUIT À LIMITATION DE COURANT, ou entre une telle partie quelconque et la terre (voir 1.4.9), ne doit pas dépasser 0,7 mA, valeur de crête, en courant alternatif, ou 2 mA en courant continu.

Pour les fréquences supérieures à 1 kHz, la limite de 0,7 mA est multipliée par la valeur de la fréquence en kilohertz mais ne doit pas dépasser 70 mA valeur de crête.

En variante, il est permis d'utiliser les appareils de mesure de l'Annexe D à la place de la résistance non inductive de  $2\,000\ \Omega \pm 10\%$  mentionnée ci-dessus.

Lorsque l'on utilise l'appareil de mesure de la Figure D.1, la tension,  $U_2$ , est mesurée et le courant est calculé en divisant la tension mesurée,  $U_2$ , par 500. La valeur calculée ne doit pas dépasser 0,7 mA valeur de crête.

NOTE 1 Si l'un des côtés du CIRCUIT À LIMITATION DE COURANT a une connexion conductrice à la terre, il convient que le point B de l'appareil de mesure de la Figure D.1 soit connecté à ce point.

Lorsqu'on utilise l'appareil de mesure de la Figure D.2, la valeur mesurée du courant ne doit pas dépasser 0,7 mA valeur de crête.

Pour les parties dont la tension ne dépasse pas 450 V valeur de crête ou tension continue, la capacité du circuit ne doit pas dépasser 0,1  $\mu\text{F}$ .

Pour les parties dont la tension  $U$  dépasse 0,45 kV valeur de crête ou tension continue, mais ne dépasse pas 15 kV valeur de crête ou tension continue, la capacité du circuit ne doit pas dépasser  $45/U$  nF, où  $U$  est exprimé en kilovolts.

NOTE 2 La limite  $45/U$  correspond à une charge stockée de 45  $\mu\text{C}$ .

Pour les parties dont la tension  $U$  dépasse 15 kV valeur de crête ou tension continue, la capacité du circuit ne doit pas dépasser  $700 / U^2$  nF, où  $U$  est exprimé en kilovolts.

NOTE 3 La limite de  $700/U^2$  correspond à une énergie disponible de 350 mJ.

### 2.4.3 Connexion des circuits à limitation de courant à d'autres circuits

Il est permis que les CIRCUITS À LIMITATION DE COURANT soient alimentés par d'autres circuits, ou connectés à d'autres circuits pourvu que les conditions suivantes soient remplies:

- le CIRCUIT À LIMITATION DE COURANT satisfait aux limites de 2.4.2 dans les conditions normales de fonctionnement;
- le CIRCUIT À LIMITATION DE COURANT continue de satisfaire aux limites de 2.4.2, en cas de premier défaut d'un composant quelconque ou de l'isolation dans le CIRCUIT À LIMITATION DE COURANT, ou d'un composant quelconque ou de l'isolation du circuit auquel il est connecté.

Si un CIRCUIT À LIMITATION DE COURANT est connecté à un ou plusieurs autres circuits, le CIRCUIT À LIMITATION DE COURANT est la partie qui satisfait aux exigences de 2.4.1.

### 2.5 Sources à puissance limitée

Une source à puissance limitée doit être conforme à l'un des points suivants, a), b), c) ou d):

- a) la puissance de sortie est limitée par construction conformément au Tableau 2B; ou
- b) une impédance linéaire ou non linéaire limite la puissance de sortie conformément au Tableau 2B. Si un dispositif à coefficient de température positif est utilisé, il doit satisfaire aux essais spécifiés dans la CEI 60730-1, Articles 15, 17, J.15 et J.17; ou
- c) un circuit de régulation limite la puissance de sortie conformément au Tableau 2B à la fois avec et sans premier défaut simulé (voir 1.4.14) dans le circuit de régulation (circuit ouvert ou court-circuit); ou
- d) un dispositif de protection contre les surintensités limite la puissance de sortie conformément au Tableau 2C.

Lorsqu'un dispositif de protection contre les surintensités est utilisé, ce doit être un élément fusible ou un dispositif électromécanique non réglable et non réarmable.

Une source à puissance limitée fonctionnant sur un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF ou une source à puissance limitée fonctionnant sur une batterie qui est rechargée sur un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF pendant qu'elle fournit l'alimentation doit comporter un transformateur d'isolement.

La vérification est effectuée par examen et par des mesures, et, lorsque c'est approprié, par examen des données du fabricant pour les batteries. Les batteries doivent être totalement chargées lors des mesures de  $U_{oc}$  et  $I_{sc}$  conformément aux Tableaux 2B et 2C.

La charge non capacitive indiquée dans les Tableaux 2B et 2C est réglée pour donner la valeur maximale mesurée de  $I_{sc}$  ou S.

Des défauts simulés dans un circuit de régulation, exigé selon le point c) ci-dessus, sont appliqués sous les valeurs maximales mesurées ci-dessus pour  $I_{sc}$  ou S.

**Tableau 2B – Limites des sources de puissance sans dispositif de protection contre les surintensités**

| Tension de sortie <sup>a</sup><br>( $U_{oc}$ )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                       | Courant de sortie <sup>b d</sup><br>( $I_{sc}$ )<br>A | Puissance apparente <sup>c d</sup><br>(S)<br>VA |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------------|-------------------------------------------------|
| V courant alternatif                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V courant continu     |                                                       |                                                 |
| $\leq 30$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $\leq 30$             | $\leq 8,0$                                            | $\leq 100$                                      |
| –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $30 < U_{oc} \leq 60$ | $\leq 150/U_{oc}$                                     | $\leq 100$                                      |
| <sup>a</sup> $U_{oc}$ : Tension de sortie mesurée conformément à 1.4.5 avec tous les circuits de charge déconnectés. Les tensions sont pour du courant alternatif pratiquement sinusoïdal et du courant continu sans ondulation. Pour les courants alternatifs non sinusoïdaux et pour les courants continus avec une ondulation supérieure à 10 % crête, la tension crête ne doit pas dépasser 42,4 V.<br><sup>b</sup> $I_{sc}$ : Courant maximal de sortie avec une charge non capacitive quelconque, y compris un court-circuit.<br><sup>c</sup> S (VA): Puissance de sortie maximale VA avec une charge non capacitive quelconque.<br><sup>d</sup> La mesure de $I_{sc}$ et de S est réalisée 5 s après l'application de la charge si la protection est assurée par un circuit électronique ou un dispositif à coefficient de température positif, et 60 s dans les autres cas. |                       |                                                       |                                                 |

**Tableau 2C – Limites des sources de puissance avec dispositif de protection contre les surintensités**

| Tension de sortie <sup>a</sup><br>( <i>U</i> <sub>oc</sub> ) |                                  | Courant de sortie <sup>b</sup><br>( <i>I</i> <sub>sc</sub> ) | Puissance<br>apparente <sup>c d</sup><br>( <i>S</i> ) | Valeur du courant<br>assigné<br>du dispositif de<br>protection<br>contre les surintensités<br><sup>e</sup> |
|--------------------------------------------------------------|----------------------------------|--------------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| V courant alternatif                                         | V courant continu                | A                                                            | VA                                                    | A                                                                                                          |
| ≤ 20                                                         | ≤ 20                             | ≤ 1 000/ <i>U</i> <sub>oc</sub>                              | ≤ 250                                                 | ≤ 5,0                                                                                                      |
| 20 < <i>U</i> <sub>oc</sub> ≤ 30                             | 20 < <i>U</i> <sub>oc</sub> ≤ 30 |                                                              |                                                       | ≤ 100/ <i>U</i> <sub>oc</sub>                                                                              |
| –                                                            | 30 < <i>U</i> <sub>oc</sub> ≤ 60 |                                                              |                                                       | ≤ 100/ <i>U</i> <sub>oc</sub>                                                                              |

<sup>a</sup> *U*<sub>oc</sub>: Tension de sortie mesurée conformément à 1.4.5 avec tous les circuits de charge déconnectés. Les tensions sont pour du courant alternatif pratiquement sinusoïdal et du courant continu sans ondulation. Pour les courants alternatifs non sinusoïdaux et pour les courants continus avec une ondulation supérieure à 10 % crête, la tension crête ne doit pas dépasser 42,4 V.

<sup>b</sup> *I*<sub>sc</sub>: Courant de sortie maximal avec toute charge non capacitive, y compris un court-circuit, mesuré 60 s après avoir appliqué la charge.

<sup>c</sup> *S* (VA): Puissance de sortie maximale en VA, quelle que soit la charge non capacitive, mesurée 60 s après l'application de la charge.

<sup>d</sup> Les impédances de limitation de courant sont maintenues pendant la mesure mais tout dispositif de protection contre les surintensités est contourné.

NOTE La raison pour laquelle les mesures sont effectuées avec les dispositifs de protection contre les surintensités contournés est de déterminer la quantité d'énergie disponible qui pourrait provoquer un échauffement pendant le délai de fonctionnement des dispositifs de protection contre les surintensités.

<sup>e</sup> Les valeurs du courant assigné du dispositif de protection contre les surintensités sont basées sur des éléments fusibles et des disjoncteurs qui coupent le circuit en moins de 120 s avec un courant égal à 210 % de la valeur du courant spécifiée dans le tableau.

## 2.6 Dispositions pour la mise à la terre

NOTE Pour les exigences complémentaires concernant la mise à la terre des matériels destinés à être connectés sur les RÉSEAUX DE TÉLÉCOMMUNICATIONS, voir 2.3.2.3, 2.3.2.4, 2.3.3, 2.3.4, 6.1.1 et 6.1.2 et, pour les SYSTÈMES DE DISTRIBUTION PAR CÂBLES, voir 7.2 et 7.4.1.

### 2.6.1 Terre de protection

Les parties suivantes des matériels doivent être reliées de façon sûre à la borne de terre de protection principale du matériel.

- a) Parties conductrices accessibles qui peuvent être supposées à une TENSION DANGEREUSE dans le cas d'un premier défaut (voir 1.4.14).
- b) Parties à reliées à la terre comme exigé en 2.9.4 d) ou e).
- c) CIRCUITS TBTS, CIRCUITS TRT et parties conductrices accessibles dont la mise à la terre est prescrite par 2.3.2.3 ou 2.3.2.4, si la source de puissance n'est pas un RÉSEAU DE TÉLÉCOMMUNICATIONS ou un SYSTÈME DE DISTRIBUTION PAR CÂBLES.
- d) CIRCUITS TBTS, CIRCUITS TRT et parties conductrices accessibles dont la mise à la terre est prescrite par 2.3.2.3, si la source de puissance est un RÉSEAU DE TÉLÉCOMMUNICATIONS ou un SYSTÈME DE DISTRIBUTION PAR CÂBLES.
- e) Circuits, écrans de transformateurs et composants (tels que les parasurtenseurs) qui ne sont pas supposés être sous une TENSION DANGEREUSE dans le cas d'un premier défaut (voir 1.4.14) mais que l'on demande de mettre à la terre pour réduire les parasites qui pourraient affecter l'isolation (par exemple voir 6.2.1 et 7.4.1);
- f) CIRCUITS TBTS et CIRCUITS TRT dont la mise à la terre est prescrite pour réduire ou éliminer les COURANTS DE CONTACT d'un RÉSEAU DE TÉLÉCOMMUNICATIONS ou un SYSTÈME DE DISTRIBUTION PAR CÂBLES (voir 5.1.8.1).

NOTE Les parties a), b) et c) sont susceptibles de transporter des courants de défaut destinés à faire fonctionner les dispositifs de protection contre les surintensités. Les parties d), e) et f) transportent d'autres courants.

Dans les ZONES D'ACCÈS POUR LA MAINTENANCE, lorsque les parties conductrices telles que les bâtis moteurs, les châssis électroniques, etc. doivent supporter une TENSION DANGEREUSE dans le cas d'un premier défaut (voir 1.4.14), ces parties conductrices doivent être connectées à la borne de mise à la terre de protection principale. Si cela est impossible ou irréalisable, un marquage adapté doit indiquer au PERSONNEL DE MAINTENANCE que de telles parties ne sont pas mises à la terre et qu'il convient de vérifier qu'elles ne sont pas sous TENSION DANGEREUSE avant de les toucher.

*La vérification est effectuée par examen et, lorsque c'est approprié, par les essais spécifiés en 2.6.3.*

### 2.6.2 Mise à la terre fonctionnelle

Dans le cas où la MISE À LA TERRE FONCTIONNELLE des parties conductrices accessibles ou non accessibles est nécessaire, tout ce qui suit s'applique au circuit de MISE À LA TERRE FONCTIONNELLE:

- le circuit de TERRE FONCTIONNELLE doit être séparé des parties sous TENSION DANGEREUSE dans les matériels par:
  - une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE; ou
  - un écran mis à la terre de protection ou d'autres parties conductrices mises à la terre de protection séparées des parties sous TENSION DANGEREUSE par au moins une ISOLATION PRINCIPALE; et
- il est permis de connecter la mise à la terre fonctionnelle à la borne de terre de protection, ou à un conducteur de liaison à la terre de protection; et

- les bornes de raccordement à utiliser uniquement pour la MISE À LA TERRE FONCTIONNELLE ne doivent pas être marquées par le symbole  $\perp$  (IEC 60417-5017(DB:2002-10)) ou par le symbole  $\oplus$  (IEC 60417-5019 (DB:2002-10)), avec l'exception que, lorsqu'une borne de raccordement est fournie sur un composant (par exemple un bornier) ou sur un sous-ensemble, le symbole  $\perp$  est permis; et

NOTE Les autres marquages tels que l'un des symboles  $\perp$  (IEC 60417-5018 (DB:2002-10)) ou  $\perp$  (IEC 60417-5020 (DB:2002-10)), s'ils sont appropriés, sont permis.

- pour les conducteurs de MISE À LA TERRE FONCTIONNELLE internes, la combinaison des couleurs vert et jaune ne doit pas être utilisée excepté dans le cas des composants pré assemblés à usage multiple (par exemple câbles à conducteurs multiples les filtres CEM); et
- dans un câble d'alimentation dans lequel un conducteur vert et jaune est utilisé uniquement pour fournir une MISE À LA TERRE FONCTIONNELLE:
  - le matériel ne doit pas être marqué avec le symbole  $\square$  (IEC 60417-5172 (2003-02)); et
  - il n'y a pas d'exigences autres que celles de 3.1.9 concernant la terminaison de ce conducteur côté matériel.

*La conformité est vérifiée par examen.*

## 2.6.3 Conducteurs de mise à la terre de protection et conducteurs de liaison à la terre

### 2.6.3.1 Généralités

Les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION et les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION doivent avoir une capacité suffisante de transport de courant.

Les exigences de 2.6.3.2, 2.6.3.3 et 2.6.3.4 s'appliquent seulement aux CONDUCTEURS DE MISE À LA TERRE DE PROTECTION et aux CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION fournis pour être conformes à 2.6.1 a), b) et c).

Pour les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION et les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION fournis pour être conformes à 2.6.1 d), les exigences de 2.6.3.4 e) s'appliquent.

Pour les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION et les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION fournis pour être conformes à 2.6.1 e) et 2.6.1 f) et pour les conducteurs de MISE À LA TERRE FONCTIONNELLE, la capacité de passage du courant doit être adaptée au courant réel dans les conditions normales de fonctionnement, conformément à 3.1.1, c'est-à-dire qu'il ne leur est pas demandé de supporter les courants de défaut à la terre.

### 2.6.3.2 Taille des conducteurs de mise à la terre de protection

Les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION dans les câbles d'alimentation fournis avec le matériel doivent être conformes aux tailles minimales de conducteurs données dans le Tableau 3B (voir 3.2.5).

*La vérification est effectuée par examen et par des mesures.*

### 2.6.3.3 Taille des conducteurs de liaison de protection

Les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION doivent être conformes à un des points suivants:

- aux tailles minimales de conducteur du Tableau 3B (voir 3.2.5); ou
- aux exigences du 2.6.3.4 et aussi, si le courant nominal du circuit est supérieur à 16 A, aux tailles minimales de conducteur du Tableau 2D; ou
- pour les composants seulement, ne pas être plus petits que les conducteurs alimentant en puissance le composant.

Les CARACTÉRISTIQUES ASSIGNÉES DU COURANT DE PROTECTION du circuit (utilisé dans le Tableau 2D et dans l'essai de 2.6.3.4) dépendent de la fourniture et de l'emplacement du dispositif de protection contre les surintensités. Elles doivent être prises comme les valeurs les plus faibles de a) b) ou c), selon ce qui est applicable.

- a) Pour les MATÉRIELS DE TYPE A RACCORDÉS PAR PRISE DE COURANT, les CARACTÉRISTIQUES ASSIGNÉES DU COURANT DE PROTECTION sont celles d'un dispositif de protection contre les surintensités à l'extérieur du matériel (par exemple dans le câblage du bâtiment, dans la fiche réseau ou dans un rack du matériel) pour protéger le matériel, avec une valeur nominale de 16 A.

NOTE 1 Dans la plupart des pays, 16 A est considéré comme une valeur adaptée comme CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION du circuit.

NOTE 2 Au Canada et aux USA, la CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION du circuit retenue est de 20 A.

NOTE 3 Au Royaume-Uni, la caractéristique assignée du circuit à retenir est de 13 A, et non 16 A.

- b) Pour les MATÉRIELS DE TYPE B RACCORDÉS PAR PRISE DE COURANT et les MATÉRIELS RELIÉS À DE MEURE (voir 2.7.1), LA VALEUR ASSIGNÉE DU COURANT DE PROTECTION est la valeur assignée maximale du dispositif de protection contre les surintensités spécifiée dans les instructions d'installation du matériel à prévoir à l'extérieur du matériel (voir 1.7.2.3).
- c) Pour tous les matériels indiqués ci-dessus, la VALEUR ASSIGNÉE DU COURANT DE PROTECTION est celle d'un dispositif de protection contre les surintensités, s'il est fourni dans le matériel ou comme partie de celui-ci et qui protège le circuit ou la partie devant être mis à la terre.

*La vérification est effectuée par examen et par des mesures.*



**Tableau 2D – Taille minimale des conducteurs de liaison de protection**

| CARACTÉRISTIQUE ASSIGNÉE DU<br>COURANT DE PROTECTION du circuit<br>à considérer<br><br>Jusqu'à et y compris<br><b>A</b> | Tailles minimales des conducteurs |                                               |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------|
|                                                                                                                         | Section<br>mm <sup>2</sup>        | AWG ou kcmil (section<br>en mm <sup>2</sup> ) |
| 16                                                                                                                      | Taille non spécifiée              | Taille non spécifiée                          |
| 25                                                                                                                      | 1,5                               | 14 (2)                                        |
| 32                                                                                                                      | 2,5                               | 12 (3)                                        |
| 40                                                                                                                      | 4,0                               | 10 (5)                                        |
| 63                                                                                                                      | 6,0                               | 8 (8)                                         |
| 80                                                                                                                      | 10                                | 6 (13)                                        |
| 100                                                                                                                     | 16                                | 4 (21)                                        |
| 125                                                                                                                     | 25                                | 2 (33)                                        |
| 160                                                                                                                     | 35                                | 1 (42)                                        |
| 190                                                                                                                     | 50                                | 0 (53)                                        |
| 230                                                                                                                     | 70                                | 000 (85)                                      |
| 260                                                                                                                     | 95                                | 0000 (107)                                    |
| 300                                                                                                                     | 120                               | 250 kcmil (126)                               |
| 340                                                                                                                     | 150                               | 300 kcmil (152)                               |
| 400                                                                                                                     | 185                               | 400 kcmil (202)                               |
| 460                                                                                                                     | 240                               | 500 kcmil (253)                               |

NOTE Les dimensions AWG et kcmil sont données pour information uniquement. Les sections associées ont été arrondies pour ne montrer que des chiffres significatifs. Les AWG se réfèrent à l'American Wire Gauge et le terme «cmil» se réfère aux *mils circulaires* dans lesquels 1 cmil est égal à la surface d'un cercle ayant un diamètre de 1 mil (un millième de pouce). Ces termes sont communément employés en Amérique du Nord pour désigner des tailles de conducteurs.

#### 2.6.3.4 Résistance des conducteurs de mise à la terre et leurs terminaisons

Les conducteurs de mise à la terre et leurs terminaisons ne doivent pas avoir une résistance trop grande.

Les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION sont considérés conformes sans essai.

Les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION qui satisfont aux tailles minimales de conducteurs du Tableau 3B (voir 3.2.5) sur toute leur longueur et dont toutes les bornes satisfont au Tableau 3E (voir 3.3.5), sont considérés conformes sans essai.

*La vérification est effectuée par examen et par des mesures et, pour les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION qui ne sont pas conformes aux tailles minimales du Tableau 3B (voir 3.2.5) sur toute leur longueur ou dont les bornes ne satisfont pas toutes au Tableau 3E (voir 3.3.5), par l'essai suivant.*

*La chute de tension dans un CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION est mesurée après avoir effectué l'essai de courant pendant la période de temps spécifiée ci-dessous. L'essai de courant peut être effectué soit en alternatif soit en continu et la tension d'essai ne doit pas dépasser 12 V. Les mesures sont effectuées entre la borne de terre de protection principale et le point du matériel que 2.6.1 prescrit de mettre à la terre. La résistance du CONDUCTEUR DE MISE À LA TERRE DE PROTECTION n'est pas incluse dans la mesure. Cependant, si le CONDUCTEUR DE MISE À LA TERRE DE PROTECTION est fourni avec le matériel, il est permis de l'inclure dans le circuit d'essai, mais la mesure de la chute de tension est effectuée uniquement entre la borne principale de mise à la terre de protection et la partie qu'il est prescrit de mettre à la terre.*



Dans un matériel où la liaison à la terre de protection à un sous-ensemble ou à une unité séparée est réalisée au moyen d'un conducteur d'un câble multiconducteurs assurant également l'alimentation de ce sous-ensemble ou de cette unité à partir du réseau, la résistance du CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION dans ce câble n'est pas comprise dans la mesure. Cependant, cette option est seulement permise si le câble est protégé par un dispositif de protection aux caractéristiques assignées appropriées qui tient compte de la taille du conducteur.

Si la protection d'un CIRCUIT TBTS ou d'un CIRCUIT TRT est assurée par la mise à la terre du circuit protégé lui-même conformément à 2.9.4 e), les limites de chute de résistance et de tension s'appliquent entre le côté mis à la terre du circuit protégé et la borne principale de mise à la terre de protection.

Si le circuit est protégé par une mise à la terre de l'enroulement d'un transformateur alimentant le circuit protégé, les limites de chute de la résistance et de la tension s'appliquent entre le côté qui n'est pas relié à la terre de l'enroulement et la borne principale de mise à la terre de protection. L'ISOLATION PRINCIPALE entre les enroulements primaire et secondaire n'est pas soumise aux essais de premier défaut exigés en 5.3.7 et en 1.4.14.

On prend soin que la résistance de contact entre l'extrémité de la sonde de mesure et la partie conductrice en essai n'influence pas les résultats de l'essai.

Le courant d'essai, la durée de l'essai et les résultats d'essais sont les suivants:

- a) Pour les matériels alimentés par le RÉSEAU, si la CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION du circuit en essai (voir 2.6.3.3) est inférieure ou égale à 16 A, le courant d'essai est égal à 200 % la valeur de la CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION appliquée pendant 120 s.

La résistance du CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION, calculée à partir de la chute de tension, ne doit pas dépasser 0,1  $\Omega$ . A l'issue de l'essai, le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas être endommagé.

- b) Pour les matériels alimentés par un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, si la CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION du circuit en essai dépasse 16 A, le courant d'essai est égal à 200 %, la valeur de la CARACTÉRISTIQUE NOMINALE DU COURANT DE PROTECTION et la durée de l'essai est telle qu'indiqué au Tableau 2E.

**Tableau 2E – Durée de l'essai, réseaux d'alimentation en courant alternatif**

| CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION du circuit<br>( $I_{pc}$ )<br>A | Durée de l'essai<br>min |
|-----------------------------------------------------------------------------------|-------------------------|
| $\leq 30$                                                                         | 2                       |
| $30 < I_{pc} \leq 60$                                                             | 4                       |
| $60 < I_{pc} \leq 100$                                                            | 6                       |
| $100 < I_{pc} \leq 200$                                                           | 8                       |
| $> 200$                                                                           | 10                      |

La chute de tension dans le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas dépasser 2,5 V. A l'issue de l'essai, le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas être endommagé.

- c) Comme alternative à b) ci-dessus, les essais sont fondés sur les caractéristiques de temps/courant du dispositif de protection contre les surintensités qui limite le courant de défaut dans le conducteur de liaison à la terre de protection. Ce dispositif est soit prévu à l'intérieur du matériel en essai soit spécifié dans les instructions d'installation fournies à l'extérieur du matériel. Les essais sont réalisés à 200 % de la CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION, pour la durée correspondant à 200 % de la caractéristique temps/courant. Si la durée pour 200 % n'est pas donnée, il est permis d'utiliser le point le plus proche sur la caractéristique temps/courant.

*La chute de tension dans le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas dépasser 2,5 V. A l'issue de l'essai, le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas être endommagé.*

- d) Pour les matériels alimentés par un réseau en courant continu, si la CARACTÉRISTIQUE ASSIGNÉE DU COURANT DE PROTECTION du circuit en essai dépasse 16 A, le courant d'essai et la durée sont tels que spécifiés par le fabricant.

*La chute de tension dans le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas dépasser 2,5 V. A l'issue de l'essai, le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas être endommagé.*

- e) Pour les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION fournis pour satisfaire à 2.6.1 d), le courant d'essai est égal à 150 % du courant maximal disponible provenant du RÉSEAU DE TÉLÉCOMMUNICATIONS ou du SYSTÈME DE DISTRIBUTION PAR CÂBLES (si connu) avec une valeur minimale de 2 A, appliquée pendant 120 s. La chute de tension dans le CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION ne doit pas dépasser 2,5 V.

### 2.6.3.5 Couleur de l'isolation

L'isolation du CONDUCTEUR DE MISE À LA TERRE DE PROTECTION dans le câble d'alimentation fourni avec le matériel doit être vert et jaune.

Si un CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION est isolé, l'isolation doit être vert et jaune sauf dans les deux cas suivants:

- pour une tresse de mise à la terre, l'isolation doit être soit vert et jaune soit transparente;
- pour un CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION dans des assemblages tels que câble en ruban, barres omnibus, câblage imprimé souple, etc., toute couleur est acceptable, pourvu qu'il n'y ait pas de mauvaise interprétation quant à l'emploi du conducteur.

A l'exception de ce qui est permis en 2.6.2, la combinaison de couleurs vert et jaune doit être utilisée seulement pour identifier les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION et les CONDUCTEURS DE LIAISON DE PROTECTION.

*La conformité est vérifiée par examen.*

## 2.6.4 Bornes

### 2.6.4.1 Généralités

Les exigences de 2.6.4.2 et de 2.6.4.3 s'appliquent uniquement aux bornes mises à la terre de protection fournies pour la conformité à 2.6.1 a), b) et c).

NOTE Pour les exigences complémentaires concernant les bornes, voir 3.3.

Pour la mise à la terre de protection fournie pour la conformité à 2.6.1 d), e) et f), il suffit que les bornes soient conformes à 3.3.

#### 2.6.4.2 Bornes de mise à la terre et de liaison à la terre de protection

Le matériel devant avoir une mise à la terre de protection doit avoir une borne principale de mise à la terre de protection. Pour le matériel avec un CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE, la borne de mise à la terre dans le dispositif d'entrée est considérée comme la borne principale de mise à la terre de protection.

Si un matériel est pourvu de plus d'une connexion d'alimentation (par exemple différentes tensions, ou fréquences, ou alimentation de secours), il est permis d'avoir une borne principale de mise à la terre de protection associée à chaque connexion d'alimentation. Dans de tels cas, les bornes doivent être dimensionnées suivant la valeur du courant d'alimentation associé.

Les bornes doivent être conçues pour résister à un desserrage accidentel du conducteur. En général, les conceptions communément utilisées pour les bornes de courant, autres que certaines bornes de type pilier, fournissent une résilience suffisante pour être conformes à cette exigence; pour les autres conceptions, des précautions spéciales doivent être prises, telles que l'usage d'une partie à résilience adaptée et qui ne peut pas être démontée par inadvertance.

A l'exception de ce qui est noté ci-dessous, toutes les bornes de mise à la terre ou de liaison à la terre de protection, de type pilier, à plot de contact ou à vis doivent être conformes aux exigences de taille minimale données au Tableau 3E (voir 3.3.5).

Lorsqu'une borne pour un CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION n'est pas conforme au Tableau 3E (voir 3.3.5), l'essai de 2.6.3.4 doit être appliqué au trajet du CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION dans lequel la borne est utilisée.

La borne principale de mise à la terre de protection pour le MATÉRIEL RELIÉ À DEMEURE doit être

- située de telle sorte qu'elle soit facilement accessible quand la connexion de l'alimentation est faite; et
- munie de piliers plots, vis ou bornes analogues montés en usine, et avec les moyens de fixation nécessaires s'il est exigé d'avoir un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION de plus de 7 mm<sup>2</sup> (3 mm de diamètre).

*La vérification est effectuée par examen et par des mesures.*

#### 2.6.4.3 Séparation entre le conducteur de mise à la terre de protection et les conducteurs de liaison à la terre de protection

Des bornes séparées, qui peuvent être sur la même barre omnibus, doivent être fournies, une pour le CONDUCTEUR DE MISE À LA TERRE DE PROTECTION, ou une pour chaque CONDUCTEUR DE MISE À LA TERRE DE PROTECTION si plus d'un est prévu, et un ou plusieurs pour les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION.

Toutefois, il est permis de fournir une seule borne du type vis ou à plot, dans les MATÉRIELS RELIÉS À DEMEURE ayant un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE, et dans les MATÉRIELS DE TYPE A OU B RACCORDÉS PAR PRISE DE COURANT ayant un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE spécial, pourvu que la terminaison de câblage du CONDUCTEUR DE MISE À LA TERRE DE PROTECTION soit séparée par un écrou de celles des CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION. L'ordre d'empilage des terminaisons du CONDUCTEUR DE MISE À LA TERRE DE PROTECTION et des CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION n'est pas spécifié.

Il est aussi permis de fournir une seule borne dans les matériels avec un socle de connecteur.

*La conformité est vérifiée par examen.*

## **2.6.5 Intégrité de la mise à la terre de protection**

### **2.6.5.1 Interconnexion des matériels**

Dans un système de matériels interconnectés, la connexion de la mise à la terre de protection doit être assurée pour tout matériel nécessitant une connexion de mise à la terre de protection, sans tenir compte de la disposition du matériel dans le système.

Le matériel qui a un CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION pour maintenir la continuité des circuits de mise à la terre de protection avec d'autres matériels dans le système ne doit pas être marqué du symbole  (IEC 60417-5172 (DB:2003-02)).

Un tel matériel doit aussi fournir l'alimentation aux autres matériels dans le système (voir 2.6.5.3).

*La conformité est vérifiée par examen.*

### **2.6.5.2 Composants dans le conducteur de mise à la terre de protection et dans les conducteurs de liaison à la terre de protection**

LES CONDUCTEURS DE MISE À LA TERRE DE PROTECTION et les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION ne doivent pas contenir d'interrupteurs ou de dispositifs contre les surintensités.

*La conformité est vérifiée par examen.*

### **2.6.5.3 Déconnexion de la terre de protection**

Les connexions de mise à la terre de protection doivent être telles que la déconnexion de la mise à la terre de protection en un point d'une unité ou d'un système ne rompt pas la connexion de la mise à la terre de protection aux autres parties ou unités dans un système, à moins que le danger identifié ne soit en même temps retiré.

*La conformité est vérifiée par examen.*

### **2.6.5.4 Parties pouvant être démontées par un opérateur**

Les connexions de la mise à la terre de protection doivent être faites plus tôt et défaites plus tard que les connexions de l'alimentation dans les cas suivants:

- le connecteur d'une partie qui peut être enlevée par un OPÉRATEUR;
- une prise sur un câble d'alimentation;
- un socle de connecteur.

*La conformité est vérifiée par examen.*

### **2.6.5.5 Pièces démontées pendant la maintenance**

Les connexions de mise à la terre de protection doivent être conçues de telle sorte qu'elles n'aient pas à être démontées pour la maintenance, mis à part celles qui sont liées au démontage de la partie qu'elles protègent, à moins que le danger identifié ne soit en même temps retiré.

*La conformité est vérifiée par examen.*

### 2.6.5.6 Résistance à la corrosion

Les parties conductrices en contact avec les bornes et les connexions de mise à la terre de protection ne doivent pas être sujettes à une corrosion significative causée par une réaction électrochimique, dans toutes les conditions d'environnement concernant le fonctionnement, le stockage et le transport, comme spécifié dans les instructions fournies avec le matériel. Les combinaisons placées au-dessus de la ligne dans l'Annexe J doivent être évitées. La résistance à la corrosion peut être obtenue par un procédé approprié de placage ou de recouvrement.

*La vérification est effectuée par examen et par référence au tableau des potentiels électrochimiques (Annexe J).*

### 2.6.5.7 Vis pour la liaison à la terre de protection

NOTE Les exigences suivantes complètent celle de 3.1.6.

Les vis autotaraudeuses (par enlèvement ou par repoussage de matière) et les vis à grand pas sont autorisées pour assurer la liaison à la terre de protection mais il ne doit pas être nécessaire d'interrompre la connexion pendant la maintenance.

Dans tous les cas, l'épaisseur de la partie métallique au point où une vis est taraudée ne doit pas être de moins de deux fois le pas de la vis taraud. Il est permis d'utiliser une extrusion locale d'une partie métallique pour augmenter l'épaisseur utile.

Au moins deux vis doivent être utilisées pour chaque connexion. Toutefois, il est permis d'utiliser une seule vis autotaraudeuse pourvu que l'épaisseur de la partie métallique au point où la vis est taraudée soit d'au moins 0,9 mm pour les vis de type filetage par forme et 1,6 mm pour les vis de type filetage par découpe.

*La conformité est vérifiée par examen.*

### 2.6.5.8 Confiance dans le réseau de télécommunications ou les systèmes de distribution par câbles

La mise à la terre de protection ne doit pas dépendre du RÉSEAU DE TÉLÉCOMMUNICATIONS OU D'UN SYSTÈME DE DISTRIBUTION PAR CÂBLES.

*La conformité est vérifiée par examen.*

## 2.7 Protection contre les surintensités et les défauts à la terre dans les circuits primaires

### 2.7.1 Exigences générales

La protection contre les surintensités, les courts-circuits et les défauts à la terre dans les CIRCUITS PRIMAIRES doit être fournie soit comme partie intégrante du matériel soit comme partie de l'installation du bâtiment.

Si la protection d'un MATÉRIEL DU TYPE B RACCORDÉ PAR UNE PRISE DE COURANT ou d'un MATÉRIEL RELIÉ À DEMEURE dépend de dispositifs de protection extérieurs, les instructions d'installation du matériel doivent l'indiquer et doivent également spécifier les exigences pour la protection contre les courts-circuits ou contre les surintensités, ou les deux, lorsque c'est nécessaire.

NOTE Dans les pays membres du CENELEC, il faut que les dispositifs de protection nécessaires pour la conformité aux exigences de 5.3, avec certaines exceptions, soient inclus comme partie du matériel.

*La conformité est vérifiée par examen.*

### 2.7.2 Défauts non simulés en 5.3.7

La protection contre les défauts non simulés en 5.3.7 (par exemple les courts-circuits à la terre de protection d'un enroulement dans un CIRCUIT PRIMAIRE) n'a pas besoin d'être installée comme partie intégrante du matériel.

*La conformité est vérifiée par examen.*

### 2.7.3 Protection en amont contre les courts-circuits

A moins qu'une protection en amont appropriée ne soit fournie, les dispositifs de protection doivent avoir un pouvoir de coupure (rupture) adéquat pour interrompre le courant maximal de défaut susceptible de se présenter (y compris le courant de court-circuit).

Pour les MATÉRIELS RELIÉS À DEMEURE ou les MATÉRIELS DU TYPE B RACCORDÉS PAR PRISE DE COURANT, il est permis que la protection en amont contre les courts-circuits soit dans l'installation du bâtiment.

Pour les MATÉRIELS DU TYPE A RACCORDÉS PAR PRISE DE COURANT, il est considéré que l'installation du bâtiment assure la protection en amont contre les courts-circuits.

NOTE Si des fusibles conformes à la CEI 60127 sont utilisés dans les CIRCUITS PRIMAIRES, il convient qu'ils aient un pouvoir de coupure élevé (1 500 A) si le courant de court-circuit présumé dépasse 35 A ou dix fois le courant nominal du fusible, suivant la valeur la plus élevée.

*La vérification est effectuée par examen et par les essais de 5.3.*

### 2.7.4 Nombre et emplacement des dispositifs de protection

Le nombre et l'emplacement des systèmes ou dispositifs de protection dans les CIRCUITS PRIMAIRES doivent être tels que soient détectés et interrompus les courants excessifs circulant dans tout chemin de courant correspondant à un défaut (par exemple entre lignes, entre ligne et neutre, entre ligne et CONDUCTEUR DE MISE À LA TERRE DE PROTECTION ou entre ligne et CONDUCTEUR DE LIAISON À LA TERRE DE PROTECTION).

Il n'y a pas de protection exigée contre les défauts à la terre, dans les matériels qui:

- n'ont pas de connexion à la terre; ou
- ont une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE entre le CIRCUIT PRIMAIRE et toutes les parties connectées à la terre.

NOTE 1 Lorsqu'une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE est fournie, un court-circuit à la terre serait considéré comme un double défaut.

Dans une alimentation d'une charge utilisant plus d'un conducteur de ligne, si un dispositif de protection interrompt le conducteur de neutre, il doit également interrompre tous les autres conducteurs d'alimentation. Les dispositifs de protection unipolaires ne doivent donc pas être utilisés dans de tels cas.

*La vérification est effectuée par examen et, lorsque c'est nécessaire, par une simulation de premier défaut (voir 1.4.14).*

NOTE 2 Pour les dispositifs de protection qui font partie intégrante du matériel, des exemples de nombre et d'emplacement des fusibles ou des pôles de disjoncteurs nécessaires pour fournir une interruption du courant de défaut dans les systèmes d'alimentation communément rencontrés sont donnés dans l'exemple informatif figurant au Tableau 2F pour les matériels et sous-ensembles monophasés, et dans l'exemple informatif figurant au Tableau 2G pour les matériels triphasés. Les exemples ne sont pas nécessairement valables pour les dispositifs de protection extérieurs au matériel.

**Tableau 2F – Exemples informatifs de dispositifs de protection  
dans les matériels et sous-ensembles monophasés**

| Connexion du matériel<br>à l'alimentation                                                                                                                                                      | Protection<br>contre | Nombre minimal<br>de coupe-circuits<br>à fusibles ou de pôles<br>de disjoncteurs | Emplacement                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------|------------------------------------|
| Cas A:<br>Matériel destiné à être relié à des<br>schémas d'alimentations avec neutre<br>à la terre identifiés de façon sûre excepté<br>pour le cas C ci-dessous                                | Défauts à la terre   | 1                                                                                | Conducteur de ligne                |
|                                                                                                                                                                                                | Surintensité         | 1                                                                                | L'un ou l'autre des<br>conducteurs |
| Cas B:<br>Matériel destiné à être relié à toute<br>alimentation y compris les schémas<br>d'alimentation IT et les alimentations<br>avec fiches réversibles excepté pour<br>le cas C ci-dessous | Défauts à la terre   | 2                                                                                | Les deux conducteurs               |
|                                                                                                                                                                                                | Surintensité         | 1                                                                                | L'un ou l'autre des<br>conducteurs |
| Cas C:<br>Matériel destiné à être relié à des<br>schémas d'alimentation à 3 conducteurs<br>avec neutre à la terre identifié                                                                    | Défauts à la terre   | 2                                                                                | Tous les conducteurs de<br>ligne   |
|                                                                                                                                                                                                | Surintensité         | 2                                                                                | Tous les conducteurs de<br>ligne   |

**Tableau 2G – Exemples informatifs de dispositifs de protection  
dans les matériels triphasés**

| Système d'alimentation               | Nombre de<br>conducteurs<br>d'alimentation | Protection<br>contre  | Nombre minimal<br>de coupe-circuits<br>à fusibles ou de<br>pôles de disjoncteur | Emplacement                      |
|--------------------------------------|--------------------------------------------|-----------------------|---------------------------------------------------------------------------------|----------------------------------|
| Triphasé sans neutre                 | 3                                          | Défauts à la<br>terre | 3                                                                               | Les trois conducteurs            |
|                                      |                                            | Surintensité          | 2                                                                               | Deux des conducteurs             |
| Avec neutre à la terre<br>(TN ou TT) | 4                                          | Défauts à la<br>terre | 3                                                                               | Tous les conducteurs<br>de ligne |
|                                      |                                            | Surintensité          | 3                                                                               | Tous les conducteurs<br>de ligne |
| Avec neutre non mis<br>à la terre    | 4                                          | Défauts à la<br>terre | 4                                                                               | Les quatre<br>conducteurs        |
|                                      |                                            | Surintensité          | 3                                                                               | Tous les conducteurs<br>de ligne |

### 2.7.5 Protection par plusieurs dispositifs

Lorsque des dispositifs de protection sont utilisés dans plus d'un pôle d'une alimentation à une charge donnée, ces dispositifs doivent être placés côte à côte. Il est permis de combiner plusieurs dispositifs de protection dans un seul composant.

*La conformité est vérifiée par examen.*



## 2.7.6 Avertissement au personnel de maintenance


Un marquage convenable doit être fourni sur le matériel ou une indication doit figurer dans les instructions pour la maintenance, pour alerter le PERSONNEL DE MAINTENANCE d'un danger possible, lorsque les deux conditions suivantes existent:

- lorsqu'un fusible est utilisé dans le neutre d'un matériel monophasé relié à demeure ou équipé d'une prise non réversible; et
- lorsque, après le fonctionnement du fusible, les parties du matériel qui restent alimentées risquent de représenter un danger pendant la maintenance.

Le marquage suivant ou un marquage similaire est considéré comme convenable:

### **ATTENTION DOUBLE POLE/FUSIBLE SUR LE NEUTRE**

Comme variante au texte ci-dessus, il est permis d'utiliser la combinaison des symboles représentatifs suivante, qui comprend le symbole danger de choc électrique ISO 3864 N° 5036, celui du fusible IEC-60417-5016 (DB:2002-10) et une indication que le fusible est dans le neutre N. Toutefois l'indication doit figurer également dans les instructions pour la maintenance. Toutefois dans ce cas, l'indication doit également être contenue dans les instructions de maintenance.



*La conformité est vérifiée par examen.*

## 2.8 Verrouillages de sécurité

### 2.8.1 Exigences générales

Des VERROUILLAGES DE SÉCURITÉ doivent être prévus lorsque l'OPÉRATEUR a accès à des zones présentant normalement des risques de danger au sens de la présente norme.

*La conformité est vérifiée par examen.*

### 2.8.2 Exigences de protection

Les VERROUILLAGES DE SÉCURITÉ doivent être conçus de façon que le risque ait disparu avant que le couvercle, la porte, etc., ne se trouvent dans une position quelconque permettant le contact avec des parties dangereuses par le doigt d'épreuve de la Figure 2A (voir 2.1.1.1).

Pour la protection contre les chocs électriques, les rayonnements et les dangers de transfert d'énergie, l'enlèvement, l'ouverture ou le retrait du couvercle, de la porte, etc. doivent:

- nécessiter la mise hors tension préalable de telles parties; ou
- amorcer automatiquement la déconnexion de l'alimentation de telles parties, et abaisser en 2 s la tension à une valeur inférieure ou égale à 42,4 V valeur de crête, ou 60 V tension continue, et le niveau d'énergie à une valeur inférieure à 20 J.

Pour une partie mobile qui continue son mouvement pendant un moment et qui continue à présenter un danger mécanique (par exemple un tambour de rotative), l'enlèvement, l'ouverture ou le retrait du couvercle, de la porte, etc., doivent:

- nécessiter la réduction préalable du mouvement à un niveau de sécurité acceptable; ou
- amorcer automatiquement la réduction du mouvement à un niveau de sécurité acceptable.

*La vérification est effectuée par examen, par des mesures et par l'utilisation du doigt d'épreuve de la Figure 2A (voir 2.1.1.1).*



### 2.8.3 Retour imprévu du danger

Les VERROUILLAGES DE SÉCURITÉ doivent être conçus de telle façon qu'un retour imprévu du danger ne puisse se produire lorsque les couvercles, dispositifs de protection, portes, etc., ne sont pas en position fermée.

Tout VERROUILLAGE DE SÉCURITÉ accessible à l'OPÉRATEUR qui peut être mis en fonctionnement au moyen du doigt d'épreuve, Figure 2A (voir 2.1.1.1), est considéré comme étant susceptible de provoquer un retour par inadvertance du danger.

Les interrupteurs de VERROUILLAGE DE SÉCURITÉ doivent être choisis en tenant compte des chocs mécaniques et des vibrations en fonctionnement normal, de façon que ceux-ci ne provoquent pas un enclenchement malencontreux dans une position dangereuse.

*La vérification est effectuée par examen et, lorsque c'est nécessaire, par un essai avec le doigt d'épreuve de la Figure 2A (voir 2.1.1.1).*

### 2.8.4 Fonctionnement sans défaillance

Un système de VERROUILLAGE DE SÉCURITÉ doit être conçu et construit de façon que:

- si une défaillance du VERROUILLAGE DE SÉCURITÉ pendant la vie normale du matériel n'est pas susceptible de se produire et, même si une défaillance survient, elle ne crée pas un danger grave; ou
- si une défaillance du VERROUILLAGE DE SÉCURITÉ pendant la vie normale du matériel est possible, la panne ne créera pas un danger contre lequel une protection est prescrite.

*La vérification est effectuée par examen du VERROUILLAGE DE SÉCURITÉ, des schémas du circuit et des données disponibles et, si nécessaire, par simulation de premiers défauts (voir 1.4.14), (par exemple la défaillance d'un dispositif à semiconducteur ou d'un composant électromécanique). Les parties mécaniques mobiles dans les systèmes mécaniques et électromécaniques ne sont pas soumises aux essais simulés de premier défaut si elles satisfont à 2.8.5 et 2.8.7.*

*Il est permis d'utiliser des VERROUILLAGES DE SÉCURITÉ simulés pour les essais.*

### 2.8.5 Parties mobiles

Les parties mobiles dans les VERROUILLAGES DE SÉCURITÉ mécaniques et électromécaniques doivent avoir une endurance adéquate.

*La vérification est effectuée par examen du VERROUILLAGE DE SÉCURITÉ, des données disponibles et, si nécessaire, en soumettant le VERROUILLAGE DE SÉCURITÉ à un fonctionnement de 10 000 cycles, sans défaillance autre que dans le cas de fonctionnement sûr.*

NOTE L'essai ci-dessus est effectué pour vérifier l'endurance des parties mobiles autres que celles qui existent dans les interrupteurs de VERROUILLAGE DE SÉCURITÉ et les relais. Les interrupteurs VERROUILLAGE DE SÉCURITÉ et les relais, s'ils existent, sont soumis à 2.8.7. Si l'essai de 2.8.7.3 est prescrit en plus de l'essai ci-dessus, il convient de combiner les essais.

### 2.8.6 Ré enclenchement forcé

Lorsqu'il peut être nécessaire au PERSONNEL DE MAINTENANCE d'effectuer un ré enclenchement forcé d'un VERROUILLAGE DE SÉCURITÉ, le système de ré enclenchement forcé doit:

- nécessiter un effort volontaire pour fonctionner; et
- réenclencher automatiquement le fonctionnement normal lorsque la maintenance est terminée ou empêcher le fonctionnement normal tant que le PERSONNEL DE MAINTENANCE ne l'a pas réenclenché; et

- nécessiter un OUTIL pour fonctionner lorsqu'il est situé dans la ZONE D'ACCÈS DE L'OPÉRATEUR, et ne pas pouvoir fonctionner avec le doigt d'épreuve de la Figure 2A (voir 2.1.1.1); et
- ne pas contourner un VERROUILLAGE DE SÉCURITÉ contre un danger important à moins qu'un autre moyen sûr de protection de sécurité ne devienne efficace lorsque le verrouillage est ainsi contourné. Le matériel doit être conçu de façon que le VERROUILLAGE DE SÉCURITÉ ne puisse être contourné tant que l'autre moyen de protection n'est pas entièrement en place et en état de fonctionner.

*La conformité est vérifiée par examen.*

### **2.8.7 Interrupteurs et relais**

Un interrupteur dans un système de VERROUILLAGE DE SÉCURITÉ doit:

- être conforme à la CEI 61058-1, avec évaluation pour 10 000 cycles de fonctionnement conformément à 7.1.4.4 de la CEI 61058-1; ou
- être conforme à 2.8.7.1 et satisfaire aux essais de 2.8.7.3 et 2.8.7.4; ou
- satisfaire aux essais de 2.8.7.2, 2.8.7.3 et 2.8.7.4.

Un relais dans un système de VERROUILLAGE DE SÉCURITÉ doit:

- être conforme à 2.8.7.1 et satisfaire aux essais de 2.8.7.3 et 2.8.7.4; ou
- satisfaire aux essais de 2.8.7.2, 2.8.7.3 et 2.8.7.4.

*La vérification est effectuée par examen et par les essais appropriés de 2.8.7.1 à 2.8.7.4.*

#### **2.8.7.1 Distances d'ouverture des contacts**

Si la distance d'ouverture des contacts est située dans le CIRCUIT PRIMAIRE, cette distance d'ouverture des contacts ne doit pas être inférieure à celle du dispositif de sectionnement (voir 3.4.2). Si la distance d'ouverture des contacts est située dans un circuit autre que le CIRCUIT PRIMAIRE, la distance d'ouverture des contacts de l'interrupteur ne doit pas être inférieure à la valeur applicable de la DISTANCE DANS L'AIR pour une ISOLATION PRINCIPALE dans un CIRCUIT SECONDAIRE, spécifiée en 2.10.3 (ou dans l'Annexe G).

*La vérification est effectuée par examen des données disponibles et, si nécessaire, par des mesures.*

#### **2.8.7.2 Essai de surcharge**

*Le contact de l'interrupteur de VERROUILLAGE DE SÉCURITÉ ou le relais est soumis à une surcharge constituée de 50 cycles de fonctionnement à une cadence de 6 à 10 cycles par minute, ouvrant et fermant 150 % du courant imposé dans l'application, excepté que lorsqu'un contact commute la charge d'un moteur, l'essai est effectué avec le rotor du moteur en position bloquée. Après l'essai, l'interrupteur ou le relais doit être encore en état de fonctionner.*

#### **2.8.7.3 Essai d'endurance**

*Le contact de l'interrupteur VERROUILLAGE DE SÉCURITÉ ou le relais est soumis à un essai d'endurance, ouvrant et fermant 100 % du courant imposé dans l'application, à une cadence de 6 à 10 cycles de fonctionnement par minute. Une cadence plus élevée est permise si elle est requise par le fabricant. Pour les interrupteurs à lame souple dans les CIRCUITS TBT, les CIRCUITS TBTS et les CIRCUITS TRT-1, l'essai est de 100 000 cycles de fonctionnement. Pour les autres interrupteurs et relais, l'essai est de 10 000 cycles de fonctionnement. Après l'essai, l'interrupteur ou le relais doit être encore en état de fonctionner.*

#### 2.8.7.4 Essai de rigidité diélectrique

*Excepté pour les interrupteurs à lame souple dans des CIRCUITS TBT, des CIRCUITS TBTS et des CIRCUITS TRT-1, un essai de rigidité diélectrique, comme spécifié en 5.2.2, est effectué entre les contacts après les essais de 2.8.7.2 et 2.8.7.3. Si le contact est dans un CIRCUIT PRIMAIRE, la tension d'essai est comme spécifié pour une ISOLATION RENFORCÉE. Si le contact est dans un circuit autre qu'un CIRCUIT PRIMAIRE, la tension d'essai est comme spécifié pour une ISOLATION PRINCIPALE dans un CIRCUIT PRIMAIRE.*

#### 2.8.8 Actionneurs mécaniques

Dans le cas où la sécurité repose sur la partie mobile d'un VERROUILLAGE DE SÉCURITÉ mécanique, des précautions doivent être prises pour s'assurer qu'elle n'est pas surchargée. Dans le cas où cette exigence n'est pas couverte par la conception du composant, le déplacement excessif au-delà de la position de fonctionnement de la partie mobile doit être limité à 50 % du maximum, par exemple par son montage ou son emplacement, ou par le réglage.

*La vérification est effectuée par examen et par des mesures.*

### 2.9 Isolation électrique

#### 2.9.1 Propriétés des matériaux isolants

Le choix et l'application des matériaux isolants doivent prendre en compte les contraintes électriques, thermiques et mécaniques, la fréquence de la TENSION DE SERVICE et l'environnement de travail (température, pression, humidité et pollution).

Ni le caoutchouc naturel ni les matériaux hygroscopiques ni les matériaux contenant de l'amiante ne doivent être utilisés comme isolation.

On ne doit pas compter sur des courroies d'entraînement et des dispositifs de couplage pour assurer l'isolation électrique, à moins que la courroie ou le dispositif de couplage ne soit d'une construction spéciale évitant le risque d'un remplacement inapproprié.

*La vérification est effectuée par examen et, si nécessaire, par l'évaluation des données pour le matériau.*

*Lorsque nécessaire, si les données ne confirment pas que le matériau est non hygroscopique, la nature hygroscopique d'un matériau isolant est déterminée en soumettant le composant, ou le sous-ensemble employant l'isolation en question, à l'épreuve hygroscopique de 2.9.2. L'isolation est ensuite soumise à l'essai de rigidité diélectrique approprié de 5.2.2, alors qu'elle est encore dans l'enceinte humide ou dans la pièce dans laquelle les échantillons ont été portés à la température prescrite.*

#### 2.9.2 Conditionnement hygroscopique

*Lorsqu'il est prescrit en 2.9.1, 2.10.8.3, 2.10.10 ou 2.10.11, le conditionnement hygroscopique est effectué pendant 48 h dans une enceinte ou dans une salle contenant de l'air avec une humidité relative comprise entre 91 % et 95 %. La température de l'air, en tout endroit où les échantillons peuvent être placés, est maintenue, à 1 °C près, à une valeur quelconque appropriée  $t$  comprise entre 20 °C et 30 °C telle qu'il n'y ait pas production de condensation. Au cours de ce conditionnement, le composant ou le sous-ensemble n'est pas mis sous tension.*

*Avec l'accord du fabricant, la durée de 48 h peut être augmentée.*

*Avant le conditionnement hygroscopique, l'échantillon est porté à une température comprise entre  $t$  et  $t + 4$  °C.*

### 2.9.3 Nature de l'isolation

L'isolation doit être considérée comme étant une ISOLATION FONCTIONNELLE, une ISOLATION PRINCIPALE, une ISOLATION SUPPLÉMENTAIRE, une ISOLATION RENFORCÉE ou une DOUBLE ISOLATION.

L'application de l'isolation dans un grand nombre de situations courantes est décrite dans le Tableau 2H et illustrée dans la Figure 2H, mais d'autres solutions et d'autres situations existent. Ces exemples sont informatifs. Dans certains cas, le degré d'isolation nécessaire peut être supérieur ou inférieur. Lorsqu'un degré d'isolation différent peut être nécessaire, ou si une configuration particulière des parties sous tension n'est pas représentée dans les exemples, il convient que le degré nécessaire d'isolation soit déterminé en considérant les effets d'un premier défaut (voir 1.4.14). Il convient que cela laisse intactes les exigences pour la protection contre les chocs électriques.

Dans certains cas, l'isolation peut être pontée par un chemin conducteur (par exemple lorsque 1.5.6, 1.5.7, 2.2.4, 2.3.4 ou 2.4.3 s'appliquent), pourvu que le niveau de sécurité soit maintenu.

Pour la DOUBLE ISOLATION, il est permis d'intervertir les éléments constituant l'ISOLATION PRINCIPALE et l'ISOLATION SUPPLÉMENTAIRE. Si la DOUBLE ISOLATION est utilisée, les CIRCUITS TBT ou les parties conductrices non mises à la terre sont permises entre l'ISOLATION PRINCIPALE et l'ISOLATION SUPPLÉMENTAIRE pourvu que le niveau total d'isolation soit maintenu.

Une SURFACE FRONTIÈRE est traitée comme un CIRCUIT TBTS non relié à la terre si elle fait partie soit:

- d'une ENVELOPPE conductrice non reliée à la terre; soit
- d'une ENVELOPPE non conductrice.


*La conformité est vérifiée par examen.*

Tableau 2H – Exemples d'application de l'isolation

| Nature de l'isolation      | Emplacement de l'isolation                                                                       |                                                                                                                                                                                                                                                                                                     | Légende pour la Figure 2H                                      |
|----------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|                            | entre                                                                                            | et                                                                                                                                                                                                                                                                                                  |                                                                |
| FONCTIONNELLE <sup>a</sup> | CIRCUIT TBTS non mis à la terre ou une partie conductrice à double isolation non mise à la terre | <ul style="list-style-type: none"> <li>– une partie conductrice mise à la terre</li> <li>– une partie conductrice à double isolation</li> <li>– un CIRCUIT TBTS non mis à la terre</li> <li>– un CIRCUIT TBTS mis à la terre</li> <li>– un CIRCUIT TRT-1 mis à la terre</li> </ul>                  | F1<br>F2<br>F2<br>F1<br>F10 <sup>f</sup>                       |
|                            | un CIRCUIT TBTS mis à la terre                                                                   | <ul style="list-style-type: none"> <li>– un CIRCUIT TBTS mis à la terre</li> <li>– une partie conductrice mise à la terre</li> <li>– un CIRCUIT TRT-1 non mis à la terre</li> <li>– un CIRCUIT TRT-1 mis à la terre</li> </ul>                                                                      | F11<br>F11<br>F12 <sup>f</sup><br>F13 <sup>f</sup>             |
|                            | un CIRCUIT TBT ou une partie conductrice à isolation principale                                  | <ul style="list-style-type: none"> <li>– une partie conductrice mise à la terre</li> <li>– un CIRCUIT TBTS mis à la terre</li> <li>– une partie conductrice à isolation principale</li> <li>– CIRCUIT TBT</li> </ul>                                                                                | F3<br>F3<br>F4<br>F4                                           |
|                            | un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE mis à la terre                                     | un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE mis à la terre                                                                                                                                                                                                                                        | F5                                                             |
|                            | CIRCUIT TRT-1                                                                                    | CIRCUIT TRT-1                                                                                                                                                                                                                                                                                       | F7                                                             |
|                            | CIRCUIT TRT-2                                                                                    | CIRCUIT TRT-2                                                                                                                                                                                                                                                                                       | F8                                                             |
|                            | CIRCUIT TRT-3                                                                                    | CIRCUIT TRT-3                                                                                                                                                                                                                                                                                       | F9                                                             |
|                            | entre parties série/parallèle d'un enroulement d'un transformateur                               |                                                                                                                                                                                                                                                                                                     | F6                                                             |
| PRINCIPALE                 | CIRCUIT PRIMAIRE                                                                                 | <ul style="list-style-type: none"> <li>– un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE mis à la terre OU NON</li> <li>– une partie conductrice mise à la terre</li> <li>– un CIRCUIT TBTS mis à la terre</li> <li>– une partie conductrice à isolation principale</li> <li>– CIRCUIT TBT</li> </ul> | B1<br>B2<br>B2<br>B3<br>B3                                     |
|                            | un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE mis à la terre ou non                              | <ul style="list-style-type: none"> <li>– un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE non mis à la terre</li> <li>– une partie conductrice mise à la terre</li> <li>– un CIRCUIT TBTS mis à la terre</li> <li>– une partie conductrice à isolation principale</li> <li>– CIRCUIT TBT</li> </ul>    | B4<br>B5<br>B5<br>B6<br>B6                                     |
|                            | CIRCUIT TBTS non mis à la terre ou une partie conductrice à double isolation non mise à la terre | <ul style="list-style-type: none"> <li>– un CIRCUIT TRT-1 non mis à la terre</li> <li>– un CIRCUIT TRT-2</li> <li>– un CIRCUIT TRT-3</li> </ul>                                                                                                                                                     | B7 <sup>f</sup><br>B8 <sup>d</sup><br>B9 <sup>d e</sup>        |
|                            | un CIRCUIT TBTS mis à la terre                                                                   | <ul style="list-style-type: none"> <li>– un CIRCUIT TNV-2</li> <li>– un CIRCUIT TRT-3</li> </ul>                                                                                                                                                                                                    | B10 <sup>d</sup><br>B11 <sup>d e</sup>                         |
|                            | CIRCUIT TRT-2                                                                                    | <ul style="list-style-type: none"> <li>– un CIRCUIT TRT-1 non mis à la terre</li> <li>– un CIRCUIT TRT-1 mis à la terre</li> <li>– un CIRCUIT TRT-3</li> </ul>                                                                                                                                      | B12 <sup>d e</sup><br>B13 <sup>d e f</sup><br>B14 <sup>f</sup> |
|                            | CIRCUIT TRT-3                                                                                    | <ul style="list-style-type: none"> <li>– un CIRCUIT TRT-1 non mis à la terre</li> <li>– un CIRCUIT TRT-1 mis à la terre</li> </ul>                                                                                                                                                                  | B12<br>B13 <sup>d</sup>                                        |
|                            |                                                                                                  |                                                                                                                                                                                                                                                                                                     |                                                                |
| SUPPLÉMENTAIRE             | une partie conductrice à isolation principale ou un CIRCUIT TBT                                  | <ul style="list-style-type: none"> <li>– une partie conductrice à double isolation</li> <li>– un CIRCUIT TBTS non mis à la terre</li> </ul>                                                                                                                                                         | S1 <sup>b</sup><br>S1 <sup>b</sup>                             |
|                            | CIRCUIT TRT                                                                                      | <ul style="list-style-type: none"> <li>– une partie conductrice à isolation principale</li> <li>– un CIRCUIT TBT</li> </ul>                                                                                                                                                                         | S2 <sup>d</sup><br>S2                                          |

**Tableau 2H (fin)**

| Nature de l'isolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Emplacement de l'isolation                                       |                                                                                                                                                                       | Légende pour la Figure 2H                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | entre                                                            | et                                                                                                                                                                    |                                                             |
| SUPPLÉMENTAIRE ou RENFORCÉE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE non mis à la terre | <ul style="list-style-type: none"> <li>– une partie conductrice à double isolation</li> <li>– un CIRCUIT TBTS non mis à la terre</li> <li>– un CIRCUIT TRT</li> </ul> | S/R1 <sup>c</sup><br>S/R1 <sup>c</sup><br>S/R2 <sup>c</sup> |
| RENFORCÉE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | CIRCUIT PRIMAIRE                                                 | <ul style="list-style-type: none"> <li>– une partie conductrice à double isolation</li> <li>– un CIRCUIT TBTS non mis à la terre</li> <li>– un CIRCUIT TRT</li> </ul> | R1<br>R1<br>R2                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE mis à la terre     | <ul style="list-style-type: none"> <li>– une partie conductrice à double isolation</li> <li>– un CIRCUIT TBTS non mis à la terre</li> <li>– un CIRCUIT TRT</li> </ul> | R3<br>R3<br>R4                                              |
| <p>L'expression «partie conductrice» se réfère à une partie conductrice électriquement qui:</p> <ul style="list-style-type: none"> <li>– n'est pas normalement sous tension, et</li> <li>– n'est reliée à aucun des circuits suivants:               <ul style="list-style-type: none"> <li>• un circuit sous TENSION DANGEREUSE, ou</li> <li>• un CIRCUIT TBT, ou</li> <li>• un CIRCUIT TRT, ou</li> <li>• un CIRCUIT TBTS, ou</li> <li>• un CIRCUIT À LIMITATION DE COURANT.</li> </ul> </li> </ul> <p>Des exemples d'une telle partie conductrice sont la MASSE du matériel, le noyau d'un transformateur et, dans certains cas, un écran conducteur d'un transformateur.</p> <p>Si une telle partie conductrice est protégée d'une partie sous TENSION DANGEREUSE par:</p> <ul style="list-style-type: none"> <li>– une DOUBLE ISOLATION ou une ISOLATION RENFORCÉE, elle est appelée «partie conductrice à double isolation»;</li> <li>– une ISOLATION PRINCIPALE et une mise à la terre de protection, elle est appelée «partie conductrice mise à la terre»;</li> <li>– une ISOLATION PRINCIPALE mais sans mise à la terre, c'est-à-dire sans deuxième niveau de protection, elle est appelée «partie conductrice à isolation principale».</li> </ul> <p>Un circuit ou une partie conductrice est dit «mis à la terre» s'il est relié à une borne ou à un contact de mise à la terre de protection de façon à satisfaire aux exigences de 2.6 (bien qu'il ne soit pas nécessairement au potentiel de terre). Dans le cas contraire, le circuit ou la partie conductrice sont dits «non mis à la terre».</p>                                                                                                                                                                                         |                                                                  |                                                                                                                                                                       |                                                             |
| <p><sup>a</sup> Pour les exigences applicables à l'ISOLATION FONCTIONNELLE, voir 5.3.4.</p> <p><sup>b</sup> La TENSION DE SERVICE de l'ISOLATION SUPPLÉMENTAIRE entre un CIRCUIT TBT ou une partie conductrice à isolation principale et une partie conductrice accessible non mise à la terre est égale à la TENSION DE SERVICE la plus sévère pour l'ISOLATION PRINCIPALE. La TENSION DE SERVICE la plus sévère peut être due à un CIRCUIT PRIMAIRE ou à un CIRCUIT SECONDAIRE et l'isolation est spécifiée en conséquence.</p> <p><sup>c</sup> L'isolation entre un CIRCUIT SECONDAIRE sous TENSION DANGEREUSE non mis à la terre et une partie ou un circuit accessible non mis à la terre (S/R, S/R1 ou S/R2 à la Figure 2H) doit satisfaire à la plus sévère des exigences suivantes:</p> <ul style="list-style-type: none"> <li>– ISOLATION RENFORCÉE dont la TENSION DE SERVICE est égale à la TENSION DANGEREUSE; ou</li> <li>– ISOLATION SUPPLÉMENTAIRE dont la TENSION DE SERVICE est égale à la tension entre le CIRCUIT SECONDAIRE sous TENSION DANGEREUSE et:               <ul style="list-style-type: none"> <li>• un autre CIRCUIT SECONDAIRE sous TENSION DANGEREUSE, ou</li> <li>• un CIRCUIT PRIMAIRE.</li> </ul> </li> </ul> <p>Ces exemples s'appliquent si:</p> <ul style="list-style-type: none"> <li>– il y a uniquement une ISOLATION PRINCIPALE entre le CIRCUIT SECONDAIRE et le CIRCUIT PRIMAIRE; et</li> <li>– il y a uniquement une ISOLATION PRINCIPALE entre le CIRCUIT SECONDAIRE et la terre.</li> </ul> <p><sup>d</sup> L'ISOLATION principale n'est pas toujours prescrite (voir 2.3.2.1 et 2.10.5.13).</p> <p><sup>e</sup> Les exigences de 2.10 s'appliquent, voir aussi 6.2.1.</p> <p><sup>f</sup> Les exigences de 2.10 ne s'appliquent pas, mais voir 6.2.1.</p> |                                                                  |                                                                                                                                                                       |                                                             |

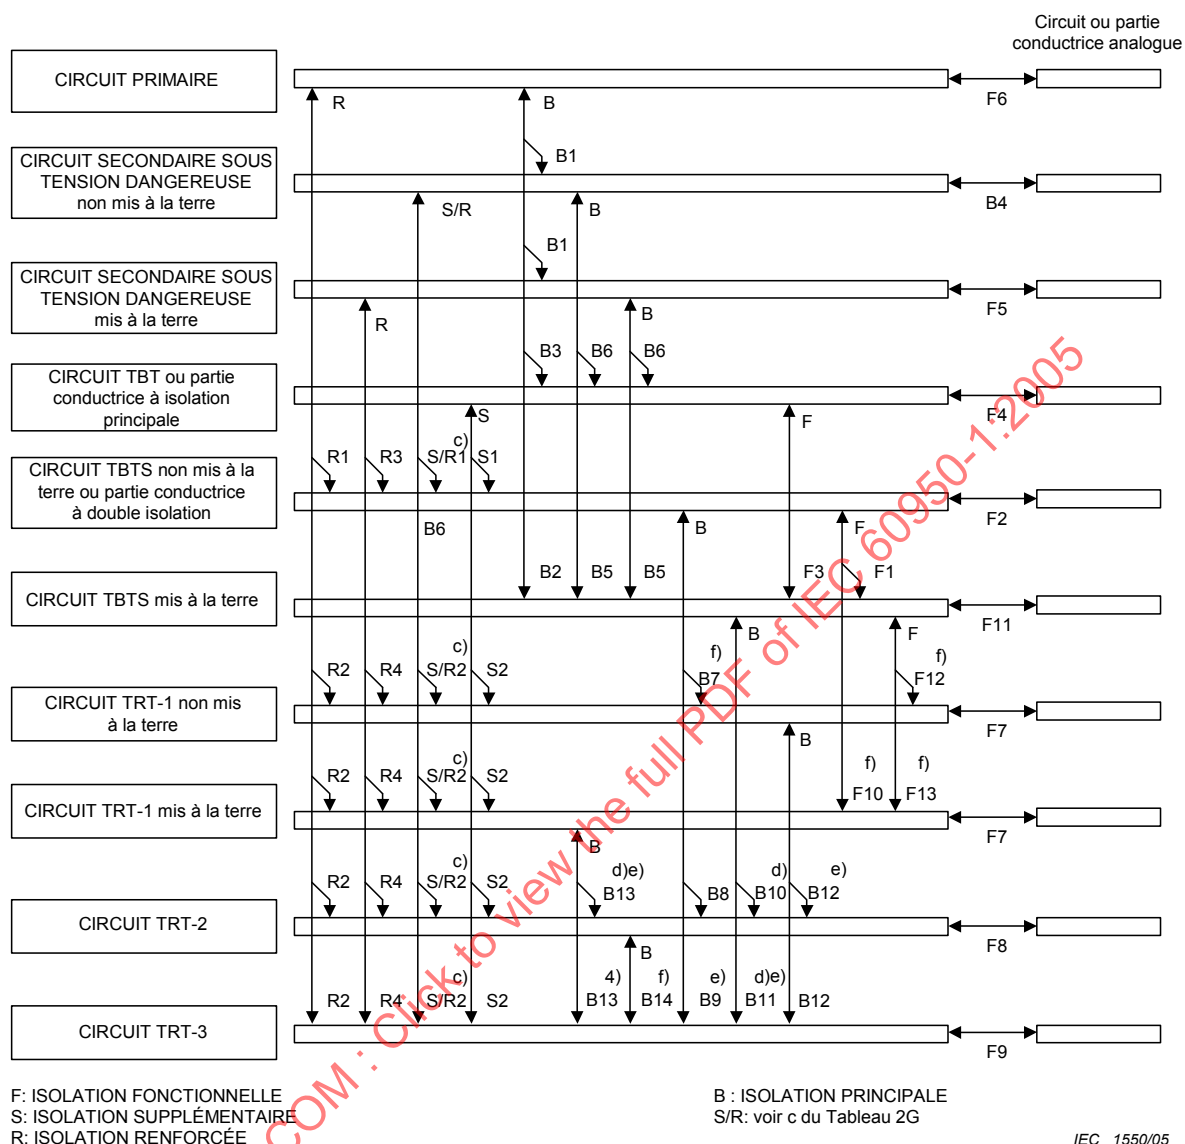

NOTE Les références c), d), e) et f) se rapportent aux notes de bas de tableau correspondantes du Tableau 2H.

**Figure 2H – Exemples d'application de l'isolation**

### 2.9.4 Séparation des tensions dangereuses

Lorsque des parties conductrices accessibles, y compris des CIRCUITS TBTS, des CIRCUITS TRT et leurs enroulements respectifs, sont séparées des parties sous TENSION DANGEREUSE, les constructions suivantes sont permises. L'isolation, y compris chaque élément de DOUBLE ISOLATION, doit être adaptée pour la TENSION DE SERVICE ou, si cela est applicable, pour la TENSION DE TENUE PRESCRITE entre les parties. Les différentes méthodes de séparation se répartissent en trois groupes, méthodes 1, 2 et 3.

- a) (Méthode 1) DOUBLE ISOLATION ou ISOLATION RENFORCÉE assurant une séparation permanente, assurée par des barrières, par guidage ou fixation; ou
- b) (Méthode 1) DOUBLE ISOLATION ou ISOLATION RENFORCÉE sur ou entre les parties à séparer; ou



- c) (Méthode 1) DOUBLE ISOLATION, comprenant une ISOLATION PRINCIPALE sur une des parties à séparer et ISOLATION SUPPLÉMENTAIRE sur l'autre partie; ou
- d) (Méthode 2) ISOLATION PRINCIPALE sur la partie sous TENSION DANGEREUSE, avec écrans de protection connectés à la principale borne de mise à la terre conformément à 2.6.1 b); ou
- e) (Méthode 3) ISOLATION PRINCIPALE sur la partie sous TENSION DANGEREUSE, avec connexion de l'autre partie à la principale borne de mise à la terre de protection conformément à 2.6.1 b), de telle manière que les limites de tension pour la partie accessible soient maintenues par des impédances de circuit relatives ou par le fonctionnement d'un dispositif de protection; ou
- f) toute autre construction assurant une séparation équivalente.

NOTE 1 Pour connaître les exemples d'autres constructions assurant une séparation équivalente, se reporter au Tableau 2H et à la Figure 2H.

Pour e), il est permis de protéger un circuit en reliant à la terre une autre partie que le circuit protégé lui-même, par exemple l'enroulement secondaire d'un transformateur qui alimente le circuit protégé.

NOTE 2 Il convient de prendre en compte les conséquences d'une possible mise à la terre du circuit en un second point, par exemple par connexion avec un autre matériel.

*La conformité est vérifiée par examen.*

## **2.10 Distances dans l'air, lignes de fuite et distances à travers l'isolation**

### **2.10.1 Généralités**

*En général, la vérification de la conformité à 2.10.1 est effectuée par examen et, si nécessaire, par des mesures.*

#### **2.10.1.1 Fréquence**

Les exigences en matière d'isolation données en 2.10 sont pour des fréquences inférieures ou égales à 30 kHz. Il est permis d'utiliser les mêmes exigences pour une isolation fonctionnant à des fréquences supérieures à 30 kHz jusqu'à ce que des données supplémentaires soient disponibles.

NOTE Pour des informations sur le comportement de l'isolation en fonction de la fréquence, voir la CEI 60664-1 et la CEI 60664-4.

#### **2.10.1.2 Degrés de pollution**

Les degrés de pollution sont classés comme suit:

- Le degré de pollution 1 s'applique en l'absence de pollution ou en présence d'une pollution sèche et non conductrice uniquement. La pollution n'a pas d'influence. Normalement, cela est obtenu en enfermant les composants et les sous-ensembles de façon adéquate par enveloppement ou scellement hermétique de manière à empêcher toute pénétration de poussière ou d'humidité (voir 2.10.12).
- Le degré de pollution 2 s'applique en présence d'une pollution non conductrice qui pourrait devenir temporairement conductrice à la suite d'une condensation occasionnelle. Ce degré est généralement approprié aux matériels couverts par le domaine d'application de la présente norme;
- le degré de pollution 3 s'applique lorsqu'un environnement local à l'intérieur du matériel est soumis à une pollution conductrice ou à une pollution sèche non conductrice qui pourrait devenir conductrice à la suite d'une condensation attendue.



### 2.10.1.3 Valeurs réduites pour l'isolation fonctionnelle

Il n'existe pas de DISTANCE DANS L'AIR ou de LIGNE DE FUITE minimale pour l'ISOLATION FONCTIONNELLE, sauf si cela est prescrit en 5.3.4 a).

NOTE Si les DISTANCES DANS L'AIR et les LIGNES DE FUITE pour l'ISOLATION FONCTIONNELLE sont plus petites que celles spécifiées en 2.10.3, 2.10.4 et dans l'Annexe G, elles sont soumises aux exigences de 5.3.4 b) ou de 5.3.4 c).

### 2.10.1.4 Parties conductrices non connectées intercalées

Il est permis que les DISTANCES DANS L'AIR et les LIGNES DE FUITE soient divisées par interposition de parties conductrices non connectées (flottantes), telles que les contacts non utilisés d'un connecteur, pourvu que la somme des distances individuelles satisfasse aux exigences minimales spécifiées, voir le Tableau F.1 et la Figure F.13.

### 2.10.1.5 Isolation à dimensions variables

Si l'isolation d'un transformateur a différentes TENSIONS DE SERVICE sur la longueur de l'enroulement, il est permis de faire varier les DISTANCES DANS L'AIR, LIGNES DE FUITE et DISTANCES À TRAVERS L'ISOLATION en conséquence.

NOTE Un exemple d'une telle construction est un enroulement de 30 kV constitué de bobines multiples connectées en série et mis à la terre à une seule extrémité.

### 2.10.1.6 Exigences spéciales de séparation

Les exigences de 2.10 et de l'Annexe G ne s'appliquent pas à la séparation prévue pour satisfaire à 2.3.2 à moins d'utiliser une ISOLATION PRINCIPALE, ni à la séparation prévue pour satisfaire à 6.1.2 ou à 6.2.1.

NOTE Voir aussi la Note f du Tableau 2H.

### 2.10.1.7 Isolation dans les circuits générant des impulsions de démarrage

Pour un circuit qui génère des impulsions de démarrage pour allumer une lampe à décharge et si le circuit est un CIRCUIT À LIMITATION DE COURANT conforme à 2.4, les exigences pour l'ISOLATION FONCTIONNELLE s'appliquent entre le circuit et d'autres parties conductrices (voir 5.3.4).

Si le circuit n'est pas un CIRCUIT À LIMITATION DE COURANT, les exigences pour l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLÉMENTAIRE et l'ISOLATION RENFORCÉE s'appliquent aux LIGNES DE FUITE et aux distances à travers l'isolation. Pour les DISTANCES DANS L'AIR, voir 2.10.3.5.

NOTE Pour les TENSIONS DE SERVICE des cas ci-dessus, voir 2.10.2.1 i).

## 2.10.2 Détermination de la tension de service

*En général, la vérification de la conformité selon 2.10.2 est effectuée par examen et, si nécessaire, par des mesures.*

### 2.10.2.1 Généralités

Pour la détermination des TENSIONS DE SERVICE, toutes les exigences suivantes s'appliquent (voir aussi 1.4.8).

- Les parties conductrices accessibles non mises à la terre doivent être supposées l'être.
- Si un enroulement d'un transformateur ou une autre partie est flottant (n'est pas relié à un circuit qui fixe son potentiel par rapport à la terre), il doit être supposé relié à la terre au point par lequel la plus haute TENSION DE SERVICE est obtenue.

- c) A l'exception de ce qui est permis en 2.10.1.5, pour l'isolation entre deux enroulements de transformateur, la plus haute tension entre deux points quelconques dans les deux enroulements doit être utilisée en tenant compte des tensions externes auxquelles les enroulements seront reliés.
- d) A l'exception de ce qui est permis en 2.10.1.5, pour l'isolation entre un enroulement de transformateur et une autre partie, la tension la plus haute entre un point quelconque de l'enroulement et l'autre partie doit être utilisée.
- e) Lorsque la DOUBLE ISOLATION est utilisée, la TENSION DE SERVICE à travers l'ISOLATION PRINCIPALE doit être déterminée en imaginant un court-circuit à travers l'ISOLATION SUPPLÉMENTAIRE et vice versa. Pour la DOUBLE ISOLATION entre les enroulements d'un transformateur, le court-circuit doit être supposé comme ayant lieu au point par lequel la plus haute TENSION DE SERVICE est produite dans l'autre isolation.
- f) Lors que la TENSION DE SERVICE est déterminée par des mesures, la puissance d'entrée fournie à l'APPAREIL EN ESSAI doit être la valeur de la TENSION ASSIGNÉE ou la tension dans la PLAGE ASSIGNÉE DE TENSIONS qui donne lieu à la valeur mesurée la plus élevée.

NOTE Les tolérances concernant la TENSION ASSIGNÉE ou la PLAGE ASSIGNÉE DE TENSIONS ne sont pas prises en compte.

- g) On doit considérer que la TENSION DE SERVICE entre tout point du CIRCUIT PRIMAIRE et la terre et entre tout point du CIRCUIT PRIMAIRE et un CIRCUIT SECONDAIRE est supérieure à ce qui suit:
  - la TENSION ASSIGNÉE ou la tension la plus élevée de la PLAGE ASSIGNÉE DE TENSIONS; et
  - la tension mesurée.
- h) Lorsqu'on détermine la TENSION DE SERVICE pour un CIRCUIT TRT connecté à un RÉSEAU DE TÉLÉCOMMUNICATIONS, les tensions normales de fonctionnement doivent être prises en compte. Si elles ne sont pas connues, on doit prendre les valeurs suivantes comme hypothèses:
  - 60 V en courant continu pour les CIRCUITS TRT-1;
  - 120 V en courant continu pour les CIRCUITS TRT-2 et les CIRCUITS TRT-3.

Les signaux de sonnerie de téléphone ne doivent pas être pris en compte à cet effet.

- i) Si les impulsions de démarrage sont utilisées pour allumer des lampes à décharge, la valeur de crête de la tension de service est la valeur de crête des impulsions avec la lampe connectée mais avant l'allumage de celle-ci. La VALEUR EFFICACE DE LA TENSION DE SERVICE pour déterminer les LIGNES DE FUITE minimales est la tension mesurée après l'allumage de la lampe.

### 2.10.2.2 Valeur efficace de la tension de service

Les LIGNES DE FUITE minimales dépendent des VALEURS EFFICACES DES TENSIONS DE SERVICE.

Lorsqu'on détermine une valeur efficace de tension de service, les règles suivantes doivent être utilisées:

- la valeur efficace mesurée doit être utilisée pour toutes les formes d'ondes;
- les conditions de courte durée (par exemple les signaux cadencés de sonnerie de téléphone dans les CIRCUITS TRT) ne doivent pas être prises en compte;
- les transitoires non répétitifs (par exemple dus aux perturbations atmosphériques) ne doivent pas être pris en compte.

NOTE La valeur efficace obtenue d'une forme d'onde ayant une tension efficace en courant alternatif "A" et un décalage de tension "B" est donnée par la formule suivante:

$$\text{valeur efficace} = (A^2 + B^2)^{1/2}$$

### 2.10.2.3 Valeur de crête de la tension de service

Les DISTANCES DANS L'AIR minimales et les tensions d'essai de rigidité diélectrique dépendent des VALEURS DE CRÊTE DES TENSIONS DE SERVICE.

Lorsqu'on détermine une VALEUR DE CRÊTE DE TENSION DE SERVICE, les règles suivantes doivent être utilisées:

- la valeur de crête mesurée doit être utilisée pour toutes les formes d'onde; la valeur de crête de toute ondulation (jusqu'à 10 %) sur la TENSION EN COURANT CONTINU doit être incluse;
- les transitoires non répétitifs (par exemple dus aux perturbations atmosphériques) ne doivent pas être pris en compte;
- lorsqu'on détermine la VALEUR DE CRÊTE DE LA TENSION DE SERVICE entre des CIRCUITS PRIMAIRE et SECONDAIRE, la tension de tout CIRCUIT TBT, TBTS OU TNT (y compris signaux de sonnerie de téléphone) doit être considérée comme zéro.

### 2.10.3 Distances dans l'air

#### 2.10.3.1 Généralités

Les DISTANCES DANS L'AIR doivent être dimensionnées de telle façon que les surtensions y compris les transitoires qui peuvent entrer dans le matériel et les tensions crêtes qui peuvent être produites à l'intérieur du matériel ne détruisent pas la DISTANCE DANS L'AIR.

Il est permis d'utiliser soit les exigences de 2.10.3 pour les catégories de surtensions I ou II utilisant la valeur de crête de la tension de service ou les exigences de l'Annexe G pour les catégories de surtensions I, II, III ou IV en utilisant la TENSION DE TENUE PRESCRITE pour un composant ou un sous-ensemble particulier ou pour le matériel de son ensemble.

Ces exigences s'appliquent au matériel destiné à fonctionner jusqu'à 2 000 m au dessus du niveau de la mer. Pour les matériels destinés à être utilisés à plus de 2 000 m au-dessus du niveau de la mer, les DISTANCES DANS L'AIR minimales doivent être multipliées par le facteur donné au Tableau A.2 de la CEI 60664-1. L'interpolation linéaire est autorisée entre les deux points les plus proches du Tableau A.2. La DISTANCE DANS L'AIR minimale calculée en utilisant ce facteur de multiplication doit être arrondie à l'échelon de 0,1 mm immédiatement supérieur.

NOTE 1 On considère comme bonne pratique le fait de concevoir une ISOLATION SOLIDE pour des surtensions transitoires plus élevées que les DISTANCES DANS L'AIR associées.

Les DISTANCES DANS L'AIR minimales spécifiées sont soumises aux valeurs minimales absolues suivantes:

- 10 mm pour un intervalle d'air assurant une ISOLATION RENFORCÉE entre une partie sous TENSION DANGEREUSE et une partie conductrice accessible de l'ENVELOPPE d'un matériel reposant sur le sol ou de la surface supérieure non verticale d'un matériel à poser sur un bureau;
- 2 mm pour un intervalle d'air des contacts servant d'ISOLATION PRINCIPALE entre une partie sous TENSION DANGEREUSE et une partie conductrice accessible reliée à la terre de l'ENVELOPPE de MATÉRIELS DE TYPE A RACCORDÉS PAR PRISE DE COURANT.

NOTE 2 Les deux DISTANCES DANS L'AIR minimales ci-dessus ne s'appliquent pas entre une partie sous TENSION DANGEREUSE et la SURFACE FRONTIÈRE d'une ENVELOPPE non conductrice.

A l'exception de ce qui est prescrit en 2.8.7.1, les DISTANCES DANS L'AIR minimales spécifiées ne s'appliquent pas à la distance entre les contacts de THERMOSTATS, de COUPE-CIRCUIT THERMIQUES, de dispositifs de protection contre les surcharges, d'interrupteurs à faible distance d'ouverture des contacts et dispositifs analogues, lorsque la distance varie avec les contacts.

NOTE 3 Pour la distance entre les contacts des interrupteurs de verrouillage, voir 2.8.7.1. Pour la distance entre les contacts des dispositions de déconnexion, voir 3.4.2.

- Les DISTANCES DANS L'AIR entre la SURFACE FRONTIÈRE d'un connecteur et les parties conductrices à l'intérieur du connecteur qui sont connectées à une TENSION DANGEREUSE doivent être conformes aux exigences D'ISOLATION RENFORCÉE. A titre exceptionnel, pour les connecteurs qui sont
- fixés au matériel; et
- situés à l'intérieur de l'ENVELOPPE extérieure du matériel; et sont
- uniquement accessibles après retrait d'un sous-ensemble qui peut être remplacé par l'UTILISATEUR qui doit être en place en fonctionnement normal,

ces DISTANCES DANS L'AIR doivent être conformes aux exigences pour l'ISOLATION PRINCIPALE.

NOTE 4 Les essais de 2.1.1.1 pour l'accès aux parties dangereuses s'appliquent à de tels connecteurs après le retrait du sous-ensemble.

Pour toutes les autres DISTANCES DANS L'AIR dans les connecteurs, y compris les connecteurs qui ne sont pas fixés au matériel, les valeurs minimales spécifiées en 2.10.3.3 ou 2.10.3.4 s'appliquent.

Les DISTANCES DANS L'AIR minimales ci-dessus pour les connecteurs ne s'appliquent pas aux connecteurs qui sont conformes à une norme harmonisée avec la CEI 60083, la CEI 60309, la CEI 60320, la CEI 60906-1 ou la CEI 60906-2. Voir aussi 1.5.2.

*La vérification de conformité à 2.10.3.3 et 2.10.3.4 est effectuée par des mesures, en tenant compte de l'Annexe F. Les conditions suivantes s'appliquent:*

- *les parties mobiles sont placées dans leurs positions les plus défavorables;*
- *Pour le matériel équipé de CÂBLES D'ALIMENTATION FIXÉS À DEMEURE ordinaires, les mesures de DISTANCES DANS L'AIR sont effectuées avec des conducteurs d'alimentation de la plus forte section spécifiée en 3.3.4 et aussi sans conducteurs.*

NOTE 5 Les essais de force de 4.2.2, 4.2.3 et 4.2.4 s'appliquent.

- *lorsque les DISTANCES DANS L'AIR, à partir de la SURFACE FRONTIÈRE d'une ENVELOPPE en matière isolante, sont mesurées à travers une fente ou une ouverture dans l'ENVELOPPE ou à travers une ouverture dans un connecteur accessible, la surface accessible doit être considérée comme conductrice comme si elle était recouverte d'une feuille de métal partout où elle peut être touchée par le doigt d'épreuve de la Figure 2A (voir 2.1.1.1), appliqué sans force appréciable (voir Figure F.12, point X).*

*Il n'existe pas d'essai de rigidité diélectrique pour vérifier les distances dans l'air à l'exception de ce qui est exigé dans la Note c du Tableau 2M et en 5.3.4 b).*

### **2.10.3.2 Tensions transitoires du réseau**

#### **a) RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF**

Pour les matériels destinés à être alimentés par le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, la valeur de la TENSION TRANSITOIRE DU RÉSEAU dépend de la catégorie de surtension et de la tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF. En général, les DISTANCES DANS L'AIR dans les matériels destinés à être connectés au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF doivent être prévues pour la catégorie de surtension II.

NOTE 1 Se reporter à l'Annexe Z pour les lignes directrices supplémentaires concernant la détermination de la catégorie de surtensions.

Les matériels qui, une fois installés, sont susceptibles de subir des surtensions transitoires dépassant celles de leur catégorie de surtension de conception devront être équipés d'une protection supplémentaire à prévoir à l'extérieur du matériel. Dans ce cas, les instructions d'installation doivent indiquer la nécessité d'une telle protection extérieure.

La valeur applicable de la TENSION TRANSITOIRE DU RÉSEAU doit être déterminée à partir de la catégorie de surtension et de la tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, à l'aide du Tableau 2J.

**Tableau 2J – Tensions transitoires du réseau en courant alternatif**

| TENSION DU RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF <sup>a</sup><br>jusqu'à et y compris<br><br>V efficace | TENSION TRANSITOIRE DU RÉSEAU <sup>b</sup><br>V crête |       |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-------|
|                                                                                                               | Catégorie de surtension                               |       |
|                                                                                                               | I                                                     | II    |
| 50                                                                                                            | 330                                                   | 500   |
| 100                                                                                                           | 500                                                   | 800   |
| 150 <sup>c</sup>                                                                                              | 800                                                   | 1 500 |
| 300 <sup>d</sup>                                                                                              | 1 500                                                 | 2 500 |
| 600 <sup>e</sup>                                                                                              | 2 500                                                 | 4 000 |

<sup>a</sup> Pour les matériels conçus pour être connectés à une alimentation triphasée à trois fils dans laquelle il n'y a pas de conducteur neutre, la tension d'ALIMENTATION DU RÉSEAU EN COURANT ALTERNATIF est la tension entre phases. Dans tous les autres cas où il existe un conducteur neutre, il s'agit de la tension entre phase et neutre.

<sup>b</sup> La TENSION TRANSITOIRE DU RÉSEAU est toujours l'une des valeurs du tableau. L'interpolation n'est pas autorisée.

<sup>c</sup> Y compris 120/208 V et 120/240 V.

<sup>d</sup> Y compris 230/400 V et 277/480 V.

<sup>e</sup> Y compris 400/690 V.

NOTE 2 Au Japon, la valeur des TENSIONS TRANSITOIRES SUR LE RÉSEAU pour une tension nominale du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF de 100 V est déterminée à partir de la ligne applicable pour une tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF de 150 V.

#### **b) ALIMENTATIONS DU RÉSEAU EN COURANT CONTINU reliées à la terre**

Si une ALIMENTATION DE RÉSEAU EN COURANT CONTINU est connectée à la terre de protection et se trouve entièrement à l'intérieur d'un même bâtiment, la TENSION TRANSITOIRE DU RÉSEAU doit être prise comme égale à 71 V, valeur de crête. Si cette connexion se situe à l'intérieur de l'appareil en essai, elle doit être conforme à 2.6.1 d).

NOTE 3 La connexion à une terre de protection peut se situer à la source du RÉSEAU D'ALIMENTATION EN COURANT CONTINU ou à l'emplacement du matériel, ou les deux (voir la Recommandation UIT-T K.27).

#### **c) ALIMENTATIONS DU RÉSEAU EN COURANT CONTINU non reliées à la terre**

Si une alimentation du RÉSEAU EN COURANT CONTINU n'est pas reliée à la terre et est située comme indiqué en b) ci-dessus, la TENSION TRANSITOIRE DU RÉSEAU doit être prise comme égale à la TENSION TRANSITOIRE DU RÉSEAU dans le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF qui fournit le RÉSEAU D'ALIMENTATION EN COURANT CONTINU.

#### **d) Fonctionnement sur batteries**

Si le matériel est alimenté par une batterie dédiée qui ne dispose d'aucun dispositif de charge à partir d'un RÉSEAU D'ALIMENTATION externe, la TENSION TRANSITOIRE DU RÉSEAU doit être prise comme 71 V, valeur de crête.

#### **2.10.3.3 Distances dans l'air dans les circuits primaires**

Pour l'isolation dans les CIRCUITS PRIMAIRES, entre CIRCUITS PRIMAIRES et la terre et entre CIRCUITS PRIMAIRES et CIRCUITS SECONDAIRES, les règles suivantes s'appliquent.

Pour un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF ne dépassant pas 300 V en valeur efficace (420 V valeur de crête):

- a) si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE ne dépasse pas la valeur de crête d'une TENSION DU RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, les DISTANCES DANS L'AIR minimales sont déterminées à partir du Tableau 2K;
- b) la VALEUR DE CRÊTE DE LA TENSION DE SERVICE dépasse la valeur de crête de la tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, la DISTANCE DANS L'AIR minimale est la somme des deux valeurs suivantes:
  - la DISTANCE DANS L'AIR minimale du Tableau 2K; et
  - la DISTANCE DANS L'AIR supplémentaire appropriée du Tableau 2L.

NOTE Une DISTANCE DANS L'AIR minimale obtenue en utilisant le Tableau 2L se situe entre les valeurs prescrites pour les champs homogènes et non homogènes. En conséquence, elle peut ne pas passer avec succès l'essai de rigidité diélectrique approprié si le champ est substantiellement non homogène.

Pour une ALIMENTATION DE RÉSEAU EN COURANT ALTERNATIF supérieure à 300 V en valeur efficace (420 V valeur de crête), les DISTANCES DANS L'AIR minimales sont déterminées à partir du Tableau 2K.

**Tableau 2K – Distances dans l'air minimales pour l'isolation dans les circuits primaires et entre circuits primaires et secondaires**

DISTANCES DANS L'AIR en mm

| TENSION DE SERVICE<br>DE CRETE <sup>a</sup><br>jusqu'à et y<br>compris<br>V | TENSION TRANSITOIRE DU RÉSEAU   |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
|-----------------------------------------------------------------------------|---------------------------------|--------------|--------------|-----|--------------|--------------|----------------------|--------------|--------------|-----|--------------|--------------|------------------------|--------------|--------------|
|                                                                             | 1 500 V <sup>c</sup>            |              |              |     |              |              | 2 500 V <sup>c</sup> |              |              |     |              |              | 4 000 V <sup>c</sup>   |              |              |
|                                                                             | Degré de pollution              |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
|                                                                             | 1 et 2 <sup>b</sup>             |              |              | 3   |              |              | 1 et 2 <sup>b</sup>  |              |              | 3   |              |              | 1, 2 <sup>b</sup> et 3 |              |              |
|                                                                             | F                               | B/S          | R            | F   | B/S          | R            | F                    | B/S          | R            | F   | B/S          | R            | F                      | B/S          | R            |
| 71                                                                          | 0,4                             | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8 | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,0                  | 2,0<br>(1,5) | 4,0<br>(3,0) | 1,3 | 2,0<br>(1,5) | 4,0<br>(3,0) | 2,0                    | 3,2<br>(3,0) | 6,4<br>(6,0) |
| 210                                                                         | 0,5                             | 1,0<br>(0,5) | 2,0<br>(1,0) | 0,8 | 1,3<br>(0,8) | 2,6<br>(1,6) | 1,4                  | 2,0<br>(1,5) | 4,0<br>(3,0) | 1,5 | 2,0<br>(1,5) | 4,0<br>(3,0) | 2,0                    | 3,2<br>(3,0) | 6,4<br>(6,0) |
| 420                                                                         | F 1,5 B/S 2,0 (1,5) R 4,0 (3,0) |              |              |     |              |              |                      |              |              |     |              |              | 2,5                    | 3,2<br>(3,0) | 6,4<br>(6,0) |
| 840                                                                         | F 3,0 B/S 3,2 (3,0) R 6,4 (6,0) |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 1 400                                                                       | F/BS 4,2 R 6,4                  |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 2 800                                                                       | F/B/S/R 8,4                     |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 7 000                                                                       | F/B/S/R 17,5                    |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 9 800                                                                       | F/B/S/R 25                      |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 14 000                                                                      | F/B/S/R 37                      |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 28 000                                                                      | F/B/S/R 80                      |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |
| 42 000                                                                      | F/B/S/R 130                     |              |              |     |              |              |                      |              |              |     |              |              |                        |              |              |

Les valeurs du tableau sont applicables à l'ISOLATION FONCTIONNELLE (F), si cela est requis par 5.3.4 a) (voir 2.10.1.3), l'ISOLATION PRINCIPALE (B), l'ISOLATION SUPPLÉMENTAIRE (S) et l'ISOLATION RENFORCÉE (R).

Les valeurs entre parenthèses sont applicables à l'ISOLATION PRINCIPALE, à l'ISOLATION SUPPLÉMENTAIRE ou à l'ISOLATION RENFORCÉE uniquement si la fabrication est soumise à un programme de contrôle de la qualité qui fournit un niveau d'assurance au moins égal à celui de l'exemple donné à l'Article R.2. La DOUBLE ISOLATION et l'ISOLATION RENFORCÉE doivent être soumises à un ESSAI INDIVIDUEL DE SÉRIE pour la rigidité diélectrique.

Si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE dépasse la valeur de crête de la tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, l'interpolation linéaire est autorisée entre les plus proches des deux points, la DISTANCE DANS L'AIR minimale calculée étant arrondie à l'échelon de 0,1 mm immédiatement supérieur.

<sup>a</sup> Si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE dépasse la valeur de crête de la TENSION DU RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, voir 2.10.3.3. b) concernant les DISTANCES DANS L'AIR supplémentaires.

<sup>b</sup> Il n'est pas exigé de passer avec succès les essais de 2.10.10 pour le degré de pollution 1.

<sup>c</sup> La relation entre TENSION TRANSITOIRE DU RÉSEAU et tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF est donnée au Tableau 2J.

**Tableau 2L – Distances dans l'air supplémentaires dans les circuits primaires**

DISTANCES DANS L'AIR en mm

| TENSION TRANSITOIRE DU RÉSEAU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                         |                                                                        |                     |                                                                       |                                                                        |                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------|---------------------|
| 1 500 V <sup>c</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                         |                                                                        |                     | 2 500 V <sup>c</sup>                                                  |                                                                        |                     |
| Degrés de pollution<br>1 et 2 <sup>b</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Degré de pollution<br>3 | ISOLATION FONCTIONNELLE <sup>a</sup> ,<br>PRINCIPALE OU SUPPLÉMENTAIRE | ISOLATION RENFORCÉE | Degrés de pollution<br>1, 2 et 3 <sup>b</sup>                         | ISOLATION FONCTIONNELLE <sup>a</sup> ,<br>PRINCIPALE OU SUPPLÉMENTAIRE | ISOLATION RENFORCÉE |
| VALEUR DE CRÊTE DE LA TENSION DE SERVICE<br>jusqu'à et y compris<br>V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                                                                        |                     | VALEUR DE CRÊTE DE LA TENSION DE SERVICE<br>jusqu'à et y compris<br>V |                                                                        |                     |
| 210 (210)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 210 (210)               | 0,0                                                                    | 0,0                 | 420 (420)                                                             | 0,0                                                                    | 0,0                 |
| 298 (288)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 294 (293)               | 0,1                                                                    | 0,2                 | 493 (497)                                                             | 0,1                                                                    | 0,2                 |
| 386 (366)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 379 (376)               | 0,2                                                                    | 0,4                 | 567 (575)                                                             | 0,2                                                                    | 0,4                 |
| 474 (444)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 463 (459)               | 0,3                                                                    | 0,6                 | 640 (652)                                                             | 0,3                                                                    | 0,6                 |
| 562 (522)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 547 (541)               | 0,4                                                                    | 0,8                 | 713 (729)                                                             | 0,4                                                                    | 0,8                 |
| 650 (600)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 632 (624)               | 0,5                                                                    | 1,0                 | 787 (807)                                                             | 0,5                                                                    | 1,0                 |
| 738 (678)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 715 (707)               | 0,6                                                                    | 1,2                 | 860 (884)                                                             | 0,6                                                                    | 1,2                 |
| 826 (756)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 800 (790)               | 0,7                                                                    | 1,4                 | 933 (961)                                                             | 0,7                                                                    | 1,4                 |
| 914 (839)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                         | 0,8                                                                    | 1,6                 | 1 006 (1 039)                                                         | 0,8                                                                    | 1,6                 |
| 1 002 (912)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 0,9                                                                    | 1,8                 | 1 080 (1 116)                                                         | 0,9                                                                    | 1,8                 |
| 1 090 (990)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 1,0                                                                    | 2,0                 | 1 153 (1 193)                                                         | 1,0                                                                    | 2,0                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                         | 1,1                                                                    | 2,2                 | 1 226 (1 271)                                                         | 1,1                                                                    | 2,2                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                         | 1,2                                                                    | 2,4                 | 1 300 (1 348)                                                         | 1,2                                                                    | 2,4                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                         | 1,3                                                                    | 2,6                 | (1 425)                                                               | 1,3                                                                    | 2,6                 |
| <p>Les DISTANCES DANS L'AIR supplémentaires du tableau s'appliquent si cela est prescrit en 2.10.3.3.b).</p> <p>Les valeurs entre parenthèses doivent être utilisées:</p> <ul style="list-style-type: none"> <li>- si les valeurs entre parenthèses du Tableau 2K sont utilisées; et</li> <li>- pour l'isolation fonctionnelle si cela est prescrit en 5.3.4 a).</li> </ul> <p>Pour les valeurs de tension ci-dessus, les valeurs de la VALEUR DE CRÊTE DE LA TENSION DE SERVICE données dans le tableau, l'extrapolation linéaire est autorisée.</p> |                         |                                                                        |                     |                                                                       |                                                                        |                     |
| <p><sup>a</sup> Il n'existe pas de DISTANCE DANS L'AIR minimale pour l'ISOLATION FONCTIONNELLE sauf si cela est prescrit en 5.3.4 a). Voir 2.10.1.3.</p> <p><sup>b</sup> Il n'est pas exigé de passer avec succès les essais de 2.10.10 pour le degré de pollution 1.</p> <p><sup>c</sup> La relation entre TENSION TRANSITOIRE DU RÉSEAU et tension du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF est donnée au Tableau 2J.</p>                                                                                                                     |                         |                                                                        |                     |                                                                       |                                                                        |                     |

**2.10.3.4 Distances dans l'air dans les circuits secondaires**

Les DISTANCES DANS L'AIR minimales dans les CIRCUITS SECONDAIRES sont déterminées à partir du Tableau 2M.

La VALEUR DE CRÊTE DE LA TENSION DE SERVICE pour utilisation dans le Tableau 2M est:

- la valeur de crête d'une tension sinusoïdale;
- la valeur de crête mesurée d'une tension sinusoïdale.

La surtension transitoire la plus élevée pour utilisation dans le Tableau 2M est soit

- le transitoire le plus élevé provenant du RÉSEAU D'ALIMENTATION, déterminé conformément à 2.10.3.6 ou à 2.10.3.7; soit
- le transitoire le plus élevé provenant d'un RÉSEAU DE TÉLÉCOMMUNICATIONS, déterminé conformément à 2.10.3.8,

en prenant la valeur la plus élevée.



DISTANCES DANS L'AIR en mm

| VALEUR DE CRETE<br>DE LA TENSION DE<br>SERVICE<br><br>jusqu'à et y<br>compris                                                                                                                                                                                                                                                                                                                                                                                 | Surtension transitoire la plus élevée dans le CIRCUIT SECONDAIRE (V crête) |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-------|-----|----------------------------------------------|-------|-----|-------------------------|-------|-----|----------------------------------------------|-------|-----|-------------------------------------------------------------------|-------|-----|------------------------|-------|-------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Jusqu'à 71 V<br>inclus                                                     |       |     | Supérieure à<br>71 V jusqu'à<br>800 V inclus |       |     | Jusqu'à 800 V<br>inclus |       |     | Supérieure à 800 V jusqu'à<br>1 500 V inclus |       |     | Supérieure à<br>1 500 V<br>jusqu'à 2 500 V<br>inclus <sup>a</sup> |       |     |                        |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Degré de pollution                                                         |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1 et 2 <sup>b</sup>                                                        |       |     |                                              |       |     | 3                       |       |     | 1 et 2 <sup>b</sup>                          |       |     | 3                                                                 |       |     | 1, 2 <sup>b</sup> et 3 |       |       |
| V                                                                                                                                                                                                                                                                                                                                                                                                                                                             | F                                                                          | B/S   | R   | F                                            | B/S   | R   | F                       | B/S   | R   | F                                            | B/S   | R   | F                                                                 | B/S   | R   | F                      | B/S   | R     |
| 71                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0,2                                                                        | 0,4   | 0,8 | 0,2                                          | 0,7   | 1,4 | 0,8                     | 1,3   | 2,6 | 0,5                                          | 1,0   | 2,0 | 0,8                                                               | 1,3   | 2,6 | 1,5                    | 2,0   | 4,0   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (0,2)                                                                      | (0,4) |     | (0,2)                                        | (0,4) |     | (0,8)                   | (1,6) |     | (0,5)                                        | (1,0) |     | (0,8)                                                             | (1,6) |     | (1,5)                  | (3,0) |       |
| 140                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0,2                                                                        | 0,7   | 1,4 | 0,2                                          | 0,7   | 1,4 | 0,8                     | 1,3   | 2,6 | 0,5                                          | 1,0   | 2,0 | 0,8                                                               | 1,3   | 2,6 | 1,5                    | 2,0   | 4,0   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (0,2)                                                                      | (0,4) |     | (0,2)                                        | (0,4) |     | (0,8)                   | (1,6) |     | (0,5)                                        | (1,0) |     | (0,8)                                                             | (1,6) |     | (1,5)                  | (3,0) |       |
| 210                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0,2                                                                        | 0,7   | 1,4 | 0,2                                          | 0,9   | 1,8 | 0,8                     | 1,3   | 2,6 | 0,5                                          | 1,0   | 2,0 | 0,8                                                               | 1,3   | 2,6 | 1,5                    | 2,0   | 4,0   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (0,2)                                                                      | (0,4) |     | (0,2)                                        | (0,4) |     | (0,8)                   | (1,6) |     | (0,5)                                        | (1,0) |     | (0,8)                                                             | (1,6) |     | (1,5)                  | (3,0) |       |
| 280                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0,2                                                                        | 1,1   | 2,2 | F 0,8 B/S 1,4 (0,8) R 2,8 (1,6)              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        | 2,0   | 4,0   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (0,2)                                                                      | (0,4) |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     | 1,5                    | (1,5) | (3,0) |
| 420                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0,2                                                                        | 1,4   | 2,8 | F 1,0 B/S 1,9 (1,0) R 3,8 (2,0)              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        | 2,0   | 4,0   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (0,2)                                                                      | (0,4) |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     | 1,5                    | (1,5) | (3,0) |
| 700                                                                                                                                                                                                                                                                                                                                                                                                                                                           | F/B/S 2,5 R, 5,0                                                           |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 840                                                                                                                                                                                                                                                                                                                                                                                                                                                           | F/B/S 3,2 R, 5,0                                                           |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 1 400                                                                                                                                                                                                                                                                                                                                                                                                                                                         | F/B/S 4,2 R, 5,0                                                           |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 2 800                                                                                                                                                                                                                                                                                                                                                                                                                                                         | F/B/S/R 8,4 Voir <sup>c</sup>                                              |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 7 000                                                                                                                                                                                                                                                                                                                                                                                                                                                         | F/B/S/R 7,5 Voir <sup>c</sup>                                              |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 9 800                                                                                                                                                                                                                                                                                                                                                                                                                                                         | F/B/S/R 25 voir <sup>c</sup>                                               |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 14 000                                                                                                                                                                                                                                                                                                                                                                                                                                                        | F/B/S/R 37 Voir <sup>c</sup>                                               |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 28 000                                                                                                                                                                                                                                                                                                                                                                                                                                                        | F/B/S/R 80 Voir <sup>c</sup>                                               |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| 42 000                                                                                                                                                                                                                                                                                                                                                                                                                                                        | F/B/S/R 130 Voir <sup>c</sup>                                              |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| Les valeurs du tableau s'appliquent à l'ISOLATION FONCTIONNELLE (F), si cela est requis par 5.3.4 a) (voir 2.10.1.3), l'ISOLATION PRINCIPALE (B), l'ISOLATION SUPPLÉMENTAIRE (S) et l'ISOLATION RENFORCÉE (R).                                                                                                                                                                                                                                                |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| Il est permis de procéder par interpolation linéaire entre les deux points les plus proches, les distances dans l'air minimales calculées étant arrondies à l'échelon de 0,1 mm immédiatement supérieur.                                                                                                                                                                                                                                                      |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| Si le chemin de la DISTANCE DANS L'AIR suit partiellement la surface d'isolation qui n'appartient pas au groupe de matériau I, la tension d'essai est appliquée à travers l'espace et le groupe de matériau I uniquement. La partie du chemin le long de la surface de tout matériau isolant est contournée.                                                                                                                                                  |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| Les valeurs entre parenthèses sont applicables à l'ISOLATION PRINCIPALE, à l'ISOLATION SUPPLÉMENTAIRE ou à l'ISOLATION RENFORCÉE uniquement si la fabrication est soumise à un programme de contrôle de la qualité qui fournit un niveau d'assurance au moins égal à celui de l'exemple donné à l'Article R.2 de l'Annexe R. La DOUBLE ISOLATION et l'ISOLATION RENFORCÉE doivent être soumises à un ESSAI INDIVIDUEL DE SÉRIE pour la rigidité diélectrique. |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| <sup>a</sup> Pour les surtensions transitoires supérieures à 2 500 V en valeur de crête, soit le Tableau 2K doit être utilisé, soit la distance dans l'air minimale doit être déterminée en utilisant l'Annexe G.                                                                                                                                                                                                                                             |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| <sup>b</sup> Il n'est pas exigé de passer avec succès les essais de 2.10.10 pour le degré de pollution 1.                                                                                                                                                                                                                                                                                                                                                     |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| <sup>c</sup> Dans un CIRCUIT SECONDAIRE, pour les VALEURS DE CRÊTE DES TENSIONS DE SERVICE supérieures à 1 400 V, la DISTANCE DANS L'AIR minimale est de 5 mm sous réserve que le chemin de la DISTANCE DANS L'AIR passe avec succès l'essai de rigidité diélectrique selon 5.2.2 en utilisant                                                                                                                                                                |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| - une tension d'essai en courant alternatif dont la valeur efficace est égale à 106 % de la VALEUR DE CRÊTE DE LA TENSION DE SERVICE (valeur de crête 150 % de la VALEUR DE CRÊTE DE LA TENSION DE SERVICE), ou                                                                                                                                                                                                                                               |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |
| - une tension d'essai en courant continu égale à 150 % de la VALEUR DE CRÊTE DE LA TENSION DE SERVICE.                                                                                                                                                                                                                                                                                                                                                        |                                                                            |       |     |                                              |       |     |                         |       |     |                                              |       |     |                                                                   |       |     |                        |       |       |



### 2.10.3.5 Distances dans l'air dans des circuits avec impulsions de démarrage

Pour un circuit qui génère des impulsions de démarrage pour allumer une lampe à décharge et si le circuit n'est pas un CIRCUIT À LIMITATION DE COURANT conforme à 2.4 (voir 2.10.1.7), la bonne adéquation des DISTANCES DANS L'AIR est déterminée par l'une des méthodes suivantes:

- a) Déterminer la DISTANCE DANS L'AIR minimale conformément à l'Annexe G; ou
- b) Effectuer des essais de rigidité diélectrique en utilisant une des procédures suivantes. Au cours des essais, les bornes des lampes sont court-circuitées ensemble.
  - Essai selon 5.2.2, en utilisant une tension d'essai de crête en courant alternatif ou une tension en courant continu égale à 150 % la VALEUR DE CRÊTE DE LA TENSION DE SERVICE; ou
  - Appliquer 30 impulsions ayant une amplitude égale à 150 % de la VALEUR DE CRÊTE DE LA TENSION DE SERVICE provenant d'un générateur d'impulsions extérieur. La largeur d'impulsion doit être supérieure ou égale à celle de l'impulsion de démarrage générée en interne.

NOTE Pour les TENSIONS DE SERVICE, voir 2.10.2.1 i).

### 2.10.3.6 Transitoires provenant d'un réseau d'alimentation en courant alternatif

A l'exception de ce qui est permis ci-dessous, le transitoire le plus élevé dans un CIRCUIT SECONDAIRE dû aux transitoires sur le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF est la valeur mesurée conformément à 2.10.3.9 a).

Sinon, pour certains CIRCUITS SECONDAIRES, il est permis de supposer que le transitoire le plus élevé est soit:

- la valeur mesurée conformément à 2.10.3.9 a); soit
- un niveau en dessous dans la liste suivante par rapport à la TENSION TRANSITOIRE DU RÉSEAU du Tableau 2J dans le CIRCUIT PRIMAIRE:

330, 500, 800, 1 500, 2 500 et 4 000 V de crête.

Cela est autorisé dans les cas suivants:

- un CIRCUIT SECONDAIRE, dérivé d'une ALIMENTATION RÉSEAU EN COURANT ALTERNATIF, qui est connecté à la principale borne de mise à la terre de protection conformément à 2.6.1;
- un CIRCUIT SECONDAIRE, dérivé d'une ALIMENTATION DE RÉSEAU EN COURANT ALTERNATIF et séparé du CIRCUIT PRIMAIRE par un écran métallique qui est connecté à la principale borne de mise à la terre de protection conformément en 2.6.1.

### 2.10.3.7 Transitoires provenant d'un réseau d'alimentation en courant continu

NOTE 1 Un circuit connecté à une ALIMENTATION DE RÉSEAU EN COURANT CONTINU est considéré comme un CIRCUIT SECONDAIRE (voir 1.2.8.2).

Le transitoire le plus élevé dans un CIRCUIT SECONDAIRE dû aux transitoires sur une ALIMENTATION DE RÉSEAU EN COURANT CONTINU est

- la TENSION TRANSITOIRE DU RÉSEAU, si le CIRCUIT SECONDAIRE est directement connecté à l'ALIMENTATION DU RÉSEAU EN COURANT CONTINU; ou
- la valeur mesurée conformément à 2.10.3.9 a) dans d'autres cas sauf ceux de 2.10.3.2 b) et 2.10.3.2 c).

NOTE 2 Les deux options ci-dessus dépendent de la valeur de la TENSION TRANSITOIRE DU RÉSEAU. Dans certains cas, cette valeur est supposée égale à 71 V en valeur de crête [voir 2.10.3.2 b) ou d)]. La colonne appropriée du Tableau 2K est utilisée et aucune mesure n'est nécessaire.

### 2.10.3.8 Transitoires provenant des réseaux de télécommunications et des systèmes de distribution par câbles

Si la TENSION TRANSITOIRE DU RÉSEAU DE TÉLÉCOMMUNICATIONS est connue pour le réseau concerné, il est permis d'utiliser la valeur connue en 2.10.3.4.

Si la TENSION TRANSITOIRE DU RÉSEAU DE TÉLÉCOMMUNICATIONS n'est pas connue, la valeur suivante doit être utilisée:

- 1 500 V valeur de crête si le circuit relié au RÉSEAU DE TÉLÉCOMMUNICATIONS est un CIRCUIT TRT-1 ou un CIRCUIT TRT-3; et
- 800 V valeur de crête si le circuit relié au RÉSEAU DE TÉLÉCOMMUNICATIONS est un CIRCUIT TBTS ou un CIRCUIT TRT-2.

Si les transitoires entrants sont atténués à l'intérieur du matériel, il est permis d'utiliser la valeur mesurée selon 2.10.3.9 b).

L'effet du signal de sonnerie de téléphone n'est pas pris en compte.

L'effet des transitoires provenant d'un SYSTÈME DE DISTRIBUTION PAR CÂBLES n'est pas pris en compte (voir toutefois 7.4.1).

### 2.10.3.9 Mesure des tensions transitoires

*Les essais suivants sont effectués uniquement s'il est prescrit de déterminer si oui ou non la tension transitoire à travers la DISTANCE DANS L'AIR dans un circuit quelconque est plus faible que la normale (en raison, par exemple, de l'effet d'un filtre dans le matériel). La tension transitoire à travers la DISTANCE DANS L'AIR est mesurée à l'aide des procédures d'essai suivantes.*

*Pendant les essais, le matériel est relié à son unité d'alimentation séparée, s'il elle existe, mais n'est pas relié au réseau d'alimentation, ni à aucun RÉSEAU DE TÉLÉCOMMUNICATIONS, et tous les parasurtenseurs dans les CIRCUITS PRIMAIRES sont déconnectés.*

*Un dispositif de mesure de tension est connecté à travers la DISTANCE DANS L'AIR concernée.*

#### a) Transitoires provenant d'un RÉSEAU D'ALIMENTATION

*Pour mesurer une tension transitoire à travers une DISTANCE DANS L'AIR due aux tensions transitoires sur un RÉSEAU D'ALIMENTATION, le générateur d'impulsions d'essai, référence 2 du Tableau N.1 est utilisé pour produire des impulsions de 1,2/50  $\mu$ s.  $U_c$  est égal à la TENSION TRANSITOIRE DU RÉSEAU donnée au Tableau 2J.*

*Trois à six impulsions de polarités alternées, avec des intervalles d'au moins 1 s entre les impulsions, sont appliquées entre tous les points suivants, lorsque c'est applicable:*

#### **Pour une ALIMENTATION DE RÉSEAU EN COURANT CONTINU**

- entre lignes;
- tous les conducteurs de ligne reliés galvaniquement ensemble et le neutre;
- tous les conducteurs de ligne reliés galvaniquement ensemble et la terre de protection;
- le neutre et la terre de protection.

### **Pour une ALIMENTATION DE RÉSEAU EN COURANT CONTINU**

- les points positif et négatif de connexion d'alimentation;
- tous les points de connexion d'alimentation reliés galvaniquement ensemble et la terre de protection.

### **b) Transitoires provenant d'un RÉSEAU DE TÉLÉCOMMUNICATIONS**

Pour mesurer une tension transitoire à travers une DISTANCE DANS L'AIR due aux tensions transitoires sur un RÉSEAU DE TÉLÉCOMMUNICATIONS, le générateur d'impulsions d'essai, référence 1 du Tableau N.1 est utilisé pour produire des impulsions de 10/700  $\mu$ s.  $U_c$  est égal à la TENSION TRANSITOIRE SUR LE RÉSEAU DE TÉLÉCOMMUNICATIONS déterminée en 2.10.3.8.

Trois à six impulsions de polarités alternées, avec des intervalles d'au moins 1 s entre les impulsions, sont appliquées entre tous les points de connexion suivants du RÉSEAU DE TÉLÉCOMMUNICATIONS d'un type d'interface unique:

- chaque paire de bornes (par exemple A et B ou donnée et sonnerie) d'une interface;
- toutes les bornes d'un type d'interface unique reliées ensemble et la terre.

Lorsqu'il existe plusieurs circuits identiques, un seul est soumis aux essais.

## **2.10.4 Lignes de fuite**

### **2.10.4.1 Généralités**

Les LIGNES DE FUITE doivent être dimensionnées de telle façon que, pour UNE VALEUR EFFICACE DE TENSION DE SERVICE donnée et un degré de pollution, il n'y ait ni contournement ni rupture de l'isolation (par exemple dû au cheminement).

### **2.10.4.2 Groupe de matériau et indice de résistance au cheminement**

Les groupes de matériaux dépendent de l'indice de résistance au cheminement (IRC) et sont classés comme suit:

|                         |            |                |
|-------------------------|------------|----------------|
| Groupe de matériau I    |            | IRC $\geq$ 600 |
| Groupe de matériau II   | 400 $\leq$ | IRC < 600      |
| Groupe de matériau IIIa | 175 $\leq$ | IRC < 400      |
| Groupe de matériau IIIb | 100 $\leq$ | IRC < 175      |

Le groupe de matériau est vérifié par l'évaluation des données d'essai pour le matériau conformément à la CEI 60112 en utilisant 50 gouttes de la solution A.

Lorsque le groupe de matériau n'est pas connu, il est supposé être le groupe de matériau IIIb.

Si un IRC supérieur ou égal à 175 est nécessaire et si les données ne sont pas disponibles, le groupe de matériau peut être établi avec un essai pour l'indice de tenue au cheminement (ITC) comme détaillé dans la CEI 60112. Un matériau peut être inclus dans un groupe si son ITC établi par ces essais est supérieur ou égal à la valeur la plus faible de l'IRC spécifiée pour le groupe.

### 2.10.4.3 Lignes de fuite minimales

Les LIGNES DE FUITE ne doivent pas être inférieures aux valeurs minimales appropriées spécifiées dans le Tableau 2N.

Si la valeur minimale de la LIGNE DE FUITE provenant du Tableau 2N est inférieure à la DISTANCE DANS L'AIR minimale applicable, la valeur pour cette DISTANCE DANS L'AIR doit être appliquée comme valeur minimale pour la LIGNE DE FUITE.

Pour le verre, le mica, la céramique vitrifiée ou d'autres matériaux inorganiques similaires, si la LIGNE DE FUITE minimale est supérieure à la DISTANCE DANS L'AIR minimale applicable, il est permis d'appliquer cette valeur de DISTANCE DANS L'AIR minimale comme LIGNE DE FUITE minimale.

Les LIGNES DE FUITE entre la SURFACE FRONTIÈRE d'un connecteur et les parties conductrices à l'intérieur du connecteur qui sont connectées à une TENSION DANGEREUSE doivent être conformes aux exigences D'ISOLATION RENFORCÉE. A titre exceptionnel, pour les connecteurs qui sont

- fixés au matériel; et
- situés à l'intérieur de l'ENVELOPPE extérieure du matériel; et
- uniquement accessibles après retrait d'un sous-ensemble qui peut être remplacé par l'UTILISATEUR qui doit être en place en fonctionnement normal,

ces LIGNES DE FUITE doivent être conformes aux exigences pour l'ISOLATION PRINCIPALE.

NOTE Les essais de 2.1.1.1 pour l'accès aux parties dangereuses s'appliquent à de tels connecteurs après le retrait du sous-ensemble.

Pour toutes les autres LIGNES DE FUITE dans les connecteurs, y compris les connecteurs qui ne sont pas fixés au matériel, les valeurs minimales spécifiées au Tableau 2N s'appliquent.

Les LIGNES DE FUITE minimales ci-dessus pour les connecteurs ne s'appliquent pas aux connecteurs qui sont conformes à une norme harmonisée avec la CEI 60083, la CEI 60309, la CEI 60320, la CEI 60906-1 ou la CEI 60906-2, voir aussi 1.5.2.

*La vérification est effectuée par des mesures, en tenant compte de l'Annexe F. Les conditions suivantes s'appliquent:*

- *les parties mobiles doivent être placées dans la position la plus défavorable;*
- *pour le matériel équipé de CÂBLES D'ALIMENTATION FIXÉS À DEMEURE ordinaires, les mesures de LIGNES DE FUITE sont effectuées avec des conducteurs d'alimentation de la plus forte section spécifiée en 3.3.4 pour la borne concernée et aussi sans conducteurs; et*
- *lorsque les LIGNES DE FUITE, à partir de la SURFACE FRONTIÈRE d'une ENVELOPPE en matière isolante, sont mesurées à travers une fente ou une ouverture dans l'ENVELOPPE ou à travers une ouverture dans un connecteur accessible, la surface accessible est considérée comme conductrice comme si elle était recouverte d'une feuille de métal partout où elle peut être touchée par le doigt d'épreuve de la Figure 2A (voir 2.1.1.1), appliqué sans force appréciable (voir Figure F.12, point X).*

Tableau 2N – Lignes de fuite minimales

LIGNES DE FUITE en mm

| VALEUR EFFICACE DE LA TENSION DE SERVICE<br><br>jusqu'à et y compris<br><br>V | Degré de pollution  |             |                   |      |      |            |      |      |                        |
|-------------------------------------------------------------------------------|---------------------|-------------|-------------------|------|------|------------|------|------|------------------------|
|                                                                               | 1 <sup>a</sup>      | 2           | 1 <sup>a</sup>    | 2    |      |            | 3    |      |                        |
|                                                                               | Groupe de matériaux |             |                   |      |      |            |      |      |                        |
|                                                                               | Cartes imprimées    |             | Autres matériaux  |      |      |            |      |      |                        |
|                                                                               | I, II, IIIa, IIIb   | I, II, IIIa | I, II, IIIa, IIIb | I    | II   | IIIa, IIIb | I    | II   | IIIa, IIIb (voir Note) |
| 10                                                                            | 0,025               | 0,04        | 0,08              | 0,4  | 0,4  | 0,4        | 1,0  | 1,0  | 1,0                    |
| 12,5                                                                          | 0,025               | 0,04        | 0,09              | 0,42 | 0,42 | 0,42       | 1,05 | 1,05 | 1,05                   |
| 16                                                                            | 0,025               | 0,04        | 0,1               | 0,45 | 0,45 | 0,45       | 1,1  | 1,1  | 1,1                    |
| 20                                                                            | 0,025               | 0,04        | 0,11              | 0,48 | 0,48 | 0,48       | 1,2  | 1,2  | 1,2                    |
| 25                                                                            | 0,025               | 0,04        | 0,125             | 0,5  | 0,5  | 0,5        | 1,25 | 1,25 | 1,25                   |
| 32                                                                            | 0,025               | 0,04        | 0,14              | 0,53 | 0,53 | 0,53       | 1,3  | 1,3  | 1,3                    |
| 40                                                                            | 0,025               | 0,04        | 0,16              | 0,56 | 0,8  | 1,1        | 1,4  | 1,6  | 1,8                    |
| 50                                                                            | 0,025               | 0,04        | 0,18              | 0,6  | 0,85 | 1,2        | 1,5  | 1,7  | 1,9                    |
| 63                                                                            | 0,04                | 0,063       | 0,2               | 0,63 | 0,9  | 1,25       | 1,6  | 1,8  | 2,0                    |
| 80                                                                            | 0,063               | 0,10        | 0,22              | 0,67 | 0,9  | 1,3        | 1,7  | 1,9  | 2,1                    |
| 100                                                                           | 0,1                 | 0,16        | 0,25              | 0,71 | 1,0  | 1,4        | 1,8  | 2,0  | 2,2                    |
| 125                                                                           | 0,16                | 0,25        | 0,28              | 0,75 | 1,05 | 1,5        | 1,9  | 2,1  | 2,4                    |
| 160                                                                           | 0,25                | 0,40        | 0,32              | 0,8  | 1,1  | 1,6        | 2,0  | 2,2  | 2,5                    |
| 200                                                                           | 0,4                 | 0,63        | 0,42              | 1,0  | 1,4  | 2,0        | 2,5  | 2,8  | 3,2                    |
| 250                                                                           | 0,56                | 1,0         | 0,56              | 1,25 | 1,8  | 2,5        | 3,2  | 3,6  | 4,0                    |
| 320                                                                           | 0,75                | 1,6         | 0,75              | 1,6  | 2,2  | 3,2        | 4,0  | 4,5  | 5,0                    |
| 400                                                                           | 1,0                 | 2,0         | 1,0               | 2,0  | 2,8  | 4,0        | 5,0  | 5,6  | 6,3                    |
| 500                                                                           | 1,3                 | 2,5         | 1,3               | 2,5  | 3,6  | 5,0        | 6,3  | 7,1  | 8,0                    |
| 630                                                                           | 1,8                 | 3,2         | 1,8               | 3,2  | 4,5  | 6,3        | 8,0  | 9,0  | 10                     |
| 800                                                                           | 2,4                 | 4,0         | 2,4               | 4,0  | 5,6  | 8,0        | 10   | 11   | 12,5                   |
| 1 000                                                                         | 3,2                 | 5,0         | 3,2               | 5,0  | 7,1  | 10         | 12,5 | 14   | 16                     |
| 1 250                                                                         |                     |             | 4,2               | 6,3  | 9,0  | 12,5       | 16   | 18   | 20                     |
| 1 600                                                                         |                     |             | 5,6               | 8,0  | 11   | 16         | 20   | 22   | 25                     |
| 2 000                                                                         |                     |             | 7,5               | 10   | 14   | 20         | 25   | 28   | 32                     |
| 2 500                                                                         |                     |             | 10                | 12,5 | 18   | 25         | 32   | 36   | 40                     |
| 3 200                                                                         |                     |             | 12,5              | 16   | 22   | 32         | 40   | 45   | 50                     |
| 4 000                                                                         |                     |             | 16                | 20   | 28   | 40         | 50   | 56   | 63                     |
| 5 000                                                                         |                     |             | 20                | 25   | 36   | 50         | 63   | 71   | 80                     |
| 6 300                                                                         |                     |             | 25                | 32   | 45   | 63         | 80   | 90   | 100                    |
| 8 000                                                                         |                     |             | 32                | 40   | 56   | 80         | 100  | 110  | 125                    |
| 10 000                                                                        |                     |             | 40                | 50   | 71   | 100        | 125  | 140  | 160                    |
| 12 500                                                                        |                     |             | 50                | 63   | 90   | 125        |      |      |                        |
| 16 000                                                                        |                     |             | 63                | 80   | 110  | 160        |      |      |                        |
| 20 000                                                                        |                     |             | 80                | 100  | 140  | 200        |      |      |                        |
| 25 000                                                                        |                     |             | 100               | 125  | 180  | 250        |      |      |                        |
| 32 000                                                                        |                     |             | 125               | 160  | 220  | 320        |      |      |                        |
| 40 000                                                                        |                     |             | 160               | 200  | 280  | 400        |      |      |                        |
| 50 000                                                                        |                     |             | 200               | 250  | 360  | 500        |      |      |                        |
| 63 000                                                                        |                     |             | 250               | 320  | 450  | 600        |      |      |                        |

Les valeurs du tableau s'appliquent à l'ISOLATION FONCTIONNELLE, si cela est requis par 5.3.4 a) (voir 2.10.1.3), l'ISOLATION PRINCIPALE et l'ISOLATION SUPPLÉMENTAIRE. Pour l'ISOLATION RENFORCÉE, les valeurs sont le double de celles du tableau.

Il est permis de procéder par interpolation linéaire entre les deux points les plus voisins, la LIGNE DE FUITE calculée étant arrondie à l'échelon de 0,1 mm immédiatement supérieur. Pour l'ISOLATION RENFORCÉE, la valeur calculée de l'ISOLATION PRINCIPALE doit être doublée d'abord avant d'arrondir.

NOTE Le groupe de matériau IIIb n'est pas recommandé pour les applications en degré de pollution 3 avec une VALEUR EFFICACE DE LA TENSION DE SERVICE supérieure à 630 V.

<sup>a</sup> Il est permis d'utiliser les valeurs du degré de pollution 1 si un échantillon passe avec succès les essais de 2.10.10.

## 2.10.5 Isolation solide

### 2.10.5.1 Généralités

En 2.10.5, les exigences pour l'ISOLATION SOLIDE (à l'exception de celles pour les matériaux en fines feuilles) et pour les composés isolant s'appliquent également aux matériaux à base de gel utilisés à cet effet.

L'isolation solide doit être:

- dimensionnée de telle façon que les surtensions, y compris les transitoires qui entrent dans le matériel, et les tensions crêtes qui peuvent être produites à l'intérieur du matériel ne détruisent pas l'ISOLATION SOLIDE; et
- disposée de telle manière que la probabilité d'une rupture due à la présence de micro-trous dans les couches fines d'isolation soit limitée.

L'email à base de solvant est accepté uniquement sur les fils de bobinage tels que décrits en 2.10.5.13.

Sauf dans les cas des cartes imprimées, l'ISOLATION SOLIDE doit soit

- être conforme aux distances minimales à travers l'isolation conformément à 2.10.5.2; ou
- satisfaire aux exigences et subir avec succès les essais de 2.10.5.3 à 2.10.5.13, tels qu'applicables.

NOTE 1 Pour les cartes imprimées, voir 2.10.6.

NOTE 2 Pour l'ISOLATION SOLIDE sur les câblages internes, voir 3.1.4.

*La vérification de conformité aux exigences des Paragraphes 2.10.5.2 à 2.10.5.14 pour l'adéquation de l'ISOLATION SOLIDE est effectuée par examen et par des mesures en tenant compte de l'Annexe F, par les essais de rigidité diélectrique de 5.2 et par les essais supplémentaires exigés de 2.10.5.4 à 2.10.5.14.*

### 2.10.5.2 Distances à travers l'isolation

Si une conception est fondée sur des distances à travers l'isolation, ces distances doivent être dimensionnées selon l'application de l'isolation (voir 2.9) et comme suit (voir Figure F.14):

- si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE ne dépasse pas 71 V, il n'y a pas d'exigence pour la distance à travers l'isolation;
- si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE dépasse 71 V, les règles suivantes s'appliquent:
  - pour l'ISOLATION FONCTIONNELLE et l'ISOLATION PRINCIPALE, il n'existe pas de distance minimale à travers l'isolation;
  - l'ISOLATION SUPPLÉMENTAIRE ET l'ISOLATION RENFORCÉE doivent avoir une distance à travers l'isolation supérieure ou égale à 0,4 mm fournie par une couche unique.

*Pour les critères de conformité, voir 2.10.5.1.*

### 2.10.5.3 Composé isolant comme isolation solide

NOTE 1 Pour les cartes imprimées, voir 2.10.6 et pour les composants bobinés, voir 2.10.5.11, 2.10.5.12, 2.10.5.13 et 2.10.5.14.

Il n'existe pas de DISTANCE DANS L'AIR OU DE LIGNE DE FUITE interne minimale si le composé isolant remplit complètement le boîtier d'un composant ou d'un sous-ensemble sous réserve que chaque distance à travers l'isolation d'un composant ou d'un sous-ensemble satisfasse aux exigences de 2.10.5.2 et qu'un échantillon unique passe avec succès les essais de 2.10.10.

NOTE 2 Quelques exemples d'un tel traitement sont connus sous les termes d'enrobage, mise sous boîtier rempli et imprégnation sous vide.

NOTE 3 Les constructions ci-dessus peuvent contenir des joints scellés, auquel cas 2.10.5.5 s'applique aussi.

*Pour les critères de conformité, voir 2.10.5.1.*

#### **2.10.5.4 Dispositifs à semiconducteurs**

Il n'existe pas de distance minimale à travers l'isolation pour l'isolation supplémentaire ou l'isolation renforcée faite d'un composé isolant remplissant le boîtier d'un composant à semiconducteur (par exemple un optocoupleur, voir la Figure F.17), sous réserve que le composant satisfasse à l'une des conditions suivantes, a) ou b):

- a) – satisfait aux ESSAIS DE TYPE et aux critères d'examen de 2.10.11; et
  - est soumis à des ESSAIS INDIVIDUELS DE SÉRIE pour la rigidité diélectrique pendant la fabrication, avec la valeur appropriée de tension d'essai de 5.2.2; ou
- b) pour un optocoupleur uniquement, est conforme aux exigences de la CEI 60747-5-5<sup>1)</sup>, où les tensions d'essai comme spécifié en 5.2.6 (de la CEI 60747-5-5):
  - la tension  $V_{ini,a}$  pour les ESSAIS DE TYPE, et
  - la tension  $V_{ini,b}$  pour les ESSAIS DE TYPE,doivent être la valeur appropriée de la tension d'essai en 5.2.2 de la présente norme.

NOTE Les constructions ci-dessus peuvent contenir des joints scellés, auquel cas 2.10.5.5 s'applique aussi.

Comme alternative à a) et b) ci-dessus, il est permis de traiter un semiconducteur selon 2.10.5.3, si cela est applicable.

*Pour les critères de conformité, voir 2.10.5.1.*

#### **2.10.5.5 Joints scellés**

Lorsque le chemin entre des parties conductrices est rempli avec un composé isolant et que ce composé isolant forme un joint scellé entre deux parties non conductrices (voir Figure F.18) ou entre une partie non conductrice et lui-même (voir Figures F.16 et F.17), un des points suivants a), b) ou c) s'applique.

- a) La distance le long du chemin entre deux parties conductrices ne doit pas être inférieure aux DISTANCES DANS L'AIR et aux LIGNES DE FUITE minimales pour le degré de pollution 2. Les exigences pour la distance à travers l'isolation de 2.10.5.2 ne s'appliquent pas le long du joint.
- b) La distance le long du chemin entre deux parties conductrices ne doit pas être inférieure aux DISTANCES DANS L'AIR et aux LIGNES DE FUITE minimales pour le degré de pollution 1. De plus, un échantillon doit passer avec succès l'essai de 2.10.10. Les exigences pour la distance à travers l'isolation de 2.10.5.2 ne s'appliquent pas le long du joint.
- c) Les exigences pour la distance à travers l'isolation de 2.10.5.2 s'appliquent entre les parties conductrices le long du joint. De plus, trois échantillons doivent passer avec succès l'essai de 2.10.11.

---

1) A publier.



Pour a) et b) ci-dessus, si les matériaux isolants concernés sont de groupes de matériaux différents, c'est le cas le plus défavorable qui est utilisé. Lorsque le groupe de matériau n'est pas connu, il est supposé être le groupe de matériau IIIb.

Pour b) et c) ci-dessus, les essais de 2.10.10 et 2.10.11 ne sont pas appliqués à une carte imprimée réalisée en utilisant du prépreg si la température de la carte imprimée mesurée au cours de l'essai d'échauffement de 4.5.2 ne dépasse pas 90 °C.

NOTE 1 Il n'existe pas de DISTANCE DANS L'AIR ou de LIGNE DE FUITE à moins que le joint n'éclate, par exemple, suite au vieillissement. Pour couvrir cette possibilité, les exigences et les essais du c) s'appliquent si les DISTANCES DANS L'AIR et les LIGNES DE FUITE selon a) ou b) sont satisfaites.

NOTE 2 Ci-dessous quelques exemples de joints scellés:

- entre deux parties non conductrices scellées ensemble, par exemple deux couches d'une carte imprimée multicouches (voir Figure F.16) ou la bobine séparée d'un transformateur là où la cloison est fixée par de l'adhésif (voir Figure F.18);
- entre des couches d'isolation enroulées en spirale sur un fil de bobinage, scellées par de l'adhésif;
- entre le boîtier non conducteur d'un optocoupleur et le composé isolant remplissant le boîtier (voir Figure F.17).

*Pour les critères de conformité, voir 2.10.5.1.*

#### **2.10.5.6 Matériaux en couches minces – Généralités**

Il n'existe pas d'exigence de dimension ou de construction pour l'isolation dans les matériaux en fines feuilles utilisés comme ISOLATION FONCTIONNELLE ou ISOLATION PRINCIPALE.

L'isolation en fines feuilles est permise pour l'ISOLATION SUPPLÉMENTAIRE ET l'ISOLATION RENFORCÉE (voir Figure F.15), quelle que soit la distance à travers l'isolation, sous réserve que l'ensemble de ce qui suit s'applique:

- deux couches au moins sont utilisées;
- l'isolation se trouve à l'intérieur de l'ENVELOPPE du matériel;
- l'isolation n'est pas soumise à des manipulations ou à l'abrasion au cours de la maintenance par l'OPÉRATEUR; et
- les exigences et les essais de 2.10.5.7 (pour des couches séparées) ou de 2.10.5.8 (pour des couches non séparées) sont satisfaites.

Il n'est pas exigé que les deux ou plus de deux couches soient fixées à la même partie conductrice. Ces deux ou plus de deux couches peuvent être

- fixées à l'une des parties conductrices exigeant la séparation, ou
- partagées entre les deux parties conductrices, ou
- sans fixation sur aucune partie conductrice.

#### **2.10.5.7 Matériau en fines feuilles séparables**

Pour l'isolation des couches en fines feuilles séparables, en plus des exigences de 2.10.5.6,

- l'ISOLATION SUPPLÉMENTAIRE doit comprendre au moins deux couches de matériau, chacune d'elles satisfaisant à l'essai de rigidité diélectrique pour l'ISOLATION SUPPLÉMENTAIRE; ou
- l'ISOLATION SUPPLÉMENTAIRE doit comprendre trois couches de matériau dans lesquelles toutes les combinaisons de deux couches ensemble satisfont à l'essai de rigidité diélectrique pour l'ISOLATION SUPPLÉMENTAIRE; ou
- l'ISOLATION RENFORCÉE doit comprendre au moins deux couches de matériau, chacune d'elles satisfaisant à l'essai de rigidité diélectrique pour l'ISOLATION RENFORCÉE; ou
- l'ISOLATION RENFORCÉE doit comprendre trois couches de matériau dans lesquelles toutes les combinaisons de deux couches ensemble satisfont à l'essai de rigidité diélectrique pour l'ISOLATION RENFORCÉE.



Il est permis que différentes couches d'isolation soient en matériaux différents ou d'épaisseurs différentes, ou les deux à la fois.

*La vérification est effectuée par examen et par l'essai de rigidité diélectrique de 2.10.5.9 ou de 2.10.5.10.*

#### **2.10.5.8 Matériaux en couches minces non séparables**

Pour les isolations en matériaux en couches minces non séparables, les modalités d'essai du Tableau 2P s'appliquent en complément des exigences de 2.10.5.6.

Il est permis que différentes couches d'isolation soient en matériaux différents ou d'épaisseurs différentes, ou les deux à la fois.

*La conformité est vérifiée par examen et par les essais spécifiés au Tableau 2P.*

**Tableau 2P – Essais pour l'isolation en couches non séparables**

| Nombre de couches                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Procédure d'essai                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| ISOLATION SUPPLÉMENTAIRE<br>Deux ou plus de deux couches                                                                                                                                                                                                                                                                                                                                                                                                                              | La procédure d'essai de 2.10.5.9 est appliquée <sup>a</sup> .                                                                                     |
| ISOLATION RENFORCÉE<br>Deux couches:<br>Trois ou plus de trois couches                                                                                                                                                                                                                                                                                                                                                                                                                | La procédure d'essai de 2.10.5.9 est appliquée <sup>a</sup> .<br>Les procédures d'essai de 2.10.5.9 et l'Annexe AA sont appliquées <sup>a</sup> . |
| <sup>a</sup> La procédure d'essai alternative de 2.10.5.10 ne peut pas être utilisée pour les couches non séparables.<br><br>NOTE L'objet des essais de l'Annexe AA est d'assurer que le matériau a une solidité adéquate pour résister aux dommages lorsqu'il est intégré dans des couches intérieures de l'isolation. Par conséquent, les essais ne sont pas appliqués à l'isolation en deux couches. Les essais de l'Annexe AA ne sont pas appliqués à l'ISOLATION SUPPLÉMENTAIRE. |                                                                                                                                                   |

#### **2.10.5.9 Matériaux en fines feuilles – modalité d'essai normalisée**

*Pour les couches séparables ou non séparables, les essais de rigidité diélectrique sont appliqués conformément à 5.2.2 à toutes les couches ensemble. La tension d'essai est:*

- 200 % de  $U_{\text{essai}}$  si deux couches sont utilisées; ou
- 150 % de  $U_{\text{essai}}$  si trois couches sont utilisées; ou

*lorsque  $U_{\text{essai}}$  est la tension d'essai spécifiée en 5.2.2 pour l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE selon ce qui est approprié.*

NOTE A moins que toutes les couches soient du même matériau et aient la même épaisseur, il est possible que la tension d'essai soit partagée de manière égale entre les couches en provoquant une rupture d'une couche qui aurait passé l'essai avec succès si elle avait été soumise à l'essai séparément.

#### **2.10.5.10 Matériaux en fines feuilles – modalité d'essai alternative**

*Si les couches peuvent être séparées pour des essais individuels, l'alternative suivante à la procédure d'essai normalisée de 2.10.5.9 est autorisée.*

*Les essais de rigidité diélectrique sont appliqués conformément à 5.2.2 en utilisant des tensions d'essai égales à la tension d'essai spécifiée en 5.2.2 pour l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE, selon ce qui est approprié.*

*Si deux couches sont utilisées, chaque couche doit passer l'essai avec succès.*

*Si trois ou plus de trois couches sont utilisées, chaque combinaison de deux couches doit passer l'essai avec succès.*

*Si trois ou plus de trois couches sont utilisées, il est permis de diviser ces couches en deux ou trois groupes pour les essais. Dans les essais de rigidité diélectrique ci-dessus, deux ou trois groupes sont soumis aux essais à la place de deux ou trois couches.*

*Un essai sur une couche ou un groupe de couches n'est pas répété sur une couche ou un groupe identique.*

#### **2.10.5.11 Isolation des composants bobinés**

Les transformateurs planaires ne sont pas considérés comme des composants bobinés.

NOTE 1 Les transformateurs planaires sont soumis aux exigences de construction des cartes imprimées, voir 2.10.6.

Il n'existe pas d'exigence de dimension ou de construction pour l'ISOLATION FONCTIONNELLE d'un composant bobiné.

Il est permis que l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE à l'intérieur d'un composant soit assurée par

- l'isolation sur un fil de bobinage ou un autre fil (voir 2.10.5.12 ou 2.10.5.13); ou
- une autre isolation (voir 2.10.5.14); ou
- une combinaison des deux.

NOTE 2 De tels composants bobinés peuvent contenir des joints scellés, auquel cas 2.10.5.5 s'applique aussi.

Pour une DOUBLE ISOLATION entre le conducteur d'un fil et une autre partie conductrice, il est permis que l'ISOLATION PRINCIPALE soit assurée par une isolation conforme à 2.10.5.12 sur l'un des fils et par une ISOLATION SUPPLÉMENTAIRE par une isolation supplémentaire conforme à 2.10.5.14 ou vice versa.

*Pour les critères de conformité, voir 2.10.5.1.*

*En outre, l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLÉMENTAIRE et l'ISOLATION RENFORCÉE dans les composants bobinés finis doivent passer avec succès les ESSAIS INDIVIDUELS DE SÉRIE pour la rigidité diélectrique conformément à 5.2.2.*

#### **2.10.5.12 Fil dans les composants bobinés**

Les exigences suivantes s'appliquent au fil de bobinage et aux autres fils dont l'isolation assure l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE, selon ce qui est exigé.

L'email à base de solvant n'est pas considéré comme fournissant une ISOLATION PRINCIPALE, SUPPLÉMENTAIRE OU RENFORCÉE. L'email à base de solvant est accepté uniquement s'il est utilisé sur l'isolation de fils de bobinage comme cela est décrit en 2.10.5.13.

NOTE 1 Pour l'isolation fournie en plus de celle sur le fil de bobinage, voir 2.10.5.14.

Si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE ne dépasse pas 71 V, il n'y a pas d'exigence de dimension ou de construction.

Si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE dépasse 71 V, l'un des points suivants a), b) ou c) s'applique:

a) Pour l'ISOLATION PRINCIPALE qui n'est pas sous contrainte (par exemple tension de bobinage), il n'y a pas d'exigence de dimension ou de construction. Pour l'isolation principale qui est soumise à une telle contrainte, b) ou c) s'applique.

NOTE 2 L'exception en a) ne s'applique pas à l'ISOLATION SUPPLÉMENTAIRE ou à l'ISOLATION RENFORCÉE.

b) Pour l'ISOLATION PRINCIPALE, l'ISOLATION SUPPLÉMENTAIRE OU l'ISOLATION RENFORCÉE, l'isolation sur le fil doit

- soit avoir une épaisseur d'au moins 0,4 mm assurée par une seule couche; soit
- être conforme à 2.10.5.6 et à l'Annexe U.

c) Le fil de bobinage doit être conforme à l'Annexe U. En outre, le nombre minimal de couches qui se chevauchent d'une bande enroulée en spirale ou de couches extrudées d'isolation doit être comme suit:

- pour l'ISOLATION PRINCIPALE: une couche;
- pour l'ISOLATION SUPPLÉMENTAIRE: deux couches;
- pour l'ISOLATION RENFORCÉE: trois couches.

Pour l'isolation entre deux fils de bobinage adjacents, une couche sur chaque conducteur est considérée comme fournissant une ISOLATION SUPPLÉMENTAIRE.

Un ruban enroulé en spirale avec moins de 50 % de chevauchement est considéré comme constituant une couche.

Un ruban enroulé en spirale avec plus de 50 % de chevauchement est considéré comme constituant deux couches.

Un ruban enroulé en spirale doit être scellé et doit passer avec succès les essais de 2.10.5.5 a), b) ou c).

NOTE 3 Pour les fils isolés par un processus d'extrusion, le scellement est inhérent au processus.

Lorsque deux fils de bobinage ou un fil de bobinage et un autre fil sont en contact à l'intérieur d'un composant bobiné et se croisent avec un angle compris entre 45° et 90° et sont soumis à la tension de l'enroulement, une protection contre les contraintes mécaniques doit être prévue. Cette protection peut être obtenue, par exemple, en fournissant une séparation physique sous la forme d'un manchon isolant ou d'un matériau en feuille, ou en utilisant le double du nombre de couches d'isolants prescrit.

*Pour les critères de conformité, voir 2.10.5.1. Si les essais de l'Annexe U sont nécessaires, ils ne sont pas répétés si les données du matériau confirment la conformité.*

### **2.10.5.13 Fil avec email à base de solvant dans des composants bobinés**

Il est permis d'utiliser de l'email à base de solvant sur le fil de bobinage pour assurer la séparation électrique qui est considérée comme satisfaisant aux exigences de 2.3.2.1.

NOTE 1 L'email à base de solvant n'est pas considéré comme fournissant une ISOLATION PRINCIPALE, SUPPLÉMENTAIRE OU RENFORCÉE, voir 2.10.5.12.

L'isolation de tous les conducteurs doit être en émail conforme aux exigences pour un fil de bobinage de niveau 2 selon l'une des normes de la série de la CEI 60317 avec l'ESSAI DE TYPE réalisé à une tension d'essai qui n'est pas inférieure à celle exigée en 5.2.2.

*La vérification est effectuée par examen et par les essais suivants.*

*Le composant fini est soumis à un ESSAI DE TYPE pour la résistance diélectrique (entre enroulements et entre les enroulements et le noyau (voir l'Article C.2) conformément à 5.2.2.*

*Le composant fini doit être soumis aux essais individuels de série de rigidité diélectrique d'une séparation électrique conformément à 5.2.2 en utilisant la tension d'essai de 1 000 V.*

*Les exigences de dimension et de construction de 2.10 et de l'Annexe G ne s'appliquent pas pour la conformité à 2.10.5.13.*

NOTE 2 Dans certains cas, 6.1.2.1 s'applique aussi.

NOTE 3 En Finlande, en Norvège et en Suède, il existe des exigences complémentaires d'isolation, voir 6.1.2.1 Note 2 et 6.1.2.2 Note.

#### **2.10.5.14 Isolation supplémentaire des composants bobinés**

Les exigences suivantes s'appliquent à l'isolation dans un composant bobiné, fournie en plus de l'isolation sur le fil de bobinage ou l'autre fil. Cela inclut, par exemple:

- l'isolation entre bobinages; et
- l'isolation entre un fil de bobinage ou un autre fil et toute autre partie conductrice dans le composant bobiné.

NOTE Pour l'isolation sur le fil de bobinage lui-même, voir 2.10.5.12.

Si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE ne dépasse pas 71 V, il n'y a pas d'exigence de dimension ou de construction.

Si la VALEUR DE CRÊTE DE LA TENSION DE SERVICE dépasse 71 V,

- pour l'ISOLATION PRINCIPALE qui n'est pas soumise à une contrainte mécanique, il n'y a pas d'exigence de dimension ou de construction;
- l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE doit
  - soit avoir une épaisseur d'au moins 0,4 mm assurée par une seule couche; soit
  - être conforme à 2.10.5.6.

#### **2.10.6 Construction des cartes imprimées**

NOTE 2.10.6 s'applique aux enroulements d'un transformateur planaire et d'un transformateur en céramique.

##### **2.10.6.1 Cartes imprimées sans revêtement**

L'isolation entre les conducteurs sur les surfaces extérieures d'une carte imprimée sans revêtement doit être conforme aux exigences de DISTANCE DANS L'AIR minimale de 2.10.3 (ou de l'Annexe G) et de LIGNE DE FUITE minimale de 2.10.4.

*La vérification est effectuée par examen et par des mesures.*

### 2.10.6.2 Cartes imprimées avec revêtement

Pour les cartes imprimées dont les surfaces extérieures doivent être revêtues d'un matériau adapté, les exigences suivantes s'appliquent aux parties conductrices avant qu'elles ne soient revêtues:

- les distances minimales de séparation du Tableau 2Q doivent être respectées; et
- la fabrication est soumise à un programme de contrôle de la qualité qui fournit au moins le même niveau d'assurance que l'exemple donné à l'Article A.1 de l'Annexe R. La DOUBLE ISOLATION et l'ISOLATION RENFORCÉE doivent passer avec succès les ESSAIS INDIVIDUELS DE SÉRIE pour la rigidité diélectrique.

L'une des deux parties conductrices ou les deux, et au minimum 80 % des distances sur la surface entre les parties conductrices, doivent être revêtues.

Le mode de revêtement, le matériau de revêtement et le matériau de base doivent être tels qu'une qualité uniforme soit assurée et que les distances d'isolation considérées soient effectivement protégées.

Les DISTANCES DANS L'AIR minimales de 2.10.3 (ou de l'Annexe G) et les LIGNES DE FUITE minimales de 2.10.4 s'appliquent

- si les conditions ci-dessus ne sont pas satisfaites;
- entre deux parties conductrices quelconques sans revêtement; et
- sur l'extérieur du revêtement.

*La vérification est effectuée par examen et par des mesures en tenant compte de la Figure F.11 et par les essais de 2.10.8.*

**Tableau 2Q – Distances minimales de séparation pour les cartes imprimées avec revêtement**

| VALEUR DE CRETE DE LA TENSION<br>DE SERVICE<br>jusqu'à et y compris<br>V crête | ISOLATION FONCTIONNELLE,<br>PRINCIPALE OU SUPPLÉMENTAIRE<br>mm | ISOLATION RENFORCÉE<br>mm |
|--------------------------------------------------------------------------------|----------------------------------------------------------------|---------------------------|
| 90                                                                             | 0,1                                                            | 0,2                       |
| 180                                                                            | 0,2                                                            | 0,4                       |
| 230                                                                            | 0,3                                                            | 0,6                       |
| 285                                                                            | 0,4                                                            | 0,8                       |
| 355                                                                            | 0,6                                                            | 1,2                       |
| 455                                                                            | 0,8                                                            | 1,6                       |
| 570                                                                            | 1,0                                                            | 2,0                       |
| 710                                                                            | 1,3                                                            | 2,6                       |
| 895                                                                            | 1,8                                                            | 3,6                       |
| 1 135                                                                          | 2,4                                                            | 3,8                       |
| 1 450                                                                          | 2,8                                                            | 4,0                       |
| 1 800                                                                          | 3,4                                                            | 4,2                       |
| 2 300                                                                          | 4,1                                                            | 4,6                       |
| 2 850                                                                          | 5,0                                                            | 5,0                       |
| 3 550                                                                          | 6,3                                                            | 6,3                       |
| 4 550                                                                          | 8,2                                                            | 8,2                       |
| 5 700                                                                          | 10                                                             | 10                        |
| 7 100                                                                          | 13                                                             | 13                        |
| 8 950                                                                          | 16                                                             | 16                        |
| 11 350                                                                         | 20                                                             | 20                        |
| 14 200                                                                         | 26                                                             | 26                        |
| 18 000                                                                         | 33                                                             | 33                        |
| 23 000                                                                         | 43                                                             | 43                        |
| 28 500                                                                         | 55                                                             | 55                        |
| 35 500                                                                         | 70                                                             | 70                        |
| 45 500                                                                         | 86                                                             | 86                        |

Il est permis de procéder par interpolation linéaire entre les deux points les plus proches, la distance minimale de séparation étant arrondie à l'échelon de 0,1 mm immédiatement supérieur. Si la valeur minimale de la LIGNE DE FUITE spécifiée au Tableau 2N est inférieure à la distance de séparation minimale spécifiée ci-dessus, c'est la distance la plus faible qui s'applique.

### 2.10.6.3 Isolation entre conducteurs sur la même surface interne d'une carte imprimée

Sur une surface interne d'une carte imprimée multi couches (voir Figure F.16), le chemin entre l'un des deux conducteurs doit être conforme aux exigences pour un joint scellé en 2.10.5.5.

### 2.10.6.4 Isolation entre conducteurs sur différentes surfaces d'une carte imprimée

L'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE entre parties conductrices sur différentes surfaces dans des cartes imprimées double face à couche unique, dans des cartes imprimées multi couches et dans des cartes imprimées à noyau métallique, doivent:

- soit avoir une épaisseur minimale de 0,4 mm; soit
- être conformes à l'une des spécifications et passer avec succès les essais correspondants du Tableau 2R.

Il n'existe pas d'exigence correspondante pour l'ISOLATION FONCTIONNELLE ou l'ISOLATION PRINCIPALE.

*La vérification est effectuée par examen et par des mesures et, lorsque c'est approprié, par des essais.*

**Tableau 2R – Isolation dans les cartes imprimées**

| Spécification de l'isolation                                                                                                                 | ESSAIS DE TYPE <sup>a</sup> | ESSAIS INDIVIDUELS DE SÉRIE pour l'essai de rigidité diélectrique <sup>c</sup> |
|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------|
| Deux couches de matériau isolant en feuilles y compris le préreg <sup>b</sup>                                                                | Non                         | Oui                                                                            |
| Trois couches ou plus de matériau isolant en feuilles y compris le préreg <sup>b</sup>                                                       | Non                         | Non                                                                            |
| Un système d'isolation avec revêtement en céramique sur un substrat métallique, traité à $\geq 500$ °C                                       | Non                         | Oui                                                                            |
| Un système d'isolation avec deux revêtements ou plus dans une matière autre que la céramique sur un substrat métallique, traité à $< 500$ °C | Oui                         | Oui                                                                            |
| NOTE 1 Préreg est le terme utilisé pour une couche de tissu de verre imprégné d'une résine préconditionnée.                                  |                             |                                                                                |
| NOTE 2 Pour la définition de la céramique, voir le VEI 212-05-24.                                                                            |                             |                                                                                |
| <sup>a</sup> Le conditionnement thermique de 2.10.8.2 suivi par l'essai de rigidité diélectrique de 5.2.2.                                   |                             |                                                                                |
| <sup>b</sup> Les couches sont comptées avant traitement.                                                                                     |                             |                                                                                |
| <sup>c</sup> L'essai de rigidité diélectrique est effectué sur la carte imprimée finie.                                                      |                             |                                                                                |

### 2.10.7 Terminaisons externes des composants

Il est permis d'utiliser des revêtements sur les terminaisons externes des composants pour augmenter les DISTANCES DANS L'AIR et les LIGNES DE FUITE efficaces (voir la Figure F.10). Les distances minimales de séparation du Tableau 2Q s'appliquent au composant avant application du revêtement et le revêtement doit satisfaire à toutes les exigences de 2.10.6.2 y compris les dispositions relatives au contrôle de la qualité.

L'arrangement mécanique et la rigidité des terminaisons doivent être suffisants pour assurer que, pendant la manipulation normale, l'assemblage dans le matériel et l'utilisation ultérieure, les terminaisons ne seront pas soumises à des déformations qui risqueraient de faire craquer le revêtement ou de réduire les distances de séparation entre parties conductrices au-dessous des valeurs du Tableau 2Q (voir 2.10.6.2).

*La vérification est effectuée par examen en tenant compte de la Figure F.10, et en effectuant la séquence d'essais couverte par 2.10.8.1, 2.10.8.2 et 2.10.8.3. Ces essais sont effectués sur un ensemble complet y compris le ou les composants.*

*De même, l'essai de résistance à l'abrasion de 2.10.8.4 est effectué sur une carte de circuit imprimé spécialement préparée comme décrit pour l'échantillon 3 de 2.10.8.1, excepté que la séparation entre les parties conductrices doit être représentative des séparations minimales et des différences de potentiel maximales utilisées dans l'ensemble.*

## 2.10.8 Essais sur les cartes imprimées et les composants avec revêtement

### 2.10.8.1 Préparation des échantillons et examen préliminaire

Trois cartes échantillons (ou, pour les composants avec revêtement en 2.10.7, deux composants et une carte) identifiées comme échantillons 1, 2 et 3 sont nécessaires. L'emploi de cartes réelles ou d'échantillons fabriqués spécialement avec un revêtement représentatif et les séparations minimales est permis. Chaque carte échantillon doit être représentative des séparations minimales utilisées et est revêtue. Chaque carte échantillon est soumise à la séquence totale des opérations de fabrication, y compris le soudage et le nettoyage, auxquelles la carte est normalement soumise pendant l'assemblage du matériel.

Lors de l'examen visuel, les cartes ne doivent présenter ni micro-trous ni bulles dans le revêtement ni rupture des pistes conductrices aux coins.

### 2.10.8.2 Conditionnement thermique

L'échantillon 1 (voir 2.10.8.1) est soumis à la séquence du cycle thermique de 2.10.9.

L'échantillon 2 est vieilli dans une étuve ventilée à une température et pendant une durée choisies sur la Figure 2J, en utilisant la ligne d'indice de température qui correspond à la température maximale de fonctionnement de la carte imprimée. La température de l'étuve est maintenue à la température spécifiée  $\pm 2$  °C. La température utilisée pour déterminer la ligne d'indice de température est la température la plus élevée sur la carte lorsque la sécurité est impliquée.

Lorsqu'on utilise la Figure 2J, il est permis d'effectuer une interpolation entre les deux lignes d'indice de température les plus proches.

IECNORM.COM : Click to view the full PDF file 60950-1:2005



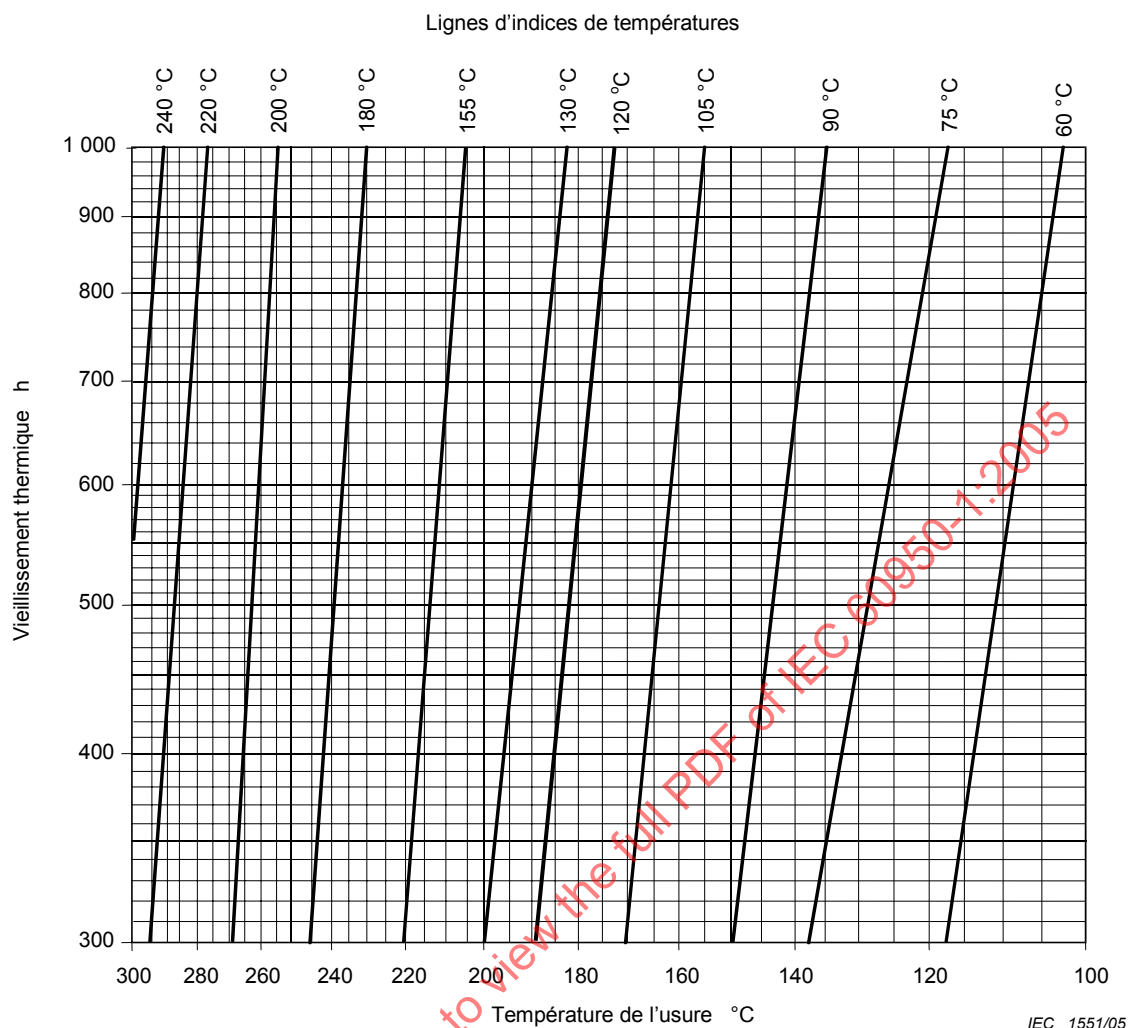


**Figure 2J – Durée de vieillissement thermique**

### 2.10.8.3 Essai de rigidité diélectrique

Les échantillons 1 et 2 (voir 2.10.8.1) sont ensuite soumis à l'épreuve hygroscopique de 2.9.2 puis doivent satisfaire à l'essai applicable de rigidité diélectrique entre conducteurs de 5.2.2.

### 2.10.8.4 Essai de résistance à l'abrasion


La carte échantillon 3 (voir 2.10.8.1) est soumise à l'essai suivant.

Des rayures sont faites à travers cinq paires de parties conductrices et les séparations intermédiaires aux points où les séparations seront soumises à la différence de potentiel maximale pendant les essais.

Les rayures sont faites au moyen d'une broche d'acier trempé dont l'extrémité a la forme d'un cône ayant un angle au sommet de 40°, la pointe étant arrondie et polie, avec un rayon de 0,25 mm ± 0,02 mm.

Les rayures sont faites en déplaçant la broche sur la surface dans un plan perpendiculaire aux conducteurs à une vitesse de 20 mm/s ± 5 mm/s comme indiqué sur la Figure 2K. La broche est appuyée de telle sorte que la force exercée suivant son axe soit de 10 N ± 0,5 N. Les rayures doivent être distantes d'au moins 5 mm et sont à au moins 5 mm du bord de l'échantillon.

Après cet essai, la couche de revêtement ne doit ni s'être relâchée ni s'être percée et elle doit satisfaire à un essai de rigidité diélectrique entre les conducteurs comme spécifié en 5.2.2. Dans le cas de cartes imprimées à noyau métallique, le substrat est l'un des conducteurs.

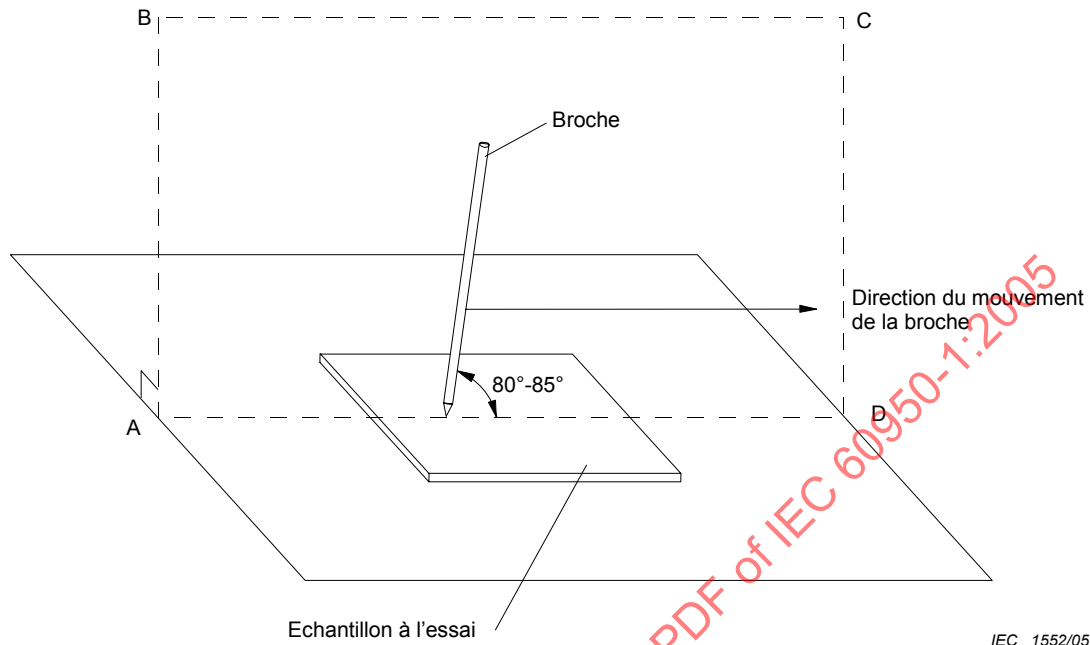

NOTE La broche est dans le plan ABCD qui est perpendiculaire à l'échantillon à l'essai.

**Figure 2K – Essai de résistance à l'abrasion pour les couches de revêtement**

### 2.10.9 Cycles thermiques

La séquence suivante de cycles thermiques est utilisée si cela est prescrit par 2.10.8.2, 2.10.10 ou 2.10.11.

Un échantillon d'un composant ou sous-ensemble est soumis à la séquence d'essais suivante. Pour les transformateurs, les coupleurs magnétiques et les dispositifs analogues dans lesquels la sécurité dépend de l'isolation, une tension de 500 V efficace à une fréquence de 50 Hz ou 60 Hz est appliquée entre les enroulements et également entre les enroulements et les autres parties conductrices pendant l'essai de cycles thermiques suivant.

L'échantillon est soumis dix fois au cycle thermique suivant:

|                    |                                   |
|--------------------|-----------------------------------|
| 68 h à             | $T_1 \pm 2 \text{ °C};$           |
| 1 h à              | $25 \text{ °C} \pm 2 \text{ °C};$ |
| 2 h à              | $0 \text{ °C} \pm 2 \text{ °C};$  |
| pas moins de 1 h à | $25 \text{ °C} \pm 2 \text{ °C}.$ |

$T_1 = T_2 + T_{ma} - T_{amb} + 10 \text{ K}$ , mesurées conformément à 1.4.5 et, lorsque c'est applicable, à 1.4.13, ou  $85 \text{ °C}$ , suivant la valeur la plus élevée. Toutefois, la marge de 10 K n'est pas ajoutée si la température est mesurée par un thermocouple enfoui ou par la méthode par résistance.

$T_2$  est la température des parties mesurée pendant l'essai de 4.5.2.

La signification de  $T_{ma}$  et  $T_{amb}$  est donnée en 1.4.12.1.

*Le temps nécessaire pour le passage d'une température à une autre n'est pas spécifié, mais il est permis que le passage soit graduel.*

*Il ne doit pas y avoir de signe de rupture de l'isolation au cours du conditionnement.*

#### **2.10.10 Essai pour l'environnement de degré de pollution 1 et pour le composé isolant**

*L'essai est réalisé lorsque cela est exigé pour vérifier un environnement de degré de pollution 1 (lors de l'utilisation du Tableau 2N, 2.10.5.5 b) ou du Tableau G.2) ou lorsque cela est exigé en 2.10.5.3 ou en 2.10.12.*

NOTE Il n'est pas exigé de passer cet essai avec succès en liaison avec les Tableaux 2K, 2L et 2M, lorsque les exigences pour le degré de pollution 1 sont les mêmes que pour le degré de pollution 2.

*Un échantillon est soumis à la séquence de cycles thermique de 2.10.9. Après refroidissement jusqu'à la température ambiante, l'échantillon est soumis à l'épreuve hygroscopique de 2.9.2, suivie immédiatement de l'essai de rigidité diélectrique applicable de 5.2.2.*

*Les essais sont suivis d'un examen et de mesurages. Le matériau isolant ne doit pas présenter de craquelures. Pour la conformité à 2.10.5.3, l'échantillon est également divisé en sections et il ne doit pas y avoir de vides dans le matériau isolant.*

#### **2.10.11 Essais pour les dispositifs à semi-conducteurs et les joints scellés**

*Si cela est exigé par 2.10.5.4 ou 2.10.5.5 c), trois échantillons sont soumis à la séquence de cycles thermiques de 2.10.9. Avant l'essai du joint scellé, tout bobinage d'un fil en émail à base de solvant utilisé dans le composant est remplacé par la feuille métallique ou par quelques tours de fil nu placé à proximité du joint scellé.*

*Les trois échantillons sont alors essayés comme suit:*

- un des échantillons est soumis à l'essai applicable de rigidité diélectrique de 5.2.2, effectué immédiatement après la dernière période à la température  $T_1$  °C au cours du cycle thermique mais la tension d'essai multipliée par 1,6;*
- les autres échantillons sont soumis à l'essai applicable de rigidité diélectrique de 5.2.2 après l'épreuve hygroscopique de 2.9.2, mais la tension d'essai est multipliée par 1,6.*

*Les essais sont suivis d'un examen, comprenant le sectionnement, et de mesurages. Le matériau isolant ne doit pas présenter de vides, de trous ou de craquelures. Dans le cas des cartes imprimées multi couches, il ne doit pas y avoir de délamination.*

#### **2.10.12 Parties enfermées et scellées**

*Pour les composants ou sous-ensembles qui sont enfermés de façon adéquate par enveloppement ou par scellement hermétique pour empêcher la pénétration de la poussière ou de l'humidité, les valeurs pour le degré de pollution 1 s'appliquent aux DISTANCES DANS L'AIR et aux LIGNES DE FUITE internes.*

NOTE Les parties situées dans des boîtes scellées hermétiquement par un adhésif ou un autre moyen et les parties enveloppées dans un revêtement épais sont quelques exemples de telles constructions.

*La vérification est effectuée par examen depuis l'extérieur, par des mesures et, si nécessaire, par des essais. Un composant ou un sous-ensemble est considéré comme enfermé de façon adéquate si un échantillon satisfait aux essais de 2.10.10.*

### **3 Câblage, connexions et alimentation**

#### **3.1 Généralités**

##### **3.1.1 Caractéristique assignée de courant et protection contre les surintensités**

La section des conducteurs internes et des CÂBLES ASSURANT L'INTERCONNEXION doit être appropriée pour les courants qu'ils sont destinés à transporter lorsque le matériel fonctionne sous la CHARGE NORMALE de façon que la température maximale admissible pour leur isolation ne soit pas dépassée.

Tous les conducteurs internes (y compris les barres omnibus) et les CÂBLES ASSURANT L'INTERCONNEXION utilisés pour la distribution de l'alimentation primaire doivent être protégés contre les surintensités et les courts-circuits par des dispositifs de protection de caractéristiques nominales appropriées.

Les conducteurs qui ne sont pas directement impliqués dans le parcours de distribution sont exemptés de cette exigence lorsqu'on peut montrer qu'il n'y a pas de probabilité de création de dangers (par exemple circuits de signalisation).

NOTE 1 Des dispositifs de protection contre les surcharges des composants peuvent également assurer la protection des conducteurs associés.

NOTE 2 Des circuits internes connectés à un RÉSEAU D'ALIMENTATION peuvent nécessiter une protection individuelle compte tenu de la réduction de la section et de la longueur des conducteurs.

*La vérification est effectuée par examen et par les essais appropriés de 4.5.2 et de 4.5.3.*

##### **3.1.2 Protection contre les dommages mécaniques**

Les passages empruntés par les conducteurs doivent être lisses et ne doivent pas présenter d'arêtes vives. Les conducteurs doivent être protégés de façon qu'ils n'entrent pas en contact avec des aspérités, des ailettes de refroidissement, des parties mobiles, etc., susceptibles d'endommager leur isolation. Les trous dans le métal pour le passage des conducteurs isolés doivent être convenablement arrondis ou munis de traversées.

Dans les ensembles électroniques, les fils peuvent être en contact très proche avec les broches recevant des connexions enroulées et analogues si une défaillance de l'isolation ne peut avoir pour résultat un état de risque, ou si une protection mécanique appropriée est prévue par le système d'isolation.

*La conformité est vérifiée par examen.*

##### **3.1.3 Fixation des conducteurs internes**

Les conducteurs internes doivent être guidés, supportés, fixés ou assujettis de telle façon qu'ils empêchent:

- une contrainte excessive sur les conducteurs et sur le raccordement aux bornes;
- le desserrage du raccordement aux bornes;
- l'endommagement de l'isolation des conducteurs.

*La conformité est vérifiée par examen.*

### 3.1.4 Isolation des conducteurs

Excepté ce qui est couvert par 2.1.1.3 b), l'isolation des conducteurs individuels du câblage interne doit être conforme aux exigences de 2.10.5 et être capable de supporter l'essai applicable de rigidité diélectrique spécifié en 5.2.2.

Quand un câble d'alimentation dont les propriétés d'isolation satisfont aux types de câbles de 3.2.5 est utilisé à l'intérieur d'un matériel, soit comme une extension du câble d'alimentation extérieur, soit comme un conducteur indépendant, sa gaine est considérée comme une ISOLATION SUPPLÉMENTAIRE adéquate dans le cadre de 3.1.4.

NOTE Les exigences concernant les couleurs de l'isolation sont données en 2.6.3.5.

*La vérification est effectuée par examen et par évaluation des résultats des essais applicables montrant qu'il n'y a pas eu de perforation de l'isolation.*

*En l'absence de résultats d'essais applicables, la vérification est effectuée par l'essai de rigidité diélectrique effectué sur un échantillon d'environ 1 m de long auquel la tension d'essai correspondante est appliquée comme suit:*

- *pour l'isolation d'un conducteur: suivant la méthode d'essai décrite à l'Article 3 de la CEI 60885-1, en utilisant la tension d'essai de 5.2.2 de la présente norme correspondant au type de l'isolation étudiée; et*
- *pour l'ISOLATION SUPPLÉMENTAIRE (par exemple manchon autour d'un groupe de conducteurs): entre un conducteur inséré dans la gaine et une feuille métallique enroulée serrée autour de la gaine sur une longueur d'environ 100 mm.*

### 3.1.5 Perles isolantes et isolant céramique

Les perles isolantes et pièces similaires isolantes en matière céramique entourant des conducteurs doivent:

- être fixées ou supportées de façon à ne pas pouvoir changer leur position de telle façon qu'il pourrait se produire un risque; et
- ne doivent pas être posées sur des arêtes vives ou des angles aigus.

Si les perles isolantes sont placées à l'intérieur de conduits métalliques flexibles, elles doivent être revêtues d'une gaine isolante, sauf si le conduit est monté ou fixé de telle façon qu'un mouvement en usage normal ne produise pas de risque.

*La vérification est effectuée par examen et, si nécessaire, par l'essai suivant.*

*Une force de 10 N est appliquée à l'isolant ou sur le conduit. Le déplacement résultant, s'il y en a un, ne doit pas produire de risque au sens de la présente norme.*

### 3.1.6 Vis exerçant une pression sur un contact électrique

Lorsqu'une pression est prescrite pour un contact électrique, une vis doit engager au moins deux filets complets dans une tôle métallique, un écrou métallique ou un insert métallique.

Les vis en matériau isolant ne doivent pas être utilisées lorsque les connexions électriques, y compris la mise à la terre de protection, sont concernées, ou lorsque leur remplacement par des vis métalliques peut affecter l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE.

Lorsque des vis en matériau isolant contribuent à d'autres aspects de la sécurité, elles doivent avoir au moins deux filets complètement engagés.

NOTE Voir également 2.6.5.7 pour les vis utilisées pour la liaison à la terre de protection.

*La conformité est vérifiée par examen.*

### **3.1.7 Matériaux isolants dans les connexions électriques**

Les connexions électriques, y compris celles pour la mise à la terre de protection (voir 2.6), doivent être conçues de façon que la pression de contact ne se transmette pas par l'intermédiaire de matériaux isolants sauf si un retrait éventuel ou une déformation de la matière isolante sont susceptibles d'être compensés par une élasticité suffisante des parties métalliques.

*La conformité est vérifiée par examen.*

### **3.1.8 Vis auto taraudeuses et vis à grand pas**

Les vis à grand pas ne doivent pas être utilisées pour la connexion des parties transportant le courant, sauf si elles serrent directement ces parties l'une contre l'autre et sont pourvues d'un dispositif de blocage approprié.

Les vis auto taraudeuses (par enlèvement ou par repoussage de matière) ne doivent pas être utilisées pour la connexion électrique des parties transportant le courant, sauf si elles donnent naissance à un filetage normal. De plus, ces vis ne doivent pas être utilisées si elles sont manoeuvrées par l'UTILISATEUR ou l'installateur, à moins que le filetage ne soit formé par emboutissage.

NOTE Voir également 2.6.5.7 pour les vis utilisées pour la liaison à la terre de protection.

*La conformité est vérifiée par examen.*

### **3.1.9 Terminaisons des conducteurs**

Les conducteurs doivent être munis de dispositifs (par exemple barrière ou écran de fixation), ou raccordés de telle manière, qu'ils ne puissent, eux et leurs connexions (par exemple bornes de sonnerie et bornes à connexion rapide, etc.) se placer, en utilisation normale, de telle façon que les DISTANCES DANS L'AIR ou les LIGNES DE FUITE soient réduites à des valeurs inférieures à celles spécifiées en 2.10 (ou à l'Annexe G).

Il est permis d'utiliser des connexions réalisées par soudage, brasage, sertissage, contacts à pousser (sans vis) et des terminaisons similaires pour la connexion des conducteurs. Dans le cas des connexions soudées, le conducteur doit être disposé ou fixé de façon que son maintien en position ne dépende pas seulement du soudage.

Dans les prises multi contacts, et dans la mesure où un court-circuit pourrait se produire, le dispositif doit éviter un contact entre les CIRCUITS TBTS ou CIRCUITS TRT et les parties à TENSION DANGEREUSE dû au desserrage d'une borne ou à la cassure d'un fil de la terminaison.

*La vérification est effectuée par examen, par des mesures et, si nécessaire, par l'essai suivant.*

*Une force de 10 N est appliquée sur le conducteur près de ces points de connexion. Le conducteur ne doit pas se détacher ou pivoter dans sa connexion à tel point que les DISTANCES DANS L'AIR ou les LIGNES DE FUITE soient réduites à des valeurs inférieures à celles spécifiées en 2.10 (ou à l'Annexe G).*

*Pour l'évaluation de la conformité il est supposé que:*

- *deux fixations indépendantes ne se desserreront pas simultanément; et*
- *les parties fixées par vis et écrous avec rondelles autobloquantes ou autres moyens de blocage ne sont pas susceptibles de prendre de jeu.*

NOTE Les rondelles à ressort ou équivalent peuvent fournir un blocage satisfaisant.

*Exemples de constructions respectant l'ensemble des exigences:*

- *manchons ajustés (par exemple une gaine thermo rétractable ou caoutchouc), appliqués autour des câbles et leurs connexions;*
- *conducteurs connectés par soudage et tenus en place près de la connexion, indépendamment de la soudure;*
- *conducteurs connectés par soudage et «crochetés» avant de souder, pourvu que le trou à travers lequel passe le conducteur ne soit pas exagérément gros;*
- *conducteurs connectés par bornes à vis, avec une fixation supplémentaire près de la borne qui maintient, dans le cas de conducteurs à âme câblée, l'isolation et pas seulement les conducteurs;*
- *conducteurs connectés par bornes à vis et munis de terminaisons (par exemple cosse à œillet sur les conducteurs ou équivalent) qui ne sont pas susceptibles de se libérer. Le pivotement de telles terminaisons est examiné;*
- *conducteurs courts et rigides qui restent en position lorsque la vis de fixation est perdue.*

### **3.1.10 Manchons sur les câbles**

Lorsqu'un manchon est utilisé comme ISOLATION SUPPLÉMENTAIRE sur des conducteurs internes, il doit être maintenu en position par des moyens efficaces.

*La conformité est vérifiée par examen.*

*Exemples de constructions qui sont considérés comme respectant cette exigence:*

- *un manchon qui ne peut être retiré qu'en cassant ou en coupant le câble ou le manchon;*
- *un manchon qui est fixé à ses deux extrémités;*
- *un manchon thermo rétractable qui renforce l'isolation d'un câble;*
- *un manchon qui est d'une longueur telle qu'il ne peut glisser.*

## **3.2 Raccordement à une alimentation du réseau**

### **3.2.1 Moyens de connexion**

#### **3.2.1.1 Raccordement à une alimentation du réseau en courant alternatif**

Afin d'assurer une connexion sûre et fiable à un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, le matériel doit être pourvu d'un des moyens suivants:

- *des bornes à une connexion à demeure à l'alimentation;*
- *UN CÂBLE D'ALIMENTATION FIXÉ À DEMEURE pour une connexion permanente à l'alimentation ou pour un raccordement à l'alimentation par l'intermédiaire d'une fiche de prise de courant;*

NOTE Dans de nombreux pays, il existe une obligation légale de fournir une fiche qui soit conforme aux règles nationales d'installation.



- un socle connecteur pour le raccordement d'un CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE;
- une fiche de prise de courant qui est une partie d'un MATERIEL ENFICHABLE DIRECTEMENT.

*La conformité est vérifiée par examen.*

### **3.2.1.2 Raccordement à une alimentation du réseau en courant continu**

Afin d'assurer une connexion sûre et fiable à une ALIMENTATION DU RÉSEAU EN COURANT CONTINU, le matériel doit être pourvu de l'un des moyens suivants:

- des bornes à une connexion à demeure à l'alimentation;
- UN CÂBLE D'ALIMENTATION FIXÉ À DEMEURE pour une connexion permanente à l'alimentation ou pour un raccordement à l'alimentation par l'intermédiaire d'une fiche de prise de courant;
- un socle connecteur pour le raccordement d'un CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE;

Les fiches de prises de courant et les socles de connecteurs ne doivent pas être d'un type utilisé pour un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF si un danger peut être créé par leur usage. Leur conception doit être telle qu'elle empêche des connexions en polarité inverse si ces connexions peuvent créer un danger.

Il est permis que l'un des pôles du RÉSEAU D'ALIMENTATION EN COURANT CONTINU soit connecté à la fois à une borne d'entrée d'alimentation et à la borne principale de mise à la terre de protection du matériel, si elle existe, pourvu que les instructions d'installation du matériel donnent les détails pour une mise à la terre correcte du système.

*La conformité est vérifiée par examen.*

### **3.2.2 Raccordements multiples à l'alimentation**

Lorsque le matériel est muni de plus d'une possibilité de raccordement à l'alimentation (par exemple pour différentes tensions ou fréquences ou pour l'alimentation de secours), la conception doit être telle que toutes les conditions suivantes soient remplies:

- des moyens de raccordement séparés sont prévus pour les différents circuits; et
- les raccordements de la prise de courant de l'alimentation, s'il en existe, ne sont pas interchangeables, si un danger risque de survenir du fait d'un raccordement incorrect; et
- des parties nues d'un CIRCUIT TBT ou des parties sous TENSIONS DANGEREUSES, telles que les contacts des fiches, ne sont pas accessibles à un OPÉRATEUR lorsqu'on déconnecte une ou plusieurs prises mobiles de connecteurs.

*La vérification est effectuée par examen et pour l'accessibilité, si nécessaire, par un essai avec le doigt d'épreuve, Figure 2A (voir 2.1.1.1).*

### **3.2.3 Matériels reliés à demeure**

Le MATÉRIEL RELIÉ À DEMEURE doit être muni soit:

- d'un ensemble de bornes comme spécifié en 3.3; soit
- d'un câble d'alimentation fixé à demeure.

Le MATÉRIEL RELIÉ À DEMEURE ayant un ensemble de bornes doit:

- permettre le raccordement des conducteurs d'alimentation après que le matériel a été fixé sur son support; et



- être pourvu d'entrées de câbles, d'entrées de conduits, d'entrées défonçables ou de presse-étoupe, qui permettent le raccordement des types appropriés de câbles ou de conduits.

Pour le matériel de COURANT NOMINAL ne dépassant pas 16 A, les entrées de câbles doivent être appropriées pour des câbles ou des conduits ayant un diamètre externe indiqué dans le Tableau 3A.

Les entrées de conduits, les entrées de câbles et les entrées défonçables pour le raccordement au réseau doivent être conçues ou placées de façon que l'introduction du conduit ou du câble n'affecte pas la protection contre les chocs électriques ou n'abaisse pas les LIGNES DE FUITE et les DISTANCES DANS L'AIR au-dessous des valeurs spécifiées en 2.10 (ou à l'Annexe G).

*La vérification est effectuée par examen, par un essai d'installation effective et par des mesures.*

**Tableau 3A – Dimensions des câbles et conduits  
pour les matériels de courant nominal ne dépassant pas 16 A**

| Nombre de conducteurs y compris<br>le CONDUCTEUR DE MISE À LA TERRE<br>DE PROTECTION lorsqu'il existe                                                                                                                             | Diamètre extérieur<br>mm |             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------|
|                                                                                                                                                                                                                                   | Câble                    | Conduit     |
| 2                                                                                                                                                                                                                                 | 13,0                     | 16,0 (22,2) |
| 3                                                                                                                                                                                                                                 | 14,0                     | 16,0 (22,2) |
| 4                                                                                                                                                                                                                                 | 14,5                     | 20,0 (27,8) |
| 5                                                                                                                                                                                                                                 | 15,5                     | 20,0 (27,8) |
| NOTE Au Canada et aux Etats-Unis, les dimensions entre parenthèses représentent la taille de l'ouverture du conduit nécessaire pour les terminaisons nominales de 1/2 pouce et 3/4 pouce des conduits de dimensions commerciales. |                          |             |

### 3.2.4 Socles de connecteurs

Les socles de connecteurs doivent être conformes à toutes les exigences suivantes:

- être situés ou enfermés de façon que des parties sous TENSIONS DANGEREUSES ne soient pas accessibles pendant l'introduction ou l'enlèvement de la prise mobile (les socles de connecteurs conformes à la CEI 60309 ou à la CEI 60320 sont considérés comme satisfaisant à cette exigence); et
- être placés de façon que la prise mobile puisse être introduite sans difficulté; et
- être placés de façon qu'après l'introduction de la prise mobile, le matériel ne soit pas supporté par la prise mobile quelle que soit sa position en usage normal sur une surface plane.

*La vérification est effectuée par examen et, pour l'accessibilité, au moyen du doigt d'épreuve de la Figure 2A (voir 2.1.1.1).*

NOTE Pour la Suisse, voir 3.2.1.1 Note.

### 3.2.5 Câbles d'alimentation

#### 3.2.5.1 Câbles d'alimentation en courant alternatif

Un câble d'alimentation pour le raccordement au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF doit être conforme à toutes les exigences suivantes, si c'est approprié:

- s'il a une isolation en caoutchouc, ne pas être plus léger que les câbles souples sous gaine ordinaire de caoutchouc conformément à la CEI 60245 (désignation 60245 IEC 53); et
- s'il a une isolation en PVC:
  - pour les matériels équipés d'un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE, et de masse inférieure ou égale à 3 kg, ne pas être plus léger que les câbles souples sous gaine légère PVC conformément à la CEI 60227 (désignation 60227 IEC 52);
  - pour les matériels équipés d'un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE, et de masse supérieure à 3 kg, ne pas être plus léger que les câbles souples sous gaine ordinaire PVC conformément à la CEI 60227 (désignation 60227 IEC 53);
  - pour les matériels équipés d'un CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE, ne pas être plus léger que les câbles souples sous gaine légère PVC conformément à la CEI 60227 (désignation 60227 IEC 52); et

NOTE 1 Il n'y a pas de limite de masse pour les matériels qui sont prévus pour être utilisés avec un CÂBLE D'ALIMENTATION NON FIXÉ À DEMEURE.

- être pourvu, dans le cas d'un matériel mis à la terre de protection, d'un conducteur de protection de terre vert et jaune; et
- avoir des conducteurs dont les sections nominales ne soient pas inférieures aux sections spécifiées dans le Tableau 3B.

NOTE 2 En Australie et en Nouvelle-Zélande, les tailles des conducteurs pour certaines gammes de courant sont différentes de celles spécifiées au Tableau 3B.

*La conformité est vérifiée par examen et par des mesures. En outre, pour les câbles blindés, la vérification est effectuée par des essais de la CEI 60227 (toutes les parties). Toutefois, les essais de flexion ne sont nécessaires que sur les câbles d'alimentation blindés pour MATÉRIELS MOBILES.*

NOTE 3 Bien que les câbles blindés ne fassent pas partie du domaine d'application de la CEI 60227, les essais applicables de la CEI 60227 sont utilisés.

*L'endommagement du blindage du câble est permis, à condition que*

- *au cours de l'essai de flexion, le blindage ne fasse contact avec aucun conducteur, et*
- *après l'essai de flexion, l'échantillon satisfasse à l'essai de rigidité diélectrique effectué entre le blindage et tous les conducteurs.*

**Tableau 3B – Dimensions des conducteurs**

| COURANT ASSIGNÉ du matériel<br>A | Tailles minimales des conducteurs   |                                                              |
|----------------------------------|-------------------------------------|--------------------------------------------------------------|
|                                  | Section nominale<br>mm <sup>2</sup> | AWG ou kcmil<br>[section en mm <sup>2</sup> ]<br>voir Note 2 |
| Jusqu'à 6 inclus                 | 0,75 <sup>a</sup>                   | 18 [0,8]                                                     |
| De 6 à 10 inclus                 | (0,75) <sup>b</sup> 1,00            | 16 [1,3]                                                     |
| De 10 à 13 inclus                | (1,0) <sup>c</sup> 1,25             | 16 [1,3]                                                     |
| De 13 à 16 inclus                | (1,0) <sup>c</sup> 1,5              | 14 [2]                                                       |
| De 16 à 25 inclus                | 2,5                                 | 12 [3]                                                       |
| De 25 à 32 inclus                | 4                                   | 10 [5]                                                       |
| De 32 à 40 inclus                | 6                                   | 8 [8]                                                        |
| De 40 à 63 inclus                | 10                                  | 6 [13]                                                       |
| De 63 à 80 inclus                | 16                                  | 4 [21]                                                       |
| De 80 à 100 inclus               | 25                                  | 2 [33]                                                       |
| De 100 à 125 inclus              | 35                                  | 1 [42]                                                       |
| De 125 à 160 inclus              | 50                                  | 0 [53]                                                       |
| De 160 à 190 inclus              | 70                                  | 000 [85]                                                     |
| De 190 à 230 inclus              | 95                                  | 0000 [107]                                                   |
| De 230 à 260 inclus              | 120                                 | 250 kcmil [126]                                              |
| De 260 à 300 inclus              | 150                                 | 300 kcmil [152]                                              |
| De 300 à 340 inclus              | 185                                 | 400 kcmil [202]                                              |
| De 340 à 400 inclus              | 240                                 | 500 kcmil [253]                                              |
| De 400 à 460 inclus              | 300                                 | 600 kcmil [304]                                              |

NOTE 1 La CEI 60320 spécifie les combinaisons acceptables de raccordements de connecteurs et de câbles souples y compris ceux qui sont couverts par les Notes a, b et c ci-dessus. Toutefois, plusieurs pays ont indiqué qu'ils n'acceptent pas toutes les valeurs données dans le Tableau 3B, particulièrement les valeurs qui sont indiquées dans les Notes a, b et c.

NOTE 2 Les dimensions AWG et kcmil sont données pour information uniquement. Les sections associées, entre crochets, ont été arrondies pour ne montrer que des chiffres significatifs. Les AWG se réfèrent à l'American Wire Gauge et le terme «cmil» se réfère aux *mils circulaires* dans lesquels 1 cmil est égal à la surface d'un cercle ayant un diamètre de 1 mil (un millième de pouce). Ces termes sont employés communément en Amérique du Nord pour désigner des tailles de conducteurs.

<sup>a</sup> Pour un COURANT ASSIGNÉ jusqu'à 3 A, une section nominale de 0,5 mm<sup>2</sup> est permise dans certains pays, pourvu que la longueur du câble ne dépasse pas 2 m.

<sup>b</sup> La valeur entre parenthèses s'applique à des CÂBLES D'ALIMENTATION DÉTACHABLES équipés de prises mobiles de connecteurs de COURANT NOMINAL égal à 10 A conformément à la CEI 60320 (types C13, C15, C15A et C17), à condition que la longueur du câble ne dépasse pas 2 m.

<sup>c</sup> La valeur entre parenthèses s'applique à des CÂBLES D'ALIMENTATION DÉTACHABLES équipés de prises mobiles de connecteurs de COURANT NOMINAL égal à 16 A conformément à la CEI 60320 (types C19, C21, et C23), à condition que la longueur du câble ne dépasse pas 2 m.

**3.2.5.2 Câbles d'alimentation en courant continu**

Un câble d'alimentation pour le raccordement au RÉSEAU D'ALIMENTATION EN COURANT CONTINU doit être adapté à la tension, au courant et aux contraintes physiques qu'il est susceptible de rencontrer.

*La conformité est vérifiée par examen.*

### 3.2.6 Dispositifs d'arrêt de traction et relâchement des contraintes

Pour les matériels avec un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE, un dispositif d'arrêt de traction et de torsion doit être fourni de telle manière que

- les points de connexion des conducteurs du câble soient protégés contre les contraintes, et
- le revêtement extérieur du câble soit protégé contre l'abrasion.

Il ne doit pas être possible de repousser le câble à l'intérieur du matériel à tel point que le câble ou ses conducteurs, ou les deux, soient endommagés ou que des parties internes du matériel soient déplacées.

Pour les CÂBLES D'ALIMENTATION FIXÉS À DEMEURE comportant un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION, la construction doit être telle que, si le câble devait se libérer de son dispositif d'arrêt de traction et de torsion, provoquant une contrainte sur les conducteurs, le CONDUCTEUR DE MISE À LA TERRE DE PROTECTION soit le dernier à être soumis à la contrainte.

Le dispositif d'arrêt de traction et de torsion doit être fait d'un matériau isolant, ou bien être recouvert d'un matériau isolant conforme aux exigences pour l'ISOLATION SUPPLÉMENTAIRE. Cependant, lorsque le dispositif d'arrêt de traction et de torsion est un manchon qui comprend la connexion électrique au blindage d'un câble blindé, cette exigence n'est pas applicable. La construction du dispositif d'arrêt de traction et de torsion doit être telle:

- que le remplacement du câble ne porte pas atteinte à la sécurité du matériel; et
- que pour les câbles à remplacement ordinaire, la façon de protéger contre les contraintes soit claire; et
- que le câble ne soit pas maintenu par une vis métallique qui appuie directement sur le câble, que le dispositif d'arrêt de traction et de torsion, y compris la vis, soit fait d'un matériau isolant et que la vis ait une taille comparable au diamètre du câble à maintenir; et
- que des méthodes telles qu'attacher le câble en faisant un nœud ou en mettant une ficelle ne soient pas utilisées; et
- que le câble ne puisse pas tourner par rapport au corps du matériel à un point tel que des contraintes mécaniques soient imposées aux connexions électriques.

*La vérification est effectuée par examen et par les essais suivants qui sont effectués avec le type de câble fourni avec le matériel.*

*Le câble est soumis à une force de traction constante, dont la valeur est indiquée dans le Tableau 3C, appliquée dans la direction la plus défavorable. L'essai est réalisé 25 fois, chaque fois pendant 1 s.*

*Pendant les essais, le câble ne doit pas être endommagé. Cela est vérifié par examen visuel, et par un essai de rigidité diélectrique entre les conducteurs du câble d'alimentation et les parties conductrices accessibles, sous la tension d'essai appropriée pour l'ISOLATION RENFORCÉE.*

*Après les essais, le câble d'alimentation ne doit pas d'être déplacé longitudinalement de plus de 2 mm et les connexions ne doivent pas être soumises à une contrainte appréciable et les LIGNES DE FUITE et DISTANCES DANS L'AIR ne doivent pas être réduites à des valeurs inférieures aux valeurs spécifiées en 2.10 (ou à l'Annexe G).*

**Tableau 3C – Essais physiques sur les câbles d'alimentation**

| Masse (M) du matériel<br>kg | Force de traction<br>N |
|-----------------------------|------------------------|
| Jusqu'à 1 inclus            | 30                     |
| De 1 à 4 inclus             | 60                     |
| Supérieure à 4              | 100                    |

### 3.2.7 Protection contre les dommages mécaniques

Les câbles d'alimentation ne doivent pas être exposés à des arêtes vives ou des bords coupants à l'intérieur ou sur la surface du matériel ainsi qu'aux entrées de câble et aux traversées de câbles.

La gaine extérieure d'un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE doit pénétrer à l'intérieur du matériel à travers une traversée ou un dispositif de protection et doit dépasser le dispositif de serrage de l'arrêt de traction et de torsion d'au moins la moitié du diamètre du câble.

Les traversées, lorsqu'elles sont utilisées, doivent

- être fixées de façon sûre, et
- ne pas pouvoir être enlevées sans l'aide d'un OUTIL.

On ne doit pas utiliser une traversée de câble métallique sur une ENVELOPPE non métallique.

Une traversée de câble ou un dispositif de protection de câble sur une partie conductrice sans protection de terre doit satisfaire aux exigences pour l'ISOLATION SUPPLÉMENTAIRE.

*La vérification est effectuée par examen et par des mesures.*

### 3.2.8 Protection des câbles

Un dispositif de protection doit être prévu à l'entrée du câble d'alimentation sur le matériel équipé d'un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE, et qui est un MATÉRIEL PORTATIF ou est destiné à être déplacé pendant l'utilisation. En variante, l'entrée du câble ou la traversée doit être munie d'un orifice en forme de cloche, soigneusement arrondi, dont le rayon de courbure est au moins égal à 1,5 fois le diamètre extérieur du câble de la plus grande section à raccorder.

Les dispositifs de protection doivent

- être conçus pour protéger le câble contre les pliages excessifs à l'entrée du matériel; et
- être en matériau isolant,
- être fixés de façon sûre, et
- dépasser à l'extérieur du matériel à partir de l'orifice d'entrée d'une longueur au moins égale à cinq fois le diamètre extérieur ou, pour les câbles plats, à cinq fois la plus grande dimension extérieure du câble.

*La vérification est effectuée par examen, par des mesures et, lorsque c'est nécessaire, par l'essai suivant avec le câble fourni par le fabricant.*

*Le matériel est placé de façon que l'axe du dispositif de protection, au point de sortie du câble, fasse saillie d'un angle de 45° lorsque le câble est exempt de contraintes. Une masse égale à  $10 \times D^2$  g est alors attachée à l'extrémité libre du câble, D étant, en millimètres, le diamètre extérieur, ou, pour les câbles plats, la plus petite dimension extérieure du câble.*

*Si le dispositif de protection est fait dans une matière sensible à la température, l'essai est effectué à  $23 \text{ °C} \pm 2 \text{ °C}$ .*

*Les câbles plats sont pliés dans le plan de la moindre résistance.*

*Immédiatement après l'accrochage de la masse, le rayon de courbure du câble ne doit être en aucun endroit inférieur à 1,5 D.*

### **3.2.9 Espace pour l'installation des câbles d'alimentation**

L'espace pour l'installation des câbles d'alimentation prévu à l'intérieur, ou en tant que partie, du matériel pour la connexion à demeure ou pour la connexion d'un CÂBLE D'ALIMENTATION ordinaire FIXÉ À DEMEURE doit être conçu:

- pour permettre l'introduction et le raccordement facile des conducteurs; et
- de façon que l'extrémité non isolée d'un conducteur ne soit pas susceptible de se libérer de sa borne ou, si elle le fait, qu'elle ne puisse venir en contact avec:
  - une partie conductrice accessible qui n'est pas reliée à la terre de protection; ou
  - une partie conductrice accessible d'un MATÉRIEL PORTATIF; et
- pour permettre de vérifier, avant la mise en place du couvercle éventuel, que les conducteurs sont correctement raccordés et disposés; et
- de façon que les couvercles éventuels puissent être mis en place sans risquer d'endommager les conducteurs d'alimentation ou leur isolation; et
- de façon que les couvercles éventuels donnant accès aux bornes puissent être enlevés avec un OUTIL d'emploi courant.

*La vérification est effectuée par examen et par un essai d'installation avec des câbles de la plus forte section de la plage appropriée spécifiée en 3.3.4.*

## **3.3 Bornes pour les conducteurs externes**

### **3.3.1 Bornes**

Les MATÉRIELS RELIÉS À DEMEURE et les matériels équipés d'un CÂBLE D'ALIMENTATION ordinaire FIXÉ À DEMEURE doivent être pourvus de bornes dans lesquelles les connexions sont assurées au moyen de vis, d'écrous ou d'autres moyens aussi efficaces (voir aussi 2.6.4).

*La conformité est vérifiée par examen.*

### **3.3.2 Raccordement des câbles d'alimentation fixés à demeure**

Pour les matériels équipés d'un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE, le raccordement des conducteurs individuels aux conducteurs internes du matériel doit être réalisé par tout moyen susceptible de fournir un raccordement mécanique et électrique fiable, sans dépasser les limites de température admissibles (voir aussi 3.1.9).

*La vérification est effectuée par examen, et en mesurant la température de la connexion, qui ne doit pas dépasser les valeurs de 4.5.3, Tableau 4B.*

### 3.3.3 Bornes à vis

Les vis et écrous pour le serrage des conducteurs externes d'alimentation doivent avoir un filetage conforme à l'ISO 261 ou à l'ISO 262, ou un filetage ayant un pas et une résistance mécanique comparables (par exemple les filetages unifiés). Ils ne doivent pas servir à fixer d'autres composants. Toutefois, ils peuvent serrer aussi des conducteurs internes, pourvu que les conducteurs internes soient disposés de façon qu'ils ne soient pas susceptibles d'être déplacés lors du raccordement des conducteurs d'alimentation. Pour les bornes de mise à la terre et de liaison à la terre de protection, voir aussi 2.6.4.2.

Il est permis d'utiliser les bornes d'un composant (par exemple un interrupteur) incorporé au matériel comme bornes pour les conducteurs externes d'alimentation, sous réserve qu'elles soient conformes aux exigences de 3.3.

*La conformité est vérifiée par examen.*

### 3.3.4 Dimensions des conducteurs à raccorder

Les bornes doivent permettre le raccordement de conducteurs ayant les sections nominales indiquées dans le Tableau 3D.

Lorsqu'il est fait usage de câbles avec des sections plus importantes, les bornes doivent être dimensionnées en conséquence.

*La vérification est effectuée par examen, par des mesures et par le raccordement de câbles de la plus petite et de la plus grande section de la plage appropriée spécifiée dans le Tableau 3D.*

**Tableau 3D – Plage des dimensions des conducteurs à introduire dans les bornes**

| COURANT NOMINAL du matériel<br>A | Section nominale<br>mm <sup>2</sup> |               |
|----------------------------------|-------------------------------------|---------------|
|                                  | Câbles souples                      | Autres câbles |
| Jusqu'à 3 inclus                 | 0,5 à 0,75                          | 1 à 2,5       |
| De 3 à 6 inclus                  | 0,75 à 1                            | 1 à 2,5       |
| De 6 à 10 inclus                 | 1 à 1,5                             | 1 à 2,5       |
| De 10 à 13 inclus                | 1,25 à 1,5                          | 1,5 à 4       |
| De 13 à 16 inclus                | 1,5 à 2,5                           | 1,5 à 4       |
| De 16 à 25 inclus                | 2,5 à 4                             | 2,5 à 6       |
| De 25 à 32 inclus                | 4 à 6                               | 4 à 10        |
| De 32 à 40 inclus                | 6 à 10                              | 6 à 16        |
| De 40 à 63 inclus                | 10 à 16                             | 10 à 25       |

### 3.3.5 Dimensions des bornes pour les conducteurs

Les bornes de type pilier à plot de contact ou à vis doivent être conformes aux exigences de taille minimale données au Tableau 3E.

*La vérification est effectuée par examen et par des mesures.*

**Tableau 3E – Dimensions des bornes pour les conducteurs de l'alimentation et pour les conducteurs de mise à la terre de protection<sup>a</sup>**

| COURANT NOMINAL du matériel<br><b>A</b>                                                                                                                      | Diamètre nominal minimal de la partie filetée<br>mm |                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------|
|                                                                                                                                                              | Type pilier ou à plot                               | Type à vis <sup>b</sup> |
| Jusqu'à 10 inclus                                                                                                                                            | 3,0                                                 | 3,5                     |
| De 10 à 16 inclus                                                                                                                                            | 3,5                                                 | 4,0                     |
| De 16 à 25 inclus                                                                                                                                            | 4,0                                                 | 5,0                     |
| De 25 à 32 inclus                                                                                                                                            | 4,0                                                 | 5,0                     |
| De 32 à 40 inclus                                                                                                                                            | 5,0                                                 | 5,0                     |
| De 40 à 63 inclus                                                                                                                                            | 6,0                                                 | 6,0                     |
| <sup>a</sup> Ce tableau est également utilisé pour les dimensions des bornes pour les CONDUCTEURS DE LIAISON À LA TERRE DE PROTECTION si spécifié en 2.6.4.2 |                                                     |                         |
| <sup>b</sup> «Type à vis" signifie une borne qui fixe le conducteur sous la tête de la vis avec ou sans rondelle.                                            |                                                     |                         |

### 3.3.6 Conception des bornes pour les conducteurs

Les bornes doivent être conçues de façon que l'âme conductrice soit serrée entre des surfaces métalliques avec une pression de contact suffisante et sans dommage pour l'âme.

Les bornes doivent être conçues ou localisées de telle sorte que le conducteur ne puisse pas s'enlever lorsque les vis ou les écrous de serrage sont resserrés.

Les bornes doivent être pourvues des fixations appropriées des conducteurs (par exemple écrous et rondelles).

Les bornes doivent être fixées de telle sorte que lorsque le moyen de serrage du conducteur est resserré ou desserré:

- la borne elle-même ne se desserre pas,
- les conducteurs internes ne soient pas soumis à des contraintes; et
- les DISTANCES DANS L'AIR et les LIGNES DE FUITE ne soient pas réduites au-dessous des valeurs spécifiées en 2.10 (ou à l'Annexe G).

*La vérification est effectuée par examen et par des mesures.*

### 3.3.7 Groupement des bornes pour les conducteurs

Pour les CÂBLES D'ALIMENTATION FIXÉS À DEMEURE ordinaires, et pour les MATÉRIELS RELIÉS À DEMEURE, toutes les bornes du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF associées doivent être placées au voisinage l'une de l'autre et de la borne de terre de protection éventuelle.

Pour les CÂBLES D'ALIMENTATION FIXÉS À DEMEURE ordinaires et pour les MATÉRIELS RELIÉS À DEMEURE, toutes les bornes du RÉSEAU D'ALIMENTATION EN COURANT CONTINU associées doivent être placées au voisinage l'une de l'autre. Elles n'ont pas besoin d'être placées au voisinage de la borne de terre de protection éventuelle, pourvu que les instructions d'installation du matériel donnent les détails pour une mise à la terre correcte du système.

*La conformité est vérifiée par examen.*



### 3.3.8 Conducteur à âme câblée

L'extrémité d'un conducteur à âme câblée ne doit pas être consolidée avec de la soudure tendre aux endroits où le conducteur est soumis à une pression de contact, à moins que la méthode de fixation ne soit conçue de façon à prévenir le risque d'un mauvais contact dû au fluage à froid de la soudure.

Les bornes à ressort qui compensent le fluage à froid sont considérées comme satisfaisant à cette exigence.

Le fait d'empêcher les vis de blocage de tourner n'est pas considéré comme suffisant.

Les bornes doivent être placées, protégées ou isolées de façon que, si un brin d'un conducteur souple vient à se détacher après le raccordement du conducteur, il n'y ait pas de risque de contact accidentel entre le brin et

- les parties conductrices accessibles, ou
- les parties conductrices non mises à la terre, séparées des parties conductrices accessibles par une ISOLATION SUPPLÉMENTAIRE seulement.

*La vérification est effectuée par examen et par l'essai suivant, à moins qu'un câble spécial ne soit préparé de façon à empêcher l'échappement de brins.*

*L'extrémité d'un conducteur souple ayant la section nominale appropriée est dépouillée de son enveloppe isolante sur une longueur d'environ 8 mm. Un brin du conducteur est décâblé et les autres brins sont introduits complètement et serrés dans la borne.*

*Le brin décâblé est plié, sans que l'enveloppe isolante soit déchirée, dans toutes les directions possibles, mais sans angles vifs le long de la protection.*

*Si le conducteur est sous une TENSION DANGEREUSE, le brin décâblé ne doit toucher aucune partie métallique accessible ou en liaison avec une partie métallique accessible ou, pour les matériels à DOUBLE ISOLATION, aucune partie métallique séparée des parties métalliques accessibles par une ISOLATION SUPPLÉMENTAIRE seulement.*

*Si le conducteur est relié à une borne de terre, le brin décâblé ne doit toucher aucune partie sous TENSION DANGEREUSE.*

## 3.4 Séparation de l'alimentation du réseau

### 3.4.1 Exigence générale

Un dispositif ou des dispositifs de sectionnement doivent être prévus pour séparer le matériel du réseau d'alimentation en vue de la maintenance.

NOTE On peut fournir des instructions pour permettre la maintenance des parties du matériel en ouvrant ou non le dispositif de sectionnement.

*La conformité est vérifiée par examen.*

### 3.4.2 Dispositifs de sectionnement

Pour les matériels destinés à être alimentés par un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF de catégorie de surtension I, de catégorie de surtension II ou de catégorie de surtension III ou par un RÉSEAU D'ALIMENTATION EN COURANT CONTINU qui est à un niveau de TENSION DANGEREUSE, un dispositif de sectionnement doit avoir une séparation de contact d'au moins 3 mm. Pour un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF de catégorie de surtension IV, se reporter à la CEI 60947-1.

Pour les matériels destinés à être alimentés par un D'ALIMENTATION EN COURANT CONTINU qui est à un niveau de TENSION DANGEREUSE, un dispositif de sectionnement doit avoir une séparation de contact au moins égale à la DISTANCE DANS L'AIR minimale pour l'ISOLATION PRINCIPALE.

NOTE Pour un RÉSEAU D'ALIMENTATION EN COURANT CONTINU, des mesures supplémentaires peuvent être nécessaires pour empêcher la formation d'arcs dans le dispositif de sectionnement, en fonction du circuit.

Si un dispositif de sectionnement est incorporé dans le matériel, il doit être connecté aussi près que possible de l'arrivée de l'alimentation.

Il est permis que les interrupteurs fonctionnels soient utilisés comme dispositifs de sectionnement pourvu qu'ils satisfassent à toutes les exigences pour les dispositifs de sectionnement. Cependant, ces exigences ne sont pas applicables aux interrupteurs fonctionnels lorsque d'autres moyens de sectionnement sont prévus.

Les types suivants de dispositifs de sectionnement sont permis:

- la fiche RÉSEAU du câble d'alimentation;
- une fiche de prise de courant RÉSEAU qui est une partie d'un MATÉRIEL ENFICHABLE DIRECTEMENT.
- un connecteur;
- un interrupteur sectionneur;
- un disjoncteur;
- pour un RÉSEAU D'ALIMENTATION EN COURANT CONTINU qui n'est pas à une TENSION DANGEREUSE, un fusible amovible, sous réserve de n'être accessible qu'au PERSONNEL DE MAINTENANCE;
- tout dispositif équivalent.

*La conformité est vérifiée par examen.*

### **3.4.3 Matériels reliés à demeure**

Pour les MATÉRIELS RELIÉS À DEMEURE, le dispositif de sectionnement doit être incorporé dans le matériel, à moins que celui-ci ne soit accompagné d'une notice d'installation conforme à 1.7.2.1 indiquant qu'un dispositif de sectionnement approprié doit être prévu à l'extérieur du matériel.

NOTE Il n'est pas nécessaire de fournir les dispositifs de sectionnement externes avec le matériel.

*La conformité est vérifiée par examen.*

### **3.4.4 Parties qui restent sous tension**

Les parties placées du côté alimentation d'un dispositif de sectionnement dans le matériel qui restent sous tension lorsque le dispositif est coupé doivent être protégées par une barrière pour éviter un contact accidentel du PERSONNEL DE MAINTENANCE.

*La conformité est vérifiée par examen.*

### **3.4.5 Interrupteurs dans les câbles souples**

Les interrupteurs sectionneurs ne doivent pas être montés sur des câbles souples.

*La conformité est vérifiée par examen.*

### 3.4.6 Nombre de pôles – matériel monophasé et à courant continu

Un dispositif de sectionnement, s'il est prévu à l'intérieur ou comme partie du matériel, doit déconnecter les deux pôles simultanément avec les exceptions suivantes:

- s'il est possible de se fier à l'identification d'un conducteur relié à la terre dans le RÉSEAU D'ALIMENTATION EN COURANT CONTINU, ou d'un neutre mis à la terre dans un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, il est permis d'utiliser un dispositif de sectionnement monophasé qui déconnecte le conducteur non relié à la terre, ou
- s'il n'est pas possible de se fier à l'identification d'un conducteur relié à la terre dans le RÉSEAU D'ALIMENTATION EN COURANT CONTINU ou d'un neutre mis à la terre dans un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF et que le matériel n'est pas équipé d'un dispositif de sectionnement biphasé, les instructions d'installation doivent spécifier qu'un dispositif de sectionnement biphasé doit être fourni à l'extérieur du matériel.

NOTE Exemples de cas dans lesquels un dispositif de sectionnement biphasé est nécessaire à (parce que l'identification d'un conducteur relié à la terre dans le RÉSEAU D'ALIMENTATION n'est pas possible):

- matériel alimenté à partir d'un schéma d'alimentation IT;
- MATÉRIEL RACCORDÉ PAR PRISE DE COURANT alimenté par un connecteur réversible ou par une fiche de prise de courant réversible (à moins que la fiche elle-même ou le connecteur ne soit utilisé comme dispositif de sectionnement);
- matériel alimenté au travers d'un socle de polarité indéterminée ou non identifiée.

*La conformité est vérifiée par examen.*

### 3.4.7 Nombre de pôles – matériel triphasé

Pour un matériel triphasé, le dispositif de sectionnement doit déconnecter simultanément tous les conducteurs de ligne du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF.

Pour un matériel nécessitant une connexion au neutre d'un système d'alimentation IT, le dispositif de sectionnement doit être un dispositif quadripolaire et doit déconnecter tous les conducteurs de ligne et le conducteur de neutre. Si ce dispositif quadripolaire n'est pas fourni dans le matériel, les instructions d'installation doivent spécifier la nécessité de le fournir hors du matériel.

Si un dispositif de sectionnement coupe le neutre, il doit déconnecter simultanément tous les conducteurs de ligne.

*La conformité est vérifiée par examen.*

### 3.4.8 Interrupteurs comme dispositifs de sectionnement

Lorsque le dispositif de sectionnement est un interrupteur incorporé dans le matériel, ses positions «MARCHE»/«ARRÊT» doivent être marquées conformément à 1.7.8.

*La conformité est vérifiée par examen.*

### 3.4.9 Fiches comme dispositifs de sectionnement

Lorsqu'une fiche sur le câble d'alimentation est utilisée comme dispositif de sectionnement, la notice d'installation doit être conforme à 1.7.2.1.

*La conformité est vérifiée par examen.*

### 3.4.10 Matériels interconnectés

Lorsqu'un groupe d'unités munies de moyens de connexion individuels est interconnecté de telle manière qu'il est possible que des TENSIONS DANGEREUSES ou des NIVEAUX D'ÉNERGIE DANGEREUX soient transmis entre unités, un dispositif de sectionnement doit être prévu pour couper les parties dangereuses susceptibles d'être touchées pendant la maintenance de l'unité considérée, à moins que ces parties ne soient protégées et ne portent des étiquettes d'avertissement appropriées. De plus, une étiquette en évidence doit être prévue sur chaque unité, donnant des instructions appropriées pour la coupure de toute l'alimentation de l'unité.

*La conformité est vérifiée par examen.*

### 3.4.11 Alimentations multiples

Lorsqu'une unité reçoit de l'énergie de plus d'une source (par exemple dans le cas de différentes tensions ou fréquences ou comme alimentation de secours), un marquage doit être placé en évidence sur chaque dispositif de sectionnement donnant des instructions appropriées pour la coupure de toute l'alimentation de l'unité.

*La conformité est vérifiée par examen.*

## 3.5 Interconnexion des matériels

### 3.5.1 Exigences générales

Lorsqu'un matériel est destiné à être connecté électriquement à un autre matériel, à un accessoire ou à un RÉSEAU DE TÉLÉCOMMUNICATIONS, les circuits d'interconnexion doivent être choisis pour fournir une conformité continue aux exigences de 2.2 pour les CIRCUITS TBTS, et à celles de 2.3 pour les CIRCUITS TRT, après avoir effectué la connexion.

NOTE 1 Cela est généralement obtenu en connectant les CIRCUITS TBTS aux CIRCUITS TBTS, et les CIRCUITS TRT aux CIRCUITS TRT.

De plus, les CIRCUITS TBTS des accès de données pour la connexion à d'autres matériels ou accessoires doivent limiter le risque d'incendie dans le matériel connecté comme spécifié en 3.5.4.

NOTE 2 Il est permis qu'un CÂBLE D'INTERCONNEXION contienne plus d'un type de circuit (par exemple CIRCUIT TBTS, CIRCUIT À LIMITATION DE COURANT, CIRCUIT TRT, CIRCUIT TBT, ou sous TENSION DANGEREUSE) pourvu qu'ils soient séparés comme prescrit dans la présente norme.

*La conformité est vérifiée par examen.*

### 3.5.2 Types de circuits d'interconnexion

Chaque circuit d'interconnexion doit être de l'un des types suivants:

- un circuit tbts ou un circuit à limitation de courant; ou
- un CIRCUIT TRT-1, un CIRCUIT TRT-2 ou un CIRCUIT TRT-3; ou
- un circuit sous TENSION DANGEREUSE.

A l'exception de ce qui est permis en 3.5.3, les circuits d'interconnexion ne doivent pas être des CIRCUITS TBT.

*La conformité est vérifiée par examen.*

### 3.5.3 Circuits TBT comme circuits d'interconnexion

Lorsqu'un matériel supplémentaire est spécifiquement complémentaire d'un matériel hôte (premier) (par exemple un collecteur pour une machine à photocopier), il est permis que des CIRCUITS TBT servent de circuits d'interconnexion entre les matériels, pourvu que les matériels continuent de satisfaire aux exigences de la présente norme lorsqu'ils sont connectés ensemble.

*La conformité est vérifiée par examen.*

### 3.5.4 Accès de données pour matériel supplémentaire

Pour limiter le risque d'incendie dans un matériel ou un accessoire supplémentaire (par exemple un numériseur, une souris, un clavier, un lecteur de DVD, un lecteur de CD-ROM ou une manette de jeu), les CIRCUITS TBTS d'un accès de données pour la connexion d'un tel matériel doivent être alimentés par une source de puissance limitée conforme à 2.5. Cette exigence ne s'applique pas si le matériel supplémentaire est connu comme étant conforme à 4.7.

NOTE Il est recommandé que les fabricants des accessoires et de leurs CABLES D'INTERCONNEXION intègrent une protection contre les courants de défaut jusqu'à 8 A à 100 VA, la valeur maximale fournie par une source de puissance limitée conformément au Tableau 2B.

*La vérification est effectuée par examen et par un essai, si nécessaire.*

IECNORM.COM : Click to view the full PDF of IEC 60950-1:2005

## 4 Exigences physiques

### 4.1 Stabilité

Dans les conditions d'utilisation normale, le matériel ne doit pas devenir mécaniquement instable au point de risquer de présenter un danger pour un OPÉRATEUR et le PERSONNEL DE MAINTENANCE.

Lorsque des unités sont prévues pour être attachées l'une à l'autre sur le site et non pour être utilisées individuellement, la stabilité des unités individuelles est exemptée des exigences de 4.1.

Les exigences de 4.1 ne s'appliquent pas lorsque les instructions pour l'installation d'une unité spécifient que le matériel doit être fixé à la structure du bâtiment avant la mise en fonctionnement.

Lorsque des moyens de stabilisation sont nécessaires dans des conditions d'utilisation par l'OPÉRATEUR, ils doivent automatiquement fonctionner lors de l'ouverture des portes, des tiroirs, etc.

Pendant les interventions du PERSONNEL DE MAINTENANCE, les moyens de stabilisation, s'ils sont nécessaires, doivent fonctionner automatiquement, ou alors un marquage doit être fourni pour indiquer au PERSONNEL DE MAINTENANCE qu'il doit déployer ces moyens de stabilisation.

*La vérification est effectuée par les essais suivants, lorsqu'ils s'appliquent. Chaque essai est effectué individuellement. Pendant les essais, les récipients contiennent la quantité de substance, dans la limite de leur capacité assignée, produisant les conditions les plus défavorables. Toutes les roulettes et tous les vérins, s'ils sont utilisés lors du fonctionnement normal, sont mis dans leur position la plus défavorable, avec les roues et les organes analogues fermés ou bloqués. Cependant, si les roulettes sont destinées uniquement au transport de l'unité et s'il est prescrit dans les instructions d'installation que les vérins doivent être baissés après l'installation, alors les vérins (et pas les roulettes) sont utilisés dans cet essai; les vérins sont mis dans leur position la plus défavorable, compatible avec une mise à niveau raisonnable de l'unité.*

- *Une unité d'une masse supérieure ou égale à 7 kg ne doit pas se renverser lorsqu'elle est inclinée de 10° par rapport à sa position verticale normale. Les portes, tiroirs, etc., sont fermés pendant cet essai. Une unité dont les caractéristiques permettent des positions multiples doit être soumise à l'essai dans la position la plus défavorable permise par la construction.*
- *Une unité reposant sur le sol, d'une masse au moins égale à 25 kg, ne doit pas se renverser lorsqu'une force égale à 20 % de son poids, mais ne dépassant pas 250 N, est appliquée dans n'importe quelle direction, sauf vers le haut, à la hauteur ne dépassant pas 2 m au-dessus du sol. Les portes, les tiroirs, etc., qui peuvent être déplacés pour la maintenance par l'OPÉRATEUR ou par le PERSONNEL DE MAINTENANCE, sont placés dans la position la plus défavorable, compatible avec les instructions d'installation.*
- *Une unité reposant sur le sol ne doit pas se renverser lorsqu'une force constante de 800 N, dirigée vers le bas, est appliquée au point de moment maximal, sur n'importe quelle surface horizontale d'au moins 125 mm par 200 mm, située à une hauteur jusqu'à 1 m au-dessus du sol. Les portes, tiroirs, etc. sont fermés pendant cet essai. La force de 800 N est appliquée avec un outil d'essai approprié ayant une surface plane d'environ 125 mm par 200 mm. La force dirigée vers le bas est appliquée avec la totalité de la surface plane de l'outil d'essai et en contact avec le matériel à l'essai; il n'est pas nécessaire que l'outil d'essai soit entièrement en contact avec des surfaces irrégulières, (par exemple des surfaces ondulées ou courbes).*

## 4.2 Résistance mécanique

### 4.2.1 Généralités

Les matériels doivent avoir une résistance mécanique appropriée et doivent être construits de façon à éviter tout risque dans le sens de cette norme lorsqu'ils sont manipulés dans des conditions attendues.

Les essais de résistance mécanique ne sont pas exigés sur une barrière interne, un écran interne ou un dispositif analogue, prévu pour satisfaire aux exigences de 4.6.2, si l'ENVELOPPE assure la protection mécanique.

Une ENVELOPPE MÉCANIQUE doit être suffisamment complète pour contenir ou détourner des parties qui, à cause d'une défaillance ou pour toute autre raison, pourraient se relâcher, se séparer ou être projetées à partir d'une partie mobile.

NOTE Parmi les exemples de matériels pour lesquels de telles précautions peuvent être nécessaires, il y a les lecteurs de CD ROM et les lecteurs de DVD dont la vitesse de rotation est supérieure à 8 000 r.p.m.

*La vérification est effectuée par examen de la construction et des données disponibles et, lorsque c'est nécessaire, par les essais applicables de 4.2.2 à 4.2.7 comme spécifié.*

*Les essais ne sont pas effectués sur les poignées, leviers, boutons, le devant des tubes à rayons cathodiques (voir 4.2.8) ni sur les couvercles transparents ou translucides des dispositifs indicateurs ou des dispositifs de mesure à moins que des parties sous TENSIONS DANGEREUSES ne soient accessibles au moyen du doigt d'épreuve de la Figure 2A (voir 2.1.1.1), si la poignée, le levier, le bouton ou le couvercle est enlevé.*

*Pendant les essais de 4.2.2, 4.2.3 et 4.2.4, les ENVELOPPES conductrices, mises à la terre ou non, ne doivent pas ponter les parties entre lesquelles un NIVEAU D'ÉNERGIE DANGEREUX existe et ne doivent pas toucher une partie sous TENSION DANGEREUSE. Pour les tensions dépassant 1 000 V en courant alternatif ou 1 500 V en courant continu, le contact n'est pas permis et il doit rester un intervalle d'air entre les parties sous TENSION DANGEREUSE et l'ENVELOPPE. Cet intervalle d'air doit être au moins égal à la DISTANCE DANS L'AIR minimale spécifiée en 2.10.3 (ou à l'Annexe G) pour une ISOLATION PRINCIPALE, ou alors résister à l'essai de rigidité diélectrique approprié de 5.2.2.*

*Après les essais de 4.2.2 à 4.2.7, l'échantillon doit satisfaire aux exigences de 2.1.1, 2.6.1, 2.10, 3.2.6 et 4.4.1. Il ne doit présenter aucun signe de perturbation des dispositifs de sécurité tels que COUPE-CIRCUIT THERMIQUES, dispositifs de protection contre les surintensités ou dispositifs de verrouillage. En cas de doute, l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE est soumise à un essai de rigidité diélectrique comme spécifié en 5.2.2.*

*Les endommagements de finition, les fissures, les bosses et les écaillages ne sont pas pris en considération s'ils n'affectent pas la sécurité de façon défavorable.*

NOTE Si une ENVELOPPE séparée ou une partie d'ENVELOPPE est utilisée pour un essai, il peut être nécessaire de la ré-assembler dans le matériel dans le but de vérifier la conformité.

### 4.2.2 Essai de force constante, 10 N

*Les composants et les parties autres que les parties servant d'ENVELOPPE (voir 4.2.3 et 4.2.4) sont soumis à une force constante de  $10\text{ N} \pm 1\text{ N}$ .*

*Les critères de conformité sont en 4.2.1.*



#### 4.2.3 Essai de force constante, 30 N

Les parties d'une ENVELOPPE située dans une ZONE D'ACCÈS DE L'OPÉRATEUR, qui sont protégées par un couvercle ou une porte satisfaisant aux exigences de 4.2.4, sont soumises pendant une durée de 5 s à une force constante de  $30\text{ N} \pm 3\text{ N}$ , appliquée au moyen d'une version droite et sans articulation du doigt d'épreuve de la Figure 2A (voir 2.1.1.1), à la partie sur ou dans le matériel.

Les critères de conformité sont en 4.2.1.

#### 4.2.4 Essai de force constante, 250 N

Les ENVELOPPES externes sont soumises pendant une durée de 5 s à une force de  $250\text{ N} \pm 10\text{ N}$  appliquée tour à tour sur le dessus, le fond et les côtés de l'ENVELOPPE fixée au matériel, au moyen d'un outil d'essai convenable assurant un contact sur une surface plane circulaire de 30 mm de diamètre. Cependant, cet essai n'est pas applicable à l'ENVELOPPE des matériels de masse supérieure à 18 kg.

Les critères de conformité sont en 4.2.1.

#### 4.2.5 Essai de choc

Pour les matériels autres que les matériels identifiés en 4.2.6, les surfaces externes des ENVELOPPES dont la défaillance permettrait l'accès à des parties dangereuses sont essayées comme suit.

Un échantillon, constitué de l'ENVELOPPE complète ou d'une partie de celle-ci représentant la plus grande surface non renforcée, est fixé dans sa position normale. Une sphère massive d'acier poli, d'environ 50 mm de diamètre et d'une masse de  $500\text{ g} \pm 25\text{ g}$ , tombe librement sur l'échantillon d'une hauteur (H) de 1,3 m (voir Figure 4A) en partant du repos. (Les surfaces verticales sont exemptées de cet essai.)

De plus, la sphère d'acier est suspendue par une corde et balancée comme un pendule tombant d'une distance verticale (H) de 1,3 m dans le but d'appliquer un choc horizontal (voir Figure 4A). (Les surfaces horizontales sont exemptées de cet essai.) En variante, l'échantillon est tourné de  $90^\circ$  autour de chacun de ses axes horizontaux et la sphère est lâchée comme dans l'essai du choc vertical.


Les fonds des ENVELOPPES sont également soumis aux essais si le mode d'emploi permet une orientation dans laquelle le fond de l'ENVELOPPE devient le haut ou un côté de celle-ci.

L'essai n'est pas appliqué aux éléments suivants:

- un moniteur à écran plat;
- la face d'un tube à rayons cathodiques (voir 4.2.8);
- la glace d'un matériel (par exemple sur une photocopieuse);
- la surface de l'ENVELOPPE du MATÉRIEL FIXE, y compris MATÉRIEL À ENCASTRER, qui est inaccessible et protégée après installation.

Les critères de conformité sont en 4.2.1.



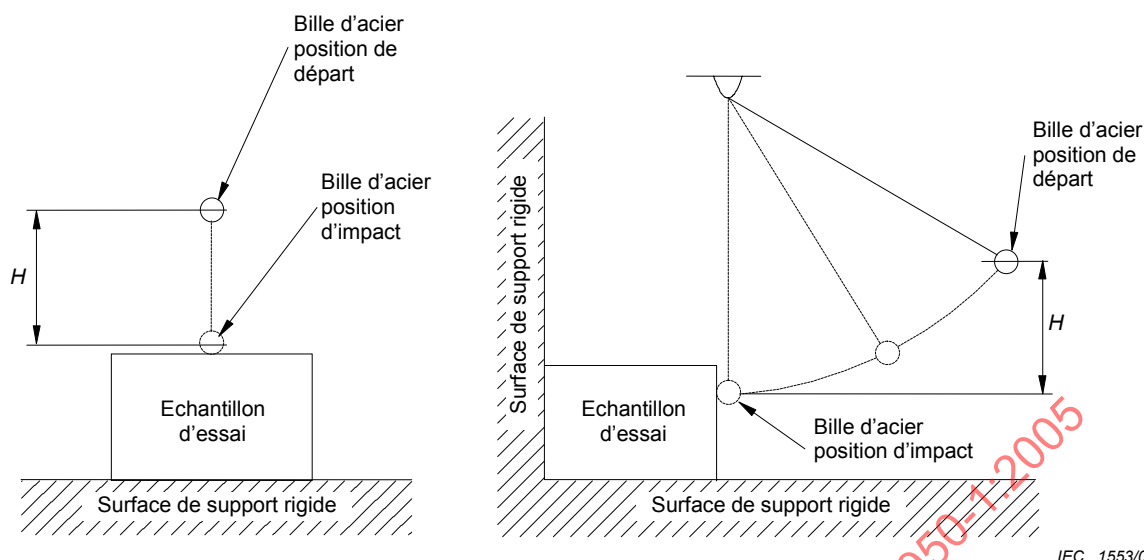

IEC 1553/05

**Figure 4A – Essai de choc utilisant la sphère d'acier**

#### 4.2.6 Essai de chute

Les matériels suivants sont soumis à un essai de chute:

- MATÉRIELS PORTATIFS;
- MATÉRIELS ENFICHABLES DIRECTEMENT;
- MATÉRIELS TRANSPORTABLES;
- matériels de masse inférieure ou égale à 5 kg, à poser sur un bureau et destinés à fonctionner avec un des sous ensembles suivants:
  - un combiné de téléphone relié par un câble; ou
  - un autre accessoire avec une fonction acoustique, tenu dans la main lors de son utilisation et relié par un câble; ou
  - un casque.
- MATÉRIEL MOBILE devant être levé ou manipulé par l'UTILISATEUR dans le cadre de son utilisation prévue.

NOTE Un exemple d'un tel matériel est une déchiqueteuse installée sur un bac qui doit être enlevée pour que ce bac puisse être vidé.

*Un échantillon du matériel complet est soumis à trois impacts provoqués par leur chute sur une surface horizontale dans les positions susceptibles d'entraîner les résultats les plus défavorables.*

*La hauteur de chute doit être de:*

- 750 mm  $\pm$  10 mm pour les matériels à poser sur un bureau comme décrit ci-dessus;
- 750 mm  $\pm$  10 mm pour les matériels à poser sur un bureau comme décrit ci-dessus;
- 1 000 mm  $\pm$  10 mm pour les MATÉRIELS PORTATIFS, les MATÉRIELS ENFICHABLES DIRECTEMENT et les MATÉRIELS TRANSPORTABLES.

*La surface horizontale est en bois dur d'au moins 13 mm d'épaisseur et montée sur deux couches de contreplaqué ayant chacune une épaisseur de 19 mm à 20 mm, le tout étant posé sur un sol en béton ou en matériau non élastique équivalent.*

*Les critères de conformité sont en 4.2.1.*

#### 4.2.7 Essai de relâchement des contraintes

*Les ENVELOPPES réalisées en matières plastiques thermomoulées ou thermoformées doivent être construites de façon que toute contraction ou déformation du matériau due au relâchement des contraintes internes entraînées par les opérations de moulage ou de formage ne risque pas de provoquer l'exposition de parties dangereuses ou de réduire les DISTANCES DANS L'AIR ou les LIGNES DE FUITE en dessous des valeurs spécifiées en 2.10 (ou à l'Annexe G).*

*La vérification est effectuée par l'essai décrit ci-dessus ou, le cas échéant, par examen de la construction et des données disponibles.*

*Un échantillon constitué du matériel complet, ou de l'ENVELOPPE complète avec toutes les structures de support, est placé dans une étuve à circulation d'air (conformément à la CEI 60216-4-1) et porté pendant 7 h à une température supérieure de 10 K à la température maximale observées sur l'ENVELOPPE pendant l'essai de 4.5.2, mais en aucun cas inférieure à 70 °C, puis on le laisse refroidir jusqu'à la température ambiante.*

*Avec l'accord du fabricant, il est permis d'augmenter la durée d'essai ci-dessus.*

*Pour les matériels dont l'encombrement rend impossible l'essai de l'ENVELOPPE complète, il est permis d'utiliser la partie de l'ENVELOPPE représentative de l'assemblage complet quant à l'épaisseur, à la forme et à la présence éventuelle de pièces mécaniques de support.*

NOTE Il n'est pas nécessaire de maintenir l'humidité relative à une valeur spécifique pendant cet essai.

*Si l'essai ci-dessus est effectué, les critères de conformité de 4.2.1 s'appliquent.*

#### 4.2.8 Tubes à rayons cathodiques

Si un tube cathodique ayant une dimension maximale de face supérieure à 160 mm est à l'intérieur du matériel, le tube à rayons cathodiques ou l'ENVELOPPE avec le tube correctement installé doit être conforme aux exigences de l'Article 18 de la CEI 60065 concernant la résistance mécanique des tubes cathodiques.

NOTE L'Article 18 de la CEI 60065 exige que les tubes à rayons cathodiques passent avec succès les essais spécifiés en 18.1 ou soient conformes à la CEI 61965. Dans le futur amendement 2 à la CEI 60065:2001, envisagé pour 2006 au plus tôt, il est prévu que les tubes cathodiques à protection intrinsèque devront être conformes à la CEI 61965, sans option comme celle autorisée actuellement dans la septième édition. L'essai actuellement en 18.3 de la CEI 60065 continuera de s'appliquer aux tubes qui ne possèdent pas de protection intrinsèque qui ne font pas partie du Domaine d'application de la CEI 61965.

*La vérification est effectuée par examen, par des mesures et, si nécessaire, par les exigences et les essais applicables de l'Article 18 de la CEI 60065.*

#### 4.2.9 Lampes à haute pression

L'ENVELOPPE MÉCANIQUE d'une lampe à haute pression doit avoir une résistance suffisante pour contenir une explosion de la lampe, de façon à empêcher tout dommage pour un OPÉRATEUR ou une personne placée près du matériel pendant son utilisation normale ou la maintenance par l'OPÉRATEUR.

Dans le cadre de la présente norme une «lampe à haute pression» signifie une lampe dans laquelle la pression dépasse 0,2 MPa à froid ou 0,4 MPa en fonctionnement.

*La conformité est vérifiée par examen.*

NOTE 2.10.3.5 peut également être appliqué dans certains cas.

#### 4.2.10 Matériels fixés au mur ou au plafond

Les moyens de fixation du matériel prévu pour être fixé au mur ou au plafond doivent être adéquats.

*La vérification est effectuée par examen de la construction et des données disponibles ou, lorsque c'est nécessaire, par l'essai suivant.*

*Le matériel est fixé conformément aux instructions du fabricant. En plus du poids du matériel, une force supplémentaire est appliquée vers le bas pendant 1 min à travers le centre de gravité du matériel. La force supplémentaire doit être égale à trois fois le poids du matériel mais pas moins de 50 N. Pendant l'essai, le matériel et ses moyens de fixations associés ne doivent pas se dissocier. A l'issue de cet essai, le matériel, y compris toute plaque de montage associée, ne doit pas être endommagé.*

### 4.3 Conception et construction

#### 4.3.1 Bords et coins

Lorsque les bords et les coins pourraient présenter un risque pour l'OPÉRATEUR à cause de leur emplacement ou de leur application dans le matériel, ils doivent être arrondis et rendus lisses.

Cette exigence ne s'applique pas aux bords et coins nécessaires au bon fonctionnement du matériel.

*La conformité est vérifiée par examen.*

#### 4.3.2 Poignées et organes de contrôle manuels

Les poignées, les boutons, les manettes, les leviers et les organes analogues doivent être fixés de façon sûre de sorte qu'ils ne se desserrent pas en usage normal si cela peut créer un danger. Les matières de remplissage et les matières analogues autres que les résines durcissant à l'air ne doivent pas être utilisées pour éviter le desserrage.

Si les poignées, les boutons et les organes analogues sont utilisés pour indiquer la position des interrupteurs ou de composants analogues, ils ne doivent pas pouvoir être montés dans une position incorrecte si cela peut créer un danger.

*La vérification est effectuée par examen, par un essai à la main et en essayant d'enlever la poignée, le bouton, la manette ou le levier par application pendant 1 min d'une force axiale comme indiqué ci-dessous.*

*Si la forme de ces parties est telle qu'il est improbable qu'un effort de traction axial soit appliqué en usage normal, la force est de:*

- 15 N pour les organes de manœuvre des composants électriques; et
- 20 N dans les autres cas.

*Si la forme est telle qu'un effort de traction axial est susceptible d'être appliqué, la force est de:*

- 30 N pour les organes de manœuvre des composants électriques; et
- 50 N dans les autres cas.

#### 4.3.3 Dispositifs de commande réglables

Le matériel doit être construit de façon que le réglage manuel d'un dispositif de contrôle, comme le dispositif de sélection des différentes tensions du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, nécessite l'aide d'un OUTIL si un danger peut résulter d'un mauvais réglage involontaire.

NOTE Les exigences de marquage pour le réglage de la tension d'alimentation sont en 1.7.4.

*La vérification est effectuée par un essai à la main.*

#### 4.3.4 Fixation des composants

Les vis, les écrous, les rondelles, les ressorts ou les pièces analogues doivent être fixés de façon fiable pour résister aux contraintes mécaniques apparaissant lors d'un usage normal, si leur détachement ou leur desserrement risque de créer un danger ou si les LIGNES DE FUITE ou les DISTANCES DANS L'AIR pour l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE risquent d'être réduites en dessous des valeurs spécifiées en 2.10 (ou à l'Annexe G).

NOTE 1 Les exigences concernant les fixations des conducteurs sont en 3.1.9.

*La vérification est effectuée par examen, par des mesures et par un essai à la main.*

*Pour la vérification de la conformité:*

- *il est supposé que deux fixations indépendantes ne se desserreront pas simultanément; et*
- *il est supposé que les parties fixées au moyen de vis ou d'écrous avec des rondelles de blocage ou d'autres moyens de blocage ne sont pas susceptibles de se desserrer.*

NOTE 2 Les rondelles à ressort ou équivalent peuvent fournir un blocage satisfaisant.

#### 4.3.5 Connexion des fiches et des socles

A l'intérieur d'une unité ou d'un système du fabricant, les fiches et les socles susceptibles d'être manipulés par l'OPÉRATEUR ou le PERSONNEL DE MAINTENANCE ne doivent pas être utilisés d'une manière susceptible de créer un danger par suite d'une mauvaise connexion. En particulier, les connecteurs satisfaisant à la CEI 60083 ou à la CEI 60320 ne doivent pas être utilisés dans des CIRCUITS TBTs ou des CIRCUITS TRT. Sont considérés comme satisfaisant à cette exigence le clavetage, l'emplacement ou, dans le cas de connecteurs accessibles uniquement au PERSONNEL DE MAINTENANCE, un marquage en clair.

*La conformité est vérifiée par examen.*

#### 4.3.6 Matériels enfichables directement

Les MATÉRIELS ENFICHABLES DIRECTEMENT ne doivent pas imposer une contrainte excessive au socle de prise de courant. La partie fiche doit satisfaire à la norme pour les fiches concernées.

*La vérification est effectuée par examen et, en cas de doute, par l'essai suivant.*

*Le matériel est introduit, comme en usage normal, dans un socle du type prévu par le fabricant, qui peut pivoter autour d'un axe horizontal coupant les axes des alvéoles à une distance de 8 mm en arrière de la surface d'engagement du socle. Le couple de torsion supplémentaire qui est appliqué au socle pour maintenir la surface d'engagement dans le plan vertical ne doit pas dépasser 0,25 N·m.*

NOTE 1 En Australie et en Nouvelle-Zélande, la conformité est vérifiée conformément à l'AS/NZS 3112.

NOTE 2 Au Royaume-Uni, l'essai de couple est réalisé en utilisant un socle conforme à la BS 1363 et la partie fiche du MATÉRIEL ENFICHABLE DIRECTEMENT doit être évaluée selon les articles appropriés de la BS 1363.

#### 4.3.7 Éléments chauffants dans un matériel mis à la terre

Les éléments chauffants dans un matériel qui est mis à la terre pour des raisons de sécurité doivent être protégés de façon que, dans les conditions de défaut de terre, il ne puisse y avoir un danger d'incendie par élévation excessive de température. Dans de tels matériels, les dispositifs thermosensibles, s'ils sont fournis, doivent être placés dans tous les conducteurs de phase alimentant les éléments chauffants.

Les dispositifs thermosensibles doivent aussi couper le conducteur de neutre pour chacun des cas suivants:

- a) sur le matériel alimenté à partir d'un schéma d'alimentation IT;
- b) sur le MATÉRIEL RACCORDÉ PAR PRISE DE COURANT alimenté par un connecteur ou par une fiche de prise de courant réversible;
- c) sur le matériel alimenté au travers d'un socle de polarité indéterminée.

Dans les cas b) et c), il est permis de satisfaire à cette exigence en connectant un THERMOSTAT dans un conducteur et un COUPE-CIRCUIT THERMIQUE dans l'autre conducteur.

Il n'est pas exigé de déconnecter tous les conducteurs simultanément.

*La conformité est vérifiée par examen.*

#### 4.3.8 Piles ou batteries

NOTE 1 Les exigences concernant les marquages et les instructions sont données en 1.7.13.

NOTE 2 Les exigences pour la protection contre les surintensités sont données en 3.1.1 et en 5.3.1.

NOTE 3 Les exigences pour les batteries stationnaires (comme les batteries d'accumulateurs de grande taille installées dans une installation fixe à l'extérieur du matériel) sont données dans la CEI 60896-21, la CEI 60896-22 et la EN 50272-2.

Les matériels utilisant des piles ou des batteries doivent être conçus pour réduire le risque d'incendie et d'explosion et de fuites chimiques, dans des conditions d'utilisation normale et après un premier défaut dans le matériel (voir 1.4.14), y compris dans les circuits intégrés à la pile. Pour les piles remplaçables par l'UTILISATEUR, la conception doit réduire la probabilité d'installation en polarité inverse si cela risque de créer un danger.

Les circuits de la pile ou de la batterie doivent être conçus de façon que:

- les caractéristiques de sorties du circuit de recharge soient compatibles avec celles de la batterie rechargeable; et
- pour les piles non rechargeables, la décharge à un taux supérieur aux recommandations du fabricant et la charge non intentionnelle soient impossibles; et
- pour les batteries rechargeables, la charge et la décharge à un taux excédant les recommandations du fabricant et la charge en polarité inverse soient impossibles; et
- les batteries remplaçables par l'OPÉRATEUR doivent soit:
  - avoir des contacts qui ne puissent pas être court-circuités par le doigt d'épreuve de la Figure 2A, soit
  - être protégées de manière intrinsèque pour éviter de créer un danger au sens de la présente norme.

NOTE 4 La charge en polarité inverse d'une batterie rechargeable apparaît quand la polarité du circuit de recharge est inversée pour aider la décharge de la batterie.

Si une batterie contient un électrolyte liquide ou sous forme de gel, un coffre de batterie doit être prévu qui soit capable d'empêcher toute fuite de liquide à la suite de la formation d'une pression interne dans la batterie. Cette exigence de coffre de batterie ne s'applique pas si la construction de la batterie est telle qu'une fuite de l'électrolyte est improbable (voir aussi 1.3.6).

NOTE 5 Le type de batterie scellé à régulation par soupape est un exemple de construction de batterie pour lequel la fuite de l'électrolyte est considérée comme improbable.

Si un coffre de batterie est exigé, sa capacité doit être égale au moins au volume de l'électrolyte de tous les éléments de la batterie ou au volume d'un seul élément si la conception de la batterie est telle que la fuite simultanée de plusieurs éléments est improbable.

NOTE 6 Si plusieurs éléments (par exemple les six éléments d'une batterie plomb-acide de 12 V) se trouvent dans un seul boîtier, une rupture de celui-ci pourrait conduire à un volume de fuite supérieur à celui d'un seul élément.

*La vérification est effectuée par examen de la construction et des données fournies par le fabricant du matériel et le fabricant de la pile ou de la batterie.*

*Lorsque les données appropriées ne sont pas disponibles, la vérification est effectuée par des essais. Toutefois, les batteries qui sont intrinsèquement sûres pour les conditions données ne sont pas essayées dans ces conditions. Les piles ordinaires carbone-zinc ou alcalines non rechargeables sont considérées sûres dans les conditions de court-circuit et ne sont donc pas essayées pour les décharges, pas plus qu'elles ne le sont pour les fuites dans les conditions de stockage.*

*La pile utilisée pour les essais suivants est soit une nouvelle pile non rechargeable soit une batterie complètement rechargée fournie avec le matériel ou recommandée par le fabricant pour l'utilisation avec le matériel.*

- **Surcharge d'une batterie rechargeable.** La batterie est rechargée dans l'une des conditions suivantes tour à tour.
  - Le circuit de charge de batterie est réglé avec la batterie déconnectée pour donner 106 % de la tension assignée de sortie du chargeur ou la tension de charge maximale du chargeur (sans simulation de défauts), en fonction de la valeur la plus forte qui peut être atteinte. La batterie est ensuite chargée pendant 7 h.
  - Le circuit de charge de batterie est réglé avec la batterie déconnectée pour donner 100 % de la tension assignée de sortie du chargeur. La batterie est chargée tout en étant brièvement soumise à la simulation d'un premier défaut sur un composant qui pourrait survenir dans le circuit de charge et qui donnerait lieu à une surcharge de la batterie. Pour réduire la durée d'essai, la défaillance est choisie de manière à causer le courant de surcharge le plus élevé. La batterie est ensuite chargée pendant une durée unique de 7 h avec le défaut simulé en place.
- **Charge non intentionnelle d'une batterie non rechargeable.** La batterie est chargée tout en étant brièvement soumise à la simulation d'un premier défaut sur un composant qui pourrait survenir dans le circuit de charge et qui donnerait lieu à un chargement non intentionnel de la batterie. Pour réduire la durée d'essai, la défaillance est choisie de manière à causer le courant de charge le plus élevé. La batterie est ensuite chargée pendant une durée unique de 7 h avec le défaut simulé en place.
- **Charge en polarité inverse d'une batterie rechargeable.** La batterie est chargée en polarité inverse tout en étant brièvement soumise à la simulation d'un premier défaut sur un composant qui pourrait survenir dans le circuit de charge et qui donnerait lieu à un chargement en polarité inverse de la batterie. Pour réduire la durée d'essai, la défaillance est choisie de manière à causer le courant de charge en polarité inverse le plus élevé. La batterie est ensuite chargée en polarité inverse pendant une durée unique de 7 h avec le défaut simulé en place.



- **Vitesse de déchargement excessive d'une batterie.** La batterie est soumise à une décharge en créant un défaut de circuit ouvert ou un court-circuit à un dispositif de limitation de courant ou de limitation de tension dans le circuit de charge de la pile à l'essai.

NOTE 7 Certains essais spécifiés peuvent être dangereux pour le personnel les effectuant. Il convient de prendre toutes les mesures appropriées de protection contre des dangers chimiques ou d'explosion.

*Ces essais ne doivent pas avoir comme résultat une des conséquences suivantes:*

- des fuites chimiques provoquées par des fissures, des ruptures ou l'éclatement de l'enveloppe de la pile, si de telles fuites risquent d'altérer l'isolation prescrite; ou
- un débordement de liquide dû à un dispositif de réduction de la pression à l'intérieur de la batterie sauf si ce débordement est contenu par le matériel sans risque de dommage pour l'isolation ou pour l'UTILISATEUR; ou
- l'explosion de la pile si une telle explosion risque de blesser un UTILISATEUR; ou
- l'émission de flammes ou l'expulsion de métal fondu vers l'extérieur de l'ENVELOPPE du matériel.

*A l'issue des essais, le matériel est soumis aux essais de rigidité diélectrique de 5.3.9.2.*

#### **4.3.9 Huiles et graisses**

Lorsque les conducteurs internes, les enroulements, les collecteurs, les bagues et les organes analogues, et l'isolation en général, sont exposés à l'huile, à la graisse ou à des substances similaires, l'isolation doit avoir des propriétés adéquates pour résister à la détérioration dans ces conditions.

*La vérification est effectuée par examen et par évaluation des données pour le matériau isolant.*

#### **4.3.10 Poussière, poudres, liquides et gaz**

Les matériels produisant de la poussière (par exemple de la poussière de papier) ou utilisant des poudres, des liquides ou des gaz doivent être construits de telle façon qu'il soit improbable qu'il y ait une concentration dangereuse de ces matières et qu'un danger au sens de la présente norme soit créé par la condensation, la vaporisation, les fuites, le débordement ou la corrosion pendant le fonctionnement normal, le stockage, le remplissage ou la vidange. Les DISTANCES DANS L'AIR et les LIGNES DE FUITE ne doivent pas être réduites au-dessous des valeurs spécifiées en 2.10 (ou à l'Annexe G).

*La vérification est effectuée par examen, par des mesures et, lorsque le débordement de liquides pourrait affecter l'isolation électrique pendant le remplissage, par l'essai suivant et, pour les liquides inflammables, par les essais de 4.3.12.*

*Les matériels doivent être prêts à être utilisés suivant les instructions d'installation, mais ils ne doivent pas être mis sous tension.*

*Le réservoir du matériel est complètement rempli du liquide spécifié par le fabricant et une quantité supplémentaire, égale à 15 % de la capacité du récipient, est versée graduellement en 1 min. Pour les réservoirs dont la capacité ne dépasse pas 250 ml et pour les réservoirs sans évacuation et pour lesquels il n'est pas possible d'observer le remplissage de l'extérieur, une quantité supplémentaire de liquide égale à la capacité du réservoir est versée graduellement en 1 min.*

*Immédiatement après cette épreuve, le matériel doit satisfaire à un essai de rigidité diélectrique comme spécifié en 5.2.2 sur toute isolation sur laquelle un débordement aurait pu se produire et l'examen doit montrer que le liquide n'a pas créé de danger dans le sens de la présente norme.*

*Il est permis de placer le matériel pendant 24 h dans une atmosphère normale de salle d'essais avant de subir un nouvel essai diélectrique.*

#### **4.3.11 Réservoirs de liquides ou de gaz**

Les matériels qui, en usage normal, contiennent un liquide ou un gaz doivent comporter des dispositions de sécurité appropriées contre l'apparition d'une pression excessive.

*La vérification est effectuée par examen et, si nécessaire, par un essai approprié.*

#### **4.3.12 Liquides inflammables**

Si un liquide inflammable est utilisé dans le matériel, le liquide doit être gardé dans un réservoir fermé sauf la quantité nécessaire pour le fonctionnement du matériel. La quantité maximale de liquide inflammable stockée dans un matériel ne doit pas en général être supérieure à 5 l. Toutefois, si la consommation de liquide est telle que plus de 5 l sont consommés en 8 h, il est permis d'augmenter la quantité stockée jusqu'à celle qui est nécessaire pour un fonctionnement de 8 h.

L'huile ou les fluides équivalents utilisés pour la lubrification ou dans un système hydraulique doivent avoir un point d'éclair au moins égal à 149 °C et leur réservoir doit être de construction hermétique. Le circuit doit être prévu pour permettre l'expansion du fluide et doit comporter des dispositifs pour la réduction de la pression. Cette exigence n'est pas applicable aux huiles de lubrification qui sont appliquées à des points de frottement en quantités qui ne constituent qu'un apport négligeable de combustible dans un incendie.

A l'exception des cas indiqués ci-dessous, les liquides qu'il faut recharger tels que les encres d'imprimerie doivent avoir un point d'éclair au moins égal à 60 °C, et ne doivent pas être soumis à une pression suffisante pour provoquer leur pulvérisation.

Il est permis d'utiliser des liquides inflammables qu'il faut recharger et qui ont un point d'éclair inférieur à 60 °C ou qui sont soumis à une pression suffisante pour provoquer leur pulvérisation, pourvu qu'un examen montre qu'il n'y a pas de risque de pulvérisations de liquide ou de formation de mélanges vapeur-air inflammables qui pourraient provoquer une explosion ou un risque d'incendie. Dans les conditions de fonctionnement normal, les matériels utilisant des liquides inflammables ne doivent produire aucun mélange vapeur-air avec une concentration dépassant un quart de la LIMITE D'EXPLOSION si le mélange est à proximité d'une source d'inflammation, ou la moitié de la LIMITE D'EXPLOSION si le mélange n'est pas à proximité d'une source d'inflammation. L'examen doit également prendre en compte l'intégrité du système de manutention du liquide. Le système de manutention du liquide doit être convenablement logé ou construit de façon à réduire le risque de feu ou d'explosion, même dans les conditions d'essai énumérées en 4.2.5.

*La vérification est effectuée par examen et, si nécessaire, par l'essai suivant.*

*Le matériel est mis en fonctionnement conformément à 4.5.2 jusqu'à la stabilisation de sa température. Dans cette condition, le matériel est mis en fonctionnement d'une manière normale comme indiqué dans les instructions d'utilisation, et des échantillons de l'atmosphère au voisinage des composants électriques et autour du matériel sont prélevés pour permettre de déterminer la concentration de vapeurs inflammables présentes.*

*Les échantillons de l'atmosphère sont prélevés par intervalles de 4 min: quatre échantillons à prélever pendant le fonctionnement normal, puis sept échantillons après l'arrêt du matériel.*

*Si, après l'arrêt du matériel, il apparaît que la concentration de vapeurs inflammables est en train d'augmenter, on doit continuer à faire des prélèvements à des intervalles de 4 min jusqu'à ce que les résultats montrent que la concentration va en décroissant.*



*S'il est possible que le matériel fonctionne de façon anormale avec l'un quelconque de ses ventilateurs arrêté, cette condition est simulée pendant l'essai de conformité.*

### 4.3.13 Rayonnements

#### 4.3.13.1 Généralités

Les matériels doivent être conçus de façon que les risques d'effets nuisibles des rayonnements sur les personnes et de dommages aux matériaux affectant la sécurité soient réduits.

*La vérification est effectuée par examen et comme détaillé en 4.3.13.2, 4.3.13.3, 4.3.13.4, 4.3.15.5 et 4.3.13.6, selon ce qui est approprié.*

#### 4.3.13.2 Rayonnements ionisants

*Pour les matériels produisant des rayonnements ionisants, la vérification de la conformité est effectuée par l'essai décrit à l'Annexe H.*

#### 4.3.13.3 Effets des rayonnements ultraviolets (UV) sur les matériels

Les exigences suivantes s'appliquent seulement aux matériels contenant des lampes qui produisent un rayonnement UV significatif, c'est-à-dire ayant une émission prédominante dans le spectre de 180 nm à 400 nm, suivant la spécification du fabricant de lampes.

NOTE Les lampes incandescentes et fluorescentes d'utilisation générale, avec des ENVELOPPES en verre ordinaire, ne sont pas considérées comme émettant un rayonnement UV significatif.

Les pièces non métalliques (par exemple des ENVELOPPES non métalliques et des matériaux internes dont les isolants des fils et câbles) qui sont exposées aux rayonnements UV d'une lampe dans le matériel doivent être suffisamment résistantes à la dégradation pour ne pas affecter la sécurité.

**Tableau 4A – Limites minimales de rétention des propriétés après exposition UV**

| Pièces à soumettre à l'essai                | Propriété                                    | Norme à appliquer pour la méthode d'essai | Rétention minimale après essai |
|---------------------------------------------|----------------------------------------------|-------------------------------------------|--------------------------------|
| Pièces fournissant un support mécanique     | Résistance à la traction <sup>a</sup>        | ISO 527                                   | 70 %                           |
|                                             | ou<br>Résistance à la flexion <sup>a b</sup> | ISO 178                                   | 70 %                           |
| Pièces fournissant une résistance aux chocs | Choc de Charpy <sup>c</sup>                  | ISO 179                                   | 70 %                           |
|                                             | ou<br>Choc Izod <sup>c</sup>                 | ISO 180                                   | 70 %                           |
|                                             | ou<br>Choc de traction <sup>c</sup>          | ISO 8256                                  | 70 %                           |
| Toutes les pièces                           | Classification d'inflammabilité              | Voir 1.2.12 et Annexe A                   | Voir <sup>d</sup>              |

<sup>a</sup> Les essais de résistance à la traction et de résistance à la flexion sont effectués sur des échantillons dont l'épaisseur n'est pas supérieure à l'épaisseur réelle.

<sup>b</sup> La face des échantillons exposés au rayonnement UV doit être en contact avec les deux points de charge quand on utilise la méthode aux trois points de charge.

<sup>c</sup> Les essais sont effectués sur des échantillons de 3,0 mm d'épaisseur pour l'essai de choc Izod et sur des échantillons de 4,0 mm d'épaisseur pour l'essai au choc de Charpy. Ils sont considérés comme représentatifs d'autres épaisseurs, descendant jusqu'à 0,8 mm.

<sup>d</sup> La classification vis-à-vis de l'inflammabilité peut changer tant qu'elle ne tombe pas en dessous de ce qui est spécifié à l'Article 4.

*La vérification est effectuée par examen de la construction et des données disponibles concernant les caractéristiques de la résistance au rayonnement UV des pièces exposées au rayonnement UV dans le matériel. Si de telles données ne sont pas disponibles, les essais du Tableau 4A sont effectués sur ces pièces.*

*Les échantillons prélevés sur les pièces, ou constitués d'un matériau identique, sont préparés en conformité avec la norme pour l'essai à effectuer. Ils sont alors conditionnés selon l'Annexe Y. Après conditionnement, les échantillons ne doivent pas montrer de signes d'une détérioration significative, telles des craquelures ou des fissures. Ils sont alors maintenus dans les conditions de température ambiante de la pièce pendant au moins 16 h et pas plus de 96 h, après quoi ils sont soumis à l'essai applicable, en conformité avec la norme qui définit cet essai.*

*De manière à évaluer le pourcentage de rétention des propriétés après essai, les échantillons qui n'ont pas été conditionnés selon l'Annexe Y sont soumis aux essais en même temps que les échantillons conditionnés. La rétention doit être telle que spécifié dans le Tableau 4A.*

#### **4.3.13.4 Exposition du corps humain au rayonnement ultraviolet (UV)**

Les exigences suivantes s'appliquent seulement aux matériels contenant des lampes qui produisent un rayonnement UV significatif, c'est-à-dire ayant une émission prédominante dans le spectre de 180 nm à 400 nm, suivant la spécification du fabricant de lampes.

NOTE 1 Les lampes incandescentes et fluorescentes d'utilisation générale, avec des enveloppes en verre ordinaire ne sont pas considérées comme émettant un rayonnement UV significatif.

Les matériels ne doivent pas émettre un rayonnement UV excessif.

Le rayonnement UV doit, soit

- être contenu de façon adéquate par l'ENVELOPPE de la lampe UV ou par l'ENVELOPPE du matériel, soit
- ne pas dépasser les limites applicables de la CEI 60825-9.

En fonctionnement normal, la limite applicable est celle qui s'applique à une exposition de 8 h.

Des limites plus élevées sont permises pour des périodes de temps limitées destinées à des opérations de maintenance et de nettoyage, s'il est nécessaire que la lampe UV fonctionne pendant ces opérations. Les limites applicables sont celles des durées prévues pour ces opérations, qui doivent être indiquées dans les instructions pour l'UTILISATEUR et pour la maintenance.

Toutes les portes et tous les couvercles auxquels l'UTILISATEUR a accès qui, s'ils sont ouverts, permettraient l'accès à des émissions plus élevées que celles permises ci-dessus doivent être marqués avec l'un des avertissements suivants (voir également 1.7.12):

- "ATTENTION: COUPER LA LAMPE UV AVANT D'OUVRIR", ou équivalent; ou

- le symbole  ou équivalent.

Il est permis que le symbole donné ci-dessus soit placé à côté d'une porte ou d'un couvercle ou sur une porte sous réserve que la porte soit fixée au matériel.

L'avertissement ci-dessus n'est pas requis pour une porte ou un couvercle équipé d'un VERROUILLAGE DE SÉCURITÉ à interrupteur (voir 2.8) interrompant l'alimentation de la lampe UV lorsque la porte ou le couvercle est ouvert, ou tout autre mécanisme qui empêche le rayonnement UV.

Si le symbole de rayonnement UV est utilisé sur le matériel, le symbole et un texte d'avertissement similaire à celui indiqué ci-dessus doivent également figurer tous les deux dans les instructions pour l'UTILISATEUR et pour la maintenance.

Si des émissions plus élevées que celles permises ci-dessus sont accessibles dans une ZONE D'ACCÈS POUR LA MAINTENANCE, et s'il est nécessaire que le matériel reste alimenté pendant la maintenance, le matériel doit être marqué avec l'un des avertissements suivants:

- "ATTENTION: UTILISER DES PROTECTIONS CONTRE LES UV POUR LES YEUX ET LA PEAU PENDANT LA MAINTENANCE", ou équivalent; ou

- le symbole  ou équivalent.

Le marquage doit être placé de façon à être facilement visible pendant l'opération de maintenance (voir également 1.7.12).

Si le symbole de rayonnement UV est utilisé sur le matériel, à la fois le symbole et un texte d'avertissement similaire à celui indiqué ci-dessus doivent figurer dans les instructions de maintenance.

*La vérification est effectuée par examen et, si nécessaire, par des mesures.*

*Le rayonnement UV est mesuré avec un spectrographe à balayage ou un détecteur spécifique ayant une réponse spectrale égale à l'efficacité spectrale relative pour la bande UV.*

*L'exposition au rayonnement UV et l'éclairement énergétique effectif pendant un fonctionnement normal ne doivent pas dépasser les limites données dans la CEI 60825-9 pour une exposition de 8 h.*

*L'exposition au rayonnement UV et l'éclairement énergétique effectif durant les opérations de maintenance et de nettoyage ne doivent pas dépasser les limites de la CEI 60825-9 correspondant aux temps d'exposition indiqués dans les instructions applicables pour ces opérations. Le rayonnement maximal permis est celui qui s'applique pour 30 min d'exposition.*

NOTE 2 Le rayonnement permis est augmenté en fonction de la réduction du temps d'exposition.

*Toutes les portes et les couvercles auxquels l'UTILISATEUR a accès, et les pièces telles que les lentilles, filtres et équivalents, si leur ouverture ou enlèvement peut provoquer une augmentation du rayonnement UV, doivent être ouverts ou enlevés pendant les mesures, à moins qu'ils ne soient équipés d'un VERROUILLAGE DE SÉCURITÉ à interrupteur interrompant l'alimentation de la lampe UV, ou tout autre mécanisme qui empêche le rayonnement UV.*

NOTE 3 Pour des informations sur les techniques de mesure, voir la Publication 63 de la CIE.

#### **4.3.13.5 Lasers (y compris les diodes électroluminescentes (DEL))**

A l'exception de ce qui est permis ci-dessous, les matériels doivent être classifiés et munis d'une étiquette conforme à la CEI 60825-1, à la CEI 60825-2 et à la CEI 60825-12, selon ce qui est applicable.

Un équipement qui est par nature un appareil à laser de classe I, c'est-à-dire un équipement ne contenant pas de laser ou de diode électroluminescente (DEL) de classe supérieure, n'a pas besoin d'avoir une étiquette d'avertissement ou autre indication propre aux lasers.

Les données pour les lasers ou les DEL doivent confirmer que ces composants sont conformes à la Limite d'Emission Accessible (LEA) pour la classe 1, mesurée suivant la CEI 60825-1, pour que les exceptions ci-dessus s'appliquent. Les données peuvent être obtenues du fabricant de composants (voir 1.4.15) et peuvent traiter du composant seul ou du composant dans l'application à laquelle il est destiné dans les matériels. Les lasers ou les DEL doivent produire des rayonnements uniquement dans la bande de 180 nm à 1 mm.

NOTE Des exemples d'applications des DEL qui seront normalement conformes sont les applications dans lesquelles les DEL sont utilisés comme:

- voyants lumineux;
- dispositifs infrarouges tels que ceux utilisés dans les appareils domestiques de divertissement;
- dispositifs infrarouges pour la transmission de données tels que ceux qui sont utilisés entre ordinateurs et périphériques;
- optocoupleurs; et
- autres dispositifs similaires de faible puissance.

*La vérification est effectuée par examen, par évaluation des données fournies par le fabricant et, si nécessaire, par des essais en conformité avec la CEI 60825-1.*

#### **4.3.13.6 Autres types**

*Pour les autres types de rayonnement, la vérification est effectuée par examen.*

### **4.4 Protection contre les parties mobiles dangereuses**

#### **4.4.1 Généralités**

Les parties mobiles dangereuses des matériels, c'est-à-dire les parties mobiles qui peuvent potentiellement entraîner une blessure, doivent être disposées, enfermées ou protégées de façon à réduire le risque de blessure sur les personnes.

Des COUPE-CIRCUIT THERMIQUES À REENCLenchement AUTOMATIQUE ou des dispositifs de protection contre les surintensités, des interrupteurs chronométriques à démarrage automatique, etc. ne doivent pas être incorporés si leur remise à zéro intempestive risque de créer un danger.

*La vérification est effectuée par examen et comme détaillé en 4.4.2, 4.4.3 et 4.4.4.*

#### **4.4.2 Protection dans la zone d'accès de l'opérateur**

Dans une ZONE D'ACCÈS DE L'OPÉRATEUR, la protection doit être assurée par une construction appropriée afin de réduire le risque d'accès aux parties mobiles dangereuses ou par une localisation des parties mobiles dans une ENVELOPPE pourvue d'un VERROUILLAGE DE SÉCURITÉ mécanique ou électrique qui supprime le danger lorsque l'accès a lieu.

Lorsqu'il n'est pas possible de satisfaire entièrement aux exigences sur les accès ci-dessus tout en permettant au matériel de fonctionner comme prévu, l'accès est permis pourvu que:

- la partie mobile dangereuse en question soit impliquée directement dans la fonction du matériel (par exemple les parties mobiles d'une machine à détruire les documents); et
- le danger associé à cette partie soit évident pour l'OPÉRATEUR; et
- les mesures supplémentaires soient prises comme suit:
  - une indication doit être fournie dans la notice d'utilisation et un marquage doit être fixé sur le matériel, chacun contenant le texte suivant ou un texte similaire approprié:

**ATTENTION**  
**PARTIES MOBILES DANGEREUSES**  
**TENIR LES DOIGTS ET LES AUTRES PARTIES DU CORPS ÉLOIGNÉS**

- lorsque les doigts, les bijoux, les vêtements, etc. peuvent être happés par les parties mobiles, un moyen d'arrêter cette partie mobile doit être fourni à l'OPÉRATEUR.

L'avertissement ci-dessus et le moyen d'arrêter la partie mobile, s'il existe, doivent être placés à un endroit en vue, rapidement visible et accessible à partir de l'endroit où le risque de blessure est le plus grand.

*La vérification est effectuée par examen et, lorsque c'est nécessaire, par un essai avec le doigt d'épreuve de la Figure 2A (voir 2.1.1.1), après enlèvement des parties détachables par l'OPÉRATEUR, et avec ouverture des portes et couvercles accessibles à l'OPÉRATEUR.*

*A moins que des mesures supplémentaires n'aient été prises comme spécifié ci-dessus, il ne doit pas être possible de toucher les parties mobiles dangereuses avec le doigt d'épreuve appliqué sans force appréciable dans toutes les positions possibles.*

*Les ouvertures ne permettant pas l'entrée du doigt d'épreuve de la Figure 2A (voir 2.1.1.1) sont, de plus, essayées au moyen d'un doigt d'épreuve de mêmes dimensions mais droit et sans jointures avec une force de 30 N. Si ce dernier doigt d'épreuve pénètre, l'essai avec le doigt d'épreuve de la Figure 2A (voir 2.1.1.1) est répété, le doigt étant enfoncé dans l'ouverture avec toute la force nécessaire, mais sans dépasser 30 N.*

#### **4.4.3 Protection dans un emplacement à accès restreint**

Pour les matériels prévus pour être installés dans un EMBLEMMENT À ACCÈS RESTREINT, les exigences et les critères de conformité de 4.4.2 pour les ZONES ACCÈS DE L'OPÉRATEUR s'appliquent.

#### **4.4.4 Protection dans une zone d'accès pour la maintenance**

Dans une ZONE D'ACCÈS POUR LA MAINTENANCE, il doit y avoir une protection afin de réduire le risque de contact non intentionnel avec des parties mobiles dangereuses lors des opérations de maintenance impliquant d'autres parties du matériel.

*La conformité est vérifiée par examen.*

### **4.5 Exigences thermiques**

#### **4.5.1 Généralités**

Le Paragraphe 4.5 spécifie les exigences prévues pour empêcher:

- les parties qui peuvent être touchées de dépasser certaines températures; et
- les composants, les parties, l'isolation et les matières plastiques de dépasser des températures qui pourraient dégrader les propriétés électriques, mécaniques ou autres propriétés lors d'une utilisation normale durant la vie entière du matériel.

On doit prendre en considération le fait que, à long terme, les propriétés électriques et mécaniques de certains matériaux isolants (voir 2.9.1) peuvent être détériorées (par exemple des plastifiants s'évaporant à des températures inférieures aux températures normales de ramollissement des matériaux).

Au cours des essais de 4.5.2, les amplificateurs audio sont mis en fonctionnement conformément au Paragraphe 4.2.4 de la CEI 60065.

#### 4.5.2 Essais en température

Les matériaux utilisés dans les composants ou dans la fabrication du matériel doivent être sélectionnés de façon que, sous une CHARGE NORMALE, les températures ne dépassent pas des valeurs sûres au sens de la présente norme.

Les composants travaillant à haute température doivent être efficacement enveloppés ou isolés pour éviter les surchauffes des matériaux et composants avoisinants.

*La vérification est effectuée par examen des données du matériau et par détermination et enregistrement des températures. Le matériel ou les parties du matériel sont mis en fonctionnement conformément à 1.4.5 sous la CHARGE NORMALE jusqu'à la stabilisation de la température. Pour les limites de températures, voir 4.5.3 et 4.5.4.*

NOTE Voir aussi 1.4.4, 1.4.10, 1.4.12 et 1.4.13.

*Il est permis d'essayer les composants et autres parties indépendamment sous réserve de respecter les conditions d'essai applicables au matériel.*

*Le matériel destiné à être encastré ou monté dans des baies, ou à être incorporé dans de plus grands équipements est essayé dans les conditions les plus défavorables, réelles ou simulées autorisées par les instructions d'installation.*

*La température de l'isolation électrique (autre que celle des enroulements, voir 1.4.13) dont la défaillance pourrait provoquer un danger est mesurée sur la surface de l'isolation en un point proche de la source de chaleur (voir note a du Tableau 4B). Pendant cet essai:*

- *les COUPE-CIRCUITS THERMIQUES et les dispositifs de protection contre les surintensités ne doivent pas fonctionner;*
- *il est permis que les THERMOSTATS fonctionnent à condition qu'ils n'interrompent pas le fonctionnement normal du matériel;*
- *il est permis que les LIMITEURS DE TEMPÉRATURE fonctionnent;*
- *les matières de remplissage, si elles existent, ne doivent pas couler.*

#### 4.5.3 Limites de température pour les matériaux

*La température des matériaux et des composants ne doit pas dépasser les valeurs représentées au Tableau 4B.*

**Tableau 4B – Limites de température, matériaux et composants**

| Partie                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Température maximale ( $T_{\max}$ )<br>°C                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Isolations, y compris celles des enroulements: <ul style="list-style-type: none"> <li>– en matériau de classe 105 (A)</li> <li>– en matériau de classe 120 (E)</li> <li>– en matériau de classe 130 (B)</li> <li>– en matériau de classe 155 (F)</li> <li>– en matériau de classe 180 (H)</li> <li>– en matériau de classe 200</li> <li>– en matériau de classe 220</li> <li>– en matériau de classe 250</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 100 <sup>a b c</sup><br>115 <sup>a b c</sup><br>120 <sup>a b c</sup><br>140 <sup>a b c</sup><br>165 <sup>a b c</sup><br>180 <sup>a b</sup><br>200 <sup>a b</sup><br>225 <sup>a b</sup> |
| Isolation en caoutchouc ou PVC des conducteurs internes et externes y compris les câbles d'alimentation: <ul style="list-style-type: none"> <li>– sans marquage de température</li> <li>– avec marquage de température</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 75 <sup>d</sup><br>Marquage de la température                                                                                                                                          |
| Autre isolation thermoplastique                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Voir <sup>e</sup>                                                                                                                                                                      |
| Bornes, y compris les bornes de terre pour conducteurs externes de mise à la terre des MATÉRIELS FIXES à moins qu'elles ne soient munies d'un CÂBLE D'ALIMENTATION FIXÉ À DEMEURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 85                                                                                                                                                                                     |
| Parties en contact avec un liquide inflammable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Voir 4.3.12                                                                                                                                                                            |
| Composants                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Voir 1.5.1                                                                                                                                                                             |
| <sup>a</sup> Si la température d'un enroulement est déterminée au moyen de thermocouples, ces valeurs sont réduites de 10 °C, sauf dans le cas <ul style="list-style-type: none"> <li>– d'un moteur, ou</li> <li>– d'un enroulement avec thermocouples incorporés.</li> </ul> <sup>b</sup> Pour chaque matériau, on doit tenir compte des données de ce matériau afin de déterminer la température maximale appropriée. <sup>c</sup> Les désignations A à H, attribuées précédemment dans la CEI 60085 aux classes thermiques 105 à 180, sont données entre parenthèses. <sup>d</sup> En l'absence de marquage sur le fil, le marquage sur la bobine de fil ou la caractéristique de température assignée par le fabricant est considéré comme acceptable. <sup>e</sup> En raison de leur grande variété, il n'est pas possible de spécifier des températures maximales autorisées pour les matériaux thermoplastiques. Ceux-ci doivent satisfaire aux essais spécifiés en 4.5.5. |                                                                                                                                                                                        |

#### 4.5.4 Limites de température de contact

Les températures des parties accessibles dans les ZONES D'ACCÈS DE L'OPÉRATEUR ne doivent pas dépasser les valeurs représentées au Tableau 4C.



**Tableau 4C – Limites de températures de contact**

| Parties situées dans les<br>ZONES D'ACCÈS DE L'OPÉRATEUR                                  | Température maximale ( $T_{\max}$ )<br>°C |                                           |                                                      |
|-------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|------------------------------------------------------|
|                                                                                           | Métal                                     | Verre, porcelaine<br>et matière vitrifiée | Caoutchouc<br>et matières<br>plastiques <sup>b</sup> |
| Poignées, boutons, manettes, etc., tenus ou touchés pendant de courtes périodes seulement | 60                                        | 70                                        | 85                                                   |
| Poignées, boutons, manettes, etc., tenus de façon continue en usage normal                | 55                                        | 65                                        | 75                                                   |
| Surfaces extérieures du matériel qui peuvent être touchées <sup>a</sup>                   | 70                                        | 80                                        | 95                                                   |
| Parties à l'intérieur du matériel qui peuvent être touchées <sup>c</sup>                  | 70                                        | 80                                        | 95                                                   |

<sup>a</sup> Les températures jusqu'à 100 °C sont autorisées sur les parties suivantes:

- zones sur la surface externe du matériel qui n'ont aucune dimension supérieure à 50 mm et qui ne sont pas susceptibles d'être touchées en utilisation normale, et
- une partie du matériel nécessitant de la chaleur pour la fonction prévue (par exemple une pelliculeuse de document), sous réserve que cette condition soit évidente pour l'UTILISATEUR. Un avertissement doit être marqué sur le matériel à un endroit en évidence près de la partie chaude.

L'avertissement doit être

- soit le symbole (IEC 60417-5041 (DB:2002-10)):
- soit le libellé suivant ou un libellé similaire:

**AVERTISSEMENT  
SURFACE CHAUDE  
NE PAS TOUCHER**

<sup>b</sup> Pour chaque matériau, on doit tenir compte des données de ce matériau afin de déterminer la température maximale appropriée.

<sup>c</sup> Des températures dépassant les limites sont permises pourvu que les conditions suivantes soient remplies:

- un contact non intentionnel avec une telle partie est improbable; et
- la partie porte un marquage indiquant que cette partie est chaude. Il est permis d'utiliser le symbole suivant (IEC 60417-5041 (DB:2002-10)), pour fournir cette information.

*Pour les matériels destinés à être installés dans un EMPLACEMENT À ACCÈS RESTREINT, les limites de température indiquées dans le Tableau 4C s'appliquent avec l'exception que pour les parties métalliques externes qui sont de toute évidence conçues comme des radiateurs ou qui portent un avertissement visible, une température de 90 °C est permise.*

#### 4.5.5 Résistance aux chaleurs anormales

Les parties thermoplastiques sur lesquelles sont montées directement des parties sous TENSION DANGEREUSE doivent être résistantes à une chaleur anormale.

*La vérification consiste à soumettre la partie à l'essai à la bille conformément à la CEI 60695-10-2. L'essai n'est pas effectué si l'examen des caractéristiques physiques du matériau montre clairement qu'il satisfera aux exigences de cet essai.*

*L'essai est effectué dans une étuve à une température de  $(T - T_{\text{amb}} + T_{\text{ma}} + 15 \text{ °C}) \pm 2 \text{ °C}$ .*

*Toutefois, une partie thermoplastique supportant des parties dans un CIRCUIT PRIMAIRE est essayée à une température au moins égale à 125 °C.*

*Les significations de  $T$ ,  $T_{\text{ma}}$  et  $T_{\text{amb}}$  sont telles que donné en 1.4.12.1.*



## 4.6 Ouvertures dans les enveloppes

NOTE 1 Les Paragraphes 4.6.1 et 4.6.2 ne s'appliquent pas aux MATÉRIELS TRANSPORTABLES. Le Paragraphe 4.6.4 s'applique aux MATÉRIELS TRANSPORTABLES uniquement.

NOTE 2 Des exigences supplémentaires concernant les ouvertures dans les ENVELOPPES sont données en 2.1.1.

### 4.6.1 Ouvertures dans le dessus et dans les parois latérales

Pour les matériels prévus avec plusieurs orientations possibles (voir 1.3.6), les exigences de 4.6.1 s'appliquent pour chacune des orientations appropriées.

Les ouvertures dans la paroi supérieure ou les parois latérales des ENVELOPPES, à l'exclusion des ENVELOPPES des MATÉRIELS TRANSPORTABLES (voir 4.6.4), doivent être situées et construites de sorte qu'il soit peu probable que les objets puissent traverser les ouvertures et créer des dangers par contact avec des parties conductrices nues.

NOTE 1 Les dangers comprennent des énergies dangereuses, et ceux créés par le pontage de l'isolation ou par l'accès de l'OPÉRATEUR à des parties sous TENSIONS DANGEREUSES (par exemple à travers des bijoux métalliques).

Il n'est pas exigé que les ouvertures situées derrière des portes, des panneaux, des couvercles, etc. qui peuvent être ouverts ou enlevés par l'OPÉRATEUR soient conformes, à condition que les ouvertures du matériel le soient lorsque les portes, les panneaux et les couvercles sont fermés ou en place.

Lorsqu'une partie de la paroi latérale d'une ENVELOPPE CONTRE LE FEU tombe dans la zone délimitée par l'angle de 5° de la Figure 4E, les limitations de 4.6.2 sur les dimensions des ouvertures dans le fond des ENVELOPPES CONTRE LE FEU s'appliquent également à cette partie de la paroi latérale.

*La vérification est effectuée par examen et par des mesures. A l'exception des parties de parois latérales d'une ENVELOPPE CONTRE LE FEU qui sont soumises aux exigences de 4.6.2 (voir l'alinéa ci-dessus), chacun des choix suivants est considéré comme pouvant satisfaire aux exigences (d'autres constructions ne sont pas exclues):*

- *ouvertures n'ayant aucune dimension supérieure à 5 mm;*
- *ouvertures ayant moins de 1 mm de large quelle que soit la longueur;*
- *ouvertures dans le dessus à travers lesquelles l'entrée verticale des objets est impossible (voir exemples à la Figure 4B);*
- *ouvertures dans les parois latérales équipées de volets en grille-écran dont la forme empêche l'entrée des objets extérieurs tombant verticalement (voir exemples à la Figure 4C);*
- *ouvertures dans le dessus ou dans les parois latérales, comme indiqué à la Figure 4D, qui ne sont pas situées à la verticale ou dans un volume V délimité par la projection de 5° par rapport à la verticale jusqu'à la taille d'ouverture L, au-dessus des parties conductrices:*
  - *SOUS TENSION DANGEREUSE; ou*
  - *qui présentent un niveau d'énergie dangereuse au sens de 2.1.1.5.*

NOTE 2 Les exemples des Figures 4B, 4C, 4D et 4E ne sont pas destinés à être utilisés comme des dessins d'exécution mais ont seulement pour objet d'illustrer le but de ces exigences.

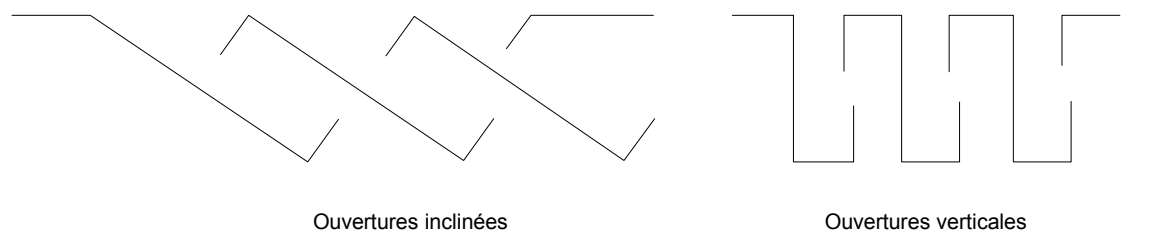


**Figure 4B – Exemples de coupes d'ouvertures empêchant un accès vertical**


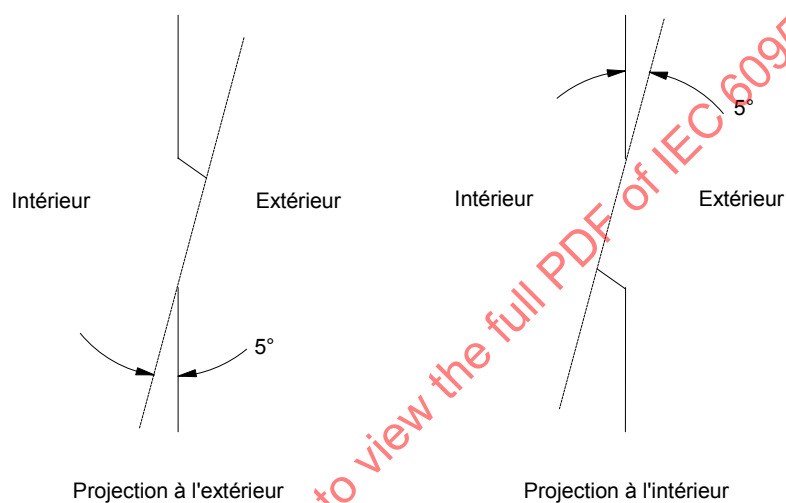


**Figure 4C – Exemples de volets en grille-écran**

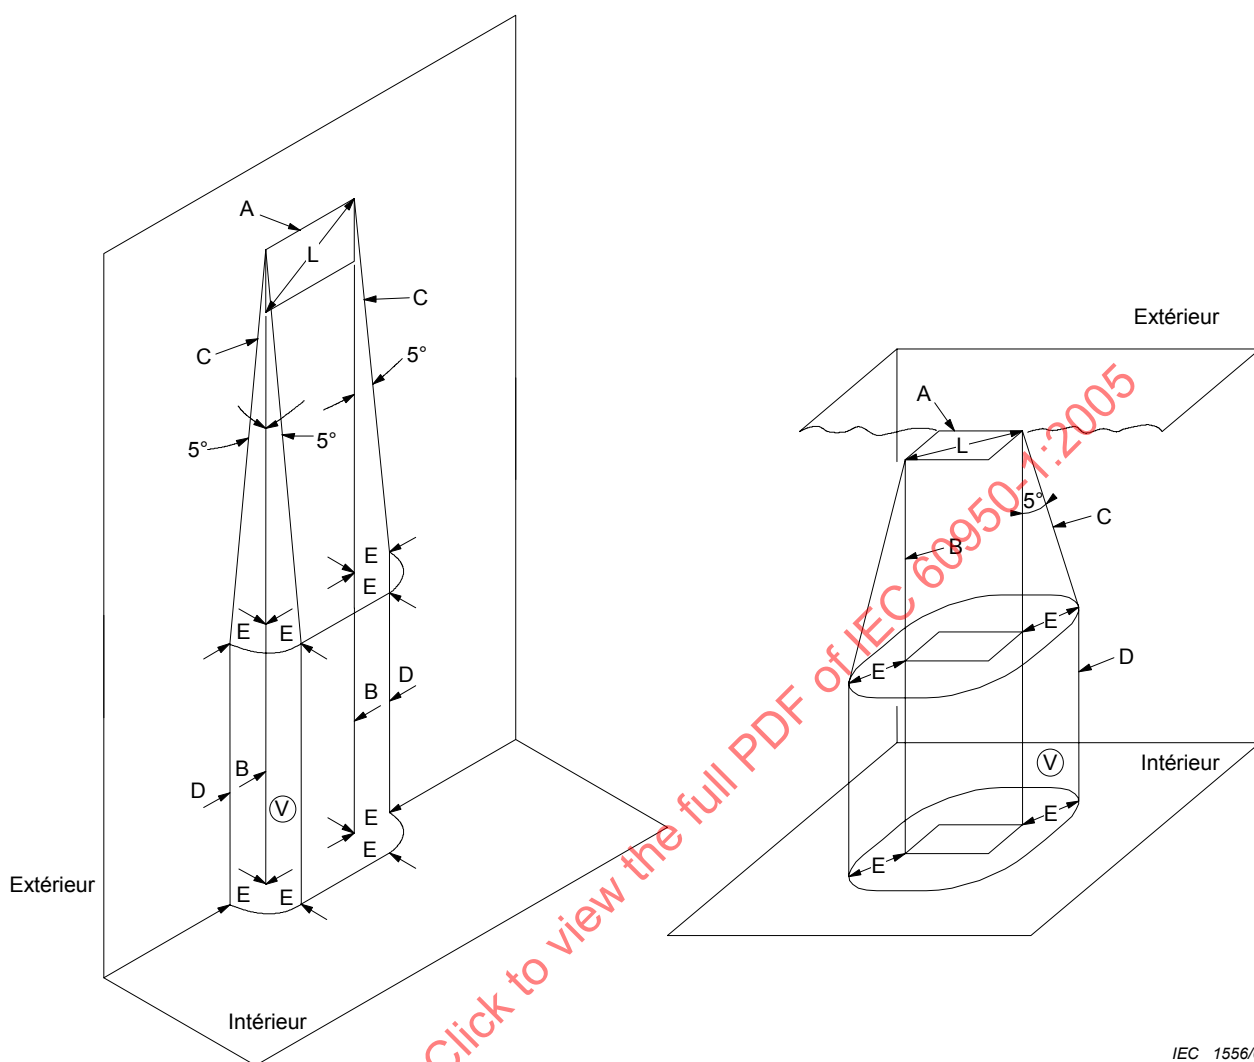

IEC 1556/05

- A Ouverture d'une ENVELOPPE.
- B Projection verticale des bords extérieurs de l'ouverture.
- C Lignes inclinées qui se projettent à un angle de 5° des bords de l'ouverture à des points situés à une distance E de B.
- D Ligne qui est projetée verticalement dans le même plan que l'ouverture latérale.
- E Projection du bord extérieur de l'ouverture (B) et de la ligne inclinée (C) (qui ne doit pas être supérieure à L).
- L Dimension maximale de l'ouverture de l'ENVELOPPE.
- V Volume dans lequel les parties nues sous TENSION DANGEREUSE, ou qui présentent des niveaux d'énergie (voir 4.6.1), ne sont pas situées.

**Figure 4D – Ouvertures dans une enveloppe**

#### 4.6.2 Fonds de l'enveloppe contre le feu


Pour les matériels prévus avec plusieurs orientations possibles (voir 1.3.6), les exigences de 4.6.2 s'appliquent pour chacune des orientations appropriées.

Le fond d'une ENVELOPPE CONTRE LE FEU (à l'exception de l'ENVELOPPE CONTRE LE FEU d'un MATÉRIEL TRANSPORTABLE) ou les barrières individuelles doivent assurer la protection sous toutes les parties internes, y compris les composants ou les ensembles partiellement enfermés, qui, dans les conditions de défaut, pourraient émettre des matières susceptibles d'enflammer la surface d'appui.

NOTE Voir 4.7.2.2 pour les parties qui ne nécessitent pas une ENVELOPPE CONTRE LE FEU.

Le fond ou la barrière doivent être situés conformément à la Figure 4E et leur surface ne doit pas être inférieure à ce qui est indiqué sur cette figure; ils doivent être soit horizontaux soit pourvus de lèvres ou autres façonnages pour assurer une protection équivalente.

Une ouverture doit être protégée par une chicane, un écran ou un moyen analogue de façon qu'il soit peu probable que du métal en fusion et des matériaux brûlants tombent à l'extérieur de l'ENVELOPPE CONTRE LE FEU.

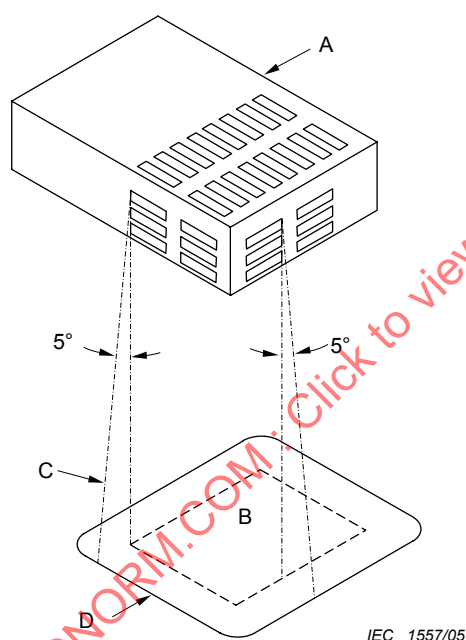

A Partie d'un élément constituant sous laquelle une ENVELOPPE CONTRE LE FEU est exigée, par exemple sous les ouvertures dans un élément constituant ou un ensemble à travers lesquelles des particules enflammées pourraient être émises. Si l'élément constituant ou l'ensemble n'a pas sa propre ENVELOPPE CONTRE LE FEU, la surface à protéger est la surface totale occupée par l'élément constituant ou l'ensemble.

B Contour de la projection de la surface A effectuée verticalement de haut en bas sur le plan horizontal du point le plus bas de l'ENVELOPPE CONTRE LE FEU.

C Ligne inclinée qui trace un contour D sur le même plan que B. Se déplaçant autour du périmètre du contour B, cette ligne fait un angle de 5° par rapport à la ligne verticale qui part de chaque point du périmètre des ouvertures dans A et est orientée de manière à définir la plus grande surface possible.

D Contour minimal du fond de l'ENVELOPPE CONTRE LE FEU. Une partie d'une paroi latérale d'une ENVELOPPE CONTRE LE FEU qui se trouve à l'intérieur de la surface délimitée par l'angle de 5° est aussi considérée comme faisant partie du fond de l'ENVELOPPE CONTRE LE FEU.

**Figure 4E – Fond typique d'une enveloppe contre le feu pour les composants ou ensembles partiellement enfermés**

Les exigences de 4.6.2 ne s'appliquent pas aux MATÉRIELS FIXES prévus uniquement pour être utilisés dans un emplacement à accès restreint et pour être montés sur une surface en béton ou toute autre surface non combustible. De tels matériels doivent être marqués comme suit:

**DESTINÉS UNIQUEMENT À ÊTRE MONTÉS SUR UNE SURFACE EN BÉTON  
OU SUR TOUTE AUTRE SURFACE NON COMBUSTIBLE**

La vérification est effectuée par examen et, lorsque c'est nécessaire, par l'essai de l'Article A.3.

Les constructions suivantes sont considérées comme satisfaisant aux exigences sans essai:

- aucune ouverture dans le fond d'une ENVELOPPE CONTRE LE FEU;
- ouvertures de toutes dimensions dans le fond sous une barrière interne, un écran interne ou un autre dispositif qui lui-même satisfait aux exigences pour les ENVELOPPES CONTRE LE FEU, voir aussi 4.2.1;
- ouvertures dans le fond ayant chacune une surface inférieure ou égale à 40 mm<sup>2</sup> sous des composants ou des parties satisfaisant aux exigences du MATÉRIAU CELLULAIRE DE CLASSE V-1 ou du MATÉRIAU DE CLASSE HF-1 ou sous le plus petit composant qui satisfait à l'essai du brûleur-aiguille de la CEI 60695-11-5 en utilisant une durée d'application de la flamme de 30 s;
- construction avec une plaque écran comme illustré sur la Figure 4F;
- fond métallique des ENVELOPPES CONTRE LE FEU conforme aux dimensions limites d'une ligne quelconque du Tableau 4D;
- grille de fond en métal ayant une maille dont la distance entre les lignes passant par le centre des ouvertures nominales est inférieure ou égale à 2 mm et dont le diamètre des fils est égal ou supérieur à 0,45 mm.

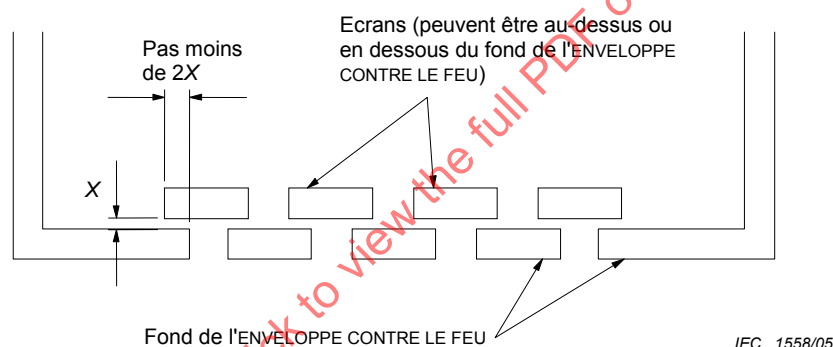


**Figure 4F – Construction avec plaque écran**

**Tableau 4D – Dimensions et espacements des trous dans les fonds métalliques des enveloppes contre le feu**

| Applicable aux trous circulaires      |                            |                                        | Applicable aux autres formes d'ouvertures |                                               |
|---------------------------------------|----------------------------|----------------------------------------|-------------------------------------------|-----------------------------------------------|
| Epaisseur minimale du fond métallique | Diamètre maximal des trous | Espacement minimal des trous (entraxe) | Surface maximale                          | Espacement minimal des ouvertures bord à bord |
| mm                                    | mm                         | mm                                     | mm <sup>2</sup>                           | mm                                            |
| 0,66                                  | 1,1                        | 1,7                                    | 1,1                                       | 0,56                                          |
| 0,66                                  | 1,2                        | 2,3                                    | 1,2                                       | 1,1                                           |
| 0,76                                  | 1,1                        | 1,7                                    | 1,1                                       | 0,55                                          |
| 0,76                                  | 1,2                        | 2,3                                    | 1,2                                       | 1,1                                           |
| 0,81                                  | 1,9                        | 3,1                                    | 2,9                                       | 1,1                                           |
| 0,89                                  | 1,9                        | 3,1                                    | 2,9                                       | 1,2                                           |
| 0,91                                  | 1,6                        | 2,7                                    | 2,1                                       | 1,1                                           |
| 0,91                                  | 2,0                        | 3,1                                    | 3,1                                       | 1,2                                           |
| 1,0                                   | 1,6                        | 2,7                                    | 2,1                                       | 1,1                                           |
| 1,0                                   | 2,0                        | 3,0                                    | 3,2                                       | 1,0                                           |

#### 4.6.3 Portes et couvercles dans les enveloppes contre le feu

Si une partie d'une ENVELOPPE CONTRE LE FEU comporte une porte ou un couvercle conduisant à une ZONE D'ACCÈS DE L'OPÉRATEUR, elle doit satisfaire à l'une des exigences suivantes:

- la porte ou le couvercle doivent être verrouillés pour satisfaire aux exigences de 2.8;
- une porte ou un couvercle destinés à être ouverts par l'OPÉRATEUR, en usage habituel, doivent satisfaire aux deux conditions suivantes:
  - il ne doit pas être possible à l'OPÉRATEUR de les séparer de l'ENVELOPPE CONTRE LE FEU; et
  - ils doivent être munis d'un dispositif qui les maintient fermés pendant le fonctionnement normal;
- il est permis qu'une porte ou un couvercle destinés seulement à un usage occasionnel par l'OPÉRATEUR, par exemple pour l'installation d'accessoires, soient amovibles pourvu que le mode d'emploi du matériel contienne des directives pour un enlèvement et une remise en place correcte de la porte ou du couvercle.

*La conformité est vérifiée par examen.*

#### 4.6.4 Ouvertures dans les matériels transportables

Les risques d'inflammation causés par des petits objets métalliques, tels que des trombones ou des agrafes se déplaçant à l'intérieur des MATÉRIELS TRANSPORTABLES lors du transport doivent être réduits par des moyens tels que ces objets aient peu de probabilité de pénétrer dans le matériel et de ponter les parties conductrices qui peuvent être à l'origine d'un risque d'incendie. Sauf si cela est exigé en 4.6.4.3, de telles mesures ne sont pas nécessaires pour les parties conductrices nues entre lesquelles la puissance est limitée conformément à 2.5.

NOTE Les exigences ci-dessus ne s'appliquent qu'aux parties conductrices nues. Les parties conductrices présentant un revêtement ne sont pas considérées comme des parties conductrices nues.

*La vérification est effectuée conformément à 4.6.4.1, 4.6.4.2 et 4.6.4.3 selon ce qui est approprié. Au cours de l'examen et des essais, toutes les portes et tous les couvercles sont fermés ou en place et les éléments ou ensembles périphériques, tels des lecteurs de disques, des batteries, etc., sont installés comme prévu.*

#### **4.6.4.1 Mesures de conception de la construction**

Exemples de mesures de conception de construction acceptables:

- limiter la largeur des ouvertures à 1 mm quelle que soit la longueur; ou
- disposer une grille ayant une maille dont la distance entre les lignes passant par le centre des ouvertures est inférieure ou égale à 2 mm et construite avec un diamètre de fil ou de filament égal ou supérieur à 0,45 mm; ou
- ajouter des barrières internes; ou
- d'autres moyens de construction équivalents.

NOTE Les grilles prévues pour limiter l'entrée de petits objets font partie de l'ENVELOPPE et les exigences de 4.7 pour les ENVELOPPES CONTRE LE FEU peuvent s'appliquer, voir aussi 1.3.6.

*La vérification est effectuée par examen et par des mesures et, si nécessaire, en simulant la pénétration d'objets qui pourraient ponter les parties conductrices nues.*

#### **4.6.4.2 Mesures d'évaluation pour ouvertures de grande taille**

Des ouvertures de tailles supérieures à celles spécifiées en 4.6.4.1 sont autorisées (voir aussi 2.1.1.1), sous réserve que des essais de défaut soit réalisés pour simuler le pontage le long d'un chemin droit entre les parties conductrices nues (pour les parties métallisées, voir 4.6.4.3) situées à moins de 13 mm les unes des autres partout à l'intérieur du matériel ne satisfaisant pas aux critères de 4.6.4.1.

*La vérification est effectuée par examen et par des mesures et par un essai de défaut simulé. Un pontage est considéré exister entre des parties conductrices nues qui peuvent être touchées simultanément en utilisant un objet métallique droit, de 1 mm de diamètre et ayant une longueur quelconque inférieure à 13 mm, appliqué sans force appréciable. Au cours des essais de défaut, il ne doit pas se produire d'inflammation de matériaux non métalliques ni d'émission de métal fondu.*

#### **4.6.4.3 Utilisation de parties métallisées**

Lorsque des parties métallisées d'une barrière ou d'une ENVELOPPE plastique sont situées à une distance inférieure ou égale à 13 mm de parties de circuits dans lesquels la puissance disponible est supérieure à 15 VA, une des exigences suivantes a), b) ou c) s'applique:

- a) l'accès d'un objet métallique extérieur doit être limité conformément à 4.6.4.1, que la puissance disponible satisfasse aux limites de 2.5 ou non; ou
- b) il doit y avoir une barrière entre les parties conductrices nues et la barrière métallisée ou l'ENVELOPPE; ou
- c) des essais de défauts doivent être effectués pour simuler un pontage entre une partie conductrice nue et la plus proche partie métallisée de la barrière ou de l'ENVELOPPE qui est située à moins de 13 mm de la partie conductrice nue.

NOTE Les exemples de barrières ou d'ENVELOPPES plastiques métallisées comprennent celles qui sont faites à partir de matériaux composites conducteurs ou qui sont recouvertes par électrolyse, par dépôt sous vide, par peinture ou par une feuille.

*La vérification est effectuée par examen et par des mesures et, lorsque c'est approprié, par des essais. Si des essais de défaut simulés sont réalisés, il ne doit pas y avoir d'inflammation de la barrière métallisée ou de l'ENVELOPPE.*

#### 4.6.5 Adhésifs entrant dans la construction

Si une barrière ou un écran prévus pour satisfaire à 4.6.1, 4.6.2 ou 4.6.4 sont fixés avec de l'adhésif sur l'intérieur de l'ENVELOPPE ou sur d'autres parties à l'intérieur de l'ENVELOPPE, l'adhésif doit avoir des propriétés d'adhérence adéquates durant toute la vie du matériel.

*La vérification est effectuée par examen de la construction et des données disponibles. Si de telles données ne sont pas disponibles, la vérification est effectuée par les essais suivants.*

*Un échantillon du matériel ou une partie de l'ENVELOPPE avec la barrière ou l'écran attaché est évalué dans une position de l'échantillon telle que la barrière ou l'écran soit placé en dessous.*

*Conditionner l'échantillon dans une étuve à l'une des températures suivantes pour les durées spécifiées:*

- 100 °C ± 2 °C pendant une semaine; ou*
- 90 °C ± 2 °C pendant trois semaines; ou*
- 82 °C ± 2 °C pendant huit semaines.*

*A l'issue du conditionnement thermique, soumettre l'échantillon aux manipulations suivantes:*

- enlever l'échantillon de l'étuve et le laisser pendant 1 h à température quelconque entre 20 °C et 30 °C;*
- placer l'échantillon dans un congélateur pendant 4 h à -40 °C ± 2 °C;*
- enlever l'échantillon du congélateur et le laisser revenir sur une période de 8 h à une température quelconque entre 20 °C et 30 °C;*
- placer l'échantillon pendant 72 h dans une étuve avec une humidité relative de 91 % à 95 %;*
- enlever l'échantillon et le laisser pendant 1 h à une température quelconque entre 20 °C et 30 °C;*
- placer l'échantillon dans l'étuve pendant 4 h à la température choisie dans le premier cycle;*
- enlever l'échantillon et le laisser refroidir sur une période de 8 h à une température quelconque entre 20 °C et 30 °C.*

*L'échantillon est alors soumis immédiatement aux essais de 4.2 qui sont applicables. La barrière ou l'écran ne doit pas tomber ou se détacher en partie à la suite de ces essais.*

*Avec l'accord du fabricant, il est permis d'augmenter toute durée indiquée ci-dessus.*

#### 4.7 Résistance au feu

Le présent paragraphe spécifie les exigences destinées à réduire le risque d'inflammation et la propagation de la flamme, tant à l'intérieur qu'à l'extérieur du matériel, par une utilisation appropriée des matériaux et des composants ainsi que par une construction convenable.

NOTE 1 Le risque d'inflammation est réduit en limitant la température maximale sur les composants dans des conditions normales et après un premier défaut (voir 1.4.14), ou en limitant l'énergie disponible dans le circuit.

NOTE 2 La propagation de la flamme dans le cas d'une inflammation est réduite par l'utilisation des matériaux et isolants ayant des propriétés de retard à l'inflammation et par une séparation adéquate.

NOTE 3 Pour un classement des matériaux suivant le degré d'inflammabilité, se référer aux notes de 1.2.12.1.

NOTE 4 En Australie et en Nouvelle-Zélande, un ensemble d'essais au feu alternatif est également accepté.

Les matières métalliques, céramiques et les verres doivent être considérés comme conformes sans essai.



#### 4.7.1 Limitation du risque d'inflammation et de propagation du feu

Pour le matériel ou pour une portion du matériel, il y a deux méthodes pour obtenir la protection contre l'inflammation et la propagation de la flamme qui risquent d'affecter les matériaux, les câbles, les composants bobinés et les composants électroniques tels que les circuits intégrés, les transistors, les thyristors, les diodes, les résistances et les condensateurs.

Méthode 1 – Choix et utilisation de composants, de câbles et de matériaux qui réduisent la possibilité d'inflammation et de propagation de la flamme et, si nécessaire, utilisation d'une ENVELOPPE CONTRE LE FEU. Les exigences correspondantes figurent en 4.7.2 et en 4.7.3. De plus, les simulations de défauts de 5.3.7 s'appliquent à l'exception de 5.3.7 c) lorsque cette méthode est utilisée.

NOTE 1 La méthode 1 peut être préférée pour les matériels ou pour la partie des matériels comportant un grand nombre de composants.

Méthode 2 – Application de tous les essais de simulation de défauts de 5.3.7. Une ENVELOPPE CONTRE LE FEU n'est pas exigée pour le matériel ou la partie des matériels pour laquelle la méthode 2 est utilisée. En particulier, 5.3.7 c) s'applique. Il inclut des essais sur tous les composants concernés à la fois dans les CIRCUITS PRIMAIRES et les CIRCUITS SECONDAIRES.

NOTE 2 La méthode 2 peut être préférée pour les matériels ou pour la partie des matériels comportant un petit nombre de composants électroniques.

#### 4.7.2 Conditions applicables à une enveloppe contre le feu

Une ENVELOPPE CONTRE LE FEU est exigée lorsque les températures des composants sous des conditions de défaut risquent d'être suffisantes pour provoquer une inflammation.

##### 4.7.2.1 Composants nécessitant une enveloppe contre le feu

Sauf lorsque la méthode 2 de 4.7.1 est utilisée, ou comme permis en 4.7.2.2, les parties suivantes sont considérées comme ayant un risque d'inflammation et, donc, nécessitent une ENVELOPPE CONTRE LE FEU:

- composants dans un CIRCUIT PRIMAIRE;
- composants dans les CIRCUITS SECONDAIRES alimentés par des sources d'énergie qui dépassent les limites de 2.5;
- composants dans les CIRCUITS SECONDAIRES alimentés par des sources d'énergie limitée conformes à 2.5, mais non montés sur un matériau de CLASSE V-1;
- composants à l'intérieur d'une unité d'alimentation ou un ensemble fournissant une énergie conforme à 2.5, y compris les dispositifs de protection contre les surintensités, les impédances de limitation, les réseaux de régulation et tout le câblage jusqu'au point auquel les critères de sortie des sources à puissance limitée sont remplis;
- composants ayant des parties non enfermées sur lesquelles se forment des arcs, telles que les contacts ouverts des interrupteurs et des relais et les commutateurs, dans un circuit à TENSION DANGEREUSE ou à niveau D'ÉNERGIE DANGEREUX; et
- le câblage isolé.

##### 4.7.2.2 Composants ne nécessitant pas une enveloppe contre le feu

Les parties suivantes ne nécessitent pas une ENVELOPPE CONTRE LE FEU:

- moteurs;
- transformateurs;
- composants électromécaniques conformes à 5.3.5;

- conducteurs et câbles à isolant PVC, TFE, PTFE, FEP, polychloroprène ou polyimide;
- fiches et connecteurs faisant partie d'un cordon d'alimentation ou d'un CÂBLE D'INTERCONNEXION;
- composants, y compris les connecteurs, satisfaisant aux exigences de 4.7.3.2, qui remplissent une ouverture dans une ENVELOPPE CONTRE LE FEU;
- connecteurs dans les CIRCUITS SECONDAIRES alimentés par une source d'énergie limitée au maximum à 15 VA (voir 1.4.11) dans des conditions normales d'utilisation et après un premier défaut dans le matériel (voir 1.4.14);
- connecteurs dans des CIRCUITS SECONDAIRES alimentés par des sources à puissance limitée conformes à 2.5;
- autres composants dans des CIRCUITS SECONDAIRES:
  - alimentés par des sources à puissance limitée conformes à 2.5 et montés sur des matériaux de CLASSE V-1;
  - alimentés par des sources d'énergie internes ou externes limitées au maximum à 15 VA (voir 1.4.11) dans des conditions d'utilisation normales et après un premier défaut (voir 1.4.14) dans le matériel, et montés sur un MATÉRIAU DE CLASSE HB75 si la plus petite épaisseur significative de ce matériau est <3 mm ou de CLASSE HB40 si la plus petite épaisseur significative de ce matériau est ≥3 mm;

NOTE Au Canada et aux Etats-Unis, des exigences supplémentaires peuvent s'appliquer, voir Article 6 Note 5.

- conformes à la méthode 2 de 4.7.1;
- matériel, ou partie du matériel, ayant un interrupteur à contact temporaire que l'utilisateur doit activer en permanence, et dont le relâchement coupe toute alimentation du matériel ou une partie.

*La vérification de la conformité à 4.7.2.1 et à 4.7.2.2 est effectuée par examen et par évaluation des données fournies par le fabricant. Dans le cas où aucune donnée n'est fournie, la conformité est vérifiée par des essais.*

### 4.7.3 Matériaux

#### 4.7.3.1 Généralités

Les ENVELOPPES, les composants et les autres parties doivent être construits de façon telle ou doivent utiliser des matériaux tels que la propagation du feu soit réduite.

LES MATÉRIAUX DE CLASSE VTM-0, de CLASSE VTM-1 et de CLASSE VTM-2 sont considérés comme équivalents aux MATÉRIAUX DE CLASSE V-0, DE CLASSE V-1 et DE CLASSE V-2, respectivement en ce qui concerne leur propriétés d'inflammabilité. Leurs propriétés électriques et mécaniques ne sont pas nécessairement équivalentes.

Lorsqu'un MATÉRIAU DE CLASSE HB40, DE CLASSE HB75 OU CELLULAIRE DE CLASSE HBF est exigé, un matériau satisfaisant à l'essai avec le fil incandescent à 550 °C selon la CEI 60695-2-11 est acceptable comme variante.

Quand il n'est pas possible en pratique de protéger les composants contre des échauffements en condition de défaut, les composants doivent être montés sur des MATÉRIAUX DE CLASSE V-1. De plus, de tels composants doivent être séparés des matériaux de classe inférieure à la CLASSE V-1 (voir 1.2.12.1, Note 2) par au moins 13 mm d'air, ou par une barrière solide de CLASSE V-1.

NOTE 1 Voir aussi 4.7.3.5.

NOTE 2 Au Canada et aux USA, des exigences complémentaires à 4.7.3.2 et 4.7.3.3 s'appliquent aux ENVELOPPES et aux PARTIES DÉCORATIVES ayant une surface externe avec une zone d'exposition plus large que 0,9 m<sup>2</sup> ou avec une dimension plus grande que 1,8 m.

NOTE 3 En considérant comment réduire au minimum la propagation du feu et quelles sont les «petites parties», il convient de tenir compte de l'effet cumulatif des petites parties lorsqu'elles sont adjacentes et également de la possibilité de propagation du feu d'une partie à une autre.

NOTE 4 Les exigences d'inflammabilité du matériau en 4.7.3 sont résumées dans le Tableau 4E.

*La vérification est effectuée par examen et par évaluation des données correspondantes fournies par le fabricant.*

#### **4.7.3.2 Matériaux pour les enveloppes contre le feu**

Les exigences suivantes s'appliquent suivant ce qui est approprié.

Le critère de masse de 18 kg s'applique aux matériels individuels complets, même s'ils sont utilisés très près l'un de l'autre (par exemple l'un au-dessus de l'autre). Toutefois, si une partie de l'ENVELOPPE CONTRE LE FEU est enlevée dans une telle situation (dans le même exemple le fond du matériel placé au-dessus), la masse combinée du matériel s'applique. Pour la détermination de la masse totale d'un matériel les fournitures ou produits consommables et les supports d'information et d'enregistrement utilisés avec le matériel ne doivent pas être pris en compte.

Pour les MATÉRIELS MOBILES ayant une masse totale ne dépassant pas 18 kg, le matériau des ENVELOPPES CONTRE LE FEU, dans la plus petite épaisseur significative de paroi utilisée, doit être de CLASSE V-1 ou satisfaire à l'essai de l'Article A.2.

Pour les MATÉRIELS MOBILES ayant une masse totale dépassant 18 kg et pour tous les MATÉRIELS FIXES, le matériau des ENVELOPPES CONTRE LE FEU, dans la plus petite épaisseur significative de paroi utilisée, doit être de CLASSE 5VB ou satisfaire à l'essai de l'Article A.1.

Le matériau des composants qui obturent une ouverture dans une ENVELOPPE CONTRE LE FEU et qui sont destinés à être montés de cette façon doit:

- être un MATÉRIAU DE CLASSE V-1; ou
- satisfaire aux essais de l'Article A.2; ou
- satisfaire aux exigences d'inflammabilité de la norme de composants correspondante de la CEI.

NOTE Les porte fusibles, les interrupteurs, les lampes témoins, les connecteurs et les socles de connecteurs sont des exemples de ces composants.

Les matériaux plastiques des ENVELOPPES CONTRE LE FEU doivent être situés à plus de 13 mm dans l'air des parties sur lesquelles se produisent des arcs, telles que les contacts des commutateurs non enfermés et des interrupteurs non enfermés.

Les matériaux plastiques des ENVELOPPES CONTRE LE FEU situées à moins de 13 mm dans l'air des parties sur lesquelles ne se produisent pas d'arcs qui, dans n'importe quelle condition de fonctionnement normal ou anormal, pourraient atteindre une température suffisante pour enflammer le matériau, doivent être capables de satisfaire à l'essai de la CEI 60695-2-20. Le temps moyen d'inflammation de l'échantillon ne doit pas être inférieur à 15 s. Si l'échantillon se ramollit sans s'enflammer, le temps pour lequel le phénomène se produit n'est pas considéré comme le temps d'inflammation.

*La vérification est effectuée par examen des données du matériel et du matériau et, si nécessaire, par un ou des essais appropriés dans l'Annexe A ou de la CEI 60695-2-20.*

#### 4.7.3.3 Matériaux pour les composants et les autres parties à l'extérieur des enveloppes contre le feu

A l'exception de ce qui est spécifié dans la note ci-dessous, les composants et les autres parties (y compris les ENVELOPPES MÉCANIQUES, les ENVELOPPES ÉLECTRIQUES et les PARTIES DÉCORATIVES) situés à l'extérieur des ENVELOPPES CONTRE LE FEU, doivent être

- EN MATÉRIAU DE CLASSE HB75 si la plus petite épaisseur significative de ce matériau est  $< 3$  mm, ou
- EN MATÉRIAU DE CLASSE HB40 si la plus petite épaisseur significative de ce matériau est  $\geq 3$  mm, ou
- en MATÉRIAU CELLULAIRE DE CLASSE HBF.

NOTE Lorsqu'une ENVELOPPE MÉCANIQUE ou une ENVELOPPE ÉLECTRIQUE sert aussi comme ENVELOPPE CONTRE LE FEU, les exigences pour les ENVELOPPES CONTRE LE FEU s'appliquent.

Les exigences pour les matériaux dans les assemblages de filtres à air sont données en 4.7.3.5 et les exigences pour les matériaux utilisés dans les composants à haute tension sont données en 4.7.3.6.

Les connecteurs doivent satisfaire à un des cas ci-dessous:

- être un MATÉRIAU DE CLASSE V-2; ou
- satisfaire aux essais de l'Article A.2; ou
- satisfaire aux exigences sur l'inflammabilité de la norme de composants correspondante de la CEI; ou
- être montés sur un matériau de classe v-1 et être de petite taille; ou
- être situés dans un circuit secondaire alimenté par une source d'énergie limitée au maximum à 15 VA (voir 1.4.11) dans des conditions de fonctionnement normales ou après un premier défaut dans le matériel (voir 1.4.14).

L'exigence applicable aux matériaux pour les composants et les autres parties spécifiant qu'ils doivent être de CLASSE D'INFLAMMABILITÉ HB40, de CLASSE D'INFLAMMABILITÉ HB75, ou de CLASSE D'INFLAMMABILITÉ CELLULAIRE HBF ne s'applique à aucun des cas suivants:

- composants électriques qui ne présentent pas de danger de feu dans des conditions de fonctionnement anormales, lorsqu'ils sont essayés suivant 5.3.7;
- matériaux et composants situés à l'intérieur d'une ENVELOPPE de volume inférieur ou égal à  $0,06 \text{ m}^3$ , réalisée entièrement en métal et sans ouvertures de ventilation, ou à l'intérieur d'une unité hermétique contenant un gaz inerte;
- boîtiers d'indicateurs (à condition qu'ils soient jugés par ailleurs propres à recevoir des parties sous TENSION DANGEREUSE), cadrans d'indicateurs et lampes ou leurs cabochons de signalisation;
- composants satisfaisant aux exigences d'inflammabilité d'une norme CEI de composants applicable qui comprend de telles exigences;
- composants électroniques, comme les circuits intégrés, les opto-coupleurs, les condensateurs et autres petites parties qui sont:
  - montés sur un MATÉRIAU DE CLASSE V-1; ou
  - alimentés par une source d'énergie ne dépassant pas 15 VA (voir 1.4.11) dans des conditions normales de fonctionnement ou après un premier défaut dans le matériel (voir 1.4.14), et montés sur un matériau de classe HB75 si la plus petite épaisseur significative de ce matériau est  $< 3$  mm, ou de classe HB40 si la plus petite épaisseur significative de ce matériau est  $\geq 3$  mm;
- fils, câbles et connecteurs isolés par du PVC, TFE, PTFE, FEP, polychloroprène ou polyimide;

- colliers individuels (à l'exclusion des revêtements hélicoïdaux ou autres revêtements continus), rubans de laçage, attaches de câbles ou de torons, utilisés avec les faisceaux de câbles;
- engrenages, cames, courroies, paliers et autres petites parties qui ne constitueraient qu'un apport négligeable de combustible dans un incendie, y compris les PARTIES DÉCORATIVES, les étiquettes, les pieds de montage, les couvercles de serrure, les boutons et les organes analogues;
- fournitures, matières consommables, supports d'enregistrements et d'information;
- parties qui doivent avoir des caractéristiques particulières pour remplir leur fonction, telles que les rouleaux en caoutchouc pour la prise du papier et sa restitution et les tubes d'encre.

*La vérification est effectuée par examen des données du matériel et du matériel et, si nécessaire, par le ou les essais appropriés dans l'Annexe A.*

#### **4.7.3.4 Matériaux pour les composants et les autres parties à l'intérieur des enveloppes contre le feu**

Les exigences pour les matériaux dans les assemblages de filtres à air sont en 4.7.3.5 et les exigences pour les matériaux utilisés dans les composants à haute tension sont en 4.7.3.6.

A l'intérieur des ENVELOPPES CONTRE LE FEU, les matériaux des composants et autres pièces, (y compris les ENVELOPPES MÉCANIQUES et ÉLECTRIQUES situées à l'intérieur des ENVELOPPES CONTRE LE FEU) doivent satisfaire à un des cas suivants:

- être en MATÉRIAU DE CLASSE V-2 ou CELLULAIRE HF-2; ou
- satisfaire à l'essai d'inflammabilité de l'Article A.2; ou
- satisfaire aux exigences sur l'inflammabilité de la norme de composants correspondante de la CEI, qui spécifie de telles exigences.

Les exigences ci-dessus ne s'appliquent à aucun des cas suivants:

- composants électriques qui ne présentent pas de danger de feu dans des conditions de fonctionnement anormales, lorsqu'ils sont essayés suivant 5.3.7;
- matériaux et composants situés à l'intérieur d'une ENVELOPPE de volume inférieur ou égal à 0,06 m<sup>3</sup>, réalisée entièrement en métal et sans ouvertures de ventilation, ou à l'intérieur d'une unité hermétique contenant un gaz inerte;
- une ou plusieurs couches de matériaux d'isolation minces tels que du ruban adhésif, utilisé directement sur une surface quelconque à l'intérieur d'une ENVELOPPE CONTRE LE FEU, y compris la surface des parties transportant le courant, pourvu que la combinaison du matériau d'isolation mince et de la surface d'application satisfasse aux exigences d'une CLASSE V-2 ou CELLULAIRE HF-2;

NOTE Lorsque le matériau d'isolation mince auquel il est fait référence dans l'exemption ci-dessus est sur la surface interne d'une ENVELOPPE CONTRE LE FEU, les exigences de 4.6.2 continuent de s'appliquer à l'ENVELOPPE CONTRE LE FEU.

- boîtiers d'indicateurs (à condition qu'ils soient jugés par ailleurs propres à recevoir des parties sous TENSION DANGEREUSE), cadrans d'indicateurs et lampes ou leurs cabochons de signalisation;
- composants électroniques, comme les circuits intégrés, les opto-coupleurs, les condensateurs et autres petites parties qui sont montés sur un MATÉRIAU DE CLASSE V-1;
- fils, câbles et connecteurs isolés par du PVC, TFE, PTFE, FEP, polychloroprène ou polyimide;
- colliers individuels (à l'exclusion des revêtements hélicoïdaux ou autres revêtements continus), rubans de laçage, attaches de câbles ou de torons utilisés avec les faisceaux de câbles;

- parties ci-après pourvu qu'elles soient séparées par au moins 13 mm d'air ou par une barrière solide en MATÉRIAU DE CLASSE V-1, des parties électriques (autres que les fils et câbles isolés) qui, dans des conditions de défaut, sont susceptibles d'engendrer une température qui pourrait provoquer une inflammation:
  - les engrenages, cames, courroies, paliers et autres petites parties qui ne constituent qu'un apport négligeable de combustible dans un incendie, y compris les parties décoratives, les étiquettes, les pieds de montage, les couvercles de serrure, les boutons et les organes analogues;
  - les fournitures, matières consommables, supports d'enregistrements et d'information;
  - les parties qui doivent avoir des caractéristiques particulières pour remplir leur fonction, telles que les rouleaux en caoutchouc pour la prise du papier et sa restitution et les tubes d'encre;
  - les canalisations pour les circuits d'air ou de tout fluide, les réservoirs pour les poudres ou les liquides et les parties en plastique cellulaire, pourvu qu'ils soient en matériau de CLASSE HB75 si la plus petite épaisseur significative du matériau est < 3 mm ou de CLASSE HB40 si la plus petite épaisseur significative du matériau est ≥ 3 mm, ou de CLASSE CELLULAIRE HBF.

*La vérification est effectuée par examen des données du matériel et du matériau et, si nécessaire, par le ou les essais appropriés de l'Annexe A.*

#### **4.7.3.5 Assemblages de filtres à air**

Les assemblages de filtres à air doivent être construits en MATÉRIAU DE CLASSE V-2 ou HF-2 CELLULAIRE.

Cette exigence ne s'applique pas aux constructions suivantes:

- les assemblages de filtres à air dans les systèmes à circulation d'air, étanches à l'air ou non, qui ne sont pas destinés à avoir de communication avec l'extérieur de l'ENVELOPPE CONTRE LE FEU;
- les assemblages de filtres à air situés à l'intérieur ou à l'extérieur d'une ENVELOPPE CONTRE LE FEU, pourvu que les matériaux du filtre soient séparés par un écran métallique des parties qui pourraient provoquer l'inflammation. Cet écran peut être perforé et doit satisfaire aux exigences de 4.6.2 pour les fonds des ENVELOPPES CONTRE LE FEU;
- les assemblages de filtres à air construits
  - EN MATÉRIAU DE CLASSE HB75 si la plus petite épaisseur significative de ce matériau est < 3 mm, ou
  - EN MATÉRIAU DE CLASSE HB40 si la plus petite épaisseur significative de ce matériau est ≥ 3 mm, ou
  - en MATÉRIAU PLASTIQUE CELLULAIRE DE CLASSE HBF,

pourvu qu'elles soient séparées par au moins 13 mm d'air ou par une barrière solide en MATÉRIAU DE CLASSE V-1, des parties électriques (autres que les fils et câbles isolés) qui, dans des conditions de défaut, sont susceptibles d'engendrer une température qui pourrait provoquer une inflammation.

*La vérification est effectuée par l'examen du matériel et des fiches techniques des matériaux et, si nécessaire, par des essais appropriés.*

#### **4.7.3.6 Matériaux utilisés dans les composants haute tension**

Les composants haute tension fonctionnant à des tensions crête à crête supérieures à 4 kV doivent soit être de CLASSE V-2 soit de CLASSE CELLULAIRE HF-2, soit être conformes à 14.4 de la CEI 60065 soit satisfaire à l'essai au brûleur-aiguille de la CEI 60695-11-5.



*La vérification est effectuée par l'examen du matériel et des fiches techniques des matériaux et, si nécessaire, par*

- les essais pour les MATÉRIAUX DE LA CLASSE V-2 OU CELLULAIRE HF-2; ou*
- l'essai décrit en 14.4 de la CEI 60065; ou*
- l'essai au brûleur-aiguille selon la CEI 60695-11-5.*

*De plus les indications suivantes, qui se réfèrent à la CEI 60695-11-5, s'appliquent:*

#### *Article 7 – Degrés de sévérité*

*La flamme d'essai est appliquée pendant 10 s. Si une flamme auto-alimentée ne dure pas plus de 30 s, la flamme est appliquée à nouveau pendant 1 min au même point ou en tout autre point. Si à nouveau une flamme auto-alimentée ne dure pas plus de 30 s, la flamme d'essai est alors appliquée pendant 2 min au même point ou en tout autre point.*

#### *Article 8 – Préconditionnement*

*A l'exception des transformateurs haute tension et des multiplicateurs haute tension, les spécimens sont maintenus pendant 2 h dans une étuve à la température de  $100\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ .*

*Pour les transformateurs haute tension, une puissance de 10 W (en continu ou en alternatif à la fréquence du réseau) est appliquée initialement au bobinage haute tension. Cette puissance est maintenue pendant 2 min, puis augmentée par paliers successifs de 10 W toutes les 2 min jusqu'à 40 W.*

*L'épreuve dure 8 min ou se termine dès l'apparition d'une rupture du bobinage ou d'une séparation appréciable de l'enveloppe de protection.*

NOTE 1 Certains transformateurs sont conçus de telle sorte que ce preconditionnement ne peut pas être appliqué. Dans ce cas, on applique le preconditionnement dans l'étuve.

*Pour les multiplicateurs haute tension, une tension provenant d'un transformateur haute tension approprié est appliquée à chaque spécimen, le circuit de sortie étant court-circuité.*

*La tension d'entrée est réglée de sorte que le courant de court-circuit initial soit de  $25\text{ mA} \pm 5\text{ mA}$ . Ce courant est maintenu pendant 30 min ou l'épreuve se termine dès l'apparition d'une interruption du circuit ou d'une séparation appréciable de l'enveloppe de protection.*

NOTE 2 Lorsque la conception du multiplicateur haute tension est telle qu'un courant de court-circuit de 25 mA ne peut être obtenu, on utilise un courant de preconditionnement représentant le courant maximal que l'on peut atteindre, déterminé soit par la conception du multiplicateur soit par ses conditions d'utilisation dans un appareil particulier.

#### *Article 11 – Evaluation des résultats d'essai*

*Après la première application de la flamme d'essai, les spécimens ne doivent pas s'être consumés complètement.*

*Après toute application de la flamme d'essai, toute flamme auto-alimentée doit s'être éteinte en 30 s. Il ne doit y avoir ni inflammation du papier mousseline ni roussissement de la planche.*

**Tableau 4E – Résumé des exigences d'inflammabilité des matériaux**

| Partie                                                                                                                                                     |                                                | Exigence                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ENVELOPPE CONTRE LE FEU<br>4.7.3.2                                                                                                                         | MATÉRIELS MOBILES >18 kg et<br>MATÉRIELS FIXES | <ul style="list-style-type: none"> <li>– 5VB</li> <li>– Essai A.1</li> <li>– Essai au fil chauffant de la CEI 60695-2-20 (Si &lt;13 mm d'air avec les parties à haute température qui pourraient causer une inflammation)</li> </ul>                                     |
|                                                                                                                                                            | MATÉRIELS MOBILES ≤18 kg                       | <ul style="list-style-type: none"> <li>– V-1</li> <li>– Essai A.2</li> <li>– Essai au fil chauffant de la CEI 60695-2-20 (Si &lt;13 mm d'air avec les parties à haute température qui pourraient causer une inflammation)</li> </ul>                                     |
|                                                                                                                                                            | Parties qui obturent une ouverture             | <ul style="list-style-type: none"> <li>– V-1</li> <li>– Essai A.2</li> <li>– Norme du composant</li> </ul>                                                                                                                                                               |
| Composants et parties, y compris les ENVELOPPES MÉCANIQUES et les ENVELOPPES ÉLECTRIQUES, à l'extérieur des ENVELOPPES CONTRE LE FEU<br>4.7.3.1 et 4.7.3.3 |                                                | <ul style="list-style-type: none"> <li>– HB40 pour une épaisseur ≥3 mm</li> <li>– HB75 pour une épaisseur &lt;3 mm</li> <li>– HBF</li> <li>– Essai au fil incandescent 550 °C de la CEI 60695-2-11</li> </ul> <p>Pour les connecteurs et les exceptions voir 4.7.3.3</p> |
| Composants et parties, y compris les ENVELOPPES MÉCANIQUES et les ENVELOPPES ÉLECTRIQUES, à l'intérieur des ENVELOPPES CONTRE LE FEU<br>4.7.3.4            |                                                | <ul style="list-style-type: none"> <li>– V-2</li> <li>– HF-2</li> <li>– Essai A.2</li> <li>– Norme du composant</li> </ul> <p>Pour les exceptions voir 4.7.3.4</p>                                                                                                       |
| Assemblages de filtres<br>4.7.3.5                                                                                                                          |                                                | <ul style="list-style-type: none"> <li>– V-2</li> <li>– HF-2</li> <li>– Essai A.2</li> </ul> <p>Pour les exceptions voir 4.7.3.5</p>                                                                                                                                     |
| Composants haute tension (>4 kV)<br>4.7.3.6                                                                                                                |                                                | <ul style="list-style-type: none"> <li>– V-2</li> <li>– HF-2</li> <li>– Essai de 14.4 de la CEI 60065</li> <li>– Essai au brûleur-aiguille de la CEI 60695-11-5</li> </ul>                                                                                               |



## 5 Exigences électriques et simulation de conditions de défauts

### 5.1 Courant de contact et courant dans le conducteur de protection

Dans ce paragraphe, les mesures de courant à travers des réseaux simulant l'impédance du corps humain sont désignées comme mesures de COURANT DE CONTACT.

A l'exception de l'application de 5.1.8.2, ces exigences ne s'appliquent pas aux matériels destinés à être alimentés uniquement par le RÉSEAU D'ALIMENTATION EN COURANT CONTINU.

#### 5.1.1 Généralités

Le matériel doit être conçu et construit de façon que ni le COURANT DE CONTACT ni le COURANT DANS LE CONDUCTEUR DE PROTECTION ne puisse créer un danger de choc électrique.

*La vérification est effectuée par des essais conformément aux exigences de 5.1.2 à 5.1.7 compris et, si c'est applicable, de 5.1.8 (voir aussi 1.4.4).*

*Toutefois, s'il est clair d'après l'étude du diagramme des circuits des MATÉRIELS FIXES RELIÉS À DEMEURE ou des MATÉRIELS DU TYPE B RACCORDÉS PAR PRISE DE COURANT, qui ont un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION, que le COURANT DE CONTACT dépassera 3,5 mA efficaces, mais que le COURANT DANS LE CONDUCTEUR DE PROTECTION ne dépassera pas 5 % du courant de charge, les essais de 5.1.5, 5.1.6 et 5.1.7.1 a) ne sont pas effectués.*

NOTE Dans le cas ci-dessus, l'exigence de 5.1.7.1 b) continue de s'appliquer.

#### 5.1.2 Configuration du matériel en essai

##### 5.1.2.1 Raccordement unique à une alimentation du réseau en courant alternatif

*Les systèmes comprenant des matériels interconnectés avec des connexions individuelles au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF doivent faire l'objet d'un essai individuel sur chaque élément du système. Les systèmes comprenant des matériels interconnectés avec une connexion commune au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF doivent être traités comme un matériel unique. Voir aussi 1.4.10 au sujet des différentes configurations possibles.*

NOTE Les systèmes comprenant des matériels interconnectés sont spécifiés avec plus de détails dans l'Annexe A de la CEI 60990.

##### 5.1.2.2 Raccordements multiples redondants à une alimentation du réseau en courant alternatif

*Les matériels qui sont prévus pour des connexions multiples au réseau à ALIMENTATION EN COURANT ALTERNATIF, dont une seule est nécessaire à la fois, doivent être essayés avec une seule connexion.*

##### 5.1.2.3 Raccordements multiples simultanés à une alimentation du réseau en courant alternatif

*Les matériels qui nécessitent une alimentation venant simultanément de deux alimentations du RÉSEAU EN COURANT ALTERNATIF ou plus doivent être essayés avec toutes les sources d'alimentation connectées.*

*Le COURANT DE CONTACT total traversant tous les CONDUCTEURS DE MISE À LA TERRE DE PROTECTION qui sont connectés entre eux et à la terre est mesuré.*

Un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION qui n'est pas connecté à l'intérieur du matériel à d'autres parties reliées à la terre dans le matériel ne doit pas être inclus dans les essais ci-dessus. Si une source d'alimentation en courant alternatif possède un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION, elle doit être soumise aux essais selon 5.1.2.1 (voir aussi 5.1.7.2).

### 5.1.3 Circuit d'essai

Le matériel est essayé à l'aide du circuit de la Figure 5A (pour les matériels monophasés à connecter uniquement sur des schémas d'alimentation TN étoile ou TT) ou de la Figure 5B (pour les matériels triphasés à connecter uniquement sur des schémas d'alimentation TN étoile ou TT) ou, lorsque c'est approprié, un autre circuit d'essai figurant dans les Figures 7, 9, 10, 12, 13 ou 14 de la CEI 60990.


L'utilisation d'un transformateur d'essai pour l'isolation est optionnel. Pour la protection maximale, un transformateur d'essai pour l'isolation (T dans les Figures 5A et 5B) est utilisé et la borne principale de mise à la terre de protection du matériel à l'essai est mise à la terre. Toute fuite capacitive dans le transformateur doit être prise en compte. En variante à la mise à la terre du matériel à l'essai, le secondaire du transformateur d'essai et le matériel à l'essai sont laissés flottants (non mis à la terre), auquel cas il n'est pas nécessaire de tenir compte de la fuite capacitive dans le transformateur.

Si le transformateur T n'est pas utilisé, l'appareil en essai et les circuits d'essai ne doivent pas être mis à la terre. Le matériel en essai est placé sur un support isolant, et des précautions adéquates de sécurité sont prises dans l'éventualité de la mise sous TENSION DANGEREUSE de la MASSE du matériel.

Les matériels à connecter sur un schéma d'alimentation IT sont essayés en conséquence (voir les Figures 9, 10 et 12 de la CEI 60990). De tels matériels peuvent aussi être connectés sur des schémas d'alimentation TN ou TT sans autre essai.


Un matériel monophasé destiné à fonctionner entre deux conducteurs de phase est essayé à l'aide d'un circuit d'essai triphasé tel que celui de la Figure 5B.

S'il y a un inconvénient à essayer le matériel à la tension d'alimentation la plus défavorable (voir 1.4.5), il est permis de faire l'essai à n'importe quelle tension disponible dans la PLAGE ASSIGNÉE DE TENSIONS ou dans la tolérance de la TENSION ASSIGNÉE, et de calculer ensuite les résultats.

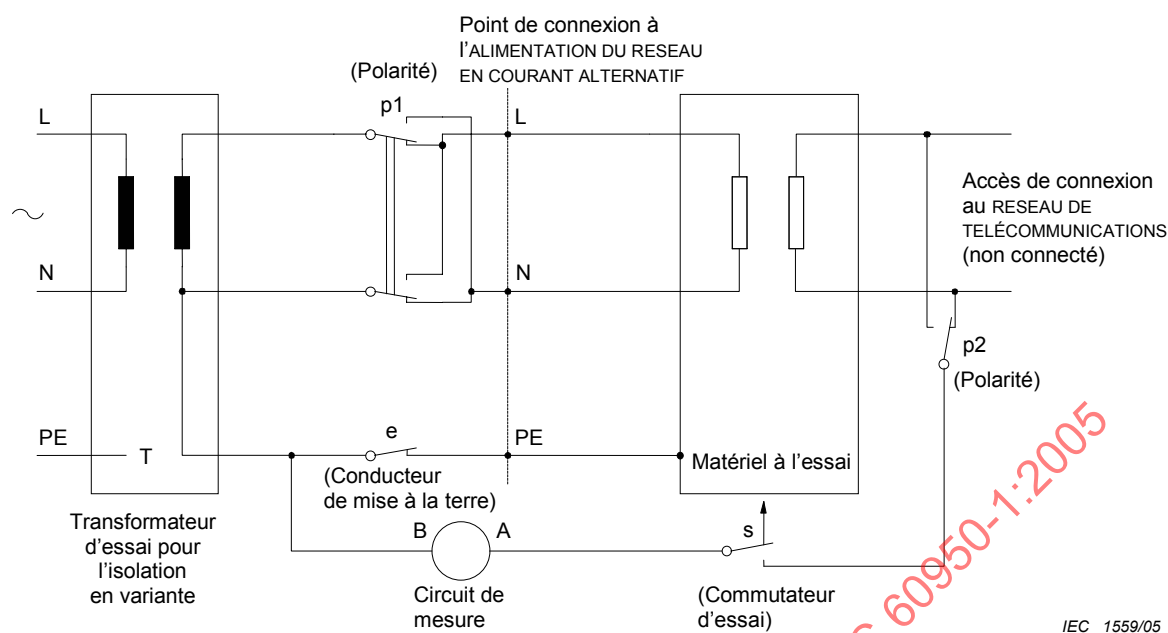

NOTE Cette figure est tirée de la Figure 6 de la CEI 60990.

**Figure 5A – Circuit d'essai pour le courant de contact d'un matériel monophasé sur des schémas d'alimentation TN étoile ou TT**

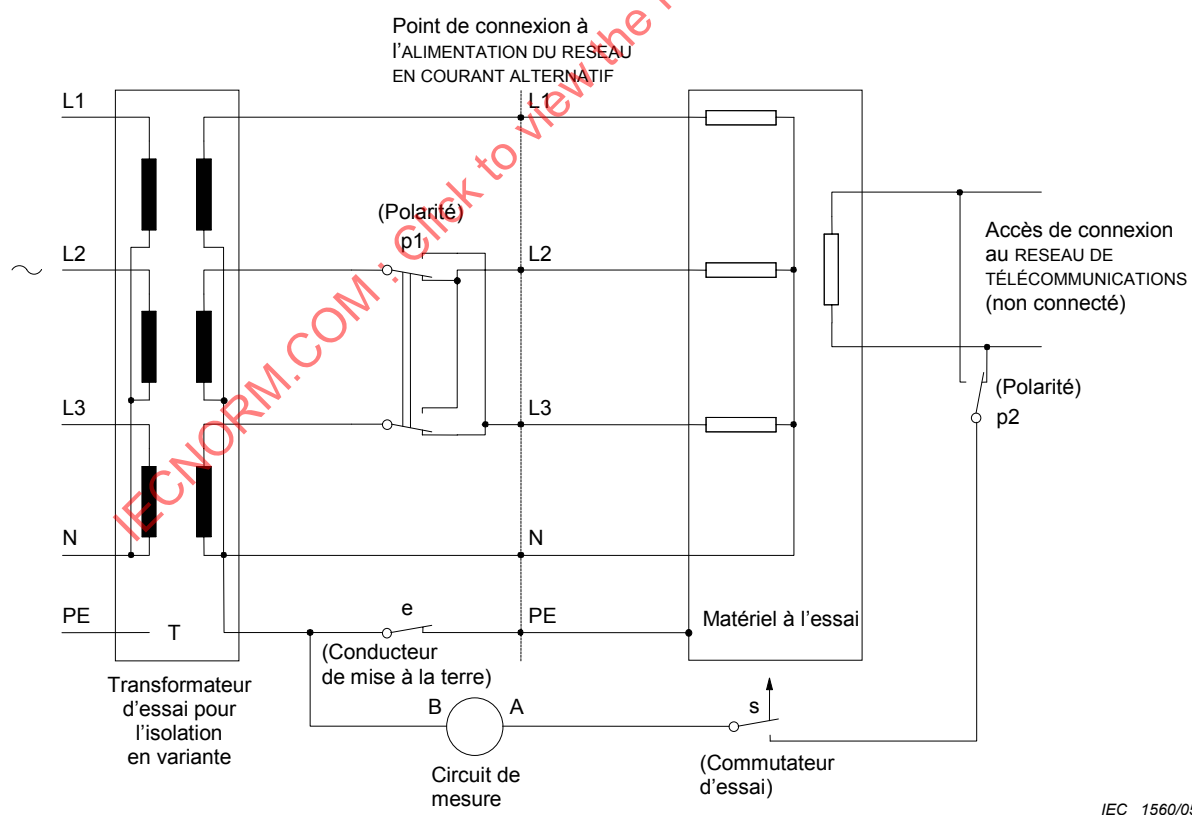

NOTE Cette figure est tirée de la Figure 11 de la CEI 60990.

**Figure 5B – Circuit d'essai pour le courant de contact d'un matériel triphasé sur des schémas d'alimentation TN étoile ou TT**

#### 5.1.4 Application de l'appareil de mesure

*Les essais sont effectués à l'aide de l'un des appareils de mesure de l'Annexe D, ou de tout autre circuit donnant les mêmes résultats.*

*L'extrémité B de l'appareil de mesure est connectée au conducteur mis à la terre (neutre) de l'alimentation (voir Figure 5A ou 5B).*

*L'extrémité A de l'appareil de mesure est connectée comme spécifié en 5.1.5.*

*Pour une partie accessible non conductrice, l'essai est effectué vers une feuille métallique de dimensions 100 mm sur 200 mm en contact avec la partie. Si la surface de la feuille est plus petite que la surface en essai, la feuille est déplacée pour essayer toutes les parties de la surface. Lorsqu'une feuille métallique adhésive est utilisée, l'adhésif doit être conducteur. Des précautions sont prises pour empêcher que la feuille métallique n'affecte la dissipation de chaleur du matériel.*

NOTE 1 L'essai utilisant la feuille simule le contact de la main.

*Les parties conductrices qui sont connectées de manière fortuite à d'autres parties sont essayées à la fois comme parties connectées et comme parties déconnectées.*

NOTE 2 Les parties connectées de manière fortuite sont décrites avec plus de détails dans l'Annexe C de la CEI 60990.

#### 5.1.5 Procédure d'essai

*Pour les matériels ayant une connexion de mise à la terre de protection ou une connexion de MISE À LA TERRE FONCTIONNELLE, l'extrémité A de l'appareil de mesure est connectée par l'intermédiaire de l'interrupteur de mesure «s», à la borne principale de mise à la terre du matériel à l'essai, l'interrupteur «e» du conducteur de mise à la terre étant ouvert.*

*L'essai est aussi effectué, sur tous les matériels, avec l'extrémité A du réseau de mesure connecté par l'intermédiaire de l'interrupteur de mesure «s», à chaque partie accessible non mise à la terre ou non conductrice et à chaque circuit accessible non mis à la terre, à tour de rôle, l'interrupteur «e» du conducteur de mise à la terre étant fermé.*

*De plus:*

- pour les matériels monophasés, les essais sont répétés en polarité inversée (interrupteur «p1»);*
- pour les matériels triphasés, les essais sont répétés en polarité inversée (interrupteur «p1») à moins que le matériel ne soit sensible à la séquence de phases.*

*Lors des essais des matériels triphasés, tous les composants utilisés pour des raisons de CEM et reliés entre phase et terre sont déconnectés un par un. A cet effet, les groupes de composants en parallèle reliés par une connexion unique sont traités comme des composants uniques. Chaque fois qu'on déconnecte une connexion à la terre du composant, la séquence de manœuvres des interrupteurs est répétée.*

NOTE Si les filtres sont normalement enrobés, il peut être nécessaire de fournir un filtre non enrobé pour cet essai ou de simuler le réseau du filtre.

*Pour chaque position de l'appareil de mesure, tous les interrupteurs dans le CIRCUIT PRIMAIRE et susceptibles d'être manœuvrés en usage normal sont ouverts et fermés dans toutes les combinaisons possibles.*

*Après application de chacune des conditions d'essai, le matériel est ramené à son état de fonctionnement d'origine, sans défaut ou dommage consécutif.*

### 5.1.6 Mesures d'essai

Soit la valeur efficace de la tension,  $U_2$ , est mesurée à l'aide de l'appareil de mesure de la Figure D.1, soit la valeur efficace du courant est mesurée à l'aide de l'appareil de mesure de la Figure D.2.

L'appareil D.1 permet une mesure plus précise que l'appareil D.2 si la forme d'onde est non sinusoïdale et si la fréquence fondamentale dépasse 100 Hz.

En variante, la valeur de crête de la tension,  $U_2$ , est mesurée à l'aide de l'appareil de mesure décrit à l'Article D.1.

Si la tension,  $U_2$ , est mesurée à l'aide de l'appareil de mesure décrit à l'Article D.1, le calcul suivant est utilisé:

$$\text{COURANT DE CONTACT (A)} = U_2 / 500$$

NOTE Bien que les valeurs efficaces du COURANT DE CONTACT aient traditionnellement été mesurées, les valeurs de crête fournissent une meilleure corrélation avec la réponse du corps humain aux formes d'onde de courant non sinusoïdal.

Aucune des valeurs mesurées conformément à 5.1.6 ne doit dépasser les limites correspondantes du Tableau 5A, à l'exception de ce qui est permis en 2.4 (voir aussi 1.5.6 et 1.5.7) et 5.1.7.

**Tableau 5A – Courant maximal**

| Type de matériel                                                                                                                                                                     | Borne A de l'appareil de mesure reliée à:                                           | COURANT DE CONTACT maximal mA efficace <sup>a</sup> | COURANT maximal DANS LE CONDUCTEUR DE PROTECTION |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------------------|
| Tous les matériels                                                                                                                                                                   | Parties accessibles et circuits non connectés à la terre de protection <sup>b</sup> | 0,25                                                | –                                                |
| PORTATIFS                                                                                                                                                                            | Borne principale de mise à la terre de protection (si elle existe)                  | 0,75                                                | –                                                |
| PORTABLES (autres que PORTATIFS mais y compris les TRANSPORTABLES)                                                                                                                   |                                                                                     | 3,5                                                 | –                                                |
| FIXES, TYPE A RELIÉS PAR PRISE DE COURANT                                                                                                                                            |                                                                                     | 3,5                                                 | –                                                |
| Tous les autres MATÉRIELS FIXES                                                                                                                                                      |                                                                                     | 3,5                                                 | –                                                |
| – non soumis aux conditions de 5.1.7                                                                                                                                                 |                                                                                     | –                                                   | 5 % du courant d'entrée                          |
| – soumis aux conditions de 5.1.7                                                                                                                                                     |                                                                                     | –                                                   | 5 % du courant d'entrée                          |
| <sup>a</sup> Si des valeurs de crête du COURANT DE CONTACT sont mesurées, les valeurs maximales sont obtenues en multipliant les valeurs efficaces dans le tableau par 1,414.        |                                                                                     |                                                     |                                                  |
| <sup>b</sup> Certaines parties accessibles non reliées à la terre sont couvertes par 1.5.6 et 1.5.7 et les exigences de 2.4 s'appliquent. Elles peuvent différer de celles de 5.1.6. |                                                                                     |                                                     |                                                  |

### 5.1.7 Matériel avec un courant de contact dépassant 3,5 mA

#### 5.1.7.1 Généralités

Les résultats de mesure du COURANT DE CONTACT dépassant 3,5 mA en valeur efficace sont autorisés pour les matériels suivants qui possèdent une borne de mise à la terre de protection:

- MATÉRIEL FIXE RELIÉ À DEMEURE;
- MATÉRIEL FIXE DU TYPE B RACCORDÉ PAR PRISE DE COURANT;
- MATÉRIEL FIXE DU TYPE A RACCORDÉ PAR PRISE DE COURANT avec une connexion unique au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF et équipé d'une borne de mise à la terre de protection en plus de la borne principale de mise à la terre de protection, le cas échéant (voir 2.6.4.1). Les instructions d'installation doivent spécifier que cette borne séparée de mise à la terre de protection est reliée à la terre de façon permanente;

NOTE 1 Le matériel ci-dessus ne doit pas être installé à un EMPLACEMENT À ACCÈS RESTREINT. Toutefois, l'exigence pour le MATÉRIEL FIXE est plus sévère que les exigences similaires de 2.3.2.3 a) parce que le risque potentiel est plus important.

- MATÉRIEL MOBILE ou le MATÉRIEL DU TYPE A RACCORDÉ PAR PRISE DE COURANT destiné à être utilisé dans UN EMPLACEMENT À ACCÈS RESTREINT avec une connexion unique au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF et équipé d'une borne de mise à la terre de protection séparée en plus de la borne principale de mise à la terre de protection, le cas échéant (voir 2.6.4.1). Les instructions d'installation doivent spécifier que cette borne séparée de mise à la terre de protection est reliée à la terre de façon permanente;

NOTE 2 La limitation d'utilisation à un EMPLACEMENT À ACCÈS RESTREINT est plus sévère que les exigences similaires de 2.3.2.3 a) parce que le risque potentiel est plus important.

- MATÉRIEL FIXE DU TYPE A RACCORDÉ PAR PRISE DE COURANT avec connexions multiples simultanées au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, destiné à être utilisé à un emplacement disposant d'une liaison équipotentielle (par exemple un centre de télécommunications, une salle informatique dédiée ou un EMPLACEMENT À ACCÈS RESTREINT). Une borne de mise à la terre de protection supplémentaire séparée doit être prévue sur le matériel. Les instructions d'installation doivent exiger tous les éléments suivants:

- l'installation du bâtiment doit fournir un moyen de connexion à la terre de protection; et
- le matériel doit être connecté à ce moyen; et
- une personne du PERSONNEL DE MAINTENANCE doit vérifier si le socle de prise qui doit alimenter le matériel possède ou non une connexion à la terre de protection du bâtiment. Si tel n'est pas le cas, la personne membre du PERSONNEL DE MAINTENANCE doit pourvoir à l'installation d'un CONDUCTEUR DE MISE A LA TERRE DE PROTECTION entre la borne de mise à la terre de protection séparée et le fil de terre de protection dans le bâtiment.

NOTE 3 En Finlande, en Norvège et en Suède, les résultats de mesure du COURANT DE CONTACT qui dépassent 3,5 mA en valeur efficace sont autorisés uniquement pour le matériel suivant:

- MATÉRIEL FIXE DU TYPE A RACCORDÉ PAR PRISE DE COURANT qui
  - est destiné à être utilisé dans un EMPLACEMENT À ACCÈS RESTREINT où la liaison équipotentielle a été appliquée, par exemple dans un centre de télécommunications; et
  - est équipé pour un CONDUCTEUR DE MISE À LA TERRE DE PROTECTION relié à demeure; et
  - est fourni avec des instructions pour l'installation de ce conducteur par une personne du PERSONNEL DE MAINTENANCE;
- MATÉRIEL FIXE DU TYPE B RACCORDÉ PAR PRISE DE COURANT;
- MATÉRIEL FIXE RELIÉ À DEMEURE.

NOTE 4 Au Danemark, les résultats des mesures du COURANT DE CONTACT dépassant 3,5 mA en valeur efficace sont autorisés uniquement pour les MATÉRIELS RELIÉS A DEMEURE et les MATÉRIELS DE TYPE B RACCORDÉS PAR PRISE DE COURANT.

Si le résultat de la mesure du COURANT DE CONTACT sur l'un des matériels indiqués ci-dessus dépasse 3,5 mA en valeur efficace, les exigences suivantes a) et b) s'appliquent ainsi que celles de 5.1.7.2, le cas échéant.

- a) Le COURANT efficace DANS LE CONDUCTEUR DE PROTECTION ne doit pas dépasser 5 % du courant de charge par phase dans les conditions normales de fonctionnement. Si la charge n'est pas équilibrée, on doit utiliser pour ce calcul le plus élevé des courants sur les trois phases.

Pour mesurer le COURANT DU CONDUCTEUR DE PROTECTION, la procédure pour mesurer le COURANT DE CONTACT est utilisée, mais l'appareil de mesure est remplacé par un ampèremètre à impédance négligeable; et

- b) une des étiquettes suivantes, ou une étiquette portant une phrase analogue, doit être fixée au voisinage de la connexion du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF:

**AVERTISSEMENT**  
**COURANT DE FUITE ÉLEVÉ**  
**RACCORDEMENT À LA TERRE**  
**INDISPENSABLE**  
**AVANT LE RACCORDEMENT À**  
**L'ALIMENTATION**

**AVERTISSEMENT**  
**COURANT DE CONTACT ÉLEVÉ**  
**RACCORDEMENT À LA TERRE**  
**INDISPENSABLE**  
**AVANT LE RACCORDEMENT À**  
**L'ALIMENTATION**

*La vérification est effectuée par examen et par des mesures.*

#### **5.1.7.2 Connexions multiples simultanées à l'alimentation**

*Ce qui suit s'applique au matériel essayé selon 5.1.2.3. Si le résultat de la mesure du COURANT DE CONTACT total dépasse 3,5 mA en valeur efficace, l'essai est répété avec chaque RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF et son CONDUCTEUR DE TERRE DE PROTECTION connecté un à la fois, l'autre RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF, y compris ses CONDUCTEURS DE TERRE DE PROTECTION, étant déconnecté. Toutefois, si deux connexions au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF sont inséparables, par exemple des connexions pour un moteur et ses circuits de commande, elles doivent être toutes les deux sous tension pour un essai répété.*

NOTE Il n'est pas attendu que le matériel en essai fonctionne normalement au cours de cet essai.

*Si le résultat de la mesure du COURANT DE CONTACT pour un des essais répétés dépasse 3,5 mA en valeur efficace, les exigences de 5.1.7.1 a) s'appliquent à la connexion concernée avec le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF. Pour calculer 5 % du courant d'entrée par phase, on utilise le courant d'entrée provenant du RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF mesuré au cours de l'essai répété.*

#### **5.1.8 Courants de contact transmis vers des réseaux de télécommunications et des systèmes de distribution par câbles et reçus des réseaux de télécommunications**

NOTE Dans le présent paragraphe, les références aux «accès de connexion du RÉSEAU DE TÉLÉCOMMUNICATIONS» (ou accès de télécommunications) sont destinées à couvrir les points de connexion auxquels un RÉSEAU DE TÉLÉCOMMUNICATIONS est destiné à être raccordé. De telles références ne sont pas destinées à inclure d'autres accès de données, tels que ceux qui sont communément identifiés comme série, parallèles, clavier, jeu, manette, etc.

##### **5.1.8.1 Limitation du courant de contact transmis à un réseau de télécommunications et à un système de distribution par câbles**

Le COURANT DE CONTACT d'un matériel alimenté par un RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF vers un RÉSEAU DE TÉLÉCOMMUNICATIONS ou un SYSTÈME DE DISTRIBUTION PAR CÂBLES doit être limité.

*La vérification est effectuée à l'aide du circuit d'essai détaillé en 5.1.3.*

*Les essais ne sont pas effectués sur les matériels dans lesquels le circuit à relier à un RÉSEAU DE TÉLÉCOMMUNICATIONS ou à un SYSTÈME DE DISTRIBUTION PAR CÂBLES est connecté à la borne de mise à la terre de protection ou à la borne de MISE À LA TERRE FONCTIONNELLE dans le matériel. Le courant du matériel à l'essai vers le RÉSEAU DE TÉLÉCOMMUNICATIONS ou le SYSTÈME DE DISTRIBUTION PAR CÂBLES est considéré comme étant égal à zéro.*



*Pour les matériels ayant plus d'un circuit à connecter au RÉSEAU DE TÉLÉCOMMUNICATIONS ou au SYSTÈME DE DISTRIBUTION PAR CÂBLES, l'essai est effectué sur un seul exemple de chaque type de circuit.*

*Pour les matériels qui n'ont pas de borne principale de mise à la terre de protection, l'interrupteur du conducteur de protection "e", s'il est connecté à une borne de MISE À LA TERRE FONCTIONNELLE sur le matériel à l'essai, est laissé ouvert. Sinon il est fermé.*

*La borne B de l'appareil de mesure est connectée au conducteur mis à la terre (neutre) de l'alimentation. La borne A est connectée par l'intermédiaire de l'interrupteur de mesure «s» et l'interrupteur de polarité «p2» à l'accès de connexion du RÉSEAU DE TÉLÉCOMMUNICATIONS ou du SYSTÈME DE DISTRIBUTION PAR CÂBLES.*

*Pour les matériels monophasés l'essai est effectué dans toutes les combinaisons des interrupteurs de polarité "p1" et "p2".*

*Pour les matériels triphasés, l'essai est effectué dans les deux positions de l'interrupteur de polarité "p2".*

*Après application de chacune des conditions d'essai, le matériel est ramené à son état de fonctionnement d'origine.*

*Les mesures d'essai sont effectuées à l'aide de l'un des appareils de mesure de l'Annexe D comme décrit en 5.1.6.*

*Aucune des valeurs mesurées conformément à 5.1.8.1 ne doit dépasser 0,25 mA en valeur efficace.*

#### **5.1.8.2 Somme des courants de contact reçus des réseaux de télécommunications**

NOTE L'Annexe W explique la base de 5.1.8.2.

Un matériel à l'essai qui fournit des accès de connexion du RÉSEAU DE TÉLÉCOMMUNICATIONS pour la connexion de multiples éléments d'autres matériels de télécommunications ne doit pas créer un danger pour les UTILISATEURS et le PERSONNEL DE MAINTENANCE du RÉSEAU DE TÉLÉCOMMUNICATIONS du fait de la somme des courants de contacts.

Dans ces exigences, les abréviations ont la signification suivante:

- $I_1$  est le COURANT DE CONTACT reçu d'autres matériels par l'intermédiaire d'un RÉSEAU DE TÉLÉCOMMUNICATIONS à l'accès de télécommunication du matériel à l'essai;
- $\Sigma I_1$  est la somme des COURANTS DE CONTACT reçus d'autres matériels à tous les accès de télécommunications du matériel à l'essai;
- $I_2$  est le COURANT DE CONTACT dû au RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF du matériel à l'essai.

Il doit être supposé que chaque accès de télécommunications reçoit 0,25 mA ( $I_1$ ) de l'autre matériel, à moins que l'on sache que le courant réel venant de l'autre matériel est inférieur.

Les exigences suivantes, a) ou b) suivant celle qui s'applique, doivent être respectées:

##### **a) Matériel à l'essai avec des accès de télécommunications mis à la terre**

Pour un matériel à l'essai dans lequel chaque accès de télécommunications est relié à la borne de mise à la terre de protection du matériel à l'essai, les points suivants 1), 2) et 3) doivent être pris en considération:



- 1) si  $\sum I_1$  (non compris  $I_2$ ) dépasse 3,5 mA:
  - le matériel doit être équipé d'une possibilité de connexion permanente à la terre de protection en plus du CONDUCTEUR DE MISE À LA TERRE DE PROTECTION dans le câble d'alimentation des MATÉRIELS DE TYPE A OU B RACCORDÉS PAR PRISE DE COURANT; et
  - les instructions d'installation doivent spécifier la fourniture d'une connexion permanente à la terre de protection, avec une section au moins égale à 2,5 mm<sup>2</sup>, si elle a une protection mécanique, sinon de 4,0 mm<sup>2</sup>; et
  - une des étiquettes suivantes, ou une étiquette portant une phrase analogue, doit être fixée au voisinage de la connexion permanente à la terre. Il est permis de combiner cette étiquette avec l'étiquette de 5.1.7.1 b).

**AVERTISSEMENT**

**COURANT DE FUITE ÉLEVÉ  
RACCORDEMENT À LA TERRE  
INDISPENSABLE  
AVANT LE RACCORDEMENT  
AU RÉSEAU DE TÉLÉCOMMUNICATIONS**

**AVERTISSEMENT**

**COURANT DE CONTACT ÉLEVÉ  
RACCORDEMENT À LA TERRE  
INDISPENSABLE  
AVANT LE RACCORDEMENT  
AU RÉSEAU DE TÉLÉCOMMUNICATIONS**

- 2)  $\sum I_1$  plus  $I_2$  doit satisfaire aux limites du Tableau 5A (voir 5.1.6).
- 3) Si c'est applicable, un tel matériel doit satisfaire à 5.1.7. La valeur de  $I_2$  doit être utilisée pour calculer la limite de 5 % du courant d'entrée par phase spécifiée en 5.1.7.

*La vérification de la conformité au point a) est effectuée par examen et, si nécessaire, par un essai.*

*Si le matériel est équipé d'une possibilité de connexion permanente à la terre de protection conformément au point 1) ci-dessus, il n'est pas nécessaire de faire des mesures, excepté que  $I_2$  doit satisfaire aux exigences applicables de 5.1.*

*Les essais de COURANT DE CONTACT, s'ils sont nécessaires, sont effectués à l'aide de l'appareil de mesure convenable décrit à l'Annexe D ou de tout autre appareil donnant les mêmes résultats. Une source en courant alternatif à couplage capacitif de la même fréquence de ligne et phase que le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF est appliquée à chaque accès de télécommunications de façon que 0,25 mA, ou le courant réel venant du matériel si on sait qu'il est inférieur, soit disponible pour traverser cet accès de télécommunications. Le courant circulant dans le conducteur de protection est alors mesuré.*

**b) Matériel à l'essai dont les accès de télécommunications n'ont pas de référence par rapport à la terre de protection**

Si les accès de télécommunications sur le matériel n'ont pas de connexion commune, chaque accès de télécommunications doit satisfaire à 5.1.8.1.

Si tous les accès de télécommunications ou si un groupe de tels accès ont une connexion commune, le COURANT DE CONTACT total de chaque connexion commune ne doit pas dépasser 3,5 mA.

*La vérification de la conformité au point b) est effectuée par examen et, si nécessaire, par les essais de 5.1.8.1 ou, s'il y a des points de connexion commune, par l'essai suivant.*

*Une source en courant alternatif à couplage capacitif de même fréquence de ligne et de même phase que le RÉSEAU D'ALIMENTATION EN COURANT ALTERNATIF est appliquée à chaque accès de télécommunications de façon que 0,25 mA, ou le courant réel venant du matériel si l'on sait qu'il est inférieur, soit disponible pour traverser cet accès de télécommunications. Les points de connexion communs sont essayés conformément à 5.1, que ces points soient accessibles ou non.*

## 5.2 Rigidité diélectrique

NOTE Lorsque l'on fait référence à l'essai de rigidité diélectrique de 5.2 dans d'autres parties de cette norme, on considère que l'essai de rigidité diélectrique est effectué à chaud conformément à 5.2.1.

Lorsque l'on fait une référence spécifique à l'essai de rigidité diélectrique à 5.2.2 dans d'autres parties de cette norme, on considère que l'essai de rigidité diélectrique est effectué sans le chauffage préalable donné en 5.2.1.

### 5.2.1 Généralités

La rigidité diélectrique de l'ISOLATION SOLIDE utilisée dans le matériel doit être appropriée.

*La vérification est effectuée conformément à 5.2.2 alors que le matériel est encore en bonne condition de température immédiatement après l'essai d'échauffement de 4.5.2.*

*Si un composant ou un sous-ensemble est essayé séparément à l'extérieur du matériel, il est porté à la température atteinte par cette partie pendant l'essai d'échauffement de 4.5.2 (par exemple en le plaçant dans une étuve) avant l'essai de rigidité diélectrique. Toutefois, il est permis que les essais de rigidité diélectrique des matériaux en couches minces pour l'ISOLATION SUPPLÉMENTAIRE ou l'ISOLATION RENFORCÉE selon 2.10.5.9 ou 2.10.5.10 soient effectués à la température ambiante.*

*Aucun essai de rigidité diélectrique ne s'applique à l'isolation d'un transformateur entre un enroulement quelconque et le noyau ou l'écran, pourvu que le noyau ou l'écran soit totalement enfermé ou mis sous boîtier rempli et qu'il n'y ait aucune connexion électrique au noyau ou à l'écran. Toutefois, les essais entre les parties qui ont des sorties continuent de s'appliquer.*

### 5.2.2 Procédure d'essai

*Sauf spécification contraire dans la présente norme, l'isolation est soumise soit à une tension pratiquement sinusoïdale, de 50 Hz ou 60 Hz soit à une TENSION CONTINUE de valeur égale à la valeur de crête de la tension d'essai alternative prescrite.*

*Les tensions d'essai pour la rigidité diélectrique pour la qualité appropriée d'isolation (ISOLATION FONCTIONNELLE si prescrite en 5.3.4 b), ISOLATION PRINCIPALE, ISOLATION SUPPLÉMENTAIRE OU ISOLATION RENFORCÉE) sont telles que spécifiées soit:*

- *au Tableau 5B en utilisant la VALEUR DE CRÊTE DE LA TENSION DE SERVICE (U) en 2.10.2; soit*
- *au Tableau 5C en utilisant la TENSION DE TENUE PRESCRITE, telle que déterminée à l'Article G.4.*

NOTE 1 A différents endroits dans la présente norme, des essais spéciaux de rigidité diélectrique ou des tensions d'essai spéciales sont spécifiés pour certaines situations. Les tensions d'essai de 5.2.2 ne s'appliquent pas à de telles situations.

NOTE 2 Pour la prise en compte des surtensions temporaires, voir la CEI 60664-1.

*Pour les matériels des catégories de surtension I et II, il est permis d'utiliser soit le Tableau 5B soit le Tableau 5C. Toutefois, pour un CIRCUIT SECONDAIRE qui n'est ni connecté à une terre de protection ni équipé d'une grille de protection conforme à 2.6.1 e), c'est le Tableau 5C qui doit être utilisé.*

*Pour les matériels des catégories de surtensions III et IV, le Tableau 5C doit être utilisé.*

*La tension appliquée à l'isolation en essai est amenée progressivement de zéro à la tension prescrite, et maintenue à cette valeur pendant 60 s.*

*Si, ailleurs dans la présente norme, des ESSAIS INDIVIDUELS DE SÉRIE sont prescrits conformément à 5.2.2, il est permis de réduire la durée de l'essai de rigidité diélectrique à 1 s pour réduire de 10 % la tension d'essai autorisée au Tableau 5C.*

*Il ne doit pas se produire de rupture de l'isolation pendant l'essai.*

*On considère qu'il s'est produit une rupture de l'isolation lorsque le courant qui circule par l'effet de l'application de la tension d'essai augmente rapidement d'une façon incontrôlée, c'est-à-dire que l'isolation n'empêche plus la circulation du courant. L'effet de couronne ou un simple contournement momentané n'est pas considéré comme une perforation de l'isolation.*

*Les revêtements isolants sont essayés avec une feuille métallique en contact avec la surface isolante. Cette procédure est limitée aux endroits où l'isolation est présumée faible, par exemple aux endroits où des arêtes vives métalliques se trouvent sous l'isolation. Lorsque c'est possible, les revêtements d'isolation sont essayés séparément. On veille à ce que la feuille métallique soit placée de telle façon qu'il ne se produise pas de contournement aux bords de l'isolation. Lorsqu'une feuille métallique adhésive est utilisée, l'adhésif doit être conducteur.*

*Pour éviter les dommages aux composants ou aux isolations qui ne sont pas concernés par l'essai, il est permis de déconnecter les circuits intégrés ou analogues ainsi que d'utiliser une liaison équipotentielle.*

*Pour le matériel comportant à la fois une ISOLATION RENFORCÉE et des natures d'isolation plus faibles, on veille à ce que la tension appliquée à l'ISOLATION RENFORCÉE ne produise pas de contraintes trop élevées sur l'ISOLATION PRINCIPALE ou sur l'ISOLATION SUPPLÉMENTAIRE.*

NOTE 3 Lorsqu'il y a des condensateurs sur l'isolation à l'essai (par exemple condensateurs d'antiparasitage), il est recommandé d'utiliser des tensions d'essai continues.

NOTE 4 Il y a lieu de déconnecter les composants qui fournissent un chemin en courant continu en parallèle avec l'isolation à essayer, tels que les résistances de décharge des condensateurs de filtre et les dispositifs de limitation de tension.

*Lorsque l'isolation d'un enroulement de transformateur varie le long de la longueur de l'enroulement conformément à 2.10.1.5, une méthode d'essai de rigidité diélectrique qui en tient compte est utilisée.*

NOTE 5 Un exemple d'une telle méthode d'essai est une méthode dans laquelle une tension d'essai induite est appliquée à une fréquence suffisamment élevée pour éviter la saturation du transformateur. On augmente la tension d'entrée jusqu'à une valeur qui induit une tension de sortie égale à la tension d'essai requise.

*Aucun essai n'est appliqué à l'ISOLATION FONCTIONNELLE à moins que 5.3.4 b) n'ait été choisi.*