

INTERNATIONAL STANDARD



Digital audio interface –
Part 3: Consumer applications

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 60988-3:2021 RVV



IEC 60958-3

Edition 4.0 2021-09
REDLINE VERSION

INTERNATIONAL STANDARD



Digital audio interface –
Part 3: Consumer applications

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160.01

ISBN 978-2-8322-1024-9

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	7
INTRODUCTION to Amendment 1	7
INTRODUCTION to Amendment 2	7
1 Scope.....	10
2 Normative references.....	10
3 Terms and definitions	10
4 Interface format	11
5 Channel status	11
5.1 General.....	11
5.2 Application.....	11
5.2.1 Channel status general format.....	11
5.2.2 Mode 0 channel status format for digital audio equipment for consumer use	14
5.3 Copyright management guidelines for consumer application of the digital audio interface	20
5.3.1 General	20
5.3.2 Category code groups	21
6 User data	24
6.1 General.....	24
6.2 Application.....	24
6.2.1 User data bitstream.....	24
6.2.2 User data message structure.....	24
6.2.3 Equipment classification.....	25
6.2.4 User data message length and contents	25
6.3 Information for synchronization.....	27
6.3.1 General	27
6.3.2 SMPTE time code information	27
6.3.3 Latency information.....	29
6.3.4 Loudness information.....	30
Annex A (normative) Application of the digital audio interface in the compact disc digital audio system	32
A.1 Overview.....	32
A.2 General: application-specific details.....	32
A.3 Channel status: application-specific details.....	32
A.4 User data: application-specific details.....	32
Annex B (normative) Application of the digital interface in the 2-channel PCM encoder/decoder.....	34
B.1 Overview.....	34
B.2 General: application-specific details.....	34
B.3 Channel status: application-specific details.....	34
B.4 User data: application-specific details.....	34
Annex C (normative) Application of the digital interface in the 2-channel digital audio tape recorder in the consumer mode	35
C.1 Overview.....	35
C.2 General: application-specific details.....	35
C.3 Channel status: application-specific details.....	35

C.4	User data: application-specific details	36
Annex D (normative)	Application of the digital interface in laser optical digital audio systems for which no other category code is defined	39
D.1	Overview	39
D.2	General: application-specific details	39
D.3	Channel status: application-specific details	39
D.4	User data: application-specific details	39
Annex E (normative)	Application of the digital interface in a digital audio mixer in the consumer mode	40
E.1	Overview	40
E.2	General: application-specific details	40
E.3	Channel status: application-specific details	40
E.4	User data: application specific details	40
Annex F (normative)	Application of the digital interface with a sampling rate converter in the consumer mode	41
F.1	Overview	41
F.2	General: application-specific details	41
F.3	Channel status: application-specific details	41
F.4	User data: application-specific details	41
Annex G (normative)	Application of the digital interface with a digital sound sampler in the consumer mode	42
G.1	Overview	42
G.2	General: application-specific details	42
G.3	Channel status: application-specific details	42
G.4	User data: application specific details	42
Annex H (normative)	Application of the digital interface in a digital broadcast receiver (Japan) in the consumer mode	43
H.1	Overview	43
H.2	General: application-specific details	43
H.3	Channel status: application-specific details	43
H.4	User data: application-specific details	43
Annex I (normative)	Application of the digital interface in a digital broadcast receiver (Europe) in the consumer mode	44
I.1	Overview	44
I.2	General: application-specific details	44
I.3	Channel status: application-specific details	44
I.4	User data: application-specific details	44
Annex J (normative)	Application of the digital interface in a digital broadcast receiver (USA) in the consumer mode	45
J.1	Overview	45
J.2	General: application-specific details	45
J.3	Channel status: application-specific details	45
J.4	User data: application-specific details	45
Annex K (normative)	Application of the digital interface for electronic software delivery in the consumer mode	46
K.1	Overview	46
K.2	General: application-specific details	46
K.3	Channel status: application-specific details	46
K.4	User data: application-specific details	46

Annex L (normative) Application of the digital interface in the digital compact cassette system in the consumer mode	47
L.1 Overview.....	47
L.2 General: application-specific details.....	47
L.3 Channel status: application-specific details	47
L.4 User data: application-specific details	47
L.4.1 General	47
L.4.2 Marker mode.....	47
L.4.3 Extended mode	48
Annex M (normative) Application of the digital interface in the mini-disc system in the consumer mode	52
M.1 Overview.....	52
M.2 General: application-specific details.....	52
M.3 Channel status: application-specific details	52
M.4 User data: application-specific details	52
Annex N (normative) Application of the digital interface in a digital sound processor in the consumer mode	53
N.1 Overview.....	53
N.2 General: application-specific details.....	53
N.3 Channel status: application-specific details	53
N.4 User data: application-specific details	53
Annex O (normative) Application of the digital interface in the digital versatile disc system (DVD) in the consumer mode.....	54
O.1 Overview.....	54
O.2 General: application-specific details.....	54
O.3 Channel status: application-specific details	54
O.4 User data: application-specific details	54
Annex P (informative) Use of original sampling frequency, sampling frequency and clock accuracy.....	55
Annex Q (normative) Application of the digital interface in magnetic disc digital audio systems in the consumer mode	57
Q.1 Overview.....	57
Q.2 General: application-specific details.....	57
Q.3 Channel status: application-specific details	57
Q.4 User data: application-specific details	57
Annex R (normative) Explanations of category code implementation	58
R.1 Multi-media player.....	58
R.2 Home-recorded medium player	58
R.3 Monitoring output from a recorder	59
R.3.1 Real-time monitoring (direct monitoring)	59
R.3.2 Monitoring after recording	59
R.4 Integrated products	60
R.5 Implementation rule of category code groups for digital/digital converter and signal-processing products	60
R.5.1 Discrete product worked as a digital/digital converter or a signal processing unit	60
R.5.2 Integrated product including a digital/digital converter or a signal processing unit	60
R.6 Magnetic disc recorder unit inside an integrated product	61
R.7 Category code assignment	61

R.7.1	No category code in a corresponding category code group.....	61
R.7.2	No category code group for a corresponding product	61
R.8	Other assignment of integrated products.....	62
Annex S (informative)	Application of the digital audio interface for synchronization of audio, video and multi-media equipment.....	63
S.1	General.....	63
S.2	Lip-sync system model	63
S.3	How to compensate lip-sync	63
S.3.1	General	63
S.3.2	Detection methods	64
S.4	Use of time code	65
S.5	Use of latency information	66
S.6	Example of latency parameter transmission method with TL_V	66
S.6.1	An example for solving lip-sync problems	66
S.6.2	Another example for solving lip-sync problems.....	67
Annex T (normative)	MPEG Surround over PCM.....	68
T.1	Format of MPEG Surround buried data frames.....	68
T.2	MPEG Surround detection	68
Bibliography	69
Figure 1	– Example of message structure using information units	24
Figure 2	– First UI contents.....	26
Figure 3	– Second UI contents	26
Figure 4	– Third UI contents.....	26
Figure 5	– User information.....	27
Figure 6	– SMPTE time code information.....	28
Figure 7	– LTC information alignment.....	28
Figure 8	– VITC information alignment	29
Figure 9	– Latency information	29
Figure 10	– Latency information alignment	30
Figure 11	– Loudness information	30
Figure 12	– Loudness information alignment.....	31
Figure C.1	– Example of different combinations of start-ID and shortening-ID.....	38
Figure L.1	– Marker mode	47
Figure L.2	– Extended mode	48
Figure P.1	– Player and interface model.....	55
Figure R.1	– Multi-media player	58
Figure R.2	– Home-recorded medium player.....	59
Figure R.3	– Direct monitoring.....	59
Figure R.4	– Monitoring after recording	59
Figure R.5	– Integrated product.....	60
Figure R.6	– Digital/digital converter	60
Figure R.7	– Integrated product including digital/digital converter.....	61
Figure R.8	– Integrated product including magnetic disc recorder.....	61
Figure S.1	– Lip-sync system model.....	63

Figure S.2 – Lip-sync compensation	64
Figure S.3 – Time-code transmission	64
Figure S.4 – Latency parameter transmission	65
Figure S.5 – Latency parameter transmission with TLv	65
Figure S.6 – Example of latency parameter transmission	66
Figure S.7 – Another example for solving lip-sync problems.....	67
Figure T.1 – Relation between MPEG Surround buried data frame and IEC 60958-3 frame.....	68
Table 1 – Channel status general format for consumer use	12
Table 2 – Mode 0 channel status format for consumer use.....	15
Table 3 – Category code groups.....	21
Table 4 – Category code groups for laser optical products	21
Table 5 – Category code groups for digital/digital converter and signal-processing products	22
Table 6 – Category code groups for magnetic tape or magnetic disc based products	22
Table 7 – Category code groups for broadcast reception of digitally encoded audio with/without video signals	22
Table 8 – Category code groups for musical instruments, microphones and other sources that create original sound.....	23
Table 9 – Category code groups for A/D converters for analogue signals without copyright information	23
Table 10 – Category code groups for A/D converters for analogue signals with copyright information	23
Table 11 – Category code groups for solid state memory based products.....	23
Table A.1 – Example of 2-channel compact disc format	33
Table C.1 – Use of Cp-bit, L-bit and category code for DAT	35
Table C.2 – User data application in the DAT system.....	37
Table L.1 – Layout of message number "000000"	49
Table L.2 – Deck status codes	49
Table L.3 – ITTS packet extended message example	50
Table P.1 – Term definitions	55
Table P.2 – Cases	56
Table P.3 – Example.....	56

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL AUDIO INTERFACE –**Part 3: Consumer applications****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 60958-3:2006+AMD1:2009+AMD2:2015 CSV. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 60958-3 has been prepared by technical area 20: Analogue and digital audio, of IEC technical committee 100: Audio, video and multimedia systems and equipment. It is an International Standard.

This fourth edition cancels and replaces the third edition published in 2006, Amendment 1:2009 and Amendment 2:2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) The relevant part of IEC 60958-5 is supported.

The text of this International Standard is based on the following documents:

Draft	Report on voting
100/3543/CDV	100/3594/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

A list of all parts in the IEC 60958 series, published under the general title *Digital audio interface*, can be found on the IEC website.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION to Amendment 1

~~The revision of IEC 60958-3 (2006) has become necessary to transmit the audio signal and its information of the current improved audio formats and systems. The revised items apply to the small parts of IEC 60958-3.~~

~~Additional sampling frequencies have been defined for the use of audio transmission of IEC 60958 conformant data format for the new formats of the IEC 61937 series.~~

~~CGMS-A validity is added to clarify the use of CGMS-A information.~~

~~The identification of the embedded MPEG Surround information to LPCM and its normative Annex U are added.~~

~~Table 2 includes the new additions and Table 3 has been clarified.~~

INTRODUCTION to Amendment 2

~~The revision of IEC 60958-3:2006 has become necessary to document the protocol for transmitting the audio signal and its information in current improved audio formats and systems.~~

~~To apply IEC 60958-3 and its IEC 60958 conformant data format transmitting as part or whole of the multichannel audio data, a general channel assignment number specified in IEC 62574 is added to the C-bit.~~

~~**Loudness information is added to the U-bit to enable loudness control.**~~

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

DIGITAL AUDIO INTERFACE –

Part 3: Consumer applications

1 Scope

This part of IEC 60958 specifies the consumer application of the interface for the inter-connection of digital audio equipment defined in IEC 60958-1.

NOTE When used in a consumer digital processing environment, the interface is primarily intended to carry stereophonic programmes, with a resolution of up to 20 bits per sample, an extension to 24 bits per sample being possible.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 60841:1988, Audio recording – PCM encoder/decoder system~~

~~IEC 60908:1999, Audio recording – Compact disc digital audio system~~

IEC 60958-1:2004, *Digital audio interface – Part 1: General*

IEC 60958-5, *Digital audio interface – Part 5: Consumer application enhancement*

~~IEC 61119-1:1992, Digital audio tape cassette system (DAT) – Part 1: Dimensions and characteristics~~

~~IEC 61119-6:1992, Digital audio tape cassette system (DAT) – Part 6: Serial copy management system~~

~~IEC 62574:2011, Audio, video and multimedia systems – General channel assignment of multichannel audio~~

~~IEEE 1394:2004, IEEE standard for high-performance serial bus bridges~~

~~ISO/IEC 23003-1, Information technology – MPEG audio technologies – Part 1: MPEG Surround~~

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60958-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Interface format

The interface format as defined in IEC 60958-1 shall be used.

Unless otherwise specified in Annex A to Annex T, the following specification is applicable.

- Audio sample word has a length of 20 bits/sample. The auxiliary sample bits are an optional expansion of the audio sample, if not used = "0".
- User data is not used, all bits = "0".
- Channel status is identical for both subframes of the interface, with the exception of the channel number, if that is not equal to zero.

5 Channel status

5.1 General

For every subframe, the channel status bit provides information related to the audio channel that is carried in that same subframe.

Channel status information is organized in a 192-bit block, subdivided into 24 bytes, numbered 0 to 23 (see Table 1). The first bit of each channel status block is carried in the frame with preamble "B".

The individual bits of a channel status block are numbered 0 to 191.

The primary application is indicated by channel status bit 0.

As stated in IEC 60958-1, for the consumer digital audio applications described in this document and IEC 60958-5, this first channel status bit equals "0".

NOTE As stated in IEC 60958-1, for professional applications, this first channel status bit equals "1".

Secondary applications may be defined within the framework of these primary applications.

5.2 Application

5.2.1 Channel status general format

For each channel, the channel status block provides the information described in this clause and summarized in Table 1.

Table 1 – Channel status general format for consumer use

Byte		a = "0"	b	c	d			Mode	
0	bit	0	1	2	3	4	5	6	7
1									
1	bit	8	9	10	11	12	13	14	15
2									
2	bit	16	17	18	19	20	21	22	23
3									
3	bit	24	25	26	27	28	29	30	31
4									
4	bit	32	33	34	35	36	37	38	39
5									
5	bit	40	41	42	43	44	45	46	47
6									
6	bit	48	49	50	51	52	53	54	55
7									
7	bit	56	57	58	59	60	61	62	63
8									
8	bit	64	65	66	67	68	69	70	71
9									
9	bit	72	73	74	75	76	77	78	79
10									
10	bit	80	81	82	83	84	85	86	87
11									
11	bit	88	89	90	91	92	93	94	95
12									
12	bit	96	97	98	99	100	101	102	103
13									
13	bit	104	105	106	107	108	109	110	111
14									
14	bit	112	113	114	115	116	117	118	119
15									
15	bit	120	121	122	123	124	125	126	127
16									
16	bit	128	129	130	131	132	133	134	135
17									
17	bit	136	137	138	139	140	141	142	143
18									
18	bit	144	145	146	147	148	149	150	151
19									
19	bit	152	153	154	155	156	157	158	159
20									
20	bit	160	161	162	163	164	165	166	167
21									
21	Bit	168	169	170	171	172	173	174	175
22									
22	Bit	176	177	178	179	180	181	182	183
23									
23	Bit	184	185	186	187	188	189	190	191
		a: use of channel status block b: linear PCM identification				c: copyright information d: additional format information			

Byte 0: General control and mode information**Control:**

Bit 0	"0"	Consumer use of channel status block (Notes 1 and 2)
-------	-----	--

NOTE 1 The significance of byte 0, bit 0 is such that transmission from an interface conforming to IEC 60958-4 can be identified.

Bit 1	"0"	Audio sample word represents linear PCM samples (Note 2)
	"1"	Audio sample word used for other purposes

NOTE 2 The functions of channel status bits 0 and 1 are defined in IEC 60958-1.

Bit 2	"0"	Software for which copyright is asserted (Note 3)
	"1"	Software for which no copyright is asserted

NOTE 3 Bit 2 is referred to as the "Cp-bit". It ~~should indicate~~ indicates whether copyright protection has been asserted.

The copyright status ~~may~~ can be unknown for certain applications. The above interpretation is therefore not valid in combination with some category codes (as indicated in the annex associated with the category code). The Cp-bit can alternate between 0 and 1 at a rate between 4 Hz and 10 Hz (see Annex A).

Bits 3 to 5	Additional format information, meaning depends on bit 1.
-------------	--

When bit 1 = "0", linear PCM audio mode:

Bit	3 4 5	
State	"0 0 0"	2 audio channels without pre-emphasis
	"1 0 0"	2 audio channels with 50 µs/15 µs pre-emphasis
	"0 1 0"	Reserved (for 2 audio channels with pre-emphasis)
	"1 1 0"	Reserved (for 2 audio channels with pre-emphasis)
	"0 0 1"	Assigned for IEC 60958-5
	"0 1 1"	Assigned for IEC 60958-5

All other states of bits 3 to 5 are reserved and shall not be used until further defined.

NOTE 4 The single and dual channel operating modes are defined with the frame format in IEC 60958-1.

When bit 1 = "1", other than linear PCM applications:

Bit	3 4 5	
State	"0 0 0"	Default state for applications other than linear PCM

All other states of bits 3 to 5 are reserved and shall not be used until further defined.

Bits 6 and to 7	Channel status mode, indicates one of four possible channel status formats (bytes 1 to 23). There are four possible modes for each of the states of bit 1.
-------------------------------	--

Bit	6 7	
State	"0 0"	Mode 0, refer to 5.2.2

All other states of bits 6 and 7 are reserved and shall not be used until further defined.

The contents of bits 8 to 191 depend on the mode as indicated by bits 6 and 7. If not defined otherwise, the default value is "0".

5.2.2 Mode 0 channel status format for digital audio equipment for consumer use

When the audio sample word represents linear PCM and the channel status mode is mode 0, the channel status format shown in Table 2 should be applied.

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Table 2 – Mode 0 channel status format for consumer use

Byte

0	a = "0"		b = "0"		c		d		Mode = "0 0"	
bit	0	1	2	3	4	5	6	7		
1	Category code									
bit	8	9	10	11	12	13	14	15		
2	Source number					Channel number				
bit	16	17	18	19	20	21	22	23		
3	Sampling frequency					Clock accuracy		Sampling frequency extension		
bit	24	25	26	27	28	29	30	31		
4	Word length					Original sampling frequency				
bit	32	33	34	35	36	37	38	39		
5	CGMS-A		CGMS-A validity		Auto sampling frequency coefficient					
bit	40	41	42	43	44	45	46	47		
6	Information hidden in PCM signal	General channel assignment channel number for A channel							General channel assignment channel number for B channel	
bit	48	49	50	51	52	53	54	55		
7	General channel assignment channel number for B channel					LFE Playback level				
bit	56	57	58	59	60	61	62	63		
8										
bit	64	65	66	67	68	69	70	71		
9										
bit	72	73	74	75	76	77	78	79		
10										
bit	80	81	82	83	84	85	86	87		
11										
bit	88	89	90	91	92	93	94	95		
12										
bit	96	97	98	99	100	101	102	103		
13										
bit	104	105	106	107	108	109	110	111		
14										
bit	112	113	114	115	116	117	118	119		
15										
bit	120	121	122	123	124	125	126	127		
16										
bit	128	129	130	131	132	133	134	135		
17										
bit	136	137	138	139	140	141	142	143		
18										
bit	144	145	146	147	148	149	150	151		
19										
bit	152	153	154	155	156	157	158	159		
20										
bit	160	161	162	163	164	165	166	167		
21										
bit	168	169	170	171	172	173	174	175		
22										
bit	176	177	178	179	180	181	182	183		
23										
bit	184	185	186	187	188	189	190	191		
a: use of channel status block					c: copyright information					
b: linear PCM identification					d: additional format information					

Byte 0 as defined in 5.2.1, with

Bit 1	"0"	Audio sample word represents linear PCM samples
Bits 6 to 7	"0 0"	Mode 0

Byte 1: Category code

The category code indicates the kind of equipment that generates the digital audio interface signal. See the relevant annexes for the assignments. Bit 8 = LSB, bit 15 = MSB.

Byte 2: Source and channel number

Bits 16 to 19 Source number, bit 16 = LSB, bit 19 = MSB

Bit	16	17	18	19	
State	"0 0 0 0"	Do not take into account			
	"1 0 0 0"	1			
	"0 1 0 0"	2			
	"1 1 0 0"	3			
				
	"1 1 1 1"	15			

Bits 20 to 23 Channel number (audio channel), bit 20 = LSB, bit 23 = MSB.

Bit	20	21	22	23	
State	"0 0 0 0"	Do not take into account.			
	"1 0 0 0"	(left channel for stereo channel format)			
	"0 1 0 0"	(right channel for stereo channel format)			
	"1 1 0 0"				
				
	"1 1 1 1"				

NOTE 1 The single and dual channel operating modes are defined with the frame format in IEC 60958-1.

Byte 3: Sampling frequency and clock accuracy

Bits 24 to 27 Sampling frequency

Bit	24	25	26	27	
State	"0 0 1 0"	22,05 kHz			
	"0 0 0 0"	44,1 kHz			
	"0 0 0 1"	88,2 kHz			
	"0 0 1 1"	176,4 kHz			
	"0 1 1 0"	24 kHz			
	"0 1 0 0"	48 kHz			
	"0 1 0 1"	96 kHz			
	"0 1 1 1"	192 kHz			
	"1 1 0 0"	32 kHz			
	"1 0 0 0"	Sampling frequency not indicated			
	"1 0 0 1"	768 kHz			

All other combinations are reserved and shall not be used until further defined.

Bits 28 to 29 Clock accuracy.

Bit	28	29	
State	"0 0"		Level II
	"1 0"		Level I
	"0 1"		Level III
	"1 1"		Interface frame rate not matched to sampling frequency.

Bits 30 to 31 Sampling frequency extension with sampling frequency bits 24 to 27

Bit	24	25	26	27	30	31	Sampling frequency
State	"1 0	1 0	0 0	0"			384 kHz
	"1 0	1 0	1 0	1 0"			1 536 kHz
	"1 0	1 0	1 1	1 1"			1 024 kHz
	"1 0	1 1	0 0	0"			352,8 kHz
	"1 0	1 1	0 1	1"			705,6 kHz
	"1 0	1 1	1 0	1 0"			1 411,2 kHz
	"1 1	0 1	0 0	0"			64 kHz
	"1 1	0 1	0 1	1"			128 kHz
	"1 1	0 1	1 0	1 0"			256 kHz
	"1 1	0 1	1 1	1 1"			512 kHz

NOTE 2 The sampling frequency over 192 kHz is not actual. It represents frame rate for compressed audio transmission, and it is used for high bit-rate transmission using the IEC 60958 protocol. For example, IEC 61883-6 can transmit a high bit rate of IEC 61937 using the IEC 60958 conformant format defined in IEC 61883-6.

Byte 4: Word length and original sampling frequency

Bit 32	"0"	Maximum audio sample word length is 20 bits
	"1"	Maximum audio sample word length is 24 bits

Bits 33 to 35 Sample word length

Bit	33	34	35	Audio sample word length if maximum length is 24 bits as indicated by bit 32	Audio sample word length if maximum length is 20 bits as indicated by bit 32
State	"0 0 0"			Word length not indicated (default)	Word length not indicated (default)
	"1 0 0"			20 bits	16 bits
	"0 1 0"			22 bits	18 bits
	"0 0 1"			23 bits	19 bits
	"1 0 1"			24 bits	20 bits
	"0 1 1"			21 bits	17 bits

All other combinations are reserved and shall not be used until further defined.

NOTE 3 The first edition of IEC 60958 had bits 32 to 35 reserved and set to zero. Therefore, the all-zero state for these bits on a received signal **may** can be an indicator that the word length indication has not been implemented. When bits 3 4 5 = "0 0 1" or "0 1 1", refer to IEC 60958-5 for bits 32, 33, 34, and 35.

Bits 36 to 39 Original sampling frequency

Bit	36	37	38	39	
State	"1	1	1	1"	44,1 kHz
	"1	1	1	0"	88,2 kHz
	"1	1	0	1"	22,05 kHz
	"1	1	0	0"	176,4 kHz
	"1	0	1	1"	48 kHz
	"1	0	1	0"	96 kHz
	"1	0	0	1"	24 kHz
	"1	0	0	0"	192 kHz
	"0	1	1	1"	128 kHz
	"0	1	1	0"	8 kHz
	"0	1	0	1"	11,025 kHz
	"0	1	0	0"	12 kHz
	"0	0	1	1"	32 kHz
	"0	0	1	0"	64 kHz
	"0	0	0	1"	16 kHz
	"0	0	0	0"	Original sampling frequency not indicated (default)

NOTE 3 The original sampling frequency field ~~may~~ can be used to indicate the sampling frequency of a signal prior to sampling frequency conversion in a consumer playback system.

NOTE 4 Many of the values indicated for a frequency in the original sampling frequency field in byte 4 are complementary to the values used for that frequency in the sampling frequency field in byte 3.

Byte 5: CGMS-A

Bits 40 to 41 CGMS-A

Bit	40	41	
State	"0	0"	Copying is permitted without restriction
	"0	1"	Condition not used
	"1	0"	One generation of copies may be made
	"1	1"	No copying is permitted

Bit 42 CGMS-A validity

Bit	42	
State	"0"	No indication
	"1"	CGMS-A valid

Bits 44 to 47 Audio sampling frequency coefficient

Bit	44	45	46	47	
State	"0	0	0	0"	No indication
	"0	0	0	1"	Equal to transmission sampling frequency
	"0	0	1	0"	1/2
	"0	0	1	1"	1/4
	"0	1	0	0"	1/8
	"0	1	0	1"	1/16

"0 1 1 0"	1/32
"0 1 1 1"	Reserved
"1 0 0 0"	Reserved
"1 0 0 1"	Reserved
"1 0 1 0"	Reserved
"1 0 1 1"	×32
"1 1 0 0"	×16
"1 1 0 1"	×8
"1 1 1 0"	×4
"1 1 1 1"	×2

NOTE 6 CGMS-A information from other IEC standards (for example, IEC 61880) can be carried. When bits 3 4 5 = "0 0 1" or "0 1 1", refer to IEC 60958-5 for bits 44, 45, 46, and 47. One generation copy is described in serial copy management of IEC 61119-6.

Byte 6 and byte 7: Information hidden in PCM signal and general channel assignment channel number

Bit 48	Information hidden in PCM signal	
Bit	48	
State	"0"	No indication
	"1"	Additional information in LSB
Bits 49 to 53	General channel assignment channel number for A channel	
Bit	49 50 51 52 53 54	
State	"0 0 0 0 0 0"	Channel number 1
	"1 0 0 0 0 0"	Channel number 2
	⋮	
	"1 1 1 1 1 0"	Channel number 32
Bit 54 to 58	General channel assignment channel number for B channel	
Bit	55 56 57 58 59 60	
State	"0 0 0 0 0 0"	Channel number 1
	"1 0 0 0 0 0"	Channel number 2
	⋮	
	"1 1 1 1 1 0"	Channel number 32
Bit 61 to 62	LFE playback level	
Bit	61 62	
State	"0 0"	no information
	"0 1"	+10 dB
	"1 0"	0 dB

NOTE 5 Bit 48 refers to information within the audio sample word, not in the AUX bits.

NOTE 6 When bit 48 is set to 1, processing of the audio signal (such as redithering, sample rate conversion, and change in level) should be avoided. A receiver ~~may~~ can also use this state as a hint that it should look for extra information (such as MPEG Surround transmitted over PCM channels as specified in ISO/IEC 23003-1, see Annex T) in the low bits of the signal.

NOTE 7 Rec. ITU-R BS.775-3 explains how to handle LFE playback level information.

IEC 62574 specifies the general channel assignment. The assignments of channel numbers 1 to 32 are specified in Table A.1 of IEC 62574:2014/2020.

When bit 3 4 5 = "0 0 1" or "0 1 1", refer to IEC 60958-5 for bits 49 to 165.

5.3 Copyright management guidelines for consumer application of the digital audio interface

5.3.1 General

Category codes are used for all consumer products that are capable of supplying a digital signal to consumer digital audio recorders, except for products that are fully transparent from input to output. A category code of a product is defined as a live function to make a source data. If products have the capability to play plural recorded media that are defined in different categories, the category code of the product should be defined as a playing medium.

These category codes have been grouped by general function of the product. This makes it possible to take into account future digital recording products not yet defined in detail. Such a product then deals with the group code under a general rule. These rules define whether a digital recorder is enabled to record a copyright-protected digital signal.

Unless otherwise specified, any consumer equipment capable of transferring digital audio information from an input terminal to an output terminal, if not fully transparent and regardless of the delay or kind of transformation of the audio content of the signal, shall copy channel status bits 0, 1, 3, 4, 5, 6 and 7 from the source. Bit 2 shall be copied from the source, unless otherwise specified in the annexes.

Bit 15 is referred to as the "L-bit". It indicates the "generation status" of the digital audio signal.

"Generation status" means:

- whether the signal emanates from a source that has been produced or published or authorized by the rights owner of the material, such as commercially released pre-recorded compact discs or DAT tapes or a digital broadcast (referred to herein as "original") and for which copyright has been asserted; or
- whether the signal emanates from a recording made from such "original" material (i.e. "a home-copy of generation 1 or higher").

Generally the L-bit is specified as:

Bit 15	"0"	No indication
	"1"	Commercially released pre-recorded software

For historical reasons, the reverse situation is valid for the signals originating from

- laser optical products (category code "100 XXXXL");
- broadcast reception (category codes "001 XXXXL" and "011 1XXXL").

For these category codes the L-bit indicates:

Bit 15	"0"	Commercially released pre-recorded software
	"1"	No indication

The generation status may be unknown for certain applications. The above interpretation is therefore not valid in combination with some category codes such as

- general (category code "000 00000");
- analogue/digital converters for analogue signals without copyright information (category code "011 00XXL").

5.3.2 Category code groups

5.3.2.1 The category code groups are defined in Table 3.

Table 3 – Category code groups

Bits 8 to 15	Category
"000 00000"	General. Used temporarily
"100 XXXXL"	Laser optical products
"010 XXXXL"	Digital/digital converters and signal processing products
"110 XXXXL"	Magnetic tape or disc based products
"001 XXXXL" and "011 1XXXXL"	Broadcast reception of digitally encoded audio signals with or without video signals
"101 XXXXL"	Musical instruments, microphones and other sources without copyright information
"011 00XXL"	Analogue/digital converters for analogue signals without copyright information
"011 01XXL"	Analogue/digital converters for analogue signals which include copyright information in the form of "Cp-bit and L-bit status"
"000 1XXXXL"	Solid-state memory-based products
"000 0001L"	Experimental products not for commercial sale, and other products of these groups and/or experimental products
"111 XXXXL"	Not defined. Reserved
"000 0XXXXL"	Not defined. Reserved, except for "000 00000" and "000 0001L"

5.3.2.2 Within a group, a further indication of the kind of source is given.

5.3.2.3 For the general category code ("000 00000") the following applies:

- used temporarily;
- applied specifically for digital audio broadcast reception with or without a video signal, for example, digital satellite reception in Japan in the case where no copyright information is transmitted (see also Annex H);
- for the group of laser optical products (category code = "100 XXXXL"), the category codes are defined in Table 4.

Table 4 – Category code groups for laser optical products

Bits 8 to 15	Category
"100 00000"	Compact-disc digital audio signal compatible with IEC 60908 (see Annex A)
"100 1000L"	Laser optical digital audio systems for which no other category code is defined (see Annex D)
"100 1001L"	Mini-disc system (see Annex M)
"100 1100L"	Digital versatile disc (DVD) (see Annex O)
"100 1111L"	Other products of this category
"100 others"	Reserved

5.3.2.4 For the group of digital/digital converters and signal-processing products (category code = "010 XXXXL"), the category codes are defined in Table 5.

Table 5 – Category code groups for digital/digital converter and signal-processing products

Bits 8 to 15	Category
"010 0000L"	PCM encoder/decoder (see Annex B)
"010 0100L"	Digital signal mixer (see Annex E)
"010 1100L"	Sampling rate converter (see Annex F)
"010 0010L"	Digital sound sampler (see Annex G)
"010 1010L"	Digital sound processor (see Annex N)
"010 1111L"	Other products of this category
"010 others"	Reserved

5.3.2.5 For the group of magnetic-tape or magnetic-disc-based products (category code = "110 XXXXL"), the category codes are defined in Table 6.

Table 6 – Category code groups for magnetic tape or magnetic disc based products

Bits 8 to 15	Category
"110 0000L"	DAT (see Annex C)
"110 1000L"	Video tape recorder with digital sound
"110 0001L"	Digital compact cassette (see Annex L)
"110 1100L"	Magnetic disc digital audio system (see Annex Q)
"110 1111L"	Other products of this category
"110 others"	Reserved

5.3.2.6 For the group of broadcast reception of digitally encoded audio with/without video signals (category code = "001 XXXXL" or "011 1XXXXL"), the category codes are defined in Table 7.

Table 7 – Category code groups for broadcast reception of digitally encoded audio with/without video signals

Bits 8 to 15	Category
"001 0000L"	Digital audio broadcast signal with or without a video signal (Japan) (see Annex H)
"001 1000L"	Digital audio broadcast signal with or without a video signal (Europe) (see Annex I)
"001 0011L"	Digital audio broadcast signal with or without a video signal (USA) (see Annex J)
"001 0001L"	Electronic software delivery (see Annex K)
"001 0010L"	Used by another standard (see note)
"001 1111L"	Other products of this category
"001 others"	Reserved
"011 1XXXXL"	Reserved

NOTE The code "001 0010L" is under consideration for use in connection with IEC 62105.

5.3.2.7 For the group of musical instruments, microphones and other sources that create original sound (category code = "101 XXXXL"), the category codes are defined in Table 8.

Table 8 – Category code groups for musical instruments, microphones and other sources that create original sound

Bits 8 to 15	Category
"101 0000L"	Synthesizer
"101 1000L"	Microphone
"101 1111L"	Other products of this category
"101 others"	Reserved

5.3.2.8 For the group of analogue/digital converters for analogue signals without copyright information (category code = "011 00XXL"), the category codes are defined in Table 9.

Table 9 – Category code groups for A/D converters for analogue signals without copyright information

Bits 8 to 15	Category
"011 0000L"	A/D converter
"011 0011L"	Other products of this category
"011 00 others"	Reserved

5.3.2.9 For the group of analogue/digital converters for analogue signals which include copyright information in the form of "Cp-bit and L-bit status" (category code = "011 01XXL"), the category codes are defined in Table 10.

Table 10 – Category code groups for A/D converters for analogue signals with copyright information

Bits 8 to 15	Category
"011 0100L"	A/D converter
"011 0111L"	Other products of this category
"011 01 others"	Reserved

5.3.2.10 For the group of solid-state memory-based products (category code = "000 1XXXL"), the category codes are defined in Table 11.

Table 11 – Category code groups for solid state memory based products

Bits 8 to 15	Category
"000 1000L"	Digital audio recorder and player using solid state memory
"000 1111L"	Other products of this category
"000 1 others"	Reserved

5.3.2.11 For experimental products not for commercial sale (category code = "000 0001L"), the following definition applies.

New products for which a category code and a category group is not yet defined or for which circuitry to signal the appropriate category is not yet available.

6 User data

6.1 General

The default value of the user bits is logical "0".

For interchangeability of equipment, it is strongly recommended that the general user data format described below be used for consumer applications of the user data.

6.2 Application

6.2.1 User data bitstream

The user data bits from every subframe in a frame combine so that there is just one user data bitstream for each interface.

6.2.2 User data message structure

A message consists of information units (IUs). An IU consists of one start bit (logical value "1") followed by seven information bits.

The eight bits of an IU are also referred to as the P, Q, R, S, T, U, V and W bits. IUs in a message are separated by up to and including eight bits with a logical value "0". The nominal number of bits with logical value "0" between IUs is four. Messages are separated by more than eight bits with a logical value "0". An example of this structure is shown in Figure 1.

Bit	0	1	2	3	4	5	6	7	8	9	10	11	
0	0	0	1	Q	R	S	T	U	V	W	0	0	A)
+12	0	0	1	Q	R	S	T	U	V	W	0	0	
+24	1	Q	R	S	T	U	V	W	0	0	0	0	B)
+36	0	0	0	0	1	Q	R	S	T	U	V	W	C)
+48	1	Q	R	S	T	U	V	W	0	0	0	0	
+60	1	Q	R	S	T	U	V	W	0	0	0	0	D)
+72	0	0	0	0	0	0	0	1	Q	R	S	T	
+84	U	V	W	0	0	0	0	1	Q	R	S	T	E)
+96	U	V	W	0	0	0	0	0	1	Q	R	S	

Key

0 Bit between IUs with logical value "0"

1 Start bit P, first bit of IU with logical value "1"

Q, R, S, T, U, V, W information bits

A) Example of an IU: start bit plus seven information bits

B) Maximum distance between two IUs of the same message is two bits

C) Minimum distance between two IUs of the same message is zero bits

D) Distance of more than eight bits between IUs indicates start of a new message

E) Nominal distance between two IUs of the same message is four bits

IEC 1743/99

Figure 1 – Example of message structure using information units

6.2.3 Equipment classification

6.2.3.1 General

Equipment is divided into three classes, according to the category code of the channel status. See ~~also~~ the relevant annexes that specifies the class.

Future equipment, for which there is no relevant annex, shall be classified as belonging to one of the three classes defined below.

6.2.3.2 Class I: original user data generating equipment

Original user data generating equipment will generate user data bits according to a format that is defined in the standard for that equipment. ~~See the relevant annex.~~

Any new equipment in this class will carry the general user data format as defined in 6.2.4.2.

6.2.3.3 Class II: user data transparent equipment

The user data transparent equipment shall either provide all "0" user data bits or transfer the user data bits it receives from its input unchanged to its output. If the processing of the audio information causes considerable delay, it is recommended that the user data bits should be equally delayed.

6.2.3.4 Class III: mixed mode user data equipment

This class of equipment shall either operate as class II (user data transparent) equipment or originate a new user data stream according to the general user data format.

The possible user data formats for this class are:

- all "0" bits;
- the complete user data information of the input, or one of the inputs in the case of multiple inputs;
- the general user data format. The information carried in this case may originate from within the equipment itself, or be transcoded from the input source(s).

6.2.4 User data message length and contents

6.2.4.1 General

The possible length and contents of the user data messages depends on the category code of the equipment. See the relevant annex that specifies user data.

For new equipment that is capable of generating original user data contents, the general user data format shall be used.

6.2.4.2 General user data format

According to the general user data format, a message consists of a minimum of 3 and a maximum of 129 information units, except for a length of 96 information units. A total message length of 96 information units is reserved for some specific laser optical products (see 6.2.4.3).

The contents of the first IU are shown in Figure 2.

1 (Start)	1 (Q)	Mode R	Mode S	Mode T	Item U	Item V	Item W
-----------	-------	--------	--------	--------	--------	--------	--------

Figure 2 – First UI contents

The bits R, S, T, U, V, W have the following meaning:

Mode	RST	
	000	Not used, reserved for digital compact cassette (DCC)
	100	SMPTE time code
	110	Latency
	111	Loudness
	other 1XX	} May be used for new messages
	X1X	
	XX1	

The mode bits indicate a class of messages, for example text, pre-set information, etc., and the item bits give a further definition of the type of message.

It is recommended that any new application should conform as much as possible to messages coded according to the general user data format that have been defined for other applications.

The second IU contains a number indicating the following number of IUs as shown in Figure 3.

1 (Start)	IU Count6	IU Count5	IU Count4	IU Count3	IU Count2	IU Count1	IU Count0
-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

Figure 3 – Second UI contents

IU count6 is the most significant bit; IU count0 is the least significant bit. The number is coded as a binary number in the range 1 to 127 (000 0001b to 111 1111b) except that the value 94 is not possible.

The third IU contains the originating category code, without the L-bit, of the equipment that generates the general user data format messages as shown in Figure 4.

1 (Start)	C-Ch bit 8	C-Ch bit 9	C-Ch bit 10	C-Ch bit 11	C-Ch bit 12	C-Ch bit 13	C-Ch bit 14
-----------	------------	------------	-------------	-------------	-------------	-------------	-------------

Figure 4 – Third UI contents

The L-bit (C-channel bit 15) is not carried in this message, as it is not relevant for the decoding of the user data messages. Therefore, any decisions on the copyright status of the audio information shall be based on the category code and Cp-bit as carried in the channel status.

The IUs that follow the third IU contain user information.

User information that originally was organized as bytes is carried as in Figure 5: four successive IUs carry a maximum of three successive bytes (X, Y and Z, 7 = MSB, 0 = LSB) in bits R, S, T, U, V, W of the IUs:

1 (Start)	Q	X7	X6	X5	X4	X3	X2
1 (Start)	Q	X1	X0	Y7	Y6	Y5	Y4
1 (Start)	Q	Y3	Y2	Y1	Y0	Z7	Z6
1 (Start)	Q	Z5	Z4	Z3	Z2	Z1	Z0

Figure 5 – User information

The Q bits can optionally indicate that the remaining six bits of the IU contain an error:

"0" no error detected.

"1" error in bits R, S, T, U, V, W.

If not used, the error flag should be set to a logical "0" value.

If the number of bytes to transfer does not fill a complete quadruplet (i.e. just one or two bytes, not three bytes), the remaining byte(s) shall be coded "0 0 0 0 0 0 0".

6.2.4.3 General user data format for some specific laser optical products

For historical reasons, the laser optical products with category codes "100 0000" (compact disc digital audio, see IEC 60908) and "100 1001L" (mini disc) employ a user data format that differs from the one defined above. In this format, no message length specifier is applied. Instead, the length is fixed to 96 IUs. The information in the Q bits of the IUs is considered to be in a separate channel (the Q channel).

Each group of six bits R, S, T, U, V, W of an information unit is called a SYMBOL.

The SYMBOL numbering follows the numbering of the bits in Table A.1.

A group of 24 SYMBOLS is called a PACK:

PACK 1 is formed by symbols 1 to 24;

PACK 2 is formed by symbols 25 to 48;

PACK 3 is formed by symbols 49 to 72;

PACK 4 is formed by symbols 73 to 96.

Information will be carried in the PACKS according to specific formats.

6.3 Information for synchronization

6.3.1 General

To manage audio data synchronization with other data such as video data, the information for synchronization is applied.

6.3.2 SMPTE time code information

SMPTE time code is aligned to mode bits and item bits as shown in Figure 6.

Mode item	RSTUVW	
	100000	SMPTE time code: LTC
	100001	SMPTE time code: VITC

Figure 6 – SMPTE time code information

The second information unit is settled as follows.

0010001b

The third information units are same as defined in 6.2.4.2.

LTC information is aligned to 16 IUs of user information area as shown in Figure 7.

1 (Start)	Q	Units of frame				1st binary group	
1 (Start)	Q	1st binary group		Tens of frames		Drop fr	Color fr
1 (Start)	Q	2nd binary group				Units of seconds	
1 (Start)	Q	Units of seconds		3rd binary group			
1 (Start)	Q	Tens of seconds			ph. color bit	4th binary group	
1 (Start)	Q	4th binary group		Units of minutes			
1 (Start)	Q	5th binary group				Tens of minutes	
1 (Start)	Q	Tens of minutes	Bin G flg	6th binary group			
1 (Start)	Q	Units of hours				7th binary group	
1 (Start)	Q	7th binary group		Tens of hours		Bin G flg	Bin G flg
1 (Start)	Q	8th binary group				Sync word	
1 (Start)	Q	Sync word					
1 (Start)	Q	Sync word					
1 (Start)	Q	Sync word		0	0	0	0
1 (Start)	Q	0	0	0	0	0	0
1 (Start)	Q	0	0	0	0	0	0

Figure 7 – LTC information alignment

VITC information is aligned to 16 IUs of user information area as shown in Figure 8.

1 (Start)	Q	1	0	Units of frame			
1 (Start)	Q	1st binary group			1	0	
1 (Start)	Q	Tens of frames		Drop fr	Color fr	2nd binary group	
1 (Start)	Q	2nd binary group		1	0	Units of seconds	
1 (Start)	Q	Units of seconds		3rd binary group			
1 (Start)	Q	1	0	Tens of seconds			Field mark
1 (Start)	Q	4th binary group			1	0	
1 (Start)	Q	Units of minutes			5th binary group		
1 (Start)	Q	5th binary group		1	0	Tens of minutes	
1 (Start)	Q	Tens of minutes	Bin G frg	6th binary group			
1 (Start)	Q	1	0	Units of hours			
1 (Start)	Q	7th binary group			1	0	
1 (Start)	Q	Tens of hours		Bin G frg	Bin G frg	8th binary group	
1 (Start)	Q	8th binary group		1	0	CRC	
1 (Start)	Q	CRC					
1 (Start)	Q	1	0	0	0	0	0

Figure 8 – VITC information alignment

6.3.3 Latency information

Latency information is aligned to information units as shown in Figure 9.

Mode	RSTUVW	
	110000	Latency

Figure 9 – Latency information

The second information unit is settled as follows.

0001101b

The third information units are the same as defined in 6.2.4.2.

Latency information is aligned to 12 IUs of the user information area, as shown in Figure 10.

1 (Start)	Q	Audio latency valid		Audio units type		0	0
1 (Start)	Q	0	0	Audio latency (1)			
1 (Start)	Q	Audio latency (1)				Audio latency (2)	
1 (Start)	Q	Audio latency (2)					
1 (Start)	Q	0	0	0	0	0	0
1 (Start)	Q	0	0	Video latency valid		Video units type	
1 (Start)	Q	0	0	0	0	Total video latency (1)	
1 (Start)	Q	Total video latency (1)					
1 (Start)	Q	Total video latency (2)					
1 (Start)	Q	Total video latency (2)		0	0	0	0
1 (Start)	Q	0	0	0	0	0	0
1 (Start)	Q	0	0	0	0	0	0

Audio latency valid	2 bit	
	00	Invalid
	10	Valid
	Others	Reserved
Audio unit type	2 bit	
	00	millisecond
	01	1/16 millisecond
	Others	
Audio latency	16 bit	Binary (current accumulation of audio latency)
Video latency valid	2 bit	
	00	Invalid
	10	Valid
	Others	Reserved
Video unit type	2 bit	
	00	millisecond
	01	1/16 millisecond
	Others	Reserved
Total video latency	16 bit	Binary (total accumulation of video latency)

Figure 10 – Latency information alignment

6.3.4 Loudness information

Loudness information is aligned to information units, as shown in Figure 11.

Mode	RSTUVW	
	111000	Loudness

Figure 11 – Loudness information

The second information unit is specified as follows.

0001111b

Loudness information is aligned to 16 IUs of the user information area, as shown in Figure 12.

1 (Start)	Q	LoudnessValue					
1 (Start)	Q	LoudnessValue					
1 (Start)	Q	LoudnessValue				LoudnessRange	
1 (Start)	Q	LoudnessRange					
1 (Start)	Q	LoudnessRange					
1 (Start)	Q	LoudnessRange		MaxTruePeakLevel			
1 (Start)	Q	MaxTruePeakLevel					
1 (Start)	Q	MaxTruePeakLevel					
1 (Start)	Q	MaxMomentaryLoudness					
1 (Start)	Q	MaxMomentaryLoudness					
1 (Start)	Q	MaxMomentaryLoudness				MaxShortTermLoudness	
1 (Start)	Q	MaxShortTermLoudness					
1 (Start)	Q	MaxShortTermLoudness					
1 (Start)	Q	MaxShortTermLoudness	0	0	0	0	
1 (Start)	Q	0	0	0	0	0	
1 (Start)	Q	0	0	0	0	0	

NOTE Loudness information is defined in EBU Tech 3285.

Figure 12 – Loudness information alignment

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex A
(normative)

**Application of the digital audio interface
in the compact disc digital audio system**

A.1 Overview

This annex applies to equipment having category code "100 00000". See IEC 60908.

A.2 General: application-specific details

The audio sample word length is 16 bits.

The auxiliary sample bits are = "0".

A.3 Channel status: application-specific details

The four CONTROL bits of the Q-channel (subcode) shall be copied to the channel status bits 0 to 3 (part of the CONTROL in the channel status).

Bit 2, the Cp-bit, shall mean:

Bit 2	"0"	Software for which copyright is asserted
	"1"	Software for which no copyright is asserted

The Cp-bit may alternate between 0 and 1 at a rate between 4 Hz and 10 Hz.

The Cp-bit indicates in the alternating mode that the signal does not emanate from commercially released pre recorded software, but from a recording made from "original" material, that is, a home copy of generation 1 or higher.

A.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

The user data carries the subcode (see Table A.1).

The U-bits form one subcode block of 1 176 bits (average) multiplexed over the left and the right channel. One compact disc frame consists of one subcoding symbol with 12 audio samples. Ninety-eight subcoding symbols constitute one subcoding block, resulting in 12 times 98 = 1 176 U-bits.

The subcode synchronization word is minimum 16 "0" bits.

Table A.1 – Example of 2-channel compact disc format

No.	Preamble SYNC	AUX	Audio samples				MSB	V	U	C	P
1	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C1L	P
2	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C1R	P
3	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C2L	P
4	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C2R	P
5	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C3L	P
6	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C3R	P
7	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C4L	P
8	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C4R	P
9	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C5L	P
10	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C5R	P
11	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C6L	P
12	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C6R	P
13	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C7L	P
14	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C7R	P
15	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C8L	P
16	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C8R	P
17	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C9L	P
18	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C9R	P
19	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C10L	P
20	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C10R	P
21	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C11L	P
22	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C11R	P
23	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C12L	P
24	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C12R	P
25	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	1	C13L	P
26	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	Q1	C13R	P
27	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	R1	C14L	P
28	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	S1	C14R	P
29	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	T1	C15L	P
30	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	U1	C15R	P
31	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	V1	C16L	P
32	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	W1	C16R	P
33	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C17L	P
34	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C17R	P
35	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C18L	P
36	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C18R	P
37	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	1	C19L	P
38	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	Q2	C19R	P
39	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	R2	C20L	P
40	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	S2	C20R	P
41	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	T2	C21L	P
42	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	U2	C21R	P
43	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	V2	C22L	P
44	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	W2	C22R	P
45	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C23L	P
46	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C23R	P
47	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C24L	P
48	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C24R	P

Annex B (normative)

Application of the digital interface in the 2-channel PCM encoder/decoder

B.1 Overview

This annex applies to equipment having category code "010 0000L". See IEC 60841.

B.2 General: application-specific details

The audio sample word length is 14 or 16 bits.

The auxiliary sample bits are "0".

B.3 Channel status: application-specific details

Copy and emphasis bits of the CONTROL bits should be copied from the source (the polarity should be inverted).

B.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

All user data bits are "0".

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex C (normative)

Application of the digital interface in the 2-channel digital audio tape recorder in the consumer mode

C.1 Overview

This annex applies to equipment having category code "110 0000L". See IEC 61119-1 and IEC 61119-6.

C.2 General: application-specific details

The audio sample word length is 16 bits. The auxiliary sample bits are "0".

C.3 Channel status: application-specific details

Bits 0 to 4 ("CONTROL") and bits 24 to 27 ("Fs") should be copied from the source.

Table C.1 illustrates the use of the Cp-bit, L-bit and category code for DAT.

Table C.1 – Use of Cp-bit, L-bit and category code for DAT

Application or source signal	Input signal to DAT-recorder for consumer audio use of C-channel			On DAT tape	Effect on DAT output
	Cp-bit bit 2	Category code Bits 8 to 14	L-bit Bit 15	ID 6	Cp-bit / L-bit bit 2 / bit 15
	No copyright "1"		Home copy "0"		Recordable
General	"1"	"0000000"	"0"	"11"	Set bit 2 to "0"
Laser optical product	"1"	"100XXXX"	"1"	"00"	
D/D converter	"1"	"010XXXX"	"0"	"00"	
Magnetic product	"1"	"110XXXX"	"0"	"00"	
Broadcast reception	"1"	"001XXXX" and "0111XXX"	"1"	"00"	
Musical instrument	"1"	"101XXXX"	"0"	"00"	
Present A/D converter	"1"	"01100XX"	"0"	"11"	
Future A/D converter	"1"	"01101XX"	"0"	"00"	
Solid-state memory	"1"	"0001XXX"	"0"	"00"	
Experimental	"1"	"0000001"	"0"	"00"	
	No copyright "1"		Pre-recorded "1"		Recordable
General	"1"	"0000000"	"1"	"11"	Set bit 2 to "0"
Laser optical product	"1"	"100XXXX"	"0"	"00"	
D/D converter	"1"	"010XXXX"	"1"	"00"	
Magnetic product	"1"	"110XXXX"	"1"	"00"	
Broadcast reception	"1"	"001XXXX" and "0111XXX"	"0"	"00"	
Musical instrument	"1"	"101XXXX"	"1"	"00"	
Present A/D converter	"1"	"01100XX"	"1"	"11"	
Future A/D converter	"1"	"01101XX"	"1"	"00"	
Solid-state memory	"1"	"0001XXX"	"1"	"00"	
Experimental	"1"	"0000001"	"1"	"00"	

Application or source signal	Input signal to DAT-recorder for consumer audio use of C-channel			On DAT tape	Effect on DAT output
	Cp-bit bit 2	Category code Bits 8 to 14	L-bit Bit 15	ID 6	Cp-bit / L-bit bit 2 / bit 15
	With copyright "0"		Home copy "0"		Not recordable
D/D converter	"0"	"010XXXX"	"0"	-	Not recordable
Magnetic product	"0"	"110XXXX"	"0"	-	Not recordable
Musical instrument	"0"	"101XXXX"	"0"	-	Not recordable
Future A/D converter	"0"	"01101XX"	"0"	-	Not recordable
Solid-state memory	"0"	"0001XXX"	"0"	-	Not recordable
Experimental	"0"	"0000001"	"0"	-	Not recordable
Laser optical product	"0"	"100XXXX"	"1"	-	Not recordable
Broadcast reception	"0"	"0111XXX"	"1"	-	Not recordable
Broadcast reception	"0"	"001XXXX"	"1"	-	Not recordable
CD recordable	"Alternating at 4 Hz to 10 Hz"	"1000000"	"0"	-	Not recordable
	With copyright "0"		Pre-recorded "1"		Recordable set bit 15 to "0"
D/D converter	"0"	"010XXXX"	"1"	"10"	Set bit 15 to "0"
Magnetic product	"0"	"110XXXX"	"1"	"10"	Set bit 15 to "0"
Musical instrument	"0"	"101XXXX"	"1"	"10"	Set bit 15 to "0"
Future A/D converter	"0"	"01101XX"	"1"	"10"	Set bit 15 to "0"
Solid-state memory	"0"	"0001XXX"	"1"	"10"	Set bit 15 to "0"
Experimental	"0"	"0000001"	"1"	"10"	Set bit 15 to "0"
Laser optical product	"0"	"100XXXX"	"0"	"10"	Set bit 15 to "0"
Broadcast reception	"0"	"0111XXX"	"0"	"10"	Set bit 15 to "0"
Broadcast reception	"0"	"001XXXX"	"0"	"10"	Set bit 15 to "0"

C.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

The user data carries a message of a single information unit. The Q and R bits will reflect the states of the start-ID and shortening-ID, respectively. This is shown in Table C.2.

The start bit of the information unit is carried in the subframe of the first sampling word (L_0), the Q bit ("start-ID") in the subframe of the second sampling word (R_0) and the R-bit ("shortening-ID") in the subframe of the third sampling word (L_1), of one DAT frame. Other bits are logical zero "0". When the DAT player replays normally, start-ID and shortening-ID should be transmitted whenever it detects them, that is, start-ID: (300 ± 30) frames and shortening-ID: (33 ± 3) frames.

When the player shortens playback, shortening-ID should be transmitted once for the first frame.

Transmission of start-ID and shortening-ID is illustrated by an example in Figure C.1.

Audio sample word/DAT frame:

$F_s = 48 \text{ kHz}$:	L_0	R_0	L_1	R_1	L_2	L_{1439}	R_{1439}	2 880 words	
$F_s = 44,1 \text{ kHz}$	L_0	R_0	L_1	R_1	L_2	L_{1322}	R_{1322}	2 646 words	
$F_s = 32 \text{ kHz}$	L_0	R_0	L_1	R_1	L_2	L_{959}	R_{959}	1 920 words	(32K, 32K 4-channel mode)
$F_s = 32 \text{ kHz}$	L_0	R_0	L_1	R_1	L_2	L_{1919}	R_{1919}	3 840 words	(32K LP mode)

Table C.2 – User data application in the DAT system

Word	User data
L_0	Sync
R_0	S-ID
L_1	Sh-ID
R_1	0
L_2	0
R_2	0
.....
.....
.....
.....
.....
L_0	Sync
R_0	S-ID
L_1	Sh-ID
R_1	0

One DAT frame

IECNORM.COM · Click to view the full PDF of IEC 60958-3:2021 RLV

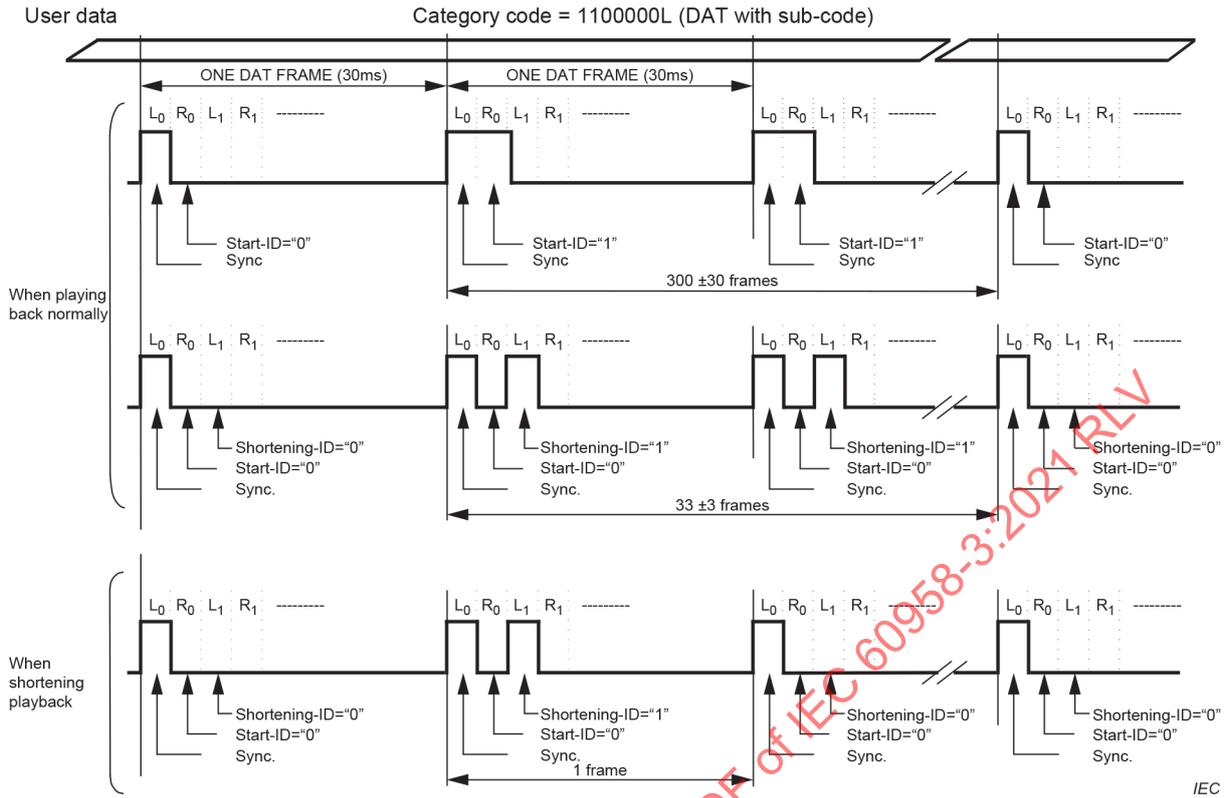


Figure C.1 – Example of different combinations of start-ID and shortening-ID

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex D (normative)

Application of the digital interface in laser optical digital audio systems for which no other category code is defined

D.1 Overview

This annex applies to equipment having category code "100 1000L".

D.2 General: application-specific details

This category code is for signals from laser optical read-out of discs not compatible with IEC 60908, for example, the magnetic-optical type.

The code "100 10000" shall be used for read-out from pre-recorded discs.

The code "100 10001" shall be used for read-out from home-recorded discs.

The audio sample word length is maximum 24 bits.

D.3 Channel status: application-specific details

Not applicable.

D.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex E (normative)

Application of the digital interface in a digital audio mixer in the consumer mode

E.1 Overview

This annex applies to equipment having category code "010 0100L".

E.2 General: application-specific details

This category code is for signals from products that mix various digital input channels into one or more digital output signals.

E.3 Channel status: application-specific details

This category code shall be used only for products that correctly flag in the output signal the copyright status and the generation status of the input signal(s). Where more than one digital audio input signal is combined into one digital audio output signal, and at least one of the input signals is a first generation or higher copy over which copyright protection has been asserted, then the equipment shall reflect in the L-bit of the digital output signal the generation status for a first generation or higher copy and in the Cp-bit that copyright protection is asserted.

The product shall always apply category code 010 0100L, even when the equipment is adjusted so as not to alter the input signal, i.e. the output signal is identical to the input signal. However, when all input signals originate from an A/D converter and carry category code 011 00XXL, the output signal can also carry category code A/D converter (011 00XXL).

Input signals, of which the copyright status is ambiguous, such as with category code "general", shall result in an output signal with bit 2 = "0" and bit 15 = "1" (copyright protection asserted, original).

E.4 User data: application specific details

Equipment specified in this annex is classified as class III (see 6.2.3).

Annex F (normative)

Application of the digital interface with a sampling rate converter in the consumer mode

F.1 Overview

This annex applies to equipment having category code "010 1100L".

F.2 General: application-specific details

This category code is for signals from products that modify or change the sampling frequency of digital signals.

F.3 Channel status: application-specific details

This category code shall be used only for products that correctly flag in the output signal the copyright status and the generation status of the input signal. Input signals for which copyright protection has been asserted, and which are not "original" shall result in an output signal with bit 2 = "0" and bit 15 = "0".

The product shall always apply category code 010 1100L, whether the equipment is adjusted so as not to alter the signal (so that the input signal is identical to the output signal), or is adjusted differently. However, when the input signal originates from an A/D converter and carries category code 011 00XXL, the output signal can also carry category code A/D converter (011 00XXL).

Input signals, of which the copyright status is ambiguous such as with category code "general", shall result in an output signal with bit 2 = "0" and bit 15 = "1" (copyright protection asserted, original).

F.4 User data: application-specific details

Equipment specified in this annex is classified as class III (see 6.2.3).

Annex G (normative)

Application of the digital interface with a digital sound sampler in the consumer mode

G.1 Overview

This annex applies to equipment having category code "010 0010L".

G.2 General: application-specific details

This category code is for signals from products that sample and reassemble digital input signal(s) into one or more digital output signals.

G.3 Channel status: application-specific details

This category code shall only be used for products that correctly flag in the output signal the copyright status and the generation status of the input signal. Input signals for which copyright protection has been asserted, and which are not "original", and which are used for sampling for more than 1 s, shall result in an output signal with bit 2 = "0" and bit 15 = "0".

When the input signal originates from an A/D converter and carries category code 011 00XXL, the output signal can also carry category code A/D converter (011 00XXL).

Input signals, of which the copyright status is ambiguous such as with category code "general", shall result in an output signal with bit 2 = "0" and bit 15 = "1" (copyright protection asserted, original).

G.4 User data: application specific details

Equipment specified in this annex is classified as class III (see 6.2.3).

Annex H (normative)

Application of the digital interface in a digital broadcast receiver (Japan) in the consumer mode

H.1 Overview

This annex applies to equipment having category code "001 0000L".

H.2 General: application-specific details

This category code shall be used for digital audio broadcast reception with or without a video signal (for example, digital satellite reception) in Japan.

The audio sample word length is 14 or 16 bits.

The auxiliary sample bits are "0".

H.3 Channel status: application-specific details

Bits 0 to 5 (CONTROL) should be copied from the source.

Cp-bit = "0" in the case where copyright information has been transmitted and copyright protection asserted, or no copyright information is transmitted.

Cp-bit = "1" in the case where copyright information has been transmitted and no copyright protection asserted.

H.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

User data bits = "0" (reserved).

Annex I (normative)

Application of the digital interface in a digital broadcast receiver (Europe) in the consumer mode

I.1 Overview

This annex applies to equipment having category code "001 1000L".

I.2 General: application-specific details

This category code shall be used for digital audio broadcast reception with or without a video signal (for example, digital satellite reception) in Europe.

The audio sample word length is 14 or more bits.

I.3 Channel status: application-specific details

Cp-bit = "0" in the case where copyright information has been transmitted and copyright protection asserted or no copyright information is transmitted.

Cp-bit = "1" in the case where copyright information has been transmitted and no copyright protection asserted.

I.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

User data bits = "0" (reserved).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex J (normative)

Application of the digital interface in a digital broadcast receiver (USA) in the consumer mode

J.1 Overview

This annex applies to equipment having category code "001 0011L".

J.2 General: application-specific details

This category code shall be used for digital audio broadcast reception with or without a video signal (for example, digital satellite reception) in the USA.

The audio sample word length is 14 bits or more.

J.3 Channel status: application-specific details

Cp-bit = "0" in the case where copyright information has been transmitted and copyright protection asserted or no copyright information is transmitted.

Cp-bit = "1" in the case where copyright information has been transmitted and no copyright protection asserted.

J.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

User data bits = "0" (reserved).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex K (normative)

Application of the digital interface for electronic software delivery in the consumer mode

K.1 Overview

This annex applies to equipment having category code "001 0001L".

K.2 General: application-specific details

This category code shall be used for digital audio signals from receivers for which a fee may be charged for the reception of certain software.

K.3 Channel status: application-specific details

Cp-bit = "0" in the case where copyright information has been transmitted and copyright protection asserted, or no copyright information is transmitted.

Cp-bit = "1" in the case where copyright information has been transmitted and no copyright protection asserted.

K.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex L (normative)

Application of the digital interface in the digital compact cassette system in the consumer mode

L.1 Overview

This annex applies to equipment having category code "110 0001L".

L.2 General: application-specific details

This category code shall be used for equipment specified according to the digital compact cassette (DCC) system.

L.3 Channel status: application-specific details

Not applicable.

L.4 User data: application-specific details

L.4.1 General

Equipment specified in this annex is classified as class I (see 6.2.3).

Two modes are available, marker mode and extended mode. Both use the same definition of messages. The marker mode is required; the extended mode is optional.

L.4.2 Marker mode

This mode allows just one message that contains the most important information. This message consists of one information unit, which is shown in Figure L.1.



Figure L.1 – Marker mode

The bits have the following definitions.

- The first bit is the start bit and is equal to "1".
- The second bit is "0" to identify that it is a marker-mode message.
- LAB (LABEL): gives an indication of the position of the start of a track. The following rules apply:
during play back the equipment should
 - a) set the LAB-bit to "1" for 16 frames at the start of a new track;

NOTE 1 The "0" to "1" transition coincides with the track start (a track start is indicated on pre-recorded tapes by the "1" to "0" transition of the L-ID, and on consumer recorded tapes by the "0" to "1" transition of the same bit);

- b) set the LAB-bit to "0" if the SCM-ID (and SCM-bit in the marker mode) is "1".

during recording the equipment should

- c) record an L-ID = "1" for 16 frames if it detects an SCM bit "1" to "0" transition;
- d) record an L-ID = "1" for 16 frames if it detects a LAB-bit "0" to "1" transition.

- SH (SHORTENING ID): if this bit is set to "1", play starts.
- FAD (FADE): if this bit is set to "1", a gradual reduction of playback level occurs from start of mute, and a gradual increase of playback level occurs from reset of mute. If this bit is set to "0", start and reset of mute occur in one step.
- MUT (MUTE): if this bit is set to "1", mute starts and will continue until the bit is reset to "0".
- STP (STOP): this bit is set to "1" if no audio signal is available due to search actions or when playback is stopped. Otherwise, it is set to "0".
- SCM (SECTOR MARKER): this bit is set to "1" during detection of a sector marker.

This marker-mode message shall be sent at least once for every DCC tape frame.

It is recommended that the information be sent simultaneously with the audio information.

NOTE 2 L-ID and sector markers are signals recorded in the auxiliary information track of the DCC player, indicating specific portions of the tape.

L.4.3 Extended mode

L.4.3.1 General

In this mode, several messages are defined. The first IU of a message is as shown in Figure L.2.

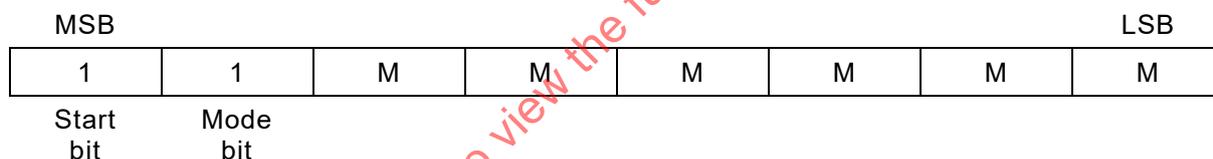


Figure L.2 – Extended mode

- The first bit is the start bit and is equal to "1".
- The second bit is "1" to identify the extended mode.
- The remaining bits indicate the message number.

L.4.3.2 Message number "000000": current status

Implementation of this message is optional. If implemented, a message shall be sent at least once in every tape frame.

This message contains information on the current status of the deck. Three bytes of information shall be made available: deck status, track number and index number. The three bytes are carried in four IUs. The layout of the whole message shall be as shown in Table L.1.

Table L.1 – Layout of message number "000000"

1 (Start)	1 (Extended mode)	0	0	0	0	0	0
1 (Start)	Error flag	State ₇	State ₆	State ₅	State ₄	State ₃	State ₂
1 (Start)	Error flag	State ₁	State ₀	Track ₇	Track ₆	Track ₅	Track ₄
1 (Start)	Error flag	Track ₃	Track ₂	Track ₁	Track ₀	Index ₇	Index ₆
1 (Start)	Error flag	Index ₅	Index ₄	Index ₃	Index ₂	Index ₁	Index ₀

The error flag is optional and can be used to indicate whether the information in the IU is possibly in error: "0" = no error, "1" = possible error in the remaining six bits.

The deck status is carried with the MSB first. It is a BCD-coded two-digit message. The codes given in Table L.2 apply.

Table L.2 – Deck status codes

Code	Meaning	Explanation
00	STOP	Deck stopped, no information read from tape
01	PAUSE	Deck in pause mode, no information read from tape
02	EJECT	Cassette ejected, no ITTS and auxiliary information available from tape
11	PLAY-A	Playback of sector A, information read from tape
12	PLAY-B	Playback of sector B, information read from tape
13	PLAY-C	Playback of sector C, information read from tape
14	PLAY-D	Playback of sector D, information read from tape
18	CC-PLAY	A compact cassette is played back, no information from tape
21	WIND	Wind (forward in time), no information read from tape
22	REWIND	Rewind (backwards in time), no information read from tape
23	SEARCH-F	Forward search, track number estimated from markers
24	SEARCH-B	Backward search, track number estimated from markers
30	REC-PAU	Recording + pause mode, no ITTS and auxiliary information available from tape
31	REC	Recording, no ITTS and auxiliary information available from tape

Mode indications 30 and 31 shall be available only during recording from analogue sources. Recording from digital sources implies that the information from the digital source will be copied on the digital output.

The track and index information is copied from the auxiliary data, or may be estimated during search or playback of tapes with track numbering. During playback of tapes without track numbering or compact cassettes, the track and index number is unknown ("00"). Both bytes are BCD-coded with MSB first.

L.4.3.3 Message numbers "000001", "000010", "000011": ITTS packet message

Text information in the form of "ITTS packets" from the DCC tape can optionally be transferred on the digital output. If implemented, the message number "000000" (current status) shall also be implemented. All ITTS packets shall be sent in the same sequence as recorded on the DCC tape.

The message number indicates whether the message contains the start of an ITTS packet, a continuation or the end of a packet.

Message number	Contents
"000001"	ITTS packet start or complete packet
"000010"	ITTS packet continuation
"000011"	ITTS packet continuation and end

The 48 bytes of an ITTS packet shall be coded in a similar way to the method used for coding the three bytes of the current status message, using four IUs for every three bytes, bytes coded with the MSB first. If a message does not contain a multiple of three ITTS bytes, the remaining bits in the IU that contains the last bits of the final ITTS byte shall be padded with "0" bits (for example, for a message of two ITTS bytes, three information units are used, in which the two final bits of the third information unit contain "0"). It is not permitted to add an IU that is fully padded with "0" bits, as this would make the detection of an ITTS byte with all zeroes impossible.

In total, the extended message consists of a maximum of 66 IUs: one IU to indicate extended message, one IU containing message contents identification, and a maximum of 64 IUs for the ITTS packet data, including error flags and start bits.

An example of a complete ITTS packet extended message is shown in Table L.3.

Table L.3 – ITTS packet extended message example

1 (Start)	1 (Extended mode)	0	0	0	0	0	1
1(Start)	IU count ₆	IU count ₅	IU count ₄	IU count ₃	IU count ₂	IU count ₁	IU count ₀
1(Start)	Error flag	Byte 1 ₆	Byte 1 ₆	Byte 1 ₅	Byte 1 ₄	Byte 1 ₃	Byte 1 ₂
1(Start)	Error flag	Byte 1 ₁	Byte 1 ₀	Byte 2 ₇	Byte 2 ₆	Byte 2 ₅	Byte 2 ₄
1(Start)	Error flag	Byte 2 ₃	Byte 2 ₂	Byte 2 ₁	Byte 2 ₀	Byte 3 ₇	Byte 3 ₆
1(Start)	Error flag	Byte 3 ₅	Byte 3 ₄	Byte 3 ₃	Byte 3 ₂	Byte 3 ₁	Byte 3 ₀
...
1(Start)	Error flag	Byte 46 ₇	Byte 46 ₆	Byte 46 ₅	Byte 46 ₄	Byte 46 ₃	Byte 46 ₂
1(Start)	Error flag	Byte 46 ₁	Byte 46 ₀	Byte 47 ₇	Byte 47 ₆	Byte 47 ₅	Byte 47 ₄
1(Start)	Error flag	Byte 47 ₃	Byte 47 ₂	Byte 47 ₁	Byte 47 ₀	Byte 48 ₇	Byte 48 ₆
1(Start)	Error flag	Byte 48 ₅	Byte 48 ₄	Byte 48 ₃	Byte 48 ₂	Byte 48 ₁	Byte 48 ₀

The information unit count (IU count_{6...0}) indicates how many information units will follow and can range from 0 (no ITTS information available) to 64 (complete ITTS packet).

IU count₆ = MSB, IU count₀ = LSB, binary coded.

The error flag is optional and can be used to indicate whether the information in the IU is in error: "0" = no error detected, "1" = error in the remaining six bits.

Bytes 46 to 48 represent here the three last character codes in an ITTS packet.

Partial ITTS packets may be sent in similar fashion. The message number may need to be changed according to the contents: start, continuation or end. Several combinations are possible, as shown in L.4.3.4 a), b) and c).

It is also allowed to mix ITTS messages with marker-mode and other extended-mode messages, as long as the ITTS packet sequence is maintained, as shown in L.4.3.4 d).

L.4.3.4 Examples of ITTS packet transfer

a) Complete ITTS packet transfer

Message number	IU count	Total message length	ITTS bytes
000001 start	64	66	48

b) One ITTS packet in the form of two combined messages

Message number	IU count	Total message length	ITTS bytes
000001 start	32	34	24
000011 end	32	34	24

c) Two examples of one ITTS packet in the form of three combined messages

Example 1

Message number	IU count	Total message length	ITTS bytes
000001 start	11	13	8
000010 continue	43	45	32
000011 end	11	13	8

NOTE The number of ITTS bytes transferred in a message in the examples above may be changed, as long as the total number of ITTS bytes remains below 48 and the IU count is adjusted accordingly.

Example 2

Message number	IU count	Total message length	ITTS bytes
000001 start	12	14	9
000010 continue	40	42	30
000011 end	12	14	9

d) One ITTS packet in the form of eight messages with marker mode and current status

First byte	IU count	Total message length	ITTS bytes
11000001 start	8	10	6
11000010 continue	8	10	6
11000010 continue	8	10	6
11000010 continue	8	10	6
10xxxxxx marker	–	1	–
11000000 current status	–	5	–
11000010 continue	8	10	6
11000010 continue	8	10	6
11000010 continue	8	10	6
11000011 end	8	10	6

Other message numbers are reserved for future use.

Annex M (normative)

Application of the digital interface in the mini-disc system in the consumer mode

M.1 Overview

This annex applies to equipment having category code "100 1001L".

M.2 General: application-specific details

This category code is for signals from products according to the mini-disc system.

M.3 Channel status: application-specific details

Not applicable.

M.4 User data: application-specific details

Equipment specified in this annex is classified as class 1 (see 6.2.3).

The format of user data is in accordance with Clause A.4.

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex N

(normative)

Application of the digital interface in a digital sound processor in the consumer mode

N.1 Overview

This annex applies to equipment having category code "010 1010L".

N.2 General: application-specific details

This category code is for signals from products that transform the audio information, such as equalization, echo, delay, surround sound, etc.

N.3 Channel status: application-specific details

Not applicable.

N.4 User data: application-specific details

Equipment specified in this annex is classified as class II (see 6.2.3).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex O (normative)

Application of the digital interface in the digital versatile disc system (DVD) in the consumer mode

O.1 Overview

This annex applies to equipment having category code "100 1100L".

O.2 General: application-specific details

This category code is for signals from products according to the DVD system.

O.3 Channel status: application-specific details

Not applicable.

O.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex P (informative)

Use of original sampling frequency, sampling frequency and clock accuracy

The bit states in the channel status fields for "original sampling frequency", "sampling frequency" and "clock accuracy" can identify the process being executed in a player and interface unit of a transmitter.

For explanation, terms are defined in Table P.1.

Table P.1 – Term definitions

Term	Meaning	Explanation
OSF	Original sampling frequency	Sampling frequency recorded on disc, etc. This can be identified by bits 36-39
TSF	Transmitted sampling frequency	The sampling frequency required to present the transmitted audio data at the intended reproduction speed. This can be identified by bits 24-27
IFR	Interface frame rate	Frame rate on interface
N	Up or down sampling ratio	By re-sampling, etc.
M	High-speed transmission ratio	By high-speed revolution of disc, etc.

The player and interface model is described in Figure P.1.

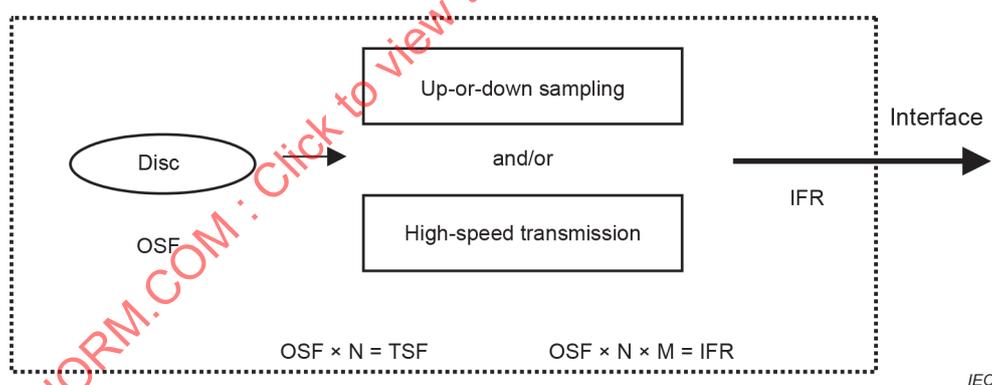


Figure P.1 – Player and interface model

In this model, cases depend on the state of channel status bits 28 and 29, as described in Table P.2. With the state "11", "interface frame rate not matched to sampling frequency", high-speed transmission is used and the interface frame rate (IFR) is scaled up from the transmitted sampling frequency (TSF) by the high-speed transmission ratio (M). For other states of bits 28 and 29 IFR is equal to TSF.

TSF is equal to the original sampling frequency (OSF) except when up-or-down sampling (sample rate conversion) is used. In that case, the TSF is scaled from the OSF by the up or down sampling ratio (N).

Table P.2 – Cases

Bits 28,29	TSF	IFR	Case
11	TSF = N × OSF	IFR = TSF × M	High-speed transmission and up or down sampling
11	TSF = OSF	IFR = TSF × M	High-speed transmission
00, 01, 10	TSF = N × OSF	IFR = TSF	Up or down sampling
00, 01, 10	TSF = OSF	IFR = TSF	Original

In Table P.3, some examples of cases are described.

Table P.3 – Example

	Player conditions					Interface coding		
	Sampling frequency recorded in disc	Up or down sampling ratio	Transmitted sampling frequency	High-speed transmission ratio	Interface frame rate	Clock accuracy	Original sampling frequency (OSF)	Sampling frequency (TSF)
	OSF	N	TSF	M	IFR	Bit 28,29	Bits 36-39	Bits 24-27
Formula			OSF × N		OSF × N × M			
Example	44,1 kHz	2	88,2 kHz	1	88,2 kHz	00,01,10	1111	0001
		1	44,1 kHz	1	44,1 kHz	00,01,10		0000
				2	88,2 kHz	11		
				4	176,4 kHz	11		
	96 kHz	1	96 kHz	1	96 kHz	00,01,10	1010	0101
				2	192 kHz	11		
		1/2	48 kHz	1	48 kHz	00,01,10		0100
				2	96 kHz ^a	11		
				4	192 kHz	11		
	192 kHz	1	192 kHz	1	192 kHz	00,01,10	1000	0111
				1	96 kHz	00,01,10		
		1/2	96 kHz	2	192 kHz ^a	11		0101
1/4		48 kHz	1	48 kHz	00,01,10	0100		
			2	96 kHz	11			
			4	192 kHz ^a	11			

NOTE ^a Even if OSF is equal to IFR, there may be a down sampling and high-speed transmission process if TSF is not also equal.

Annex Q (normative)

Application of the digital interface in magnetic disc digital audio systems in the consumer mode

Q.1 Overview

This annex applies to equipment having category code "110 1100L".

Q.2 General: application-specific details

This category code is for signals from magnetic disc, i.e. hard disc drive products.

The code "110 11000" shall be used for read-out from home-recorded discs or no indication.

The code "110 11001" shall be used for read-out from commercially released pre-recorded discs or equivalent contents that is delivered by the other media or system.

The audio sample word length is maximum 24 bits.

Q.3 Channel status: application-specific details

Not applicable.

Q.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex R (normative)

Explanations of category code implementation

R.1 Multi-media player

When a product can play multiple recorded media, a category code is assigned as a medium that is playing. This rule is compliant with the definition of 5.3.1.

Then a category code may change within a player that can play multi-media (see Figure R.1).

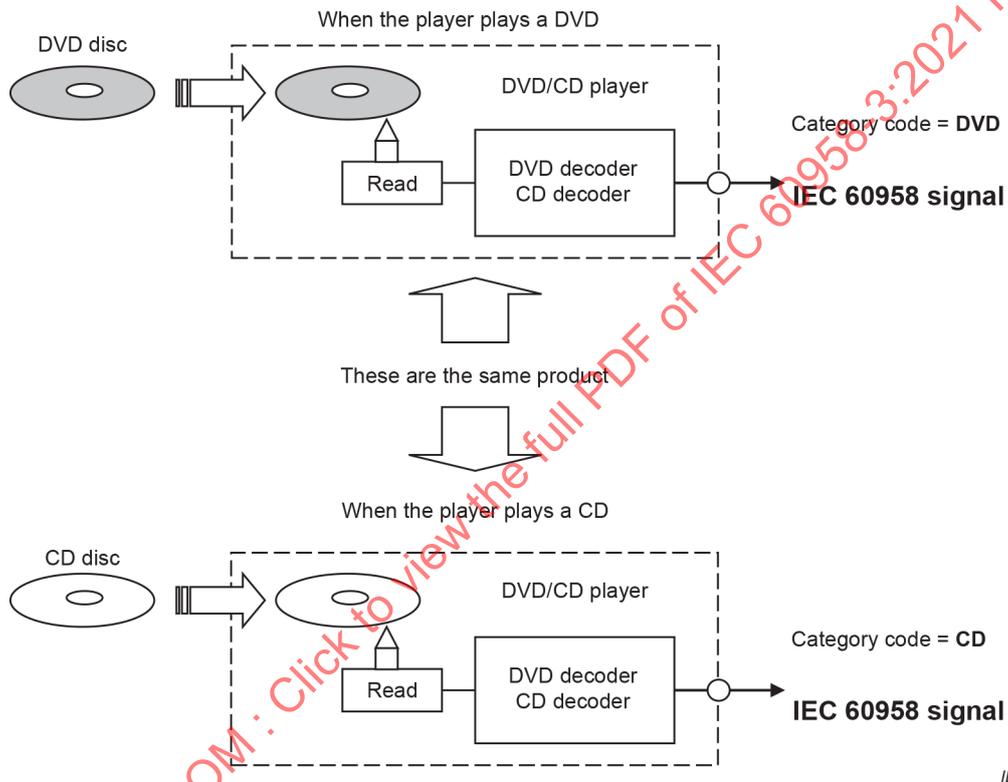


Figure R.1 – Multi-media player

R.2 Home-recorded medium player

A category code from a player is a category code of playing medium.

If a CD recorder records some contents from an IEC 60958 interface that has a category code, a player that plays the recorded disc does not carry a category code of the original source (see Figure R.2).

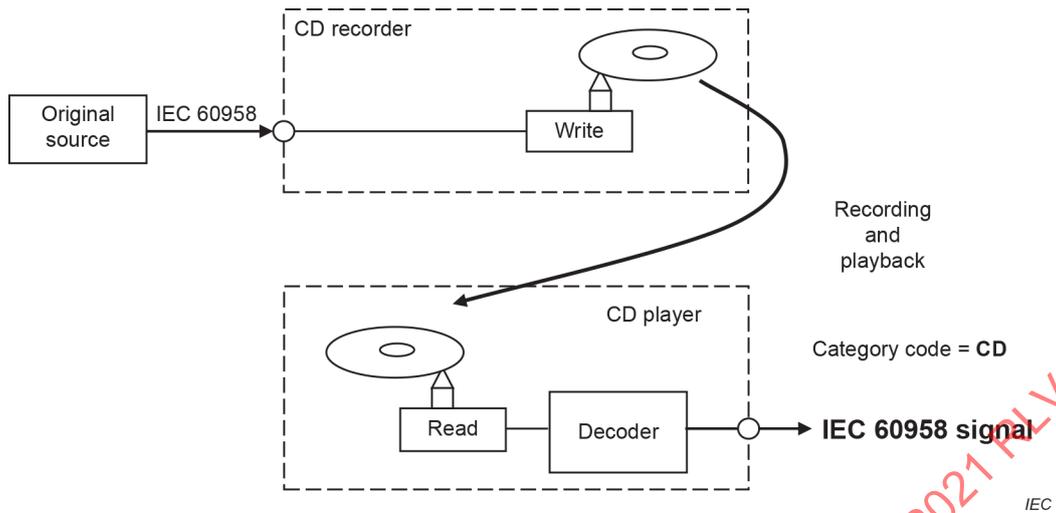


Figure R.2 – Home-recorded medium player

R.3 Monitoring output from a recorder

R.3.1 Real-time monitoring (direct monitoring)

If output data is transmitted direct from an input monitoring terminal, the category code is the same as the input one (see Figure R.3).

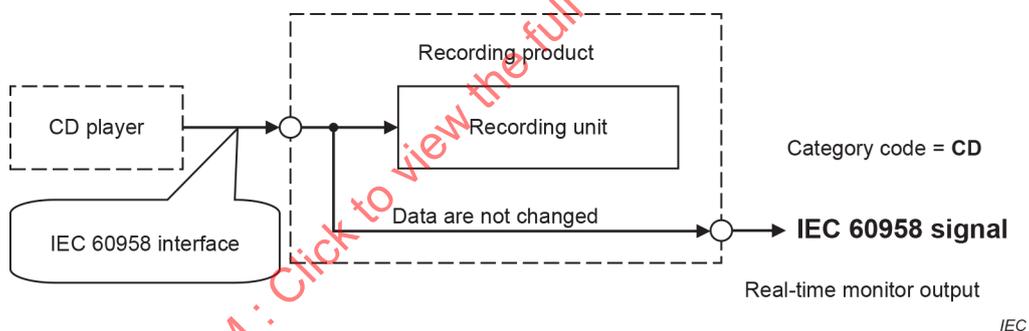


Figure R.3 – Direct monitoring

R.3.2 Monitoring after recording

An output category code is assigned as a reading medium.

Even if writing and reading are done simultaneously, the output category code is one of reading medium (see Figure R.4).

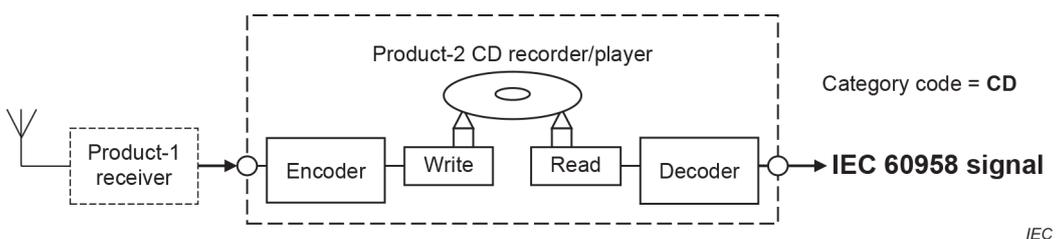


Figure R.4 – Monitoring after recording

R.4 Integrated products

The definition of 5.3.1 defines a category code of a product as an active function to make a source data. In other words, a category code of an integrated product is assigned to the selected unit (see Figure R.5).

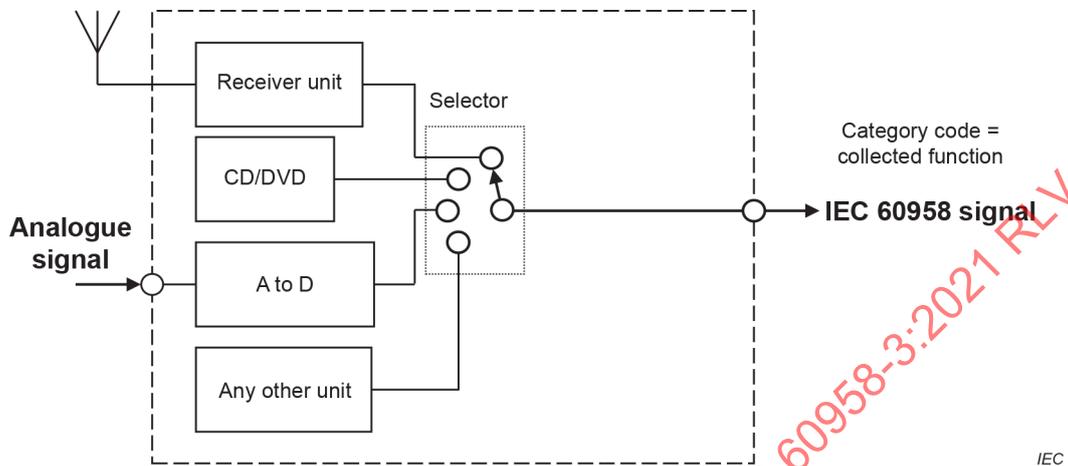


Figure R.5 – Integrated product

R.5 Implementation rule of category code groups for digital/digital converter and signal-processing products

R.5.1 Discrete product worked as a digital/digital converter or a signal processing unit

A category code of an output signal is assigned by Table 5 as 010 XXXXL".

When an input IEC 60958 data is not changed in the product, an output category code of the product takes over from the input category code. Even in this case, a product of this group may use the category code of "digital/digital converter or a signal processing unit". In this case, the setting of output channel status should be equivalent to the source channel status. Discrete product complied with category code groups of digital/digital converter and processing unit (see Figure R.6).

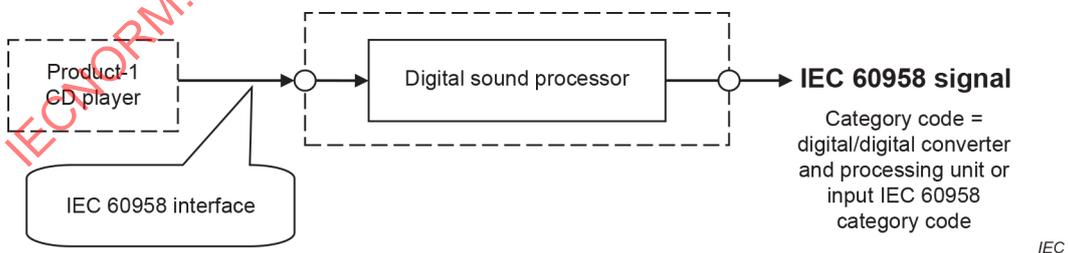


Figure R.6 – Digital/digital converter

R.5.2 Integrated product including a digital/digital converter or a signal processing unit

When the input of a digital/digital converter or a signal processing unit is connected to other units or input terminals in the product as follows, the output category code may be assigned as source unit and also assigned as "digital/digital converter and signal processing products". In this case, the setting of output channel status should be equivalent to source conditions (see Figure R.7).

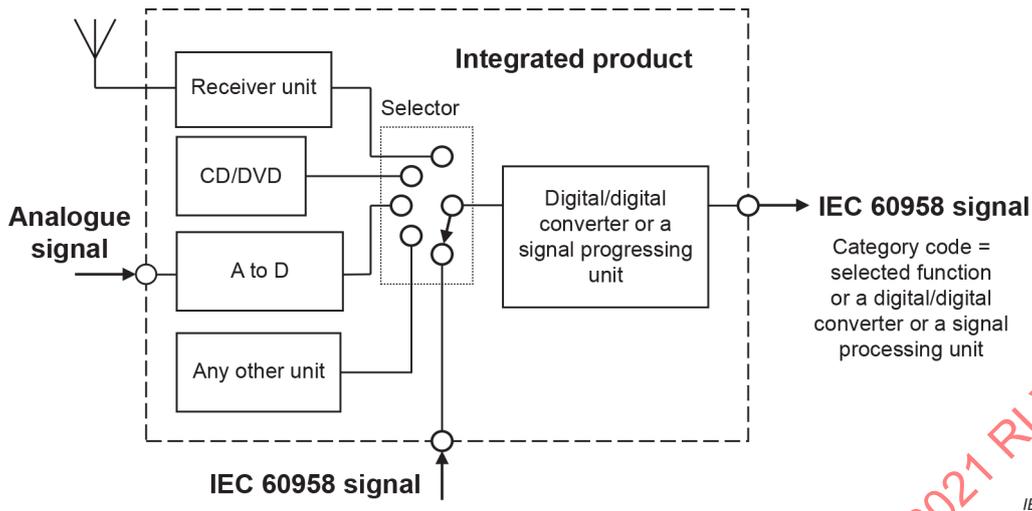


Figure R.7 – Integrated product including digital/digital converter

R.6 Magnetic disc recorder unit inside an integrated product

If an output signal is transmitted from a magnetic disc recorder unit in a playback of a magnetic disc as follows, a category code of a product shall be defined as one of a tape- or disc-based products reception whatever the selector position is (see Figure R.8).

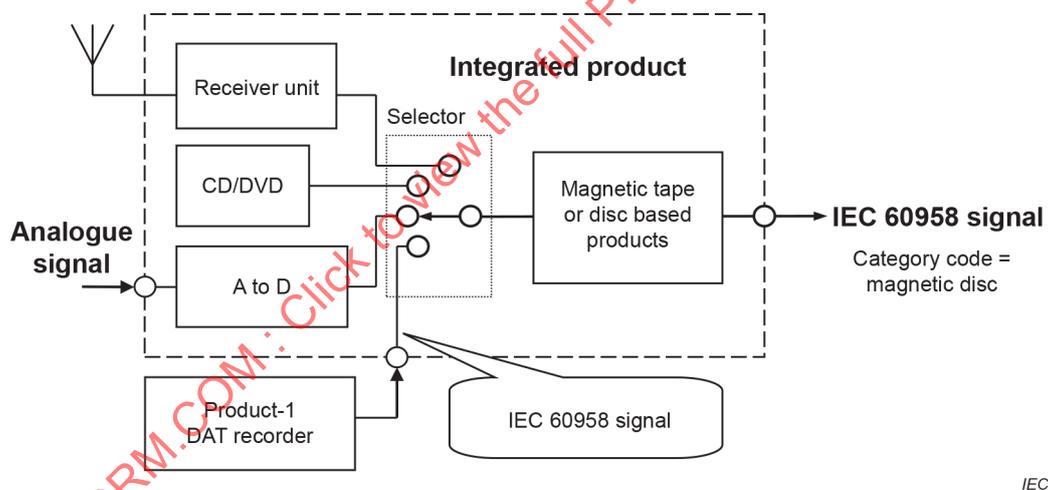


Figure R.8 – Integrated product including magnetic disc recorder

R.7 Category code assignment

R.7.1 No category code in a corresponding category code group

If there is no corresponding category code for the product, it may use a category code of "other products" in the category group.

R.7.2 No category code group for a corresponding product

If there is no corresponding category group for the product, it may use a category code of "other products".

R.8 Other assignment of integrated products

Though a category code of a product is defined as an active function to make a source data, to keep consistency with the previous version of this document, it is admitted that one category code can be assigned to a product.

In order to apply this method, the category code should not change in any case, and the setting of the output channel status should be equivalent to source conditions.

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex S (informative)

Application of the digital audio interface for synchronization of audio, video and multi-media equipment

S.1 General

When reproducing or watching audio-visual content, audio and video presentation time should be assumed to coincide at the source device. However, lip-sync problems ~~may~~ can be caused by transmission. It is because of the difference between audio latency and video latency, especially in each individual case of equipment on the paths. In order to solve the problem, this technical specification provides some usages of time-code and latency information onto the digital audio interface.

S.2 Lip-sync system model

The subject is each latency from reproducer to AV presentation (see Figure S.1).

Definitions

Latency: unavoidable delay in a device to propagate and/or processing a data stream from input to output.

Delay: amount of delay intentionally added to a data stream in a device.

TL_v : total sum of latencies of video stream.

TL_a : total sum of latencies of audio stream.

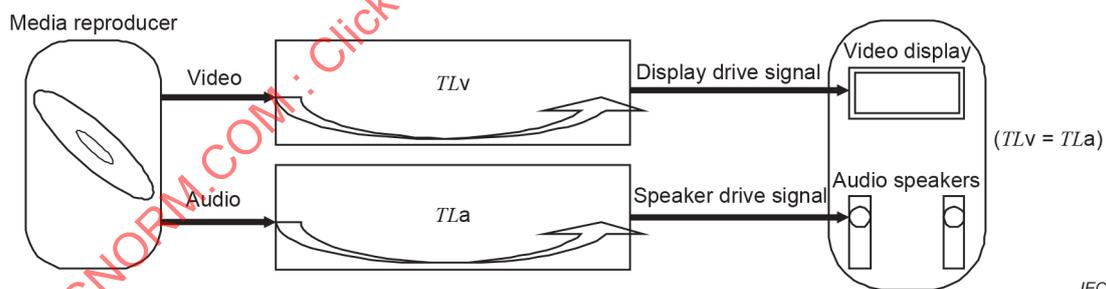


Figure S.1 – Lip-sync system model

S.3 How to compensate lip-sync

S.3.1 General

The basic way is by adding delay to the equipment on the shorter latency path as well as on others. For that purpose, it is necessary to detect the difference between TL_v and TL_a . Vice versa, extra delay on the video path can be added, in principle.

Even if there is no compensation, it ~~may~~ can be negligible because the allowance is high enough in the case where the video presentation is faster than the audio (see Figure S.2).

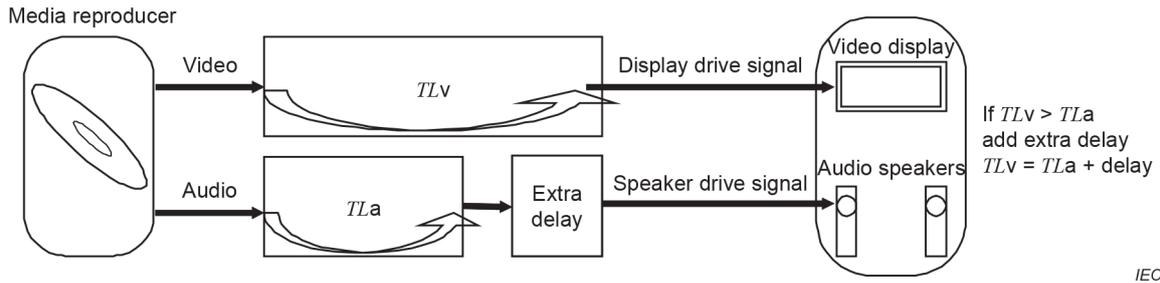


Figure S.2 – Lip-sync compensation

S.3.2 Detection methods

S.3.2.1 General

There are two types of method as follows.

S.3.2.2 Time-code transmission method

The source transmits SMPTE time code concurrently with audio and video signals (see Figure S.3). The controller detects the difference between the audio SMPTE output and that of video. Then the controller adds extra delay.


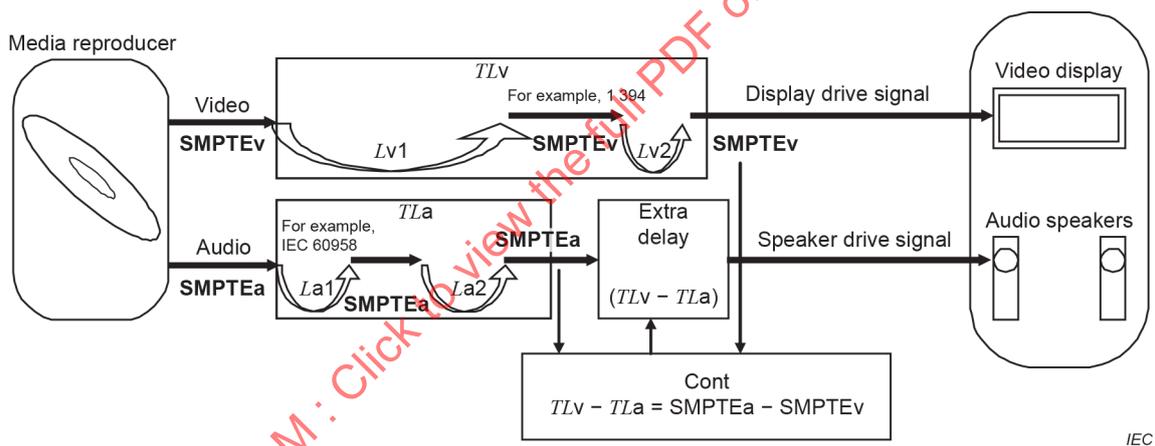


Figure S.3 – Time-code transmission

S.3.2.3 Latency parameter transmission method

All devices transmit accumulative latency parameter. For instance, Video device2 adds L_{v2} on AL_{v1} and outputs accumulated value as AL_{v2} . Therefore, the final device output total sum of latencies through the path is, for example, TL_v or TL_a . A controller detects TL_v and TL_a . Then the controller adds extra delay $(TL_v - TL_a)$ on the device in the audio path if $TL_v > TL_a$ (see Figure S.4).

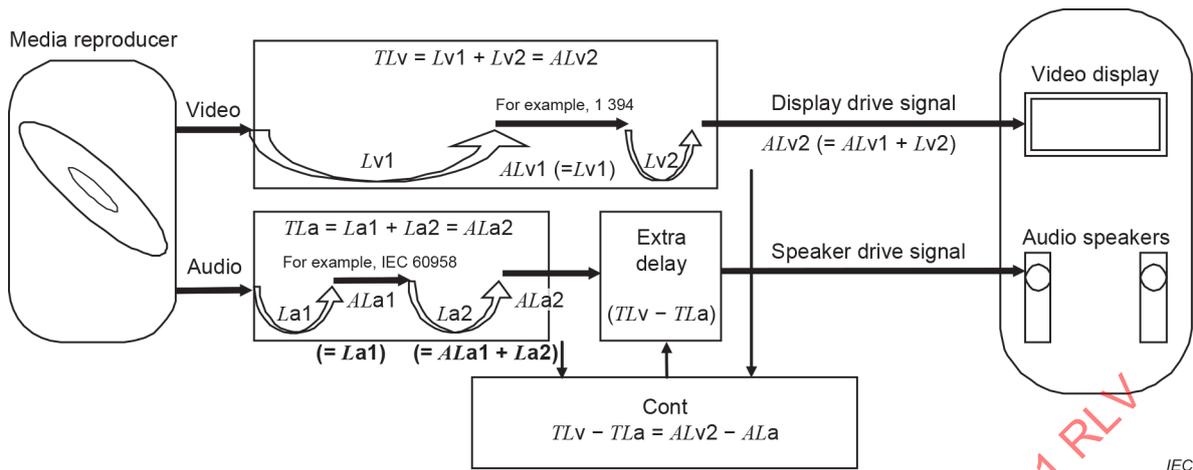


IEC

Figure S.4 – Latency parameter transmission

S.3.2.4 Latency parameter transmission method with TL_v

When the video path has bi-directional data interface such as IEEE 1394 or HDMI, the source device may inquire the total sum of latencies through the video path by ~~some~~ emitting a command sequence in IEEE 1394 format, or by the EDID system in HDMI format. If the source gets the TL_v parameter by means of up-directional way, the TL_v parameter can be transmitted in the audio interface among others. The audio devices transmit accumulative audio latency parameter with TL_a parameter. Therefore, the final audio device output total sum of latencies through the audio path as TL_a with TL_v . Then the controller detects both TL_v and TL_a only from the final audio device. Then the controller adds extra delay $(TL_v - TL_a)$ on the device in audio path, if $TL_v > TL_a$ (see Figure S.5).

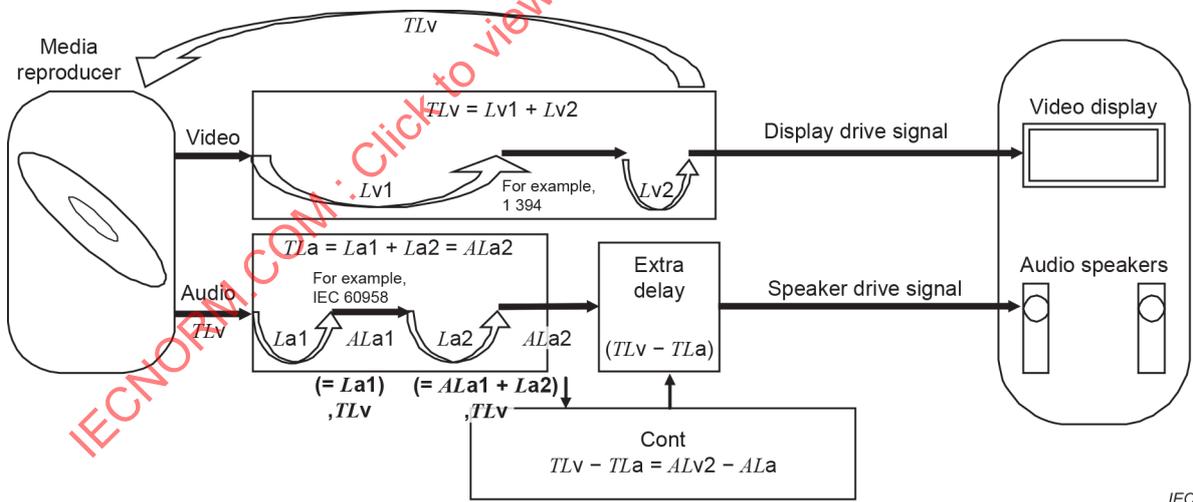

IEC

Figure S.5 – Latency parameter transmission with TL_v

S.4 Use of time code

When a source transmits the SMPTE LTC time code and/or the SMPTE VITC time code by user bits, the time code transmission timing shall be aligned the first start bit of first IU to the video frame top. Therefore, the source shall transmit time the code frame by frame. If there is no valid time code, the source shall not transmit the SMPTE time code.

When a repeater or an equivalent device transmits the SMPTE LTC time code and/or the SMPTE VITC time code by user bits, the time code transmission timing shall have same delay as audio latency. If there is no valid time code, the repeater shall not transmit the SMPTE time code.

S.5 Use of latency information

When a source transmits audio latency and/or video latency by user bits, the latency information transmission timing shall be transmitted at least every 500 ms. In this case, the audio latency shall be the audio latency of the source itself, and the video latency shall be the TL_v parameter that is detected by the up-directional interface in the other video path. If there is no valid information, the source shall set the validity bit to invalid status, or shall not transmit any latency information.


When a repeater or an equivalent device transmits audio latency and/or video latency by user bits, the latency information transmission timing shall be transmitted at least every 500 ms. In this case, the audio latency shall be the added audio latency of the repeater itself on the previous input value accumulatively, and the video latency shall be TL_v as transparent value. If there is no valid information, the repeater shall set the validity bit to invalid status, or shall not transmit any latency information.

When a sink device receives the audio latency and/or the video latency by user bits, the audio latency shall be the added audio latency of the sink itself on the previous input value accumulatively. Then, the final audio latency shall be TL_a . If both audio latency and video latency are valid, the sink device ~~may~~ can calculate the difference between TL_v and TL_a . Then the sink device adds extra delay to compensate if capable. If only the audio latency is valid, the sink device cooperates ~~to~~ with a device that detects total video latencies (TL_v).

S.6 Example of latency parameter transmission method with TL_v

S.6.1 An example for solving lip-sync problems

An example for solving lip-sync problems caused primarily by video processing time is shown in Figure S.6.

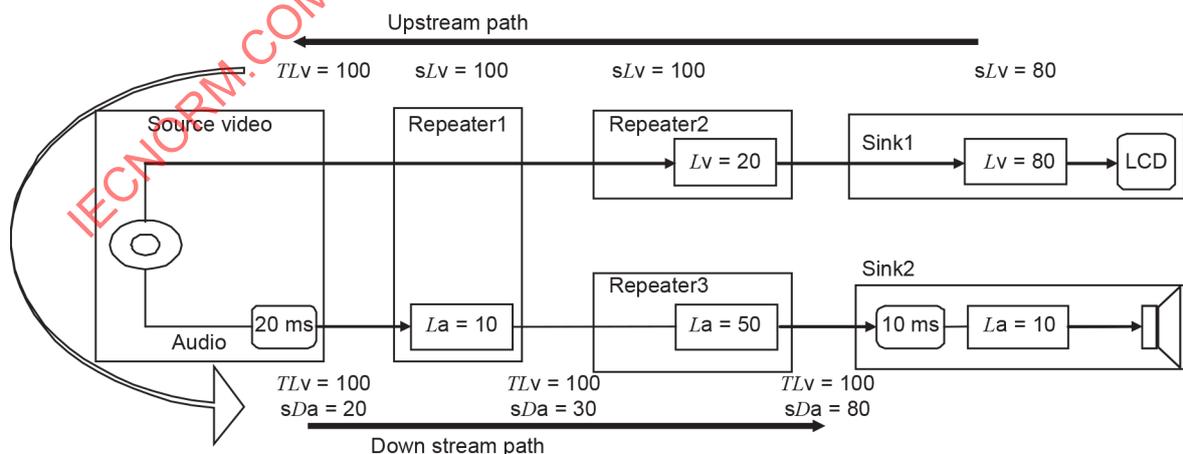

IEC

Figure S.6 – Example of latency parameter transmission

In this example, the source device is the DVD player. The source device first enquires the total sum latency of the video path from the source to the sink device by means of HDMI EDID. The latencies of the devices in the video path are as follows.

Repeater 2: $L_{v1} = 20$ ms , Sink1: $L_{v2} = 80$ ms

As a result, the total latency of the video is 100 ms; and the source device gets the result parameter $TL_V (= 100$ ms).

The source device transmits both the $TL_V (= 100$ ms) and its own audio latency ($L_{a1} = 20$ ms) as $AL_a = 20$ ms by using, for example, the u-bit. Repeater1 receives $TL_V = 100$ ms and $AL_a = 20$ ms and transmits $TL_V = 100$ ms and $TL_a = 30$ ms that is accumulated from the source to the point. Repeater2 receives $TL_V = 100$ ms and $AL_a = 30$ ms and transmits $TL_V = 100$ ms and $AL_a = 80$ ms that is accumulated from the source to the point. Sink2 has adjustable audio delay and its own latency of 10 ms. Sink2 receives $TL_V = 100$ ms and $AL_a = 80$ ms and add extra delay of 10 ms for minimizing the difference between the total audio latency and the total video latency. As a result, the total latency of the audio becomes 100 ms. Thus, the audio path and the video path have the same amount of latency and the lip-sync problem can be solved.

S.6.2 Another example for solving lip-sync problems

Another example for solving lip-sync problems caused primarily by video processing time is shown in Figure S.7.

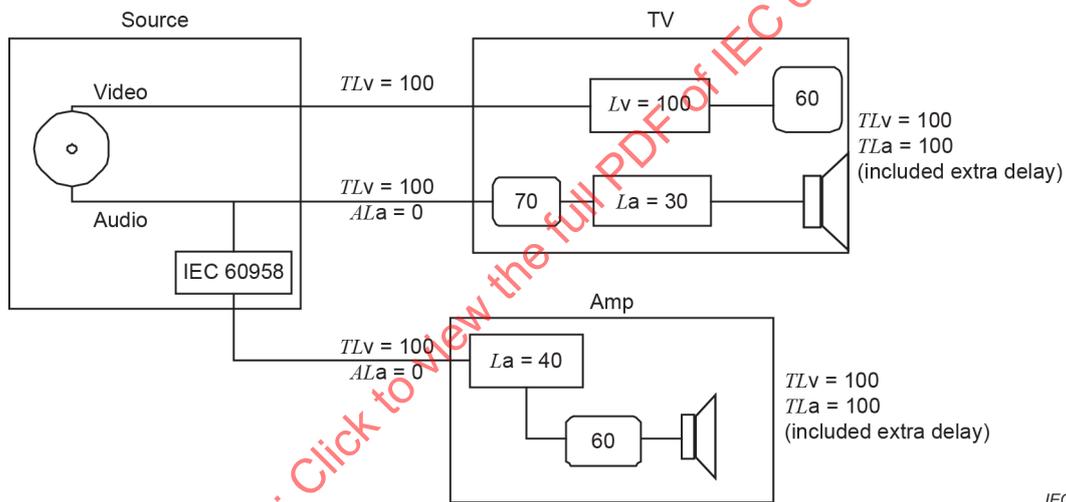


Figure S.7 – Another example for solving lip-sync problems

This example includes some branching audio path. The source device first enquires the total sum latency of the video path from the source to the sink device by means of HDMI EDID. The latencies of the devices in the video path are as follows.

TV: $L_v = 100$ ms

So the total latency of the video is 100 ms; and the source device gets the result parameter $TL_V (= 100$ ms).

The source device transmits both $TL_V (= 100$ ms) and its own audio latency ($L_a = 0$ ms) as $AL_a = 0$ ms to TV. TV has adjustable audio delay and its own latency of 30 ms. TV receives $TL_V = 100$ ms and $AL_a = 0$ ms and adds an extra delay of 70 ms. The source device also transmits both $TL_V (= 100$ ms) and its own audio latency ($L_a = 0$ ms) as $AL_a = 0$ ms to AMP by using, for example, a u-bit. AMP has adjustable audio delay and its own latency of 40 ms. AMP receives $TL_V = 100$ ms and $AL_a = 0$ ms and adds an extra delay of 60 ms. As a result, the total latency of audio becomes 100 ms at the TV. The total latency of audio also becomes 100 ms at the AMP. Thus, all the latencies of the total audio path are adjusted to the same value of video. The lip-sync problem can be solved in this topology.

Annex T (normative)

MPEG Surround over PCM

T.1 Format of MPEG Surround buried data frames

MPEG Surround bit-stream data should be embedded in conformity with ISO/IEC 23003-1:2007, 7.3. An MPEG Surround buried data frame contains MPEG Surround bit-stream data embedded in the less significant bits of the audio sample words of IEC 60958-3 frames. Figure T.1 illustrates the relation between an MPEG Surround buried data frame and an IEC 60958-3 frame. An MPEG surround buried data frame corresponds to a number of $(bsBDFramelength+1) \times 64$ IEC 60958-3 frames (see ISO/IEC 23003-1:2007, 7.3.3 for the definition of *bsBDFramelength*).

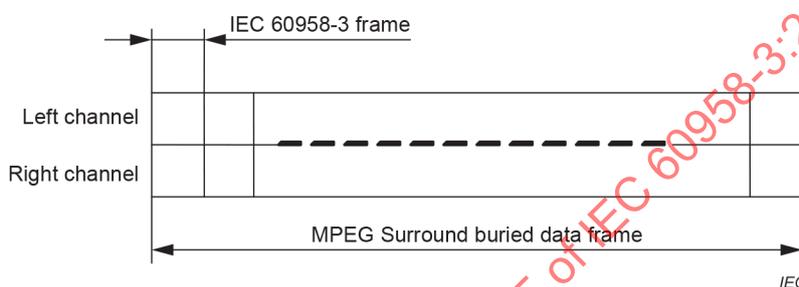


Figure T.1 – Relation between MPEG Surround buried data frame and IEC 60958-3 frame

When embedding MPEG Surround into PCM data in the IEC 60958-3 interface, bit 48 of the channel status shall be set to '1', indicating the presence of hidden information. Furthermore, bits 33, 34 and 35 of the channel status shall be set to indicate the audio word length, that is, have a value different from '000'. In this case, the MPEG Surround buried data shall be embedded starting from the LSB that corresponds to an audio sample word with the length indicated by bits 33, 34 and 35 of the channel status, that is, starting from time slot '28-w' of the subframe, where w represents the audio sample word length. The MPEG Surround buried data sync word *bsBDSyncword*, defined in ISO/IEC 23003-1:2007, 7.3, shall be embedded in the LSB that corresponds to an audio sample word with the length indicated by bits 33, 34 and 35 of the channel status, that is, in time slot '28-w' of the subframe.

T.2 MPEG Surround detection

When bit 48 of the channel status is set to '1' and bits 33, 34 and 35 of the channels status are set to a value different from '000' and MPEG Surround bit-stream data is to be retrieved, the MPEG Surround buried data sync word *bsBDSyncword* shall be searched at the LSB corresponding to an audio sample word with the length indicated by bits 33, 34 and 35 of the channel status, that is, at time slot '28-w' of the subframe, where w represents the audio sample word length.

When bit 48 of the channel status is set to '1' and bits 33, 34 and 35 of the channels status are set to '000' and MPEG Surround bit-stream data is to be retrieved, the MPEG Surround buried data sync word *bsBDSyncword* shall be searched at least at the LSB corresponding to the maximum audio sample word length *w_{max}*, which is indicated by bit 32 of the channel status, that is, at time slot '28-w_{max}' of the subframe, and at the LSB corresponding to an audio sample word length of 16 bits, that is, at time slot 12 of the subframe.

When bit 48 of the channel status is set to '0' and MPEG Surround bit-stream data is to be retrieved, the MPEG Surround buried data sync word *bsBDSyncword* shall be searched at least at the LSB corresponding to an audio sample word length of 16 bits and an audio sample word length of 20 bits, that is, at time slot 12 and 8 of the subframe respectively.

Bibliography

IEC 60841, *Audio recording – PCM encoder/decoder system*

IEC 60908, *Audio recording – Compact disc digital audio system*

IEC 60958 (all parts), *Digital audio interface*

IEC 60958-4:~~2003~~2016, *Digital audio interface – Part 4: Professional applications*

IEC 61119-1, *Digital audio tape cassette system (DAT) – Part 1: Dimensions and characteristics*

IEC 61119-6, *Digital audio tape cassette system (DAT) – Part 6: Serial copy management system*

IEC 61880:1998, *Video systems (525/60) – Video and accompanied data using the vertical blanking interval – Analogue interface*

IEC 61883-6:~~2005~~2014, *Consumer audio/video equipment – Digital interface – Part 6: Audio and music data transmission protocol*

IEC 61937 (all parts), *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958*

IEC 62574:2020, *Audio, video and multimedia systems – General channel assignment of multichannel audio*

ISO/IEC 23003-1:2007, *Information technology – MPEG audio technologies – Part 1: MPEG Surround*

Recommendation ITU-R BS.775-3:2012, *Multichannel stereophonic sound system with and without accompanying picture*

EBU TECH 3285 Version 2.0 (all supplements):2011, *Specification of the Broadcast Wave Format (BWF)*

SMPTE ~~12M~~ ST 12-1:2014, *Television, Audio and Film – Time and Control Code*

IEEE 1394:2004, *IEEE standard for high-performance serial bus bridges*

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of IEC 60958-3:2021 RLV

INTERNATIONAL STANDARD

Digital audio interface –
Part 3: Consumer applications

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

CONTENTS

FOREWORD.....	7
1 Scope.....	9
2 Normative references.....	9
3 Terms and definitions	9
4 Interface format	9
5 Channel status	9
5.1 General.....	9
5.2 Application.....	10
5.2.1 Channel status general format.....	10
5.2.2 Mode 0 channel status format for digital audio equipment for consumer use	13
5.3 Copyright management guidelines for consumer application of the digital audio interface	18
5.3.1 General	18
5.3.2 Category code groups	19
6 User data	22
6.1 General.....	22
6.2 Application.....	22
6.2.1 User data bitstream.....	22
6.2.2 User data message structure.....	22
6.2.3 Equipment classification.....	23
6.2.4 User data message length and contents	24
6.3 Information for synchronization.....	26
6.3.1 General	26
6.3.2 SMPTE time code information	26
6.3.3 Latency information.....	27
6.3.4 Loudness information.....	28
Annex A (normative) Application of the digital audio interface in the compact disc digital audio system	30
A.1 Overview.....	30
A.2 General: application-specific details.....	30
A.3 Channel status: application-specific details.....	30
A.4 User data: application-specific details.....	30
Annex B (normative) Application of the digital interface in the 2-channel PCM encoder/decoder.....	32
B.1 Overview.....	32
B.2 General: application-specific details.....	32
B.3 Channel status: application-specific details.....	32
B.4 User data: application-specific details.....	32
Annex C (normative) Application of the digital interface in the 2-channel digital audio tape recorder in the consumer mode	33
C.1 Overview.....	33
C.2 General: application-specific details.....	33
C.3 Channel status: application-specific details.....	33
C.4 User data: application-specific details.....	34
Annex D (normative) Application of the digital interface in laser optical digital audio systems for which no other category code is defined	37

D.1	Overview.....	37
D.2	General: application-specific details.....	37
D.3	Channel status: application-specific details.....	37
D.4	User data: application-specific details.....	37
Annex E (normative) Application of the digital interface in a digital audio mixer in the consumer mode.....		38
E.1	Overview.....	38
E.2	General: application-specific details.....	38
E.3	Channel status: application-specific details.....	38
E.4	User data: application specific details.....	38
Annex F (normative) Application of the digital interface with a sampling rate converter in the consumer mode.....		39
F.1	Overview.....	39
F.2	General: application-specific details.....	39
F.3	Channel status: application-specific details.....	39
F.4	User data: application-specific details.....	39
Annex G (normative) Application of the digital interface with a digital sound sampler in the consumer mode.....		40
G.1	Overview.....	40
G.2	General: application-specific details.....	40
G.3	Channel status: application-specific details.....	40
G.4	User data: application specific details.....	40
Annex H (normative) Application of the digital interface in a digital broadcast receiver (Japan) in the consumer mode.....		41
H.1	Overview.....	41
H.2	General: application-specific details.....	41
H.3	Channel status: application-specific details.....	41
H.4	User data: application-specific details.....	41
Annex I (normative) Application of the digital interface in a digital broadcast receiver (Europe) in the consumer mode.....		42
I.1	Overview.....	42
I.2	General: application-specific details.....	42
I.3	Channel status: application-specific details.....	42
I.4	User data: application-specific details.....	42
Annex J (normative) Application of the digital interface in a digital broadcast receiver (USA) in the consumer mode.....		43
J.1	Overview.....	43
J.2	General: application-specific details.....	43
J.3	Channel status: application-specific details.....	43
J.4	User data: application-specific details.....	43
Annex K (normative) Application of the digital interface for electronic software delivery in the consumer mode.....		44
K.1	Overview.....	44
K.2	General: application-specific details.....	44
K.3	Channel status: application-specific details.....	44
K.4	User data: application-specific details.....	44
Annex L (normative) Application of the digital interface in the digital compact cassette system in the consumer mode.....		45
L.1	Overview.....	45
L.2	General: application-specific details.....	45

L.3	Channel status: application-specific details	45
L.4	User data: application-specific details	45
L.4.1	General	45
L.4.2	Marker mode	45
L.4.3	Extended mode	46
Annex M (normative)	Application of the digital interface in the mini-disc system in the consumer mode	50
M.1	Overview	50
M.2	General: application-specific details	50
M.3	Channel status: application-specific details	50
M.4	User data: application-specific details	50
Annex N (normative)	Application of the digital interface in a digital sound processor in the consumer mode	51
N.1	Overview	51
N.2	General: application-specific details	51
N.3	Channel status: application-specific details	51
N.4	User data: application-specific details	51
Annex O (normative)	Application of the digital interface in the digital versatile disc system (DVD) in the consumer mode	52
O.1	Overview	52
O.2	General: application-specific details	52
O.3	Channel status: application-specific details	52
O.4	User data: application-specific details	52
Annex P (informative)	Use of original sampling frequency, sampling frequency and clock accuracy	53
Annex Q (normative)	Application of the digital interface in magnetic disc digital audio systems in the consumer mode	55
Q.1	Overview	55
Q.2	General: application-specific details	55
Q.3	Channel status: application-specific details	55
Q.4	User data: application-specific details	55
Annex R (normative)	Explanations of category code implementation	56
R.1	Multi-media player	56
R.2	Home-recorded medium player	56
R.3	Monitoring output from a recorder	57
R.3.1	Real-time monitoring (direct monitoring)	57
R.3.2	Monitoring after recording	57
R.4	Integrated products	58
R.5	Implementation rule of category code groups for digital/digital converter and signal-processing products	58
R.5.1	Discrete product worked as a digital/digital converter or a signal processing unit	58
R.5.2	Integrated product including a digital/digital converter or a signal processing unit	58
R.6	Magnetic disc recorder unit inside an integrated product	59
R.7	Category code assignment	59
R.7.1	No category code in a corresponding category code group	59
R.7.2	No category code group for a corresponding product	59
R.8	Other assignment of integrated products	60

Annex S (informative) Application of the digital audio interface for synchronization of audio, video and multi-media equipment.....	61
S.1 General.....	61
S.2 Lip-sync system model.....	61
S.3 How to compensate lip-sync.....	61
S.3.1 General.....	61
S.3.2 Detection methods.....	62
S.4 Use of time code.....	63
S.5 Use of latency information.....	64
S.6 Example of latency parameter transmission method with TL_V	64
S.6.1 An example for solving lip-sync problems.....	64
S.6.2 Another example for solving lip-sync problems.....	65
Annex T (normative) MPEG Surround over PCM.....	66
T.1 Format of MPEG Surround buried data frames.....	66
T.2 MPEG Surround detection.....	66
Bibliography.....	67
Figure 1 – Example of message structure using information units.....	23
Figure 2 – First UI contents.....	24
Figure 3 – Second UI contents.....	24
Figure 4 – Third UI contents.....	25
Figure 5 – User information.....	25
Figure 6 – SMPTE time code information.....	26
Figure 7 – LTC information alignment.....	26
Figure 8 – VITC information alignment.....	27
Figure 9 – Latency information.....	27
Figure 10 – Latency information alignment.....	28
Figure 11 – Loudness information.....	28
Figure 12 – Loudness information alignment.....	29
Figure C.1 – Example of different combinations of start-ID and shortening-ID.....	36
Figure L.1 – Marker mode.....	45
Figure L.2 – Extended mode.....	46
Figure P.1 – Player and interface model.....	53
Figure R.1 – Multi-media player.....	56
Figure R.2 – Home-recorded medium player.....	57
Figure R.3 – Direct monitoring.....	57
Figure R.4 – Monitoring after recording.....	57
Figure R.5 – Integrated product.....	58
Figure R.6 – Digital/digital converter.....	58
Figure R.7 – Integrated product including digital/digital converter.....	59
Figure R.8 – Integrated product including magnetic disc recorder.....	59
Figure S.1 – Lip-sync system model.....	61
Figure S.2 – Lip-sync compensation.....	62
Figure S.3 – Time-code transmission.....	62
Figure S.4 – Latency parameter transmission.....	63

Figure S.5 – Latency parameter transmission with TLV	63
Figure S.6 – Example of latency parameter transmission	64
Figure S.7 – Another example for solving lip-sync problems.....	65
Figure T.1 – Relation between MPEG Surround buried data frame and IEC 60958-3 frame.....	66
Table 1 – Channel status general format for consumer use	11
Table 2 – Mode 0 channel status format for consumer use.....	13
Table 3 – Category code groups.....	19
Table 4 – Category code groups for laser optical products	20
Table 5 – Category code groups for digital/digital converter and signal-processing products	20
Table 6 – Category code groups for magnetic tape or magnetic disc based products	20
Table 7 – Category code groups for broadcast reception of digitally encoded audio with/without video signals	21
Table 8 – Category code groups for musical instruments, microphones and other sources that create original sound.....	21
Table 9 – Category code groups for A/D converters for analogue signals without copyright information	21
Table 10 – Category code groups for A/D converters for analogue signals with copyright information	21
Table 11 – Category code groups for solid state memory based products.....	22
Table A.1 – Example of 2-channel compact disc format	31
Table C.1 – Use of Cp-bit, L-bit and category code for DAT	33
Table C.2 – User data application in the DAT system.....	35
Table L.1 – Layout of message number "000000"	46
Table L.2 – Deck status codes	47
Table L.3 – ITTS packet extended message example	48
Table P.1 – Term definitions	53
Table P.2 – Cases	54
Table P.3 – Example.....	54

IECNORM.COM Click to view the full PDF of IEC 60958-3:2021 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL AUDIO INTERFACE –**Part 3: Consumer applications****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 60958-3 has been prepared by technical area 20: Analogue and digital audio, of IEC technical committee 100: Audio, video and multimedia systems and equipment. It is an International Standard.

This fourth edition cancels and replaces the third edition published in 2006, Amendment 1:2009 and Amendment 2:2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) The relevant part of IEC 60958-5 is supported.

The text of this International Standard is based on the following documents:

Draft	Report on voting
100/3543/CDV	100/3594/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

A list of all parts in the IEC 60958 series, published under the general title *Digital audio interface*, can be found on the IEC website.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

DIGITAL AUDIO INTERFACE –

Part 3: Consumer applications

1 Scope

This part of IEC 60958 specifies the consumer application of the interface for the inter-connection of digital audio equipment defined in IEC 60958-1.

NOTE When used in a consumer digital processing environment, the interface is primarily intended to carry stereophonic programmes, with a resolution of up to 20 bits per sample, an extension to 24 bits per sample being possible.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60958-1, *Digital audio interface – Part 1: General*

IEC 60958-5, *Digital audio interface – Part 5: Consumer application enhancement*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60958-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Interface format

The interface format as defined in IEC 60958-1 shall be used.

Unless otherwise specified in Annex A to Annex T, the following specification is applicable.

- Audio sample word has a length of 20 bits/sample. The auxiliary sample bits are an optional expansion of the audio sample, if not used = "0".
- User data is not used, all bits = "0".
- Channel status is identical for both subframes of the interface, with the exception of the channel number, if that is not equal to zero.

5 Channel status

5.1 General

For every subframe, the channel status bit provides information related to the audio channel that is carried in that same subframe.

Channel status information is organized in a 192-bit block, subdivided into 24 bytes, numbered 0 to 23 (see Table 1). The first bit of each channel status block is carried in the frame with preamble "B".

The individual bits of a channel status block are numbered 0 to 191.

The primary application is indicated by channel status bit 0.

As stated in IEC 60958-1, for the consumer digital audio applications described in this document and IEC 60958-5, this first channel status bit equals "0".

NOTE As stated in IEC 60958-1, for professional applications, this first channel status bit equals "1".

Secondary applications may be defined within the framework of these primary applications.

5.2 Application

5.2.1 Channel status general format

For each channel, the channel status block provides the information described in this clause and summarized in Table 1.

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 PLV

Table 1 – Channel status general format for consumer use

Byte		a = "0"	b	c	d			Mode	
0	bit	0	1	2	3	4	5	6	7
1	bit	8	9	10	11	12	13	14	15
2	bit	16	17	18	19	20	21	22	23
3	bit	24	25	26	27	28	29	30	31
4	bit	32	33	34	35	36	37	38	39
5	bit	40	41	42	43	44	45	46	47
6	bit	48	49	50	51	52	53	54	55
7	bit	56	57	58	59	60	61	62	63
8	bit	64	65	66	67	68	69	70	71
9	bit	72	73	74	75	76	77	78	79
10	bit	80	81	82	83	84	85	86	87
11	bit	88	89	90	91	92	93	94	95
12	bit	96	97	98	99	100	101	102	103
13	bit	104	105	106	107	108	109	110	111
14	bit	112	113	114	115	116	117	118	119
15	bit	120	121	122	123	124	125	126	127
16	bit	128	129	130	131	132	133	134	135
17	bit	136	137	138	139	140	141	142	143
18	bit	144	145	146	147	148	149	150	151
19	bit	152	153	154	155	156	157	158	159
20	bit	160	161	162	163	164	165	166	167
21	Bit	168	169	170	171	172	173	174	175
22	Bit	176	177	178	179	180	181	182	183
23	Bit	184	185	186	187	188	189	190	191
		a: use of channel status block b: linear PCM identification				c: copyright information d: additional format information			

5.2.2 Mode 0 channel status format for digital audio equipment for consumer use

When the audio sample word represents linear PCM and the channel status mode is mode 0, the channel status format shown in Table 2 should be applied.

Table 2 – Mode 0 channel status format for consumer use

Byte	a = "0"		b = "0"		c		d			Mode = "0 0"	
0	bit	0	1	2	3	4	5	6	7		
1	Category code										
1	bit	8	9	10	11	12	13	14	15		
2	Source number					Channel number					
2	bit	16	17	18	19	20	21	22	23		
3	Sampling frequency				Clock accuracy			Sampling frequency extension			
3	bit	24	25	26	27	28	29	30	31		
4	Word length				Original sampling frequency						
4	bit	32	33	34	35	36	37	38	39		
5	CGMS-A		CGMS-A validity		Auto sampling frequency coefficient						
5	bit	40	41	42	43	44	45	46	47		
6	Information hidden in PCM signal	General channel assignment channel number for A channel								General channel assignment channel number for B channel	
6		bit	48	49	50	51	52	53	54	55	
7	General channel assignment channel number for B channel						LFE Playback level				
7	bit	56	57	58	59	60	61	62	63		
8	bit	64	65	66	67	68	69	70	71		
9	bit	72	73	74	75	76	77	78	79		
10	bit	80	81	82	83	84	85	86	87		
11	bit	88	89	90	91	92	93	94	95		
12	bit	96	97	98	99	100	101	102	103		
13	bit	104	105	106	107	108	109	110	111		
14	bit	112	113	114	115	116	117	118	119		
15	bit	120	121	122	123	124	125	126	127		
16	bit	128	129	130	131	132	133	134	135		
17	bit	136	137	138	139	140	141	142	143		
18	bit	144	145	146	147	148	149	150	151		
19	bit	152	153	154	155	156	157	158	159		
20	bit	160	161	162	163	164	165	166	167		
21	bit	168	169	170	171	172	173	174	175		
22	bit	176	177	178	179	180	181	182	183		
23	bit	184	185	186	187	188	189	190	191		
a: use of channel status block						c: copyright information					
b: linear PCM identification						d: additional format information					

Byte 0 as defined in 5.2.1, with

Bit 1	"0"	Audio sample word represents linear PCM samples
Bits 6 to 7	"0 0"	Mode 0

Byte 1: Category code

The category code indicates the kind of equipment that generates the digital audio interface signal. See the relevant annexes for the assignments. Bit 8 = LSB, bit 15 = MSB.

Byte 2: Source and channel number

Bits 16 to 19 Source number, bit 16 = LSB, bit 19 = MSB

Bit	16	17	18	19	
State	"0 0 0 0"				Do not take into account
	"1 0 0 0"				1
	"0 1 0 0"				2
	"1 1 0 0"				3
				
	"1 1 1 1"				15

Bits 20 to 23 Channel number (audio channel), bit 20 = LSB, bit 23 = MSB.

Bit	20	21	22	23	
State	"0 0 0 0"				Do not take into account.
	"1 0 0 0"				(left channel for stereo channel format)
	"0 1 0 0"				(right channel for stereo channel format)
	"1 1 0 0"				
				
	"1 1 1 1"				

NOTE 1 The single and dual channel operating modes are defined with the frame format in IEC 60958-1.

Byte 3: Sampling frequency and clock accuracy

Bits 24 to 27 Sampling frequency

Bit	24	25	26	27	
State	"0 0 1 0"				22,05 kHz
	"0 0 0 0"				44,1 kHz
	"0 0 0 1"				88,2 kHz
	"0 0 1 1"				176,4 kHz
				
	"0 1 1 0"				24 kHz
	"0 1 0 0"				48 kHz
	"0 1 0 1"				96 kHz
	"0 1 1 1"				192 kHz
				
	"1 1 0 0"				32 kHz

"1 0 0 0" Sampling frequency not indicated

"1 0 0 1" 768 kHz

All other combinations are reserved and shall not be used until further defined.

Bits 28 to 29 Clock accuracy.

Bit	28	29	
State	"0 0"		Level II
	"1 0"		Level I
	"0 1"		Level III
	"1 1"		Interface frame rate not matched to sampling frequency.

Bits 30 to 31 Sampling frequency extension with sampling frequency bits 24 to 27

Bit	24	25	26	27	30	31	Sampling frequency
State	"1 0 1 0 0 0"						384 kHz
	"1 0 1 0 1 0"						1 536 kHz
	"1 0 1 0 1 1"						1 024 kHz
	"1 0 1 1 0 0"						352,8 kHz
	"1 0 1 1 0 1"						705,6 kHz
	"1 0 1 1 1 0"						1 411,2 kHz
	"1 1 0 1 0 0"						64 kHz
	"1 1 0 1 0 1"						128 kHz
	"1 1 0 1 1 0"						256 kHz
	"1 1 0 1 1 1"						512 kHz

NOTE 2 The sampling frequency over 192 kHz is not actual. It represents frame rate for compressed audio transmission, and it is used for high bit-rate transmission using the IEC 60958 protocol. For example, IEC 61883-6 can transmit a high bit rate of IEC 61937 using the IEC 60958 conformant format defined in IEC 61883-6.

Byte 4: Word length and original sampling frequency

Bit 32	"0"	Maximum audio sample word length is 20 bits
	"1"	Maximum audio sample word length is 24 bits

Bits 33 to 35 Sample word length

Bit	33	34	35	Audio sample word length if maximum length is 24 bits as indicated by bit 32	Audio sample word length if maximum length is 20 bits as indicated by bit 32
State	"0 0 0"			Word length not indicated (default)	Word length not indicated (default)
	"1 0 0"			20 bits	16 bits
	"0 1 0"			22 bits	18 bits
	"0 0 1"			23 bits	19 bits
	"1 0 1"			24 bits	20 bits
	"0 1 1"			21 bits	17 bits

All other combinations are reserved and shall not be used until further defined.

The first edition of IEC 60958 had bits 32 to 35 reserved and set to zero. Therefore, the all-zero state for these bits on a received signal can be an indicator that the word length indication has not been implemented. When bits 3 4 5 = "0 0 1" or "0 1 1", refer to IEC 60958-5 for bits 32, 33, 34, and 35.

Bits 36 to 39 Original sampling frequency

Bit	36	37	38	39	
State	"1	1	1	1"	44,1 kHz
	"1	1	1	0"	88,2 kHz
	"1	1	0	1"	22,05 kHz
	"1	1	0	0"	176,4 kHz
	"1	0	1	1"	48 kHz
	"1	0	1	0"	96 kHz
	"1	0	0	1"	24 kHz
	"1	0	0	0"	192 kHz
	"0	1	1	1"	128 kHz
	"0	1	1	0"	8 kHz
	"0	1	0	1"	11,025 kHz
	"0	1	0	0"	12 kHz
	"0	0	1	1"	32 kHz
	"0	0	1	0"	64 kHz
	"0	0	0	1"	16 kHz
	"0	0	0	0"	Original sampling frequency not indicated (default)

NOTE 3 The original sampling frequency field can be used to indicate the sampling frequency of a signal prior to sampling frequency conversion in a consumer playback system.

NOTE 4 Many of the values indicated for a frequency in the original sampling frequency field in byte 4 are complementary to the values used for that frequency in the sampling frequency field in byte 3.

Byte 5: CGMS-A

Bits 40 to 41 CGMS-A

Bit	40	41	
State	"0	0"	Copying is permitted without restriction
	"0	1"	Condition not used
	"1	0"	One generation of copies may be made
	"1	1"	No copying is permitted

Bit 42 CGMS-A validity

Bit	42	
State	"0"	No indication
	"1"	CGMS-A valid

Bits 44 to 47 Audio sampling frequency coefficient

Bit	44	45	46	47	
State	"0	0	0	0"	No indication
	"0	0	0	1"	Equal to transmission sampling frequency
	"0	0	1	0"	1/2
	"0	0	1	1"	1/4
	"0	1	0	0"	1/8
	"0	1	0	1"	1/16
	"0	1	1	0"	1/32
	"0	1	1	1"	Reserved
	"1	0	0	0"	Reserved
	"1	0	0	1"	Reserved
	"1	0	1	0"	Reserved
	"1	0	1	1"	×32
	"1	1	0	0"	×16
	"1	1	0	1"	×8
	"1	1	1	0"	×4
	"1	1	1	1"	×2

CGMS-A information from other IEC standards (for example, IEC 61880) can be carried. When bits 3 4 5 = "0 0 1" or "0 1 1", refer to IEC 60958-5 for bits 44, 45, 46, and 47. One generation copy is described in serial copy management of IEC 61119-6.

Byte 6 and byte 7: Information hidden in PCM signal and general channel assignment channel number

Bit 48 Information hidden in PCM signal

Bit	48	
State	"0"	No indication
	"1"	Additional information in LSB

Bits 49 to 53 General channel assignment channel number for A channel

Bit	49	50	51	52	53	54	
State	"0	0	0	0	0	0"	Channel number 1
	"1	0	0	0	0	0"	Channel number 2
							⋮
	"1	1	1	1	1	0"	Channel number 32

Bit 54 to 58 General channel assignment channel number for B channel

Bit	55	56	57	58	59	60	
State	"0	0	0	0	0	0"	Channel number 1
	"1	0	0	0	0	0"	Channel number 2
							⋮
	"1	1	1	1	1	0"	Channel number 32

Bit 61 to 62 LFE playback level

Bit	61	62
-----	----	----

State	"0 0"	no information
	"0 1"	+10 dB
	"1 0"	0 dB

NOTE 5 Bit 48 refers to information within the audio sample word, not in the AUX bits.

NOTE 6 When bit 48 is set to 1, processing of the audio signal (such as redithering, sample rate conversion, and change in level) should be avoided. A receiver can also use this state as a hint that it should look for extra information (such as MPEG Surround transmitted over PCM channels as specified in ISO/IEC 23003-1, see Annex T) in the low bits of the signal.

NOTE 7 Rec. ITU-R BS.775-3 explains how to handle LFE playback level information.

IEC 62574 specifies the general channel assignment. The assignments of channel numbers 1 to 32 are specified in Table A.1 of IEC 62574:2020.

When bit 3 4 5 = "0 0 1" or "0 1 1", refer to IEC 60958-5 for bits 49 to 165.

5.3 Copyright management guidelines for consumer application of the digital audio interface

5.3.1 General

Category codes are used for all consumer products that are capable of supplying a digital signal to consumer digital audio recorders, except for products that are fully transparent from input to output. A category code of a product is defined as a live function to make a source data. If products have the capability to play plural recorded media that are defined in different categories, the category code of the product should be defined as a playing medium.

These category codes have been grouped by general function of the product. This makes it possible to take into account future digital recording products not yet defined in detail. Such a product then deals with the group code under a general rule. These rules define whether a digital recorder is enabled to record a copyright-protected digital signal.

Unless otherwise specified, any consumer equipment capable of transferring digital audio information from an input terminal to an output terminal, if not fully transparent and regardless of the delay or kind of transformation of the audio content of the signal, shall copy channel status bits 0, 1, 3, 4, 5, 6 and 7 from the source. Bit 2 shall be copied from the source, unless otherwise specified in the annexes.

Bit 15 is referred to as the "L-bit". It indicates the "generation status" of the digital audio signal.

"Generation status" means:

- whether the signal emanates from a source that has been produced or published or authorized by the rights owner of the material, such as commercially released pre-recorded compact discs or DAT tapes or a digital broadcast (referred to herein as "original") and for which copyright has been asserted; or
- whether the signal emanates from a recording made from such "original" material (i.e. "a home-copy of generation 1 or higher").

Generally the L-bit is specified as:

Bit 15	"0"	No indication
	"1"	Commercially released pre-recorded software

For historical reasons, the reverse situation is valid for the signals originating from

- laser optical products (category code "100 XXXXL");
- broadcast reception (category codes "001 XXXXL" and "011 1XXXL").

For these category codes the L-bit indicates:

Bit 15	"0"	Commercially released pre-recorded software
	"1"	No indication

The generation status may be unknown for certain applications. The above interpretation is therefore not valid in combination with some category codes such as

- general (category code "000 00000");
- analogue/digital converters for analogue signals without copyright information (category code "011 00XXL").

5.3.2 Category code groups

5.3.2.1 The category code groups are defined in Table 3.

Table 3 – Category code groups

Bits 8 to 15	Category
"000 00000"	General. Used temporarily
"100 XXXXL"	Laser optical products
"010 XXXXL"	Digital/digital converters and signal processing products
"110 XXXXL"	Magnetic tape or disc based products
"001 XXXXL" and "011 1XXXL"	Broadcast reception of digitally encoded audio signals with or without video signals
"101 XXXXL"	Musical instruments, microphones and other sources without copyright information
"011 00XXL"	Analogue/digital converters for analogue signals without copyright information
"011 01XXL"	Analogue/digital converters for analogue signals which include copyright information in the form of "Cp-bit and L-bit status"
"000 1XXXL"	Solid-state memory-based products
"000 0001L"	Experimental products not for commercial sale, and other products of these groups and/or experimental products
"111 XXXXL"	Not defined. Reserved
"000 0XXXL"	Not defined. Reserved, except for "000 00000" and "000 0001L"

5.3.2.2 Within a group, a further indication of the kind of source is given.

5.3.2.3 For the general category code ("000 00000") the following applies:

- used temporarily;
- applied specifically for digital audio broadcast reception with or without a video signal, for example, digital satellite reception in Japan in the case where no copyright information is transmitted (see also Annex H);
- for the group of laser optical products (category code = "100 XXXXL"), the category codes are defined in Table 4.

Table 4 – Category code groups for laser optical products

Bits 8 to 15	Category
"100 0000"	Compact-disc digital audio signal compatible with IEC 60908 (see Annex A)
"100 1000L"	Laser optical digital audio systems for which no other category code is defined (see Annex D)
"100 1001L"	Mini-disc system (see Annex M)
"100 1100L"	Digital versatile disc (DVD) (see Annex O)
"100 1111L"	Other products of this category
"100 others"	Reserved

5.3.2.4 For the group of digital/digital converters and signal-processing products (category code = "010 XXXXL"), the category codes are defined in Table 5.

Table 5 – Category code groups for digital/digital converter and signal-processing products

Bits 8 to 15	Category
"010 0000L"	PCM encoder/decoder (see Annex B)
"010 0100L"	Digital signal mixer (see Annex E)
"010 1100L"	Sampling rate converter (see Annex F)
"010 0010L"	Digital sound sampler (see Annex G)
"010 1010L"	Digital sound processor (see Annex N)
"010 1111L"	Other products of this category
"010 others"	Reserved

5.3.2.5 For the group of magnetic-tape or magnetic-disc-based products (category code = "110 XXXXL"), the category codes are defined in Table 6.

Table 6 – Category code groups for magnetic tape or magnetic disc based products

Bits 8 to 15	Category
"110 0000L"	DAT (see Annex C)
"110 1000L"	Video tape recorder with digital sound
"110 0001L"	Digital compact cassette (see Annex L)
"110 1100L"	Magnetic disc digital audio system (see Annex Q)
"110 1111L"	Other products of this category
"110 others"	Reserved

5.3.2.6 For the group of broadcast reception of digitally encoded audio with/without video signals (category code = "001 XXXXL" or "011 1XXXXL"), the category codes are defined in Table 7.

Table 7 – Category code groups for broadcast reception of digitally encoded audio with/without video signals

Bits 8 to 15	Category
"001 0000L"	Digital audio broadcast signal with or without a video signal (Japan) (see Annex H)
"001 1000L"	Digital audio broadcast signal with or without a video signal (Europe) (see Annex I)
"001 0011L"	Digital audio broadcast signal with or without a video signal (USA) (see Annex J)
"001 0001L"	Electronic software delivery (see Annex K)
"001 0010L"	Used by another standard (see note)
"001 1111L"	Other products of this category
"001 others"	Reserved
"011 1XXXXL"	Reserved

NOTE The code "001 0010L" is under consideration for use in connection with IEC 62105.

5.3.2.7 For the group of musical instruments, microphones and other sources that create original sound (category code = "101 XXXXL"), the category codes are defined in Table 8.

Table 8 – Category code groups for musical instruments, microphones and other sources that create original sound

Bits 8 to 15	Category
"101 0000L"	Synthesizer
"101 1000L"	Microphone
"101 1111L"	Other products of this category
"101 others"	Reserved

5.3.2.8 For the group of analogue/digital converters for analogue signals without copyright information (category code = "011 00XXL"), the category codes are defined in Table 9.

Table 9 – Category code groups for A/D converters for analogue signals without copyright information

Bits 8 to 15	Category
"011 0000L"	A/D converter
"011 0011L"	Other products of this category
"011 00 others"	Reserved

5.3.2.9 For the group of analogue/digital converters for analogue signals which include copyright information in the form of "Cp-bit and L-bit status" (category code = "011 01XXL"), the category codes are defined in Table 10.

Table 10 – Category code groups for A/D converters for analogue signals with copyright information

Bits 8 to 15	Category
"011 0100L"	A/D converter
"011 0111L"	Other products of this category
"011 01 others"	Reserved

5.3.2.10 For the group of solid-state memory-based products (category code = "000 1XXXL"), the category codes are defined in Table 11.

Table 11 – Category code groups for solid state memory based products

Bits 8 to 15	Category
"000 1000L"	Digital audio recorder and player using solid state memory
"000 1111L"	Other products of this category
"000 1 others"	Reserved

5.3.2.11 For experimental products not for commercial sale (category code = "000 0001L"), the following definition applies.

New products for which a category code and a category group is not yet defined or for which circuitry to signal the appropriate category is not yet available.

6 User data

6.1 General

The default value of the user bits is logical "0".

For interchangeability of equipment, it is strongly recommended that the general user data format described below be used for consumer applications of the user data.

6.2 Application

6.2.1 User data bitstream

The user data bits from every subframe in a frame combine so that there is just one user data bitstream for each interface.

6.2.2 User data message structure

A message consists of information units (IUs). An IU consists of one start bit (logical value "1") followed by seven information bits.

The eight bits of an IU are also referred to as the P, Q, R, S, T, U, V and W bits. IUs in a message are separated by up to and including eight bits with a logical value "0". The nominal number of bits with logical value "0" between IUs is four. Messages are separated by more than eight bits with a logical value "0". An example of this structure is shown in Figure 1.

Bit	0	1	2	3	4	5	6	7	8	9	10	11	
0	0	0	1	Q	R	S	T	U	V	W	0	0	A)
+12	0	0	1	Q	R	S	T	U	V	W	0	0	
+24	1	Q	R	S	T	U	V	W	0	0	0	0	B)
+36	0	0	0	0	1	Q	R	S	T	U	V	W	C)
+48	1	Q	R	S	T	U	V	W	0	0	0	0	
+60	1	Q	R	S	T	U	V	W	0	0	0	0	D)
+72	0	0	0	0	0	0	0	1	Q	R	S	T	
+84	U	V	W	0	0	0	0	1	Q	R	S	T	E)
+96	U	V	W	0	0	0	0	0	1	Q	R	S	

Key

0 Bit between IUs with logical value "0"

1 Start bit P, first bit of IU with logical value "1"

Q, R, S, T, U, V, W information bits

A) Example of an IU: start bit plus seven information bits

B) Maximum distance between two IUs of the same message is two bits

C) Minimum distance between two IUs of the same message is zero bits

D) Distance of more than eight bits between IUs indicates start of a new message

E) Nominal distance between two IUs of the same message is four bits

IEC 1743/99

Figure 1 – Example of message structure using information units

6.2.3 Equipment classification

6.2.3.1 General

Equipment is divided into three classes, according to the category code of the channel status. See the relevant annexes that specifies the class.

Future equipment, for which there is no relevant annex, shall be classified as belonging to one of the three classes defined below.

6.2.3.2 Class I: original user data generating equipment

Original user data generating equipment will generate user data bits according to a format that is defined in the standard for that equipment.

Any new equipment in this class will carry the general user data format as defined in 6.2.4.2.

6.2.3.3 Class II: user data transparent equipment

The user data transparent equipment shall either provide all "0" user data bits or transfer the user data bits it receives from its input unchanged to its output. If the processing of the audio information causes considerable delay, it is recommended that the user data bits should be equally delayed.

6.2.3.4 Class III: mixed mode user data equipment

This class of equipment shall either operate as class II (user data transparent) equipment or originate a new user data stream according to the general user data format.

The possible user data formats for this class are:

- all "0" bits;
- the complete user data information of the input, or one of the inputs in the case of multiple inputs;
- the general user data format. The information carried in this case may originate from within the equipment itself, or be transcoded from the input source(s).

6.2.4 User data message length and contents

6.2.4.1 General

The possible length and contents of the user data messages depends on the category code of the equipment. See the relevant annex that specifies user data.

For new equipment that is capable of generating original user data contents, the general user data format shall be used.

6.2.4.2 General user data format

According to the general user data format, a message consists of a minimum of 3 and a maximum of 129 information units, except for a length of 96 information units. A total message length of 96 information units is reserved for some specific laser optical products (see 6.2.4.3).

The contents of the first IU are shown in Figure 2.

1 (Start)	1 (Q)	Mode R	Mode S	Mode T	Item U	Item V	Item W
-----------	-------	--------	--------	--------	--------	--------	--------

Figure 2 – First UI contents

The bits R, S, T, U, V, W have the following meaning:

Mode	RST	
	000	Not used, reserved for digital compact cassette (DCC)
	100	SMPTE time code
	110	Latency
	111	Loudness
	other 1XX	} May be used for new messages
	X1X	
	XX1	

The mode bits indicate a class of messages, for example text, pre-set information, etc., and the item bits give a further definition of the type of message.

It is recommended that any new application should conform as much as possible to messages coded according to the general user data format that have been defined for other applications.

The second IU contains a number indicating the following number of IUs as shown in Figure 3.

1 (Start)	IU Count6	IU Count5	IU Count4	IU Count3	IU Count2	IU Count1	IU Count0
-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

Figure 3 – Second UI contents

IU count6 is the most significant bit; IU count0 is the least significant bit. The number is coded as a binary number in the range 1 to 127 (000 0001b to 111 1111b) except that the value 94 is not possible.

The third IU contains the originating category code, without the L-bit, of the equipment that generates the general user data format messages as shown in Figure 4.

1 (Start)	C-Ch bit 8	C-Ch bit 9	C-Ch bit 10	C-Ch bit 11	C-Ch bit 12	C-Ch bit 13	C-Ch bit 14
-----------	---------------	---------------	----------------	----------------	----------------	----------------	----------------

Figure 4 – Third UI contents

The L-bit (C-channel bit 15) is not carried in this message, as it is not relevant for the decoding of the user data messages. Therefore, any decisions on the copyright status of the audio information shall be based on the category code and Cp-bit as carried in the channel status.

The IUs that follow the third IU contain user information.

User information that originally was organized as bytes is carried as in Figure 5: four successive IUs carry a maximum of three successive bytes (X, Y and Z, 7 = MSB, 0 = LSB) in bits R, S, T, U, V, W of the IUs:

1 (Start)	Q	X7	X6	X5	X4	X3	X2
1 (Start)	Q	X1	X0	Y7	Y6	Y5	Y4
1 (Start)	Q	Y3	Y2	Y1	Y0	Z7	Z6
1 (Start)	Q	Z5	Z4	Z3	Z2	Z1	Z0

Figure 5 – User information

The Q bits can optionally indicate that the remaining six bits of the IU contain an error:

"0" no error detected.

"1" error in bits R, S, T, U, V, W.

If not used, the error flag should be set to a logical "0" value.

If the number of bytes to transfer does not fill a complete quadruplet (i.e. just one or two bytes, not three bytes), the remaining byte(s) shall be coded "0 0 0 0 0 0 0".

6.2.4.3 General user data format for some specific laser optical products

For historical reasons, the laser optical products with category codes "100 0000" (compact disc digital audio, see IEC 60908) and "100 1001L" (mini disc) employ a user data format that differs from the one defined above. In this format, no message length specifier is applied. Instead, the length is fixed to 96 IUs. The information in the Q bits of the IUs is considered to be in a separate channel (the Q channel).

Each group of six bits R, S, T, U, V, W of an information unit is called a SYMBOL.

The SYMBOL numbering follows the numbering of the bits in Table A.1.

A group of 24 SYMBOLS is called a PACK:

PACK 1 is formed by symbols 1 to 24;

PACK 2 is formed by symbols 25 to 48;

PACK 3 is formed by symbols 49 to 72;
 PACK 4 is formed by symbols 73 to 96.

Information will be carried in the PACKS according to specific formats.

6.3 Information for synchronization

6.3.1 General

To manage audio data synchronization with other data such as video data, the information for synchronization is applied.

6.3.2 SMPTE time code information

SMPTE time code is aligned to mode bits and item bits as shown in Figure 6.

Mode item	RSTUVW	
	100000	SMPTE time code: LTC
	100001	SMPTE time code: VITC

Figure 6 – SMPTE time code information

The second information unit is settled as follows.

0010001b

The third information units are same as defined in 6.2.4.2.

LTC information is aligned to 16 IUs of user information area as shown in Figure 7.

1 (Start)	Q	Units of frame				1st binary group	
1 (Start)	Q	1st binary group		Tens of frames		Drop fr	Color fr
1 (Start)	Q	2nd binary group				Units of seconds	
1 (Start)	Q	Units of seconds		3rd binary group			
1 (Start)	Q	Tens of seconds			ph color bit	4th binary group	
1 (Start)	Q	4th binary group		Units of minutes			
1 (Start)	Q	5th binary group				Tens of minutes	
1 (Start)	Q	Tens of minutes	Bin G flg	6th binary group			
1 (Start)	Q	Units of hours				7th binary group	
1 (Start)	Q	7th binary group		Tens of hours		Bin G flg	Bin G flg
1 (Start)	Q	8th binary group				Sync word	
1 (Start)	Q	Sync word					
1 (Start)	Q	Sync word					
1 (Start)	Q	Sync word		0	0	0	0
1 (Start)	Q	0	0	0	0	0	0
1 (Start)	Q	0	0	0	0	0	0

Figure 7 – LTC information alignment

VITC information is aligned to 16 IUs of user information area as shown in Figure 8.

1 (Start)	Q	1	0	Units of frame			
1 (Start)	Q	1st binary group			1	0	
1 (Start)	Q	Tens of frames		Drop fr	Color fr	2nd binary group	
1 (Start)	Q	2nd binary group		1	0	Units of seconds	
1 (Start)	Q	Units of seconds		3rd binary group			
1 (Start)	Q	1	0	Tens of seconds			Field mark
1 (Start)	Q	4th binary group			1	0	
1 (Start)	Q	Units of minutes			5th binary group		
1 (Start)	Q	5th binary group		1	0	Tens of minutes	
1 (Start)	Q	Tens of minutes	Bin G frg	6th binary group			
1 (Start)	Q	1	0	Units of hours			
1 (Start)	Q	7th binary group			1	0	
1 (Start)	Q	Tens of hours		Bin G frg	Bin G frg	8th binary group	
1 (Start)	Q	8th binary group		1	0	CRC	
1 (Start)	Q	CRC					
1 (Start)	Q	1	0	0	0	0	0

Figure 8 – VITC information alignment

6.3.3 Latency information

Latency information is aligned to information units as shown in Figure 9.

Mode	RSTUVW	
	110000	Latency

Figure 9 – Latency information

The second information unit is settled as follows.

0001101b

The third information units are the same as defined in 6.2.4.2.

Latency information is aligned to 12 IUs of the user information area, as shown in Figure 10.

1 (Start)	Q	Audio latency valid		Audio units type		0	0
1 (Start)	Q	0	0	Audio latency (1)			
1 (Start)	Q	Audio latency (1)				Audio latency (2)	
1 (Start)	Q	Audio latency (2)					
1 (Start)	Q	0	0	0	0	0	0
1 (Start)	Q	0	0	Video latency valid		Video units type	
1 (Start)	Q	0	0	0	0	Total video latency (1)	
1 (Start)	Q	Total video latency (1)					
1 (Start)	Q	Total video latency (2)					
1 (Start)	Q	Total video latency (2)		0	0	0	0
1 (Start)	Q	0	0	0	0	0	0
1 (Start)	Q	0	0	0	0	0	0

Audio latency valid	2 bit	
	00	Invalid
	10	Valid
	Others	Reserved
Audio unit type	2 bit	
	00	millisecond
	01	1/16 millisecond
	Others	
Audio latency	16 bit	Binary (current accumulation of audio latency)
Video latency valid	2 bit	
	00	Invalid
	10	Valid
	Others	Reserved
Video unit type	2 bit	
	00	millisecond
	01	1/16 millisecond
	Others	Reserved
Total video latency	16 bit	Binary (total accumulation of video latency)

Figure 10 – Latency information alignment

6.3.4 Loudness information

Loudness information is aligned to information units, as shown in Figure 11.

Mode	RSTUVW	
	111000	Loudness

Figure 11 – Loudness information

The second information unit is specified as follows.

0001111b

Loudness information is aligned to 16 IUs of the user information area, as shown in Figure 12.

1 (Start)	Q	LoudnessValue					
1 (Start)	Q	LoudnessValue					
1 (Start)	Q	LoudnessValue				LoudnessRange	
1 (Start)	Q	LoudnessRange					
1 (Start)	Q	LoudnessRange					
1 (Start)	Q	LoudnessRange		MaxTruePeakLevel			
1 (Start)	Q	MaxTruePeakLevel					
1 (Start)	Q	MaxTruePeakLevel					
1 (Start)	Q	MaxMomentaryLoudness					
1 (Start)	Q	MaxMomentaryLoudness					
1 (Start)	Q	MaxMomentaryLoudness				MaxShortTermLoudness	
1 (Start)	Q	MaxShortTermLoudness					
1 (Start)	Q	MaxShortTermLoudness					
1 (Start)	Q	MaxShortTermLoudness	0	0	0	0	
1 (Start)	Q	0	0	0	0	0	
1 (Start)	Q	0	0	0	0	0	

NOTE Loudness information is defined in EBU Tech 3285.

Figure 12 – Loudness information alignment

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex A
(normative)

**Application of the digital audio interface
in the compact disc digital audio system**

A.1 Overview

This annex applies to equipment having category code "100 00000". See IEC 60908.

A.2 General: application-specific details

The audio sample word length is 16 bits.

The auxiliary sample bits are = "0".

A.3 Channel status: application-specific details

The four CONTROL bits of the Q-channel (subcode) shall be copied to the channel status bits 0 to 3 (part of the CONTROL in the channel status).

Bit 2, the Cp-bit, shall mean:

Bit 2	"0"	Software for which copyright is asserted
	"1"	Software for which no copyright is asserted

The Cp-bit may alternate between 0 and 1 at a rate between 4 Hz and 10 Hz.

The Cp-bit indicates in the alternating mode that the signal does not emanate from commercially released pre recorded software, but from a recording made from "original" material, that is, a home copy of generation 1 or higher.

A.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

The user data carries the subcode (see Table A.1).

The U-bits form one subcode block of 1 176 bits (average) multiplexed over the left and the right channel. One compact disc frame consists of one subcoding symbol with 12 audio samples. Ninety-eight subcoding symbols constitute one subcoding block, resulting in 12 times 98 = 1 176 U-bits.

The subcode synchronization word is minimum 16 "0" bits.

Table A.1 – Example of 2-channel compact disc format

No.	Preamble SYNC	AUX	Audio samples				MSB	V	U	C	P
1	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C1L	P
2	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C1R	P
3	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C2L	P
4	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C2R	P
5	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C3L	P
6	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C3R	P
7	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C4L	P
8	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C4R	P
9	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C5L	P
10	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C5R	P
11	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C6L	P
12	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C6R	P
13	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C7L	P
14	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C7R	P
15	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C8L	P
16	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C8R	P
17	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C9L	P
18	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C9R	P
19	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C10L	P
20	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C10R	P
21	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C11L	P
22	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C11R	P
23	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C12L	P
24	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C12R	P
25	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	1	C13L	P
26	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	Q1	C13R	P
27	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	R1	C14L	P
28	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	S1	C14R	P
29	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	T1	C15L	P
30	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	U1	C15R	P
31	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	V1	C16L	P
32	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	W1	C16R	P
33	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C17L	P
34	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C17R	P
35	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C18L	P
36	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C18R	P
37	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	1	C19L	P
38	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	Q2	C19R	P
39	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	R2	C20L	P
40	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	S2	C20R	P
41	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	T2	C21L	P
42	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	U2	C21R	P
43	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	V2	C22L	P
44	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	W2	C22R	P
45	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C23L	P
46	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C23R	P
47	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C24L	P
48	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C24R	P

Annex B
(normative)

**Application of the digital interface
in the 2-channel PCM encoder/decoder**

B.1 Overview

This annex applies to equipment having category code "010 0000L". See IEC 60841.

B.2 General: application-specific details

The audio sample word length is 14 or 16 bits.

The auxiliary sample bits are "0".

B.3 Channel status: application-specific details

Copy and emphasis bits of the CONTROL bits should be copied from the source (the polarity should be inverted).

B.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

All user data bits are "0".

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex C (normative)

Application of the digital interface in the 2-channel digital audio tape recorder in the consumer mode

C.1 Overview

This annex applies to equipment having category code "110 0000L". See IEC 61119-1 and IEC 61119-6.

C.2 General: application-specific details

The audio sample word length is 16 bits. The auxiliary sample bits are "0".

C.3 Channel status: application-specific details

Bits 0 to 4 ("CONTROL") and bits 24 to 27 ("Fs") should be copied from the source.

Table C.1 illustrates the use of the Cp-bit, L-bit and category code for DAT.

Table C.1 – Use of Cp-bit, L-bit and category code for DAT

Application or source signal	Input signal to DAT-recorder for consumer audio use of C-channel			On DAT tape	Effect on DAT output
	Cp-bit bit 2	Category code Bits 8 to 14	L-bit Bit 15	ID 6	Cp-bit / L-bit bit 2 / bit 15
	No copyright "1"		Home copy "0"		Recordable
General	"1"	"0000000"	"0"	"11"	Set bit 2 to "0"
Laser optical product	"1"	"100XXXX"	"1"	"00"	
D/D converter	"1"	"010XXXX"	"0"	"00"	
Magnetic product	"1"	"110XXXX"	"0"	"00"	
Broadcast reception	"1"	"001XXXX" and "0111XXX"	"1"	"00"	
Musical instrument	"1"	"101XXXX"	"0"	"00"	
Present A/D converter	"1"	"01100XX"	"0"	"11"	
Future A/D converter	"1"	"01101XX"	"0"	"00"	
Solid-state memory	"1"	"0001XXX"	"0"	"00"	
Experimental	"1"	"0000001"	"0"	"00"	
	No copyright "1"		Pre-recorded "1"		Recordable
General	"1"	"0000000"	"1"	"11"	Set bit 2 to "0"
Laser optical product	"1"	"100XXXX"	"0"	"00"	
D/D converter	"1"	"010XXXX"	"1"	"00"	
Magnetic product	"1"	"110XXXX"	"1"	"00"	
Broadcast reception	"1"	"001XXXX" and "0111XXX"	"0"	"00"	
Musical instrument	"1"	"101XXXX"	"1"	"00"	
Present A/D converter	"1"	"01100XX"	"1"	"11"	
Future A/D converter	"1"	"01101XX"	"1"	"00"	
Solid-state memory	"1"	"0001XXX"	"1"	"00"	
Experimental	"1"	"0000001"	"1"	"00"	

Application or source signal	Input signal to DAT-recorder for consumer audio use of C-channel			On DAT tape	Effect on DAT output
	Cp-bit bit 2	Category code Bits 8 to 14	L-bit Bit 15	ID 6	Cp-bit / L-bit bit 2 / bit 15
	With copyright "0"		Home copy "0"		Not recordable
D/D converter	"0"	"010XXXX"	"0"	-	Not recordable
Magnetic product	"0"	"110XXXX"	"0"	-	Not recordable
Musical instrument	"0"	"101XXXX"	"0"	-	Not recordable
Future A/D converter	"0"	"01101XX"	"0"	-	Not recordable
Solid-state memory	"0"	"0001XXX"	"0"	-	Not recordable
Experimental	"0"	"0000001"	"0"	-	Not recordable
Laser optical product	"0"	"100XXXX"	"1"	-	Not recordable
Broadcast reception	"0"	"0111XXX"	"1"	-	Not recordable
Broadcast reception	"0"	"001XXXX"	"1"	-	Not recordable
CD recordable	"Alternating at 4 Hz to 10 Hz"	"1000000"	"0"	-	Not recordable
	With copyright "0"		Pre-recorded "1"		Recordable set bit 15 to "0"
D/D converter	"0"	"010XXXX"	"1"	"10"	Set bit 15 to "0"
Magnetic product	"0"	"110XXXX"	"1"	"10"	Set bit 15 to "0"
Musical instrument	"0"	"101XXXX"	"1"	"10"	Set bit 15 to "0"
Future A/D converter	"0"	"01101XX"	"1"	"10"	Set bit 15 to "0"
Solid-state memory	"0"	"0001XXX"	"1"	"10"	Set bit 15 to "0"
Experimental	"0"	"0000001"	"1"	"10"	Set bit 15 to "0"
Laser optical product	"0"	"100XXXX"	"0"	"10"	Set bit 15 to "0"
Broadcast reception	"0"	"0111XXX"	"0"	"10"	Set bit 15 to "0"
Broadcast reception	"0"	"001XXXX"	"0"	"10"	Set bit 15 to "0"

C.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

The user data carries a message of a single information unit. The Q and R bits will reflect the states of the start-ID and shortening-ID, respectively. This is shown in Table C.2.

The start bit of the information unit is carried in the subframe of the first sampling word (L_0), the Q bit ("start-ID") in the subframe of the second sampling word (R_0) and the R-bit ("shortening-ID") in the subframe of the third sampling word (L_1), of one DAT frame. Other bits are logical zero "0". When the DAT player replays normally, start-ID and shortening-ID should be transmitted whenever it detects them, that is, start-ID: (300 ± 30) frames and shortening-ID: (33 ± 3) frames.

When the player shortens playback, shortening-ID should be transmitted once for the first frame.

Transmission of start-ID and shortening-ID is illustrated by an example in Figure C.1.

Audio sample word/DAT frame:

$F_s = 48 \text{ kHz}$:	L_0	R_0	L_1	R_1	L_2	L_{1439}	R_{1439}	2 880 words	
$F_s = 44,1 \text{ kHz}$	L_0	R_0	L_1	R_1	L_2	L_{1322}	R_{1322}	2 646 words	
$F_s = 32 \text{ kHz}$	L_0	R_0	L_1	R_1	L_2	L_{959}	R_{959}	1 920 words	(32K, 32K 4-channel mode)
$F_s = 32 \text{ kHz}$	L_0	R_0	L_1	R_1	L_2	L_{1919}	R_{1919}	3 840 words	(32K LP mode)

Table C.2 – User data application in the DAT system

Word	User data
L_0	Sync
R_0	S-ID
L_1	Sh-ID
R_1	0
L_2	0
R_2	0
.....
.....
.....
.....
.....
L_0	Sync
R_0	S-ID
L_1	Sh-ID
R_1	0

One DAT frame

IECNORM.COM · Click to view the full PDF of IEC 60958-3:2021 RLV

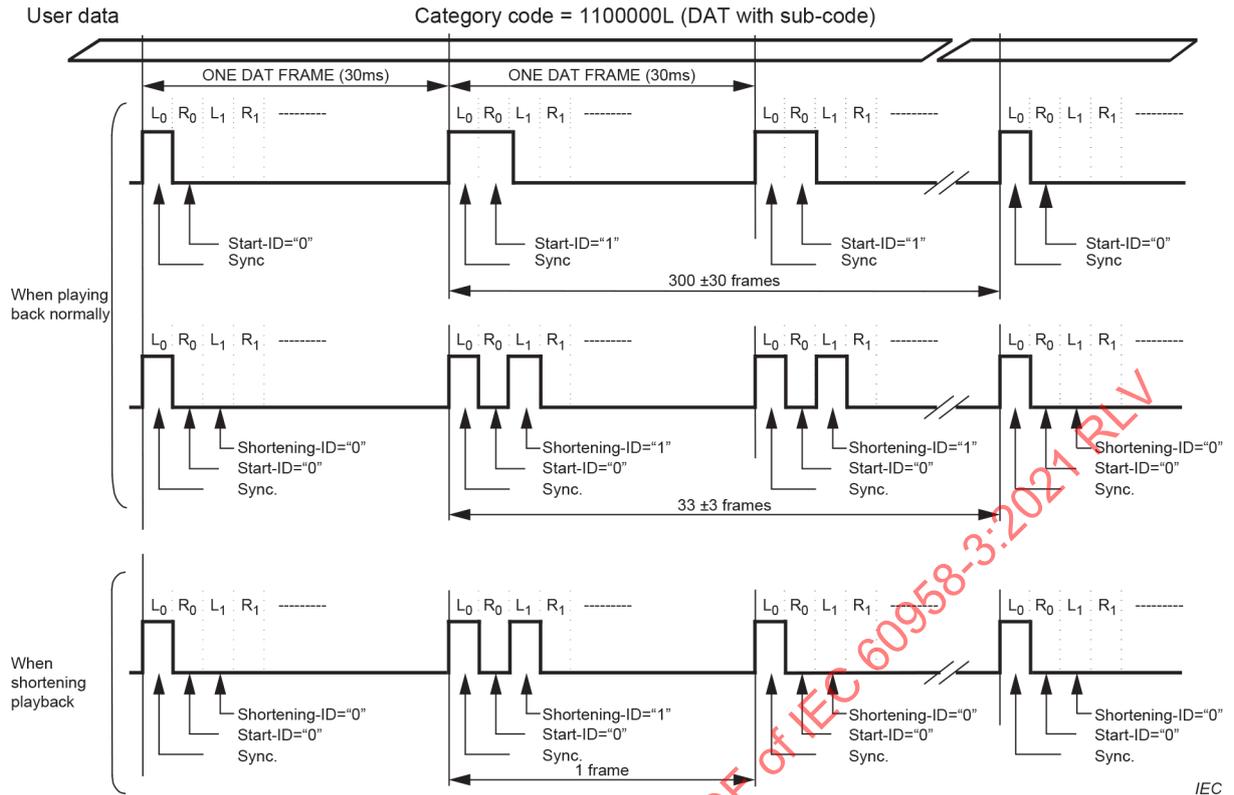


Figure C.1 – Example of different combinations of start-ID and shortening-ID

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 21V

Annex D

(normative)

Application of the digital interface in laser optical digital audio systems for which no other category code is defined

D.1 Overview

This annex applies to equipment having category code "100 1000L".

D.2 General: application-specific details

This category code is for signals from laser optical read-out of discs not compatible with IEC 60908, for example, the magnetic-optical type.

The code "100 10000" shall be used for read-out from pre-recorded discs.

The code "100 10001" shall be used for read-out from home-recorded discs.

The audio sample word length is maximum 24 bits.

D.3 Channel status: application-specific details

Not applicable.

D.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

IECNORM.COM : Click to view the full PDF of IEC 60958-3:2021 RLV

Annex E (normative)

Application of the digital interface in a digital audio mixer in the consumer mode

E.1 Overview

This annex applies to equipment having category code "010 0100L".

E.2 General: application-specific details

This category code is for signals from products that mix various digital input channels into one or more digital output signals.

E.3 Channel status: application-specific details

This category code shall be used only for products that correctly flag in the output signal the copyright status and the generation status of the input signal(s). Where more than one digital audio input signal is combined into one digital audio output signal, and at least one of the input signals is a first generation or higher copy over which copyright protection has been asserted, then the equipment shall reflect in the L-bit of the digital output signal the generation status for a first generation or higher copy and in the Cp-bit that copyright protection is asserted.

The product shall always apply category code 010 0100L, even when the equipment is adjusted so as not to alter the input signal, i.e. the output signal is identical to the input signal. However, when all input signals originate from an A/D converter and carry category code 011 00XXL, the output signal can also carry category code A/D converter (011 00XXL).

Input signals, of which the copyright status is ambiguous, such as with category code "general", shall result in an output signal with bit 2 = "0" and bit 15 = "1" (copyright protection asserted, original).

E.4 User data: application specific details

Equipment specified in this annex is classified as class III (see 6.2.3).

Annex F (normative)

Application of the digital interface with a sampling rate converter in the consumer mode

F.1 Overview

This annex applies to equipment having category code "010 1100L".

F.2 General: application-specific details

This category code is for signals from products that modify or change the sampling frequency of digital signals.

F.3 Channel status: application-specific details

This category code shall be used only for products that correctly flag in the output signal the copyright status and the generation status of the input signal. Input signals for which copyright protection has been asserted, and which are not "original" shall result in an output signal with bit 2 = "0" and bit 15 = "0".

The product shall always apply category code 010 1100L, whether the equipment is adjusted so as not to alter the signal (so that the input signal is identical to the output signal), or is adjusted differently. However, when the input signal originates from an A/D converter and carries category code 011 00XXL, the output signal can also carry category code A/D converter (011 00XXL).

Input signals, of which the copyright status is ambiguous such as with category code "general", shall result in an output signal with bit 2 = "0" and bit 15 = "1" (copyright protection asserted, original).

F.4 User data: application-specific details

Equipment specified in this annex is classified as class III (see 6.2.3).

Annex G (normative)

Application of the digital interface with a digital sound sampler in the consumer mode

G.1 Overview

This annex applies to equipment having category code "010 0010L".

G.2 General: application-specific details

This category code is for signals from products that sample and reassemble digital input signal(s) into one or more digital output signals.

G.3 Channel status: application-specific details

This category code shall only be used for products that correctly flag in the output signal the copyright status and the generation status of the input signal. Input signals for which copyright protection has been asserted, and which are not "original", and which are used for sampling for more than 1 s, shall result in an output signal with bit 2 = "0" and bit 15 = "0".

When the input signal originates from an A/D converter and carries category code 011 00XXL, the output signal can also carry category code A/D converter (011 00XXL).

Input signals, of which the copyright status is ambiguous such as with category code "general", shall result in an output signal with bit 2 = "0" and bit 15 = "1" (copyright protection asserted, original).

G.4 User data: application specific details

Equipment specified in this annex is classified as class III (see 6.2.3).

IECNORM.COM .Click to view the full PDF of IEC 60958-3:2021 RLV

Annex H (normative)

Application of the digital interface in a digital broadcast receiver (Japan) in the consumer mode

H.1 Overview

This annex applies to equipment having category code "001 0000L".

H.2 General: application-specific details

This category code shall be used for digital audio broadcast reception with or without a video signal (for example, digital satellite reception) in Japan.

The audio sample word length is 14 or 16 bits.

The auxiliary sample bits are "0".

H.3 Channel status: application-specific details

Bits 0 to 5 (CONTROL) should be copied from the source.

Cp-bit = "0" in the case where copyright information has been transmitted and copyright protection asserted, or no copyright information is transmitted.

Cp-bit = "1" in the case where copyright information has been transmitted and no copyright protection asserted.

H.4 User data: application-specific details

Equipment specified in this annex is classified as class I (see 6.2.3).

User data bits = "0" (reserved).