

INTERNATIONAL STANDARD

Arc welding equipment –
Part 13: Welding current return clamp

IECNORM.COM : Click to view the full PDF of IEC 60974-13:2021



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 60074-3:2021

INTERNATIONAL STANDARD

**Arc welding equipment –
Part 13: Welding current return clamp**

IECNORM.COM : Click to view the full PDF of IEC 60974-13:2021

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.160.30

ISBN 978-2-8322-9694-3

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Environmental conditions	6
5 Tests	6
5.1 Test conditions	6
5.2 Measuring instruments	6
5.3 Test sequence	6
6 Designation	7
7 Protection against electric shock – Voltage drop	7
8 Thermal rating	8
8.1 Temperature rise	8
8.2 Resistance to hot objects	8
9 Mechanical requirements	9
9.1 RETAINING MEANS	9
9.2 Welding cable entry	9
9.3 Welding cable connection	9
9.4 Drop withstand	10
10 Marking	10
11 Instructions for use	10
Bibliography	11
Figure 1 – Device for testing the resistance to hot objects	8
Table 1 – Relation between WELDING CURRENT RETURN CLAMP test current and welding cables cross-sectional area	7

IECNORM.COM: Click to view the full PDF of IEC 60974-13:2021

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ARC WELDING EQUIPMENT –

Part 13: Welding current return clamp

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60974-13 has been prepared by IEC technical committee 26: Electric welding.

This second edition cancels and replaces the first edition, published in 2011, and constitutes a technical revision.

The significant technical changes with respect to the previous edition are the following:

- Modified the title from "Welding clamp" to "Welding current return clamp" and updated the term through the document.
- Updated all values of test current in Table 1 corrected to 40 °C.
- Updated the reference to EN 50565-1:2014, *Electric cables – Guide to use for cables with a rated voltage not exceeding 450/750 V (U0/U) – Part 1: General guidance*

This part of IEC 60974 is to be used in conjunction with IEC 60974-1.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
26/717/FDIS	26/722/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

In this standard, the following print types are used:

- conformity statements: in *italic type*.
- terms defined in Clause 3: in SMALL ROMAN CAPITALS.

A list of all parts of the IEC 60974 series, published under the general title *Arc welding equipment*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 60974-13:2021

ARC WELDING EQUIPMENT –

Part 13: Welding current return clamp

1 Scope

This part of IEC 60974 is applicable to WELDING CURRENT RETURN CLAMPS for arc welding processes, designed to make an electrical connection to the workpiece without using tools.

This document is not applicable to WELDING CURRENT RETURN CLAMPS for underwater welding and plasma cutting.

This document specifies safety and performance requirements of WELDING CURRENT RETURN CLAMPS.

This document does not specify requirements for welding cables.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-151:2001, *International Electrotechnical Vocabulary (IEV) – Part 151: Electrical and magnetic devices*

IEC 60050-151:2001/AMD1:2013

IEC 60050-151:2001/AMD2:2014

IEC 60050-151:2001/AMD3:2019

IEC 60050-151:2001/AMD4:2020

IEC 60974-1:2017, *Arc welding equipment – Part 1: Welding power sources*

IEC 60974-1:2017/AMD1:2019

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-151, IEC 60974-1, as well as the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

WELDING CURRENT RETURN CLAMP

WORK CLAMP, US

RETURN CURRENT CLAMP, UK

clamp that is attached to, or in contact with, the workpiece, to connect the welding return cable to the workpiece

[SOURCE: IEC 60050-851:2008, 851-14-36]

3.2

RATED CURRENT

current assigned by the manufacturer that the WELDING CURRENT RETURN CLAMP can accept at 60 % duty cycle without exceeding the permitted temperature rise

3.3

RETAINING MEANS

mechanical arrangement that holds the WELDING CURRENT RETURN CLAMP in position and prevents an unintentional withdrawal, when properly attached to the workpiece

4 Environmental conditions

The WELDING CURRENT RETURN CLAMP shall be capable of operation when the following environmental conditions prevail:

- a) range of ambient air temperature:
 - during operation: –10 °C to +40 °C;
- b) relative humidity of the air: up to 50 % at 40 °C;
up to 90 % at 20 °C.

The WELDING CURRENT RETURN CLAMP shall withstand storage and transport at an ambient air temperature of

- 20 °C to + 55 °C without any damage to function and performance.

5 Tests

5.1 Test conditions

All type tests shall be carried out on the same new and completely assembled WELDING CURRENT RETURN CLAMP.

All type tests shall be carried out at an ambient air temperature between 10 °C and 40 °C.

5.2 Measuring instruments

As specified in 5.2 of IEC 60974-1:2017.

5.3 Test sequence

The type tests given below shall be carried out in the following sequence:

- a) general visual inspection;
- b) temperature rise, see 8.1;
- c) RETAINING MEANS, see 9.1;
- d) drop withstand, see 9.4;
- e) voltage drop, see Clause 7;
- f) general visual inspection.

The other type tests in this document not mentioned above may be carried out in any convenient sequence.

6 Designation

The WELDING CURRENT RETURN CLAMP shall be designated by the range of cross-section area of the welding cable intended to be connected. The test current is given in Table 1 based on maximum cross-section area. The WELDING CURRENT RETURN CLAMP shall accept the minimum cross-sectional area as given in Table 1. Minimum cross-sectional area may be reduced to extend the WELDING CURRENT RETURN CLAMP fitting range.

Table 1 – Relation between WELDING CURRENT RETURN CLAMP test current and welding cables cross-sectional area

Range of cross-sectional area mm ²	WELDING CURRENT RETURN CLAMP test current at 60 % duty cycle A	WELDING CURRENT RETURN CLAMP test current at 100 % duty cycle A
6 to 10	88	87
10 to 16	121	117
16 to 25	165	157
25 to 35	211	196
35 to 50	275	248
50 to 70	351	309
70 to 95	433	374
95 to 120	511	435
120 to 150	599	505
150 to 185	693	579
185 to 240	824	679

NOTE 60 % and 100 % duty cycle test current values are based on cable current capacity given in Table D.4 of EN 50565-1:2014 corrected for an ambient temperature of 40 °C

Conformity shall be checked by measurement.

7 Protection against electric shock – Voltage drop

The WELDING CURRENT RETURN CLAMPS in the new condition shall be capable of satisfactorily passing the voltage test.

Conformity shall be checked by the following test:

Two WELDING CURRENT RETURN CLAMPS are required for this test. Connect each clamp to a cable of maximum cross-sectional area as indicated in Table 1, by using the method of attachment for which the clamps are designed. Attach one clamp to each end of a clean mild steel plate 300 mm x 75 mm x 12 mm. The two clamps shall be positioned so that the centers of the contact points are 260 mm ±20 mm apart. Connect the other end of the cables to a power source to form a circuit. Pass the test current through both clamps and the plate. The voltage is measured on the two cables, at a distance of 10 mm from the cable connections. The voltage drop shall not exceed 0,08 V per 100 A of the test current.

8 Thermal rating

8.1 Temperature rise

The temperature rise caused by the current passing through a WELDING CURRENT RETURN CLAMP normally coupled and fitted with an untinned copper welding cable of maximum cross-sectional area as indicated in Table 1 shall not exceed:

- a) at the hottest spot of the external surface normally gripped by the operator: 40 K;
- b) at the connection of the welding cable to the WELDING CURRENT RETURN CLAMP: 45 K.

NOTE These values are temperature rises in relation to the ambient air temperature (maximum 40 °C).

Conformity shall be checked by the following test:


Voltage drop set-up given in Clause 7 is used for this test. Before beginning the test, pass the test current through the WELDING CURRENT RETURN CLAMP for a period of 1 h. Allow the WELDING CURRENT RETURN CLAMP to cool to ambient temperature.

A DC current equal to the 100 % duty cycle test current given in Table 1 is passed through the WELDING CURRENT RETURN CLAMP until the rate of the temperature rise does not exceed 2 K/h. During the total test time, the DC current shall be kept constant with a tolerance of $\pm 2\%$.

8.2 Resistance to hot objects

In the case of insulated WELDING CURRENT RETURN CLAMP, the insulation shall be capable of withstanding hot objects and the effects of a normal amount of weld spatter without being ignited.

Conformity shall be checked with a device in accordance with Figure 1.

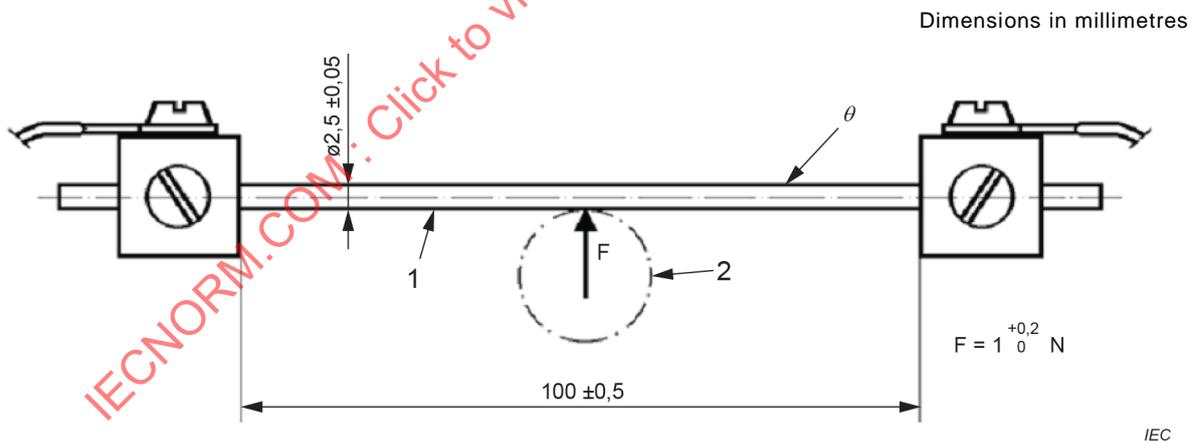

Key

- 1 18/8 chrome-nickel steel
- 2 WELDING CURRENT RETURN CLAMP
- θ test temperature

Figure 1 – Device for testing the resistance to hot objects

An electric current (of approximately 25 A) is passed through the rod until a steady-state temperature θ of $\geq 300^{+5}_0$ °C is reached. During the test, the temperature of the heated rod shall be maintained. This temperature will be measured by a contact thermometer or thermocouple.

The heated rod in a horizontal position is then applied for 2 min to the insulation. The heated rod shall not penetrate through the insulation and contact live parts.

An attempt is made to ignite any gases which may be emitted in the region of the contact point by means of an electric spark or small flame. If the gases are flammable, the burning shall stop as soon as the heated rod is removed.

9 Mechanical requirements

9.1 RETAINING MEANS

A WELDING CURRENT RETURN CLAMP shall be designed to maintain sufficient electrical contact in normal service and to prevent the unintentional separation of the WELDING CURRENT RETURN CLAMP as a result of a longitudinal pull.

Where springs are incorporated in the WELDING CURRENT RETURN CLAMP, they shall not constitute part of the current path unless they are permanently by-passed by a fixed conductor capable of carrying the test current given in Table 1.

Conformity shall be checked by visual inspection and the following test:

A WELDING CURRENT RETURN CLAMP is fitted in accordance with the manufacturer's instructions, with a welding cable of maximum cross-sectional area 5 mm² length and its coupling device. The welding cable is folded to form a bundle not exceeding 0,4 m in length. The clamp is attached to a clean mild steel plate 3 mm thick. The steel plate is positioned such that the cable bundle applies a vertical longitudinal force on the clamp for 1 min.

Test is passed if the WELDING CURRENT RETURN CLAMP remains attached to the steel plate.

9.2 Welding cable entry

The cable entries of the WELDING CURRENT RETURN CLAMP shall be designed so as to prevent damage to the cable due to flexing.

Conformity shall be checked by visual inspection.

9.3 Welding cable connection

The design of the WELDING CURRENT RETURN CLAMP shall be such that welding cables with a cross-sectional area within the range as specified by the manufacturer can be replaced. The connection shall withstand the mechanical stress of the following tensile test without separation. A clamp may be provided with adaptor to enlarge the fitting range.

Conformity shall be checked by visual inspection and by the following test:

A WELDING CURRENT RETURN CLAMP is fitted in accordance with the manufacturer's instructions, with a welding cable of maximum cross-sectional area. The connection is subjected to 10 pulls with a force of 40 N per mm² of the cross-sectional area with a maximum of 2 000 N applied to the welding cable. The force of each pull is gradually increased from zero to the specified value in 1 s and maintained for 1 s.

After the test, the conductor shall not have been displaced by more than 2 mm.

This test shall be repeated with a welding cable having the minimum permissible cross-sectional area as specified by the manufacturer.

If more than one method of cable fixing is provided, all methods shall be tested.

9.4 Drop withstand

The WELDING CURRENT RETURN CLAMP shall be capable of withstanding a drop test without impairing the mechanical functioning.

Conformity shall be checked by the following test, manual operation and visual inspection.

Lift the WELDING CURRENT RETURN CLAMP without any cable fitted to a height of 5 m above a 10 mm thick steel plate, release without initial velocity and allow to fall on the steel plate. Repeat this procedure 10 times with the clamp in various initial orientations to ensure each side and edge is tested.

10 Marking

The following information shall be legibly and indelibly marked on a WELDING CURRENT RETURN CLAMP:

- a) name of the manufacturer, distributor, importer or the registered trademark;
- b) RATED CURRENT;
- c) maximum permissible cross-sectional area of the welding cable;
- d) minimum permissible cross-sectional area of the welding cable;
- e) reference to this document, confirming that the WELDING CURRENT RETURN CLAMP complies with the requirements.

Conformity shall be checked by visual inspection.

11 Instructions for use

Each WELDING CURRENT RETURN CLAMP shall be delivered with an instruction sheet which includes the following information:

- a) correct coupling and uncoupling of the WELDING CURRENT RETURN CLAMP;
- b) correct connection of the welding cable;
- c) choice of welding cable, type and size;
- d) relation of permissible current and duty cycle.

Conformity shall be checked by visual inspection.