

INTERNATIONAL  
STANDARD

ISO/IEC/  
IEEE  
8802-1Q

First edition  
2016-03-15

AMENDMENT 3  
2017-07

---

---

**Information technology —  
Telecommunications and information  
exchange between systems — Local  
and metropolitan area networks —  
Specific requirements —**

**Part 1Q:  
Bridges and bridged networks**

**AMENDMENT 3: Enhancements for  
scheduled traffic**

*Technologies de l'information — Télécommunications et échange  
d'information entre systèmes — Réseaux locaux et métropolitains —  
Exigences spécifiques —*

*Partie 1Q: Ponts et réseaux pontés*

*AMENDEMENT 3: Améliorations pour le trafic programmé*



Reference number  
ISO/IEC/IEEE 8802-1Q:2016/Amd.3:2017(E)

© IEEE 2016

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017



**COPYRIGHT PROTECTED DOCUMENT**

© IEEE 2016

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO or IEEE at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

Institute of Electrical and Electronics Engineers, Inc  
3 Park Avenue, New York  
NY 10016-5997, USA

stds.ipr@ieee.org  
www.ieee.org

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of ISO/IEC JTC 1 is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is called to the possibility that implementation of this standard may require the use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. ISO/IEEE is not responsible for identifying essential patents or patent claims for which a license may be required, for conducting inquiries into the legal validity or scope of patents or patent claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance or a Patent Statement and Licensing Declaration Form, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from ISO or the IEEE Standards Association.

Amendment 3 to ISO/IEC/IEEE 8802-1Q:2016 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE Std 802.1Qca-2016). It was adopted by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*, in parallel with its approval by the ISO/IEC national bodies, under the "fast-track procedure" defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE. IEEE is responsible for the maintenance of this document with participation and input from ISO/IEC national bodies.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

IEEE Standard for  
Local and metropolitan area networks—

**Bridges and Bridged Networks**

**Amendment 25: Enhancements for Scheduled  
Traffic**

IEEE Computer Society

Sponsored by the  
LAN/MAN Standards Committee

---

IEEE  
3 Park Avenue  
New York, NY 10016-5997  
USA

**IEEE Std 802.1Qbv™-2015**  
(Amendment to  
IEEE Std 802.1Q™-2014  
as amended by  
IEEE Std 802.1Qca™-2015,  
IEEE Std 802.1Qcd™-2015, and  
IEEE Std 802.1Q-2014/Cor 1-2015)

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

**IEEE Std 802.1Qbv™-2015**

(Amendment to  
IEEE Std 802.1Q™-2014  
as amended by  
IEEE Std 802.1Qca™-2015,  
IEEE Std 802.1Qcd™-2015, and  
IEEE Std 802.1Q-2014/Cor 1-2015)

**IEEE Standard for  
Local and metropolitan area networks—**

**Bridges and Bridged Networks**

**Amendment 25: Enhancements for Scheduled  
Traffic**

Sponsor

**LAN/MAN Standards Committee  
of the  
IEEE Computer Society**

Approved 5 December 2015

**IEEE SA-Standards Board**

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

**Abstract:** Enhancements to the forwarding process that supports scheduled traffic is provided in this amendment to IEEE Std 802.1Q-2014.

**Keywords:** Bridged Local Area Networks, IEEE 802<sup>®</sup>, IEEE 802.1Q<sup>™</sup>, IEEE 802.1Qca<sup>™</sup>, IEEE 802.1Qcd<sup>™</sup>, IEEE 802.1Qbv<sup>™</sup>, local area networks (LANs), MAC Bridges, metropolitan area networks, scheduled traffic, Virtual Bridged Local Area Networks (virtual LANs)

---

The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2016 by The Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 18 March 2016. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 978-1-5044-0721-2      STD20807  
PDF: ISBN 978-1-5044-0722-9      STDPD20807

*IEEE prohibits discrimination, harassment, and bullying.*

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

*No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.*

## Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

## Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

## Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

## Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

## Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board  
445 Hoes Lane  
Piscataway, NJ 08854 USA

## Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

## Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

## Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

## Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://ieeexplore.ieee.org/xpl/standards.jsp> or contact IEEE at the address listed previously. For more information about the IEEE-SA or IOWA's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

## Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

## Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

## Participants

At the time this standard was submitted to the IEEE-SA Standards Board for approval, the IEEE 802.1 Working Group had the following membership:

**Glenn Parsons, Chair**

**John Messenger, Vice Chair**

**Tony Jeffrey, Editor**

**Michael Johas Teener, Chair, Time Sensitive Networking Task Group**

**Janos Farkas, Vice Chair, Time Sensitive Networking Task Group**

Christian Boiger  
Paul Bortoff  
David Chen  
Feng Chen  
Weiyang Cheng  
Rodney Cummings  
Norman Finn  
Geoffrey Garner  
Craig Gunther  
Stephen Haddock  
Mark Hantel  
Marc Holness  
Hal Keen  
Stephan Kehrer  
Marcel Kiessling

Philippe Klein  
Jouni Korhonen  
Yizhou Li  
Christophe Mangin  
Tom McBeath  
James McIntosh  
Hiroki Nakano  
Bob Noseworthy  
Donald R. Pannell  
Walter Pienciak  
Karen Randall  
Maximilian Riegel  
Dan Romascanu  
Jessy Rouyer

Panagiotis Saltisidis  
Michael Seaman  
Daniel Sexton  
Johannes Specht  
Wilfried Steiner  
Patricia Thaler  
David Thornburg  
Jeremy Touve  
Paul Unbehagen  
Karl Weber  
Brian Weis  
Jordon Woods  
Helge Zinner  
Juan Carlos Zuniga

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802 1Q:2016/Amd 3:2017

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Thomas Alexander  
 Butch Anton  
 Lee Armstrong  
 Christian Boiger  
 Ashley Butterworth  
 William Byrd  
 William Carney  
 Juan Carreon  
 Minh Cheong  
 Keith Chow  
 Charles Cook  
 Rodney Cummings  
 Patrick Diamond  
 Yezid Donoso  
 Sourav Dutta  
 Richard Edgar  
 Liu Fangfang  
 Janos Farkas  
 Hans-Joachim Fischer  
 Michael Fischer  
 Yukihiko Fujimoto  
 Devon Gayle  
 Gregory Gillooly  
 Eric W. Gray  
 David Gregson

Randall Groves  
 Craig Gunther  
 Stephen Haddock  
 Marco Hernandez  
 Werner Hoelzl  
 Noriyuki Ikeuchi  
 Sergiu Iordanescu  
 Atsushi Ito  
 Tony Jeffrey  
 Michael Johas Teener  
 Peter Jones  
 Vincent Jones  
 Adri Jovin  
 Shinkyō Kaku  
 Piotr Karocki  
 Stuart Kerry  
 Yongbum Kim  
 Jouni Korhonen  
 Bruce Kraemer  
 Arthur H. Light  
 Elvis Maculuba  
 Arthur Marris  
 John Messenger  
 Charles Moorwood  
 Michael Newman

Nick S. A. Nikjoo  
 Satoshi Obara  
 Arumugam Paventhan  
 Alon Regev  
 Robert Robinson  
 Dan Romascanu  
 Jessie Rouyer  
 Bartien Sayogo  
 Michael Seaman  
 Shusaku Shimada  
 Veselin Skendzic  
 Kevin Stanton  
 Thomas Starai  
 Eugene Stoudenmire  
 René Struik  
 Walter Struppler  
 Mark-Rene Uchida  
 Dmitri Varsanofiev  
 Prabodh Varshney  
 George Vlantis  
 Khurram Waheed  
 Hung-Yu Wei  
 Andreas Wolf  
 Chun Yu Charles Wong  
 Oren Yuen

When the IEEE-SA Standards Board approved this standard on 5 December 2015, it had the following membership:

**John D. Kulick**, *Chair*  
**Jon Walter Rosdahl**, *Vice Chair*  
**Richard H. Hulett**, *Past Chair*  
**Konstantinos Karachalios**, *Secretary*

Masayuki Ariyoshi  
Ted Burse  
Stephen Dukes  
Jean-Philippe Faure  
J. Travis Griffith  
Gary Hoffman  
Michael Janezic

Joseph L. Koepfinger\*  
David J. Law  
Hung Ling  
Andrew Myles  
T. W. Olsen  
Glenn Parsons  
Ronald C. Petersen  
Annette D. Reilly

Stephen J. Shellhammer  
Adrian P. Stephens  
Yatin Trivedi  
Phillip Winston  
Don Wright  
Yu Yuan  
Daidi Zhong

\*Member Emeritus

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

## Introduction

This introduction is not part of IEEE Std 802.1Qbv-2015, IEEE Standard for Local and metropolitan area networks—Bridges and Bridged Networks—Amendment 25: Enhancements for Scheduled Traffic.

This amendment to IEEE Std 802.1Q-2014 provides enhancements to the forwarding process that support scheduled traffic.

This standard contains state-of-the-art material. The area covered by this standard is undergoing evolution. Revisions are anticipated within the next few years to clarify existing material, to correct possible errors, and to incorporate new related material. Information on the current revision state of this and other IEEE 802® standards may be obtained from

Secretary, IEEE-SA Standards Board  
445 Hoes Lane  
Piscataway, NJ 08854-4141  
USA

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

## Contents

2. Normative references .....	14
3. Definitions .....	15
4. Abbreviations .....	16
5. Conformance .....	17
5.4 VLAN Bridge component requirements .....	17
5.13 MAC Bridge component requirements .....	17
5.24 EVB station requirements .....	17
5.25 End station requirements—enhancements for scheduled traffic .....	17
6. Support of the MAC Service .....	18
6.5 Quality of service (QoS) maintenance .....	18
8. Principles of bridge operation .....	19
8.6 The Forwarding Process .....	19
12. Bridge management .....	30
12.29 Managed objects for scheduled traffic .....	30
17. Management Information Base (MIB) .....	33
17.2 Structure of the MIB .....	33
17.3 Relationship to other MIBs .....	34
17.4 Security considerations .....	35
17.7 MIB modules .....	36
Annex A (normative) PICS proforma—Bridge implementations .....	49
Annex B (normative) PICS proforma—End station implementations .....	51
Annex Q (informative) Traffic scheduling .....	52

## Figures

Figure 8-12—Transmission selection with gates.....	20
Figure 8-13—Scheduled traffic state machines—overview and relationships.....	22
Figure 8-14—Cycle Timer state machine.....	23
Figure 8-15—List Execute state machine.....	24
Figure 8-16—List Config state machine .....	25
Figure Q-1—Establishing a guard band .....	53
Figure Q-2—Using gate operations.....	54

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

## Tables

Table 8-6—Gate operations .....	21
Table 12-28—The Gate Parameter Table .....	30
Table 17-28—IEEE8021-ST-MIB Structure and relationship to this standard.....	33

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

## IEEE Standard for Local and metropolitan area networks—

### Bridges and Bridged Networks

### Amendment 25: Enhancements for Scheduled Traffic

**IMPORTANT NOTICE:** *IEEE Standards documents are not intended to ensure safety, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.*

*This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.*

(This amendment is based on IEEE Std 802.1Q™-2014 as amended by IEEE Std 802.1Qca™-2015, IEEE Std 802.1Qcd™-2015, and IEEE Std 802.1Q-2014/Cor 1-2015.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in **bold italic**. Four editing instructions are used: change, delete, insert, and replace. **Change** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed either by using ~~striketrough~~ (to remove old material) and underscore (to add new material); **Delete** removes existing material. **Insert** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. **Replace** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.<sup>1</sup>

<sup>1</sup>Notes in text, tables, and figures are given for information only, and do not contain requirements needed to implement the standard.

## 2. Normative references

*Insert the following reference in alphanumeric order:*

IEEE Std 802.1AS™, IEEE Standard for Local and metropolitan area networks—Timing and Synchronization for Time-Sensitive Applications in Bridged Local Area Networks.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

### 3. Definitions

*Insert the following definitions in alphabetic order, renumbering as appropriate, and renumber the subsequent terms accordingly:*

**3.1 gate-close event:** An event that occurs when the transmission gate associated with a queue transitions from the Open state to the Closed state, disconnecting the transmission selection function of the forwarding process from the queue and preventing it from selecting frames from that queue.

**3.2 gate-open event:** An event that occurs when the transmission gate associated with a queue transitions from the Closed state to the Open state, connecting the transmission selection function of the forwarding process to a queue and allowing it to select frames from that queue.

**3.3 gating cycle:** The period of time over which the sequence of operations in a gate control list repeats.

**3.4 transmission gate:** A gate that connects or disconnects the transmission selection function of the forwarding process from the queue, allowing or preventing it from selecting frames from that queue. The gate has two states, Open and Closed.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

#### **4. Abbreviations**

*Insert the following abbreviations in alphabetic order:*

**PTP** IEEE 1588<sup>TM</sup> precision time protocol

**TAI** Temps Atomic International—International Atomic Time

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

## 5. Conformance

### 5.4 VLAN Bridge component requirements

#### 5.4.1 VLAN Bridge component options

*Insert the following items at the end of the lettered list, renumbering as necessary:*

- ac) Support the enhancements for scheduled traffic as specified in 8.6.8.4;
- ad) Support the management entities for scheduled traffic as specified in 12.29.

### 5.13 MAC Bridge component requirements

#### 5.13.1 MAC Bridge component options

*Insert the following items at the end of the lettered list, renumbering as necessary:*

- l) Support the enhancements for scheduled traffic as specified in 8.6.8.4;
- m) Support the state machines for scheduled traffic as specified in 8.6.9.

### 5.24 EVB station requirements

*Insert the following new subclause after 5.24.1.2, at the end of Clause 5:*

#### 5.25 End station requirements—enhancements for scheduled traffic

An end station implementation that conforms to the provisions of this standard for enhancements for scheduled traffic shall:

- a) Support the enhancements for scheduled traffic as specified in 8.6.8.4.
- b) Support the state machines for scheduled traffic as specified in 8.6.9.

## 6. Support of the MAC Service

### 6.5 Quality of service (QoS) maintenance

#### 6.5.2 Frame loss

*Insert a new list item b8) at the end of the numbered list:*

- 8) The Bridge supports enhancements for scheduled traffic (8.6.8.4) and the size of the service data unit exceeds the value of queueMaxSDU (8.6.8.4) for the traffic class queue on which the frame is to be queued.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 3:2017

## 8. Principles of bridge operation

### 8.6 The Forwarding Process

#### 8.6.6 Queuing frames

*Delete the fourth paragraph of 8.6.6 as shown:*

~~VID is not applicable to VLAN-unaware MAC Relays and the above combinations will exclude any reference to VID when applied to MAC Bridges.~~

*Change NOTE 2 of 8.6.6 as shown:*

~~NOTE 2—Different numbers of traffic classes may be implemented for different Ports can use different numbers of traffic classes. Ports with media access methods that support a single transmission priority, such as Ethernet, can support more than one traffic class.~~

#### 8.6.8 Transmission selection

*Change the first paragraph of 8.6.8 as shown:*

For each Port, frames are selected for transmission on the basis of the traffic classes that the Port supports and the operation of the transmission selection algorithms supported by the corresponding queues on that Port. For a given Port and supported value of traffic class, frames are selected from the corresponding queue for transmission if and only if

*Insert a new paragraph at the end of 8.6.8 as shown:*

When the enhancements for scheduled traffic are supported, additional requirements to determine whether a frame is available for transmission apply, as specified in 8.6.8.4.

##### 8.6.8.2 Credit-based shaper algorithm

*Change the text of 8.6.8.2 list item d), and add a NOTE, as shown:*

- d) *idleSlope*. The rate of change of *credit*, in bits per second, when the value of *credit* is increasing (i.e., while *transmit* is FALSE and the transmission gate for the queue is open [8.6.8.4]). The value of *idleSlope* can never exceed *portTransmitRate*. If the enhancements for scheduled traffic (8.6.8.4) are not supported, or if GateEnabled is FALSE (8.6.9.4.14), the value of *idleSlope* for a given queue is determined by equal to the value of the *operIdleSlope(N)* parameter for that queue, as defined in 34.3. If the enhancements for scheduled traffic (8.6.8.4) are supported, and GateEnabled is TRUE (8.6.9.4.14), then:

$$\text{idleSlope} = (\text{operIdleSlope}(N) \times \text{OperCycleTime} / \text{GateOpenTime})$$

where OperCycleTime is as defined in 8.6.9.4.20 and GateOpenTime is equal to the total amount of time during the gating cycle that the gate state for the queue is Open.

NOTE—When scheduled traffic operation is enabled, credit is accumulated only while the gate is open; therefore, the effective data rate of the *idleSlope* is increased to reflect the duty cycle for the transmission gate associated with the queue; however, the value of *operIdleSlope(N)* for the queue remains unchanged.

Change the text of 8.6.8.2 list item f) as shown:

- f) **credit.** The transmission credit, in bits, that is currently available to the queue. If, at any time, there are no frames in the queue, and the *transmit* parameter is FALSE, and the transmission gate for the queue is open (8.6.8.4), and *credit* is positive, then *credit* is set to zero.

8.6.8.3 ETS algorithm

Insert a new subclause 8.6.8.4 after 8.6.8.3, renumbering as necessary:

8.6.8.4 Enhancements for scheduled traffic

A Bridge or an end station may support enhancements that allow transmission from each queue to be scheduled relative to a known timescale. In order to achieve this, a transmission gate is associated with each queue; the state of the transmission gate determines whether or not queued frames can be selected for transmission (see Figure 8-12). For a given queue, the transmission gate can be in one of two states:

- a) **Open:** Queued frames are selected for transmission, in accordance with the definition of the transmission selection algorithm associated with the queue.
- b) **Closed:** Queued frames are not selected for transmission.

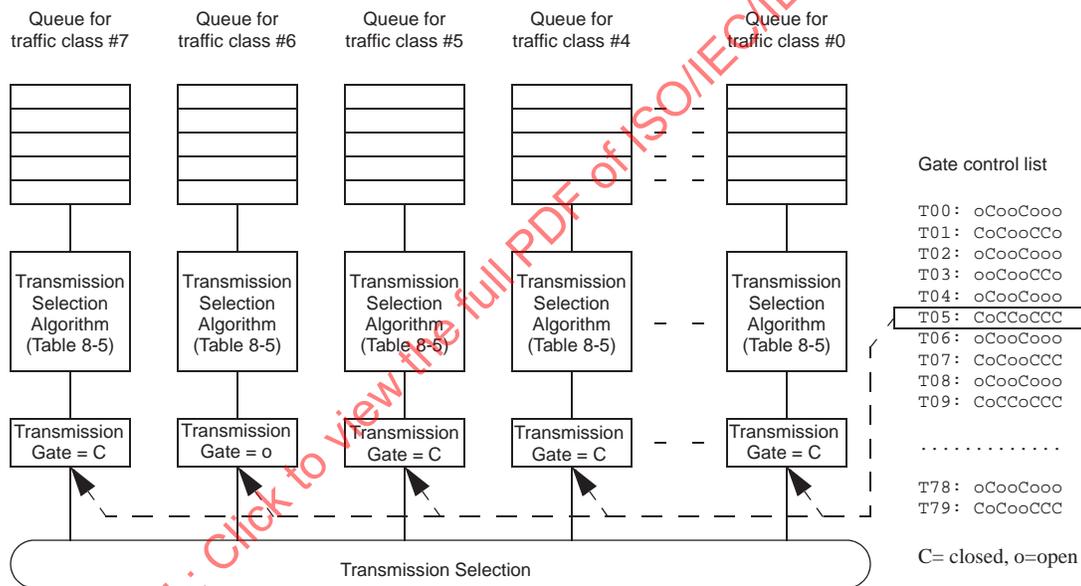


Figure 8-12—Transmission selection with gates

A *gate control list* associated with each Port contains an ordered list of gate operations. Each gate operation changes the transmission gate state for the gate associated with each of the Port's traffic class queues. In an implementation that does not support enhancements for scheduled traffic, all gates are assumed to be permanently in the *open* state. Table 8-6 identifies the gate operation types, their parameters, and the actions that result from their execution. The state machines that control the execution of the gate control list, along with their variables and procedures, are specified in 8.6.9.

In addition to the other checks carried out by the transmission selection algorithm, a frame on a traffic class queue is not available for transmission [as required for tests (a) and (b) in 8.6.8] if the transmission gate is in the closed state or if there is insufficient time available to transmit the entirety of that frame before the next gate-close event (3.1) associated with that queue. A per-traffic class counter, *TransmissionOverrun* (12.29.1.1.2), is incremented if the implementation detects that a frame from a given queue is still being transmitted by the MAC when the gate-close event for that queue occurs.

Table 8-6—Gate operations

Operation name	Parameter(s)	Action
SetGateStates	GateState, TimeInterval	The <i>GateState</i> parameter indicates a value, <i>open</i> or <i>closed</i> , for each of the Port's queues. The gates are immediately set to the states indicated in the <i>GateState</i> parameter. This causes gate-close events (3.13.1) and/or gate-open events (3.23.2) to occur for any queue where the new <i>GateState</i> represents a change of state relative to the current state of the gate. After <i>TimeInterval</i> ticks (8.6.9.4.16) have elapsed since the completion of the previous gate operation in the gate control list, control passes to the next gate operation.

NOTE 1—It is assumed that the implementation has knowledge of the transmission overheads that are involved in transmitting a frame on a given Port and can therefore determine how long the transmission of a frame will take. However, there can be reasons why the frame size, and therefore the length of time needed for its transmission, is unknown; for example, where cut-through is supported, or where frame preemption is supported and there is no way of telling in advance how many times a given frame will be preempted before its transmission is complete. It is desirable that the schedule for such traffic is designed to accommodate the intended pattern of transmission without overrunning the next gate-close event for the traffic classes concerned.

NOTE 2— It is assumed that the implementation can determine the time at which the next gate-close event will occur from the sequence of gate events. In the normal case, this can be achieved by inspecting the sequence of gate operations in *OperControlList* (8.6.9.4.19) and associated variables. However, when a new configuration is about to be installed, it would be necessary to inspect the contents of both the *OperControlList* and the *AdminControlList* (8.6.9.4.2) and associated variables in order to determine the time of the next gate-close event, as the gating cycle for the new configuration may differ in size and phasing from the old cycle.

A per-traffic class queue *queueMaxSDU* parameter defines the maximum service data unit size for each queue; frames that exceed *queueMaxSDU* are discarded [6.5.2 b8)]. The value of *queueMaxSDU* for each queue is configurable by management (12.29); its default value is the maximum SDU size supported by the MAC procedures employed on the LAN to which the frame is to be relayed [6.5.2 b3)].

NOTE 3—The use of PFC is likely to interfere with a traffic schedule, because PFC is transmitted by a higher layer entity (see Clause 36).

In order for an end station to support the scheduled transmission of frames, it is necessary for its behavior to be compatible with the operation of the forwarding and queuing mechanisms employed in the Bridges to which it connects. In effect, the requirements for an end station are for its transmission selection to operate as if it is a single outbound Port of a Bridge that supports scheduled traffic. There are no particular requirements for end station support for the reception of scheduled traffic; only for the transmission of scheduled traffic.

*Insert a new subclause 8.6.9 after 8.6.8, renumbering as necessary:*

### 8.6.9 Scheduled traffic state machines

The execution of the gate operations in a Port's gate control list (8.6.8.4) is controlled by three state machines:

- a) The Cycle Timer state machine (8.6.9.1);
- b) The List Execute state machine (8.6.9.2); and
- c) The List Config state machine (8.6.9.3).

One instance of each state machine is instantiated for each Port that supports the enhancements for scheduled traffic.


The Cycle Timer state machine initiates the execution of the gate control list and ensures that the gating cycle time defined for the Port is maintained.

The List Execute state machine executes the gate operations in the gate control list, in sequence, and establishes the appropriate time delay between each operation.

The List Config state machine manages the process of updating the current active schedule, interrupting the operation of the other two state machines while the update process is performed, and restarting them once the new schedule has been installed.

The state machine notation is specified in Annex E.

An overview of the state machines, showing their relationships and the variables that are used by them, can be seen in Figure 8-13.

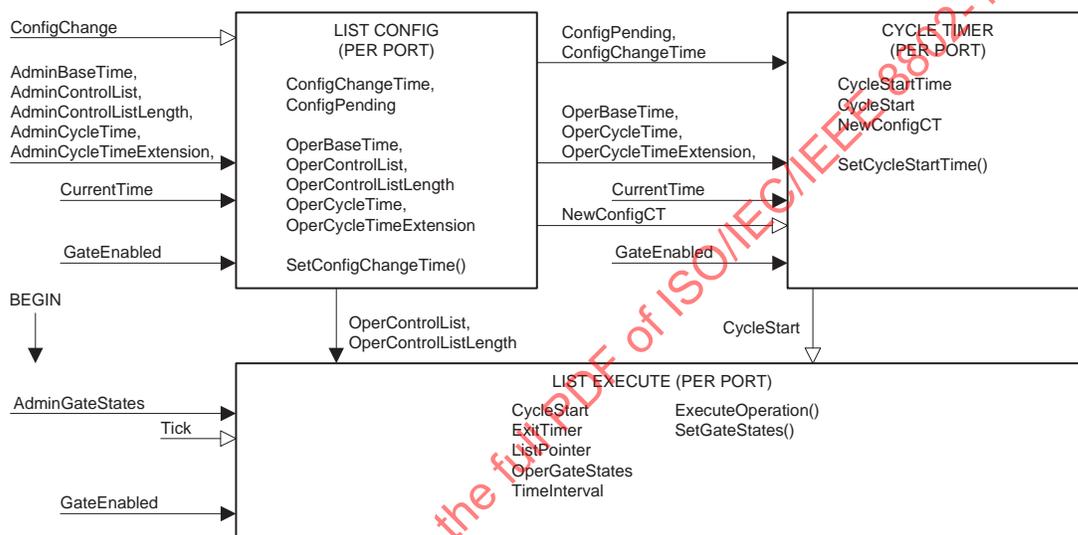

**NOTATION:**  
Variables are shown both within the machine where they are initialized and between machines where they are used to communicate information. In the latter case the arrow styles, running from one machine to another, provide an overview of how the variables are used:

- ▶ Not changed by the target machine, this variable communicates between state machines for the same port.
- ▷ Set (or cleared) by the originating machine, cleared (or set) by the target machine, communicates between machines for the same port.

**Figure 8-13—Scheduled traffic state machines—overview and relationships**

### 8.6.9.1 Cycle Timer state machine

The Cycle Timer state machine shall implement the function specified by the state diagram in Figure 8-14 and the attendant definitions in 8.6.9.1.1 and 8.6.9.4.

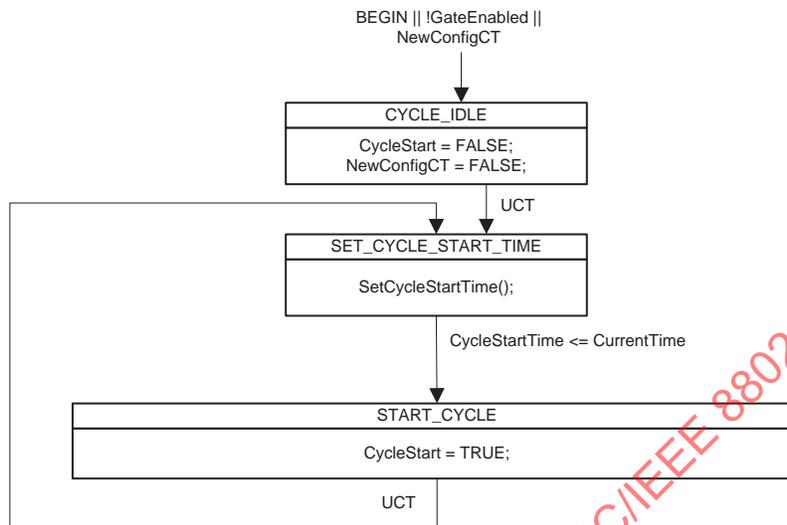


Figure 8-14—Cycle Timer state machine

#### 8.6.9.1.1 SetCycleStartTime()

The SetCycleStartTime() procedure determines the time at which the next gate control list execution cycle is to start. The procedure sets the CycleStartTime variable (8.6.9.4.12) to the start time, based upon the values of CurrentTime (8.6.9.4.10), OperBaseTime (8.6.9.4.18), OperCycleTime (8.6.9.4.20), OperCycleTimeExtension (8.6.9.4.21), ConfigChangeTime (8.6.9.4.9), and ConfigPending (8.6.9.4.8), according to the following rules:

- a) If:
  - ConfigPending = FALSE, and
  - OperBaseTime  $\geq$  CurrentTime  
(i.e., OperBaseTime specifies the current time or a future time)
 Then:
  - CycleStartTime = OperBaseTime.
- b) If:
  - ConfigPending = FALSE, and
  - OperBaseTime < CurrentTime  
(i.e., OperBaseTime specifies a time in the past)
 Then:
  - CycleStartTime = (OperBaseTime + N\*OperCycleTime)  
where N is the smallest integer for which the relation:  
CycleStartTime  $\geq$  CurrentTime  
would be TRUE.
- c) If:
  - ConfigPending = TRUE, and
  - ConfigChangeTime > (CurrentTime + OperCycleTime + OperCycleTimeExtension)
 Then:
  - CycleStartTime = (OperBaseTime + N\*OperCycleTime)  
where N is the smallest integer for which the relation:

CycleStartTime >= CurrentTime  
 would be TRUE.

- d) If:  
 ConfigPending = TRUE, and  
 ConfigChangeTime <= (CurrentTime + OperCycleTime + OperCycleTimeExtension)  
 Then:  
 CycleStartTime = ConfigChangeTime

NOTE 1—Since the origin of the PTP timescale is 1 January 1970 00:00:00 TAI, CycleStartTime will be larger than  $1.3 \times 10^{18}$  ns. If sufficient precision is not maintained when computing N, CycleStartTime will not be an integer multiple of OperCycleTime, which could result in misalignment of the cycles at ports on different bridges.

NOTE 2—If AdminBaseTime is set to the same time in the past in all bridges and end stations, OperBaseTime is always in the past, and all cycles start synchronized. Using AdminBaseTime in the past is appropriate when you can start schedules prior to starting the application that uses the schedules. Use of AdminBaseTime in the future is intended to change a currently running schedule in all bridges and end stations to a new schedule at a future time. Using AdminBaseTime in the future is appropriate when schedules must be changed without stopping the application.

### 8.6.9.2 List Execute state machine

The List Execute state machine shall implement the function specified by the state diagram in Figure 8-15 and the attendant definitions in 8.6.9.2.1, 8.6.9.2.2, and 8.6.9.4.

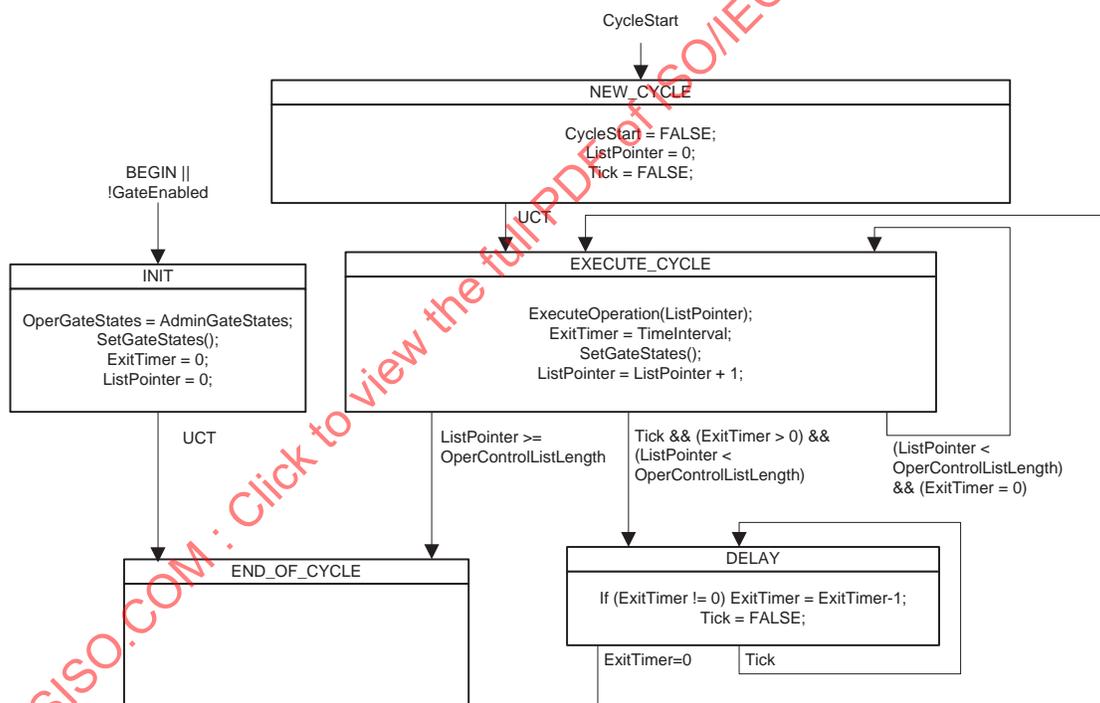


Figure 8-15—List Execute state machine

#### 8.6.9.2.1 ExecuteOperation()

The ExecuteOperation() procedure is responsible for fetching the next gate operation from the OperControlList, along with any parameters associated with it, and performing actions based upon the gate operation that has been fetched. The value of the ListPointer variable (8.6.9.4.15) is used as an index into OperControlList. The procedure processes the operation according to its operation name (Table 8-6) as follows:

- a) If the operation name is SetGateStates, then the GateState parameter value associated with the operation is assigned to the OperGateStates variable (8.6.9.4.22), and the TimeInterval parameter value associated with the operation is assigned to the TimeInterval variable (8.6.9.4.24). If the TimeInterval parameter value associated with the operation was 0, the TimeInterval variable is assigned the value 1.
- b) If the operation name is unrecognized, then the ListPointer variable (8.6.9.4.15) is assigned the value of the OperControlListLength variable (8.6.9.4.23) and the TimeInterval variable (8.6.9.4.24) is assigned the value 0.
- c) If there is no TimeInterval parameter associated with the operation, then the TimeInterval variable is assigned the value 0.

### 8.6.9.2.2 SetGateStates()

This procedure sets the gate state for each of the Port's queues as specified by the value of the OperGateStates variable (8.6.9.4.22).

NOTE—If the OperGateStates value differs from the previous gate states, the SetGateStates() procedure causes gate-open and/or gate-close events to occur (3.1, 3.2). It is possible that, on a given queue, the maximum time interval between any gate-open event and a subsequent gate-close event is smaller than the value of queueMaxSDU, in which case, frames that are too long to transmit but are shorter than queueMaxSDU could be queued on that queue. Such frames would never be transmitted, but would eventually be discarded because they exceed the maximum frame lifetime (6.5.2, 6.5.6). It should also be noted that a Bridge is allowed to discard frames that could never be transmitted [6.5.2 b8)].

### 8.6.9.3 List Config state machine

The List Config state machine shall implement the function specified by the state diagram in Figure 8-16 and the attendant definitions in 8.6.9.3.1 and 8.6.9.4.

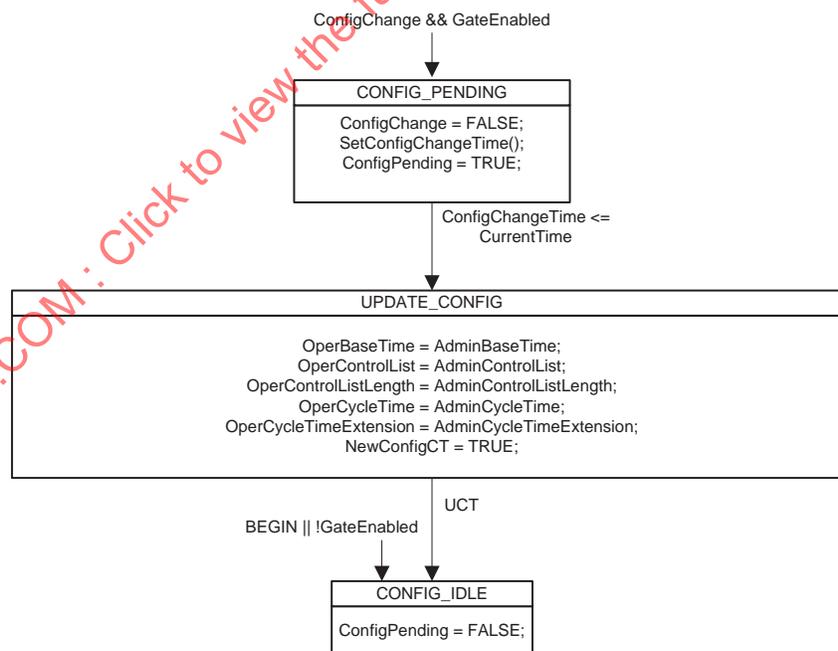


Figure 8-16—List Config state machine

### 8.6.9.3.1 SetConfigChangeTime()

The SetConfigChangeTime() procedure determines the time at which the administrative values of the cycle configuration variables are to be copied across to the operational variables. The procedure sets the ConfigChangeTime variable (8.6.9.4.9) to the start time, based upon the values of AdminBaseTime (8.6.9.4.1) and AdminCycleTime (8.6.9.4.3), according to the following rules:

- a) If:  
AdminBaseTime  $\geq$  CurrentTime (8.6.9.4.10)  
(i.e., AdminBaseTime specifies the current time or a future time)  
Then:  
ConfigChangeTime = AdminBaseTime
- b) If:  
(AdminBaseTime < CurrentTime) and (GateEnabled = FALSE)  
(i.e., AdminBaseTime specifies a time in the past, and the current schedule is stopped)  
Then:  
ConfigChangeTime = (AdminBaseTime + N\*AdminCycleTime)  
where N is the smallest integer for which the relation  
ConfigChangeTime  $\geq$  CurrentTime  
would be TRUE.
- c) If:  
(AdminBaseTime < CurrentTime) and (GateEnabled = TRUE)  
(i.e., AdminBaseTime specifies a time in the past, and the current schedule is running)  
Then:  
Increment ConfigChangeError counter (12.29.1)  
ConfigChangeTime = (AdminBaseTime + N\*AdminCycleTime)  
where N is the smallest integer for which the relation  
ConfigChangeTime  $\geq$  CurrentTime  
would be TRUE.

### 8.6.9.4 State machine variables

#### 8.6.9.4.1 AdminBaseTime

The administrative value of base time, expressed as an IEEE 1588 precision time protocol (PTP) timescale (see 8.2 of IEEE Std 802.1AS-2011). This value can be changed by management, and is used by the List Config state machine (8.6.9.3) to set the value of OperBaseTime (8.6.9.4.18).

NOTE—Time is expressed in the PTP timescale as the number of seconds, nanoseconds, and fractional nanoseconds that have elapsed since 1 January 1970 00:00:00 TAI.

#### 8.6.9.4.2 AdminControlList

The administrative version of the gate control list for the Port. This value can be changed by management, and is used by the List Config state machine (8.6.9.3) to set the value of OperControlList (8.6.9.4.19).

#### 8.6.9.4.3 AdminCycleTime

The administrative value of the gating cycle for the Port (3.3). This value can be changed by management, and is used by the List Config state machine (8.6.9.3) to set the value of OperCycleTime (8.6.9.4.20). The AdminCycleTime variable is a rational number of seconds, defined by an integer numerator and an integer denominator.

#### 8.6.9.4.4 AdminCycleTimeExtension

An integer number of nanoseconds, defining the maximum amount of time by which the gating cycle for the Port (3.3) is permitted to be extended when a new cycle configuration is being installed. This administrative value can be changed by management, and is used by the List Config state machine (8.6.9.3) to set the value of OperCycleTimeExtension (8.6.9.4.21).

#### 8.6.9.4.5 AdminGateStates

The initial state of the gate associated with each queue for the Port is set by the List Execute state machine (8.6.9.2), and is determined by the value of the AdminGateStates variable. The default value of AdminGateStates is *open* for all queues. The value of AdminGateStates can be changed by management.

#### 8.6.9.4.6 AdminControlListLength

This value can be changed by management, and is used by the List Config state machine (8.6.9.3) to set the value of OperControlListLength (8.6.9.4.23).

#### 8.6.9.4.7 ConfigChange

A Boolean variable that acts as a start signal to the List Config state machine (8.6.9.3) that the administrative variable values for the Port are ready to be copied into their corresponding operational variables. This variable is set TRUE by management and is set FALSE by the List Config state machine.

#### 8.6.9.4.8 ConfigPending

A Boolean variable, set TRUE by the List Config state machine (8.6.9.3) to signal that there is a new cycle configuration awaiting installation. The variable is set FALSE when the List Config state machine has installed the new configuration. The variable is used by the SetCycleStartTime() procedure (8.6.9.1.1) to control the length of the cycle that immediately precedes the first cycle that uses the new configuration values. This value can be read by management, as specified in 12.29.1.

#### 8.6.9.4.9 ConfigChangeTime

The time at which the administrative variables that determine the cycle are to be copied across to the corresponding operational variables, expressed as a PTP timescale. The value of this variable is set by the SetConfigChangeTime() procedure (8.6.9.3.1) in the List Config state machine (8.6.9.3).

#### 8.6.9.4.10 CurrentTime

The current time maintained by the local system, expressed as a PTP timescale (see 8.2 of IEEE Std 802.1AS-2011).

NOTE 1—Other sources of times can be used to provide a value for the time. The implementation has to ensure that the same view of time is shared by the implementation and whatever entity is responsible for establishing the time schedule. The described mechanisms will work also with other formats of time.

NOTE 2—A discontinuity in time will have a predictable effect upon the operation of the state machines, as a consequence of their definitions. The implementer and/or user is advised to understand what those effects could be, and either limit such discontinuities or ensure that the results will not adversely affect the application.

#### 8.6.9.4.11 CycleStart

A Boolean variable used as a signal from the Cycle Timer state machine (8.6.9.1) to the List Execute state machine to start executing the gate control list. Set TRUE by the Cycle Timer state machine and set FALSE by the List Execute state machine (8.6.9.2).

#### 8.6.9.4.12 CycleStartTime

The time at which the next gate control list execution cycle is to start, expressed as a PTP timescale. The value of this parameter is set by the SetCycleStartTime() procedure (8.6.9.1.1) in the Cycle Timer state machine (8.6.9.1).

#### 8.6.9.4.13 ExitTimer

A timer that implements the delay associated with the currently executing gate operation, expressed as an integer number of nanoseconds. The value is set by the operation of the List Execute state machine (8.6.9.2).

#### 8.6.9.4.14 GateEnabled

A Boolean variable that indicates whether the operation of the state machines is enabled (TRUE) or disabled (FALSE). This variable is set by management. The default value of this variable is FALSE.

#### 8.6.9.4.15 ListPointer

An integer used as a pointer to entries in the OperControlList (8.6.9.4.19), each entry consisting of a gate operation with its associated parameters (Table 8-6). A value of zero points at the first entry in the list; a value of (OperControlListLength)-1 points at the last entry.

#### 8.6.9.4.16 Tick

A Boolean variable, set to TRUE by an implementation-specific system clock function at one nanosecond intervals, that controls the decrementing of the ExitTimer variable (8.6.9.4.13). This variable is set FALSE by the operation of the List Execute state machine (8.6.9.2).

NOTE—While the state machine is documented on the basis of a nanosecond clock “tick,” it is anticipated that real implementations will use a wide variety of clocks that differ in frequency accuracy and granularity. Hence, the management parameters specified in 12.29 allow a management station to discover the characteristics of an implementation’s cycle timer clock (TickGranularity) and to set the parameters for the gating cycle accordingly.

#### 8.6.9.4.17 NewConfigCT

A Boolean variable that is used as a signal from the List Config state machine (8.6.9.3) to the Cycle Timer state machine (8.6.9.1) to indicate that a new configuration is being processed. The variable is set TRUE by the operation of the List Config state machine and set FALSE by the operation of the Cycle Timer state machine (8.6.9.1).

#### 8.6.9.4.18 OperBaseTime

The operational value of base time, expressed as a PTP timescale (see 8.2 of IEEE Std 802.1AS-2011). This variable is used by the List Config state machine (8.6.9.3).

#### 8.6.9.4.19 OperControlList

The active Gate Control List for the Port; the List Execute state machine executes this list. The contents of the list is populated dynamically from the AdminControlList (8.6.9.4.2) under the control of the List Config state machine (8.6.9.3).

#### 8.6.9.4.20 OperCycleTime

The operational value of the gating cycle for the Port (3.3). This variable is set dynamically from the AdminCycleTime variable (8.6.9.4.3) under the control of the List Config state machine (8.6.9.3). OperCycleTime is used by the Cycle Timer state machine (8.6.9.1) to enforce the cycle time for the Port. The OperCycleTime variable is a rational number of seconds, defined by an integer numerator and an integer denominator.

#### 8.6.9.4.21 OperCycleTimeExtension

An integer number of nanoseconds, defining the maximum amount of time by which the gating cycle for the Port (3.3) is permitted to be extended when a new cycle configuration is installed. This operational value is set by the List Config state machine (8.6.9.3) to the value of AdminCycleTimeExtension (8.6.9.4.4). The value of OperCycleTimeExtension is used by the SetCycleStartTime() procedure (8.6.9.1.1).

#### 8.6.9.4.22 OperGateStates

The current state of the gate associated with each queue for the Port. OperGateStates is set by the List Execute state machine (8.6.9.2), and its initial value is determined by the value of the AdminGateStates variable (8.6.9.4.5).

#### 8.6.9.4.23 OperControlListLength

This variable is set dynamically from the AdminControlListLength parameter (8.6.9.4.6) under the control of the List Config state machine (8.6.9.3). OperControlListLength indicates the number of entries in the OperControlList and is used by the List Execute state machine (8.6.9.2) to determine when the end of the list has been reached.

#### 8.6.9.4.24 TimeInterval

Set to the value of the TimeInterval parameter associated with the currently executing gate operation. Used in the operation of the List Execute state machine (8.6.9.2).

## 12. Bridge management

*Insert a new subclause 12.29 after 12.28, as shown, renumbering as necessary.*

### 12.29 Managed objects for scheduled traffic

The Bridge enhancements for support of scheduled traffic are defined in 8.6.8 and 8.6.8.4.

The objects that comprise this managed resource are as follows:

- a) The Gate Parameter Table (12.29.1)

#### 12.29.1 The Gate Parameter Table

There is one Gate Parameter Table per Port of a Bridge component. Each table row contains a set of parameters that supports the enhancements for scheduled traffic (8.6.8.4), as detailed in Table 12-28. Rows in the table can be created or removed dynamically in implementations that support dynamic configuration of ports and components.

**Table 12-28—The Gate Parameter Table**

Name	Data type	Operations supported <sup>a</sup>	Conformance <sup>b</sup>	References
queueMaxSDUTable <sup>c</sup>	sequence of queueMaxSDU	RW	BE	8.6.8.4, 12.29.1.1, 12.29.1.1.1
GateEnabled	Boolean	RW	BE	8.6.9.4.14
AdminGateStates	gateStatesValue	RW	BE	8.6.9.4.5, 12.29.1.2, 12.29.1.2.2
OperGateStates	gateStatesValue	R	BE	8.6.9.4.22, 12.29.1.2, 12.29.1.2.2
AdminControlListLength	unsigned integer	RW	BE	8.6.9.4.6, 12.29.1.2
OperControlListLength	unsigned integer	R	BE	8.6.9.4.23, 12.29.1.2
AdminControlList	sequence of GateControlEntry	RW	BE	8.6.9.4.2, 12.29.1.2, 12.29.1.2.1
OperControlList	sequence of GateControlEntry	R	BE	8.6.9.4.19, 12.29.1.2, 12.29.1.2.1
AdminCycleTime	RationalNumber	RW	BE	8.6.9.4.3, 12.29.1.3
OperCycleTime	RationalNumber (seconds)	R	BE	8.6.9.4.20, 12.29.1.3
AdminCycleTimeExtension	Integer (nanoseconds)	RW	BE	8.6.9.4.4

**Table 12-28—The Gate Parameter Table (continued)**

Name	Data type	Operations supported <sup>a</sup>	Conformance <sup>b</sup>	References
OperCycleTimeExtension	Integer (nanoseconds)	R	BE	8.6.9.4.21
AdminBaseTime	PTPtime	RW	BE	8.6.9.4.1, 12.29.1.4
OperBaseTime	PTPtime	R	BE	8.6.9.4.18, 12.29.1.4
ConfigChange	Boolean	RW	BE	8.6.9.4.7
ConfigChangeTime	PTPtime	R	BE	8.6.9.4.9, 12.29.1.4
TickGranularity	Integer (tenths of nanoseconds)	R	BE	8.6.9.4.16
CurrentTime	PTPtime	R	BE	8.6.9.4.10, 12.29.1.4
ConfigPending	Boolean	R	BE	8.6.9.3, 8.6.9.4.8
ConfigChangeError	Integer	R	BE	8.6.9.3.1
SupportedListMax	Integer	R	BE	12.29.1.5

<sup>a</sup>R= Read only access; RW = Read/Write access.

<sup>b</sup>B = Required for Bridge or Bridge component support of enhancements for scheduled traffic.

E = Required for end station support of enhancements for scheduled traffic.

<sup>c</sup>The number of queues supported by a Port is available from the traffic class table (12.6.3)

### 12.29.1.1 The queueMaxSDUTable structure and data types

The queueMaxSDUTable consists of up to 8 entries, one per traffic class supported by the implementation, each entry consisting of a queueMaxSDU value (12.29.1.1.1) and a TransmissionOverrun counter.

#### 12.29.1.1.1 queueMaxSDU

An unsigned integer value, denoting the maximum SDU size supported by the queue.

#### 12.29.1.1.2 TransmissionOverrun

A counter that is incremented when the implementation detects that the transmission gate associated with a queue has closed and a frame that originated from the queue is still being transmitted by the MAC.

### 12.29.1.2 The gate control list structure and data types

The AdminControlList and OperControlList are ordered lists containing AdminControlListLength or OperControlListLength entries, respectively. Each entry represents a gate operation as defined in Table 8-6. Each entry in the list is structured as a GateControlEntry (12.29.1.2.1).

#### 12.29.1.2.1 GateControlEntry

A GateControlEntry consists of an operation name, followed by up to 2 parameters associated with the operation, as detailed in Table 8-6. The first parameter, if present, is a gateStatesValue (12.29.1.2.2); the second parameter, if present, is a timeIntervalValue (12.29.1.2.3).

#### 12.29.1.2.2 gateStatesValue

A list of up to 8 tuples, one for each traffic class supported by the Port, each of which consists of a traffic class number in the range 0–7 and a gate state that is an enumerated value representing the gate state, *open* or *closed*, for that traffic class (see GateState in Table 8-6).

#### 12.29.1.2.3 timeIntervalValue

An unsigned integer, denoting a TimeInterval in nanoseconds (see TimeInterval in Table 8-6).

#### 12.29.1.3 RationalNumber

A rational number represented by an integer numerator and an integer denominator.

#### 12.29.1.4 PTPtime

A time value, expressed as a PTP timescale (see 8.2 of IEEE Std 802.1AS-2011).

#### 12.29.1.5 SupportedListMax

The maximum value supported by this Port of the AdminControlListLength and OperControlListLength parameters. It is available for use by schedule computation software to determine the port's control list capacity prior to computation.

## 17. Management Information Base (MIB)

### 17.2 Structure of the MIB

*Insert a new subclause 17.2.22 at the end of 17.2, as shown, renumbering as necessary.*

#### 17.2.22 Structure of the IEEE8021-ST-MIB

The IEEE8021-ST-MIB provides for configuration of scheduled traffic (8.6.8, 8.6.8.4) on ports. Table 17-28 indicates the relationship between the SMIV2 objects defined in the MIB module (17.7.22) and managed objects defined in 12.29.

**Table 17-28—IEEE8021-ST-MIB Structure and relationship to this standard**

MIB table	MIB object	Reference
<i>ieee8021STMaxSDU subtree</i>		
ieee8021STMaxSDUTable		Max SDU table, 8.6.8.4, 8.6.9, 12.29.1
	ieee8021STTrafficClass	Traffic Class (Table index)
	ieee8021STMaxSDU	queueMaxSDU, 8.6.8.4, 8.6.9, 12.29.1, 12.29.1.1.1
	ieee8021TransmissionOverrun	TransmissionOverrun, 8.6.8.4, 8.6.9, 12.29.1, 12.29.1.1.2
<i>ieee8021STParameters</i>		
ieee8021STParametersTable		Scheduled Traffic parameter table, 8.6.8.4, 8.6.9, 12.29.1
	ieee8021STGateEnabled	GateEnabled, 8.6.8.4, 8.6.9, 8.6.9.4.14, 12.29.1
	ieee8021STAdminGateStates	AdminGateStates, 8.6.8.4, 8.6.9, 8.6.9.4.5, 12.29.1
	ieee8021STOperGateStates	OperGateStates, 8.6.8.4, 8.6.9, 8.6.9.4.22, 12.29.1
	ieee8021STAdminControlListLength	AdminControlListLength, 8.6.8.4, 8.6.9, 8.6.9.4.6, 12.29.1
	ieee8021STOperControlListLength	OperControlListLength, 8.6.8.4, 8.6.9, 8.6.9.4.23, 12.29.1
	ieee8021STAdminControlList	AdminControlList, 8.6.8.4, 8.6.9, 8.6.9.4.2, 12.29.1
	ieee8021STOperControlList	OperControlList, 8.6.8.4, 8.6.9, 8.6.9.4.19, 12.29.1
	ieee8021STAdminCycleTimeNumerator	Numerator — AdminCycleTime, 8.6.8.4, 8.6.9, 8.6.9.4.3, 12.29.1

**Table 17-28—IEEE8021-ST-MIB Structure and relationship to this standard (continued)**

MIB table	MIB object	Reference
	ieee8021STAdminCycleTimeDenominator	Denominator — AdminCycleTime, 8.6.8.4, 8.6.9, 8.6.9.4.3, 12.29.1
	ieee8021STOperCycleTimeNumerator	Numerator — OperCycleTime, 8.6.8.4, 8.6.9, 8.6.9.4.20, 12.29.1
	ieee8021STOperCycleTimeDenominator	Denominator — OperCycleTime, 8.6.8.4, 8.6.9, 8.6.9.4.20, 12.29.1
	ieee8021STAdminCycleTimeExtension	AdminCycleTimeExtension, 8.6.8.4, 8.6.9, 8.6.9.4.4, 12.29.1
	ieee8021STOperCycleTimeExtension	OperCycleTimeExtension, 8.6.8.4, 8.6.9, 8.6.9.4.21, 12.29.1
	ieee8021STAdminBaseTime	AdminBaseTime, 8.6.8.4, 8.6.9, 8.6.9.4.1, 12.29.1
	ieee8021STOperBaseTime	OperBaseTime, 8.6.8.4, 8.6.9, 8.6.9.4.18, 12.29.1
	ieee8021STConfigChange	ConfigChange, 8.6.8.4, 8.6.9, 8.6.9.4.7, 12.29.1
	ieee8021STConfigChangeTime	ConfigChangeTime, 8.6.8.4, 8.6.9, 8.6.9.4.9, 12.29.1
	ieee8021STTickGranularity	TickGranularity, 8.6.8.4, 8.6.9, 12.29.1
	ieee8021STCurrentTime	CurrentTime, 8.6.8.4, 8.6.9, 8.6.9.4.10, 12.29.1
	ieee8021STConfigPending	ConfigPending, 8.6.9.4.8
	ieee8021STSupportedListMax	SupportedListMax, 12.29.1.5

### 17.3 Relationship to other MIBs

*Insert a new subclause 17.3.23 at the end of 17.3, renumbering as necessary.*

#### 17.3.23 Relationship of the IEEE8021-ST-MIB to other MIBs

The IEEE8021-ST-MIB provides objects that extend the core management functionality of a Bridge, as defined by the IEEE8021-BRIDGE-MIB (17.7.2), in order to support the additional management functionality needed when the scheduled traffic extensions, as defined in 8.6.8.4, are supported by the Bridge. As support of the objects defined in the IEEE8021-ST-MIB also requires support of the IEEE8021-BRIDGE-MIB, the provisions of 17.3.2 apply to implementations claiming support of the IEEE8021-ST-MIB.

## 17.4 Security considerations

*Insert a new subclause 17.4.23 at the end of 17.4, renumbering as necessary.*

### 17.4.23 Security considerations of the IEEE8021-ST-MIB

There are a number of management objects defined in the IEEE8021-ST-MIB module that have a MAX-ACCESS clause of read-write. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a nonsecure environment without proper protection can have a negative effect on network operations.

The following tables and objects in the IEEE8021-ST-MIB can be misconfigured to interfere with the operation of the forwarding and queuing mechanisms in a manner that would be detrimental to the transmission of scheduled traffic:

ieee8021STMaxSDU  
 ieee8021STGateEnabled  
 ieee8021STAdminGateStates  
 ieee8021STAdminControlListLength  
 ieee8021STAdminControlList  
 ieee8021STAdminCycleTimeNumerator  
 ieee8021STAdminCycleTimeDenominator  
 ieee8021STAdminCycleTimeExtension  
 ieee8021STAdminBaseTime  
 ieee8021STConfigChange  
 ieee8021STConfigChangeTime

- a) ieee8021STMaxSDU can be misconfigured to affect the ability of a Port to transmit frames of greater than a given SDU size.
- b) ieee8021STGateEnabled can be misconfigured to enable/disable scheduled traffic processing.
- c) ieee8021STAdminGateStates can be misconfigured to affect the gate states of a Port on startup.
- d) ieee8021STAdminControlListLength, ieee8021STAdminControlList, ieee8021STAdminCycleTimeNumerator, ieee8021STAdminCycleTimeDenominator, ieee8021STAdminCycleTimeExtension, ieee8021STAdminBaseTime, ieee8021STConfigChange, and ieee8021STConfigChangeTime can be misconfigured to affect the traffic schedule for the Port.

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not accessible) can be considered sensitive or vulnerable in some network environments. Thus it is important to control all types of access (including GET and/or NOTIFY) to these objects and possibly to encrypt the values of these objects when sending them over the network via SNMP.

## 17.7 MIB modules

Insert a new subclause 17.7.22 after 17.7.21, at the end of 17.7, as follows:

### 17.7.22 Definitions for the IEEE8021-ST-MIB module

```

IEEE8021-ST-MIB DEFINITIONS ::= BEGIN

-- =====
-- MIB for support of the Scheduled Traffic Enhancements
-- for 802.1Q Bridges.
-- =====

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Unsigned32,
    Counter64
        FROM SNMPv2-SMI
    TEXTUAL-CONVENTION,
    TruthValue
        FROM SNMPv2-TC
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ieee802dot1mibs
        FROM IEEE8021-TC-MIB
    ieee8021BridgeBaseComponentId,
    ieee8021BridgeBasePort
        FROM IEEE8021-BRIDGE-MIB
    ;

ieee8021STMib MODULE-IDENTITY
    LAST-UPDATED "201602190000Z" -- February 19, 2016
    ORGANIZATION "IEEE 802.1 Working Group"
    CONTACT-INFO
        " WG-URL: www.ieee802.org/1
          WG-EMail: stds-802-1-L@ieee.org

          Contact: IEEE 802.1 Working Group Chair
          Postal: C/O IEEE 802.1 Working Group
                 IEEE Standards Association
                 445 Hoes Lane
                 Piscataway
                 NJ 08854
                 USA

          E-mail: stds-802-1-L@ieee.org"
    DESCRIPTION
        "The Bridge MIB module for managing devices that support
        the Scheduled Traffic Enhancements
        for 802.1Q Bridges.

        Unless otherwise indicated, the references in this MIB
        module are to IEEE Std 802.1Q-2014.

        Copyright (C) IEEE (2016).
        This version of this MIB module is part of IEEE802.1Q;

```

see the draft itself for full legal notices."

REVISION "201602190000Z" -- February 19, 2016

DESCRIPTION

"Initial version published as part of IEEE Std 802.1Qbv."

```
::= { ieee802dot1mibs 30 }
```

```
-- =====
-- Textual Conventions
-- =====
```

```
IEEE8021STTrafficClassValue ::= TEXTUAL-CONVENTION
```

```
  DISPLAY-HINT "d"
```

```
  STATUS      current
```

```
  DESCRIPTION
```

```
    "A traffic class value.
```

```
    This is the numerical value associated with a traffic
    class in a Bridge. Larger values are associated with
    higher priority traffic classes."
```

```
  REFERENCE   "12.29.1"
```

```
  SYNTAX      Unsigned32 (0..7)
```

```
IEEE8021STPTptimeValue ::= TEXTUAL-CONVENTION
```

```
  STATUS      current
```

```
  DESCRIPTION
```

```
    "A PTptime value, represented as a 48-bit unsigned integer
    number of seconds and a 32-bit unsigned integer number of
    nanoseconds.
```

```
    The first 6 octets represent the number of seconds: the
    first octet is the most significant
    octet of the 48-bit seconds value and the sixth octet
    is the least significant octet of the seconds value.
    The remaining octets, 7 through 10, represent the
    number of nanoseconds: the seventh octet
    is the most significant octet of the 32-bit nanoseconds
    value and the tenth octet is the
    least significant octet of the nanoseconds value."
```

```
  REFERENCE   "8.6.8.4, 8.6.9.4, 12.29.1"
```

```
  SYNTAX      OCTET STRING (SIZE(10))
```

```
-- =====
-- subtrees in the ST MIB
-- =====
```

```
ieee8021STNotifications
```

```
  OBJECT IDENTIFIER ::= { ieee8021STMib 0 }
```

```
ieee8021STObjects
```

```
  OBJECT IDENTIFIER ::= { ieee8021STMib 1 }
```

```
ieee8021STConformance
```

```
  OBJECT IDENTIFIER ::= { ieee8021STMib 2 }
```

```
ieee8021STMaxSDUSubtree
```

```
  OBJECT IDENTIFIER ::= { ieee8021STObjects 1 }
```

```
ieee8021STParameters
```

```

OBJECT IDENTIFIER ::= { ieee8021STObjects 2 }

-- =====
-- The ieee8021STMaxSDUSubtree subtree
-- This subtree defines the objects necessary for the management
-- of the max SDU size parameters for each traffic class on a Port.
-- =====

-- =====
-- the ieee8021STMaxSDUTable
-- =====

ieee8021STMaxSDUTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021STMaxSDUEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table containing a set of max SDU
        parameters, one for each traffic class.
        All writeable objects in this table must be
        persistent over power up restart/reboot."
    REFERENCE   "8.6.8.4, 8.6.9.4, 12.29.1"
    ::= { ieee8021STMaxSDUSubtree 1 }

ieee8021STMaxSDUEntry OBJECT-TYPE
    SYNTAX      Ieee8021STMaxSDUEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A list of objects containing Max SDU size
        for each traffic class supported by the Port."
    INDEX { ieee8021BridgeBaseComponentId,
            ieee8021BridgeBasePort,
            ieee8021STTrafficClass }
    ::= { ieee8021STMaxSDUTable 1 }

Ieee8021STMaxSDUEntry ::=
    SEQUENCE {
        ieee8021STTrafficClass
        IEEE8021STTrafficClassValue,
        ieee8021STMaxSDU
        Unsigned32,
        ieee8021TransmissionOverrun
        Counter64
    }

ieee8021STTrafficClass OBJECT-TYPE
    SYNTAX      IEEE8021STTrafficClassValue
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The traffic class number associated with the row of
        the table.

        A row in this table is created for each traffic class
        that is supported by the Port"
    REFERENCE   "8.6.8.4, 8.6.9.4, 12.29.1"
    ::= { ieee8021STMaxSDUEntry 1 }

```

```

ieee8021STMaxSDU OBJECT-TYPE
    SYNTAX      Unsigned32
    UNITS       "octets"
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The value of the MaxSDU parameter for the traffic class.
        This value is represented as an unsigned integer. A value
        of 0 is interpreted as the max SDU size supported by
        the underlying MAC.

        The default value of the MaxSDU parameter is 0.

        The value of this object MUST be retained across
        reinitializations of the management system."
    REFERENCE   "8.6.8.4, 8.6.9.4, 12.29.1"
    DEFVAL      { 0 }
    ::= { ieee8021STMaxSDUEntry 2}

ieee8021TransmissionOverrun OBJECT-TYPE
    SYNTAX      Counter64
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of transmission overrun events, where
        a PDU is still being transmitted by a MAC at the
        time when the transmission gate for the queue closed."
    REFERENCE   "8.6.8.4, 8.6.9.4, 12.29.1, 12.29.1.1.2"
    DEFVAL      { 0 }
    ::= { ieee8021STMaxSDUEntry 3}

-- =====
-- The ieee8021STParameters subtree
-- This subtree defines the objects necessary for the management
-- of the traffic scheduling mechanism for IEEE Std 802.1Q.
-- =====

-- =====
-- the ieee8021STParametersTable
-- =====

ieee8021STParametersTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021STParametersEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table that contains the per-port manageable parameters for
        traffic scheduling.

        For a given Port, a row in the table exists.

        All writable objects in this table must be
        persistent over power up restart/reboot."
    REFERENCE   "8.6.8.4, 8.6.9.4, 12.29.1"
    ::= { ieee8021STParameters 1 }

```

```

ieee8021STParametersEntry OBJECT-TYPE
    SYNTAX      Ieee8021STParametersEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A list of objects that contains the manageable parameters for
        traffic scheduling for a port."
    INDEX { ieee8021BridgeBaseComponentId,
           ieee8021BridgeBasePort
         }
    ::= { ieee8021STParametersTable 1 }

```

```

Ieee8021STParametersEntry ::=
    SEQUENCE {
        ieee8021STGateEnabled
            TruthValue,
        ieee8021STAdminGateStates
            OCTET STRING,
        ieee8021STOperGateStates
            OCTET STRING,
        ieee8021STAdminControlListLength
            Unsigned32,
        ieee8021STOperControlListLength
            Unsigned32,
        ieee8021STAdminControlList
            OCTET STRING,
        ieee8021STOperControlList
            OCTET STRING,
        ieee8021STAdminCycleTimeNumerator
            Unsigned32,
        ieee8021STAdminCycleTimeDenominator
            Unsigned32,
        ieee8021STOperCycleTimeNumerator
            Unsigned32,
        ieee8021STOperCycleTimeDenominator
            Unsigned32,
        ieee8021STAdminCycleTimeExtension
            Unsigned32,
        ieee8021STOperCycleTimeExtension
            Unsigned32,
        ieee8021STAdminBaseTime
            IEEE8021STPTPtimeValue,
        ieee8021STOperBaseTime
            IEEE8021STPTPtimeValue,
        ieee8021STConfigChange
            TruthValue,
        ieee8021STConfigChangeTime
            IEEE8021STPTPtimeValue,
        ieee8021STTickGranularity
            Unsigned32,
        ieee8021STCurrentTime
            IEEE8021STPTPtimeValue,
        ieee8021STConfigPending
            TruthValue,
        ieee8021STConfigChangeError
            Counter64,
        ieee8021STSupportedListMax
            Unsigned32
    }

```

## ieee8021STGateEnabled OBJECT-TYPE

SYNTAX TruthValue  
 MAX-ACCESS read-write  
 STATUS current

## DESCRIPTION

"The GateEnabled parameter determines whether traffic scheduling is active (true) or inactive (false).

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"

DEFVAL { false }

::= { ieee8021STParametersEntry 1 }

## ieee8021STAdminGateStates OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))  
 MAX-ACCESS read-write  
 STATUS current

## DESCRIPTION

"The administrative value of the GateStates parameter for the Port. The bits of the octet represent the gate states for the corresponding traffic classes; the MS bit corresponds to traffic class 7, the LS bit to traffic class 0. A bit value of 0 indicates closed; a bit value of 1 indicates open.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"

::= { ieee8021STParametersEntry 2 }

## ieee8021STOperGateStates OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))  
 MAX-ACCESS read-only  
 STATUS current

## DESCRIPTION

"The operational value of the GateStates parameter for the Port. The bits of the octet represent the gate states for the corresponding traffic classes; the MS bit corresponds to traffic class 7, the LS bit to traffic class 0. A bit value of 0 indicates closed; a bit value of 1 indicates open."

REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"

::= { ieee8021STParametersEntry 3 }

## ieee8021STAdminControlListLength OBJECT-TYPE

SYNTAX Unsigned32  
 MAX-ACCESS read-write  
 STATUS current

## DESCRIPTION

"The administrative value of the ListMax parameter for the Port. The integer value indicates the number of entries (TLVs) in the AdminControlList.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"

::= { ieee8021STParametersEntry 4 }

## ieee8021STOperControlListLength OBJECT-TYPE

SYNTAX Unsigned32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION  
 "The operational value of the ListMax parameter for the Port.  
 The integer value indicates the number of entries (TLVs) in the  
 OperControlList."  
 REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"  
 ::= { ieee8021STParametersEntry 5 }

ieee8021STAdminControlList OBJECT-TYPE

SYNTAX OCTET STRING  
 MAX-ACCESS read-write  
 STATUS current  
 DESCRIPTION  
 "The administrative value of the ControlList parameter for the Port.  
 The octet string value represents the contents of the control list as  
 an ordered list of entries, each encoded as a TLV, as follows.  
 The first octet of each TLV is interpreted as an  
 unsigned integer representing a gate operation name:  
 0: SetGateStates  
 1-255: Reserved for future gate operations  
  
 The second octet of the TLV is the length field,  
 interpreted as an unsigned integer, indicating the number of  
 octets of the value that follows the length. A length of  
 zero indicates that there is no value  
 (i.e., the gate operation has no parameters).  
  
 The third through (3 + length -1)th octets encode the  
 parameters of the gate operation, in the order that they  
 appear in the definition of the operation  
 in Table 8-6. Two parameter types are currently defined:  
  
 - GateState:  
 A GateState parameter is encoded in a single octet.  
 The bits of the octet represent the gate states for the  
 corresponding traffic classes; the MS bit corresponds  
 to traffic class 7,  
 the LS bit to traffic class 0. A bit value of 0 indicates  
 closed; a bit value of 1 indicates open.  
  
 - TimeInterval:  
 A TimeInterval is encoded in 4 octets as a 32-bit  
 unsigned integer, representing a number of nanoseconds.  
 The first octet encodes the most significant 8 bits of the  
 integer, and the fourth octet encodes the least  
 significant 8 bits.  
  
 The value of this object MUST be retained across  
 reinitializations of the management system."  
 REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"  
 ::= { ieee8021STParametersEntry 6 }

ieee8021STOperControlList OBJECT-TYPE

SYNTAX OCTET STRING  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION

"The operational value of the ListMax parameter for the Port.  
The octet string value represents the contents of the control list as  
an ordered list of TLVs, as follows.  
The first octet of each TLV is interpreted as a gate operation name:  
0: SetGateStates  
1-255: Reserved for future gate operations

The second octet of the TLV is the length field,  
interpreted as an unsigned integer,  
indicating the number of octets of the value that follows  
the length. A length of zero indicates that there is no value  
(i.e., the gate operation has no parameters).

The third through (3 + length -1)th octets encode the  
parameters of the gate operation, in the order that they  
appear in the definition of the operation  
in Table 8-6. Two parameter types are currently defined:

- GateState:  
A GateState parameter is encoded in a single octet.  
The bits of the octet represent the gate states for the  
corresponding traffic classes; the MS bit corresponds to  
traffic class 7, the LS bit to traffic class 0.  
A bit value of 0 indicates closed; a  
bit value of 1 indicates open.
- TimeInterval:  
A TimeInterval is encoded in 4 octets as a 32-bit  
unsigned integer, representing  
a number of nanoseconds. The first octet encodes the  
most significant 8 bits of the integer, and the fourth  
octet encodes the least significant 8 bits."

REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"  
::= { ieee8021STParametersEntry 7 }

ieee8021STAdminCycleTimeNumerator OBJECT-TYPE

SYNTAX Unsigned32  
MAX-ACCESS read-write  
STATUS current  
DESCRIPTION

"The administrative value of the numerator of the CycleTime  
parameter for the Port.  
The numerator and denominator together represent the cycle time as  
a rational number of seconds.

The value of this object MUST be retained across  
reinitializations of the management system."

REFERENCE "8.6.8.4, 8.6.9.4, 12.29.1"  
::= { ieee8021STParametersEntry 8 }

ieee8021STAdminCycleTimeDenominator OBJECT-TYPE

SYNTAX Unsigned32  
MAX-ACCESS read-write  
STATUS current  
DESCRIPTION

"The administrative value of the denominator of the  
CycleTime parameter for the Port.  
The numerator and denominator together represent the cycle time as  
a rational number of seconds.