



UL 1838

STANDARD FOR SAFETY

Low Voltage Landscape Lighting Systems

[ULNORM.COM](https://ulnorm.com) : Click to view the full PDF of UL 1838 2023

[ULNORM.COM](https://ulnorm.com) : Click to view the full PDF of UL 1838 2023

UL Standard for Safety for Low Voltage Landscape Lighting Systems, UL 1838

Third Edition, Dated January 13, 2003

Summary of Topics

The revisions of ANSI/UL 1838 dated July 11, 2023 include the following changes in requirements:

- **Removed the output circuit VA power limitation; [1.3](#), [1.4](#), and [56.6](#)**
- **Definition Removals; [2.5](#), [2.13](#), [2.14](#), [2.14.1](#), [2.19.1](#), [7.1](#), and [10.1](#)**
- **Clarified the requirements applicable to class 2 circuits within a power unit; [15.1.1](#) and [15.1.2](#)**
- **Protective Devices; [20.1](#) and [20.4](#)**
- **Elimination of multiple branch circuit supply connections; [24.1.2](#) and [50.9](#)**
- **Power supply cords with integral attachment plugs; [24.3.3](#)**
- **Maximum Output Test; [28.2.2](#)**
- **Overload Test; [29.2](#) and [Figure 29.1](#)**
- **Short Circuit Test revision and elimination of Limited Short Circuit Test; [44.1](#) and [Section 45](#)**
- **Shifted the Manufacturing and Production Tests to an informative Annex; [Section 46](#), [Section 47](#), [Section 48](#) and [Appendix B](#)**
- **Rating and marking adjustments; [49.1](#), [56.2](#) and [56.4](#)**
- **Use of websites and QR Codes for required product instructions; [Table 50.1](#)**
- **Insulation Piercing Terminal Temperature Test; [53.4.4](#), [55.3](#), [55.5](#) and [Figure 55.1](#)**
- **Dielectric Withstand Test; [32.1](#) and [Appendix A](#)**
- **Editorial; [Section 13](#) title**

Text that has been changed in any manner or impacted by ULSE's electronic publishing system is marked with a vertical line in the margin.

The new and revised requirements are substantially in accordance with Proposal(s) on this subject dated March 3, 2023.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

ULNORM.COM : Click to view the full PDF of UL 1838 2023

JANUARY 13, 2003
(Title Page Reprinted: July 11, 2023)



ANSI/UL 1838-2023

1

UL 1838

Standard for Low Voltage Landscape Lighting Systems

First Edition – March, 1994
Second Edition – March, 1996

Third Edition

January 13, 2003

This ANSI/UL Standard for Safety consists of the Third edition including revisions through July 11, 2023.

The most recent designation of ANSI/UL 1838 as an American National Standard (ANSI) occurred on July 11, 2023. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to ULSE at any time. Proposals should be submitted via a Proposal Request in ULSE's Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

COPYRIGHT © 2023 ULSE INC.

No Text on This Page

[ULNORM.COM](https://ulnorm.com) : Click to view the full PDF of UL 1838 2023

CONTENTS

INTRODUCTION

1	Scope	7
2	Glossary	8
2A	Electric Shock.....	11
3	Components	12
4	Units of Measurement	12
5	Undated References	12
6	Organization and Application	12

PART 1 – POWER UNITS

MECHANICAL CONSTRUCTION

7	General	13
8	Enclosures	13
9	Metal Thickness	14
	9.1 Sheet metal.....	14
	9.2 Extrusions.....	14
	9.3 Cast metal	14
10	Corrosion Protection.....	15
11	Open Holes.....	16
12	Drain Holes.....	18
13	Knockouts	18
14	Gaskets and Bushings.....	18

ELECTRICAL CONSTRUCTION

15	General	19
	15.1 Class 2 Circuits Within Power Unit	19
	15.1A Class 2 Power Units	19
	15.2 Wiring devices.....	19
	15.3 Internal wiring connections	19
	15.4 Insulation	20
	15.5 Prevention of wire damage	20
16	Device and Conductor Ratings	20
	16.1 Voltage	20
	16.2 Current	20
17	Switches and Relays	21
18	Convenience Receptacles	21
19	Wiring and Conductors	22
20	Protective Devices.....	22
21	Printed Wiring Boards.....	22
22	Separation of Circuits	22
	22.1 General.....	22
	22.2 Separation of Conductors.....	22
	22.3 Output circuit isolation.....	23
23	Electrical Spacings	24
24	Power Supply and Output Circuit Connections.....	26
	24.1 Power supply connection method.....	26
	24.2 Power supply conduit connection and conductor connection provisions	26

24.3	Power supply cord	27
24.4	Output circuit connection provisions	28
24.5	<i>Deleted</i>	29
25	Grounding and Bonding	29
25.1	Grounding	29
25.2	Bonding	30
26	Water Shields	31

PERFORMANCE

27	Test Parameters	31
28	Input and Output Tests	32
28.1	Input test	32
28.2	Maximum output test	32
29	Overload Test	32
30	Burnout Test	34
31	Endurance Test	34
32	Dielectric Voltage Withstand Test	34
33	Temperature Test	34
34	Grounding Continuity Test	38
35	Leakage Current Test	38
36	Leakage Current Test Following Humidity Conditioning	40
37	Weather Tests	40
37.1	General	40
37.2	Impact conditioning	40
37.3	General – test conditions	40
37.4	General – test results	41
37.5	Sprinkler test	41
37.6	Immersion test	44
37.7	Gasket tests	44
37.8	Gasket adhesion test	45
37.9	Rain test	45
38	Strain Relief Test	47
39	Screw Torque Test	47
40	Polymeric Enclosure Conduit Connection Tests	47
40.1	General	47
40.2	Pullout	47
40.3	Torque	47
40.4	Bending	48
41	Tests on knockouts	49
42	Impact Test on Units With Open Holes	49
43	Component Fault Test	49
44	Short Circuit Test	50
45	Limited Short Circuit Test	50

MANUFACTURING AND PRODUCTION TESTS

46	Dielectric Voltage Withstand Test	50
47	Polarity Test	50
48	Continuity of Grounding Connection Test	50

RATINGS

49	Details	51
----	---------------	----

MARKING

50	Details	51
51	Installation Instructions	54

PART 2 – EQUIPMENT CONNECTED TO THE POWER UNIT OUTPUT**CONSTRUCTION**

52	General	55
53	Output Circuit Wiring and Connections	56
53.1	General	56
53.2	Internal wiring	56
53.3	Main low voltage cable	56
53.4	Unit low voltage cable	57

PERFORMANCE

54	Temperature	57
55	Insulation-Piercing Terminal Temperature Test	58

MARKING

56	General	60
57	Installation Instructions	61

PART 3 – TUNGSTEN-HALOGEN LUMINAIRES**INTRODUCTION**

58	General	61
----	---------------	----

CONSTRUCTION

59	Lamp Containment Barrier	62
----	--------------------------------	----

PERFORMANCE

60	Adhesively Secured Lamp Containment Barrier Test	63
61	Lamp Containment Adhesive Support Test	63
62	Abnormal Operation Tests	64
62.1	General	64
62.2	Severe condition	64
62.3	Vertical surface	65
62.4	Overlapping	65
63	Polymeric Lamp Containment Barrier Test	65
63.1	General	65
63.2	Test method	65

MARKING

64	General	66
65	Instructions	66

PART 4 – POND AND SMALL DECORATIVE FOUNTAIN LUMINAIRES AND FITTINGS

INTRODUCTION

66	General	67
----	---------------	----

CONSTRUCTION

67	Water Barriers	68
	67.1 General	68
	67.2 Gaskets	68
	67.3 Adhesives and Sealants	68
68	Immersed Low Voltage Cable	68

PERFORMANCE

69	Temperature Test	68
70	Water Leakage Test	69
	70.1 General	69
	70.2 Impact conditioning	69
	70.3 Water leakage	69

MARKING

71	General	71
----	---------------	----

INSTRUCTIONS

72	Installation Instructions	71
----	---------------------------------	----

Appendix A

	Standards for Components	72
--	--------------------------------	----

Appendix B (informative)

B1	General	73
B2	Insulation Integrity Tests	73
	B2.1 Dielectric voltage withstand test	73
	B2.2 DC Insulation resistance measurement test	74
B3	Continuity of Grounding Connection Test	74
B4	Polarity Test	74

INTRODUCTION

1 Scope

1.1 The requirements in this standard apply to a low-voltage landscape lighting system and components that consist of an isolating type power unit, low voltage cable or flexible cord, and luminaires. The equipment is intended to be installed in accordance with the National Electrical Code, ANSI/NFPA 70, Article 411.

1.2 Landscape lighting power units covered by this standard have a maximum output circuit voltage as specified in [Table 2A.1](#).

1.3 This standard covers power units where each output circuit is rated maximum 25 A.

1.4 This standard covers landscape lighting system luminaires and other system components that are intended for use on circuits rated maximum 25 A, and the voltage specified in [Table 2A.1](#).

1.5 The luminaires and low voltage system components covered by this standard are intended for garden, walkway, patio areas, or similar outdoor locations and for certain indoor locations such as atriums and shopping malls. The power units are to be installed indoors or outdoors in accordance with the marking on the product.

1.6 This standard covers luminaires and low voltage system components intended for use submersed in or floating on:

- a) portable self-contained fountains; and
- b) ponds and other natural and artificially made body of water within the scope of Article 682 “Natural and Artificially Made Bodies of Water” of the National Electrical Code, NFPA 70.

1.7 Throughout this standard, all requirements identified as applicable to luminaires and low voltage system components used submerged in or floating on ponds also apply to luminaires and low voltage system components intended for use in other bodies of water covered by Article 682 of the National Electrical Code, ANSI/NFPA 70. Further, markings, instructions, and other product specific information shall be permitted to refer to one or more bodies of water covered by Article 682 in addition to ponds or instead of ponds.

1.8 The luminaires and low voltage system components covered by this standard are not suitable for use in swimming pools, spas, other bodies of water intended to contain immersed persons, or permanent fountains covered by Part V of Article 680 of the National Electrical Code, ANSI/NFPA 70. Luminaires intended for use in these locations are covered by the Standard for Underwater Luminaires and Junction Boxes, UL 676. Fountains covered by Part V of Article 680 of the National Electrical Code, ANSI/NFPA 70 are permanent, not self-contained, not portable, or exceed 5 feet (1.5 m) in any dimension.

1.9 Fluorescent and high intensity discharge lighting systems will be investigated in accordance with the applicable requirements in this standard and with the applicable requirements in the Standard for Luminaires, UL 1598, as intended.

1.10 Light emitting diode (LED) components and subassemblies, such as drivers, control gear, and LED arrays, shall comply with the applicable requirements of the Standard for Lighting Emitting Diode (LED) Equipment for Use in Lighting Products, UL 8750.

2 Glossary

2.1 For the purpose of this standard, the following definitions apply.

2.2 ACCESSIBILITY BARRIER – A material provided to restrict access to:

- a) Uninsulated current carrying parts; and
- b) Current carrying parts insulated with materials not intended to be subject to user contact. All or part of the barrier is able to serve as an enclosure.

2.2.1 CLASS 1 WIRING METHODS– Wiring methods specified in Chapter 3 of the National Electrical Code, ANSI/NFPA 70.

2.2.2 CLASS 2 CIRCUIT – A circuit supplied by either (a) a transformer complying with the construction and performance requirements for Class 2 transformers in the Standard for Low Voltage Transformers – Part 1: General Requirements, UL 5085-1 and the Standard for Low Voltage Transformers – Part 3: Class 2 and Class 3 Transformers, UL 5085-3; or (b) a power unit complying with the construction and performance requirements in the Standard for Class 2 Power Units, UL 1310.

2.3 Deleted

2.4 CONNECTOR – A generic term used to refer to an electrical fitting that:

- a) Connects the luminaire to the main low voltage cable (also called line-to-luminaire connector); or
- b) Is used to extend main low voltage cable (also called line-to-line connector).

2.5 Deleted


2.6 ELECTRICAL FITTING – Any device that supports or encloses uninsulated current carrying parts.

2.7 ELECTRONIC POWER UNIT – Equipment that powers and controls the lamps used for a landscape lighting system and consists of electronic circuits to isolate the secondary from the primary circuit and reduce voltage and limit available power.

2.8 ENCLOSURE – A material provided to enclose electrical parts and components that involves a risk of fire. All or part of the enclosure serves as an accessibility barrier.

2.9 LANDSCAPE LIGHTING SYSTEM – The system consisting of the power unit, luminaire, luminaire fittings, and wiring. See [Figure 2.1](#) for a diagram of a typical landscape lighting system.

Figure 2.1
Typical landscape lighting system

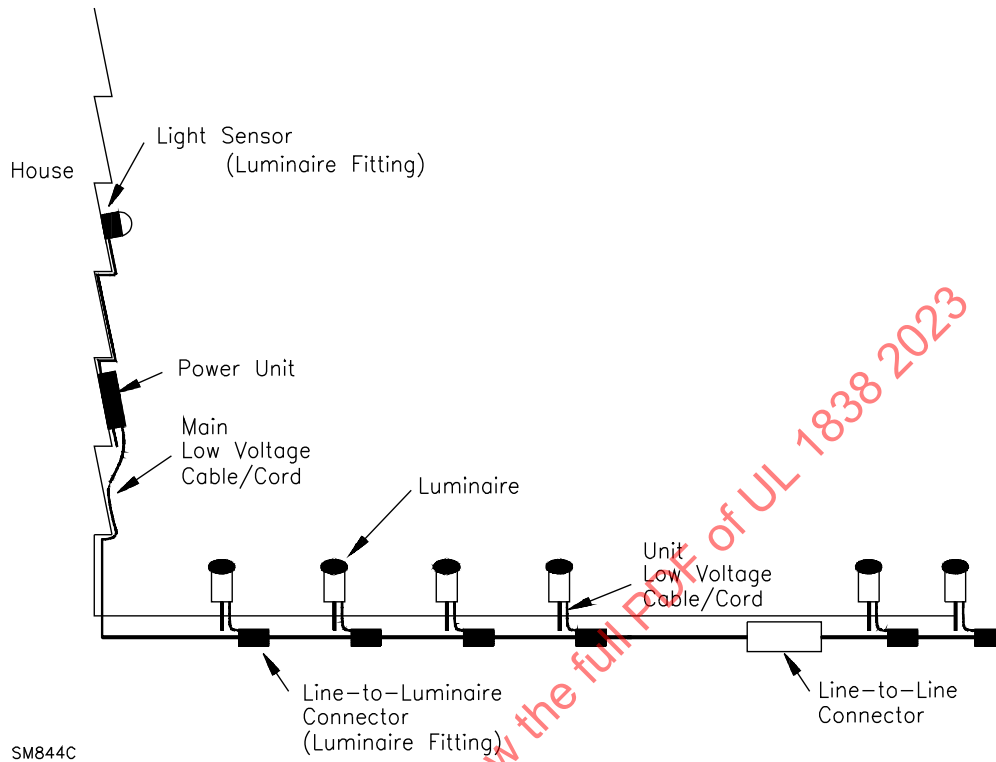

2.10 Deleted

2.11 LUMINAIRE – An assembly that consists of the lamps, enclosures, mounting means, luminaire fittings, and the means of connection to unit low voltage cable or the main low voltage cable.

2.12 LUMINAIRE FITTING – An individual component or accessory that is provided with a luminaire or that is electrically or mechanically connected to the power unit.

2.13 Deleted

2.14 Deleted

2.14.1 Deleted

2.15 POWER UNIT – The equipment that powers and controls the lamps used for the landscape lighting system. A power unit consists of one or more of the following:


- a) Transformer or solid-state circuitry to isolate the output circuit from the primary input circuit, reduce voltage and limit available power;
- b) Timers, switches, sensors, or similar devices to control the lighting; and
- c) Integral overcurrent protection.

2.16 RISK OF ELECTRIC SHOCK – See Section [2A](#).

2.17 SCREW, SHEET-METAL – A screw with threads having a pitch such that thinner sheet metal is able to be secured by physical fit between successive threads. Self-tapping screws are also known as sheet-metal screws.

2.18 SCREW, THREAD-FORMING – A screw with a tapered end that is criss-cross stamped as shown in [Figure 2.2](#). When screwed into an open hole, the screw forces the sheet-metal around the open hole to expand and form threads. A thread-forming screw will not necessarily follow the same threads if reinserted into the same opening.

Figure 2.2
Thread-forming screw

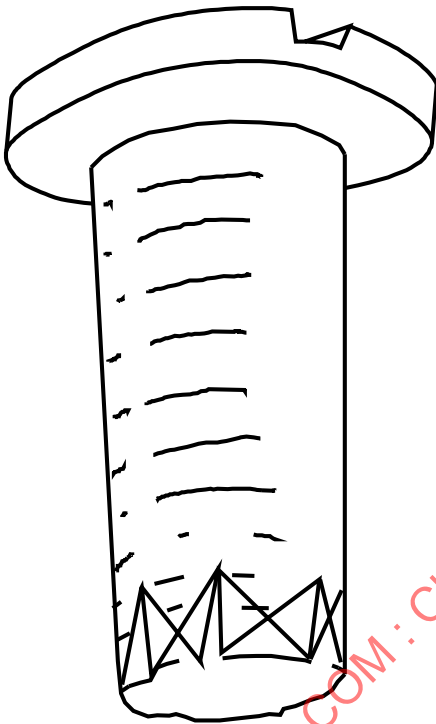

SM359

2.19 SECONDARY WIRING – Wiring connecting the output of the power unit to the luminaire, including the main low voltage cable and the unit low voltage cable.

2.19.1 Deleted

2.20 SPLICE – Any point where one wire is connected to another wire. A wire terminating at a pressure wiring terminal or wire binding screw is not determined to be a splice.

2.21 TERMINAL, INSULATION PIERCING – A terminal having a contact pin that punctures the conductor insulation and is inserted into strands of the conductor. Also an insulation displacement terminal where the insulation is cut and the conductor is positioned between the pins of the terminal.

2.22 WATER BARRIER – All parts such as a lens, luminaire body, gasket, or sealant/adhesive material that are in contact with water under normal use conditions and that, if compromised, would allow water to reach uninsulated parts that pose a risk of electric shock (see Section [2A](#)). A water barrier includes a part

not directly isolating water from a dry location but that is relied upon for water barrier integrity, such as a bezel or face/trim ring that bears against a lens that, in turn, bears against/compresses a gasket.

2A Electric Shock

2A.1 An uninsulated conductive part is considered to pose a risk of electric shock when the voltage potential between the part and earth ground or any other accessible part exceeds the values specified in [Table 2A.1](#).

**Table 2A.1
Maximum voltage considered not a risk of electric shock, and the maximum permitted output circuit voltage for landscape lighting systems**

Voltage type		Maximum Voltage
1.	Sinusoidal, ac	15 V, rms
2.	Nonsinusoidal, ac	21.2 V, peak
3.	Pure dc ^{a, b}	30 V
4.	Combinations of dc and sinusoidal ac at frequencies not greater than 100 Hertz	c

^a If the peak-to-peak ripple voltage generated by an electronic power unit is more than 10 percent of the dc voltage, see footnote c.
^b DC waveforms interrupted at frequencies between 10 – 200 Hz shall be limited to 12.4 V.
^c The voltage limit shall be the non-sinusoidal ac limit where the dc voltage is no more than 10.4 V, and shall be (16.5 + 0.45 Vdc) where the dc voltage is between 10.4 and 30 V.

Figure 2A.1

Maximum voltage for combinations of dc and sinusoidal ac voltage at frequencies not greater than 100 hertz
 Figure deleted

Table 2A.2

Maximum current considered not a risk of electric shock
 Table deleted

Figure 2A.2

Maximum current for combinations of dc and sinusoidal ac current at frequencies not greater than 100 hertz
 Figure deleted