

INTERNATIONAL STANDARD

IEC 61162-1

Third edition
2007-04

Maritime navigation and radiocommunication equipment and systems – Digital interfaces

Part 1: Single talker and multiple listeners



Reference number
IEC 61162-1:2007(E)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

IECNORM.COM: Click to visit the full PDF of IEC 61662-1:2007

INTERNATIONAL STANDARD

IEC 61162-1

Third edition
2007-04

Maritime navigation and radiocommunication equipment and systems – Digital interfaces

Part 1: Single talker and multiple listeners

IECNORM.COM: Click to view the full PDF of IEC 61162-1:2007



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE **XF**

For price, see current catalogue

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references.....	7
3 Terms and definitions	8
4 Manufacturer's documentation	8
5 Hardware specification.....	8
5.1 Interconnecting wire.....	8
5.2 Conductor definitions.....	8
5.3 Electrical connections/shield requirements.....	8
5.4 Connector.....	9
5.5 Electrical signal characteristics	9
6 Data transmission.....	10
7 Data format protocol	10
7.1 Characters.....	10
7.2 Fields	11
7.3 Sentences	13
7.4 Error detection and handling	20
7.5 Handling of deprecated sentences	20
8 Data content.....	20
8.1 Character definitions.....	20
8.2 Field definitions.....	23
8.3 Approved sentences.....	25
9 Applications.....	90
9.1 Example parametric sentences.....	90
9.2 Example encapsulation sentences	94
9.3 Examples of receiver diagrams.....	94
Annex A (informative) Glossary	96
Annex B (normative) Guidelines for methods of testing and required test results.....	103
Annex C (normative) Six-bit binary field conversion	109
Annex D (normative) Alarm system fields	112
Annex E (informative) Example of use of FIR, DOR and WAT sentences.....	121
Annex F (informative) Example encapsulation sentence	125
Bibliography.....	131
Figure 1 – Listener receive circuit.....	9
Figure 2 – Data transmission format.....	10
Figure 3 – Example 1, J-FET, N channel, opto-isolator based listener circuit.....	94
Figure 4 – Example 2, NPN opto-isolator based listener circuit	95
Figure C.1 – 6-bit binary code converted to valid IEC 61162-1 character.....	110
Figure C.2 – Valid IEC 61162-1 character converted to 6-bit binary code	111

Figure E.1 – Example system diagram.....	122
Figure F.1 – Message data format.....	126
Figure F.2 – Work sheet for decoding and interpreting encapsulated string.....	130
Table 1 – Reserved characters.....	20
Table 2 – Valid characters.....	21
Table 3 – Character symbol.....	22
Table 4 – Talker identifier mnemonics.....	23
Table 5 – Field type summary.....	24
Table B.1 – Example – Data string GGA sent by the EUT to the test receiver (listener).....	106
Table B.2 – Checksum.....	107
Table B.3 – Example – data string GGA received by the EUT.....	107
Table B.4 – Example – Checksum.....	108
Table B.5 – Break of data line.....	108
Table C.1 – Six-bit binary field conversion table.....	109
Table D.1 – System alarm fields.....	112
Table F.1 – Example message from ITU-R M.1371.....	129

IECNORM.COM: Click to view the full PDF of IEC 61162-1:2007

Without watermark

INTERNATIONAL ELECTROTECHNICAL COMMISSION

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –

Part 1: Single talker and multiple listeners

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability should attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC should not be held responsible for identifying any or all such patent rights.

International Standard IEC 61162-1 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems.

This third edition cancels and replaces the second edition published in 2000, and constitutes a technical revision. This part of IEC 61162 is closely aligned with NMEA 0183 version 3.01. It also replaces PAS 61162-100 (2002), PAS 61162-101 (2003) and PAS 61162-102 (2003).

The main changes with respect to the previous edition are listed below:

- Normative references have been renumbered from 1.2 to 2, Terms and definitions from 1.3 to 3 and Manufacturers documentation from 2 to 4. Thereafter all clauses are numbered two ahead of those in the previous edition.
- Clause 7 (Clause 5 in the previous edition) has been expanded to include two types of start of sentence delimiters. The conventional delimiter "\$" is used with the conventional sentences which are now called parametric sentences. A new delimiter "!" identifies

sentences that conform to special purpose encapsulation. The example applications in Clause 9 (Clause 7 in the previous edition) have been expanded to describe both types.

- The tables in Clause 8 (Clause 6 in the previous edition) have been updated. The previous Table 5 (Approved sentence formatters) and the associated Annex A (Minimum required sentences) have been deleted.
- Clause 8 has been expanded to include new and revised sentences.
- Four new annexes have been added to support the text.

The text of this standard is based upon the following documents:

FDIS	Report on voting
80/464/FDIS	80/473/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

INTRODUCTION

International standard IEC 61162 is a four part standard which specifies four digital interfaces for application in marine navigation, radiocommunication and system integration. The four parts are:

- IEC 61162-1 Single talker and multiple listeners
- IEC 61162-2 Single talker and multiple listeners, high speed transmission
- IEC 61162-3 Multiple talkers and multiple listeners – Serial data instrument network (under consideration)
- IEC 61162-4 Multiple talkers and multiple listeners – Ship systems interconnection

IEC technical committee 80 interface standards are developed with input from manufacturers, private and government organisations and equipment operators. The information is intended to meet the needs of users at the time of publication, but users should recognise that as applications and technology change, interface standards should change as well. Users of this standard are advised to immediately inform the IEC of any perceived inadequacies therein.

This edition is a complete revision of the second edition of IEC 61162-1. Liaison has been maintained with NMEA and this edition has been aligned as closely as possible with NMEA 0183 version 3.01. It incorporates three previously issued publicly available specifications: PAS 61162-100 *Extra requirements to IEC 61162-1 for UAIS*, PAS 61162-101 *Modified sentences and requirements for IEC 61162* and PAS 61162-102 *Extra requirements to IEC 61162-1 for the voyage data recorder*.

The second edition included details of the ship equipment defined in IMO resolutions together with appropriate sentences for communication between them. It is now the practice to specify the sentence formatters in the individual standards for equipment, so, in this edition the previous Table 5 (Approved sentence formatters) and Annex A (Minimum required sentences) have not been included.

NOTE The equipment responses and behaviour is beyond the scope for this standard and should be included in the individual equipment standards, for example alarm handling.

This edition introduces (from PAS 61162-100) two types of start of sentence delimiters. The conventional delimiter "\$" is used with the conventional sentences which are now called parametric sentences. The new delimiter "!" identifies sentences that conform to special purpose encapsulation. The example applications in Clause 9 (Clause 7 in second edition) have been expanded to describe both types.

The list of sentences in Clause 8 (Clause 6 in second edition) has been updated to include all the sentences which were developed in the three public available specifications together with new sentences for display dimming (DDC), NAVTEX (NRM and NRX), rudder order (ROR), heading (THS) and user identification code transmission (UID).

As a result of experience the sentences given in PAS 61162-102 for the voyage data recorder; ALA, AKD, DOR, ETL, EVE, FIR, GEN, HSS, PRC, TRC, TRD and WAT have been modified in this edition.

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –

Part 1: Single talker and multiple listeners

1 Scope

This part of IEC 61162 contains the requirements for data communication between maritime electronic instruments, navigation and radiocommunication equipment when interconnected via an appropriate system.

This standard is intended to support one-way serial data transmission from a single talker to one or more listeners. This data is in printable ASCII form and may include information such as position, speed, depth, frequency allocation, etc. Typical messages may be from about 11 to a maximum of 79 characters in length and generally require transmission no more rapidly than one message per second.

The electrical definitions in this standard are not intended to accommodate high-bandwidth applications such as radar or video imagery, or intensive database or file transfer applications. Since there is no provision for guaranteed delivery of messages and only limited error checking capability, this standard should be used with caution in all safety applications.

For applications where a faster transmission rate is necessary, reference should be made to IEC 61162-2.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60945: *Maritime navigation and radiocommunication equipment and systems – General requirements – Methods of testing and required test results*

IEC 61162-2:1998, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 2: Single talker and multiple listeners, high-speed transmission*

ISO/IEC 8859-1:1998, *Information technology – 8-bit single-byte coded graphic character sets – Part 1: Latin alphabet No.1*

ITU-R M.493, *Digital selective-calling system for use in the maritime mobile service*

ITU-R M.821, *Optional expansion of the digital selective-calling system for use in the maritime mobile service*

ITU-R M.825, *Characteristics of a transponder system using digital selective calling techniques for use with vessel traffic services and ship-to-ship identification*

ITU-R M.1371, *Technical characteristics for an automatic identification system using time division multiple access in the VHF band*

ITU-T X.27/V.11:1996, *Electrical characteristics for balanced double-current interchange circuits operating at data signalling rates up to 10 Mbit/s*

3 Terms and definitions

Common terms are defined in the glossary of Annex A. Where there is a conflict, terms shall be interpreted wherever possible in accordance with the references in Clause 2.

For the purposes of this document, the following terms and definitions apply.

talker

any device which sends data to other devices. The type of talker is identified by a 2-character mnemonic as listed in 8.2 (Table 4)

listener

any device which receives data from another device

4 Manufacturer's documentation

Operator manuals or other appropriate literature provided for equipment that is intended to meet the requirements of this standard shall contain the following information:

- a) identification of the A and B signal lines;
- b) the output drive capability as a talker;
- c) a list of approved sentences, noting unused fields, proprietary sentences transmitted as a talker and transmission interval for each sentence;
- d) the load requirements as a listener;
- e) a list of sentences and associated data fields that are required as a listener;
- f) the current software and hardware revision if this is relevant to the interface;
- g) an electrical description or schematic of the listener/talker input/output circuits citing actual components and devices used, including connector type and part number;
- h) the version number and date of update of the standard for which compliance is sought.

5 Hardware specification

NOTE Guidelines on methods of testing are given in Annex B.

One talker and multiple listeners may be connected in parallel over an interconnecting wire. The number of listeners depends on the output capability and input drive requirements of individual devices.

5.1 Interconnecting wire

Interconnection between devices may be by means of a two-conductor, shielded, twisted-pair wire.

5.2 Conductor definitions

The conductors referred to in this standard are the signal lines A and B, and shield.

5.3 Electrical connections/shield requirements

All signal line A connections are connected in parallel with all device A connections and all signal line B connections are connected in parallel with all device B connections. The shields of all listener cables should be connected to the talker chassis only and should not be connected at each listener.

5.4 Connector

No standard connector is specified. Wherever possible readily available commercial connectors shall be used. Manufacturers shall provide means for user identification of the connections used.

5.5 Electrical signal characteristics

This subclause describes the electrical characteristics of transmitters and receivers.

5.5.1 Signal state definitions

The idle, marking, logical 1, OFF or stop bit states are defined by a negative voltage on line A with respect to line B.

The active, spacing, logical 0, ON or start bit states are defined by a positive voltage on line A with respect to line B.

It should be noted that the above A with respect to B levels are inverted from the voltage input/output requirements of standard UARTs and that many line drivers and receivers provide a logic inversion.

5.5.2 Talker drive circuits

No provision is made for more than a single talker to be connected to the bus. The drive circuit used to provide the signal A and the return B shall meet, as a minimum, the requirements of ITU-T X.27/V.11.

5.5.3 Listener receive circuits

Multiple listeners may be connected to a single talker. The listener receive circuit shall consist of an opto-isolator and shall have protective circuits to limit current, reverse bias and power dissipation at the opto-diode as shown in Figure 1. Reference is made to example circuits in 9.2.

The receive circuit shall be designed for operation with a minimum differential input voltage of 2,0 V¹ and shall not take more than 2,0 mA from the line at that voltage.

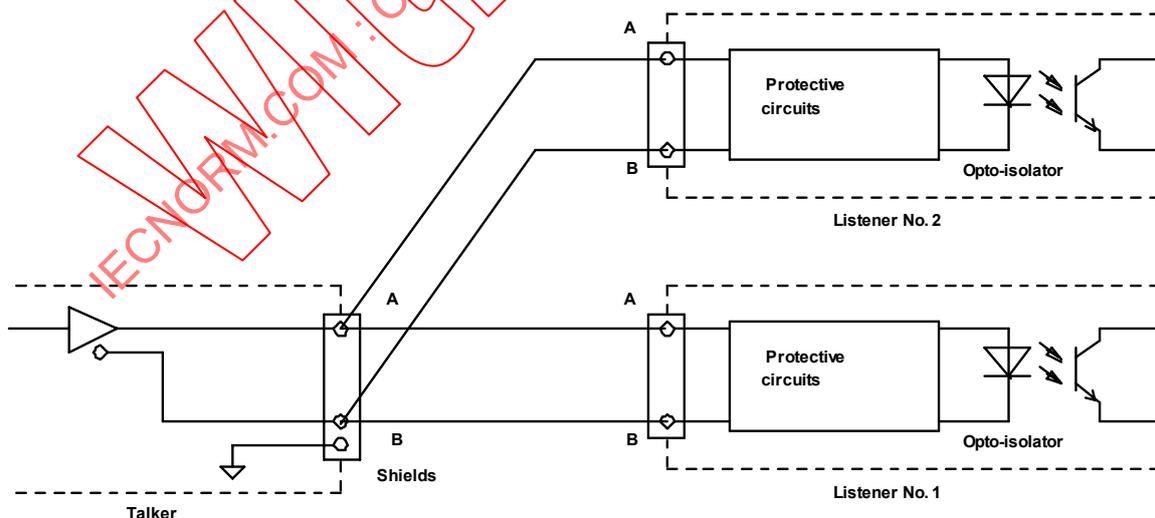


Figure 1 – Listener receive circuit

IEC 910/2000

¹ For reasons of compatibility with equipment designed to comply with earlier versions of NMEA 0183, it is noted that the idle, marking, logical "1", OFF or stop bit state had previously been defined to be in the range $-15,0\text{ V}$ to $+0,5\text{ V}$. The active, spacing, logical "0", ON or start bit state was defined to be in the range $+4,0\text{ V}$ to $+15,0\text{ V}$ while sourcing was not less than 15 mA.

5.5.4 Electrical isolation

Within a listener, there shall be no direct electrical connection between the signal line A, return line B, or shield and ship's ground or power. Isolation from ships' ground is required.

5.5.5 Maximum voltage on bus

The maximum applied voltage between signal lines A and B and between either line and ground shall be in accordance with ITU-T X.27/V.11.


For protection against mis-wiring and for use with earlier talker designs, all receive circuit devices shall be capable of withstanding 15 V between signal lines A and B and between either line and ground for an indefinite period.

6 Data transmission

Data is transmitted in serial asynchronous form in accordance with the standards referenced in Clause 2. The first bit is a start bit and is followed by data bits, least-significant-bit first, as illustrated by Figure 2.

The following parameters are used:

- baud rate 4 800;
- data bits 8 (D7 = 0), parity none;
- stop bits 1.

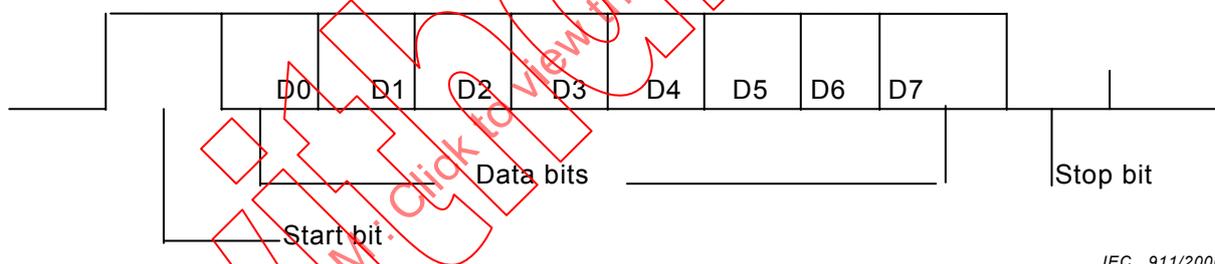

IEC 911/2000

Figure 2 – Data transmission format

7 Data format protocol

7.1 Characters

All transmitted data shall be interpreted as ASCII characters. The most significant bit of the eight-bit character shall always be transmitted as zero (D7 = 0).

7.1.1 Reserved characters

The reserved character set consists of those ASCII characters shown in 8.1 (Table 1). These characters are used for specific formatting purposes, such as sentence and field delimiting, and except for code delimiting, shall not be used in data fields.

7.1.2 Valid characters

The valid character set consists of all printable ASCII characters (HEX 20 to HEX 7E) except those defined as reserved characters. The list of the valid character set is given in 8.1 (Table 2).

7.1.3 Undefined characters

ASCII values not specified as either “reserved characters” or “valid characters” are excluded and shall not be transmitted at any time.

When it is necessary to communicate an 8-bit character defined by ISO/IEC 8859-1 that is a reserved character (Table 1) or not listed in Table 2 as a valid character (e.g. in a proprietary sentence or text sentence), three characters shall be used.

The reserved character “^” (HEX 5E) is followed by two ASCII characters (0-9, A-F) representing the HEX value of the character to be communicated. For example:

- to send heading as “127.5°”, transmit “127.5 ^F8”;
- to send the reserved characters <CR><LF>, transmit “^0D^0A”;
- to send the reserved character “^”, transmit “^5E”.

IEC 60945 states that, as a minimum requirement, English language shall be used for controls and displays. Other languages/characters are only supported by the TUT sentence.

7.1.4 Character symbols

When individual characters are used in this standard to define units of measurement, to indicate the type of data field, type of sentence, etc. they shall be interpreted according to the character symbol in 8.1 (Table 3).

7.2 Fields

A field consists of a string of valid characters, or no characters (null field), located between two appropriate delimiter characters.

7.2.1 Address field

An address field is the first field in a sentence and follows the “\$” or “!” delimiter; it serves to define the sentence. The “\$” delimiter identifies sentences that conform to the conventional parametric and delimited field composition rules as described in 7.3.2. The “!” delimiter identifies sentences that conform to the special-purpose encapsulation and non-delimited field composition rules as described in 7.3.3. Characters within the address field are limited to digits and upper case letters. The address field shall not be a null field. Only sentences with the following three types of address fields shall be transmitted.

7.2.1.1 Approved address field

Approved address fields consist of five digits and upper case letter characters defined by this standard. The first two characters are the talker identifier, listed in 8.2 (Table 4). The talker identifier serves to define the nature of the data being transmitted.

Devices that have the capability to transmit data from multiple sources shall transmit the appropriate talker identifier (for example a device with both a GPS receiver and a LORAN-C receiver shall transmit GP when the position is GPS-based, LC when the position is LORAN-C-based, and IN for integrated navigation shall be used if lines of position from LORAN-C and GPS are combined into a position fix).

Devices capable of re-transmitting data from other sources shall use the appropriate identifier (for example GPS receivers transmitting heading data shall not transmit \$GPHCD unless the compass heading is actually derived from the GPS signals).

The next three characters form the sentence formatter used to define the format and the type of data. A list of sentence formatters is given in 8.3.

7.2.1.2 Query address field

The query address field consists of five characters and is used for the purpose of requesting transmission of a specific sentence on a separate bus from an identified talker.

The first two characters are the talker identifier of the device requesting data, the next two characters are the talker identifier of the device being addressed and the final character is the query character "Q".

7.2.1.3 Proprietary address field

The proprietary address field consists of the proprietary character "P" followed by a three-character manufacturer's mnemonic code, used to identify the talker issuing a proprietary sentence, and any additional characters as required.

NOTE A list of valid manufacturer's mnemonic codes may be obtained from NMEA (see 7.3.5).

7.2.2 Data fields

Data fields in approved sentences follow a "," delimiter and contain valid characters (and code delimiters "^") in accordance with the formats illustrated in 8.2 (Table 5). Data fields in proprietary sentences contain only valid characters and the delimiter characters "," and "^", but are not defined by this standard.

Because of the presence of variable data fields and null fields, specific data fields shall only be located within a sentence by observing the field delimiters ",". Therefore, it is essential for the listener to locate fields by counting delimiters rather than counting the total number of characters received from the start of the sentence.

7.2.2.1 Variable length fields

Although some data fields are defined to have fixed length, many are of variable length in order to allow devices to convey information and to provide data with more or less precision, according to the capability or requirements of a particular device.

Variable length fields may be alphanumeric or numeric fields. Variable numeric fields may contain a decimal point and may contain leading or trailing zeros.

7.2.2.2 Data field types

Data fields may be alpha, numeric, alphanumeric, variable length, fixed length or fixed/ variable (with a portion fixed in length while the remainder varies). Some fields are constant, with their value dictated by a specific sentence definition. The allowable field types are summarized in 8.2 (Table 5).

7.2.2.3 Null fields

A null field is a field of length zero, i.e. no characters are transmitted in the field. Null fields shall be used when the value is unreliable or not available.

For example, if heading information were not available, sending data of "000" is misleading because a user cannot distinguish between "000" meaning no data and a legitimate heading of "000". However, a null field, with no characters at all, clearly indicates that no data is being transmitted.

Null fields with their delimiters can have the following appearance depending on where they are located in the sentence:

"," " " ,**

The ASCII NULL character (HEX 00) shall not be used as the null field.

7.2.3 Checksum field

A checksum field shall be transmitted in all sentences. The checksum field is the last field in a sentence and follows the checksum delimiter character "*". The checksum is the eight-bit exclusive OR (no start or stop bits) of all characters in the sentence, including ",", and "A" delimiters, between but not including the "\$" or "!" and the "*" delimiters.

The hexadecimal value of the most significant and least significant four bits of the result is converted to two ASCII characters (0-9, A-F) for transmission. The most significant character is transmitted first.

Examples of the checksum field are:

\$GPGLL,5057.970,N,00146.110,E,142451,A*27 and

\$GPVTG,089.0,T,,15.2,N,,*53.

7.2.4 Sequential message identifier field

This is a field that is critical to identifying groups of 2 or more sentences that make up a multi-sentence message. This field is incremented each time a new multi-sentence message is generated with the same sentence formatter. The value is reset to zero when it is incremented beyond the defined maximum value. The maximum value, size, and format of this field is determined by the applicable sentence definition in Clause 8. This is one of three key fields supporting the multi-sentence message capability (see 7.3.8).

7.3 Sentences

This subclause describes the general structure of sentences. Details of specific sentence formats are found in 8.3. Some sentences may specify restrictions beyond the general limitations given in this standard. Such restrictions may include defining some fields as fixed length, numeric or text only, required to be non-null, transmitted with a certain frequency, etc.

The maximum number of characters in a sentence shall be 82, consisting of a maximum of 79 characters between the starting delimiter "\$" or "!" and the terminating delimiter <CR><LF>.

The minimum number of fields in a sentence is one (1). The first field shall be an address field containing the identity of the talker and the sentence formatter which specifies the number of data fields in the sentence, the type of data they contain and the order in which the data fields are transmitted. The remaining portion of the sentence may contain zero or multiple data fields.

The maximum number of fields allowed in a single sentence is limited only by the maximum sentence length of 82 characters. Null fields may be present in the sentence and shall always be used if data for that field is unavailable.

All sentences begin with the sentence-starting delimiter character "\$" or "!" and end with the sentence-terminating delimiter <CR><LF>.

7.3.1 Description of approved sentences

Approved sentences are those designed for general use and detailed in this standard. Approved sentences are listed in 8.3 and shall be used wherever possible. When a deprecated sentence has been replaced by an approved sentence, this is indicated in 8.3 by a note.

Other sentences, not recommended for new designs, may be found in practice.

NOTE Such sentences are listed in NMEA 0183. Information on such sentences may be obtained from the National Marine Electronics Association (NMEA) (see 7.3.5).

An approved sentence contains, in the order shown, the following elements:

ASCII	HEX	Description
"\$" or "!"	24 or 21	– start of sentence
<address field>		– talker identifier and sentence formatter
["," <data field>]		– zero or more data fields
["," <data field>]		
"*" <checksum field>		– checksum field
<CR><LF>	0D 0A	– end of sentence

7.3.2 Parametric sentences

7.3.2.1 Description

These sentences start with the "\$" delimiter, and represent the majority of sentences defined by this standard. This sentence structure, with delimited and defined data fields, is the preferred method for conveying information.

The basic rules for parametric sentence structures are:

- the sentence begins with the "\$" delimiter;
- only approved sentence formatters are allowed. Formatters used by special-purpose encapsulation sentences cannot be reused. See 8.2;
- only valid characters are allowed. See 8.1 (Tables 1 and 2);
- only approved field types are allowed. See 8.2 (Table 5);
- data fields (parameters) are individually delimited, and their content is identified and often described in detail by this standard;
- encapsulated non-delimited data fields are NOT ALLOWED.

7.3.2.2 Structure

The following provides a summary explanation of the approved parametric sentence structure:

\$aacc, c---c*hh<CR><LF>

ASCII	HEX	Description
"\$"	24	Start of sentence: starting delimiter.
aacc		Address field: alphanumeric characters identifying type of talker, and sentence formatter. The first two characters identify the talker. The last three are the sentence formatter mnemonic code identifying the data type and the string format of the successive fields. Mnemonics will be used as far as possible to facilitate read-outs by users.
","	2C	Field delimiter: starts each field except address and checksum fields. If it is followed by a null field, it is all that remains to indicate no data in a field.
c---c		Data sentence block: follows address field and is a series of data fields containing all of the data to be transmitted. Data field sequence is fixed and identified by the third and subsequent characters of the address field (the sentence formatter). Data fields may be of variable length and are preceded by delimiters ",".

"*"	2A	checksum delimiter: follows last data field of the sentence. It indicates that the following two alpha-numeric characters show the HEX value of the checksum.
hh		Checksum field: the absolute value calculated by exclusive- OR'ing the eight data bits (no start bits or stop bits) of each character in the sentence between, but excluding, "\$" and "*". The hexadecimal value of the most significant and least significant four bits of the result are converted to two ASCII characters (0-9, A-F) for transmission. The most significant character is transmitted first. The checksum field is required in all cases.
<CR><LF>	0D 0A	End of sentence: sentence terminating delimiter.

7.3.3 Encapsulation sentences

7.3.3.1 Description

These sentences start with the "!" delimiter. The function of this special-purpose sentence structure is to provide a means to convey information, when the specific data content is unknown or greater information bandwidth is needed. This is similar to a modem that transfers information without knowing how the information is to be decoded or interpreted.

The basic rules for encapsulation sentence structures are:

- the sentence begins with the "!" delimiter;
- only approved sentence formatters are allowed. Formatters used by conventional parametric sentences cannot be reused. See 8.2;
- only valid characters are allowed. See 8.1 (Tables 1 and 2);
- only approved field types are allowed. See 8.2 (Table 5);
- only six-bit coding may be used to create encapsulated data fields. See 8.2 (Table 5);
- encapsulated data fields may consist of any number of parameters, and their content is not identified or described by this standard;
- the sentence shall be defined with one encapsulated data field and any number of parametric data fields separated by the "," data field delimiter. The encapsulated data field shall always be the second to last data field in the sentence, not counting the checksum field. See 7.2.2;
- the sentence contains a "total number of sentences" field. See 7.3.3.1;
- the sentence contains a "sentence number" field. See 7.3.3.1;
- the sentence contains a "sequential message identifier" field. See 7.3.3.1;
- the sentence contains a "fill bits" field immediately following the encapsulated data field. The fill bits field shall always be the last data field in the sentence, not counting the checksum field. See 7.3.3.1.

NOTE This method to convey information is to be used only when absolutely necessary, and will only be considered when one or both of two conditions are true, and when there is no alternative.

Condition 1: The data parameters are unknown by devices having to convey the information. For example, the ABM and BBM sentences meet this condition, because the content is not known to the Automatic Identification System (AIS).

Condition 2: When information requires a significantly higher data rate than can be achieved by the IEC 61162-1 (4 800 baud) and IEC 61162-2 (38 400 baud) standards utilizing parametric sentences.

By encapsulating a large amount of information, the number of overhead characters, such as "," field delimiters can be reduced, resulting in higher data transfer rates. It is very unusual for this second condition to be fulfilled. As an example, an AIS has a data rate capability of 4 500 messages per minute, and satisfies this condition, resulting in the VDM and VDO sentences.

7.3.3.2 Structure

The following provides a summary explanation of the approved encapsulation sentence structure:

!aacc,x1,x2,x3,c--c,x4*hh<CR><LF>

ASCII	HEX	description
"!"	21	start of sentence: starting delimiter.
aacc		address field: alphanumeric characters identifying type of talker, and sentence formatter. The first two characters identify the talker. The last three are the sentence formatter mnemonic code identifying the data type and the string format of the successive fields. Mnemonics will be used as far as possible to facilitate readouts by users.
","	2C	field delimiter: starts each field except address and checksum fields. If it is followed by a null field, it is all that remains to indicate no data in a field.
x1		total number of sentences field: encapsulated information often requires more than one sentence. This field represents the total number of encapsulated sentences needed. This may be a fixed or variable length, and is defined by the sentence definitions in 8.3.
x2		sentence number field: encapsulated information often requires more than one sentence. This field identifies which sentence of the total number of sentences this is. This may be fixed or variable length, and is defined by the sentence definitions in 8.3.
x3		sequential message identifier field: this field distinguishes one encapsulated message consisting of one or more sentences, from another encapsulated message using the same sentence formatter. This field is incremented each time an encapsulated message is generated with the same formatter as a previously encapsulated message. The value is reset to zero when it is incremented beyond the defined maximum value. The maximum value and size of this field are determined by the applicable sentence definitions in Clause 8.
c--c		data sentence block: follows sequential message identifier field and is a series of data fields consisting of one or more parametric data fields and one encapsulated data field. Data field sequence is fixed and identified by 3rd and subsequent characters of the address field (the "sentence formatter"). Individual data fields may be of variable length and are preceded by delimiters ",". The encapsulated data field shall always be the second to the last data field in the sentence.
x4		fill bits field: this field represents the number of fill bits added to complete the last six-bit coded character. This field is required and shall immediately follow the encapsulated data field. To encapsulate, the number of binary bits shall be a multiple of six. If it is not, one to five fill bits are added. This field shall be set to zero when no fill bits have been added. The fill bits field shall always be the last data field in the sentence. This shall not be a null field.
"*"	2A	checksum delimiter: follows the last data field of the sentence. It indicates that the following two alphanumeric characters show the HEX value of the checksum.

hh checksum Field: the absolute value calculated by exclusive-OR'ing the 8 data bits (no start bits or stop bits) of each character in the sentence, between, but excluding "!" and "*". The hexadecimal value of the most significant and least significant 4 bits of the result are converted to two ASCII characters (0-9, A-F (upper case)) for transmission. The most significant character is transmitted first. The checksum field is required in all transmitted sentences.

<CR><LF> 0D 0A end of sentence: sentence terminating delimiter.

7.3.4 Query sentences

7.3.4.1 Description

Query sentences are intended to request approved sentences to be transmitted in a form of two-way communication. The use of query sentences implies that the listener shall have the capability of being a talker with its own bus. Query sentences shall always be constructed with the "\$" – start of sentence delimiter.

The approved query sentence contains, in the order shown, the following elements:

ASCII	HEX	description
"\$"	24	start of sentence
<aa>		talker identifier of requester
<aa>		talker identifier for device from which data is being requested
"Q"		query character, identifies query address
","		data field delimiter
<ccc>		approved sentence formatter of data being requested
"*" <checksum field>		checksum field
<CR><LF>0D 0A		end of sentence

7.3.4.2 Reply to query sentence

The reply to a query sentence is the approved sentence that was requested. The use of query sentences requires cooperation between the devices that are interconnected. A reply to a query sentence is not mandatory and there is no specified time delay between the receipt of a query and the reply.

7.3.5 Proprietary sentences

These are sentences not included within this standard; these provide a means for manufacturers to use the sentence structure definitions of this standard to transfer data which does not fall within the scope of approved sentences. This will generally be for one of the following reasons:

- data is intended for another device from the same manufacturer, is device specific, and not in a form or of a type of interest to the general user;
- data is being used for test purposes prior to the adoption of approved sentences;
- data is not of a type and general usefulness which merits the creation of an approved sentence.

NOTE The manufacturers' reference list of mnemonic codes is a component of the equivalent specification NMEA 0183. ²

A proprietary sentence contains, in the order shown, the following elements:

ASCII	HEX	description
"\$"	24	start of sentence
"P"	50	proprietary sentence ID
<aaa>		manufacturer's mnemonic code (The NMEA secretariat maintains the master reference list which comprises codes registered and formally adopted by NMEA)
[<valid characters,"^" and "," >]		manufacturer's data
**<checksum field>		checksum field
<CR><LF> 0D 0A		end of sentence

Proprietary sentences shall include checksums and conform to requirements limiting overall sentence length. Manufacturer's data fields shall contain only valid characters but may include “^” and “,” for delimiting or as manufacturer's data. Details of proprietary data fields are not included in this standard and need not be submitted for approval. However, it is required that such sentences be published in the manufacturer's manuals for reference.

7.3.6 Command Sentences

Command sentences are those that provide an ability to alter or change the configuration or operation of a device. Examples of legacy command sentences are the “HTC - Heading/Track control command” and the “ACA - AIS channel assignment” sentences. When a command sentence is generated in response to a Query sentence, a means to identify that the sentence as only a status report of current settings is required.

Some command sentences cannot be queried and provide a different sentence formatter for status information, so they should not be misinterpreted. This is the case with the HTC sentence. The HTD sentence is provided to determine the status of a heading control system's settings. There is a high possibility of misinterpretation if a device receives a query sentence for a HTC sentence, and erroneously provides the HTC sentence.

The ACA sentence is an example of a command sentence that can also be queried to determine the status of the current settings. The ACA sentence definition provides a field that when set to any valid value, identifies the sentence as a status of current settings and not a command to change settings. There is a high probability of misinterpreting this sentence because the field is used for two distinct purposes at the same time.

To avoid any possibility of misinterpretation and to satisfy the requirements of the voyage data recorder required to be carried on ships under the SOLAS Convention, a clear and unambiguous means to identify that a command sentence is to be interpreted as a command or that it contains status information only and is not a command shall be provided.

Any sentence that contains one or more command fields shall be identified as a “command sentence”. Command sentences shall contain the “Sentence status flag” field.

² The NMEA Secretariat maintains the master reference list which comprises codes registered and formally adopted by NMEA.

The address for the registration of manufacturer's codes is:

NMEA 0183 Standards Committee Fax: +1 410 975 9450
 7 Riggs Ave e-mail: info@nmea.org
 Servana Pk, Maryland 21146 web site http://www.nmea.org
 USA.

Field formatter	Description
a	<p><u>Sentence status flag.</u> This field is a required field for any sentence designated as a command sentence. The field distinguishes the contents of command sentence as being commands intended to change settings or as being status information only.</p> <p>This field shall not be null.</p> <p>This field shall contain an "R" when the sentence is a status report of current settings. This may occur when the sentence is provided in response to a query or is autonomously generated.</p> <p>This field shall contain a "C" when the sentence is a configuration command to change settings. A sentence without a "C" in this field is not a command. If a designated command sentence cannot be queried, as stated in the sentence's definition, this field shall always be set to "C".</p>

7.3.7 Valid sentences

Approved sentences, query sentences and proprietary sentences are the only valid sentences. Sentences of any other form are non-valid and shall not be transmitted on the bus.

7.3.8 Multi-sentence messages

Multi-sentence messages may be transmitted where a data message exceeds the available character space in a single sentence. The key fields supporting the multi-sentence message capability shall always be included, without exception. These required fields are: total number of sentences, sentence number, and sequential message identifier fields. Only sentence definitions containing these fields may be used to form messages. The TUT and VDM sentences are good examples of how a sentence is defined to provide these capabilities.

The listener should be aware that a multi-sentence message may be interrupted by a higher priority message such as an alarm sentence, and thus the original message should be discarded as incomplete and has to await a re-transmission. The listener has to check that multi-sentences are contiguous.

Should an error occur in any sentence of a multi-sentence message, the listener shall discard the whole message and be prepared to receive the message again upon the next transmission.

7.3.9 Sentence transmission timing

Frequency of sentence transmission when specified shall be in accordance with the approved sentence definitions (see 8.3). When not specified, the rate shall be consistent with the basic measurement or calculation cycle but generally not more frequently than once per second.

It is desirable that sentences be transmitted with minimum inter-character spacing, preferably as a near continuous burst, but under no circumstance shall the time to complete the transmission of a sentence be greater than 1 s.

7.3.10 Additions to approved sentences

In order to allow for improvements or additions, future revisions of this standard may modify existing sentences by adding new data fields after the last data field but before the checksum delimiter character "*" and checksum field. Listeners shall determine the end of the sentence by recognition of "<CR><LF>" and "*" rather than by counting field delimiters. The checksum value shall be computed on all received characters between, but not including, "\$" or "!" and "*" whether or not the listener recognizes all fields.

7.4 Error detection and handling

Listening devices shall detect errors in data transmission including:

- a) checksum error (see 7.2.3);
- b) invalid characters (see 7.1.2);
- c) incorrect length of address field (see 7.2.1), and data fields as specified within sentence definitions;
- d) time out of sentence transfer (see 7.3.9).

Listening devices shall use only correct sentences, consistent with the version of IEC 61162-1 supported by the talker devices.

7.5 Handling of deprecated sentences

Deprecated sentences are no longer recommended for sole use in new or revised designs. These sentences are valid sentences, but due to changing circumstances it is desirable to delete or replace these sentences.

Generally, in each of the deprecated sentences a reference is made to a replacement sentence in the current edition of the standard. Manufacturers are urged to use the currently recommended sentence in new or revised designs. It is desirable that manufacturers provide both new and old sentences whenever possible for a period of time that will serve as a phase-in period for new sentences.

8 Data content

8.1 Character definitions

The following tables indicate character definitions.

Table 1 – Reserved characters

ASCII	HEX	DEC	Description
<CR>	0D	13	Carriage return
<LF>	0A	10	Line feed – End of sentence delimiter
\$	24	36	Start of sentence delimiter
*	2A	42	Checksum field delimiter
.	2C	44	Field delimiter
!	21	33	Start of encapsulation sentence delimiter
\	5C	92	Comment block delimiter
^	5E	94	Code delimiter for HEX representation of ISO 8859-1 (ASCII) characters
~	7E	126	Reserved for future use
	7F	127	Reserved for future use

Table 2 – Valid characters

ASCII	HEX	DEC	ASCII	HEX	DEC	ASCII	HEX	DEC
Space	20	32	@	40	64	`	60	96
Reserved	21	33	A	41	65	a	61	97
"	22	34	B	42	66	b	62	98
#	23	35	C	43	67	c	63	99
Reserved	24	36	D	44	68	d	64	100
%	25	37	E	45	69	e	65	101
&	26	38	F	46	70	f	66	102
'	27	39	G	47	71	g	67	103
(28	40	H	48	72	h	68	104
)	29	41	I	49	73	i	69	105
Reserved	2A	42	J	4A	74	j	6A	106
+	2B	43	K	4B	75	k	6B	107
Reserved	2C	44	L	4C	76	l	6C	108
–	2D	45	M	4D	77	m	6D	109
.	2E	46	N	4E	78	n	6E	110
/	2F	47	O	4F	79	o	6F	111
0	30	48	P	50	80	p	70	112
1	31	49	Q	51	81	q	71	113
2	32	50	R	52	82	r	72	114
3	33	51	S	53	83	s	73	115
4	34	52	T	54	84	t	74	116
5	35	53	U	55	85	u	75	117
6	36	54	V	56	86	v	76	118
7	37	55	W	57	87	w	77	119
8	38	56	X	58	88	x	78	120
9	39	57	Y	59	89	y	79	121
:	3A	58	Z	5A	90	z	7A	122
;	3B	59	[5B	91	{	7B	123
<	3C	60	Reserved	5C	92		7C	124
=	3D	61]	5D	93	}	7D	125
>	3E	62	Reserved	5E	94	Reserved	7E	126
?	3F	63	_	5F	95	Reserved	7F	127

Table 3 – Character symbol

A	Status symbol; Yes; Data valid; Warning flag clear; Auto; Ampere, ASCII
a	Alphabet character variable A through Z or a through z
B	Bar (pressure, 1 000 mb = 100 kPa(Pascal(Pa))),Bottom
C	Celsius (Degrees); Course-up
c	Valid character; Calculating
D	Degrees (of arc)
E	Error; East; Engine
F	Fathoms (1 fathom equals 1,828 766 m)
f	Feet (1 foot equals 0,304 79 m)
G	Great circle; Green
g	Good
H	Compass heading; Head-up; Hertz; Humidity
h	Hours; HEX number
I	Inches (1 inch equals 0,0254 m)
J	Input operation completed
K	Kilometres; km/h; kg/m ³
k	Kilograms
L	Left; Local; Lost target
l	Latitude; Litres; l/s
M	Metres; m/s; Magnetic; Manual; Cubic metres
m	Minutes; message
N	Nautical miles; Knots; North; North-up; Newtons
n	Numeral; address
P	Purple; Proprietary (only when following "\$" or "!"); Position sensor; Per cent; Pascal (pressure)
Q	Query; Target-being-acquired
R	Right; Rhumb line; Red; Relative; Reference; Radar tracking; revolutions/min (RPM)
S	South; Statute miles (1 609,31 m); Statute miles/h; Shaft Salinity parts/thousand; Simulator mode
s	Seconds; Six-bit number
T	Time difference; True; Track; Tracked target
t	Test
U	Dead reckoning estimate
u	Sign, if minus "-" (HEX 2D)
V	Data invalid; No; Warning flag set; Manual; Volt
W	West; Water; Wheelover
x	Numeric character variable
y	Longitude
Z	Time

8.2 Field definitions

Field definitions are indicated in the following tables.

Table 4 – Talker identifier mnemonics

Talker device		Identifier
Heading/track controller (autopilot)	general	AG
	magnetic	AP
Automatic identification system		AI
Bilge system		BI
Communications:	digital selective calling (DSC)	CD
	data receiver	CR
	satellite	CS
	radio-telephone (MF/HF)	CT
	radio-telephone (VHF)	CV
scanning receiver		CX
DECCA navigator		DE
Direction finder		DF
Electronic chart system (ECS)		EC
Electronic chart display and information system (ECDIS)		EI
Emergency position indicating radio beacon (EPIRB)		EP
Engine room monitoring system		ER
Fire door controller/monitoring system		FD
Fire extinguisher system		FE
Fire detection system		FR
Fire sprinkler system		FS
Galileo positioning system		GA
Global positioning system (GPS)		GP
GLONASS positioning system		GL
Global navigation satellite system (GNSS)		GN
Heading sensors:	compass, magnetic	HC
	gyro, north seeking	HE
	fluxgate	HF
	gyro, non-north seeking	HN
Hull door controller/monitoring system		HD
Hull stress monitoring		HS
Integrated instrumentation		II
Integrated navigation		IN
LORAN: LORAN-C		LC
Proprietary code		P
Radar and/or radar plotting		RA
Propulsion machinery including remote control		RC
Sounder, depth		SD
Steering gear/steering engine		SG
Electronic positioning system, other/general		SN
Sounder, scanning		SS
Turn rate indicator		TI
Velocity sensors:	Doppler, other/general	VD
	speed log, water, magnetic	VM
	speed log, water, mechanical	VW
Voyage data recorder		VR
Watertight door controller/monitoring system		WD
Water level detection system		WL
Transducer		YX
Timekeeper, time/date:	atomic clock	ZA
	chronometer	ZC
	quartz	ZQ
	radio update	ZV
Weather instrument		WI

Table 5 – Field type summary

Field type	Symbol	Definition
Special format fields		
Status	A	Single character field: A = Yes, data valid, warning flag clear V = No, data invalid, warning flag set
Latitude	IIII.II	Fixed/variable length field: degrees/minutes and decimal – two fixed digits of degrees, two fixed digits of minutes and a variable number of digits for a decimal fraction of minutes. Leading zeros always included for degrees and minutes to maintain fixed length. The decimal point and associated decimal fraction are optional if full resolution is not required.
Longitude	yyyyy.yy	Fixed/variable length field: degrees/minutes and decimal – three fixed digits of degrees, two fixed digits of minutes and a variable number of digits for a decimal fraction of minutes. Leading zeros always included for degrees and minutes to maintain fixed length. The decimal point and associated decimal fraction are optional if full resolution is not required.
Time	hhmmss.ss	Fixed/variable length field: hours/minutes/seconds and decimal – two fixed digits of hours, two fixed digits of minutes, two fixed digits of seconds and a variable number of digits for decimal fraction of seconds. Leading zeros always included for hours, minutes and seconds to maintain fixed length. The decimal point and associated decimal fraction are optional if full resolution is not required.
Defined field		Some fields are specified to contain pre-defined constants, most often alpha characters. Such a field is indicated in this standard by the presence of one or more valid characters. Excluded from the list of allowable characters are the following which are used to indicate field types within this standard: "A", "a", "c", "hh", "hhmmss.ss", "IIII.II", "x", "yyyyy.yy".
Numeric value fields		
Variable numbers	x.x	Variable length integer or floating numeric field. Optional leading and trailing zeros. The decimal point and associated decimal fraction are optional if full resolution is not required (example: 73.10 = 73.1 = 073.1 = 73). The specific use of this formatter and restrictions (for example integer, range) is defined in the sentence definition.
Fixed HEX field	hh-	Fixed length HEX numbers only, MSB on the left.
Variable HEX field	h--h	Variable length HEX numbers only, MSB on the left.
Fixed six-bit field	ss__	Fixed length six-bit coded characters only. See Annex C for field conversions.
Variable six-bit field	s--s	Variable length six-bit coded characters only. See Annex C for field conversions.
Information fields		
Variable text	c--c	Variable length valid character field.
Fixed alpha field	aa-	Fixed length field of upper-case or lower-case alpha characters.
Fixed number field	xx-	Fixed length field of numeric characters.
Fixed text field	cc-	Fixed length field of valid characters.

NOTE 1 Identifies the distant addressed AIS unit involved with the acknowledgement. If more than one MMSI is being addressed (ITU-R M.1371 messages 15 and 16), the MMSI of the first distant AIS unit, identified in the message, is the MMSI reported here. This is a null field when the ITU-R M.1371 message type is 8 or 14.

NOTE 2 Indication of the VHF data link channel upon which a message type 7 or 13 acknowledgement was received. An "A" indicates reception on channel A. A "B" indicates reception on channel B.

NOTE 3 This indicates to the external application the type of ITU-R M.1371 message that this ABK sentence is addressing. Also see the message IDs listed in Note 4.

NOTE 4 The message sequence number, together with the message ID and MMSI of the addressed AIS unit, uniquely identifies a previously received ABM, AIR, or BBM sentence. Generation of an ABK sentence makes a sequence message identifier available for re-use. The message ID determines the source of the message sequence number. The following lists the source by message ID:

ITU-R M.1371 Message ID	Message sequence number source
6	sequential message identifier from ABM sentence
7	addressed AIS unit's Message 7, sequence number
8	sequential message identifier from BBM-sentence
12	sequential message identifier from ABM-sentence
13	addressed AIS unit's Message 13, sequence number
14	sequential message identifier from BBM sentence
15	no source, the message sequence number should be null


NOTE 5 Acknowledgements provided are:

- 0 = Message (6 or 12) successfully received by the addressed AIS unit.
- 1 = Message (6 or 12) was broadcast, but no acknowledgement by the addressed AIS unit,
- 2 = message could not be broadcast (i.e. quantity of encapsulated data exceeds five slots),
- 3 = requested broadcast of Message (8, 14 or 15) has been successfully completed,
- 4 = late reception of a Message 7 or 13 acknowledgement that was addressed to this AIS unit (own ship) and referenced as a valid transaction.

ABM – AIS Addressed binary and safety related message

This sentence supports ITU-R M.1371 Messages 6 and 12 and provides an external application with a means to exchange data via an AIS transponder. Data is defined by the application only, not the AIS unit. This message offers great flexibility for implementing system functions that use the transponder like a communications device. After receiving this sentence via the IEC 61162-2 interface, the transponder initiates a VDL broadcast of either Message 6 or 12. The AIS unit will make up to four broadcasts of the message. The actual number will depend on the reception of an acknowledgement from the addressed "destination" AIS unit. The success or failure of reception of this transmission by the addressed AIS unit is confirmed through the use of the "Addressed binary and safety related message acknowledgement" ABK sentence formatter, and the processes that support the generation of an ABK sentence.

!-ABM,x,x,x,xxxxxxxx,x,xx,s—s,x*hh<CR><LF>

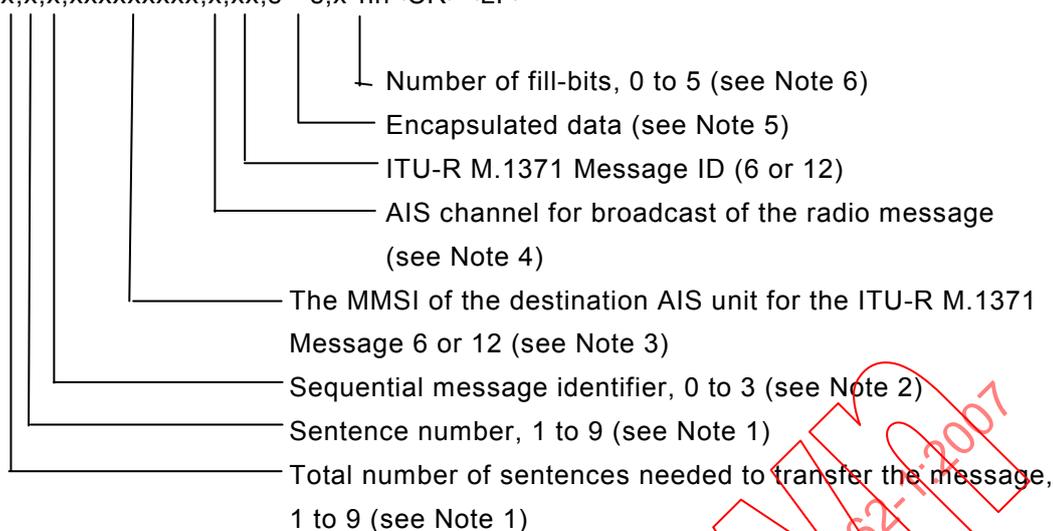

NOTE 1 The total number of sentences required to transfer the binary message data to the AIS unit. The first field specifies the total number of sentences used for a message, minimum value 1. The second field identifies the order of this sentence in the message, minimum value 1. All sentences contain the same number of fields. Successive sentences may use null fields for fields that have not changed, such as fields 4, 5, and 6.

NOTE 2 This sequential message identifier serves two purposes. It meets the requirements as stated in 1.3.2, and it is the sequence number utilised by ITU-R M.1371 in message types 6 and 12. The range of this field is restricted by ITU-R M.1371 to 0 – 3. The sequential message identifier value may be re-used after the AIS unit provides the "ABK" acknowledgement for this number. (See the ABK sentence).

NOTE 3 The MMSI of the AIS unit that is the destination of the message.

NOTE 4 The AIS channel that is to be used for the broadcast: 0 = no broadcast channel preference, 1 = Broadcast on AIS channel A, 2 = broadcast on AIS channel B, 3 = broadcast message on both AIS channels, A and B.

NOTE 5 This is the content of the "binary data" parameter for ITU-R M.1371 Messages 6, or the "Safety related Text" parameter for Message 12. Up to 936 bits of binary data (156 six-bit coded characters) using multi-line sentences. The first sentence may contain up to 48 valid six-bit codes (288 bits). Following sentences may contain up to 60 valid six-bit codes (360 bits), if fields 4, 5, and 6 are unchanged from the first sentence and set to null. The actual number of valid characters should be such that the total number of characters in a sentence does not exceed the "82-character" limit.


NOTE 6 This cannot be a null field. See "x⁴" in 7.3.3.

ACA – AIS channel assignment message

An AIS device can receive regional channel management information in four ways: ITU-R M.1371 Message 22, DSC telecommand received on channel 70, manual operator input, and an ACA sentence. The AIS unit may store channel management information for future use. Channel management information is applied based upon the actual location of the AIS device. An AIS unit is "using" channel management information when the information is being used to manage the operation of the VHF receiver and/or transmitter inside the AIS unit.

This sentence is used both to enter and obtain channel management information. When sent to an AIS unit, the ACA sentence provides regional information that the unit stores and uses to manage the internal VHF radio. When sent from an AIS unit, the ACA sentence provides the current channel management information retained by the AIS unit. The information contained in this sentence is similar to the information contained in an ITU-R M.1371 Message 22. The information contained in this sentence directly relates to the initialisation phase and dual channel operation and channel management functions of the AIS unit as described in ITU-R M.1371.

\$--ACA,x,IIII.II,a,yyyy.yy,a,IIII.II,a,yyyy.yy,a,x,xxxx,x,xxxx,x,x,x,a,x,hmmss.ss*hh<CR><LF>

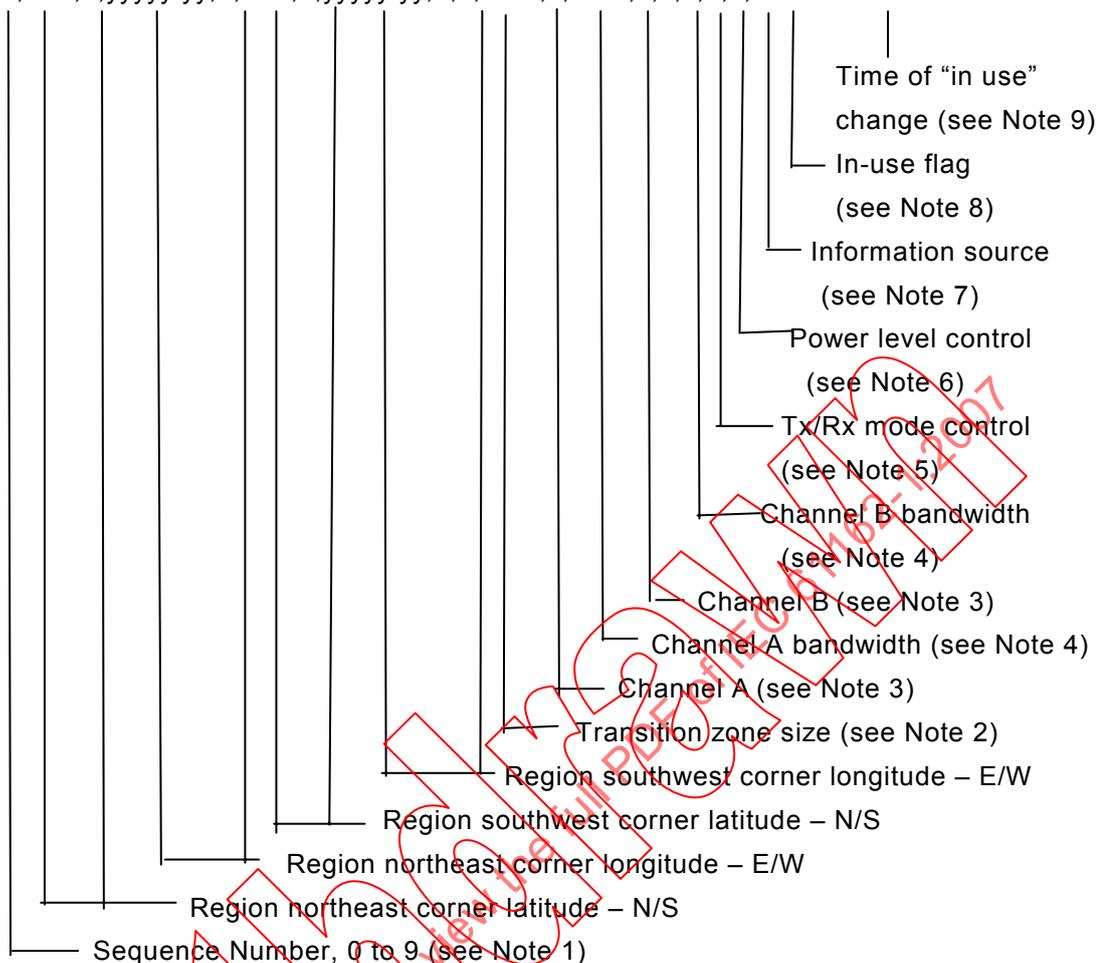

NOTE 1 This is used to bind the contents of the ACA and ACS sentences together. The ACS sentence, when provided by the AIS unit, shall immediately follow the related ACA sentence, containing the same sequence number. The AIS unit generating the ACA and ACS sentences, shall increment the sequence number each time an ACA/ACS pair is created. After 9 is used the process shall begin again from 0. Information contained in the ACS sentence is not related to the information in the ACA sentence if the sequence numbers are different. When an AIS unit is queried for an ACA sentence, the AIS unit should respond with the ACA/ACS sentence pair. When an external device is sending an ACA sentence to the AIS unit, the sequence number may be null if no ACS sentence is being sent.

NOTE 2 Range of 1 to 9 nautical miles.

NOTE 3 VHF channel number, see ITU-R M.1084, Annex 4

NOTE 4 Value of 0, bandwidth is specified by channel number, see ITU-R M.1084, Annex 4
Value of 1, bandwidth is 12.5 kHz.

NOTE 5 Value of 0, transmit on channels A and B, receive on channels A and B
Value of 1, transmit on channel A, receive on channels A and B
Value of 2, transmit on channel B, receive on channels A and B
Value of 3, do not transmit, receive on channels A and B
Value of 4, do not transmit, receive on channel A
Value of 5, do not transmit, receive on channel B

NOTE 6 Value of 0, high power
Value of 1, low power

NOTE 7 Source identifiers:

A = ITU-R M.1371 Message 22: Channel Management addressed message,

B = ITU-R M.1371 Message 22: Channel Management broadcast geographical area message,

C = IEC 61162-1 AIS Channel Assignment sentence,

D = DSC Channel 70 telecommand,

M = operator manual input.

This field should be null when the sentence is sent to an AIS device.

NOTE 8 This value is set to indicate that the other parameters in the sentence are “in-use” by an AIS unit at the time that the AIS unit sends this sentence. A value of “0” indicates that the parameters are not “in-use,” and a value of “1” indicates that the parameters are “in-use.” This field should be null when the sentence is sent to an AIS unit.

NOTE 9 This is the UTC time that the “In-use flag” field changed to the indicated state. This field should be null when the sentence is sent to an AIS unit

ACK – Acknowledge alarm

Acknowledge device alarm. This sentence is used to acknowledge an alarm condition reported by a device.


\$--ACK,xxx*hh<CR><LF>

└── Unique alarm number (identifier) at alarm source

ACS – AIS Channel management information source

This sentence is used in conjunction with the ACA sentence. This sentence identifies the originator of the information contained in the ACA sentence and the date and time the AIS unit received that information.

\$--ACS,x,xxxxxxxx,hhmmss.ss,xx,xx,xxxx*hh<CR><LF>

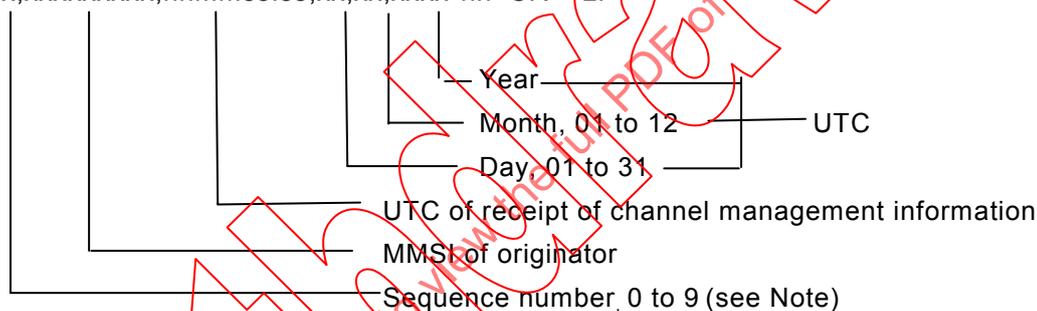


NOTE This is used to bind the contents of the ACA and ACS sentences together. The ACS sentence, when provided by the AIS unit, should immediately follow the related ACA sentence, containing the same sequence number. The AIS unit generating the ACA and ACS sentences, should increment the sequence number each time an ACA/ACS pair is created. After 9 is used the process should begin again from 0. Information contained in the ACS sentence is not related to the information the ACA sentence if the sequence numbers are different. When an external device is sending an ACA sentence to the AIS unit, the sequence number may be null if no ACS sentence is being sent.

AIR – AIS Interrogation request

This sentence supports ITU-R M.1371 Message 15. It provides an external application with the means to initiate requests for specific ITU-R M.1371 messages, from distant mobile or base station, AIS units. A single sentence can be used to request up to two messages from one AIS unit and one message from a second AIS unit, or up to three messages from one AIS unit. The message types that can be requested are limited. The complete list of messages that may be requested can be found within the Message 15 description in ITU-R M.1371. Improper requests may be ignored.

The external application initiates the interrogation. The external application is responsible for assessing the success or failure of the interrogation. After receiving this sentence, the AIS unit initiates a radio broadcast (on the VHF Data Link) of a Message 15 – Interrogation. The success or failure of the interrogation broadcast is determined by the application using the combined reception of the ABK-sentence and VDM sentences provided by the AIS unit. After receiving this AIR-sentence, the AIS unit shall take no more than 4 s to broadcast the Message 15, and the addressed distant unit(s) shall take no more than another 4 s to respond – a total of 8 s.

\$--AIR,xxxxxxxx,x.x,x,x.x,xxxxxxxx,x.x,x*hh<CR><LF>

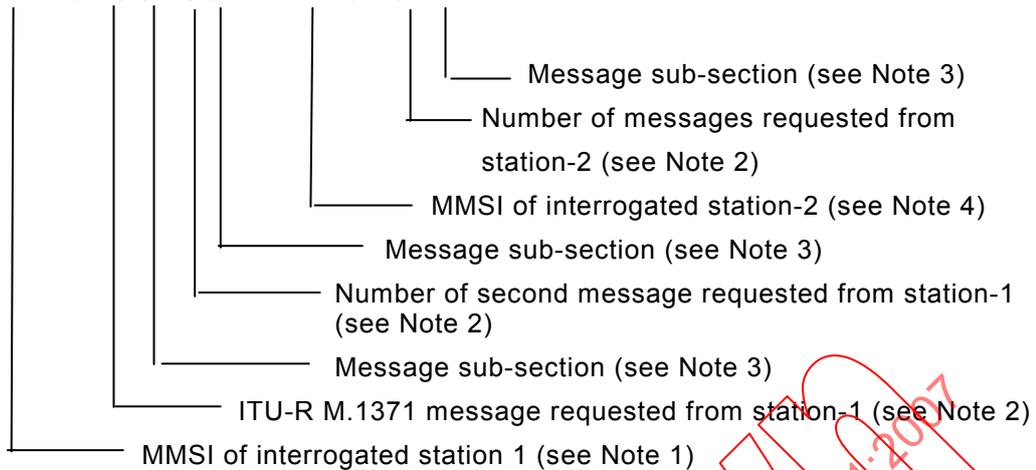

NOTE 1 Identifies the first distant AIS unit being interrogated. Two messages can be requested from the first AIS unit.

NOTE 2 Examples of messages that may be requested from a distant mobile AIS unit include:

Message 3, = Position Report,

Message 5, = Ship static and voyage related data, see additional information in Note 3.

Message 9, = Standard SAR Aircraft Position Report

Message 18, = Standard Class B equipment position report.

Message 19, = Extended Class B equipment position report

Message 21, = Aids-to-navigation report.

Examples of messages that may be requested from a distant AIS base station include:

Message 4 = Base Station Report

Message 17 = GNSS Broadcast Binary Message

Message 20 = Data link management message

Message 22 = Channel Management

NOTE 3 This field is used to request a message that has been further sub-divided into alternative data structures. When requesting a message with alternative data structures, this message sub-section field should be provided, so that the correct sub-division of the message data is provided. If the message structure is not sub-divided into different structures, this field should be null.


NOTE 4 This identifies the second distant AIS unit being interrogated. Only one message may be requested from the second AIS unit. The MMSI of the second AIS unit may be the same MMSI as the first AIS unit.

AKD – Acknowledge detail alarm condition

This sentence provides for acknowledgement of a detailed alarm condition reported through ALA.

NOTE As IEC 61162-1 does not guarantee reliable transport, the designer should be very careful about how this sentence is used. Problems can occur either when the initial alarm message was lost or when the acknowledgement message was lost. A possible solution is to retransmit the alarm message until acknowledgement has been received. When acknowledgement has been received, an alarm acknowledged shall be sent. This acknowledgement must be sent on all subsequent acknowledgements. Acknowledgements must be sent on each received alarm message after acknowledgement and further on until the alarm acknowledgement message has been received.

\$--AKD,hhmmss.ss,aa,aa,xx,xxx,aa,aa,xx *hh<CR><LF>

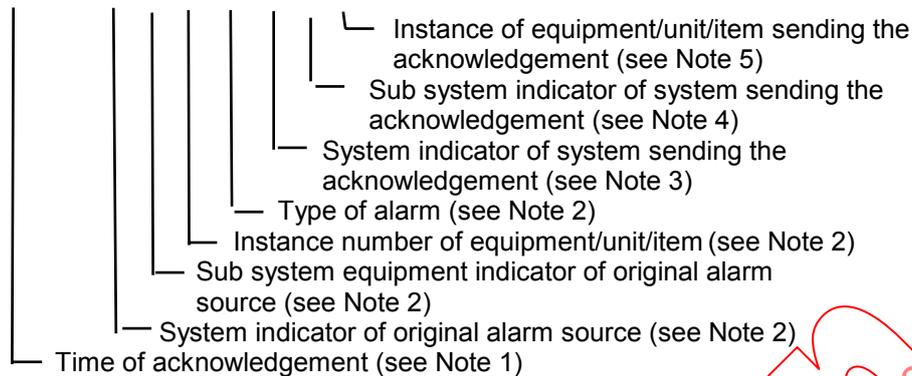

NOTE 1 This defines the time of acknowledgement. This may be a null field.

NOTE 2 These fields should contain the identical information of the corresponding fields from the ALA sentence being acknowledged.

NOTE 3 Indicator characters identifying the system sending the acknowledgement. This field is two fixed characters, see Annex D. This may be a null field.

NOTE 4 Indicator characters identifying the sub system sending the acknowledgement. This field is two fixed characters, see Annex D. This may be a null field.

NOTE 5 Instance number identifying the equipment, unit or item sending the acknowledgement. This field is two fixed numeric characters. This may be a null field.


ALA – Report detailed alarm condition

This sentence permits the alarm and alarm acknowledge condition of systems to be reported. Unlike ALR this sentence supports reporting multiple system and sub-system alarm conditions.

NOTE Dedicated sentences (for example FIR, DOR, HSS, WAT) are intended for reporting from a dedicated alarm detection system,

NOTE As IEC 61162-1 does not guarantee reliable transport, the designer should be very careful about how this sentence is used. Problems can occur either when the initial alarm message was lost or when the acknowledgement message was lost. One possible solution (in some cases) is to retransmit the alarm message until acknowledgement has been received. When acknowledgement has been received, an alarm acknowledged should be sent. This acknowledgement should be sent on all subsequent acknowledgements. Acknowledgements should be sent on each received alarm message after acknowledgement and further on until the alarm acknowledgement message has been received.

\$--ALA,hhmmss.ss,aa,aa,xx,xxx,a,a,c--c *hh<CR><LF>

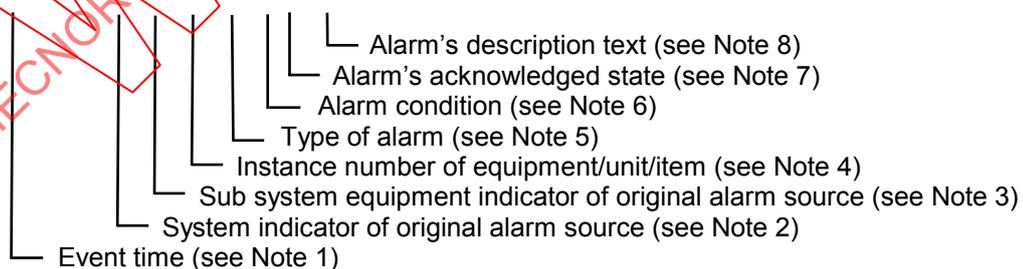

NOTE 1 Event time of alarm condition change including acknowledgement state change. If this is not available, this should be a null field.

NOTE 2 Indicator characters as system of alarm source. This field is two fixed characters, see Annex D.

NOTE 3 Indicator characters as sub-system of alarm source. This field is two fixed characters, see Annex D. For group alarms or if no sub-system can be identified, this should be a null field.

NOTE 4 Instance number identifying the equipment, unit or item. This field is two fixed numeric characters.

NOTE 5 Type of alarm. This field is three fixed numeric characters as defined in Annex D, Table D.1. Codes 900-999 are user definable.

NOTE 6 This field is a single character specified by the following:

- N = normal state
- H = alarm state (threshold exceeded)
- J = alarm state (extreme threshold exceeded)
- L = alarm state (low threshold exceeded, i.e. not reached)
- K = alarm state (extreme low threshold exceeded, i.e. not reached)
- X = other

NOTE 7 This field is a single character specified by the following:


- A = acknowledged
- V = not acknowledged
- B = Broadcast (acknowledgement not applicable)
- H = harbour mode
- O = Override

NOTE 8 Additional and optional descriptive text/ alarm detail condition tag. Maximum number of characters will be limited by maximum sentence length and length of other fields.


ALM – GPS almanac data

Contains GPS week number, satellite health and the complete almanac for one satellite. Multiple sentences may be transmitted, one for each satellite in the GPS constellation, up to a maximum of 32 sentences.

\$--ALM, x.x, x.x, xx, x.x, hh, hhhh, hh, hhhh, hhhh, hhhhhh,...

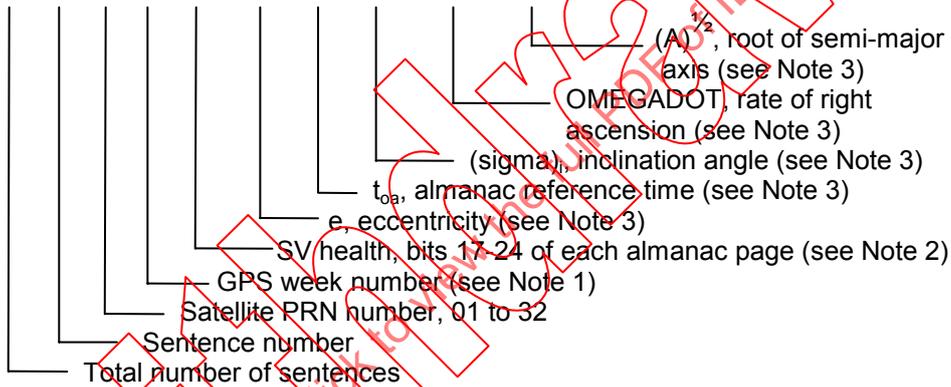

..hhhhhh, hhhhhh, hhhhhh, hhh, hhh*hh<CR><LF>

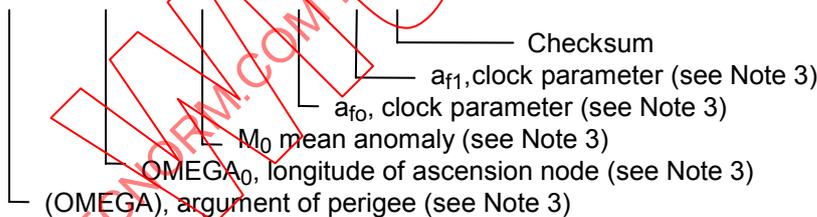

(from ICD-GPS-200, revision B (see Annex A))

NOTE 1 Variable length integer, four digits maximum (0 to 9999). This is an extended GPS week number to which the almanac reference time parameter (toa) is referenced. Week zero refers to the week of 06 January 1980. The value is the "Extended Week Number", which is the elapsed number of weeks since week zero. Extended week numbers should not be reset to zero when the 10-bit GPS week number rolls back to zero every 19,6 years. This value should be determined by the GPS receiver at the time of the almanac data decoding. It is based on the 8-bit Almanac Reference week form, Page 25, Subframe 5, word 3, bits 17 to 24; that 8-bit value should be expanded by the GPS receiver to give a full Extended Week Number. Furthermore, care should be taken to ensure that the Almanac Reference Time and the Extended Week Number are correctly linked as part of a single almanac data set, avoiding inconsistencies between different almanac data sets when new almanac uploads occur after reading Page 25 of Subframe 5.


NOTE 2 Reference 20.3.3.5.1.3, Table 20-VII and Table 20-VIII.

NOTE 3 Reference Table 20-VI, for scaling factors and units.

ALR – Set alarm state


Local alarm condition and status. This sentence is used to report an alarm condition on a device and its current state of acknowledgement.

\$--ALR,hhmmss.ss,xxx,A, A,c--c*hh<CR><LF>

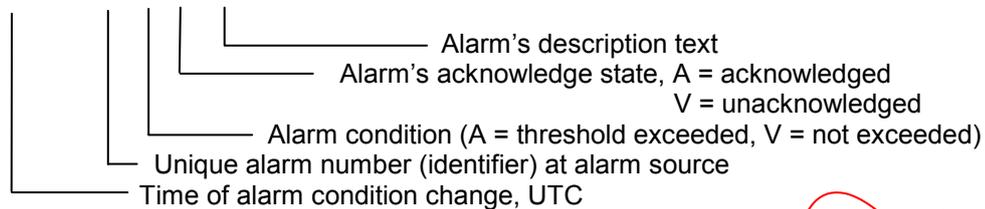**APB – Heading/track controller (autopilot) sentence B**

Commonly used by autopilots, this sentence contains navigation receiver warning flag status, cross-track-error, waypoint arrival status, initial bearing from origin waypoint to the destination, continuous bearing from present position to destination and recommended heading to steer to destination waypoint for the active navigation leg of the journey.

\$--APB, A, A, x.x, a, N, A, A, x.x, a, c--c, x.x, a, x.x, a, a*hh<CR><LF>

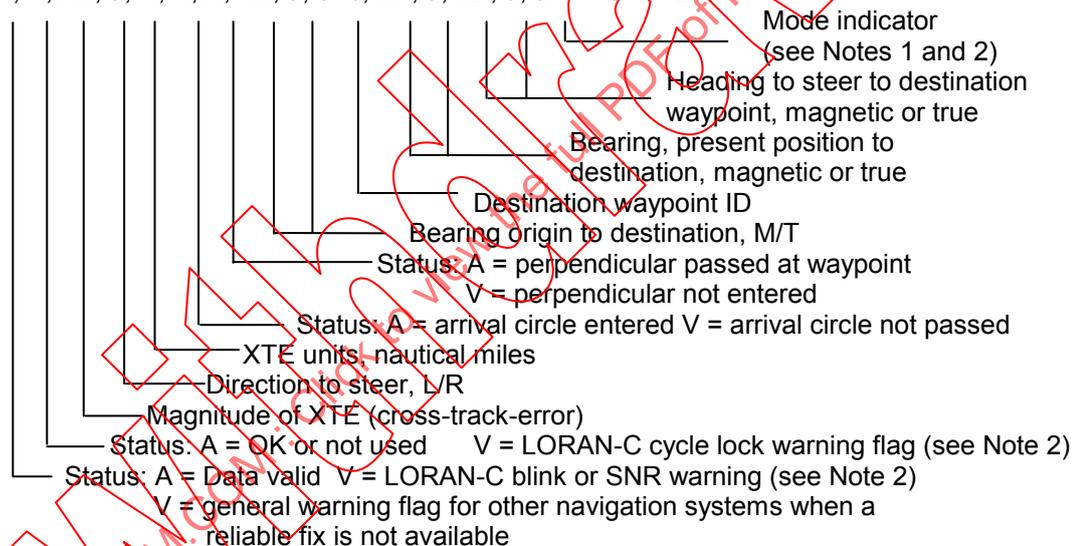

NOTE 1 Positioning system mode indicator:


- A = Autonomous mode
- D = Differential mode
- E = Estimated (dead reckoning) mode
- M = Manual input mode
- S = Simulator mode
- N = Data not valid

NOTE 2 The positioning system mode indicator field supplements the positioning system status fields (fields 1 and 2), the status fields should be set to V = invalid for all values of mode indicator except for A = Autonomous and D = Differential. The positioning system mode Indicator should not be null fields.

BBM – AIS Broadcast binary message

This sentence supports generation of ITU-R M.1371 binary Messages 8 and 14. This provides the application with a means to broadcast data, as defined by the application only. Data is defined by the application only – not the AIS. This message offers great flexibility for implementing system functions that use the AIS unit as a digital broadcast device. After receiving this sentence, via the IEC 61162-2 interface, the AIS unit initiates a VHF broadcast of either Message 8 or 14 within 4 s. (See the ABK sentence for acknowledgement of the BBM).

!--BBM,x,x,x,x,x,x,x,s--s,x*hh<CR><LF>

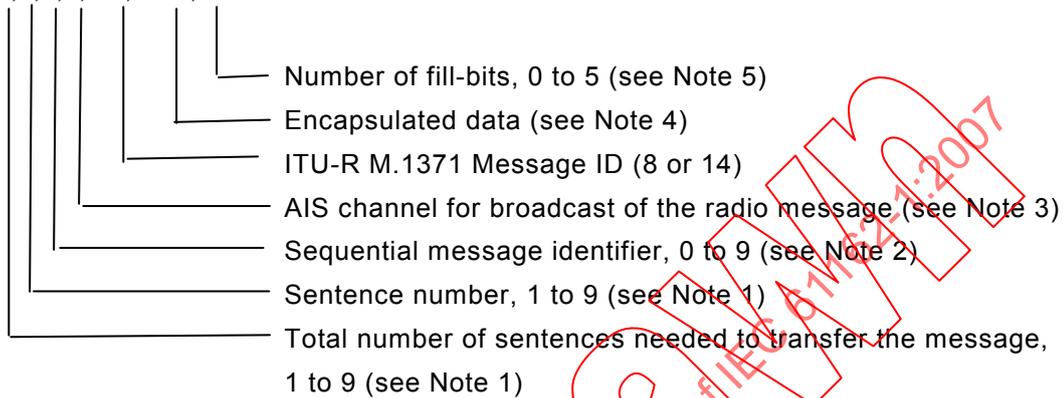

NOTE 1 The total number of IEC 61162-1 sentences required to transfer the contents of the binary message to the AIS unit. The first field specifies the total number of sentences used for a message, minimum value 1. The second field identifies the order of this sentence in the message, minimum value 1. All sentences contain the same number of fields. Successive sentences may use null fields for fields that have not changed, such as fields 4 and 5.

NOTE 2 The sequential message identifier provides a message identification number from 0 to 9 that is sequentially assigned and is incremented for each new multi-sentence message. The count resets to 0 after 9 is used. For a message requiring multiple sentences, each sentence of the message contains the same sequential message identification number. It is used to identify the sentences containing portions of the same message. This allows for the possibility that other sentences might be interleaved with the message sentences that, taken collectively, contain a single message. This value is used by the ABK sentence to acknowledge a specific BBM sentence.

NOTE 3 The AIS channel that should be used for the broadcast: 0 = no broadcast channel preference, 1 = Broadcast on AIS channel A, 2 = Broadcast on AIS channel B, 3 = Broadcast the message on both AIS channels A and B.


NOTE 4 This is the content of the "binary data" parameter for ITU-R M.1371 Messages 8,19 and 21, or the "Safety related text" parameter for Message 14. The first sentence may contain up to 58 valid "six-bit" symbols (348 bits). The following sentences may contain up to 60 valid "six-bit" symbols (360 bits), if fields 4 and 5 are unchanged from the first sentence and set to null. The actual number of characters should be such that the total number of characters in a sentence does not exceed the "82-character" limit.

NOTE 5 This cannot be a null field. See "x⁴" in 7.3.3.

BEC – Bearing and distance to waypoint – dead reckoning

Time (UTC) and distance and bearing to, and location of, a specified waypoint from the dead-reckoned present position.


\$--BEC, hhhmss.ss, llll.ll, a, yyyy.yy, a, x.x, T, x.x, M, x.x, N, c--c*hh<CR><LF>

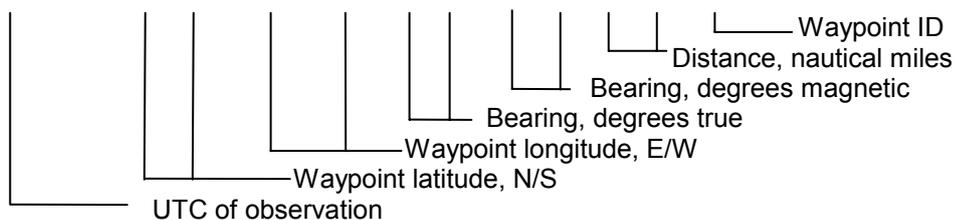

BOD – Bearing origin to destination

Bearing angle of the line, calculated at the origin waypoint, extending to the destination waypoint from the origin waypoint for the active navigation leg of the journey.

\$--BOD, x.x, T, x.x, M, c--c, c--c*hh<CR><LF>

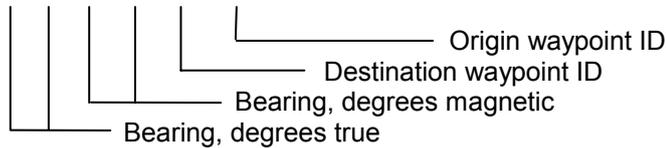**BWC – Bearing and distance to waypoint – great circle**


Time (UTC) and distance and bearing to, and location of, a specified waypoint from present position. \$--BWC data is calculated along the great circle path from present position rather than along the rhumb line.

BWR – Bearing and distance to waypoint – rhumb line

Time (UTC) and distance and bearing to, and location of, a specified waypoint from present position. \$--BWR data is calculated along the rhumb line from present position rather than along the great circle path.

\$--BWC, hhmmss.ss, llll.ll, a, yyyy.yy, a, x.x, T, x.x, M, x.x, N, c--c, a*hh<CR><LF>

\$--BWR, hhmmss.ss, llll.ll, a, yyyy.yy, a, x.x, T, x.x, M, x.x, N, c--c, a*hh<CR><LF>

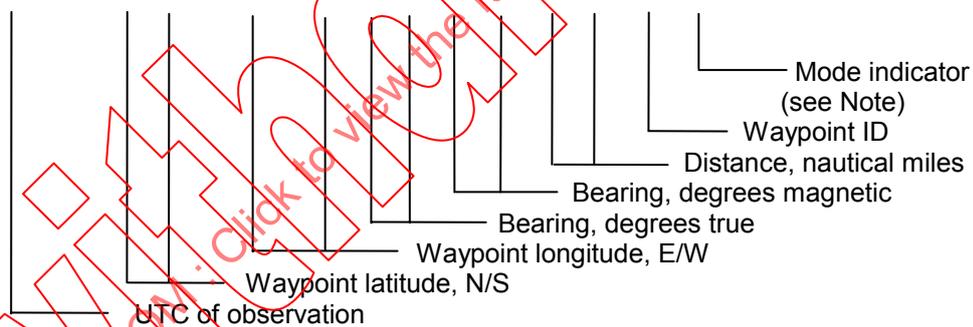


- NOTE Positioning system mode indicator
- A = Autonomous mode
 - D = Differential mode
 - E = Estimated (dead reckoning) mode
 - M = Manual input mode
 - S = Simulator mode
 - N = Data not valid

The mode indicator field should not be a null field.

BWW – Bearing waypoint to waypoint


Bearing angle of the line, between the TO and the FROM waypoints, calculated at the FROM waypoint for any two arbitrary waypoints.

\$--BWW, x.x, T, x.x, M, c--c, c--c*hh<CR><LF>

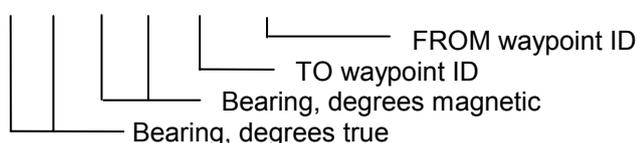

CUR – Water current layer – Multi-layer water current data

\$--CUR,A,x,x,x,x,x,x,a,x,x,x,x,x,a*hh<CR LF>

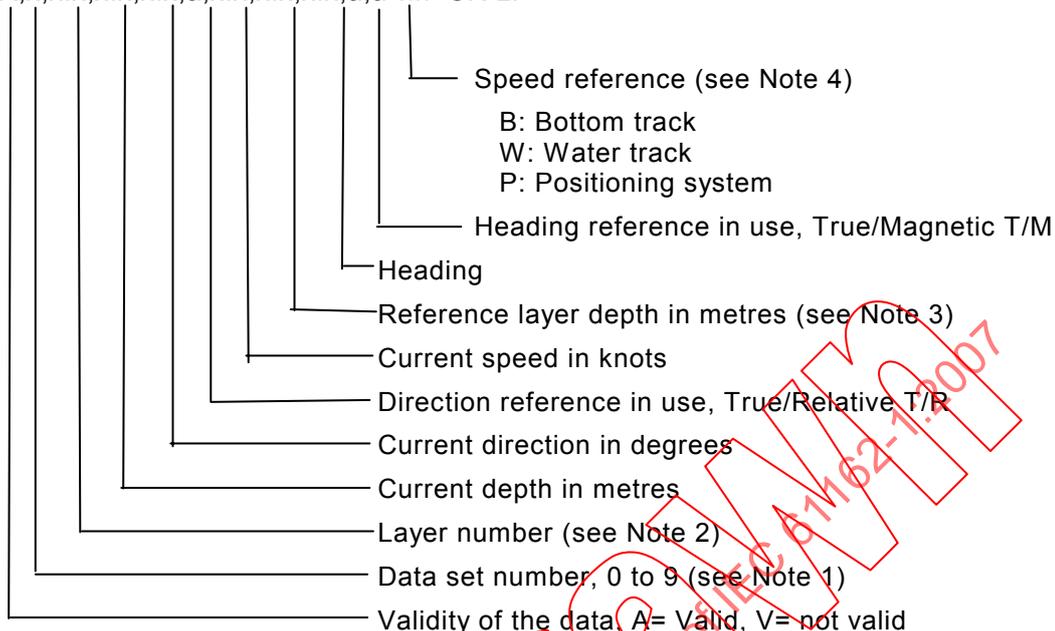

NOTE 1 The data set number is used to identify multiple sets of current data produced in one measurement instance. Each measurement instance may result in more than one sentence containing current data measurements at different layers, all with the same data set number. This is used to avoid the data measured in another instance to be accepted as one set of data.

NOTE 2 The layer number identifies which layer the current data measurements were made from. The number of layers that can be measured varies by device. The typical number is between 3 and 32, though many more are possible.


NOTE 3 The current of each layer is measured according to this reference layer, when the speed reference field is set to "water track", or the depth is too deep for bottom track.

NOTE 4 "Speed reference" identifies the method of ship speed used for measuring the current speed.

DBT – Depth below transducer

Water depth referenced to the transducer.


\$--DBT, x,x, f, x,x, M, x,x, F*hh<CR><LF>

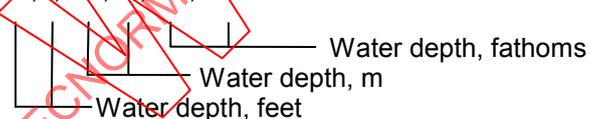

DCN – DECCA position

Status and lines-of-position for a specified DECCA chain.

\$ -- DCN, xx, cc, x.x, A, cc, x.x, A, cc, x.x, A, A, A, A, x.x, N, x*hh<CR><LF>

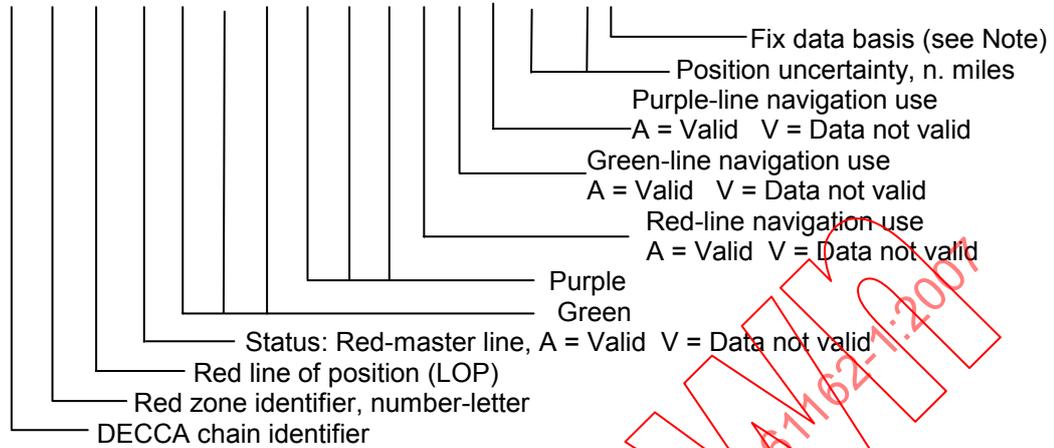


NOTE Fix data basis:

- 1 = Normal pattern
- 2 = Lane identification pattern
- 3 = Lane identification transmissions

DDC – Display Dimming Control

The DDC sentence provides controls for equipment display dimming presets and a display brightness percentage.

\$--DDC,a,xx,a*hh<CR><LF>

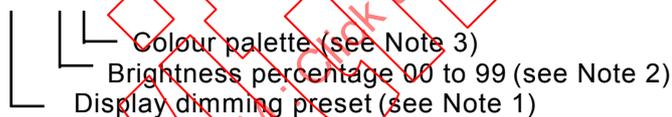

NOTE 1 The display dimming preset field contains an indicator that may be associated with a preset dimmed level on an electronic device.

- D = Day time setting
- K = Dusk setting
- N = Night time setting
- O = Backlighting off setting

Actual display brightness levels for the display dimming preset indicators above are dependant upon the capabilities provided by the manufacturer of the equipment. Proper use of this field would be as follows. A device provides the operator or user with the ability to set a brightness level to be associated with day, dusk night, etc. Upon receipt of the DDC sentence, the device would switch it's display brightness to the preset value the operator had determined for the corresponding indicator value. If the equipment had no brightness or dimming preset capability this field would be ignored.

NOTE 2 The brightness percentage field contains a value from zero to ninety nine. The value zero, provided as 00, indicates that the display's brightness should be set to its most dimmed level, as determined by the capabilities of the equipment. The value ninety nine, provided as 99, indicates that the display brightness should be set to the brightest level, as determined by the capabilities of the equipment. Values between 0 and 99 correspond to some percentage of brightness, as determined by the equipment receiving this sentence.


NOTE 3 The colour palette preset field contains an indicator that may be associated with a preset dimmed level on an electronic device.

- D = Day time setting
- K = Dusk setting
- N = Night time setting
- O = Backlighting off setting

DOR – Door status detection

This sentence indicates the status of watertight doors, fire doors or other hull openings / doors.

\$--DOR,a,hmmss.ss,aa,aa,xxx,xxx,a,a,c--c *hh<CR><LF>

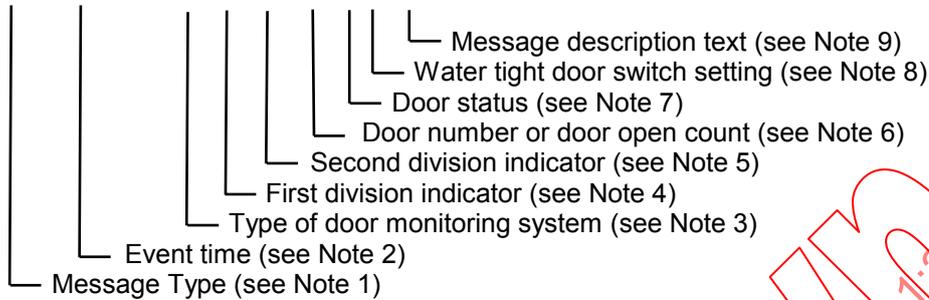

NOTE 1 S: Status for section: the number of faulty and/or open doors reported in the division specified in fields 4 and 5. The section may be a whole section (one or both of the division indicator fields are null) or a sub-section. The status S is normally transmitted at regular intervals. Examples of use are given in Annex E.

E: Status for single door. (E may be used to indicate an event).

F: Fault in system: Division indicator fields defines the section when provided.

NOTE 2 Time when this status/message was valid. This may be a null field.

NOTE 3 The field is two fixed characters, see table below.

NOTE 4 First division indicator where door is located. This field is two characters, see table below.

NOTE 5 Second division indicator where the door is located. This field is three numeric characters, see table below.

NOTE 6 This field is three fixed numeric characters. When the message type field is E this field identifies the door. When message type field is S this field contains the number of doors that are open or faulty. When the message type field is F this field is null.

NOTE 7 When the message type field is S or F this field should be a null field. When the message type field is E, this field is specified by the following:

- O = Open
- C = Closed
- S = Secured
- F = Free status (for watertight door)
- X = Fault (door status unknown)

NOTE 8 This field includes a single character specified by the following:

- O = Harbour mode (allowed open)
- C = Sea mode (ordered closed)

This may be a null field.


NOTE 9 Descriptive text/door tag. If a door allocation identifier is string type, it is possible to use this field instead of the above door allocation fields. The maximum number of characters will be limited by the maximum sentence length and the length of other fields.

Type of door monitoring system		First division indicator	Second division indicator
ID	System category		
WT	Watertight door	Number of watertight bulkhead / frame number	Deck number
WS	Semi-watertight door (splash-tight)		
FD	Fire door	Number / letter of zone. This can also be identifier for control and monitoring main system.	Deck number or control system loop number or other control system division indicator as is appropriate for system
HD	Hull (shell) door	Door indication number / frame number	Deck number
OT	Other	As above	As above

DPT – Depth

Water depth relative to the transducer and offset of the measuring transducer. Positive offset numbers provide the distance from the transducer to the waterline. Negative offset numbers provide the distance from the transducer to the part of the keel of interest.

\$--DPT, x.x, x.x, x.x*hh<CR><LF>

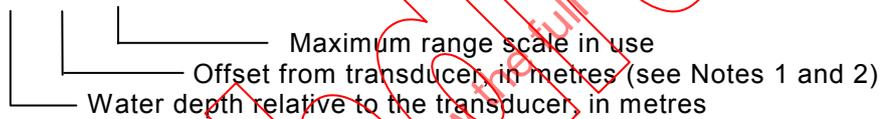


NOTE 1 "positive" = distance from transducer to water line; "-" = distance from transducer to keel.

NOTE 2 For IEC applications, the offset should always be applied so as to provide depth relative to the keel.

DSC – Digital selective calling information

This sentence is used to receive a call from or provide data to a radiotelephone using digital selective calling in accordance with ITU-R M.493.

\$--DSC,xx,xxxxxxxx,xx,xx,xx,x.x, x.x,xxxxxxxx,xx, a,a*hh<CR><LF>

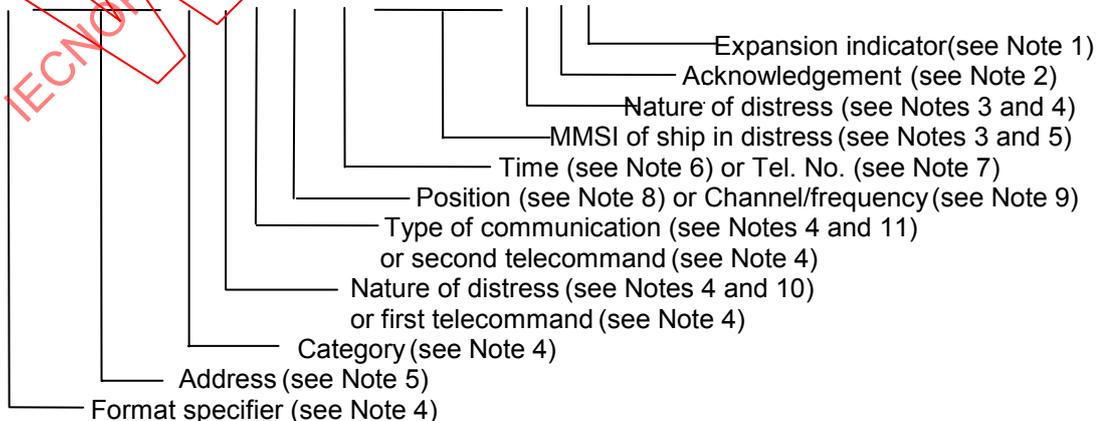

NOTE 1 Expansion indicator = "E", null otherwise. When set to "E" this sentence is followed by the DSC expansion sentence \$--DSE, without intervening sentences, as the next transmitted or received sentence.

NOTE 2 Acknowledgement type:

R = Acknowledge request

B = Acknowledgement

S = Neither (end of sequence)

NOTE 3 For Distress Acknowledgement, Distress Relay and Distress Relay Acknowledgement calls only, null otherwise.

NOTE 4 Use two least-significant digits of symbol codes in ITU-R M.493.

NOTE 5 Maritime Mobile Service Identifier (MMSI) for the station to be called or the MMSI of the calling station in a received call. For a nine-digit MMSI "0" shall be added as the tenth digit. For calls to a geographic area the area is coded in accordance with ITU-R M.493.

System configuration (wiring) and the Talker ID are used to confirm if the sentence is transmitted or received. The MMSI of the calling station for transmitted calls is inserted automatically in the ITU-R M.493 transmission at the radiotelephone.

NOTE 6 Time (UTC) of position, four digits, hhmm (hours and minutes).

NOTE 7 Telephone number, 16 digits maximum, odd/even information to be inserted by the DSC equipment.

NOTE 8 Latitude/longitude, degrees and minutes, 10 digits, coded in accordance with ITU-R M.493

NOTE 9 Frequency or channel, six or twelve digits, coded in accordance with ITU-R M.493.


NOTE 10 Distress calls only.

NOTE 11 Distress, Distress Acknowledgement, Distress Relay and Distress Relay Acknowledgement calls only.

DSE – Expanded digital selective calling

This sentence immediately follows, without intervening sentences or characters, \$--DSC, \$--DSI or \$--DSR when the DSC expansion field in these sentences is set to "E". It is used to provide data to or receive DSC expansion data from a radiotelephone using digital selective calling in accordance with ITU-R M.821.

\$--DSE,x, x, a,xxxxxxxx, xx,c--c,.....,xx,c--c*hh<CR><LF>

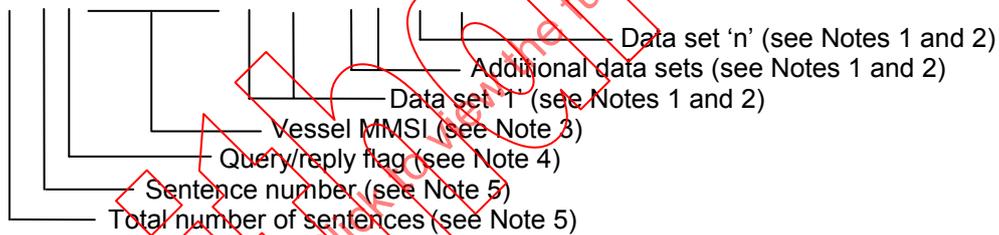

NOTE 1 Data sets consist of two fields. The first field is the code field: the two least significant digits of symbol codes in ITU-R M.821-1, Table 1. The second field is the data field: the additional information required by ITU-R M.821-1, null otherwise. The digits appearing in these fields are the data or commands as specified by ITU-R M.821-1 except for commands, the two least significant digits of Table 3 of ITU-R M.821-1 are preceded by ASCII "C" (HEX 43). A variable number of data sets are allowed, null fields are not required for unused data sets.

NOTE 2 ASCII characters are used to describe text (station name and port of call), not symbols of ITU-R M.821-1, Table 2. When <> (Comma, HEX 2C – a reserved character) is needed, <'> (Apostrophe, HEX 27) is substituted.

NOTE 3 Identical to the address field in the associated \$--DSC, \$--DSI or \$--DSR sentence.

NOTE 4 "Q" = Query. A device is requesting expanded data. Code fields filled as desired, all data fields null.


"R" = Reply. A device is responding with selected expanded data, in response to a query.

"A" = Automatic. A device is transmitting data automatically, not in response to a query request.

NOTE 5 The number of data sets may require the transmission of multiple sentences all containing identical field formats. The first field specifies the number of sentences, minimum value = 1. The second field identifies the order of this sentence (sentence number), minimum value = 1. For efficiency, it is permitted that null fields be used in the additional sentences when the data is unchanged from the first sentence (note that this practice can lead to the incorrect assembly of messages if there is a high risk of loss of sentence).

DSI – DSC transponder initialise

This sentence is used to provide data to a radiotelephone for use in making calls using Digital selective calling in accordance with ITU-R M.825.

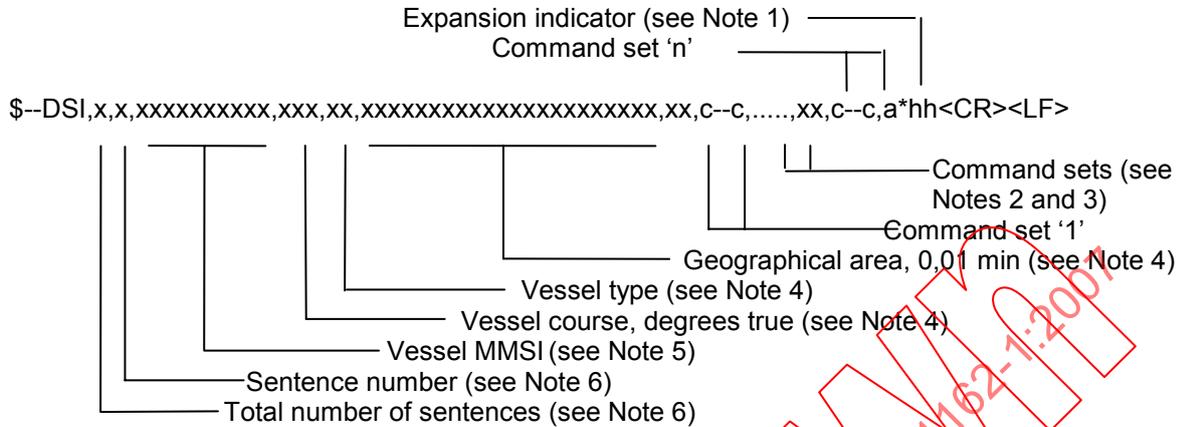

NOTE 1 Expansion indicator = “E”, null otherwise. When set to “E” this sentence is followed by the DSC Expansion sentence \$--DSE, without intervening sentences or characters, as the next transmitted sentence.

NOTE 2 Command sets consist of two fields. The first field is the two least significant digits of symbol codes in ITU-R M.825-3, Table 4, the second field is the additional information required by ITU-R M.825-3, null otherwise. A variable number of command sets is allowed, null fields are not required for unused command sets.

NOTE 3 ASCII characters are used to describe station name and port of call, not symbols of ITU-R M.825-3, Table 1. When <, > (Comma, HEX2C – a reserved character) is needed, <'> (Apostrophe, HEX 27) is substituted.

NOTE 4 All vessels in a geographic area or vessels of a specific type or on a specific course in that area, may be addressed. Code in accordance with ITU-R M.825-3, paragraph 5 and Table 3. These fields shall be null when the MMSI of an individual station is used.


NOTE 5 Maritime Mobile Service Identifiers (MMSI) for the individual station to be called. For a nine-digit MMSI “0” should be added as the tenth digit. This field is null when addressing ships by area. Information relevant to the voyage of a ship may be provided by using the own ship MMSI together with the following command sets:

- 00, followed by the second digit of other ships in ITU-R M.825-3, Table 3 (status).
- 05, followed by a null second field (entering VTS).
- 07, followed by a null second field (leaving VTS).
- 14, followed by a second field beginning “00” or “01” as described in paragraph 8.1.5 of ITU-R M.825-3 (destination).
- 21, followed by a second field containing the next port of call.
- 23, followed by the draught as described in paragraph 8.1.10 of ITU-R M.825-3.

NOTE 6 The number of data sets may require the transmission of multiple sentences all containing identical field formats. The first field specifies the number of sentences, minimum value = 1. The second field identifies the order of this sentence (sentence number), minimum value = 1. For efficiency, it is permitted that null fields be used in the additional sentences when the data is unchanged from the first sentence (note that this practice can lead to the incorrect assembly of messages if there is a high risk of loss of sentence).

DSR – DSC transponder response

This sentence is used to receive data from a radiotelephone using Digital Selective Calling in accordance with ITU-R M.825.

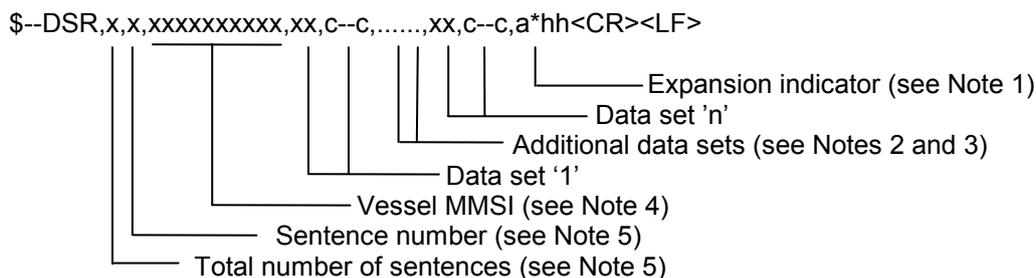

NOTE 1 Expansion indicator = “E”, null otherwise. When set to “E” this sentence is followed by the DSC expansion sentence \$--DSE, without intervening sentences or characters, as the next received sentence.

NOTE 2 Data sets consist of two fields. The first field is the two least significant digits of symbol codes in ITU-R M.825, the second field is the additional information required by ITU-R M.825, null otherwise. A variable number of data sets are allowed, null fields are not required for unused data sets.

NOTE 3 ASCII characters are used to describe station name and port of call, not symbols of ITU-R M.825. When <,> (Comma, HEX 2C – a reserved character) is needed, <'> (Apostrophe, HEX 27) is substituted.

NOTE 4 Maritime Mobile Service Identifier (MMSI) of the station responding. For a nine digit MMSI "0" should be added as the tenth digit.

NOTE 5 The number of data sets may require the transmission of multiple sentences all containing identical field formats. The first field specifies the number of sentences, minimum value = 1. The second field identifies the order of this sentence (sentence number), minimum value = 1. For efficiency, it is permitted that null fields be used in the additional sentences when the data is unchanged from the first sentence (note that this practice can lead to the incorrect assembly of messages if there is a high risk of loss of sentence).


DTM – Datum reference

Local geodetic datum and datum offsets from a reference datum. This sentence is used to define the datum to which a position location, and geographic locations in subsequent sentences, are referenced. Latitude, longitude and altitude offsets from the reference datum, and the selection of the reference datum, are also provided.

Cautionary notes: the datum sentence should be transmitted immediately prior to every positional sentence (e.g. GLL, BWC, WPL) which is referenced to a datum other than WGS84, the datum recommended by IMO.

For all datums the DTM sentence should be transmitted prior to any datum change and periodically at intervals of not greater than 30 s.

\$--DTM,ccc,a,x.x,a,x.x,a, x.x,ccc*hh<CR><LF>

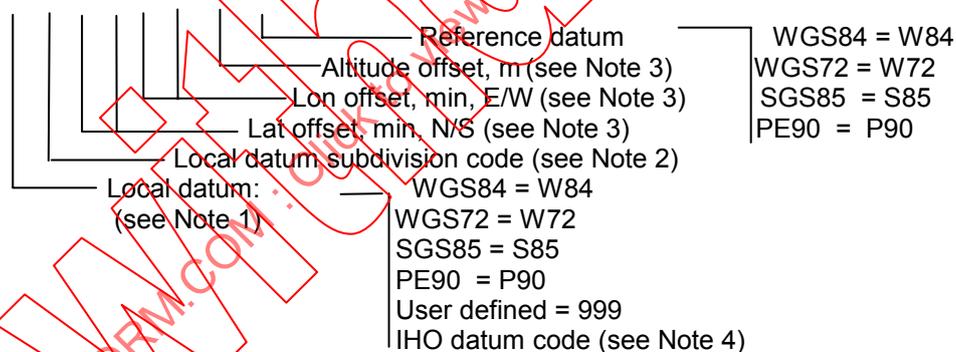

NOTE 1 Three character alpha code for local datum. If not one of the listed earth-centred datums, or 999 for user defined datums, use IHO datum code from International Hydrographic Organisation Publication S-60, Appendices B and C. Null field if unknown. This field should be set to 999 when manual offsets are entered and in use by the position fixing device.

NOTE 2 One character subdivision datum code when available or user defined reference character for user defined datums, null field otherwise. Subdivision character from IHO Publication S-60, Appendices B and C.

NOTE 3 Latitude and longitude offsets are positive numbers, the altitude offset may be negative. Offsets change with position: position in the local datum is offset from the position in the reference datum in the directions indicated:

$$P_{\text{local datum}} = P_{\text{ref datum}} + \text{offset}$$


When field 1 contains a value of 999, these fields may not be null, and should contain the manually entered or user defined offsets.

NOTE 4 Users should be aware that chart transformations based on IHO S60 parameters may result in significant positional errors when applied to chart data.

ETL – Engine telegraph operation status

This sentence indicates engine telegraph position including operating location and sub-telegraph indicator.

\$--ETL,hhmmss.ss,a,xx,xx,a,x *hh<CR><LF>

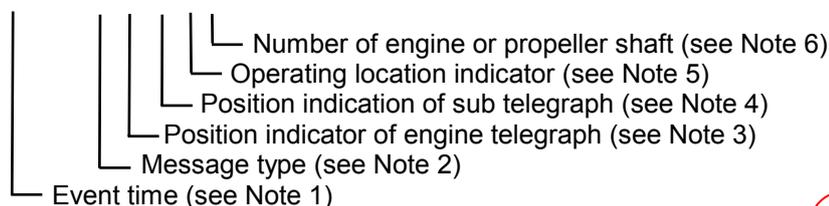

NOTE 1 Event time of condition change. This may be a null field.

NOTE 2 Indicator character to identify message type. This should not be a null field.

O = Order

A = Answer-back

NOTE 3 Numeric characters showing telegraph position. This field is two characters:

00 = STOP ENGINE

01 = [AH] DEAD SLOW

02 = [AH] SLOW

03 = [AH] HALF

04 = [AH] FULL

05 = [AH] NAV. FULL

11 = [AS] DEAD SLOW

12 = [AS] SLOW

13 = [AS] HALF

14 = [AS] FULL

15 = [AS] CRASH ASTERN

NOTE 4 Numeric characters showing sub-telegraph position. This field is two numeric characters:

20 = S/B (Stand-by engine)

30 = F/A (Full away – Navigation full)

40 = F/E (Finish with engine)

NOTE 5 Indication to identify location. This field is single character.

B = Bridge

P = Port wing

S = Starboard wing

C = Engine control room

E = Engine side / local

W = Wing (port or starboard not specified)

If not known, this should be a null field.

NOTE 6 Numeric character to identify engine or propeller shaft controlled by the system. This is numbered from centre-line. This field is single character:

0 = single or on centre-line


Odd = starboard

Even = port

EVE – General event message

This sentence is used to transmit events (e.g. actions by the crew on the bridge) with a time stamp.

\$--EVE,hhmmss.ss,c--c,c--c*hh<CR><LF>

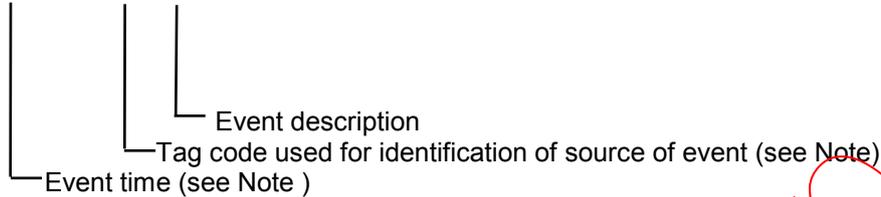


NOTE This may be a null field.

FIR – Fire detection

This sentence indicates fire detection status with data on the specific location.

\$--FIR,a,hhmmss.ss,aa,aa,xxx,xxx,a,a,c--c *hh<CR><LF>

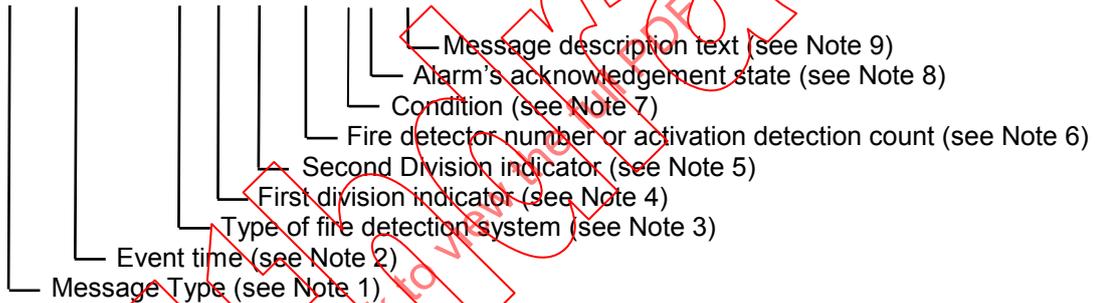

NOTE 1 S: Status for section: Number of faulty and activated condition reported as number in field 6. The section may be a whole section (one or both of the division indicator fields are null) or a sub-section. The status S is normally transmitted at regular intervals. Examples of use are given in Annex E.

E: Status for each fire detector. (E may be used to indicate an event.)

F: Fault in system: Division indicator fields define the section when provided.

D: Disabled: Detector is manually or automatically disabled from giving fire alarms.

NOTE 2 Time of condition change or acknowledgement This may be a null field.

NOTE 3 The field is two fixed characters, see table below.

NOTE 4 First division indicator where detector is located. This field is two characters, see table below.

NOTE 5 Second division indicator where detector is located. This field is three numeric characters, see table below.

NOTE 6 This field is three fixed numeric characters. When the message type field is E this field identifies the detector. When the message type field is S this field contains the number of fire detectors activated. When the message type field is F or D this field is a null field.

NOTE 7 When the message type field is S this field should be a null field. When the message type field is E, F or D this field includes a single character specified by the following:

- A = Activation
- V = Non-activation
- X = Fault (state unknown)

NOTE 8 When the message field type is E or F this field includes a single character specified by the following:

- A = acknowledged
- V = not acknowledged

When the message field type is S or D this should be a null field.

NOTE 9 Descriptive text/sensor location tag. If a sensor location identifier is string type, it is possible to use this field instead of above sensor allocation fields. Maximum number of characters will be limited by maximum sentence length and length of other fields.


Type of fire detection system		First division indicator	Second division indicator
ID	System category		
FD	Generic fire detector, can be any of the below.	Number / letter of zone. This can also be control and monitoring system main unit identifier, for example fire central number/letter.	Loop number. This can also be another control and monitoring sub-system identifier, for example sub-central number.
FH	Heat type detector		
FS	Smoke type detector		
FD	Smoke and heat detector		
FM	Manual call point		
GD	Any gas detector	As above	As above
GO	Oxygen gas detector		
GS	Hydrogen Sulphide gas detector		
GH	Hydro-carbon gas detector		
SF	Sprinkler flow switch	As above	As above
SV	Sprinkler manual valve release		
CO	CO ₂ manual release		
OT	Other	As above	As above

NOTE For units controlled from the fire alarm system (typically all FD, FH, FS, FD and FM), the normal division indicators should be fire zone and loop number.

FSI – Frequency set information

This sentence is used to set frequency, mode of operation and transmitter power level of a radiotelephone, to read out frequencies, mode and power and to acknowledge setting commands.

\$--FSI, xxxxxx, xx(xxx),c,x*hh<CR><LF>

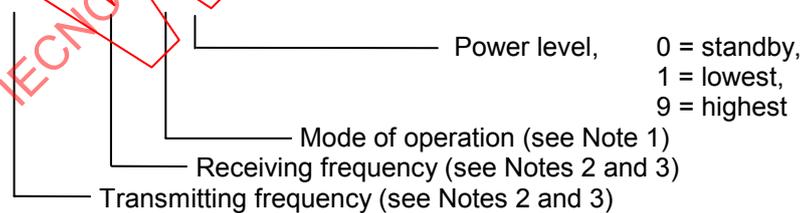

NOTE 1 Mode of operation:

- d = F3E/G3E, simplex, telephone
- e = F3E/G3E, duplex, telephone
- m = J3E, telephone
- o = H3E, telephone
- q = F1B/J2B FEC NBDP, telex/teleprinter
- s = F1B/J2B ARQ NBDP, telex/teleprinter
- t = F1B/J2B, receive only, teleprinter/DSC
- w = F1B/J2B, teleprinter/DSC
- x = A1A Morse, tape recorder
- { = A1A Morse, Morse key/head set
- | = F1C/F2C/F3C, facsimile machine
- null for no information.

NOTE 2 Frequencies to be in 100 Hz increments.

MF/HF telephone channels to have first digit 3, followed by ITU channel numbers with leading zeros as required. MF/HF teletype channels to have first digit 4; the second and third digit give the frequency bands, and the fourth to sixth digits ITU channel numbers; each with leading zeros as required. VHF channels to have the first digit 9 followed by zero. The next number is "1" indicating the ship station's transmit frequency is being used as a simplex channel frequency, or "2" indicating the coast station's transmit frequency is being used as a simplex channel frequency, "0" otherwise. The remaining three numbers are the VHF channel numbers with leading zeros as required.

NOTE 3 For paired frequencies, only the transmitting frequency needs to be included; null for receiving frequency field. For receive frequencies only, the transmitting frequency field should be null.


GBS – GNSS satellite fault detection

This sentence is used to support receiver autonomous integrity monitoring (RAIM). Given that a GNSS receiver is tracking enough satellites to perform integrity checks of the positioning quality of the position solution, a message is needed to report the output of this process to other systems to advise the system user. With the RAIM in the GNSS receiver, the receiver can isolate faults to individual satellites and not use them in its position and velocity calculations. Also, the GNSS receiver can still track the satellite and easily judge when it is back within tolerance.

This sentence shall be used for reporting this RAIM information. To perform this integrity function, the GPS receiver should have at least two observables in addition to the minimum required for navigation. Normally, these observables take the form of additional redundant satellites.

If only GPS, GLONASS, etc. is used for the reported position solution, the talker ID is GP, GL, etc. and the errors pertain to the individual system. If satellites from multiple systems are used to obtain the reported position solution, the talker ID is GN and the errors pertain to the combined solution.

\$--GBS, hhmss.ss, x.x x.x, x.x, xx, x.x, x.x, x.x *hh <CR><LF>

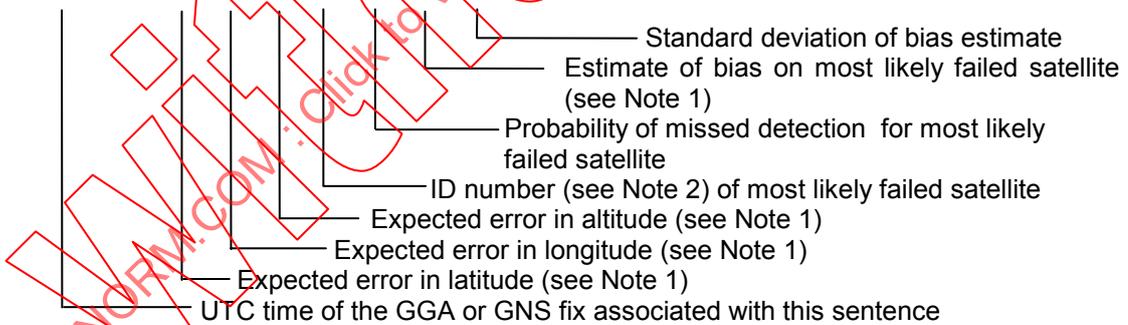

NOTE 1 Expected error in metres due to bias, with noise = 0.

NOTE 2 Satellite ID numbers. To avoid possible confusion caused by repetition of satellite ID numbers when using multiple satellite systems, the following convention has been adopted:

- a) GPS satellites are identified by their PRN numbers, which range from 1 to 32.
- b) The numbers 33-64 are reserved for WAAS satellites. The WAAS system PRN numbers are 120-138. The offset from WAAS SV ID to WAAS PRN number is 87. A WAAS PRN number of 120 minus 87 yields the SV ID of 33. The addition of 87 to the SV ID yields the WAAS PRN number.
- c) The numbers 65 – 96 are reserved for GLONASS satellites. GLONASS satellites are identified by 64+ satellite slot numbers. The slot numbers are 1 through 24 for the full GLONASS constellation of 24 satellites, thus giving a range of 65 through 88. The numbers 89 through 96 are available if slot numbers above 24 are allocated to on-orbit spares.


GEN – Generic binary information

This sentence provides a means of transmitting generic binary information (e.g. lamp display status). The sentence is designed for efficient use of the bandwidth.

In general, the proper decoding and interpretation of binary data will require access to information developed and maintained outside of this standard. This standard contains information that describes how the data should be coded, decoded, and structured. The specific meaning of the binary data is obtained outwith this standard.

The packed generic binary data is "assumed to be" a linear array of 2^{16} (65536) 16 bit entities. The GEN sentence specify new content for up to eight consecutive 16-bit entities indexed into the array by the first field.

\$--GEN,hhhh,hhmmss.ss,hhhh,.....,hhhh*hh<CR><LF>

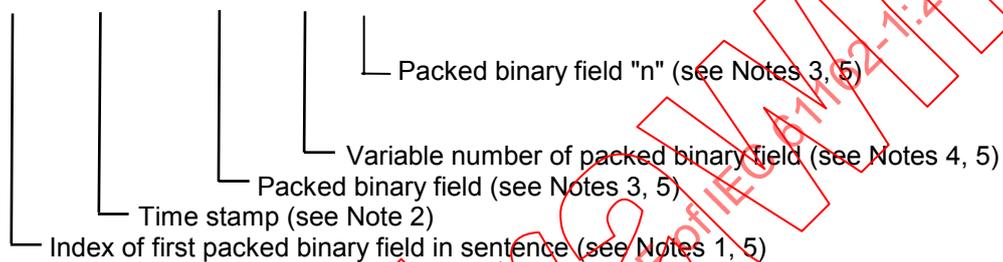

NOTE 1 Index of first group in GEN sentence. Address is represented in hexadecimal format in HEX range 0000 through FFFF. The 16-bit address is formatted as fixed 4-character HEX field.

NOTE 2 This may be a null field.


NOTE 3 The packed binary field is represented as a 16-bit value. The 16-bit value is formatted as fixed 4-character HEX field. This may be a null field.

NOTE 4 Optional repeated packed binary field. Each repeat increases the index by one. Up to seven repetitions yielding a total of 128 bits per sentence is possible.

NOTE 5

a) The 4-character HEX field values used in this sentence are interpreted as follows:

hhhh = (highest bit) [15][14][13][12]...[3][2][1][0] (lowest bit)




b) The example below shows 10 groups of status information. The 4-character HEX field value of 0123 for the first packed generic status group at HEX address 0000 is interpreted as a 16-bit value with bits 0, 1, 5 and 8 being set. The status from the source is sent in two sentences:

```
$VRGEN,0000,011200.00,0123,4567,89AB,CDEF,0123,4567,89AB,CDEF*64
```


```
$VRGEN,0008,011200.00,0123,4567*6C
```

GGA – Global positioning system (GPS) fix data

Time, position and fix-related data for a GPS receiver.

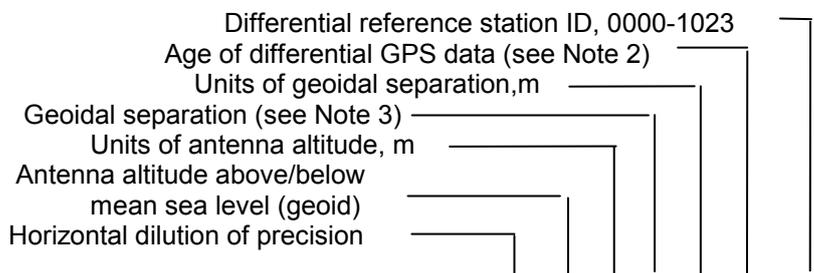

\$--GGA, hhhmss.ss, llll.ll, a, yyyy.yy, a, x, xx, x.x, x.x, M, x.x, M, x.x, xxxx*hh<CR><LF>

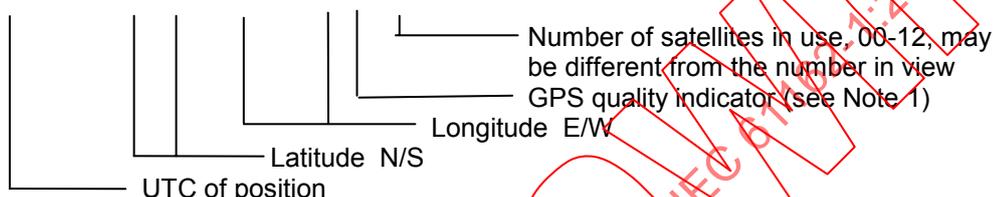

NOTE 1 All GPS quality indicators in headings 1 through 8 are considered "valid". The heading "0" is the only "invalid" indicator. The GPS quality indicator field should not be a null field.

- 0 = fix not available or invalid
- 1 = GPS SPS mode
- 2 = differential GPS, SPS mode
- 3 = GPS PPS mode
- 4 = Real Time Kinematic. Satellite system used in RTK mode with fixed integers
- 5 = Float RTK. Satellite system used in RTK mode with floating solution
- 6 = Estimated (dead reckoning) mode
- 7 = Manual input mode
- 8 = Simulator mode


NOTE 2 Time in seconds since last SC104 type 1 or 9 update, null field when DGPS is not used.

NOTE 3 Geoidal separation: the difference between the WGS-84 earth ellipsoid surface and mean sea level (geoid) surface, " - " = mean sea level surface below the WGS-84 ellipsoid surface.

GLC – Geographic position – LORAN-C

LORAN-C GRI, status and time difference (TD) lines of position for present vessel position.

\$ -- GLC, xxxx, x.x, a, x.x, a, x.x, a, x.x, a, x.x, a, x.x, a*hh<CR><LF>

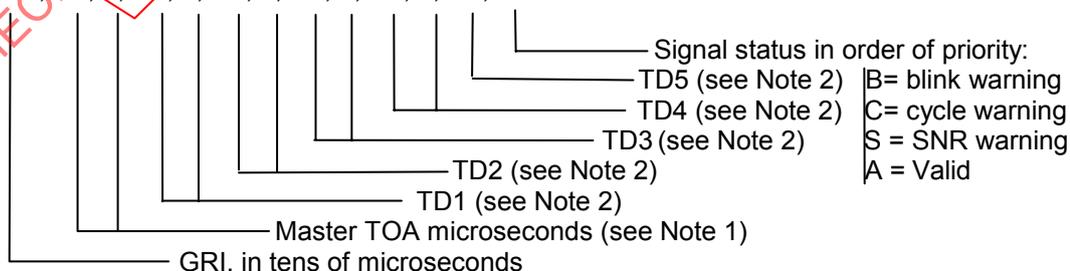


NOTE 1 Master TOA provides for direct ranging operation. It may be the actual range to the master in microseconds, or be offset and track the arrival of the master signal.

NOTE 2 Time difference numbers in microseconds are in the LORAN-C coding delay order with null fields used when values are unavailable.

GLL – Geographic position – latitude/longitude

Latitude and longitude of vessel position, time of position fix and status.

\$-GLL, IIII.II, a, yyy.yy, a, hhmmss.ss, A, a *hh<CR><LF>

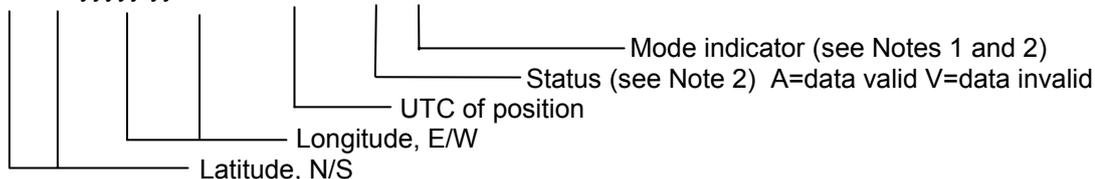

NOTE 1 Positioning system mode indicator:

A = Autonomous
 D = Differential
 E = Estimated (dead reckoning)
 M = Manual input
 S = Simulator
 N = Data not valid

NOTE 2 The mode indicator field supplements the status field (field 6). The status field should be set to V = invalid for all values of operating mode except for A = Autonomous and D = Differential. The positioning system mode indicator and status fields should not be null fields.


GMP – GNSS map projection fix data

This sentence supports land use and provide map projection co-ordinates of any GNSS system.

Fix data for single or combined satellite navigation systems (GNSS) in grid (or local) co-ordinates expressed in the given map projection. This sentence provides fix data for GPS, GLONASS, possible future satellite systems, and systems combining these. This sentence could be used with the talker identification of GP for GPS, GL for GLONASS, GN for GNSS combined systems, as well as future identifiers. Some fields may be null fields for certain applications, as described below.

If a GNSS receiver is capable simultaneously of producing a position using combined satellite systems, as well as a position using only one of the satellite systems, then separate \$GPGMP, \$GLGMP, etc. sentences may be used to report the data calculated from the individual systems.

If a GNSS receiver is set up to use more than one satellite system, but for some reason one or more of the systems are not available, then it may continue to report the positions using \$GNGMP, and use the mode indicator to show which satellite systems are being used.

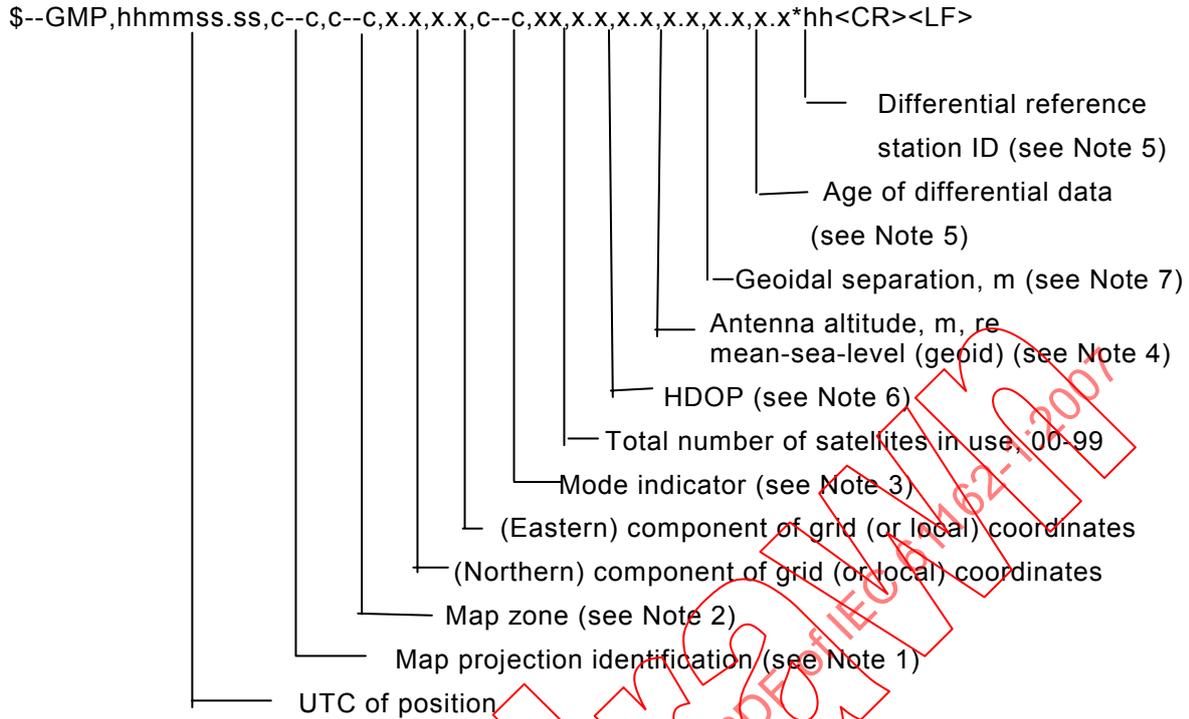

NOTE 1 Map projection identification. A variable length valid character field type consisting of 3 characters as follows: UTM = Universal Transverse Mercator, LOC = Local Coordinate System.

NOTE 2 Map zone. A variable length valid character field type containing of the map projection zone. A typical map zone field might contain M20 for a map projection identification of UTM.

NOTE 3 Mode indicator. A variable length valid character field type with the first two characters currently defined. The first character indicates the use of GPS satellites; the second character indicates the use of GLONASS satellites. If another satellite system is added to the standard, the mode indicator will be extended to three characters, new satellite systems should always be added on the right, so the order of characters in the mode indicator is: GPS, GLONASS, other satellite systems in the future. The characters shall take one of the following values:

- N = No fix. Satellite system not used in position fix, or fix not valid
- A = Autonomous. Satellite system used in non-differential mode in position fix
- D = Differential. Satellite system used in differential mode in position fix
- P = Precise. Satellite system used in precision mode. Precision mode is defined as: no deliberate degradation (such as selective availability) and higher resolution code (P-code) is used to compute position fix
- R = Real Time Kinematic. Satellite system used in RTK mode with fixed integers
- F = Float RTK. Satellite system used in real time kinematic mode with floating solution
- E = Estimated (dead reckoning) mode
- M = Manual input mode
- S = Simulator mode

The mode indicator should not be a null field.

NOTE 4 Antenna altitude. This is referenced to mean-sea-level for UTM map projections or to local coordinates if LOC map projections are specified.

NOTE 5 Age of differential data and differential reference station ID:

- a) When the talker is GN and more than one of the satellite systems are used in differential mode, then the "age of differential data" and "differential reference station ID" fields should be null. In this case, the "age of differential data" and "differential reference station ID" fields should be provided in following GMP sentences with talker IDs of GP, GL, etc. These following GMP messages should have the map projection identification, map zone, X coordinate, Y coordinate, altitude, geoidal separation, mode, and HDOP fields null. This indicates to the listener that the field is supporting a previous \$GNGMP sentence with the same time tag. The "number of satellites" field may be used in these following sentences to denote the number of satellites used from that satellite system.

Example: A combined GPS/GLONASS receiver using only GPS differential corrections has the following GNS sentence sent.

\$GNGMP,122310.2,UTM,M20,12345.56,65543.21,DA,14,0.9,1005.543,6.5,5.2,23*75<CR><LF>

Example: A combined GPS/GLONASS receiver using both GPS differential corrections and GLONASS differential corrections may have the following three GNS sentences sent in a group.

\$GNGMP,122310.2,UTM,M20,12345.56,65543.21,DD,14,0.9,1005.543,6.5,*,*58<CR><LF>

\$GPGMP,122310.2,,,,,,7,,,,,5.2,23*4D<CR><LF>

\$GLGMP,122310.2,,,,,,7,,,,,3.0,23*55<CR><LF>

The differential reference station ID may be the same or different for the different satellite systems.

b) Age of differential data:

For GPS differential data:

This value is the average age of the most recent differential corrections in use. When only RTCM SC104 Type 1 corrections are used, the age is that of the most recent Type 1 correction. When RTCM SC104 Type 9 corrections are used solely, or in combination with Type 1 corrections, the age is the average of the most recent corrections for the satellites used. Null field when differential GPS is not used.

For GLONASS differential data:

This value is the average age of the most recent differential corrections in use. When only RTCM SC104 Type 31 corrections are used, the age is that of the most recent Type 31 correction. When RTCM SC104 Type 34 corrections are used solely, or in combination with Type 31 corrections, the age is the average of the most recent corrections for the satellites used. Null field when differential GLONASS is not used.

NOTE 6 HDOP calculated using all the satellites (GPS, GLONASS, and any future satellites) used in computing the solution reported in each GMP sentence.


NOTE 7 Geoidal separation: the difference between the earth ellipsoid surface and mean-sea-level (geoid) surface defined by the reference datum used in the position solution, "-" = mean-sea-level surface below ellipsoid. The reference datum may be specified in the DTM sentence.

GNS – GNSS fix data


Fix data for single or combined satellite navigation systems (GNSS). This sentence provides fix data for GPS, GLONASS, possible future satellite systems and systems combining these. This sentence could be used with the talker identification of GP for GPS, GL for GLONASS, GN for GNSS combined systems, as well as future identifiers. Some fields may be null fields for certain applications, as described below.

If a GNSS receiver is capable simultaneously of producing a position using combined satellite systems, as well as a position using only one of the satellite systems, then separate \$GPGNS, \$GLGNS, etc. sentences may be used to report the data calculated from the individual systems.

If a GNSS receiver is set up to use more than one satellite system, but for some reason one or more of the systems are not available, then it may continue to report the positions using \$GNGNS, and use the mode indicator to show which satellite systems are being used.

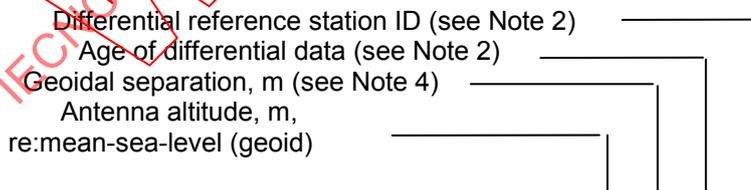

\$-- GNS, hhhmss.ss, llll.ll, a, yyyy.yy, a, c--c,xx,x.x,x.x,x.x,x.x,x.x,x.x *hh<CR><LF>

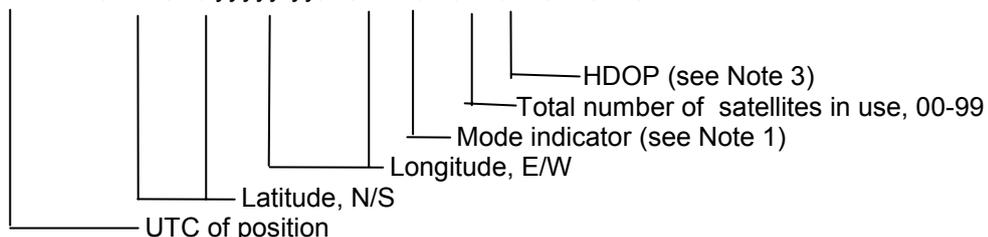

NOTE 1 Mode Indicator. A variable length valid character field type with the first two characters currently defined. The first character indicates the use of GPS satellites, the second character indicates the use of GLONASS satellites. If another satellite system is added to the standard, the mode indicator will be extended to three characters; new satellite systems shall always be added to the right, so the order of characters in the mode indicator is: GPS, GLONASS, other satellite systems.

The characters should take one of the following values:

- N = No fix. Satellite system not used in position fix, or fix not valid.
- A = Autonomous. Satellite system used in non-differential mode in position fix.
- D = Differential. Satellite system used in differential mode in position fix.
- P = Precise. Satellite system used in precision mode. Precision mode is defined as: no deliberate degradation (such as selective availability), and higher resolution code (P-code) is used to compute position fix.
- R = Real time kinematic. Satellite system used in RTK mode with fixed integers.
- F = Float RTK. Satellite system used in real time kinematic mode with floating solution.
- E = Estimated (dead reckoning) mode.
- M = Manual input mode.
- S = Simulator mode.

The mode indicator should not be a null field.

NOTE 2 Age of differential data and differential reference station ID

a) When the talker is GN and more than one of the satellite systems is used in differential mode, then the "age of differential data" and "differential reference station ID" fields should be null. In this case, the "age of differential data" and "differential reference station ID" fields should be provided in following GNS messages with talker IDs of GP, GL, etc. These following GNS messages should have the latitude, N/S, longitude, E/W, altitude, geoidal separation, mode and HDOP fields null. This indicates to the listener that the field is supporting a previous \$GNGNS message with the same time tag. The "number of satellites" field may be used in these following messages to denote the number of satellites used from that satellite system.

Example: A combined GPS/GLONASS receiver using only GPS differential corrections has the following GNS sentence sent:

```
$GNGNS,122310.2,3722.425671,N,12258.856215,W,DA,14.0,9,1005.543,6.5,5,2,23*59<CR><LF>
```

Example: A combined GPS/GLONASS receiver using both GPS differential corrections and GLONASS differential corrections may have the following three GNS sentences sent in a group:

```
$GNGNS,122310.2,3722.425671,N,12258.856215,W,DD,14.0,9,1005.543,6.5,,*74<CR><LF>
$GPGNS,122310.2,,,,,7,,,,5.2,23*4D<CR><LF>
$GLGNS,122310.2,,,,,7,,,,3.0,23*55<CR><LF>
```

The differential reference station ID may be the same or different for the different satellite systems

b) Age of differential data

For GPS differential data: this value is the average of the most recent differential corrections in use. When only RTCM SC104 Type 1 corrections are used, the age is that of the most recent Type 1 correction. When RTCM SC104 Type 9 corrections are used solely, or in combination with Type 1 corrections, the age is the average of the most recent corrections for the satellites used. Null field when differential GPS is not used.

For GLONASS differential data: this value is the average age of the most recent differential corrections in use. When only RTCM SC104 Type 31 corrections are used, the age is that of the most recent Type 31 correction. When RTCM SC104 Type 34 corrections are used solely, or in combination with Type 31 corrections, the age is the average of the most recent corrections for the satellites used. Null field when differential GLONASS is not used.

NOTE 3 HDOP calculated using all the satellites (GPS, GLONASS and any future satellites) used in computing the solution reported in each GNS sentence.

NOTE 4 Geoidal separation is the difference between the earth ellipsoid surface and mean-sea-level (geoid) surface defined by the reference datum used in the position solution, "-" = mean-sea-level surface below ellipsoid surface. The reference datum may be specified in the DTM sentence.


GRS – GNSS range residuals

This sentence is used to support receiver autonomous integrity monitoring (RAIM). Range residuals can be computed in two ways for this process. The basic measurement integration cycle of most navigation filters generates a set of residuals and uses these to update the position state of the receiver. These residuals can be reported with GRS, but because of the fact that these were used to generate the navigation solution, they should be re-computed using the new solution in order to reflect the residuals for the position solution in the GGA or GNS sentence. The MODE field should indicate which computation method was used.

An integrity process that uses these range residuals would also require GGA or GNS, GSA and GSV sentences to be sent.

If only GPS, GLONASS, etc. is used for the reported position solution, the talker ID is GP, GL, etc. and the range residuals pertain to the individual system. If GPS, GLONASS, etc. are combined to obtain the position solution, multiple GRS messages are produced, one with the GPS satellites, another with the GLONASS satellites, etc. Each of these GRS sentences shall have talker ID "GN", to indicate that the satellites are used in a combined solution. It is important to distinguish the residuals from those that would be produced by a GPS-only, GLONASS-only, etc. position solution. In general, the residuals for a combined solution will be different from the residual for a GPS-only, GLONASS-only, etc. solution.

\$--GRS, hhmmss.ss,x,x.x,x.x,x.x,x.x,x.x,x.x,x.x,x.x,x.x,x.x,x.x,x.x,x.x *hh<CR><LF>

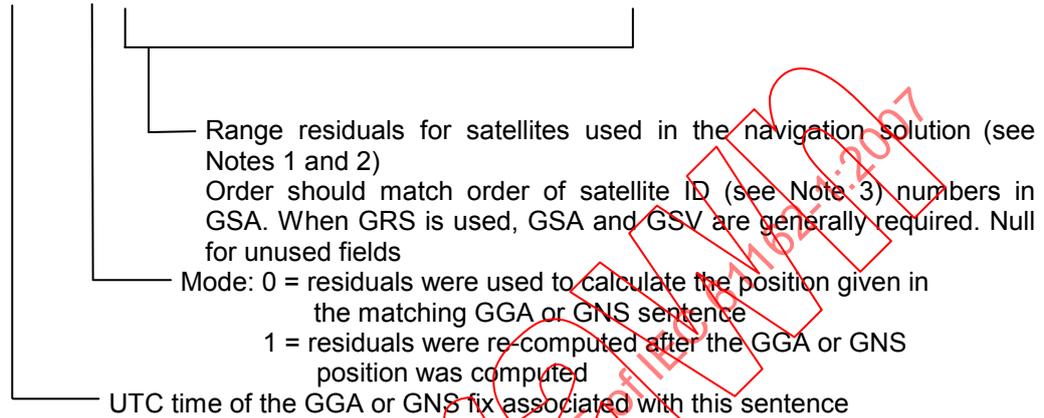

NOTE 1 If the range residual exceeds ±99,9 m, then the decimal part is dropped, resulting in an integer (-103,7 becomes -103). The maximum value for this field is ±999.


NOTE 2 The sense or sign of the range residual is determined by the order of parameters used in the calculation. The expected order is as follows: range residual = calculated range - measured range.

NOTE 3 When multiple GRS messages are being sent, their order of transmission should match the order of corresponding GSA messages. Listeners should keep track of pairs of GSA and GRS sentences and discard data if pairs are incomplete.

GSA – GNSS DOP and active satellites

GNSS receiver operating mode, satellites used in the navigation solution reported by the GGA or GNS sentences, and DOP values. If only GPS, GLONASS, etc. are used for the reported position solution, the talker ID is GP, GL, etc. and the DOP values pertain to the individual system. If GPS, GLONASS, etc. are combined to obtain the reported position solution, multiple GSA sentences are produced, one with the GPS satellites, another with the GLONASS satellites, etc. Each of these GSA sentences shall have talker ID GN, to indicate that the satellites are used in a combined solution and each shall have the PDOP, HDOP and VDOP for the combined satellites used in the position.

\$--GSA, a,x,xx,xx,xx,xx,xx,xx,xx,xx,xx,xx,xx,x.x,x.x,x.x*hh<CR><LF>

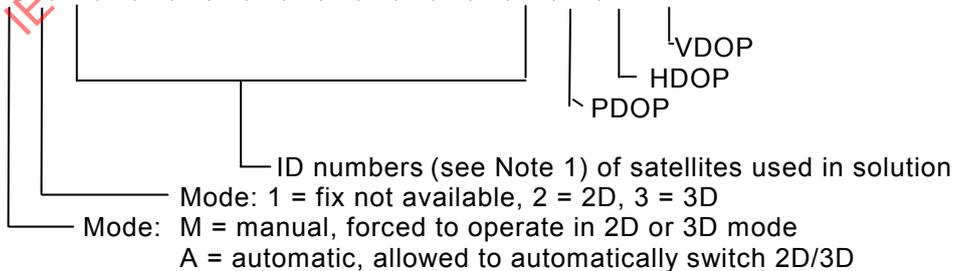

NOTE Satellite ID numbers. To avoid possible confusion caused by repetition of satellite ID numbers when using multiple satellite systems, the following convention has been adopted:


- a) GPS satellites are identified by their PRN numbers, which range from 1 to 32.
- b) The numbers 33-64 are reserved for WAAS satellites. The WAAS system PRN numbers are 120-138. The offset from WAAS SV ID to WAAS PRN number is 87. A WAAS PRN number of 120 minus 87 yields the SV ID of 33. The addition of 87 to the SV ID yields the WAAS PRN number.

- c) The numbers 65 – 96 are reserved for GLONASS satellites. GLONASS satellites are identified by 64+ satellite slot numbers. The slot numbers are 1 through 24 for the full GLONASS constellation of 24 satellites, thus giving a range of 65 through 88. The numbers 89 through 96 are available if slot numbers above 24 are allocated to on-orbit spares.

GST – GNSS pseudorange noise statistics

This sentence is used to support receiver autonomous integrity monitoring (RAIM). Pseudorange measurement noise statistics can be translated in the position domain in order to give statistical measures of the quality of the position solution. If only GPS, GLONASS, etc. is used for the reported position solution, the talker ID is GP, GL, etc. and the error data pertain to the individual system. If satellites from multiple systems are used to obtain the position solution, the talker ID is GN and the errors pertain to the combined solution.

\$--GST, hhmss.ss, x.x, x.x, x.x, x.x, x.x, x.x, x.x*hh<CR><LF>

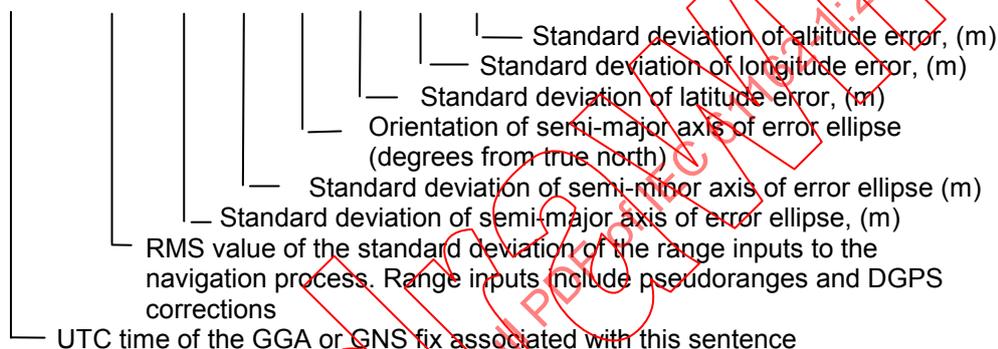


GSV – GNSS satellites in view

Number of satellites (SV) in view, satellite ID numbers, elevation, azimuth and SNR value. Four satellites maximum per transmission, additional satellite data sent in second or third message. Total number of messages being transmitted and the number of the message being transmitted is indicated in the first two fields.

If multiple GPS, GLONASS, etc. satellites are in view, use separate GSV sentences with talker ID GP to show the GPS satellites in view, and talker GL to show the GLONASS satellites in view, etc. The GN identifier shall not be used with this sentence.

\$--GSV, x, x, xx, xx, xx, xxx, xx....., xx, xx, xxx, xx*hh<CR><LF>

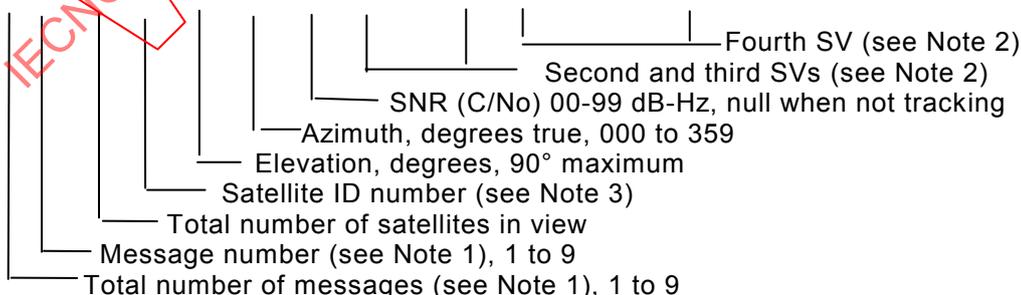

NOTE 1 Satellite information may require the transmission of multiple messages, all containing identical field formats. The first field specifies the total number of messages, minimum value = 1. The second field identifies the order of this message (message number), minimum value = 1. For efficiency, it is recommended that null fields be used in the additional sentences where the data is unchanged from the first sentence.

NOTE 2 A variable number of "satellite ID-elevation-azimuth-SNR" sets are allowed up to a maximum of four sets per message. Null fields are not required for unused sets when less than four sets are transmitted.


NOTE 3 Satellite ID numbers. To avoid possible confusion caused by repetition of satellite ID numbers when using multiple satellite systems, the following convention has been adopted:

- a) GPS satellites are identified by their PRN numbers, which range from 1 to 32.
- b) The numbers 33-64 are reserved for WAAS satellites. The WAAS system PRN numbers are 120-138. The offset from WAAS SV ID to WAAS PRN number is 87. A WAAS PRN number of 120 minus 87 yields the SV ID of 33. The addition of 87 to the SV ID yields the WAAS PRN number.
- c) The numbers 65-96 are reserved for GLONASS satellites. GLONASS satellites are identified by 64+satellite slot number. The slot numbers are 1 through 24 for the full GLONASS constellation of 24 satellites, this gives a range of 65 through 88. The numbers 89 through 96 are available if slot numbers above 24 are allocated to on-orbit spares.

HDG – Heading, deviation and variation

Heading (magnetic sensor reading), which if corrected for deviation will produce magnetic heading, which if offset by variation will provide true heading.

\$--HDG, x.x, x.x, a, x.x, a*hh<CR><LF>

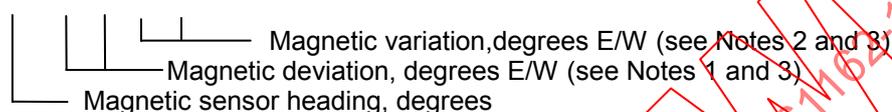

- NOTE 1 To obtain magnetic heading: add easterly deviation (E) to magnetic sensor reading;
subtract westerly deviation (W) from magnetic sensor reading.
- NOTE 2 To obtain true heading: add easterly variation (E) to magnetic heading;
subtract westerly variation (W) from magnetic heading.
- NOTE 3 Variation and deviation fields will be null fields if unknown.

HDT – Heading true

Actual vessel heading in degrees true produced by any device or system producing true heading.

NOTE This is a deprecated sentence which has been replaced by THS.


\$--HDT, x.x, T*hh<CR><LF>



HMR – Heading monitor receive

Heading monitor receive: this sentence delivers data from the sensors selected by HMS from a central data collecting unit and delivers them to the heading monitor.

\$-HMR,c--c,c--c,x.x,x.x,A,x.x,A,a,x.x,a,x.x,A, a, x.x,a,x.x,a*hh<CR><LF>

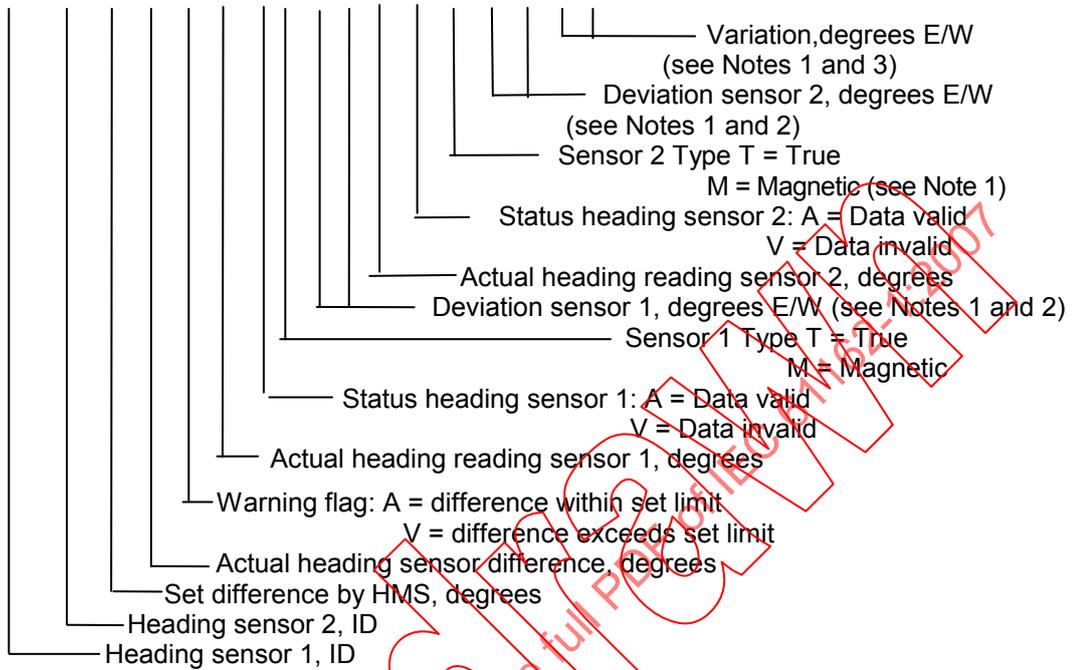

NOTE 1 For magnetic sensors used, the deviation for the sensors and the variation of the area should be obtained; otherwise, or if unknown, null fields.


NOTE 2 To obtain magnetic heading: add Easterly deviation (E) to magnetic sensor reading; subtract Westerly deviation (W) from magnetic sensor reading.

NOTE 3 To obtain true heading: add Easterly variation (E) to magnetic heading; subtract Westerly variation (W) from magnetic heading.

HMS – Heading monitor set

Set heading monitor: two heading sources may be selected and the permitted maximum difference may then be set.

\$-HMS,c--c,c--c,x.x*hh<CR><LF>

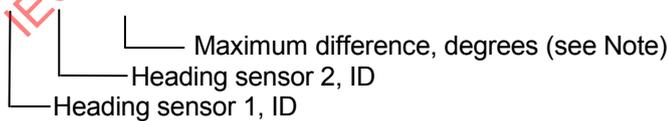


NOTE Maximum difference between both sensors which is accepted.

HSC – Heading steering command

Commanded heading to steer vessel.


\$--HSC, x.x, T, x.x, M*hh<CR><LF>



HSS – Hull stress surveillance systems

This sentence indicates the hull stress surveillance system measurement data.

\$--HSS,c—c,x.x,A*hh<CR><LF>

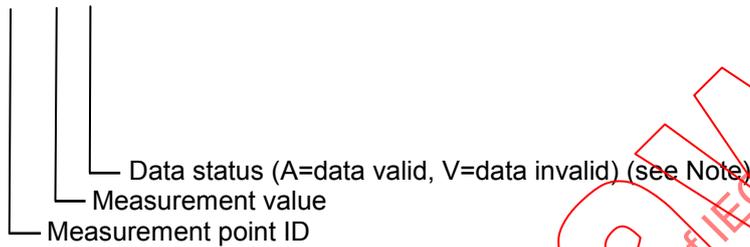


NOTE This field should not be a null field.

HTC – Heading/track control command

HTD – Heading /track control data

HTC is a command sentence. Provides input to (HTC) a heading controller to set values, modes and references; or provides output from (HTD) a heading controller with information about values, modes and references in use.

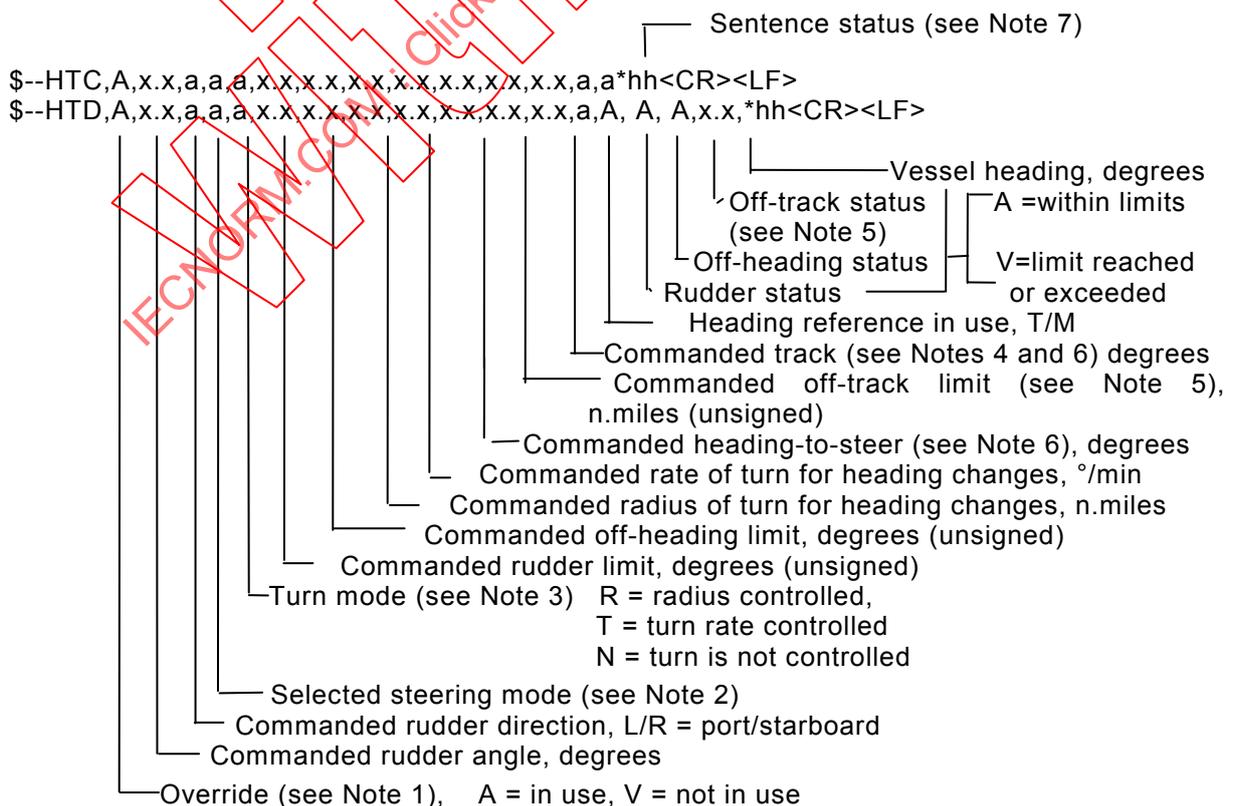

NOTE 1 Override provides direct control of the steering gear. In the context of this sentence, override means a temporary interruption of the selected steering mode. In this period, steering is performed by special devices. As long as field "override" is set to "A", both fields "selected steering mode" and "turn mode" should be ignored by the heading/track controller and its computing parts should operate as if manual steering was selected.

NOTE 2 All steering modes represent steering as selected by a steering selector switch or by a preceding HTC sentence. Priority levels of these inputs and usage/acceptance of related fields are to be defined and documented by the manufacturer.

Selected steering modes may be:

M = Manual steering. The main steering system is in use.

S = Stand-alone (heading control). The system works as a stand-alone heading controller. Field "commanded heading to steer" is not accepted as an input.

H = Heading control. Input of commanded heading to steer is from an external device and the system works as a remotely controlled heading controller. Field "commanded heading to steer" is accepted as an input.

T = Track control. The system works as a track controller by correcting a course received in field "commanded track". Corrections are made based on additionally received track errors (e.g. from sentence XTE, APB, ...).

R = Rudder control. Input of commanded rudder angle and direction from an external device. The system accepts values given in fields "commanded rudder angle" and "commanded rudder direction" and controls the steering by the same electronic means as used in modes S, H or T.

NOTE 3 Turn mode defines how the ship changes heading when in steering modes S, H or T according to the selected turn mode values given in fields "commanded radius of turn" or "commanded rate of turn". With turn mode set to "N", turns are not controlled but depend upon the ship's manoeuvrability and applied rudder angles only.

NOTE 4 Commanded track represents the course line (leg) between two waypoints. It may be altered dynamically in a track-controlled turn along a pre-planned radius.

NOTE 5 Off-track status can be generated if the selected steering mode is "T".

NOTE 6 Data in these fields should be related to the heading reference in use.

NOTE 7 This field is used to indicate a sentence that is a status report of current settings or a configuration command changing settings. This field should not be null.

R = Sentence is a status report of current settings (use for a reply to a query).


C = Sentence is a configuration command to change settings. A sentence without "C" is not a command.

LCD – LORAN-C signal data

Signal-to-noise ratio and pulse shape (ECD) data for LORAN-C signals.

Secondary S5 (see Note) relative ECD, 000 to 999
Secondary S5 (see Note) relative SNR, 000 to 999
(unsigned numbers)

\$--LCD, xxxx,xxx,xxx,xxx,xxx,xxx,xxx,xxx,xxx,xxx,xxx,xxx*hh<CR><LF>

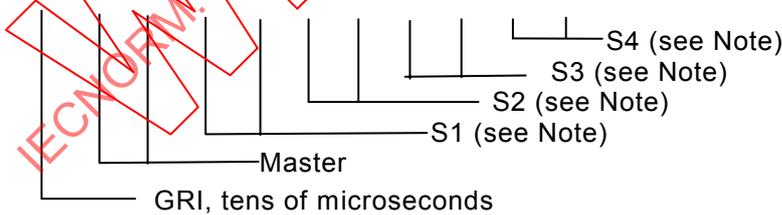


NOTE Data is in the LORAN-C coding delay order, with null fields used when values are unavailable.

LR1 – AIS long-range reply sentence 1

The LR1 sentence identifies the destination for the reply and contains the information items requested by the “A” function identification character (see the LRF sentence).

\$--LR1,x,xxxxxxxx,xxxxxxxx,c—c,c—c,xxxxxxxx*hh<CR><LF>

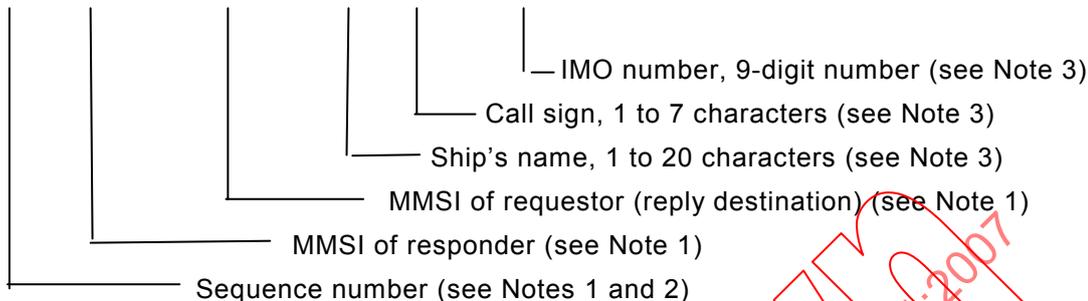

NOTE 1 The three fields, sequence number, MMSI of responder and MMSI of requestor are always provided.


NOTE 2 The sequence number should be the same number as the sequence number of the LRI and LRF sentences that initiated this reply.

NOTE 3 The characters that can be used are listed in the ITU-R M.1371, 6-bit ASCII Table 14. Some of the acceptable characters in this 6-bit ASCII table are the reserved characters within this standard IEC 61162-1, Table 1. These characters should be represented using the “A” method (see 7.1.3). The individual information items should be a null field if any of the following three conditions exist:


- the information item was not requested;
- the information item was requested but is not available;
- the information item was requested but is not being provided.

LR2 – AIS long-range reply sentence 2

The LR2-sentence contains the information items requested by the “B, C, E and F” function identification characters, (see the LRF sentence)

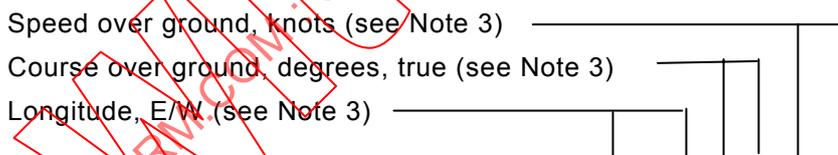

\$--LR2,x,xxxxxxxx,xxxxxxxx,hmms.ss,llll.ll,a,yyyy.yy,a,x.x,T,x.x,N*hh<CR><LF>

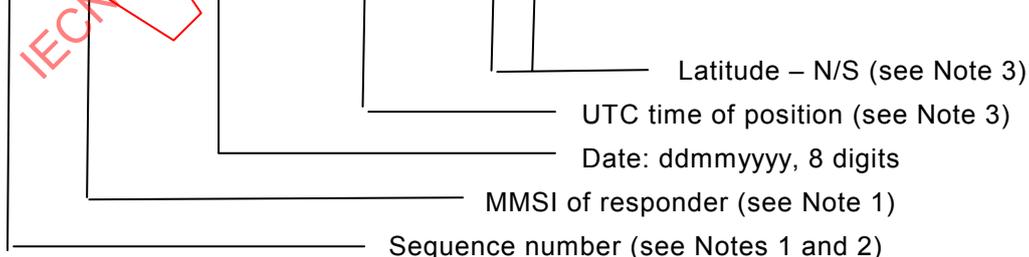

NOTE 1 The two fields, sequence number and MMSI of responder, are always provided.


NOTE 2 The sequence number should be the same as the sequence number of the LRI and LRF sentences that initiated this reply.

NOTE 3 This field should be null if any of the following three conditions exist:

- the information item was not requested;
- the information item was requested but is not available;
- the information item was requested but is not being provided.

LR3 – AIS long-range reply sentence 3

The LR3 sentence contains the information items requested by the “I, O, P, U and W” function identification character (see the LRF sentence).

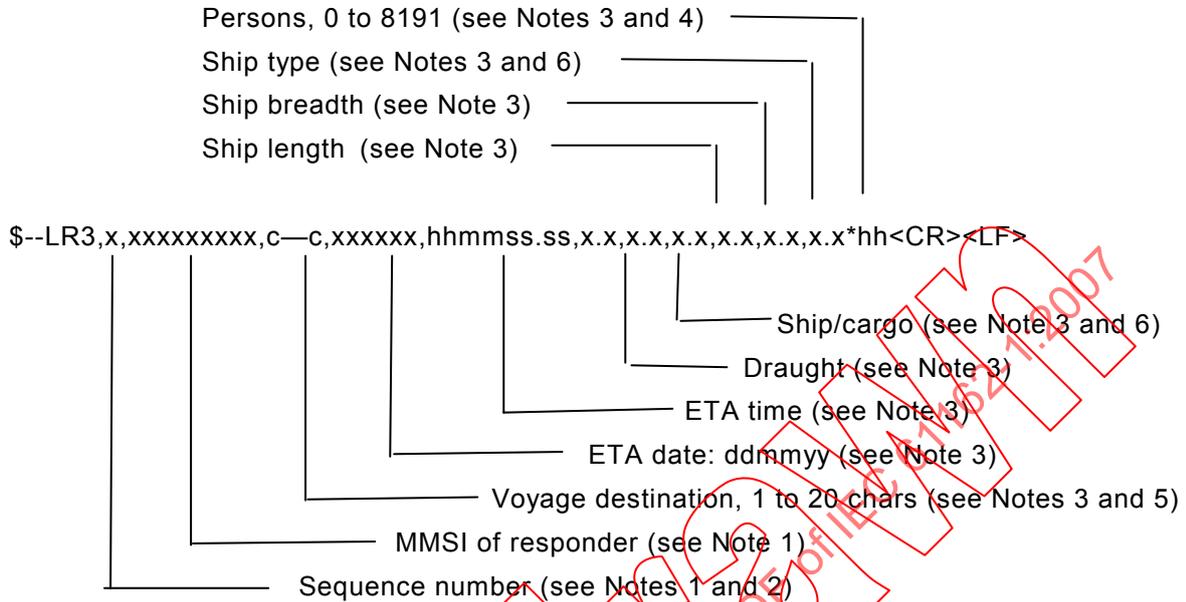


- NOTE 1 The two fields, sequence number and MMSI of responder, are always provided.
- NOTE 2 The sequence number should be the same as the sequence number of the LRI and LRF sentences that initiated this reply.
- NOTE 3 This field should be null if any of the following three conditions exist:
- the information item was not requested;
 - the information item was requested but is not available;
 - the information item was requested but is not being provided.
- NOTE 4 Current number of persons on-board, including crew members: 0 to 8191, 0 = default (not available), 8191 = 8191 or more people.
- NOTE 5 The characters that can be used are listed in the ITU-R M.1371, 6-bit ASCII Table 14. Some of the acceptable characters in this 6-bit ASCII table are the reserved characters within this standard, Table 1. These characters should be represented using the “^” method (see 7.1.3).
- NOTE 6 See ITU-R M.1371, parameter “Type of ship and cargo type” for the range of valid values for this field.

LRF – AIS long-range function

This sentence is used in both long-range interrogation requests and long-range interrogation replies. The LRF-sentence is the second sentence of the long-range interrogation request pair, LRI and LRF (see the LRI-sentence).

The LRF-sentence is also the first sentence of the long-range interrogation reply. The minimum reply consists of a LRF-sentence followed by a LR1-sentence. The LR2-sentence and/or the LR3-sentence follow the LR1-sentence if information provided in these sentences was requested by the interrogation. When the AIS unit creates the LRF-sentence for the long-range interrogation reply, fields 1, 2, 3 and 4 should remain as received in the long-range interrogation request; and field 5 (function reply status) and the new checksum are added to the LRF reply sentence.

\$--LRF,x,xxxxxxxx,c--c,c--c,c--c*hh<CR><LF>

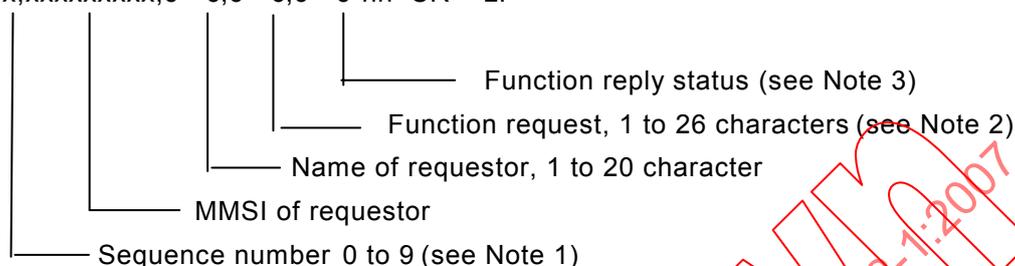

NOTE 1 This is used to bind the contents of the LRI and LRF sentences together. The LRF sentence should immediately follow the LRI sentence and use the same sequence number. The requestor process should increment the sequence number each time a LRI/LRF pair is created. After 9 is used the process shall begin again from 0. The long-range interrogation is not valid if the LRI and LRF sequence numbers are different.

NOTE 2 The function request field uses alphabetic characters, based upon IMO Resolution A.851(20), to request specific information items. Specific information items are requested by including their function identification character in this string of characters. The order in which the characters appear in the string is not important. All characters are upper-case. Information items will not be provided if they are not specifically requested – even if available to the AIS unit. The IMO Resolution defines the use of all characters from A to Z, but not all defined information is available to the AIS unit. The following is a list of the function identification characters, with the information they request:

- A = Ship's: name, call sign, and IMO number
- B = Date and time of message composition
- C = Position
- E = Course over ground
- F = Speed over ground
- I = Destination and Estimated Time of Arrival (ETA)
- O = Draught
- P = Ship/cargo
- U = Ship's: length, breadth, type
- W = Persons on board

NOTE 3 The function reply status field provides the status characters for the "function request" information. When the long-range interrogation request is originated, the "function reply status" field should be null. The "function reply status" characters are organised in the same order as the corresponding function identification characters in the "function request" field. The following is a list of the "function reply status" characters with the status they represent:


2 = information available and provided in the following LR1, LR2 or LR3 sentence,

3 = information not available from AIS unit,

4 = information is available but not provided (i.e. restricted access determined by the ship's master).

LRI – AIS long-range interrogation

The long-range interrogation of the AIS unit is accomplished through the use of two sentences. The pair of interrogation sentence formatters, a LRI sentence followed by a LRF sentence, provides the information needed by a universal AIS unit to determine if it should construct and provide the reply sentences (LRF, LR1, LR2, and LR3). The LRI sentence contains the information that the AIS unit needs in order to determine if the reply sentences need to be constructed. The LRF sentence identifies the information that needs to be in those reply sentences.

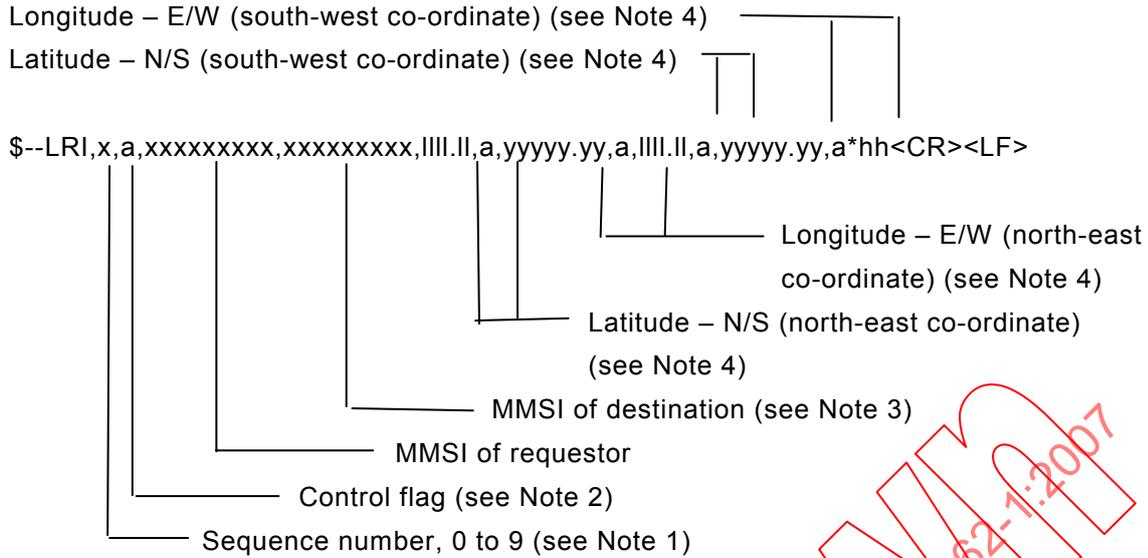

NOTE 1 This is used to bind the contents of the LRI and LRF sentences together. The LRF sentence should immediately follow the LRI sentence and use the same sequence number. The requestor process should increment the sequence number each time a LRI/LRF pair is created. The sequencing process should continuously increment. After 9 is used the process should begin again from 0. The long-range interrogation is not valid if the LRI and LRF sequence numbers are different.

NOTE 2 The control flag is a single character that qualifies the request for information. The control flag affects AIS unit's reply logic. The control flag cannot be a null field. When the control flag is "0", the logic is normal. Under "normal" operation, the AIS unit responds if either:


- the AIS unit is within the geographic rectangle provided, and
 - the AIS unit has not responded to the requesting MMSI in the last 24 hours, and
 - the MMSI "destination" field is null.
- or
- The AIS unit's MMSI appears in the MMSI "destination" field in the LRI sentence.

When the control flag is "1", the AIS unit responds if:

- the AIS unit is within the geographic rectangle provided.


NOTE 3 This is the nine digit number that uniquely identifies the specific AIS unit that should respond. This field should be null when the interrogation is for a geographic region. When addressing a specific AIS unit, it is not necessary to provide the geographic co-ordinates of the region.

NOTE 4 The geographic region being interrogated is a rectangle defined by the latitude and longitude of the north-east and south-west corners. These should be null fields when interrogating a specific AIS unit (see Note 2)

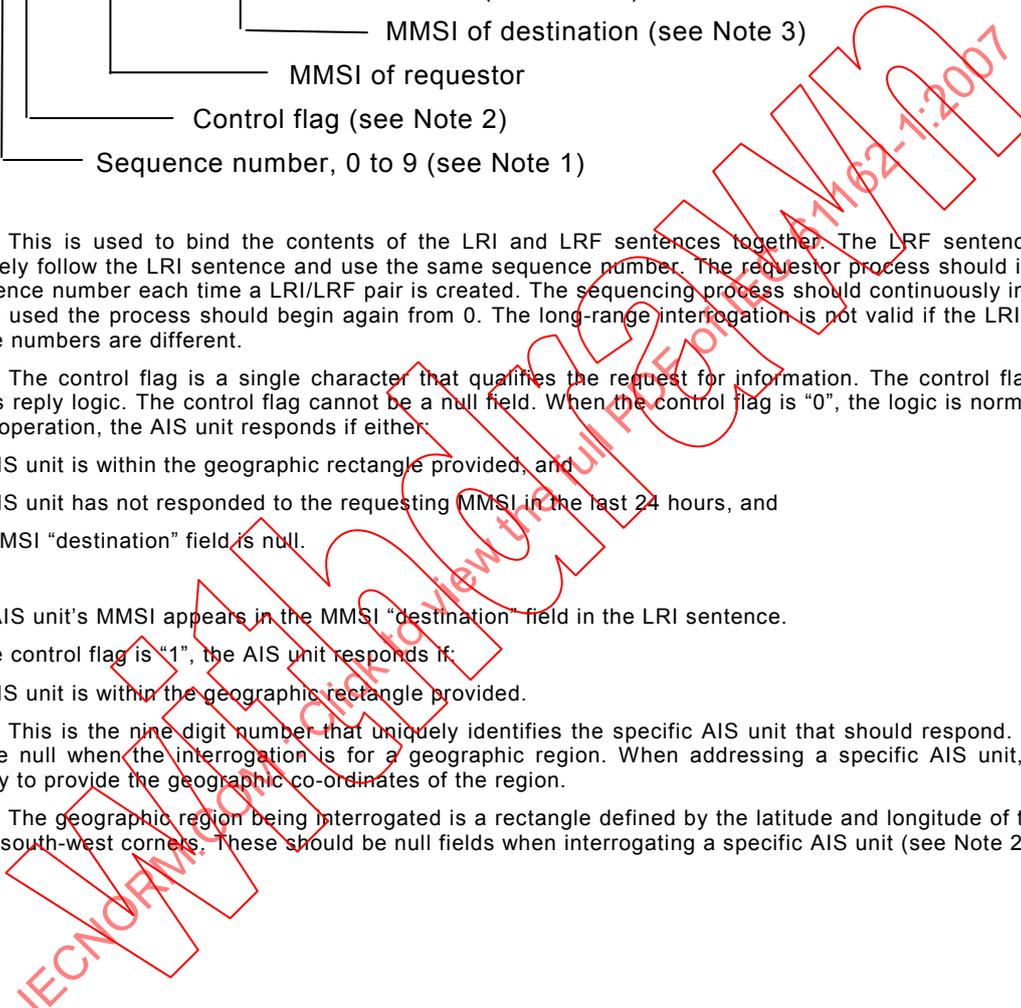

MLA – GLONASS almanac data

Contains complete almanac data for one GLONASS satellite. All data are transmitted in accordance with the GLONASS Interface control document. Multiple sentences may be transmitted, one for each satellite in the GLONASS configuration.

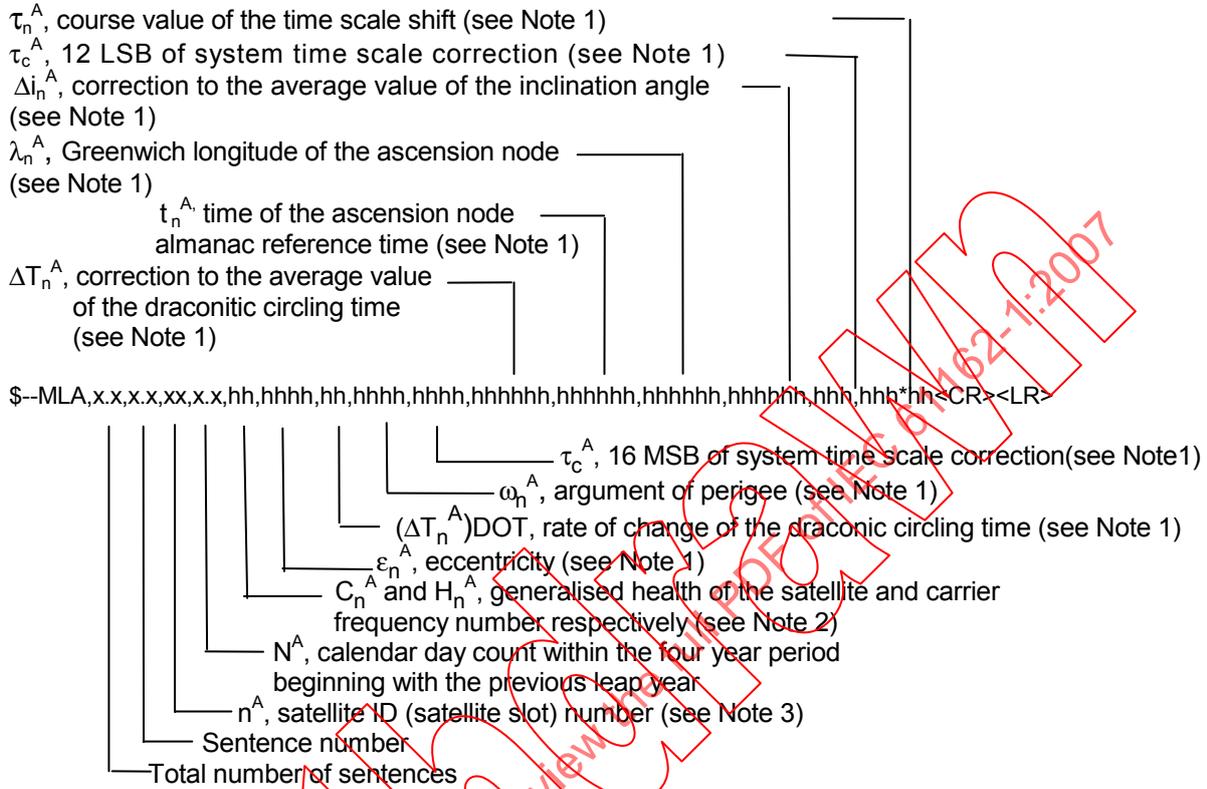


(Reference GLONASS Interface control document, 1995)

NOTE 1 Section 4.5, Table 4.3. The least significant bits (LSB, low bits) of the HEX data field correspond to the LSB of the word indicated in Table 4.3. If the number of available bits in the HEX field is greater than is necessary to represent the word in Table 4.3, then the most significant bits (MSB, upper bits) of the Hex field are unused and filled with zero (0).

NOTE 2 C_n^A and H_n^A from the GLONASS Interface control document are represented in this 2-character HEX field as follows:

hh = [8][7][6][5][4][3][2][1] (LSB)

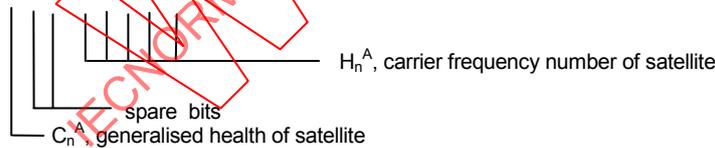


NOTE 3 The numbers 65 – 96 are reserved for GLONASS satellites. GLONASS satellites are identified by 64+ satellite slot numbers. The slot numbers are 1 through 24 for the full GLONASS constellation of 24 satellites; this gives a range of 65 through 88. The numbers 89 through 96 are available if slot numbers above 24 are allocated to on-orbit spares.

MSK – MSK receiver interface

This is a Command Sentence. This sentence is used to set the controls of a radiobeacon MSK receiver (beacon receiver) or to report the status of an MSK receiver’s controls in response to a query sentence.

\$--MSK,x.x,a,x.x,a,x.x,x,a*hh<CR><LF>

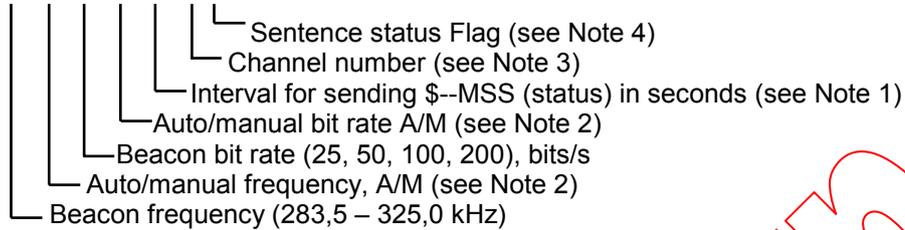


- NOTE 1 When status data is not to be transmitted this field should be null.
 - NOTE 2 If auto is specified, the previous field is ignored.
 - NOTE 3 Set equal to "1" or null for single channel receivers.
 - NOTE 4 This field is used to indicate a sentence that is a status report of current settings or a configuration command changing settings. This field shall not be null.
- R = Sentence is a status report of current settings (use for a reply to a query).
 C = Sentence is a configuration command to change settings. A sentence without "C" is not a command.

MSS – MSK receiver signal status

Signal-to-noise ratio, signal strength, frequency and bit rate from a MSK beacon receiver.

\$--MSS,x.x,x.x,x.x,x.x,x,x*hh<CR><LF>

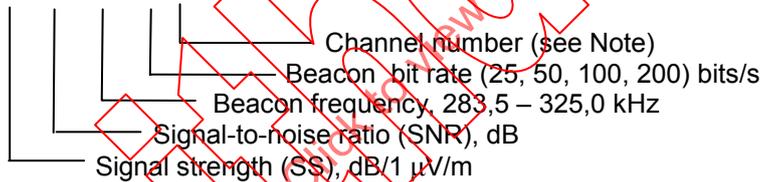

- NOTE Set equal to "1" or null for single channel receivers.
- In addition the beacon receiver shall respond to queries using the standard query request (Q). See 9.1.6 for examples.

MTW – Water temperature


\$-- MTW, x.x, C*hh<CR><LF>



MWD – Wind direction and speed

The direction from which the wind blows across the earth's surface, with respect to north, and the speed of the wind.

\$--MWD, x.x,T,x.x,M,x.x,N,x.x,M*hh<CR><LF>

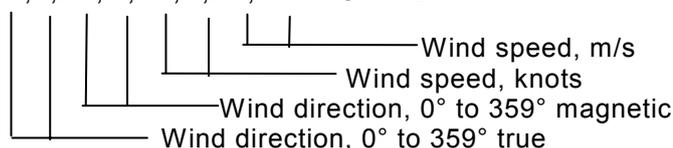**MWV – Wind speed and angle**


When the reference field is set to R (Relative), data is provided giving the wind angle in relation to the vessel's bow/centreline and the wind speed, both relative to the (moving) vessel. Also called apparent wind, this is the wind speed as felt when standing on the (moving) ship.

When the reference field is set to T (Theoretical/calculated wind), data is provided giving the wind angle in relation to the vessel's bow/centreline and the wind speed as if the vessel was stationary. On a moving ship, these data can be calculated by combining the measured relative wind with the vessel's own speed.

Example 1 If the vessel is heading west at 7 knots and the wind is from the east at 10 knots the relative wind is 3 knots at 180°. In this same example the theoretical wind is 10 knots at 180° (if the boat suddenly stops the wind will be at the full 10 knots and come from the stern of the vessel 180° from the bow).


Example 2 If the vessel is heading west at 5 knots and the wind is from the southeast at 7,07 knots the relative wind is 5 knots at 270°. In this same example the theoretical wind is 7,07 knots at 225° (if the boat suddenly stops the wind will be at the full 7,07 knots and come from the port-quarter of the vessel 225° from the bow).

\$--MWV, x.x, a, x.x, a, A *hh<CR><LF>

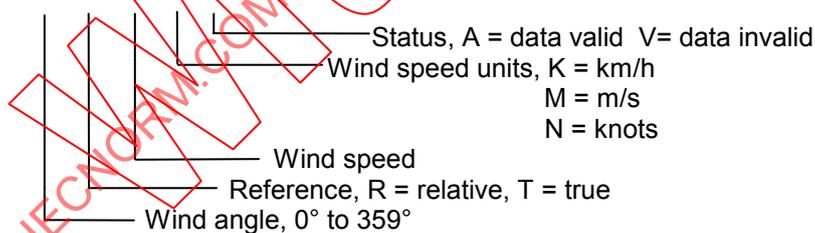**NRM – NAVTEX receiver mask**

This command is used to manipulate the configuration masks that control which messages are stored, printed and sent to the INS port of the NAVTEX receiver.

\$--NRM,x,x,hhhhhhhh,hhhhhhh*hh<CR><LF>

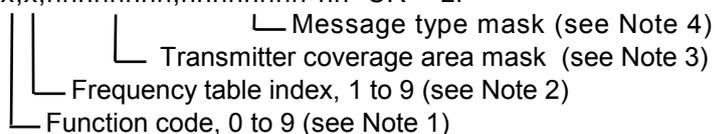

NOTE 1 The function code is used to further identify the purpose of the sentence. The meaning of the function code is as follows:

- 0 – request messages for the given mask
- 1 – set/report the storage mask
- 2 – set/report the printer mask
- 3 – set/report the INS mask
- 4 to 9 – reserved for future use

NOTE 2 The frequency indicator identifies the frequency that the NAVTEX message was received on:

- 1 = 490 kHz
- 2 = 518 kHz
- 3 = 4209,5 kHz
- 4 through 9 are reserved for future use

NOTE 3 The transmitter coverage area mask is defined as a 32 bit hex field where the least significant bit represents transmitter coverage area 'A', the next bit is 'B' and so on up to bit 25 which is 'Z'. Bits 31 through 26 are reserved for future use and should be set to zero. To select a transmitter coverage area its corresponding bit should be set to one. To deselect a transmitter coverage area its corresponding bit should be set to zero.

NOTE 4 The message type mask is defined as a 32 bit hex field where the least significant bit represents message type 'A', the next bit is 'B' and so on up to bit 25 which is 'Z'. Bits 31 through 26 are reserved for future use and should be set to zero. To select a message type its corresponding bit should be set to one. To deselect a message type its corresponding bit should be set to zero.

NOTE 5 When another device (for example an INS) wishes to set one or more of the bit masks it sends one or more NRM sentences to the NAVTEX receiver. When another device wishes to determine the current values of the bit masks it sends a query sentence to the NAVTEX receiver as follows:

`$--CRQ,NRM*hh<CR><LF>`

On receiving this query, the NAVTEX receiver will respond with one NRM sentence for each mask type and frequency combination that it supports. For example, a NAVTEX receiver which supports separate storage, printer and INS masks for each of three receiver frequencies will return a total of nine NRM sentences in response to the above query.

Example usage:


`$INNRM,2,1,00001E1F,00000023*57`

This example specifies that message identifiers 'A', 'B' and 'F' received from transmitter areas 'A' to 'E' and 'J' to 'M' on 490 kHz should be sent to the printer port when they are received. Note that this command sets the printer mask for future use; there is no immediate output generated as a result of receiving this command.

Example usage:


`$INNRM,0,2,00001E1F,0FFFFFFF*21`

This example requests that all currently stored messages of all message types, received from transmitter areas 'A' to 'E' and 'J' to 'M' on 518 kHz should be immediately returned to the requesting device as a series of NRM sentences. Note that this command does not update any of the stored masks.

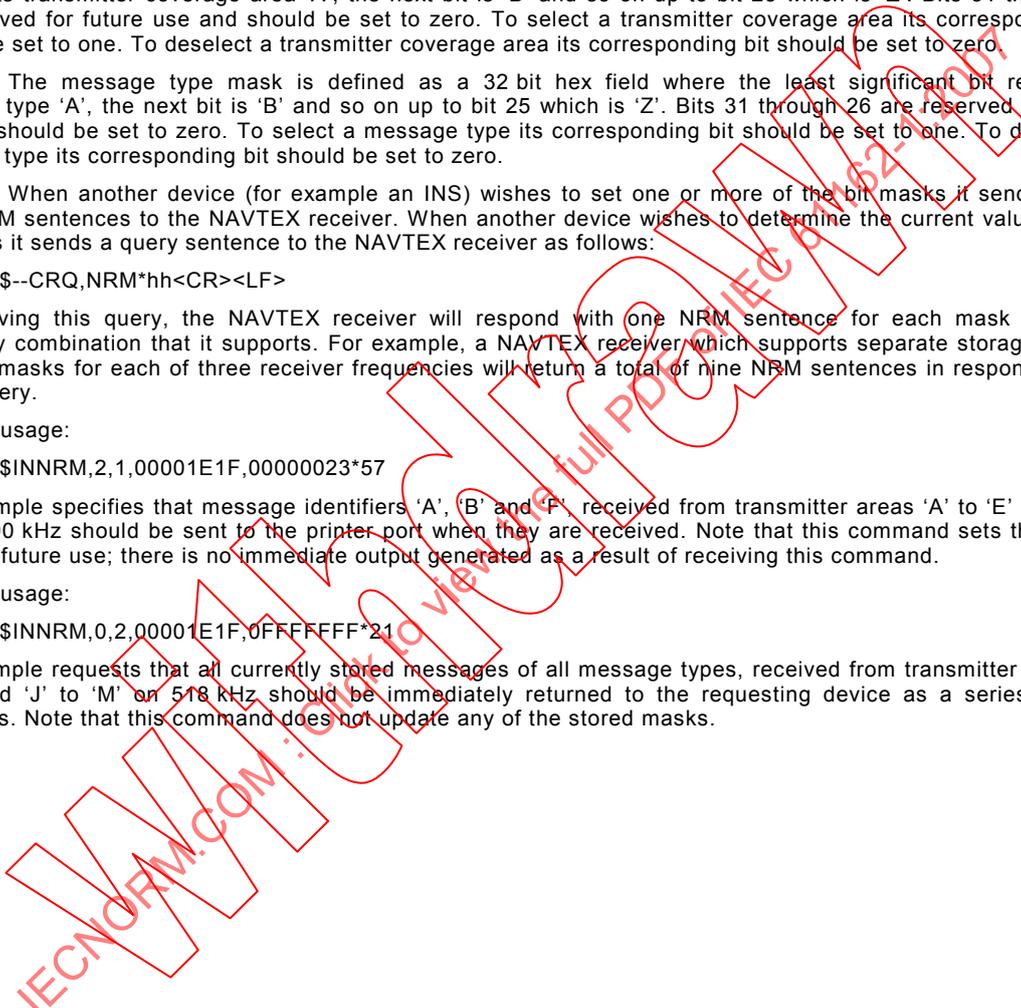

NRX – NAVTEX received message

The NRX sentence is used to transfer the contents of a received NAVTEX message from the NAVTEX receiver to another device. As the length of a single NAVTEX message may exceed the number of characters permitted in a single sentence, many NRX sentences may be required to transfer a single NAVTEX message.

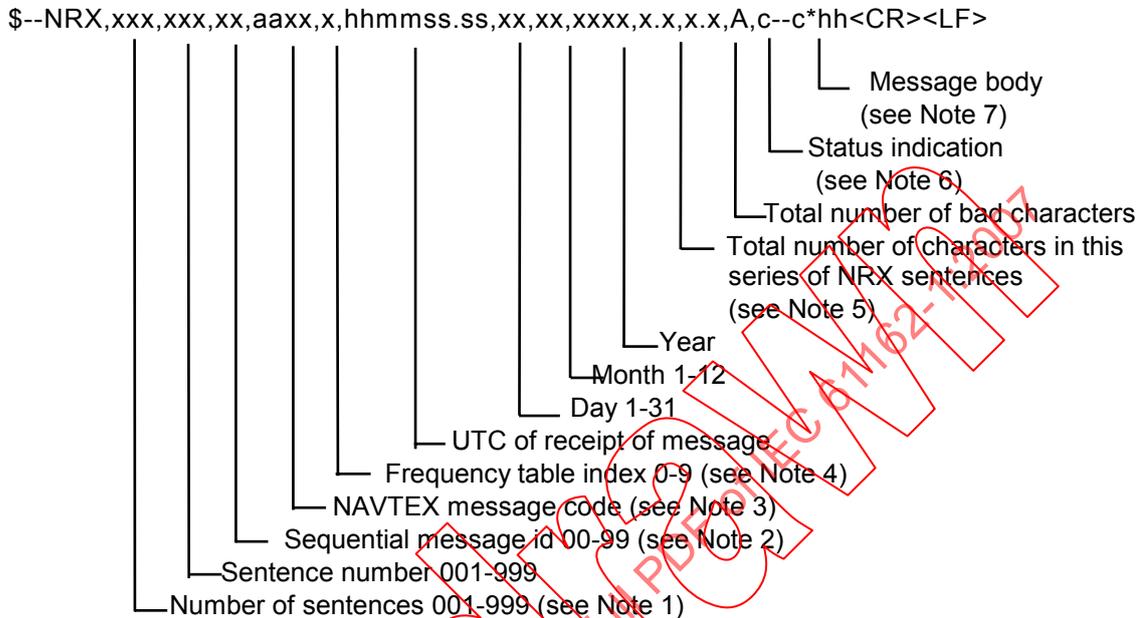

NOTE 1 The total number of sentences required to transfer the NAVTEX message from the NAVTEX radio receiver. The first field specifies the total number of sentences used for a message, minimum value 1. The sentence number field identifies the order of this sentence in the message, minimum value 1. All sentences contain the same number of fields. For efficiency, it is recommended that null fields be used in the additional sentences where the data is unchanged from the first sentence (this applies to fields 4 through 12).

NOTE 2 The sequential message identifier provides a unique identifier for each NAVTEX message represented by a group of sentences. Though the message code (field 4) contains a NAVTEX message serial number, there are special cases when the message serial number is set to 00 and has a different meaning or when the same message code can occur more than once. When these conditions occur, the sequential message identifier can be relied upon to uniquely identify this NAVTEX message from other NAVTEX messages with the same message code.

NOTE 3 The NAVTEX message code contains three related entities. The first character identifies the transmitter coverage area and the second character identifies the type of message. Both these characters are as defined in Table I of Recommendation ITU-R M.625-3, combination numbers 1-26. Transmitter identification characters are allocated by the IMO NAVTEX Co-ordinating Panel; these characters and the meanings of the message type characters are described in the NAVTEX manual (IMO publication 951E). The remaining two characters are restricted to numerals with a range of 00 to 99 and represent a serial number for each type of message. The value of 00 is a special case and not considered a serial number. See 4.3.5 for interpretation of special case value of 00.

NOTE 4 The frequency indicator identifies the frequency that the NAVTEX message was received on:
 0 = not received over air (for example test messages)
 1 = 490 kHz
 2 = 518 kHz
 3 = 4209,5 kHz
 4 through 9 are reserved for future use

NOTE 5 The total number of characters indicates the expected size of the message body sent in this sequence of NRX sentences. It does not include the additional overhead for reserved characters found in Table 1.

NOTE 6 Status 'A' is used for syntactically correct message reception. Status 'V' is used for syntactically incorrect message reception, for example end characters NNNN missing.

NOTE 7 The message body may contain reserved characters.

The example below shows a typical message received by the NAVTEX receiver with 3 bad characters ("*"):

<start of example>

ZCZC IE69=====

ISSUED ON SATURDAY 06 JANUARY 2001.

INSHORE WATERS FORECAST TO 12 MILES

OFFSHORE FROM 1700 UT* TO 0500 UTC.

NORTH FORELAND TO SE**EY BILL.
12 HOURS FORECAST:

SHOWERY WINDS, STRONGEST IN NORTH.

NNNN

<end of example>

Inspecting the corresponding NRX sentences would typically show:

```
$CRNRX,007,001,00,IE69,1,135600,27,06,2001,241,3,A,=====*09
$CRNRX,007,002,00,,,,,,,,,,,,,=====^0D^0AISSUED ON SATURDAY 06 JANUARY 2001.*29
$CRNRX,007,003,00,,,,,,,,,,,,,^0D^0AINSHORE WATERS FORECAST TO 12 MILES^0D^0AOFF*0D
$CRNRX,007,004,00,,,,,,,,,,,,,SHORE FROM 1700 UT^2A TO 0500 UTC.^0D^0A^0D^0ANORT*70
$CRNRX,007,005,00,,,,,,,,,,,,,H FORELAND TO SE^2A^2AEY BILL.^0D^0A12 HOURS FOREC*16
$CRNRX,007,006,00,,,,,,,,,,,,,AST:^0D^0A^0ASHOWERY WINDS, STRONGEST IN NORTH.^0D*15
$CRNRX,007,007,00,,,,,,,,,,,,,^0A^0A*79
```

Decoding the message body should give the following result:

```
<start of decoding>
=====
ISSUED ON SATURDAY 06 JANUARY 2001.

INSHORE WATERS FORECAST TO 12 MILES
OFFSHORE FROM 1700 UT* TO 0500 UTC.

NORTH FORELAND TO SE**EY BILL.
12 HOURS FORECAST:


SHOWERY WINDS, STRONGEST IN NORTH.

<end of decoding>
```

OSD – Own ship data

Heading, course, speed, set and drift summary. Useful for, but not limited to radar/ARPA applications. OSD gives the movement vector of the ship based on the sensors and parameters in use.

\$--OSD, x.x,A,x.x, a.x.x,a.x.x,x.x,a*hh<CR><LF>

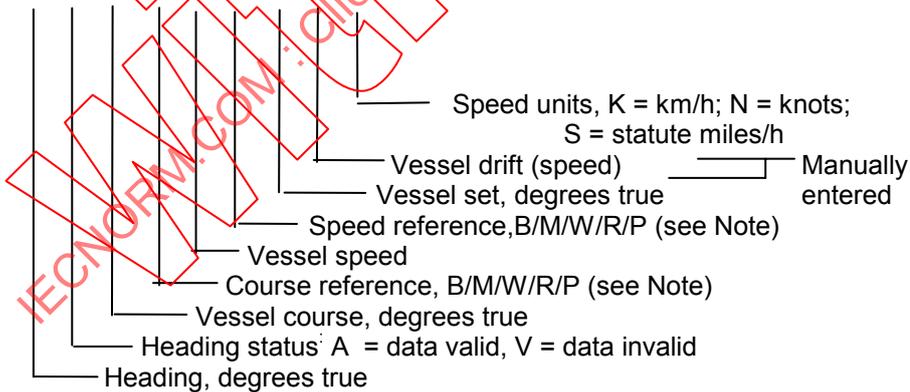


NOTE Reference systems on which the calculation of vessel course and speed is based. The values of course and speed are derived directly from the referenced system and do not additionally include the effects of data in the set and drift fields.

- B = bottom tracking log
- M = manually entered
- W = water referenced
- R = radar tracking (of fixed target)
- P = positioning system ground reference.

PRC – Propulsion remote control status

This sentence indicates the engine control status (engine order) on a remote control system. This provides the detailed data not available from the engine telegraph sentence ETL. The sentence shall be transmitted at regular intervals.

\$--PRC,x,x,A,x,x,a,x,x,a,a,x*hh<CR><LF>

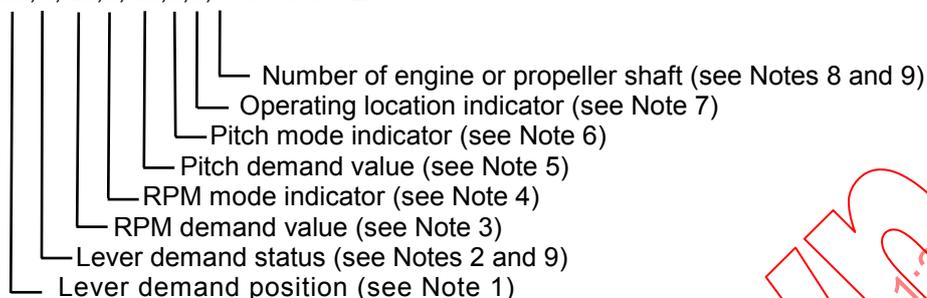

NOTE 1 Lever position of engine telegraph demand. -100 – 0 – 100 % from “full astern” (crash astern) to “full ahead” (navigation full) “ stop engine”

NOTE 2 A = data valid

V = data invalid

NOTE 3 RPM demand value “-“ Astern

NOTE 4 P = Per cent (%): 0 – 100 % from zero to maximum rpm

R = Revolutions per minute (rpm): “-“ Astern

V = data invalid

NOTE 5 Pitch demand value

NOTE 6 P = Per Cent (%): -100 – 0 – 100 % from “full astern” (crash astern) to “full ahead” (navigation full) through “stop engine”

D = degrees: “-“: Astern

V = data invalid

NOTE 7 Indication to identify location. This field is single character.

B = Bridge

P = Port wing

S = Starboard wing

C = Engine control room

E = Engine side / local

W = Wing (port or starboard not specified)

This may be a null field.

NOTE 8 Numeric character to identify engine or propeller shaft controlled by the system. This is numbered from centre-line. This field is a single character.

0 = single or on centre-line

Odd = starboard


Even = port

NOTE 9 This should not be a null field.

RMA – Recommended minimum specific LORAN-C data

Position, course and speed data provided by a LORAN-C receiver. Time differences A and B are those used in computing latitude/longitude. This sentence is transmitted at intervals not exceeding 2 s and is always accompanied by RMB when a destination waypoint is active. RMA and RMB are the recommended minimum data to be provided by a LORAN-C receiver. All data fields should be provided, null fields are used only when data is temporarily unavailable.

\$--RMA, A, IIII.II, a, yyyy.yy, a, x.x, x.x, x.x, x.x, x.x, a, a*hh<CR><LF>

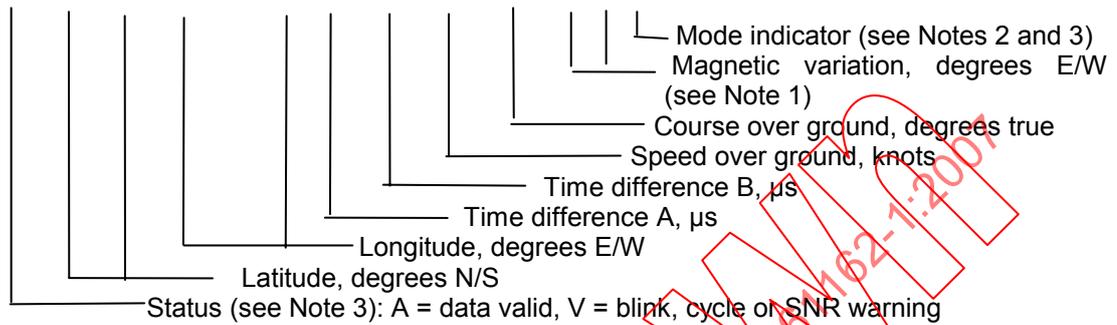


NOTE 1 Easterly variation (E) subtracts from true course. Westerly variation (W) adds to true course.

NOTE 2 Positioning system mode indicator:

- A = Autonomous mode
- D = Differential mode
- E = Estimated (dead reckoning) mode
- M = Manual input mode
- S = Simulator mode
- N = Data not valid


NOTE 3 The positioning system mode indicator field supplements the status field (field No. 1), which should be set to V = invalid for all values of Mode indicator except for A = Autonomous and D = Differential. The positioning system mode indicator and status fields should not be null fields.

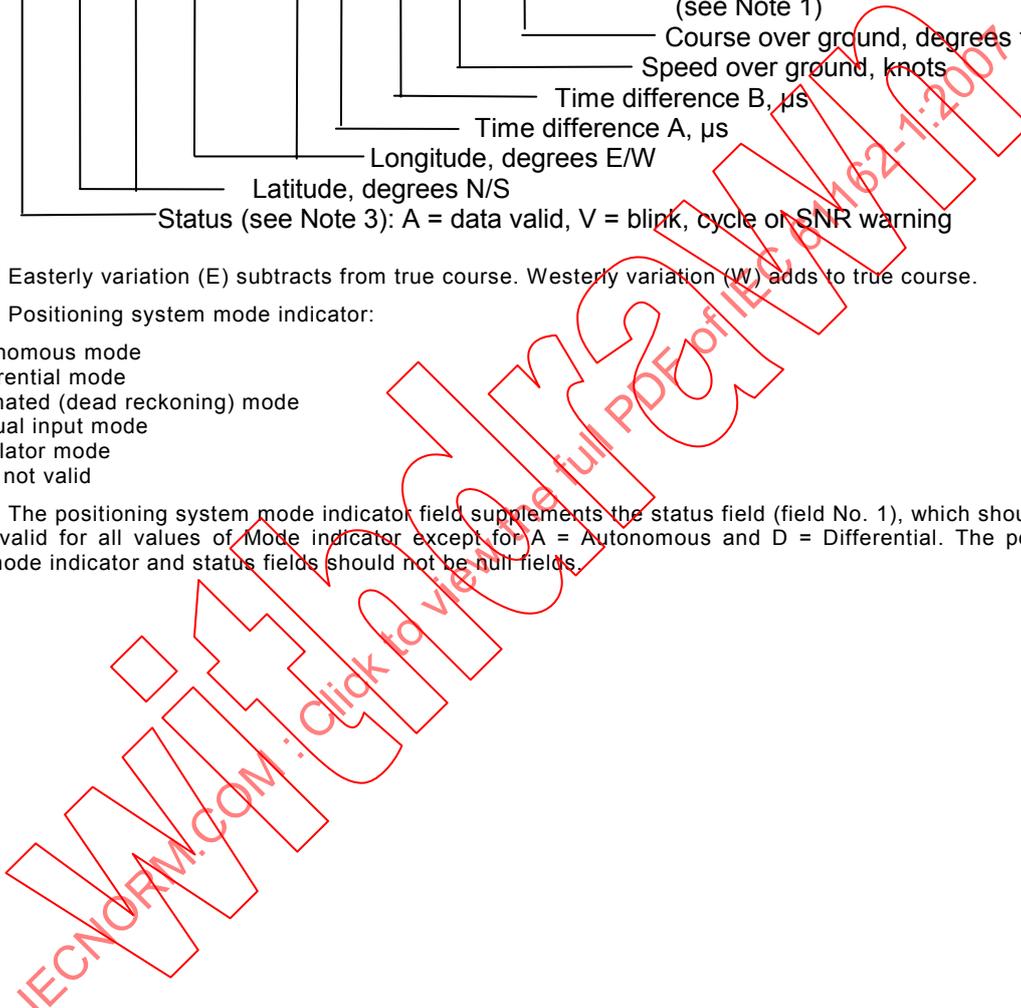

RMB – Recommended minimum navigation information

Navigation data from present position to a destination waypoint provided by a LORAN-C, GNSS, DECCA, navigation computer or other integrated navigation system. This sentence always accompanies RMA or RMC sentences when a destination is active when provided by a LORAN-C, or GNSS receiver, other systems may transmit \$--RMB without \$--RMA or \$--RMC.

\$--RMB, A, x.x, a, c--c, c--c, llll.ll, a, yyyyy.yy,a,x.x, x.x, x.x, A, a *hh<CR><LF>

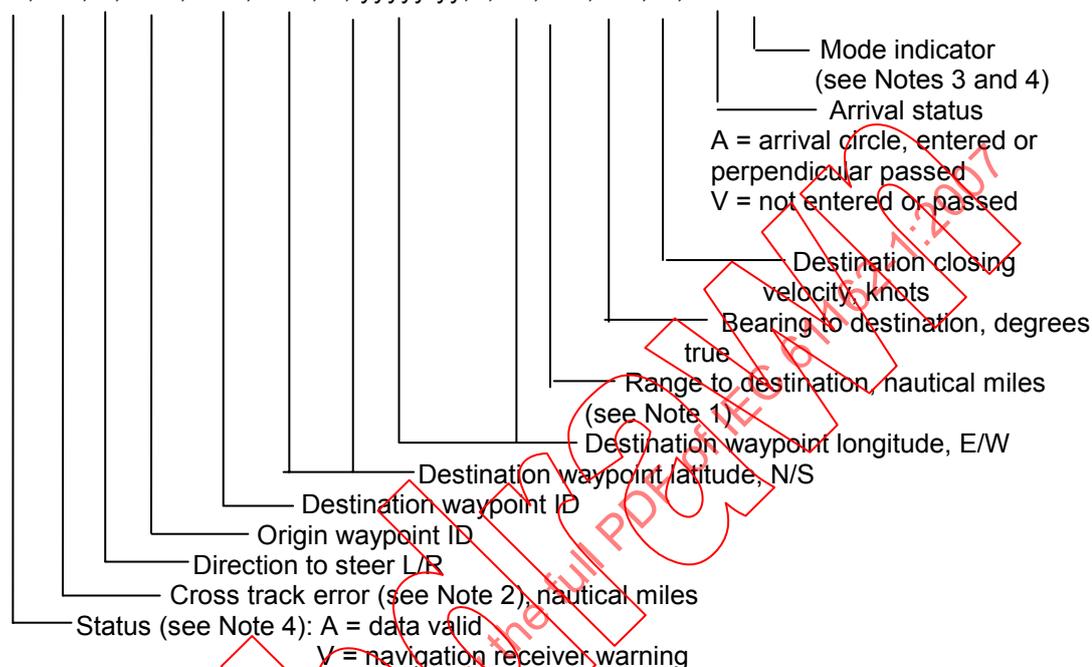

NOTE 1 If range to destination exceeds 999,9 nautical miles, display 999,9.

NOTE 2 If cross track error exceeds 9,99 nautical miles, display 9,99.

NOTE 3 Positioning system mode indicator:


A = Autonomous mode
 D = Differential mode
 E = Estimated (dead reckoning) mode
 M = Manual input mode
 S = Simulator mode
 N = Data not valid

NOTE 4 The positioning system mode indicator field supplements the status field (field No. 1) which should be set to V = invalid for all values of Mode indicator except for A = Autonomous and D = Differential. The positioning system mode indicator and status fields should not be null fields.

RMC – Recommended minimum specific GNSS data

Time, date, position, course and speed data provided by a GNSS navigation receiver. This sentence is transmitted at intervals not exceeding 2 s and is always accompanied by RMB when a destination waypoint is active. RMC and RMB are the recommended minimum data to be provided by a GNSS receiver. All data fields should be provided, null fields used only when data is temporarily unavailable.

\$--RMC, hhhmss.ss, A, llll.ll,a, yyyy.yy, a, x.x, x.x, xxxxxx, x.x,a, a*hh<CR><LF>

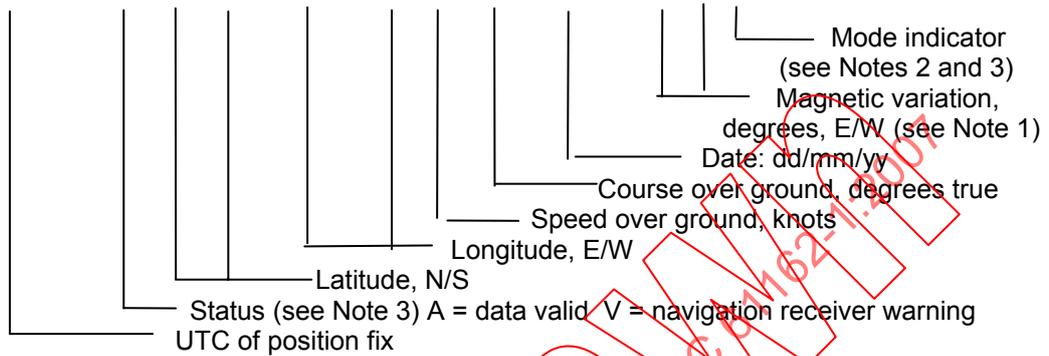

NOTE 1 Easterly variation (E) subtracts from true course. Westerly variation (W) adds to true course.

NOTE 2 Positioning system mode indicator:


- A = Autonomous mode
- D = Differential mode
- E = Estimated (dead reckoning) mode
- M = Manual input mode
- S = Simulator mode
- N = Data not valid

NOTE 3 The positioning system mode indicator field supplements the positioning system status field (field No. 2) which should be set to V = invalid for all values of mode indicator except for A = Autonomous and D = Differential. The positioning system mode indicator and status fields should not be null fields.

ROR – Rudder order status

Angle ordered for the rudder.

\$--ROR,x.x,A,x.x,A,a*hh<CR><LF>

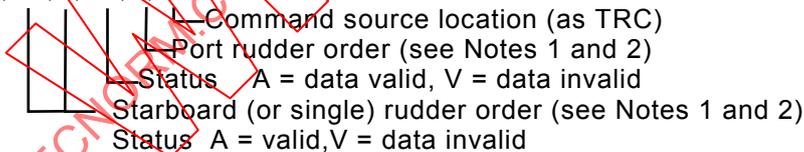


NOTE 1 Relative measurement of rudder order angle without units, "-" = bow turns to port.

NOTE 2 The status field should not be a null field.

ROT – Rate of turn

Rate of turn and direction of turn.


\$--ROT, x.x, A*hh<CR><LF>

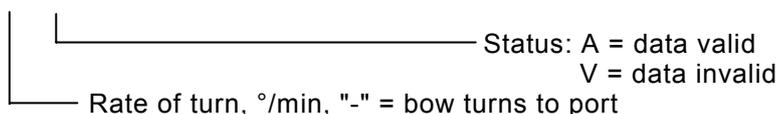

RPM – Revolutions


Shaft or engine revolution rate and propeller pitch

\$--RPM, a, x, x.x, x.x, A*hh<CR><LF>

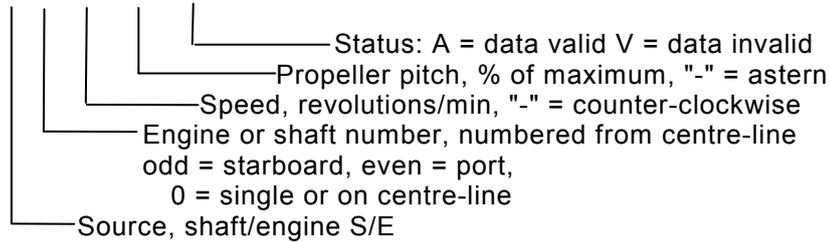**RSA – Rudder sensor angle**

Relative rudder angle, from rudder angle sensor.

\$--RSA, x.x, A, x.x, A*hh<CR><LF>

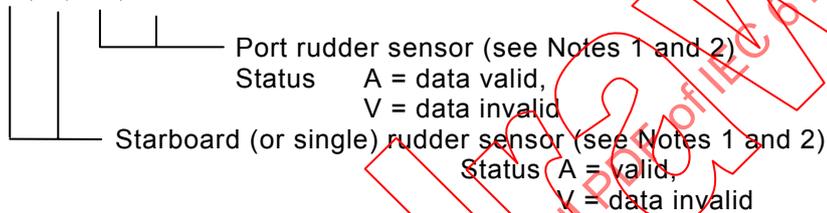


NOTE 1 Relative measurement of rudder angle without units, "-" = bow turns to port. Sensor output is proportional to rudder angle but not necessarily 1:1.

NOTE 2 The status field should not be a null field.

RSD – Radar system data

Radar display setting data.

\$--RSD, x.x, x.x,x.x, x.x,x.x, x.x,x.x, x.x,x.x, x.x, x.x, a, a*hh<CR><LF>

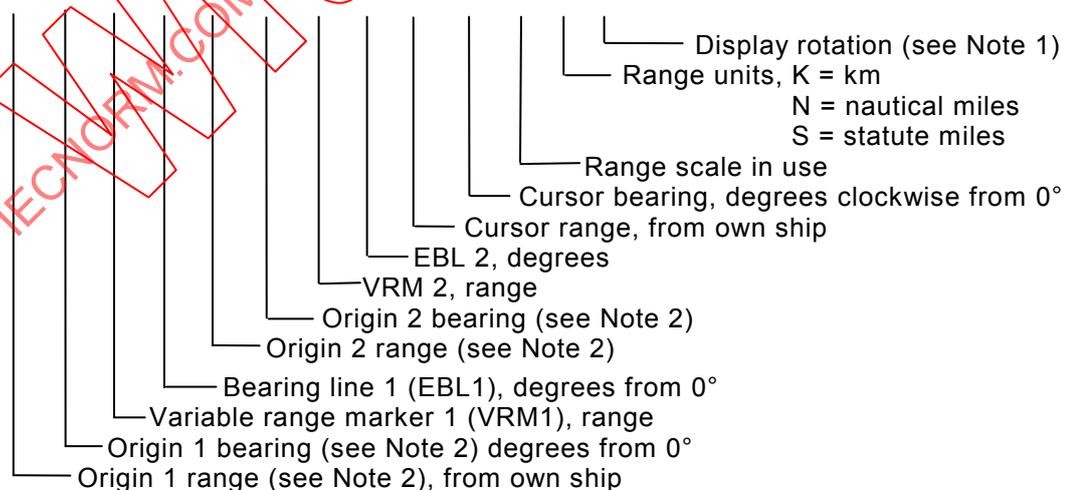

NOTE 1 Display rotation:

C = course-up, course-over-ground up, degrees true

H = head-up, ship's heading (centre-line) 0° up


N = north-up, true north is 0° up

NOTE 2 Origin 1 and origin 2 are located at the stated range and bearing from own ship and provide for two independent sets of variable range markers (VRM) and electronic bearing lines (EBL) originating away from own ship position.

RTE – Routes

Waypoint identifiers, listed in order with starting waypoint first, for the identified route. Two modes of transmission are provided: "c" indicates that the complete list of waypoints in the route is being transmitted; "w" indicates a working route where the first listed waypoint is always the last waypoint that had been reached (FROM), while the second listed waypoint is always the waypoint that the vessel is currently heading for (TO) and the remaining list of waypoints represents the remainder of the route.

\$--RTE, x.x, x.x, a, c--c, c--c,..... c--c*hh<CR><LF>

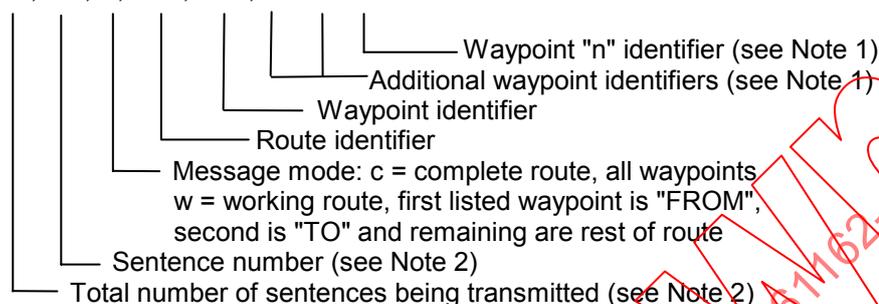


NOTE 1 A variable number of waypoint identifiers, up to "n", may be included within the limits of allowed sentence length. As there is no specified number of waypoints, null fields are not required for waypoint identifier fields.

NOTE 2 A single route may require the transmission of multiple sentences, all containing identical field formats when sending a complex message. The first field specifies the number of sentences, minimum value = 1. The second field identifies the order of this sentence (sentence number) minimum value = 1. For efficiency, it is permitted that null fields be used in the additional sentences when the data is unchanged from the first sentence. (Note that this practice can lead to the incorrect assembly of sentences if there is a high risk of loss of sentence.)

SFI – Scanning frequency information

This sentence is used to set frequencies and mode of operation for scanning purposes and to acknowledge setting commands. Scanning frequencies are listed in order of scanning. For DSC distress and safety watchkeeping only six channels shall be scanned in the same scanning sequence. To indicate a frequency set at the scanning receiver, use FSI sentence.

\$--SFI, x.x, x.x, xxxxxx, c,.....,xxxxxx, c*hh<CR><LF>

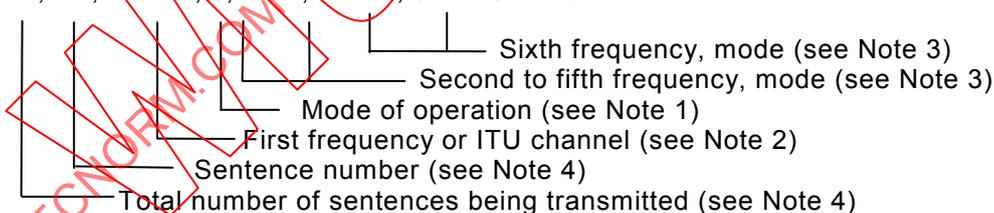

NOTE 1 Mode of operation:

- d = F3E/G3E simplex, telephone
- e = F3E/G3E duplex, telephone
- m = J3E, telephone
- o = H3E, telephone
- q = F1B/J2B FEC NBDP, Telex/teleprinter
- s = F1B/J2B ARQ NBDP, Telex/teleprinter
- t = F1B/J2B receive only, teleprinter/DSC
- w = F1B/J2B, teleprinter/DSC
- x = A1A, Morse, tape recorder
- { = A1A Morse, morse key/head set
- | = F1C/F2C/F3C, facsimile machine
- null for no information

NOTE 2 Frequencies to be in 100 Hz increments.

MF/HF telephone channels to have first digit 3 followed by ITU channel numbers with leading zeros as required.

MF/HF teletype channels to have first digit 4; the second and third digit frequency bands; and the fourth to sixth digits ITU channel numbers; each with leading zeros as required.

VHF channels to have first digit 9 followed by zero.

The next number is “1” indicating the ship station’s transmit frequency is being used as a simplex channel frequency, or “2” indicating the coast station’s transmit frequency is being used as a simplex channel frequency. The remaining three numbers are the VHF channel numbers with leading zeros as required.


NOTE 3 A variable number of frequency-mode pair fields is allowed up to a maximum of six pairs. Null fields are not required for unused pairs when less than six pairs are transmitted.

NOTE 4 Scanning frequency information may require the transmission of multiple messages. The first field specifies the total number of messages, minimum value = 1. The second field identifies the order of this message (message number), minimum value = 1.

SSD – AIS ship static data

This sentence is used to enter static parameters into a shipboard AIS unit. The parameters in this sentence support a number of the ITU-R M.1371 Messages.

\$--SSD,c—c,c—c,xxx,xxx,xx,xx,c,aa*hh<CR><LF>

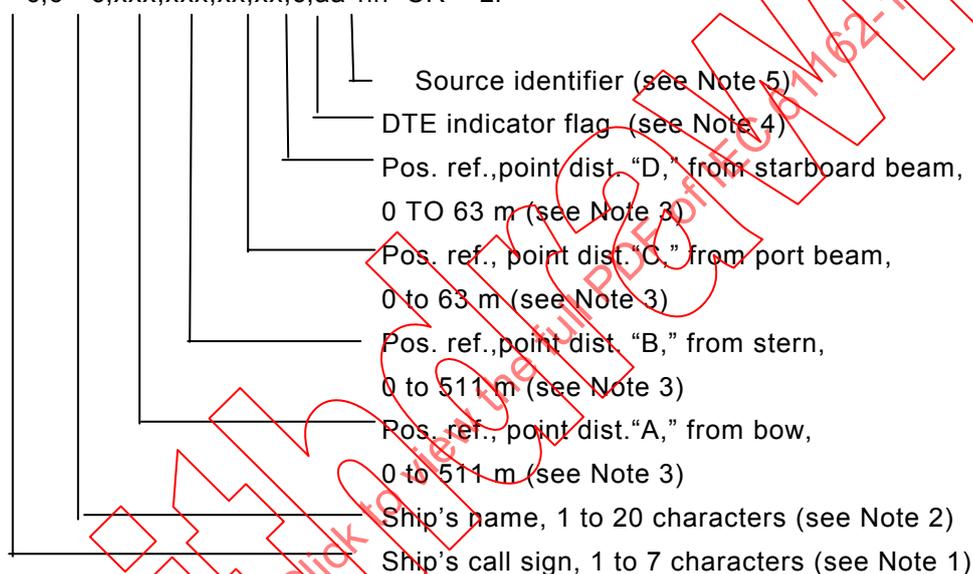

NOTE 1 Ship's call sign. A null field indicates that the previously entered call sign is unchanged. The string of characters "@@@@@@" is used to indicate that the call sign is not available.

NOTE 2 The characters that can be used in the name are listed in the ITU-R M.1371, 6-bit ASCII. Some of the acceptable characters in this 6-bit ASCII table are the reserved characters within this standard IEC 61162-1, Table 1. These characters should be represented using the "A" method (see 7.1.3). A null field indicates that the previously entered name is unchanged. The string of characters "@@@@@@@@@@@@@@@@@@" is used to indicate that the ship's name is not available.

NOTE 3 These are the four dimensions from the bow, stern, port beam, and starboard beam to the horizontal reference point on the ship for which the current "position reports" are valid. The sum of A + B is the length of the ship in metres, and the sum of C + D is the width of the ship in metres. Refer to the ITU-R M.1371, Message 5, "reference point for reported position and dimensions of ship." If the reference point of "reported position" is not available, but the dimensions of the ship are available: A = C = 0 and B > 0 and D > 0. If neither the reference point for the reported position nor the dimensions of the ship are available: A = B = C = D = 0 (default). Use of a null field for A, B, C, and/or D indicates that the previously entered dimension for that parameter is unchanged. In many cases, the ship's reference point for "reported position" will be the location of the positioning antenna.

NOTE 4 The DTE indicator is an abbreviation for data terminal equipment indicator. The purpose of the DTE indicator is to inform distant receiving applications that, if set to "available," the transmitting station conforms, at least, to the minimum keyboard and display requirements. The DTE indicator is only used as information provided to the application layer – indicating that the transmitting station is available for communications. On the transmitting side, the DTE indicator may be set by an external application using this sentence. DTE indicator flag values are:

0 = Keyboard and display are a standard configuration, and communication is supported.


1 = Keyboard and display are either unknown or unable to support communication.

NOTE 5 The source identifier contains the talker ID of the equipment at this location.

STN – Multiple data ID

This sentence is transmitted before each individual sentence where there is a need for the listener to determine the exact source of data in a system. Examples might include dual-frequency depth sounding equipment or equipment that integrates data from a number of sources and produces a single output.

\$--STN, xx*hh<CR><LF>




THS – True heading and status

NOTE This sentence replaces the deprecated sentence HDT.

Actual vessel heading in degrees true produced by any device or system producing true heading. This sentence includes a “mode indicator” field providing critical safety related information about the heading data, and replaces the deprecated HDT sentence.

\$--THS,x.x,a*hh<CR><LF>




NOTE Mode indicator. This field should not be null.

- A = Autonomous
- E = Estimated (dead reckoning)
- M = Manual input
- S = Simulator mode
- V = Data not valid (including standby)

TLB – Target label

Common target labels for tracked targets. This sentence is used to specify labels for tracked targets to a device that provides tracked target data (e.g. via the TTM – Tracked target message). This will allow all devices displaying tracked target data to use a common set of labels (e.g. targets reported by two radars and displayed on an ECDIS).

\$--TLB,x.x,c--c,x.x,c--c,x.x,c--c*hh<CR><LF>

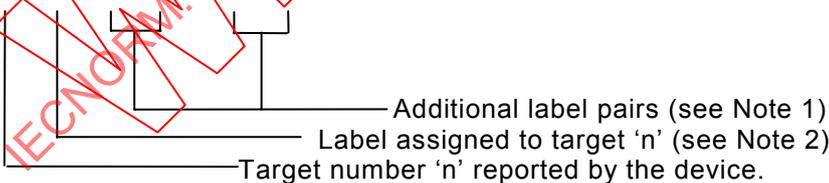


NOTE 1 This sentence allows several target number/label pairs to be sent in a single message, the maximum sentence length limits the number of labels allowed in a message.

NOTE 2 Null fields indicate that no common label is specified, not that a null label should be used. The intent is to use a null field as a place holder. A device that provides tracked target data should use its "local" label (usually the target number) unless it has received a TLB sentence specifying a common label.

TLL – Target latitude and longitude

Target number, name, position and time tag for use in systems tracking targets.

\$--TLL, xx, llll.ll, a, yyyy.yy, a, c--c, hhmmss.ss, a, a*hh<CR><LF>

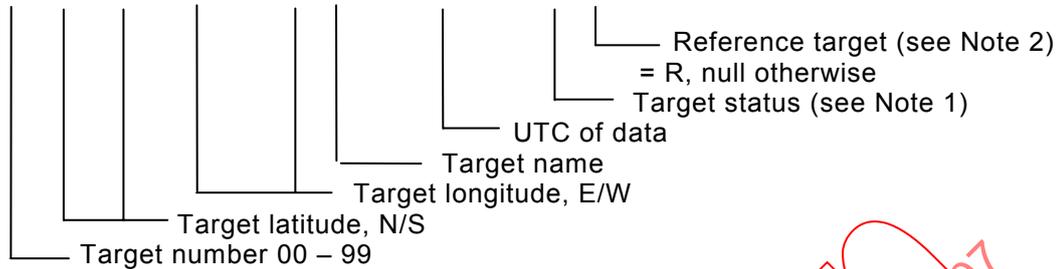

NOTE 1 Target status:


- L = Lost, tracked target has been lost
- Q = Query, target in the process of acquisition
- T = tracking

NOTE 2 Reference target: set to "R" if target is a reference used to determine own ship position or velocity, null otherwise.

TRC – Thruster control data

This sentence provides the status of control data for thruster devices. This sentence may also be used as a Command Sentence (see Note 9). When providing status data the sentence shall be transmitted at regular intervals.

\$--TRC,x,x.x,a,x.x,a,x.x,a,a*hh<CR><LF>

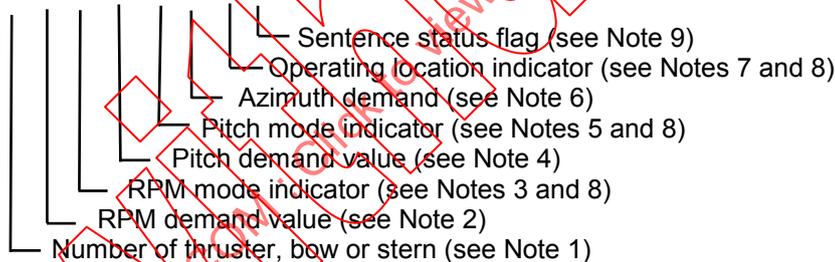

NOTE 1 Numeric character to identify a thruster in the system. This is numbered from centre-line. This field is single digit:

- Odd = Bow thruster
- Even = Stern thrusters

NOTE 2 "-" = port

NOTE 3 P = Per cent (%): 0 – 100 % from zero to maximum rpm

- R = Revolutions per minute (RPM)
- V = data invalid

NOTE 4 "-" = port

NOTE 5 P = Per cent (%)

- D = Degrees (°)
- V = data invalid

NOTE 6 Direction of thrust in degrees (0° – 360°). This may be a null field.

NOTE 7 Indication to identify location. This field is single character.

- B = Bridge
- P = Port wing
- S = Starboard wing
- C = Engine control room

E = Engine side / local

W = Wing (port or starboard not specified)

NOTE 8 This should not be a null field.

NOTE 9 This field is used to indicate a sentence that is a status report of current settings or a configuration command changing settings. This field should not be null.


R = Sentence is a status report of current settings (used for a reply to a query).

C = Sentence is a configuration command to change settings. A sentence without "C" is not a command.

TRD – Thruster response data

This sentence provides the response data for thruster devices.

\$---TRD,x,x.x,a,x.x,a,x.x,*hh<CR><LF>

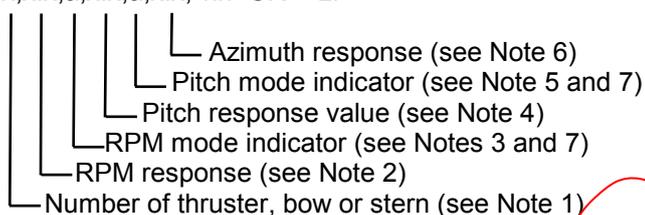

NOTE 1 Numeric character to identify a thruster in the system. This is numbered from the centre-line. This field is single digit:

Odd = Bow thruster

Even = Stern thrusters

NOTE 2 "-" = port

NOTE 3 P = Per cent (%): 0 – 100 % from zero to maximum rpm

R = Revolutions per minute (RPM)

V = data invalid

NOTE 4 "-" port

NOTE 5 P = Per cent (%):

D = Degrees

V = data invalid


NOTE 6 Direction of thrust in degrees (0° – 360°). This may be a null field.

NOTE 7 This should not be a null field.

TTM – Tracked target message

Data associated with a tracked target relative to own ship's position.

\$--TTM, xx, x.x, x.x, a, x.x, x.x, a, x.x, x.x, a, c--c, a, a, hhmmss.ss, a *hh<CR><LF>

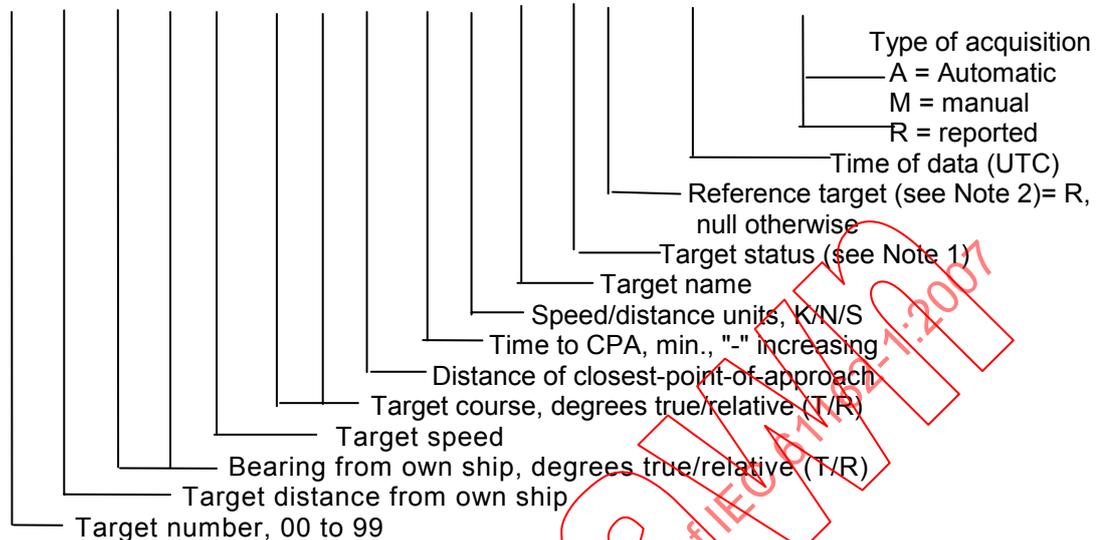

NOTE 1 Target status:

L = Lost, tracked target has been lost

Q = Query, target in the process of acquisition

T = Tracking


NOTE 2 Reference target: set to "R" if target is a reference used to determine own-ship position or velocity, null otherwise

TUT – Transmission of multi-language text

A sentence to support multi-language text using a variable length Hex field in the sentence definition.

The sentence structure is similar to the TXT sentence, however it has two additional fields. There is a "source identifier" field used to identify the origin of the sentence and a "translation code" field that is used to define the coding system for the text body. This enables the use of multi-language codes, such as, unicode or other codes. A proprietary look-up table method is incorporated to allow pre-defined messages to be sent in short sentences.

\$--TUT,aa, hh, hh, hh, c--c, h--h*hh<CR><LF>

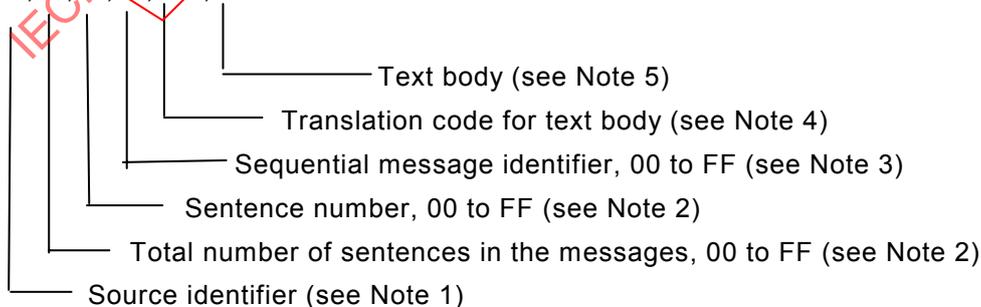

NOTE 1 The source identifier contains the talker ID indicating the type of equipment that originated this message.

NOTE 2 Unicode text may require the transmission of multiple sentences all containing identical field formats. The second field specifies the total number of sentences in the message, minimum value 01^{hex}. The third field identifies the sequence of this sentence (sentence number), minimum value 01^{hex}. For efficiency, it is recommended that null fields be used in the additional sentences when the data is unchanged from the first sentence.

NOTE 3 The sequence message identifier number relates all sentences that belong to a group of multiple sentences. Multiple sentences (see Note 2) with the same sequence identifier number, make up one text message.

NOTE 4 The translation code identifies the Hex character coding method used in the text body field and determines the maximum number of Hex character positions available in the “text body” field.

- U = Unicode (ISO 10646-1), 56 Hex character positions in the text body.
- A =Subset of ISO 8859, 56 Hex character positions in the text body.
- 1-16 = Part number of ISO 8859
- P<aaa> = Proprietary (user defined), 53 Hex character positions in the text body. This field consists of the letter “P” directly followed by the three letter manufacturer’s mnemonic code. An example might be “PXYZ”, if the XYZ company’s equipment produced a TUT message with a proprietary translation code.

NOTE 5 The text body consists either 56 or 53 Hex character positions, depending on the “translation code field”. The number and type of characters and code delimiters if needed, up to the maximum permitted sentence length, are as follows:

- U => Up to fourteen 16-bit unicode characters including code delimiters. Each unicode character is represented by 2 Hex character codes. The letter “A” would be represented by 0041 hex, while the “Katakana letter A” would be represented by 30A2 hex.
- A or 1-16 => Up to twenty-eight 8-bit ASCII characters including code delimiters. Each ASCII character is represented by 2 Hex character codes. The letter “A” would be represented by 41 hex, while the Latin capital letter thorn “Þ” would be represented by DE hex. The “Katakana letter A” cannot be represented by 2 Hex character codes.
- P<aaa> => Up to fifty-three 4-bit user-defined characters including code delimiters. These are intended to be used as an index or entry into a user defined (proprietary) look-up table. Each character is represented by 1 or more Hex character codes.

Example scenario containing the proprietary and unicode translation codes:

A depth sounder sends a warning of “Shallow Water!” to an integrated navigation system using a proprietary translation code. The integrated navigation system sends a unicode text message to a remote display in the local language of Kanji.

`$SDTUT,SD,01,01, 1,PXYZ,02*6D<CR><LF>`

The integrated navigation system, upon receiving this sentence would look within in its own table for the unicode text contents referenced by the value 02. The text being reported in this TUT example is “Shallow Water!” Note that there is no constraint on how many hex characters are used to represent the look-up value. It could be represented in the field as 2 or 02 or 002 or 0002, as long as the sender and receiver of this know how to interpret this proprietary text body.

The integrated navigation system could then generate and send the following sentence using the unicode translation code to a remote display device in the local language desired; Kanji in this example. The Kanji equivalent of “Shallow Water!” is “浅瀬危険”, and is represented according to unicode as the hex codes of 6D45 702C 5371 967A.

`$INTUT,SD,01,01, 1,U,6D45702C5371967A*5D<CR><LF>`


The same text “Shallow Water!” could have been generated by the integrated navigation system using the ASCII translation code as shown below.

`$INTUT,SD,01,01, 1,A,5368616C6C6F7720576174657221*4B<CR><LF>`

TXT – Text transmission

For the transmission of short text messages. Longer text messages may be transmitted by using multiple sentences.

`$--TXT,xx,xx,xx,c--c*hh<CR><LF>`

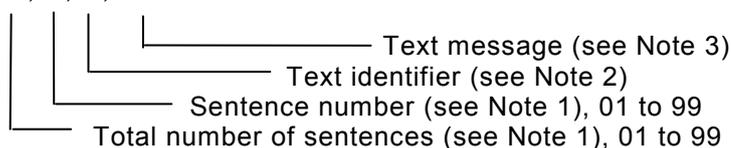

NOTE 1 Text messages may require the transmission of multiple sentences, all containing identical field formats when sending a complex message. The first field specifies the number of sentences, minimum value = 1. The second field identifies the order of this sentence (sentence number), minimum value = 1. For efficiency, it is permitted that null fields be used in the additional sentences when the data is unchanged from the first sentence. (Note that this practice can lead to the incorrect assembly of messages if there is a high risk of loss of sentence.)

NOTE 2 The text identifier is a number, 01 to 99, used to identify different text messages.

NOTE 3 ASCII characters, and code delimiters if needed, up to the maximum permitted sentence length (i.e. up to 61 characters including any code delimiters).


Example: A GPS receiver sends a text alarm message (message ID 25, DR MODE – ANTENNA FAULT!) upon reverting to dead-reckoning mode due to an antenna fault (note the use of “^ 21” to indicate “!”, see 7.1.3).

`$GPTXT,01,01,25,DR MODE-ANTENNA FAULT^21*38<CR><LF>`

UID – User identification code transmission

This sentence allows a user to send an identification message to a system.

`$--UID,c--c,c--c*hh<CR><LF>`



NOTE 1 User identification code UIC may consist of up to 20 alpha-numerical characters (A-Z, a-z, and 0-9). UIC will be used by the receiving system to identify the user and check the validity of the request. UIC might be recorded for accounting purposes. Field equipment needs to have means to input both UICs (e.g. input dialog).

NOTE 2 User identification code 2 is optional and allows further identification of the user or his project.


Example: A GPS receiver sends a user identification message (uic1 HEP SLGN02376 and uic2 DB Los 23).

`$GPUID,HEP SLGN02376,DB Los 23*hh<CR><LF>`

VBW – Dual ground/water speed

Water-referenced and ground-referenced speed data

\$--VBW, x.x, x.x, A, x.x, x.x, A, x.x, A, x.x, A*hh<CR><LF>

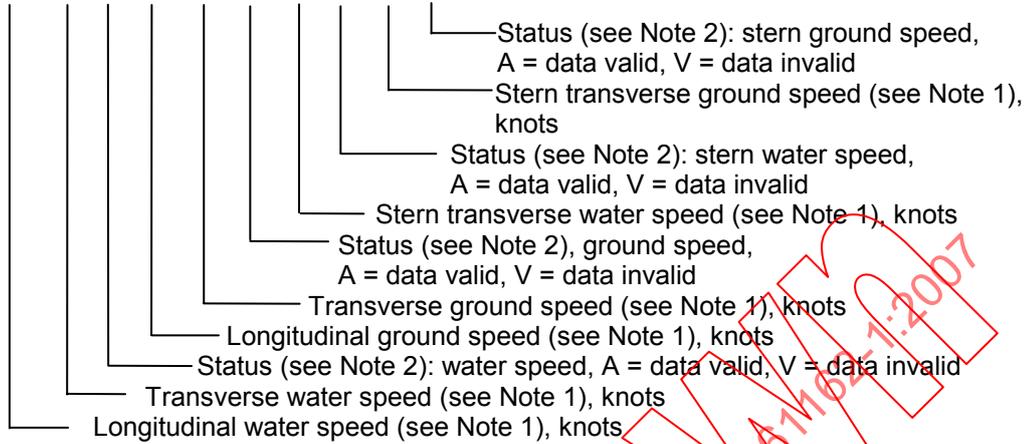

NOTE 1 Transverse speed: "-" = port,
Longitudinal speed: "-" = astern.


NOTE 2 The status field should not be a null field.

VDM – AIS VHF data-link message

This sentence is used to transfer the entire contents of a received AIS message packet, as defined in ITU-R M.1371 and as received on the VHF Data Link (VDL), using the "six-bit" field type. The structure provides for the transfer of long binary messages by using multiple sentences.

Data messages should be transmitted in as few sentences as possible. When a data message can be accommodated in a single sentence, then it shall not be split.

!--VDM,x,x,x,a,s--s,x*hh<CR><LF>

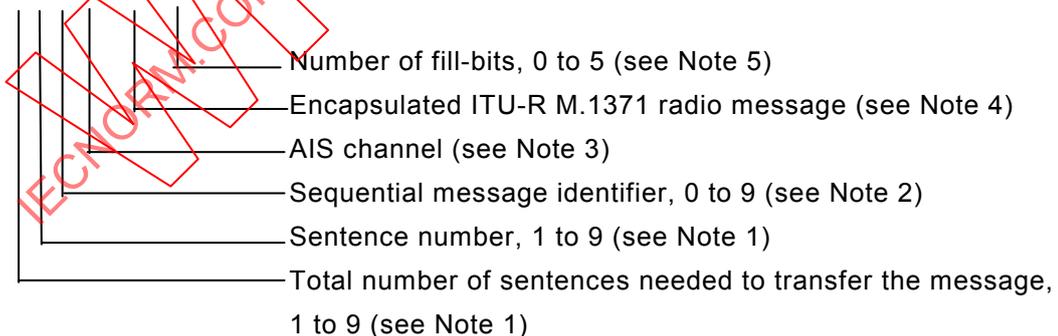

NOTE 1 The length of an ITU-R M.1371 message may require the transmission of multiple sentences. The first field specifies the total number of sentences used for a message, minimum value 1. The second field identifies the order of this sentence in the message, minimum value 1. These cannot be null fields.

NOTE 2 The sequential message identifier provides a message identification number from 0 to 9 that is sequentially assigned and is incremented for each new multi-sentence message. The count resets to 0 after 9 is used. For a message requiring multiple sentences, each sentence of the message contains the same sequential message identification number. It is used to identify the sentences containing portions of the same message. This allows for the possibility that other sentences might be interleaved with the message sentences that, taken collectively, contain a single message. This should be a null field for messages that fit into one sentence.

NOTE 3 The AIS channel is indicated as either “A” or “B”. This channel indication is relative to the operating conditions of the AIS unit when the packet is received. This should be a null field when the channel identification is not provided. The VHF channel numbers for channels “A” and “B” are obtained by using a “query” (see 7.3.4) of the AIS unit for an ACA sentence.


NOTE 4 This field supports up to 60 valid characters. Under certain conditions, this field may support up to a maximum of 62 valid characters: 1) When the message can be transmitted using a single sentence, the sequential message identifier field is set to null allowing an additional valid character in this encapsulated field. 2) When the AIS channel field is set to null an additional valid character is allowed in this encapsulated field. 3) The maximum number of 62 valid characters is only possible when the conditions allow both the sequential message identifier and AIS channel fields is set to null.

NOTE 5 This cannot be a null field. See “x⁴” in 7.3.3.

VDO – AIS VHF data-link own-vessel report

This sentence is used to transfer the entire contents of an AIS unit’s broadcast message packet, as defined in ITU-R M.1371 and as sent out by the AIS unit over the VHF data link (VDL) using the “six-bit” field type. The sentence uses the same structure as the VDM sentence formatter.

!-VDO,x,x,x,a,s—s,x*hh<CR><LF>

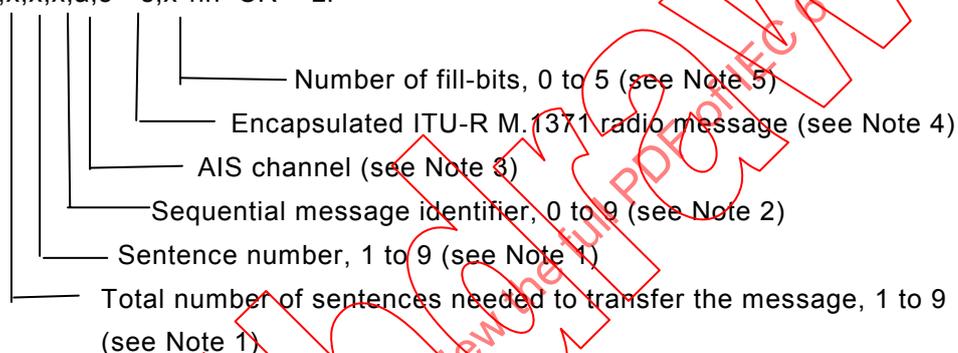


NOTES 1 to 5 See VDM sentence notes.

VDR – Set and drift

The direction towards which a current flows (set) and speed (drift) of a current.


\$-VDR,x,x,T,x.x,M,x.x,N*hh<CR><LF>

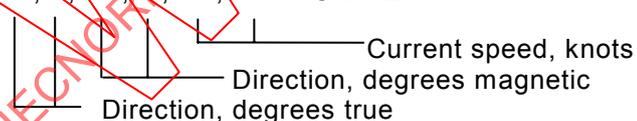

VHW – Water speed and heading

The compass heading to which the vessel points and the speed of the vessel relative to the water.

\$--VHW, x.x, T, x.x, M, x.x, N, x.x, K*hh<CR><LF>

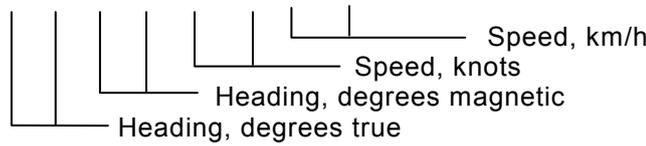


VLW – Dual ground/water distance

The distance travelled, relative to the water and over the ground.

NOTE Two additional fields have been added to the previous VLW sentence, and the description and title have been reworded to provide for distance relative to the ground. This brings the sentence in line with the structure and information provided by the VBW sentence.


\$--VLW, x.x, N, x.x, N, x.x, N, x.x, N*hh<CR><LF>

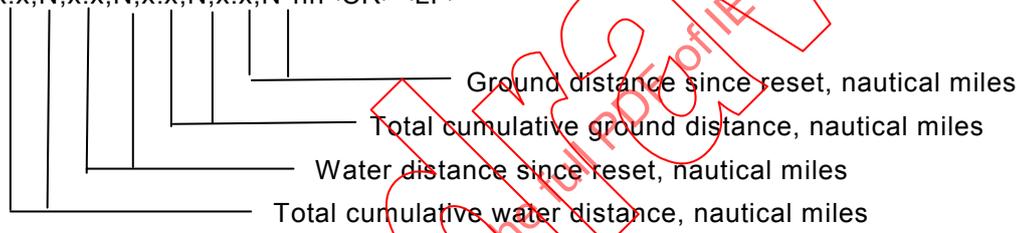

VPW – Speed measured parallel to wind


The component of the vessel's velocity vector parallel to the direction of the true wind direction. Sometimes called "speed made good to windward" or "velocity made good to windward".

\$--VPW, x.x, N, x.x, M*hh<CR><LF>



VSD – AIS voyage static data

This sentence is used to enter information about a ship's transit that remains relatively static during the voyage. However, the information often changes from voyage to voyage. The parameters in this sentence support a number of the ITU-R M.1371 messages.

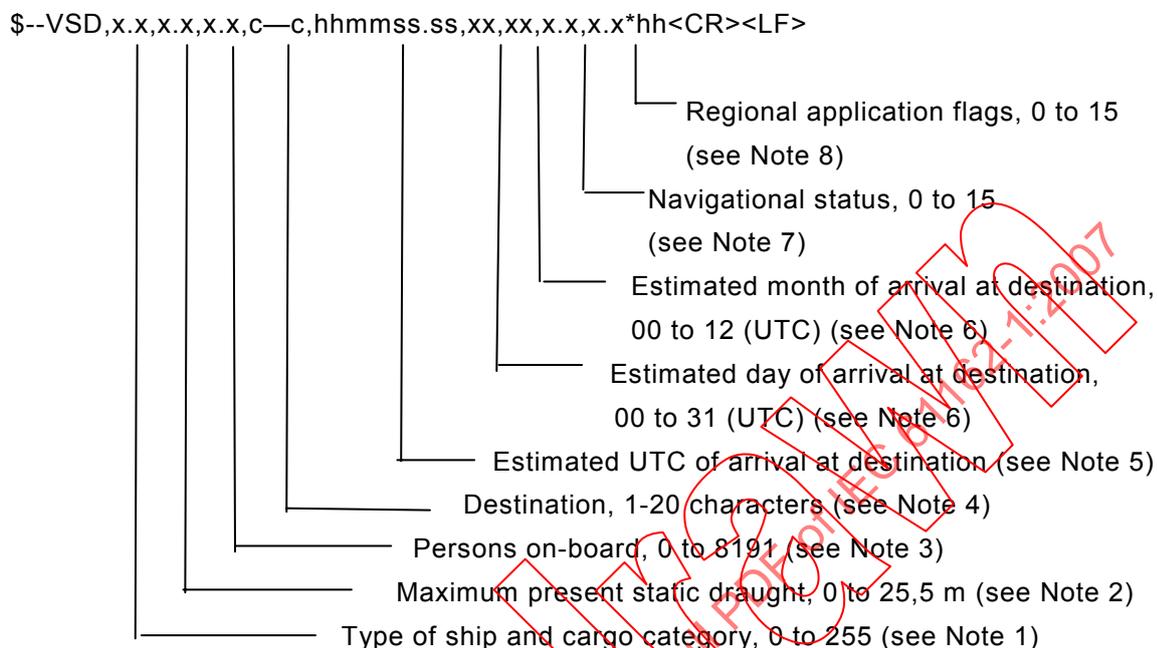

NOTE 1 Type of ship and cargo category are defined under Message 5 of ITU-R M.1371. The descriptions of ship and cargo are indicated by a number. The values are defined in ITU-T M. 1371, Message 5. A null field indicates that this is unchanged.

NOTE 2 The draught is reported in units of metres. valid range is 0 to 25,5. The value 0 = not available and the value 25,5 indicates that the draught is 25,5 m or more. A null field indicates that this is unchanged.

NOTE 3 Current number of persons on-board including crew. Valid range is 0 to 8191. The value 0 = not available and the value 8191 = 8191 or more people. A null field indicates that this is unchanged.

NOTE 4 The characters that can be used in the destination are listed in the ITU-R M.1371, 6-bit ASCII Table 14. Some of these characters are reserved characters in Table 1. These characters should be represented using the "A" method (see 7.1.3). A null field indicates that the previously entered destination is unchanged. The string of characters "@@@@@@@@@@@@@@@@@@" are used to indicate that the ship's destination is not available.

NOTE 5 If the hour of arrival is not available, "hh" should be set to 24. If the minute of arrival is not available, "mm" should be set to 60. The seconds option "ss.ss" of the field may be set to "00" as the AIS unit only broadcasts hours and minutes. A null field indicates that this is unchanged.

NOTE 6 The day and month of arrival are in UTC. The field is a fixed two-digit number requiring leading zeros. If the day of arrival is not available, "00" should be the number for the day. If the month of arrival is not available, "00" should be the number for the month. A null field indicates that this is unchanged.

NOTE 7 The navigational status is indicated using the following values, a null field indicates the status is unchanged (ref. ITU-R M.1371, Message 1, navigational status parameter):


0 = under way using engine	4 = constrained by draught	9 = reserved for High Speed Craft (HSC)
1 = at anchor	5 = moored	10 = reserved for Wing In Ground (WIG)
2 = not under command	6 = aground	11 to 14 = reserved for future use
3 = restricted manoeuvrability	7 = engaged in fishing	15 = default
	8 = under way sailing	

NOTE 8 Definition of values 1 to 15 provided by a competent regional authority. Value should be set to zero (0), if not used for any regional application. Regional applications should not use zero. A null field indicates that this is unchanged (ref. ITU-R M.1371, Message 1, reserved for regional applications parameter).VTG – Course over ground and ground speed

VTG – Course over ground and ground speed

The actual course and speed relative to the ground.

\$--VTG, x.x, T, x.x, M, x.x, N, x.x, K,a*hh<CR><LF>

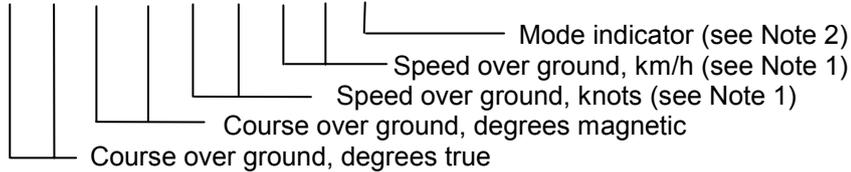

NOTE 1 The speed over the ground should always be non-negative.


NOTE 2 The mode indicator provides status information about the operation of the source device (such as positioning systems, velocity sensors, etc.) generating the sentence, and the validity of data being provided. The possible indications are as follows:

- A = Autonomous mode
 - D = Differential mode
 - E = Estimated (dead reckoning) mode
 - M = Manual input mode
 - S = Simulator mode
 - N = Data not valid
- The mode indicator field should not be a null field.

WAT – Water level detection

This sentence provides detection status of water leakage and bilge water level, with monitoring location data.

\$--WAT,a,hhmmss.ss,aa,xx,xx,xxx,a,a,c--c*hh<CR><LF>

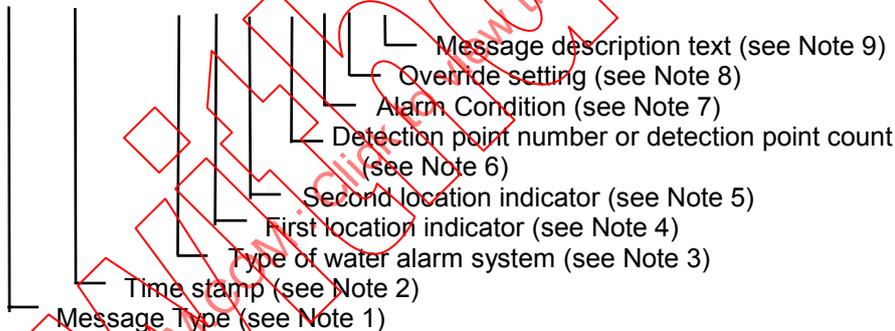

NOTE 1 S: Status for section: Number of faulty and activated condition reported as number in fields 4 and 5. The section may be a whole section (one or both of the location indicator fields are null) or a sub-section. The status S is normally transmitted at regular intervals. Examples of use are given in Annex E.

E: Status for each water level detector. (E may be used to indicate an event.)

F: Fault in system: location indicator fields define the sections when provided.

NOTE 2 Time when this status/message was valid. This may be a null field.

NOTE 3 Indicator characters showing system detecting water level. The field is two fixed characters.

- WL = Water level detection system
- BI = High water level by bilge system
- HD = Water leakage at hull (shell) door
- OT = others

NOTE 4 First location indicator characters showing detection location. This field is two characters. The content of this field is not defined by this standard, but the two location fields should uniquely define the source for the alarm.

NOTE 5 Second location indicator character showing detection location. This field is two characters. The content of this field is not defined by this standard, but the two location fields should uniquely define the source for the alarm.

NOTE 6 This field is three fixed numeric characters. When the message type field is E this field identifies the high-water-level detection point. When the message type field is S this field contains the number of the water leakage detection points. When the message type field is F this field is a null field.

NOTE 7 When the message type field is S or F this field should be a null field. When the message type field is E this field is a single character specified by the following:

N = normal state
 H = alarm state (threshold exceeded)
 J = alarm state (extreme threshold exceeded)
 L = alarm state (low threshold exceeded, i.e. not reached)
 K = alarm state (extreme low threshold exceeded, i.e. not reached)
 X = fault (state unknown)

NOTE 8 This field includes a single character specified by the following:

O = Override mode (water allowed in space)
 N = Normal mode (water not allowed in space)


If there is no override setting, this should be a null field.

NOTE 9 Descriptive text/level detector tag. If a level detector identifier is string type, it is possible to use this field instead of above level detector location fields. Maximum number of characters will be limited by maximum sentence length and length of other fields

WCV – Waypoint closure velocity

The component of the velocity vector in the direction of the waypoint, from present position. Sometimes called "speed made good" or "velocity made good".

\$--WCV, x.x, N, c--c,a*hh<CR><LF>

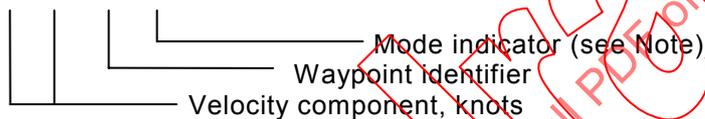

NOTE Positioning system mode indicator:

A = Autonomous mode

D = Differential mode

E = Estimated (dead reckoning) mode

M = Manual mode

S = Simulator mode


N = Data not valid

The positioning system mode indicator field should not be a null field.

WNC – Distance waypoint to waypoint

Distance between two specified waypoints.


\$--WNC, x.x, N, x.x, K, c--c, c--c*hh<CR><LF>

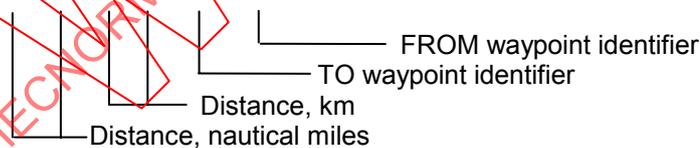

WPL – Waypoint location

Latitude and longitude of specified waypoint.


\$--WPL, IIII.II, a, yyyyy.yy, a, c--c*hh<CR><LF>

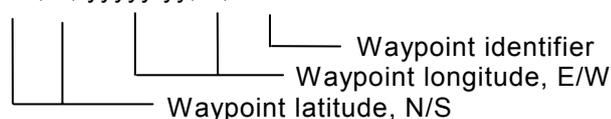

XDR – Transducer measurements

Measurement data from transducers that measure physical quantities such as temperature, force, pressure, frequency, angular or linear displacement, etc. Data from a variable number of transducers measuring the same or different quantities can be mixed in the same sentence. This sentence is designed for use by integrated systems as well as transducers that may be connected in a "chain" where each transducer receives the sentence as an input and adds on its own data fields before retransmitting the sentence.

\$--XDR, a, x.x, a, c--c,..... a, x.x, a, c--c*hh<CR><LF>

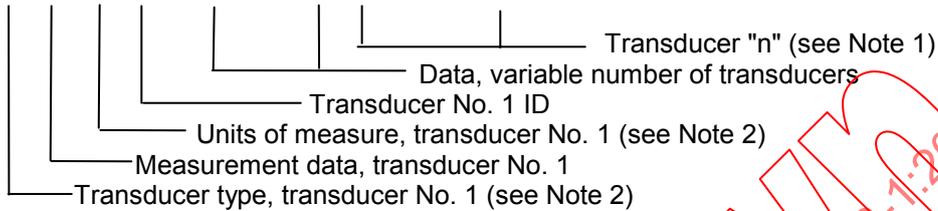

NOTE 1 Sets of the four fields "type-data-units-ID" are allowed for an undefined number of transducers. Up to "n" transducers may be included within the limits of allowed sentence length; null fields are not required except where portions of the "type-data-units-ID" combination are not available.

NOTE 2 Allowed transducer types and their units of measure are:


Transducer	Type field	Units	Comments
Temperature	C	C = degrees Celsius	
Angular displacement	A	D = degrees	^- = anticlockwise
Absolute humidity	B	K = kg/m ³	Kilograms per cubic metre
Linear displacement	D	M = metres	^- = compression
Frequency	F	H = Hertz	
Salinity	L	S = ppt	ppt = parts per thousand
Force	N	N = newtons	^- = compression
Pressure	P	P = pascals	^- = vacuum
Flow rate	R	l = litres/s	
Tachometer	T	R = revolutions/min	
Humidity	H	P = per cent	
Volume	V	M = cubic metres	
Voltage	U	V = volts	
Current	I	A = amperes	
Switch or valve	S	None (null)	1 = ON, CLOSED; 0 = OFF, OPEN
Generic	G	None (null)	x.x = variable data

XTE – Cross-track error, measured

NOTE In the second edition of IEC 61162-1, there was a printing/format error in this sentence. The correct definition is given below.

Magnitude of the position error perpendicular to the intended track line and the direction to steer to return to track.

```
$--XTE,A,A,x.x,a,N,a*hh<CR><LF>
```

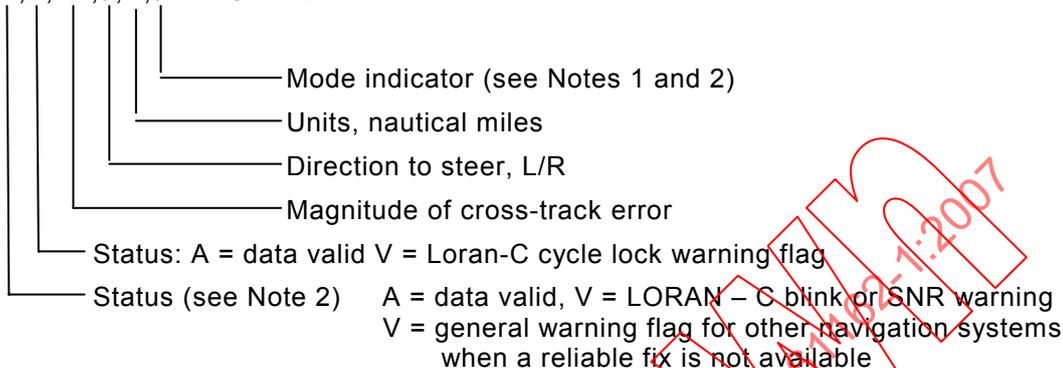


NOTE 1 Positioning system mode indicator:
 A = Autonomous mode
 D = Differential mode
 E = Estimated (dead reckoning) mode
 M = Manual input mode
 S = Simulator mode
 N = Data not valid

NOTE 2 The positioning system mode indicator field supplements the positioning system status fields (fields 1 and 2); the status fields should be set to V = invalid for all values of indicator mode except for A = Autonomous and D = Differential. The positioning system mode indicator and status fields should not be null fields.

XTR – Cross-track error, dead reckoning

Magnitude of the dead reckoned position error perpendicular to the intended track line and the direction to steer to return to track.


```
$--XTR, x.x, a, N*hh<CR><LF>
```

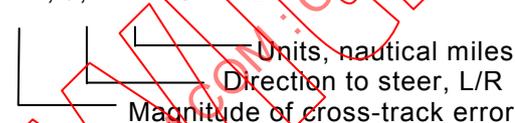

ZDA – Time and date

UTC, day, month, year and local time zone.

```
$--ZDA, hhmmss.ss, xx, xx, xxxx, xx, xx*hh<CR><LF>
```

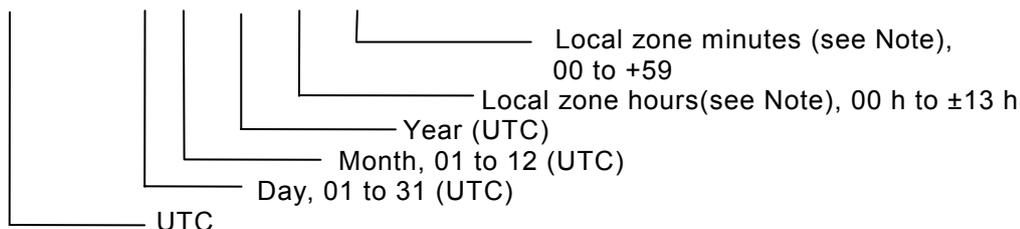


NOTE Local time zone is the magnitude of hours plus the magnitude of minutes added, with the sign of local zone hours, to local time to obtain UTC. Local zone is generally negative for East longitudes with local exceptions near the International date line.

Example: At Chatham Is. (New Zealand) at 1230 (noon) local time on June 10, 1995:
 \$GPZDA,234500,09,06,1995,-12,45*6C<CR><LF>
 In the Cook Islands at 1500 local time on June 10, 1995:
 \$GPZDA,013000,11,06,1995,10,30*4A<CR><LF>

ZDL – Time and distance to variable point

Time and distance to a point that might not be fixed. The point is generally not a specific geographic point but may vary continuously, and is most often determined by calculation (the recommended turning point for sailboats for optimum sailing to a destination, the wheel-over point for vessels making turns, a predicted collision point, etc.).


\$-ZDL, hhmmss.ss, x.x, a*hh<CR><LF>

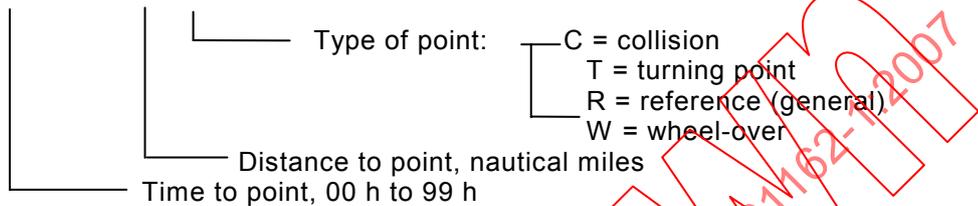

ZFO – UTC and time from origin waypoint

UTC and elapsed time from origin waypoint.


\$-ZFO, hhmmss.ss, hhmmss.ss, c--c*hh<CR><LF>

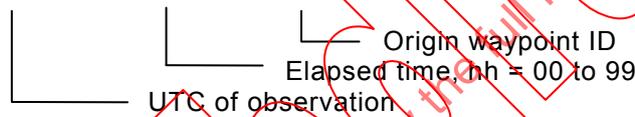

ZTG – UTC and time to destination waypoint

UTC and predicted time-to-go to destination waypoint.

\$-ZTG, hhmmss.ss, hhmmss.ss, c--c*hh<CR><LF>

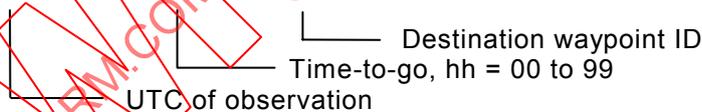

9 Applications


9.1 Example parametric sentences

These examples are intended as samples of correctly constructed parametric sentences. They are representative samples only and show part of the wide range of acceptable variations possible with sentences. They shall not necessarily be used as templates for sentences.

9.1.1 Example 1 – LORAN-C latitude/longitude

This example gives present position in latitude/longitude, as determined by LORAN-C. The three character mnemonic in the address, GLL, indicates that the data is present position in latitude/longitude. The time (UTC) of the position fix is 09 h, 13 min and 42 s. Decimal seconds are not available and the decimal point is optionally omitted. There are no warning flags set in the navigation receiver as indicated by status A.


\$LCGLL, 4728.31, N, 12254.25, W, 091342, A,A*4C<CR><LF>

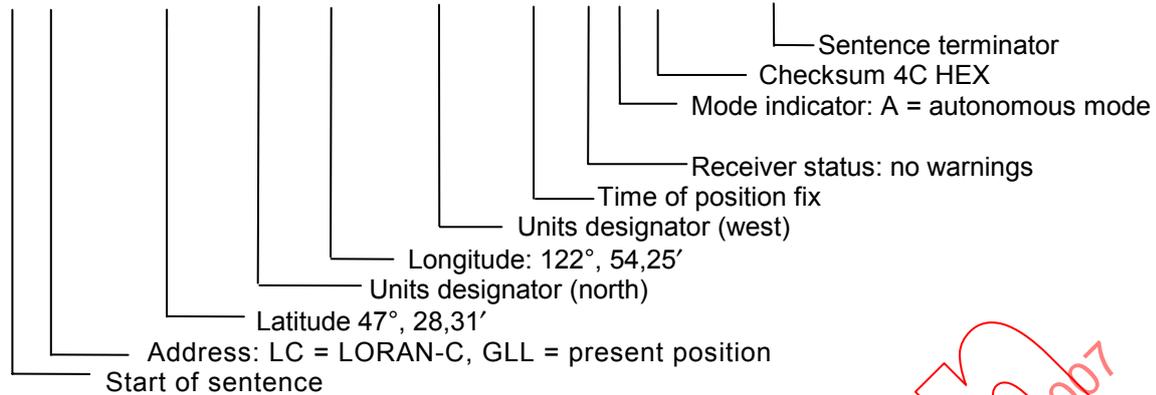

9.1.2 Example 2 – LORAN-C arrival alarm


This example illustrates arrival alarm data. The mnemonic code for arrival alarm is AAM. In this case, the address field is "LCAAM" for LORAN-C arrival alarm. The first data field shows "V" indicating the radius of the arrival circle HAS NOT been entered, the second data field is "A" showing that the perpendicular to the course line, at the destination, HAS been crossed. The third and fourth fields show the radius and units of the destination waypoint arrival circle ".15, N" for 0,15 nautical miles. Data field 5 is the waypoint identifier field of valid characters.

\$LCAAM,V, A,.15, N, CHAT-N6*56<CR><LF>

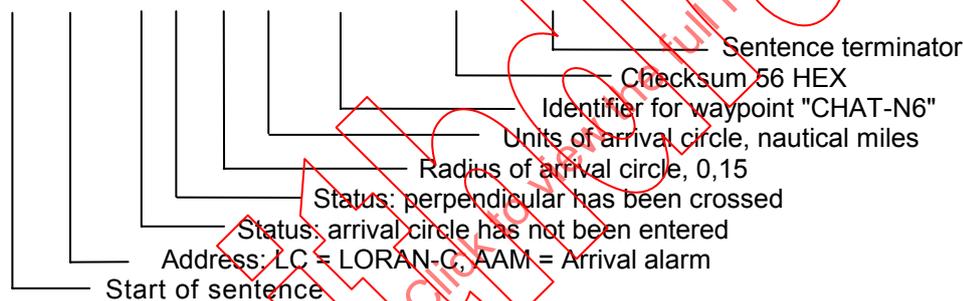


9.1.3 Example 3 – Proprietary sentence

A proprietary sentence has the following general format:

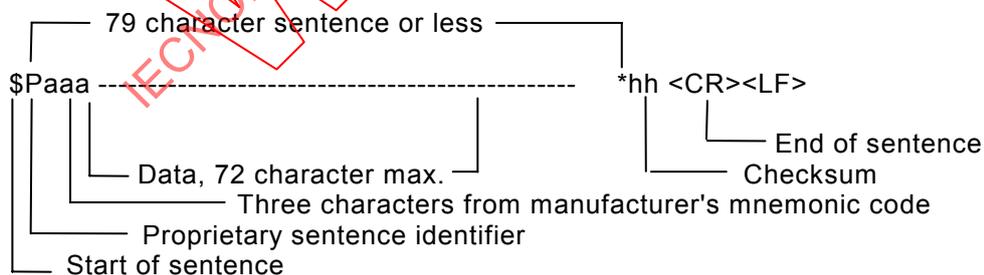

A specific example will have little meaning to someone other than the particular manufacturer that designed the sentence:

\$PSRDA003[470738][1224523]???RST47, 3809, A004 *47<CR><LF>

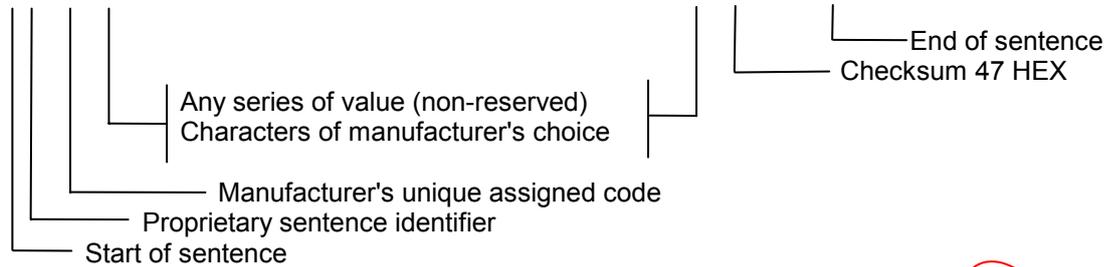

9.1.4 Example 4 – RMA examples

The following group of sentences show a typical progression of output data as a LORAN-C receiver acquires stations:

- a) \$LCRMA, V,,,,,14162.8,,,,,N *6F<CR><LF>
Data invalid, only one TD acquired. Fields where data is not yet available are null fields;
- b) \$LCRMA, V,,,,,14172.3, 26026.7,,,,,N *4C<CR><LF>
Two TDs acquired but not settled, data invalid;
- c) \$LCRMA, A,,,,,14182.3, 26026.7,,,,,A *5B<CR><LF>
Data valid, two TDs cycled but latitude/longitude not yet calculated;
- d) \$LCRMA, A,4226.26,N,07125.89,W,14182.3,26026.7,8.5,275.,14.0,W,A*05<CR><LF>
Normal operation;
- e) \$LCRMA,V,4226.26,N,07125.89,W,14182.3,26026.7,8.5,275.,14.0, W,N*1D<CR><LF>
Data invalid, potential LORAN-C problem;
- f) \$LCRMA,A,4226.265,N,07125.890,W,14172.33,26026.71,8.53,275.,14.0,W,D*3B<CR>
LORAN-C operating in high resolution mode.

9.1.5 Example 5 – FSI examples

The following sentences show typical applications for remote control of radiotelephones:

- a) \$CTFSI, 020230, 026140, m, 0*14<CR><LF>
Set transmitter 2 023 kHz, receiver 2 614 kHz, mode J3E, telephone, standby;
- b) \$CTFSI, 020230, 026140, m, 5*11<CR><LF>
MF/HF radiotelephone set transmit 2 023 kHz, receive 2 614 kHz, mode J3E, telephone, medium power;
- c) \$CTFSI,, 021820, o, *2D<CR><LF>
Set receiver 2 182 kHz, mode H3E, telephone;
- d) \$CDFSI, 900016,, d, 9*08<CR><LF>
Set VHF transmit and receive channel 16, F3E/G3E, simplex, telephone, high power;
- e) \$CTFSI, 300821,, m, 9*17<CR><LF>
Set MF/HF radiotelephone to telephone channel 821, for example transmit 8 255 kHz, receive 8 779 kHz, mode J3E, telephone, high power;
- f) \$CTFSI, 404001,, w, 5*08<CR><LF>

Set MF/HF radiotelephone to teletype channel 1 in 4 MHz band, for example transmit 4 172,5 kHz, receive 4 210,5 kHz, mode F1B/J2B, teleprinter, medium power;

g) \$CTFSI, 416193,, s, 0*00<CR><LF>

MF/HF radiotelephone set to teletype channel 193 in 16 MHz band, for example transmitter 16 784,5 kHz, receiver 16 902,5 kHz, mode F1B/J2E ARQ, telex/teleprinter, standby;

h) \$CTFSI, 041620, 043020, |, 9*0A<CR><LF>

Set MF/HF radiotelephone transmit 4 162 kHz, receive 4 302 kHz, mode F1C/F2C/F3C, facsimile machine, high power;

i) \$CXFSI,, 021875, t, *3A<CR><LF>

Scanning receiver set to 2 187,5 kHz, mode F1B/J2B, receive only, teleprinter/DSC.

9.1.6 Example 6 – MSK/MSS examples

The following sentences show applications of query to a beacon receiver: GPS receiver (GP) query sentences to a data receiver (CR):

a) request for configuration information:

\$GPCRQ,MSK*2E<CR><LF>

reply could be:

\$CRMSK,293.0,M,100,A,10,1*6F<CR><LF>

b) request for signal strength, S/N ratio:

\$GPCRQ,MSS*36<CR><LF>

reply could be

\$CRMSS,50,17,293.0,100,1*55<CR><LF>

9.1.7 Example 7 – DSC and DSE sentences

The following sentences might be output from a DSC capable VHF radio upon reception of a distress message (from another ship) with enhanced position resolution as in IEC 62238.

\$CVDSC,12,3601234560,12,05,00,1474712519,0817,,,S,E,*51

\$CVDSE,1,1,A,3601234560,00,12345678*0C

The fields of the first sentence indicate:

- 1) distress call
- 2) from MMSI 360123456
- 3) category distress (implicit in a distress call)
- 4) sinking (code 105)
- 5) respond by radiotelephony (G3E/F3E code 100)
- 6) position 47 47N 125 19W
- 7) time of position 08:1
- 8) null
- 9) null
- 10) end of sequence (no acknowledgement request)
- 11) expansion sentence to follow
- 12) sentence checksum

\$xxDSE,1,1,A,3601234560,00,12345678*0C

The fields of the second sentence indicate:

- 1) expansion sentence
- 2) of which this is the first (and in this case only)
- 3) message sent automatically (not requested). This field probably not too useful in this case
- 4) from MMSI 360123456
- 5) with data containing enhanced position resolution
- 6) 1234 minutes latitude and .5678 longitude (i.e. position 47 47.1234N 125 19.5678W)
- 7) sentence checksum

The following are all DSC sentences received by an MF/HF radio.

All ships distress relay from 011234567 for ship 999121212 at 47 47N 122 19W at time 12:34 on fire

\$CTDSC,16,0112345670,12,12,09,1474712219,1234,9991212120,00,S*19

All ships safety call from 011234567 to work J3E on 4125 kHz RX only

\$CTDSC,16,0112345670,08,09,26,041250,,,,,S*11

9.1.8 Example 8 – FIR, DOR and WAT sentences


An example is given in Annex E

9.2 Example encapsulation sentences

An example is given in Annex F

9.3 Examples of receiver diagrams

The illustrative diagrams in Figures 3 and 4 show the example structure of two opto-isolator based listener circuits that offer overvoltage, reverse voltage and power dissipation protection for the opto-isolator and serve to limit the current drawn from the line.

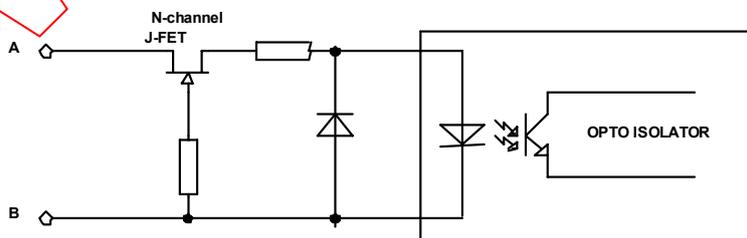

IEC 912/2000

Figure 3 – Example 1, J-FET, N channel, opto-isolator based listener circuit

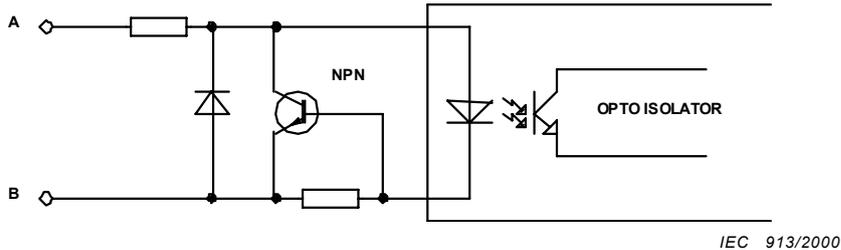


Figure 4 – Example 2, NPN opto-isolator based listener circuit

IECNORM.COM: Click to view the full PDF of IEC 61162-1:2007
Withdrawn

Annex A (informative)

Glossary

NOTE The definitions which follow are included for additional understanding of this standard, but may not command universal acceptance.

accuracy: in navigation, measure of the error between the point desired and the point achieved, or between the position indicated by measurement and the true position (compare with **precision**).

address field: for sentences in this standard, fixed length field following the beginning sentence delimiter "\$" (HEX 24); for approved sentences, composed of a two-character talker identifier and a three-character sentence formatter; for proprietary sentences, composed of the character "P" (HEX 50) followed by a three-character manufacturer identification code.

additional secondary factor: in LORAN-C, a correction in addition to the secondary phase factor correction for the additional time (or phase delay) for transmission of a low-frequency signal over a composite land-sea path when the signal transit time is based on the free-space velocity.

AIS: automatic identification system.

alarm: denotes a condition that has to be recognised, or acted upon immediately, for example depth minimum limit exceeded, anchor deep.

apparent wind: see **relative wind**.

approved sentence: sentence which is listed in this standard and annexes.

arrival alarm: alarm signal issued by a voyage tracking unit which indicates arrival at, or at a pre-determined distance from, a waypoint (see **arrival circle**).

arrival circle: artificial boundary placed around the destination waypoint of the present navigation leg, the entering of which will signal an arrival alarm.

arrival perpendicular: crossing of the line which is perpendicular to the course line and which passes through the destination waypoint.

azimuth: horizontal direction of a celestial point from a terrestrial point, expressed as the angular distance from a reference direction, usually measured from 000° at the reference direction clockwise through 359°.

ASCII: American standard code for information interchange. A seven-bit wide serial code describing numbers, upper and lower case alphabetical characters, special and non-printing characters. See American National Standards Institute (ANSI) ANSI X 3.15, ANSI X 3.16 and ANSI X 3.4.

atomic time: time obtained by counting the cycles of a signal in resonance with certain kinds of atoms.

autopilot: see **heading control system**.

bearing: horizontal direction of one terrestrial point from another, expressed as the angular distance from a reference direction, usually measured from 000° at the reference direction clockwise through 359°.

beaufort wind scale: numerical scale for indicating wind speed. Beaufort numbers (or forces) range from force 0 (calm) to force 12 (hurricane).

blink: in LORAN-C, signal used to indicate that a station is malfunctioning. Intended to prevent use of that signal for navigation.

checksum: for this standard, a mandatory validity check performed on the data contained in the sentences, calculated by the talker, appended to the message, then re-calculated by the listener for comparison to determine if the message was received correctly.

communication protocol: method established for message transfer between a talker and a listener which includes the message format and the sequence in which the messages are to be transferred. Also includes the signalling requirements such as baud rate, stop bits, parity, and bits per character.

course: horizontal direction in which a vessel is steered or intended to be steered, expressed as angular distance from north, usually from 000° at north, clockwise through 359°. Strictly, the term applies to direction through the water, not the direction intended to be made good over the ground (see **track**). Differs from **heading**.

course over ground (COG): term used to refer to the direction of the path over ground actually followed by a vessel (a misnomer, in that courses are directions steered or intended to be steered through the water with respect to a reference meridian).

cross track error (XTE): distance from the vessel's present position to the closest point on a line between the origin and destination waypoints of the navigation leg being travelled.

cycle lock: in LORAN-C, comparison, in time difference, between corresponding carrier cycles contained in the rise times of a master and slave station pulse is called cycle match. This value when refined to a determination of the phase difference between these two cycles results in cycle lock (see also **envelope-to-cycle distortion**).

data field: in a sentence, field which contains a data value.

diagnostic: usually denotes a failure, or warning of deterioration in a system, for example engine failure malfunction.

dead reckoning: process of determining the position of a vessel at any instant by applying to the last well-determined position (point of departure or subsequent fix) the run that has since been made, usually based on the recent history of speed and heading measurements.

DECCA chain: group of associated stations of the DECCA Navigator system. A DECCA chain normally consists of a master and three slave stations. Each slave station is called by the colour of an associated pattern of hyperbolic lines as printed on the chart, i.e. red slave, green slave, purple slave.

DECCA navigator system: short-to-medium range low frequency (70 kHz to 130 kHz) radionavigation system by which a hyperbolic line of position of high accuracy is obtained. The system is an arrangement of fixed, phase-locked, continuous wave transmitters operating on harmonically related frequencies and special receiving equipment located on a vessel. The operation of the system depends on phase comparison of the signals from the transmitters brought to a common comparison frequency with the receiver.

delimiter: in this standard, character or characters used to separate fields or sentences. The following delimiters are used in this standard:

Field delimiters:

- ASCII "\$" (HEX 24) for address field
- ASCII ",", (HEX 2C) for data fields
- ASCII "*" (HEX 2A) for checksum field

Sentence delimiters

- carriage return <CR> and line feed <LF> (HEX 0D0A)

NOTE <CR><LF> is not required preceding the first sentence transmitted.

deprecated sentence: sentence not to be used for new designs (see 7.5).

depth sounder: instrument which determines the depth of water by measuring the time interval between the emissions of a sound and the return of its echo from the bottom.

destination: immediate geographic point of interest to which a vessel is navigating. It may be the next waypoint along a route of waypoints or the final destination of a voyage.

deviation: angle between the magnetic meridian and the axis of a compass card, expressed in degrees east or west to indicate direction in which the northern end of the compass card is offset from magnetic north.

DGNSS: Differential GNSS, the use of GNSS measurements, some or all of which are differentially corrected.

DGPS: Differential GPS, the use of GPS measurements which are differentially corrected.

Doppler speed log: instrument which measures the relative motion between a vessel and the reflective sea bottom (for bottom return mode) or suspended particulate matter in the seawater itself (for water return mode) by measuring the frequency shifts between a transmitted and subsequently echoed acoustic or electromagnetic signal.

drift: speed of a current.

echo sounder: see **depth sounder**.

envelope-to-cycle distortion (ECD): time relationship between the phase of the LORAN-C carrier and the time origin of the envelope waveform.

event: is used to log a condition that has occurred and/or track the operation of some condition. Events are normally defined, for example transfer of control to the bridge.

fault: is a technical problem in one of the system components that will reduce the availability, or future availability, of some or all functions.

field: in this standard, character or string of characters immediately preceded by a field delimiter (see **delimiter**).

fixed field: in this standard, field in which the number of characters is fixed. For data fields, such fields are shown in the sentence definitions with no decimal point. Other fields which fall into this category are the address field and the checksum field (if present).

Galileo: a European Union project for a satellite navigation system.

geoid: surface along which the gravity potential is equal everywhere (equipotential surface) and to which the direction of gravity is always perpendicular.

geometric dilution of precision (GDOP): value representing all geometric factors that degrade the accuracy of a position fix which has been derived from a navigation system.

global navigation satellite system (GNSS): any single or combined satellite navigation system. Currently the options are: GPS, GLONASS and combined GPS/GLONASS.

GLONASS: an all-weather, continuous satellite navigation system, maintained by the Russian Space Forces. Normally composed of 24 satellites in 3 orbital planes with 8 satellites in each plane. The spacing of satellites in orbit is arranged so that a minimum of 4 satellites will be in view to users worldwide to provide position dilution of position (PDOP) of 6 or less.

global positioning system (GPS): all-weather, continuous satellite navigation system. The fully deployed operational system is intended to provide highly accurate position and velocity information in three dimensions and precise time and time interval on a global basis, to an unlimited number of authorized users.

great circle: intersection of the surface of a sphere and a plane through its centre.

great circle chart: chart on which a great circle appears as a straight line or approximately so.

great circle direction: horizontal direction of a great circle, expressed as angular distance from a reference direction.

group repetition interval (GRI): (of a particular LORAN-C chain) specified time interval for all stations of the chain to transmit their pulse groups. For each chain a minimum group repetition interval is selected of sufficient duration to provide time for each station to transmit its pulse group and additional time between each pulse group so that signals from two or more stations cannot overlap in time anywhere within the coverage area.

gyrocompass: compass having one or more gyroscopes as the directive element, and which is north-seeking. Its operation depends upon four natural phenomena: gyroscopic inertia, gyroscopic precession, the earth's rotation and gravity.

gyropilot: automatic device for steering a vessel by means of control signals received from a gyrocompass (see heading control system).

gyroscope: rapidly rotating mass free to move about one or both axes perpendicular to the axis of rotation and to each other.

heading: horizontal direction in which a ship actually points or heads at any instant, expressed in angular units from a reference direction, usually from 000° at the reference direction clockwise through 359°. (See **true heading** and **magnetic heading**).

heading control system: automatic device for steering a vessel so as to maintain heading in an intended direction. Mechanical means are used to steer the rudder. A radio navigation system is often connected to correct for track errors, or to select new destinations.

heading to steer: difference between the bearing to destination (from present position) and track made good, applied to the bearing to the destination to produce a heading that will guide the vessel to the destination.

horizontal dilution of precision (HDOP): similar to GDOP, except elevation factors are ignored.

keel: longitudinal timber or plate extending along the centre of the bottom of a ship and often projecting from the bottom.

line of position (LOP): in LORAN or DECCA navigation systems, vector obtained by measurement of the time difference between the receipt of the master and slave signals which is then used to select a corresponding LOP from a chart or table. Two or more intersecting LOPs are required to obtain a position fix.

listener: in this standard, recipient of messages across an interconnecting link.

log: instrument for measuring the speed or distance or both travelled by a vessel.

LORAN: general designation of one group of radionavigation systems by which a hyperbolic line of position is determined through measuring the difference in the times of reception of synchronized pulse signals from two fixed transmitters.

magnetic bearing: bearing relative to magnetic north; compass bearing corrected for deviation.

magnetic heading: heading relative to magnetic north.

manufacturer identification code: in this standard, three character manufacturer identifier, usually an acronym derived from the company name, for use by a manufacturer as part of the address field in formulation of proprietary sentences.

Mercator map projection: conformal cylindrical map projection in which the surface of a sphere or spheroid, such as earth, is conceived as developed on a cylinder tangent along the equator. Meridians appear as equally spaced vertical lines and parallels as horizontal lines drawn farther apart as the latitude increases, such that the correct relationship between latitude and longitude scales at any point is maintained. Also known as Mercator map projection.

message two or more sentences with the same sentence formatter. Messages are used when two or more sentences are needed to convey related data that exceeds the maximum sentence length. This only applies to those sentence formatters that are defined with key fields supporting multi-sentence messages.

navigation leg: portion of a voyage upon which the vessel currently travels. Each leg consists of two waypoints, an origin, a destination, and a line between them, upon which the vessel travels.

null field: indicates that data is not available for the field. Indicated by two ASCII commas, i.e. ",," (HEX 2C2C), or, for the last data field in a sentence, one comma followed by the checksum delimiter "*" (HEX 2A).

NOTE The ASCII null character (HEX 00) is not to be used for null fields.

one-way communication protocol: protocol established between a talker and a listener in which only the talker may send messages (compare to **two-way** communication protocol).

origin waypoint: starting point of the present navigation leg.

precision: measure of how close the outcome of a series of observations or measurements cluster about some estimated value of a desired quantity, such as the average value of a series of observations of a quantity. Precision implies repeatability of the observations within some specified limit and depends upon the random errors encountered due to the quality of the observing equipment, the skill of the observer and randomly fluctuating conditions such as temperature, pressure, refraction, etc. (compare with **accuracy**).

proprietary sentence: sentence to be sent across the interconnecting link which is not included in the list of approved sentences of this standard. All proprietary sentences sent over the interconnecting link contain a unique talker identifier which begins with a "P" (HEX 50) followed by a three-character manufacturer identification code.

relative bearing: bearing relative to heading or to the vessel.

relative wind: the speed and relative direction from which the wind appears to blow with reference to a moving point (also called **apparent wind**).

rhumb line: line on the surface of the earth making the same oblique angle with all meridians. A rhumb line is a straight line on a rhumb (or Mercator) projection.

rhumb direction: the horizontal direction of a rhumb line, expressed as angular distance from a reference direction. Also known as Mercator direction (see **Mercator** map projection).

RM- sentence: recommended minimum acceptable (RM-) sentence, a composite sentence recommended by this standard to ensure interoperability between talkers and listeners and to ensure that all data considered necessary for navigation is sent by a particular navigation unit.

route: planned course of travel, usually composed of more than one navigation leg.

route system: any system of one or more routes and/or routing measures aimed at reducing the risk of casualties during a voyage which may include such items as traffic separation schemes, recommended tracks, restricted areas, inshore traffic zones, etc.

semi-fixed field: data fields having a base other than 10, but using base 10 to express precision of the final term (such as minutes expressed as units with a decimal trailer instead of seconds in a base 60 field, or seconds expressed with a decimal trailer).

selected waypoint: waypoint currently selected to be the point towards which the vessel is travelling. Also called "**TO**" **waypoint**, **destination** or **destination waypoint**.

sentence formatter: in this standard, three-character sentence identifier which follows the talker identifier and is included as part of the address field. The sentence formatters are an integral part of the sentence definitions provided by this standard and annexes.

set: direction towards which a current flows.

signal-to-noise ratio (SNR): ratio of the magnitude of a signal to that of the noise (interference), often expressed in decibels.

speed log: instrument for measuring a vessel's speed through water and/or speed over ground. A single axis speed log normally measures speed along the longitudinal (fore/aft) axis of the vessel, while a dual axis speed log measures speed along the transverse (port/starboard) axis as well (see also **Doppler speed log**).

speed made good: adjusted speed which takes into account factors such as drift and wind speed. Can be estimated or computed by a navigation receiver.

speed over ground (SOG): speed of a vessel along the actual path of travel over the ground.

talker: originator of messages across a link.

talker identifier: first two characters following the "\$" (HEX 24) in a sentence (address characters 1 and 2); selected from Table 4.

time difference (TD): in LORAN-C, time difference measured from the time of reception of the master station signal to the time of reception of the slave station signal.

track: intended or desired horizontal direction of travel with respect to the earth. The track expressed in degrees of the compass may differ from the course due to allowances made in the course for such factors as sea and weather conditions in order to resume the desired track (see **track made good**).

track made good: single resultant direction from a point of departure to a point of arrival at any given time.

transducer: device that converts one type of energy to another, such as a loudspeaker that changes electrical energy into acoustical energy.

true bearing: bearing relative to true north; compass bearing corrected for compass error.

true heading: heading relative to true north.

two-way communication protocol: protocol established between a talker and a listener in which the listener may also issue requests to the talker when required (compare to **one-way communication protocol**).

UAIS: universal automatic identification system.

UART: universal asynchronous receiver/transmitter which produces an electrical signal and timing for transmission of data over a communications path, and circuitry for detection and capture of such data transmitted from another UART.

universal time coordinated (UTC): time scale based on the rotation of the earth which is disseminated by most broadcast time services (compare with **atomic time**).

variable field: data field which may or may not contain a decimal point and which may vary in precision following the decimal point depending on the requirements and the accuracy of the measuring device (talker).

variation: angle between the magnetic and geographic meridians at any place, expressed in degrees and minutes east or west to indicate the direction of magnetic north from true north.

voyage data recorder (VDR): device for automatically logging key operating parameters of a vessel and maintaining a secure record for subsequent analysis in the event of a collision, sinking or other incident.

warning: is similar to **alarm** but need not be acted upon immediately.

waypoint: reference point on a track.

wide area augmentation system (WAAS): an augmentation to GNSS which uses geostationary satellites to broadcast GNSS integrity and correction data and additional ranging signals.

Annex B (normative)

Guidelines for methods of testing and required test results

B.1 General

B.1.1 The EUT (equipment under test), including all necessary test equipment shall be set up and checked to ensure that it is operational before testing commences. The manufacturer shall provide sufficient technical documentation of the EUT.

B.1.2 The manufacturer shall provide, unless otherwise agreed, all necessary test reports for type approval (including customers documents).

B.1.3 Where appropriate, tests against different clauses of this annex may be carried out simultaneously.

B.2 Definition of environmental conditions for the tests

The tests shall be carried out at normal environmental conditions as defined in 5.2.1 of IEC 60945. Only test B.4.5 shall be performed at the environmental conditions as defined in IEC 60945, Table 3 for the class of the EUT.

B.3 Examination of the manufacturer's documentation

B.3.1 Check for completeness according to IEC 61162-1.

B.3.2 Check the availability of the defined minimum sentences on the EUT (receiving and transmitting).

B.3.3 Check of documentation of approved and proprietary sentences:

- approved sentences for conformity with the standard;
- proprietary sentences for conformity with the standard and the documentation of the manufacturer;
- fields that are required or acceptable to a listener;
- noted unused fields to a talker;
- transmission interval for each sentence.

B.3.4 Check of used talker – ID's.

B.3.5 Check of hardware requirements:

- output drive capability of talker;
- load requirement as listener;
- current software and hardware revision if this is relevant to the interface port selection and pin configuration;
- electrical isolation of the input circuits for compliance with IEC 60945;
- description or schematic of listener receive and talker driver circuits, citing actual components and devices used, including connector type and part number.

B.4 Test of hardware

B.4.1 Interface units

(see 5.5.2)

For compatibility of the hardware, standard tests shall be used as defined in ITU-T X.27/V.11 for all transmitter interface units where compliance with ITU-T X.27/V.11 is not documented.

B.4.2 Ability of the input circuits to work with limited current

(see 5.5.3)

For testing that the receiving capability is not degraded by a minimum supply of 2,0 mA at a differential voltage of 2,0 V.

The receiver unit shall be connected to a data-source with a differential voltage of 2,0 V and a current limitation of 2,0 mA. The data source shall transmit appropriate sentences for this EUT. All sentences shall be received and detected without any errors or degradation.

B.4.3 Check of electrical isolation

(see 5.5.4)

Check in the manufacturer's documentation that the isolation of the receiver between signal line "A", return line "B", or shield and ships ground or power fulfil the requirements of 6.7 of IEC 60945.

B.4.4 Ability of input circuits to withstand maximum voltage on the bus

(see 5.5.5)

Between the connectors 'A' and 'B' of the interface a voltage of 15 V shall be applied for at least 1 min. This test shall be carried out with both polarities of applied test voltage. After all tests the function of the interface shall be checked for any malfunction or damage.

B.4.5 Test arrangement for performance tests according to IEC 60945

The following test shall be carried out for testing capability of interconnection during the temperature tests defined in IEC 60945. Where the equipment manufacturer specifies a temperature range outside that specified in IEC 60945, the manufacturer's specification shall be employed.

To test the transmitting interface of the EUT, connect it to a reference-receiving interface that complies with Clause 5. To test the receiving interface of the EUT, connect it to a reference transmitting interface that complies with Clause 5. The reference equipment shall be outside the climatic chamber. The transmitting interface shall transmit a sequence of appropriate sentences and the receiving interface shall receive and detect these sentences without any errors or degradation. The check of the result can be carried out directly or indirectly at the receiving unit.

B.4.6 Test under maximum interface workload

After activating all ports of the EUT with the maximum number of sentences to be transmitted and/or received, the performance of the EUT shall not be degraded in any way.

At least one receiver input not used to perform the primary function of the EUT shall be connected to a data source transmitting continuously a set of approved sentences with a channel limit of 80 % to 90 %. Only one of these sentences shall be usable for the EUT. The test shall be carried out for 30 min. The EUT may give an alarm for a minor function not supported by the selected sentence, but the main function of the EUT shall be operational without any degradation.

B.4.7 Test against corrupted data at an interface

To test the capability against corrupted data of the EUT sent out by a equipment after a system failure.

One receiver input not used to perform the primary function of the EUT shall be connected to a data source transmitting continuously unsorted text.

The test shall be carried out for a sufficient time to ensure that the primary function of the EUT works in a reliable manner. The EUT may give an alarm for the minor function assigned to the selected input. The main function should not be supported by the selected sentence but the main function of the EUT shall be operational without any degradation.

B.4.8 Test under long term conditions

For testing the capability of the EUT working constantly.

The EUT shall be connected to transmitting sources as defined by the manufacturer for normal operation. This test shall be carried out for 30 min, and all data transmitted by the EUT shall be recorded and analysed for corruption against this standard.

B.4.9 Protocol test of the interface of the EUT

(see Clause 7)

B.4.9.1 Data strings transmitted by the EUT

By altering the parameters of the EUT, appropriate data strings shall be transmitted.

These data strings are received by test equipment which is able to display the sentences.

- a) Test of conformity with the manufacturer's documentation and IEC 61162-1.
- b) Test of status accuracy for all status and operation mode indications.
- c)¹ Test of data accuracy corresponding with the status information and the selected operation mode.
- d)² Test of checksum accuracy
- e) Test of transmitting intervals (if necessary)

B.4.9.2 Data strings received by the EUT

Artificially generated data strings with various content and formatting shall be sent to the EUT. These are generated by the above-mentioned means and in accordance with the manufacturer's documentation.

- a)³ Test of correct evaluation of the data.
- b)³ Test of correct evaluation of all status indications and the selected operation mode.

1) Refer to Table B.1 as an example.

2) Refer to Table B.2 as an example.

3) Refer to Table B.3 as an example.

- c)⁵ Test of adequate reaction in case of incorrectness corresponding with the status information and the selected operation mode.
- d)⁴ Test of correct evaluation of the checksum.
- e)⁵ Test of break of data line.
- f) Test of the required receiving intervals (if necessary).

Where the transmitted or received data corresponds to that shown on the display of the EUT, this data shall be compared directly with that sent by the test equipment.

Otherwise, if the data is altered or combined with other data so that direct access and comparison is not possible, parts of the test shall be adapted appropriately so that indirect comparison is possible.

Table B.1 – Example – Data string GGA sent by the EUT to the test receiver (listener)

Field	Field label (and operational state)	Value sent from EUT in the data sentence	Received value at the test receiver
1	UTC of position	Value at the EUT	
2 + 3	Latitude, N/S	Value at the EUT	
4 + 5	Longitude, E/W	Value at the EUT	
6	GPS quality indicator – Fix not available or invalid (has to be set at EUT)	0	
	GPS quality indicator – GPS SPS mode, fix valid (has to be set at EUT)	1	
	GPS quality indicator – Differential GPS, SPS mode, fix valid (has to be set at EUT)	2	
	GPS quality indicator – GPS PPS mode, fix valid	3	
	Real time kinematic, satellite system used in RTK mode with fixed integers	4	
	Float RTK, satellite system used in RTK mode with floating integers	5	
	Estimated (dead reckoning) data	6	
	Manual input mode	7	
	Simulator mode	8	
7	Number of satellites in use, 00-12, may be different from the number in view	Value at the EUT	
8	Horizontal dilution of precision (HDOP)	Value at the EUT	
9	Antenna altitude above/below mean-sea-level (geoid)	Value at the EUT (always in metres, also when the displayed value is not in this unit)	
10	Units of antenna altitude, m	"M", also when value at the EUT not shown in metres	
11	Geoidal separation	Value at the EUT (always in metres, also when the displayed value is not in this unit)	

4) Refer to Table B.4 as an example.

5) Refer to Table B.5 as an example.

Field	Field label (and operational state)	Value sent from EUT in the data sentence	Received value at the test receiver
12	Units of geoidal separation, m	"M", also when value at the EUT not shown in metres	
13	Age of differential GPS data	Value at the EUT if differential mode, otherwise null field	
14	Differential reference station ID, 0000 – 1023	Value at the EUT if differential mode, otherwise null field (for GPS)	

Table B.2 – Checksum

The checksum of the sentences shall be checked with static and dynamic sentences.

Set condition	Actual condition
Each sentence shall send the correct checksum	

Table B.3 – Example – data string GGA received by the EUT

Field	Field label	Value sent to EUT in the data sentence	Expected value on the EUT	Displayed value on the EUT
1	UTC	121355	No value (Time = Time of fix based on UTC, not to be used as UTC)	
2 + 3	LAT	3433.099,N	34°33.099' N	
		5959.099,S	59°59.099' S	
		Null field	No or invalid signed position	
4 + 5	LON	01445.999,E	14°45.999' E	
		17959.999,W	179°59.999' W	
		Null field	No or invalid signed position	
6	GPS quality indicator	0	No or invalid signed position	
		1	Send position with label GPS	
		2	Send position with label DGPS	
		3	Send position with label GPS or GPS with PPS	
		Any other value	No or invalid signed position	
		2 -> 1	Alarm, send position with label GPS	
		2 -> 0	Alarm, no or invalid signed position	
		2 -> 3	Send position with label GPS	
		3 -> 1	Send position with label GPS	
		1 -> 2	Alarm, send position with label DGPS	
		3 -> 0	Alarm, no or invalid signed position	
		4 – 8 (each value was sent to the EUT)	Send position with the label corresponding to the sent value, an alarm and corresponding label if the value has changed	
1 -> any other value	Alarm, no or invalid signed position			
	Null field	Alarm, no or invalid signed position		
7	Number of satellites in use, 00 – 12, may be different from the number in view	4	4	
		12	12	
8	Horizontal dilution of precision (HDOP)	1,0	1,0	
		5,5	5,5	

Field	Field label	Value sent to EUT in the data sentence	Expected value on the EUT	Displayed value on the EUT
9 + 10	Antenna altitude above/below mean sea level, Units of antenna altitude, m	143,5,M	143,5 m	
		-16,0,M	-16,0 m	
11 + 12	Geoidal separation, Units of geoidal separation, m	43,5,M	43,5 m	
		-20,3,M	-20,3 m	
13	Age of differential GPS data, sec	4	4	
		20	20	
		Null field for GPS	No value	
14	Differential reference station ID, 0000 – 1023	0313	0313	
		0314	0314	
		Null field for GPS	No value	

Table B.4 – Example – Checksum

Send to EUT	Expected value on the EUT	Displayed value on the EUT
Data string GGA with <u>correct</u> checksum	Send position with relevant label	
Data string GGA with <u>incorrect</u> checksum	No or invalid signed position (alarm when the checksum changes from correct to incorrect)	

Table B.5 – Break of data line

Send to EUT	Expected value on the EUT	Displayed value on the EUT
Break of data line during transmission of valid data strings	Alarm after time-out of maximum 30 s; no or invalid signed position	

NOTE Refer to Table B.1 for an example of the range of sentences.

Annex C (normative)

Six-bit binary field conversion

Valid characters (see Table 2)

Binary field, Most significant bit on the left. The two MSB's of the valid characters are not used.

Table C.1 – Six-bit binary field conversion table

Valid character	Binary field	Valid character	Binary field
0	000000	P	100000
1	000001	Q	100001
2	000010	R	100010
3	000011	S	100011
4	000100	T	100100
5	000101	U	100101
6	000110	V	100110
7	000111	W	100111
8	001000	X	101000
9	001001	a	101001
:	001010	b	101010
;	001011	c	101011
<	001100	d	101100
=	001101	e	101101
>	001110	f	101110
?	001111	g	101111
@	010000	h	110000
A	010001	i	110001
B	010010	j	110010
C	010011	k	110011
D	010100	l	110100
E	010101	m	110101
F	010110	n	110110
G	010111	o	110111
H	011000	p	111000
I	011001	q	111001
J	011010	r	111010
K	011011	s	111011
L	011100	t	111100
M	011101	u	111101
N	011110	v	111110
O	011111	w	111111

The six-bit binary field conversion can be done mathematically as well as with Table C.1.

The algorithm to convert a 6-bit binary field to the appropriate 8-bit valid IEC 61162-1 character field is shown in Figure C.1 (see below). Similarly, an algorithm can also be used to convert the valid IEC 61162-1 characters to the 6-bit binary values as shown in Figure C.2 (see below).

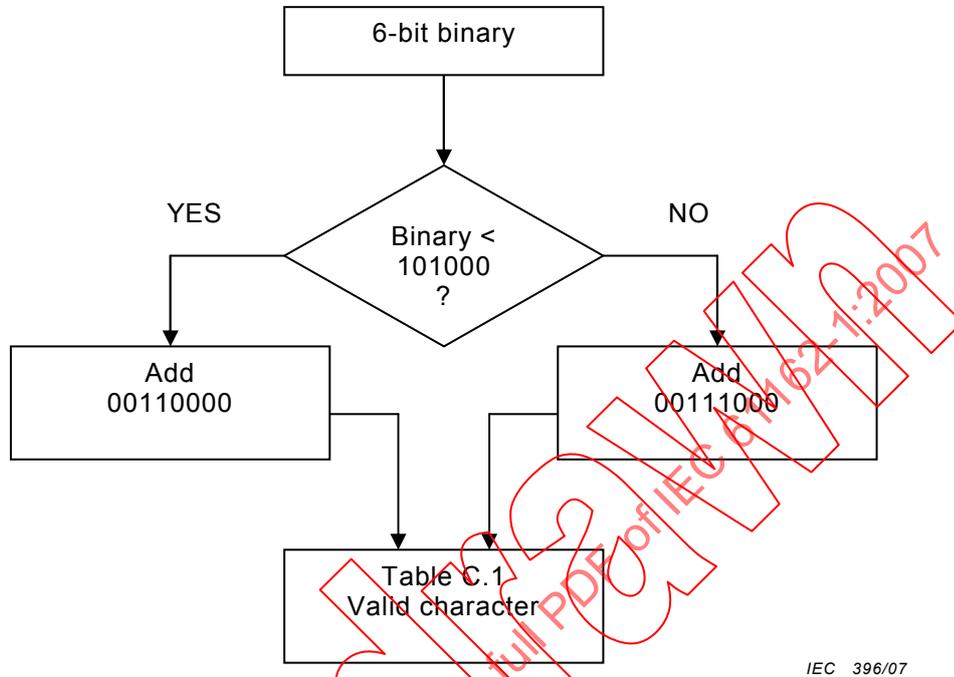


Figure C.1 – 6-bit binary code converted to valid IEC 61162-1 character

Consider the following examples:

000001 is less than 101000, therefore add 00110000

00110000

00110001 = 31_{hex} = 1 (see Table 2)

000010 is less than 101000, therefore add 00110000

00110000

00110010 = 32_{hex} = 2 (see Table 2)

111010 is not less than 101000, therefore add 00111000

00111000

01110010 = 72_{hex} = r (see Table 2)