

INTERNATIONAL STANDARD

IEC
61162-420

First edition
2001-11

**Maritime navigation and radiocommunication
equipment and systems –
Digital interfaces –**

**Part 420:
Multiple talkers and multiple listeners –
Ship systems interconnection –
Companion standard requirements
and basic companion standards**



Reference number
IEC 61162-420:2001(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/catlg-e.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/JP.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 61162-420

First edition
2001-11

Maritime navigation and radiocommunication equipment and systems – Digital interfaces –

Part 420: Multiple talkers and multiple listeners – Ship systems interconnection – Companion standard requirements and basic companion standards

© IEC 2001 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission
Telefax: +41 22 919 0300

3, rue de Varembe Geneva, Switzerland
e-mail: inmail@iec.ch IEC web site <http://www.iec.ch>



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE **XD**

For price, see current catalogue

CONTENTS

| | |
|--|----|
| FOREWORD..... | 6 |
| INTRODUCTION..... | 8 |
| | |
| 1 Scope and object..... | 9 |
| 2 Normative references..... | 10 |
| 3 Definitions | 10 |
| 3.1 Terms and abbreviations | 10 |
| 3.2 General typographical rules in this standard..... | 12 |
| 4 General principles for the PCS..... | 12 |
| 4.1 General structure..... | 12 |
| 4.1.1 Purpose..... | 12 |
| 4.1.2 Components of the PCSDL | 12 |
| 4.1.3 Object based principles in the PCSDL..... | 13 |
| 4.1.4 Generic and manufacturer specific companion standards..... | 14 |
| 4.1.5 Generic companion standards (PFS)..... | 15 |
| 4.1.6 Manufacturer specific companion standards..... | 15 |
| 4.1.7 Guidelines for using PCS | 16 |
| 4.2 Products of the PCS | 17 |
| 4.2.1 MAU name..... | 17 |
| 4.2.2 Interface name..... | 17 |
| 4.2.3 Interface class name..... | 17 |
| 4.2.4 Data object name..... | 18 |
| 4.2.5 Data object function..... | 18 |
| 4.2.6 Data object structure..... | 18 |
| 4.2.7 Data object information contents..... | 18 |
| 4.2.8 Run-time library information items..... | 18 |
| 4.2.9 PFS information items..... | 19 |
| 4.3 The PISCES foundation specifications (PFS) | 19 |
| 4.4 Generic interfaces in the PFS | 19 |
| 5 The companion standard reference specification..... | 19 |
| 5.1 Introduction..... | 19 |
| 5.2 Basic concepts of the PCS..... | 20 |
| 5.3 Conventions for companion standard specification files..... | 21 |
| 5.3.1 General principles..... | 21 |
| 5.3.2 Tokens | 21 |
| 5.3.3 Name structure | 23 |
| 5.3.4 Name scope | 23 |
| 5.3.5 Configurable identifiers and literal | 24 |
| 5.4 General structure of PCS specifications | 24 |
| 5.4.1 General | 24 |
| 5.4.2 The specification header..... | 25 |
| 5.4.3 The specification body | 26 |
| 5.5 Application specifications..... | 26 |
| 5.5.1 Overview | 26 |
| 5.5.2 General layout | 26 |
| 5.5.3 Header | 27 |
| 5.5.4 Body..... | 28 |

| | | |
|-------|---|----|
| 5.6 | Interface component specifications | 30 |
| 5.6.1 | Overview | 30 |
| 5.6.2 | General layout | 31 |
| 5.6.3 | Header specification | 31 |
| 5.6.4 | Body specification | 32 |
| 5.7 | Information specifications | 33 |
| 5.7.1 | Overview | 33 |
| 5.7.2 | General layout | 33 |
| 5.7.3 | Header | 34 |
| 5.7.4 | Body | 34 |
| 5.8 | Data types | 35 |
| 5.8.1 | Overview | 35 |
| 5.8.2 | General layout | 35 |
| 5.8.3 | Header | 36 |
| 5.8.4 | Body | 36 |
| 6 | PISCES foundation specification (PFS) | 38 |
| 6.1 | Introduction | 38 |
| 6.2 | Naming conventions | 39 |
| 6.3 | Application classes | 39 |
| 6.3.1 | Introduction | 39 |
| 6.3.2 | Application base class: PACApplication | 40 |
| 6.3.3 | LNA MAU application: PACLNA | 40 |
| 6.3.4 | Managed applications: PACFullApplication | 40 |
| 6.3.5 | IEC 61162-1 and IEC 61162-2 interface application: PACNMEARelay | 40 |
| 6.3.6 | Console application: PACConsole | 40 |
| 6.3.7 | General alarm and monitoring application: PACServerApp | 40 |
| 7 | Specification requirements for PCS compliant applications | 41 |
| 7.1 | Introduction and general documentation format | 41 |
| 7.2 | Function block | 41 |
| 7.2.1 | Function block graphical view | 41 |
| 7.2.2 | Physical effects | 41 |
| 7.2.3 | Input variables | 41 |
| 7.2.4 | Output variables | 42 |
| 7.2.5 | Events | 42 |
| 7.2.6 | Commands | 42 |
| 7.2.7 | Status | 42 |
| 7.2.8 | Parameters | 42 |
| 7.2.9 | Indication of accept or connect functionality | 42 |
| 7.3 | Functional description | 42 |
| 7.4 | Companion standard descriptions | 43 |

| | |
|--|----|
| Annex A (normative) Defined keywords | 44 |
| Annex B (normative) Basic IEC 61162-4 data types | 46 |
| Annex C (normative) General application companion standards | 47 |
| C.1 Introduction and general principles..... | 47 |
| C.2 Functionality overview..... | 47 |
| C.2.1 General data definitions | 47 |
| C.2.2 Version codes..... | 47 |
| C.2.3 Manufacturer and model identification | 47 |
| C.2.4 Interface and MCP information | 47 |
| C.2.5 Authentication..... | 47 |
| C.2.6 File overview..... | 48 |
| C.2.7 Data types General | 48 |
| C.2.8 Application PACSimpleApplication..... | 52 |
| C.2.9 Application PACFullApplication | 52 |
| C.2.10 Interface PCCVersionCodes..... | 53 |
| C.2.11 Interface PCCApplicationInfo | 54 |
| C.2.12 Data types UserAuth..... | 55 |
| C.2.13 Interface PCCUserAuth..... | 56 |
| Annex D (normative) LNA-MAU companion standard | 59 |
| D.1 General principles..... | 59 |
| D.2 Companion standards..... | 60 |
| D.2.1 Data types LnaMau | 60 |
| D.2.2 Interface PCCLNAStats..... | 62 |
| Annex E (normative) General alarm and monitoring companion standards | 64 |
| E.1 Introduction and general principles..... | 64 |
| E.2 Alarm and monitoring system identifiers | 64 |
| E.3 Functionality overview..... | 64 |
| E.3.1 Companion standard for tag based monitoring and alarm system | 64 |
| E.3.2 Client-server architecture | 65 |
| E.3.3 Tag number | 65 |
| E.3.4 Tag sets | 65 |
| E.3.5 Tag information..... | 65 |
| E.3.6 Tag attributes | 65 |
| E.3.7 Tag data | 65 |
| E.3.8 Alarms..... | 66 |
| E.4 Application classes | 66 |
| E.5 Companion standard structure | 67 |
| E.6 File structure | 67 |
| E.7 Standard tag names | 68 |
| E.7.1 General | 68 |
| E.7.2 Structure of P tag name class | 69 |
| E.7.3 General structural rules..... | 69 |
| E.7.4 Main process codes | 70 |
| E.7.5 Process sub-codes | 70 |
| E.7.6 General sub-groups | 70 |

| | | |
|---------------------|--|-----|
| E.7.7 | Automation related sub-group | 71 |
| E.7.8 | Navigation sub-groups | 71 |
| E.7.9 | Data type indication group..... | 71 |
| E.7.10 | Use of engineering units | 72 |
| E.7.11 | Sequence number..... | 72 |
| E.8 | Structure of standard tags (S class) | 73 |
| E.9 | Structure of yard tags (Y class)..... | 73 |
| E.10 | Structure of internal tags (I class) | 73 |
| E.11 | New tag name classes | 73 |
| E.12 | General quality indicators | 73 |
| E.13 | Certification | 73 |
| E.14 | Time stamp | 73 |
| E.15 | Validity flag..... | 74 |
| E.16 | Authentication..... | 74 |
| E.17 | Companion standard specifications | 74 |
| E.17.1 | DATA TYPES TagData | 74 |
| E.17.2 | Application PACReadableServer | 80 |
| E.17.3 | Application PACWritableServer | 80 |
| E.17.4 | Application PACAlarmSystem..... | 81 |
| E.17.5 | Interface PCCTagDatabase | 82 |
| E.17.6 | Interface PCCTagText | 84 |
| E.17.7 | Interface PCCTagStream | 85 |
| E.17.8 | Interface PCCTagNetsearch | 86 |
| E.17.9 | Interface PCCTagAttributes | 87 |
| E.17.10 | Interface PCCTagSubscribe..... | 88 |
| E.17.11 | Interface PCCTagWrite | 89 |
| E.17.12 | Interface PCCTagAlarm..... | 90 |
| E.17.13 | Interface PCCTagSet..... | 91 |
| E.17.14 | Interface PCCTagAttributeWrite..... | 92 |
| Annex F (normative) | Navigational Interfaces..... | 94 |
| F.1 | IEC 61162-1 relay function..... | 94 |
| F.2 | Interface PCCNMEAIn | 94 |
| F.2.1 | READ NoOfPorts | 94 |
| F.2.2 | FUNCTION GetPortDescription | 94 |
| F.2.3 | FUNCTION NoOfSentences | 94 |
| F.2.4 | FUNCTION GetListOfSentences | 94 |
| F.2.5 | FUNCTION GetSentence | 94 |
| F.2.6 | SUBSCRIBE Port_<nn> | 95 |
| F.2.7 | SUBSCRIBE Port_<nn>_<fmt>..... | 95 |
| F.3 | Interface PCCNMEAOut..... | 95 |
| F.3.1 | READ NoOfPorts | 95 |
| F.3.2 | FUNCTION GetPortDescription | 95 |
| F.3.3 | NONACKED-WRITE Port_<nn> | 95 |
| F.4 | The IEC 61162-1/2 related companion standard documents | 96 |
| F.4.1 | The IEC 61162-1/2 data type description | 96 |
| F.4.2 | Description of Interface PCCNMEAIn | 97 |
| F.4.3 | Description of Interface PCCNMEAOut..... | 100 |
| F.4.4 | Application Description | 101 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MARITIME NAVIGATION AND RADIOCOMMUNICATION
EQUIPMENT AND SYSTEMS –
DIGITAL INTERFACES –**

**Part 420: Multiple talkers and multiple listeners –
Ship systems interconnection – Companion standard requirements
and basic companion standards**

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61162-420 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems.

The text of this standard is based on the following documents:

| FDIS | Report on voting |
|-------------|------------------|
| 80/312/FDIS | 80/327/RVD |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

The special typographical conventions and nomenclature used in this standard are defined in IEC 61162-400 annex A.

Annexes A, B, C, D, E and F form an integral part of this standard.

The committee has decided that the contents of this publication will remain unchanged until June, 2005. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IECNORM.COM: Click to view the full PDF of IEC 61162-420:2001
Withdrawn

INTRODUCTION

International Standard IEC 61162 is a four part standard which specifies four digital interfaces for applications in marine navigation, radiocommunication and system integration.

The four parts are:

- IEC 61162-1 Single talker and multiple listeners
- IEC 61162-2 Single talker and multiple listeners, high speed transmission
- IEC 61162-3 Multiple talkers and multiple listeners – Serial data instrument network
- IEC 61162-4 Multiple talkers and multiple listeners – Ship systems interconnection. Part 4 of this standard is sub-divided into a number of individual standards with part numbers in the 400 series.

IEC 61162-420 contains the specification of a description language for IEC 61162-4 series companion standards (user layer specifications), a framework for the organization of such companion standard descriptions and also the descriptions of basic components that can be used as a starting point to build IEC 61162-4 series components and networks.

Later standards in the companion standard series (IEC 61162-42x) are expected to address more concrete interface requirements for specific navigational equipment.

Relationship with the other parts of the IEC 61162 series of standards is defined in annex B to IEC 61162-400.

IECNORM.COM: Click to view the full PDF of IEC 61162-420

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –

Part 420: Multiple talkers and multiple listeners – Ship systems interconnection – Companion standard requirements and basic companion standards

1 Scope and object

International Standard IEC 61162-420 specifies the requirement for and basic components of the IEC 61162-4 series companion standards. These components are referred to as follows:

- a) **PCS** (PISCES companion standards) which contain the rules for creation of companion standards. The general principles underlying the PCS are described in clause 4.
- b) **PCSDL** (PCS description language). Part of the PCS is the definition of the syntax for the various types of companion standard documents that make them readable by computer tools. The PCSDL is described in clause 5.
- c) **function block** description. The function block description is a high level and graphical description of applications using the IEC 61162-4 series interface standard. The function block syntax is specified in clause 7.
- d) **PFS** (PISCES foundation specifications) which contain a framework for classification of applications adhering to the IEC 61162-4 standard. The PFS will also provide a minimum level of interoperability between different manufacturers' applications using this framework. The PFS is described in clause 6.

Clause 5 contains the complete reference to the PCS description language. Subclause 5.2 explains the basic concept of the PCS which is given by the distinction between four types of specifications: applications, interfaces, information and data types. General conventions with respect to the syntax of the PCS can be found in 5.3. All PCS documents are based on a similar structure. This approach is intended to make it easier to become familiar with the syntax and semantics of the PCS which is defined in 5.3.1. The four subclauses thereafter explain in detail the syntax and semantics of the four different types of specifications generated by the PCS.

Clause 6 describes the relationship between the different classes of IEC 61162-4 applications and gives an overview of their functionality. The annexes contain the detailed PCS definitions for the classes.

The objective of companion standards is to provide definitions of the information that is transferred within an integrated ship control system and of how these information items can be accessed or provided. Furthermore, the standard shall allow the definition of the actual network interfaces which the applications use to connect to the system. The description format is machine-readable, allowing an automatic compilation of the description into interface software.

A companion standard allows the reader to, at will, shift the focus between a technical specification and a definition of interfaces and information items. The development team can determine information attributes like unit, power, accuracy and the structure of the system architecture and create a common interpretation basis for data before the system implementation. The formalisms underlying the specification language will at the same time provide an unambiguous and precise description of the equipment interfaces which allow the use of computer tools to automatically generate interface program codes or to inspect and manipulate interfaces on-line, for example for debugging and monitoring purposes.

2 Normative references

The following normative documents contain provisions, which, through reference in this text, constitute provisions of this part of IEC 61162. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of IEC 61162 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of IEC and ISO maintain registers of currently valid International Standards.

IEC 61162-1:2000, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 1: Single talker and multiple listeners*

IEC 61162-2:1998, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 2: Single talker and multiple listeners, high speed transmission*

IEC 61162-3, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 3: Multiple talkers and multiple listeners – Serial data instrument network*¹

IEC 61162-400, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 400: Multiple talkers and multiple listeners – Ship systems interconnection – Introduction and general principles*

IEC 61162-401, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 401: Multiple talkers and multiple listeners – Ship systems interconnection – Application profile*

ISO/IEC 8859-1:1998, *Information technology – 8-bit single-byte coded graphic character sets – Part 1: Latin alphabet No. 1*

3 Definitions

For the purpose of this part of IEC 61162, the following definitions apply.

3.1 Terms and abbreviations

3.1.1

abstract specification

PCS specifications that are part of the PFS (defined in this standard) are not intended for direct implementation and are termed “abstract”

3.1.2

application interface

a collection of interface components instantiated in an application definition document as one protocol level interface

¹ To be published.

3.1.3

CP – connection point

an application interface consists of a number of individual “functions” that can be called into or out from

3.1.4

CS – companion standard

a protocol layer on top of the normal OSI application level (see definition of companion standard in IEC 61162-400), representing the definition of how the application layer functionality is used to implement a certain application’s interface functionality. Also called user layer

3.1.5

function block

a high level, partly graphical representation of an application’s place in an integrated system which presents all interfaces and relationships between these on an overview level

3.1.6

interface (component)

a collection of connection points (CP) in one INTERFACE definition document. It can be aggregated with others into an actual interface as defined in the A-profile. The actual interface (A-profile sense) is defined as the application interface in the APPLICATION document

3.1.7

NMEA

the National Marine Electronics Association (NMEA) maintains a protocol standard called NMEA 0183 that is almost identical to IEC 61162-1 and IEC 61162-2. For historical reasons, symbolic names in some of the PCS documents in this standard refers to NMEA instead of to IEC 61162-1 (annex F). Although references to NMEA are made, the PCS documents define an application that is intended for use together with the IEC 61162-1 and IEC 61162-2 standards. It can also be useful for transmittal of NMEA 0183 messages, but this is outside the scope of this standard.

3.1.8

PCS – PISCES companion standard

the complete concept, including description language (PCSDL), function blocks and the foundation classes (PFS)

3.1.9

PCSDL – PISCES companion standard description language

the formal interface description language for PCS

3.1.10

PFS – PISCES foundation specifications

the interface base classes for all applications created in the framework of the PCS

3.1.11

tangible

a specification of an entity that shall be implemented (instantiated) at some time

3.2 General typographical rules in this standard

The following typographical rules apply throughout this standard:

- a) fragments and complete pieces of PCSDL source code is written in `Courier`;
- b) tokens written in capitals, typeset in `COURIER` are reserved PCSDL keywords;
- c) words in angle brackets (elbows), '<' and '>', define place-holders that have to be filled with the appropriate token as described in the text;
- d) tokens in square brackets, '[' and ']', define tokens that are optional, for example parts of a statement that are only required under special circumstances;
- e) ellipses, . . . , show that the preceding item can be repeated.

Subclause 5.3 defines other typographical and lexical conventions that apply to PCSDL documents.

4 General principles for the PCS

4.1 General structure

4.1.1 Purpose

The main purpose of the PCS is to give an unambiguous way to interpret data transmitted via the IEC 61162-401 A-profile protocol. In this sense, the companion standard adds meaning to the data transmitted via the protocol, converts it to information and makes it usable for application modules connected to the network. To serve this purpose, the PCS shall provide the following:

- a) establish a language to define information types, application interfaces and applications. This language has to be human readable as well as interpretable by a computer. this language is the **PCSDL**;
- b) provide a standardized set of information types and interfaces which can be used as a basis to create customized (i.e. vendor specific) application and interface descriptions. This set of specifications is the **PFS**, see 4.4;
- c) provide a general framework for a high level description of applications that use the IEC 61162-4 standard for communication. This is the function block specification format.

4.1.2 Components of the PCSDL

The PCSDL supports the generation of four different types of specifications as outlined in the following subclauses.

The three first document types can be used to generate protocol (A-profile) related entities, for example data object names, MAU names and format strings. The information specification can be used to add more application related meaning to the information entities. The information specifications can also use an extended format string syntax to implement higher level functionality based on the A-profile specification.

4.1.2.1 Application

Representation of application units within the PCS. An application is defined by application interfaces specifying the respective inputs and/or outputs. The application specification can be looked at as the specification of how one particular piece of equipment is connected to the system. Applications will normally consist of a number of *interfaces* configured as either providing data to or using data from the system.

4.1.2.2 Interface (component)

Specification of connection mechanisms used between applications. Each interface has one or more connection points (CP). Each connection point specifies one or more information type received or provided by the respective interface. The connection point specification consists of the data structures transferred, the information the data structures carry and how the information can be accessed (read, write, etc.).

4.1.2.3 Data type

Data type definition specifies the structure and to some degree the content of data transmitted via the IEC 61162-4 network. This document can be optionally exchanged or complemented with *information specifications*.

4.1.2.4 Information

An information specification represents and defines the content and interpretation of data transmitted via the IEC 61162-4 network. The purpose of these specifications is to define the format of exchanged data and specify the usage of the respective information. This type of document extends and replaces the function of the data type definition by making it possible to give more meaning to the data structures. Any information specification can be converted to a data type definition, but at a loss of information meaning.

NOTE The information type specification is not currently used in the PFS. At this time, only the data type specification is used to define structure and contents of transmitted data blocks. However, it is recommended that the information type is considered for new specifications.

4.1.3 Object based principles in the PCSDL

4.1.3.1 General

The PCSDL supports a simplified object based view on companion standard specifications. To create companion standards, the following object-based principles can be applied.

All specifications used within PCS are seen as encapsulated structures defining their own scope and domain. Each specification can be used as a “building block” to create new specifications following the rules given in clause 5. Two different mechanisms are available to compose new specifications from existing ones: specialization and aggregation.

4.1.3.2 Specialization

The PCSDL gives the opportunity to derive new specifications from existing ones. The new specification (i.e. application, interface or information) inherits all properties from the old specification called the base specification). This mechanism forms a generalized-specialization relation between these two specifications.

4.1.3.3 Aggregation

It is possible to compose new specifications by aggregating two or more existing specifications. A complex information type can, for example be formed by including several information specifications into a new specification. The same applies for composing complex application interfaces from one or more interfaces (see 5.6).

Specifications for applications, interfaces and information are included in three separate hierarchies, see figure 1. Each hierarchy stems from a base specification covering properties common to each specification of the respective type (i.e. information, application or interface). An overview of the PFS hierarchy for applications is given in annex E.

4.1.3.4 Data types versus information

The current version of the PFS does not make use of interface specifications and neither the object-oriented principles inherent in that. Instead, the less advanced data type definitions are used. This is due to legacy companion standards from previous versions of this document (see MiTS in part 400).

NOTE This part of the standard emphasizes the information type documents as it is believed that this will be the description method of choice in the future. However, the reader may want to concentrate on data type documents which are the most commonly used.

4.1.4 Generic and manufacturer specific companion standards

The general approach recommended by PCS is to divide the set of companion standards into two different parts (figure 1): Generic CS and manufacturer specific CS. Generic CS will be defined by the PFS. The PFS contains generic specifications for data types, information, interfaces and applications. These specifications can be used by manufacturers as a starting point to define own specifications to describe their respective equipment. This means that PFS specifications can be used as templates to create equipment specific specifications. This mechanism forms a generalized-specialization relation between the newly created specification and the respective specification of the PFS. It has to be noted that specifications which are part of the PFS are abstract in the sense that they cannot be used directly to specify equipment. A tangible PCS specification of a component has always to be derived from a PFS specification.

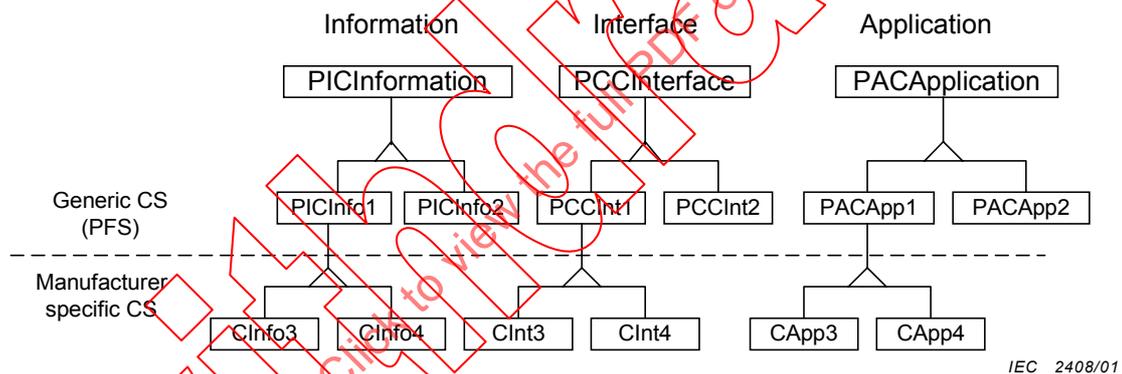


Figure 1 – General structure of PCS hierarchy of specifications

To form specifications of information, interfaces or applications, direct inheritance mechanisms can be used. The new specification inherits all properties from the specification from which it is derived (the base specification). When deriving new specifications from existing ones, attributes only may be added (see also 4.2.5). Thus, the following mechanisms are the only ones permitted by the PCS description language:

- a) generation of a new application specification: derivation of the new specification from an existing one (abstract or tangible specification) and addition of new application interfaces (see 5.5);
- b) generation of a new interface specification: derivation from an existing interface specification (abstract or tangible specification) and addition of connection points (see 5.6);
- c) generation of a new information specification: derivation from an existing specification and addition of attributes, i.e. data types or information (see 5.7);
- d) creation of new data type specifications (see 5.8).

4.1.5 Generic companion standards (PFS)

IEC 61162-420 defines generic information or data types to be transmitted via the A-profile protocol and standardized interface or application descriptions. With respect to physical components, these generic descriptions define the minimum required functionality (including the information they shall provide) of the component concerned. Generic companion standards, including application, interface, data type or information specifications, are part of this standard and shall not be modified by manufacturers.

Thus, applications, interfaces and information specifications contained in the generic companion standard form abstract specifications and normally it makes little or no sense to use these directly as full specifications for actual applications. Normally, it is necessary to create a more concrete specification (a tangible specification), by deriving it from one of the abstract specifications.

NOTE Generic companion standards provide the least common denominator for information interchange via the IEC 61162-4 protocol. For instance, a physical position sensor will at least own the interfaces defined for a generic position sensor. In this sense, these generic application and interface descriptions have to be in line with the respective IMO performance standards.

The collection of generic specifications defined by the PCS is the **PFS**.

4.1.6 Manufacturer specific companion standards

To satisfy the needs of specific (i.e. physical) components, a manufacturer creates specific companion standards for information type, data types, interfaces or applications. These companion standards are derived from generic companion standards (see 4.2.7). In general, a manufacturer specific companion standard for, for example an interface will contain the content (information types, attributes, etc.) of the respective generic companion standard as a sub-set.

NOTE The main advantage of this approach is that there is no need for a manufacturer to develop specific components from scratch. This accelerates the process of specification production and implementation significantly. The second advantage is that any interface derived from a generic PCS interface description provides as a minimum the information types defined within the respective specification of the PFS: even if a manufacturer specific companion standard is unknown, the services of the respective template can be used. For example if manufacturer B wants to connect his ECDIS system with a GPS receiver of vendor A, the manufacturer can at least receive the information types of the generic GPS interface (i.e. position, satellites in view, valid flag and time), even if he does not know the specification of the customized interface. Only the generic interface used as the template has to be known in this case.

Companion standards for information types, interfaces and applications are defined within hierarchies (figure 1). Information types and interfaces will be derived from the respective base specification defining the properties (attributes) common to all specifications derived from this base. There is also a base specification for applications.

The limit between the generic (normative) and the customized (manufacturer specific) part of the PCS is formed by a horizontal cut within the respective specification hierarchy. This is indicated by the dashed line in figure 1.

Attributes and methods necessary to implement services that are needed from the A-profile will also be defined within the highest-level base specifications. They are implemented by several specialized generic interfaces. These interfaces are described within 4.4.


To provide a high level description of a new application, the manufacturer should also provide a function block specification of the application (clause 7).

4.1.7 Guidelines for using PCS

This subclause gives an overview of how to use the PCSDL to create specific companion standards. The starting point is the need to connect a new application to an IEC 61162-4 compliant network. To implement such a connection, the following steps have to be carried out:

- a) identify the necessary interaction between the application concerned and other applications in the system. Add possible interactions to possible future applications where appropriate. Group these interactions roughly into draft PCS application interfaces. If possible, the draft should be based on an already existing similar application which is known to conform to the PFS;
- b) construct a function block that can be used to describe the new application. The function block should identify input interfaces, output interfaces, physical relationships between application and environment and the application's functionality;
- c) if an appropriate application specification does not already exist, derive a new application specification from a PFS template (i.e. an application base specification contained in the PFS) and adapt it by adding new application interfaces;
- d) determine the number and type of each connection point in each of the application interfaces. Add new connection points to existing interfaces where appropriate. Sub-divide each application interface into separate interfaces where appropriate (see below) and create the new interface specification documents, either based on existing interface specifications, from scratch or by inheritance from interfaces in the PFS;
- e) determine input/output formats for each new connection point in the interfaces. Describe this in information and/or data type documents, where possible from existing PCS specifications;
- f) create the final application specification document by using specialization from the appropriate component in the PFS library and adding the newly developed or modified interfaces.

Note that **application interfaces** are defined only in application specifications. Each application interface consists of one or more interface components, grouped together to form one interface module as seen from the application. Each of the interface components is defined by one interface specification. This approach ensures high flexibility for adapting application interfaces to specific needs of applications by creating a building block system for interfaces.

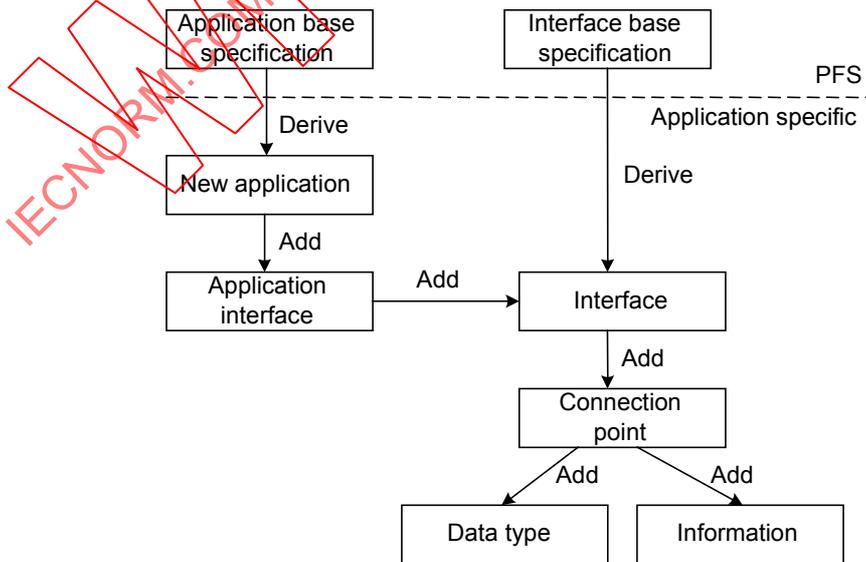

IEC 2409/01

Figure 2 – Generating applications

Figure 2 shows the way to create an application specification derived from a template (base specification, i.e. the PFS).

As stated above, a new application specification must be created by deriving it from an existing PFS compliant specification. The newly created application will inherit all application interfaces from the respective base specification. The only adaptive mechanism allowed is application interfaces. A new application interface is created by grouping one or more existing or newly created interface specifications. As with application specifications, specifications of new interfaces have to be derived from existing specifications (i.e. abstract interface specifications of the PFS or other existing interface specifications). Newly created interfaces will inherit all connection points from the respective base specification.

Newly created interfaces can be adapted to specific needs by addition of connection points. Connection points already defined for that interface (i.e. those specified in base specifications of the interface in view) may not be changed. As shown in figure 2, connection points form collections of data types or information specifications. They may contain zero or an arbitrary number of attributes (data types or information specifications). It is also allowed to have empty connection points. Data types and information specifications shall not be mixed in one connection point.

4.2 Products of the PCS

The PCS is basically a formalized way to describe the system interfaces of applications that use this standard. This means that the PCS must specify certain protocol entities that are used in the establishment of connections between applications and in the exchange of information. These entities are described in the following subclauses.

There are also other entities produced from the PCSDL documents. These are either used in special protocol entities (priorities, load limitations) or in various PFS defined interfaces (authentication and application management). These entities are defined in the last two subclauses.

Note that there is a difference in whether applications are clients or servers of a particular data object. These differences are based on the fact that the server will generally be less configurable than the client.

4.2.1 MAU name

The server MAU name is one of the connection attributes of the data objects used for communication. The *application* document defines the MAU name. Note that the document may specify that the MAU name shall be configurable, in which case the MAU name is defined during system integration by the help of some configuration tool.

4.2.2 Interface name

The interface name is common to a group of data objects that are connected to *en block* during connection establishment. The interface name is one of the data object attributes. The interface name is determined in the *application* document. The interface name can in some cases be configurable. In this case, the ability to configure the name will be made explicit in the *application* document.

4.2.3 Interface class name

If an interface name is changed during configuration, the old interface name as specified in the application document shall be saved in the application and made available to configuration tools as the interface class name.

The interface class name is not used during connection establishment and can in principle be disregarded by applications not conform to the PFS.

4.2.4 Data object name

The data object name is another data object attribute that is used during connection establishment. The data object name is defined by the *interface* document. It is not possible to configure this name.

4.2.5 Data object function

The data object may represent one of several function types, for example read, write or subscribe. The functional capabilities of a data object is determined in the *interface* document. One data object can have only one function, but several data objects with the same name in the same interface can be distinguished between by their function (or data structures). This is similar to name overloading in object-oriented languages.

4.2.6 Data object structure

In addition to function, each data object is also recognized by the input and/or output data structures. The data structures are defined in the *interface* document itself, in a *data type* document or in an *information* document. On the protocol level, it is only the structure of the data element that is important for establishing contact. However, the protocol has provisions for embedding information contents requirements in the data structure (see 4.2.7).

4.2.7 Data object information contents

For meaningful exchange of information, the participating applications need to know more about the sent and received data than just their structure. This aspect is partly covered in the *data type* document, where meaningful interpretations of data structures usually are defined together with the definition of the structure itself. It is also possible to give meaning to the data structures in the *interface* documents in conjunction with defining the functional scope of an interface. A third method is to require additional documentation from a provider of a server MAU. This requirement can be specified in the *application* document.

However, the preferred way to give meaning to data structures is through the *information* document type. This document can either be an addition to the data type document or replace the data type document altogether.

4.2.8 Run-time library information items

Some parts of the companion standard documents generate attribute values for the run-time system that implements a MAU. These items are:

- a) load related attribute values, i.e. number of clients for an accept type interface or transaction queue length for all types;
- b) priority for various connection points or interfaces;
- c) password for interfaces;
- d) watchdog timer for the MAU.

These parameters are set in the application definition header and in conjunction with the definition of accept and connect interfaces in the same document.

Some of the attribute values are most commonly specified as configurable, for example password.

4.2.9 PFS information items

Parts of the companion standard documents do also generate various information items that are used by the PFS. These items are used by software libraries and parts of the PFS to generate various configuration tables. These items are:

- a) version codes for PFS base class;
- b) authentication parameters in application and interface component documents for use in user authentication interface classes;
- c) manufacturer and model information for application management classes;
- d) original classes of interface classes that are renamed in application documents.

4.3 The PISCES foundation specifications (PFS)

The PFS contains the generic part of the PCS. The PFS consists of the following parts:

- a) application foundation specifications;
- b) definition of generic interfaces (see 4.4);
- c) data type specifications.

Application foundation specifications form aggregations of standard interfaces according to the functionality to be covered by the respective generic application.

4.4 Generic interfaces in the PFS

The purpose of generic interfaces specified in the PCS is to give the developer access to the services provided by the A-profile. Annexes in this part of IEC 61162 contain companion standards for the following interfaces:

- a) retrieval of general information about applications and interfaces such as version codes, manufacturer and type of equipment;
- b) interfaces to change/assign control to a specific console combined with authentication of user and workstation, for example to change control, acknowledge alarms or change system parameters;
- c) specialized interfaces of a system MAU associated with each LNA for system management on the application level, for example retrieve network statistics or report attributes of local MAUs;
- d) general mechanisms for retrieving and manipulating data based on tagged information entities. These mechanisms include search, read, write, subscribe and alarm manipulation. The mechanisms can be used for general data access as well as for implementation of alarm systems. This includes an interface to transmit or receive stream based data;
- e) general interface for transmission of IEC 61162-1 telegrams over a system network.

5 The companion standard reference specification

5.1 Introduction

This clause contains the complete reference for the PISCES companion standard description language (PCSDL). It contains all information necessary to understand the companion standards contained in the PFS and to write own companion standards based on the PFS.

Subclause 5.2 explains the basic concepts of the PCS. Subclause 5.3 defines the general conventions with respect to the syntax and semantic of the PCS description language. It explains the use of tokens (identifiers, keywords and literal constants) and the use of white-space elements (delimiters, indentations, comments, etc.). Subclause 5.3.3 concludes with the explanation of naming rules with a particular focus on the scope rules for the identifiers.

As explained in 4.2, the PCS can be used to specify four types of entities: applications, interfaces, information and data types. These four different document types have a common structure, formed by a header specifying general properties for all definitions in the document and a body containing the individual definitions. The body of the definition document normally consists of several blocks, each identified by a keyword. This general structure will be elaborated on in 5.4.

Subclauses 5.5 to 5.8 contain the specification of the description language for each documentation type mentioned above. Each of these sections have the following layout:

- a) a short overview explaining the purpose and the properties of the document in question;
- b) a description of the general layout of the respective document. This description includes the general properties than can be set within the header of the document and an overview of the blocks allowed in the body of the document;
- c) a detailed reference to the syntax of the respective blocks.

5.2 Basic concepts of the PCS

The PCS supports a simplified object-based principle for specifying protocol entities. To create new companion standards, the mechanisms of aggregation and specialization can be used. Specialization means that new companion standards can be derived from existing specifications. The new specification inherits all properties from the base specification from which it is derived (see figure 3).

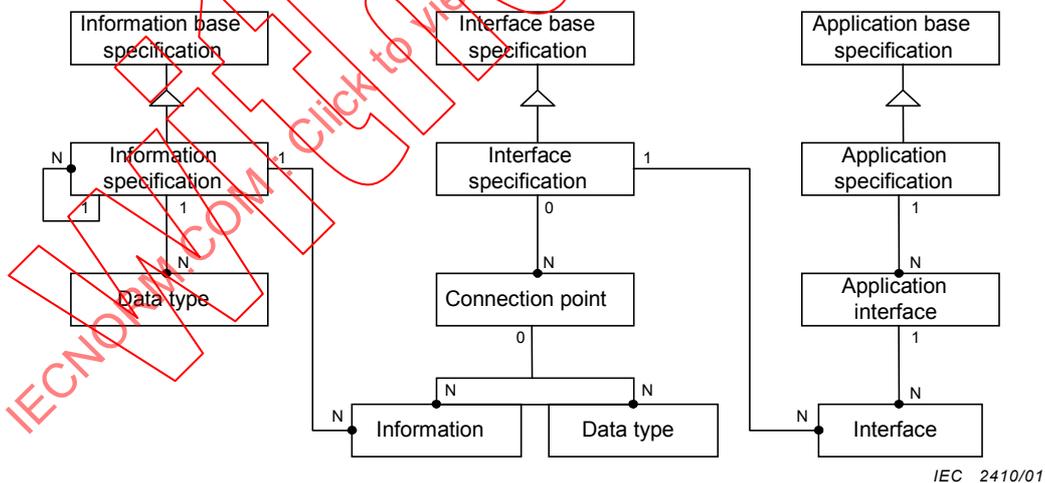


Figure 3 – Relationships between specifications of the PCS

The following types of specialization are possible for PCS:

- derived applications will inherit all application interfaces from the respective base specification;
- derived interfaces will inherit all connection points from the respective base specification;
- derived information specifications will inherit all attributes from their base specification. Attributes may be of the type data or information.

Newly created specifications can be adapted to specific needs by adding properties to them. This mechanism is called aggregation. The following aggregation mechanisms are allowed for companion standards:

- application specifications can be adapted by adding application interfaces to them. Each application interface consists of a set of interfaces. For every interface used, a corresponding interface specification must exist. Application interfaces already defined in base specifications may not be changed;
- interfaces can be extended by addition of connection points. Connection points use one or more information or data types. For each information or data type used a corresponding specification must exist. Connection points already defined in base specifications cannot be changed. Data types and information specifications shall not be mixed in one connection point;
- information specifications can be adapted by adding new attributes to them (data type or information type).

The mechanisms of specialization and aggregation form relationships between the different specification types as elucidated in figure 3.

5.3 Conventions for companion standard specification files

This subclause covers general typographic conventions that apply to the PCS description files. It covers the use of tokens (see 5.3.2) and general naming rules including specification of the scope of named objects (see 5.3.3).

5.3.1 General principles

The files shall contain only characters from the 8-bit ISO 8859-1 character set, except where literal characters or strings are used. For literal character types, it is legal to use 16-bit characters where supported by tools and a computer system.

NOTE The actual representation of long characters must be checked in the programmer's references.

Only printable characters, the *newline* control code and *whitespace* are allowed.

No more than 80 printable characters (including *whitespace*) are allowed on one line. A continuation symbol can be used to continue a long line before a *newline* control code. The continuation symbol is the backslash, '\

5.3.2 Tokens

The basic element of the PCS description language is the token. A token in the PCS can be of one of the following types:

- a) *Identifier*: token to refer to a named entity in a specification. An identifier is defined by its name and scope;
- b) *Keywords*: reserved words of the PCS description language (see annex A);
- c) *Literal constants*: tokens to express a constant value. Literal constants can be of several data types (e.g. integer, floating point, character or string);
- d) delimiters;
- e) white space.

The following paragraphs give the typographic conventions that apply to these tokens.

5.3.2.1 Identifiers

Identifiers can be any sequence of letters or numbers. The first character has to be a letter. Capitals and lower case letters will be distinguished between. All characters of an identifier are significant.

5.3.2.2 Keywords

Keywords are always in capitals. A list of the PCS keywords is given in annex A. To enhance readability, keywords should be avoided when used out of context, for example in comments.

NOTE Because the PCS description language distinguishes between capitals and lower case, it is generally legal to use keywords in lower case or in mixed-case variants, for example for identifiers. However, to avoid confusion for the reader, it is not recommended to do so.

5.3.2.3 Literal constants

Literal constants are representing explicit values. Depending on the data type expressed by a literal constant, the following types can be distinguished:

- a) *Integer constant*: representation of integers by a sequence of digits, for example 4123. The number can be signed or unsigned, in hexadecimal, octal or decimal;
- b) *character constant*: representation of one character (see ISO/IEC 8859-1), for example 's'. Long characters are also legal as literal where supported by computers and tools;
- c) *floating constant*: a floating constant consists of an integer part, a decimal sign, a fractional part, an optional **e** or **E** as exponential sign and an unsigned or signed integer exponent. The integer as well as the fractional part consists of a sequence of decimal digits. For instance 3.1415926 or 123.1e-5 are valid floating constants;
- d) *string constant*: a string is a sequence of characters from the ISO/IEC 8859-1 character set, for example "this is a string". Long characters are legal where supported by computer and tools;
- e) *aggregate constant*: this type is used to represent more complex data structures. Aggregates can be records or arrays of the type {<token1>, <token2>, ..., <tokenN>}.

A formal definition of the allowed formats of these literal constants can be found in the annexes of IEC 61162-400.

5.3.2.4 Delimiters

Three types of delimiters are used:

- a) *whitespace* (see next paragraph) is used to separate other tokens in the documentation;
- b) *newline* is to be understood as the line separator character(s) used on a given platform, for example a single line-feed (on a UNIX system) or a carriage-return followed by a line-feed (on PCs);
- c) *block separators* (see 5.4) are separated by two or more *newline* delimiters, i.e. with one or more empty lines between them.

Whitespace is understood as one or more tokens that act as separators between tokens, but which have no syntactic meaning. Any contiguous number of the tokens listed below is defined to be "one" whitespace.

5.3.2.5 Indentation

For indentation the space character, ' ', shall be used. Indentations should be used to structure the text (e.g. mark one block).

5.3.2.6 Comments

Comments can be placed anywhere in the text to structure the document. The general operator that starts a comment to the end of a line is the semicolon ‘;’. Comments can be at the beginning of a line to mark the entire line as a comment or within a line – in the latter case, the rest of the line is a comment.

NOTE A newline following a whitespace is a newline token even if the whitespace is part of a full line comment.

If a comment is extended over more than one line, it has to be marked with an asterisk, ‘*’, as the first character. A multiple line comment has to be terminated by a block delimiter (two or more newlines).

| | |
|--|---|
| <code>----- ;-----</code> | Comment over an entire line. |
| <code>DATA BLOCK Time * A representation of relative time</code> | Multiple line comment with indentation, delimited by newlines. |
| <code>word32_m sec ;seconds word32_m usec ;micro-seconds</code> | Declaration followed by comment |

IEC 2411/01

Figure 4 – Example comments

NOTE Although the comments described here are not evaluated by a computer reading the description files, they have a significant impact on the human readability of PCS documents and are highly recommended.

5.3.3 Name structure

Identifiers for data types (interpretation, data blocks or constants), application, interface or information specifications may contain a mix of upper and lower case letters, digits and the special character underscore, ‘_’. They should normally start with an upper case letter.

NOTE The A-profile uses these identifiers as attribute values during connection establishment, but does not enforce any rules on their construction other than that they do not contain the null character.

Other identifiers, for example attribute names, may contain the same mix of printable characters. For uniformity in specifications, they should start with a lower case letter.

5.3.4 Name scope

The scope of an identifier depends on its type. Identifiers declared within application, interface or information specifications are local to the respective specification. Dependent on specification type, this affects the identifiers as follows:

- *applications*: identifiers for interfaces specified within application specifications are local (5.5);
- *interfaces*: identifiers for connection points defined within an interface or identifiers for connection points defined in another interface referenced and reused by this interface are local to this interface (5.6);
- *information specifications*: identifiers for attributes to the information type are local (5.7);
- *data types*: these are scope dependent on being declared as local or global (see below).

Data type specifications contain two different sections, one for local and one for global variables. These sections are marked by the keywords `LOCAL` and `GLOBAL`:

- data types (i.e. interpretations, constants and data blocks) within the `LOCAL` section are local to the respective specification. As for the specification types mentioned above, they are accessible from other specifications only via the scope operator, ‘.’;

- data types within the `GLOBAL` section have global scope. This means that they are accessible from all specifications referencing the respective data type specification directly. In this case, the use of the scope operator is optional.

NOTE The purpose of the `GLOBAL` keyword is to allow the definition of data types that can be used without the scope operator in later documents. This simplifies the text of specifications.

The `LOCAL` section has to precede the `GLOBAL` part of data type specifications. If no keyword is used, the section is assumed to be global.

To make reference to a scope identifier, the name of the scope to which it belongs has to be prefixed and followed by a full stop, '.', delimiter. (e.g., `myInformation.m_myMember`).

5.3.5 Configurable identifiers and literal

Some identifiers, for example MAU and interface names may be specified as configurable during system installation. This is typically necessary if several identical units (MAUs) are installed in one system. In this case, each MAU must be given a unique name.

To specify in companion standard documents that an identifier or literal is configurable, it can be enclosed in angle brackets, '<' and '>'. The documentation should specify where and how the entity is configured.

5.4 General structure of PCS specifications

5.4.1 General

PCS documents are used to specify the following entities:

- a) application specifications;
- b) interface (specifications);
- c) information specifications,
- d) data types.

An outline of the general document is shown in figure 5.

The specification consists of two main parts:

- a) the specification **header** defines attributes of a general nature and is similar for all document types.
- b) the **body** of the specification consists of a sequence of **blocks** defining properties specific to the respective entity type. The structure of this part is dependent on the document type.

The header is delimited from the body by a block delimiter.

| | |
|---|---|
| <pre> <type> <parameter_list> [* description] <header keyword> <literal> . . . ;----- ;specification body <keyword> <parameter_list> [* description] ;body of block ;----- ;next block . . . </pre> | <p>The first line of the specification indicates type. A comment to describe the entity specified. Each specification starts with a header setting general attributes such as version, date, responsibility.</p> <p>The body of a specification consists of a sequence of blocks giving the detailed specification of the entity in view.</p> |
|---|---|

Figure 5 – PCS general structure

IEC 2412/01

5.4.2 The specification header

All specifications start with a keyword defining the *type* of entity that shall be specified. <type> may be one of the following:

- APPLICATION to specify an application;
- INTERFACE for an interface;
- INFORMATION to create an information specification;
- DATA TYPES to generate a data type specification.

A list of parameters is appended to <type>. The format of this list depends on the type specified. The first parameter of the list always specifies the identifier (i.e. the name) of the entity. For details on the syntax of the specific types, see below.

The first line can be followed by a block comment giving a description of the content of the specification.

| | | |
|-------------|----------------|---------------------------|
| VERSION | <version_code> | One attribute definition. |
| DATE | <date> | Another after a newline, |
| RESPONSIBLE | <name> | and another. |

Figure 6 – Header

IEC 2413/01

In the rest of the header, each line consists of a keyword naming an attribute to be specified and a literal constant giving the attribute value. An example is shown in figure 6. The lines shall be separated by one or more newlines and/or block comments. The parser will normally look for the first keyword of the body of the specification to determine that the header has ended.

The following header fields are common and required for all PCS specification documents:

- VERSION <version_code>: the VERSION keyword sets the version of a PCS entity to the value given by <version_code>. The version code shall be written in the format N.N where N may be any integer-constant. Leading zeros are allowed (e.g. 0.001);
- DATE <date>: defines the date of creation of the entity to <date>. The date shall be in the form YYYY-MM-DD with YYYY specifying the year of creation, MM the month and DD the day (all fields are integer constants). For instance 2000-08-03 is a valid date;
- RESPONSIBLE <name>: this field specifies the responsible organization and author of the specification. It may be any string constant. This field should normally name the organization and person in the organization responsible for further maintenance of the document.

5.4.3 The specification body

The basic element of the specification body is the block structure. Each block starts with a keyword indicating the type of block followed by a list of parameters. The available types of blocks are dependent on the type of entity to be specified. Details on legal blocks and the respective syntax will be given in the following sections. Blocks are separated from each other by at least one block separator.

5.5 Application specifications

5.5.1 Overview

An application specification is the description of the interfaces of one application unit that shall be connected to the IEC 61162-4 network. Each application specification consists of a set of one or more interface specifications. A PCS application specification, with its referenced documents, contains all necessary information to create the programming code that implements the interfaces of the application unit.

New application specifications can be derived from existing ones. The new specification inherits all properties from the existing application specification, i.e.:

- attribute values defined in the header of the respective base specification;
- all interfaces specified by the base specification.

5.5.2 General layout

Figure 7 shows the general layout of the application specification. Examples of application specifications can be found in the annexes.

The keyword `APPLICATION` defines the start of an application specification. The syntax of the statement is as follows:

```
APPLICATION <appl_name> DERIVED [FROM] <base_application>
```

The identifier `<appl_name>` defines the name of the application (the MAU name). The keyword `DERIVED` shows that the application is derived from a base specification given by the identifier `<base_application>`. This identifier has to be a valid reference to another application specification. The keyword `FROM` is used to make the statement more readable. A tangible application specification shall be derived from a base specification. Only abstract specifications (specifications which are part of PFS) need not to be derived from base specifications.

```

APPLICATION <appl_name> DERIVED [FROM]
<base_application>

  <general header>

;-----
-
REFERENCES
  <interface_name> [version]
  . . .
;-----
-
USAGE
  [* description]
;-----
--
INTERFACES
  [* description]

ACCEPT <interface_name>
  [* description]

  <properties of the interface>
  . . .

CONNECT <interface_name> ON <server_name>
  [* description]

  <properties of the interface>
  . . .

```

Figure 7 – General layout of an application specification

IEC 2414/01

A block comment should follow the first line, giving a short overview of the application specified. It is recommended also to supply a revision history where appropriate. This is not part of the formal syntax and can be included after the description by another comment block.

5.5.3 Header

As for all entity types covered by the PCS, an application specification is divided into a header and a body. In addition to the general properties listed in clause 5.4, the following entries can be defined in the header of application specifications:

```

VERSION      <version_code>
DATE         <date>
RESPONSIBLE  <name>
[MANUFACTURER <name>]
[MODEL      <name>]
[WATCHDOG   <interval ms>]
[AUTHENTICATION [<user>:<password>,< user>:<password>,. . . ]]

```

Figure 8 – Application header

IEC 2415/01

- a) MANUFACTURER <name>: this attribute specifies the manufacturer of the application specified here. The name may be any character string;
- b) MODEL <name>: the model name of the application should be given here. This attribute is used, for example to distinguish between different variants of a product family. The name may be any character string;
- c) WATCHDOG <interval ms>: this field specifies an optional watchdog interval (in milliseconds) that is used by the LNA to periodically interrogate the state of the MAU;
- d) AUTHENTICATION <user>: <password>: this field specifies that authentication is used for all interfaces in the MAU and may, optionally, specify the available user and password codes. The latter is normally not included in open documents. Authentication uses a dedicated PFS interface.

5.5.4 Body

The specification body shall consist of three main blocks in the order shown in the following subclauses. All blocks shall be present, although they may be empty or consist of just comments as, for example the `USAGE` block.

5.5.4.1 References

Each external interface has to be referenced before it can be used in the `INTERFACE` blocks. This is done in a block that starts with the keyword `REFERENCES`. Each additional line of this block contains a reference to an interface in the form:

```
<interface_name> [version]
```

`<interface_name>` shall be the name of a valid interface. To distinguish between different versions of one interface, the version code may be specified as a text string. This string, if present, will be compared to the version code specified in the header of the referenced interface. A mismatch shall cause a parser error.

5.5.4.2 Usage

This block gives a description on how the application should be used. The block starts with the keyword `USAGE`, but the remainder of the block must be formatted as a block of comments.

5.5.4.3 Interfaces

The `INTERFACE` block contains the specification of the application interfaces with which the application is provided. Each application interface identifier is prefixed by the keyword `ACCEPT` (for a server interface) or `CONNECT` (for a client interface). The keyword line may be followed by a block comment giving a description of the purpose and functionality of the respective application interface.

5.5.4.4 Accept type interface

The syntax used to specify a server interface is illustrated in figure 9.

```
ACCEPT <interface_name>
  [* description]

  [MAX MESSAGE RATE <msg_per_sec>]
  [AUTHENTICATION [<user>:<password> . . .]]
  [CLIENTS <num_clients>]
  [TRANSACTION QUEUE <num_trans>]
  [PASSWORD [<passwd>]]

INTERFACE [COMPONENT] <name> . . .
```

Figure 9 – Accept interface template

IEC 2416/01

The specification of a server interface starts with the keyword `ACCEPT`. The newly created interface will be named `<interface_name>`. The name may be specified as configurable by enclosing it in angle brackets. The interface will be composed of a number of interface components as specified at the end of the example.

A number of properties can be specified for the server interface by using a set of property definition statements. These statements must be placed between the header line and the first interface component definition. They may be listed in any order. Each statement shall be one line, separated from other lines by one or more newlines. The following properties may be set for a server interface:

- a) **MAX MESSAGE RATE** <msg_per_sec>: this entry is not converted to a protocol entity. It is used to check and verify system and module load. It shall specify the maximum number of transactions (including connection attempts) that the server application accepts on this interface;
- b) **AUTHENTICATION** <user>:<password>: if user authentication is required for the respective interface, this property has to be defined. The user and password fields may optionally be specified to list the available users. The password may be specified as configurable;
- c) **CLIENTS** <numb_clients>: the maximum number of clients that are allowed to be connected to the server may be specified here. The token <numb_clients> is of integer type. This property may be omitted if the maximum number of clients is not limited. The limitation is enforced by the LNA by denying further connection attempt, after the number of clients has been accepted by the MAU. The limitations do not apply to *urgent* connection attempts;
- d) **TRANSACTION QUEUE** <numb_trans>: the maximum number of pending transaction requests that the server allows in the input queue may be specified here. The token <numb_trans> is of integer type. This property will limit the number of transactions sent to the server for a given interface. By delaying acknowledgements, the server can use this limit to control its load. The limitation does not apply to *urgent* requests;
- e) **PASSWORD** [<passwd>]: if the server shall be protected by a password it may be specified here. Note that the password normally will be configurable and that the string specified as <passwd> usually is empty or a string in angle brackets. The string will be the default password for the interface.

The interface connection points are specified by a number of the following statements:

```
INTERFACE [COMPONENT] <name>
```

Each application interface consists of one or more interface components, each specified as in the line above. All components specifications must be in one block (only one newline between each line). The keyword [COMPONENT] is normally used to make the code more readable. <name> has to be the name of a valid interface specification as defined in the REFERENCES section (see above). The complete interface (consisting of all components) will be instantiated as one A-profile interface and given the name set in the ACCEPT statement.

5.5.4.5 Connect type interface

The specification of a client interface is initiated by the keyword **CONNECT**. The definition is similar to the accept type interface definitions, except for the properties that can be set and the definition of a server to connect to.

The identifier <server_name> has to be a valid name of an application acting as the server for the respective application interface (the server MAU name). The <interface name> must likewise be the name of one of the application interfaces on the server. Both these names may be specified as configurable.

```
CONNECT <interface_name> ON <server_name>
  [* description]

  [MAX MESSAGE RATE <msg_per_sec>]
  [PRIORITY [interface_comp[.conn_point]] <priority>]
  [TRANSACTION QUEUE <num_trans>]
  [PASSWORD <passwd>]
  . . .

INTERFACE [COMPONENT] <name>
  . . .
```

Figure 10 – Connect application interface template

The following properties may be set for a client interface:

- a) `MAX MESSAGE RATE <msg. per sec.>`: this entry has the same function as for the `ACCEPT` statement. It shall specify the maximum number of transactions generated by this client application for this interface. This is a measure that may be enforced by the application, but it is normally only tested against and is used as a guideline for total system load calculations;
- b) `PRIORITY [interface_comp[.conn_point]] <priority>`: the `PRIORITY` flag can be used to set the priority of an interface component or a specific connection point. If not specified, the priority will be set to `NORMAL`. The connection point of the interface component affected by this property is specified by the name argument. If the name argument is omitted, the priority applies to all connection points in the application interface. If the `.conn_point` component is omitted, the priority applies to all connection points in the interface component specified. The constant-token `<priority>` shall have the values `NORMAL` or `URGENT`;
- c) `TRANSACTION QUEUE`: this is as for the accept interface;
- d) `PASSWORD`: this is as for the accept interface, except that the password specified is that used for connection to the server.

The remainder of the specification consists of one or more lines as follows:

```
INTERFACE [COMPONENT] <name>
```

These lines are used to specify the components of the application interface in the same format as for the accept interface.

Note that a connect interface may contain a sub-set of components that the server supports in its interface. It cannot, however, have components that are not supported by the server. This will result in a run time connection failure.

5.5.4.6 Handling of anonymous broadcast

If the application interface name is `ABCMn` or `ABCn` where `n` is a digit from 1 to 5, the interface components shall consist of only anonymous broadcast connection points. For accept interfaces, this means that a `MAU` name is disregarded.

These connection points shall be exported as listening (`connect`) or sending (`accept`) on the specified broadcast port.

5.6 Interface component specifications

5.6.1 Overview

Interfaces are used in application specifications to describe the functionality and connectivity of the application. The application specification defines application interfaces which consists of a number of interface components. Each of the interface components is defined in an interface definition document.

The format of interface component descriptions is defined in this clause. Interface components themselves form aggregations of connection points. Each connection point specifies input and/or output information available from the interface.

NOTE In essence, interfaces describe the view on an application from the outside world – from an object-oriented point of view, interfaces specify the methods giving access to the internal structure and behaviour of an application object. That means that all functionality and behaviour of an application visible from other applications is given by the interfaces.

5.6.2 General layout

Figure 11 shows the general layout of the specification for an interface component. Examples of interface specifications can be found in the annexes. The following subclauses describe the document in more detail.

```

INTERFACE <interface_name> DERIVED [FROM] <base_specification>

  <header>

;-----
REFERENCES
  <info_name> [version]
  <data_type> [version]
  . . .
;-----
USAGE
  [*description]
;-----
REQUIRED DOCUMENTATION
  <entity_name> [version]
  . . .
;-----
CONNECTION POINTS
  <connection_type> <connection_name>
  [* description]

  INPUT
  [* description]

  <element declaration>
  . . .

  OUTPUT
  [* description]

  <element declaration>
  . . .

```

Figure 11 – General layout of an interface specification

IEC 2418/01

5.6.3 Header specification

The keyword `INTERFACE` defines the beginning of an interface component specification. The syntax is as follows:

```
INTERFACE <interface_name> DERIVED [FROM] <base_specification>
```

The identifier `<interface_name>` defines the name of the interface specification. This is later used in application specification documents to identify the interface component. A block comment should normally follow the first line, explaining properties and usage of the interface component. The keyword `DERIVED` indicates that the interface is derived from a base specification given by the identifier `<base_specification>`. This identifier has to be a valid reference to another interface specification. The keyword `FROM` can be used to make the semantics easier to understand.

It is mandatory to derive a tangible interface specification from a base specification. Only abstract specifications (parts of the basic PFS) need not be derived from base specifications.

As for all entity types covered by the PCS, an interface specification is divided into a header and a body. The properties to be set in the header are given in 5.4.

5.6.4 Body specification

The blocks defined in the following subclauses shall be part of the body of an interface specification.

5.6.4.1 References

Information or data type specifications used in the specification of connection points must be referenced before use. Each line of the REFERENCE block contains a reference to an information or data type specification in the form:

```
<name> [version]
```

<name> shall be the name of an information or data type specification. To distinguish between different versions of specifications referenced here the version code may be given by the token <version>. This is a string that, if specified, must match the version string in the referenced document.

5.6.4.2 Usage

This block shall give a description on how the interface should be used. The actual content is a comment and is not parsed.

5.6.4.3 Required documentation

This block lists additional documentation required for proper interpretation of the interface specification. This is mainly to instruct the parser/compiler of the PCS specification that it should give a warning to the system integrator to check the availability of the specified documentation. It will not generate protocol entities. Following the keyword a list is given as one text block; each line in the block should normally contain an entry of the form:

```
<entity_name> [version]
```

The token <entity_name> is a user defined symbol which one can assume identifies the documentation in question. If version information is available for the documentation, it may be specified by the token [version].

5.6.4.4 Connection points

This block contains the specification of the connection points that the interface component provides. Each connection point is specified by the following parameters:

- a) <connection_type>: keyword specifying the type of the connection as in the first column of table 1;
- b) <connection_name>: identifier specifying the name of the connection point to be created;
- c) INPUT/OUTPUT: dependent on <connection_type> (see table 1) the connection point needs an INPUT and/or an OUTPUT specification. The formats of both input and output blocks are the same.

The connection types and corresponding input and output requirements are listed in the table below. Note that an input or output field may be empty although the existence of the field is required.

Table 1 – Connection point types

| Keyword | In | Out |
|----------------------|-----|-----|
| FUNCTION | Yes | Yes |
| READ | Yes | |
| WRITE | | Yes |
| NONACKED WRITE | | Yes |
| SUBSCRIBE | | Yes |
| INDIVIDUAL SUBSCRIBE | Yes | Yes |
| BROADCAST SUBSCRIBE | | Yes |
| ANONYMOUS BROADCAST | | Yes |

The <element declaration> can take one of the following forms:

- <information> <name>: the specification of a single information entity (previously declared in the reference section). This is then the output or input entity;
- <data type> <name> [. . .]: the specification of a data type with the syntax as for a data block (5.8.4.4.3). The single type, the array or the data block will then be the input or output entity;

NOTE 1 If a new data block is defined (over multiple lines) in this manner it may be given a name by the parser for reference by application source code. The name will normally be the name of the connection point with the postfix In or Out. This is, however, determined by the parser.

NOTE 2 The use of a single data item or array will not cause a new data block to be defined. In this case, only the actual data item or array is transmitted.

- opaque <information> [count type: max size]: the specification of a variable length data block (as for variable length arrays in 5.8.4.4.3), where the interpretation is defined in an information document previously referenced.

The <name> field may be used by the parser to name application source code entities. It has no meaning for any A-profile entities.

5.7 Information specifications

5.7.1 Overview

Information specifications define information transmitted via an IEC 61162-4 network. Mainly, two properties of information entities will be defined:

- interpretation: the object based concept (i.e. assignment of information entities to a specific type) and the transmission of additional information by complex data structures allows the programmer to transmit data with an implicit meaning, see 4.1;
- structure: for high-level applications (e.g. decision support systems) it is not sufficient to process only data. Additional information has to be available, for example source of information, accuracy and time stamp. This leads to complex structures. The specification of the internal structure of such complex data entities can be given in information specifications.

5.7.2 General layout

Figure 12 shows the general layout of an information specification. Examples can be found in the annexes.

```

INFORMATION <information_name> [DERIVED [FROM] <base_specification>]

    <header>

;-----
REFERENCES
    <type_name> [version]
    . . .
;-----
USAGE
    <description>
;-----
ATTRIBUTES
    [* description]
    <attribute_list>
    
```

Figure 12 – General layout of an information specification

IEC 2#19/01

5.7.3 Header

The keyword `INFORMATION` defines the beginning of an information specification. The syntax is as follows:

```
INFORMATION <information_name> [DERIVED [FROM] <base_specification>]
```

The identifier `<information_name>` defines the name of the information specification. This name can be used by interface component specifications to specify an input or output to a connection point. The optional keywords `DERIVED FROM` indicates that the information specification is derived from a base specification given by the identifier `<base_specification>`. This identifier has to be a valid reference to another information specification. The keyword `FROM` is used to make the text easier to read. A block comment should follow the first line, explaining properties and usage of the information entity.

As for all entity types covered by the PCS, an information specification is divided into a header and a body. The properties to be defined in the header are defined in 5.4.

5.7.4 Body

The body consists of the blocks defined in the following subclauses in the order they are described:

5.7.4.1 References

The types used within the `ATTRIBUTE` block described below have to be referenced before usage. Data types (5.8) and other information specifications can be referenced here. Each reference has to be in the form:

```
<type_name> [version]
```

`<type_name>` has to be a valid name of an information specification, data block or interpretation. To distinguish between different versions of one type, the relevant version number may be specified by substituting `[version]` with the relevant version string.

5.7.4.2 Usage

This block gives a description on how the information specification should be used. The field `<description>` is a comment block and is not used by any parser.

5.7.4.3 Attributes

This block specifies the attributes of the information entity. Each attribute is declared on a separate line, making up the block `<attribute_list>`. Each line uses the following syntax:

```
<type_name> <attribute_name>
```

Where `<type_name>` may be one of the following:

- a) a valid name of another information entity referred to in the REFERENCE block (see above);
- b) a valid name of an interpretation or data block specified in a referenced data type document (5.8);
- c) one of the basic data types (see annex B).

An `<attribute_name>` is specified so that the parser can generate an application code for the information element.

5.8 Data types

5.8.1 Overview

Data type specifications have three purposes:

- a) define new data types: a data block defines a new data type. This type is normally also associated with an implicit interpretation;
- b) define interpretations: an interpretation describes how to *understand* the contents of data of a given type. The interpretation declaration gives an old type a new name and defines a new interpretation for this new type;
- c) define named constants: the constant declarations define constants with symbolic names that can be used by the same or other PCS documents.

The body of a data type specification is divided into two sections. The section identified by the keyword LOCAL contains all data types having local scope. Data types with global scope are included in the section marked with the keyword GLOBAL, see 5.3.3. Unless a data type, interpretation, or constant is declared GLOBAL, the respective entity can only be accessed from other specifications by using a scope operator. This is done by using a concatenation of the data type specification name and the data type name with a dot (`.`) as separator.

5.8.2 General layout

Figure 13 shows the general layout of the specification of data types. Examples can be found in the annexes.

```

DATA TYPES <module>

  <header>

;-----
REFERENCES
  <module> [version]
  . . .
;-----
LOCAL
  * specify data types with local scope

CONSTANT <type_name> [OF <old_type>] IS <constant-token>
  [* description]

;-----
INTERPRETATION <type_name> OF <old_type>
  [* description]

  <interpretation>
  . . .
;-----
DATA BLOCK <type_name>
  [* description]

  <data_list>
  . . .
;-----
UNION <type_name>
  [* description]

  <data_type> <item> [;description]
  <data_type> <item> [;description]
  <data_type> <item> [;description]
  . . .
;-----
GLOBAL

  * specification of data types with global scope, syntax is as
  in the LOCAL section of the specification

```

Figure 13 – General layout of a data type specification

IEC 2420/01

5.8.3 Header

The keyword DATA TYPES defines the beginning of the data type specification. The complete syntax is as follows:

```
DATA TYPES <module>
```

The identifier <module> gives the name of the data type specification. A comment should follow the first line, explaining properties and usage of the data types specified. Other header fields are described in 5.4.

5.8.4 Body

The body of a data type specification consists of the following blocks in the listed order.

5.8.4.1 References

External data type specifications necessary to define the entities of the current specification shall be referenced here. This block consists of a list with each line containing a valid name of a PCS data type specification. To distinguish between different versions, the version concerned here may be given by the token <version>.

5.8.4.2 Local data definitions

The keyword `LOCAL` introduces the specification of data types with local scope. These data types are accessible from other specifications only via the scope operator `'.'`, see 5.3.4. The section marked as `LOCAL` has to precede a `GLOBAL` section, if the `LOCAL` section is used.

5.8.4.3 Global data definitions

The keyword `GLOBAL` precedes the specification of data types with global scope. These data types are accessible from other specifications directly without the use of the scope operator (`'.'` – see 5.3.4). The `LOCAL` section must precede the `GLOBAL` section if a `LOCAL` section is used.

5.8.4.4 Data definition types

Each local or global block consists of a number of data type definitions. These definitions can be in any order. The following subclauses specify the format of each type of definition.

5.8.4.4.1 Constant

The format of a constant definition is:

```
CONSTANT <type_name> [OF <old_type>] IS <constant-token>
```

The new constant named `<type_name>`, optionally specified to be of type `<old_type>`, is given a constant value `<constant-token>`. `<constant-token>` can be any literal representable by the optionally specified type, see 5.3.1. The type has to be a built-in type or a type that has been defined earlier or from a referenced document.

5.8.4.4.2 Interpretation

The format of an interpretation is:

```
INTERPRETATION <type_name> OF <old_type>
<interpretation>
```

This block defines a new data type named `<type_name>` based on some built-in or previously defined data type named `<old_type>`. The defined interpretations follow after a block separator. Each line in the interpretation block defines a meaning for one discrete value that the type is able to represent. The different variants are shown in the table below.

Table 2 – Interpretation forms

| Form | Description |
|-----------------|---|
| literal = token | Define a new token to have a constant value (literal) |
| token2 = token1 | Define a new token1 to be identical to an old token2. |
| token | Define a new token with no particular value |
| constant | Describe the interpretation of a specific value |

All forms can be supplied with an in-line description after a semicolon. The two variants using an equals sign assign a new value to the left-hand side token. The new token can be used in other contexts in the definition documents. The constant tokens can be of one of the types described in 5.3.2 or a symbol created in a constant definition.

The two last lines in the table are used to give an informal description of how a particular value or a previously defined token or constant should be interpreted. Neither of these will define new symbols.

5.8.4.4.3 Data block

The data block is used to define a new data type consisting of a set of data elements (a record). The structure of the data block definition is:

```
DATA BLOCK <type-name>
<data-type> <element-name> [; description]
<data-type> <element-name> [; description]
. . .
```

The new record is given the name <type-name>. After the keyword line, a comment should follow with an informal description of the new type.

Each data element in the new record is listed in order after the description. Each line defines one new element of type <data-type> with name <element-name>. The different elements and the declaration forms are shown in the table below. old-type references a previously defined data type or a built-in type as listed in annex B.

Table 3 – Data type declaration formats

| Form | Description |
|--------------------|-------------------------------------|
| old_type | A single element of given type |
| [N] old_type | An ordinary array of given type |
| [wtype:N] old_type | Variable length array of given type |

The N can be any integer. It specifies the (maximum) number of elements in the array. The third form defines a variable length array. wtype may be one of the unsigned integer types listed in annex B.

The built-in types are listed in annex B. These types should be referenced with the name given in the left hand column.

5.8.4.4.4 Union

Unions are data objects that can be transmitted as one of several data elements of different types and sizes. The specification of a union contains the possible elements that can be transmitted in the place of this object. The syntax of a union specification is shown below:

```
UNION <type-name> : <wtype>
<data_type> <item> [; description]
<data_type> <item> [; description]
. . .
```

The union is given the name <type-name>. The wtype is an unsigned integral basic type that is used to transmit the enumeration value of the union element actually transmitted. The enumeration starts at one for the first line and increases continuously. The value zero is reserved for an empty union, i.e. no data transmitted.

Only one of the elements defined on the following lines will be transmitted. Each element must be a basic type or a derived type (data block or interpretation).

6 PISCES foundation specification (PFS)

6.1 Introduction

This clause gives an overview of the components of the PFS and defines the structure and naming conventions.

6.2 Naming conventions

To simplify the reading and understanding of PFS class trees, the following naming convention has been defined:

- all PFS class names start with three upper case letters;
- PAC is used for application classes;
- PCC is used for interface component classes;
- PIC is used for information classes.

In addition, the PFS will contain one standard data type file called "General". Other data type files are created as found necessary.

6.3 Application classes

6.3.1 Introduction

The PFS application classes are organized in a tree as shown in figure 14. Each box represents one application base class. The shaded boxes represent applications that are not included in the companion standard source code, but which are included as examples of possible derivations. The name of the application class is in bold font in the first line of text. The component interfaces are listed underneath.

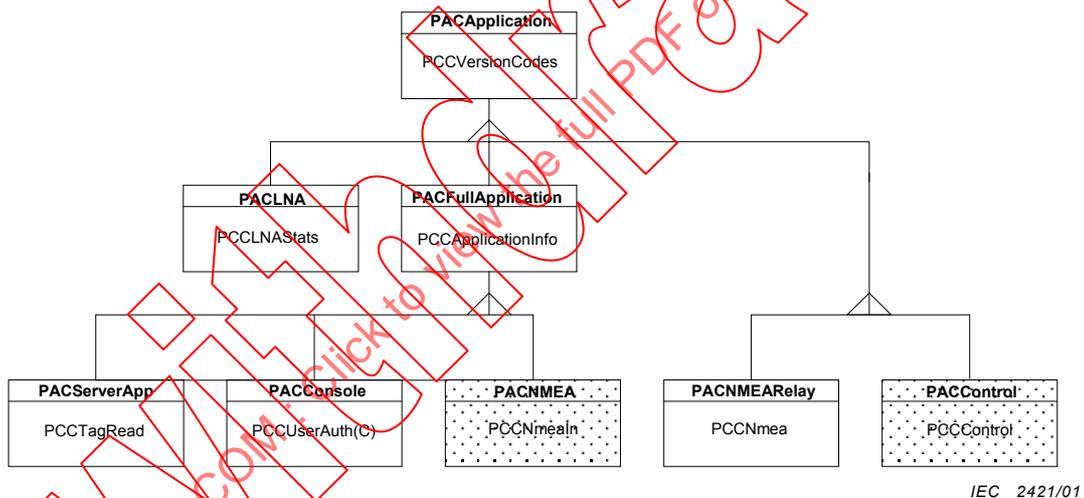


Figure 14 – Application class tree

New tangible applications can be derived from any class in the tree, also those that are not leaf nodes.

The tree defines a set of generally useful application classes as described in the following clauses.

6.3.2 Application base class: PACApplication

All PFS compliant applications must as a minimum have version and manufacturer codes available (`PCCVersionCodes`). These components of the PFS are described in annex C (in the PCSDL format).

Two “simple” example applications are shown as: a simple relay function for IEC 61162-1 and IEC 61162-2 telegrams (`PACNMEARelay`) and a simple control function (`PACControl`). The latter is assumed to be some kind of simple control interface.

It is recommended that only very simple applications are derived from this base class. Most applications should be derived from the managed application base class.

6.3.3 LNA MAU application: PACLNA

There is an application class associated with the system’s LNA (`PACLNA`). This application is implemented as a MAU that can look into some of the LNA’s management structures. This can be used for application management, configuration and debugging. The minimal functionality of this MAU is defined in annex D.

6.3.4 Managed applications: PACFullApplication

There is also a more complex class of applications that as default support the inspection and possible configuration of the interfaces and connection points implemented by the application (`PACFullApplication`). The source code for the interfaces is included in Annex C.

This application class enables, together with the LNA MAU, the on-line creation of a connectivity tree with detailed information about each connection point. This is an important tool for system integration and system management and debugging.

6.3.5 IEC 61162-1 and IEC 61162-2 interface application: PACNMEARelay

One example of a full application is the NMEA relay base class. This base class allows the relay of IEC 61162-1 and IEC 61162-2 telegrams over the IEC 61162-4 protocol. This represents a simple way to integrate parts 1, 2 and 4 of this standard. The source code is included in annex F.

6.3.6 Console application: PACConsole

The console application base class provides a starting point for the creation of consoles that shall cater to user centred HMI. In this standard, the base class is only provided with an authentication client interface (`PCCUserAuth`). This is typically used to verify console position and user authenticity before any operation with side effects is allowed to be performed. The source code is included in annex C.

6.3.7 General alarm and monitoring application: PACServerApp

A simple base class with a simple data base function for general data retrieval is implemented in this application base class. A more detailed application tree is described in annex E. This base class, or at least parts of its component interfaces should be included in any application that may present data to a higher level application.

These application classes are also useful as general gateways between any other sub-system or bus and the IEC 61162-4 protocol.

7 Specification requirements for PCS compliant applications

7.1 Introduction and general documentation format


To enable the user to get a reasonable overview of an application's functionality and the relationship to and between interfaces, a set of documentation requirements has been developed.

The application documentation shall consist of three main parts as described in the following subclauses.

7.2 Function block

7.2.1 Function block graphical view

The documentation shall contain a graphical function block view. This view shall be structured as indicated in figure 15. Other graphical formats can be used, but the information entities listed in the following shall as a minimum be included.

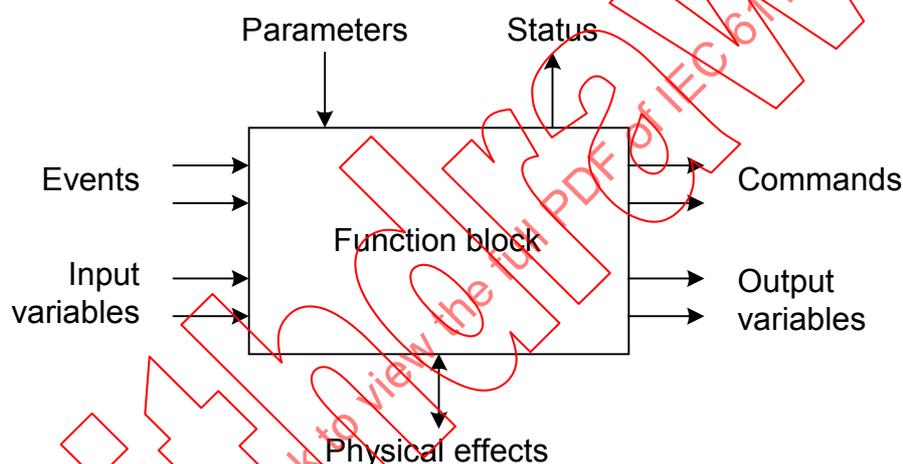

IEC 2422/01

Figure 15 – Function block prototype

In the function block view, the application is drawn as a rectangle with certain inputs and outputs. The inputs and outputs should be labelled with the corresponding connection point, interface component or application interface dependent on wanted resolution. Only the inputs and outputs that are most important for application function need to be included. The figure shows those inputs and outputs that are normally included. These are discussed in the following subclauses.

7.2.2 Physical effects

Physical effects are interactions not representable in the IEC 61162-4 network. They shall be drawn as double pointed arrows underneath the function block.

Physical effects are effects of interaction between the physical entities outside the control system and the function block, transformed by, for example sensors, actuators or HMI.

7.2.3 Input variables

Input variables shall be drawn as arrows pointing into the function block in the lower left corner.

These are information elements generated by other function blocks. They are read during the execution of the function block's algorithm and are necessary for the correct operation of the function block.

7.2.4 Output variables

Output variables shall be drawn as arrows pointing out of the function block in the lower right corner.

These are readable information elements generated as a result of execution of the function block. These are typically input to other function blocks.

7.2.5 Events

Events shall be drawn as arrows pointing into the function block in the upper left corner.

Events are commands or notifications that are delivered to the function block from other function blocks and which cause the function block to perform some operation.

7.2.6 Commands

Commands shall be drawn as arrows pointing out of the function block in the upper right corner.

Commands are generated by the function block as commands or notifications (including alarms and warnings) to other function blocks to trigger some remote operation.

7.2.7 Status

Status shall be drawn as arrows pointing up from the function block in the upper right corner.

Status represents information items that can be made available to other function blocks that are not yet known, typically interfaces to various forms of higher level decision support systems.

7.2.8 Parameters

Parameters shall be drawn as arrows pointing down into the function block in the upper left corner.

Parameters represent data that can be set in the function blocks to control the function block's operation. The operation of the function block shall not depend on the continuous availability of these data which can be filter constants, set-points or alarm limits.

7.2.9 Indication of accept or connect functionality

It may be convenient to indicate in the figure what is defined as connect (client) and what is defined as accept (server) type interfaces. Note that this is independent of an entry point acting as input or output. The following conventions shall be observed:

- a) a client entry point shall be labelled with an upper case 'C' near the rectangle;
- b) a server entry point shall be labelled with an upper case 'A' near the rectangle;
- c) no label is legal and does not carry any particular meaning.

7.3 Functional description

The documentation shall contain a section that describes the functionality of the application. This section shall relate the various inputs and outputs to the overall functionality.

The level of detail and the actual mechanisms employed to describe the functionality is left to the author. As a general rule, the description should allow a reader to understand what the application does and how the various inputs and outputs can be used to deploy the application in an integrated system.

7.4 Companion standard descriptions

The third part of the documentation is a detailed description of all inputs and outputs in the form of PCSDL documents. Base classes that are used in derivations and which are taken from official versions of this standard need not be included in the listings.

Interfaces that are only used for internal purposes and which are not meant for public use may also be deleted from the listing providing that these interfaces have no safety-related impacts on the application or in the system in which the application shall operate.

IECNORM.COM: Click to view the full PDF of IEC 61162-420:2001

Withdrawn

Annex A (normative)

Defined keywords

The following table shows the keywords reserved in the companion standard definition documents.

| Keyword | Description |
|----------------------|---|
| ACCEPT | Define an accept-type interface |
| ANONYMOUS BROADCAST | Define an ABC connection point |
| APPLICATION | Define a new application specification |
| ATTRIBUTES | Declare attributes of an information specification |
| AUTHENTICATION | Specify need for user authentication |
| BROADCAST SUBSCRIBE | A data object function type |
| CLIENTS | Specify maximum number of clients for an interface |
| COMPONENT | Syntactic sugar |
| CONNECT | Define a connect-type interface |
| CONNECTION POINTS | Define a set of connection points |
| CONSTANT | Define a constant data item |
| DATA BLOCK | Define a new data aggregate type |
| DATA TYPES | Define new data types |
| DATE | Followed by date of last modification |
| DERIVED | Specify the base specification of a PCS specification |
| FROM | Syntactic sugar |
| FUNCTION | A data object function type |
| GLOBAL | Define global scope for an identifier |
| INFORMATION | Define a new information specification |
| INDIVIDUAL SUBSCRIBE | Define an individual subscribe connection point |
| INPUT | Define the data object's input record |
| INTERFACE | Define a new interface specification |
| INTERFACES | Define application interfaces |
| INTERPRETATION | Define an interpretation of a data item |
| IS | Syntactic sugar |
| LOCAL | Define local scope for the following data types |
| MANUFACTURER | Specify manufacturer of an application |
| MAX MESSAGE RATE | Specify maximum message rate of an interface |
| MODEL | Specify model of an application |
| NAMED | Syntactic sugar |
| NONACKED WRITE | A data object function type |
| OF | Syntactic sugar |
| ON | Syntactic sugar |
| OUTPUT | Define the data object's output record |
| PASSWORD | Specify password protection for a server interface |
| PRIORITY | Specify the priority of a CONNECT interface |
| READ | A data object function type |

| Keyword | Description |
|------------------------|---|
| REFERENCES | Heads "included files" section |
| REQUIRED DOCUMENTATION | Additional required documentation for an interface |
| RESPONSIBLE | Responsible author of a specification |
| SUBSCRIBE | A data object function type |
| TRANSACTION QUEUE | Specification of load limitation for server |
| UNION | Specify a union data type |
| USAGE | Heads a description of the usage of a specification |
| VERSION | Followed by version code of the specification |
| WRITE | A data object function type |

IECNORM.COM: Click to view the full PDF of IEC 61162-420:2001

Withdrawing


Annex B (normative)

Basic IEC 61162-4 data types

The following basic data types are supported by the IEC 61162-4 A-profile (IEC 61162-401). The IEC 61162-4 protocol guarantees to transmit any aggregates of these types between application units with no loss in precision or value.

| Type | Description |
|-----------|-------------------------------|
| bool_m | 1 bit Boolean |
| char8_m | 8 bit character |
| char16_m | 16 bit character |
| word8_m | 8 bit unsigned integer |
| word16_m | 16 bit unsigned integer |
| word32_m | 32 bit unsigned integer |
| word64_m | 64 bit unsigned integer |
| int8_m | 8 bit 2's complement integer |
| int16_m | 16 bit 2's complement integer |
| int32_m | 32 bit 2's complement integer |
| int64_m | 64 bit 2's complement integer |
| float32_m | 32 bit floating point |
| float64_m | 64 bit floating point |

Refer to a more detailed description and a formal definition of representation in IEC 61162-401.

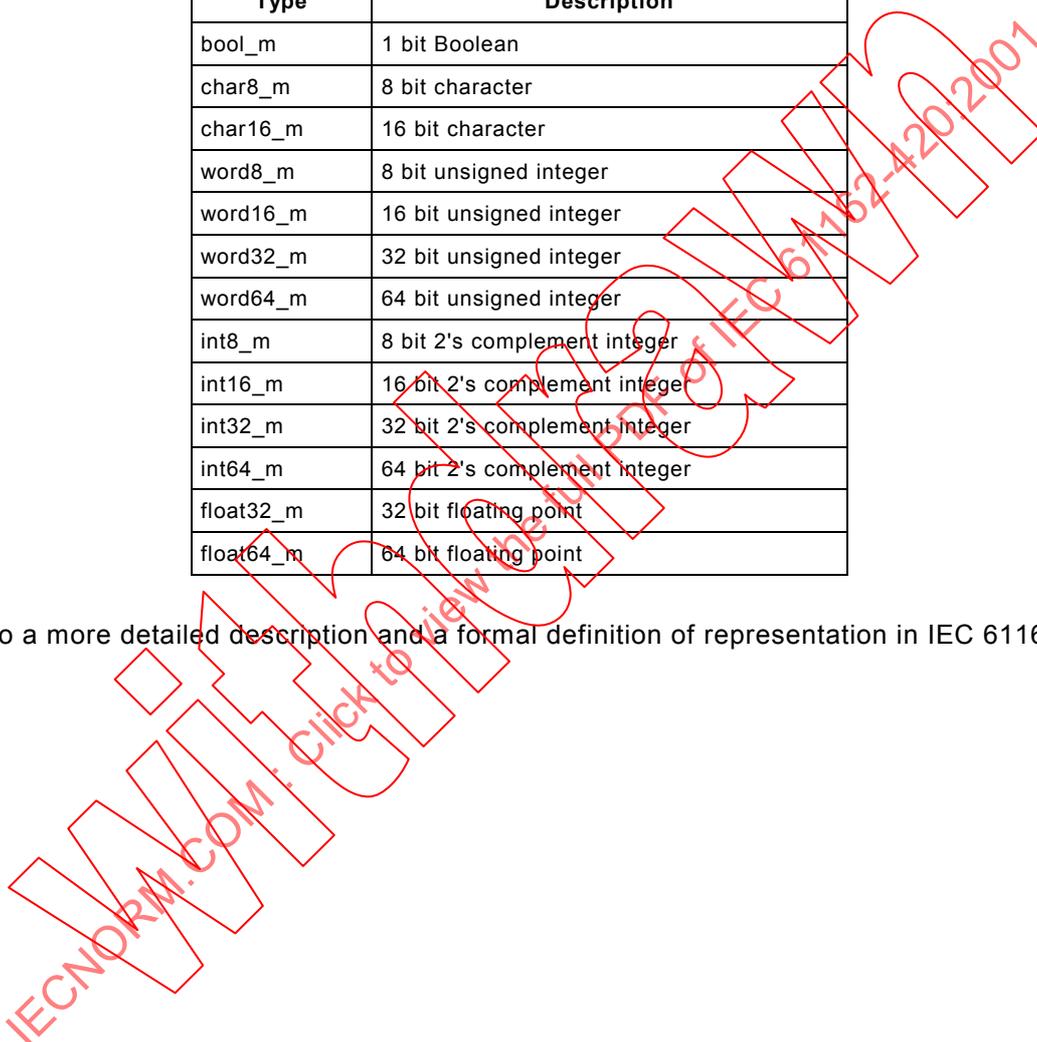

Annex C (normative)

General application companion standards

C.1 Introduction and general principles

This annex describes interface components and applications for basic system management functions. Each application shall belong to one of the super-classes:

- a) `PACSimpleApplication`: shall provide mechanisms for accessing simple information about the application (version codes, manufacturer and model information);
- b) `PACFullApplication`: shall provide mechanisms for accessing information about the interfaces and connection points provided by the application;
- c) `PACLNA`: special application associated with LNA (see annex D).

Other applications are defined to be not conform to the standard.

This annex also contains an authentication interface that can be used by applications that require operator or workstation authentication.

C.2 Functionality overview

C.2.1 General data definitions

The data type `General` provides general data definitions for all applications conforming to this standard.

C.2.2 Version codes

The interface `PCCSimpleApplication` provides version codes in standard three number format. Version codes for application program and protocol shall be provided.

C.2.3 Manufacturer and model identification

These are text strings that identify the manufacturer and the model. They should be the official name of the respective entities.

C.2.4 Interface and MCP information

The `PCCFullApplication` interface provides additional information that allows a management client to inspect all interfaces and MCPs.

C.2.5 Authentication

Authentication is application specific in that different servers have different requirements for authentication. The standard provides a general interface to do authentication and this, together with the session codes, can be used to make sure that the identity of a requesting client is that which one expects.

C.2.6 File overview

The following table lists the interfaces. Applications are contained in this annex.

Table 4 – Application related CS components

| Component | Description | File |
|----------------------|---------------------------------------|-------------|
| General | General data types | general.mcs |
| PACSimpleApplication | Simple application skeleton | appsimp.mcs |
| PACFullApplication | Full application skeleton | appfull.mcs |
| PCCVersionCodes | Interface for version codes | version.mcs |
| PCCApplicationInfo | Interface for application information | appinfo.mcs |
| UserAuth | User authentication data types | authd.mcs |
| PCCUserAuth | User authentication | auth.mcs |
| LnaMau | LNA data types definition | lnadata.mcs |
| LnaMaulf | LNA MAU interface | lnaif.mcs |

C.2.7 Data types General

DATA TYPES General

* This module defines a set of general data-types. They are all defined as global.

* Revision history:

010102 1.2 First IEC FDIS release
 990831 1.1 First IEC CDV release

VERSION 1.2
 DATE 2001-01-02
 RESPONSIBLE IEC TC80/WG6

REFERENCES
 none

 USAGE

* This file contains general definitions for PFS

GLOBAL

 INTERPRETATION FieldOk OF bool_m

* Each bit indicates whether the corresponding field in a block is valid. Valid means interpretable, i.e. a null-terminated string can be flagged as valid. A zero length variable length array can also be valid. Fields are counted from the top of the data block definition (as index zero) and down (increasing index). The field is valid if the corresponding bit is TRUE (1).

 INTERPRETATION BlockOk OF bool_m

* Value indicates whether data block is valid or not.

FALSE ; Block is illegal
 TRUE ; Block is ok

 DATA BLOCK Time

* A representation of relative time. Note that the representation cannot accommodate longer time differences than approximately 136 years.

word32_m sec
 word32_m usec ; Micro-seconds fraction of above

```

;-----
INTERPRETATION GlobalTime OF Time
* GlobalTime contains number of atom clock seconds and micro-seconds
  since midnight 1. January 1970 UTC, *excluding* leap
  seconds. This is compatible with POSIX time representation (for
  use in, e.g., ctime or localtime functions). This time
  measurement has an offset to UTC time that is changed for each
  (negative or positive) leap second.

* Note 2: The constant UTCOFFSET_JAN1999 can be used as an
  approximation to the offset to UTC time. One should keep in mind
  that there may be a second or so difference between the MiTS time
  as specified by the system server and real UTC time. This should
  be no problem as long as this is consistent during a voyage.

* Note 3: The GPS satellite or a radio or modem based time standard
  server can be used to update the offset count.

* Note 4: When using POIX time conversion functions, one should
  check if the leap second count is taken into consideration (it
  should not be) and if the second count is signed or not. A signed
  second count will cause problems around year 2038 when a signed
  seconds count wrap around to negative.

* Note 5: The second counter wraps around sometime in the year
  2107. Use of the time structure should take care to do modulo
  arithmetic correctly.

sec ; Seconds since 1970-01-01 00:00:00 UTC
usec ; Micro-seconds fraction of above

```

```

;-----
CONSTANT UTCOFFSET_JAN1999 IS 22
* The last leap second (at date of writing) occurred at the start of
  January 1999. The total offset between POSIX time and UTC was after
  that event 22 seconds. A complete list of leap seconds can be
  found below. The list is adapted from a file located at
  ftp://maia.usno.navy.mil/ser7/leapsec.dat.

* 1972 JAN 1
* 1972 JUL 1
* 1973 JAN 1
* 1974 JAN 1
* 1975 JAN 1
* 1976 JAN 1
* 1977 JAN 1
* 1978 JAN 1
* 1979 JAN 1
* 1980 JAN 1
* 1981 JUL 1
* 1982 JUL 1
* 1983 JUL 1
* 1985 JUL 1
* 1988 JAN 1
* 1990 JAN 1
* 1991 JAN 1
* 1992 JUL 1
* 1993 JUL 1
* 1994 JUL 1
* 1996 JAN 1
* 1997 JUL 1
* 1999 JAN 1

```

```

;-----
DATA BLOCK Version
* Version codes generally used in this protocol. An increment in major
  number indicates a specification (protocol) change that may render
  older versions incompatible with newer. Downward compatibility may
  be supported but shall not be relied on. The value zero for major
  represent a test version with unknown relationship to official
  versions. An increment in minor number represents some form of
  correction or minor adjustment that retains upwards specification
  compatibility. An increment in release number indicates software
  fixes with possible changes in functionality only to correct

```

previous errors. The date represents the compilation date and time for the software implementing the version.

word16_m major
word16_m minor
word16_m release
GlobalTime date

```
;-----
INTERPRETATION EngineeringUnit OF word16_m
* Specification of scalar dimension. Most units are based on SI, but
  some special considerations have been made to naval units (knots,
  nautical miles and angular measures).

* Note: Different storage classes can use the same engineering unit,
  e.g., a time can be represented in a float or an integer. It is
  usually necessary to know both storage class and engineering unit
  to interpret a number.

* EU_NAVDIRECTION is used both for positions (E/W or N/S) or compass
  headings. The context defines how it is used.

0 = EU_OTHER          ; other (use description)
1 = EU_UNKNOWN        ; not known
;
2 = EU_COUNT          ; number - dimension-less
3 = EU_RATIO          ; ratio - dimension-less
;
4 = EU_TEXT           ; No unit - text string
;
10 = EU_LENGTH        ; m (linear measure)
12 = EU_AREA          ; m**2 (area)
13 = EU_VOLUME        ; m**3 (volume)
14 = EU_NAVDISTANCE   ; nautical miles - 1852 m (navigational length )
;
20 = EU_ANGLE         ; radians (angular measure)
21 = EU_NAVDIRECTION ; degrees, positive clockwise (angular
; measure, normally N is zero).
22 = EU_POSITION      ; data value pair: first is degrees N positive
; (S neg), degrees E positive (W neg) (position in
; latitude, longitude).
;
30 = EU_VELOCITY      ; m/s (linear velocity)
31 = EU_NAVVELOCITY   ; knots - nm/h (navigational velocity)
32 = EU_ANGVELOCITY   ; radians/s (angular velocity)
;
40 = EU_ACCEL         ; m/s**2 (linear acceleration)
41 = EU_ANGACCEL      ; radians/s**2 (angular acceleration)
;
50 = EU_TIME          ; s (time)
51 = EU_FREQUENCY     ; Hz (frequency)
;
60 = EU_MASS          ; kg (mass)
61 = EU_DENSITY       ; kg/m**3 (density)
62 = EU_MASSFLOW      ; kg/s (mass flow)
;
70 = EU_FORCE         ; N (Force)
71 = EU_TORQUE        ; Nm (Torque)
72 = EU_PRESSURE      ; Pa or N/m (Pressure)
;
80 = EU_ENERGY        ; J (Energy)
81 = EU_POWER         ; W (Power)
82 = EU_HEATFLOW      ; J/m**2 (Heatflow)
83 = EU_TEMP          ; Degrees C (temperature)
84 = EU_ABSTEMP       ; Degrees K (absolute temperature)
;
90 = EU_DYNVISC       ; N/m * s (Dynamic viscosity)
91 = EU_KINVISC       ; m**2/s (Kinematic viscosity)
;
100 = EU_RESISTANCE   ; Ohm (Resistance)
101 = EU_CURRENT      ; A (Current)
102 = EU_VOLTAGE      ; V (Voltage)
;
1000 = EU_RAW         ; Raw byte stream (file)
```

```

1001 = EU_JAVA           ; Java text code
1002 = EU_TCLTK         ; TCL/TK code
1003 = EU_EXPRESS       ; EXPRESS text code
                           ;
10000 = EU_FREE         ; User defined from this value and up
;-----
INTERPRETATION LocationCode OF word32_m
* Location codes. Unused codes are user defined. For future expansion
  these codes should start at USERLOCATIONS.

0 = LC_EVERYWHERE
;
100000 = LC_USERLOCATIONS ; Above and including this number
;-----
INTERPRETATION TPnet OF word16_m
* Code for various T-profile network (IEC 61162-420).

0 = TPN_ANYADR_USER ; User specified
1 = TPN_MAUADR_IPC   ; MAU-LNA system specific IPC
2 = TPN_MAUADR_TCP   ; MAU-LNA over WAN TCP
129 = TPN_LNADR_IPV4R ; IPV4 Std. LNA-LNA redundant
130 = TPN_LNADR_IPV4RE ; IPV4 Extended LNA-LNA redundant
131 = TPN_MMADR_IPV4R ; IPV4 Std. MAU-MAU redundant
132 = TPN_MMADR_IPV4RE ; IPV4 Extended MAU-MAU redundant
120 = TPN_LNADR_IPV4 ; IPV4 Std. LNA-LNA non-redundant
121 = TPN_LNADR_IPV4E ; IPV4 Extended LNA-LNA non-redundant
122 = TPN_MMADR_IPV4 ; IPV4 Std. MAU-MAU non-redundant
123 = TPN_MMADR_IPV4E ; IPV4 Extended MAU-MAU non-redundant
;-----
DATA BLOCK address_m
* Address of a stream interface. This consists of a T-profile type and a
  T-profile dependent address block. The currently defined address blocks
are:

TPN_ANYADR_USER: User defined, any length
TPN_MAUADR_IPC: System dependent code, e.g., process id
TPN_MAUADR_TCP: Void, zero length
TPN_LNADR_IPV4R: Void, zero length
TPN_LNADR_IPV4RE: 8 octets, two word32_m Internet addresses
TPN_MMADR_IPV4R: Void, zero length
TPN_MMADR_IPV4RE: 8 octets, 2 word32_m
TPN_LNADR_IPV4: Void, zero length
TPN_LNADR_IPV4E: 4 octets: word32_m
TPN_MMADR_IPV4: Void, zero length
TPN_MMADR_IPV4E: 4 octets: word32_m

TPnet      tProfile ; T-profile in use
[word8_m:48]word8_m tAddress ; The address
;-----
INTERPRETATION TPService IS word32_m
* A TP network service class. Values defined by T-profile.

0 = TPNS_UNKNOWN
;-----
INTERPRETATION TPSInstance IS word32_m
* A TP network service class instance. Values dependent on service. For
  MAU-MAU stream over Internet, the value is TCP port number.

0 = TPNSC_NONE

```

C.2.8 Application PACSimpleApplication

APPLICATION PACSimpleApplication

* This application contains the general framework for the creation of a minimum IEC 61162-4 application.

* Revision history :
010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES

INTERFACE PCCVersionCodes

USAGE

* Minimum required functionality for PFS application.

INTERFACES

ACCEPT Application

INTERFACE COMPONENT PCCVersionCodes

C.2.9 Application PACFullApplication

APPLICATION PACFullApplication DERIVED FROM PACSimpleApplication

* This application contains the general framework for the creation of a complete IEC 61162-4 application.

* Revision history:
010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES

INTERFACE PCCApplicationInfo

USAGE

* Minimum functionality for full application.

INTERFACES

ACCEPT Application

INTERFACE COMPONENT PCCApplicationInfo



C.2.10 Interface PCCVersionCodes

INTERFACE PCCVersionCodes

* This interface gives access to basic information about the application.

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES
General

USAGE

This interface is for general use by all applications compliant to the IEC 61162-4 companion standard. It is also contained in the application base class defined within the PFS classes

*NOTE: All variable length strings are length encoded and not null terminated.

DATA TYPES

INTERPRETATION PFCClass OF word16_m
* PFC application class code.

0 = PFC_NONE ; Special class
1 = PFC_LNA ; LNA MAU
2 = PFC_FULL ; Full server
3 = PFC_SIMPLE ; Simple interface

CONNECTION POINTS

FUNCTION GetApplicationInfo

* This connection point returns general information about the application concerned. This includes header information (the name of the responsible author, manufacturer and type of application) as well as information about the interfaces.

* Post condition: Returns number of interfaces supported in addition to this one. I.e., zero is in principle a legal number. The number specifies interface components. Interface components are numbered from zero (this one) to interfaces.

INPUT
none

OUTPUT
[word16_m:64]char8_m manufacturer ;manufacturer
[word16_m:64]char8_m model ;model (type)
int32_m interfaces ;number of additional interfaces
PFCClass class ;PFC type
Version appVersion ;Application revision
Version protoVersion ;Protocol revision

C.2.11 Interface PCCApplicationInfo

INTERFACE PCCApplicationInfo

* This interface gives access to information about applications (general attributes), application interfaces and their connection points

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES
General

USAGE

This interface is for general use by all applications compliant to the IEC 61162-4 companion standard. It is also contained in the application base class defined within the PFS classes

*NOTE: All variable length strings are length encoded and not null terminated.

CONNECTION POINTS

FUNCTION GetInterfaceInfo

* This command is used to retrieve detailed information about one selected interface component in the application concerned.

* Precondition :
Input parameter interface (see below) must be a number of an interface, numbered from zero (this interface itself) to interfaces (from GetApplicationInfo).

* Postcondition :
Information about the interface is retrieved. The data is valid if the flag isOk is set to TRUE. Please note that the following fields are only valid for an accept interface (i. e. type == 1):
- auth_flag
- numb_clients
- password
The field priority is only valid for a connect interface (i.e. type == 0).

* Number of connection points are the total number of interfaces,

* Interface number is negative for illegal interfaces:
-1: No such interface
-2: No data on interface

INPUT
int32_m interface

OUTPUT
int32_m interface ; Interface number, as input
[word16_m:32]char8_m appName ; Name of interface
[word16_m:32]char8_m className ; Name of interface class
bool_m isAccept ; FALSE: connect / TRUE: accept
bool_m hasAuth ; authentication necessary
bool_m needPassword ;interface password protected (TRUE/FALSE)
word16_m acceptClients ;max. number of clients
word16_m max_mess_rate ;maximum message rate possible
word16_m min_mess_rate ;minimum message rate allowed
word16_m priority ;LOW, MEDIUM or HIGH
int32_m noCPs ;Number of connection points
Version vNo ;Version information

```

;-----
FUNCTION GetCPInfo
* This command is used to retrieve detailed information
  about one selected connection point.

* Precondition :
  Input parameter interface (see below) must be a valid code for an
  existing interface component. conn_pt be a valid code for a
  connection point belonging to the interface.

* Postcondition :
  Information about the connection point conn_pt is retrieved. The
  data is valid if returned interface and conn_pt is
  non-negative. Negative values for one or both are: -1: No such
  entry for this interface/conn_pt -2: No data available on this
  interface/conn_pt

INPUT
  int32_m interface
  int32_m conn_pt

OUTPUT
  int32_m interface
  int32_m conn_pt
  [word16_m:1950]char8_m  format ;Format string
  [word16_m:32]char8_m   name   ;Name of CP

```

C.2.12 Data types UserAuth

```

DATA TYPES UserAuth
* These data types are related to user authentication.

* Revision history:
010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

```

REFERENCES

```

DATA TYPES General

```

GLOBAL

```

;-----
INTERPRETATION UserGroup OF int32_m
* Codes for user groups.

```

```

0 = UG_CAPTAIN
1 = UG_CHIEF
2 = UG_DECKOFFICER
3 = UG_OOW ; Officer On Watch
4 = UG_OTHERENGINEER ; not chief
;
1000 = UG_USER ; user defined from here

```

```

;-----
INTERPRETATION ConsoleGroup OF int32_m
* Codes for operating consoles (from IMO A.830(19) and other)

```

```

0 = CG_OTHER ; Not defined location
1 = CG_BRIDGE ; Navigation bridge
2 = CG_MACHINERY ; Machinery control room
3 = CG_FIRE ; Central fire control station
4 = CG_LOCAL ; At location of equipment being monitored
5 = CG_ENGINEER ; Engineer's accommodation
;

```

```

6 = CG_BRIDGEWINGP ; Navigation position port
7 = CG_BRIDGEWINGS ; Navigation position starboard
8 = CG_BOWCONTROL ; Navigation and DP position
9 = CG_BOWDOOR ; For bow door
;
1000 = CG_USER ; User defined position from this code

```

```

;-----

```

```

INTERPRETATION UaStatus of int32_m
* Return status for request to authenticate.

```

```

0 = US_ALLOWED
1 = US_WRONGUSER
2 = US_WRONGCONSOLE
3 = US_WRONGSPECIFICCONSOLE
4 = US_WRONGSPECIFICUSER
5 = US_WRONGPASSWORD
6 = US_UNKNOWN ; Other unknown error
;
1000 = US_OTHER ; Other specific errors

```

```

;-----

```

```

INTERPRETATION UaCode of [32]bool_m
* The user authentication code. Increasing codes give increasing
  levels of authorities. Coding is dependent on controlled
  application. May be a bit-map?

```

```

0 = UA_NONE ; No secure operation is allowed when all bits zero
1 = UA_READ ; Allowed to read data and attributes
2 = UA_WRITE ; Allowed to write some data
3 = UA_WATTR ; Allowed to write and set some attributes
4 = UA_ALARM ; Allowed to acknowledge some alarms
;
0xffffffff = UA_ALL ; All operations allowed when all bits set

```

```

;-----

```

```

INTERPRETATION CommandCode OF int32_m
* Codes used in the function calls.

```

```

0 = CC_NOOP ; No operation
1 = CC_REQCONSOLE ; Request transfer of console to remote
2 = CC_SETCONSOLE ; Force to be set as console
3 = CC_ACKTRANSFER ; Acknowledge transfer
4 = CC_WHATCONSOLE ; What is console
;
1000 = CC_USER ; Other commands

```

C.2.13 Interface PCCUserAuth

```

INTERFACE PCCUserAuth

```

* This interface is used for user authentication. A client asks a server for authentication codes based on a passwords, a user code the code for the controlling function and the function to control.

* Revision history:

```

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

```

```

VERSION      1.2
DATE         2001-01-02
RESPONSIBLE  IEC TC80/WG6

```

```

;-----

```

```

REQUIRED DOCUMENTATION

```

```

  PASSWORDS ; It must be documented how passwords are configured in
             ; both client and server

```

```

;-----

```

```

REFERENCES

```

DATA TYPES General
DATA TYPES UserAuth

```

;-----
CONNECTION POINTS

;-----
FUNCTION Authenticate
* This connection point is used to identify a user and returns an
  authentication code. The protocol will ensure that it is
  possible to identify the client MAU between connection points and
  interfaces.

* Precondition: Input user and console codes and password. Input
  optionally a specific user and console code. This may be
  required by some applications. A new request terminates
  automatically any previous authorisations.

* Postcondition: Authorisation status. The requesting MAU will
  automatically have an authorisation level corresponding to user
  and console. This will be used where applicable on other
  requests to the server MAU. The time field gives optionally a
  time to live for the authorisation (zero is infinite). A new
  request must be sent before this time to validate the
  authorisation. The authorisation code and descriptive string
  specifies allowed operations.

INPUT
  UserGroup      user          ; What user code
  ConsoleGroup   console       ; What control position
  [8]char8_m     spConsole    ; Optional specific console code or null
  [8]char8_m     spUser       ; Optional specific user code or null
  [8]char8_m     password     ; Password

OUTPUT
  UaStatus       status        ; return code
  UaCode         authCode      ; authorisation code
  Time           ttl           ; Time that authorisation is valid
  int32_m        console      ; Console number
  [32]char8_m    authDesc     ; Optional descriptive string

;-----
SUBSCRIBE IsControl
* This subscription point informs all connected consoles about
  current status.

* Precondition: The listeners console code must be established by
  doing an authorisation request. If not, the listener should
  assume zero as this code never is used.

* Postcondition: The command code specifies necessary actions:
  REQCONSOLE and nextConsole is self: Acknowledge take over
  SETCONSOLE: Register new console in command, use provided data.
  WHATCONSOLE: Information about new or changed console
  configuration. Use provided data.
  Other: ignore

* The user, console, spConsole and spUser describes the
  attributes of the new console when SET, REQ or WHAT
  CONSOLE. Invalid else.

OUTPUT
  CommandCode    command      ; Command to consoles
  int32_m        inConsole    ; Current console in command
  int32_m        nextConsole  ; Next to be console in command
  UserGroup      user         ; What user code
  ConsoleGroup   console      ; What control position
  [8]char8_m     spConsole    ; Optional specific console code or null
  [8]char8_m     spUser       ; Optional specific user code or null

;-----
FUNCTION SetControl
* This connection point does one of several things:
  - Inquire about current console in command
  - Ask for transfer to another console

```

- Ask for forced transfer to this console
- Acknowledge transfer to this console

by the character string `new_console`. It returns the name of the workstation previously controlling the process as well as a flag indicating whether the assignment has been executed successfully.


* Precondition: Authorisation must have been established. A console code for own console will be returned through that. One can ask for transfer to own or to another. One can also ask for console in command (do not usually require authorisation).

INPUT

| | | |
|-------------|-------------|-----------------------------|
| CommandCode | command | ; Operation to be performed |
| int32_m | nextConsole | ; Myself or transfer to |

OUTPUT

| | | |
|----------|-------------|----------------------------|
| UaStatus | status | |
| int32_m | nextConsole | ; Requested console number |

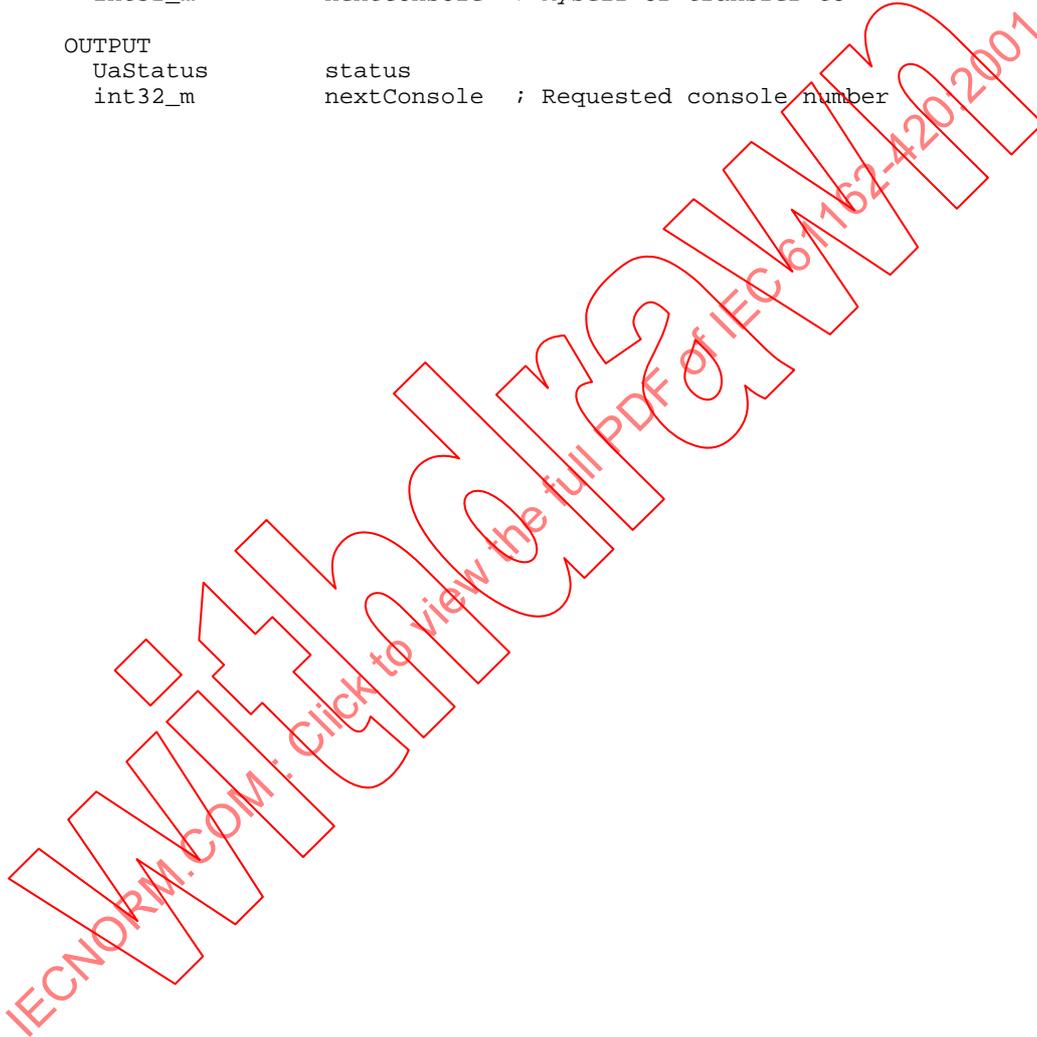


Annex D (normative)

LNA-MAU companion standard

D.1 General principles

The LNA-MAU is a special MAU embedded in the LNA that can be used to interrogate the LNA about its own status as well as the status of its connected MAUs and remote LNAs. The purpose of this functionality is to implement a limited set of monitoring and debugging functions in the system.

The information available from this MAU is illustrated in the below ER-diagram. Note that the number of octets transmitted for a given session associated with an accept interface is valid for that relationship alone, although it is transmitted in the session information data block.

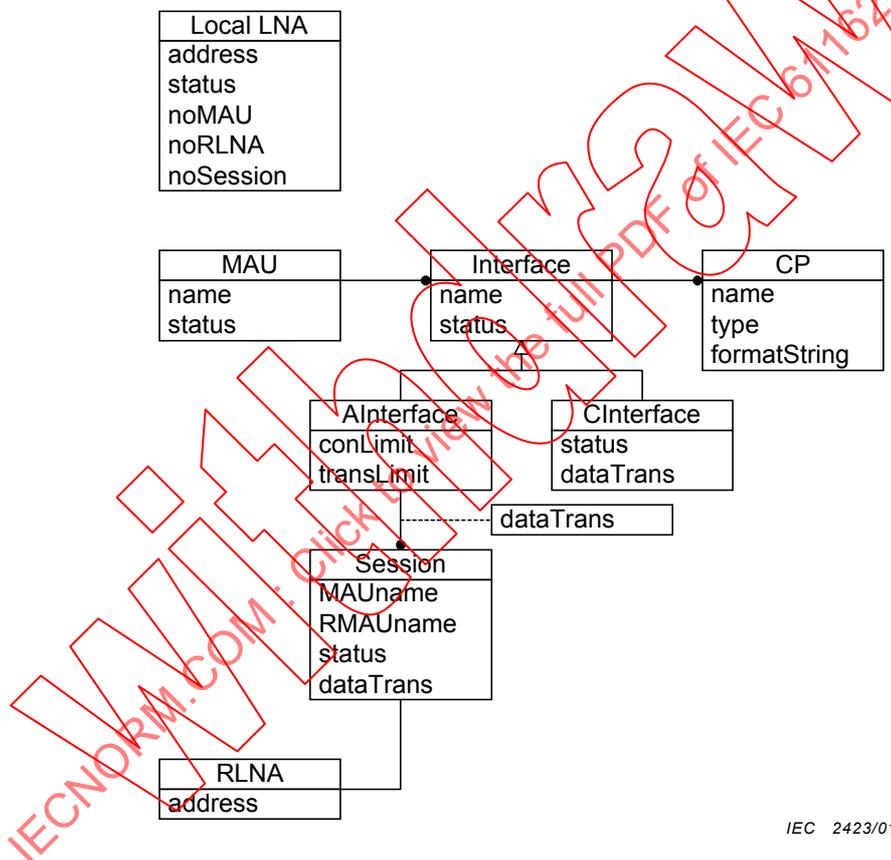

IEC 2423/01

Figure 16 – LNA-MAU information entities

THE LNA-MAU can be directly asked about its own status, about its local MAUs and about known remote LNAs. By using local MAU as key, one can also get information about the MAUs interfaces and, furthermore, their connection points. For accept type interfaces it is also possible to get a list of the active sessions (remote MAUs connected to this interface). For all connect interfaces and for all sessions it is possible to retrieve the number of octets transmitted while the entity has been in use.

The general access mechanism is to enquire about information items based on a key and to get a list of information items in return. A limit number of items can be returned and sometimes it is necessary to make several calls to the retrieval function with changing start keys. All retrieval functions use the input key to specify the first item to be returned. The value zero is always interpreted as search from the start. The function returns a maximum number of items related to the request, starting at the input key specified. The function will also return the next

key that can be used as a new input or zero if there are no more items left. The function shall not interpret an input key literally as a valid key, it shall always start a returned list at the input key or at the closest key to the input key. If the key is useless as a start value, the function shall interpret it as zero and start the listing from the beginning. All keys are unique and will not normally be reused even if an entity disappears and another is created. However, the uniqueness is limited by the implementation. Keys are only valid within one group of entities, i.e., an interface key may have the same value as a MAU key.

The users and writers of this application need to consider the dynamic nature of an LNA's status. This means that one cannot be guaranteed consistency between consecutive calls and that, e.g., one may not get the same number of interfaces returned from a interface list request as is specified as that MAU's number of interfaces. Further more, this application will normally run at a low priority not to interfere with the LNA's normal operation. This means that the status returned is only an approximation of the LNA's status. However, in a steady state where no new entities are defined or destroyed in the LNA, the application shall be able to return the true state of the LNA.

The LNA status CP is of the subscribe type and will return a new data block each time the LNA's status changes (not including updates of transmission counts). Note however, that there may be a delay between the status change and the subscription acknowledgement as the status module normally runs on low priority.

D.2 Companion standards

D.2.1 Data types LnaMau

DATA TYPES LnaMau

* This module defines a set of general data-types to be used in PISCES companion standard specifications for the LNA-MAU.

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

;-----

REFERENCES
none

;-----

GLOBAL

;CONSTANTS:

CONSTANT CONST_ELEM_CPLIST IS 12
;The number of elements in a connection point list.

CONSTANT CONST_ELEM_IFLIST IS 12
;The number of elements in a connection point list.

CONSTANT CONST_ELEM_LNALIST IS 40
;The number of elements in a lna list.

CONSTANT CONST_ELEM_MAULIST IS 45
;The number of elements in a mau list.

CONSTANT CONST_ELEM_SESSIONLIST IS 12
;The number of elements in a session list.

CONSTANT CONST_FORMAT_LENGTH IS 1500
;The max. string length of a format string.

CONSTANT CONST_CPNAME_LENGTH IS 32
;The max. string length of a connection point name.

```

CONSTANT CONST_IFNAME_LENGTH IS 32
;The max. string length of an interface name.

CONSTANT CONST_LNANAME_LENGTH IS 32
;The max. string length of a lna name.

CONSTANT CONST_MAUNAME_LENGTH IS 32
;The max. string length of a mau name.

;-----
;INTERPRETATIONS:

INTERPRETATION LNAStatus OF word8_m
;Definition of LNA status (local is either connected or unknown)

0 = undefined
1 = LNA_HEARD      ; Heard about, but not connected to
2 = LNA_CONNECTED ; Connected to

INTERPRETATION MAUStatus OF word8_m
;Definition of local MAU status

0 = undefined
1 = LMAU_ACTIVE

INTERPRETATION IFStatus OF word8_m
;The definition of type IfStatus. Variables of this type may have
;the following values:

0 = undefined
1 = IF_WAIT      ; Being established
2 = IF_OPEN      ; Open

;-----
;DATA BLOCKS:

DATA BLOCK LnaInfo
* Information about any LNA.

address_m   address      ; The network address of LNA.
word32_m    networkNode  ; Node number of ditto
LNAStatus   status       ; The status
word32_m    lnaKey       ; The LNA key

DATA BLOCK MauInfo
* The data block MauInfo describes a local MAU.

[CONST_MAUNAME_LENGTH]char8_m   name
MauStatus                       status
word32_m                        numberConnectIFs
word32_m                        numberAcceptIFs
word32_m                        mauKey

DATA BLOCK AIFInfo
* Description of a MAUs accept type interface.

[CONST_IFNAME_LENGTH]char8_m   name      ; The name of the interface.
IfStatus                       status     ; Status of IF
word32_m                       noCps      ; No of CPs
word16_m                       conLimit   ; Session limit
word16_m                       transLimit ; Transaction limit
word32_m                       noSessions ; No of sessions
word32_m                       ifKey      ; Unique key for this interface

DATA BLOCK CIFInfo
* Description of a MAUs connect type interface.

[CONST_IFNAME_LENGTH]char8_m   name      ; The name of the interface.
IfStatus                       status     ; Status of IF
word32_m                       noCps      ; No of CPs
word32_m                       dataTrans ; No of transmitted octets
word32_m                       ifKey      ; Unique key for this interface

```

DATA BLOCK CPInfo

* Additional description of a connection point. Note that type is included as first letter in format string.

[CONST_CPNAME_LENGTH]char8_m name
[word16_m:CONST_FORMAT_LENGTH]char8_m formatString
word32_m cpKey

DATA BLOCK SessionInfo

* Description of a session. Note that the number of octets transmitted is dependent on the interface for which the request is made.

[CONST_MAUNAME_LENGTH]char8_m mauname ; The local MAU name.
word32_m mauKey ; Local MAU key
[CONST_MAUNAME_LENGTH]char8_m rmauname ; The remote MAU name.
word32_m dataTrans ; Octets send for IF and session
word32_m lnaKey; ; Remote LNA

D.2.2 Interface PCCLNASTats

INTERFACE PCCLNASTats

* This is the LNA-MAU interface.

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES

DATA TYPES LnaMau

USAGE

This Companion Standard Description provides the interface to the LNA-MAU. It is supposed to be a part of each LNA.

REQUIRED DOCUMENTATION

LnaMau

CONNECTION POINTS

SUBSCRIBE GetStatus

* This connection point shall be used to retrieve status information about the LNA from the LNA-MAU. Any changes in status will be reported to all subscribers (change does not include bytes transmitted).

OUTPUT

LnaInfo status ; The status of the LNA.
word32_m noMAU ; Number of local MAUs.
word32_m noRLNA ; Number of remote LNAs.
word32_m noSession ; Number of sessions.
Version swVersion ; SW version code and date

FUNCTION GetMauList

* This connection point shall be used to retrieve a list of MAUs attached to this LNA.

INPUT

word32_m mauKey ; The first MAU to be listed

OUTPUT

[word32_m:CONST_ELEM_MAULIST]MauInfo list ; The list of MAUs.
word32_m nextMauKey ; Next MAU or zero

```

FUNCTION GetAInterfaceList
* This connection point shall be used to retrieve a list of accept
Interfaces
associated with a MAU. More than one list of interface may exist. Each
interface list can be addressed by the listNumber attribute.

INPUT
word32_m ifKey          ; The id of first IF to be listed
word32_m mauKey         ; The MAU key (see GetMauList).

OUTPUT
[word32_m:CONST_ELEM_IFLIST]AIFInfo  alist ; The list of Accept
interfaces.
word32_m          nextIfKey           ; Next IF or zero

;-----
FUNCTION GetCInterfaceList
* This connection point shall be used to retrieve a list of connect
Interfaces
associated with a MAU. More than one list of interface may exist. Each
interface list can be addressed by the listNumber attribute.

INPUT
word32_m ifKey          ; The id of first IF to be listed
word32_m mauKey         ; The MAU key (see GetMauList).

OUTPUT
[word32_m:CONST_ELEM_IFLIST]CIFInfo  alist ; The list of Accept
interfaces.
word32_m          nextIfKey           ; Next IF or zero

;-----
FUNCTION GetMcpList
* This connection point shall be used to retrieve a list of MCPs of a
given interface and MAU. More than one list may exist.
Each list can be addressed by the listNumber attribute.

INPUT
word32_m cpKey          ; First CP to be listed
word32_m mauKey         ; identification of MAU
word32_m ifKey          ; identification of interface

OUTPUT
[word32_m:CONST_ELEM_CPLIST]CPInfo   cpList ; The list of CPs.
word32_m          nextCpKey           ; Next CP or zero

;-----
FUNCTION GetSessionByIF
* Return active sessions for one accept interface. Note that this function
returns the number of octets sent on this session and this interface.

INPUT
word32_m sessionKey     ; First session to be listed
word32_m mauKey         ; identification of MAU
word32_m ifKey          ; identification of interface

OUTPUT
[word32_m:CONST_ELEM_SESSIONLIST]SessionInfo  sessionList
word32_m nextSessionKey ; Next session or zero

;-----
FUNCTION GetLnaList
* This connection point shall be used to retrieve a list of remote LNAs
known to this LNA.

INPUT
word32_m lnaKey         ; First LNA to be returned

OUTPUT
[word32_m:CONST_ELEM_LNALIST]LnaInfo  list ;The list of LNAs.
word32_m          nextLnaKey           ; Next LNA or zero

```

Annex E (normative)

General alarm and monitoring companion standards

E.1 Introduction and general principles

This annex contains the companion standards for a general interface to automation and alarm systems. The standards are also useful in the context of navigation, where they can be used for interfaces to alarm systems or to higher-level decision support systems.

These companion standards are based on the manipulation of information based on tag names. The tag name is an identifier for the information item. The term *tag* will in the following be used synonymously with *information item*. Each tag is associated with a value, possibly an alarm state and a set of attributes.

The companion standards provide the following general mechanisms:

- a) search for tags on a specific MAU;
- b) search for tags on the network (via anonymous broadcast);
- c) reading and writing tag values;
- d) reading and writing tag attribute values;
- e) subscribing on values from individual or a set of tags;
- f) Mechanisms for subscribing to and acknowledging alarms.

Access to tags can optionally be associated with user or workstation authentication. This is normally necessary for alarm acknowledgement and value writing.

The companion standards described here are application independent. The set of tag names will determine what application is associated with a certain MAU.

E.2 Alarm and monitoring system identifiers

Tag name: A text string identifying an information item. Several tag names can reference the same information item.

Tag number: A code referencing one information item. There is a one to one relationship between tag number and the information item.

Yard tag: A tag name (usually) assigned by the yard. The yard tag is normally associated with a physical device, e.g., a temperature transmitter, and can in some cases also be associated to a representative information item (tag number), e.g., the temperature measurement.

E.3 Functionality overview

E.3.1 Companion standard for tag based monitoring and alarm system

The purpose of the general alarm and monitoring companion standard is that all IEC 61162-4 applications of a certain class should supply one uniform service to other IEC 61162-4 clients that allows the clients to read and write data from or to the server in a standard way. This mechanism consists of a companion standard that defines certain general data objects for reading and writing based on tag names.

By having such a system, an application independent code can be generated that can be used by any client to read and write to any server. This is particularly appropriate for "decision support" type or "data fusion" type applications that lie on a higher abstraction level than the basic control applications. It is still assumed that the control applications have more specialized function blocks for use in between them, for example for GPS data output.

E.3.2 Client-server architecture

The principle for use of these companion standards is that a server makes information items available to any client in the system. Likewise, given that the appropriate functionality is installed, the client can write to information entities or subscribe to updates. It is assumed that the server does not need to know the clients a priori and that the system is based on a client-server architecture.

E.3.3 Tag number

Each information item in one server is identified by a tag number. This number is unique for that server. To each tag number there can be several tag names. This can be used to provide the same information item with different names based on yard naming principles (yard tags), standard naming principles and/or manufacturer dependent naming principles.

The basic interface component provides functionality for mapping tag names to tag numbers. This is through a search function with functionality dependent on the server in question. Very simple servers may just have a fixed set of tag numbers with a static mapping to a set of tag names. These servers may not support any search function at all.

Tag numbers are the identifiers used when tag related information is transferred to and from the server.

E.3.4 Tag sets

Servers that support subscribe and alarm handling do this with the help of tag sets. Tag sets are also established through searches, but can be manipulated with the help of functions in the `PCCTagSet` interface.

Subscriptions on values or alarms can only be done through tag sets.

E.3.5 Tag information

Each tag is associated with a set of information attributes. These can be retrieved through the MCP `GetTagInfo`. This information is, for example the engineering unit, expected precision, sampling interval, a description string, etc. It is expected that this information is static throughout the tag's life.

E.3.6 Tag attributes

Some tags can have attributes associated with them. These are semi-static information that can change through the tag's life, but not very often and rarely or never uncontrolled, for example filter constants, alarm limits, scaling factors, etc. The number of attributes can be read in the tag information data structure and the attributes can be inspected and changed through the attribute related interface components.

E.3.7 Tag data

Each tag has a data value associated with it that is expected to change more or less continuously. The data value can be read, written or subscribed to through the relevant interface components.

Read data will always have a quality flag saying to what degree the value has the required quality, a time stamp and pending alarm flag information.

E.3.8 Alarms

Alarms are a special case of tags where the server provides a mechanism for keeping a watch on the tag value to raise an exception if the value changes in some defined manner. Alarms are also assigned a sequence number that allows the client to determine if more than one alarm has been raised on one tag.

Alarms needs to be acknowledged before they are removed from the active alarm list. This is the case even if the value goes back to normal.

E.4 Application classes

The companion standards define three different application classes, all derived from PACFullApplication. These classes are shown below.

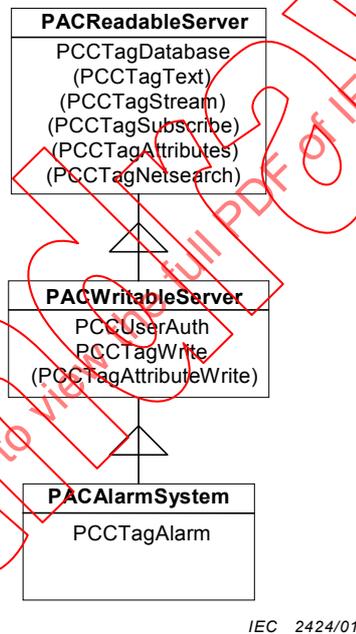


Figure 17 – Tag application classes

Each application class has certain capabilities that can be added to and thereby specializing the class into a more advanced class:

- a) PACReadableServer: this is the basic class with capabilities for searching for tags and for reading values, text or floating point. It can be extended with component interfaces for subscription and for reading attribute values. It can also be extended with a component interface for network wide search for tags;
- b) PACWritableServer: this is an extension that allows writing tags and optionally attributes. This application class requires user authentication;
- c) PACAlarmSystem: this extends the writable server with a subscription on alarms and a mechanism for acknowledging alarms.


Note that both the subscription and the alarm handling component interfaces require the use of the set definition interface component.

All interface components except the user authentication component shall be defined as belonging to the physical interface “Tags”.

E.5 Companion standard structure

The companion standards are organized in several component interfaces as discussed in the previous clause. In addition to the interface components, the definitions also contain the application definitions and a general data type definition.

The diagram below shows the relationship between the interface components. Note that the three classes TagRead, TagWrite and TagAlarm represent the application classes as discussed in the previous clause and not interface classes as such.

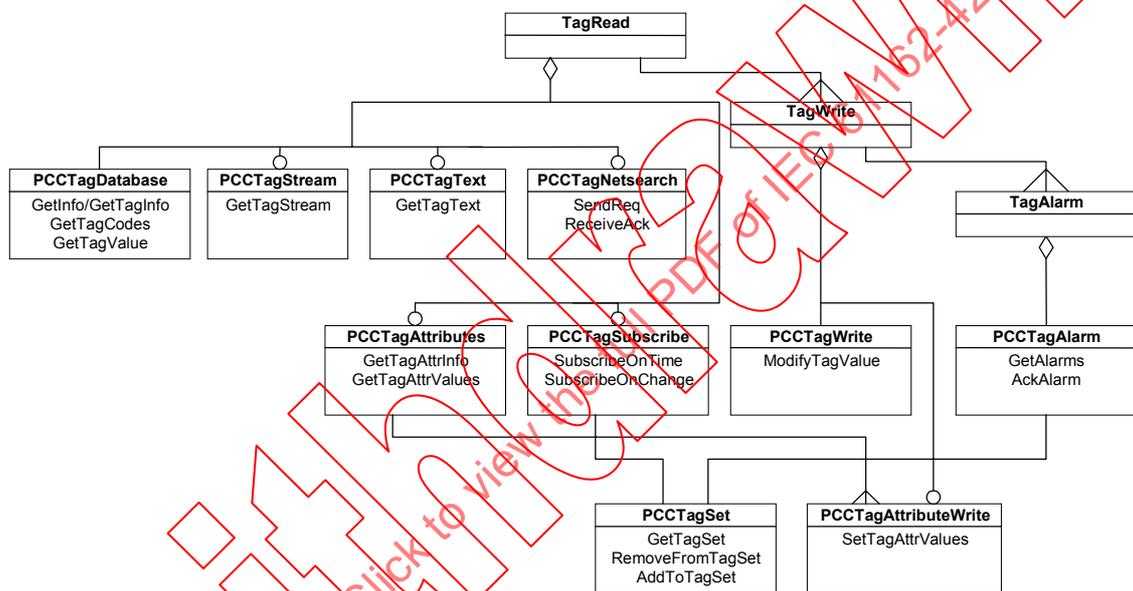

IEC 2425/01

Figure 18 – Tag interface components relationships

The diagram represents each of the basic application types as a specialization of its super-class where each specialization level aggregates more component interfaces. The empty rings denote optional component interfaces and the derivation triangle a class that needs its super-class for instantiation. The attributes are the connection points.

E.6 File structure

In addition to the classes described in the previous diagrams, there are also a general data type definition file and a file with standard tag names. The table below defines the files and their contents.

Table 5 – Tag related companion standards

| Companion standard | Description | File name |
|----------------------|---------------------------------|--------------|
| PACReadableServer | Application for reading | tagread.mcs |
| PACWritableServer | Application: add write | tagwrite.mcs |
| PACAlarmSystem | Application: add alarm handling | tagalarm.mcs |
| TagData | Data type definitions | tagdata.mcs |
| PCCTagDatabase | General data base functionality | datag.mcs |
| PCCTagText | Read text value tags | datat.mcs |
| PCCTagStream | Read a stream address | datas.mcs |
| PCCTagNetsearch | Search network for tags | datan.mcs |
| PCCTagAttributes | Read and find attributes | dataatt.mcs |
| PCCTagSubscribe | Subscribe to tag values | datasub.mcs |
| PCCTagWrite | Write tag values | dataw.mcs |
| PCCTagAlarm | Read and handle alarms | dataa.mcs |
| PCCTagSet | Define set of tags | dataset.mcs |
| PCCTagAttributeWrite | Write attribute values | dataatw.mcs |
| TagStandard | Standard tag names | tags.mcs |

E.7 Standard tag names

E.7.1 General

E.7.1.1 Internal and external representation

Note that the tag name has to be encoded in a fixed number of characters and, due to protocol requirements, adhere to a fixed structure. These rules apply only to the protocol and internal representation may use other formats, for example more compact to save storage or search times. It may also be useful to format the tag name differently for presentation to humans, although this may cause problems with recognition of the same tag name on different systems.

E.7.1.2 Tag name length

The tag name is limited to 24 characters maximum. Shorter tag names shall be null terminated.

E.7.1.3 Character set

All standard tag names (P-type and S-type) shall only use upper case letters (A to Z inclusive), lower case letters (a to z inclusive) or decimal numbers (0 to 9 inclusive). In addition, the special character dash (-), under score (_) or period (.) can be used.

Character in this context is the basic IEC 61162-4 type char8_m.

E.7.1.4 General tag name structure

All tag names shall have a structure as described below:

- a) **Tag name class:** the first character shall be a lower case letter identifying the tag name group. Currently the following groups are defined:
 - p:** tag with name conform to the PCS rules presented here;
 - y:** yard tag with name structure defined by external entity;
 - s:** standard tag pointing to a ship-independent information item;
 - i:** internal tag defined by manufacturer.

b) **Tag name body**: the rest of the name is structured dependent on the tag name class.

E.7.2 Structure of P tag name class

E.7.2.1 Introduction

The P tag name class body is structured according to the rules presented in this clause. The name body will be divided into groups, each consisting of a defined number of upper case characters followed by, from zero to any number of decimal numbers. The name is structured so that it can be parsed by a regular expression.

E.7.3 General structural rules

E.7.3.1 Outline structure

The outline format for the p class tag name is presented below.

| | | |
|----|------------------|---------------------------------------|
| | pMGnn.SGnn.TC.nn | |
| p | | - Identify p class. |
| MG | | - Main group (two letters) |
| nn | | - Optional main group instance number |
| SG | | - Sub group (two letters) |
| nn | | - Optional sub group instance number |
| TC | | - Data type code (two letters) |
| nn | | - Unique serial number |

Each group of the tag is delimited by a period (full stop), except after the first 'p'. The main group and the sub group may have an instance number immediately following.

E.7.3.2 Tag name length and encoding

The maximum length of 24 characters allows group and sub-groups of up to three digits and a serial number of up to eight digits. It is possible to compress this in an internal representation by omitting dots and the leading 'p'.

Special coding with more than three digit group numbers can be used for certain tag types, for example container or other modular cargo. However, the total length shall not exceed maximum name length.

E.7.3.3 Group and sub-group number structure

The group and sub-group number shall be a decimal number, without leading zeros. In cases where there is only one instance of the indicated group on board (e.g. only one main engine) the instance number shall be omitted.

E.7.3.4 Serial number structure

The serial number will normally be a manufacturer dependent serial number intended to distinguish between otherwise identical tag names. For some types of tags (e.g. contain related identifiers) the serial number may contain structural information.

E.7.3.5 Uniqueness of name

The tag name must be unique within a MAU. It should be unique over the ship (the PISCES network), although this is more difficult to ensure.

The main group codes must be unique. The general sub-group codes are unique among sub-groups (achieved by assigning special first letters to these groups).

Other sub-group codes must be unique among the main groups in which it is used.

E.7.4 Main process codes

The main process code consists of two upper case letters optionally followed by a decimal number. The table below lists the currently defined codes.

Table 6 – Main process codes

| Process code | Number | Explanation |
|--------------|---------|--|
| MP | Engine | Propulsion engines |
| MG | Engine | Generator and auxiliary engines |
| ML | | Lubrication oil systems |
| MC | | Cooling systems, fresh and/or salt water |
| MB | | Boiler |
| MD | Shaft | Drive train, i.e. shafts, gears, clutches, propellers |
| MF | | Fuel oil systems |
| MM | | Miscellaneous machinery |
| CB | Tank | Ballast system |
| CL | Tank | Liquid cargo tanks |
| CH | Hold | Bulk cargo |
| CR | | Reefer related entities, cooling (except CH groups) |
| CM | Deck | Modular cargo on decks (e.g. RO-RO) |
| CC | Hold | Container cargo |
| CO | | Other/general cargo |
| SH | | Ship data (name, captain, yard) |
| HU | | Hull related data |
| HF | | HVAC, climate control, provisions, waste, sanitary |
| NA | | Navigation (position, speed, ARPA, ECDIS, etc.) |
| EV | | Environment (wind, waves, weather) |
| FA | Central | Fire and gas alarm |
| SY | | System/sub-system (monitoring and alarm system itself) |
| OT | | Other/miscellaneous |

The number column specifies what the number code, if used, shall indicate. The number field shall not be used if there is only one instance of the device (e.g. main machinery) on board.

Note that machinery and cargo and ballast main-groups form two super-groups. These super-groups use the same first character (M and C respectively).

E.7.5 Process sub-codes

The second group consists of two upper case letters that defines a sub-group for the main process group. The sub-groups are divided into three classes dependent on whether they are used anywhere on the ship (general sub-groups), whether they are used within one super-group (e.g. machinery or cargo) or if they are specific to one single main group. The sub-group code can be followed by a number as for the main code.

E.7.6 General sub-groups

The following table contains the currently defined sub-groups that are in general use over more than one main process group. All codes use 'X', 'Y' or 'Z' as first character. These characters are reserved for these groups.

Table 7 – General sub-groups

| Sub-group | Number | Explanation |
|-----------|--------|--|
| ZZ | | No specific subgroup |
| XP | | Pump |
| XV | | Valve |
| XE | | Electrical motor |
| XT | | Tank |
| XM | | Manifold |
| XL | | Pipe-line, tube |
| XC | | Compressor |
| XS | | System/subsystem (network, monitoring system itself) |
| XH | | Heat exchanger |

Numbering will normally be dependent on the main group in use.

E.7.7 Automation related sub-group

This standard does not cover general automation and no more details in this area are provided here.

E.7.8 Navigation sub-groups

The following table identifies navigation related sub-groups.

Table 8 – Navigation sub-groups

| Sub-group | Number | Explanation | Main Process Codes |
|-----------|--------|--------------------------|--------------------|
| GP | | GNS receiver | NA |
| LC | | Loran C/Chaicka receiver | NA |
| AR | | ARPA radar | NA |
| EC | | ECDIS/ECS | NA |

E.7.9 Data type indication group

The third group is two upper case letters specifying the kind of information item. The code is based on a simplified version of general process equipment coding rules.

Table 9 – Data type indicators

| Letter | First position meaning | EU | Second position meaning |
|--------|---------------------------|-----------------------|---------------------------------------|
| A | Angle | rad | Alarm (no indication – binary) |
| B | | | |
| C | Conductivity (electrical) | Ω or S | Control (output) |
| D | Density/specific gravity | kg/m^3 | Documentation (data models, text: in) |
| E | Voltage | V | |
| F | Flow | m^3/s | |
| G | Dimensions | m | |
| H | | | |

| Letter | First position meaning | EU | Second position meaning |
|--------|----------------------------|---------------------|---|
| I | Current (electrical) | A | Indication (input) |
| J | Power | kW | |
| K | Time | s | |
| L | Level | m | HMI related data (input) |
| M | Moisture or humidity | % | Maintenance/calibration data/history (in) |
| N | | | |
| O | | | |
| P | Pressure | Bar | Parameter (filter, trend: in or out) |
| Q | Quantity, event or counter | | |
| R | | | Record/trend (input) |
| S | Speed or frequency | Hz, m/s, knots, RPM | System status codes (in or out) |
| T | Temperature | °C | |
| U | Function block (composite) | | Multifunction (in or out) |
| V | Viscosity | | Version/revision codes (input) |
| W | Weight or force | kg or N | |
| X | Any meaning | | Any meaning |
| Y | System level | | |
| Z | Position | m or nm | |

The first character defines the type of data entity pointed to by the tag. Of special interest are:

- **U**: this code is used for composite data entities (function blocks);
- **X**: this code is used for entities not otherwise defined;
- **Y**: this code is used for entities relating to monitoring and alarm device itself.

The second character specifies if the entity is an output or input and if it is related directly to a physical state (alarm, indication or control) or if it is related to more system-oriented information (HMI, documentation, version codes, etc.).

A complex function block with several inputs and/or outputs would normally be coded as **'UX'**.

E.7.10 Use of engineering units

The engineering unit in use will be available for the general alarm and monitoring system by looking up static attributes of the tag. However, as a rule, the SI units corresponding to the indicated measurement type (first character) shall be used.

The preferred engineering unit is listed in the EU column.

E.7.11 Sequence number

The last part of the tag name is a sequence number code. This code is specific to a particular manufacturer or system integrator and cannot in general be relied on to have any specific meaning. The sequence number shall consist of decimal digits only. Leading zeros are allowed.

E.8 Structure of standard tags (S class)

The standard tags (s name class) will use the same format as the p class tags, except that the leading letter will be a lower case 's'.

The 's' will show that this tag is a ship independent measurement with properties defined in a general ship operational data model. The preparation of this model is not within the scope of this standard.

E.9 Structure of yard tags (Y class)

The yard tag structuring shall be determined by the yard or any other authority that has an overall responsibility for the design of the ship. The main purpose of the yard tag is to provide a link between the automation system and the physical ship. It is suggested that all indicators identified by a yard tag shall have the same yard tag on their corresponding measurement or alarm.

E.10 Structure of internal tags (I class)

Internal tags have no particular rules for structuring other than the first character being the lower case letter 'i'.

E.11 New tag name classes

Other tag name classes can be defined by the standard organizations that maintain these specification documents. No user should rely on any specific leading letter being free for own internal use.

E.12 General quality indicators

All information retrieved through the tag database mechanisms will be quality controlled by the providing system. This quality control consists of several parts as discussed in the following clauses.

E.13 Certification

The quality control principles for a specific application may have been checked and certified by some agency or by the manufacturer himself. This certification is not mandatory and it is not within the scope of this standard. However, the `GetInfo` MCP provides a possibility to specify if any certificate has been awarded to the quality control mechanisms. The actual certificate or specification document must be obtained from the manufacturer.

E.14 Time stamp

All measurements shall be marked with the time at which they were collected. For raw sensor data, the time stamp should be the time of the data acquisition. For derived data, it may be an estimate of the time of validity.

The time stamp is accurate within the limits defined by the `sampleTime` attribute of the relevant `TagInfo` data block.

E.15 Validity flag

All measurements shall be marked with a validity flag saying if the value has the required quality or not. The flag can also attempt to quantify the level of non-conformance with quality requirements. Legal values for the validity flag are defined as the interpretation StateCode.

The required quality is defined in the TagInfo data block in the form of the precision and sampleTime attributes.

E.16 Authentication

The application providing this interface shall specify to what level the data values are authenticated, i.e. guaranteed to be not tampered with. Normally, this will depend on the mechanisms for data acquisition used by the application.

The authentication level is defined by the authentication flag in the TagInfo data block.

E.17 Companion standard specifications

E.17.1 DATA TYPES TagData

DATA TYPES TagData

* This specification contains general data definitions for tag based data access.

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

;

REFERENCES
General

;

GLOBAL

;

; Tag identities

INTERPRETATION TagNumber OF int32_m

* The container for tag numbers. The number zero is reserved as no tag.

0 = NO_TAG ; Undefined tag

;

INTERPRETATION TagName OF [32]char8_m

* Tag name for a measurement point, with terminating null or termination at end of array (max 32 significant characters).

* Some interfaces will contain both internal tag codes constructed as specified in this standard and yard specific codes. This means that different tag names can have the same tag number.

;

DATA BLOCK TagId

* An aggregate of tag name and number. Note that different tag names may have the same number (aliasing of name is allowed).

TagNumber number ; Tag number
TagName name ; Tag name

;

INTERPRETATION TagSet OF int32_m

* An identifier for a set of tags. A valid set id points to an internal structure in the server that lists all tags in the set. Some servers can have statically defined sets. The value zero is used to indicate no valid set. The ALL_TAGS set defines all tags in the server (not always supported as set).

0 = NO_SET
1 = ALL_TAGS

; Various application classification info

INTERPRETATION Conformance OF [32]bool_m

* These bit fields are used to indicate conformance level for this interface. This corresponds to the number of components supported with the TagData interface taken as implicit. Additional components are:

* The INCMAP/DECMAP flags indicate if the number of tag codes in use changes during the life time of the server. The first means that the number of tags may increase, the second that it may decrease.

0 = TC_INCMAP ; Increment tag number map
1 = TC_DECMAP ; Decrement tag number map
;
2 = TC_ATTRIBUTES ; Additional support of TagAttributes
3 = TC_ALARM ; Additional support of TagAlarm
4 = TC_WRITE ; Additional support of TagWrite
5 = TC_COMPLEX ; Additional support of TagDataComplex
6 = TC_STREAM ; Additional support of TagDataStream
7 = TC_SUBSCRIBE ; Additional support of TagDataSubscribe

INTERPRETATION Certificates OF [16]bool_m

* These bit fields are used to show which certificates the interface has. All false means no certificates.

0 = TC_OWNOA ; Own documentation on data QA
1 = TC_EXTQA ; External certificate for data QA
2 = TC_OWNA ; Own documentation on authentication
3 = TC_EXTA ; External certificate for authentication

INTERPRETATION TagKeyCode OF [32]bool_m

* These tag keys are used to specify the allowed key type searches supported by an implementation of the interface. The key is one bit in a 32 bit word (max is 24 bits as 8 is allocated to implementation specific keys).

0 = KEY_NONE ; No key based search, returns all tag codes
1 = KEY_NUMBER ; Search on tags by tag number allowed
2 = KEY_NAME ; Search on tags by name allowed
3 = KEY_WCNAME ; Wildcard search by name allowed
4 = KEY_LOC ; Search by location code (LocationCode)
5 = KEY_TYPE ; Search on tag type (TagType)
;
23 = KEY_SETDEF ; Can/will define a tag set
24 = KEY_USER ; Implementation specific keys to 31

INTERPRETATION TagKey OF char8_m

Contains char8_m key search pattern. The string shall be null terminated or terminated at end of array. It is legal to send an empty string for KEY_NONE. Only one search bit can be set from the following possibilities:

* KEY_NONE: No pattern (length = 0), Return all tags.

* KEY_NUMBER: A single number, a series of decimal numbers separated by comma (,), and/or a range shown by two numbers separated by a minus sign (-), e.g., "23", "23,24,26" or "20-25". In the latter case, the empty string represents

infinity, e.g., "0-" is all numbers. The numbers represent tag code numbers. This function is most useful to define sets.

- * KEY_NAME: A single tag name or a series of tag names separated by comma: "tag1" or "tag1,tag2"
- * KEY_WCNAME: One name with the following wildcards:
 - '?' (question mark) - any one legal character,
 - '*' (asterix) - any length sequence of any legal character
 Examples: "tag?" and "ta*" both match "tag1" and "tag2", ta* is the only that match "tag10".
- * KEY_LOC, KEY_TYPE: A number (as KEY_NUMBER), with location codes (see general data types) instead of tag code numbers.

```

;-----
INTERPRETATION TagType OF int16_m
* This code is used to specify the type of a tag.

0 = TT_VALUE           ; Plain numeric type (f64)
1 = TT_TEXT            ; Plain text type ([64]c8)
2 = TT_ALARM          ; Alarm type, VALUE with alarm limits
3 = TT_STREAM         ; Stream/file type
4 = TT_FB             ; Function block, value with attributes
5 = TT_COMPLEX        ; Other formatted type

;-----
INTERPRETATION TagAuthentication OF int16_m
* This code specifies the mechanism used to authenticate a given tag. This applies to both originator and quality. TQ_NOTAMPER and TQ_AUTH is used if the device flags all internal and external precision loss and tampering or if the value cannot be tampered with or lose precision. Other flags are set to qualify this statement. Lower values means better authentication.

0 = TQ_NOTAMPER       ; Value cannot be tampered with, quality controlled
1 = TQ_AUTH           ; Data is fully authenticated, all exceptions flagged
10 = TQ_CAUTH        ; Full authenticated internally and controlled source
20 = TQ_USOURCE      ; Full authenticated internally uncontrolled source
30 = TQ_OPERATOR     ; Operators are trusted and checked, but changes
                    ; are not flagged.

;
1000 = TQ_NONE        ; No authentication in force

;-----
INTERPRETATION TagSemantics OF [16]bool_m
* This code is used to specify the semantics of a tag. Read and write flags are not exclusive: Both means that the system can perform a function call with output dependent on input. Constant and unfiltered can be used in conjunction with other flags (normally only read).

0 = TS_UNKNOWN
1 = TS_READTHROUGH   ; Read directly from physical unit
2 = TS_READBUFFER    ; Read from physical unit via buffer
3 = TS_WRITETHROUGH  ; Write directly to physical unit
4 = TS_WRITEBUFFER   ; Write to physical unit via buffer
5 = TS_CONSTANT      ; Constant value
6 = TS_UNFILTERED    ; No anti-aliasing done
7 = TS_QUEUED        ; Events are queued, no changes lost

;-----
DATA BLOCK TagInfo
* Static information about a tag.

* If engineering unit is undefined (EU_OTHER), the text representation of the unit (for printing purposes) shall be defined.

* The precision is the minimum scalar distance that is necessary to say that a difference between two measurements is significant. This has meaning for scalar measurements and usually also for other multi-dimensional measurements, e.g., position (typically use length of distance vector).

```

- * The sample interval is the maximum time before the server has a new measurement of the tag value ready. Check semantics for meaning of sample time (read and write through renders it meaningless). Note that tag values normally are anti-aliasing filtered before being supplied to user (based on sample time). The unfiltered semantics flag means that this is not done.
- * The tagAttributes entry specifies the number of extra attributes that the tag data base stores (see TagAttributes type for predefined attributes).
- * The fieldFlags shall be set for all valid entities. All false means that the block is invalid. All true is legal if non-used entities contain a proper value (including null terminated strings and null values).

```

TagNumber          tagName          ; Numeric code for tag
[48]char8_m        description      ; Description of tag
TagType            tagType          ; Type of access mechanism
EngineeringUnit    engUnit          ; Engineering unit or equivalent
[8]char8_m         euText           ; Textual engineering unit
TagSemantics       tagSemantics      ; Semantics of tag operation
TagAuthentication authentication    ; Quality control mechanisms
float64_m          precision         ; Measurement precision
word32_m           sampleTime        ; Sample interval in ms
int16_m            tagAttributes      ; Attributes supported
[10]FieldOk        fieldFlags        ; Field validity flags

```

```

;-----
; Dynamic values
;-----

```

INTERPRETATION StateCode OF int16_m

- * State codes. Unused codes are user defined. For future expansion these codes should start at USERSTATES. Note the classifications of state codes. they are in increasing value:

- SC_NORMAL is normal
- Up to and including SC_AUTHENT means that value may have lost authenticity, but is still under control.
- Up to a.i. SC_PRECISION loss in precision
- Up to a.i. SC_UNRELIABLE possible spurious or locked value
- Up to a.i. SC_DEFECT sensor malfunction
- Up to a.i. SC_OPERR operation errors

```

0 = SC_NORMAL          ; operation completed as expected
1 = SC_FILTERED        ; Filter may affect value "unreasonably"
2 = SC_OPERATOR        ; Operator set value
5 = SC_AUTHENT         ; Other event that can effect authenticity
;
6 = SC_PRECISION1      ; Loss in precision by factor 10
7 = SC_PRECISION2      ; Loss in precision by factor 100
8 = SC_PRECISION3      ; Loss in precision by factor 1000
9 = SC_PRECISION       ; Unknown loss in precision
;
10 = SC_TIMEOUT        ; Update timeout exceeded by source
19 = SC_UNRELIABLE     ; Unreliable value
;
100 = SC_BADSENSOR     ; Sensor specific errors follows
101 = SC_OPEN          ; Open circuit
102 = SC_CLOSED        ; Closed circuit
103 = SC_SHORT         ; Short circuit
104 = SC_BROKEN        ; Broken connection
105 = SC_NOT_AVAILABLE ; Input or output is not available
106 = SC_MAINTENANCE   ; Unit under maintenance
107 = SC_BLOCKED       ; Input or output is blocked by operator
199 = SC_DEFECT        ; Unit is defect
;
300 = SC_NOOP          ; Specified tag does not support operation
301 = SC_NOTAG         ; No such tag
302 = SC_NOSET         ; No such tag set
399 = SC_OPERR         ; Unspecified error in data retrieval
;
400 = SC_UDEAD         ; Unit itself is dead

```

```

401 = SC_ULINK          ; Link to unit is dead
499 = SC_UCODES        ; Last unit related error
;
10000 = SC_USERSTATES

```

```

;-----
INTERPRETATION AlarmState OF [16]bool_m
* Alarm states bit map. All false is normal. Use alarm interface
  to retrieve detailed alarm state information. NONESSENTIAL
  shall only be set if there is another bit set and if the signal
  originates from a system that is not defined as essential, i.e.,
  that alarms shall have a lower priority than for essential
  systems. WARNING need not be set when ALARM is set.

0 = AC_WARNING          ; Value is outside normal, but no alarm
1 = AC_ALARM            ; Value is in alarm area
2 = AC_NA_WARNING       ; Non-acknowledged warning(s) exists
3 = AC_NA_ALARM         ; Non-acknowledged alarm(s) exists
4 = AC_NONESSENTIAL    ; This signal is not from an essential system

```

```

;-----
DATA BLOCK TagValue
  Values for one tag with standard f64 format.

  TagNumber      tagNumber  ; Numeric code for tag
  StateCode      state      ; State code
  AlarmState     alarm      ; Most important active alarm
  GlobalTime     time       ; Last updated
  float64_m     value      ; Current value

```

```

;-----
DATA BLOCK TagText
  Values for one tag with standard character format

  TagNumber      tagNumber  ; Numeric code for tag
  StateCode      state      ; State code
  GlobalTime     time       ; Last updated
  [64]char8_m   value      ; Current value

```

```

;-----
; Attribute related data
;-----
INTERPRETATION TagAttrNumber OF int32_m
* Each tag can have certain attributes associated with it.
  Normally, these are alarm limits and sometimes filter constants.
  This list specifies some common attributes. Additional
  attributes can be defined for an interface by codes from TA_USER
  and higher.

0 = TA_NONE
1 = TA_ALARMLOW
2 = TA_ALARMHIGH
4 = TA_ALARMLOWLOW
3 = TA_ALARMHIGHHIGH
;
1000 = TA_USER

```

```

;-----
INTERPRETATION TagAttrStatus OF int16_m
* The status of an attribute value can be:

0 = TAS_VALID          ; value is valid and activated
1 = TAS_DISABLED       ; value is valid, but disabled
2 = TAS_NOATTRIBUTE    ; no such attribute for tag
3 = TAS_NOTAG          ; no such tag

```

```

;-----
DATA BLOCK TagAttrInfo
* This is the container for an attribute information structure.
  Text strings are empty if not used. The description string
  should be suitable for printing out information about the
  attribute in a table, e.g., for alarm limits.

```

```

TagAttrNumber  attribute  ; Attribute code

```

```

[32]char8_m    description ; Description of attribute
EngineeringUnit engUnit    ; Engineering unit or equivalent
[8]char8_m     euText      ; Textual engineering unit
BlockOk        valid      ; valid flag

;-----
DATA BLOCK TagAttrValue
* This is the container for an attribute

TagAttrNumber  attribute   ; Attribute code
TagNumber      tagNumber   ; Tag number
TagAttrStatus  status     ; Status of value
float64_m      value       ; The value

;-----
DATA BLOCK TagAttrValueW
* This is the container for an attribute write value

TagAttrNumber  attribute   ; Attribute code
TagNumber      tagNumber   ; Tag number
float64_m      value       ; The value

;-----
; Alarm related data definitions
;-----
INTERPRETATION AlarmSequence OF int16_m
* A data value pair of tag number and alarm sequence number will identify
  an alarm instance. This is the sequence number.

;-----
INTERPRETATION AlarmCode OF int32_m
* Alarm codes. Zero is normal. Codes above USERALARMS are user
  defined. Codes below USERALARMS are reserved for future
  expansion.

0 = AC_NORMAL
1 = AC_SOMEALARM ; Undefined type of alarm
2 = AC_LOWLOW   ; Signal has very low value
3 = AC_HIGHHIGH ; Signal has very high value
4 = AC_LOW      ; Signal has low value
5 = AC_HIGH     ; Signal has high value
6 = AC_INSTRUMENT_HIGH ; Input value too high for instrument
7 = AC_INSTRUMENT_LOW  ; Input value too low for instrument
8 = AC_DEVIATION_LOW   ; Low deviation between signals
9 = AC_DEVIATION_HIGH  ; High deviation between signals
10 = AC_RATE_OF_RISE   ; Signal rising too fast
11 = AC_OSCILLATIONS   ; Signal oscillating
12 = AC_TOO_LONG      ; Too slow response
13 = AC_OPEN           ; Input open
14 = AC_CLOSE          ; Input closed
15 = AC_ERROR          ; Internal instrument error
16 = AC_OPERATOR       ; Operator intervention in instrument

100000 = AC_USERALARMS

;-----
DATA BLOCK TagAlarmValue
* Values for one tag with alarm information. The value will have to
  be interpreted according to the information specified in the
  TagInfo data block. Use state code to check if block is ok.

TagNumber      tagNumber   ; Numeric code for tag
AlarmSequence  seqNumber   ; Alarm instance for this tag
StateCode      state       ; State code
AlarmCode      alarm       ; Alarm state code
AlarmState     aState      ; Importance of alarm
GlobalTime     time        ; Time of trigger
float64_m      value       ; Current value
float64_m      limit       ; Limit that were broken

```

E.17.2 Application PACReadableServer

APPLICATION PACReadableServer DERIVED FROM PACFullApplication

* This application contains the general framework for the creation of an interface to any type of data server. Based on a tag name (16 character text string), it is possible to read the data item.

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES

PCCTagDatabase

; The following interfaces are optional, and can be added

; PCCTagText
; PCCTagSubscribe
; PCCTagAttributes
; PCCTagNetsearch

USAGE

* The application is the minimum implementation of a tag based data base reader. Refer to the individual interface specifications for detailed discussion of functionality. Additional interface components can be added to support subscription or network wide search capabilities. This has to be done as derivations from this class.

INTERFACES

ACCEPT TagData

INTERFACE COMPONENT PCCTagDatabase

; And optionally one or more

; INTERFACE COMPONENT PCCTagText
; INTERFACE COMPONENT PCCTagSubscribe
; INTERFACE COMPONENT PCCTagAttributes

; If net search shall be used, one must also provide accept and connect interfaces.

; CONNECT ABCM1

; INTERFACE COMPONENT PCCTagNetsearch

; ACCEPT ABCM1

; INTERFACE COMPONENT PCCTagNetsearch

E.17.3 Application PACWritableServer

APPLICATION PACWritableServer DERIVED FROM PACReadableServer

* This application contains the general framework for the creation of an interface to any type of data server. Based on a tag name (16 character text string), it is possible to read and write the data item.

* Revision history:

010102 1.2 First IEC FDIS release

990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES

PCCUserAuth
PCCTagWrite

; The following interfaces are optional, and can be added

; PCCTagAttributeWrite

USAGE

* The application is the minimum implementation of a tag based data base writer. Refer to the individual interface specifications for detailed discussion of functionality. Additional interface components can be added to support attribute write.

INTERFACES

ACCEPT Authenticate

* Need one interface for user authentication.

INTERFACE COMPONENT PCCUserAuth

ACCEPT TagData

* and the actual write interface

INTERFACE COMPONENT PCCTagWrite

; And optionally

; INTERFACE COMPONENT PCCTagAttributeWrite

E.17.4 Application PACAlarmSystem

APPLICATION PACAlarmSystem DERIVED FROM PACWritableServer

* This application contains the general framework for the creation of an interface to any type of data server. Based on a tag name (16 character text string), it is possible to read and write the data item.

* Revision history:

010102 1.2 First IEC FDIS release
990831 1.1 First IEC CDV release

VERSION 1.2
DATE 2001-01-02
RESPONSIBLE IEC TC80/WG6

REFERENCES

PCCTagAlarm

USAGE

* The application is the minimum implementation of a tag based alarm system. Refer to the individual interface specifications for detailed discussion of functionality.

INTERFACES