

INTERNATIONAL STANDARD



Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures – Part 1: General requirements

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2024 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 60384-1:2019+AMD1:2024 CSV



IEC 61557-1

Edition 3.1 2024-10
CONSOLIDATED VERSION

INTERNATIONAL STANDARD



Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures – Part 1: General requirements

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 17.220.20, 29.080.01, 29.240.01

ISBN 978-2-8322-9879-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	8
4 Requirements	12
4.1 General requirements	12
4.2 Influence quantities – Operating uncertainty (B), percentage operating uncertainty (B [%])	12
4.3 Rated operating conditions	13
4.4 Battery test facility	14
4.5 Safety	14
4.6 Electromagnetic compatibility.....	14
4.6.1 Immunity.....	14
4.6.2 Emission.....	14
4.7 Mechanical strength against vibration	15
5 Marking and operating instructions	15
5.1 General.....	15
5.2 Marking.....	15
5.3 Operating instructions	15
5.3.1 Performance requirements.....	15
5.3.2 Other information.....	15
6 Tests	16
6.1 General.....	16
6.2 Operating uncertainty.....	16
6.2.1 General	16
6.2.2 Influence of changing position	16
6.2.3 Influence of temperature.....	16
6.2.4 Influence of the supply voltage	16
6.3 Battery test facility	16
6.4 Safety tests.....	16
6.5 EMC tests	17
6.6 Mechanical requirements	17
6.7 Marking and operating instructions.....	17
6.8 Records	17
Annex A (informative) Explanation of the application of GUM in series IEC 61557	18
A.1 Overview.....	18
A.2 Basic model of evaluation of results under operational conditions	18
A.2.1 General	18
A.2.2 Standard uncertainty of a result	18
A.2.3 Expanded uncertainty	19
A.2.4 Relative operating uncertainty	19
A.2.5 Calibration uncertainty.....	19
A.3 Operating uncertainty calculations as basis for 4.1	20
A.3.1 Standard uncertainty	20
A.3.2 Operating uncertainty in accordance with 4.1.....	20

Annex B (informative) Environmental aspects	21
B.1 Overview.....	21
B.2 Guidelines to establish a material declaration and end-of-life information	21
B.2.1 General	21
B.2.2 Guidelines for material declaration	22
B.2.3 Guidelines for end-of-life (EoL).....	22
B.2.4 Example of a material declaration and end-of-life information	22
Bibliography.....	25
Figure B.1 – Components listed for EoL of a product	24
Table B.1 – Material content according to IEC 62474 material classes.....	23

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**ELECTRICAL SAFETY IN LOW VOLTAGE DISTRIBUTION SYSTEMS
UP TO 1 000 V AC AND 1 500 V DC –
EQUIPMENT FOR TESTING, MEASURING OR MONITORING
OF PROTECTIVE MEASURES****Part 1: General requirements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 61557-1 edition 3.1 contains the third edition (2019-07) [documents 85/689/FDIS and 85/692/RVD] and its amendment 1 (2024-10) [documents 85/900/CDV and 85/926/RVC].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 61557-1 has been prepared by technical committee 85: Measuring equipment for electrical and electromagnetic quantities.

This third edition cancels and replaces the second edition published in 2007. This edition constitutes a technical revision.

This third edition includes the following significant technical changes with respect to the previous edition:

- a) terms aligned with IEC 60050;
- b) measurement of uncertainty revised according to the equations in 4.2 of ISO/IEC Guide 98-3:2008 (GUM);
- c) updated references for safety and EMC requirements;
- d) updated references for marking and operating instructions;
- e) updated references for testing safety and EMC;
- f) Annex A contains an explanation of GUM;
- g) Annex B addresses environmental aspects.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61557 series, published under the general title *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures*, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 60364-6 stipulates standardized conditions for the initial test of power installations in TN, TT or IT systems for continuous monitoring and for testing these installations after modifications. In addition to general references for the performance of the tests, IEC 60364-6 contains requirements that have to be verified by measurements. Only in a few instances, for example when measuring the insulation resistance, does IEC 60364-6 contain details of the characteristics of the measuring device to be used. Circuits which are given as examples in IEC 60364-6, and referred to within the text of that document, are generally not suitable for practical use.

The tests are carried out in installations where hazardous voltages can occur and where careless use or a defect in the equipment can easily cause an accident. Therefore, the technician has to rely on measuring devices which ensure safe test methods, in addition to simplifying the measurements.

The application of the general safety regulations for electrical and electronic measuring devices (IEC 61010-1) for testing the protective measures is not sufficient in itself. The performance of measurements in the installation can cause hazards not only to the technician, but also to third persons, depending on the measuring method used.

Likewise, reliable and comparable results of measurement with measuring devices from different manufacturers are an important precondition in order to obtain an objective assessment about the installation, for example when the installation is handed over for periodic tests, for continuous insulation monitoring or in the case of performance warranty.

The IEC 61557 series has been established with the aim of stipulating common principles for measuring and monitoring equipment for testing electrical safety and measuring performances in systems with nominal voltages up to 1 000 V AC and 1 500 V DC which correspond to the above-mentioned characteristics.

For that reason, the following common requirements have been stipulated in IEC 61557-1 (other parts of IEC 61557 can specify additional requirements or deviations):

- protection against extraneous voltages;
- class II protection (except insulation monitoring devices and insulation fault location systems);
- requirements and safety precautions against hazardous touch voltages at the measuring device;
- requirements for the assessment of connection configurations with respect to wiring errors in the tested equipment;
- special mechanical requirements;
- measuring methods;
- measured quantity;
- specification of the maximum operating uncertainty;
- requirements for testing the influencing quantity and the calculation of the operating uncertainty;
- uncertainties of the measuring device at the thresholds specified in the respective standards;
- specification of the nature of type and routine tests and the required conditions for testing.

Contrary to the usual convention, terms and definitions that occur more than once in another part of the series are listed in IEC 61557-1:2019, Clause 3. Only terms and definitions specific to the respective part of IEC 61557 are listed in Clause 3 of that part.

ELECTRICAL SAFETY IN LOW VOLTAGE DISTRIBUTION SYSTEMS UP TO 1 000 V AC AND 1 500 V DC – EQUIPMENT FOR TESTING, MEASURING OR MONITORING OF PROTECTIVE MEASURES

Part 1: General requirements

1 Scope

This part of IEC 61557 specifies the general requirements applicable to measuring and monitoring equipment for testing the electrical safety in low-voltage distribution systems with nominal voltages up to 1 000 V AC and 1 500 V DC.

When measuring equipment or measuring installations involve measurement tasks of various measuring equipment covered by this series of standards, then the part of this series relevant to each of the measurement tasks is applicable.

NOTE The term "measuring equipment" will hereafter be used to designate "testing, measuring and monitoring equipment".

Other parts of IEC 61557 can specify additional requirements or deviations.

This document does not cover functional safety or cybersecurity.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60038:2009, *IEC standard voltages*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013¹

IEC 61010-1:2010, *Safety requirements for electrical equipment for measurement, control and laboratory use – Part 1: General requirements*

IEC 61010-1:2010/AMD1:2016²

IEC 61010-031, *Safety requirements for electrical equipment for measurement, control and laboratory use – Part 031: Safety requirements for hand-held and hand-manipulated assemblies for electrical test and measurement*

¹ A consolidated version of this publication exists, comprising IEC 60529:1989, IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013.

² A consolidated version of this publication exists, comprising IEC 61010-1:2010 and IEC 61010-1:2010/AMD 1:2016.

IEC 61010-2-030:2017, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-030: Particular requirements for equipment having testing or measuring circuits*

IEC 61010-2-032, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-032: Particular requirements for hand-held and hand-manipulated current sensors for electrical test and measurement*

IEC 61010-2-034:2017, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-034: Particular requirements for measurement equipment for insulation resistance and test equipment for electric strength*

IEC 61326-1:2012, *Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements*

IEC 61326-2-4, *Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 2-4: Particular requirements – Test configurations, operational conditions and performance criteria for insulation monitoring devices according to IEC 61557-8 and for equipment for insulation fault location according to IEC 61557-9*

IEC 61557-8:2014, *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures – Part 8: Insulation monitoring devices for IT systems*

IEC 61557-9:2014, *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures – Part 9: Equipment for insulation fault location in IT systems*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

nominal system voltage

U_n

value of the voltage by which the distribution system is designated and to which certain characteristics are assigned

3.2

voltage against earth

U_o

<in distribution systems with an earthed neutral point> voltage between a phase conductor and the earthed neutral point

3.3

voltage against earth

U_o

<in all other distribution systems> voltage present between the remaining phase conductors and earth when one of the phase conductors is short-circuited to earth

**3.4
fault voltage**

U_f
voltage between a given point of fault and reference earth resulting from an insulation fault

[SOURCE: IEC 60050-826:2004, 826-11-02, modified – The symbol has been added.]

**3.5
effective touch voltage**

U_t
voltage between conductive parts when touched simultaneously by a person or an animal

Note 1 to entry: The value of the effective touch voltage may be appreciably influenced by the impedance of the person or the animal in electric contact with these conductive parts.

[SOURCE: IEC 60050-195:1998, 195-05-11, modified – The symbol has been added.]

**3.6
conventional touch voltage limit**

U_L
maximum value of the touch voltage which is permitted to be maintained indefinitely in specified conditions of external influences and is usually equal to 50 V AC, RMS or 120 V ripple free DC

[SOURCE: IEC 60050-826:2004, 826-11-04, modified – "prospective" has been omitted from the term and from the definition and values for the limit have been added to the definition; the symbol has been added.]

**3.7
supply voltage**

voltage that is used to power the measurement equipment

Note 1 to entry: If a supply voltage is specified, for instance in the supply contract, then it is called "declared supply voltage".

**3.8
rated supply voltage**

U_S
value of the supply voltage at a point where the measuring equipment does or can accept electric energy as a supply

**3.9
output voltage**

U_a
voltage across the measuring equipment terminals where this equipment does or can output electric energy

**3.10
open-circuit voltage**

U_q
voltage present across unloaded terminals on the measuring equipment

**3.11
rated voltage**

U_N
voltage value assigned by a manufacturer or other entity for a specified operating condition of the measuring equipment

Note 1 to entry: The value for the rated voltage of low-voltage equipment is generally assigned from the list of nominal voltages in IEC 60038:2009, Tables 1 and 6.

Note 2 to entry: Equipment may have more than one rated voltage value or may have a rated voltage range.

[SOURCE: IEC 60050-614:2016, 614-03-09, modified – The domain <of equipment> and Note 1 have been omitted; the symbol has been added; the term specifically adapted for measuring equipment.]

3.12

extraneous voltage

external voltage to which the measuring equipment can be subjected during measurement

3.13

rated current

I_N

current assigned by the manufacturer for the specified operating condition of the measuring equipment

Note 1 to entry: The specified operating condition is a value (or values) within the rated operating conditions that are designated by the manufacturer.

[SOURCE: IEC 60050-442:1998, 442-01-02, modified – "for accessories" has been deleted from the term and Note 1 has been added; the definition has been adapted for application to measuring equipment.]

3.14

short-circuit current

over-current resulting from a short circuit due to a fault on the terminals or within the measuring equipment

3.15

rated frequency

f_N

frequency for which the measuring equipment is intended to be used and for which it has been designed

3.16

uncertainty of measurement

parameter, associated with the result of a measurement, that characterizes the dispersion of the values that could reasonably be attributed to the measurand

Note 1 to entry: This term is used in the "uncertainty" approach.

Note 2 to entry: The parameter can be, for example, a standard deviation (or a given multiple of it), or a half-width of an interval having a stated level of confidence. Various ways of obtaining uncertainty are defined in the GUM.

Note 3 to entry: Uncertainty of measurement comprises, in general, many components. Some of these components can be evaluated from the statistical distribution of the results of a series of measurements and can be characterized by experimental standard deviations. The other components, which can also be characterized by standard deviations, are evaluated from the assumed probability distributions based on experience or other information.

[SOURCE: IEC 60050-311:2001, 311-01-02]

3.17

operating uncertainty

calculated uncertainty taking into account the intrinsic uncertainty and defined influence quantities to mirror the worst case situation

3.18

fiducial uncertainty

uncertainty of measuring equipment expressed as a percentage of the fiducial value

3.19
fiducial value

clearly specified value to which reference is made in order to define the fiducial uncertainty

Note 1 to entry: This value can be, for example, the upper limit of the measuring range, the scale length or any other value which is clearly stated.

[SOURCE: IEC 60050-311:2001, 311-01-16, modified – "error" has been replaced by "uncertainty"; Note 1 has been omitted.]

3.20
percentage operating uncertainty

operating uncertainty of measuring equipment expressed as a percentage of the fiducial value

3.21
intrinsic uncertainty

uncertainty of a measuring instrument or supply instrument when used under reference conditions

Note 1 to entry: The uncertainty caused by friction is part of the intrinsic uncertainty.

[SOURCE: IEC 60050-311:2001, 311-03-09, modified – "or supply instrument" has been added to the definition; the Note has been deleted and Note 1 has been added.]

3.22
performance

characteristics defining the ability of a measuring instrument to achieve the intended functions

[SOURCE: IEC 60050-311:2001, 311-06-11]

3.23
influence quantity

quantity which is not the subject of the measurement and whose change affects the result of the measurement

Note 1 to entry: This term is used in the "uncertainty" approach.

Note 2 to entry: Influence quantities can originate from the measured system, the measuring equipment or the environment.

Note 3 to entry: As the calibration diagram depends on the influence quantities, in order to assign the result of a measurement it is necessary to know whether the relevant influence quantities lie within the specified range.

Note 4 to entry: An influence quantity may be external or internal with reference to the equipment. When the value of one of the influence quantities changes within its measuring range, it may affect the uncertainty due to another quantity. The measured quantity, or a parameter of it, may itself act as an influence quantity. For example, for a voltmeter, the value of the measured voltage may produce an additional uncertainty due to non-linearity or its frequency may also cause an additional uncertainty.

[SOURCE: IEC 60050-311:2001, 311-06-01, modified – "the relationship between the indication and" has been deleted from the definition; Note 4 has been added.]

3.24
variation

<due to an influence quantity> difference between the indicated values for the same value of the measurand of an indicating measuring instrument, or the values of a material measure, when an influence quantity assumes, successively, two different values

[SOURCE: IEC 60050-311:2001, 311-07-03]

3.25**reference conditions**

set of specified values and/or ranges of values of influence quantities under which the uncertainties, or limits of error, admissible for a measuring instrument are specified

[SOURCE: IEC 60050-311:2001, 311-06-02, modified – "are the smallest" has been replaced with "are specified".]

3.26**operating condition**

characteristic which may affect performance of a component, device or equipment

Note 1 to entry: Examples of operating conditions are ambient conditions, characteristics of the power supply, duty cycle or duty type.

[SOURCE: IEC 60050-151:2001, 151-16-01]

3.27**rated operating conditions**

specified set of conditions which may affect the performance of a measuring device and under which the operating uncertainty is maintained

3.28**measuring voltage** U_m

voltage present at the measuring terminals during the measurement

3.29**uncertainty of measuring equipment**

uncertainty of the result of a direct measurement of a measurand having negligible intrinsic uncertainty

Note 1 to entry: Unless explicitly stated otherwise, the measuring equipment uncertainty is expressed as an interval with coverage factor 2.

Note 2 to entry: In single-reading direct measurements of measurands having low intrinsic uncertainty with respect to the measuring equipment uncertainty, the uncertainty of the measurement coincides, by definition, with the measuring equipment uncertainty. Otherwise the measuring equipment uncertainty is to be treated as a component of category B in evaluating the uncertainty of the measurement on the basis of the model connecting the several direct measurements involved.

Note 3 to entry: The measuring equipment uncertainty automatically includes, by definition, the effects due to the quantization of the reading values (minimum evaluable fraction of the scale interval in analogic outputs, unit of the last stable digit in digital outputs).

Note 4 to entry: For material measures, the measuring equipment uncertainty is the uncertainty that should be associated to the value of the quantity reproduced by the material measure in order to ensure the compatibility of the results of its measurements.

4 Requirements**4.1 General requirements**

Measuring equipment, when used for a designated purpose, shall not endanger persons, livestock or property. Furthermore, measuring equipment with additional functions not forming part of the application of the IEC 61557 series shall also not endanger persons, livestock or property.

4.2 Influence quantities – Operating uncertainty (B), percentage operating uncertainty (B [%])

The operating uncertainty shall be calculated by means of Equation 1:

$$B = \pm \sqrt{A^2 + \frac{4}{3} \sum_i E_i^2} \quad (1)$$

where

A is the intrinsic uncertainty;

E_i is the variation;

i is the consecutive number of the variations.

The percentage operating uncertainty shall be calculated by means of Equation 2:

$$B[\%] = \pm \frac{B}{F} \times 100 \% \quad (2)$$

where

F is the fiducial value.

The influencing variations used for calculating the operating uncertainty are denoted as follows:

- variation due to changing the position E_1
- variation due to changing the supply voltage E_2
- variation due to changing the temperature E_3
- variation due to interference voltages E_4
- variation due to earth electrode resistance E_5
- variation due to changing the phase angle of impedance of circuit under test E_6
 - variation due to system phase angle 0° to 18° (use as applicable) $E_{6.1}$
 - variation due to system phase angle 0° to 30° (use as applicable) $E_{6.2}$
- variation due to changing the system frequency E_7
- variation due to changing the system voltage E_8
- variation due to system harmonics E_9
- variation due to system DC quantities E_{10}
- variation due to external low-frequency magnetic fields E_{11}
- variation due to load current E_{12}
- variation due to touch current caused by common mode voltage E_{13}
- variation due to frequency E_{14}
- variation due to repeatability E_{15}

The permissible percentage operating uncertainties are stated in other parts of IEC 61557.

Only one of the influence quantities is varied when calculating the operating uncertainty, whilst the remaining influence quantities are kept under reference conditions. The larger of the respective values of the variation (positive and negative variation) is inserted into the equation for the calculation of the operating uncertainty.

4.3 Rated operating conditions

The following rated operating conditions shall apply, except for insulation monitoring devices (IMD) in accordance with IEC 61557-8 and for insulation fault location systems (IFLS) in accordance with IEC 61557-9:

- temperature range from 0 °C to 35 °C;
- a position of $\pm 90^\circ$ from the reference position for portable measuring equipment;
- 85 % to 110 % of the nominal supply voltage for supply from the distribution systems (if applicable). The values in IEC 60038 shall be applied for a supply from the distribution system;
- the charge condition in accordance with 4.4 shall apply to the battery or batteries/accumulators for measuring equipment with a supply from batteries/accumulators;
- the range of revolutions per minute stated by the manufacturer for measuring equipment with a supply from a hand-driven generator;
- frequency of the supply voltage ± 5 % (if applicable).

NOTE Additional rated operating conditions are stated in other parts of the IEC 61557 series.

4.4 Battery test facility

Measuring equipment with power supplied from dry or rechargeable battery cells shall test and indicate that the state of charge of these batteries will permit measurement within the specification. This may be done automatically as part of the measurement cycle or as a separate function. Where the battery test is a separate function, the test load shall be of the same level as the one appearing during a measurement.

4.5 Safety

Measuring and monitoring equipment shall be in accordance with IEC 61010-1, IEC 61010-2-030, IEC 61010-031, IEC 61010-2-034 and, if applicable, IEC 61010-2-032, and with the following additional requirements.

Overvoltage categories and/or measurement categories are specified in the relevant parts of IEC 61557.

Handheld measuring equipment shall fulfil the requirements for double or reinforced insulation.

The conductive parts of the terminals shall not be accessible and hazardous in connected, partially connected or unconnected conditions.

The protective conductor, if used for measuring purposes shall be treated as a live part, except where a different requirement is specified in other parts of IEC 61557.

The terminals shall be designed so that the probe assembly can be connected to the measuring equipment reliably.

4.6 Electromagnetic compatibility

4.6.1 Immunity

For immunity requirements, IEC 61326-1:2012, Table 2 shall apply. For testing, see 6.5 of this document shall apply.

IEC 61326-2-2 shall apply for particular requirements for measuring equipment covered by IEC 61557-2, IEC 61557-3, IEC 61557-4, IEC 61557-5, IEC 61557-6 and IEC 61557-7.

IEC 61326-2-4 shall apply for particular requirements for monitoring equipment covered by IEC 61557-8 and IEC 61557-9.

4.6.2 Emission

For emissions, either class A or class B limits in accordance with IEC 61326-1:2012, 7.2 shall apply.

4.7 Mechanical strength against vibration

In addition to the mechanical resistance tests in accordance with IEC 61010-1, measuring equipment shall successfully pass the following vibration conditions (type test):

- direction: three mutually perpendicular axes;
- amplitude: 1 mm;
- frequency: 25 Hz;
- duration: 20 min.

5 Marking and operating instructions

5.1 General

Marking and operating instructions shall comply with IEC 61010-1, IEC 61010-2-032, IEC 61010-2-030 and, in addition, these instructions shall comply with the requirements specified in the relevant parts of IEC 61557.

5.2 Marking

The measuring equipment shall carry the following marking:

- type of equipment;
- type and current rating of the fuse in the case of exchangeable fuses;
- type of battery/accumulator and polarity of connection in the battery compartment;
- nominal system voltage and, if applicable, the symbol for double insulation in accordance with IEC 61010-1:2010, Table 1, symbol 14;
- manufacturer's name or registered trade mark;
- model number, name or other means to identify the equipment (inside or outside);
- reference to the operating instructions in accordance with IEC 61010-1:2010, Table 1, symbol 14.

Units of the measured quantities and ranges of measurement shall be stated on the enclosure or on the display.

5.3 Operating instructions

5.3.1 Performance requirements

The operating uncertainty, the intrinsic uncertainty and the variations E_1 to E_{15} shall be provided in the operating instructions (with the exception of measuring devices covered by IEC 61557-8 and IEC 61557-9).

5.3.2 Other information

The operating instructions shall contain the following details:

- connection diagrams;
- instructions for measurements;
- brief description of the principle of measurement;
- diagrams or tables showing the maximum permissible indicated values taking into consideration the tolerances stated by the manufacturer (if necessary);
- type of battery/rechargeable cells;
- information on the charging current, charging voltage and duration of charging for rechargeable cells;

- operational lifetime/runtime of the battery/rechargeable cells or the possible number of measurements;
- type of IP protection according to IEC 60529;
- any necessary special guidance notes.

6 Tests

6.1 General

Measuring equipment shall be tested in accordance with the safety standards IEC 61010-1, IEC 61010-2-030, IEC 61010-031, IEC 61010-2-034 and, if applicable, IEC 61010-2-032, and the EMC standards of IEC 61326 (all relevant parts).

All tests shall be carried out under reference conditions unless otherwise specified. The reference conditions are stated in the relevant parts of IEC 61557.

Tolerances are added in the relevant parts of IEC 61557.

6.2 Operating uncertainty

6.2.1 General

The operating uncertainty shall be determined according to 6.2.2 to 6.2.4.

6.2.2 Influence of changing position

The variation E_1 due to changing the position in accordance with 4.2 and 4.3, if applicable, shall be determined for positions $+90^\circ$ or -90° from the reference position stated by the manufacturer (routine test).

6.2.3 Influence of temperature

The variation E_3 shall be determined from the reference temperature at 0°C and 35°C after the device has reached a state of equilibrium (type test).

6.2.4 Influence of the supply voltage

The variation E_2 due to changing the supply voltage shall be determined under the following rated operating conditions (routine test):

- limits in accordance with 4.3 for measuring equipment supplied from distribution systems;
- limits in accordance with 4.4 and 6.3 for measuring equipment supplied from a battery/accumulator;
- limits in accordance with 4.3 for measuring equipment supplied by a hand-driven generator.

6.3 Battery test facility

The lower and upper limits for the battery voltage to which the battery test facility in accordance with 4.4 is set, shall be determined by means of an external voltage source. These values shall be used during the test in accordance with 6.2.4 as limits for variation E_2 by changing the supply voltage (routine test).

6.4 Safety tests

Compliance with 4.5 shall be tested (type test).

6.5 EMC tests

For the electromagnetic radio frequency field (RF) and conducted RF the following requirements apply:

- the auxiliary circuits of the measuring equipment shall be energised with the rated voltage;
- the measuring equipment shall be tested in its operating conditions.

6.6 Mechanical requirements

The test shall be performed in accordance with 4.7 (type test).

The tests are deemed to have been passed successfully when no parts have become loose or bent and the connecting leads are not damaged. After the process, the measuring equipment shall comply with the requirements for intrinsic uncertainty of the equipment (type test), if applicable.

6.7 Marking and operating instructions

The marking and the operating instructions shall be confirmed by visual inspection (type test).

The marking shall be inspected during type test and routine test.

6.8 Records

Compliance with the tests in Clause 6 shall be recorded.

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV

Annex A (informative)

Explanation of the application of GUM in series IEC 61557

A.1 Overview

The operating uncertainty is a predictive parameter characterizing the expanded uncertainty of the results generated by the measuring device under defined operational conditions.

The operating uncertainty forms an upper limit of the expanded uncertainty which can be expected if the device is operated within the defined operational conditions.

The operating uncertainty might be used to characterize results generated by the device if the device is used within defined operational conditions.

When possible and convenient, the uncertainty may be expressed in the relative form or in the fiducial form. The relative uncertainty is the ratio U/V of the absolute uncertainty U to the measure value V , and the fiducial uncertainty is the ratio U/V_f of the absolute uncertainty U to a conventionally chosen value V_f .

The principles of the GUM (ISO/IEC Guide 98-3:2008) are used to calculate the operating uncertainty.

A.2 Basic model of evaluation of results under operational conditions

A.2.1 General

The basic model for the evaluation of the results under operational conditions is:

$$Y_{\text{oper}} = Y_{\text{ref}} + \sum_i \delta E_i$$

The result under reference conditions Y_{ref} is the result which could be generated under reference (calibration) conditions. The uncertainty $u(Y_{\text{ref}})$ is evaluated during calibration.

The deviations δE_i are derived from the operational conditions. Usually the expectation value of the δE_i is zero and some limits are known.

A.2.2 Standard uncertainty of a result

The standard uncertainty of a result under operational conditions $u(Y_{\text{oper}})$ can be calculated using uncertainty propagation. The sensitivity of all input quantities is equal to 1.

$$u(Y_{\text{oper}}) = \sqrt{u(Y_{\text{ref}})^2 + \sum_i u(\delta E_i)^2}$$

The standard uncertainty under reference conditions is equal to the expanded uncertainty evaluated during calibration divided by the coverage factor:

$$u(Y_{\text{ref}}) = \frac{U_{\text{cal}}(Y)}{k_{\text{cal}}}$$

A.2.3 Expanded uncertainty

The expanded uncertainty of the calibration $U_{\text{cal}}(Y)$ and the coverage factor k_{cal} (usually equal to 2) are stated in the calibration certificate.

For the deviations δE_i , usually only some limits symmetric to zero are known. According to GUM, limits can be converted to a standard uncertainty with the use of a rectangular distribution:

$$u(\delta E_i) = \frac{e_i}{\sqrt{3}}$$

The e_i is the half width of the limits characterizing the deviation δE_i .

The operating uncertainty is equal to the standard uncertainty under operational conditions multiplied by the operating coverage factor:

$$U(Y_{\text{oper}}) = k_{\text{oper}} \times u(Y_{\text{oper}})$$

The operating coverage factor k_{oper} is fixed to 2,0.

This is equivalent to the half width of coverage interval with a coverage probability of 95,45 % under the assumption that the results are distributed normally.

A.2.4 Relative operating uncertainty

The relative operating uncertainty as a percentage can be calculated using a fiducial value Y_f .

$$W(Y_{\text{oper}}) = \frac{U(Y_{\text{oper}})}{Y_f} \times 100 \%$$

The operating uncertainty and the relative operating uncertainty as a percentage can be written as symmetric interval limits using plus and minus signs.

A.2.5 Calibration uncertainty

For practical calculations, the calibration uncertainty $U_{\text{cal}}(Y)$ may be replaced by A , and e_i , by E_i . The resulting equation is:

$$U(Y_{\text{oper}}) = \sqrt{A^2 + \frac{4}{3} \sum_i E_i^2} \leq |A| + 1,5 \times \sqrt{\sum_i E_i^2}$$

under the assumption that the coverage factor k_{cal} stated in the calibration certificate is equal to the operating coverage factor $k_{\text{oper}} = 2,0$.

Therefore the following equation may be used as an upper bound for the operating coverage interval:

$$B = \pm \left[|A| + 1,15 \times \sqrt{\sum_i E_i^2} \right]$$

A.3 Operating uncertainty calculations as basis for 4.1

A.3.1 Standard uncertainty

The basis for this model is the addition of faults.

Uncertainty in respect to GUM (ISO/IEC Guide 98-1:2009, measuring method B) for any statistical distribution:

$$u = \sqrt{a^2 + \sum_i e_i^2}$$

where

a is the expected intrinsic operating uncertainty for example by calibration certificates;

e_i is the expected operating uncertainty by influencing factors for example through temperature;

u is the standard uncertainty of the result of a measurement expressed as a standard deviation.

A.3.2 Operating uncertainty in accordance with 4.1

The basis for this model of calculation is the expanded uncertainty according to GUM (ISO/IEC Guide 98-3:2008, 6.2).

Determination of the operating uncertainty for the IEC 61557 series with stipulation of the defined statistical distributions based on empirical values:

– $B = \pm k \times u$ with $k = 2$ for coverage probability of 95,45 %;

– $a = \frac{A}{2}$ standard distribution for the intrinsic uncertainty;

– $e_i = \frac{E_i}{\sqrt{3}}$ rectangular distribution for the operating uncertainty through influence factors in the operation;

– $B = \pm \sqrt{A^2 + \frac{4}{3} \sum_i E_i^2}$ uncertainty for coverage probability of 95,45 % according to GUM, (ISO/IEC Guide 98-3:2008, 7.22).

Annex B (informative)

Environmental aspects

B.1 Overview

Every product has an effect on the environment, which may occur at any or all stages of its life cycle – raw-material acquisition, manufacture, distribution, use, maintenance, re-use and end-of-life. These effects may range from slight to significant; they may be short term or long term, and they may occur at the local, national, regional or global level (or a combination thereof).

The widespread use of electrical and electronic products has drawn increased awareness to their environmental impacts. As a result, legislation, as well as market-driven requirements for environmentally conscious design, is emerging.

The continuous introduction of new products and materials can make evaluation increasingly complex, since additional data will need to be gathered to assess the life-cycle impacts of such new products and materials. The gathered data is used as a basis for improvement of the products with respect to environmental impacts. Life-cycle assessment (LCA) and environmentally conscious design (ECD) principles provide instruments that may be useful in this respect.

The application of LCA to an ECD process allows the reduction of adverse environmental impacts of a product throughout its entire life cycle. This can involve balancing the environmental aspects of the product with other factors, such as its intended use, performance, cost, safety, marketability, and quality and choosing methods to meet legal and regulatory requirements in an environmentally conscious way. In striving for this goal, multiple benefits can be achieved for the organization, its customers and other stakeholders. The consideration of environmental aspects particularly in the very early stage of the product design process can contribute to cost reduction and to better marketability. Environmentally conscious design is not a separate design activity; rather it is an integral part of the existing design process. The design in this context includes the activities associated with the processes of product planning, development and decision making as well as the creation of policies within the organization.

ECD is intended to be used by all those involved in the design and development of electrical and electronic products. This includes all parties in the supply chain regardless of organization type, size, location and complexity. It is applicable for all types of products, new as well as modified. Sector-specific documents may be developed to address needs not covered in this document. The use of this annex as a base reference is encouraged so as to ensure consistency throughout the electrotechnical sector.

This annex provides a set of guidelines to establish the material declaration and the end-of-life information in the general framework of the information that shall be shared according to IEC 62430.

B.2 Guidelines to establish a material declaration and end-of-life information

B.2.1 General

Manufacturers are increasingly requested to provide a material declaration and end-of-life information in accordance with regulations or in the form of labels, or they are asked directly by their customers to communicate and declare information about the material composition of their products. The main intended uses of this information are to:

- enable assessment of product compliance with substance-restriction requirements;
- improve product end-of-life by facilitating integration in the appropriate recycling processes.

Providing the material declaration is at the discretion of the manufacturer.

NOTE Since IEC 62474 is intended to establish requirements for material declarations, standardize protocols, and facilitate transfer and processing of data, it is possible that its application throughout the supply chain will make the compilation of material declarations of products easier.

B.2.2 Guidelines for material declaration

The material declaration should be made in accordance with IEC 62474 and contain the two following sections as a minimum.

- Base data requirements:
 - product family name;
 - product identification: commercial references covered by the declaration;
 - total product mass;
 - mass and type of batteries, if integrated;
 - mass of packaging.
- Material class information:
 - distribution of the product mass according to the 15 generic material classes as defined in the IEC 62474 database.

NOTE Examples of material declarations are given in IEC 62474.

Single-material declarations can be made for a family of products only when the composition is the same for all the products thereof.

B.2.3 Guidelines for end-of-life (EoL)

Different regulations (for waste electrical and electronic equipment, batteries, packaging), incentives on circular economy or customers require or push the design of products that are easily recyclable.

If required, the end-of-life information (EoLI) should be prepared in accordance with IEC TR 62635 and should contain the following as a minimum:

- manufacturer identification;
- product identification;
- potential hazard identification;
- selective treatment;
- sketches, drawings or pictures to identify and locate parts and materials listed.

B.2.4 Example of a material declaration and end-of-life information

B.2.4.1 Manufacturer identification

Address: xxxxxxxxxxxxxxxxxxxx

Website: xxxxxxxxxxxxxxxxxxxx

B.2.4.2 Product identification

Range: multifunction meter xxxxxx

Commercial references: xxxxxx, xxxxx, xxxxxx, etc.

B.2.4.3 Purpose of the document

This declaration is intended to provide basic information on the product material content (see Table B.1) and end-of-life information.

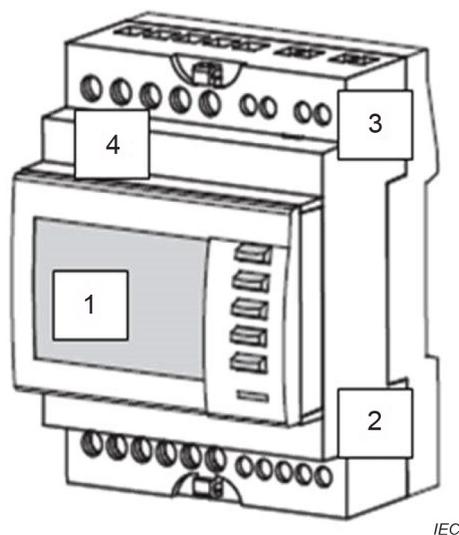
Table B.1 – Material content according to IEC 62474 material classes

Metals, weight (%)		Plastics, weight (%)		Others, weight (%)	
Stainless steel	< 1	Polyvinyl chloride	< 1	Ceramics and glass	7,5
Other ferrous alloys, non-stainless steel	5	Other thermoplastics	60	Other organic materials	< 1
Aluminium and its alloys	< 1				
Copper and its alloys	15				
Magnesium and its alloys	< 1				
Nickel and its alloys	< 1				
Zinc and its alloys	1,5				
Precious metals	< 1				
Other non-ferrous metals and alloys	< 1				
Total product mass: 400 g					
Mass of packaging:		100 g			

B.2.4.4 End-of-life information

A list of components and materials that can be subjected to selective treatment may be requested according to local/national regulations; for measuring equipment, such components may be as in the example in Figure B.1.

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV

**Key**

- 1 LCD screen
- 2 Printed circuit boards (inside the module)
- 3 Lithium cell (inside the module)
- 4 Plastics with brominated flame retardants

Figure B.1 – Components listed for EoL of a product

Decommissioning and disassembly should be performed by qualified personnel.

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV

Bibliography

IEC 60050-195, *International Electrotechnical Vocabulary (IEV) – Part 195: Earthing and protection against electric shock*

IEC 60050-311:2001, *International Electrotechnical Vocabulary (IEV) – Part 311: General terms relating to measurements*

IEC 60050-442:1998, *International Electrotechnical Vocabulary (IEV) – Part 442: Electrical accessories*

IEC 60050-614:2016, *International Electrotechnical Vocabulary (IEV) – Part 614: Generation, transmission and distribution of electricity – Operation*

IEC 60050-826:2004, *International Electrotechnical Vocabulary (IEV) – Part 826: Electrical installations*

IEC 60359, *Electrical and electronic measurement equipment – Expression of performance*

IEC 60364-1, *Low-voltage electrical installations – Part 1: Fundamental principles, assessment of general characteristics, definitions*

IEC 60364-6, *Low voltage electrical installations – Part 6: Verification*

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 61326 (all parts), *Electrical equipment for measurement, control and laboratory use – EMC requirements*

~~IEC 61326-2-4, *Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 2-4: Particular requirements – Test configurations, operational conditions and performance criteria for insulation monitoring devices according to IEC 61557-8 and for equipment for insulation fault location according to IEC 61557-9*~~

IEC 62430, *Environmentally conscious design for electrical and electronic products*

IEC 62474, *Material declaration for products of and for the electrotechnical industry*

IEC TR 62635, *Guidelines for end-of-life information provided by manufacturers and recyclers and for recyclability rate calculation of electrical and electronic equipment*

ISO/IEC Guide 98-1:2009, *Uncertainty of measurement – Part 1: Introduction to the expression of uncertainty in measurement*

ISO/IEC Guide 98-3:2008, *Uncertainty of measurement – Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	8
4 Requirements	12
4.1 General requirements	12
4.2 Influence quantities – Operating uncertainty (B), percentage operating uncertainty (B [%])	12
4.3 Rated operating conditions	13
4.4 Battery test facility	14
4.5 Safety	14
4.6 Electromagnetic compatibility.....	14
4.6.1 Immunity.....	14
4.6.2 Emission.....	14
4.7 Mechanical strength against vibration	15
5 Marking and operating instructions	15
5.1 General.....	15
5.2 Marking.....	15
5.3 Operating instructions	15
5.3.1 Performance requirements.....	15
5.3.2 Other information.....	15
6 Tests	16
6.1 General.....	16
6.2 Operating uncertainty.....	16
6.2.1 General	16
6.2.2 Influence of changing position	16
6.2.3 Influence of temperature.....	16
6.2.4 Influence of the supply voltage	16
6.3 Battery test facility	16
6.4 Safety tests.....	16
6.5 EMC tests	17
6.6 Mechanical requirements	17
6.7 Marking and operating instructions.....	17
6.8 Records	17
Annex A (informative) Explanation of the application of GUM in series IEC 61557	18
A.1 Overview.....	18
A.2 Basic model of evaluation of results under operational conditions	18
A.2.1 General	18
A.2.2 Standard uncertainty of a result	18
A.2.3 Expanded uncertainty	19
A.2.4 Relative operating uncertainty	19
A.2.5 Calibration uncertainty.....	19
A.3 Operating uncertainty calculations as basis for 4.1	20
A.3.1 Standard uncertainty	20
A.3.2 Operating uncertainty in accordance with 4.1.....	20

Annex B (informative) Environmental aspects	21
B.1 Overview.....	21
B.2 Guidelines to establish a material declaration and end-of-life information	21
B.2.1 General	21
B.2.2 Guidelines for material declaration	22
B.2.3 Guidelines for end-of-life (EoL).....	22
B.2.4 Example of a material declaration and end-of-life information	22
Bibliography.....	25
Figure B.1 – Components listed for EoL of a product	24
Table B.1 – Material content according to IEC 62474 material classes.....	23

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**ELECTRICAL SAFETY IN LOW VOLTAGE DISTRIBUTION SYSTEMS
UP TO 1 000 V AC AND 1 500 V DC –
EQUIPMENT FOR TESTING, MEASURING OR MONITORING
OF PROTECTIVE MEASURES****Part 1: General requirements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 61557-1 edition 3.1 contains the third edition (2019-07) [documents 85/689/FDIS and 85/692/RVD] and its amendment 1 (2024-10) [documents 85/900/CDV and 85/926/RVC].

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

International Standard IEC 61557-1 has been prepared by technical committee 85: Measuring equipment for electrical and electromagnetic quantities.

This third edition cancels and replaces the second edition published in 2007. This edition constitutes a technical revision.

This third edition includes the following significant technical changes with respect to the previous edition:

- a) terms aligned with IEC 60050;
- b) measurement of uncertainty revised according to the equations in 4.2 of ISO/IEC Guide 98-3:2008 (GUM);
- c) updated references for safety and EMC requirements;
- d) updated references for marking and operating instructions;
- e) updated references for testing safety and EMC;
- f) Annex A contains an explanation of GUM;
- g) Annex B addresses environmental aspects.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61557 series, published under the general title *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures*, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV

INTRODUCTION

IEC 60364-6 stipulates standardized conditions for the initial test of power installations in TN, TT or IT systems for continuous monitoring and for testing these installations after modifications. In addition to general references for the performance of the tests, IEC 60364-6 contains requirements that have to be verified by measurements. Only in a few instances, for example when measuring the insulation resistance, does IEC 60364-6 contain details of the characteristics of the measuring device to be used. Circuits which are given as examples in IEC 60364-6, and referred to within the text of that document, are generally not suitable for practical use.

The tests are carried out in installations where hazardous voltages can occur and where careless use or a defect in the equipment can easily cause an accident. Therefore, the technician has to rely on measuring devices which ensure safe test methods, in addition to simplifying the measurements.

The application of the general safety regulations for electrical and electronic measuring devices (IEC 61010-1) for testing the protective measures is not sufficient in itself. The performance of measurements in the installation can cause hazards not only to the technician, but also to third persons, depending on the measuring method used.

Likewise, reliable and comparable results of measurement with measuring devices from different manufacturers are an important precondition in order to obtain an objective assessment about the installation, for example when the installation is handed over for periodic tests, for continuous insulation monitoring or in the case of performance warranty.

The IEC 61557 series has been established with the aim of stipulating common principles for measuring and monitoring equipment for testing electrical safety and measuring performances in systems with nominal voltages up to 1 000 V AC and 1 500 V DC which correspond to the above-mentioned characteristics.

For that reason, the following common requirements have been stipulated in IEC 61557-1 (other parts of IEC 61557 can specify additional requirements or deviations):

- protection against extraneous voltages;
- class II protection (except insulation monitoring devices and insulation fault location systems);
- requirements and safety precautions against hazardous touch voltages at the measuring device;
- requirements for the assessment of connection configurations with respect to wiring errors in the tested equipment;
- special mechanical requirements;
- measuring methods;
- measured quantity;
- specification of the maximum operating uncertainty;
- requirements for testing the influencing quantity and the calculation of the operating uncertainty;
- uncertainties of the measuring device at the thresholds specified in the respective standards;
- specification of the nature of type and routine tests and the required conditions for testing.

Contrary to the usual convention, terms and definitions that occur more than once in another part of the series are listed in IEC 61557-1:2019, Clause 3. Only terms and definitions specific to the respective part of IEC 61557 are listed in Clause 3 of that part.

ELECTRICAL SAFETY IN LOW VOLTAGE DISTRIBUTION SYSTEMS UP TO 1 000 V AC AND 1 500 V DC – EQUIPMENT FOR TESTING, MEASURING OR MONITORING OF PROTECTIVE MEASURES

Part 1: General requirements

1 Scope

This part of IEC 61557 specifies the general requirements applicable to measuring and monitoring equipment for testing the electrical safety in low-voltage distribution systems with nominal voltages up to 1 000 V AC and 1 500 V DC.

When measuring equipment or measuring installations involve measurement tasks of various measuring equipment covered by this series of standards, then the part of this series relevant to each of the measurement tasks is applicable.

NOTE The term "measuring equipment" will hereafter be used to designate "testing, measuring and monitoring equipment".

Other parts of IEC 61557 can specify additional requirements or deviations.

This document does not cover functional safety or cybersecurity.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60038:2009, *IEC standard voltages*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013¹

IEC 61010-1:2010, *Safety requirements for electrical equipment for measurement, control and laboratory use – Part 1: General requirements*

IEC 61010-1:2010/AMD1:2016²

IEC 61010-031, *Safety requirements for electrical equipment for measurement, control and laboratory use – Part 031: Safety requirements for hand-held and hand-manipulated assemblies for electrical test and measurement*

¹ A consolidated version of this publication exists, comprising IEC 60529:1989, IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013.

² A consolidated version of this publication exists, comprising IEC 61010-1:2010 and IEC 61010-1:2010/AMD 1:2016.

IEC 61010-2-030:2017, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-030: Particular requirements for equipment having testing or measuring circuits*

IEC 61010-2-032, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-032: Particular requirements for hand-held and hand-manipulated current sensors for electrical test and measurement*

IEC 61010-2-034:2017, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 2-034: Particular requirements for measurement equipment for insulation resistance and test equipment for electric strength*

IEC 61326-1:2012, *Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements*

IEC 61326-2-4, *Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 2-4: Particular requirements – Test configurations, operational conditions and performance criteria for insulation monitoring devices according to IEC 61557-8 and for equipment for insulation fault location according to IEC 61557-9*

IEC 61557-8:2014, *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures – Part 8: Insulation monitoring devices for IT systems*

IEC 61557-9:2014, *Electrical safety in low voltage distribution systems up to 1 000 V AC and 1 500 V DC – Equipment for testing, measuring or monitoring of protective measures – Part 9: Equipment for insulation fault location in IT systems*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

nominal system voltage

U_n

value of the voltage by which the distribution system is designated and to which certain characteristics are assigned

3.2

voltage against earth

U_o

<in distribution systems with an earthed neutral point> voltage between a phase conductor and the earthed neutral point

3.3

voltage against earth

U_o

<in all other distribution systems> voltage present between the remaining phase conductors and earth when one of the phase conductors is short-circuited to earth

**3.4
fault voltage**

U_f
voltage between a given point of fault and reference earth resulting from an insulation fault

[SOURCE: IEC 60050-826:2004, 826-11-02, modified – The symbol has been added.]

**3.5
effective touch voltage**

U_t
voltage between conductive parts when touched simultaneously by a person or an animal

Note 1 to entry: The value of the effective touch voltage may be appreciably influenced by the impedance of the person or the animal in electric contact with these conductive parts.

[SOURCE: IEC 60050-195:1998, 195-05-11, modified – The symbol has been added.]

**3.6
conventional touch voltage limit**

U_L
maximum value of the touch voltage which is permitted to be maintained indefinitely in specified conditions of external influences and is usually equal to 50 V AC, RMS or 120 V ripple free DC

[SOURCE: IEC 60050-826:2004, 826-11-04, modified – "prospective" has been omitted from the term and from the definition and values for the limit have been added to the definition; the symbol has been added.]

**3.7
supply voltage**

voltage that is used to power the measurement equipment

Note 1 to entry: If a supply voltage is specified, for instance in the supply contract, then it is called "declared supply voltage".

**3.8
rated supply voltage**

U_S
value of the supply voltage at a point where the measuring equipment does or can accept electric energy as a supply

**3.9
output voltage**

U_a
voltage across the measuring equipment terminals where this equipment does or can output electric energy

**3.10
open-circuit voltage**

U_q
voltage present across unloaded terminals on the measuring equipment

**3.11
rated voltage**

U_N
voltage value assigned by a manufacturer or other entity for a specified operating condition of the measuring equipment

Note 1 to entry: The value for the rated voltage of low-voltage equipment is generally assigned from the list of nominal voltages in IEC 60038:2009, Tables 1 and 6.

Note 2 to entry: Equipment may have more than one rated voltage value or may have a rated voltage range.

[SOURCE: IEC 60050-614:2016, 614-03-09, modified – The domain <of equipment> and Note 1 have been omitted; the symbol has been added; the term specifically adapted for measuring equipment.]

3.12

extraneous voltage

external voltage to which the measuring equipment can be subjected during measurement

3.13

rated current

I_N

current assigned by the manufacturer for the specified operating condition of the measuring equipment

Note 1 to entry: The specified operating condition is a value (or values) within the rated operating conditions that are designated by the manufacturer.

[SOURCE: IEC 60050-442:1998, 442-01-02, modified – "for accessories" has been deleted from the term and Note 1 has been added; the definition has been adapted for application to measuring equipment.]

3.14

short-circuit current

over-current resulting from a short circuit due to a fault on the terminals or within the measuring equipment

3.15

rated frequency

f_N

frequency for which the measuring equipment is intended to be used and for which it has been designed

3.16

uncertainty of measurement

parameter, associated with the result of a measurement, that characterizes the dispersion of the values that could reasonably be attributed to the measurand

Note 1 to entry: This term is used in the "uncertainty" approach.

Note 2 to entry: The parameter can be, for example, a standard deviation (or a given multiple of it), or a half-width of an interval having a stated level of confidence. Various ways of obtaining uncertainty are defined in the GUM.

Note 3 to entry: Uncertainty of measurement comprises, in general, many components. Some of these components can be evaluated from the statistical distribution of the results of a series of measurements and can be characterized by experimental standard deviations. The other components, which can also be characterized by standard deviations, are evaluated from the assumed probability distributions based on experience or other information.

[SOURCE: IEC 60050-311:2001, 311-01-02]

3.17

operating uncertainty

calculated uncertainty taking into account the intrinsic uncertainty and defined influence quantities to mirror the worst case situation

3.18

fiducial uncertainty

uncertainty of measuring equipment expressed as a percentage of the fiducial value

3.19 fiducial value

clearly specified value to which reference is made in order to define the fiducial uncertainty

Note 1 to entry: This value can be, for example, the upper limit of the measuring range, the scale length or any other value which is clearly stated.

[SOURCE: IEC 60050-311:2001, 311-01-16, modified – "error" has been replaced by "uncertainty"; Note 1 has been omitted.]

3.20 percentage operating uncertainty

operating uncertainty of measuring equipment expressed as a percentage of the fiducial value

3.21 intrinsic uncertainty

uncertainty of a measuring instrument or supply instrument when used under reference conditions

Note 1 to entry: The uncertainty caused by friction is part of the intrinsic uncertainty.

[SOURCE: IEC 60050-311:2001, 311-03-09, modified – "or supply instrument" has been added to the definition; the Note has been deleted and Note 1 has been added.]

3.22 performance

characteristics defining the ability of a measuring instrument to achieve the intended functions

[SOURCE: IEC 60050-311:2001, 311-06-11]

3.23 influence quantity

quantity which is not the subject of the measurement and whose change affects the result of the measurement

Note 1 to entry: This term is used in the "uncertainty" approach.

Note 2 to entry: Influence quantities can originate from the measured system, the measuring equipment or the environment.

Note 3 to entry: As the calibration diagram depends on the influence quantities, in order to assign the result of a measurement it is necessary to know whether the relevant influence quantities lie within the specified range.

Note 4 to entry: An influence quantity may be external or internal with reference to the equipment. When the value of one of the influence quantities changes within its measuring range, it may affect the uncertainty due to another quantity. The measured quantity, or a parameter of it, may itself act as an influence quantity. For example, for a voltmeter, the value of the measured voltage may produce an additional uncertainty due to non-linearity or its frequency may also cause an additional uncertainty.

[SOURCE: IEC 60050-311:2001, 311-06-01, modified – "the relationship between the indication and" has been deleted from the definition; Note 4 has been added.]

3.24 variation

<due to an influence quantity> difference between the indicated values for the same value of the measurand of an indicating measuring instrument, or the values of a material measure, when an influence quantity assumes, successively, two different values

[SOURCE: IEC 60050-311:2001, 311-07-03]

3.25

reference conditions

set of specified values and/or ranges of values of influence quantities under which the uncertainties, or limits of error, admissible for a measuring instrument are specified

[SOURCE: IEC 60050-311:2001, 311-06-02, modified – "are the smallest" has been replaced with "are specified".]

3.26

operating condition

characteristic which may affect performance of a component, device or equipment

Note 1 to entry: Examples of operating conditions are ambient conditions, characteristics of the power supply, duty cycle or duty type.

[SOURCE: IEC 60050-151:2001, 151-16-01]

3.27

rated operating conditions

specified set of conditions which may affect the performance of a measuring device and under which the operating uncertainty is maintained

3.28

measuring voltage

U_m

voltage present at the measuring terminals during the measurement

3.29

uncertainty of measuring equipment

uncertainty of the result of a direct measurement of a measurand having negligible intrinsic uncertainty

Note 1 to entry: Unless explicitly stated otherwise, the measuring equipment uncertainty is expressed as an interval with coverage factor 2.

Note 2 to entry: In single-reading direct measurements of measurands having low intrinsic uncertainty with respect to the measuring equipment uncertainty, the uncertainty of the measurement coincides, by definition, with the measuring equipment uncertainty. Otherwise the measuring equipment uncertainty is to be treated as a component of category B in evaluating the uncertainty of the measurement on the basis of the model connecting the several direct measurements involved.

Note 3 to entry: The measuring equipment uncertainty automatically includes, by definition, the effects due to the quantization of the reading values (minimum evaluable fraction of the scale interval in analogic outputs, unit of the last stable digit in digital outputs).

Note 4 to entry: For material measures, the measuring equipment uncertainty is the uncertainty that should be associated to the value of the quantity reproduced by the material measure in order to ensure the compatibility of the results of its measurements.

4 Requirements

4.1 General requirements

Measuring equipment, when used for a designated purpose, shall not endanger persons, livestock or property. Furthermore, measuring equipment with additional functions not forming part of the application of the IEC 61557 series shall also not endanger persons, livestock or property.

4.2 Influence quantities – Operating uncertainty (B), percentage operating uncertainty (B [%])

The operating uncertainty shall be calculated by means of Equation 1:

$$B = \pm \sqrt{A^2 + \frac{4}{3} \sum_i E_i^2} \quad (1)$$

where

A is the intrinsic uncertainty;

E_i is the variation;

i is the consecutive number of the variations.

The percentage operating uncertainty shall be calculated by means of Equation 2:

$$B[\%] = \pm \frac{B}{F} \times 100 \% \quad (2)$$

where

F is the fiducial value.

The influencing variations used for calculating the operating uncertainty are denoted as follows:

- variation due to changing the position E_1
- variation due to changing the supply voltage E_2
- variation due to changing the temperature E_3
- variation due to interference voltages E_4
- variation due to earth electrode resistance E_5
- variation due to changing the phase angle of impedance of circuit under test E_6
 - variation due to system phase angle 0° to 18° (use as applicable) $E_{6.1}$
 - variation due to system phase angle 0° to 30° (use as applicable) $E_{6.2}$
- variation due to changing the system frequency E_7
- variation due to changing the system voltage E_8
- variation due to system harmonics E_9
- variation due to system DC quantities E_{10}
- variation due to external low-frequency magnetic fields E_{11}
- variation due to load current E_{12}
- variation due to touch current caused by common mode voltage E_{13}
- variation due to frequency E_{14}
- variation due to repeatability E_{15}

The permissible percentage operating uncertainties are stated in other parts of IEC 61557.

Only one of the influence quantities is varied when calculating the operating uncertainty, whilst the remaining influence quantities are kept under reference conditions. The larger of the respective values of the variation (positive and negative variation) is inserted into the equation for the calculation of the operating uncertainty.

4.3 Rated operating conditions

The following rated operating conditions shall apply, except for insulation monitoring devices (IMD) in accordance with IEC 61557-8 and for insulation fault location systems (IFLS) in accordance with IEC 61557-9:

- temperature range from 0 °C to 35 °C;
- a position of $\pm 90^\circ$ from the reference position for portable measuring equipment;
- 85 % to 110 % of the nominal supply voltage for supply from the distribution systems (if applicable). The values in IEC 60038 shall be applied for a supply from the distribution system;
- the charge condition in accordance with 4.4 shall apply to the battery or batteries/accumulators for measuring equipment with a supply from batteries/accumulators;
- the range of revolutions per minute stated by the manufacturer for measuring equipment with a supply from a hand-driven generator;
- frequency of the supply voltage ± 5 % (if applicable).

NOTE Additional rated operating conditions are stated in other parts of the IEC 61557 series.

4.4 Battery test facility

Measuring equipment with power supplied from dry or rechargeable battery cells shall test and indicate that the state of charge of these batteries will permit measurement within the specification. This may be done automatically as part of the measurement cycle or as a separate function. Where the battery test is a separate function, the test load shall be of the same level as the one appearing during a measurement.

4.5 Safety

Measuring and monitoring equipment shall be in accordance with IEC 61010-1, IEC 61010-2-030, IEC 61010-031, IEC 61010-2-034 and, if applicable, IEC 61010-2-032, and with the following additional requirements.

Overvoltage categories and/or measurement categories are specified in the relevant parts of IEC 61557.

Handheld measuring equipment shall fulfil the requirements for double or reinforced insulation.

The conductive parts of the terminals shall not be accessible and hazardous in connected, partially connected or unconnected conditions.

The protective conductor if used for measuring purposes shall be treated as a live part, except where a different requirement is specified in other parts of IEC 61557.

The terminals shall be designed so that the probe assembly can be connected to the measuring equipment reliably.

4.6 Electromagnetic compatibility

4.6.1 Immunity

For immunity requirements, IEC 61326-1 shall apply. For testing, 6.5 of this document shall apply.

IEC 61326-2-2 shall apply for particular requirements for measuring equipment covered by IEC 61557-2, IEC 61557-3, IEC 61557-4, IEC 61557-5, IEC 61557-6 and IEC 61557-7.

IEC 61326-2-4 shall apply for particular requirements for monitoring equipment covered by IEC 61557-8 and IEC 61557-9.

4.6.2 Emission

For emissions, either class A or class B limits in accordance with IEC 61326-1:2012, 7.2 shall apply.

4.7 Mechanical strength against vibration

In addition to the mechanical resistance tests in accordance with IEC 61010-1, measuring equipment shall successfully pass the following vibration conditions (type test):

- direction: three mutually perpendicular axes;
- amplitude: 1 mm;
- frequency: 25 Hz;
- duration: 20 min.

5 Marking and operating instructions

5.1 General

Marking and operating instructions shall comply with IEC 61010-1, IEC 61010-2-032, IEC 61010-2-030 and, in addition, these instructions shall comply with the requirements specified in the relevant parts of IEC 61557.

5.2 Marking

The measuring equipment shall carry the following marking:

- type of equipment;
- type and current rating of the fuse in the case of exchangeable fuses;
- type of battery/accumulator and polarity of connection in the battery compartment;
- nominal system voltage and, if applicable, the symbol for double insulation in accordance with IEC 61010-1:2010, Table 1, symbol 14;
- manufacturer's name or registered trade mark;
- model number, name or other means to identify the equipment (inside or outside);
- reference to the operating instructions in accordance with IEC 61010-1:2010, Table 1, symbol 14.

Units of the measured quantities and ranges of measurement shall be stated on the enclosure or on the display.

5.3 Operating instructions

5.3.1 Performance requirements

The operating uncertainty, the intrinsic uncertainty and the variations E_1 to E_{15} shall be provided in the operating instructions (with the exception of measuring devices covered by IEC 61557-8 and IEC 61557-9).

5.3.2 Other information

The operating instructions shall contain the following details:

- connection diagrams;
- instructions for measurements;
- brief description of the principle of measurement;
- diagrams or tables showing the maximum permissible indicated values taking into consideration the tolerances stated by the manufacturer (if necessary);
- type of battery/rechargeable cells;
- information on the charging current, charging voltage and duration of charging for rechargeable cells;

- operational lifetime/runtime of the battery/rechargeable cells or the possible number of measurements;
- type of IP protection according to IEC 60529;
- any necessary special guidance notes.

6 Tests

6.1 General

Measuring equipment shall be tested in accordance with the safety standards IEC 61010-1, IEC 61010-2-030, IEC 61010-031, IEC 61010-2-034 and, if applicable, IEC 61010-2-032 and the EMC standards of IEC 61326 (all relevant parts).

All tests shall be carried out under reference conditions unless otherwise specified. The reference conditions are stated in the relevant parts of IEC 61557.

Tolerances are added in the relevant parts of IEC 61557.

6.2 Operating uncertainty

6.2.1 General

The operating uncertainty shall be determined according to 6.2.2 to 6.2.4.

6.2.2 Influence of changing position

The variation E_1 due to changing the position in accordance with 4.2 and 4.3, if applicable, shall be determined for positions $+90^\circ$ or -90° from the reference position stated by the manufacturer (routine test).

6.2.3 Influence of temperature

The variation E_3 shall be determined from the reference temperature at 0°C and 35°C after the device has reached a state of equilibrium (type test).

6.2.4 Influence of the supply voltage

The variation E_2 due to changing the supply voltage shall be determined under the following rated operating conditions (routine test):

- limits in accordance with 4.3 for measuring equipment supplied from distribution systems;
- limits in accordance with 4.4 and 6.3 for measuring equipment supplied from a battery/accumulator;
- limits in accordance with 4.3 for measuring equipment supplied by a hand-driven generator.

6.3 Battery test facility

The lower and upper limits for the battery voltage to which the battery test facility in accordance with 4.4 is set, shall be determined by means of an external voltage source. These values shall be used during the test in accordance with 6.2.4 as limits for variation E_2 by changing the supply voltage (routine test).

6.4 Safety tests

Compliance with 4.5 shall be tested (type test).

6.5 EMC tests

For the electromagnetic radio frequency field (RF) and conducted RF the following requirements apply:

- the auxiliary circuits of the measuring equipment shall be energised with the rated voltage;
- the measuring equipment shall be tested in its operating conditions.

6.6 Mechanical requirements

The test shall be performed in accordance with 4.7 (type test).

The tests are deemed to have been passed successfully when no parts have become loose or bent and the connecting leads are not damaged. After the process, the measuring equipment shall comply with the requirements for intrinsic uncertainty of the equipment (type test), if applicable.

6.7 Marking and operating instructions

The marking and the operating instructions shall be confirmed by visual inspection (type test).

The marking shall be inspected during type test and routine test.

6.8 Records

Compliance with the tests in Clause 6 shall be recorded.

IECNORM.COM : Click to view the full PDF of IEC 61557-1:2019+AMD1:2024 CSV