



IEEE

IEC 61671-4

Edition 1.0 2016-04

INTERNATIONAL IEEE Std 1671.4™ STANDARD

Standard for automatic test markup language (ATML) test configuration

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2014 IEEE

All rights reserved. IEEE is a registered trademark in the U.S. Patent & Trademark Office, owned by the Institute of Electrical and Electronics Engineers, Inc. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the IEC Central Office. Any questions about IEEE copyright should be addressed to the IEEE. Enquiries about obtaining additional rights to this publication and other information requests should be addressed to the IEC or your local IEC member National Committee.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue
New York, NY 10016-5997
United States of America
stds.info@ieee.org
www.ieee.org

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016



IEEE

IEC 61671-4

Edition 1.0 2016-04

INTERNATIONAL IEEE Std 1671.4™ STANDARD

Standard for automatic test markup language (ATML) test configuration

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.040; 35.060

ISBN 978-2-8322-3266-8

Warning! Make sure that you obtained this publication from an authorized distributor.

Contents

1. Overview	1
1.1 General	1
1.2 Application of this document's annexes	2
1.3 Scope	2
1.4 Application	2
1.5 Conventions used within this document	3
2. Normative references	4
3. Definitions, acronyms, and abbreviations	4
3.1 Definitions	4
3.2 Acronyms and abbreviations	5
4. TestConfiguration schema	7
4.1 Background	7
4.2 Test configuration.xsd	7
5. TestConfiguration instance schema	32
6. ATML TestConfiguration XML schema names and locations	32
7. ATML XML schema extensibility	34
8. Conformance	34
Annex A (informative) IEEE download web-site material associated with this document	35
Annex B (informative) Test Configuration XML element mappings to MTPSI card fields	36
Annex C (informative) Examples	41
Annex D (informative) Bibliography	44
Annex E (informative) List of IEEE Participants	45

STANDARD FOR AUTOMATIC TEST MARKUP LANGUAGE (ATML) INSTRUMENT DESCRIPTION

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation.

IEEE Standards documents are developed within IEEE Societies and Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. IEEE develops its standards through a consensus development process, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of IEEE and serve without compensation. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards. Use of IEEE Standards documents is wholly voluntary. IEEE documents are made available for use subject to important notices and legal disclaimers (see <http://standards.ieee.org/IPR/disclaimers.html> for more information).

IEC collaborates closely with IEEE in accordance with conditions determined by agreement between the two organizations.

- 2) The formal decisions of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees. The formal decisions of IEEE on technical matters, once consensus within IEEE Societies and Standards Coordinating Committees has been reached, is determined by a balanced ballot of materially interested parties who indicate interest in reviewing the proposed standard. Final approval of the IEEE standards document is given by the IEEE Standards Association (IEEE-SA) Standards Board.
- 3) IEC/IEEE Publications have the form of recommendations for international use and are accepted by IEC National Committees/IEEE Societies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC/IEEE Publications is accurate, IEC or IEEE cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications (including IEC/IEEE Publications) transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC/IEEE Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC and IEEE do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC and IEEE are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or IEEE or their directors, employees, servants or agents including individual experts and members of technical committees and IEC National Committees, or volunteers of IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board, for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC/IEEE Publication or any other IEC or IEEE Publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that implementation of this IEC/IEEE Publication may require use of material covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. IEC or IEEE shall not be held responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patent Claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

IEC 61671-4:2016
IEEE Std 1671.4-2014

International Standard IEC 61671-4/IEEE Std 1671.4-2014 has been processed through IEC technical committee 91: Electronics assembly technology, under the IEC/IEEE Dual Logo Agreement.

The text of this standard is based on the following documents:

IEEE Std	FDIS	Report on voting
IEEE Std 1671.4-2014	91/1315/FDIS	91/1339/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The IEC Technical Committee and IEEE Technical Committee have decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

IEEE Standard for Automatic Test Markup Language (ATML) Test Configuration

Sponsor

**IEEE Standards Coordinating Committee 20 on
Test and Diagnosis for Electronic Systems**

Approved 27 March 2014

IEEE-SA Standards Board

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

Abstract: An exchange format is specified in this standard, using extensible markup language (XML), for identifying the test configuration used to test for and diagnose faults of a unit under test (UUT) on an automatic test system (ATS).

Keywords: ATML instance document, automatic test equipment (ATE), Automatic Test Markup Language (ATML), automatic test system (ATS), IEEE 1671.4™, Master Configuration Control Document (MCCD), Master Test Program Set Index (MTPSI), station configuration file, test configuration, XML schema

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

OpenVMS is a registered trademark of Hewlett-Packard Development Company, L.P.

UNIX is a registered trademark of The Open Group.

W3C is a trademark or registered trademark of the W3C®, (registered in numerous countries) World Wide Web Consortium. Marks of W3C are registered and held by its host institutions: Massachusetts Institute of Technology (MIT), European Research Consortium for Information and Mathematics (ERCIM), and Keio University, Japan.

Windows is a registered trademark of Microsoft Corporation.

IEEE Introduction

This introduction is not part of IEEE Std 1671.4™-2014, IEEE Standard for Automatic Test Markup Language (ATML) Test Configuration.

This child, or “dot” standard, also known as an automatic test markup language (ATML) component standard, provides for the definition of the *TestConfiguration* XML schema and contains references to an example. The XML schema and example that accompany this standard provide for the identification of all of the hardware, software, and documentation that is required to test and diagnose a unit under test (UUT) on an automatic test system (ATS).

ATML’s XML schemas define the basic information required within any test application and provide a vehicle for formally defining the test environment by defining a class hierarchy corresponding to these basic information entities and providing several methods within each to enable basic operations to be performed on these entities. ATML component standards within the ATML framework define the particular requirements within the test environment.

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://ieeexplore.ieee.org/xpl/standards.jsp> or contact IEEE at the address listed previously. For more information about the IEEE-SA or IEEE's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Standard for Automatic Test Markup Language (ATML) Test Configuration

IMPORTANT NOTICE: IEEE Standards documents are not intended to ensure safety, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading "Important Notice" or "Important Notices and Disclaimers Concerning IEEE Documents." They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

1. Overview

1.1 General

Automatic test markup language (ATML) is a collection of IEEE standards and associated eXtensible markup language (XML) schemas that allow automatic test system (ATS) and test information to be exchanged in a common format adhering to the XML standard¹.

The ATML framework and the ATML family of standards have been developed and are maintained under the guidance of the Test Information Integration (TII) Subcommittee of IEEE Standards Coordinating Committee 20 (SCC20) to serve as a comprehensive environment for integrating design data, test strategies, test requirements, test procedures, test results management, and test system implementations, while allowing test program (TP), test asset interoperability, and unit under test (UUT) data to be interchanged between heterogeneous systems.

This standard (as well as the XML schema and XML instance document example² that accompany this standard) is intended to be used in documenting the test configuration utilized during the testing of a

¹ This information is given for the convenience of users of this standard and does not constitute an endorsement by the IEEE of this consortium standard. Equivalent standards or products may be used if they can be shown to lead to the same results.

² The XML schemas and examples that accompany this standard are available at the locations defined in Clause 6.

particular UUT. This information includes information regarding the tested UUT, the test equipment, and the test program set (TPS).

1.2 Application of this document's annexes

This document includes three annexes.

Annex A, Annex B, and Annex C are informative, thus they are provided strictly as information, for users, implementers, and maintainers of this document.

1.3 Scope

This standard defines an exchange format, utilizing XML, for identifying all of the hardware, software, and documentation that is needed to test and diagnose a UUT on an ATS.

1.4 Application

This standard provides for the identification of all necessary assets required to test a particular UUT. Assets consist of, but are not limited to, test stations, instrumentation, interface cables, interface devices, ancillary equipment, test station software, test program software, and test program documentation. This collection of assets is the test configuration for that particular UUT.

Identifying a test configuration provides for the generation of a single “document” (also sometimes referred to as an “index card”) in which every asset that is required to be in place prior to testing the UUT is recorded. This document is readable by both humans and machines; humans may use the document to identify and assemble the necessary assets, whereas the machine may use the document to verify that the necessary assets are in place.

The information contained in the XML documents conforming to this standard will be useful to the following:

- a) TPS developers
- b) TPS maintainers
- c) Automatic test equipment (ATE) system developers
- d) ATE system maintainers
- e) Developers of ATML-based tools and systems
- f) UUT developers and maintainers

1.5 Conventions used within this document

1.5.1 General

In accordance with *IEEE Standards Style Manual* [B9]³, any schema examples will be shown in `Courier` font. In cases where instance document examples are necessary to clearly depict the use of a schema type or element, such examples will also be shown in `Courier` font. When the characters “...” appear in an example, it indicates that the example component is incomplete.

All simple types, complex types, attribute groups, and elements will be listed. Explanatory information will be provided along with examples if additional clarification is needed. The explanatory information will include information on the intended use of the elements and/or attributes where the name of the entity does not clearly indicate its intended use. Only attributes that extend the source type will be listed for elements derived from another source type (e.g., an abstract type). Details regarding the base type will be listed along with the base type.

When referring an attribute of an XML element, the convention of *[element]@[attribute]* will be used. In cases where an attribute name is referred to with no associated element, the attribute name will be enclosed in single quotes. Element and type names will always be set in italics when appearing in text.

This standard uses the vocabulary and definitions of relevant IEEE standards. In case of conflict of definitions, except for those portions quoted from standards, the following precedence shall be observed: 1) Clause 3 and 2) The *IEEE Standards Dictionary Online* [B8].

1.5.2 Precedence

The *TestConfiguration* schema (*TestConfiguration.xsd*) element, child element, and annotation information shall take precedence over the descriptive information contained in Clause 4.

1.5.3 Word usage

In accordance with *the IEEE Standards Style Manual* [B9], the word *shall* is used to indicate mandatory requirements strictly to be followed in order to conform to the standard and from which no deviation is permitted (*shall* equals *is required to*). The use of the word *must* is used only to describe unavoidable situations. The use of the word *will* is only used in statements of fact.

The word *should* is used to indicate that among several possibilities one is recommended as particularly suitable, without mentioning or excluding others (*should* equals *is recommended that*).

The word *may* is used to indicate a course of action permissible within the limits of the standard (*may* equals *is permitted to*).

The word *can* is used for statements of possibility and capability (*can* equals *is able to*).

³ The numbers in brackets correspond to those of the bibliography in Annex C.

2. Normative references

The following referenced document is indispensable for the application of this document (i.e., it must be understood and used, so each referenced document is cited in text and its relationship to this document is explained). Only the cited edition applies.

IEEE Std 1671TM-2010, IEEE Standard for Automatic Test Equipment Markup Language (ATML) for Exchanging Automatic Test Equipment and Test Information via XML.^{4,5}

3. Definitions, acronyms, and abbreviations

3.1 Definitions

For the purposes of this document, the following terms and definitions apply. The *IEEE Standards Dictionary Online* [B8]⁶ should be consulted for terms not defined in this clause. In the event a term is explicitly redefined, or defined in more detail, in an ATML component standard, the component standards definition shall be normative for that ATML component standard.

automatic test equipment (ATE): An integrated assembly of stimulus, measurement, and switching components under computer-control that is capable of processing software routines designed specifically to test a particular item or group of items. ATE software includes operating system software, test executive software, and instrument control software.⁷

automatic test system (ATS): A fully-integrated, computer-controlled suite of electronic test equipment hardware, software, documentation, and ancillary items designed to verify the functionality of unit under test (UUT) assemblies at any level of maintenance. An ATS combines the following three elements: ATE, TPS, and the test environment.⁷

child or “dot” standard: An IEEE standard that is identified by a number (e.g., 1671), a dot, then a number. (e.g. dot 1 refers to 1671.1; dot 2 refers to 1671.2, etc.)

digital rights management: Access control technologies that may be utilized to impose limitations on the usage of digital content material that were not foreseen by the content provider. Within the context of automatic test markup language (ATML), the digital content materials are the associated XML schemas and the content provider is IEEE.

eXtensible Markup Language (XML) style sheet: A description of how an XML document is to be presented on a computer screen or in print.

system identifier: A reference intended to identify an element of an automatic test system (ATS) (e.g., the system identifier DMM identifies a digital multi-meter in an ATS)

⁴ IEEE publications are available from the Institute of Electrical and Electronics Engineers, 445 Hoes Lane, Piscataway, NJ 08855, USA (<http://standards.ieee.org/>).

⁵ The standards or products referred to in this clause are trademarks of the Institute of Electrical and Electronics Engineers, Inc.

⁶ *IEEE Standards Dictionary Online* subscription is available at:
http://www.ieee.org/portal/innovate/products/standard/standards_dictionary.html

⁷ Adapted from DoD ATS Selection Process Guide. This document is available at :<http://www.acq.osd.mil/ats/>

test executive: A software application which controls the execution environment of unit under test (UUT) programs. Typical functions include (but are not limited to), the verification of hardware/software availability, interpretation and execution of operators commands, the initialization and control of tests, providing common subprograms for test software usage, providing debug and simulation capabilities, the logging of test data, and the allocation of virtual resources.

test program set (TPS): automatic test equipment (ATE), interface hardware, test program software, documentation, and other ancillary equipment that connects the unit under test (UUT) to the ATE. The TPS software performs fault isolation and diagnostics, and can certify a UUT as ready for issue. Ancillary hardware consists of probes, holding fixtures and peculiar instrumentation.⁷

3.2 Acronyms and abbreviations

AHAF	air hose attachment fixture
ARB	arbitrary waveform generator
ATE	automatic test equipment
ATML	Automatic Test Markup Language
ATS	automatic test system
CA	cable
CFA	cognizant field activity
CHG #	change number
CSET	cable set
DCPS	direct current power supply
DMM	digital multi-meter
ETE	end to end
FSCM	federal supply code for manufacturers
FST	fleet support team
GPO	Government Printing Office
HA	hose assembly
HF	holding fixture
ID	interface device
ITP	internal test program
ITP/SW	internal test program software
MCCD	master configuration control document

MIM	maintenance instruction manual
MTPSI	master test program set index
NAMP	Naval Aviation Maintenance Program
NOMEN	nomenclature
ODSK	optical disk
OFP	operational flight program
OFP/SW	operational flight program software
OS	operating system
OTPH	operational test program hardware
OTPI	operational test program instruction
OTPM	operational test program media
PG	page
PIN	product identification number
PLT	pallet
P/N	part number
PNL	panel
POC	point of contact
PROG	program
REFDES	reference designator
RFI	ready for issue
R/T	run-time
SCC20	Standards Coordinating Committee 20
SE	support equipment
SW NO	software number
T/E	test executive
TEC	type equipment code
TECPUB	technical publication
TF	test fixture

TII	Test Information Integration
TM	technical manual
TP	test program
TPI	test program instruction
TPM	test program medium
TPS	test program set
TWP	temporary workaround procedure
UIC	unit identification code
UNK	unknown
UUT	unit under test
W3C® ⁸	World Wide Web Consortium
WUC	work unit code
XML	eXtensible Markup Language

4. TestConfiguration schema

4.1 Background

Should the reader not have a general understanding of XML schemas, there are several XML schema tutorials available for reference. The XML Schema Part 0: Primer [B13], the XML Schema Tutorial [B14], and the XML Schema Tutorial, Part 1 [B15] are three tutorials available on the World Wide Web. These tutorials will help with the understanding of the contents of the TestConfiguration.xsd schema defined in Clause 4.

In addition to the conventions specified in 1.5.1, the prefix “c:” represents that the element is defined by the Common.xsd XML schema defined in IEEE Std 1671-2010⁹. The IEEE Std 1671-2010 schema is inherited by the TestConfiguration.xsd XML schema.

4.2 Test configuration.xsd

attributeFormDefault: **unqualified**
elementFormDefault: **qualified**
targetNamespace: **urn:IEEE-1671.4:2014:TestConfiguration**

⁸ W3C is a trademark or registered trademark of the W3C®, (registered in numerous countries) World Wide Web Consortium. Marks of W3C are registered and held by its host institutions: Massachusetts Institute of Technology (MIT), European Research Consortium for Information and Mathematics (ERCIM), and Keio University, Japan.

⁹ Information on references can be found in Clause 2.

4.2.1 element TestConfiguration

type	extension of tc:TestConfiguration					
properties	content complex					
children	tc:AncillaryEquipment tc:Extension tc:FleetSupportTeamLocation tc:SupplementalData tc:TestEquipmentAssets tc:TestProgram tc:TPSHardware tc:UnitUnderTest					
attributes	Name	Type	Use	Default	Fixed	Annotation
	changeDate	xs:date	optional			documentation The date that changes were made to the Test Configuration XML instance document
	changeNumber	xs:integer	optional	0		documentation The change number of the Test Configuration XML instance document. This should initially be 0, each time the XML instance document is changed this should be incremented by 1.
	<u>title</u>	c:NonBlankString	optional			documentation The title of the Test Configuration XML instance document
	<u>uuid</u>	c:Uuid	required			documentation A universal unique identifier for the element containing this attribute.
	<u>classified</u>	xs:boolean	optional			documentation An indication that the element is or is not classified.
	<u>securityClassification</u>	c:NonBlankString	optional			documentation A use-case determined string declaring the security classification level of the element containing this attribute and the subordinate branch of the XML document.

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

annotation	<p>documentation</p> <p>TestConfiguration schema encompasses all information necessary to identify the hardware, software and documentation that may be necessary in order to test and diagnose a Unit Under Test (UUT) on a test station. A given UUT may have multiple TestConfiguration XML instance documents. The attributes "changeNumber" should initially be 0, and should be incremented by 1 each time the XML instance document is changed, "changeDate" should reflect the date the XML instance document was changed. The "title" is equivalent to the US Navy Master Test Program Set Index (MTPSI) deck number less the version number, or the title of the UK Master Configuration Control Document (MCCD), and represents the title of the TestConfiguration XML instance document.</p>
------------	--

4.2.2 complexType AncillaryHardwareAssets

children	tc:AncillaryHardwareItem
used by	element TestConfiguration/AncillaryEquipment
annotation	<p>documentation</p> <p>Identifies each of the ancillary hardware items (e.g., assets) required to test the UUT. Each ancillary hardware item (excluding common tools) should include a description, the quantity, and the part number. This shall be repeated for each ancillary hardware item.</p>

4.2.3 element AncillaryHardwareAssets/AncillaryHardwareItem

properties	<p>minOcc 1</p> <p>maxOcc unbounded</p> <p>content complex</p>																								
attributes	<table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Use</th> <th>Default</th> <th>Fixed</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>name</td> <td>c:NonBlankString</td> <td>required</td> <td></td> <td></td> <td>documentation Description of the equipment Example: "Oscilloscope" and "Manual Lift"</td> </tr> <tr> <td>partNumber</td> <td>c:NonBlankString</td> <td>required</td> <td></td> <td></td> <td>documentation The part number of the equipment. If more than one part number exists the verbiage "or equivalent" may be appended (Example: ACME1183A or equivalent)</td> </tr> <tr> <td>quantity</td> <td>xs:integer</td> <td>required</td> <td></td> <td></td> <td>documentation How many of this item is required to test the UUT.</td> </tr> </tbody> </table>	Name	Type	Use	Default	Fixed	Annotation	name	c:NonBlankString	required			documentation Description of the equipment Example: "Oscilloscope" and "Manual Lift"	partNumber	c:NonBlankString	required			documentation The part number of the equipment. If more than one part number exists the verbiage "or equivalent" may be appended (Example: ACME1183A or equivalent)	quantity	xs:integer	required			documentation How many of this item is required to test the UUT.
Name	Type	Use	Default	Fixed	Annotation																				
name	c:NonBlankString	required			documentation Description of the equipment Example: "Oscilloscope" and "Manual Lift"																				
partNumber	c:NonBlankString	required			documentation The part number of the equipment. If more than one part number exists the verbiage "or equivalent" may be appended (Example: ACME1183A or equivalent)																				
quantity	xs:integer	required			documentation How many of this item is required to test the UUT.																				
annotation	<p>documentation</p> <p>Identifies a particular ancillary hardware item (e.g., asset) required to test the UUT. The "part number" represents the P/N of the asset, the "quantity" should indicate how many of the assets are required (the default is 1), and the "name" should be a descriptive name of the asset. This shall be repeated for each ancillary hardware item.</p>																								

4.2.4 complexType ATEAssets

children	tc:SystemIdentifier
used by	element TestConfiguration/TestEquipmentAssets
annotation	documentation Identifies the ATE system identifier (e.g., DMM, ARB, etc.) for each of the station assets that will be used by the TPS.

4.2.5 element ATEAssets/SystemIdentifier

properties	minOcc 1 maxOcc unbounded content complex												
attributes	<table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Use</th> <th>Default</th> <th>Fixed</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>systemID</td> <td>c:NonBlankString</td> <td>required</td> <td></td> <td></td> <td>documentation The system identifier for the particular asset (example: DMM)</td> </tr> </tbody> </table>	Name	Type	Use	Default	Fixed	Annotation	systemID	c:NonBlankString	required			documentation The system identifier for the particular asset (example: DMM)
Name	Type	Use	Default	Fixed	Annotation								
systemID	c:NonBlankString	required			documentation The system identifier for the particular asset (example: DMM)								
annotation	documentation Identifies a particular ATE system identifier (DMM, etc.) representative of the ATE station asset. System identifier acronyms are typically unique to each ATE, thus each system identifier acronym should match that of the particular ATE that will be used to test the UUT.												

4.2.6 complexType ATEVersion

children	tc:ATEConfiguration tc:ATEFamily tc:MinimumConfiguration
used by	elements ConfigurationTestProgramElements/EndToEndRunTimes/EndToEndRunTime/ATEVersion ConfigurationTestProgramElements/ATEVersions
annotation	documentation Identifies the ATE versions known to run the TPS

4.2.7 element ATEVersion/ATEConfiguration

type	c:NonBlankString									
properties	minOcc 0 maxOcc unbounded content simple									
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>whiteSpace</td> <td>replace</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		whiteSpace	replace	
Kind	Value	Annotation								
minLength	1									
whiteSpace	replace									
annotation	documentation The configuration of the ATE family known to run the TPS. For example, "CASS Block III" or "RTCASS".									

4.2.8 element ATEVersion/ATEFamily

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The ATE family known to run the TPS. For example, "CASS" or "IFTE".

4.2.9 element ATEVersion/MinimumConfiguration

type	c:NonBlankString
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The minimum station configuration required to run the TPS. For example, "CASS HPDTS" would indicate that the TPS can only run on a CASS HPDTS configured station.

4.2.10 complexType ConfigurationSoftwareReference

used by	elements ConfigurationUUTElements/SoftwarePrograms/InternalTestProgram ConfigurationUUTElements/SoftwarePrograms/OperationalFlightProgram ConfigurationUUTElements/SoftwarePrograms/SoftwareNumber
attributes	Name Type Use Default Fixed Annotation partNumber c:NonBlankString optional documentation The part number of the software. version c:NonBlankString optional documentation The version number of the software
annotation	documentation Base type for all TestConfiguration software elements.

4.2.11 complexType ConfigurationTestProgramElements

children	tc:AdapterRequired tc:ATERunTimeSoftware tc:ATEVersions tc:EndToEndRunTimes tc:Extension tc:OperationalDataNote tc:OperationalTestProgram tc:RunTimeClassifications tc:TemporaryWorkaroundProcedures tc:TestDiagram tc:TestProgramSoftware tc:TestProgramType tc:FederalSupplyCode tc:UnitIdentificationCode
used by	element TestConfiguration/TestProgram/TestProgramElements
annotation	documentation Base type for Test Configuration elements related to the test program such as run-time, security classification, what operational software the test program will execute with, etc.

4.2.12 element ConfigurationTestProgramElements/AdapterRequired

type	xs:boolean
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Identifies if an interface device (ID) (also known as an adapter or test adapter) is required. The Boolean "false" indicates that no adapter is required. The Boolean "true" indicates that an ID is required. Should this element not be specified, it shall be assumed that no ID is required.

4.2.13 element ConfigurationTestProgramElements/ATERunTimeSoftware

properties	content complex
children	tc:OperatingSystems tc:RunTimeApplicationSoftware
annotation	documentation The ATE Software responsible for the execution of the TPS (operating system and test executive).

4.2.14 element ConfigurationTestProgramElements/ATERunTimeSoftware/OperatingSystems

properties	minOcc 1 maxOcc unbounded content complex																		
children	tc:OperatingSystem																		
attributes	<table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Use</th> <th>Default</th> <th>Fixed</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>revision</td> <td>c:NonBlankString</td> <td>optional</td> <td></td> <td></td> <td>documentation The revision or service pack number of the operating system. Example "SP2" (for service pack 2)</td> </tr> <tr> <td>version</td> <td>c:NonBlankString</td> <td>optional</td> <td></td> <td></td> <td>documentation The version number of the operating system. Example "7" (for Windows 7)</td> </tr> </tbody> </table>	Name	Type	Use	Default	Fixed	Annotation	revision	c:NonBlankString	optional			documentation The revision or service pack number of the operating system. Example "SP2" (for service pack 2)	version	c:NonBlankString	optional			documentation The version number of the operating system. Example "7" (for Windows 7)
Name	Type	Use	Default	Fixed	Annotation														
revision	c:NonBlankString	optional			documentation The revision or service pack number of the operating system. Example "SP2" (for service pack 2)														
version	c:NonBlankString	optional			documentation The version number of the operating system. Example "7" (for Windows 7)														
annotation	documentation The operating system (OS) used during the last update of the test program. If more than on version of OS applies (due to multiple configurations of stations e.g., ATE Version 1, ATE Version 2), than all applicable OS's may be listed. Examples are 'UNIX ¹⁰ ', 'Windows 7 SP2 ¹¹ ' and "Open VMS 6.2 ¹² "																		

¹⁰ UNIX is a registered trademark of The Open Group.

¹¹ Windows is a registered trademark of Microsoft Corporation.

¹² OpenVMS is a registered trademark of Hewlett-Packard Development Company, L.P.

4.2.15 element
ConfigurationTestProgramElements/ATERunTimeSoftware/OperatingSystems/OperatingSystem

type	c:NonBlankString									
properties	content simple									
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>whiteSpace</td> <td>replace</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		whiteSpace	replace	
Kind	Value	Annotation								
minLength	1									
whiteSpace	replace									
annotation	documentation Identification of the operating system. Examples are "Windows" and "UNIX"									

4.2.16 element
ConfigurationTestProgramElements/ATERunTimeSoftware/RunTimeApplicationSoftware

properties	<table border="1"> <tr> <td>minOcc</td> <td>1</td> </tr> <tr> <td>maxOcc</td> <td>unbounded</td> </tr> <tr> <td>content</td> <td>complex</td> </tr> </table>	minOcc	1	maxOcc	unbounded	content	complex												
minOcc	1																		
maxOcc	unbounded																		
content	complex																		
children	tc:ApplicationSoftware																		
attributes	<table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Use</th> <th>Default</th> <th>Fixed</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>relativeSpeed</td> <td>xs:integer</td> <td></td> <td>0</td> <td></td> <td>documentation An indication of the relative speed of the run-time application (e.g., test executive) that the TPS has been verified with. The integer representations are as follows: No speed indication = 0, The TPS has been verified to run on the target ATE test execution environment = 1, The TPS has been verified to run only on earlier (typically slower) test execution environments = 3</td> </tr> <tr> <td>version</td> <td>c:NonBlankString</td> <td></td> <td></td> <td></td> <td>documentation The version number of the application software</td> </tr> </tbody> </table>	Name	Type	Use	Default	Fixed	Annotation	relativeSpeed	xs:integer		0		documentation An indication of the relative speed of the run-time application (e.g., test executive) that the TPS has been verified with. The integer representations are as follows: No speed indication = 0, The TPS has been verified to run on the target ATE test execution environment = 1, The TPS has been verified to run only on earlier (typically slower) test execution environments = 3	version	c:NonBlankString				documentation The version number of the application software
Name	Type	Use	Default	Fixed	Annotation														
relativeSpeed	xs:integer		0		documentation An indication of the relative speed of the run-time application (e.g., test executive) that the TPS has been verified with. The integer representations are as follows: No speed indication = 0, The TPS has been verified to run on the target ATE test execution environment = 1, The TPS has been verified to run only on earlier (typically slower) test execution environments = 3														
version	c:NonBlankString				documentation The version number of the application software														
annotation	documentation The application software program and version used during the last update of the test program. If more than one version of application software applies (due to multiple configurations of stations e.g., ATE Version 1, ATE Version 2), then all applicable application software programs may be listed.																		

**4.2.17 element
 ConfigurationTestProgramElements/ATERunTimeSoftware/RunTimeApplicationSoftware/A
 pplicationSoftware**

type	c:NonBlankString		
properties	content	simple	
facets	Kind	Value	Annotation
	minLength	1	
	whiteSpace	replace	
annotation	documentation Identification of the application software program. Examples are "VECP-1-008" and "LabWindows"		

4.2.18 element ConfigurationTestProgramElements/ATEVersions

type	tc:ATEVersion
properties	content complex
children	tc:ATEConfiguration tc:ATEFamily tc:MinimumConfiguration
annotation	documentation The versions of ATE known to run the TPS.

4.2.19 element ConfigurationTestProgramElements/EndToEndRunTimes

properties	minOcc 0 maxOcc 1 content complex
children	tc:EndToEndRunTime
annotation	documentation The time required for an experienced operator, beginning at the start menu to run a UUT to the end of testing (e.g., the RFI message appears). TPS directed test setup time is typically included, but tear down time typically is not included. If the ETE run time is unknown, 'UNK' should be identified.

**4.2.20 element
 ConfigurationTestProgramElements/EndToEndRunTimes/EndToEndRunTime**

properties	minOcc 1 maxOcc unbounded content complex
children	tc:RunTime
annotation	documentation The end-to-end (ETE) run time(s). If the TPS can be executed on more than one ATE version, an ETE run time should be included for each ATE version.

**4.2.21 element ConfigurationTestProgramElements/
EndToEndRunTimes/EndToEndRunTime/RunTime**

type	xs:time
properties	content simple
annotation	documentation The end-to-end (ETE) run time.

**4.2.22 element
ConfigurationTestProgramElements/EndToEndRunTimes/EndToEndRunTime/ATEVersion**

type	tc:ATEVersion
properties	minOcc 0 maxOcc 1 content complex
children	tc:ATEConfiguration tc:ATEFamily tc:MinimumConfiguration
annotation	documentation The ATE Version associated with this specific end-to-end run time

4.2.23 element ConfigurationTestProgramElements/Extension

type	c:Extension
properties	minOcc 0 maxOcc 1 content complex
annotation	documentation The Extension type shall be used only as the base type of extension elements in XML schema. Such elements are provided to permit implementers to extend a XML schema as required to meet the unique needs of their use case. Use follows the W3C standard XML extension mechanism.

4.2.24 element ConfigurationTestProgramElements/OperationalDataNote

type	c:Document					
properties	minOcc	0	maxOcc	1	content	complex
children	c:URL c:Text c:Extension					
attributes	Name	Type	Use	Default	Fixed	Annotation
	uuid	c:Uuid	required			documentation The universal unique identifier for the document.
	name	c:NonBlankString	required			documentation A descriptive or common name for the document
	controlNumber	c:NonBlankString	optional			documentation A unique identifier for the document.
	version	c:NonBlankString	optional			documentation The version identification of the document.
annotation	documentation Miscellaneous information about running the TPS.					

4.2.25 element ConfigurationTestProgramElements/OperationalTestProgram

properties	minOcc	0	maxOcc	1	content	complex
children	tc:OTPNumber tc:OTPMNumber					
annotation	documentation Identification of the operational test program (OTP) instructions and media.					

4.2.26 element ConfigurationTestProgramElements/OperationalTestProgram/OTPNumber

type	c:NonBlankString					
properties	content	simple				
facets	Kind	Value	Annotation			
	minLength	1				
	whiteSpace	replace				
annotation	documentation The operational test program instruction (OTPI) number.					

4.2.27 element**ConfigurationTestProgramElements/OperationalTestProgram/OTPMNumber**

type	c:NonBlankString									
properties	content simple									
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>whiteSpace</td> <td>replace</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		whiteSpace	replace	
Kind	Value	Annotation								
minLength	1									
whiteSpace	replace									
annotation	documentation The operational test program media (OTPM) identification number.									

4.2.28 element ConfigurationTestProgramElements/RunTimeClassifications

properties	<table border="1"> <tbody> <tr> <td>minOcc</td> <td>0</td> </tr> <tr> <td>maxOcc</td> <td>1</td> </tr> <tr> <td>content</td> <td>complex</td> </tr> </tbody> </table>	minOcc	0	maxOcc	1	content	complex
minOcc	0						
maxOcc	1						
content	complex						
children	tc:RunTimeClassification						
annotation	documentation The run-time classification of the TPS.						

4.2.29 element**ConfigurationTestProgramElements/RunTimeClassifications/RunTimeClassification**

type	tc:ClassificationCode															
properties	content simple															
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>enumeration</td> <td>U</td> <td></td> </tr> <tr> <td>enumeration</td> <td>C</td> <td></td> </tr> <tr> <td>enumeration</td> <td>S</td> <td></td> </tr> <tr> <td>enumeration</td> <td>TS</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	enumeration	U		enumeration	C		enumeration	S		enumeration	TS	
Kind	Value	Annotation														
enumeration	U															
enumeration	C															
enumeration	S															
enumeration	TS															
annotation	documentation Either (U) Unclassified, (C) Confidential, (S) Secret or (TS) Top Secret. Should this not be identified, it should be assumed that the TPS is (U) Unclassified.															

4.2.30 element ConfigurationTestProgramElements/TemporaryWorkaroundProcedures

properties	<table border="1"> <tbody> <tr> <td>minOcc</td> <td>0</td> </tr> <tr> <td>maxOcc</td> <td>1</td> </tr> <tr> <td>content</td> <td>complex</td> </tr> </tbody> </table>	minOcc	0	maxOcc	1	content	complex
minOcc	0						
maxOcc	1						
content	complex						
children	tc:TWPDescription tc:TWPIssueDate tc:TWPNumber						
annotation	documentation The technical workaround procedure (TWP) number, description and issue date of any active TWP against the TPS. TWP's are notification of a workaround for a TPS execution problem. If there are no active TWP's for a particular TPS, this element should not be included.						

4.2.31 element ConfigurationTestProgramElements/TemporaryWorkaroundProcedures/TWPDescription

type	c:NonBlankString									
properties	content simple									
facets	<table border="1"> <tr> <td>Kind</td> <td>Value</td> <td>Annotation</td> </tr> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>whiteSpace</td> <td>replace</td> <td></td> </tr> </table>	Kind	Value	Annotation	minLength	1		whiteSpace	replace	
Kind	Value	Annotation								
minLength	1									
whiteSpace	replace									
annotation	documentation A textual description of the TWP.									

4.2.32 element ConfigurationTestProgramElements/TemporaryWorkaroundProcedures/TWPIssueDate

type	xs:date
properties	content simple
annotation	documentation The date the TWP was issued.

4.2.33 element ConfigurationTestProgramElements/TemporaryWorkaroundProcedures/TWPNumber

type	xs:integer
properties	content simple
annotation	documentation The number of the TWP.

4.2.34 element ConfigurationTestProgramElements/TestDiagram

type	c:NonBlankString									
properties	<table border="1"> <tr> <td>minOcc</td> <td>0</td> </tr> <tr> <td>maxOcc</td> <td>1</td> </tr> <tr> <td>content</td> <td>simple</td> </tr> </table>	minOcc	0	maxOcc	1	content	simple			
minOcc	0									
maxOcc	1									
content	simple									
facets	<table border="1"> <tr> <td>Kind</td> <td>Value</td> <td>Annotation</td> </tr> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>whiteSpace</td> <td>replace</td> <td></td> </tr> </table>	Kind	Value	Annotation	minLength	1		whiteSpace	replace	
Kind	Value	Annotation								
minLength	1									
whiteSpace	replace									
annotation	documentation The test diagram number when the test diagram is not included as part of the test program instructions (TPI), or TPI related material.									

4.2.35 element ConfigurationTestProgramElements/TestProgramSoftware

properties	content complex
children	tc:DirectoryName tc:TestProgramInstruction tc:TestProgramMedium tc:TestProgramName
annotation	documentation Identification of the test program name, location, media, and instructions.

4.2.36 element ConfigurationTestProgramElements/TestProgramSoftware/DirectoryName

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The test program directory name or test program root subdirectory.

4.2.37 element**ConfigurationTestProgramElements/TestProgramSoftware/TestProgramInstruction**

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The test program instruction (TPI) identification number.

4.2.38 element**ConfigurationTestProgramElements/TestProgramSoftware/TestProgramMedium**

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The test program media (TPM) identification number.

4.2.39 element**ConfigurationTestProgramElements/TestProgramSoftware/TestProgramName**

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The name of the test program used to test the UUT.

4.2.40 element ConfigurationTestProgramElements/TestProgramType

type	tc:TestProgramTypes
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration UUT enumeration Self-Test enumeration Calibration
annotation	documentation The distinct type of TPS; either "UUT", "Self-Test", or "Calibration". If the test program type is not identified, it should be assumed that this is a UUT TPS.

4.2.41 element ConfigurationTestProgramElements/FederalSupplyCode

type	c:NonBlankString
properties	content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The commercial industries TPS developers (or maintainers) federal supply code for manufacturers (FSCM).

4.2.42 element ConfigurationTestProgramElements/UnitIdentificationCode

type	c:NonBlankString
properties	content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The US governments TPS developers (or maintainers) unit identification code (UIC).

4.2.43 complexType ConfigurationUUTElements

children	tc:DiagnosticFlowChart tc:Extension tc:Model tc:Nomenclature tc:PartNumber tc:ReferenceDesignator tc:SoftwarePrograms tc:SystemNumber tc:TechnicalManuals tc:TypeEquipmentCode tc:WorkUnitCode
used by	element TestConfiguration/UnitUnderTest/UUTElements
annotation	documentation Base type for Test Configuration elements related to the UUT such as model, nomenclatures (NOMEN), part number, type equipment codes (TEC), work unit codes (WUC), UUT software -operational flight program (OFP), internal test program (ITP), and technical manuals (TM)s.

4.2.44 element ConfigurationUUTElements/DiagnosticFlowChart

type	c:Document					
properties	minOcc	0	maxOcc	unbounded	content	complex
children	c:URL c:Text c:Extension					
attributes	Name	Type	Use	Default	Fixed	Annotation
	uuid	c:Uuid	required			documentation The universal unique identifier for the document.
	name	c:NonBlankString	required			documentation A descriptive or common name for the document
	controlNumber	c:NonBlankString	optional			documentation A unique identifier for the document.
	version	c:NonBlankString	optional			documentation The version identification of the document.
annotation	documentation The diagnostic flow chart for the UUT.					

4.2.45 element ConfigurationUUTElements/Extension

type	c:Extension					
properties	minOcc	0	maxOcc	1	content	complex
annotation	documentation The Extension type shall be used only as the base type of extension elements in XML schema. Such elements are provided to permit implementers to extend a XML schema as required to meet the unique needs of their use case. Use follows the W3C standard XML extension mechanism.					

4.2.46 element ConfigurationUUTElements/Model

type	c:NonBlankString					
properties	minOcc	0	maxOcc	1	content	simple
facets	Kind	Value	Annotation			
	minLength	1				
	whiteSpace	replace				
annotation	documentation The model number of the UUT.					

4.2.47 element ConfigurationUUTElements/Nomenclature

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The name / nomenclature (NOMEN) of the UUT.

4.2.48 element ConfigurationUUTElements/PartNumber

type	c:NonBlankString
properties	content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The part number of the UUT.

4.2.49 element ConfigurationUUTElements/ReferenceDesignator

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The reference designator (REFDES) of the UUT. Example "A10".

4.2.50 element ConfigurationUUTElements/SoftwarePrograms

properties	minOcc 0 maxOcc 1 content complex
children	tc:OperationalFlightProgram tc:InternalTestProgram tc:SoftwareNumber
annotation	documentation The executable software programs loaded into the UUT.

4.2.51 element ConfigurationUUTElements/SoftwarePrograms/OperationalFlightProgram

type	tc:ConfigurationSoftwareReference					
properties	minOcc	0				
	maxOcc	1				
	content	complex				
attributes	Name	Type	Use	Default	Fixed	Annotation
	partNumber	c:NonBlankString	optional			documentation The part number of the software.
	version	c:NonBlankString	optional			documentation The version number of the software.
annotation	documentation The operational flight program (OFP) software (OFP/SW) identification and version number (This may also be known as a "Oper Flight Prog"). This software, when present, typically is required by the UUT to operate within the weapon system.					

4.2.52 element ConfigurationUUTElements/SoftwarePrograms/InternalTestProgram

type	tc:ConfigurationSoftwareReference					
properties	minOcc	0				
	maxOcc	1				
	content	complex				
attributes	Name	Type	Use	Default	Fixed	Annotation
	partNumber	c:NonBlankString	optional			documentation The part number of the software.
	version	c:NonBlankString	optional			documentation The version number of the software.
annotation	documentation The internal test program (ITP) software (ITP/SW) identification and version number. This software when present typically overwrites the OFP for the purposes of testing the UUT.					

4.2.53 element ConfigurationUUTElements/SoftwarePrograms/SoftwareNumber

type	tc:ConfigurationSoftwareReference					
properties	minOcc	0				
	maxOcc	1				
	content	complex				
attributes	Name	Type	Use	Default	Fixed	Annotation
	partNumber	c:NonBlankString	optional			documentation The part number of the software.
	version	c:NonBlankString	optional			documentation The version number of the software.
annotation	documentation The identification and version number for software related to the UUT, similar to the OFP/SW and ITP/SW; but software that is not an OFP or ITP loaded into the UUT.					

4.2.54 element ConfigurationUUTElements/SystemNumber

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The system number of the UUT.

4.2.55 element ConfigurationUUTElements/TechnicalManuals

namespace	urn:IEEE-1671.4:2014:TestConfiguration					
type	c:Document					
properties	minOcc 0 maxOcc unbounded content complex					
children	c:URL c:Text c:Extension					
attributes	Name	Type	Use	Default	Fixed	Annotation
	uuid	c:Uuid	required			documentation The universal unique identifier for the document.
	name	c:NonBlankString	required			documentation A descriptive or common name for the document.
	controlNumber	c:NonBlankString	optional			documentation A unique identifier for the document.
	version	c:NonBlankString	optional			documentation The version identification of the document.
annotation	documentation The name of either the technical manual (TM), technical publication (TECPUB) or maintenance instruction manual (MIM) for the UUT.					

4.2.56 element ConfigurationUUTElements/TypeEquipmentCode

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation The type equipment code (TEC) is an US military alphanumeric code that identifies the end item of equipment on which work is performed. For example, there are sixteen (16) categories of equipment, identified by the first character of the TEC. The first character for an Aircraft is 'A', the first character for a Jet Engine is 'J'. Refer to COMNAVAIRFORINST 4790.2B [B12] for a description of TEC codes.

4.2.57 element ConfigurationUUTElements/UUTDescriptionInstanceFile

type	c:NonBlankString
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	Documentation The name of the UUT Description XML instance file for the UUT.

4.2.58 element ConfigurationUUTElements/WorkUnitCode

type	c:NonBlankString
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 1 whiteSpace replace
annotation	documentation A work unit code (WUC) is a US military code that identifies the system, subsystem, or component; which is the UUT being tested. A UUT may have more than one WUC. Refer to Mil-Std-780G [B11] for a description of WUC's.

4.2.59 complexType TestConfiguration

children	tc:AncillaryEquipment tc:Extension tc:FleetSupportTeamLocation tc:SupplementalData tc:TestEquipmentAssets tc:TestProgram tc:TPSHardware tc:UnitUnderTest
used by	element TestConfiguration
annotation	documentation The Base type for all Test Configuration elements.

4.2.60 element TestConfiguration/AncillaryEquipment

type	tc:AncillaryHardwareAssets
properties	minOcc 0 maxOcc 1 content complex
children	tc:AncillaryHardwareItem
annotation	documentation Collector element for the name/nomenclatures (NOMEN) of each piece of ancillary equipment required by the TPS, but not included with the TPS. Ancillary equipment refers to any support equipment (SE), other than common shop tools. Examples of ancillary equipment are Oscilloscopes, Meg-ohmmeters, Ground Straps, and Lift Devices.

4.2.61 element TestConfiguration/Extension

type	c:Extension
properties	minOcc 0 maxOcc 1 content complex
annotation	documentation The Extension type shall be used only as the base type of extension elements in XML schema. Such elements are provided to permit implementers to extend a XML schema as required to meet the unique needs of their use case. Use follows the W3C standard XML extension mechanism.

4.2.62 element TestConfiguration/FleetSupportTeamLocation

properties	minOcc 0 maxOcc 1 content complex
children	tc:TPSSupport tc:UUTSupport tc:UUT TPSSupport
annotation	documentation The fleet support team (FST) (also referred to as a cognizant field activity or CFA) responsible for the TPS and the UUT. The location(s) should be identified, the POC should not (TPS's may transition, which would create erroneous POC information about the TPS). Either the common UUT/TPS location or the separate UUT/TPS locations should be identified.

4.2.63 element TestConfiguration/FleetSupportTeamLocation/TPSSupport

type	c:ManufacturerData					
properties	content	complex				
children	c:Contacts c:FaxNumber c:MailingAddress c:URL					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	c:NonBlankString	required			documentation A descriptive or common name for the manufacturer.
	cageCode	c:NonBlankString	optional			documentation The commercial and government entity (CAGE) code for the company indicated by the name attribute.
annotation	documentation Identifies the FST activity responsible for the TPS when the UUT is maintained by a separate activity.					

4.2.64 element TestConfiguration/FleetSupportTeamLocation/UUTSupport

type	c:ManufacturerData					
properties	minOcc	0				
	maxOcc	1				
	content	complex				
children	c:Contacts c:FaxNumber c:MailingAddress c:URL					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	c:NonBlankString	required			documentation A descriptive or common name for the manufacturer.
	cageCode	c:NonBlankString	optional			documentation The commercial and government entity (CAGE) code for the company indicated by the name attribute.
annotation	documentation Identifies the FST activity responsible for the UUT when the TPS is maintained by a separate activity.					

4.2.65 element TestConfiguration/FleetSupportTeamLocation/UUTTPSSupport

type	c:ManufacturerData					
properties	content complex					
children	c:Contacts c:FaxNumber c:MailingAddress c:URL					
attributes	Name name	Type c:NonBlankString	Use required	Default	Fixed	Annotation documentation A descriptive or common name for the manufacturer.
	cageCode	c:NonBlankString	optional			documentation The commercial and government entity (CAGE) code for the company indicated by the name attribute.
annotation	documentation Identifies the FST responsible for maintaining both the UUT and TPS in those cases where the FST is the same for both the UUT and the TPS,					

4.2.66 element TestConfiguration/SupplementalData

type	c:Document					
properties	minOcc 0 maxOcc 1 content complex					
children	c:URL c:Text c:Extension					
attributes	Name uuid	Type c:Uuid	Use required	Default	Fixed	Annotation documentation The universal unique identifier for the document.
	name	c:NonBlankString	required			documentation A descriptive or common name for the document
	controlNumber	c:NonBlankString	optional			documentation A unique identifier for the document.
	version	c:NonBlankString	optional			documentation The version identification of the document.
annotation	documentation Identification any additional / supplemental Test Configuration data in a textual format.					

4.2.67 element TestConfiguration/TestEquipmentAssets

type	tc:ATEAssets
properties	content complex
children	tc:SystemIdentifier
annotation	documentation Collector element for the list of ATE assets, represented by their acronyms that will be used during the execution of the TPS to test the UUT. Examples are 'DMM', 'ARB', 'UPCONV' and 'EO'. Should an ATML Test Station XML instance document exist, the acronyms can be derived from that XML instance document.

4.2.68 element TestConfiguration/TestProgram

properties	content complex
children	tc:TestProgramElements
annotation	documentation Collector element for test program and test program developer / maintainer information. This includes such things as the test program classification, directory structures, run-times, instructions, and work around procedures.

4.2.69 element TestConfiguration/TestProgram/TestProgramElements

type	tc:ConfigurationTestProgramElements
properties	minOcc 1 maxOcc unbounded content complex
children	tc:AdapterRequired tc:ATERunTimeSoftware tc:ATEVersions tc:EndToEndRunTimes tc:Extension tc:OperationalDataNote tc:OperationalTestProgram tc:RunTimeClassifications tc:TemporaryWorkaroundProcedures tc:TestDiagram tc:TestProgramSoftware tc:TestProgramType tc:FederalSupplyCode tc:UnitIdentificationCode
annotation	documentation Identifies all elements which have been identified to be related to the test program.

4.2.70 element TestConfiguration/TPSHardware

type	tc:TPSHardwareAssets
properties	content complex
children	tc:TPSHardwareItem
annotation	documentation Collector element for the TPS hardware components (including adapters, interface devices, cables, etc.) required to test the UUT, which are supplied with the TPS. Should an ATML Test Adapter XML instance document exist, the type, P/N, REFDES and quantity should be derived from that XML instance document.

4.2.71 element TestConfiguration/UnitUnderTest

properties	content complex
children	tc:UUTElements
annotation	documentation Collector element for UUT and UUT developer / maintainer information. This includes such things as UUT nomenclatures, OFP's, ITP's, and technical manuals.

4.2.72 element TestConfiguration/UnitUnderTest/UUTElements

type	tc:ConfigurationUUTElements
properties	minOcc 1 maxOcc unbounded content complex
children	tc:DiagnosticFlowChart tc:Extension tc:Model tc:Nomenclature tc:PartNumber tc:ReferenceDesignator tc:SoftwarePrograms tc:SystemNumber tc:TechnicalManuals tc:TypeEquipmentCode tc:WorkUnitCode
annotation	documentation The UUT and UUT developer / maintainer information.

4.2.73 complexType TPSHardwareAssets

children	tc:TPSHardwareItem
used by	element TestConfiguration/TPSHardware
annotation	Documentation Identifies the Type, Part Number, Reference Designator, and Quantity for each piece of "government approved support equipment (SE)" required to test the UUT. This should include a description, reference designation, quantity, and part number of a piece of support equipment (interface devices, cables, adapters, etc). This shall be repeated for each piece of support equipment required to test the UUT. Should a TestAdapter XML instance document exist for the TPS, this information could be derived from that XML instance document.

IECNORM.COM : Click to buy the full PDF of IEC 61671-4:2016

4.2.74 element TPShardwareAssets/TPShardwareItem

properties	minOcc 1 maxOcc unbounded content complex																														
attributes	<table border="1"> <thead> <tr> <th data-bbox="362 359 607 390">Name</th> <th data-bbox="607 359 792 390">Type</th> <th data-bbox="792 359 927 390">Use</th> <th data-bbox="927 359 1052 390">Default</th> <th data-bbox="1052 359 1187 390">Fixed</th> <th data-bbox="1187 359 1385 390">Annotation</th> </tr> </thead> <tbody> <tr> <td data-bbox="362 390 607 842">partNumber</td> <td data-bbox="607 390 792 842">c:NonBlankString</td> <td data-bbox="792 390 927 842">required</td> <td data-bbox="927 390 1052 842"></td> <td data-bbox="1052 390 1187 842"></td> <td data-bbox="1187 390 1385 842"> documentation The part numbers of each piece of government approved support equipment required to test the UUT. This is the hardware components supplied with the TPS (adapters, interface test adapters, cables, etc.). </td> </tr> <tr> <td data-bbox="362 842 607 957">quantity</td> <td data-bbox="607 842 792 957">xs:integer</td> <td data-bbox="792 842 927 957">required</td> <td data-bbox="927 842 1052 957"></td> <td data-bbox="1052 842 1187 957"></td> <td data-bbox="1187 842 1385 957"> documentation The quantity indicates how many assets are required. </td> </tr> <tr> <td data-bbox="362 957 607 1199">referenceDesignator</td> <td data-bbox="607 957 792 1199">c:NonBlankString</td> <td data-bbox="792 957 927 1199">optional</td> <td data-bbox="927 957 1052 1199"></td> <td data-bbox="1052 957 1187 1199"></td> <td data-bbox="1187 957 1385 1199"> documentation For cables and/or shorting adapters, the TPS hardware component's REFDES number (e.g., W201, A10). </td> </tr> <tr> <td data-bbox="362 1199 607 1892">type</td> <td data-bbox="607 1199 792 1892">c:NonBlankString</td> <td data-bbox="792 1199 927 1892">required</td> <td data-bbox="927 1199 1052 1892"></td> <td data-bbox="1052 1199 1187 1892"></td> <td data-bbox="1187 1199 1385 1892"> documentation Type is typically the acronym (example: CA=Cable, CSET=Cable Set, ID=Interface Device, TF=Test Fixture, HF=Holding Fixture, AHAF=Air Hose Attach Fixture, HA=Hose Assembly, ODSK=Optical Disk, PNL=Panel, PLT=Pallet) This is not a complete list as Acronyms can be unique to each TPS </td> </tr> </tbody> </table>	Name	Type	Use	Default	Fixed	Annotation	partNumber	c:NonBlankString	required			documentation The part numbers of each piece of government approved support equipment required to test the UUT. This is the hardware components supplied with the TPS (adapters, interface test adapters, cables, etc.).	quantity	xs:integer	required			documentation The quantity indicates how many assets are required.	referenceDesignator	c:NonBlankString	optional			documentation For cables and/or shorting adapters, the TPS hardware component's REFDES number (e.g., W201, A10).	type	c:NonBlankString	required			documentation Type is typically the acronym (example: CA=Cable, CSET=Cable Set, ID=Interface Device, TF=Test Fixture, HF=Holding Fixture, AHAF=Air Hose Attach Fixture, HA=Hose Assembly, ODSK=Optical Disk, PNL=Panel, PLT=Pallet) This is not a complete list as Acronyms can be unique to each TPS
Name	Type	Use	Default	Fixed	Annotation																										
partNumber	c:NonBlankString	required			documentation The part numbers of each piece of government approved support equipment required to test the UUT. This is the hardware components supplied with the TPS (adapters, interface test adapters, cables, etc.).																										
quantity	xs:integer	required			documentation The quantity indicates how many assets are required.																										
referenceDesignator	c:NonBlankString	optional			documentation For cables and/or shorting adapters, the TPS hardware component's REFDES number (e.g., W201, A10).																										
type	c:NonBlankString	required			documentation Type is typically the acronym (example: CA=Cable, CSET=Cable Set, ID=Interface Device, TF=Test Fixture, HF=Holding Fixture, AHAF=Air Hose Attach Fixture, HA=Hose Assembly, ODSK=Optical Disk, PNL=Panel, PLT=Pallet) This is not a complete list as Acronyms can be unique to each TPS																										

IECNORM.COM : Click to view the full PDF of IEC 61671-4:2016

annotation	documentation Identifies each piece of TPS hardware required to test the UUT.
------------	--

4.2.75 simpleType ClassificationCode

namespace	urn:IEEE-1671.4:2014:TestConfiguration															
type	restriction of xs:string															
properties	base xs:string															
used by	element ConfigurationTestProgramElements/RunTimeClassifications/RunTimeClassification															
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>enumeration</td> <td>U</td> <td></td> </tr> <tr> <td>enumeration</td> <td>C</td> <td></td> </tr> <tr> <td>enumeration</td> <td>S</td> <td></td> </tr> <tr> <td>enumeration</td> <td>TS</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	enumeration	U		enumeration	C		enumeration	S		enumeration	TS	
Kind	Value	Annotation														
enumeration	U															
enumeration	C															
enumeration	S															
enumeration	TS															
annotation	documentation Base type: restriction of xs:string Enumerations: U C S TS This shall be used as the base type for the run-time classifications (either, unclassified, confidential, secret or top secret).															

4.2.76 simpleType TestProgramTypes

namespace	urn:IEEE-1671.4:2014:TestConfiguration												
type	restriction of xs:string												
properties	base xs:string												
used by	element ConfigurationTestProgramElements/TestProgramType												
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>enumeration</td> <td>UUT</td> <td></td> </tr> <tr> <td>enumeration</td> <td>Self-Test</td> <td></td> </tr> <tr> <td>enumeration</td> <td>Calibration</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	enumeration	UUT		enumeration	Self-Test		enumeration	Calibration	
Kind	Value	Annotation											
enumeration	UUT												
enumeration	Self-Test												
enumeration	Calibration												
annotation	documentation Base type: restriction of xs:string Enumerations: UUT Self-Test Calibration This shall be used as the base type for the type of test (either, unit under test, self-test or calibration).												

5. TestConfiguration instance schema

The ATML *TestConfiguration* sub-domain does not include a *TestConfiguration* instance schema.

6. ATML TestConfiguration XML schema names and locations

IEEE provides a download web-site for material published in association with published IEEE Standards, presented in machine friendly format. This material is digital rights management restricted use material. The ATML family of standards utilizes this download web-site to allow easy accessibility to all of the ATML family XML schemas (and in some cases, example XML instance documents). As depicted by

Figure 1, the IEEE download web-site (<http://standards.ieee.org/downloads/>) contains several folders, each folder labeled by an associated IEEE standards number (e.g., IEEE 1671 series standards are in the 1671 folder). Each folder under this “base” IEEE standard number contains the material (XML schemas, etc) for that ATML family component standard. ATML family component standards are identified by their IEEE 1671 series “dot” standard number and the year in which that standard was published by the IEEE.

NOTE 1—Standards that are revised will contain a folder for the year in which the standard is “reissued.” Both folders (for each year the standard was published) will be present on the IEEE download web-site.¹³

NOTE 2—Folders for a particular standard are not available until the standard is published by the IEEE and providing the standard has associated material that is to be made available via the download web-site.

Figure 1 depicts a portion of the entire IEEE download web-site, as it pertains to the Test Configuration ATML family standard.

<http://standards.ieee.org/downloads/>

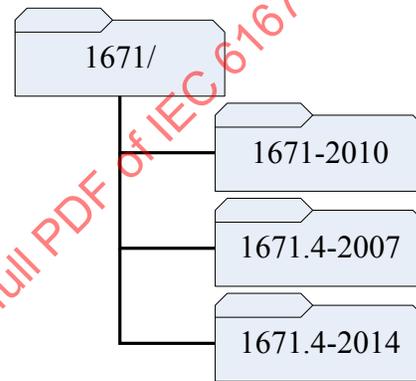


Figure 1—ATML Test Configuration related IEEE download web-site structure

The Test Configuration ATML family component standard, where the component is defined, their associated XML schemas names, and the IEEE download web-site folder name (where the XML schemas shall be located), is as defined in Table 1.

Table 1—TestConfiguration XML schema name and folder location

Component	Defined in Clause	XML schema name	IEEE download Web site folder (see Figure 1)
Test Configuration	4	TestConfiguration.xsd	1671.4-2014

The XML schema identified in Table 1 contains ATML common elements included by Test Configuration.xsd. The ATML common element (e.g., component), where the component is defined, the associated XML schemas name, and the IEEE download web-site folder name (where the XML schema shall be located), is as defined in Table 2.

¹³ Notes in text, tables, and figures of a standard are given for information only and do not contain requirements needed to implement this standard.

Table 2—ATML Common element XML schema name and location

Component	Defined in IEEE Std 1671-2010	XML schema name	IEEE download Web site folder (see Figure 1)
Common	Annex B.1	Common.xsd	1671-2010

7. ATML XML schema extensibility

The provision of an extension mechanism is necessary to help ensure the viability of the specification and allow producers and consumers of Test Configuration instance documents to interoperate in those cases where there is a requirement to exchange relevant data that is not included in the *Test Configuration* associated XML schema. The use of the extensions shall be done in a way that can help ensure that a conformant consumer can utilize the extended file without error, discard or otherwise sidestep the extended data, and use the non-extended portions of the data as it is intended without error or loss of functionality.

Extensions shall be additional information added to the content model of the element being extended.

Extensions shall not repackage existing information entities that are already supported by the *Test Configuration* XML schema.

An extended instance document shall be accompanied by the extension XML schema and documentation sufficient to explain the need for the extension as well as the underlying semantics and relationship(s) to the base *Test Configuration* XML schema.

The ATML family of standards associated XML schemas allow for three forms of extension:

- Wildcard-based extensions allow for the extension of the XML schemas with additional elements.
- Type derivation allows for extending the set of data types by deriving a new type from an existing common element type.
- Lists derived from *c:NamedValues* allowing user defined properties with attached values.

8. Conformance

The minimal expectations for *TestConfiguration* conformant XML instance documents shall be that a completely populated instance document is considered valid if said document complies with:

- The constraints expressed in the *TestConfiguration* schema associated with this standard and
- Any constraints imposed by inherited elements from Annex B of IEEE Std 1671-2010.

Extensions are permitted to the *TestConfiguration* schema, but shall only occur through the facility of the extensibility mechanism described in Clause 7. In short, extensions may only appear in the specific `<extension>` tags provided in the associated XML schema. As defined in the W3C XML schema standard, an extended schema must conform to the W3C XML schema specification and shall not contain any entities defined in the base schema.

Annex A

(informative)

IEEE download web-site material associated with this document

This document includes supporting material required to maintain and/or develop the ATML framework as well as maintain the ATML family of standards. This material is published by IEEE in association with this document, presented in a machine friendly format. This is digital rights management restricted use material. The ATML family of standards utilizes this download Web site to allow easy accessibility to these documents XML schemas, and associated material referenced within this document (e.g., examples or committee drafts). For an explanation, and the location, of the IEEE download web-site and its structure (as it pertains to the ATML family of standards), see Clause 6. The material available on the IEEE download Web site in association with this document is described in Table A.1.

Table A.1—IEEE download web-site contents

File	Description
TestConfiguration.xsd	The ATML <i>TestConfiguration</i> schema defined in Clause 4.
Common.xsd	The ATML common element schema defined in Annex B of IEEE Std 1671-2010.
1671_4 Annex C Example XML instance document.xml	The XML instance document contained in Annex C (Examples).
Readme.txt	User information pertaining to the files posted, and their usage.

Annex B

(informative)

Test Configuration XML element mappings to MTPSI card fields

Table B.1 details all possible master test program set index card fields, and identifies which Test Configuration schema element(s) support the fields and the entries into those fields.

Table B.1—MTPSI mapping to Test Configuration

MTPSI field and description	Test Configuration XML schema
<u>ADAPTER REQUIRED:</u> An yes/no indication as to whether an adapter is required for use with the interface device (ID).	complexType: ConfigurationTestProgramElements / AdapterRequired
<u>ANCILLARY EQUIPMENT DESCRIPTION:</u> A list of the name/nomenclature of each piece of ancillary equipment required by the TPS to test the UUT. “Ancillary equipment” refers to any support equipment (SE), other than common shop tools that are not provided with the TPS. Examples of ancillary equipment are oscilloscopes, megohmmeters, ground straps, and lift devices.	complexType: AncillaryHardwareAssets / AncillaryHardwareItem / attribute 'name'
<u>ANCILLARY EQUIPMENT PART NUMBER:</u> The part number of the identified ancillary equipment. If a part number is known to have one or more acceptable alternates, then “(or equivalent)” may be included. Example: ACME 1234 (or equivalent).	complexType: AncillaryHardwareAssets / AncillaryHardwareItem / attribute 'partNumber'
<u>ANCILLARY EQUIPMENT QUANTITY:</u> Required quantity of each identified ancillary equipment item.	complexType: AncillaryHardwareAssets / AncillaryHardwareItem / attribute 'quantity'
<u>ATE ASSETS:</u> List of ATE assets (e.g., DMM, ARB, DCPS) used by the TPS.	complexType: ATEAssets / SystemIdentifier / attribute 'systemID'
<u>ATE CONFIGURATION:</u> The configuration of the ATE family known to run the TPS. For example, “CASS Block III” or “RTCASS”.	complexType: ConfigurationTestProgramElements / ATEVersions / ATEConfiguration
<u>ATE FAMILY:</u> The ATE family known to run the TPS. For example, “CASS” or “IFTE”.	complexType: ConfigurationTestProgramElements / ATEVersions / ATEFamily
<u>CHG #:</u> The change number of the master test program set index. The initial document change number should be blank or contain zeros (e.g., '000'). Subsequent changes to the document should increment the change number by one.	element: TestConfiguration / attribute 'changeNumber'
<u>DATE:</u> The date the master test program set index was changed/edited/created	Element: TestConfiguration / attribute 'changeDate'
<u>DIAGNOSTIC FLOW CHARTS:</u> The diagnostic flow charts for the UUT.	complexType: ConfigurationUUTElements / DiagnosticFlowChart