

Edition 1:1996 consolidated with amendments 1:1999 and 2:2000

---

---

**Fibre optic connector interfaces –**

**Part 7:  
Type MPO connector family**

*Interfaces de connecteurs  
pour fibres optiques –*

*Partie 7:  
Famille de connecteurs de type MPO*



## Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

## Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

## Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** ([www.iec.ch](http://www.iec.ch))

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site ([www.iec.ch/catlg-e.htm](http://www.iec.ch/catlg-e.htm)) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications ([www.iec.ch/JP.htm](http://www.iec.ch/JP.htm)) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: [custserv@iec.ch](mailto:custserv@iec.ch)  
Tel: +41 22 919 02 11  
Fax: +41 22 919 03 00

# INTERNATIONAL STANDARD

# IEC 61754-7

Edition 1.2

2000-11

Edition 1:1996 consolidated with amendments 1:1999 and 2:2000

---

---

## Fibre optic connector interfaces –

### Part 7: Type MPO connector family

*Interfaces de connecteurs  
pour fibres optiques –*

*Partie 7:  
Famille de connecteurs de type MPO*

© IEC 2000 Droits de reproduction réservés — Copyright - all rights reserved

Aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'éditeur.

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission  
Telefax: +41 22 919 0300

3, rue de Varembé Geneva, Switzerland  
e-mail: [inmail@iec.ch](mailto:inmail@iec.ch) IEC web site <http://www.iec.ch>

---

---



Commission Electrotechnique Internationale  
International Electrotechnical Commission  
Международная Электротехническая Комиссия

---

---

## CONTENTS

	Page
FOREWORD .....	3
Clause	
1 Scope .....	5
2 Description.....	5
3 Interfaces.....	5
Figure 1 – MPO connector configurations.....	6
Figure 2a – MPO female plug connector angled interface.....	7
Figure 2b – Optical datum target location diagrams.....	9
Figure 2c – Gauge pin .....	10
Figure 2d – Gauge for plug .....	11
Figure 3a – MPO male plug connector angled interface.....	12
Figure 3b – Guide pin .....	14
Figure 4 – MPO adaptor interface .....	15
Figure 5 – MPO female plug connector flat interface.....	17
Figure 6 – MPO male plug connector flat interface.....	19
Figure 7 – MPO backplane housing interface.....	22
Figure 8 – MPO printed board housing interface.....	25
Table 1a – Dimensions of the MPO female plug connector angled interface .....	8
Table 1b – Dimensions of the gauge pin .....	10
Table 1c – Dimensions of the gauge for plug.....	11
Table 2a – Dimensions of the MPO male plug connector angled interface .....	13
Table 2b – Dimensions of the guide pin.....	14
Table 3 – Dimensions of the MPO adaptor interface.....	16
Table 4 – Dimensions of the MPO female plug connector flat interface.....	18
Table 5 – Dimensions of the MPO male plug connector flat interface.....	20
Table 6a – Dimensions of the MPO backplane housing .....	23
Table 6b – Grade.....	24
Table 7 – Dimensions of the MPO printed board housing interface .....	26

IECNORM.COM: Click to view the full text of IEC 61754-7 © IEC:1996+A1:1999+A2:2000(E) AMD1:1999+AMD2:2000 CSV

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

## FIBRE OPTIC CONNECTOR INTERFACES –

### Part 7: Type MPO connector family

#### FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this International Standard may involve the use of a patent concerning MPO connectors.

The IEC takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured the IEC that he is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with the IEC. Information may be obtained from:

Intellectual Property Department,  
Nippon Telegraph and Telephone Corporation,  
20-2 Nishi-shinjuku 3-Chome Shinjuku,  
Tokyo 163-14, Japan.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61754-7 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This consolidated version of IEC 61754-7 is based on the first edition (1996) [documents 86B/836/FDIS and 86B/926/RVD], its amendment 1 (1999) [documents 86B/1213/FDIS and 86B/1250/RVD] and amendment 2 (2000) [documents 86B/1324/FDIS and 86B/1372/RVD].

It bears the edition number 1.2.

A vertical line in the margin shows where the base publication has been modified by amendments 1 and 2.

A bilingual version of this publication may be issued at a later date.

The committee has decided that the contents of the base publication and its amendments will remain unchanged until 2004. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

Withdrawn

## FIBRE OPTIC CONNECTOR INTERFACES –

### Part 7: Type MPO connector family

#### 1 Scope

This part of IEC 61754 defines the standard interface dimensions for type MPO family of connectors.

#### 2 Description

The parent connector for type MPO connector family is a multiway plug connector characterized by a rectangular ferrule normally 6,4 mm × 2,5 mm which utilizes two pins of 0,7 mm diameter as its alignment. It is applicable to a joint of multiple fibres up to 12 fibres by arraying them between two pin-positioning holes in the ferrule. The connector includes a push-pull coupling mechanism and a ferrule spring loaded in the direction of the optical axis. The connector has a single male key which may be used to orient and limit the relative position between the connector and the component to which it is mated.

Connector interfaces are configured using a female plug without pins, a male plug with pins fixed and an adaptor as shown in figure 1. The female plug is intermateable with the male plug.

Moreover, connector interfaces between the female plug and the male plug are configured by applying a backplane housing and a printed board housing instead of the adaptor.

Connector interfaces with different numbers of optical datum targets will intermate and will correctly align the lower defined numbers of optical datum targets.

#### 3 Interfaces

This standard contains the following standard interfaces.

Interface 7-1: MPO female plug connector angled interface – Push/pull

Interface 7-2: MPO male plug connector angled interface – Push/pull

Interface 7-3: MPO adaptor interface – Push/pull

Interface 7-4: MPO female plug connector flat interface – Push/pull


Interface 7-5: MPO male plug connector flat interface – Push/pull

Interface 7-6: MPO backplane housing interface – Self-retaining

Interface 7-7: MPO printed board housing interface – Self-retaining

The following standards are intermateable:

Female plugs	Adaptors/housings	Male plugs
61754-7-1	61754-7-3	61754-7-2
61754-7-4	61754-7-3	61754-7-5
61754-7-1	61754-7-6 and 61754-7-7	61754-7-2
61754-7-4	61754-7-6 and 61754-7-7	61754-7-5

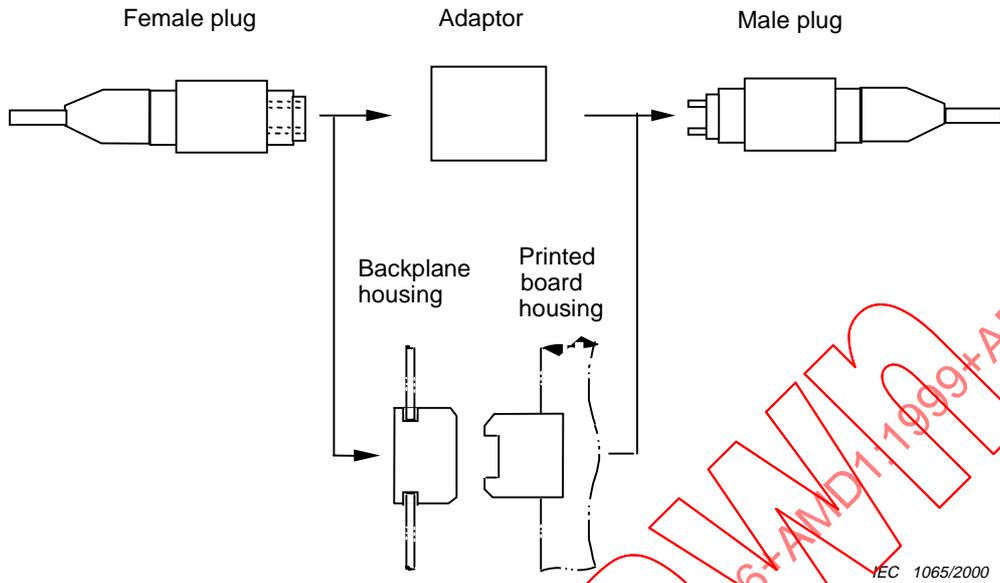

IEC 1065/2000

Figure 1 – MPO connector configurations

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

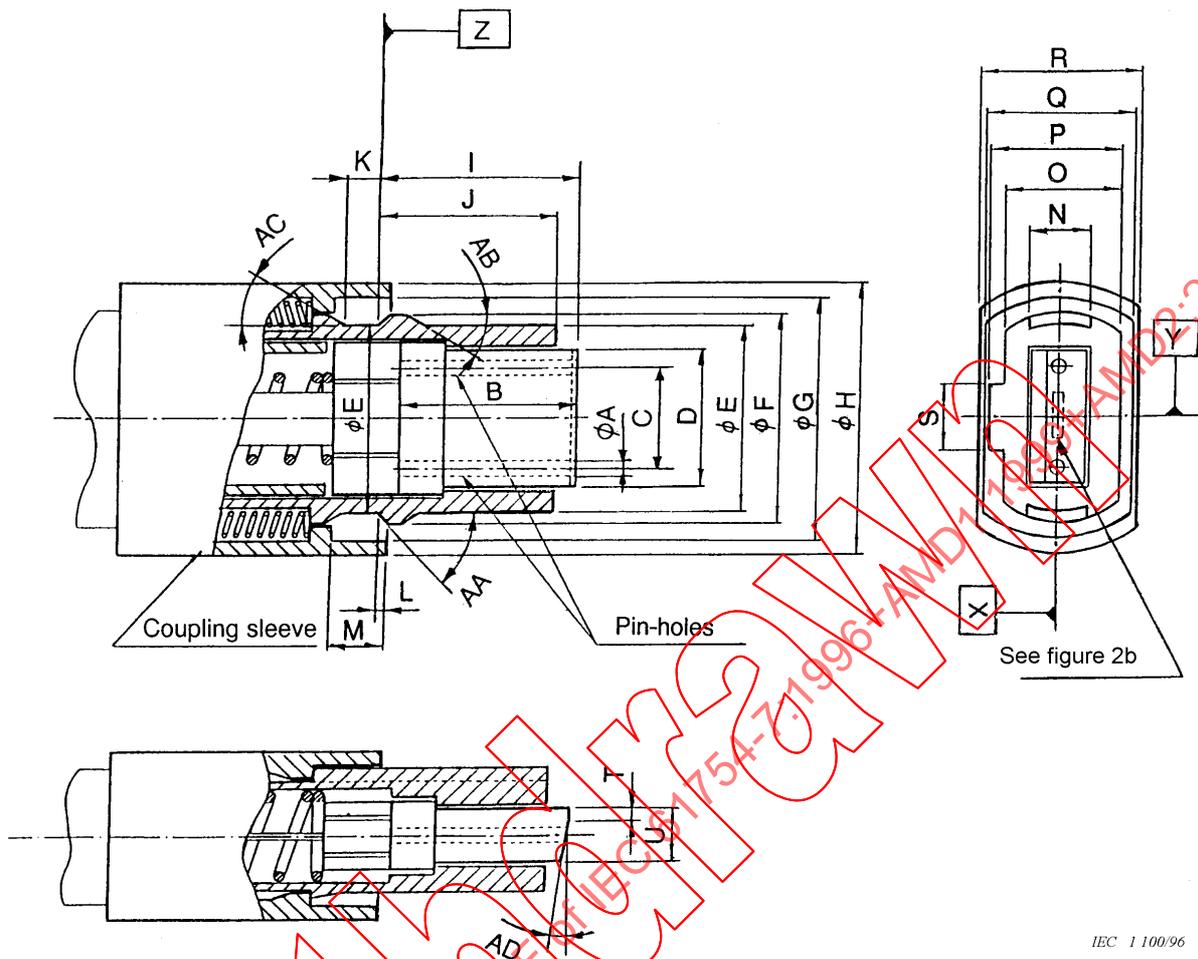


Figure 2a – MPO female plug connector angled interface

IEC 1100/96

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1996+A1:1999+A2:2000 CSV

**Table 1a – Dimensions of the MPO female plug connector angled interface**

Reference	Dimensions		Notes
	Minimum	Maximum	
A	0,699 mm	0,701 mm	1
B	7,9 mm	8,1 mm	
C	4,597 mm	4,603 mm	2
D	6,3 mm	6,5 mm	
E	8,34 mm	8,54 mm	3
F	9,49 mm	9,59 mm	
G	10,85 mm	11,05 mm	4 and 5
H	12,19 mm	12,59 mm	
I	8,8 mm	9,2 mm	3
J	7,9 mm	8,1 mm	
K	1,4 mm	-	4 and 5
L	0,2 mm	0,8 mm	
M	2,4 mm	2,6 mm	4 and 5
N	2,8 mm	3,0 mm	
O	4,89 mm	4,99 mm	4 and 5
P	5,59 mm	5,69 mm	
Q	5,7 mm	-	4 and 5
R	-	7,7 mm	
S	2,9 mm	3,1 mm	4 and 5
T	-	0,8 mm	
U	2,4 mm	2,5 mm	4 and 5
AA	42°	45°	
AB	-	45°	4 and 5
AC	-	45°	
AD	7,5°	8,5°	4 and 5


NOTE 1 Each pin-hole shall accept a gauge pin as shown in figure 2c to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two pin-holes of a plug shall accept a gauge as shown in figure 2d to a depth of 5,5 mm with a maximum force of 3,4 N.

NOTE 2 Dimension C is defined as the distance between two pin-hole centres.

NOTE 3 Dimension I is given for a fibre endface centre of a plug end when not mated. It is noticed that a ferrule is movable by a certain axial compression force, and therefore the dimension I is variable. Ferrule compression force shall be 7,8 N to 11,8 N when a position of the fibre endface from the datum Z is in the range of 8,2 mm to 8,4 mm.

NOTE 4 Coupling sleeve shall be movable by a certain axial compression force. Dimension L is given for a coupling sleeve end when not mated. Coupling sleeve compression force shall be 2,9 N to 6,9 N when a position of the coupling sleeve endface from datum Z is in the range of 0 to 0,1 mm.

NOTE 5 An adaptor coupling part shall be unlocked by a left-direction movement of a coupling sleeve, when it is separate from an adaptor. When the coupling sleeve is moved for unlocking, a position of the coupling sleeve endface shall be larger than 2,0 mm in the left direction from the datum Z.

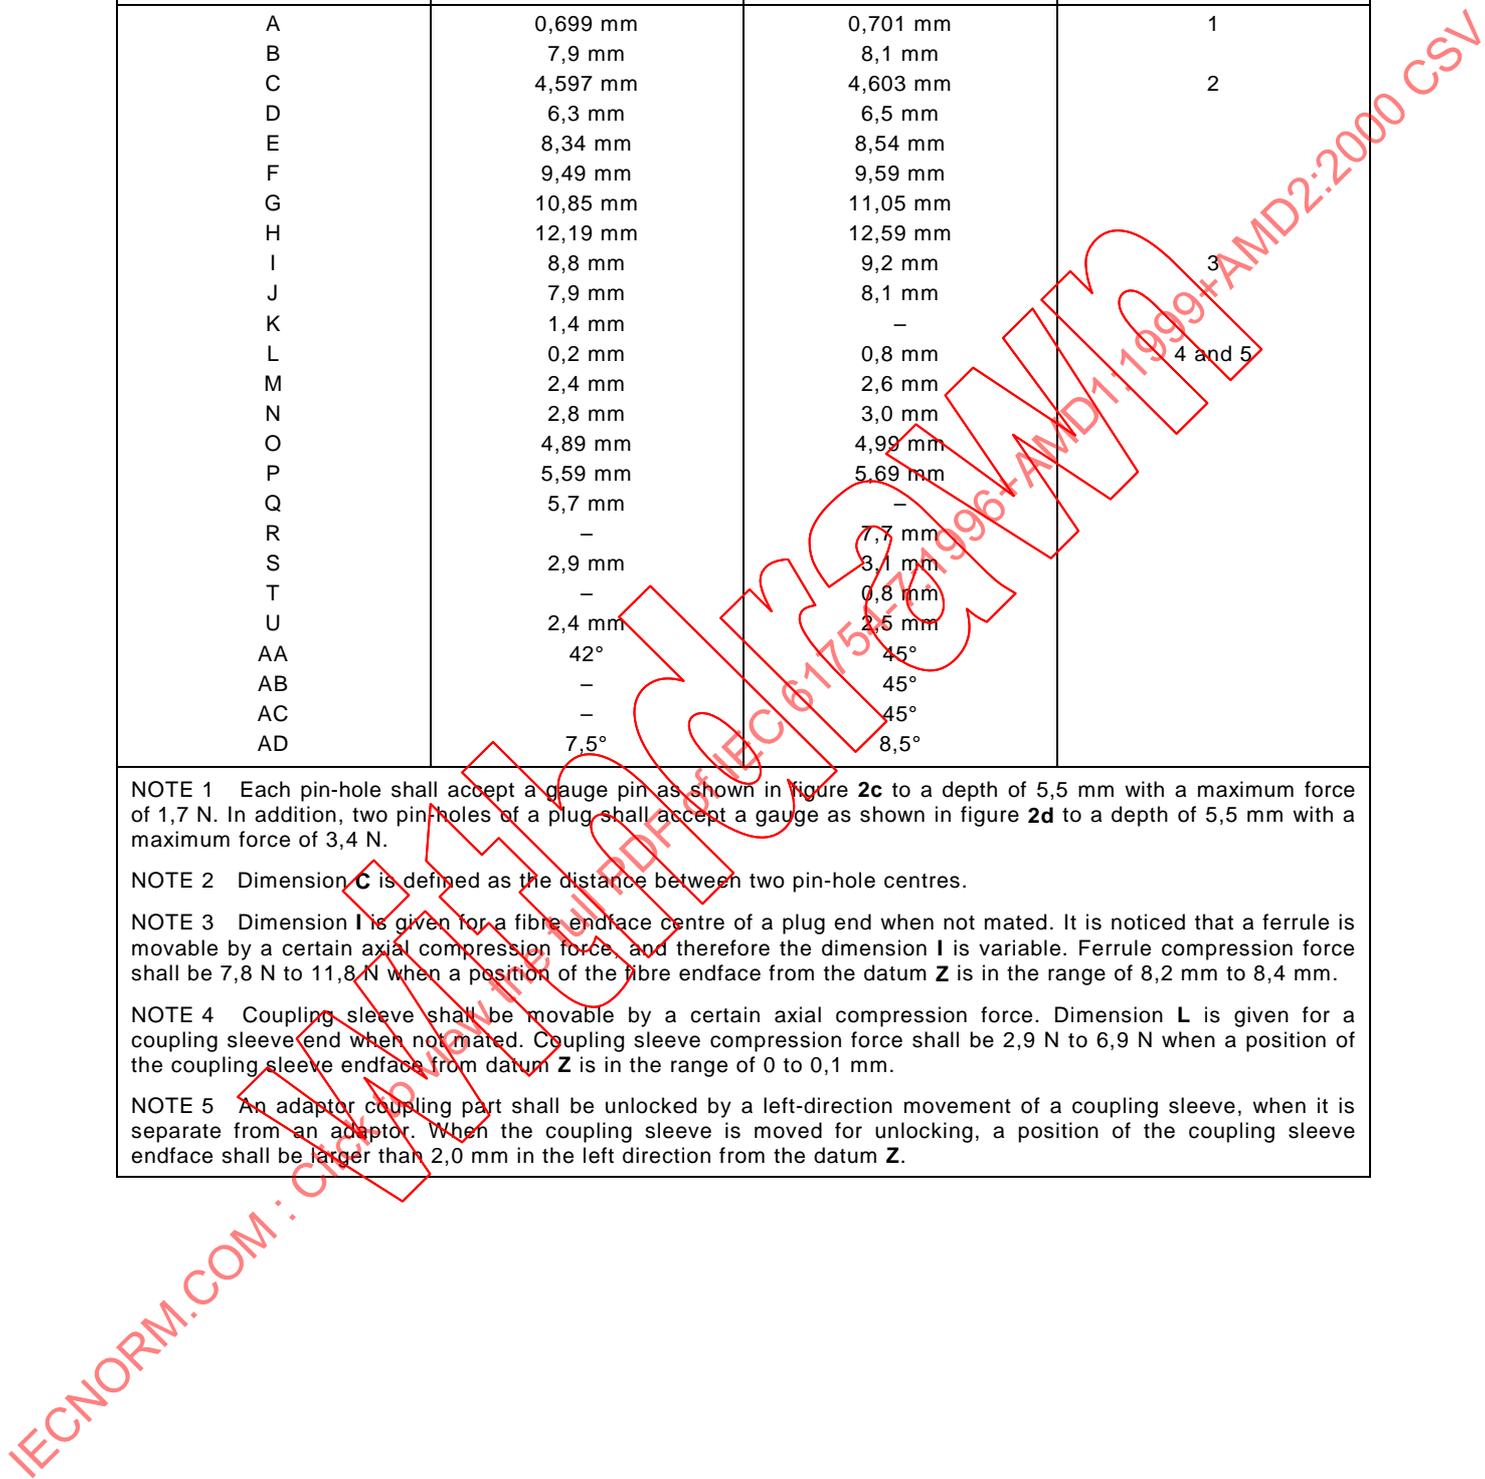

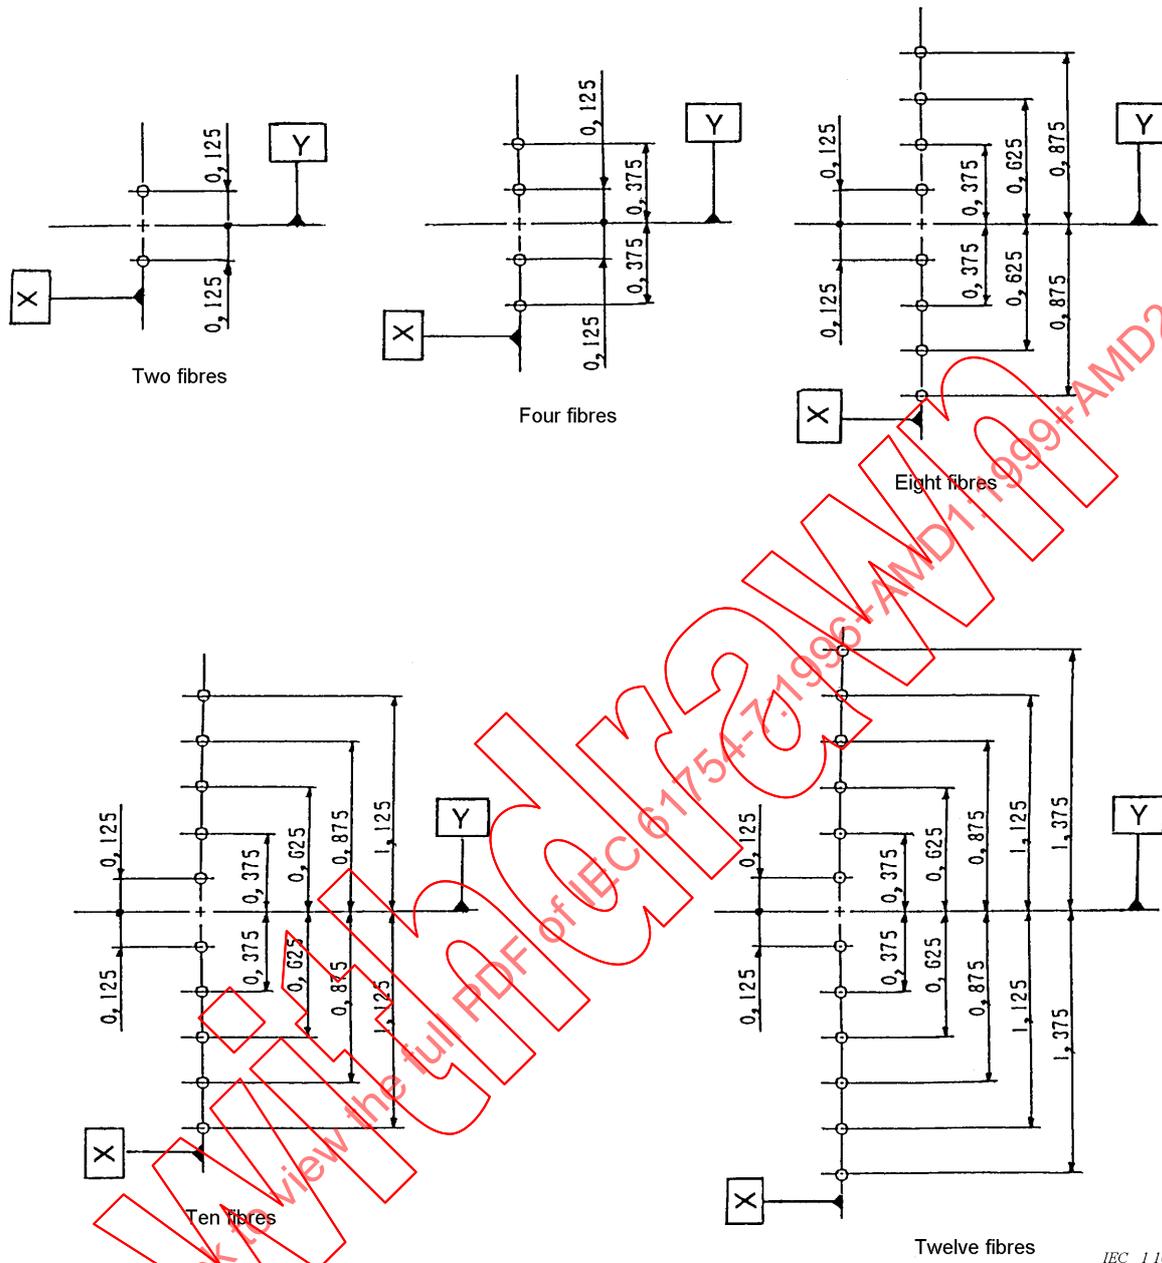


Figure 2b – Optical datum target location diagrams

NOTE The optical datum target location diagram is shown in the figure. Here, datum X is defined as the line passing through two pin-hole centres, and datum Y is defined as the line perpendicular to datum X and passing through the midpoint of two pin-hole centres.

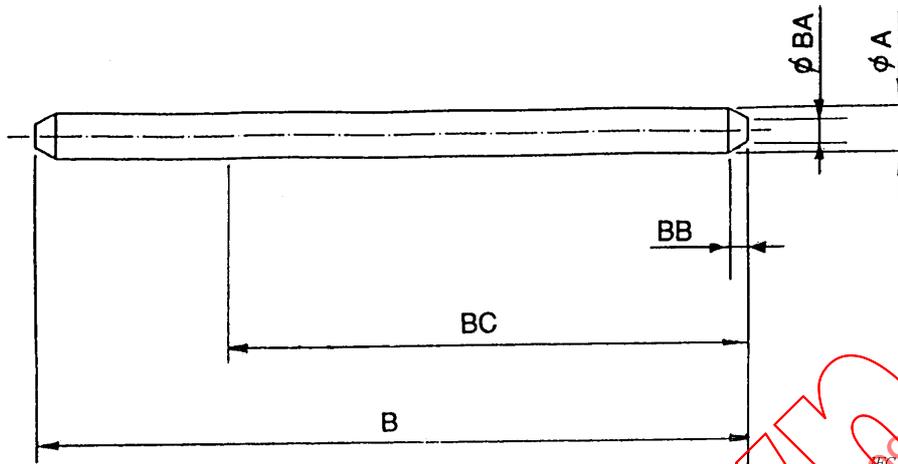



Figure 2c – Gauge pin

Table 1b – Dimensions of the gauge pin

Reference	Dimensions mm		Notes
	Minimum	Maximum	
A	0,6985	0,6990	1
B	10,8	11,2	2
BA	0,2	0,4	
BB	0,2	0,5	
BC	6,0	–	

NOTE 1 Surface roughness  $R_z = 0,1 \mu\text{m}$  for the length of dimension BC.  
 NOTE 2 Typical dimensions.

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1999+AMD1:1999+AMD2:2000 CSV

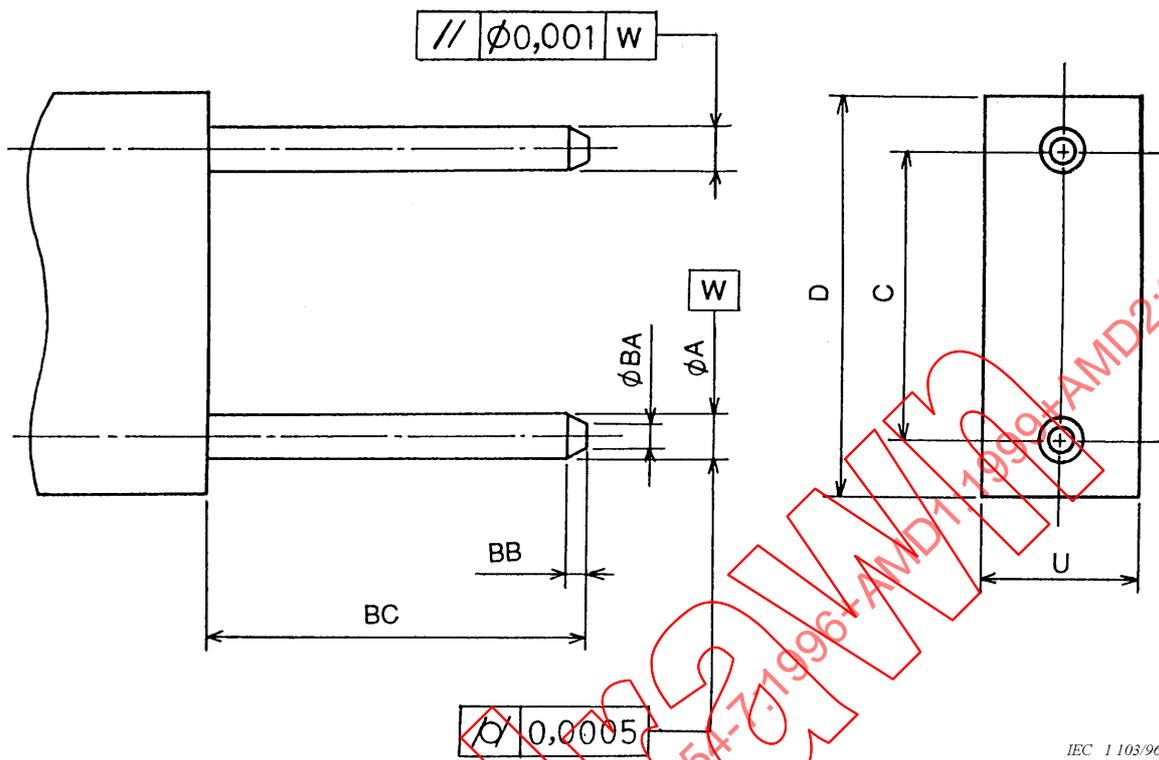


IEC 1103/96

Figure 2d – Gauge for plug

Table 1c – Dimensions of the gauge for plug

Reference	Dimensions mm		Notes
	Minimum	Maximum	
A	0,6985	0,6990	for two pins, 1
C	4,5995	4,6005	
D	6,3	6,5	2
U	2,4	2,5	2
BA	0,2	0,4	
BB	0,2	0,5	
BC	6,0	6,5	

NOTE 1 Surface roughness  $R_z = 0,1 \mu\text{m}$ .  
 NOTE 2 Typical dimensions.

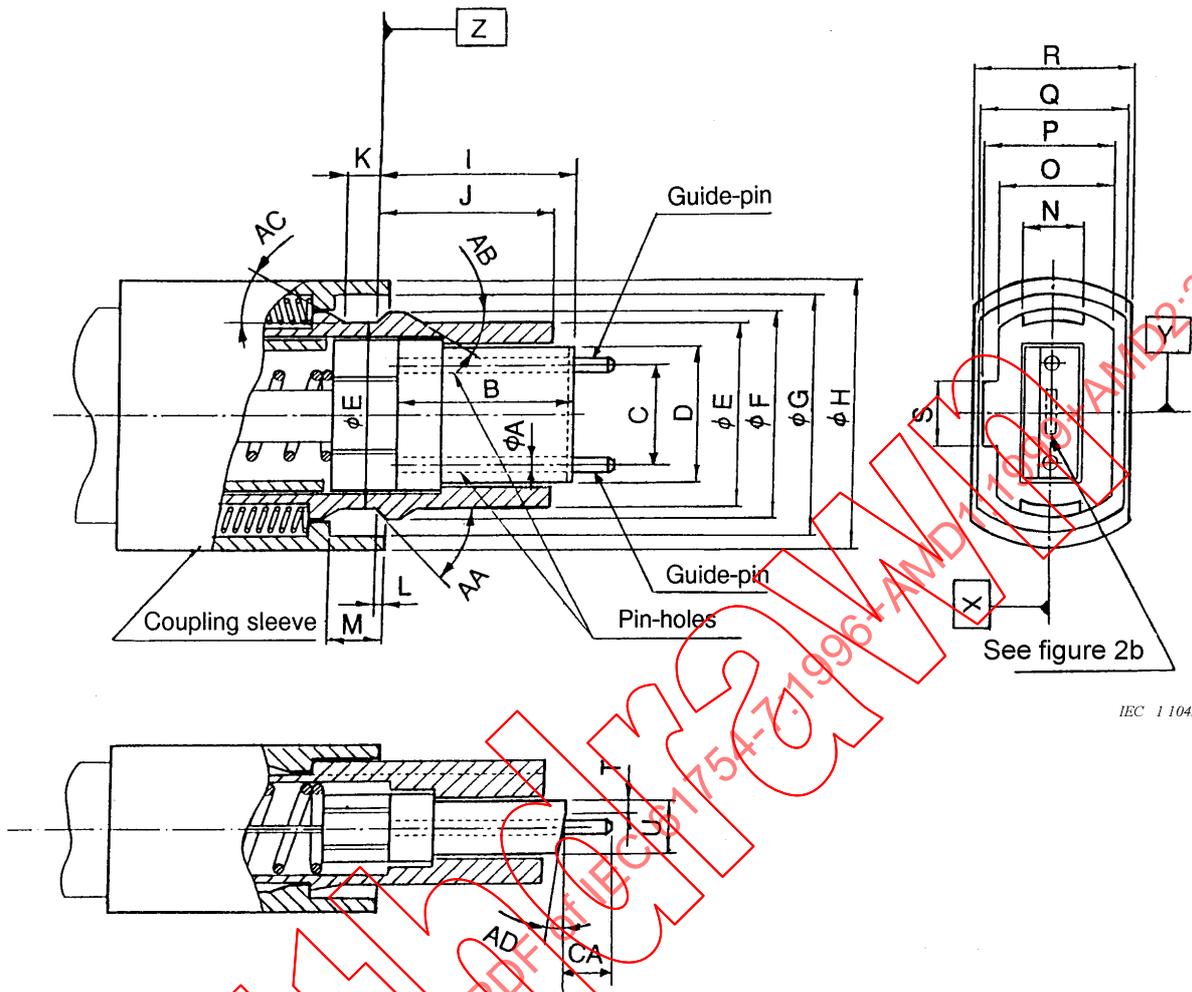

IEC 1104/96

Figure 3a - MPO male plug connector angled interface

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1996 AMD 2000 CSV

Table 2a – Dimensions of the MPO male plug connector angled interface

Reference	Dimensions		Notes
	Minimum	Maximum	
A	0,699 mm	0,701 mm	1
B	7,9 mm	8,1 mm	
C	4,597 mm	4,603 mm	2
D	6,3 mm	6,5 mm	
E	8,34 mm	8,54 mm	
F	9,49 mm	9,59 mm	
G	10,85 mm	11,05 mm	
H	12,19 mm	12,59 mm	
I	8,8 mm	9,2 mm	3
J	7,9 mm	8,1 mm	
K	1,4 mm	–	
L	0,2 mm	0,8 mm	4 and 5
M	2,4 mm	2,6 mm	
N	2,8 mm	3,0 mm	
O	4,89 mm	4,99 mm	
P	5,59 mm	5,69 mm	
Q	5,7 mm	–	
R	–	7,7 mm	
S	2,9 mm	3,1 mm	
T	–	0,8 mm	
U	2,4 mm	2,5 mm	
AA	42°	45°	
AB	–	45°	
AC	–	45°	
AD	7,5°	8,5°	
CA	1,6 mm	3,3 mm	

NOTE 1 Dimension **A** is the inner diameter of each pin-hole before two guide-pins are fixed in the plug. Each pin-hole shall accept a gauge pin as shown in figure **2c** to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two pin-holes of a plug shall accept a gauge as shown in figure **2d** to a depth of 5,5 mm with a maximum force of 3,4 N. After the guide-pins as shown in figure **3b** are fixed in the plug, each guide pin shall be retained with a minimum force of 3,4 N.

NOTE 2 Dimension **C** is defined as the distance between two pin-hole centres before two guide-pins are fixed in the plug.

NOTE 3 Dimension **I** is given for a fibre endface centre of a plug end when not mated. It is noticed that a ferrule is movable by a certain axial compression force, and therefore the dimension **I** is variable. Ferrule compression force shall be 7,8 N to 11,8 N when a position of the fibre endface from the datum **Z** is in the range of 8,2 mm to 8,4 mm.

NOTE 4 Coupling sleeve shall be movable by a certain axial compression force. Dimension **L** is given for a coupling sleeve end when not mated. Coupling sleeve compression force shall be 2,9 N to 6,9 N when a position of the coupling sleeve endface from datum **Z** is in the range of 0 to 0,1 mm.

NOTE 5 An adaptor coupling part shall be unlocked by a left-direction movement of a coupling sleeve, when it is separate from an adaptor. When the coupling sleeve is moved for unlocking, a position of the coupling sleeve endface shall be larger than 2,0 mm in the left direction from the datum **Z**.

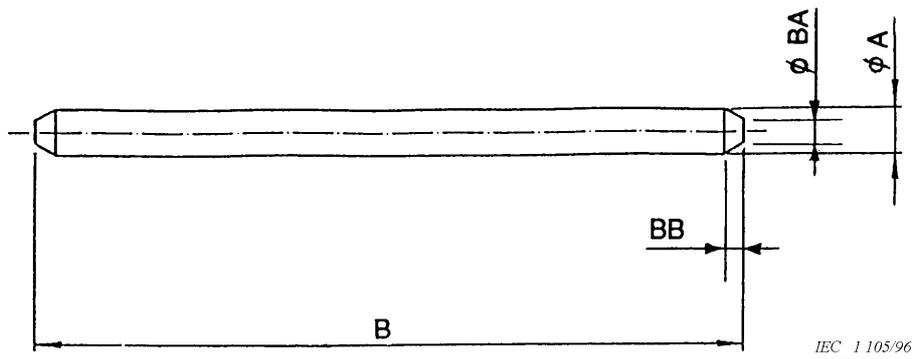



Figure 3b – Guide pin

Table 2b – Dimensions of the guide pin

Reference	Dimensions mm		Notes
	Minimum	Maximum	
A	0,697	0,699	See note
B	10,8	11,2	
BA	0,2	0,4	
BB	0,2	0,5	

NOTE Typical dimensions.

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

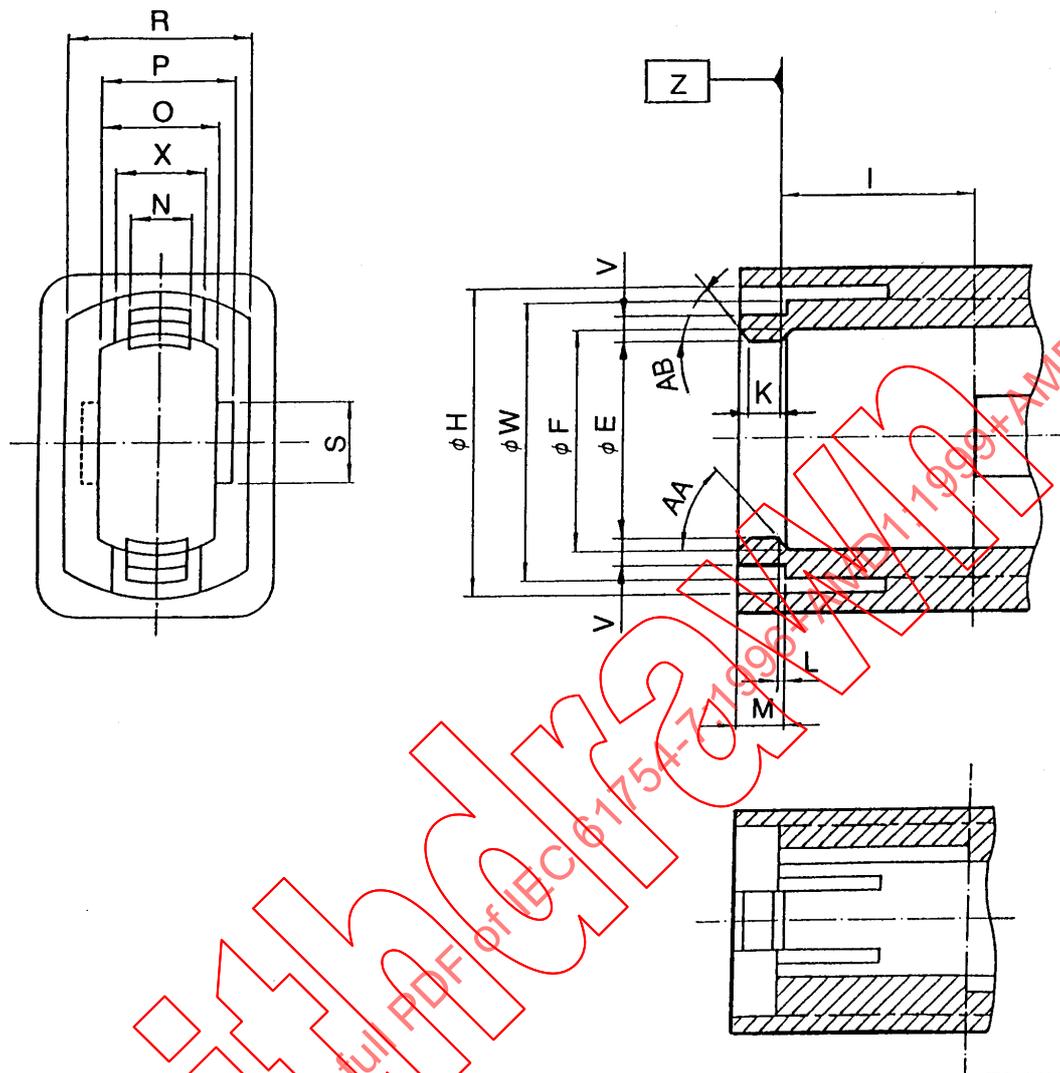

IEC 1106/96

Figure 4 – MPO adaptor interface

NOTE The adaptor may be of a structure as shown by an alternate long and short dash line in the figure.

**Table 3 – Dimensions of the MPO adaptor interface**

Reference	Dimensions		Notes
	Minimum	Maximum	
E	8,54 mm	8,74 mm	
F	9,6 mm	9,7 mm	
H	12,6 mm	–	
I	8,2 mm	8,4 mm	
K	–	1,39 mm	
L	0	0,1 mm	
M	1,6 mm	2,0 mm	
N	2,4 mm	2,6 mm	
O	5,0 mm	5,1 mm	
P	5,7 mm	5,9 mm	
R	7,8 mm	–	
S	3,4 mm	3,6 mm	
V	0,95 mm	1,15 mm	
W	11,8 mm	12,2 mm	
X	3,4 mm	–	
AA	45°	48°	
AB	45°	50°	

IECNORM.COM : Click to view the full PDF of IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV  
 Without  
 IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

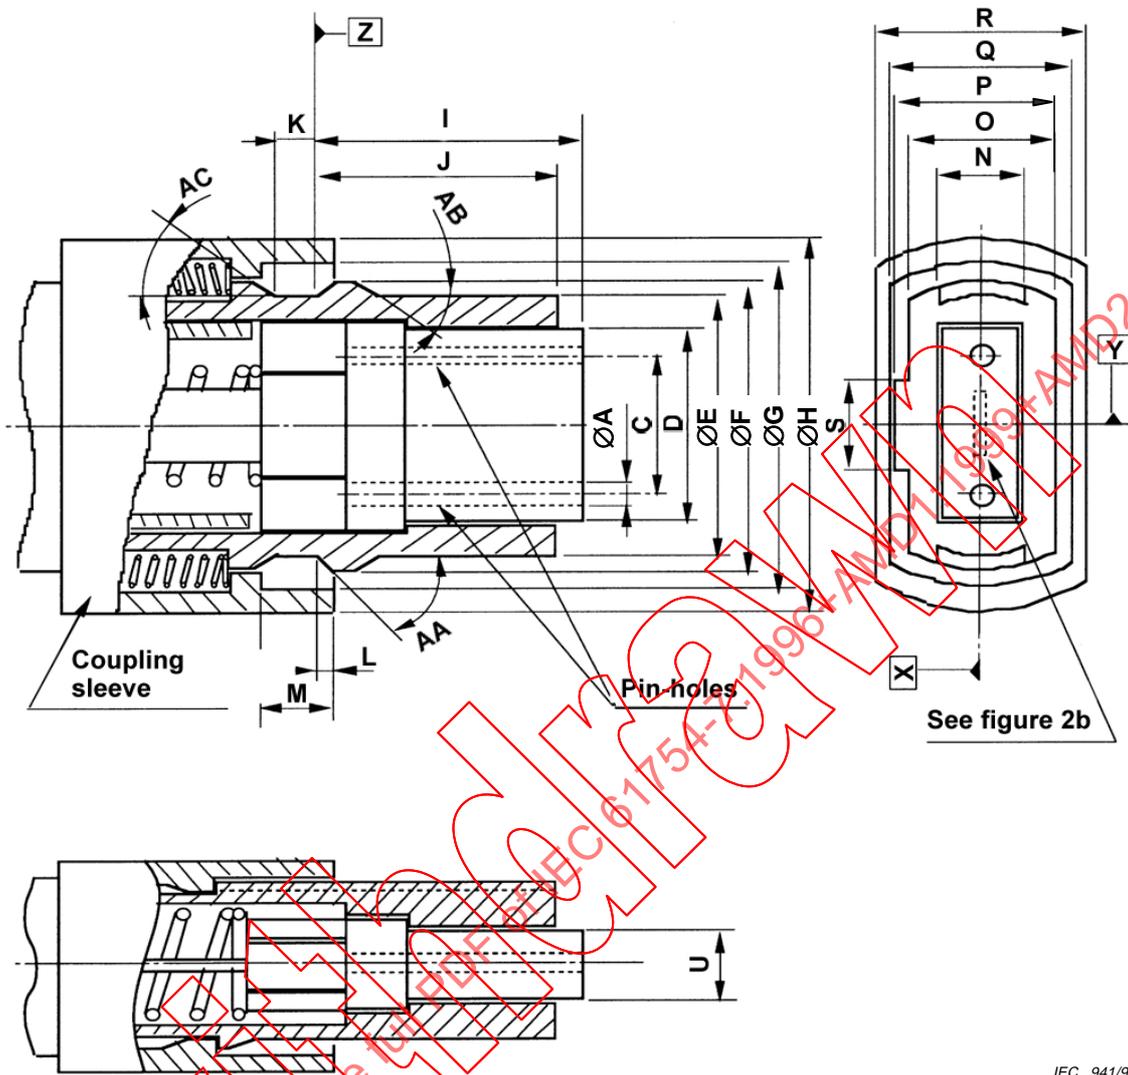


Figure 5 – MPO female plug connector flat interface

IEC 941/99

IECNORM.COM : Click to view the IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

**Table 4 – Dimensions of the MPO female plug connector flat interface**

Reference	Dimensions		Notes
	Minimum	Maximum	
A	0,699 mm	0,701 mm	1
C	4,597 mm	4,603 mm	2
D	6,3 mm	6,5 mm	
E	8,34 mm	8,54 mm	
F	9,49 mm	9,59 mm	
G	10,85 mm	11,05 mm	
H	12,19 mm	12,59 mm	
I	8,8 mm	9,2 mm	3
J	7,9 mm	8,1 mm	
K	1,4 mm	–	
L	0,2 mm	0,8 mm	4 and 5
M	2,4 mm	2,6 mm	
N	2,8 mm	3,0 mm	
O	4,89 mm	4,99 mm	
P	5,59 mm	5,69 mm	
Q	5,7 mm	–	
R	–	7,7 mm	
S	2,9 mm	3,1 mm	
U	2,4 mm	2,5 mm	
AA	42°	45°	
AB	–	45°	
AC	–	45°	

NOTE 1 Each pin-hole shall accept a gauge pin as shown in figure 2c to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two pin-holes of a plug shall accept a gauge as shown in figure 2d to a depth of 5,5 mm with a maximum force of 3,4 N.

NOTE 2 Dimension C is defined as the distance between two pin-hole centres.

NOTE 3 Dimension I is given for a fibre endface centre of a plug end when not mated. It is noticed that a ferrule is movable by a certain axial compression force, and therefore the dimension I is variable. Ferrule compression force shall be 7,8 N to 11,8 N when a position of the fibre endface from the datum Z is in the range of 8,2 mm to 8,4 mm.

NOTE 4 Coupling sleeve shall be movable by a certain axial compression force. Dimension L is given for a coupling sleeve end when not mated. Coupling sleeve compression force shall be 2,9 N to 6,9 N when a position of the coupling sleeve endface from datum Z is in the range of 0 to 0,1 mm.

NOTE 5 An adaptor coupling part shall be unlocked by a movement away from the adaptor of a coupling sleeve, when it is separate from the adaptor. When the coupling sleeve is moved for unlocking, a position of the coupling sleeve endface shall be larger than 2,0 mm in the left direction from the datum Z.

IECNORM.COM : Click here to buy full text of IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

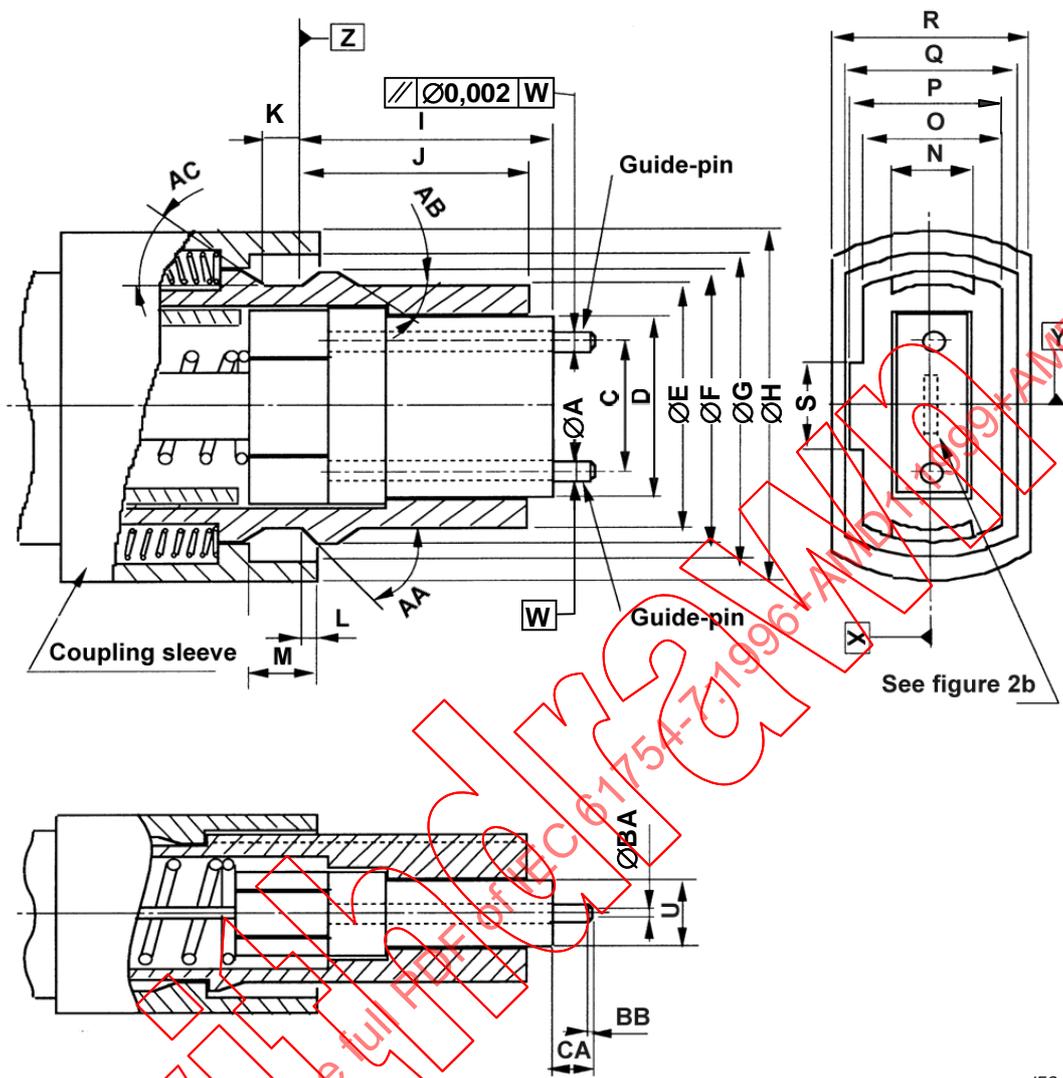


Figure 6 – MPO male plug connector flat interface

IECNORM.COM : Click to view the full PDF file of IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

**Table 5 – Dimensions of the MPO male plug connector flat interface**

Reference	Dimensions		Notes
	Minimum	Maximum	
A	0,697 mm	0,699 mm	1
C	4,597 mm	4,603 mm	2
D	6,3 mm	6,5 mm	
E	8,34 mm	8,54 mm	
F	9,49 mm	9,59 mm	
G	10,85 mm	11,05 mm	
H	12,19 mm	12,59 mm	
I	8,8 mm	9,2 mm	3
J	7,9 mm	8,1 mm	
K	1,4 mm	–	
L	0,2 mm	0,8 mm	4 and 5
M	2,4 mm	2,6 mm	
N	2,8 mm	3,0 mm	
O	4,89 mm	4,99 mm	
P	5,59 mm	5,69 mm	
Q	5,7 mm	–	
R	–	7,7 mm	
S	2,9 mm	3,1 mm	
U	2,4 mm	2,5 mm	
AA	42°	45°	
AB	–	45°	
AC	–	45°	
BA	0,2 mm	0,4 mm	
BB	0,2 mm	0,5 mm	
CA	1,6 mm	3,3 mm	


NOTE 1 Each guide-pin shall be retained with a minimum force of 3,4 N.


NOTE 2 Dimension **C** is defined as the distance between two guide-pin centres.

NOTE 3 Dimension **I** is given for a fibre endface centre of a plug end when not mated. It is noticed that a ferrule is movable by a certain axial compression force, and therefore the dimension **I** is variable. Ferrule compression force shall be 7,8 N to 11,8 N when a position of the fibre endface from the datum **Z** is in the range of 8,2 mm to 8,4 mm.


NOTE 4 Coupling sleeve shall be movable by a certain axial compression force. Dimension **L** is given for a coupling sleeve end when not mated. Coupling sleeve compression force shall be 2,9 N to 6,9 N when a position of the coupling sleeve endface from datum **Z** is in the range of 0 to 0,1 mm.

NOTE 5 An adaptor coupling part shall be unlocked by a movement away from the adaptor of a coupling sleeve, when it is separate from the adaptor. When the coupling sleeve is moved for unlocking, a position of the coupling sleeve endface shall be larger than 2,0 mm in the left direction from the datum **Z**.

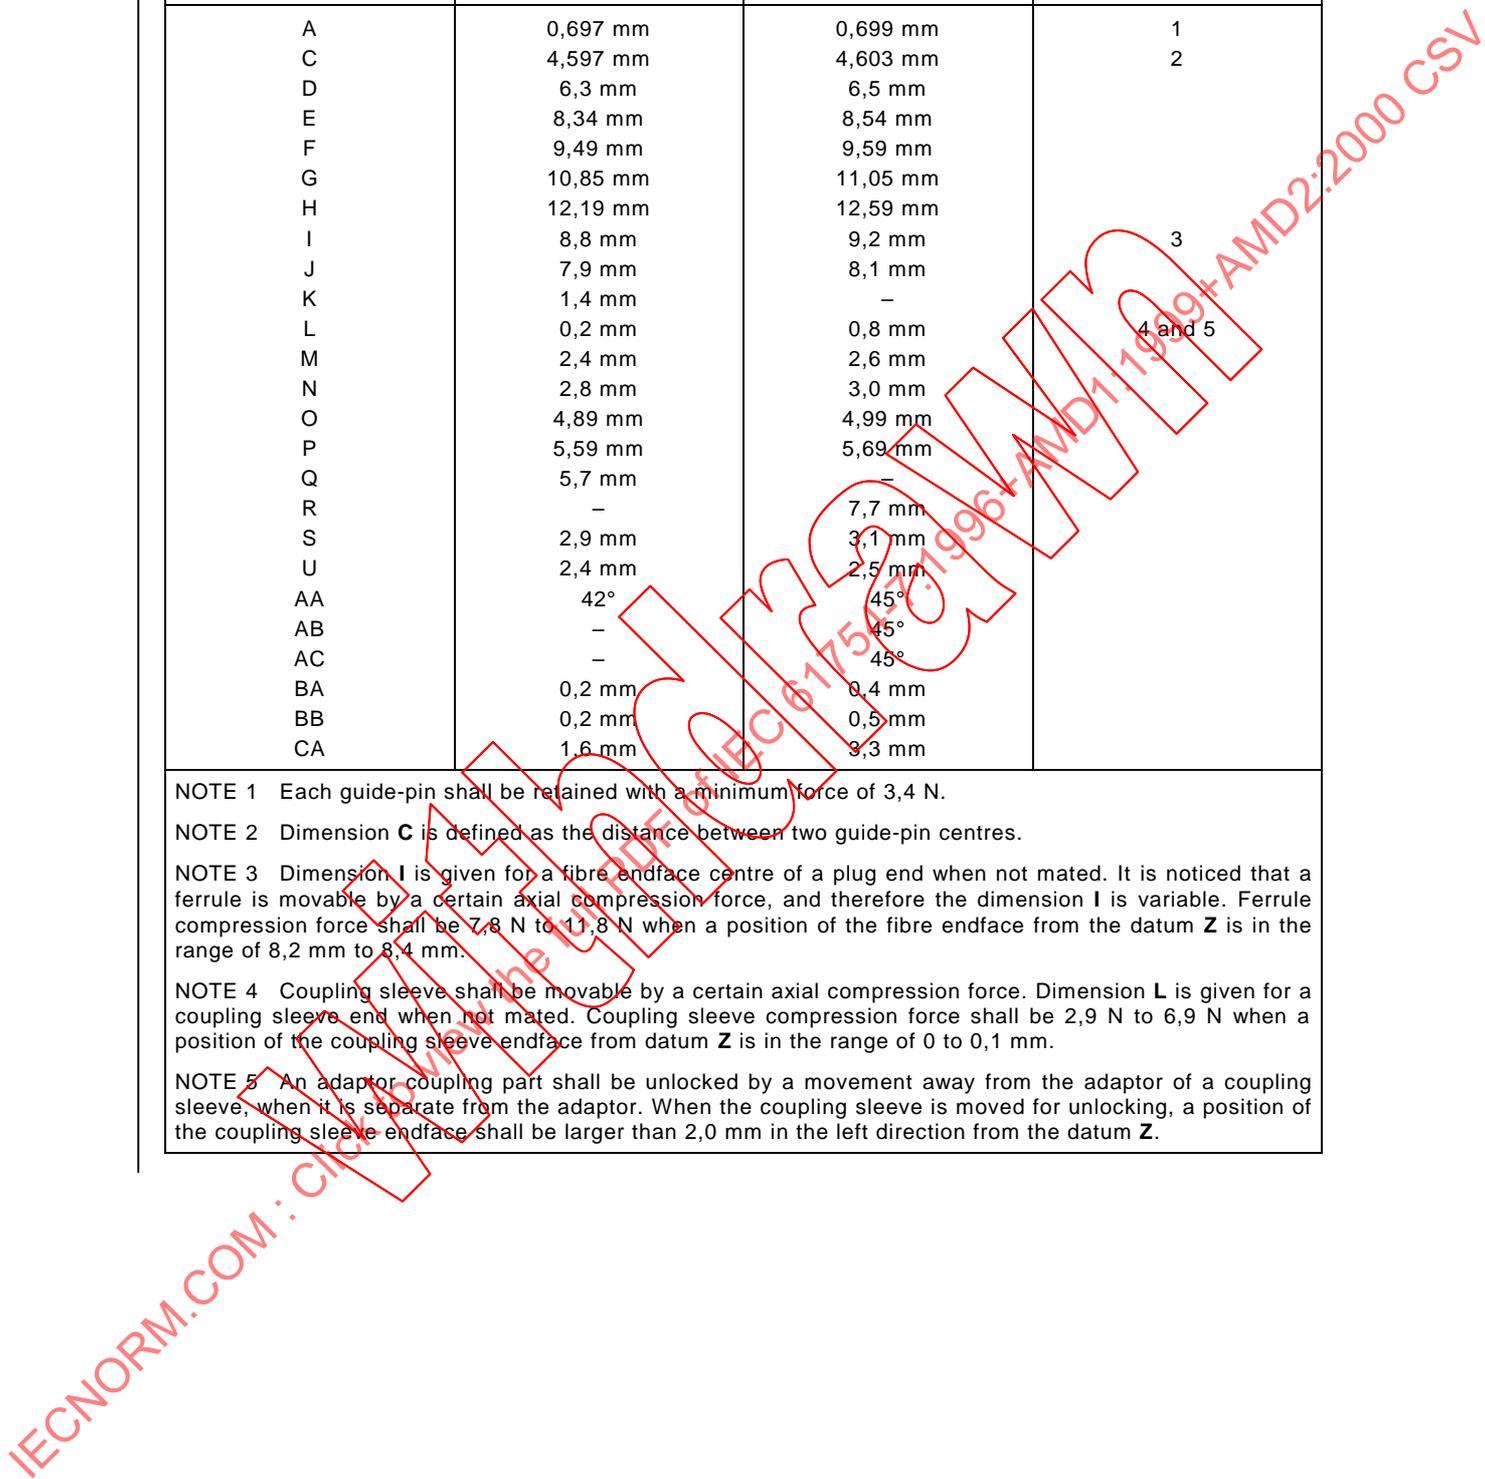

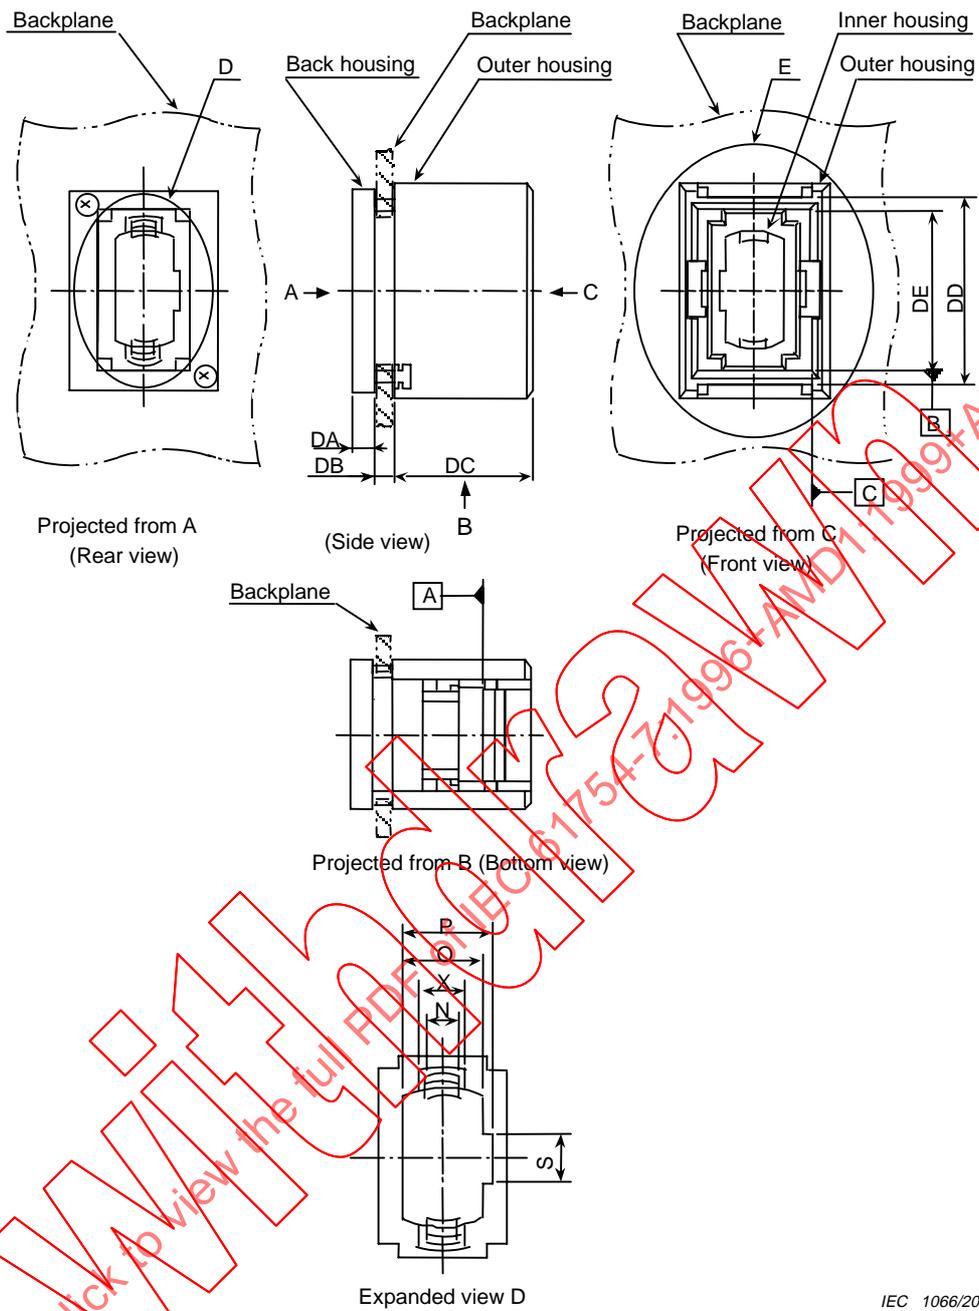

IECNORM.COM : Click to view the full PDF for IEC 61754-7:1996+AMD1:1999+AMD2:2000 CSV

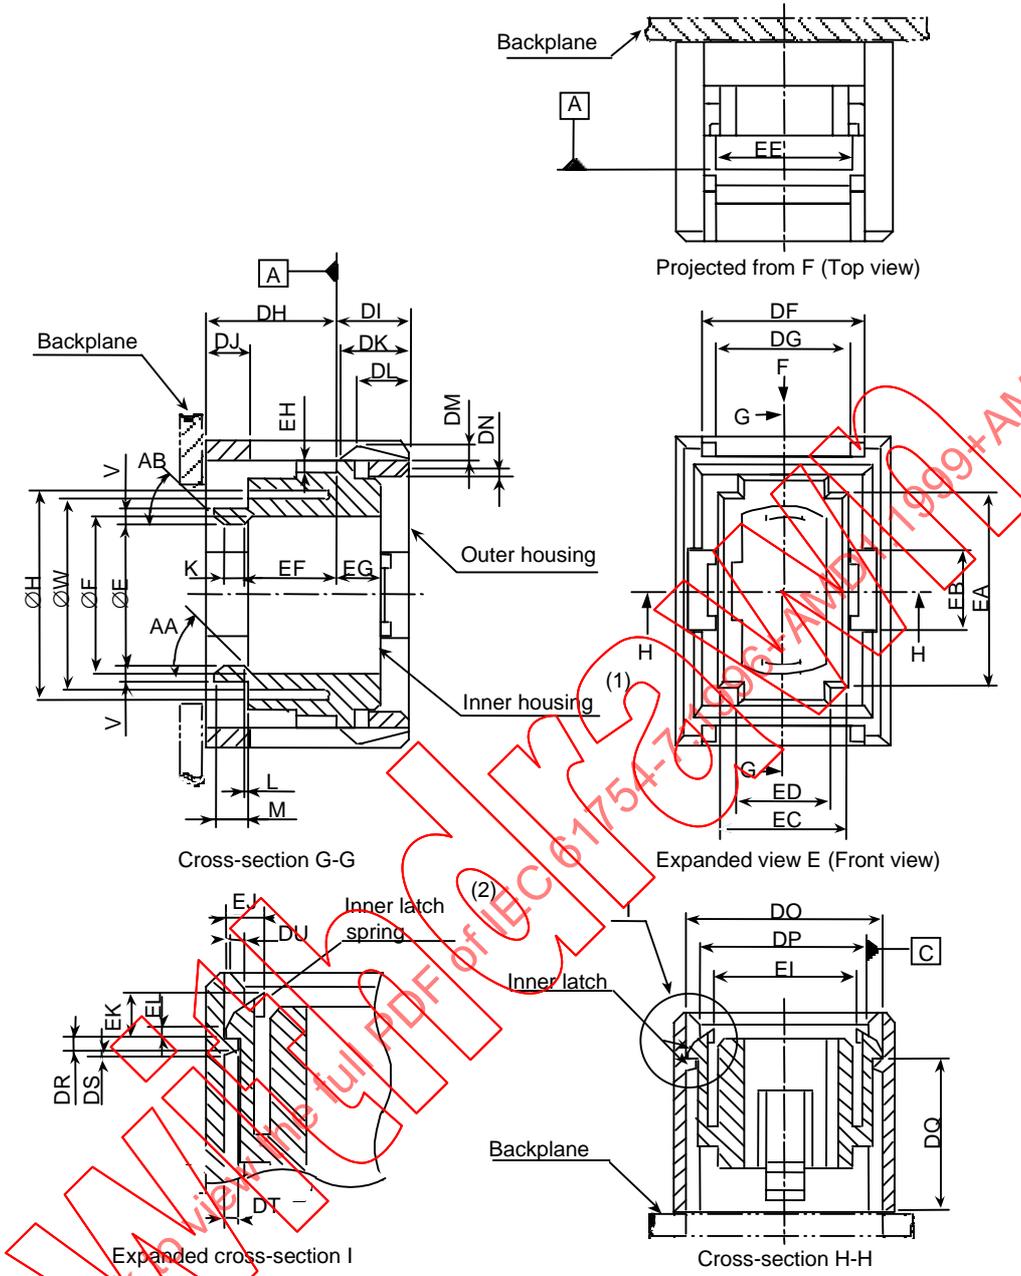

IEC 1067/2000

NOTE 1 In the figure of cross-section G-G, the inner housing shall be movable to the right at least 0,9 mm under the condition that the inner latch is completed. In addition, the inner housing shall be movable at least 2 mm to the left when the inner latch is released.

NOTE 2 In the figure of expanded cross-section I, the inner latch spring shall be moved by more than 0,65 mm to the right when the inner latch is released or latched.

Figure 7 – MPO backplane housing interface

Table 6a – Dimensions of the MPO backplane housing

Reference	Dimensions		Notes
	Minimum	Maximum	
E	8,54 mm	8,74 mm	A part of diameter
F	9,6 mm	9,7 mm	A part of diameter
H	12,6 mm	–	A part of diameter
K	1,19 mm	1,39 mm	
L	0	0,1	
M	1,6 mm	2,0 mm	
N	2,4 mm	2,6 mm	
O	5,0 mm	5,1 mm	
P	5,7 mm	5,9 mm	
S	3,4 mm	3,6 mm	
V	0,95 mm	1,15 mm	
W	11,8 mm	12,2 mm	A part of diameter
X	3,4 mm	–	
AA	45°	48°	
AB	45°	50°	
DA			See table 6b
DB			See table 6b
DC	12,25 mm	12,35 mm	
DD	16,5 mm	16,6 mm	
DE	14,3 mm	14,4 mm	
DF	9,91 mm	10,01 mm	
DG	8,2 mm	8,4 mm	
DH	7,9 mm	8,1 mm	See note
DI	4,15 mm	4,45 mm	See note
DJ	2,65 mm	2,75 mm	
DK	4,1 mm	4,3 mm	
DL	3,35 mm	3,45 mm	
DM	0,9 mm	1,0 mm	
DN	0,55 mm	0,65 mm	
DO	11,55 mm	11,65 mm	
DP	9,91 mm	10,01 mm	
DQ	9,15 mm	9,25 mm	
DR	0,35 mm	0,45 mm	
DS	0,25 mm	0,35 mm	
DT	0,55 mm	0,65 mm	
DU	0,55 mm	0,70 mm	
EA	12,14 mm	12,2 mm	
EB	4,95 mm	5,05 mm	
EC	7,94 mm	8,00 mm	
ED	5,6 mm	5,8 mm	
EE	8,15 mm	8,25 mm	
EF	5,55 mm	5,65 mm	
EG	2,55 mm	2,65 mm	
EH	0,85 mm	0,95 mm	
EI	8,6 mm	8,7 mm	
EJ	1,45 mm	1,55 mm	
EK	1,9 mm	2,0 mm	
EL	0,35 mm	0,45 mm	

NOTE These dimensions are given when the inner housing is moved in its most left-side position under the condition that the inner latch is engaged.