

CONSOLIDATED VERSION



**Consumer audio/video equipment – Digital interface –
Part 8: Transmission of ITU-R BT.601 style digital video data**

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full PDF file: www.iec.ch/standards/catalogue/iec/standards/60333-01-08+AMD1:2014/CSV

CONSOLIDATED VERSION



**Consumer audio/video equipment – Digital interface –
Part 8: Transmission of ITU-R BT.601 style digital video data**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160.40

ISBN 978-2-8322-1428-2

Warning! Make sure that you obtained this publication from an authorized distributor.

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

REDLINE VERSION



**Consumer audio/video equipment – Digital interface –
Part 8: Transmission of ITU-R BT.601 style digital video data**

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV



CONTENTS

FOREWORD.....	4
INTRODUCTION TO AMENDMENT 1	6
1 Scope.....	7
2 Normative references	7
3 Abbreviations and conventions	8
3.1 Abbreviations	8
3.2 Notation	9
3.2.1 Numeric values.....	9
3.2.2 Bit, byte and quadlet ordering.....	9
4 Reference model for data transmission.....	10
4.1 Model overview	10
4.2 Compression	11
4.3 Isochronous packet header	11
4.4 CIP header.....	11
4.5 Stream definition	12
4.6 Packetization.....	16
4.6.1 Source packet format	16
4.6.2 Type 0 ₁₆ source packet – Video data source packet.....	17
4.6.3 Type 1 ₁₆ source packet – Stream information and metadata (SIM) source packet4	21
4.6.4 Type 2 ₁₆ source packet – Audio source packet.....	28
4.7 Packet transmission method.....	28
4.7.1 Packet transmission for compression mode 0 ₁₆	28
4.7.2 Packet transmission for compression mode 1 ₁₆	31
4.7.3 Packet transmission for compression mode 2 ₁₆	31
4.7.4 Packet transmission for compression mode FF ₁₆	31
Annex A (informative) Audio/video synchronization.....	32
Annex B (normative) Additional video mode parameters	33
Annex C (informative) Using IEC 61883-1 plug control registers beyond S400.....	37
Annex D (normative) Compliance annex	38
Annex E (informative) Typical SIM source packet	39
Annex F (informative) Derivation of TRANSFER_DELAY	40
Annex G (normative) 1394 trade association CCI descriptor block	41
Bibliography.....	44
Figure 1 – Bit ordering within a byte.....	9
Figure 2 – Byte ordering within a quadlet.....	10
Figure 3 – Quadlet ordering within an octlet.....	10
Figure 4 – Isochronous packet header	11
Figure 5 – CIP header.....	11
Figure 6 – FDF field.....	12
Figure 7 – General format of a source packet	16
Figure 8 – Video data source packet.....	17

Figure 9 – Compression mode 0 ₁₆ specific information	18
Figure 10 – Color space 0 ₁₆ video data packetization	20
Figure 11 – Color space 1 ₁₆ video data packetization	20
Figure 12 – Color space 2 ₁₆ video data packetization	21
Figure 13 – Stream information and metadata source packet	22
Figure 14 – Stream information field definitions	23
Figure 15 – Auxiliary data field definitions	25
Figure E.1 – Typical SIM source packet	39
Figure G.1 – CCI descriptor block	41
Table 1 – Video mode	13
Table 2 – Compression mode	16
Table 3 – Color space	16
Table 4 – Source packet type encoding	17
Table 5 – References for video data definition	18
Table 6 – Frame rate	23
Table 7 – Aspect ratio	24
Table 8 – Progressive/interlace mode	24
Table B.1 – Additional video mode parameters, 1 of 2	33
Table B.2 – Additional video mode parameters, 2 of 2	35

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CONSUMER AUDIO/VIDEO EQUIPMENT –
DIGITAL INTERFACE –**

Part 8: Transmission of ITU-R BT.601 style digital video data

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This Consolidated version of IEC 61883-8 bears the edition number 1.1. It consists of the first edition (2008-11) [documents 100/1446/FDIS and 100/1476/RVD] and its amendment 1 (2014-02) [documents 100/2051/CDV and 100/2106/RVC]. The technical content is identical to the base edition and its amendment.

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions and deletions are displayed in red, with deletions being struck through. A separate Final version with all changes accepted is available in this publication.

This publication has been prepared for user convenience.

International Standard IEC 61883-8 has been prepared by technical area 4: Digital system interfaces and protocols, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61883 series, under the general title *Consumer audio/video equipment – Digital interface*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

INTRODUCTION TO AMENDMENT 1

The revision of IEC 61883-8:2008, has become necessary to define the following new additional copy control information.

- Analog sunset token
- Digital only token
- Copy count

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

CONSUMER AUDIO/VIDEO EQUIPMENT – DIGITAL INTERFACE –

Part 8: Transmission of ITU-R BT.601 style digital video data

1 Scope

This part of IEC 61883 specifies a protocol for the transport of uncompressed or compressed video data in the 4:2:2 format of recommendation ITU-R BT.601 (including compatible extensions to this format for the higher and lower resolutions of other commonly used video resolutions) over high performance serial bus, as specified by IEEE Std 1394-1995 as amended by IEEE Std 1394a-2000 and IEEE Std 1394b-2002 (collectively IEEE 1394). The data formats for the encapsulation of video data are compatible with those specified by IEC 61883-1. Associated audio data, if any, should be formatted as specified by IEC 61883-6.

There are many commonly used video formats unsupported by IEC 61883, such as MPEG-4, Windows Media Format (WMF) and the format used by automotive navigation applications. Support for all or most of these formats in rendering devices would require implementation of multiple video codecs. This is an undue burden that may be avoided if the source device converts to ITU-R BT.601 4:2:2 format and, if necessary, compresses the data with a codec supported by all destination devices. An additional advantage is that on-screen display (OSD) information may be mixed with video data prior to transmission to the rendering device.

Because ITU-R BT.601 4:2:2 format is widely used internally in contemporary AV equipment, this specification permits straight-forward integration of IEEE 1394 into these devices and enables markets whose usage scenarios include single video sources transmitting to one or more video displays, such as:

- consumer electronic STB or DVD video rendered by multiple displays in the home;
- automotive navigation and entertainment; and
- aeronautical in-flight entertainment.

For the sake of interoperability and bounded implementation complexity, it is essential that the specification provide the following:

- a 1394 TA controlled list of compression codecs; and
- at a minimum, a reference to one video compression codec.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61883 (all parts), *Consumer audio/video equipment – Digital interface*

IEC 61883-1, *Consumer audio/video equipment – Digital interface – Part 1: General*

ISO/IEC 11172-2:1993, *Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s – Part 2: Video*

IEEE Std 1394-1995, *Standard for a high performance serial bus*

IEEE Std 1394a-2000, *Standard for a high performance serial bus
Amendment 1*

IEEE Std 1394b-2002, *Standard for a high performance serial bus
Amendment 2*

Throughout this document, the term IEEE 1394 refers to IEEE Std 1394-1995 as amended by IEEE Std 1394a-2000 and IEEE Std 1394b-2002.

1394 Trade Association 2004006, *AV/C Digital Interface Command Set General Specification
Version 4.2*

1394 Trade Association 2003017, *IIDC 1394-based Digital Camera Specification Ver. 1.31*

EIA/CEA-861-B 2002, *A DTV Profile for Uncompressed High Speed Digital Interfaces*

IEEE Std 1394.1-2004, *Standard for High Performance Serial Bus Bridges*

ITU-R BT.601-5 1995, *Studio encoding parameters of digital television for standard 4:3 and
wide-screen 16:9 aspect ratios*

ITU-R BT.656-4 1998, *Interfaces for digital component video signals in 525-line and 625-line
television systems operating at the 4:2:2 level of recommendation ITU-R BT.601*

ITU-R BT.709-4 2000, *Parameter values for the HDTV standards for production and
international programme exchange*

ITU-R BT.1358 1998, *Studio parameters of 625 and 525 line progressive scan television
systems*

ITU-T H.263 1998, *Video coding for low bit rate communication*

SMPTE 267M-1995, *Television – Bit-Parallel Digital Interface – Component Video Signal 4:2:2
16x9 Aspect Ratio*

SMPTE 274M-1998, *Television – 1920 × 1080 Scanning and Analog and Parallel Digital
Interfaces for Multiple Picture Rates*

SMPTE 293M-1996, *Television – 720 × 483 Active Line at 59.94-Hz Progressive Scan
Production – Digital Representation*

SMPTE 296M-2001, *Television – 1280 × 720 Progressive Image Sample Structure – Analog
and Digital Representation and Analog Interface*

*VESA Monitor Timing Specifications, VESA and Industry Standards and Guidelines for
Computer Display Monitor Timing, Version 1.0, Revision 0.8*

3 Abbreviations and conventions

3.1 Abbreviations

For the purposes of this document, the abbreviations given in IEC 61883-1, as well as the following, apply.

AV/C Audio Video Control

BCD	Binary Coded Decimal
BT.601	ITU-R BT.601-5 1995
CIP	Common Isochronous Packet
CSR	Control and status register
DAC	Digital Analog Converter
DCT	Discrete Cosine Transform
DV	Digital Video
ND	No Data
OSD	Onscreen Display
OUI	Organizationally Unique Identifier
r	Reserved
MPEG	Moving Picture Experts Group
SIM	Stream Information & Metadata
VDSP	Video Data Source Packet
WMF	Windows Media Format

3.2 Notation

3.2.1 Numeric values

Decimal and hexadecimal are used within this standard. By editorial convention, decimal numbers are most frequently used to represent quantities or counts. Addresses are uniformly represented by hexadecimal numbers. Hexadecimal numbers are also used when the value represented has an underlying structure that is more apparent in a hexadecimal format than in a decimal format.

Decimal numbers are represented by Arabic numerals without subscripts or by their English names. Hexadecimal numbers are represented by digits from the character set 0 – 9 and A - F followed by the subscript 16. When the subscript is unnecessary to disambiguate the base of the number it may be omitted. For the sake of legibility hexadecimal numbers are separated into groups of four digits separated by spaces.

As an example, 42 and $2A_{16}$ both represent the same numeric value.

3.2.2 Bit, byte and quadlet ordering

This specification uses the facilities of Serial Bus, IEEE 1394, and therefore uses the ordering conventions of Serial Bus in the representation of data structures. In order to promote interoperability with memory buses that may have different ordering conventions, this specification defines the order and significance of bits within bytes, bytes within quadlets and quadlets within octlets in terms of their relative position and not their physically addressed position.

Within a byte, the most significant bit, msb, is that which is transmitted first and the least significant bit, lsb, is that which is transmitted last on serial bus, as illustrated below. The significance of the interior bits uniformly decreases in progression from msb to lsb.





Figure 1 – Bit ordering within a byte


Within a quadlet, the most significant byte is that which is transmitted first and the least significant byte is that which is transmitted last on serial bus, as shown below.

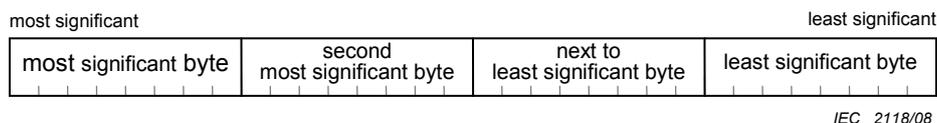

IEC 2118/08

Figure 2 – Byte ordering within a quadlet

Within an octlet, which is frequently used to contain 64-bit serial bus addresses, the most significant quadlet is that which is transmitted first and the least significant quadlet is that which is transmitted last on serial bus, as the figure below indicates.

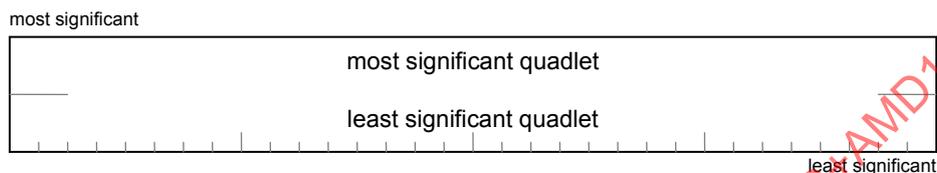

IEC 2119/08

Figure 3 – Quadlet ordering within an octlet

When block transfers take place that are not quadlet aligned or not an integral number of quadlets, no assumptions can be made about the ordering (significance within a quadlet) of bytes at the unaligned beginning or fractional quadlet end of such a block transfer, unless an application has knowledge (outside of the scope of this specification) of the ordering conventions of the other bus.

4 Reference model for data transmission

4.1 Model overview

The presently defined compression standards for IEEE 1394 transport, DV and MPEG2, have difficulties at the system level in a practical consumer AV network. Both offer excessive compression for simple transport over a wide bandwidth network and carry the associated complexity of coding and decoding signals. Each are fine for their intended purpose, but have excessive cost for simple video transport. Conventional video equipment is interfaced with analog cables carrying a number of signal formats, and it is this low cost and universal connection capability which digital interfaces need to emulate. Thus the analog output from any DVD player will connect to any TV, and this is seen as adequate by equipment manufacturers. Digital interfaces would allow many additional features, but providing every input with the capability of decoding both DV and MPEG2 in all available standards and resolutions is unnecessarily expensive. Inside equipment variations on the broadcast equipment ITU-R BT.601-5/BT.656-4 interface are common and provide a universal interface standard for digital video transport. The coding system in ITU-R BT.601-5 sends YUV data across an 8 bit interface between integrated circuits, for example an MPEG decoder and DAC. If the decoder and DAC are separated by 1394 in their separate boxes there will be a reduction in cost at the source device and the sink device will be independent from the video encoding mechanism.

This standard describes the method of passing YUV video signals across IEEE 1394 based upon the formats defined by ITU-R BT.601-5. Familiarity with the specifications ITU-R BT.601-5, ITU-R BT.656-4 and IEC 61883 is necessary to follow the technical details.

There is also the capability to transfer data in YUV 4:4:4 and 24 bit RGB formats. This allows video to be transferred without the need for color space sub-sampling.

It is valid to transmit all video modes as uncompressed data as long as the IEEE 1394 bus bandwidth is available. In practice some video modes will not be transportable in an uncompressed state.

This model also allows for the future development of video codecs. Since the transport of the video data is independent of the original source encoding as new codecs are deployed, such as MPEG-4, the transport mechanism described in this document will not need to change.

4.2 Compression

To allow the transport of high definition video signals at bus speeds less than S1600 or to allow the transport of multiple video streams it is essential that the video stream is compressed. This compression need not be more than about 10:1 and should have minimal discernable impact on the displayed image. Since compression is required to transport some of the video modes it is necessary to reference at least one compression codec in this specification. A suitable video compression codec is referenced for this purpose in Table 2. There is no requirement that a source or sink device implement this codec. Other suitable video compression codecs may be added in the future.

4.3 Isochronous packet header

The header quadlet of an IEEE 1394 isochronous packet (tcode A₁₆) is shown in the Figure 4 below.

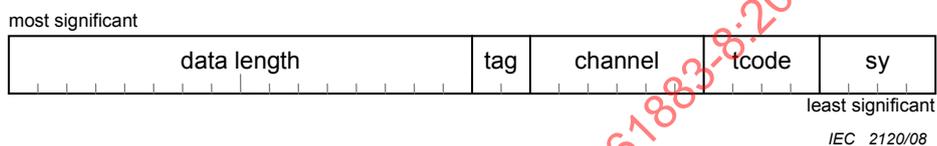


Figure 4 – Isochronous packet header

The tag field shall be set to 1₁₆ indicating that the packet has the Common Isochronous Packet (CIP) Header as defined in IEC 61883-1. The contents of the CIP Header are described in 4.4.

The definition of the remaining fields is outside of the scope of this specification.

4.4 CIP header

The definition of the CIP header is shown in Figure 5 below.




Figure 5 – CIP header

- SID denotes the source node ID. This is bus configuration dependent.
- DBS value depends upon the video mode being transported and the color space used. This value is dependent upon the compression mode, color space and video mode. The DBS value for compression mode 0₁₆ can be calculated from the source packet size given in Table 1 by dividing the value by 4. For other compression modes refer to the documentation available from the codec vendor.
- FN shall always have a value of 0₁₆. There shall only be 1 data block per source packet.
- QPC shall always have a value of 0₁₆. There shall be no padding.
- SPH shall be 0₁₆. The source packet header is not present.
- Since FN is 0₁₆ the value of DBC shall always increment by the number of source packets present in the Isochronous packet. This field indicates the count value of the first data block in the current isochronous packet.

- The value of FMT shall be 000001₂. This value indicates that the source packet format is as defined in this specification. This also indicates that the SYT field is present in the CIP header.
- The FDF field is encoded as shown in Figure 6 below.
- The SYT field is encoded as defined in IEC 61883-1.



IEC 2122/08

Figure 6 – FDF field

The ND field is used to signify whether the data payload of the isochronous packet after the CIP header is valid. If ND is set to 1₂ it indicates that the data is not valid and shall be ignored, this setting is only used in blocking transmission mode (see 4.7.1.3). The DBC field in the CIP header of a packet which has ND set to 1₂ shall be the count value of the next valid data block. The transmission of an isochronous packet with this bit set shall not cause the value of DBC to increment. If ND is set to 0₂ it indicates that the data payload of the isochronous packet after the CIP header is valid. In non-blocking transmission mode, see 4.7.1.2, ND shall be set to 0₂ for all isochronous packets.

4.5 Stream definition

A stream that conforms to this specification is governed by three key parameters:

- video mode, see Table 1 below. Additional information for each video mode is given in Annex B.
- compression mode, see Table 2 below
- color space, see Table 3 below.

Each of these parameters includes an unconstrained mode that allows modes not explicitly defined to be transmitted. The use of these unconstrained modes is beyond the scope of this standard. However, it is expected that their use will be determined by negotiation before transmission.

For transmission of compression mode 0₁₆ data the packetization and timing characteristics are defined in this specification.

For transmission of compression mode 1₁₆ and 2₁₆ data the packetization and timing characteristics are defined in the applicable specification document referenced in Table 2.

IECNORM.COM - Click to view the full PDF of IEC 61883-8:2008 +AMD1:2014 CSV

Table 1 – Video mode

Video mode	Active vertical lines	Active horizontal pixels	Interlace or progressive	Vertical frequency Hz	Source packet size for color space 0 a, b, e bytes	Source packet size for color spaces 1 and 2 a, b, e bytes	SYT interval for color space 0 a, b	SYT interval for color spaces 1 and 2 a, b	MAX VDSP for color space 0 a, b	MAX VDSP for color spaces 1 and 2 a, b	Specification
0	480	640	progr.	59,94	644	644	8	12	8	12	VESA
1	480	640	progr.	60	644	644	8	12	8	12	VESA
2	240	720	progr.	59,94	724	724	4	6	4	6	EIA/CEA-861-B
3	240	720	progr.	60	724	724	4	6	4	6	EIA/CEA-861-B
4	480	720	progr.	59,94	724	724	8	12	8	12	ITU-R BT.1358 SMPTE 293M
5	480	720	progr.	60	724	724	8	12	8	12	ITU-R BT.1358 SMPTE 293M
6	480	720	int.	59,94	724	724	4	6	4	6	ITU-R BT.601 SMPTE 267M
7	480	720	int.	60	724	724	4	6	4	6	ITU-R BT.601 SMPTE 267M
8	720	1 280	progr.	59,94	644	964	24	24	23	23	SMPTE 296M
9	720	1 280	progr.	60	644	964	24	24	23	23	SMPTE 296M
10	480	1 440	progr.	59,94	724	724	16	24	16	24	EIA/CEA-861-B
11	480	1 440	progr.	60	724	724	16	24	16	24	EIA/CEA-861-B
12	1 080	1 920	progr.	59,94	964	964	36	54	34	51	ITU-R BT.709 SMPTE 274M
13	1 080	1 920	progr.	60	964	964	36	54	34	51	ITU-R BT.709 SMPTE 274M
14	1 080	1 920	int.	59,94	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
15	1 080	1 920	int.	60	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
16	288	720	progr.	50	724	724	4	6	4	6	EIA/CEA-861-B
17	576	720	progr.	50	724	724	8	12	8	12	ITU-R BT.1358
18	576	720	int.	50	724	724	4	6	4	6	ITU-R BT.601
19	720	1 280	progr.	50	644	964	20	20	19	19	SMPTE 296M
20	576	1 440	progr.	50	724	724	16	24	16	24	EIA/CEA-861-B
21	480	960	int.	59,94	644	724	6	8	6	8	ITU-R BT.601 SMPTE 267M
22	576	960	int.	50	644	724	6	8	6	8	ITU-R BT.601

Video mode	Active vertical lines	Active horizontal pixels	Interlace or progressive	Vertical frequency Hz	Source packet size for color space 0 ^{a, b, e} bytes	Source packet size for color spaces 1 and 2 ^{a, b, e} bytes	SYT interval for color space 0 ^{a, b}	SYT interval for color spaces 1 and 2 ^{a, b}	MAX VDSP for color space 0 ^{a, b}	MAX VDSP for color spaces 1 and 2 ^{a, b}	Specification
23	-	Reserved	-	-	-	-	-	-	-	-	-
24	-	Reserved	-	-	-	-	-	-	-	-	-
25	1 080	1 920	progr.	23,976	964	964	16	24	14	21	ITU-R BT.709 SMPTE 274M
26	1 080	1 920	progr.	24	964	964	16	24	14	21	ITU-R BT.709 SMPTE 274M
27	1 080	1 920	progr.	25	964	964	16	24	15	22	ITU-R BT.709 SMPTE 274M
28	1 080	1 920	progr.	29,97	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
29	1 080	1 920	progr.	30	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
30	1 080	1 920	progr.	50	964	964	32	48	29	43	ITU-R BT.709 SMPTE 274M
31	1 080	1 920	int.	50	964	964	16	24	15	22	ITU-R BT.709 SMPTE 274M
32	288	352	progr.	25	356	532	2	2	2	2	ITU-T H.263 (CIF)
33	240	352	progr.	30	356	532	2	2	2	2	ISO-IEC 11172-2 (SIF)
34	144	176	progr.	25	180	268	2	2	1	1	H.263 (QCIF)
35	120	176	progr.	30	180	268	2	2	1	1	ISO-IEC 11172-2 (QSIF)
36	288	352	progr.	29,97	356	532	6	6	3	3	H.263 (CIF)
37	144	176	progr.	29,97	180	268	2	2	2	2	ITU-T H.263 (QCIF)
38	234	480	progr.	29,97	324	364	3	4	3	4	Automotive ^c
39	234	480	progr.	15	324	364	3	4	2	2	Automotive ^c
40	480	800	progr.	15	804	804	2	3	2	3	Automotive ^c
41	240	320	progr.	15	324	244	2	4	1	2	IIDC v.1.31 ^f
42	240	320	progr.	30	324	244	2	4	2	4	IIDC v.1.31
43	240	320	progr.	60	324	244	4	8	4	8	IIDC v.1.31
44	480	640	progr.	15	644	644	2	3	2	3	IIDC v.1.31
45	480	640	progr.	30	644	644	4	6	4	6	IIDC v.1.31
46	480	640	progr.	60	644	644	8	12	8	11	IIDC v.1.31
47	600	800	progr.	15	804	804	4	6	3	4	IIDC v.1.31

Video mode	Active vertical lines	Active horizontal pixels	Interlace or progressive	Vertical frequency Hz	Source packet size for color space 0 ^{a, b, e} bytes	Source packet size for color spaces 1 and 2 ^{a, b, e} bytes	SYT interval for color space 0 ^{a, b}	SYT interval for color spaces 1 and 2 ^{a, b}	MAX VDSP for color space 0 ^{a, b}	MAX VDSP for color spaces 1 and 2 ^{a, b}	Specification
48	600	800	progr.	30	804	804	6	9	5	7	IIDC v.1.31
49	600	800	progr.	60	804	804	10	15	9	14	IIDC v.1.31
50	768	1 024	progr.	15	516	772	8	8	6	6	IIDC v.1.31
51	768	1 024	progr.	30	516	772	12	12	12	12	IIDC v.1.31
52	768	1 024	progr.	60	516	772	24	24	24	24	IIDC v.1.31
53	960	1 280	progr.	15	644	964	8	8	8	8	IIDC v.1.31
54	960	1 280	progr.	30	644	964	16	16	15	15	IIDC v.1.31
55	960	1 280	progr.	60	644	964	32	32	29	29	IIDC v.1.31
56	1 024	1 280	progr.	15	644	964	8	8	8	8	like IIDC v1.31 ^d
57	1 024	1 280	progr.	30	644	964	16	16	16	16	like IIDC v1.31 ^d
58	1 024	1 280	progr.	60	644	964	32	32	31	31	like IIDC v1.31 ^d
59	1 200	1 600	progr.	15	804	964	12	15	9	12	IIDC v.1.31
60	1 200	1 600	progr.	30	804	964	20	25	18	23	IIDC v.1.31
61	1 200	1 600	progr.	60	804	964	36	45	36	45	IIDC v.1.31
62	480	800	progr.	30	804	804	4	6	4	6	Wide VGA
63	480	800	progr.	60	804	804	8	12	8	12	Wide VGA
255	-	Other video mode	-	-	-	-	-	-	-	-	-
Others	-	Reserved for future specification	-	-	-	-	-	-	-	-	-

^a These columns are applicable when the compression mode is 0, i.e. uncompressed video data only.
^b This value includes the quadlet that contains the Type Specific Information field.
^c These modes were requested by members of the IDB-Forum.
^d These video modes are not in IIDC specification but are comparable to the modes that are.
^e DBS can be calculated as: (Source packet size / 4).
^f See Bibliography [12].

progr. progressive
int. interlace

The use of video mode FF₁₆ is beyond the scope of this specification. However, it is expected that the use of this video mode will be determined by negotiation before transmission.

The compression mode field is encoded as defined in Table 2 below. The use of compression mode FF₁₆ is beyond the scope of this standard. However, it is expected that the use of this compression mode will be determined by negotiation before transmission.

Table 2 – Compression mode

Compression mode value	Compression mode description	Specification document reference
0 ₁₆	Uncompressed video data	None applicable
1 ₁₆	Compressed video using light codec	Oxford Semiconductor Light Codec Specification, Version 1.0, [10] ¹
2 ₁₆	Compressed Video using SmartCODEC	Fujitsu SmartCODEC Specification, Version1.0, [11]
FF ₁₆	Compressed Video using other video codec	None applicable
Others	Reserved for future specification	None applicable

The color space field is encoded as defined in Table 3 below. The use of color space FF₁₆ is beyond the scope of this standard. However, it is expected that the use of this color space will be determined by negotiation before transmission.


Table 3 – Color space

Color space format	Color space description
0 ₁₆	YUV 4:2:2 (16 bits/pixel, 8 bits/sample)
1 ₁₆	YUV 4:4:4 (24 bits/pixel, 8 bits/sample)
2 ₁₆	RGB (24 bits/pixel, 8 bits/sample)
3 ₁₆	RGB (18 bits/pixel, 6 bits/sample)
FF ₁₆	Other color space
Others	Reserved for future specification

4.6 Packetization

4.6.1 Source packet format

For a stream that conforms to this specification each IEEE-1394 isochronous packet consists of the CIP header followed by zero or more source packets. The general format of the source packet for all compression modes and all source packet types is shown in Figure 7 below. It contains a single quadlet of type specific information followed by data. The size of each source packet is compression mode, video mode and color space mode dependent. The permitted video, compression and color space modes are detailed in Table 1, Table 2 and Table 3, respectively. Table 1 indicates the source packet size for each video mode and color space mode for compression mode 0. This size is the total number of bytes per source packet, i.e. type specific information and source packet data. All the source packets of a given stream are this size.

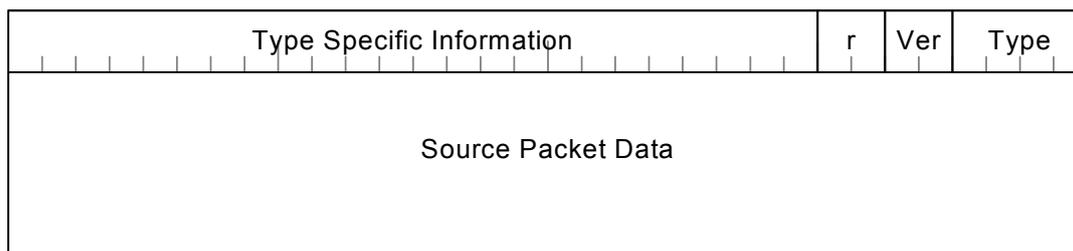

IEC 2123/08

Figure 7 – General format of a source packet

¹ The figures in square brackets refer to the Bibliography.

The *type* field indicates the type of data contained within the source packet. It is encoded as defined in Table 4 below.

The *ver* field indicates the version of the source packet. Its value is defined in the type specific sections below.

The *type specific information* field contents depends on the *type* field. Its encoding is defined in the type specific sections 4.6.2, 4.6.3 and 4.6.4 below.

The *source packet data* field contents depends on the *type* field. Its encoding is defined in the type specific sections 4.6.2, 4.6.3 and 4.6.4 below.


Table 4 – Source packet type encoding

Type	Description of type
0 ₁₆	Source packet contains video data as described in 4.6.2 below.
1 ₁₆	Source packet contains stream information and metadata as described in 4.6.3 below.
2 ₁₆	Reserved for the future specification of the transport of audio data. Further information regarding this type is given in 4.6.4 below.
others	Reserved for future use.

4.6.2 Type 0₁₆ source packet – Video data source packet

4.6.2.1 Video data source packet

Figure 8 shows the definition and arrangement of the fields in the video data source packet.

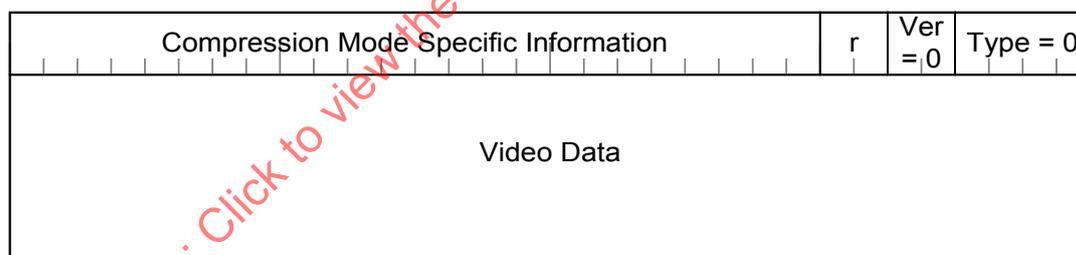

IEC 2124/08

Figure 8 – Video data source packet

The *type* field shall be set to 0₁₆ to indicate that this is a video data source packet

The *ver* field shall be set to 0₁₆ to indicate that this is version 0 of the video data source packet.

The *compression mode specific information* field has a different definition for each of the compression modes. Refer to Table 2 for a list of defined compression modes. The *compression mode specific information* for compression modes 0₁₆, 1₁₆, 2₁₆ and FF₁₆ are detailed in sections 4.6.2.2, 4.6.2.3, 4.6.2.3 and 4.6.2.5 respectively.

The *video data* field definition is determined by a combination of video mode, compression mode and color space. The reference to the applicable definition of the formatting of the *video data* field is given in Table 5 below.

Table 5 – References for video data definition

Compression mode	Color space	Video mode	Reference to video data definition
0 ₁₆	0 ₁₆	All defined except FF ₁₆	See 4.6.2.6 and 4.6.2.10
0 ₁₆	1 ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.10
0 ₁₆	2 ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.11
0 ₁₆	3 ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.13
0 ₁₆	FF ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.13
0 ₁₆	All defined	FF ₁₆	see 4.6.2.6 and 4.6.2.15
1 ₁₆	All defined	All defined	see 4.6.2.7
2 ₁₆	All defined	All defined	see 4.6.2.8
FF ₁₆	All defined	All defined	see 4.6.2.9

4.6.2.2 Compression mode 0₁₆ type specific information

Figure 9 shows the definition and arrangement of the fields within the *type specific information* field for video data source packets being transmitted in compression mode 0₁₆.



IEC 2125/08

Figure 9 – Compression mode 0₁₆ specific information

The *VDSPC* (Video Data Source Packet Count) field contains a running count of video data source packets. It is incremented by 1 for every video data source packet created by the transmitter. When a stream commences the first video data source packet created has a *VDSPC* of 0. Since *VDSPC* is only 8 bits wide the value placed in *VDSPC* is the lowest 8 bits of the running count.

The *sol* (start of line) field is set in the source packet that contains the first pixel of a video line. There is no requirement that the start of a video line be coincident with the start of an IEEE-1394 isochronous packet.

The *sav* (start of active video) field is set in the source packet that contains the first pixel of the first active video line of each frame (progressive modes) or of each field (interlace modes). This field can only be set in a source packet that has *sol* set. There is no requirement that the start of an active video line be coincident with the start of an IEEE-1394 isochronous packet.

The *line number* field is the line on which the video data in the source packet resides as defined by the video specification given in Table 1 of the given video mode. If no line numbering is defined by the video specification the *line number* field shall be a sequential count of the lines in a frame starting with the first line that is transmitted having a *line number*.

4.6.2.3 Compression mode 1₁₆ type specific information

The *type specific information* field definition for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.4 Compression mode 2_{16} type specific information

The *type specific information* field definition for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.5 Compression mode FF_{16} type specific information

The *type specific information* field definition for compression mode FF_{16} is beyond the scope of this standard.

4.6.2.6 Compression mode 0_{16} video data packetization

For transmission of compression mode 0_{16} data the video data that is transmitted is the active horizontal pixels for both the active lines and the lines of the vertical blanking period (unless they do not exist). The first pixel of a video line shall always be the first pixel in a source packet and each video line shall always fill an integer number of source packets. The number of pixels in each source packet is dependent upon the video mode and color space and is detailed in Table 1. An IEEE-1394 isochronous channel that is used to transmit data according to this specification shall only transmit a single stream of video per 1394 isochronous channel.

4.6.2.7 Compression mode 1_{16} video data packetization

The video data packetization for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.8 Compression mode 2_{16} video data packetization

The video data packetization for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.9 Compression mode FF_{16} video data packetization

The video data packetization for the this compression mode is beyond the scope of this standard.

4.6.2.10 Color space 0_{16} video data packetization – YUV 4:2:2 8 bits/sample

There is a Y sample for each pixel. Each U and V sample is used for two pixels. The subscript n denotes the pixel number within the source packet.

U ₀	Y ₀	V ₀	Y ₁
U ₂	Y ₂	V ₂	Y ₃
U ₄	Y ₄	V ₄	Y ₅
...
...
...
U _{n-5}	Y _{n-5}	V _{n-5}	Y _{n-4}
U _{n-3}	Y _{n-3}	V _{n-3}	Y _{n-2}
U _{n-1}	Y _{n-1}	V _{n-1}	Y _n

IEC 2126/08

Figure 10 – Color space 0₁₆ video data packetization

4.6.2.11 Color space 1₁₆ video data packetization – YUV 4:4:4 8 bits/sample

Each pixel contains a Y, U and V sample. The arrangement of the samples is shown in Figure 11. The subscript *n* denotes the pixel number within the source packet.

U ₀	Y ₀	V ₀	U ₁
Y ₁	V ₁	U ₂	Y ₂
V ₂	U ₃	Y ₃	V ₃
...
...
...
U _{n-3}	Y _{n-3}	V _{n-3}	U _{n-2}
Y _{n-2}	V _{n-2}	U _{n-1}	Y _{n-1}
V _{n-1}	U _n	Y _n	V _n

IEC 2127/08

Figure 11 – Color space 1₁₆ video data packetization

4.6.2.12 Color space 2₁₆ video data packetization – RGB 8 bits/sample

Each pixel contains a R, G and B sample. The arrangement of the samples is shown in Figure 12. The subscript *n* denotes the pixel number within the source packet.

R ₀	G ₀	B ₀	R ₁
G ₁	B ₁	R ₂	G ₂
B ₂	R ₃	G ₃	B ₃
...
...
...
R _{n-3}	G _{n-3}	B _{n-3}	R _{n-2}
G _{n-2}	B _{n-2}	R _{n-1}	G _{n-1}
B _{n-1}	R _n	G _n	B _n

IEC 2128/08

Figure 12 – Color space 2₁₆ video data packetization

4.6.2.13 Color space 3₁₆ video data packetization – RGB 6 bits/sample

The video data packetization for this color space is only applied for compression mode 2₁₆ and is defined in the applicable specification document referenced in Table 2.

4.6.2.14 Color space FF₁₆ video data packetization

The video data packetization for the this color space is beyond the scope of this standard.

4.6.2.15 Video mode FF₁₆ video data packetization

The video data packetization for the this video mode is beyond the scope of this standard.

4.6.3 Type 1₁₆ source packet – Stream information and metadata (SIM) source packet⁴

4.6.3.1 Stream information and metadata (SIM) source packet

A SIM source packet is transmitted exactly once per video frame for all compression modes. This type of source packet contains six data-types. Figure 13 shows the definition and arrangement of the fields of the stream information and metadata source packet.

reserved	Total Length	reserved	Ver = 1	Type = 1
reserved	Stream Info Length (bytes)	Stream Info Data (variable length field, zero or more bytes)		
reserved	Auxiliary Data Length (bytes)	Auxiliary Data (variable length field, zero or more bytes)		
reserved	Video Mode Specific Info Length (bytes)	Video Mode Specific Info Data (variable length field, zero or more bytes)		
reserved	Compression Mode Specific Info Length (bytes)	Compression Mode Specific Info Data (variable length field, zero or more bytes)		
reserved	Color Space Specific Info Length (bytes)	Color Space Specific Info Data (variable length field, zero or more bytes)		
reserved	Vendor Specific Info Length (bytes)	Vendor Specific Info Data (variable length field, zero or more bytes)		
reserved	Copy Control Info Length (bytes)	Copy Control Info Data (variable length field, zero or more bytes)		

IEC 2129/08

Figure 13 – Stream information and metadata source packet

For transmission of compression mode 0_{16} only the SIM source packet shall denote the start a video frame, that is the next video data source packet shall be the start of the first line of video data of a frame.

The six data-types included in the SIM source packet are:

- stream information;
- auxiliary data;
- video mode specific information;
- compression mode specific information;
- color space specific information;
- copy control information.

Each data-type consists of a six bit reserved field, a ten bit length and a variable number of data bytes. The six bit reserved field and the ten bit length shall be present for all data-types in all SIM source packets. If the length field is zero then no data bytes are included in the SIM source packet for that data-type. Annex D provides an example of a typical SIM source packet.

The *Type* field shall be set to 1_{16} to indicate that this is a SIM source packet.

The *Ver* field shall be set to 1_{16} to indicate that this is version 1 of the SIM source packet. This version is backward compatible with version 0. All future versions shall be backward compatible, they shall only add additional data-types in a manner consistent with those already defined. A node that receives a SIM source packet with a version number later than that which it supports should ignore the additional data-types.

The *Total Length* field indicates the number of valid bytes in the *Source Packet Data* portion of the source packet. Its value is the summation of the six length fields plus 12 bytes for the length and reserved fields themselves. The *Total Length* shall be less than or equal to (*source packet size* – 4) where *source packet size* is determined by the combination of video, compression and color space modes. Since there are a number of different source packet sizes it is unlikely that the *total length* will be equal to (*source packet size* – 4) therefore all remaining bytes in the source packet beyond those indicated by *total length* are reserved and shall be set to 00_{16} .

4.6.3.2 Stream information

The stream information data type shall be included in all SIM source packets. The definition of the fields in this data-type is shown in Figure 14 below.

reserved		Stream Info Length = 14			reserved			
Video Mode		Frame Rate	AR	Compression Mode		Color Space		
P/I	Vertical Size			r	Horizontal Size			
r	Transported Vertical Size			r	Transported Horizontal Size			

IEC 2130/08

Figure 14 – Stream information field definitions

The *stream info length* field shall be set to 14 (E_{16}) to indicate that there are 14 bytes of stream information.

The *video mode* field is encoded as defined in Table 1. For all video modes except mode FF_{16} the values of *frame rate*, *P/I*, *vertical size*, *horizontal size*, *transported vertical size* and *transported horizontal size* are fixed and are given in Annex B. When video mode FF_{16} is used these fields shall be set to the applicable value from the tables below. Where no value matches the required parameter the no information value shall be used, this value has all the bits set to 1_2 . The action taken by the sink node when receiving a field set to no information is beyond the scope of this standard.

The *frame rate* field is encoded as defined in Table 6 below.

Table 6 – Frame rate

Frame rate	Frame rate value (frames per second)
0_{16}	Reserved for future specification
1_{16}	24/1,001 (23,976...)
2_{16}	24
3_{16}	25
4_{16}	30/1,001 (29,97...)
5_{16}	30
6_{16}	50
7_{16}	60/1,001 (59,94...)
8_{16}	60
9_{16}	15
F_{16}	No information
others	Reserved for future specification

The AR field is described in Table 7 below.

Table 7 – Aspect ratio

AR	Aspect ratio
2 ₁₆	4:3
3 ₁₆	16:9
4 ₁₆	2,21:1
F ₁₆	No information
others	Reserved for future specification

The P/I field indicates whether the video stream is progressive or interlaced. It is encoded as defined in Table 8 below.

Table 8 – Progressive/interlace mode

P/I	Progressive/Interlace information
0 ₁₆	Stream contains interlaced video frames
1 ₁₆	Stream contains progressive video frames
2 ₁₆	Reserved for future specification
3 ₁₆	No Information

The *vertical size* gives the value in lines of the vertical resolution of the video stream. This figure includes the vertical blanking if appropriate.

The *horizontal size* gives the value in pixels (not samples) of the horizontal resolution of the video stream. This figure includes the horizontal blanking if appropriate.

The *transported vertical size* gives the value in lines of the vertical resolution of the video stream that is actually transported. For all video modes currently defined, except FF₁₆, every line is transported and so this figure includes any vertical blanking. Whether vertical blanking is transported for video mode FF₁₆ is beyond the scope of this standard.

The *transported horizontal size* gives the value in pixels (not samples) of the horizontal resolution of the video stream that is actually transported. For all video modes currently defined, except FF₁₆, only the active portion of each video lines is transported and so this figure excludes any horizontal blanking. Whether horizontal blanking is transported for video mode FF₁₆ is beyond the scope of this standard.

4.6.3.3 Auxiliary information

The auxiliary information data type should be included in all SIM source packets when transporting video data for which the auxiliary data is available. The definition of the fields in this data-type is shown in Figure 15 below.

reserved			Auxiliary Data Length (bits 9:8) = 0 ₂
Auxiliary Data Length (bits 7:0) = 14			
TC VAL	TC tens of frames		TC units of frames
Drop	TC tens of seconds		TC units of seconds
r	TC tens of minutes		TC units of minutes
TC tens of hours		TC units of hours	
RD VAL	DS	tens of time zone	units of time zone
r	tens of day		units of day
day of week		tens of month	units of month
tens of year		units of year	
thousands of year		hundreds of year	
RT VAL	RT tens of frames		RT units of frames
r	RT tens of seconds		RT units of seconds
r	RT tens of minutes		RT units of minutes
r	RT tens of hours		RT units of hours
reserved			

IEC 2131/08

Figure 15 – Auxiliary data field definitions

The *auxiliary data length* field shall be set to 14 (E₁₆) to indicate that there are 14 bytes of auxiliary data.

The remaining fields are defined below. The acquisition of the data contained in these fields is beyond the scope of this standard. The usage of the information contained in these fields by the sink device is implementation dependent.

TC VAL: A 1 if the Time-Code fields contain valid information.

TC tens of frames: The time-code tens of frames value in BCD.

TC units of frames: The time-code units of frames value in BCD.

Drop: A 1 if the time-code is based on drop-mode counting.

TC tens of seconds: The time-code tens of seconds value in BCD.

TC units of seconds: The time-code units of seconds value in BCD.

TC tens of minutes: The time-code tens of minutes value in BCD.

TC units of minutes: The time-code units of minutes value in BCD.

TC tens of hours: The time-code tens of hours value in BCD.

TC units of hours: The time-code units of hours value in BCD.

RD VAL: A 1 if the Record-Date fields contain valid information.

DS: A 1 if the record-time is based on daylight-savings-time.

tens of time zone : The record-time tens of time-zone value in BCD.

units of time zone: The record-time units of time-zone value in BCD.

tens of day: The record-date tens of day value in BCD.

units of day: The record-date units of day value in BCD.

day of week: The day of week, 0 (Sunday) through 6 (Saturday).

tens of month: The record-date tens of months value in BCD.

units of month: The record-date units of month value in BCD.

tens of year: The record-date tens of year value in BCD.

units of year: The record-date units of year value in BCD.

hundreds of year: The record-date hundreds of year value in BCD.

thousands of year: The record-date thousands of year value in BCD.

RT VAL: A 1 if the Record-Time fields contain valid information.

RT tens of frames: The record-time tens of frames value in BCD.

RT units of frames: The record-time units of frames value in BCD.

RT tens of seconds: The record-time tens of seconds value in BCD.


RT units of seconds: The record-time units of seconds value in BCD.

RT tens of minutes: The record-time tens of minutes value in BCD.

RT units of minutes: The record-time units of minutes value in BCD.

RT tens of hours: The record-time tens of hours value in BCD.

RT units of hours: The record-time units of hours value in BCD.

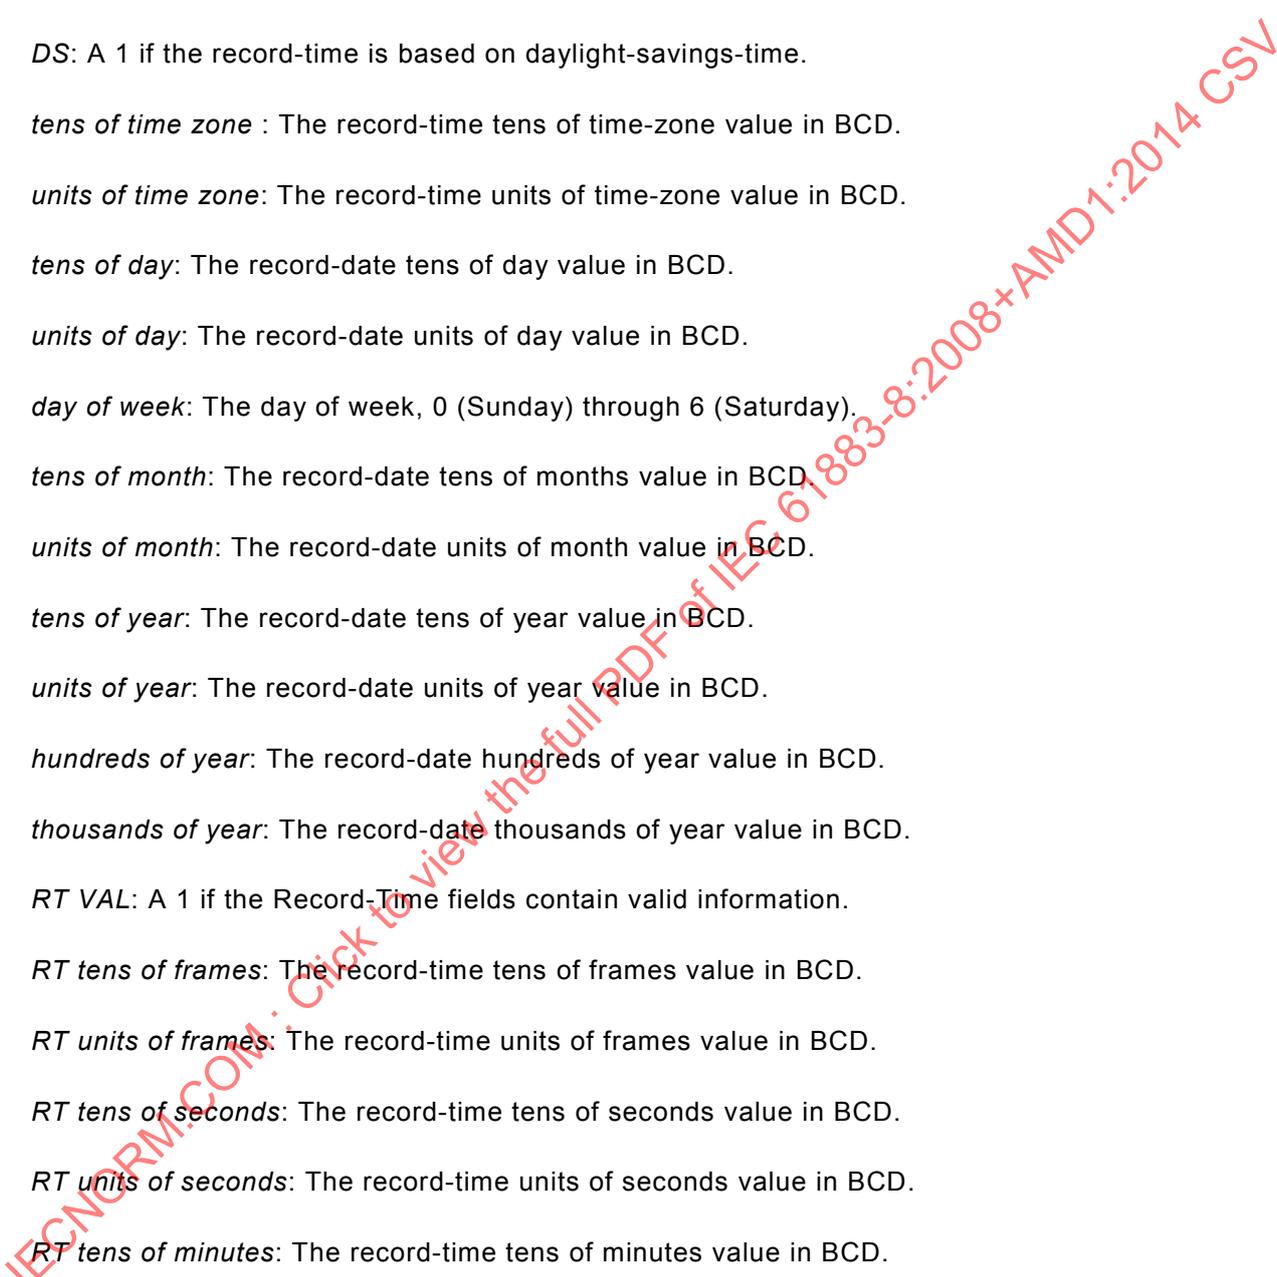

4.6.3.4 Video mode specific information

For all video modes except FF₁₆ there are no data fields currently defined for this data-type. Therefore *video mode specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

For video mode FF₁₆ the first 3 bytes following the length field shall be the OUI of the vendor that has specified the video mode specific information data-type structure that is being transported. Therefore *video mode specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.5 Compression mode specific information

For compression modes 0₁₆ there are no data fields currently defined for this data-type. Therefore *compression mode specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

For compression modes 1₁₆ and 2₁₆ the data-type length and structure is defined in the applicable specification document referenced in Table 2.

For compression mode FF₁₆ the first 3 bytes following the length field shall be the OUI of the vendor that has specified the compression mode specific information data-type structure that is being transported. Therefore *compression mode specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.6 Color space specific information

For all color space modes except FF₁₆ there are no data fields currently defined for this data-type. Therefore *color space specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

For color space FF₁₆ the first 3 bytes following the length field shall be the OUI of the vendor that has specified the color space specific information data-type structure that is being transported. Therefore *color space specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.7 Vendor specific information

If this field is unused the *vendor specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

If this field is used the first 3 bytes following the length field shall be the OUI of the vendor that has implemented the device. In this case the *vendor specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.8 Copy control information

The copy control information block shall be included in all SIM source packets.

If there is no CCI to convey the *copy control info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

If this field is used the first 3 bytes following the length field shall be the OUI of the vendor that has defined the copy control information. In this case the *copy control info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

Annex H contains the definition of a CCI descriptor structure that has been defined by the 1394 Trade Association.

4.6.4 Type 2₁₆ source packet – Audio source packet

4.6.4.1 Audio source packet

The specification of the transportation of audio data within the same 1394 stream as video data is a likely update to this specification. Until such time as this has been specified it is recommended that audio data be transmitted as a separate 1394 stream as described by IEC 61883-6, [6]. Source packet type 2₁₆ has been reserved for this purpose. A suggested method for synchronizing the video and audio on two separate 1394 channels is given in Annex A. The actual method of audio/video synchronization is implementation dependent.

4.7 Packet transmission method

4.7.1 Packet transmission for compression mode 0₁₆

4.7.1.1 Overview of transmission

When a non-empty packet is ready to be transmitted, the transmitter shall transmit it within the most recent isochronous cycle initiated by a cycle start packet. The behavior of packet transmission depends on the definition of the condition in which a non-empty packet is ready to be transmitted. There are two situations in which this condition is defined.

- a) A non-empty packet being ready for transmission is defined to be true if one or more video data source packets have arrived within an isochronous cycle. This transmission method is called non-blocking transmission, and is described in 4.7.1.2.
- b) The condition of a non-empty packet is ready to be transmitted can also be defined as true when a fixed number of data blocks have arrived. This transmission method is called blocking transmission, and is described in 4.7.1.3.

Since there is no source packet header (SPH) there is only one time stamp and this is in the SYT field of the CIP header. If a CIP contains multiple video data source packets, it is necessary to specify which source packet corresponds to the time stamp.

Since the stream contains a SIM source packet at the frequency of once per frame a mechanism is required to ensure that the SYT time stamp is generated at a regular interval of video data source packets. The VDSPC (Video Data Source Packet Count) field in video data source packet is used for this purpose.

The transmitter prepares the time stamp for the video data source packet, which meets this condition:

$$\text{mod}(\text{VDSPC}, \text{SYT_INTERVAL}) = 0;$$

where

VDSPC is the running count of transmitted video data source packets.

SYT_INTERVAL denotes the number of video data source packets between two successive valid SYT timestamps, which includes one of the video data source packets with a valid SYT. For example, if there are three video data source packets between two valid SYT timestamps, then the SYT_INTERVAL would be 4. The SYT_INTERVAL is dependent upon the video mode and color space used. The values of SYT_INTERVAL are given in Table 1.

The receiver knows the video data source packet for which the SYT timestamp is valid since it is the source packet whose VDSPC solve the following equation:

$$\text{mod}(\text{VDSPC}, \text{SYT_INTERVAL}) = 0$$

The receiver is responsible for estimating the timing of data blocks between valid time stamps. The method of timing estimation is implementation-dependent.

The SYT timestamp specifies the presentation time of the video data source packet at the receiver. A receiver must have the capability of presenting events at the time specified by the transmitter.

The TRANSFER_DELAY value is 875 μs , which accommodates the maximum latency time of isochronous packet transmission through an arbitrated short bus reset, worst case packetization delay and provides scope for encryption/decryption that may be required. The derivation of the TRANSFER_DELAY value is given in Annex F.

The transmitter quantizes the timing of the synchronization clock, for instance the rising edge of the video clock, by referring to its own CYCLE_TIME. It transmits the sum of this cycle time and TRANSFER_DELAY in the SYT field of the CIP. If the timing information is not required for a CIP the SYT shall indicate the no information code, that is FFFF₁₆.

4.7.1.2 Non-blocking transmission method

The transmitter shall construct a packet in every nominal isochronous cycle. Each packet shall comply with the following constraint:

$$0 \leq N \leq \text{MAX_VDSP}$$

where

N is the number of video data source packets in the isochronous packet.

MAX_VDSP is given in Table 1.

In normal operation the transmitter shall not transmit events late, and shall not transmit packets early. The resulting conditions may be expressed as follows:

$$\text{Packet_arrival_time_L} \leq \text{Event_arrival_time}[0] + \text{TRANSFER_DELAY}$$

$$\text{Event_arrival_time}[N-1] \leq \text{Packet_arrival_time_F}$$

where

Packet_arrival_time_F is the time (measured in μs) when the first bit of the isochronous packet arrives at the receiver.

Packet_arrival_time_L is the time (measured in μs) when the last bit of the isochronous packet arrives at the receiver.

Event_arrival_time[M] is the time (measured in μs) of the arrival at the transmitter of video data source packet M of the isochronous packet. The first video data source packet of the isochronous packet has $M = 0$.

Since MAX_VDSP is always greater than or equal to SYT_INTERVAL for all video modes there will only ever be a maximum of one SYT timestamp in a video data source packet.

4.7.1.3 Blocking transmission method

The blocking method may be used by a transmitter, which has only the ability to transmit isochronous packets of the same size. In order to indicate no data, the transmitter may transmit an isochronous packet containing just a CIP header or a special nonempty packet which has the ND (NO DATA) flag set to 1₂ in its FDF field and has the same size of dummy data as a nonempty packet.

The transmitter shall construct a packet that contains no more than MAX_VDSP + 1 source packets.

For blocking, the duration of the successive video data source packets in a CIP must be added to the default TRANSFER_DELAY.

If a CIP contains N video data source packets, then

$$\text{ACTUAL_TRANSFER_DELAY} \geq \text{TRANSFER_DELAY} + (N * \text{VDSP_DURATION})$$

where

TRANSFER_DELAY is the latency of transmission of 875 μs as given in section 4.7.1.1.

VDSP_DURATION is the duration of a video data source packet, it is dependent upon video mode and color space. The VDSP_DURATION for each video mode is given in Annex B. The total delay for MAX_VDSP video source packets is also given in Annex B.

It is recommended that the receiver have sufficient extra buffer to compensate for the delay in receiving data due to blocking transmission's characteristics. The actual value of extra delay required, and hence additional buffer size required, depends upon the video modes and color spaces supported by the receiving node.

4.7.1.4 Bandwidth allocation

Prior to stream transmission the appropriate bandwidth must be reserved at the isochronous resource manager.

The calculation of bandwidth allocation units for this purpose uses the following equations:

$$\text{Maximum number of bytes per packet} = ((\text{MAX_VDSP} + 1) \times \text{Source Packet Size}) + 20 \quad [\text{A}]$$

$$\text{Maximum number of quadlets per packet} = (\text{Maximum number of bytes per packet} / 4)$$

$$\text{Bandwidth allocation units} = \text{Maximum number of quadlets per packet} \times \text{SPEED_FACTOR}$$

SPEED_FACTOR takes the following values:

- a) for S100 SPEED_FACTOR = 16;
- b) for S200 SPEED_FACTOR = 8;
- c) for S400 SPEED_FACTOR = 4;
- d) for S800 SPEED_FACTOR = 2;
- e) for S1600 SPEED_FACTOR = 1;
- f) for S3200 SPEED_FACTOR = 0,5 (This may result in a fractional result for the bandwidth allocation units, in this circumstance the value shall be rounded up to the next integer value);

The addition of 1 to the MAX_VDSP is required to guarantee sufficient bandwidth for the SIM source packet that is sent once per frame. In the normal non-blocking transmission method, fewer than MAX_VDSP video data source packets will be transmitted in each packet, for some video modes this may allow sufficient bandwidth for the transmission of the SIM source packet without any extra bandwidth being allocated such that equation [A] becomes:

Maximum number of bytes per packet = (MAX_VDSP * Source Packet Size) + 20 [B]

For color space 0₁₆ the following video modes require equation [A]:

g) modes 49, 59, 60 and 61;

For color spaces 1₁₆ and 2₁₆ the following video modes require equation [A]:

h) mode 61 only.

For modes that do not require equation [A] for bandwidth allocation unit calculation it is recommended that they do use equation [A] since in the event of lost opportunities to transmit a packet (such as a cycle start packet drop after a bus reset) a transmitter can catch up by transmitting up to MAX_VDSP events in one or more of the subsequent packets. Also, since the SIM source packet is only sent once per frame the bandwidth allocation calculated in equation [A] provides sufficient allocated bandwidth such that one additional video data source packet over and above MAX_VDSP can be sent per isochronous packet for most isochronous packets without violating the allocated bandwidth. Whilst this additional bandwidth will be unused most of the time it provides the extra bandwidth needed to catch up with transmission sooner.

The bandwidth allocation units have been calculated for all modes using equation [A] and are listed in Annex B.

4.7.2 Packet transmission for compression mode 1₁₆

The transmission timing parameters for this compression mode are defined in the applicable specification document referenced in Table 2.

4.7.3 Packet transmission for compression mode 2₁₆

The transmission timing parameters for this compression mode are defined in the applicable specification document referenced in Table 2.

4.7.4 Packet transmission for compression mode FF₁₆

The definition of the transmission timing parameters for this compression mode is beyond the scope of this standard.

Annex A (informative)

Audio/video synchronization

A.1 Logical association of audio and video streams

There is sufficient capability in the AV/C specifications, [5] to identify 1394 isochronous streams that are associated.

A.2 Time synchronization of audio and video streams

Time synchronization may be achieved using the following principles:

A device that supports this specification and also sources IEC 61883-6 audio streams should ensure that both streams are synchronized with respect to presentation timestamp, that is audio and video data that arrived coincidentally at the transmitter should be presented at the receiver coincidentally.

The TRANSFER_DELAY for these streams is different, with TRANSFER_DELAY given by this specification being greater than that given by IEC 61883-6,[6]. Therefore the source should delay the IEC 61883-6 data prior to entering the 1394 system by a time equal to

$(\text{TRANSFER_DELAY for 601 Over 1394}) - (\text{TRANSFER_DELAY for IEC 61883-6}).$

This buffering should be done in the audio clock domain. It must be noted that IEC 61883-6 provides the capability to vary the IEC 61883-6 TRANSFER_DELAY, a transmitter that allows this functionality will have to vary this additional delay accordingly. It is permissible to adjust the IEC 61883-6 TRANSFER_DELAY to a value greater than that used by this standard. In this situation the video data would be delayed in the video clock domain by the difference in the TRANSFER_DELAY values.

The delay in the system after the presentation time may be different between the audio and video path. The receiver should ensure that this delay is the same, and if this is not possible then the audio delay should be greater than the video delay to avoid lip-sync issues but by no more than about 10 ms.

Annex B (normative)

Additional video mode parameters

This annex contains the additional parameters associated with the video modes defined in Table 1. It includes the fixed parameters that are used in the SIM source packet.

NOTE Due to the width of the tables there are two tables in this annex.

Table B.1 – Additional video mode parameters, 1 of 2

Video mode	Transported vertical size ^a	Transported horizontal size ^{a, d}	Vertical size ^a	Horizontal size ^{a, d}	Vertical blanking	Horizontal blanking	P/I ^a	Frame rate ^a	Minimum bus speed comp mode 0 ₁₆ color space 0 ₁₆	Minimum bus speed comp mode 0 ₁₆ color spaces 1 ₁₆ and 2 ₁₆
0	500	640	500	800	20	160	1 ₁₆	7 ₁₆	S800	S1600 ^b
1	500	640	500	800	20	160	1 ₁₆	8 ₁₆	S800	S1600 ^b
2	263	720	263	858	23	138	1 ₁₆	7 ₁₆	S400	S800
3	263	720	263	858	23	138	1 ₁₆	8 ₁₆	S400	S800
4	522	720	522	858	42	138	1 ₁₆	7 ₁₆	S800	S1600
5	522	720	522	858	42	138	1 ₁₆	8 ₁₆	S800	S1600
6	525	720	525	858	45	138	0 ₁₆	4 ₁₆	S400	S800
7	525	720	525	858	45	138	0 ₁₆	5 ₁₆	S400	S800
8	750	1 280	750	1 650	30	370	1 ₁₆	7 ₁₆	S1600	S3200
9	750	1 280	750	1 650	30	370	1 ₁₆	8 ₁₆	S1600	S3200
10	525	1 440	525	1 716	45	276	1 ₁₆	7 ₁₆	S1600	S3200
11	525	1 440	525	1 716	45	276	1 ₁₆	8 ₁₆	S1600	S3200
12	1 125	1 920	1 125	2 200	45	280	1 ₁₆	7 ₁₆	> ^c	> ^c
13	1 125	1 920	1 125	2 200	45	280	1 ₁₆	8 ₁₆	> ^c	> ^c
14	1 125	1 920	1 125	2 200	45	280	0 ₁₆	4 ₁₆	S3200	S3200
15	1 125	1 920	1 125	2 200	45	280	0 ₁₆	5 ₁₆	S3200	S3200
16	314	720	314	864	26	144	1 ₁₆	6 ₁₆	S400	S800
17	625	720	625	864	49	144	1 ₁₆	6 ₁₆	S800	S1600
18	625	720	625	864	49	144	0 ₁₆	3 ₁₆	S400	S800
19	750	1 280	750	1 980	30	700	1 ₁₆	6 ₁₆	S1600	S3200
20	625	1 440	625	1 728	49	288	1 ₁₆	6 ₁₆	S1600	S3200
21	525	960	525	1 144	45	184	0 ₁₆	4 ₁₆	S800 ²	S800
22	625	960	625	1 152	49	192	0 ₁₆	3 ₁₆	S800 ²	S800
23	-	-	-	-	-	-	-	-	-	-
24	-	-	-	-	-	-	-	-	-	-
25	1 125	1 920	1 125	2 750	45	830	1 ₁₆	1 ₁₆	S1600	S3200
26	1 125	1 920	1 125	2 750	45	830	1 ₁₆	2 ₁₆	S1600	S3200
27	1 125	1 920	1 125	2 640	45	720	1 ₁₆	3 ₁₆	S1600	S3200
28	1 125	1 920	1 125	2 200	45	280	1 ₁₆	4 ₁₆	S3200	S3200
29	1 125	1 920	1 125	2 200	45	280	1 ₁₆	5 ₁₆	S3200	S3200
30	1 125	1 920	1 125	2 640	45	720	1 ₁₆	6 ₁₆	S3200	> ^c
31	1 125	1 920	1 125	2 640	45	720	0 ₁₆	3 ₁₆	S1600	S3200

Video mode	Transported vertical size ^a	Transported horizontal size ^{a, d}	Vertical size ^a	Horizontal size ^{a, d}	Vertical blanking	Horizontal blanking	P/I ^a	Frame rate ^a	Minimum bus speed comp mode 0 ₁₆ color space 0 ₁₆	Minimum bus speed comp mode 0 ₁₆ color spaces 1 ₁₆ and 2 ₁₆
32	288	352	288	352	0	0	1 ₁₆	3 ₁₆	S200 ²	S200
33	240	352	240	352	0	0	1 ₁₆	5 ₁₆	S200 ²	S200
34	144	176	144	176	0	0	1 ₁₆	3 ₁₆	S100	S100
35	120	176	120	176	0	0	1 ₁₆	5 ₁₆	S100	S100
36	288	352	288	352	0	0	1 ₁₆	4 ₁₆	S200	S400 ^b
37	144	176	144	176	0	0	1 ₁₆	4 ₁₆	S100	S100
38	234	480	234	480	0	0	1 ₁₆	4 ₁₆	S200 ^b	S200
39	234	480	234	480	0	0	1 ₁₆	9 ₁₆	S100	S200 ^b
40	480	800	480	800	0	0	1 ₁₆	9 ₁₆	S400 ^b	S400
41	240	320	240	320	0	0	1 ₁₆	9 ₁₆	S100	S100
42	240	320	240	320	0	0	1 ₁₆	5 ₁₆	S100	S200 ^b
43	240	320	240	320	0	0	1 ₁₆	8 ₁₆	S200	S400 ^b
44	480	640	480	640	0	0	1 ₁₆	9 ₁₆	S200	S400 ^b
45	480	640	480	640	0	0	1 ₁₆	5 ₁₆	S400	S800 ^b
46	480	640	480	640	0	0	1 ₁₆	8 ₁₆	S800	S800
47	600	800	600	800	0	0	1 ₁₆	9 ₁₆	S400	S400
48	600	800	600	800	0	0	1 ₁₆	5 ₁₆	S800 ^b	S800
49	600	800	600	800	0	0	1 ₁₆	8 ₁₆	S800	S1600
50	768	1 024	768	1 024	0	0	1 ₁₆	9 ₁₆	S400	S800
51	768	1 024	768	1 024	0	0	1 ₁₆	5 ₁₆	S800	S1600
52	768	1 024	768	1 024	0	0	1 ₁₆	8 ₁₆	S1600	S3200
53	960	1 280	960	1 280	0	0	1 ₁₆	9 ₁₆	S800	S1600 ²
54	960	1 280	960	1 280	0	0	1 ₁₆	5 ₁₆	S1600	S1600
55	960	1 280	960	1 280	0	0	1 ₁₆	8 ₁₆	S3200	S3200
56	1 024	1 280	1 024	1 280	0	0	1 ₁₆	9 ₁₆	S800	S1600 ^b
57	1 024	1 280	1 024	1 280	0	0	1 ₁₆	5 ₁₆	S1600	S3200 ^b
58	1 024	1 280	1 024	1 280	0	0	1 ₁₆	8 ₁₆	S3200	S3200
59	1 200	1 600	1 200	1 600	0	0	1 ₁₆	9 ₁₆	S800	S1600
60	1 200	1 600	1 200	1 600	0	0	1 ₁₆	5 ₁₆	S1600	S3200
61	1 200	1 600	1 200	1 600	0	0	1 ₁₆	8 ₁₆	S3200	>
62	480	800	480	800	0	0	1 ₁₆	5 ₁₆	S400	S800
63	480	800	480	800	0	0	1 ₁₆	8 ₁₆	S800	S1600
255	Other video mode	-	-	-	-	-	-	-	-	-
Others	Reserved for future specification	-	-	-	-	-	-	-	-	-

- ^a The values represent the encodings that should be used in the SIM source packet.
- ^b These modes can be sent at the next lower bus speed if equation [B] is used to calculate bandwidth allocation units in 4.7.1.4.
- ^c This video mode requires bus speeds greater than S3200 and so must be compressed if it is to be transported until such time as bus speeds increase beyond S3200.
- ^d Horizontal blanking can be calculated as: (Horizontal size – Transported horizontal size).

Table B.2 – Additional video mode parameters, 2 of 2

Video Mode	Lines per SYT interval, all color spaces	Duration of a source packet for color space 0 μs	Duration of an isochronous packet for color space 0 μs	Duration of a source packet for color space 1 and 2 μs	Duration of an isochronous packet for color space 1 and 2 μs	Bandwidth allocation units ^a at minimum allowed speed for color space 0	Bandwidth allocation units ^a at minimum allowed speed for color space 1 and 2
0	4	16,69	133,52	11,13	133,56	2 908	2 098
1	4	16,67	133,36	11,12	133,44	2 908	2 098
2	2	31,72	126,88	21,15	126,9	3 640	2 544
3	2	31,69	126,76	21,13	126,78	3 640	2 544
4	4	15,99	127,92	10,66	127,92	3 268	2 358
5	4	15,97	127,76	10,65	127,8	3 268	2 358
6	2	31,78	127,12	21,19	127,14	3 640	2 544
7	2	31,75	127	21,17	127,02	3 640	2 544
8	6	5,57	128,11	5,57	128,11	3 869	2 895
9	6	5,56	127,88	5,56	127,88	3 869	2 895
10	4	7,95	127,2	5,3	127,2	3 082	2 265
11	4	7,94	127,04	5,3	127,2	3 082	2 265
12	9	3,71	126,14	2,48	126,48	0	0
13	9	3,71	126,14	2,47	125,97	0	0
14	5	7,42	126,14	4,95	128,7	2 172	3 256
15	5	7,41	125,97	4,94	128,44	2 172	3 256
16	2	31,85	127,4	21,24	127,44	3 640	2 544
17	4	16	128	10,67	128,04	3 268	2 358
18	2	32	128	21,34	128,04	3 640	2 544
19	5	6,67	126,73	6,67	126,73	3 225	2 413
20	4	8	128	5,34	128,16	3 082	2 265
21	2	21,19	127,14	15,89	127,12	2 264	3 268
22	2	21,34	128,04	16	128	2 264	3 268
23	-	0	0	0	0	0	0
24	-	0	0	0	0	0	0
25	4	9,27	129,78	6,18	129,78	3 620	2 654
26	4	9,26	129,64	6,18	129,78	3 620	2 654
27	4	8,89	133,35	5,93	130,46	3 861	2 774
28	5	7,42	126,14	4,95	128,7	2 172	3 256
29	5	7,41	125,97	4,94	128,44	2 172	3 256
30	8	4,45	129,05	2,97	127,71	3 618	0
31	4	8,89	133,35	5,93	130,46	3 861	2 774
32	1	69,45	138,9	69,45	138,9	2 176	3 232
33	1	69,45	138,9	69,45	138,9	2 176	3 232
34	1	138,89	138,89	138,89	138,89	1 520	2 224
35	1	138,89	138,89	138,89	138,89	1 520	2 224

Video Mode	Lines per SYT interval, all color spaces	Duration of a source packet for color space 0 μs	Duration of an isochronous packet for color space 0 μs	Duration of a source packet for color space 1 and 2 μs	Duration of an isochronous packet for color space 1 and 2 μs	Bandwidth allocation units ^a at minimum allowed speed for color space 0	Bandwidth allocation units ^a at minimum allowed speed for color space 1 and 2
36	3	57,93	173,79	57,93	173,79	2 888	2 148
37	1	115,86	231,72	115,86	231,72	2 240	3 296
38	1	47,54	142,62	35,65	142,6	2 632	3 680
39	2	94,97	189,94	71,23	142,46	3 968	2 224
40	1	69,45	138,9	46,3	138,9	2 432	3 236
41	1	138,89	138,89	69,45	138,9	2 672	3 008
42	1	69,45	138,9	34,73	138,92	3 968	2 480
43	2	34,73	138,92	17,37	138,96	3 280	2 216
44	1	69,45	138,9	46,3	138,9	3 904	2 596
45	2	34,73	138,92	23,15	138,9	3 240	2 264
46	4	17,37	138,96	11,58	127,38	2 908	3 874
47	4	55,56	166,68	37,04	148,16	3 236	4 040
48	3	27,78	138,9	18,52	129,64	2 422	3 226
49	5	13,89	125,01	9,26	129,64	4 030	3 020
50	2	21,71	130,26	21,71	130,26	3 632	2 712
51	3	10,86	130,32	10,86	130,32	3 364	2 514
52	6	5,43	130,32	5,43	130,32	3 230	2 415
53	2	17,37	138,96	17,37	138,96	2 908	2 174
54	4	8,69	130,35	8,69	130,35	2 581	3 861
55	8	4,35	126,15	4,35	126,15	2 418	3 618
56	2	16,28	130,24	16,28	130,24	2 908	2 174
57	4	8,14	130,24	8,14	130,24	2 742	2 051
58	8	4,07	126,17	4,07	126,17	2 579	3 859
59	3	13,89	125,01	11,12	133,44	4 030	3 138
60	5	6,95	125,1	5,56	127,88	3 824	2 895
61	9	3,48	125,28	2,78	125,1	3 721	0
62	2	34,73	138,92	23,15	138,9	4 040	2 824
63	4	17,73	138,96	11,58	138,96	3 628	2 618
255	-	-	-	-	-	-	-
others	-	-	-	-	-	-	-

^a The bandwidth allocation units have been calculated using the minimum bus speed and equation [A] given in 4.7.1.4. The maximum value of bandwidth allocation units available on an IEEE-1394 bus is 4915, [2]. Some modes are limited to a certain speed due to the packet size rather than the availability of bandwidth allocation units.

Color Space 3 is defined for use with compression mode 2 only. Refer to the documentation referenced in Table 2 for the applicable additional video parameters.

Annex C
(informative)

Using IEC 61883-1 plug control registers beyond S400

IEC 61883-1 [6] defines a mechanism for configuring isochronous streams up to S400. IEEE Std 1394.1-2004, Standard for high performance serial bus bridges [9]. Annex E defines a mechanism for extending this configuration for streams up to S3200.

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

Annex D (normative)

Compliance annex

It is expected that a device that implements this standard will be an AV/C specification, [5] compliant device.

It is expected that the AV/C STREAM FORMAT command will be extended to allow the identification and selection of video, compression and color space modes. Implementation dependent means for the identification and selection of video, compression and color space modes is permitted.

A source device that supports this specification shall support at least one video mode. Video mode FF₁₆ is a valid mode in this context.

A source device that supports this specification shall support at least one compression mode. Compression modes 0₁₆ and FF₁₆ are valid modes in this context.

A source device that supports this standard shall support at least one color space. Color space FF₁₆ is a valid color space in this context.

A sink device that that supports this standard and outputs the video stream, whether directly or indirectly, to a display shall support at least one video mode. Video mode FF₁₆ is a valid mode in this context.

A sink device that that supports this specification and outputs the video stream, whether directly or indirectly, to a display shall support at least one compression mode. Compression modes 0₁₆ and FF₁₆ are valid modes in this context.

A sink device that that supports this specification and outputs the video stream, whether directly or indirectly, to a display shall support at least one color space. Color space FF₁₆ is a valid color space in this context.

A sink device that supports this standard but does not output the display, for example a device used for recording or stream monitoring purposes, need only recognize the format of the isochronous stream and its source packets and process them according to its implementation dependent requirements.

This standard defines many different video, compression and color space modes. Different deployment situations will require different levels of functionality, for example, it is likely that the automotive industry and the consumer electronic industry will require the support of different video modes. Therefore no particular video mode, compression mode or color space is mandated by this standard. It is left to implementers to choose the level of support they deem suitable for their application. Implementers are encouraged to produce implementation guidelines to provide consistency and interoperability in any given application space.

Annex E
 (informative)

Typical SIM source packet

The SIM source packet shown below is a typical example.

If video mode is 0, compression mode is 0 and color space is zero then *source packet size* is 644 bytes (taken from Table 1). Therefore there would be (644 – (56+4)) reserved bytes at the end of the source packet, that is 584 reserved bytes.

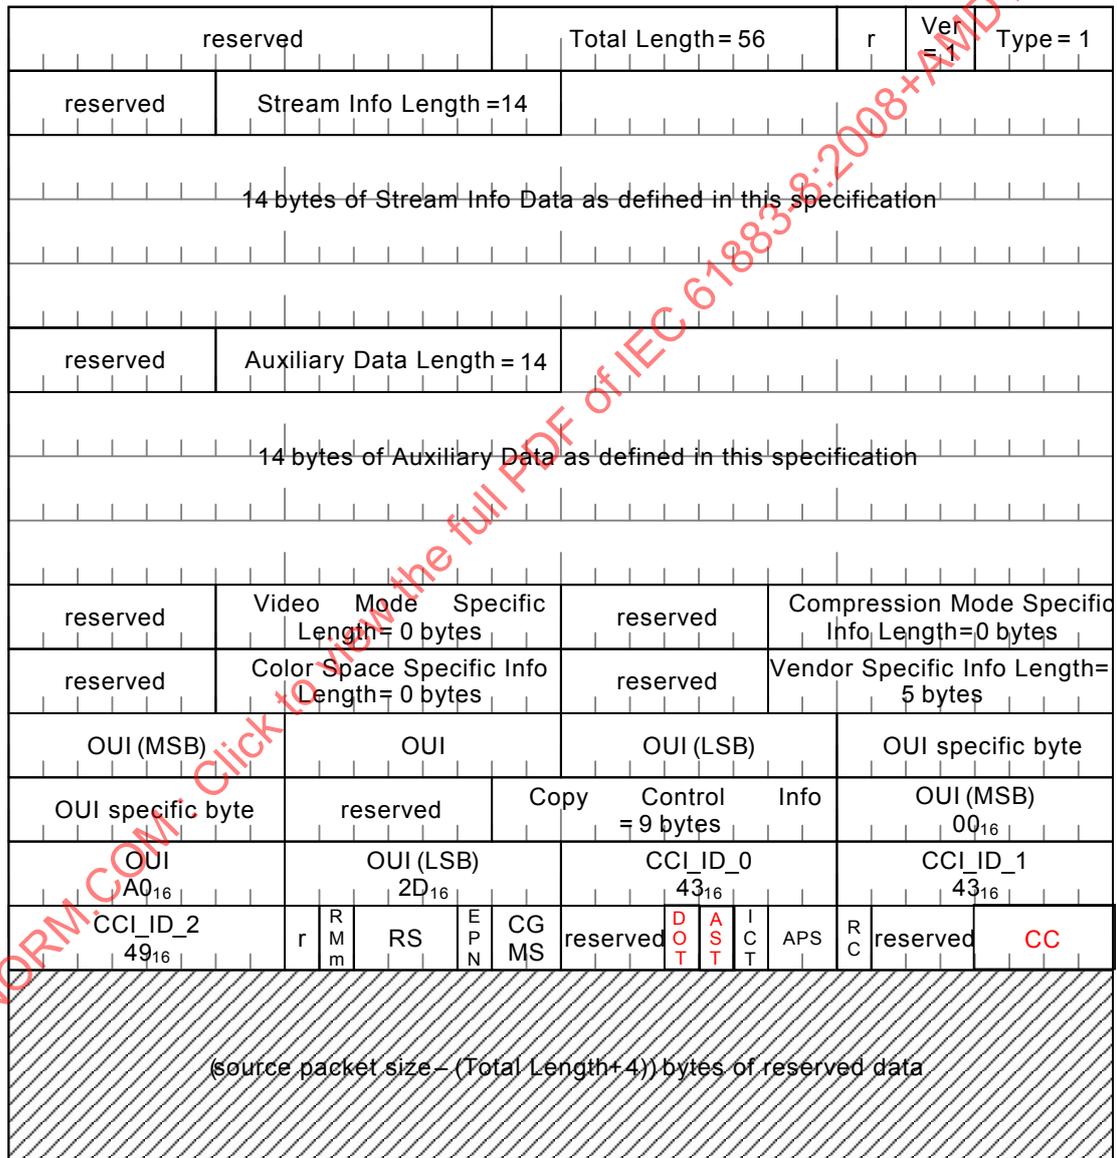


Figure E.1 – Typical SIM source packet

Annex F
(informative)

Derivation of TRANSFER_DELAY

The derivation of the TRANSFER_DELAY parameter is given below:

1394 worst case transmission delay	358 μ s
Allowance for encryption (after packetisation)	125 μ s
Allowance for decryption (before depacketisation)	125 μ s
Decision point to transmit the packet just missed	125 μ s
Slowest 601 packetisation (time to fill 1 source packet)	140 μ s
Allowance for 1 394 clock discrepancy at source and sink	25 ns
Total	873,025 μs

This is rounded up to 875 μ s so that it is exactly 7 isochronous periods thus requiring only a simple addition to the cycle timer to generate the SYT value.

The allowance for encryption/decryption is to provide scope for implementation flexibility.


The 601 packetization delay is typically much lower than 140 μ s but this is the worst case.

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

Annex G
 (normative)

1394 trade association CCI descriptor block

The structure of the 1394 TA CCI descriptor block is given in the Figure G.1. The definition of the setting of fields other than OUI and CCI_ID to particular values is beyond the scope of this standard.

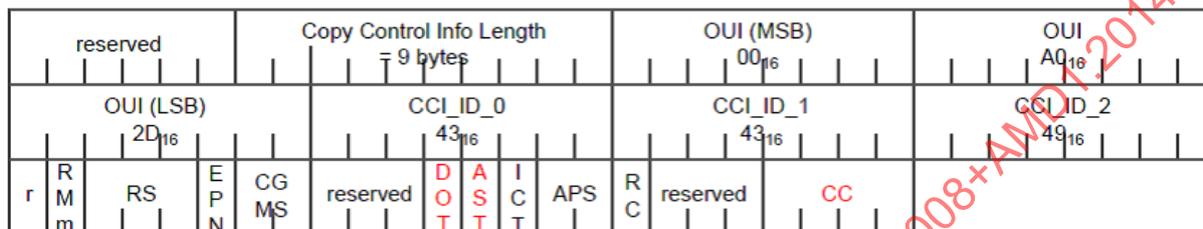

IEC 0252/14

Figure G.1 – CCI descriptor block

OUI – This is the three byte 1394TA OUI, 00A02D₁₆.

CCI_ID_x – This is the three byte 1394TA designated identifier for this CCI descriptor block, 434349₁₆.

RMm – Retention move mode is used in combination with CGMS to define the move function or the retention function. The combination of values is described below:

RMm	CGMS	Modes
0 ₂	10 ₂	Move mode
0 ₂	11 ₂	Retention mode
Other Combinations		Neither move nor retention mode

RS – Retention state is encoded as defined below:

RS	Retention time
000 ₂	Forever
001 ₂	1 week
010 ₂	2 days
011 ₂	1 day
100 ₂	12 h
101 ₂	6 h
110 ₂	3 h
111 ₂	90 min

EPN – Encryption plus non-assertion is encoded as defined below:

EPN	Meaning
0 ₂	EPN asserted
1 ₂	EPN not asserted

CGMS – CGMS is encoded as defined below:

CGMS	Meaning
00 ₂	Copy free
01 ₂	No more copies
10 ₂	Copy one generation
11 ₂	Copy never

RC – Redistribution control is as defined below:

RC	Meaning
0 ₂	Technological control of consumer redistribution is not signaled
1 ₂	Technological control of consumer redistribution is signaled

ICT – Image constraint token is encoded as described below:

ICT	Meaning
0 ₂	High definition analog output in the form of constrained image
1 ₂	High definition analog output in high definition analog form

ACS – ACS is encoded as described below:

ACS	Meaning
00 ₂	Copy free
01 ₂	APS is on : Type 1 (AGC)
10 ₂	APS is on : Type 2 (AGC + 2L Colorstripe)
11 ₂	APS is on : Type 3 (AGC + 4L Colorstripe)

AST – Analog sunset token as described below:

AST	Meaning
0 ₂	AST asserted
1 ₂	AST unasserted

DOT – Digital only token as described below:

DOT	Meaning
0 ₂	DOT asserted
1 ₂	DOT unasserted

CC – Copy count as described below:

CC	Meaning
0000 ₂	Invalid
Others	<i>N</i> copies are allowed

NOTE This annex may, at some point in the future, move to a separate 1394 Trade Association specification document.

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

Bibliography

The following documents contain additional information related to this standard:

- [1] IEEE Std 1212-2001, Standard for a Control and Status Registers (CSR) Architecture for microcomputer buses
- [2] IEEE Std 1394-1995, Standard for a High Performance Serial Bus
- [3] IEEE Std 1394a-2000, Standard for a High Performance Serial Bus—Amendment 1
- [4] IEEE Std 1394b-2002, Standard for a High Performance Serial Bus—Amendment 2
- [5] 1394 Trade Association 2004006, AV/C Digital Interface Command Set General Specification Version 4.2
- [6] IEC 61883 (all parts), *Consumer audio/video equipment – Digital interface*
- [7] ITU-R BT.601-5 1995, *Studio encoding parameters of digital television for standard 4:3 and wide-screen 16:9 aspect ratios*
- [8] ITU-R BT.656-4 1998, *Interfaces for digital component video signals in 525-line and 625-line television systems operating at the 4:2:2 level of recommendation ITU-R BT.601*
- [9] IEEE Std 1394.1-2004, *Standard for High Performance Serial Bus Bridges*
- [10] *Oxford Semiconductor Light Codec Specification, Version 1.0*
- [11] *Fujitsu SmartCODEC Specification, Version 1.0*
- [12] 1394 Trade Association, TA Document 2003017, *IIDC 1394-based Digital Camera Specification, Ver. 1.31*

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

FINAL VERSION

**Consumer audio/video equipment – Digital interface –
Part 8: Transmission of ITU-R BT.601 style digital video data**

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

CONTENTS

FOREWORD.....	4
INTRODUCTION TO AMENDMENT 1	6
1 Scope.....	7
2 Normative references	7
3 Abbreviations and conventions	8
3.1 Abbreviations	8
3.2 Notation	9
3.2.1 Numeric values.....	9
3.2.2 Bit, byte and quadlet ordering.....	9
4 Reference model for data transmission.....	10
4.1 Model overview	10
4.2 Compression	11
4.3 Isochronous packet header	11
4.4 CIP header.....	11
4.5 Stream definition	12
4.6 Packetization.....	16
4.6.1 Source packet format	16
4.6.2 Type 0 ₁₆ source packet – Video data source packet.....	17
4.6.3 Type 1 ₁₆ source packet – Stream information and metadata (SIM) source packet4	21
4.6.4 Type 2 ₁₆ source packet – Audio source packet.....	28
4.7 Packet transmission method.....	28
4.7.1 Packet transmission for compression mode 0 ₁₆	28
4.7.2 Packet transmission for compression mode 1 ₁₆	31
4.7.3 Packet transmission for compression mode 2 ₁₆	31
4.7.4 Packet transmission for compression mode FF ₁₆	31
Annex A (informative) Audio/video synchronization.....	32
Annex B (normative) Additional video mode parameters	33
Annex C (informative) Using IEC 61883-1 plug control registers beyond S400.....	37
Annex D (normative) Compliance annex	38
Annex E (informative) Typical SIM source packet	39
Annex F (informative) Derivation of TRANSFER_DELAY	40
Annex G (normative) 1394 trade association CCI descriptor block	41
Bibliography.....	44
Figure 1 – Bit ordering within a byte.....	9
Figure 2 – Byte ordering within a quadlet.....	10
Figure 3 – Quadlet ordering within an octlet.....	10
Figure 4 – Isochronous packet header	11
Figure 5 – CIP header.....	11
Figure 6 – FDF field.....	12
Figure 7 – General format of a source packet	16
Figure 8 – Video data source packet.....	17

Figure 9 – Compression mode 0 ₁₆ specific information	18
Figure 10 – Color space 0 ₁₆ video data packetization	20
Figure 11 – Color space 1 ₁₆ video data packetization	20
Figure 12 – Color space 2 ₁₆ video data packetization	21
Figure 13 – Stream information and metadata source packet	22
Figure 14 – Stream information field definitions	23
Figure 15 – Auxiliary data field definitions	25
Figure E.1 – Typical SIM source packet	39
Figure G.1 – CCI descriptor block	41
Table 1 – Video mode	13
Table 2 – Compression mode	16
Table 3 – Color space	16
Table 4 – Source packet type encoding	17
Table 5 – References for video data definition	18
Table 6 – Frame rate	23
Table 7 – Aspect ratio	24
Table 8 – Progressive/interlace mode	24
Table B.1 – Additional video mode parameters, 1 of 2	33
Table B.2 – Additional video mode parameters, 2 of 2	35

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CONSUMER AUDIO/VIDEO EQUIPMENT –
DIGITAL INTERFACE –**

Part 8: Transmission of ITU-R BT.601 style digital video data

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This Consolidated version of IEC 61883-8 bears the edition number 1.1. It consists of the first edition (2008-11) [documents 100/1446/FDIS and 100/1476/RVD] and its amendment 1 (2014-02) [documents 100/2051/CDV and 100/2106/RVC]. The technical content is identical to the base edition and its amendment.

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

This publication has been prepared for user convenience.

International Standard IEC 61883-8 has been prepared by technical area 4: Digital system interfaces and protocols, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61883 series, under the general title *Consumer audio/video equipment – Digital interface*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

INTRODUCTION TO AMENDMENT 1

The revision of IEC 61883-8:2008, has become necessary to define the following new additional copy control information.

- Analog sunset token
- Digital only token
- Copy count

IECNORM.COM : Click to view the full PDF of IEC 61883-8:2008+AMD1:2014 CSV

CONSUMER AUDIO/VIDEO EQUIPMENT – DIGITAL INTERFACE –

Part 8: Transmission of ITU-R BT.601 style digital video data

1 Scope

This part of IEC 61883 specifies a protocol for the transport of uncompressed or compressed video data in the 4:2:2 format of recommendation ITU-R BT.601 (including compatible extensions to this format for the higher and lower resolutions of other commonly used video resolutions) over high performance serial bus, as specified by IEEE Std 1394-1995 as amended by IEEE Std 1394a-2000 and IEEE Std 1394b-2002 (collectively IEEE 1394). The data formats for the encapsulation of video data are compatible with those specified by IEC 61883-1. Associated audio data, if any, should be formatted as specified by IEC 61883-6.

There are many commonly used video formats unsupported by IEC 61883, such as MPEG-4, Windows Media Format (WMF) and the format used by automotive navigation applications. Support for all or most of these formats in rendering devices would require implementation of multiple video codecs. This is an undue burden that may be avoided if the source device converts to ITU-R BT.601 4:2:2 format and, if necessary, compresses the data with a codec supported by all destination devices. An additional advantage is that on-screen display (OSD) information may be mixed with video data prior to transmission to the rendering device.

Because ITU-R BT.601 4:2:2 format is widely used internally in contemporary AV equipment, this specification permits straight-forward integration of IEEE 1394 into these devices and enables markets whose usage scenarios include single video sources transmitting to one or more video displays, such as:

- consumer electronic STB or DVD video rendered by multiple displays in the home;
- automotive navigation and entertainment; and
- aeronautical in-flight entertainment.

For the sake of interoperability and bounded implementation complexity, it is essential that the specification provide the following:

- a 1394 TA controlled list of compression codecs; and
- at a minimum, a reference to one video compression codec.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61883 (all parts), *Consumer audio/video equipment – Digital interface*

IEC 61883-1, *Consumer audio/video equipment – Digital interface – Part 1: General*

ISO/IEC 11172-2:1993, *Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s – Part 2: Video*

IEEE Std 1394-1995, *Standard for a high performance serial bus*

IEEE Std 1394a-2000, *Standard for a high performance serial bus Amendment 1*

IEEE Std 1394b-2002, *Standard for a high performance serial bus Amendment 2*

Throughout this document, the term IEEE 1394 refers to IEEE Std 1394-1995 as amended by IEEE Std 1394a-2000 and IEEE Std 1394b-2002.

1394 Trade Association 2004006, *AV/C Digital Interface Command Set General Specification Version 4.2*

1394 Trade Association 2003017, *IIDC 1394-based Digital Camera Specification Ver. 1.31*

EIA/CEA-861-B 2002, *A DTV Profile for Uncompressed High Speed Digital Interfaces*

IEEE Std 1394.1-2004, *Standard for High Performance Serial Bus Bridges*

ITU-R BT.601-5 1995, *Studio encoding parameters of digital television for standard 4:3 and wide-screen 16:9 aspect ratios*

ITU-R BT.656-4 1998, *Interfaces for digital component video signals in 525-line and 625-line television systems operating at the 4:2:2 level of recommendation ITU-R BT.601*

ITU-R BT.709-4 2000, *Parameter values for the HDTV standards for production and international programme exchange*

ITU-R BT.1358 1998, *Studio parameters of 625 and 525 line progressive scan television systems*

ITU-T H.263 1998, *Video coding for low bit rate communication*

SMPTE 267M-1995, *Television – Bit-Parallel Digital Interface – Component Video Signal 4:2:2 16x9 Aspect Ratio*

SMPTE 274M-1998, *Television – 1920 × 1080 Scanning and Analog and Parallel Digital Interfaces for Multiple Picture Rates*

SMPTE 293M-1996, *Television – 720 × 483 Active Line at 59.94-Hz Progressive Scan Production – Digital Representation*

SMPTE 296M-2001, *Television – 1280 × 720 Progressive Image Sample Structure – Analog and Digital Representation and Analog Interface*

VESA Monitor Timing Specifications, VESA and Industry Standards and Guidelines for Computer Display Monitor Timing, Version 1.0, Revision 0.8

3 Abbreviations and conventions

3.1 Abbreviations

For the purposes of this document, the abbreviations given in IEC 61883-1, as well as the following, apply.

AV/C Audio Video Control

BCD	Binary Coded Decimal
BT.601	ITU-R BT.601-5 1995
CIP	Common Isochronous Packet
CSR	Control and status register
DAC	Digital Analog Converter
DCT	Discrete Cosine Transform
DV	Digital Video
ND	No Data
OSD	Onscreen Display
OUI	Organizationally Unique Identifier
r	Reserved
MPEG	Moving Picture Experts Group
SIM	Stream Information & Metadata
VDSP	Video Data Source Packet
WMF	Windows Media Format

3.2 Notation

3.2.1 Numeric values

Decimal and hexadecimal are used within this standard. By editorial convention, decimal numbers are most frequently used to represent quantities or counts. Addresses are uniformly represented by hexadecimal numbers. Hexadecimal numbers are also used when the value represented has an underlying structure that is more apparent in a hexadecimal format than in a decimal format.

Decimal numbers are represented by Arabic numerals without subscripts or by their English names. Hexadecimal numbers are represented by digits from the character set 0 – 9 and A - F followed by the subscript 16. When the subscript is unnecessary to disambiguate the base of the number it may be omitted. For the sake of legibility hexadecimal numbers are separated into groups of four digits separated by spaces.

As an example, 42 and $2A_{16}$ both represent the same numeric value.

3.2.2 Bit, byte and quadlet ordering

This specification uses the facilities of Serial Bus, IEEE 1394, and therefore uses the ordering conventions of Serial Bus in the representation of data structures. In order to promote interoperability with memory buses that may have different ordering conventions, this specification defines the order and significance of bits within bytes, bytes within quadlets and quadlets within octlets in terms of their relative position and not their physically addressed position.

Within a byte, the most significant bit, msb, is that which is transmitted first and the least significant bit, lsb, is that which is transmitted last on serial bus, as illustrated below. The significance of the interior bits uniformly decreases in progression from msb to lsb.






Figure 1 – Bit ordering within a byte

Within a quadlet, the most significant byte is that which is transmitted first and the least significant byte is that which is transmitted last on serial bus, as shown below.



IEC 2118/08
Figure 2 – Byte ordering within a quadlet

Within an octlet, which is frequently used to contain 64-bit serial bus addresses, the most significant quadlet is that which is transmitted first and the least significant quadlet is that which is transmitted last on serial bus, as the figure below indicates.

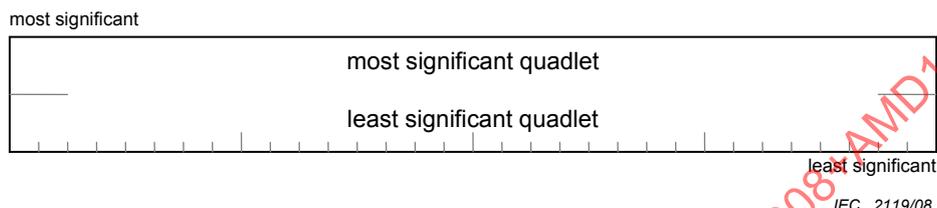

IEC 2119/08
Figure 3 – Quadlet ordering within an octlet

When block transfers take place that are not quadlet aligned or not an integral number of quadlets, no assumptions can be made about the ordering (significance within a quadlet) of bytes at the unaligned beginning or fractional quadlet end of such a block transfer, unless an application has knowledge (outside of the scope of this specification) of the ordering conventions of the other bus.

4 Reference model for data transmission

4.1 Model overview

The presently defined compression standards for IEEE 1394 transport, DV and MPEG2, have difficulties at the system level in a practical consumer AV network. Both offer excessive compression for simple transport over a wide bandwidth network and carry the associated complexity of coding and decoding signals. Each are fine for their intended purpose, but have excessive cost for simple video transport. Conventional video equipment is interfaced with analog cables carrying a number of signal formats, and it is this low cost and universal connection capability which digital interfaces need to emulate. Thus the analog output from any DVD player will connect to any TV, and this is seen as adequate by equipment manufacturers. Digital interfaces would allow many additional features, but providing every input with the capability of decoding both DV and MPEG2 in all available standards and resolutions is unnecessarily expensive. Inside equipment variations on the broadcast equipment ITU-R BT.601-5/BT.656-4 interface are common and provide a universal interface standard for digital video transport. The coding system in ITU-R BT.601-5 sends YUV data across an 8 bit interface between integrated circuits, for example an MPEG decoder and DAC. If the decoder and DAC are separated by 1394 in their separate boxes there will be a reduction in cost at the source device and the sink device will be independent from the video encoding mechanism.

This standard describes the method of passing YUV video signals across IEEE 1394 based upon the formats defined by ITU-R BT.601-5. Familiarity with the specifications ITU-R BT.601-5, ITU-R BT.656-4 and IEC 61883 is necessary to follow the technical details.

There is also the capability to transfer data in YUV 4:4:4 and 24 bit RGB formats. This allows video to be transferred without the need for color space sub-sampling.

It is valid to transmit all video modes as uncompressed data as long as the IEEE 1394 bus bandwidth is available. In practice some video modes will not be transportable in an uncompressed state.

This model also allows for the future development of video codecs. Since the transport of the video data is independent of the original source encoding as new codecs are deployed, such as MPEG-4, the transport mechanism described in this document will not need to change.

4.2 Compression

To allow the transport of high definition video signals at bus speeds less than S1600 or to allow the transport of multiple video streams it is essential that the video stream is compressed. This compression need not be more than about 10:1 and should have minimal discernable impact on the displayed image. Since compression is required to transport some of the video modes it is necessary to reference at least one compression codec in this specification. A suitable video compression codec is referenced for this purpose in Table 2. There is no requirement that a source or sink device implement this codec. Other suitable video compression codecs may be added in the future.

4.3 Isochronous packet header

The header quadlet of an IEEE 1394 isochronous packet (tcode A₁₆) is shown in the Figure 4 below.

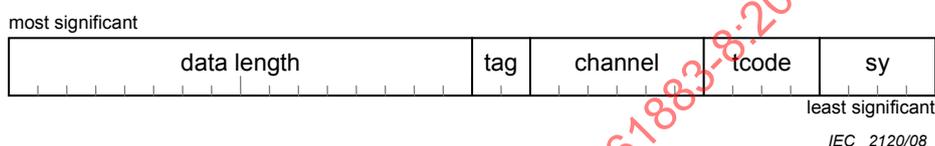


Figure 4 – Isochronous packet header

The tag field shall be set to 1₁₆ indicating that the packet has the Common Isochronous Packet (CIP) Header as defined in IEC 61883-1. The contents of the CIP Header are described in 4.4.

The definition of the remaining fields is outside of the scope of this specification.

4.4 CIP header

The definition of the CIP header is shown in Figure 5 below.




Figure 5 – CIP header

- SID denotes the source node ID. This is bus configuration dependent.
- DBS value depends upon the video mode being transported and the color space used. This value is dependent upon the compression mode, color space and video mode. The DBS value for compression mode 0₁₆ can be calculated from the source packet size given in Table 1 by dividing the value by 4. For other compression modes refer to the documentation available from the codec vendor.
- FN shall always have a value of 0₁₆. There shall only be 1 data block per source packet.
- QPC shall always have a value of 0₁₆. There shall be no padding.
- SPH shall be 0₁₆. The source packet header is not present.
- Since FN is 0₁₆ the value of DBC shall always increment by the number of source packets present in the Isochronous packet. This field indicates the count value of the first data block in the current isochronous packet.

- The value of FMT shall be 000001₂. This value indicates that the source packet format is as defined in this specification. This also indicates that the SYT field is present in the CIP header.
- The FDF field is encoded as shown in Figure 6 below.
- The SYT field is encoded as defined in IEC 61883-1.



IEC 2122/08

Figure 6 – FDF field

The ND field is used to signify whether the data payload of the isochronous packet after the CIP header is valid. If ND is set to 1₂ it indicates that the data is not valid and shall be ignored, this setting is only used in blocking transmission mode (see 4.7.1.3). The DBC field in the CIP header of a packet which has ND set to 1₂ shall be the count value of the next valid data block. The transmission of an isochronous packet with this bit set shall not cause the value of DBC to increment. If ND is set to 0₂ it indicates that the data payload of the isochronous packet after the CIP header is valid. In non-blocking transmission mode, see 4.7.1.2, ND shall be set to 0₂ for all isochronous packets.

4.5 Stream definition

A stream that conforms to this specification is governed by three key parameters:

- video mode, see Table 1 below. Additional information for each video mode is given in Annex B.
- compression mode, see Table 2 below
- color space, see Table 3 below.

Each of these parameters includes an unconstrained mode that allows modes not explicitly defined to be transmitted. The use of these unconstrained modes is beyond the scope of this standard. However, it is expected that their use will be determined by negotiation before transmission.

For transmission of compression mode 0₁₆ data the packetization and timing characteristics are defined in this specification.

For transmission of compression mode 1₁₆ and 2₁₆ data the packetization and timing characteristics are defined in the applicable specification document referenced in Table 2.

IECNORM.COM - Click to view the full PDF of IEC 61883-8:2008 +AMD1:2014 CSV

Table 1 – Video mode

Video mode	Active vertical lines	Active horizontal pixels	Interlace or progressive	Vertical frequency Hz	Source packet size for color space 0 ^{a, b, e} bytes	Source packet size for color spaces 1 and 2 ^{a, b, e} bytes	SYT interval for color space 0 ^{a, b}	SYT interval for color spaces 1 and 2 ^{a, b}	MAX VDSP for color space 0 ^{a, b}	MAX VDSP for color spaces 1 and 2 ^{a, b}	Specification
0	480	640	progr.	59,94	644	644	8	12	8	12	VESA
1	480	640	progr.	60	644	644	8	12	8	12	VESA
2	240	720	progr.	59,94	724	724	4	6	4	6	EIA/CEA-861-B
3	240	720	progr.	60	724	724	4	6	4	6	EIA/CEA-861-B
4	480	720	progr.	59,94	724	724	8	12	8	12	ITU-R BT.1358 SMPTE 293M
5	480	720	progr.	60	724	724	8	12	8	12	ITU-R BT.1358 SMPTE 293M
6	480	720	int.	59,94	724	724	4	6	4	6	ITU-R BT.601 SMPTE 267M
7	480	720	int.	60	724	724	4	6	4	6	ITU-R BT.601 SMPTE 267M
8	720	1 280	progr.	59,94	644	964	24	24	23	23	SMPTE 296M
9	720	1 280	progr.	60	644	964	24	24	23	23	SMPTE 296M
10	480	1 440	progr.	59,94	724	724	16	24	16	24	EIA/CEA-861-B
11	480	1 440	progr.	60	724	724	16	24	16	24	EIA/CEA-861-B
12	1 080	1 920	progr.	59,94	964	964	36	54	34	51	ITU-R BT.709 SMPTE 274M
13	1 080	1 920	progr.	60	964	964	36	54	34	51	ITU-R BT.709 SMPTE 274M
14	1 080	1 920	int.	59,94	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
15	1 080	1 920	int.	60	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
16	288	720	progr.	50	724	724	4	6	4	6	EIA/CEA-861-B
17	576	720	progr.	50	724	724	8	12	8	12	ITU-R BT.1358
18	576	720	int.	50	724	724	4	6	4	6	ITU-R BT.601
19	720	1 280	progr.	50	644	964	20	20	19	19	SMPTE 296M
20	576	1 440	progr.	50	724	724	16	24	16	24	EIA/CEA-861-B
21	480	960	int.	59,94	644	724	6	8	6	8	ITU-R BT.601 SMPTE 267M
22	576	960	int.	50	644	724	6	8	6	8	ITU-R BT.601

Video mode	Active vertical lines	Active horizontal pixels	Interlace or progressive	Vertical frequency Hz	Source packet size for color space 0 ^{a, b, e} bytes	Source packet size for color spaces 1 and 2 ^{a, b, e} bytes	SYT interval for color space 0 ^{a, b}	SYT interval for color spaces 1 and 2 ^{a, b}	MAX VDSP for color space 0 ^{a, b}	MAX VDSP for color spaces 1 and 2 ^{a, b}	Specification
23	-	Reserved	-	-	-	-	-	-	-	-	-
24	-	Reserved	-	-	-	-	-	-	-	-	-
25	1 080	1 920	progr.	23,976	964	964	16	24	14	21	ITU-R BT.709 SMPTE 274M
26	1 080	1 920	progr.	24	964	964	16	24	14	21	ITU-R BT.709 SMPTE 274M
27	1 080	1 920	progr.	25	964	964	16	24	15	22	ITU-R BT.709 SMPTE 274M
28	1 080	1 920	progr.	29,97	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
29	1 080	1 920	progr.	30	964	964	20	30	17	26	ITU-R BT.709 SMPTE 274M
30	1 080	1 920	progr.	50	964	964	32	48	29	43	ITU-R BT.709 SMPTE 274M
31	1 080	1 920	int.	50	964	964	16	24	15	22	ITU-R BT.709 SMPTE 274M
32	288	352	progr.	25	356	532	2	2	2	2	ITU-T H.263 (CIF)
33	240	352	progr.	30	356	532	2	2	2	2	ISO-IEC 11172-2 (SIF)
34	144	176	progr.	25	180	268	2	2	1	1	H.263 (QCIF)
35	120	176	progr.	30	180	268	2	2	1	1	ISO-IEC 11172-2 (QSIF)
36	288	352	progr.	29,97	356	532	6	6	3	3	H.263 (CIF)
37	144	176	progr.	29,97	180	268	2	2	2	2	ITU-T H.263 (QCIF)
38	234	480	progr.	29,97	324	364	3	4	3	4	Automotive ^c
39	234	480	progr.	15	324	364	3	4	2	2	Automotive ^c
40	480	800	progr.	15	804	804	2	3	2	3	Automotive ^c
41	240	320	progr.	15	324	244	2	4	1	2	IIDC v.1.31 ^f
42	240	320	progr.	30	324	244	2	4	2	4	IIDC v.1.31
43	240	320	progr.	60	324	244	4	8	4	8	IIDC v.1.31
44	480	640	progr.	15	644	644	2	3	2	3	IIDC v.1.31
45	480	640	progr.	30	644	644	4	6	4	6	IIDC v.1.31
46	480	640	progr.	60	644	644	8	12	8	11	IIDC v.1.31
47	600	800	progr.	15	804	804	4	6	3	4	IIDC v.1.31

Video mode	Active vertical lines	Active horizontal pixels	Interlace or progressive	Vertical frequency Hz	Source packet size for color space 0 ^{a, b, e} bytes	Source packet size for color spaces 1 and 2 ^{a, b, e} bytes	SYT interval for color space 0 ^{a, b}	SYT interval for color spaces 1 and 2 ^{a, b}	MAX VDSP for color space 0 ^{a, b}	MAX VDSP for color spaces 1 and 2 ^{a, b}	Specification
48	600	800	progr.	30	804	804	6	9	5	7	IIDC v.1.31
49	600	800	progr.	60	804	804	10	15	9	14	IIDC v.1.31
50	768	1 024	progr.	15	516	772	8	8	6	6	IIDC v.1.31
51	768	1 024	progr.	30	516	772	12	12	12	12	IIDC v.1.31
52	768	1 024	progr.	60	516	772	24	24	24	24	IIDC v.1.31
53	960	1 280	progr.	15	644	964	8	8	8	8	IIDC v.1.31
54	960	1 280	progr.	30	644	964	16	16	15	15	IIDC v.1.31
55	960	1 280	progr.	60	644	964	32	32	29	29	IIDC v.1.31
56	1 024	1 280	progr.	15	644	964	8	8	8	8	like IIDC v1.31 ^d
57	1 024	1 280	progr.	30	644	964	16	16	16	16	like IIDC v1.31 ^d
58	1 024	1 280	progr.	60	644	964	32	32	31	31	like IIDC v1.31 ^d
59	1 200	1 600	progr.	15	804	964	12	15	9	12	IIDC v.1.31
60	1 200	1 600	progr.	30	804	964	20	25	18	23	IIDC v.1.31
61	1 200	1 600	progr.	60	804	964	36	45	36	45	IIDC v.1.31
62	480	800	progr.	30	804	804	4	6	4	6	Wide VGA
63	480	800	progr.	60	804	804	8	12	8	12	Wide VGA
255	-	Other video mode	-	-	-	-	-	-	-	-	-
Others	-	Reserved for future specification	-	-	-	-	-	-	-	-	-
<p>^a These columns are applicable when the compression mode is 0, i.e. uncompressed video data only.</p> <p>^b This value includes the quadlet that contains the Type Specific Information field.</p> <p>^c These modes were requested by members of the IDB-Forum.</p> <p>^d These video modes are not in IIDC specification but are comparable to the modes that are.</p> <p>^e DBS can be calculated as: (Source packet size / 4).</p> <p>^f See Bibliography [12].</p>											
<p>progr. progressive int. interlace</p>											

The use of video mode FF₁₆ is beyond the scope of this specification. However, it is expected that the use of this video mode will be determined by negotiation before transmission.

The compression mode field is encoded as defined in Table 2 below. The use of compression mode FF₁₆ is beyond the scope of this standard. However, it is expected that the use of this compression mode will be determined by negotiation before transmission.

Table 2 – Compression mode

Compression mode value	Compression mode description	Specification document reference
0 ₁₆	Uncompressed video data	None applicable
1 ₁₆	Compressed video using light codec	Oxford Semiconductor Light Codec Specification, Version 1.0, [10] ¹
2 ₁₆	Compressed Video using SmartCODEC	Fujitsu SmartCODEC Specification, Version1.0, [11]
FF ₁₆	Compressed Video using other video codec	None applicable
Others	Reserved for future specification	None applicable

The color space field is encoded as defined in Table 3 below. The use of color space FF₁₆ is beyond the scope of this standard. However, it is expected that the use of this color space will be determined by negotiation before transmission.


Table 3 – Color space

Color space format	Color space description
0 ₁₆	YUV 4:2:2 (16 bits/pixel, 8 bits/sample)
1 ₁₆	YUV 4:4:4 (24 bits/pixel, 8 bits/sample)
2 ₁₆	RGB (24 bits/pixel, 8 bits/sample)
3 ₁₆	RGB (18 bits/pixel, 6 bits/sample)
FF ₁₆	Other color space
Others	Reserved for future specification

4.6 Packetization

4.6.1 Source packet format

For a stream that conforms to this specification each IEEE-1394 isochronous packet consists of the CIP header followed by zero or more source packets. The general format of the source packet for all compression modes and all source packet types is shown in Figure 7 below. It contains a single quadlet of type specific information followed by data. The size of each source packet is compression mode, video mode and color space mode dependent. The permitted video, compression and color space modes are detailed in Table 1, Table 2 and Table 3, respectively. Table 1 indicates the source packet size for each video mode and color space mode for compression mode 0. This size is the total number of bytes per source packet, i.e. type specific information and source packet data. All the source packets of a given stream are this size.

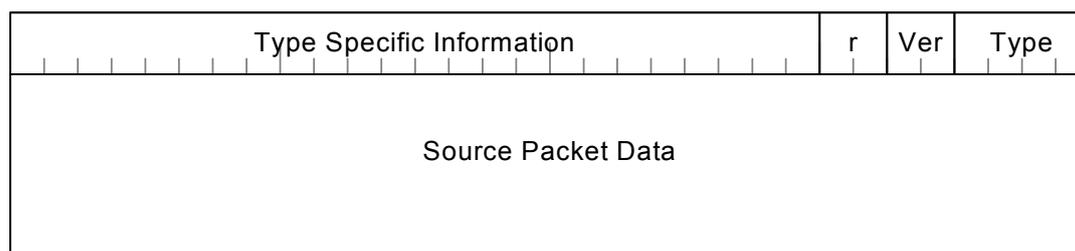

IEC 2123/08

Figure 7 – General format of a source packet

¹ The figures in square brackets refer to the Bibliography.

The *type* field indicates the type of data contained within the source packet. It is encoded as defined in Table 4 below.

The *ver* field indicates the version of the source packet. Its value is defined in the type specific sections below.

The *type specific information* field contents depends on the *type* field. Its encoding is defined in the type specific sections 4.6.2, 4.6.3 and 4.6.4 below.

The *source packet data* field contents depends on the *type* field. Its encoding is defined in the type specific sections 4.6.2, 4.6.3 and 4.6.4 below.


Table 4 – Source packet type encoding

Type	Description of type
0 ₁₆	Source packet contains video data as described in 4.6.2 below.
1 ₁₆	Source packet contains stream information and metadata as described in 4.6.3 below.
2 ₁₆	Reserved for the future specification of the transport of audio data. Further information regarding this type is given in 4.6.4 below.
others	Reserved for future use.

4.6.2 Type 0₁₆ source packet – Video data source packet

4.6.2.1 Video data source packet

Figure 8 shows the definition and arrangement of the fields in the video data source packet.

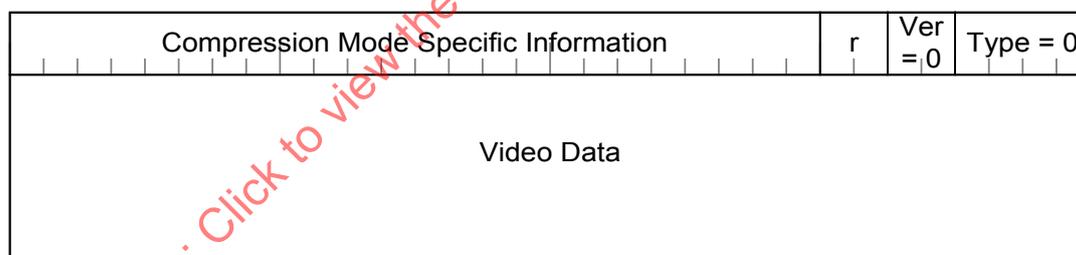

IEC 2124/08

Figure 8 – Video data source packet

The *type* field shall be set to 0₁₆ to indicate that this is a video data source packet

The *ver* field shall be set to 0₁₆ to indicate that this is version 0 of the video data source packet.

The *compression mode specific information* field has a different definition for each of the compression modes. Refer to Table 2 for a list of defined compression modes. The *compression mode specific information* for compression modes 0₁₆, 1₁₆, 2₁₆ and FF₁₆ are detailed in sections 4.6.2.2, 4.6.2.3, 4.6.2.3 and 4.6.2.5 respectively.

The *video data* field definition is determined by a combination of video mode, compression mode and color space. The reference to the applicable definition of the formatting of the *video data* field is given in Table 5 below.

Table 5 – References for video data definition

Compression mode	Color space	Video mode	Reference to video data definition
0 ₁₆	0 ₁₆	All defined except FF ₁₆	See 4.6.2.6 and 4.6.2.10
0 ₁₆	1 ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.10
0 ₁₆	2 ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.11
0 ₁₆	3 ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.13
0 ₁₆	FF ₁₆	All defined except FF ₁₆	see 4.6.2.6 and 4.6.2.13
0 ₁₆	All defined	FF ₁₆	see 4.6.2.6 and 4.6.2.15
1 ₁₆	All defined	All defined	see 4.6.2.7
2 ₁₆	All defined	All defined	see 4.6.2.8
FF ₁₆	All defined	All defined	see 4.6.2.9

4.6.2.2 Compression mode 0₁₆ type specific information

Figure 9 shows the definition and arrangement of the fields within the *type specific information* field for video data source packets being transmitted in compression mode 0₁₆.



IEC 2125/08

Figure 9 – Compression mode 0₁₆ specific information

The *VDSPC* (Video Data Source Packet Count) field contains a running count of video data source packets. It is incremented by 1 for every video data source packet created by the transmitter. When a stream commences the first video data source packet created has a *VDSPC* of 0. Since *VDSPC* is only 8 bits wide the value placed in *VDSPC* is the lowest 8 bits of the running count.

The *sol* (start of line) field is set in the source packet that contains the first pixel of a video line. There is no requirement that the start of a video line be coincident with the start of an IEEE-1394 isochronous packet.

The *sav* (start of active video) field is set in the source packet that contains the first pixel of the first active video line of each frame (progressive modes) or of each field (interlace modes). This field can only be set in a source packet that has *sol* set. There is no requirement that the start of an active video line be coincident with the start of an IEEE-1394 isochronous packet.

The *line number* field is the line on which the video data in the source packet resides as defined by the video specification given in Table 1 of the given video mode. If no line numbering is defined by the video specification the *line number* field shall be a sequential count of the lines in a frame starting with the first line that is transmitted having a *line number*.

4.6.2.3 Compression mode 1₁₆ type specific information

The *type specific information* field definition for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.4 Compression mode 2_{16} type specific information

The *type specific information* field definition for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.5 Compression mode FF_{16} type specific information

The *type specific information* field definition for compression mode FF_{16} is beyond the scope of this standard.

4.6.2.6 Compression mode 0_{16} video data packetization

For transmission of compression mode 0_{16} data the video data that is transmitted is the active horizontal pixels for both the active lines and the lines of the vertical blanking period (unless they do not exist). The first pixel of a video line shall always be the first pixel in a source packet and each video line shall always fill an integer number of source packets. The number of pixels in each source packet is dependent upon the video mode and color space and is detailed in Table 1. An IEEE-1394 isochronous channel that is used to transmit data according to this specification shall only transmit a single stream of video per 1394 isochronous channel.

4.6.2.7 Compression mode 1_{16} video data packetization

The video data packetization for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.8 Compression mode 2_{16} video data packetization

The video data packetization for this compression mode is defined in the applicable specification document referenced in Table 2.

4.6.2.9 Compression mode FF_{16} video data packetization

The video data packetization for the this compression mode is beyond the scope of this standard.

4.6.2.10 Color space 0_{16} video data packetization – YUV 4:2:2 8 bits/sample

There is a Y sample for each pixel. Each U and V sample is used for two pixels. The subscript n denotes the pixel number within the source packet.

U ₀	Y ₀	V ₀	Y ₁
U ₂	Y ₂	V ₂	Y ₃
U ₄	Y ₄	V ₄	Y ₅
...
...
...
U _{n-5}	Y _{n-5}	V _{n-5}	Y _{n-4}
U _{n-3}	Y _{n-3}	V _{n-3}	Y _{n-2}
U _{n-1}	Y _{n-1}	V _{n-1}	Y _n

IEC 2126/08

Figure 10 – Color space 0₁₆ video data packetization

4.6.2.11 Color space 1₁₆ video data packetization – YUV 4:4:4 8 bits/sample

Each pixel contains a Y, U and V sample. The arrangement of the samples is shown in Figure 11. The subscript *n* denotes the pixel number within the source packet.

U ₀	Y ₀	V ₀	U ₁
Y ₁	V ₁	U ₂	Y ₂
V ₂	U ₃	Y ₃	V ₃
...
...
...
U _{n-3}	Y _{n-3}	V _{n-3}	U _{n-2}
Y _{n-2}	V _{n-2}	U _{n-1}	Y _{n-1}
V _{n-1}	U _n	Y _n	V _n

IEC 2127/08

Figure 11 – Color space 1₁₆ video data packetization

4.6.2.12 Color space 2₁₆ video data packetization – RGB 8 bits/sample

Each pixel contains a R, G and B sample. The arrangement of the samples is shown in Figure 12. The subscript *n* denotes the pixel number within the source packet.

R ₀	G ₀	B ₀	R ₁
G ₁	B ₁	R ₂	G ₂
B ₂	R ₃	G ₃	B ₃
...
...
...
R _{n-3}	G _{n-3}	B _{n-3}	R _{n-2}
G _{n-2}	B _{n-2}	R _{n-1}	G _{n-1}
B _{n-1}	R _n	G _n	B _n

IEC 2128/08

Figure 12 – Color space 2₁₆ video data packetization

4.6.2.13 Color space 3₁₆ video data packetization – RGB 6 bits/sample

The video data packetization for this color space is only applied for compression mode 2₁₆ and is defined in the applicable specification document referenced in Table 2.

4.6.2.14 Color space FF₁₆ video data packetization

The video data packetization for the this color space is beyond the scope of this standard.

4.6.2.15 Video mode FF₁₆ video data packetization

The video data packetization for the this video mode is beyond the scope of this standard.

4.6.3 Type 1₁₆ source packet – Stream information and metadata (SIM) source packet⁴

4.6.3.1 Stream information and metadata (SIM) source packet

A SIM source packet is transmitted exactly once per video frame for all compression modes. This type of source packet contains six data-types. Figure 13 shows the definition and arrangement of the fields of the stream information and metadata source packet.

reserved	Total Length	reserved	Ver = 1	Type = 1
reserved	Stream Info Length (bytes)	Stream Info Data (variable length field, zero or more bytes)		
reserved	Auxiliary Data Length (bytes)	Auxiliary Data (variable length field, zero or more bytes)		
reserved	Video Mode Specific Info Length (bytes)	Video Mode Specific Info Data (variable length field, zero or more bytes)		
reserved	Compression Mode Specific Info Length (bytes)	Compression Mode Specific Info Data (variable length field, zero or more bytes)		
reserved	Color Space Specific Info Length (bytes)	Color Space Specific Info Data (variable length field, zero or more bytes)		
reserved	Vendor Specific Info Length (bytes)	Vendor Specific Info Data (variable length field, zero or more bytes)		
reserved	Copy Control Info Length (bytes)	Copy Control Info Data (variable length field, zero or more bytes)		

IEC 2129/08

Figure 13 – Stream information and metadata source packet

For transmission of compression mode 0_{16} only the SIM source packet shall denote the start a video frame, that is the next video data source packet shall be the start of the first line of video data of a frame.

The six data-types included in the SIM source packet are:

- stream information;
- auxiliary data;
- video mode specific information;
- compression mode specific information;
- color space specific information;
- copy control information.

Each data-type consists of a six bit reserved field, a ten bit length and a variable number of data bytes. The six bit reserved field and the ten bit length shall be present for all data-types in all SIM source packets. If the length field is zero then no data bytes are included in the SIM source packet for that data-type. Annex D provides an example of a typical SIM source packet.

The *Type* field shall be set to 1_{16} to indicate that this is a SIM source packet.

The *Ver* field shall be set to 1_{16} to indicate that this is version 1 of the SIM source packet. This version is backward compatible with version 0. All future versions shall be backward compatible, they shall only add additional data-types in a manner consistent with those already defined. A node that receives a SIM source packet with a version number later than that which it supports should ignore the additional data-types.

The *Total Length* field indicates the number of valid bytes in the *Source Packet Data* portion of the source packet. Its value is the summation of the six length fields plus 12 bytes for the length and reserved fields themselves. The *Total Length* shall be less than or equal to (*source packet size* – 4) where *source packet size* is determined by the combination of video, compression and color space modes. Since there are a number of different source packet sizes it is unlikely that the *total length* will be equal to (*source packet size* – 4) therefore all remaining bytes in the source packet beyond those indicated by *total length* are reserved and shall be set to 00_{16} .

4.6.3.2 Stream information

The stream information data type shall be included in all SIM source packets. The definition of the fields in this data-type is shown in Figure 14 below.

reserved		Stream Info Length = 14			reserved			
Video Mode		Frame Rate	AR	Compression Mode		Color Space		
P/I	Vertical Size			r	Horizontal Size			
r	Transported Vertical Size			r	Transported Horizontal Size			

IEC 2130/08

Figure 14 – Stream information field definitions

The *stream info length* field shall be set to 14 (E_{16}) to indicate that there are 14 bytes of stream information.

The *video mode* field is encoded as defined in Table 1. For all video modes except mode FF_{16} the values of *frame rate*, *P/I*, *vertical size*, *horizontal size*, *transported vertical size* and *transported horizontal size* are fixed and are given in Annex B. When video mode FF_{16} is used these fields shall be set to the applicable value from the tables below. Where no value matches the required parameter the no information value shall be used, this value has all the bits set to 1_2 . The action taken by the sink node when receiving a field set to no information is beyond the scope of this standard.

The *frame rate* field is encoded as defined in Table 6 below.

Table 6 – Frame rate

Frame rate	Frame rate value (frames per second)
0_{16}	Reserved for future specification
1_{16}	24/1,001 (23,976...)
2_{16}	24
3_{16}	25
4_{16}	30/1,001 (29,97...)
5_{16}	30
6_{16}	50
7_{16}	60/1,001 (59,94...)
8_{16}	60
9_{16}	15
F_{16}	No information
others	Reserved for future specification

The AR field is described in Table 7 below.

Table 7 – Aspect ratio

AR	Aspect ratio
2 ₁₆	4:3
3 ₁₆	16:9
4 ₁₆	2,21:1
F ₁₆	No information
others	Reserved for future specification

The P/I field indicates whether the video stream is progressive or interlaced. It is encoded as defined in Table 8 below.

Table 8 – Progressive/interlace mode

P/I	Progressive/Interlace information
0 ₁₆	Stream contains interlaced video frames
1 ₁₆	Stream contains progressive video frames
2 ₁₆	Reserved for future specification
3 ₁₆	No Information

The *vertical size* gives the value in lines of the vertical resolution of the video stream. This figure includes the vertical blanking if appropriate.

The *horizontal size* gives the value in pixels (not samples) of the horizontal resolution of the video stream. This figure includes the horizontal blanking if appropriate.

The *transported vertical size* gives the value in lines of the vertical resolution of the video stream that is actually transported. For all video modes currently defined, except FF₁₆, every line is transported and so this figure includes any vertical blanking. Whether vertical blanking is transported for video mode FF₁₆ is beyond the scope of this standard.

The *transported horizontal size* gives the value in pixels (not samples) of the horizontal resolution of the video stream that is actually transported. For all video modes currently defined, except FF₁₆, only the active portion of each video lines is transported and so this figure excludes any horizontal blanking. Whether horizontal blanking is transported for video mode FF₁₆ is beyond the scope of this standard.

4.6.3.3 Auxiliary information

The auxiliary information data type should be included in all SIM source packets when transporting video data for which the auxiliary data is available. The definition of the fields in this data-type is shown in Figure 15 below.

reserved			Auxiliary Data Length (bits 9:8) = 0 ₂
Auxiliary Data Length (bits 7:0) = 14			
TC VAL	TC tens of frames		TC units of frames
Drop	TC tens of seconds		TC units of seconds
r	TC tens of minutes		TC units of minutes
TC tens of hours		TC units of hours	
RD VAL	DS	tens of time zone	units of time zone
r	tens of day		units of day
day of week		tens of month	units of month
tens of year		units of year	
thousands of year		hundreds of year	
RT VAL	RT tens of frames		RT units of frames
r	RT tens of seconds		RT units of seconds
r	RT tens of minutes		RT units of minutes
r	RT tens of hours		RT units of hours
reserved			

IEC 2131/08

Figure 15 – Auxiliary data field definitions

The *auxiliary data length* field shall be set to 14 (E₁₆) to indicate that there are 14 bytes of auxiliary data.

The remaining fields are defined below. The acquisition of the data contained in these fields is beyond the scope of this standard. The usage of the information contained in these fields by the sink device is implementation dependent.

TC VAL: A 1 if the Time-Code fields contain valid information.

TC tens of frames: The time-code tens of frames value in BCD.

TC units of frames: The time-code units of frames value in BCD.

Drop: A 1 if the time-code is based on drop-mode counting.

TC tens of seconds: The time-code tens of seconds value in BCD.

TC units of seconds: The time-code units of seconds value in BCD.

TC tens of minutes: The time-code tens of minutes value in BCD.

TC units of minutes: The time-code units of minutes value in BCD.

TC tens of hours: The time-code tens of hours value in BCD.

TC units of hours: The time-code units of hours value in BCD.

RD VAL: A 1 if the Record-Date fields contain valid information.

DS: A 1 if the record-time is based on daylight-savings-time.

tens of time zone : The record-time tens of time-zone value in BCD.

units of time zone: The record-time units of time-zone value in BCD.

tens of day: The record-date tens of day value in BCD.

units of day: The record-date units of day value in BCD.

day of week: The day of week, 0 (Sunday) through 6 (Saturday).

tens of month: The record-date tens of months value in BCD.

units of month: The record-date units of month value in BCD.

tens of year: The record-date tens of year value in BCD.

units of year: The record-date units of year value in BCD.

hundreds of year: The record-date hundreds of year value in BCD.

thousands of year: The record-date thousands of year value in BCD.

RT VAL: A 1 if the Record-Time fields contain valid information.

RT tens of frames: The record-time tens of frames value in BCD.

RT units of frames: The record-time units of frames value in BCD.

RT tens of seconds: The record-time tens of seconds value in BCD.


RT units of seconds: The record-time units of seconds value in BCD.

RT tens of minutes: The record-time tens of minutes value in BCD.

RT units of minutes: The record-time units of minutes value in BCD.

RT tens of hours: The record-time tens of hours value in BCD.

RT units of hours: The record-time units of hours value in BCD.

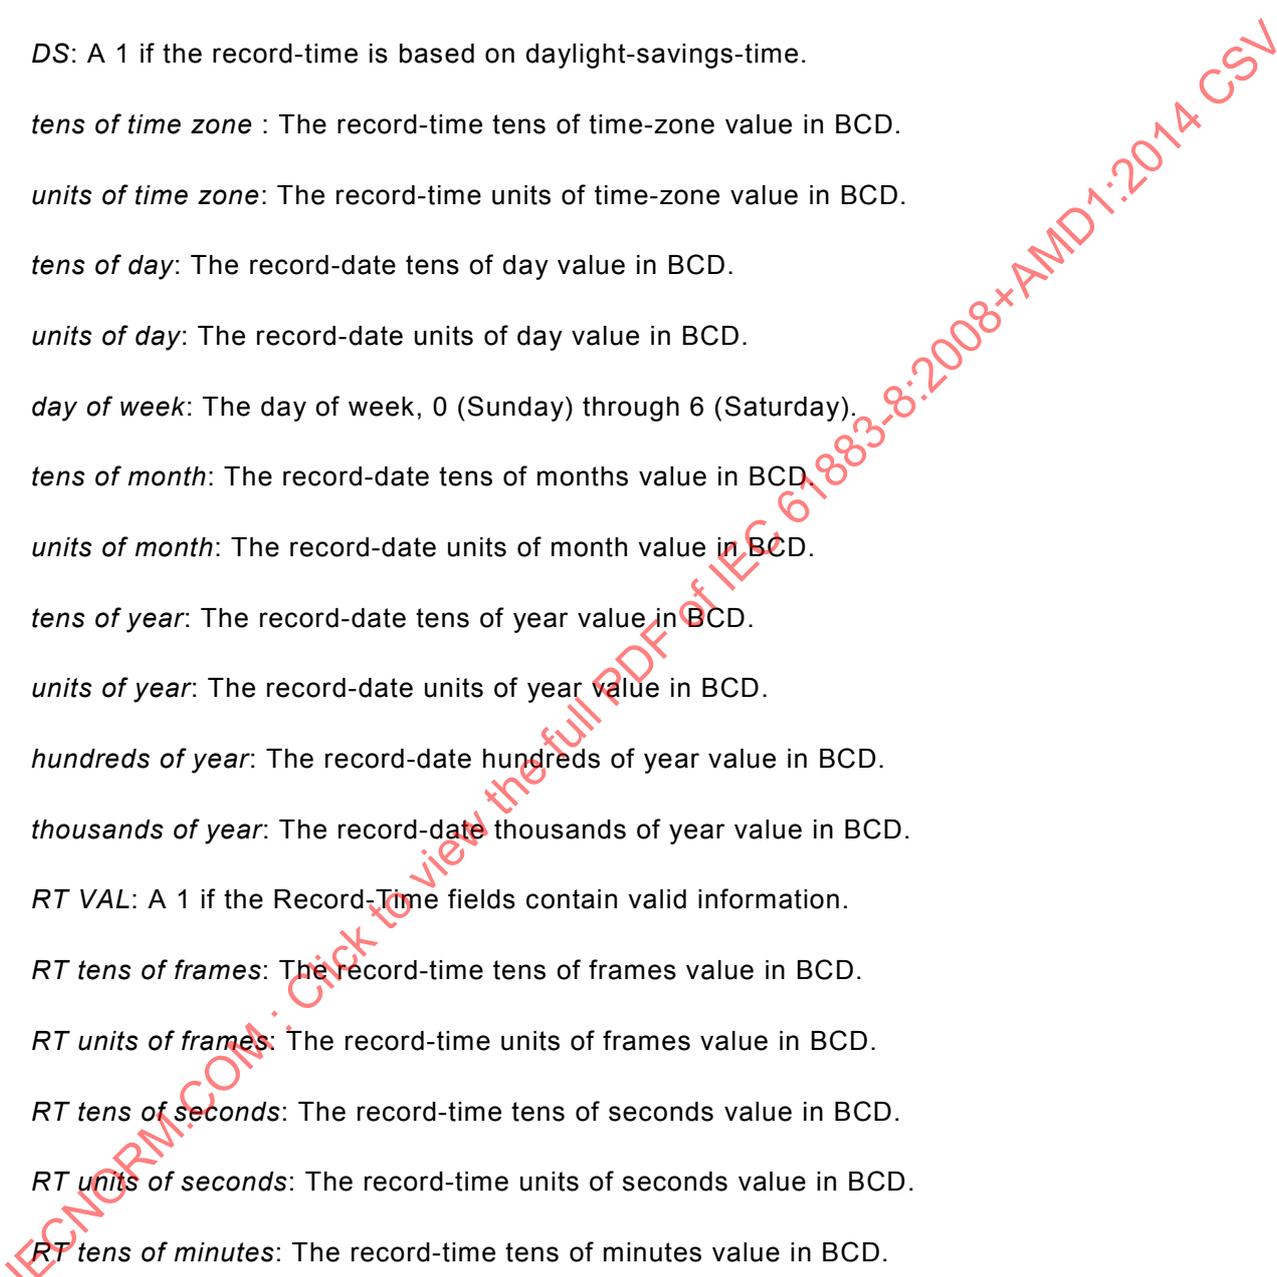

4.6.3.4 Video mode specific information

For all video modes except FF₁₆ there are no data fields currently defined for this data-type. Therefore *video mode specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

For video mode FF₁₆ the first 3 bytes following the length field shall be the OUI of the vendor that has specified the video mode specific information data-type structure that is being transported. Therefore *video mode specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.5 Compression mode specific information

For compression modes 0₁₆ there are no data fields currently defined for this data-type. Therefore *compression mode specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

For compression modes 1₁₆ and 2₁₆ the data-type length and structure is defined in the applicable specification document referenced in Table 2.

For compression mode FF₁₆ the first 3 bytes following the length field shall be the OUI of the vendor that has specified the compression mode specific information data-type structure that is being transported. Therefore *compression mode specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.6 Color space specific information

For all color space modes except FF₁₆ there are no data fields currently defined for this data-type. Therefore *color space specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

For color space FF₁₆ the first 3 bytes following the length field shall be the OUI of the vendor that has specified the color space specific information data-type structure that is being transported. Therefore *color space specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.7 Vendor specific information

If this field is unused the *vendor specific info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

If this field is used the first 3 bytes following the length field shall be the OUI of the vendor that has implemented the device. In this case the *vendor specific info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.

4.6.3.8 Copy control information

The copy control information block shall be included in all SIM source packets.

If there is no CCI to convey the *copy control info length* shall be 00₁₆ and no data bytes shall be present in the data field of this data-type.

If this field is used the first 3 bytes following the length field shall be the OUI of the vendor that has defined the copy control information. In this case the *copy control info length* shall be at least 03₁₆. The remaining fields of this data-type structure are defined by the vendor indicated by the value of OUI.