

INTERNATIONAL STANDARD



Maritime navigation and radiocommunication equipment and systems – Class B shipborne equipment of the automatic identification system (AIS) – Part 1: Carrier-sense time division multiple access (CSTDMA) techniques



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM . Click to view the full PDF of IEC 60384-1:2010+AMD1:2013 CSV

INTERNATIONAL STANDARD



**Maritime navigation and radiocommunication equipment and systems – Class B
shipborne equipment of the automatic identification system (AIS) –
Part 1: Carrier-sense time division multiple access (CSTDMA) techniques**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 47.020.70

ISBN 978-2-8322-0793-2

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	7
INTRODUCTION to Amendment 1	9
1 Scope.....	10
2 Normative references.....	10
3 Abbreviations.....	11
4 General requirements	12
4.1 General.....	12
4.1.1 Capabilities of the Class B“CS” AIS.....	12
4.1.2 Quality assurance	13
4.1.3 Safety of operation.....	13
4.1.4 Additional features	13
4.1.5 Modes of operation.....	13
4.2 Manuals.....	14
4.3 Marking and identification	14
5 Environmental, power supply, interference and safety requirements.....	14
6 Performance requirements.....	15
6.1 Composition	15
6.2 Operating frequency channels.....	15
6.3 GNSS receiver for position reporting.....	15
6.4 Identification.....	16
6.5 AIS information.....	16
6.5.1 Information content	16
6.5.2 Information reporting intervals	17
6.5.3 Permissible initialisation period.....	18
6.6 Alarms and indications, fall-back arrangements.....	18
6.6.1 Integrity and protection.....	18
6.6.2 Transmitter shutdown procedure.....	18
6.6.3 Position sensor fallback conditions.....	18
6.6.4 SOG/COG sensor fallback conditions.....	20
6.7 User interface.....	20
6.7.1 Indicators and display.....	20
6.7.2 Static data input.....	20
6.7.3 External interfaces	20
6.8 Protection from invalid control commands.....	20
7 Technical requirements	21
7.1 General.....	21
7.2 Physical layer	21
7.2.1 General.....	21
7.2.2 Transceiver characteristics.....	22
7.2.3 Transmitter requirements	23
7.2.4 Receiver requirements.....	23
7.3 Link layer	24
7.3.1 General.....	24
7.3.2 Link sublayer 1: Medium access control (MAC)	24
7.3.3 Link sublayer 2: Data Link Service (DLS).....	27

7.3.4	Link sublayer 3: Link management entity (LME).....	31
7.4	Network layer	40
7.4.1	General.....	40
7.4.2	Dual channel operation.....	40
7.4.3	Channel management.....	41
7.4.4	Distribution of transmission packets	41
7.4.5	Data link congestion resolution	41
7.5	Transport layer	41
7.5.1	General.....	41
7.5.2	Transmission packets	42
7.5.3	Sequencing of data packets	42
7.6	Digital selective calling (DSC)	42
8	Test conditions.....	42
8.1	General.....	42
8.2	Normal and extreme test conditions	42
8.2.1	Normal test conditions	42
8.2.2	Extreme test conditions.....	42
8.3	Test signals.....	42
8.3.1	Standard test signal number 1	43
8.3.2	Standard test signal number 2	43
8.3.3	Standard test signal number 3	43
8.3.4	Standard test signal number 4	43
8.3.5	Standard test signal number 5	43
8.4	Test arrangements.....	44
8.4.1	Standard test environment	44
8.4.2	Modes of operation of the transmitter	45
8.4.3	Common test conditions for protection from invalid controls.....	45
8.4.4	Measurement uncertainties	45
9	Power supply, environmental and EMC tests	46
9.1	Test summary	46
9.2	Vibration/shock.....	47
9.2.1	Vibration	47
9.2.2	Shock	47
9.3	Performance tests/checks.....	47
9.4	Undervoltage test (brown out)	48
9.4.1	Purpose	48
9.4.2	Method of test.....	48
9.4.3	Required result	48
10	Operational tests	48
10.1	General.....	48
10.1.1	Quality assurance	48
10.1.2	Safety of operation	48
10.1.3	Additional features	48
10.2	Modes of operation	49
10.2.1	Autonomous mode	49
10.2.2	Assigned mode	50
10.2.3	Polled mode/interrogation response	51
10.3	Messages extending one time period	52
10.3.1	Method of measurement	52

10.3.2	Required results.....	52
10.4	Channel selection	52
10.4.1	Valid channels	52
10.4.2	Invalid channels	52
10.5	Internal GNSS receiver	52
10.6	AIS information	53
10.6.1	Information content	53
10.6.2	Information update rates	54
10.7	Initialisation period	55
10.7.1	Method of measurement	55
10.7.2	Required results.....	55
10.8	Alarms and indications, fall-back arrangements.....	56
10.8.1	Built-in integrity test	56
10.8.2	Transceiver protection	56
10.8.3	Transmitter shutdown procedure.....	56
10.8.4	Position sensor fallback conditions.....	56
10.8.5	Speed sensors.....	57
10.9	User interface.....	57
10.9.1	Display.....	57
10.9.2	Message display	58
10.9.3	Static data input.....	58
10.9.4	External interfaces	58
11	Physical tests.....	58
11.1	TDMA transmitter.....	58
11.1.1	Frequency error	59
11.1.2	Carrier power.....	59
11.1.3	Transmission spectrum.....	60
11.1.4	Modulation accuracy.....	61
11.1.5	Transmitter output power versus time function	62
11.2	TDMA receivers.....	63
11.2.1	Sensitivity	63
11.2.2	Error behaviour at high input levels.....	63
11.2.3	Co-channel rejection.....	64
11.2.4	Adjacent channel selectivity	65
11.2.5	Spurious response rejection.....	65
11.2.6	Intermodulation response rejection	68
11.2.7	Blocking or desensitisation.....	69
11.3	Conducted spurious emissions	70
11.3.1	Spurious emissions from the receiver	70
11.3.2	Spurious emissions from the transmitter	70
12	Specific tests of link layer.....	71
12.1	TDMA synchronisation.....	71
12.1.1	Synchronisation test sync mode 1	71
12.1.2	Synchronisation test sync mode 2.....	72
12.1.3	Synchronisation test with UTC.....	72
12.2	Carrier-sense tests.....	72
12.2.1	Threshold level	72
12.2.2	Carrier-sense timing.....	74
12.3	VDL state/reservations	75

12.3.1	Method of measurement	75
12.3.2	Required results.....	75
12.4	Data encoding (bit stuffing)	75
12.4.1	Method of measurement	75
12.4.2	Required results.....	75
12.5	Frame check sequence.....	75
12.5.1	Method of measurement	75
12.5.2	Required results.....	75
12.6	Slot allocation (channel access protocol).....	75
12.6.1	Autonomous mode allocation.....	75
12.6.2	DSC listening periods	76
12.7	Assigned operation	76
12.7.1	Assignment priority.....	76
12.7.2	Entering rate assignment	76
12.7.3	Reverting from rate assignment	77
12.7.4	Reverting from quiet mode	77
12.7.5	Retry of interrogation response.....	77
12.8	Message formats.....	77
12.8.1	Received messages	77
12.8.2	Transmitted messages.....	78
13	Specific tests of network layer.....	78
13.1	Regional area designation by VDL message	78
13.1.1	Method of measurement	78
13.1.2	Required results.....	79
13.2	Regional area designation by serial message or manually	79
13.2.1	Method of measurement.....	79
13.2.2	Required result	79
13.3	Management of received regional operating settings.....	79
13.3.1	Replacement or erasure of dated or remote regional operating settings	79
13.3.2	Channel management by addressed Message 22	80
13.3.3	Invalid regional operating areas	80
13.3.4	Continuation of autonomous mode reporting rate.....	81
13.3.5	Other conditions.....	81
Annex A (informative)	Results of computer simulations and testing of CSTDMA technology	82
Annex B (informative)	Description of the system	85
Annex C (normative)	DSC channel management.....	86
Annex D (informative)	Channel management regions	93
Bibliography	94
Figure 1	– OSI layer model	21
Figure 2	– Carrier-Sense timing	25
Figure 3	– Power versus time mask	26
Figure 4	– Transmission packet	27
Figure 5	– Training sequence	29
Figure 6	– Transmission timing	31
Figure 7	– Example for CSTDMA access.....	32

Figure 8 – Format for repeating four-packet cluster.....	43
Figure 9 – Measurement arrangement for carrier power.....	59
Figure 10 – Emission mask.....	60
Figure 11 – Measurement arrangement for modulation accuracy	61
Figure 12 – Measurement arrangement.....	63
Figure 13 – Measurement arrangement with two generators.....	64
Figure 14 – SINAD or PER/BER measuring equipment.....	66
Figure 15 – Measurement arrangement for intermodulation.....	68
Figure 16 – Configuration for carrier-sense threshold test.....	73
Figure 17 – Regional area scenario.....	78
Figure A.1 – Effect on Class A AIS messages of Class B messages	82
Figure A.2 – Reception of messages by Class A AIS.....	83
Figure A.3 – Reception of messages by Class B AIS.....	83
Figure A.4 – Range achieved by a Class A AIS from Class B AIS.....	84
Figure D.1 – Channel management regions used for test given in 13.3.1.....	93
Table 1 – Position sensor fallback conditions	19
Table 2 – Use of accuracy (PA) flag	19
Table 3 – Transceiver characteristics	22
Table 4 – Transmitter parameters	23
Table 5 – Receiver parameters.....	24
Table 6 – Definition of timings for Figure 3.....	26
Table 7 – Start-buffer.....	28
Table 8 – Summary of the transmission packet.....	30
Table 9 – Transmission timing.....	30
Table 10 – Access parameters.....	32
Table 11 – Use of VDL messages by a Class B"CS" AIS.....	35
Table 12 – Number of data bits for use with Message 14	36
Table 13 – Contents of Message 18	37
Table 14 – Message 24 Part A.....	38
Table 15 – Message 24 Part B.....	38
Table 16 – Contents of Message 23	39
Table 17 – Reporting Interval Settings for use with Message 23.....	40
Table 18 – Channel management.....	41
Table 19 – Content of first two packets	43
Table 20 – Fixed PRS data derived from ITU-T.O.153	44
Table 21 – Test summary.....	46
Table 22 – Peak frequency deviation versus time.....	62
Table 23 – Frequencies for inter-modulation test	69
Table 24 – Required threshold test results	74
Table 25 – Required carrier-sense timing results	74
Table 26 – Required channels in use.....	79
Table C.1 – DSC monitoring times.....	87

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MARITIME NAVIGATION AND RADIOCOMMUNICATION
EQUIPMENT AND SYSTEMS –
CLASS B SHIPBORNE EQUIPMENT OF
THE AUTOMATIC IDENTIFICATION SYSTEM (AIS) –****Part 1: Carrier-sense time division multiple access
(CSTDMA) techniques**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of IEC 62287-1 consists of the second edition (2010) [documents 80/605/FDIS and 80/608/RVD] and its amendment 1 (2013) [documents 80/680/CDV and 80/695/RVC]. It bears the edition number 2.1.

The technical content is therefore identical to the base edition and its amendment and has been prepared for user convenience. A vertical line in the margin shows where the base publication has been modified by amendment 1. Additions and deletions are displayed in red, with deletions being struck through.

International Standard IEC 62287-1 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems.

The major technical changes with respect to the first edition are the following. The reference to the relevant recommendation of the ITU has been updated from M.1371-1 to M.1371-4 with some consequential small changes. A previous option of providing short safety-related messages in 6.5.1.5 has been removed on advice from the IMO. A new requirement for a default MMSI has been added in 6.4 and a further new requirement for protection from invalid control commands has been added in 6.8. Some test methods have been updated and, in particular, small revisions have been made to the frequencies used for testing in some of the test methods. The introduction has been deleted since it is only of historic interest.

Some editorial rearrangement has been made.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62287 series published under the general title *Maritime navigation and radiocommunication equipment and systems – Class B shipborne equipment of the automatic identification system (AIS)*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION to Amendment 1

This amendment clarifies the conditions required for input of external GNSS position, the associated tests and required results.

IECNORM.COM [Click to view the full PDF of IEC 62287-1:2010+A1:2013 CSV](#)

Withdrawn

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – CLASS B SHIPBORNE EQUIPMENT OF THE AUTOMATIC IDENTIFICATION SYSTEM (AIS) –

Part 1: Carrier-sense time division multiple access (CSTDMA) techniques

1 Scope

This part of IEC 62287 specifies the minimum operational and performance requirements, methods of testing and required test results for Class B shipborne AIS equipment using CSTDMA techniques. This standard takes into account other associated IEC International Standards and existing national standards, as applicable.

It is applicable for AIS equipment used on craft that are not covered by the mandatory carriage requirement of AIS under SOLAS Chapter V.

An AIS station intended to operate in receive-only mode is not considered a Class B shipborne mobile AIS station.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60945:2002, *Maritime navigation and radiocommunication equipment and systems – General requirements – Methods of testing and required test results*

IEC 61108 (all parts), *Maritime navigation and radiocommunication equipment and systems – Global navigation satellite systems (GNSS)*

IEC 61162 (all parts), *Maritime navigation and radiocommunication equipment and systems – Digital interfaces*

IEC 61993-2, *Maritime navigation and radiocommunication equipment and systems – Automatic identification systems (AIS) – Part 2: Class A shipborne equipment of the universal automatic identification system (AIS) – Operational and performance requirements, methods of test and required test results*

IEC 62320-1, *Maritime navigation and radiocommunication equipment and systems – Automatic identification systems (AIS) – Part 1: AIS Base Stations – Minimum operational and performance requirements, methods of testing and required test results*

IMO MSC.140(76), *Recommendation for the protection of the AIS VHF data link*

ITU-R Recommendation M.493-13, *Digital selective-calling system for use in the maritime mobile service*

ITU-R Recommendation M.825-3, *Characteristics of a transponder system using digital selective calling techniques for use with vessel traffic services and ship-to-ship identification*

ITU-R Recommendation M.1084-4, *Interim solutions for improved efficiency in the use of the band 156-174 MHz by stations in the maritime mobile service*

ITU-R Recommendation M.1371-4, *Technical characteristics for a universal shipborne automatic identification system using time division multiple access in the VHF maritime mobile band*

ITU Radio Regulations, Appendix 18, <http://www.itu.int/publ/R-REG-RR/en>

3 Abbreviations

AIS	Automatic Identification System
BER	Bit Error Rate
BT	Bandwidth Time product
COG	Course Over Ground
CP	Candidate Period
CPU	Central Processing Unit
CRC	Cyclic Redundancy Check
CS	Carrier-Sense
CSTDMA	Carrier-Sense Time Division Multiple Access
DGNSS	Differential Global Navigation Satellite System
DLS	Data Link Service
DSC	Digital Selective Calling
ECDIS	Electronic Chart Display and Information System
EPFS	Electronic Position Fixing System
ETA	Estimated Time of Arrival
EUT	Equipment Under Test
FCS	Frame Check Sequence
FM	Frequency Modulation
GMSK	Gaussian Minimum Shift Keying
GNSS	Global Navigation Satellite System
HDG	Heading
HDLC	High level Data Link Control
HSC	High Speed Craft
IHO	International Hydrographic Office
IMO	International Maritime Organization
Lat	Latitude
LME	Link Management Entity
Lon	Longitude
LR	Long Range
MAC	Medium Access Control
MMSI	Maritime Mobile Service Identity
NM	Nautical Miles (1 NM = 1 852 m)
NRZI	Non Return to Zero Inverted
NTT	Nominal Transmission Time

NUC	Not Under Command
OSI	Open System Interconnection model
P_{ss}	Steady state RF output power
PER	Packet Error Rate
PI	Presentation Interface
PRS	Pseudo Random Sequence
RAIM	Receiver Autonomous Integrity Monitoring
RF	Radio Frequency
RI	Reporting Interval
Rx	Receive
SINAD	Signal Interference Noise and Distortion ratio
SOG	Speed Over Ground
SOLAS	International Convention for the Safety Of Life At Sea
TDMA	Time Division Multiple Access
TI	Transmission Interval
Tx	Transmit
UTC	Universal Time Co-ordinated
VDL	VHF Data Link
VHF	Very High Frequency
VSWR	Voltage Standing Wave Ratio
VTS	Vessel Traffic Services

NOTE Abbreviations related to the IEC 61162 series are not included in the above list. For their meaning refer to that standard.

4 General requirements

4.1 General

4.1.1 Capabilities of the Class B“CS” AIS

The Class B“CS” AIS shall improve the safety of navigation by assisting in the efficient navigation of ships and small craft, protection of the environment, and operation of Vessel Traffic Services (VTS). Small craft are vessels which are not required to comply with the mandatory carriage requirements of SOLAS Chapter V, Regulation 19.

The Class B“CS” AIS shall be capable of providing information from small craft, automatically, continuously and with the required accuracy and update rate:

- in a ship-to-ship mode for collision avoidance;
- as a means for littoral States to obtain information about the craft; and
- as a VTS tool, i.e. ship-to-shore (traffic management).

The Class B“CS” AIS station shall be inter-operable and compatible with Class A or other Class B shipborne mobile AIS stations or any other AIS station operating on the AIS VHF Data Link. In particular, Class B“CS” AIS stations shall receive other stations, shall be received by other stations and shall not degrade the integrity of the AIS VHF Data Link.

The Class B“CS” AIS shall only transmit if it has verified that the time period intended for transmission does not interfere with transmissions made by AIS equipment defined in ITU-R

M.1371-4 A1/2 (excluding Class B"CS"). Transmissions of the Class B"CS" AIS shall not exceed one nominal time period (except when responding to a base station with Message 19).

4.1.2 Quality assurance

(see 10.1.1)

Manufacturers shall have a quality control system audited by a competent authority to ensure continuous compliance with the requirements of this standard. Alternatively, the manufacturer may use final product verification procedures where a competent authority verifies compliance with the requirements of this standard before the product is put to the market.

NOTE The ISO 9000 series, as applicable, meets the requirements of a quality control system.

4.1.3 Safety of operation

(see 10.1.2)

It shall not be possible for the operator to augment, amend or erase any program software in the equipment required for operation in accordance with the equipment standard. Data used during operation and stored in the system shall be protected in such a way, that necessary modifications and amendments by the user cannot affect its integrity and correctness.

4.1.4 Additional features

(see 10.1.3)

Where equipment provides a facility that is additional to the minimum requirements of this standard, the operation and, as far as is reasonably practicable, the malfunction of such an additional facility shall not degrade the performance of the equipment.

4.1.5 Modes of operation

4.1.5.1 General

The system shall be capable of operating in a number of modes as described below subject to the transmission of messages by a competent authority. It shall not retransmit received messages.

4.1.5.2 Autonomous and continuous mode

(see 10.2.1)

An "autonomous and continuous" mode for operation in all areas transmitting Message 18 for scheduled position reporting and Message 24 for static data.

The Class B"CS" AIS shall be able to receive and process messages at any time except during time periods of transmission.

4.1.5.3 Assigned mode

(see 10.2.2)

An "assigned" mode for operation in an area subject to a competent authority responsible for traffic monitoring so that the reporting interval, silent mode and/or transceiver behaviour may be set remotely by that authority using group assignment by Message 23.

4.1.5.4 Interrogation mode

(see 10.2.3)

A “polling” or “controlled” mode where the Class B“CS” AIS responds to interrogations by Messages 18 and 24 from a Class A AIS, a SAR aircraft or a base station. A base station interrogation for Message 19 specifying transmission offset shall also be answered. An interrogation overrides a silent period defined by Message 23 (see 7.3.4.4.4).

NOTE Since Message 19 is a message occupying two time periods, this requires the reservation of the respective time periods by Message 20 prior to interrogation.

A Class B“CS” AIS shall not interrogate other stations.

4.2 Manuals

The manuals shall include:

- the type of external connectors if applicable;
- the required information for correct siting of the antennas;
- the required information for compass safe distance.

4.3 Marking and identification

Each unit of the equipment shall be marked externally with the following information which, where practicable, shall be clearly visible when the equipment is installed in its recommended position:

- identification of the manufacturer;
- equipment type number or model identification;
- serial number of the unit;
- power supply requirements; and
- compass safe distance.

Alternatively, the marking may be presented on a display at equipment start-up.

The version of software shall be either marked or displayed on command on the equipment.

When the marking and the title and version of the software are presented only on the display, such information shall also be included in the equipment manual.

5 Environmental, power supply, interference and safety requirements

(see Clause 9)

In addition to the specific requirements of this standard, the Class B“CS” AIS shall fulfil the following general requirements as detailed in IEC 60945:

- inter-unit connection (interfaces other than IEC 61162 are allowed; see 6.7.3);
- power supply;
- extreme power supply;
- excessive conditions;
- power supply short-term variation and power supply failure (the Class B“CS” AIS shall not enter an undefined or unstable state in case of undervoltage);
- durability and resistance to environmental conditions;

- interference;
- electromagnetic compatibility;
- compass safe distance;
- safety precautions;
- protection against accidental access to dangerous voltages;
- electromagnetic radiofrequency radiation;
- X-radiation.

The manufacturer shall declare the category of the equipment as follows:

- a) portable;
- b) protected from the weather;
- c) exposed to the weather;
- d) submerged or in continuous contact with sea water.

6 Performance requirements

6.1 Composition

The B“CS” AIS shall comprise:

- a communication processor, capable of operating in a part of the VHF Maritime Mobile Service band, in support of short range (VHF) applications;
- at least one transmitter and three receiving processes, two for TDMA and one for DSC on channel 70. The DSC process may use the receiving resources on a time-share basis as described in 7.2.2.7. Outside the DSC receiving periods, the two TDMA receiving processes shall work independently and simultaneously on AIS channel A and channel B¹;
- a means for automatic channel switching in the maritime mobile band (by Message 22 and DSC). Manual channel switching shall not be provided;
- an internal GNSS position sensor, which provides a resolution of one ten thousandth of a minute of arc and uses the WGS-84 datum (see 6.3).

6.2 Operating frequency channels

(see 10.4)

The Class B“CS” AIS shall operate on the frequency channels with 25 kHz bandwidth at least in the range from 161,500 MHz to 162,025 MHz of the ITU Radio Regulations Appendix 18 and in accordance with Recommendation ITU-R M.1084-4, Annex 4. The DSC receiving process shall be tuned to channel 70.

The Class B“CS” AIS shall automatically revert to receive-only mode on the channels AIS 1 and AIS 2 when commanded to change to frequency channels outside its operating range and/or bandwidth.

6.3 GNSS receiver for position reporting

(see 10.5, 10.6.1.3)

The Class B“CS” AIS shall have an internal GNSS receiver as a source for position, COG and SOG.

¹ In some regions, the competent authority may not require DSC functionality.

The internal GNSS receiver shall meet the following requirements of a receiver as specified in the IEC 61108 series:

- ~~position accuracy, static and dynamic (5 s);~~
- datum information is received which indicates that the WGS-84 datum is in use;
- COG/SOG accuracy;
- ~~position update (5 s);~~
- internal position is available and the external position is within 26 m of the internal position, and
- interference susceptibility; and
- status indications (RAIM optional).

The internal GNSS receiver may be capable of being differentially corrected, for example by evaluation of Message 17.

An input port for an external GNSS receiver may be provided. The data of an external GNSS receiver shall only be used if:

- the manufacturer has stated, in the installation handbook, that this equipment shall only be connected to a position source that is using WGS-84 datum;
- RAIM information is received which indicates an expected error of less than 10 m in Lat or Lon;
- the external position is within 26 m of the internal position, and
- the input format complies with the IEC 61162 series including mode indicator and checksum.

6.4 Identification

For the purpose of ship and message identification, the appropriate Maritime Mobile Service Identity (MMSI) number shall be used. The unit shall only transmit if an MMSI has been programmed (see 6.5.1.2).

The unit shall be supplied with a default MMSI of “000000000” that is not a valid MMSI.

The unit shall check that the programming MMSI is between 200000000 and 799999999, otherwise the unit shall reject the programming and not be capable of transmitting.

6.5 AIS information

6.5.1 Information content

(see 10.6.1)

6.5.1.1 General

The information provided by the Class B“CS” AIS shall include the following.

6.5.1.2 Static

The list of static information includes:

- identification (MMSI);
- name of ship;
- type of ship;
- vendor ID (optional);

- call sign;
- dimensions of ship and reference for position.

The default value for type of ship shall be 37 (pleasure craft). Defaults for other static data shall be chosen such that it is obvious that the equipment has been properly initialised, in particular, the default MMSI shall be set to 000000000 and the equipment shall be designed such that transmissions are inhibited with this default setting (see 6.7.2).

6.5.1.3 Dynamic

The list of dynamic information includes:

- ship's position with accuracy indication and integrity status
 - time in UTC;
- NOTE Date to be established by receiving equipment.
- course over ground (COG);
 - speed over ground (SOG);
 - true heading (optional).

6.5.1.4 Configuration information

The following information about configuration and options active in the specific unit shall be provided:

- AIS Class B"CS" unit;
- availability of minimum keyboard/display facility;
- availability of DSC channel 70 receiver;
- ability to operate in the whole marine band or the upper 525 kHz part of the band (see 6.2);
- ability to process channel management Message 22.

6.5.1.5 Short safety-related messages

Short safety-related messages as described in ITU-R M.1371-4 (Message 14) shall not be provided.

NOTE IMO COMSAR.1/Circ.46 of February 2009 advises that short safety-related messages should not be incorporated in AIS equipment because there is no SAR infrastructure in place to accommodate them.

6.5.2 Information reporting intervals

(see 10.6.2)

The Class B"CS" AIS shall transmit position reports (Message 18) in reporting intervals of

- 30 s if $SOG > 2$ kn,
- 3 min if $SOG \leq 2$ kn,

provided that transmission time periods are available. A command received by Message 23 shall override the reporting interval. A reporting interval of less than 5 s is not required.

Static data submessages 24A and 24B shall be transmitted every 6 min in addition to and independent of the position report (see 7.4.2). Message 24B shall be transmitted within 1 min following Message 24A.

6.5.3 Permissible initialisation period

(see 10.7)

The AIS shall start transmitting position reports within

- cold start: 30 min;
- warm start (if off for less than 1 h): 5 min;
- short signal loss (GNSS signal lost for less than 5 min): resume within a time of twice the reporting interval.

6.6 Alarms and indications, fall-back arrangements

6.6.1 Integrity and protection

(see 10.8.1)

The Class B“CS” AIS shall be equipped with built-in integrity tests (BIIT). The BIIT shall run continuously or at appropriate intervals simultaneously with the standard functions of the equipment.

If any failure or malfunction is detected that will significantly reduce integrity or stop operation of the Class B“CS” AIS, a visual indication shall be given (for example a LED, see 6.7.1). This includes the detection of background noise above -77 dBm (see 7.3.2.4).

The Class B“CS” AIS installation, when operating, shall not be damaged by the effects of open-circuited or short-circuited antenna terminals.

6.6.2 Transmitter shutdown procedure

(see 10.8.3)

An automatic transmitter shutdown shall be provided in the case where a transmitter does not discontinue its transmission within 1 s of the end of its nominal transmission. This procedure shall be independent of the operating software.

6.6.3 Position sensor fallback conditions

(see 10.6.1.3, 10.8.4)

Priorities and affected position report data (refer to ITU-R M.1371-4 A8/3.16) shall be as indicated in Table 1.

Table 1 – Position sensor fallback conditions

Priority	Position sensor status		Affected data in Message 18			
			Position accuracy flag	Time stamp	RAIM-flag	Position Latitude/Longitude
1.	External DGNSS in use (corrected) ^a		1 ^d	UTC-s	1/0 ^d	Lat/Lon (external)
2.	Internal DGNSS in use (corrected; Message 17)		1 ^d	UTC-s	1/0 ^d	Lat/Lon (internal)
3.	Internal DGNSS in use (corrected; e.g. beacon) ^c		1 ^d	UTC-s	1/0 ^d	Lat/Lon (internal)
4.	External GNSS in use (uncorrected) ^a		0 ^d	UTC-s	1/0 ^d	Lat/Lon (external)
5.	Internal GNSS in use (uncorrected) ^b		0 ^d	UTC-s	1/0 ^d	Lat/Lon (internal)
6.	No sensor position in use	Manual position input	N/A	61	N/A	Do not transmit
		Dead reckoning position		62		Do not transmit
		No position		63		Do not transmit
^a Applicable only if an input from an external GNSS receiver is provided (see 6.3) which may only be used if the conditions specified in 6.3 are fulfilled.						
^b Applicable in all configurations (minimum requirement).						
^c Applicable only if (optionally) an internal beacon receiver is provided.						
^d If RAIM available "1"; if not, default "0".						

If RAIM is available (indicated by a GBS sentence or equivalent information), the position accuracy flag shall be evaluated using Table 2.

Table 2 – Use of accuracy (PA) flag

		PA flag	RAIM flag
Uncorrected	No RAIM, GBS not provided	0	0
	GBS provided, expected error 5 m	1	1
	GBS provided, expected error 5 m	0	1
Corrected	No RAIM, GBS not provided	0	0
	GBS provided, expected error 15 m	1	1
	GBS provided, expected error 15 m	0	1

If the GNSS sensor is inoperative, the unit shall not transmit scheduled Messages 18 and 24 unless interrogated by a base station.

NOTE In this case, the synchronisation process will not take into account distance delays.

The Class B“CS” AIS shall automatically select the position source with the highest priority available. If data availability changes, the Class B“CS” AIS shall maintain the position source for the next scheduled position report and automatically switch to the position source with the highest priority available afterwards. During this period, the latest valid position shall be used for reporting.

6.6.4 SOG/COG sensor fallback conditions

(see 10.8.5)

SOG/COG information shall be of the same source as position and follow the same fallback rules. This is to avoid transmission of information referenced to different points on the ship.

6.7 User interface

6.7.1 Indicators and display

(see 10.9.1)

The Class B“CS” AIS shall be provided with the following indicators.

- Power: power on and fully operable (transmitting and receiving properly).
- Tx timeout: if the unit has not transmitted a position report during the last two reporting intervals (nominal reporting interval cannot be maintained for operational reasons, for example Message 23 quiet period, high VDL load).
- Error: detection of an error as a result of the BIIT (see 6.6.1).

If a display for received messages is provided, it shall:

- display received Messages 12 and 14 and the position report from AIS-SART in active mode;
- not display messages addressed to other stations.

6.7.2 Static data input

(see 10.9.3)

Means shall be provided to input and verify the static data prior to use. It shall not be possible for the user to alter the MMSI once programmed.

6.7.3 External interfaces

(see 10.9.4)

To enable a user to access, select and display the information on a separate system, the Class B“CS” AIS may be provided with an interface. If implemented, the formats and protocol for this data stream should be as defined by the IEC 61162 series. If provided, this interface shall not output information addressed to other stations.

The Class B“CS” AIS may be provided with an interface to input sensor data. If provided, an input interface for position sensor data shall be compliant with the IEC 61162 series.

6.8 Protection from invalid control commands


The Class B“CS” AIS shall not accept control commands sent from stations with invalid base station MMSI. Before accepting and processing the Messages 17, 20, 22 and 23, the unit shall check the MMSI of the sender station. When the MMSI is “00xyyyyy” where x is between 2 and 7, the unit shall accept and process the received command, otherwise the unit shall ignore it. (See 8.4.3).

7 Technical requirements

7.1 General

This clause covers layers 1 to 4 (Physical Layer, Link Layer, Network Layer, Transport Layer) of the Open System Interconnection (OSI) model.

Figure 1 illustrates the layer model of a Class B“CS” AIS station (Physical Layer to Transport Layer) and the layers of the applications (Session Layer to Application Layer).

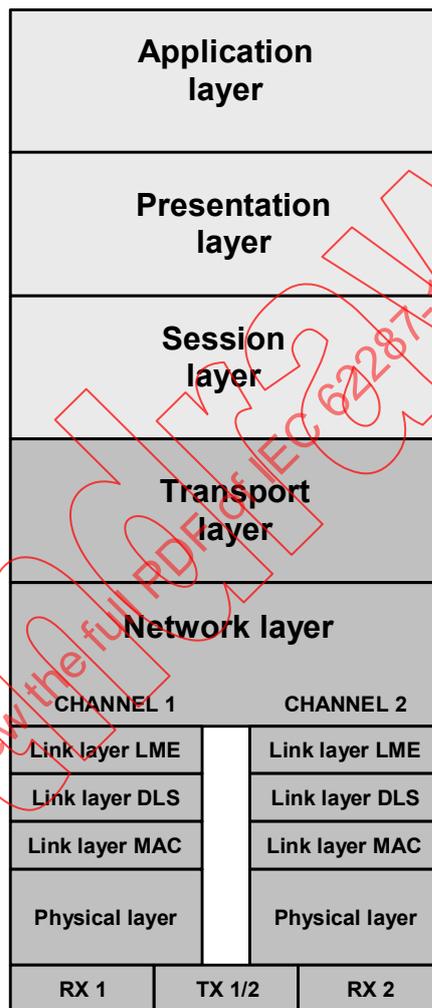

IEC 257/06

Figure 1 – OSI layer model

7.2 Physical layer

(see Clause 11)

7.2.1 General

The Physical Layer is responsible for the transfer of a bit-stream from an originator to the data link.

7.2.2 Transceiver characteristics

7.2.2.1 General

General transceiver characteristics shall be as specified in Table 3.

Table 3 – Transceiver characteristics

Symbol	Parameter name	Value	Tolerance
PH.RFR	Regional frequencies (range of frequencies within RR Appendix 18) ^a (MHz) Full range 156,025 to 162,025 is also allowed. This capability will be reflected in Message 18.	161,500 to 162,025	
PH.CHS	Channel spacing (encoded according to RR Appendix 18 with footnotes) ^a (kHz)	25	-
PH.CHB	Channel bandwidth (kHz)	Wide 25	
PH.AIS1	AIS 1 (default channel 1) (2087) ^a (MHz)	161,975	3×10^{-6}
PH.AIS2	AIS 2 (default channel 2) (2088) ^a (MHz)	162,025	3×10^{-6}
PH.BR	Bit rate (bit/s)	9 600	50×10^{-6}
PH.TS	Training sequence (bits)	24	-
PH.TXTB	GMSK transmitter BT-product	0,4	
PH.RXBT	GMSK receiver BT-product	0,5	
PH.MI	GMSK modulation index	0,5	

^a See Recommendation ITU-R M.1084-4, Annex 4.

7.2.2.2 Dual channel operation

The AIS shall be capable of operating on two parallel channels in accordance with 7.4.2. Two separate TDMA receive channels or processes shall be used to simultaneously receive information on two independent frequency channels. One TDMA transmitter shall be used to alternate TDMA transmissions on two independent frequency channels.

Data transmissions shall default to AIS 1 and AIS 2 unless otherwise specified by a competent authority, as described in 7.4.2 and Annex C.

7.2.2.3 Bandwidth

The Class B^{CS} AIS shall operate on 25 kHz channels according to Recommendation ITU-R M.1084-4 and Appendix 18 of the Radio Regulations.

7.2.2.4 Modulation scheme

The modulation scheme is bandwidth adapted frequency modulated Gaussian filtered minimum shift keying (GMSK/FM). The NRZI encoded data shall be GMSK coded before frequency modulating the transmitter.

7.2.2.5 Training sequence

Data transmission shall begin with a 24-bit demodulator training sequence (preamble) consisting of one segment synchronisation. This segment shall consist of alternating zeros and ones (0101....). This sequence shall always start with a 0.

7.2.2.6 Data encoding

The NRZI waveform is used for data encoding. The waveform is specified as giving a change in the level when a zero (0) is encountered in the bit stream.

Forward error correction, interleaving or bit scrambling is not used.

7.2.2.7 DSC operation

The Class B"CS" AIS shall be capable of receiving DSC channel management commands. It shall either have a dedicated receive process, or it shall be capable of retuning its TDMA receivers to channel 70 on a time sharing basis, with each TDMA receiver taking alternate turns to monitor channel 70 (for details see Annex C).²

7.2.3 Transmitter requirements

Transmitter parameters shall be as given in Table 4.

Table 4 – Transmitter parameters

Transmitter parameters	Required results	Condition
Frequency error	500 Hz normal 1 000 Hz extreme	
Carrier power (P_{SS})	33 dBm 1,5 dB normal 3 dB extreme	Conducted
Modulation spectrum	-25 dBW -60 dBW	Δf_c 10 kHz 25 kHz Δf_c 62,5 kHz
Modulation accuracy	3 400 Hz normal and extreme 2 400 480 Hz normal and extreme 2 400 240 Hz normal 480 Hz extreme 1 740 175 Hz normal 350 Hz extreme 2 400 240 Hz normal 480 Hz extreme	Bit 0, 1 Bit 2, 3 Bit 4 ... 31 Bit 32 ... 199: For a bit pattern of 0101 For a bit pattern of 00001111
Power versus time characteristics	Transmission delay: 2 083 μ s Ramp up time: \leq 313 μ s Ramp down time: \leq 313 μ s Transmission duration: \leq 23 333 μ s	Nominal 1 time period transmission
Spurious emissions	-36 dBm -30 dBm	9 kHz ... 1 GHz 1 GHz ... 4 GHz

7.2.4 Receiver requirements

Receiver parameters shall be as given in Table 5.

² In some regions, the competent authority may not require DSC functionality.

Table 5 – Receiver parameters

Receiver parameters	Required results		
	Result in PER	Wanted signal	Unwanted signal(s)
Sensitivity	20 %	-107 dBm normal ^a -101 dBm extreme -104 dBm normal at 500 Hz offset	
Error at high input levels	2 %	-77 dBm	
	10 %	-7 dBm	
Co-channel rejection	20 %	-101 dBm	-111 dBm -111 dBm normal at 1 kHz offset
Adjacent channel selectivity	20 %	-101 dBm	-31 dBm normal
Spurious response rejection	20 %	-101 dBm	-31 dBm
Intermodulation response rejection	20 %	-101 dBm	-36 dBm
Blocking and desensitisation	20 %	-101 dBm	-23 dBm (5 MHz)
			-15 dBm (5 MHz)
Spurious emissions	-57 dBm	9 kHz ... 1 GHz	
	-47 dBm		
^a Normal and extreme test conditions as defined in 8.2.			

7.3 Link layer

(see Clause 12)

7.3.1 General

The Link layer specifies how data shall be packaged in order to apply error detection to the data transfer. The Link layer is divided into three sublayers.

7.3.2 Link sublayer 1: Medium access control (MAC)

7.3.2.1 General

The MAC sublayer provides a method for granting access to the data transfer medium, i.e. the VHF data link. The method used shall be Time Division Multiple Access (TDMA).

7.3.2.2 Synchronisation

7.3.2.2.1 CS time period

Synchronisation shall be used to determine the nominal start of the CS time period (T_0).

7.3.2.2.2 Sync mode 1: AIS stations other than Class B"CS" is received

If signals from other AIS stations complying with IEC 61993-2 or from base stations are received, the Class B"CS" shall synchronise its time-periods to their scheduled position reports (suitable account shall be taken of the propagation delays from the individual stations). This applies to Message types 1, 2, 3, 4 as far as they are providing position data and have not been repeated (repeat indicator = 0).

Synchronisation jitter shall not exceed 3 bits (312 μ s) from the average of the received position reports. The average shall be calculated over a rolling 60 s period.

If these AIS stations are no longer received, the unit shall maintain synchronisation for a minimum of 30 s and then switch back to sync mode 2.

Other synchronisation sources fulfilling the same requirements are allowed (optionally) instead of the above.

7.3.2.2.3 Sync mode 2: no station other than Class B"CS" is received

In the case of a population of Class B"CS" stations alone (in the absence of any other class of station that can be used as a synchronisation source) the Class B"CS" station shall determine the start of time-periods (T_0) according to its internal timing.

Time periods that are reserved by a base station using Message 20 shall be respected.

If the Class B"CS" unit receives an AIS station that can be used as a synchronisation source (being in sync mode 2) it shall evaluate timing and synchronise for its next transmission to this station.


7.3.2.3 Carrier-sense (CS) detection method

Within a time window of 1 146 μs , starting at 833 μs and ending at 1 979 μs after the start of the time period intended for transmission (T_0), the AIS Class B"CS" shall detect if that time period is used (CS detection window).

NOTE Signals within the first 8 bit (833 μs) of the time period are excluded from the decision (to allow for propagation delays and ramp down periods of other units).

The Class B"CS" AIS shall not transmit on any time period in which, during the CS detection window, a signal level greater than the "CS detection threshold" (7.3.2.4) is detected.

The transmission of a CSTDMA packet shall commence 20 bits ($T_A = 2\,083\ \mu\text{s} + T_0$) after the nominal start of the time period (see Figure 2).

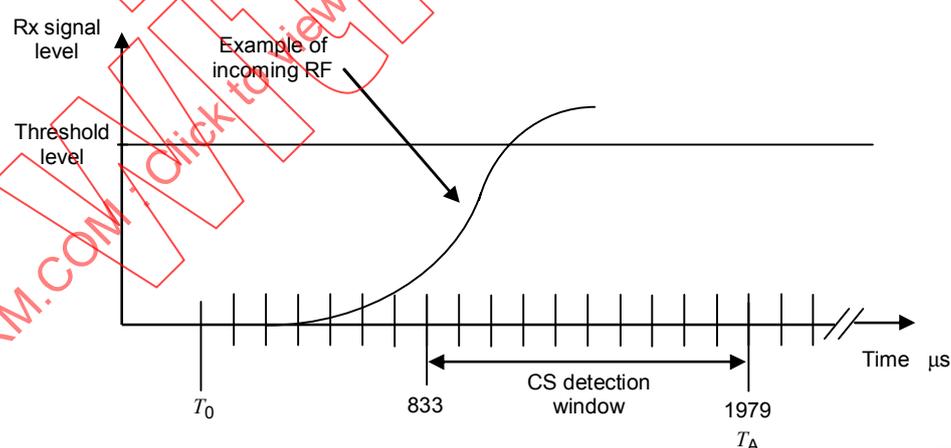

IEC 258/06

Figure 2 – Carrier-sense timing

7.3.2.4 CS detection threshold

The CS detection threshold shall be determined over a rolling 60 s interval on each receive channel separately. The threshold shall be determined by measuring the minimum energy level (representing the background noise) plus an offset of 10 dB. The minimum CS detection threshold shall be $-107\ \text{dBm}$ and background noise shall be tracked for a range of at least 30 dB ($-77\ \text{dBm}$).

NOTE The following example is compliant with the requirement: Sample the RF signal strength at a rate 1 kHz, average the samples over a sliding 20 ms period and over a 4 s interval determine the minimum period value. Maintain a history of 15 such intervals. The minimum of all 15 intervals is the background level. Add a fixed 10 dB offset to give the CS detection threshold.

An indication shall be given if the background noise exceeds -77 dBm.

7.3.2.5 VDL access

The transmitter shall begin transmission by turning on the RF power immediately after the duration of the carrier-sense window (T_A).

The transmitter shall be turned off after the last bit of the transmission packet has left the transmitting unit; nominal transmission end (T_E assuming no bit stuffing).

The access to the medium is performed as shown in Figure 3 and Table 6.

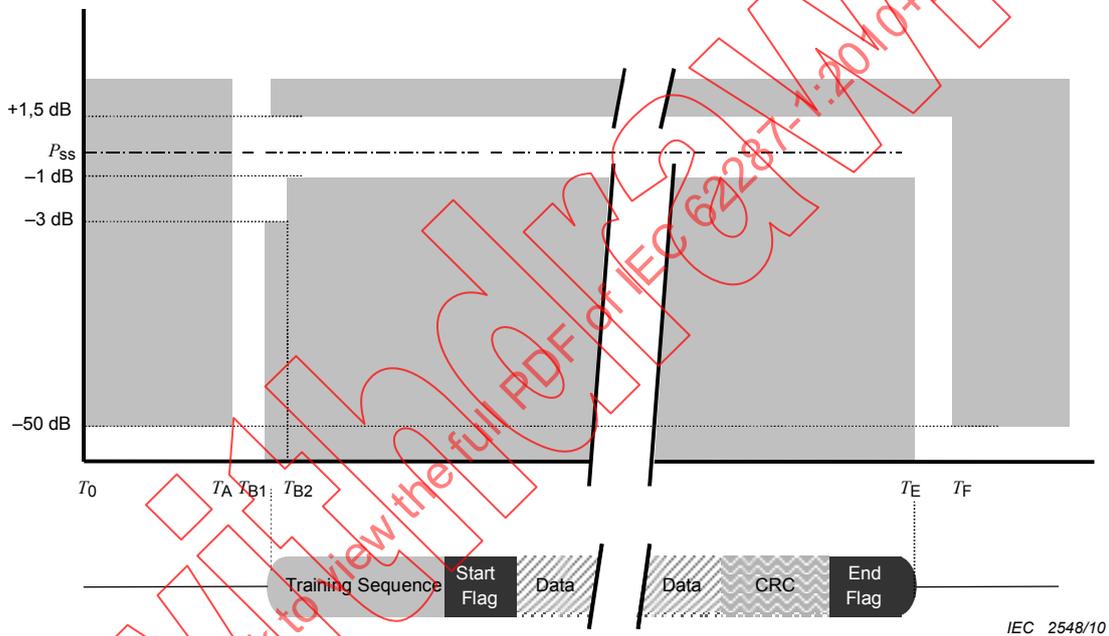


Figure 3 – Power versus time mask

Table 6 – Definition of timings for Figure 3

Reference	Bits	Time	Definition	
T_0	0	0 ms	Start of candidate transmission time period	
T_A	20	2,083 ms	Power shall not exceed -50 dB of P_{ss}	
T_B	T_{B1}	23	2,396 ms	Power shall reach within +1,5 dB or -3 dB of P_{ss}
	T_{B2}	25	2,604 ms	Power shall reach within +1,5 dB or -1 dB of P_{ss}
T_E (plus 1 stuffing bit)	248	25,833 ms	Power shall still remain within +1,5 dB or -1 dB of P_{ss}	
T_F (plus 1 stuffing bit)	251	26,146 ms	Power shall reach -50 dB of P_{ss} and stay below this	

There shall be no modulation of the RF after the termination of transmission (T_E) until the power has reached zero and next time division begins (T_G).

7.3.2.6 VDL state

The VDL state is based on the result of the carrier-sense detection (7.3.2.3) for a time period. A VDL time period can be in one of the following states.

- FREE: the time period is available and has not been identified as used in reference to 7.3.2.3.
- USED: the VDL has been identified as used in reference to 7.3.2.3.
- UNAVAILABLE: time periods shall be indicated as “UNAVAILABLE” if they are reserved by base stations using Message 20 regardless of their range.

Time-periods indicated as “UNAVAILABLE” shall not be considered as a candidate time-period for use by own station and may be used again after a timeout. The timeout shall be 3 min if not specified or as specified in Message 20.

7.3.3 Link sublayer 2: Data Link Service (DLS)

7.3.3.1 General

The DLS sublayer provides methods for

- data link activation and release,
- data transfer, or
- error detection and control.

7.3.3.2 Data link activation and release

Based on the MAC sublayer the DLS will listen, activate or release the data link. Activation and release shall be in accordance with 7.3.2.5.

7.3.3.3 Data transfer

7.3.3.3.1 General

Data transfer shall use a bit-oriented protocol which is based on the high level data link control (HDLC) as described in ITU-R M.1371-4 A2/3.2. Information packets (I-Packets) shall be used with the exception that the control field is omitted (see Figure 4).

7.3.3.3.2 Bit stuffing

The bit stream shall be subject to bit stuffing. This means that if five consecutive ones (1's) are found in the output bit stream, a zero shall be inserted. This applies to all bits except the data bits of HDLC flags (start flag and end flag, see Figure 4).

7.3.3.3.3 Packet format

Data is transferred using a transmission packet as shown in Figure 4.

Start-buffer	Training sequence	Start flag	Data	FCS	End flag	End-buffer
--------------	-------------------	------------	------	-----	----------	------------

IEC 260/06

Figure 4 – Transmission packet

The packet shall be sent from left to right. This structure is identical to the general HDLC structure, except for the training sequence. The training sequence shall be used in order to synchronise the VHF receiver as described in 7.2.2.5. The total length of the default packet is 256 bits. This is equivalent to 26,7 ms.

7.3.3.3.4 Start-Buffer

The start-buffer (refer to Table 7) is 23 bits long and consists of

- CS delay 20 bits:
 - reception delay (sync jitter + distance delay);
 - own synchronisation jitter (relative to synchronisation source);
 - ramp up (received Message);
 - CS detection window;
- ramp up (own transmitter) 3 bits.


Table 7 – Start-buffer

Sequence	Description	Bits	Note
1	Reception delay (synchronisation jitter + distance delay)	5	Class A: 3 bits of jitter (IEC 61993-2) + 2 bits (30 NM) distance delay; Base station: 1 bit of jitter (IEC 61993-2) + 4 bits (60 NM) distance delay
2	Own synchronisation jitter (relative to synchronisation source)	3	3 bits according to ITU-R M.1371-4
3	Ramp up (received Message)	8	Referring to IEC 61993-2, start of detection window (from a practical observation all observed transponders were fully ramped up after 6 bits)
4	Detection window	3	
5	Internal processing delay	1	
6	Ramp up (own transmitter)	3	
	Total	23	

7.3.3.3.5 Training sequence


The training sequence shall be a bit pattern consisting of alternating 0's and 1's (010101010...).

Twenty-four bits of preamble are transmitted prior to sending the flag. This bit pattern is modified due to the NRZI mode used by the communication circuit. See Figure 5.

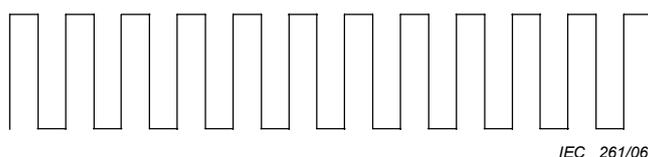

IEC 261/06

Figure 5a – Unmodified bit pattern

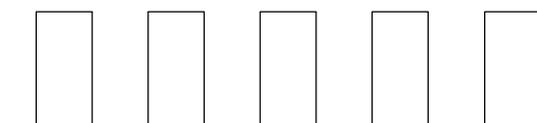

IEC 262/06

Figure 5b – Modified bit pattern by NRZI

Figure 5 – Training sequence

7.3.3.3.6 Start flag

The start flag shall be 8 bits long and consists of a standard HDLC flag. It is used to detect the start of a transmission packet. The start flag consists of a bit pattern, 8 bits long: 01111110 (7Eh). The flag shall not be subject to bit stuffing, although it consists of 6 bits of consecutive ones (1's).

7.3.3.3.7 Data

The data portion in the default transmission packet transmitted in 1 time period is a maximum of 168 bits.

7.3.3.3.8 Frame check sequence (FCS)

The FCS uses the cyclic redundancy check (CRC) 16-bit polynomial to calculate the checksum as described in ITU-R M.1371-4 A2/3.2. All the CRC bits shall be pre-set to one (1) at the beginning of a CRC calculation. Only the data portion shall be included in the CRC calculation (see Figure 6).

7.3.3.3.9 End flag

The end flag is identical to the start flag as described in 7.3.3.3.6.

7.3.3.3.10 End-buffer

- bit stuffing 4 bits

NOTE 1 The probability of 4 bits of bit stuffing is only 5 % greater than that of 3 bit; refer to ITU-R M.1371-4 A2, 3.2.2.8.

- ramp down 3 bits
- distance delay 2 bits

NOTE 2 A buffer value of 2 bits is reserved for a distance delay equivalent to 30 NM for own transmission.

A repeater delay is not applicable (duplex repeater environment is not supported).

7.3.3.4 Summary of the transmission packet

The data packet is summarised as shown in Table 8.

Table 8 – Summary of the transmission packet

Action	Bits	Explanation
Start-buffer:		
CS-delay	20	T_0 to T_A in Figure 6
Ramp up	3	T_A to T_B in Figure 6
Training sequence	24	Necessary for synchronisation
Start flag	8	In accordance with HDLC (7Eh)
Data	168	Default
CRC	16	In accordance with HDLC
End flag	8	In accordance with HDLC (7Eh)
End-buffer:		
Bit stuffing	4	
Ramp down	3	
Distance delay	2	
Total	256	

7.3.3.5 Transmission timing

Table 9 and Figure 6 show the timing of the default transmission packet (one time division).

Table 9 – Transmission timing

T_n	Time μs	bit	Description
T_0	0	0	Start of time division; beginning of start buffer
T_A	2 083	20	Start of transmission (RF power is applied)
T_B	2 396	23	End of start buffer; RF power and frequency stabilisation time, beginning of training sequence
T_C	4 896	47	Beginning of start flag
T_D	5 729	55	Beginning of data
T_E	25 729	247	Beginning of end buffer; nominal end of transmission (assuming 0 bit stuffing)
T_F	26 042	250	Nominal end of ramp down (power reaches -50 dBc)
T_G	26 667	256	End of time period, start of next time period

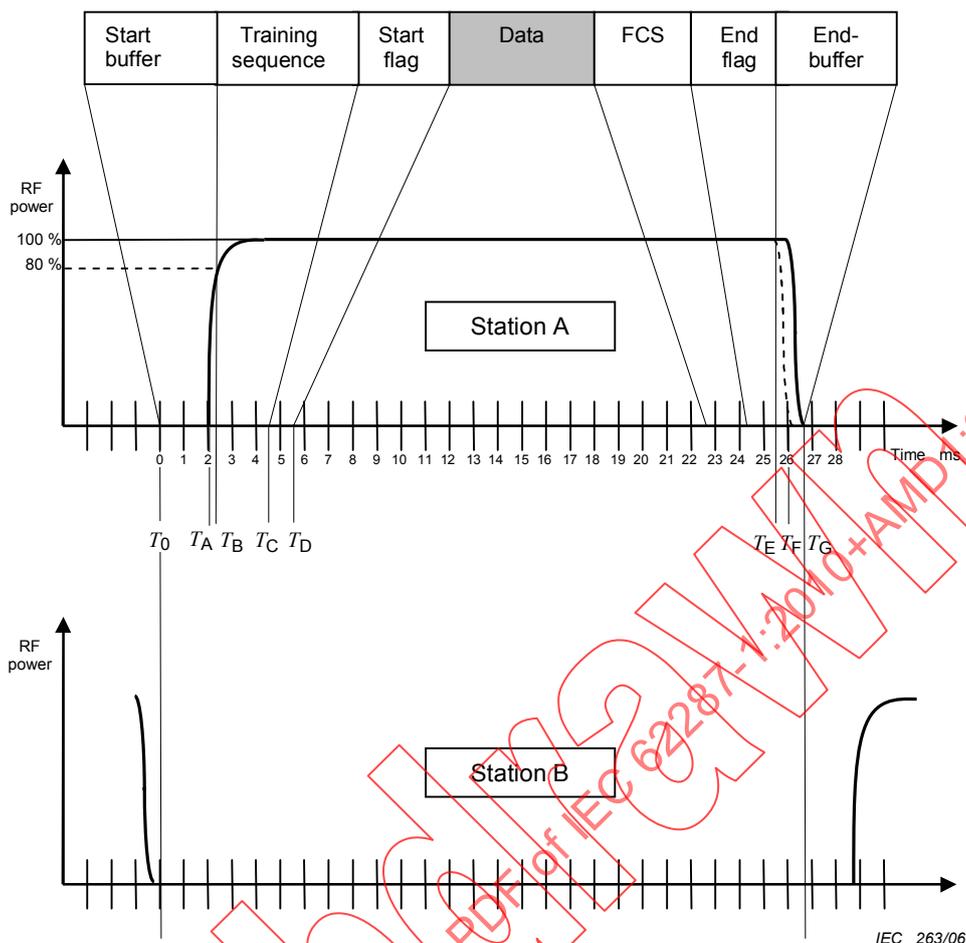


Figure 6 – Transmission timing

7.3.3.6 Long transmission packets

Autonomous transmissions are limited to one time period. When responding to an interrogation by a base station for Message 19, the response may occupy two time periods.

7.3.3.7 Error detection and control

Error detection and control shall be handled using the CRC polynomial as described in 7.3.3.3.8.

CRC errors shall result in no further action by the Class B“CS”.

7.3.4 Link sublayer 3: Link management entity (LME)

7.3.4.1 LME

The LME controls the operation of the DLS, MAC and the physical layer.

7.3.4.2 Access algorithm for scheduled transmissions

The Class B“CS” shall use a CSTDMA access using transmission periods, which are synchronised to periods of RF activity on the VDL.


The access algorithm is defined by the parameters described in Table 10.

Table 10 – Access parameters

Term	Description	Value
Reporting interval (RI)	Reporting interval as specified in 6.5.2	5 s ... 10 min
Nominal transmission time (NTT)	Nominal time-period for transmission defined by RI	
Transmission interval (TI)	Time interval of possible transmission periods, centred around NTT	$TI = RI/3$ or 10 s whichever is less
Candidate period (CP)	Time-period where a transmission attempt is made (excluding time periods indicated unavailable)	
Number of CP in TI		10

The CSTDMA algorithm shall follow the rules given below (refer to Figure 7):

- randomly define 10 candidate periods (CP) in the transmission interval (TI);
- starting with the first CP in TI, test for “carrier-sense” 7.3.2.3 and transmit if the status of CP is “unused”, otherwise wait for the next CP;
- transmission shall be abandoned if all 10 CPs are “used”.

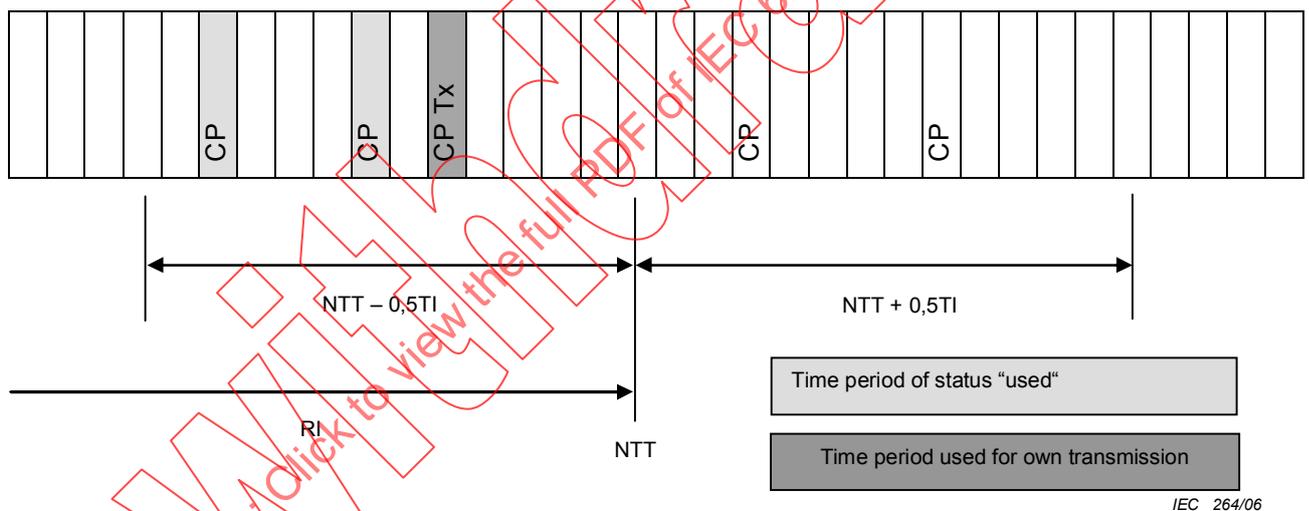

IEC 264/06

Figure 7 – Example for CSTDMA access

7.3.4.3 Access algorithm for unscheduled transmissions

Unscheduled transmissions, except responses to interrogations by a base station, shall be performed by assigning a nominal transmission time within 25 s of the request and shall use the access algorithm described in 7.3.4.2.

If the option to process Message 12 is implemented, an acknowledgement Message 13 shall be transmitted in response to Message 12 on the same channel with up to 3 repetitions of the access algorithm if needed.

7.3.4.4 Modes of operation

7.3.4.4.1 General

There shall be three modes of operation:

- autonomous (default mode);
- assigned;
- interrogation.

7.3.4.4.2 Autonomous

A station operating autonomously shall determine its own schedule for the transmission of its position reports.

7.3.4.4.3 Assigned

A station operating in the assigned mode shall use a transmission schedule assigned by a competent authority's base station. This mode is initiated by a group assignment command (Message 23, see 7.3.4.11).

The assigned mode shall affect only the transmission of position reports, and no other behaviour shall be affected. The transmission of position reports shall be as directed by Message 23.

If a station receives this group assignment command and belongs to the group addressed by region and selection parameters, it shall enter into assigned mode which shall be indicated by setting the 'Assigned Mode Flag' to "1".

To determine whether this group assignment command applies to the recipient station, it shall evaluate all selector fields concurrently.

When commanded to a specific transmission behaviour (Tx/Rx mode or reporting interval), the mobile station shall tag it with a timeout, randomly selected between 4 min and 8 min after the first transmission. After the timeout has elapsed the station shall return to autonomous mode.

NOTE This can only be done by a base station. Note that because of the timeout, assignments may be reissued by the competent authority as needed. If a Message 23 commanding a reporting interval of 6 min or 10 min is not refreshed by the base station, the assigned station will resume normal operation after timeout and thus not establish the assigned rate.

When commanded to a specific reporting rate, the AIS shall transmit the first position report with assigned rate after a time randomly selected between the time the Message 23 has been received and the assigned interval to avoid clustering.

Any individual assignment command received shall take precedence over any group assignment command received; i.e. the following cases shall be applied:

- if Message 22 is individually addressed, the Tx/Rx mode field setting of Message 22 shall take precedence over the Tx/Rx mode field setting of Message 23;
- if Message 22 with regional settings is received, the Tx/Rx mode field setting of Message 23 shall take precedence over the Tx/Rx mode field setting of Message 22. In the case of Tx/Rx mode field, the receiving station reverts to its previous Tx/Rx mode regional operating setting after the Message 23 assignment has expired.

When a Class B"CS" station receives a quiet time command, it shall continue to schedule nominal transmission time periods (NTT) but shall not transmit Messages 18 and 24 on either channel for the time commanded. Interrogations shall be answered during the quiet period. Transmissions of safety related messages may still be possible. After the quiet time has

elapsed, transmissions shall be resumed using the transmission schedule as maintained during the quiet period.

Subsequent quiet time commands received during the first commanded quiet time shall be ignored.

The quiet time command shall override a reporting rate command.

7.3.4.4.4 Interrogation mode

A station shall automatically respond to interrogation messages (Message 15) from a ship or competent authority. Operation in the interrogation mode shall not conflict with operation in the other two modes. The response shall be transmitted on the channel where the interrogation message was received.

If interrogated for Message 18 with no offset specified in Message 15, the response shall be transmitted within 30 s using the access algorithm as described in 7.3.4.3. If no free candidate period has been found, one transmission retry shall be performed after 30 s.

If interrogated with an offset given in Message 15, the response shall be transmitted in the specified time period without applying the access algorithm as described in 7.3.4.3.

An interrogation by a base station or a SAR aircraft station for Message 19 shall only be responded to if the interrogation Message 15 contains an offset to the time period in which the response shall be transmitted.

NOTE The base station will reserve time periods by Message 20 prior to interrogation.

An interrogation for Message 24 shall be responded to in the following way, depending on the number of message IDs and slot offset in Message 15:

- one message ID 24, slot offset = 0: Respond part A and B;
- two message IDs 24, slot offset = 0: Respond part A and B, each once;
- one message ID, slot offset not = 0: Respond part A in the slot defined by the slot offset;
- two message IDs, slot offset not = 0: Respond part A and B in the slots defined by the slot offsets.

Interrogations for the same message received before own response has been transmitted may be ignored.

7.3.4.5 Initialisation

At power on, a station shall monitor the TDMA channels for one minute to synchronise on received VDL transmissions (7.3.2.2) and to determine the CS detection threshold level (7.3.2.4). The first autonomous transmission shall always be the scheduled position report (Message 18) (see 6.5.3).

7.3.4.6 Communication state for CS access

Because Class B"CS" does not use any communication state information, the corresponding field in Message 18 shall be filled with the following default value

1100000000000000110

and indicating the fixed value of "1" in the Communication state selector flag.

NOTE A Class B"CS" station by default reports sync state 3 and does not report "number of received stations" (reference to ITU-R M.1371-4 table 20). Therefore, it will not be used as sync source for other stations.

7.3.4.7 VDL message use

The following Table 11 shows how the messages defined in M.1371-4/A7-4.3.3.6 shall be used by a Class B"CS" shipborne mobile AIS device. For further details refer to the appropriate section of M.1371.

Table 11 – Use of VDL messages by a Class B"CS" AIS

No.	Name of message	M.1371-4 Ref.	Receive and process a	Transmit by own	Remark
0	Undefined				
1	Position Report (Scheduled)	A8-3.1	Opt	No	
2	Position Report (Assigned)	A8-3.1	Opt	No	
3	Position Report (When interrogated)	A8-3.1	Opt	No	
4	Base Station Report	A8-3.2	Opt	No	
5	Static and Voyage Related Data	A8-3.3	Opt	No	
6	Addressed Binary Message	A8-3.4	No	No	
7	Binary Acknowledge	A8-3.5	No	No	
8	Binary Broadcast Message	A8-3.6	Opt	No	
9	Standard SAR Aircraft Position Report	A8-3.7	Opt	No	
10	UTC and Date Inquiry	A8-3.8	No	No	
11	UTC/Date Response	A8-3.2	Opt	No	
12	Safety Related Addressed Message	A8-3.10	Opt	No	NOTE Information can also be transferred via Message 14
13	Safety Related Acknowledge	A8-3.5	No	Opt	Shall be transmitted if the option to process Message 12 is implemented
14	Safety Related Broadcast Message	A8-3.12	Opt	No	
15	Interrogation	A8-3.13	Yes	No	Class B"CS" shall respond to interrogations for Message 18 and Message 24 It shall also respond to interrogations for Message 19 by a Base Station
16	Assigned Mode Command	A8-3.14	No	No	(Message 23 is applicable to the "CS" instead)
17	DGNSS Broadcast Binary Message	A8-3.15	Opt	No	
18	Standard Class B Equipment Position Report	A8-3.16	Opt	Yes	A Class B"CS" AIS shall indicate "1" for "CS" in flag bit 143
19	Extended Class B Equipment Position Report	A8-3.17	Opt	Yes	Transmit ONLY as response to Base Station interrogation
20	Data Link Management Message	A8-3.18	Yes	No	
21	Aids-to-Navigation Report	A8-3.19	Opt	No	
22	Channel Management Message	A8-3.20	Yes	No	Use of that function may be different in certain regions
23	Group Assignment	A8-3.21	Yes	No	
24	Class B"CS" Static data	A8-3.22	Opt	Yes	Part A and Part B
25	Single slot binary message	A8-3.23	Opt	No	
26	Multiple slot binary message with Communications State	A8-3.24	No	No	
27	Position report for long range applications	A8-3.25	No	No	

No.	Name of message	M.1371-4 Ref.	Receive and process ^a	Transmit by own	Remark
28 to 63	Undefined	None	No	No	Reserved for future use

^a "Receive and process" in this table means functionality visible for the user, for example output to an interface or display. For synchronisation, it is necessary to receive and internally process messages according to 7.3.2.2; this applies to Messages 1, 2, 3, 4.

7.3.4.8 Use of safety related message Message 14 (optional)

Table 12 specifies the maximum number of data bits used for Message 14 and is based on the assumption that the theoretical maximum of stuffing bits will be needed.

Table 12 – Number of data bits for use with Message 14

Number of time periods	Maximum data bits	Stuffing bits	Total buffer bits
1	136	36	56

The Class B"CS" AIS may optionally receive and process Message 14.

The transmission of Message 14 shall not be provided (see 6.5.1.5).

7.3.4.9 Message 18: Standard Class B"CS" equipment position report

The standard Class B equipment position report (see Table 13) shall be output periodically and autonomously.

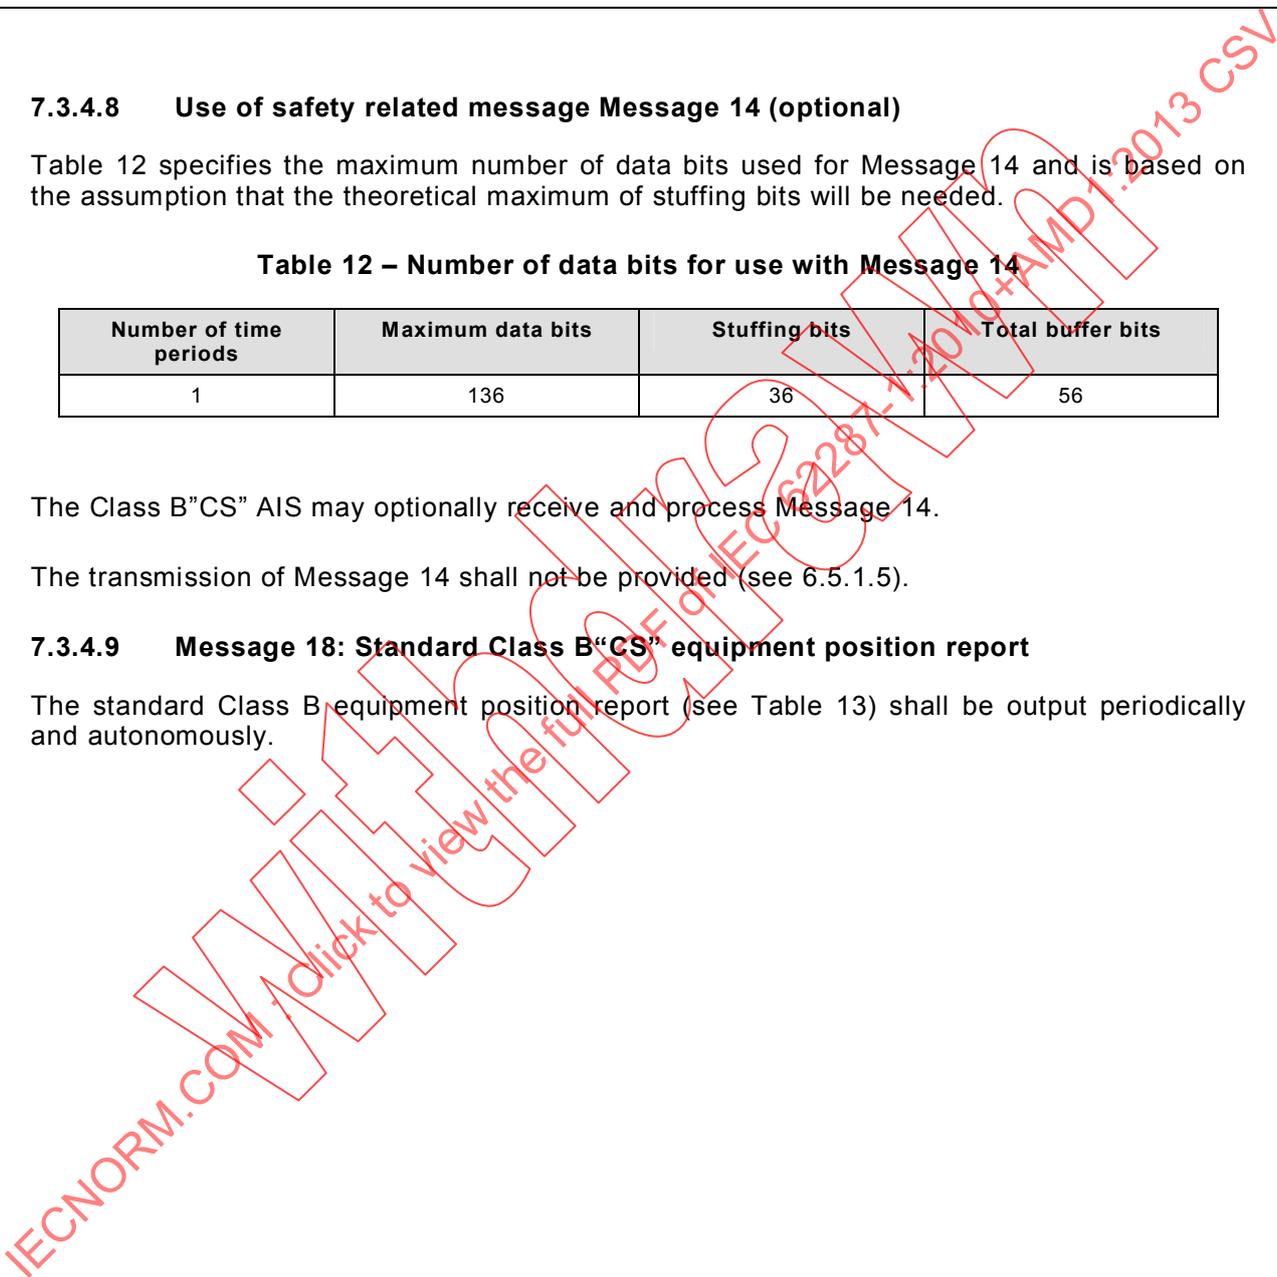


Table 13 – Contents of Message 18

Parameter	Number of bits	Description
Message ID	6	Identifier for Message 18; always 18
Repeat indicator	2	Used by the repeater to indicate how many times a message has been repeated. 0 to 3; should be 0 for Class B"CS" transmissions.
User ID	30	MMSI number
Reserved for regional or local applications	8	Reserved for definition by a competent regional or local authority. Shall be set to zero, if not used for any regional or local application.
SOG	10	Speed over ground in 1/10 kn steps (0 to 102,2 kn) 1 023 = not available, 1 022 = 102,2 kn or higher
Position accuracy	1	1 = high (_10 m) 0 = low (10 m) shall be combined with RAIM information if available; see 6.6.3
Longitude	28	Longitude in 1/10 000 min (180°, East = positive (as per 2's complement), West = negative (as per 2's complement). 181° (6791AC0 hex) = not available = default)
Latitude	27	Latitude in 1/10 000 min (90°, North = positive (as per 2's complement), South = negative (as per 2's complement). 91° (3 412 140 hex) = not available = default)
COG	12	Course over ground in 1/10° (0 to 3 599). 3 600 (E10h) = not available = default; 3 601 to 4 095 shall not be used
True heading	9	Degrees (0 to 359) (511 indicates not available = default)
Time stamp	6	UTC second when the report was generated by the EPFS (0 to 59 60 if time stamp is not available, which shall also be the default value 61, 62, 63 are not used by the Class B"CS" AIS
Reserved for regional applications	2	Reserved for definition by a competent regional authority. Shall be set to zero, if not used for any regional application. Regional applications should not use zero
Class B unit flag	1	0 = Class B SOTDMA unit (shall not be used for the Class B"CS") 1 = Class B"CS" unit
Class B display flag	1	0 = No display available; not capable of displaying Messages 12 and 14 1 = Equipped with integrated display, displaying Messages 12 and 14
Class B DSC flag	1	0 = not equipped with DSC function 1 = equipped with DSC function (dedicated or time-shared)
Class B band flag	1	0 = Capable of operating over the upper 525 kHz band of the marine band 1 = Capable of operating over the whole marine band (irrelevant if Class B Message 22 flag is 0)
Class B Message 22 flag	1	0 = No frequency management via Message 22, operating on AIS 1, AIS 2 only 1 = Frequency management via Message 22
Mode flag	1	0 = Station operating in autonomous mode = default 1 = Station operating in assigned mode
RAIM flag	1	RAIM flag of electronic position fixing device; 0 = RAIM not in use = default 1 = RAIM in use (valid data for expected position error)
Communication state selector flag	1	1 = ITDMA communication state follows
Communication state	19	ITDMA communication state; refer to 7.3.4.6
Total number of bits	168	Occupies one time period

7.3.4.10 Message 24: Class B"CS" static data report

This message shall be used by Class B"CS" shipborne mobile equipment. The message consists of two parts (see Tables 14 and 15). Message 24B shall be transmitted within 1 min following Message 24A.

In case of an interrogation for Message 24, the response shall include Part A and Part B.

Table 14 – Message 24 Part A

Parameter	Number of bits	Description
Message ID	6	Identifier for Message 24; always 24
Repeat indicator	2	Used by the repeater to indicate how many times a message has been repeated. 0 default; 3 do not repeat any more
User ID	30	MMSI number
Part number	2	Identifier for the message part number; always 0 for Part A
Name	120	Maximum 20 characters 6-bit ASCII. @@@@ not available default
Total number of bits	160	Occupies one time period

Table 15 – Message 24 Part B

Parameter	Number of bits	Description
Message ID	6	Identifier for Message 24; always 24
Repeat indicator	2	Used by the repeater to indicate how many times a message has been repeated. 0 default; 3 do not repeat any more
User ID	30	MMSI number
Part number	2	Identifier for the message part number; always 1 for Part B
Type of ship and cargo type	8	0 = not available or no ship = default 1 to 99 = as defined in 3.3.2 of ITU-R M.1371-4 100 to 199 = preserved, for regional use 200 to 255 = preserved, for future use
Vendor ID	42	Unique identification of the Unit by a Number as defined by the manufacturer (option; "#####" = not available = default). (See ITU-R M.1371-4 Table 76A)
Call sign	42	Call sign of the MMSI-registered vessel. 7 × 6 bit ASCII characters, "#####" = not available = default.
Dimension of ship/reference for position	30	Dimensions of ship in metres and reference point for reported position (see ITU-R M.1371-4/A8 Figure 41 and 3.3.3).
Spare	6	Not used. Should be set to zero. Reserved for future use.
Total number of bits	168	Occupies one time period

7.3.4.11 Message 23: Group assignment command

The group assignment command (see Table 16) is transmitted by a base station when operating as a controlling entity for Class B AIS stations.

Table 16 – Contents of Message 23

Parameter	Number of bits	Description
Message ID	6	Identifier for Message 23; always 23
Repeat Indicator	2	Used by the repeater to indicate how many times a message has been repeated. 0 to 3; default = 0; 3 = do not repeat any more
Source ID	30	MMSI of assigning station
Spare	2	Spare. Shall be set to zero
Longitude 1	18	Longitude of area to which the group assignment applies; upper right corner (north-east); in 1/10 min (180 , East = positive, West = negative)
Latitude 1	17	Latitude of area to which the group assignment applies; upper right corner (north-east); in 1/10 min (90 , North = positive, South = negative)
Longitude 2	18	Longitude of area to which the group assignment applies; lower left corner (south-west); in 1/10 min (180 , East = positive, West = negative).
Latitude 2	17	Latitude of area to which the group assignment applies; lower left corner (south-west); in 1/10 min (90 , North = positive, South = negative)
Station type	4	0 = all types of mobiles (default); 1 = Class A mobile station only; 2 = all types of Class B mobile stations; 3 = SAR airborne mobile station; 4 = Class B "SO" mobile station only; 5 = Class B "CS" shipborne mobile station only; 6 = inland waterways; 7 to 9 = regional use; 10 to 15 = for future use
Type of ship and cargo type	8	0 = all types (default) 1 to 99, see Table 50 of ITU-R M.1371-4, 3.3.2 100 to 199 reserved for regional use 200 to 255 reserved for future use
Spare	22	Reserved for future use. Not used. Shall be set to zero
Tx/Rx mode	2	This parameter commands the respective stations to one of the following modes: 0 = TxA/TxB, RxA/RxB (default); 1 = TxA, RxA/RxB , 2 = TxB, RxA/RxB, 3 = reserved for future use
Reporting Interval	4	This parameter commands the respective stations to the reporting interval given in Table 17
Quiet time	4	0 = default = no quiet time commanded; 1 to 15 = quiet time of 1 min to 15 min
Spare	6	Spare. Not used. Shall be set to zero. Reserved for future use.
Total	160	Occupies one time period

Table 17 – Reporting interval settings for use with Message 23

Reporting interval field setting	Reporting interval for Message 18
0	As given by the autonomous mode
1	10 min
2	6 min
3	3 min
4	1 min
5	30 s
6	15 s
7	10 s
8	5 s
9	Next shorter reporting interval
10	Next longer reporting interval
11	2 s (not applicable to the Class B "CS")
12 to 15	Reserved for future use
NOTE When the dual channel operation is suspended by Tx/Rx mode command 1 or 2, the resulting reporting interval should be maintained using the remaining transmission channel.	

7.4 Network layer

(see Clause 13)

7.4.1 General

The network layer shall be used for

- establishing and maintaining channel connections,
- management of priority assignments of messages,
- distribution of transmission packets between channels,
- data link congestion resolution.

7.4.2 Dual channel operation

The normal default mode of operation shall be a two-channel operating mode, where the AIS simultaneously receives on both channel A and channel B in parallel.

The DSC process may use the receiving resources on a time-share basis as described in Annex C. Outside the DSC receiving periods, the two TDMA receiving processes shall work independently and simultaneously on channel A and channel B.

For periodic repeated messages, the transmissions shall alternate between channel A and channel B. The alternating process shall be independent for Message 18 and Message 24.

Transmission of complete Message 24 shall alternate between channels (all submessages to be transmitted on the same channel before alternating to the other channel).

Channel access is performed independently on each of the two parallel channels.

Responses to interrogations shall be transmitted on the same channel as the initial message.

For non-periodic messages other than those referenced above, the transmissions of each message, regardless of message type, shall alternate between channel A and channel B.

7.4.3 Channel management

Channel management shall be carried out according to ITU-R M.1371-4 A2/4.1 except:

- channel management commands shall only be accepted by Message 22 and DSC command;
- the Class B"CS" AIS is only required to operate in the band specified in 6.2 with a channel spacing of 25 kHz. It shall stop transmitting if commanded to a frequency outside its operating capability.

Table 18 – Channel management

		Step	Region 1 Channel A (frequency 1)	Region 1 Channel B (frequency 2)	Region 2 Channel A (frequency 3)	Region 2 Channel B (frequency 4)
Region 1		A	x	x		
	Transitional zone	B	xx		xx	
Region 2	Transitional zone	C	xx		xx	
		D			x	x
x	transmit with nominal reporting rate					
xx	transmit with doubled reporting rate					

When entering (step A to B) or leaving (step C to D) a transitional zone (see Table 18) the Class B"CS" AIS shall continue to evaluate the CS threshold taking into account the noise level of the old channel initially and the new channel as time progresses. It shall continuously transmit (on frequency 1 and frequency 3 in step B) with the required rate maintaining its schedule.

7.4.4 Distribution of transmission packets

A competent authority may assign reporting intervals to any mobile station by transmitting group assignment Message 23. An assigned reporting interval shall have precedence over the nominal reporting rate; a reporting interval of less than 5 s is not required.

The Class B"CS" shall react to next shorter or next longer commands only once until timeout.

7.4.5 Data link congestion resolution

The Class B"CS" AIS shall only transmit if it has verified that the time period intended for transmission does not interfere with transmissions made by stations complying with IEC 61993-2 and base stations. In case of high channel load the Class B"CS" AIS might not be able to transmit.

7.5 Transport layer

7.5.1 General

The transport layer shall be responsible for

- converting data into transmission packets of correct size,
- sequencing of data packets,
- interfacing protocol to upper layers (see 7.1).

7.5.2 Transmission packets

A transmission packet is an internal representation of some information, which can ultimately be communicated to external systems. The transmission packet is dimensioned so that it conforms to the rules of data transfer.

The transport layer shall convert data intended for transmission, into transmission packets.

The Class B"CS" AIS shall only transmit Messages 18, 19 and 24 (Table 11).

7.5.3 Sequencing of data packets

The Class B"CS" AIS is periodically transmitting the standard position report Message 18.

This periodic transmission shall use the access scheme described in 7.3.4.2. If a transmission attempt fails because of, for example high channel load, this transmission shall not be repeated. Additional sequencing is not necessary.

7.6 Digital selective calling (DSC)

Requirements for DSC are given in Annex C.

8 Test conditions

8.1 General

When a requirement in this standard is different from IEC 60945, the requirement in this standard shall take precedence.

8.2 Normal and extreme test conditions

8.2.1 Normal test conditions

8.2.1.1 Temperature and humidity

Temperature and humidity shall be within following range:

temperature	+15 °C to +35 °C;
humidity	20 % to 75 %.

8.2.1.2 Power supply

The normal power supply for the tests shall be the nominal voltage as defined by the manufacturer 3 %.

8.2.2 Extreme test conditions

Test under extreme test conditions shall be a combination of high temperature (dry heat) and upper limit of supply voltage applied simultaneously and low temperature and lower limit of supply voltage applied simultaneously (see Clause 9).

During type-testing of battery operated equipment the power source to the equipment may be replaced by a test power source, capable of producing normal and extreme test voltages.

8.3 Test signals

NOTE Transmitters may have limitations concerning their maximum continuous transmit time and/or their transmission duty cycle. It is intended that such limitations are respected during testing.

8.3.1 Standard test signal number 1

A DSC modulated data signal comprising an infinite length of 01010101 (dotting pattern; refer to Recommendation ITU-R M.825-3).

8.3.2 Standard test signal number 2

A series of 010101 as the data within an AIS message frame, with header, start flag, end flag and CRC. NRZI is not applied to the 010101 bit stream or CRC (i.e. unaltered "on air" data). The RF should be ramped up and down on either end of the AIS message frame.

8.3.3 Standard test signal number 3

A series of 00001111 as the data within an AIS message frame, with header, start flag, end flag and CRC. NRZI is not applied to the 00001111 bit stream or CRC. The RF should be ramped up and down on either end of the AIS message frame.

8.3.4 Standard test signal number 4

A pseudo random sequence (PRS) as specified in Recommendation ITU-T O.153 as the data within an AIS message frame with header, start flag, end flag and CRC. NRZI is not applied to the PRS stream or CRC. The RF should be ramped up and down on either end of the AIS message frame.

8.3.5 Standard test signal number 5

This test signal consists of 200 packets grouped into clusters of 4 as described in Figure 8. Each cluster consists of 2 consecutive transmissions of the packets described in Table 19.

NRZI shall be applied to every packet. After sending packets 1 and 2 the notional initial state of the NRZI process shall be inverted and then packets 1 and 2 repeated.

Between every transmitted packet there shall be at least 2 free time periods. The RF carrier shall be switched off between packets to simulate normal operation.

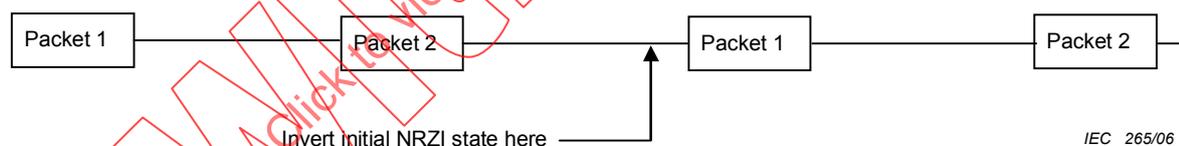


Figure 8 – Format for repeating four-packet cluster

Table 19 – Content of first two packets

Packet	Parameter	Bits	Contents	Comment
1	Training	22	0101....0101	Preamble reduced by 2 bits because of ramp-up overlap
	Start flag	8	01111110	
	Data	168	Pseudo random	As per Table 20
	CRC	16	Calculated	
	End flag	8	01111110	
2	Training	22	1010....1010	Preamble reduced by 2 bits because of ramp-up overlap
	Start flag	8	01111110	
	Data	168	Pseudo random	As per Table 20
	CRC	16	Calculated	
	End flag	8	01111110	

Table 20 – Fixed PRS data derived from ITU-T O.153

Address	Contents (HEX)							
0 to 7	0x04	0xF6	0xD5	0x8E	0xFB	0x01	0x4C	0xC7
	0000.0100	1111.0110	1101.0101	1000.1110	1111.1011	0000.0001	0100.1100	1100.0111
8 to 15	0x76	0x1E	0xBC	0x5B	0xE5	0x92	0xA6	0x2F
	0111.0110	0001.1110	1011.1100	0101.1011	1110.0101	1001.0010	1010.0110	0010.1111
16 to 20	0x53	0xF9	0xD6	0xE7	0xE0	21 Bytes = 168 bits (+ 4 stuffed bits) , CRC = 0x3B85		
	0101.0011	1111.1001	1101.0110	1110.0111	1110.0000			

8.4 Test arrangements

8.4.1 Standard test environment

8.4.1.1 Test set up

The EUT is tested in an environment using test equipment to simulate and to log VDL messages. Standard environment consists of at least one simulated Class A AIS test target and an AIS base station test target. The Class A AIS shall be in autonomous mode transmitting Message 1 with a reporting interval of 10 s according to IEC 61993-2. The AIS base station shall be in autonomous mode transmitting Message 4 with a reporting interval of 10 s according to IEC 62320-1. The signal input level at the RF input port of the EUT for any simulated target shall be -60 dBm ± 5 dB. EUT is stationary (SOG ≤ 2 kn). Operation is checked on channels in the maritime mobile band as applicable.

8.4.1.2 DSC functionality

DSC functionality where provided shall be disabled except for the DSC tests according to Annex C.

8.4.1.3 Position test input

An appropriate test input shall be provided for simulated position information following the protocol of IEC 61162. The rules for an external position sensor as defined in 6.3 shall not apply to this test input.

8.4.1.4 Test signals applied to the receiver input

Sources of test signals for application to the receiver input shall be connected in such a way that the source impedance presented to the receiver input is 50 Ω irrespective of whether one or more signals using a combining network are applied to the receiver simultaneously.

The levels of the test signals at the receiver input terminals (RF socket) shall be expressed in terms of dBm.

8.4.1.5 Waiver for receivers

If the manufacturer declares that both TDMA receivers are identical, the test shall be limited to one receiver and the test for the second receiver shall be waived. The test report shall mention this.

8.4.1.6 Artificial antenna (dummy load)

Tests shall be carried out using an artificial antenna, which shall be a non-reactive non-radiating load of 50 Ω connected to the antenna connector.

NOTE Some of the methods of measurement described in this standard for the transmitters allow for two or more different test set ups in order to perform those measurements. The corresponding figures illustrate, therefore, one

particular test set up, and are given as examples. In many of those figures, power attenuators (providing a non-reactive non-radiating load of 50 Ω to the antenna connector) have been shown. These attenuators are not "artificial antennas" as defined in this subclause. The method of measurement used shall be stated in the test report.

8.4.1.7 Facilities for access

The EUT shall be fitted with a port for the purpose of the tests to monitor transmitted and received messages following the protocols of IEC 61162. If standard external interfaces are available, these will be used for the tests. Where further access means are required to perform any specific test, these shall be provided by the manufacturer.

8.4.2 Modes of operation of the transmitter

For the purpose of the measurements according to this standard, there shall be a means to operate the transmitter unmodulated or, alternatively, the method of obtaining an unmodulated carrier or special types of modulation patterns may be decided by agreement between the manufacturer and the test laboratory. It shall be described in the test report. It may involve suitable temporary internal modifications of the equipment under test.

8.4.3 Common test conditions for protection from invalid controls

In all functional tests using Messages 17, 20, 22, 23 and DSC channel management telecommands, the messages or telecommands sender station shall use a valid base station MMSI format to verify that the EUT operates as described in the required results. The tests shall be repeated using an invalid base station MMSI format for the messages or DSC telecommands sender station to verify that the EUT ignores these messages or telecommands.

8.4.4 Measurement uncertainties

Maximum values of absolute measurement uncertainties shall be as follows:

RF frequency	1×10^{-7}
RF power	0,75 dB
Adjacent channel power	5 dB
Conducted spurious emission of transmitter	4 dB
Conducted spurious emission of receiver	3 dB
Two-signal measurement	4 dB
Three-signal measurement	3 dB
Radiated emission of transmitter	6 dB
Radiated emission of receiver	6 dB
Transmitter timing characteristics	1 bit (104 μ s)

For the test methods according to this standard, these uncertainty figures are valid to a confidence level of 95 %.

The interpretation of the results recorded in a test report for the measurements described in this standard shall be as follows:

- a) the measured value related to the corresponding limit shall be used to decide whether equipment meets the requirements of this standard;
- b) the actual measurement uncertainty of the test laboratory carrying out the measurements, for each particular measurement, shall be included in the test report;

- c) the values of the actual measurement uncertainty shall be, for each measurement, equal to or lower than the figures given in this subclause (absolute measurement uncertainties).

9 Power supply, environmental and EMC tests

9.1 Test summary

Tests shall be done in accordance with IEC 60945 as specified in Table 21.

Table 21 – Test summary

Test title ^a	Clause/subclause of IEC 60945	Comment
Inter-unit connection	4.2.4 (6.4)	Interfaces other than IEC 61162 are allowed; see 6.7.3 waiver ^b
Power supply	4.3	
Extreme power supply	4.3.1 (7.1)	Lower limit of extreme d.c. power supply shall be –20 % of nominal voltage Waiver ^b
Excessive conditions	4.3.2 (7.2)	Waiver ^b
Power supply short-term variation and power supply failure	4.3.3 (7.3, 7.4)	Waiver ^b
Undervoltage (brown out) test		See 9.4; waiver ^b
Durability and resistance to environmental conditions	4.4 (8)	
Dry heat	8.2.1	Reduce time to 5 h; waiver ^b Note that 8.2.2 is covered by Clause 11
Damp heat	8.3	Waiver ^b
Low temperature	Storage: 8.4.1 Functional: 8.4.2	Waiver ^b Note that 8.4.2 is covered by Clause 11
Thermal shock		No
Drop		No
Vibration/shock		See 9.2
Rain and spray	Do 8.8	Waiver ^b
Immersion		No
Solar radiation	Yes	Waiver ^b
Oil resistance	Yes	Waiver ^b
Corrosion	Yes	Waiver ^b
Interference	4.5	
Electromagnetic emission	9	
Immunity to electromagnetic environment	10	
Compass safe distance	4.7 (11.2) Do 11.2	Waiver ^b : manufacturer may take liability for the figures given for CSD
Safety precautions	4.8	
Protection against dangerous voltages	4.8.1 (12.1) Do 12.1	Waiver ^b
Electromagnetic radiofrequency radiation	4.8.2 (12.2)	
X-radiation	4.8.3 (12.4)	
^a Left-adjusted bold headings refer to headings in IEC 60945. ^b This test may be waived if the manufacturer is able to produce evidence that the requirement is fulfilled.		

9.2 Vibration/shock

9.2.1 Vibration

9.2.1.1 Method of measurement

The vibration test shall be done using sweep range and amplitude as defined in IEC 60945 at a sweep rate of 0,2 octaves per minute (which is about 40 min per sweep).

One sweep up (2 Hz to 100 Hz) shall be followed by a sweep down (100 Hz to 2 Hz) for each axis keeping the EUT operational throughout.

9.2.1.2 Results required

Verify that the EUT stays operational throughout the test; a successful performance check shall be carried out at the end of the test period.

9.2.2 Shock

9.2.2.1 Purpose

The test provides a method by which responses of components and equipment comparable with those likely to be experienced in practice in the operational environment can be produced in the test laboratory.

This test only applies to exposed equipment.

9.2.2.2 Method of measurement

The EUT shall be mounted in the normal operating orientation and shall be kept operational during the shocks. The EUT shall be mechanically connected to the shock machine by its normal means of attachment. The peak acceleration shall be 100 m/s², pulse shape shall be half sine and duration 25 ms.

The shock pulse shall be measured by an accelerometer placed at the EUT fixing point nearest to the centre of the table surface. To carry out the measurement proceed as follows.

- a) Carry out a performance check.
- b) Apply three successive upward shocks with the EUT operative.
- c) Check for external indications of damage.
- d) Carry out a second performance check.

9.2.2.3 Results required

There shall be no external indications of damage and there shall be no detectable degradation in performance during the performance check.

9.3 Performance tests/checks

For the performance test, repeat tests of 10.2.1.1, and 10.2.1.2.

For the performance check, repeat tests of 10.2.1.1, and 10.2.1.2.

9.4 Undervoltage test (brown out)

9.4.1 Purpose

This test simulates the situation where the nominal supply voltage drops to below acceptable levels and then recovers over a medium time period. This is consistent with the performance of a flat or unhealthy battery when an engine is started.

9.4.2 Method of test

Operate the EUT at the nominal supply voltage as indicated by the manufacturer.

- a) Gradually reduce the supply voltage to 40 % of the nominal supply voltage over a time period of 30 s.
- b) Gradually increase the supply voltage back to 80 % of the nominal supply voltage over a time period of 30 s.

9.4.3 Required result

Confirm the following.

- a) The unit shall not enter into any undefined or undesirable state as verified by a performance check.
- b) The EUT shall recover and be fully operational as verified by a performance check.

10 Operational tests

10.1 General

10.1.1 Quality assurance

(see 4.1.2)

10.1.1.1 Method of measurement

By inspection of documentation.

10.1.1.2 Required results

The requirements of 4.1.2 shall be met.

10.1.2 Safety of operation

(see 4.1.3)

10.1.2.1 Method of measurement

By inspection.

10.1.2.2 Required results

The requirements of 4.1.3 shall be met.

10.1.3 Additional features

(see 4.1.4)

10.1.3.1 Method of measurement

Operate the EUT in standard test environment. Repeat tests that might be affected by the additional feature.

10.1.3.2 Required results

The requirements of 4.1.4 shall be met.

10.2 Modes of operation

(see 4.1.5)

10.2.1 Autonomous mode

(see 4.1.5.2)

10.2.1.1 Transmit position reports

10.2.1.1.1 Method of measurement

Set up standard test environment. Record the VDL communication and check for messages transmitted by the EUT.

10.2.1.1.2 Required results

Confirm that the EUT transmits Messages 18 and 24 following the nominal schedule and alternates between channel A and channel B.

10.2.1.2 Receive Class A position reports

10.2.1.2.1 Method of measurement

Set up standard test environment.

- a) Switch on test targets, then start operation of the EUT.
- b) Start operation of the EUT, then switch on test targets.
- c) Transmit test targets using the same time periods on channel A and channel B.

Check the VDL communication, test output, and where provided, display or external interface of the EUT.

10.2.1.2.2 Required results

Confirm that EUT receives continuously under conditions 10.2.1.2.1 a), b) and c) and, where provided, outputs the received messages on the external interface or display.

10.2.1.3 Receive Class B"CS" position reports

NOTE This test is only applicable if a display or display interface for the received messages is provided.

10.2.1.3.1 Method of measurement

Set up standard test environment. Simulate at least one additional Class B"CS" test target (bit stuffing shall not increase 4 bit).

Check the VDL communication, test output, and display or external interface of the EUT.

10.2.1.3.2 Required results

Confirm that EUT receives the Class B"CS" test target continuously and, where provided, outputs the received Messages 18 and 24 on the external interface.

10.2.1.4 Receive in adjacent time periods

10.2.1.4.1 Method of measurement

Set up standard test environment. Simulate additional targets so that the first 4 of each 5 time periods are used. The reporting rate may be increased for the purpose of this test.

Check the VDL communication, test output, and where provided, display or external interface of the EUT.

10.2.1.4.2 Required results

Confirm that EUT continuously receives messages in the time periods adjacent to own transmission period with an acceptable loss of 5 %.

10.2.1.5 Rx performance test

10.2.1.5.1 Method of measurement

Set up standard test environment. Simulate additional targets so that 9 of 10 time periods are used.

Check the VDL communication, test output, and where provided, display or external interface of the EUT.

10.2.1.5.2 Required results

Confirm that EUT continuously receives messages and, where provided, outputs the received messages on the external interface with a loss of not more than 5 %.

10.2.2 Assigned mode

(see 4.1.5.3)

10.2.2.1 Group assignment

10.2.2.1.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Transmit a group assignment command Message 23 to the EUT addressing stations by

region,
station type and
type of ship,

and commanding for

Tx/Rx mode,
reporting rate,
quiet time.

Record transmitted messages.

10.2.2.1.2 Required results

Confirm that the EUT transmits position reports Message 18 according to the defined parameters and reverts to standard reporting rate after 4 min to 8 min.

Confirm that the operation of the EUT is not affected when not addressed.

10.2.2.2 Base station reservations

10.2.2.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Transmit a reservation Message 20 to the EUT specifying reserved time periods.

Record transmitted messages.

10.2.2.2.2 Required results

Confirm that the EUT transmits position reports Message 18 without using reserved time periods.

10.2.3 Polled mode/interrogation response

(see 4.1.5.4)

10.2.3.1 Interrogation for Messages 18 and 24

10.2.3.1.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Apply an interrogation message (Message 15; EUT as destination) to the VDL according to message table (ITU-R M.1371-4 Table 43) for responses with Message 18, Message 24:

- a) with transmission offset = 0;
- b) with transmission offset = defined value;
- c) with a Message 23 “quiet time” command transmitted before the interrogation.

Record transmitted messages and frame structure.

10.2.3.1.2 Required results

Check that the EUT transmits the appropriate interrogation response message as requested after defined transmission offset. Confirm that the EUT transmits the response to the interrogation on the same channel as that received.

10.2.3.2 Interrogation for Message 19

10.2.3.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Apply an interrogation message (Message 15; EUT as destination) by a Base station to the VDL according to message table (M.1371-4, Table 43) for responses with Message 19:

- a) with transmission offset = 0;
- b) with transmission offset = defined value.

Record transmitted messages and frame structure.

10.2.3.2.2 Required results

Check that

- a) the EUT does not respond,
- b) the EUT transmits the appropriate interrogation response message as requested after defined transmission offset.

Confirm that the EUT transmits the response on the same channel as that received and the data content is identical with that in Message 24.

10.3 Messages extending one time period

(see 4.1.5)

10.3.1 Method of measurement

Check the documentation for a possibility to initiate transmission of messages longer than one time period.

10.3.2 Required results

It shall not be possible for the user to initiate the transmission of messages longer than one time period.

10.4 Channel selection

(see 6.2)

10.4.1 Valid channels

10.4.1.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Switch the EUT to different channels within the operating band as specified in 6.2 by transmission of channel management message (Message 22) broadcast and addressed to EUT.

Record the VDL messages on the designated channels and check “band flag” and “Message 22 flag” in Message 18 (note that DSC command is covered in Annex C).

10.4.1.2 Required results

Confirm that the EUT switches to the required channel accordingly.

10.4.2 Invalid channels

10.4.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Check units capability on the “band flag” and “Message 22 flag” in Message 18. Switch the EUT to channels outside the operating band as specified in 6.2.

Record the VDL messages on the designated channels.

10.4.2.2 Required results

Confirm that the EUT does not switch to the respective channels and stops transmissions.

10.5 Internal GNSS receiver

(see 6.3)

Relevant tests according to the IEC 61108 series shall be performed with regard to

- position accuracy, static,
- position accuracy, dynamic,

- COG/SOG accuracy,
- position update,
- status indications (including RAIM, where fitted).

10.6 AIS information

(see 6.5)

10.6.1 Information content

(see 6.5.1)

10.6.1.1 Defaults

10.6.1.1.1 Method of measurement

Set up the standard test environment and reset the equipment to enable the manufacturers static data delivery defaults. Attempt to set the equipment to operate in autonomous mode.

10.6.1.1.2 Required results

Confirm that the default MMSI is set at 000000000 and that other static data defaults unambiguously identify that the equipment has been properly initialised. Confirm that the transmissions are inhibited and that an indication is given that transmissions are inhibited.

10.6.1.2 Required information

10.6.1.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Apply all static data to the EUT.

Record all messages on VDL and check the contents of position report Message 18 and static data report Messages 24 A and B.

10.6.1.2.2 Required results

Confirm that data transmitted by the EUT complies with static data and position sensor data.

10.6.1.3 External sensor information

(see 6.3, 6.6.3)

10.6.1.3.1 Applicability

This test is applicable if an optional interface for external sensors is provided.

10.6.1.3.2 Method of measurement

Set up standard test environment and operate EUT in autonomous mode.

- Apply external position data with expected error 10 m (from GBS sentence) and within 26 m of internal position.
- Simulate unavailable/invalid external sensor data and missing/incorrect checksum.
- Apply a non-WGS-84 ~~or unspecified (no DTM)~~ position input.
- Apply an unspecified (no DTM) position input.
- e) Apply a low accuracy position input with expected error 10 m or without RAIM information (no GBS).

- e) f) Apply position data with more than 26 m apart from internal position.
- g) Disconnect the internal GNSS antenna, or otherwise disable the internal GNSS receiver.

Record all messages on VDL and check the contents of position report Message 18 for position and COG/SOG.

10.6.1.3.3 Required results

The following results are required.

- a) Data transmitted by the EUT complies with external sensor inputs.
- b), c), d), e), f), g) External data is not used.

In all cases, confirm that accuracy and RAIM flags are set accordingly, confirm that position and COG/SOG are of the same source.

10.6.2 Information update rates

(see 6.5.2)

10.6.2.1 Nominal reporting interval

10.6.2.1.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode.

- a) Start with own SOG of 1 kn; record all messages on VDL for 10 min and evaluate reporting rate for position report of EUT by calculating average transmission offset over test period.
- b) Increase speed to 10 kn.
- c) Reduce speed to 1 kn.

Record all messages on VDL and check transmission offset between two consecutive transmissions.

10.6.2.1.2 Required results

The following results are required.

- a) Reporting interval shall be 3 min (10 s).
- b) Confirm that the reporting interval of 30 s (5 s) has been established after the next transmission in the old schedule at the latest. The average reporting interval calculated over at least 25 transmissions shall be 30 s (2 s).
- c) Confirm that the reporting rate is reduced after 3 min (speed reduction).

10.6.2.2 Assigned reporting interval

10.6.2.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode.

- a) Transmit an assigned mode command Message 23 to the EUT with designated reporting intervals of 5 s to 3 min according to Table 17.
- b) Transmit an assigned mode command Message 23 to the EUT with designated reporting interval of 10 min.
- c) Transmit Messages 23 with a refresh rate of 1 min with designated reporting intervals of 6 min and 10 min.
- d) Transmit Messages 23 designated reporting interval field settings of 11 to 15.

e) Change course, speed. Record transmitted messages.

10.6.2.2.2 Required results

The following results are required.

- a) Confirm that the EUT transmits position reports Message 18 according to the parameters defined by Message 23. The EUT shall revert to autonomous mode with nominal reporting interval after 4 min to 8 min.
- b) Confirm that the EUT reverts to autonomous mode with nominal reporting interval after 4 min to 8 min.
- c) Confirm that the EUT transmits position reports Message 18 according to the parameters defined by Message 23.
- d) Confirm that the EUT does not change its nominal behaviour.
- e) The reporting interval shall not be affected by course or speed.

10.6.2.3 Static data reporting interval

10.6.2.3.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Record the transmitted messages and check for static data (Message 24).

Repeat the test at an assigned reporting interval of 5 s.

10.6.2.3.2 Required results

Confirm that the EUT transmits submessages 24A and 24B every 6 min (24B following 24A within 1 min). Transmission shall alternate between channel A and channel B and be independent of the Message 18 reporting interval.

10.7 Initialisation period

(see 6.5.3)

10.7.1 Method of measurement

Set up standard test environment with SOG 2 kn as follows.

- a) Switch on the EUT from cold (off-time minimum 1 h) with EUT operating in autonomous mode.
- b) Switch off the EUT for a period of time between 15 min to 60 min and switch on again.
- c) Make the GNSS sensor unavailable for a period of time between 1 min to 5 min.

Record transmitted messages.

10.7.2 Required results

Confirm that the EUT starts regular transmission of Message 18 including valid position:

- a) within 30 min after switch on;
- b) within 5 min;
- c) stops transmitting after the next transmission and resumes within 1 min after enabling the position source.

10.8 Alarms and indications, fall-back arrangements

(see 6.6)

10.8.1 Built-in integrity test

(see 6.6.1)

10.8.1.1 Method of measurement

Check manufacturer's documentation on built-in integrity test.

10.8.1.2 Required result

Verify that an indication is provided if a malfunction is detected.

10.8.2 Transceiver protection

10.8.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Open-circuit and short-circuit VHF antenna terminals of the EUT for at least 5 min each.

10.8.2.2 Required results

The EUT shall be operative again within 2 min after refitting the antenna without damage to the transceiver.

10.8.3 Transmitter shutdown procedure

(see 6.6.2)

10.8.3.1 Method of measurement

Check manufacturer's documentation on transmitter shutdown procedure.

10.8.3.2 Required result

Verify that a transmitter shutdown procedure independent of the operating software is provided.

10.8.4 Position sensor fallback conditions

(see 6.6.3)

10.8.4.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Where an option for an external GNSS sensor is not provided, the respective tests shall be omitted.

Apply position sensor data in a way that the EUT operates in the states defined below:

- a) external DGNSS in use if implemented;
- b) internal DGNSS in use (corrected by Message 17) if implemented;
- c) internal DGNSS in use (corrected by a beacon) if implemented;
- d) external GNSS in use if implemented;
- e) internal GNSS in use;
- f) no sensor position in use.

Check the position accuracy and RAIM flag in the VDL Message 18 and, where provided, the ALR sentence.

10.8.4.2 Required result

Verify that the use of position source, position accuracy flag, RAIM flag and position information complies with Table 1.

Verify that the position sensor status is maintained for the next scheduled report and changed after that.

10.8.5 Speed sensors

(see 6.6.4)

10.8.5.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Where an option for an external GNSS sensor is not provided, this test shall be omitted.

- a) Apply valid external DGNSS position and speed data.
- b) Make external DGNSS position invalid (for example by wrong checksum, "valid/invalid" flag).

10.8.5.2 Required result

Check the following.

- a) The external data for SOG/COG is transmitted in Message 18.
- b) The internal data for SOG/COG is transmitted in Message 18.

10.9 User interface

(see 6.7)

10.9.1 Display

(see 6.7.1)

10.9.1.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode.

- a) Check status indications for power, Tx timeout, Error.
- b) Apply Message 23 "quiet time" of 7 min.
- c) Simulate VDL load in order to make it impossible for the EUT to find free candidate periods.

10.9.1.2 Required results

Check the following.

- a) Indicators are available and working correctly according to manufacturer's documentation.
- b) The Tx timeout indication is activated.
- c) The Tx timeout indication is activated.

10.9.2 Message display

10.9.2.1 General

This test is only applicable if a message display is provided.

10.9.2.2 Method of measurement

Set up standard test environment and operate EUT in autonomous mode.

Transmit a Message 14.

10.9.2.3 Required results

Verify that the EUT displays the message.

10.9.3 Static data input

(see 6.7.2)

10.9.3.1 Method of measurement

Verify that static data can be input to the unit according to the manufacturer's documentation. Set up standard test environment and operate EUT in autonomous mode.

10.9.3.2 Required results

Check that static data are transmitted correctly by the EUT and that the MMSI cannot be altered by the user.

10.9.4 External interfaces

(see 6.7.3)

10.9.4.1 Display interface

10.9.4.1.1 General

This test only applies if a display interface is provided.

10.9.4.1.2 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Apply a safety related broadcast Message 14 through the VDL to the EUT.

Check the output on the display interface.

10.9.4.1.3 Required results

The interface shall be compliant with IEC 61162 series protocol and the manufacturer's documentation of interface hardware.

11 Physical tests

11.1 TDMA transmitter

(see 7.2.3)

11.1.1 Frequency error

11.1.1.1 Definition

The frequency error of the transmitter is the difference between the measured carrier frequency in the absence of modulation of the transmitter and its required frequency.

11.1.1.2 Method of measurement

Perform the following.

- The carrier frequency shall be measured in the absence of modulation.
- Tests shall be performed on the lowest operating frequency on which the EUT can transmit according to the manufacturers specification and AIS 2 (162,025 MHz).
- The measurement shall be made under normal and extreme test conditions.

11.1.1.3 Required results


The frequency error shall not exceed 0,5 kHz under normal and 1 kHz under extreme test conditions.

11.1.2 Carrier power

11.1.2.1 Definition

The power of a radio frequency signal (conducted) is defined as the mean power delivered to a 50 Ω load during a radio frequency cycle. The carrier power is defined as the average radio frequency power measured over the transmitter duration. The transmitter duration is defined in 7.3.2.5.

11.1.2.2 Method of measurement

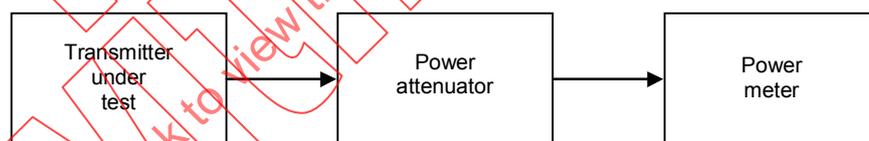

IEC 266/06

Figure 9 – Measurement arrangement for carrier power

The following measurement arrangement applies (see also Figure 9).

- The transmitter shall generate test signal number 4.
- The average power shall be measured over the transmitter duration. This power shall be further averaged over measurements from 200 transmissions. This value shall be corrected according to the transmitter duty cycle to indicate the carrier power.
- Tests shall be performed on the lowest operating frequency on which the EUT can transmit according to the manufacturer's specification and AIS 2 (162,025 MHz).
- The measurement shall be carried out under normal and extreme test conditions.

11.1.2.3 Required results

At all test frequencies, the carrier power shall be 33 dBm 1,5 dBm under normal test conditions.

At all test frequencies the carrier power shall be 33 dBm 3 dBm under extreme test conditions.

11.1.3 Transmission spectrum

11.1.3.1 Definition

This test is to ensure that the modulation and transient sidebands produced by the transmitter under normal operating conditions fall within the allowable mask.

11.1.3.2 Method of measurement

Perform the following.

- a) The test shall use test signal number 4.
- b) The EUT shall be connected to a spectrum analyser. A resolution bandwidth of 1 kHz, video bandwidth of 3 kHz or greater and positive peak detection (maximum hold) shall be used for this measurement. A sufficient number of sweeps shall be used and sufficient transmission packets measured to ensure that the emission profile is developed.
- c) Tests shall be performed on the lowest operating frequency on which the EUT can transmit according to the manufacturer's specification and AIS 2 (162,025 MHz).

11.1.3.3 Required result

The spectrum for slotted transmission shall be within the emission mask as follows:

- in the region between the carrier and 10 kHz removed from the carrier, the modulation and transient sidebands shall be below 0 dBc;
- at 10 kHz removed from the carrier, the modulation and transient sidebands shall be below -25 dBW;
- at 25 kHz to 62,5 kHz removed from the carrier, the modulation and transient sidebands shall be below the lower value of -60 dBW;
- in the region between 10 kHz and 25 kHz removed from the carrier, the modulation and transient sidebands shall be below a line specified between these two points.

The reference level for the measurement shall be the carrier power (conducted) recorded for the appropriate test frequency in 11.1.2.

For information the emission mask specified above is shown in Figure 10.

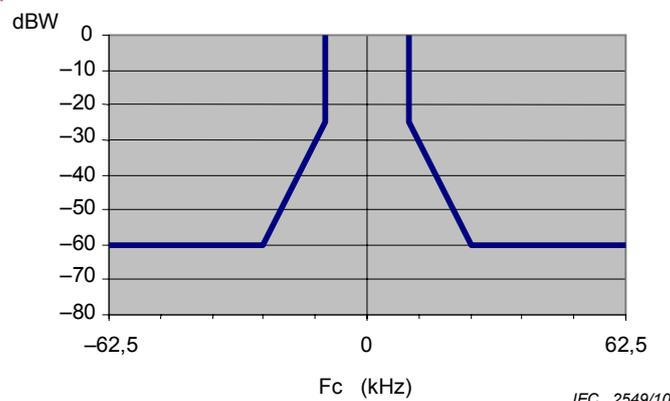


Figure 10 – Emission mask

11.1.4 Modulation accuracy

11.1.4.1 Definition

The modulation accuracy is the measurement of the peak frequency deviation of the transmitter modulation and the correct implementation of the GMSK BT filtering.

11.1.4.2 Method of measurement

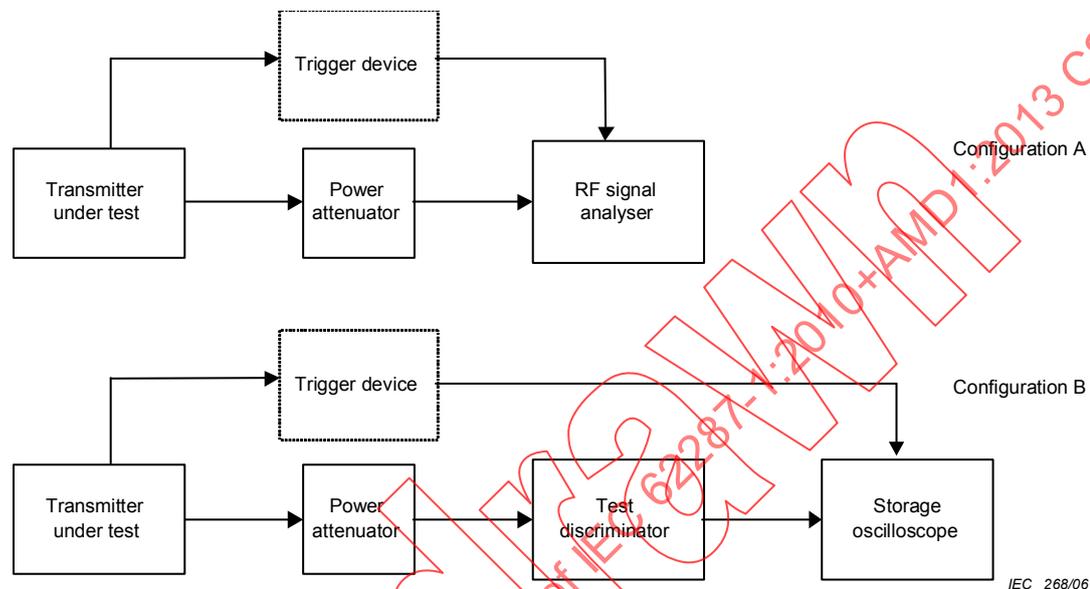


Figure 11 – Measurement arrangement for modulation accuracy

The measurement procedure shall be as follows (see also Figure 11):

- the equipment shall be connected in either configuration A or configuration B as shown. The trigger device is optional if the equipment is capable of synchronising to the transmitted bursts;
- the transmitter shall be tuned to AIS 2 (162,025 MHz);
- the transmitter shall be modulated with test signal number 2;
- the deviation from the carrier frequency shall be measured as a function of time;
- the transmitter shall be modulated with test signal number 3;
- the deviation from the carrier frequency shall be measured as a function of time;
- measurements shall be repeated at the lowest frequency on which the EUT can transmit, according to the manufacturer's specification;
- testing shall be repeated under extreme test conditions.

11.1.4.3 Required results

Peak frequency deviation at various points within the data frame shall comply with Table 22. These limits apply to both the positive and negative modulation peaks. Bit 0 is defined as the first bit of the training sequence.

Table 22 – Peak frequency deviation versus time

Measurement period from centre to centre of each bit	Test signal 2		Test signal 3	
	Normal	Extreme	Normal	Extreme
Bit 0 to bit 1	3 400 Hz			
Bit 2 to bit 3	2 400 480 Hz			
Bit 4 to bit 31	2 400 240 Hz	2 400 480 Hz	2 400 240 Hz	2 400 480 Hz
Bit 32 to bit 199	1 740 175 Hz	1 740 350 Hz	2 400 240 Hz	2 400 480 Hz

11.1.5 Transmitter output power versus time function

11.1.5.1 Definition

Transmitter output power versus time function is a combination of the transmitter delay, attack time, release time and transmission duration (referring to Figure 3), where:

- a) transmitter delay (T_A) is the time between the start of the candidate transmission time period and the time when the transmission power exceeds -50 dBc,
- b) transmitter attack time ($T_B - T_A$) is the time between the transmit power exceeding -50 dBc and the moment when the transmit power has reached a level 1 dB below the measured steady-state power (P_{ss}) and maintains a level within $+1,5/-1$ dB from P_{ss} thereafter;
- c) transmitter release time ($T_F - T_E$) is the time between the end flag being transmitted and the moment when the transmitter output power has reduced to a level 50 dB below P_{ss} and remains below this level thereafter;
- d) transmission duration ($T_F - T_A$) is the time from when power exceeds -50 dBc to when the power returns to and stays below -50 dBc.

11.1.5.2 Method of measurement

Perform the following.

- a) The measurement shall be carried out by transmitting test signal number 2 (note that this test signal generates one additional stuffing bit within its CRC portion).
- b) The EUT shall be connected to a spectrum analyser. A resolution bandwidth of 1 MHz, video bandwidth of 1 MHz and a sample detector shall be used for this measurement. The analyser shall be in zero-span mode for this measurement.
- c) For the purposes of this test, the EUT shall be equipped with a test signal (SYNC) indicating the start of each time period that it intends to transmit into. This will be used as a trigger source for the spectrum analyser. The SYNC signal shall be aligned to the nominal start time (T_0) of the transmission time period.
- d) Tests shall be performed on the lowest operating frequency on which the EUT can transmit according to the manufacturer's specification and AIS 2 ($162,025$ MHz).

11.1.5.3 Required result

The transmitter power shall remain within the mask shown in Figure 3 and associated timings given in Table 6.

11.2 TDMA receivers

(see 7.2.4)

11.2.1 Sensitivity

11.2.1.1 Definition

The maximum usable sensitivity is the minimum level of signal (dBm) at the receiver input, produced by a carrier at the nominal frequency of the receiver, modulated with the typical test signal (test signal 5), which will, without interference, produce a data signal with a specified packet error rate (*PER*) after demodulation.

11.2.1.2 Method of measurement

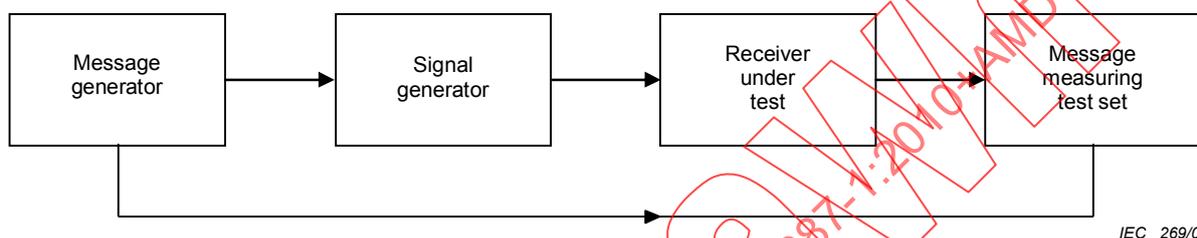


Figure 12 – Measurement arrangement

The measurement procedure shall be as follows (see also Figure 12):

- the signal generator shall be at the nominal frequency of the receiver and shall be modulated to generate test signal number 5;
- the signal level at the input of the receiver shall be set to -107 dBm;
- the message measuring test set shall be monitored and the packet error rate observed; The *PER* shall be derived by the following formula:

$$PER = (P_{TX} - P_{RX})/P_{TX} \times 100 (\%)$$

where

P_{RX} is the number of packets received without errors;

P_{TX} is the number of transmitted packets.

- the test shall be repeated at the nominal carrier frequency 500 Hz and the level at the input to the receiver adjusted to -104 dBm under normal conditions;
- the test shall be carried out on the lowest TDMA frequency declared by the manufacturer and AIS 2 ($162,025$ MHz);
- repeat under extreme conditions, at the nominal carrier frequency only. The signal generator shall be adjusted so that the level at the input to the receiver is -101 dBm.

11.2.1.3 Required results

The *PER* shall not exceed 20 %.

11.2.2 Error behaviour at high input levels

11.2.2.1 Definition

The error behaviour (performance) at high input levels (noise free operation) is defined in the same manner as for the measurement of the maximum usable sensitivity when the level of the wanted signal is significantly above the maximum wanted sensitivity.

11.2.2.2 Method of measurement

The measurement configuration for receiver sensitivity (11.2.1) shall be used.

The signal generator shall be at the nominal frequency of the receiver and shall be modulated to generate test signal number 5. The test shall be carried out on the lowest TDMA frequency declared by the manufacturer and AIS 2 (162,025 MHz). The message measuring test set shall be monitored and the packet error rate observed as follows.

- a) The level of the input signal shall be adjusted to a level of -77 dBm.
- b) The level of the input signal shall be adjusted to a level of -7 dBm.

11.2.2.3 Required results


The *PER* shall not exceed 2 % under a) and 10 % under b).

11.2.3 Co-channel rejection

11.2.3.1 Definition

The co-channel rejection is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal, both signals being at the nominal frequency of the receiver.

11.2.3.2 Method of measurement

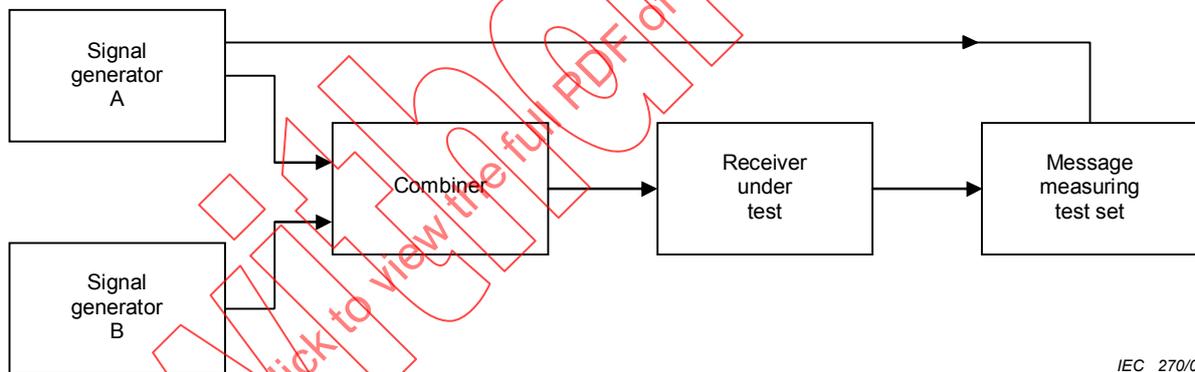

IEC 270/06

Figure 13 – Measurement arrangement with two generators

The measurement procedure shall be as follows (see also Figure 13):

- a) two generators A and B, shall be connected to the receiver via a combining network;
- b) the wanted signal, provided by signal generator A, shall be at the nominal frequency of the receiver and shall be modulated to generate test signal number 5;
- c) the unwanted signal, provided by generator B, shall also be at the nominal frequency of the receiver. Generator B shall be modulated to generate test signal number 4, either continuously or in the same time period as that used by generator A for test signal number 5. The content of the wanted and unwanted signals shall not be synchronised;
- d) the level of the wanted signal from generator A shall be adjusted to -101 dBm;
- e) the level of the unwanted signal from generator B shall be adjusted to -111 dBm;
- f) the message measuring test set shall be monitored and the packet error rate (*PER*) observed;

- g) the measurement shall be repeated for displacements of the unwanted signal of 1 kHz from the nominal frequency of the receiver and the *PER* again observed;

NOTE This value represents twice the allowable transmit frequency tolerance.

- h) the test shall be carried out on the lowest TDMA frequency declared by the manufacturer and AIS 2 (162,025 MHz).

11.2.3.3 Required result

The *PER* shall not exceed 20 %.

11.2.4 Adjacent channel selectivity

11.2.4.1 Definition

The adjacent channel selectivity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted signal which differs in frequency from the wanted signal by an amount equal to the adjacent channel separation for which the equipment is intended.

11.2.4.2 Method of measurement

The measurement procedure shall be as follows:

- a) the measurement configuration for co-channel rejection (11.2.3) shall be used;
- b) the wanted signal, provided by signal generator A, shall be at the nominal frequency of the receiver and shall be modulated to generate test signal number 5;
- c) the unwanted signal, provided by generator B, shall be frequency modulated with a 400 Hz sine wave giving a deviation of 3 kHz. Generator B shall be at a frequency 25 kHz above that of the wanted signal;
- d) the level of the wanted signal from generator A shall be adjusted to a level of –101 dBm;
- e) the level of the unwanted signal from generator B shall be adjusted to –31 dBm;
- f) the message measuring test set shall be monitored and the packet error rate observed;
- g) repeat the above measurement with the unwanted signal 25 kHz below the wanted signal;
- h) the test shall be carried out on the lowest TDMA frequency declared by the manufacturer and AIS 2 (162,025 MHz).

11.2.4.3 Required results

The *PER* shall not exceed 20 %.

11.2.5 Spurious response rejection

11.2.5.1 Definition

The spurious response rejection is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal at any other frequency, at which a response is obtained.

11.2.5.2 Manufacturer's declarations

The manufacturer shall declare the following in order to calculate the "limited frequency range" over which the initial part of the test will be performed:

- list of intermediate frequencies (IF_1, IF_2, \dots, IF_N) in Hz;
- switching range of the receiver;

NOTE 1 The switching range corresponds to the frequency range over which the receiver can be tuned.

- frequency of the local oscillator at AIS 2 (f_{LOH}) and at the lowest TDMA channel (f_{LOL}).

NOTE 2 This may be a VCO, crystal, sampling clock, BFO, numerically controlled oscillator depending on the design of the equipment.

11.2.5.3 Introduction to the method of measurement

The initial evaluation of the unit shall be performed over the "limited frequency range" and shall then be performed at the frequencies identified from this test and at "specific frequencies of interest" (as defined below).

To determine the frequencies at which spurious responses can occur the following calculations shall be made:

- a) calculation of the "limited frequency range":

the limits of the limited frequency range (LFR_{HI} LFR_{LO}) are determined by the following calculations:

$$LFR_{HI} = f_{LOH} + (IF_1 + IF_2 + \dots + IF_N + sr/2)$$

$$LFR_{LO} = f_{LOL} - (IF_1 + IF_2 + \dots + IF_N + sr/2)$$

- b) calculation of Specific Frequencies of Interest (SFI) outside the limited frequency range: these are determined by the following calculations:

$$SFI_1 = (K \times f_{LOH}) - IF_1$$


$$SFI_2 = (K \times f_{LOL}) - IF_1$$

where K is an integer from 2 to 4.

11.2.5.4 Method of measurement over the limited frequency range

11.2.5.4.1 General

Two methods are available for the measurements over the limited frequency range, one based on SINAD measurements (A) and the other based on PER measurements (B). Either method may be used, but in each case shall be followed by the method of measurement at identified frequencies.

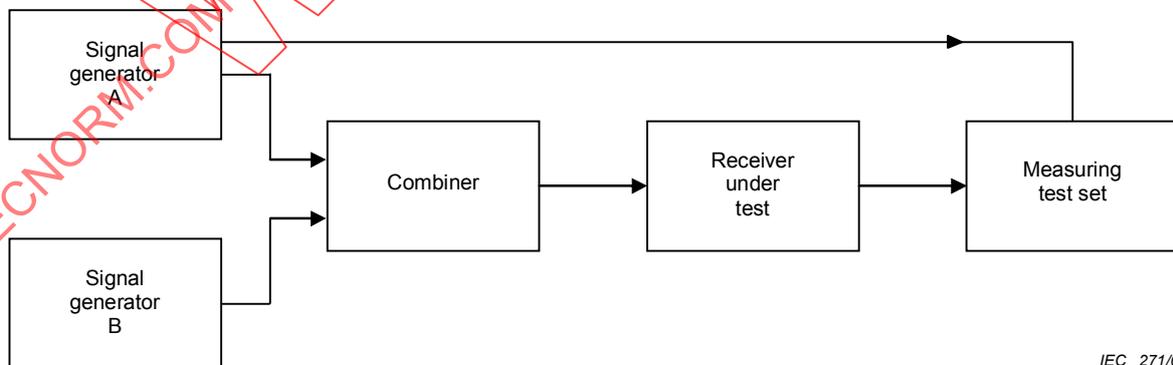

IEC 271/06

Figure 14 – SINAD or PER/BER measuring equipment

11.2.5.4.2 A) Method of search over the "limited frequency range" using SINAD measurement

For the SINAD measurement proceed as follows.

- a) Two generators A and B shall be connected to the receiver via a combining network (see Figure 14).

The wanted signal, provided by generator A, shall be at AIS 2 and shall be modulated with 1 kHz sine wave at 2,4 kHz deviation.

The unwanted signal, provided by generator B, shall be frequency modulated with a 400 Hz sine wave giving a deviation of 3 kHz.

- b) Initially, generator B (unwanted) shall be switched off (maintaining the output impedance).
The signal level from generator A (wanted) shall be adjusted to –101 dBm at the receiver.
The SINAD value shall be noted (and should be greater than 14 dB).
- c) Signal generator B shall be switched on and adjusted to –27 dBm at the receiver.
- d) The frequency of the unwanted signal shall be varied in steps of 5 kHz over the limited frequency range (from LFR_{LO} to LFR_{HI}).
- e) The frequency of any spurious response detected (by an decrease in SINAD of 3 dB or more) during the search shall be recorded for use in the next measurements.
- f) Set the receiving frequency to the lowest frequency and repeat the test.

11.2.5.4.3 B) Method of search over the "limited frequency range" using PER or BER measurement

For PER or BER measurement proceed as follows.

- a) Two generators A and B, shall be connected to the receiver via a combining network (see Figure 14).

The wanted signal, provided by generator A, shall be at AIS 2 and shall be modulated to generate test signal number 5.

The unwanted signal, provided by generator B, shall be frequency modulated with a 400 Hz sine wave giving a deviation of 3 kHz.

- b) Initially, generator B (unwanted) shall be switched off (maintaining the output impedance).
The signal level from generator A (wanted) shall be adjusted to –101 dBm at the receiver.
The *PER* or *BER* shall be noted.
- c) Signal generator B shall be switched on and adjusted to –27 dBm at the receiver.
- d) The frequency of the unwanted signal shall be varied in steps of 5 kHz over the limited frequency range (from LFR_{LO} to LFR_{HI}).
- e) The frequency of any spurious response detected (by an increase in either *PER* or *BER*) during the search shall be recorded for use in the next measurements.
- f) Set the frequency to the lowest frequency and repeat the test.
- g) In the case where operation using a continuous packet stream is not possible a similar method may be used.

11.2.5.5 Method of measurement (at identified frequencies)

Proceed as follows.

- a) Two generators A and B, shall be connected to the receiver via a combining network (see Figure 14).

The wanted signal, provided by generator A, shall be at AIS 2 and shall be modulated to generate test signal number 5.

The unwanted signal, provided by generator B, shall be frequency modulated with a 400 Hz sine wave giving a deviation of 3 kHz. Generator B shall be at the frequency of that spurious response being considered.

- b) Initially, generator B (unwanted) shall be switched off (maintaining the output impedance). The signal level from generator A (wanted) shall be adjusted –101 dBm at the receiver.
- c) Generator B shall be switched on, and the level of the unwanted signal set to –31 dBm.
- d) For each frequency noted during the tests over the limited frequency range and the specific frequencies of interest (SFI_1), transmit 200 packets to the EUT and note the *PER*.
- e) Set the receiving frequency to the lowest and repeat the test for each frequency noted during the tests over the limited frequency range on the lowest frequency and the specific frequencies of interest (SFI_2).

11.2.5.6 Required results


At any frequency separated from the nominal frequency of the receiver by two channels or more, the spurious responses shall not result in a *PER* of greater than 20 %.

11.2.6 Intermodulation response rejection

11.2.6.1 Definition

The intermodulation response rejection is the capability of the receiver to receive a wanted modulated signal, without exceeding a given degradation due to the presence of two close-spaced unwanted signals with a specific frequency relationship to the wanted signal frequency.

11.2.6.2 Method of test

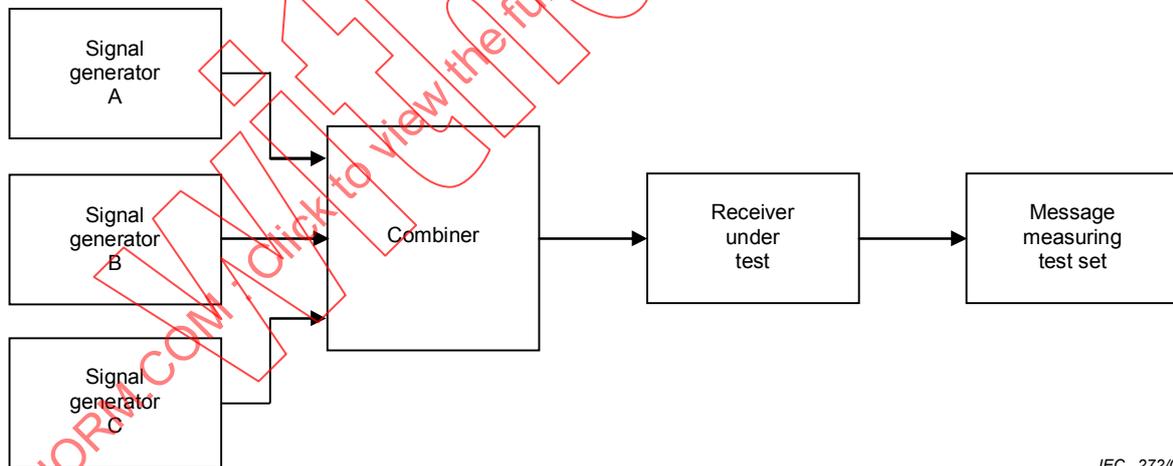

IEC 272/06

Figure 15 – Measurement arrangement for intermodulation

The measurement procedure shall be as follows (see also Figure 15):

- a) three signal generators shall be connected to the receiver via a combining network;
- b) the wanted signal, provided by signal generator A, shall be at the nominal frequency of the receiver and shall be modulated to generate test signal number 5;
- c) the unwanted signal from generator B shall be unmodulated;
- d) the unwanted signal from generator C shall be frequency modulated with a 400 Hz sine wave giving a deviation of 3 kHz;

- e) the signal level from generator A (wanted) shall be set for –101 dBm at the receiver input;
- f) the signal level from generators B and C shall be set for –36 dBm at the receiver input;
- g) the frequencies of generators A, B, C shall be set as per test #1 of Table 23;
- h) the message measuring test set shall be monitored and the packet error rate observed;
- i) repeat the measurement with frequencies set as per tests #2, #3 and #4 of Table 23.

Table 23 – Frequencies for inter-modulation test

	Generator A Wanted AIS signal	Generator B Unmodulated (±50 kHz)	Generator C Modulated (±100 kHz)
Test #1	162,025 MHz	162,075 MHz	162,125 MHz
Test #2	162,025 MHz	161,975 MHz	161,925 MHz
Test #3	F_{TDMAlo}	$F_{\text{TDMAlo}} + 50 \text{ kHz}$	$F_{\text{TDMAlo}} + 100 \text{ kHz}$
Test #4	F_{TDMAlo}	$F_{\text{TDMAlo}} - 50 \text{ kHz}$	$F_{\text{TDMAlo}} - 100 \text{ kHz}$
NOTE F_{TDMAlo} is the lowest frequency on which the EUT can operate according to the manufacturer's specification.			

11.2.6.3 Required results

The *PER* shall not exceed 20 %.

11.2.7 Blocking or desensitisation**11.2.7.1 Definition**

Blocking is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted input signal at any frequencies other than those of the spurious responses or the adjacent channels.

11.2.7.2 Method of measurement

The measurement procedure shall be as follows:

- a) two generators A and B, shall be connected to the receiver via a combining network (see Figure 13);
- b) the wanted signal, provided by signal generator A, shall be at the nominal frequency of the receiver and shall be modulated to generate test signal number 5;
- c) the unwanted signal from generator B shall be unmodulated and shall be at a frequency 0,5 MHz to 10 MHz away from the nominal frequency of the receiver. Measurements shall be carried out at frequencies of the unwanted signal at approximately 500 kHz, 1 MHz, 2 MHz, 5 MHz and 10 MHz, avoiding those frequencies at which spurious responses could occur (see C.4.6);
- d) initially, signal generator B (unwanted signal) shall be switched off (maintaining the output impedance). The level of the wanted signal from generator A shall be adjusted to –101 dBm at the receiver input;
- e) the RF signal level for signal generator B (unwanted signal) shall be adjusted to –23 dBm when the frequency setting is less than 5 MHz. For frequency settings of 5 MHz or higher the RF level shall be adjusted to –15 dBm;
- f) the test shall be repeated for all the frequencies defined in step c);
- g) the test shall be carried out on the lowest frequency on which the EUT can operate according to the manufacturer's specification and AIS 2 (162,025 MHz).

11.2.7.3 Required results

The maximum packet error rate shall not exceed 20 %.

11.3 Conducted spurious emissions

11.3.1 Spurious emissions from the receiver

11.3.1.1 Definition

Spurious emissions from the receiver are components at any frequency, conducted to the antenna. The level of spurious emissions shall be measured as their power level in a specified load.

11.3.1.2 Method of measurement

The receiver shall be connected to a 50 Ω attenuator. The output of the attenuator shall be connected to a spectrum analyser or selective voltmeter having an input impedance of 50 Ω . If the detecting device is not calibrated in terms of power input, the level of any detected components shall be determined by a substitution method using a signal generator. The measurement shall extend over the frequency range 9 kHz to 4 GHz.

The receiver shall be switched on, and the measuring receiver shall be tuned over the frequency range 9 kHz to 4 GHz.

At each frequency at which a spurious component is detected, the power level shall be recorded as the spurious level delivered into the specified load.

11.3.1.3 Required results

The power of any spurious emission in the specified range at the antenna terminal shall not exceed –57 dBm (2 nW) in the frequency range 9 kHz to 1 GHz and –47 dBm (20 nW) in the frequency range 1 GHz to 4 GHz.

11.3.2 Spurious emissions from the transmitter

11.3.2.1 Definition

Conducted spurious emissions are emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

11.3.2.2 Method of measurement

The transmitter shall be connected to a 50 Ω power attenuator. The output of the power attenuator shall be connected to a measuring receiver.

If possible, the measurement shall be made with the transmitter unmodulated. If this is not possible, the transmitter shall be modulated by test signal number 4. If possible, the modulation should be continuous for the duration of the measurement.

The measurement shall be made over a frequency range from 9 kHz to 4 GHz, excluding the channel on which the transmitter is operating and its adjacent channels.

The resolution bandwidth of the measuring instrument shall be the smallest bandwidth available which is greater than the spectral width of the spurious component being measured. This shall be considered to be achieved when the next highest bandwidth causes less than

1 dB increase in amplitude. Positive peak detection (maximum hold) shall be selected on the spectrum analyser used for this measurement.

A sufficient number of sweeps shall be measured to ensure that the emission profile is developed.

At each frequency at which a spurious component is detected, the power level shall be recorded as the conducted spurious emission level delivered into the specified load, except for the channel on which the transmitter is intended to operate and the adjacent channels.

The conditions used in the relevant measurements shall be recorded in test reports.

11.3.2.3 Required results

The power of any spurious emission on any discrete frequency shall not exceed 0,25 μW (–36 dBm) in the frequency range 9 kHz to 1 GHz and 1 μW (–30 dBm) in the frequency range 1 GHz to 4 GHz.

12 Specific tests of link layer

(see 7.3)

12.1 TDMA synchronisation

12.1.1 Synchronisation test sync mode 1

12.1.1.1 Definition

Synchronisation jitter (transmission timing error) is the time between nominal start of the transmission time period as determined by a UTC synchronisation source ($T_{0 \text{ ref}}$) and T_0 of the EUT ($T_{0 \text{ EUT}}$).

12.1.1.2 Method of measurement

Set up standard test environment and set the EUT to assigned mode for a reporting rate of 5 s. Enable test conditions for the following:

- station transmitting Message 1 or 2, 3, 4 not subject to a CS-delay, with repeat indicator = 0, with no propagation delay and with position available is received by the EUT;
- no sync source (switched off);
- with the internal clock of the EUT out of sync (sync jitter 1 000 μs), transmit messages not to be used as sync source (see 7.3.2.2) to the EUT;
- repeat test a) using a sync source transmitting Message 4; simulate the position of the station providing the sync source (for instance a base station 60 NM = 416 μs away from EUT position) in order to simulate a propagation delay;
- repeat test d) with an additional source transmitting Message 1 or 2, 3, 4, 18 not subject to a CS-delay, with repeat indicator = 0, with no propagation delay and with position available is received by the EUT.

Record VDL messages and measure the time between $T_{0 \text{ ref}}$ of the synchronisation source and the initiation of the "transmitter on" function T_A and calculate back to $T_{0 \text{ EUT}}$ (a sync output may be used for the purpose of this test). Alternative methods, for example by evaluating the start flag are allowed.

12.1.1.3 Required results

The following results are required.

- a) The EUT shall synchronise on the received source and the synchronisation jitter shall not exceed 312 μ s (sync mode 1).
- b) The synchronisation jitter shall not exceed 312 μ s during a 30 s period from the time a proper sync source was last received.
- c) The EUT shall not synchronise on these received messages.
- d) The synchronisation jitter of the EUT shall be within -416μ s 312 μ s.
- e) The synchronisation jitter of the EUT shall be -208μ s 312 μ s within 60 s.

12.1.2 Synchronisation test sync mode 2

12.1.2.1 Method of measurement

Set up standard test environment and enable test conditions for the following:

- a) operate EUT in sync mode 2 for more than 5 min.
- b) switch on sync source immediately after scheduled transmission of EUT. Sync source shall be a station transmitting Message 1 or 2, 3, 4 not subject to a CS-delay, with repeat indicator = 0 and with position available with a reporting rate of 10 s.

Record VDL messages and measure the time between $T_{0 \text{ rec}}$ of the synchronisation source and the initiation of the "transmitter on" function T_A and calculate back to $T_{0 \text{ EUT}}$ (a sync output may be used for the purpose of this test). Alternative methods, for example by evaluating the start flag are allowed.

12.1.2.2 Required results

Verify that the EUT synchronises its next scheduled transmission on the sync source. The synchronisation jitter shall not exceed 312 μ s.

12.1.3 Synchronisation test with UTC

12.1.3.1 General

This test is only relevant if optional synchronisation sources providing UTC are implemented.

12.1.3.2 Method of measurement

Set up standard test environment and enable test conditions in a way that EUT operates in UTC synchronised mode.

12.1.3.3 Required results

The synchronisation jitter shall not exceed 312 μ s.

12.2 Carrier-sense tests

12.2.1 Threshold level

12.2.1.1 Definition

Carrier-sense threshold is the signal level below which a time period shall be regarded as unused and a transmission may take place.

12.2.1.2 Method of measurement

The test configuration is described here in its most basic form, using three signal sources with RF (PIN) switches selecting when each signal is applied to the EUT. Other equipment

configurations may be used if they fulfil the same requirements (for example a single RF source fed via a switched attenuator, which is controlled by a timing circuit).

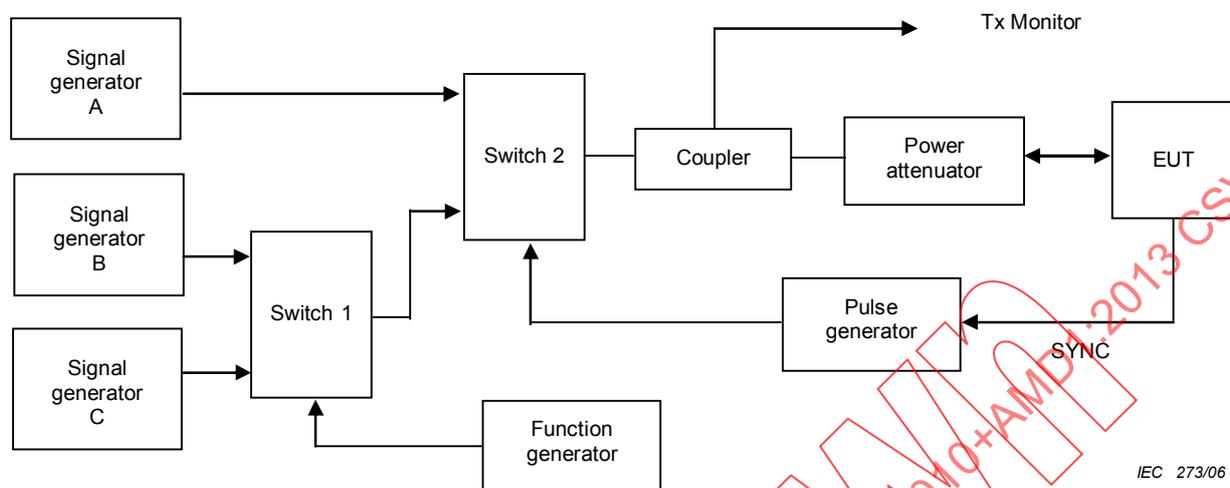


Figure 16 – Configuration for carrier-sense threshold test

The following points explain the configuration as described in Figure 16.

- a) Signal C is a carrier modulated with a 400 Hz FM signal with a deviation of 3 kHz equivalent to -60 dBm at the EUT. The switches connect this signal to the EUT most of the time to mimic 100 % channel loading with strong traffic.
- b) Signal B is a carrier modulated with a 400 Hz FM signal with a deviation of 3 kHz equivalent to -87 dBm at the EUT. Switch 1 replaces signal C with signal B for 26,67 ms. The function generator makes this happen once every 2 s. This imitates one vacant time period in a 99 % loaded channel. The level of Signal B can be manually switched between -87 dBm and OFF to mimic high and low background levels (resulting in a threshold level of -77 dBm and -107 dBm).
- c) Signal A is a carrier modulated with a 400 Hz FM signal with a deviation of 3 kHz equivalent to -104 dBm at the EUT. When the EUT attempts a transmission, switch 2 replaces the 'background traffic' with signal A to imitate an incoming message intended to inhibit the transmission attempt. The level of signal A can be manually set to -74 dBm, -104 dBm and OFF (defined as less than -117 dBm).
- d) All three signal generators are tuned to the same frequency. The test shall be carried out on the lowest frequency declared by the manufacturer and AIS 2 (162,025 MHz).
- e) For the purposes of this test, the EUT will be equipped with a test signal (SYNC) indicating the start of each time period that it intends to transmit into. This is used to trigger the pulse generator which after a delay of 0,8 ms (8 bits) generates a 23,3 ms (224 bits) pulse for switch 2.
- f) With the signal levels set to the levels shown in the first row of the following table, the EUT shall be observed making routine scheduled position reports. Levels shall then be adjusted as per subsequent steps and the EUT monitored for 10 min (or at least 20 reporting attempts) to confirm if transmission has ceased.

12.2.1.3 Required results

The required results are given in Table 24.

Table 24 – Required threshold test results

Step	Description	Signal A dBm	Signal B dBm	EUT transmission
1	Time period free	OFF	OFF	Yes
2	Time period used	-104	OFF	Ceased
3	Recovery	OFF	OFF	Yes
4	Raised background	OFF	-87	Yes
5	Time period used	-74	-87	Ceased
6	Recovery	OFF	-87	Yes

12.2.2 Carrier-sense timing

12.2.2.1 Definition

This test is to verify that signals that are received before the CS detection window starts are not used for the detection of used time periods.

12.2.2.2 Method of measurement

Use the test configuration and signals of test 12.2.1.

Signal B is switched off, signal A can be manually set to -74 dBm, -104 dBm and OFF.

The SYNC signal of the EUT indicating the start of each time period that it intends to transmit into is used to trigger the pulse generator to generate a 0,7 ms (7 bits) pulse for switch 2 starting at the SYNC signal (this pulse ends 1 bit before start of the CS detection window of the EUT).

Levels shall be adjusted as per the steps given in Table 25 and the EUT monitored for 10 min (or at least 20 reporting attempts) to confirm if EUT transmits.

12.2.2.3 Required results

The required results are given in Table 25.

Table 25 – Required carrier-sense timing results

Step	Description	Signal A dBm	Signal B dBm	EUT transmission
1	Time period free	OFF	OFF	Yes
2	Time period free	-104	OFF	Yes
3	Time period free	-74	OFF	Yes

12.3 VDL state/reservations

12.3.1 Method of measurement

Set up standard test environment and operate EUT with assigned reporting interval of 10 s. Record transmitted scheduled position reports Message 18 and check time periods used for transmission.

- a) Transmit a Message 20 to the EUT reserving a block of time periods including timeout.
- b) Transmit a Message 20 to the EUT reserving a block of time periods without timeout.

12.3.2 Required results

Verify that

- a) the reserved block is not used and used again after the timeout specified in Message 20;
- b) the reserved block is not used and used again after a timeout of 3 min.

12.4 Data encoding (bit stuffing)

12.4.1 Method of measurement

Set up standard test environment.

Set ships name to a value that requires bit-stuffing, for instance "wwwww" and check the VDL (note that this might require that the manufacturer provides means to input this data).

12.4.2 Required results

Confirm that transmitted VDL Message 24 conforms to data input.

12.5 Frame check sequence

12.5.1 Method of measurement

Apply simulated position report messages with wrong CRC bit sequence to the VDL as follows.

- a) Check test output; if a display interface is provided, check this.
- b) Repeat test 12.1.1 and check that a station transmitting messages with wrong CRC are not used for synchronisation.

12.5.2 Required results

Confirm that messages with invalid CRC are not accepted by the EUT in cases a) and b).

12.6 Slot allocation (channel access protocol)

12.6.1 Autonomous mode allocation

12.6.1.1 Method of measurement

Set up standard test environment and operate EUT with assigned reporting interval of 10 s. Record transmitted scheduled position reports Message 18 and check time periods used for transmission. Check the communication state of transmitted messages.

Repeat the test with additional simulated channel load of 80 % (4 time periods used, 1 time period unused).

12.6.1.2 Required results

The time periods used for transmission shall in both tests

- not exceed the transmission interval TI,
- not always use the same time period,
- not always use the first unused time period.

Check that the communication state of Message 18 is the default value as defined in 7.3.4.6.

12.6.2 DSC listening periods

12.6.2.1 Method of measurement

This test is applicable only if DSC functionality is implemented.

Set up standard test environment and operate EUT with assigned reporting interval of 10 s. Enable DSC functionality. Record transmitted scheduled position reports Message 18 and check time periods used for transmission.

12.6.2.2 Required results

During the DSC monitoring times, scheduled transmissions of Message 18 shall continue.

12.7 Assigned operation

12.7.1 Assignment priority

12.7.1.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Transmit an assigned mode command (Message 23) to the EUT with Tx/Rx mode 1.

- a) Transmit a Message 22 defining a region with the EUT inside that region. Transmit a Message 22 to the EUT individually addressed and specifying Tx/Rx mode 2.
- b) Repeat the test, clear the region defined by Message 22 under a). Transmit Message 22 to the EUT with regional settings specifying Tx/Rx mode 2.

NOTE This can be carried out using the method used in 13.3.1 b) step 2 or by assigning a new simulated position to the EUT.

Record transmitted messages.

12.7.1.2 Required results

Confirm the following.

- a) The Tx/Rx mode field setting of Message 22 shall take precedence over the Tx/Rx mode field setting of Message 23.
- b) The Tx/Rx mode field setting of Message 23 shall take precedence over the Tx/Rx mode field setting of Message 22. The receiving station shall revert to its previous Tx/Rx mode after a timeout value randomly chosen between 240 s and 480 s.

12.7.2 Entering rate assignment

12.7.2.1 Method of measurement

Set up standard test environment and operate EUT in autonomous mode. Transmit a Group Assignment command (Message 23) to the EUT with a reporting interval of 10 s assigned, monitor the VDL, reset by assigning 30 s rate; repeat 10 times.