

INTERNATIONAL STANDARD



**Digital living network alliance (DLNA) home networked device interoperability
guidelines –
Part 1-1: Architecture and protocols – Core architecture and protocols**

IECNORM.COM : Click to view the full PDF of IEC 62481-1-1:2017



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 60381-11:2017

INTERNATIONAL STANDARD



**Digital living network alliance (DLNA) home networked device interoperability
guidelines –
Part 1-1: Architecture and protocols – Core architecture and protocols**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160; 35.100.05; 35.110

ISBN 978-2-8322-4537-8

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	12
INTRODUCTION.....	14
1 Scope.....	16
2 Normative references	16
3 Terms, definitions, symbols, abbreviated terms and conventions	24
3.1 Terms and definitions.....	24
3.2 Symbols.....	41
3.3 Abbreviated terms.....	42
3.4 Conventions.....	42
4 DLNA home network architecture	42
4.1 General.....	42
4.2 Networking and connectivity.....	43
4.2.1 General	43
4.2.2 Network quality of service.....	44
4.3 Device discovery and control	44
4.4 Media management.....	44
4.5 Media formats	45
4.6 Media transport.....	45
4.7 Remote UI	45
5 DLNA device model	45
5.1 Overview.....	45
5.2 Device model elements	45
5.3 Device Functions	47
5.4 Device Categories.....	48
5.5 Device Classes and roles.....	48
5.6 Device Capabilities and roles	49
5.7 System Usages.....	49
5.7.1 General.....	49
5.7.2 2-box Pull system usage.....	50
5.7.3 2-box Push system usage.....	51
5.7.4 3-box system usage.....	52
5.7.5 Download system usage	53
5.7.6 Upload system usage	54
5.7.7 Download Synchronization system usage	55
5.7.8 Upload Synchronization system usage.....	56
5.7.9 Scheduled Recording system usage	57
5.7.10 EPG system usage	58
5.7.11 IPv6 Connectivity system usage impacts	59
5.8 Interoperability guidelines usage.....	60
6 Guideline terminology and conventions.....	62
6.1 Guideline compliance classifiers	62
6.2 Standard or specification usage classifiers.....	62
6.3 Guideline font usage conventions	63
6.4 Guideline syntax notation conventions	63
6.5 Guideline normative and informative text conventions	63

6.6	DLNA XML namespaces and schemas	64
6.7	General rules on XML documents and fragments	64
7	Guideline requirements overview	64
7.1	General.....	64
7.2	Conditions for measuring time in message exchanges	67
8	Networking and connectivity	68
8.1	General.....	68
8.2	Networking and connectivity: general capability requirements	68
8.2.1	General	68
8.2.2	General capability requirements for Ethernet	68
8.2.3	General capability requirements for IEEE 802.11	69
8.2.4	General capability requirements for MoCA.....	71
8.2.5	General capability requirements for HPNA.....	71
8.2.6	General capability requirements for HomePlug AV and HD-PLC	72
8.3	Networking and connectivity: QoS requirements	72
8.3.1	General	72
8.3.2	DLNAQOS requirements: Ethernet.....	74
8.3.3	DLNAQOS requirements: IEEE 802.11	76
8.3.4	DLNAQOS requirements: MoCA	76
8.3.5	DLNAQOS requirements: HPNA	77
8.3.6	DLNAQOS requirements: HomePlug AV.....	78
8.3.7	DLNAQOS requirements: HD-PLC	79
8.4	Networking and connectivity: device requirements	80
8.4.1	General	80
8.4.2	Device requirements: common.....	80
8.4.3	Device requirements: HND	84
8.4.4	Device requirements: MHD	85
9	Device discovery and control.....	85
9.1	General.....	85
9.2	Device discovery and control guidelines.....	86
9.2.1	DDC UPnP Device Architecture	86
9.2.2	DDC UPnP Auto IP support	88
9.2.3	DDC UPnP SSDP default port.....	89
9.2.4	DDC UPnP discovery robustness.....	91
9.2.5	DDC UPnP HTTP support and general rules	95
9.2.6	DDC UPnP HTTP/1.0 rules	98
9.2.7	DDC UPnP HTTP/1.1 transaction rules	99
9.2.8	DDC UPnP HTTP persistent connections.....	101
9.2.9	DDC UPnP device responsiveness	102
9.2.10	DDC UPnP device description rules.....	103
9.2.11	DDC UPnP embedded device support.....	106
9.2.12	DDC UPnP service description rules.....	108
9.2.13	DDC UPnP XML namespace.....	110
9.2.14	DDC UPnP action argument encoding	110
9.2.15	DDC UPnP SOAP packet size	111
9.2.16	DDC UPnP error codes.....	112
9.2.17	DDC UPnP GENA packet size	113
9.2.18	DDC UPnP subscription handling.....	114
9.2.19	DDC UPnP UUID format	114

9.2.20	DDC UPnP UUID generation.....	114
9.2.21	DDC UPnP event subscription renewals	115
9.2.22	DDC UPnP event notification handling	115
9.2.23	DDC UPnP unknown header/tag/field robustness rule.....	116
9.2.24	DDC URI rules.....	116
9.2.25	DDC UPnP device description usage	120
9.2.26	DDC UPnP UDN usage.....	121
9.2.27	DDC UPnP multi homing rules	122
9.2.28	DDC UPnP device icons	123
9.2.29	DDC UPnP UTF-8 support	125
9.2.30	DDC UPnP XML comments.....	125
9.2.31	DDC UPnP boolean types.....	126
9.2.32	DDC CP versioning.....	126
9.2.33	DDC absolute and relative URI requests	127
9.2.34	DDC maximum HTTP header size.....	128
9.2.35	DDC Device Capabilities.....	128
9.2.36	DDC DLNAQOS support	129
9.2.37	DDC Power Save Operations support	129
9.2.38	DDC Diagnostics support.....	129
10	Media management	130
10.1	AV media management	130
10.1.1	General	130
10.1.2	Device Classes and Device Capabilities requirements	130
10.1.3	General UPnP AV requirements.....	139
10.1.4	MediaServer requirements.....	214
10.1.5	Basic Connection Management (BCM) guidelines	263
10.1.6	MediaRenderer device requirements.....	269
10.1.7	AVT SetNextAVTransportURI action	322
10.1.8	Upload and Optional Content Management requirements.....	329
10.2	Content synchronization MM/CM guidelines	382
10.2.1	General	382
10.2.2	MM/CM: Download Synchronization Controller.....	382
10.2.3	MM/CM: Upload Synchronization Controller	383
10.2.4	MM/CM general rules for thrashing avoidance	386
10.2.5	MM/CM: DMS or M-DMS with Content Synchronization Device Option support definition	386
10.2.6	MM/CM: support for res@dlna:estimatedSize	390
10.2.7	MM/CM: operations that need CDS:UpdateObject.....	392
10.2.8	MM/CM: general rules for CDS:UpdateObject request syntax	392
10.2.9	MM/CM: general rules for server behaviour for CDS:UpdateObject	395
10.2.10	MM/CM: OCM: change metadata operation.....	395
10.3	Scheduled Recording Media Management guidelines	396
10.3.1	MM/SR system usage feature support	396
10.3.2	MM/SR exposing recorded content	397
10.3.3	MM/SR UPnP ScheduledRecording service	401
10.3.4	MM/SR CDS association.....	401
10.3.5	MM/SR SRS:GetSortCapabilities action	402
10.3.6	MM/SR SRS:BrowseRecordSchedules action	402
10.3.7	MM/SR BrowseRecordTasks action	405

10.3.8	MM/SR representation of allowed values description	408
10.3.9	MM/SR cdsNonEPG record class	410
10.3.10	MM/SR manual record class	413
10.3.11	MM/SR cdsEPG record class	415
10.3.12	MM/SR query content name record class	419
10.3.13	MM/SR query content ID record class	421
10.3.14	MM/SR query record class and EPG	422
10.3.15	MM/SR conflict resolution	424
10.3.16	MM/SR SRS:CreateRecordSchedule action	427
10.3.17	MM/SR adjustment of property values for a recordSchedule or recordTask	430
10.3.18	MM/SR SRS:GetPropertyList action	432
10.3.19	MM/SR SRS>DeleteRecordSchedule action	432
10.3.20	MMSR SRS:GetRecordSchedule action	432
10.3.21	MM/SR SRS:EnableRecordSchedule action	433
10.3.22	MM/SR SRS:DisableRecordSchedule action	433
10.3.23	MM/SR SRS:GetRecordTask action	433
10.3.24	MM/SR SRS:EnableRecordTask action	433
10.3.25	MM/SR SRS:ResetRecordTask action	434
10.3.26	MM/SR SRS:GetRecordScheduleConflicts action	434
10.3.27	MM/SR SRS:GetRecordTaskConflicts action	434
10.3.28	MM/SR open-end recording	435
10.3.29	MM/SR media format specified recording	438
10.3.30	EPG, SRS, and CDS object lifespan guidelines	444
10.4	Extended Tuner media management guidelines	450
10.4.1	General	450
10.4.2	MM/ET Extended Tuner guidelines	450
10.4.3	MM/ET Extended Tuner common guidelines	452
10.4.4	MM/ET Non-Streamable Extended Tuner guidelines	460
10.4.5	MM/ET Streamable Extended Tuner guidelines	461
10.4.6	MM/ET Presets Containers	463
10.4.7	MM/ET EPG Server Device Option additional tuner guidelines	465
10.4.8	MM/ET Scheduled Recording Device Option additional tuner guidelines	466
10.4.9	MM/ET Virtual Tuners	467
10.5	EPG Media management guidelines	479
10.5.1	MM/EPG foreign metadata feature advertisement	479
10.5.2	MM/EPG Server Device Option advertisement	479
10.5.3	MM/EPG EPG object persistence guidelines	481
10.5.4	MM/EPG EPG Controller definition	482
10.5.5	MM/EPG mandatory EPG programme item properties	482
10.5.6	MM/EPG exposing foreign metadata	505
10.5.7	MM/EPG search guidelines	507
10.5.8	MM/EPG event moderation	516
11	Media Transport	517
11.1	General	517
11.2	Uniform Client Data Availability Model	519
11.3	Media Operations	521
11.4	Media Transport protocols	522
11.4.1	General	522

11.4.2	Media Transport common guidelines.....	522
11.4.3	HTTP transport.....	537
11.4.4	RTP Media Transport.....	620
12	Content transformation device virtualization	723
12.1	Theory of operations	723
12.2	Virtual device implementation	725
12.2.1	General	725
12.2.2	Virtual device conformance to guidelines	725
12.3	Virtual device, Device Discovery and Control (DDC)	726
12.3.1	General	726
12.3.2	DDC UPnP device description of virtualized device.....	726
12.3.3	DDC UPnP actions	728
12.3.4	DDC UPnP device description ssdp:byebye of virtual device.....	729
12.3.5	DDC virtual devices	730
12.4	Virtual device Media Management (MM)	730
12.4.1	General	730
12.4.2	CMS action requirement for virtual devices	730
12.4.3	MM virtual server	735
12.4.4	MM virtual renderer	745
12.5	Virtual device Media Formats (MF)	747
12.5.1	MF virtual HND server media types.....	747
12.5.2	MF virtual MHD server media types	747
12.5.3	MF virtual HND HND renderer media types.....	748
12.6	Virtual device Media Transport (MT)	748
12.6.1	MT virtual HND server media transport	748
12.6.2	MT virtual MHD server media transport.....	748
12.6.3	MT virtual HND renderer media types	749
12.6.4	MT virtual device control.....	749
13	3D media rendering guidelines	749
13.1	General.....	749
Annex A (informative)	Network Infrastructure Device (NID) recommendations	751
A.1	General.....	751
A.2	NID Functions	751
A.3	NID recommendations.....	751
A.3.1	General capability recommendations: Ethernet	751
A.3.2	Device recommendations: IGD.....	752
A.3.3	Device recommendations – AP	754
A.3.4	Device recommendations – Bridge NC NID bridge – Addressability	758
A.3.5	Device recommendations – Interconnect NC NID Ethernet interconnect	758
A.3.6	Device recommendations – MoCA Bridge	758
A.3.7	Device recommendations – HPNA Bridge	761
A.3.8	Device recommendations – HomePlug AV and HD-PLC Bridge.....	764
Annex B (informative)	Basic Tuner representation	771
B.1	General.....	771
B.2	Tuner objects.....	771
B.3	Channel objects	771
B.3.1	General	771
B.3.2	Channel order.....	771

B.3.3	Channel Number.....	771
B.3.4	Channel Name.....	772
B.3.5	Channel Title	772
B.4	Accessing a tuner channel	772
B.5	Tuner example	773
Annex C (informative)	UPnP devices with multiple network interfaces.....	775
C.1	Representation at the UPnP Device level	775
C.2	Representation at the CDS level	777
C.3	Understanding the "treated as or assumed to be routable" clause	778
C.4	Multiple <res> elements	779
Annex D (informative)	Example applications of the Uniform Client Data Availability Model	780
D.1	Uniform Client Data Availability Model definitions.....	780
D.1.1	General	780
D.1.2	The stream	780
D.1.3	Stored content	781
D.1.4	Converted content	782
D.1.5	Live content.....	782
D.2	UCDAM and media operations	783
D.2.1	General	783
D.2.2	Data ranges	783
D.2.3	Play data flow	784
D.2.4	Stop data flow.....	784
D.2.5	Pause and Pause-release data flow	784
D.2.6	Scan operations.....	785
Annex E (informative)	Auto-IP developer guidance	786
E.1	Goal.....	786
E.2	Overview.....	786
E.3	Suggested solution	787
E.3.1	General	787
E.3.2	Route for an Auto-IP device sending packets	787
E.3.3	Route for a DHCPv4 device sending packets	788
E.4	Validation example using UPnP AV applications	788
E.4.1	General	788
E.4.2	How to add a route on Windows 2000 and Windows XP?	789
E.4.3	How to add a route on Linux?	790
E.5	Installing routes during address transitions	791
Annex F (informative)	RTP Protocol Stack and SDP/RTSP/RTCP Parameters	793
Annex G (informative)	Guidance on address conflict resolution in Auto-IP	796
Annex H (informative)	Wi-Fi Direct for DLNA	797
H.1	Wi-Fi Direct introduction.....	797
H.1.1	Overview	797
H.1.2	Terminology.....	797
H.1.3	Group formation.....	798
H.1.4	P2P Group operation	799
H.1.5	Features that are optional in Wi-Fi Direct certification	800
H.2	Wi-Fi Direct with system usages	801
H.2.1	General	801

H.2.2	2-box system usage.....	802
H.2.3	3-box system usage.....	805
Annex I (informative)	EPG Theory of Operation	810
I.1	Goal.....	810
I.2	Usage scenarios	810
I.3	The model.....	810
I.3.1	EPG data.....	810
I.3.2	FreeFormQuery	811
I.3.3	Channel lineup	811
I.3.4	Channel ordering	812
I.3.5	channelID@distriNetworkID	812
I.3.6	Advanced lineup	812
I.4	Implementation considerations.....	812
I.4.1	General	812
I.4.2	Discovering features and capabilities.....	813
I.4.3	Discovering EPG Servers	813
I.4.4	Discovering Tuners.....	813
I.4.5	Determining FreeFormQuery capabilities	813
I.4.6	GetFeatureList example.....	813
I.4.7	Determining FreeFormQuery capabilities	814
I.4.8	Retrieving a channel lineup.....	814
I.4.9	Obtaining an EPG grid.....	814
Annex J (normative)	Rating systems.....	817
Annex K (normative)	3D media rendering guidelines for HDMI signal.....	825
K.1	Overview.....	825
K.2	MPEG-2 3DFC format output mapping	825
K.3	MPEG-4 part 10 3DFC format output mapping	825
K.4	3D-capable renderer HDMI format conversion.....	827
K.5	HDMI backward compatible output signalling	827
Annex L (informative)	Live content use cases	829
L.1	General.....	829
L.2	Live content use cases	829
L.2.1	General	829
L.2.2	Streaming from time shift buffer (TSB).....	829
L.2.3	Streaming from in-progress recording	830
L.2.4	Live streaming	830
L.3	Guidelines clarifications	830
L.3.1	The live position	830
L.3.2	Content pacing	831
L.3.3	Server termination for live content transfer	831
L.4	Association with protocolInfo guidelines.....	832
L.4.1	4th field signalling related to live content	832
L.4.2	Values of 4th field for various live content and DVR use cases	833
Bibliography		834
Figure 1 – DLNA functional components		43
Figure 2 – DLNA device model terms hierarchy.....		47
Figure 3 – 2-box Pull system usage interaction model.....		51

Figure 4 – 2-box Push system usage interaction model	52
Figure 5 – 3-box system usage interaction model	53
Figure 6 – Download system usage interaction model	54
Figure 7 – Upload system usage interaction model	55
Figure 8 – Download Synchronization system usage interaction model	56
Figure 9 – Upload Synchronization system usage interaction model	57
Figure 10 – Scheduled Recording system usage interaction model	58
Figure 11 – EPG system usage interaction model	59
Figure 12 – Guideline layout and definitions	65
Figure 13 – Visual map of possible values for the attribute tables	67
Figure 14 – DLNA QoS visual organization	73
Figure 15 – UPnP discovery robustness	93
Figure 16 – DLNA PlayContainer URI example	262
Figure 17 – Recording conflict behaviour	425
Figure 18 – CDS and SRS object lifetimes	445
Figure 19 – Extended Tuner and its containers	450
Figure 20 – Modelling DLNA Extended Tuner	452
Figure 21 – UCDAM summary	520
Figure 22 – Example of a valid and invalid pipelined POST transaction	620
Figure 23 – Calculated Line	637
Figure 24 – Wall Clock Time sample accuracy distribution	637
Figure 25 – Packet with Wall Clock Time Sample header extension	640
Figure 26 – Packet with another header extension following Wall Clock Time Sample	641
Figure 27 – BFR packet format	649
Figure 28 – Content transformation with a virtual MediaServer	724
Figure 29 – Content transformation with a virtual MediaRenderer	725
Figure C.1 – UPnP Device representation	775
Figure C.2 – UPnP device on multiple networks	776
Figure C.3 – Content URIs over multiple networks	778
Figure D.1 – Abstract representation of a stream	780
Figure D.2 – A stored content stream	781
Figure D.3 – Stream with no random access support	781
Figure D.4 – Stream with random access support	781
Figure D.5 – Live stream with growing buffer and no random access	782
Figure D.6 – Live stream with growing buffer and random access	782
Figure D.7 – Live stream with sliding buffer and random access support	783
Figure D.8 – Time-delayed live stream with sliding buffer and random access support	783
Figure E.1 – IP mixed network (Auto-IP and DHCPv4)	787
Figure E.2 – Communication in mixed IP network.	789
Figure E.3 – New routes in address transition flow	792
Figure F.1 – Overview of the protocol stack for RTP transport	793
Figure F.2 – SDP and RTSP Parameters	794
Figure F.3 – RTCP Parameters	795

Figure H.1 – P2P Group.....	797
Figure H.2 – Group formation simplified diagram	798
Figure H.3 – Device discovery procedure	799
Figure H.4 – Intra-BSS distribution and Cross-connection.....	801
Figure H.5 – 2-box system usage: step 1	802
Figure H.6 – 2-box system usage: step 2a	803
Figure H.7 – 2-box system usage: step 2b.1	804
Figure H.8 – 2-box system usage: step 2b.2	805
Figure H.9 – 3-box system usage: step 1	806
Figure H.10 – 3-box system usage: step 2a	807
Figure H.11 – 3-box system usage: step 2b.1	808
Figure H.12 – 3-box system usage: step 2b.2	809
Figure L.1 – Live position to a TSB available data range.....	831
Table 1 – Key technology ingredients	14
Table 2 – DLNA Device Classes in the HND Device Category.....	61
Table 3 – DLNA Device Capabilities.....	61
Table 4 – DLNA Device Classes in the MHD Device Category	62
Table 5 – DLNA namespace values	64
Table 6 – Allowed values for change indicator fields in attribute tables	66
Table 7 – Normative priorities for DLNA traffic types	74
Table 8 – Colour depth of device icons	124
Table 9 – DMR serviceType and serviceID values.....	135
Table 10 – DMS/M-DMS serviceType and serviceID values	138
Table 11 – CDS and UPnP maximum byte length.....	141
Table 12 – Namespace prefixes.....	151
Table 13 – Recommended metadata properties	152
Table 14 – Required res@ metadata properties	152
Table 15 – Conditionally Required ResExt metadata properties	153
Table 16 – Conditionally Required ResExt metadata properties	154
Table 17 – CDS:Search minimum support of operators	240
Table 18 – UPnP:class for searching all CDS objects	242
Table 19 – Capability ID syntax	255
Table 20 – DLNA state variables for Controller-byte seek operations	309
Table 21 – Arguments for AVT:X_DLNA_GetBytePositionInfo	312
Table 22 – Error codes for AVT:X_DLNA_GetBytePositionInfo.....	312
Table 23 – Capability IDs for AnyContainer support	332
Table 24 – Required Media Class UPnP values	343
Table 25 – Required UPnP createClass elements	348
Table 26 – Capability ID syntax	387
Table 27 – UPnP AV MediaServer Metadata SearchCriteria.....	389
Table 28 – dlina:objectType values.....	399
Table 29 – Guidelines for recorded CDS properties based on srs:class values	400

Table 30 – Recommended recorded CDS properties based on srs:class value	401
Table 31 – dlina:openDuration Property Type and Multi Value	436
Table 32 – dlina:desiredPN property type and multi value	439
Table 33 – dlina:PN property type and multi value	440
Table 34 – Capability ID syntax	448
Table 35 – Modulation format values	459
Table 36 – CDS:X_DLNA_SelectChange action parameters	472
Table 37 – CDS:X_DLNA_SelectChange action error codes	473
Table 38 – A_ARG_TYPE_DLNAChannelID state variable	475
Table 39 – A_ARG_TYPE_DLNAConnectionID state variable	475
Table 40 – DLNA Media Transfer modes	517
Table 41 – Permitted combinations of DLNAQOS_UP and Transfer Mode per Media Class	518
Table 42 – DLNA Streaming Media Operation definitions	522
Table 43 – MT Media Class Transfer Modes	523
Table 44 – HTTP prohibited operations references	599
Table A.1 – NID functions	751
Table A.2 – WMM Access Category mapping	755
Table A.3 – WMM access and IEEE 802.1D priority	756
Table A.4 – MoCA Priority mapping	759
Table A.5 – MoCA Access and IEEE 802.1D Priority	760
Table A.6 – HPNA Priority mapping	762
Table A.7 – HPNA Access and IEEE 802.1D Priority	763
Table A.8 – Homeplug AV Priority mapping	767
Table A.9 – HD-PLC PHY Priority mapping	767
Table A.10 – Homeplug AV PHY access and IEEE 802.1 D priority	768
Table A.11 – HD-PLC PHY access and IEEE 802.1 D priority	768
Table E.1 – Auto-IP route	788
Table E.2 – DHCPv4 route	788
Table E.3 – Windows routing table example for device w/DHCP address	790
Table E.4 – Windows routing table example for device w/Auto-IP address	790
Table E.5 – Linux routing table example for device w/DHCP address	790
Table E.6 – Linux routing table example for device w/Auto-IP address	791
Table J.1 – Rating systems	819
Table K.1 – Examples of mapping of S3D_video_format_type information to HDMI VSI	825
Table K.2 – Examples of mapping of SEI 3D format type information to HDMI VSI	826

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL LIVING NETWORK ALLIANCE (DLNA) HOME NETWORKED DEVICE INTEROPERABILITY GUIDELINES –

Part 1-1: Architecture and protocols – Core architecture and protocols

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62481-1-1 has been prepared under technical area 8: Multimedia home systems and applications for end-user network, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This third edition cancels and replaces IEC 62481-1 published in 2013 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) removal of Bluetooth, printers (DMP_r, +PR1+ and +PR2+), Mobile Digital Media Uploader (M-DMU), Mobile Digital Media Downloader (M-DMD), Mobile Network Connectivity Function (M NCF) and Media Interoperability Unit (MIU);
- b) removal of CEA2014 guidelines (RUISRC, RUISINK, RUICTRL, RUIPL);
- c) addition of IPv6;
- d) heading levels adjusted to be no deeper than heading level 5.

The text of this standard is based on the following documents:

CDV	Report on voting
100/2730/CDV	100/2880/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 62481 series, published under the general title *Digital living network alliance (DLNA) home networked device interoperability guidelines*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

Overview

Consumers are acquiring, viewing, and managing an increasing amount of digital media (photos, music, and video) on devices in the consumer electronics (CE), mobile device, and personal computer (PC) domains. Consumers want to conveniently enjoy that content, regardless of the source, across different devices and locations in their homes. The digital home vision integrates the Internet, mobile, and broadcast networks through a seamless, interoperable network, which will provide a unique opportunity for manufacturers and consumers alike. In order to deliver on this vision, it was recognized that a common set of industry design guidelines would be required to allow companies to participate in a growing marketplace, leading to more innovation, simplicity, and value for consumers.

The Digital Living Network Alliance answered this challenge by taking the initiative to develop a workable framework for interoperable product design. The DLNA Home Networked Device interoperability guidelines have been created in a unique cross-industry effort that combined the efforts of over 100 consumer electronics, PC-industry and mobile device companies from around the world that worked together with the aim of achieving the world's first substantial platform for true interoperability between personal computer and consumer electronic devices. The interoperability guidelines provide product developers with a long-term architectural view, plus specific guidance for IP-networked platforms, devices and applications in the home. The interoperability guidelines will be introduced in phases over several years to accompany the market adoption of usages and the availability of needed technology and standards.

The interoperability guidelines that are the object of this document are based on an architecture (see Clause 4) that defines interoperable components for devices and software infrastructure. It covers physical media, network transports, device discovery and control, media management and control, media formats, media transport protocols, and remote user interfaces. Table 1 shows a summary of the key functional components and technology ingredients that are covered by these interoperability guidelines.

Table 1 – Key technology ingredients

Functional components	Technology ingredients
Connectivity	Ethernet, IEEE 802.11 (including Wi-Fi Direct), MoCA, HD-PLC, HomePlug-AV, and HPNA
Networking	IPv4 suite, IPv6 suite
Device discovery and control	UPnP device architecture
Media management and control	UPnP AV, EnergyManagement, DeviceManagement
Media formats	Required and optional format profiles
Media transport	HTTP (mandatory), HTTP adaptive delivery (DASH) and RTP
Remote User Interfaces	HTML5, RVU
Device profiles	CVP-2

The protocols defined in this standard are based on the DLNA interoperability guidelines version 4.0. Device implementations advertise adherence to the protocols selecting value 4.0 in the fields and flags designed to expose the DLNA protocol version.

The interoperability guidelines are intended for the following audiences:

- marketing professionals who specify requirements for home networked media products;
- developers who design and build home networked media products;
- quality assurance personnel who test and validate home networked media products.

IECNORM.COM : Click to view the full PDF of IEC 62481-1-1:2017

DIGITAL LIVING NETWORK ALLIANCE (DLNA) HOME NETWORKED DEVICE INTEROPERABILITY GUIDELINES –

Part 1-1: Architecture and protocols – Core architecture and protocols

1 Scope

This part of IEC 62481-1, the DLNA guidelines series, specifies the core architecture and protocols of DLNA implementations.

The interoperability guidelines consist of five parts covering Architecture and Protocols, Media Formats, Link Protection, DRM Interoperability Systems and Device Profiles. This part of the DLNA guidelines provides vendors with the information needed to build interoperable networked platforms and devices for the digital home. The necessary standards and technologies are now available to enable products to be built for networked entertainment-centric usages. However, standards and technologies need to be clarified and options limited to ensure interoperability. The five parts of the DLNA Home Networked Device interoperability guidelines fulfill that role.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60169-24, *Radio-frequency connectors – Part 24: Radio-frequency coaxial connectors with screw coupling, typically for use in 75 ohm cable distribution systems (Type F)*

IEC 62481-2:2017, *Digital living network alliance (DLNA) guidelines – Part 2: Media Format Profiles*

IEC 62481-3:2017, *Digital living network alliance (DLNA) guidelines – Part 3: Link protection*

IEC 62481-8:2017, *Digital living network alliance (DLNA) guidelines – Part 8: Diagnostics*

IEC 62481-10:2017, *Digital living network alliance (DLNA) guidelines – Part 10: Low Power Model*

ISO/IEC 13818-1:2000, *Information technology – Generic coding of moving pictures and associated audio information: Systems*

ISO/IEC 13818-2, *Information technology – Generic coding of moving pictures and associated audio (MPEG): Video*

ISO/IEC 13818-9, *Information technology – Generic coding of moving pictures and associated audio information – Part 9: Extension for real time interface for systems decoders, International Standards Organization*

ISO/IEC 29341-1:2011, *Information technology – UPnP Device Architecture – Part 1-1: UPnP Device Architecture*

ISO/IEC 29341-1-2:2016, *Information technology – UPnP Device Architecture – Part 1-2: UPnP Device Architecture Version 2.0*

ISO/IEC 29341-3-2, *Information technology – UPnP Device Architecture – Part 3-2: Audio Video Device Control Protocol – Media Renderer Device*¹

ISO/IEC 29341-20-3, *Information technology – UPnP Device Architecture – Part 20-3: Audio Video Device Control Protocol – Level 4 – Media Server Device*²

ISO/IEC 29341-20-10:2011, *Information technology – UPnP Device Architecture – Part 20-10: Audio Video Device Control Protocol – Level 4 – Audio Video Transport Service*²

ISO/IEC 29341-14-11, *Information technology – UPnP Device Architecture – Part 14-11: Audio Video Device Control Protocol – Level 3 – Connection Manager Service*²

ISO/IEC 29341-20-12:2016, *Information technology – UPnP Device Architecture – Part 20-12: Audio Video Device Control Protocol – Level 4 – Content Directory Service*²

ISO/IEC 29341-3-13, *Information technology – UPnP Device Architecture – Part 3-13: Audio Video Device Control Protocol – Rendering Control Service*¹

ISO/IEC 29341-4-2, *Information technology – UPnP Device Architecture – Part 4-2: Audio Video Device Control Protocol – Level 2 – Media Renderer Device*³

ISO/IEC 29341-4-3, *Information technology – UPnP Device Architecture – Part 4-3: Audio Video Device Control Protocol – Level 2 – Media Server Device*⁴

ISO/IEC 29341-4-4, *Information technology – UPnP Device Architecture – Part 4-4: Audio Video Device Control Protocol – Level 2 – Audio Video Data Structures*³

ISO/IEC 29341-4-10, *Information technology – UPnP Device Architecture – Part 4-10: Audio Video Device Control Protocol – Level 2 – Audio Video Transport Service*³

ISO/IEC 29341-4-11, *Information technology – UPnP Device Architecture – Part 4-11: Audio Video Device Control Protocol – Level 2 – Connection Manager Service*³

ISO/IEC 29341-4-12:2008, *Information technology – UPnP Device Architecture – Part 4-12: Audio Video Device Control Protocol – Level 2 – Content Directory Service*⁴

ISO/IEC 29341-4-13, *Information technology – UPnP Device Architecture – Part 4-13: Audio Video Device Control Protocol – Level 2 – Rendering Control Service*³

ISO/IEC 29341-4-14:2011, *Information technology – UPnP Device Architecture – Part 4-14: Audio Video Device Control Protocol – Level 2 – Scheduled Recording Service*³

ISO/IEC 29341-14-3, *Information technology – UPnP Device Architecture – Part 14-3: Audio Video Device Control Protocol – Level 3 – Media Server Device*⁵

¹ In this document, it is also referred to as AVv1.

² In this document, it is also referred to as AVv4.

³ In this document, it is also referred to as AVv2, AVv3.

⁴ In this document, it is also referred to as AVv2.

ISO/IEC 29341-14-12:2011, *Information technology – UPnP Device Architecture – Part 14-12: Audio Video Device Control Protocol – Level 3 – Content Directory Service*⁵

ISO 3166, *Codes for the representation of names of countries and their subdivisions*

ISO 8601, *Data elements and interchange formats – Information interchange – Representation of dates and times*, International Standards Organization

ITU-T G.9954, *Recommendation, Home networking transceivers – Enhanced physical, media access, and link layer specifications*. ITU-T SG15/Q4 T-REC-G.9954-200701-I, Geneva, Switzerland.
<http://www.itu.int/rec/T-REC-G.9954-200701-I>

ETSI TS 102 822-3, *Broadcast and On-line Services: Search, select, and rightful use of content on personal storage systems ("TV-Anytime"), Part 3: Metadata*

ETSI TS 102 822-4, *Broadcast and On-line Services: Search, select, and rightful use of content on personal storage systems ("TV-Anytime"); Part 4: Content referencing*

ETSI EN 300 468, *Specification for Service Information (SI) in DVB systems, Digital Video Broadcasting (DVB)*

IEEE 802.1D:2004, *Annex G, IEEE Standard for Information technology – Telecommunications and information exchange between systems – IEEE standard for local and metropolitan area networks – Common specifications – Media access control (MAC) Bridges*.
<http://standards.ieee.org/getieee802/index.html>

IEEE 802.1Q:2003, *IEEE Standard for Information Technology – Telecommunications and information exchange between systems – IEEE standard for local and metropolitan area networks – Media Access Control (MAC) Bridges and Virtual Bridged Local Area Networks--Corrigendum 2: Technical and editorial corrections*.
<http://standards.ieee.org/getieee802/index.html>

IEEE 802.3:2002, *IEEE Standard for Ethernet – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specification*.
<http://standards.ieee.org/getieee802/index.html>

IEEE 802.11, *System Interoperability Wi-Fi CERTIFIED™⁶ Test Plan Version 2.0.36, Wi-Fi CERTIFIED™ ac Interoperability Test Plan v1.0.5* Wi-Fi Alliance
http://www.wi-fi.org/testing_information.php

IEEE 1901, *Standard for Broadband Over Power Line Networks: Medium Access Control and Physical Layer Specifications*
<http://www.IEEE.org>

IETF RFC 768, *User Datagram Protocol*, J. Postel.
<http://www.ietf.org/rfc/rfc0768.txt>

⁵ In this document, also referred to as AVv3.

⁶ Wi-Fi CERTIFIED™ is an example of a suitable product available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named.

IETF RFC 791, *Internet Protocol*, J. Postel.
<http://www.ietf.org/rfc/rfc0791.txt>

IETF RFC 792, *Internet Control Message Protocol*, J. Postel.
<http://www.ietf.org/rfc/rfc0792.txt>

IETF RFC 793, *Transmission Control Protocol*, J. Postel.
<http://www.ietf.org/rfc/rfc0793.txt>

IETF RFC 826, *An Ethernet Address Resolution Protocol – or – Converting Network Protocol Addresses to 48.bit Ethernet Addresses for Transmission on Ethernet Hardware*, David C. Plummer.
<http://www.ietf.org/rfc/rfc0826.txt>

IETF RFC 1122, *Requirements for Internet Hosts – Communications Layers*, R. Braden.
<http://www.ietf.org/rfc/rfc1122.txt>

IETF RFC 1123:1989, *Requirements for Internet Hosts – applications and support*.
<http://www.ietf.org/rfc/rfc1123.txt>

IETF RFC 1191, *Path MTU Discovery*, J. Mogul, DECWRL, S. Deering, Stanford University.
<http://www.ietf.org/rfc/rfc1191.txt>

IETF RFC 1305, *Network Time Protocol (Version 3), Specification, Implementation and Analysis*, David L. Mills, University of Delaware.
<http://www.ietf.org/rfc/rfc1305.txt>

IETF RFC 1738, *Uniform Resource Locators (URL)*, T. Berners-Lee, CERN, L. Masinter, Xerox Corporation, M. McCahill, University of Minnesota.
<http://www.ietf.org/rfc/rfc1738.txt>

IETF RFC 1812, *Requirements for IP version 4 Routers*, F. Baker.
<http://www.ietf.org/rfc/rfc1812.txt>

IETF RFC 1945, *Hypertext Transfer Protocol – HTTP/1.0*, T. Berners-Lee, MIT/LCS, R. Fielding, UC Irvine, H. Frystyk.
<http://www.ietf.org/rfc/rfc1945.txt>

IETF RFC 2045, *Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies*, N. Freed, N. Borenstein, November 1996
<http://www.ietf.org/rfc/rfc2045.txt>

IETF RFC 2119, *Key words for use in RFCs to Indicate Requirement Levels*, S. Bradner.
<http://www.ietf.org/rfc/rfc2119.txt>

IETF RFC 2131, *Dynamic Host Configuration Protocol*, R. Droms.
<http://www.ietf.org/rfc/rfc2131.txt>

IETF RFC 2145, *Use and Interpretation of HTTP Version Numbers*, J. C. Mogul, DEC, R. Fielding, UC Irvine, J. Gettys, DEC, H. Frystyk, MIT/LCS.
<http://www.ietf.org/rfc/rfc2145.txt>

IETF RFC 2181, *Clarifications to the DNS Specifications*.
<http://www.ietf.org/rfc/rfc2181.txt>

IETF RFC 2234, *Augmented BNF for Syntax Specifications: ABNF*, Ed D. Crocker, Internet Mail Consortium, P. Overell, Demon Internet Ltd.
<http://www.ietf.org/rfc/rfc2234.txt>

IETF RFC 2250, *RTP Payload Format for MPEG1/MPEG2 Video*, D. Hoffman, G. Fernando, Sun Microsystems, Inc., V. Goyal, Precept Software, Inc. M. Civanlar, AT&T Labs – Research.
<http://www.ietf.org/rfc/rfc2250.txt>

IETF RFC 2279, *UTF-8, a transformation format of ISO 10646*, F. Yergeau, Alis Technologies.
<http://www.ietf.org/rfc/rfc2279.txt>

IETF RFC 2326:1998, *Real Time Streaming Protocol (RTSP)*, H. Schulzrinne, Columbia U., A. Rao, Netscape, R. Lanphier, RealNetworks.
<http://www.ietf.org/rfc/rfc2326.txt>

IETF RFC 2327:1998, *SDP: Session Description Protocol*, M. Handley, V. Jacobson, ISI/LBNL.
<http://www.ietf.org/rfc/rfc0791.txt>

IETF RFC 2396, *Uniform Resource Identifiers (URI): Generic Syntax*, T. Berners-Lee, MIT/LCS, R. Fielding, U.C. Irvine, L. Masinter, Xerox Corporation.
<http://www.ietf.org/rfc/rfc2396.txt>

IETF RFC 2429, *RTP Payload Format for the 1988 Version of ITU-T Rec. H.263 Video (H.263+)*.
<http://www.ietf.org/rfc/rfc2429.txt>

IETF RFC 2474, *Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers*, K. Nichols, Cisco Systems, S. Blake, Torrent Networking Technologies, F. Baker, Cisco Systems, D.Black, EMC Corporation.
<http://www.ietf.org/rfc/rfc2474.txt>

IETF RFC 2616:1999, *Hypertext Transfer Protocol – HTTP/1.1*, R. Fielding, UC Irvine, J. Gettys, Compaq/W3C, J. Mogul, Compaq, H. Frystyk, W3C/MIT, L. Masinter, Xerox, P. Leach, Microsoft, T. Berners-Lee.
<http://www.ietf.org/rfc/rfc2616.txt>

IETF RFC 2766, *Network Address Translation – Protocol Translation (NAT-PT)*, G. Tsirtsis, P. Srisuresh.
<http://www.ietf.org/rfc/rfc2766.txt>

IETF RFC 2822:2001, *Internet Message Format*, P. Resnick, QUALCOMM Incorporated.
<http://www.ietf.org/rfc/rfc2822.txt>

IETF RFC 2929, *Domain Name System (DNS) IANA Considerations*, D. Eastlake, E. Brunner-Williams, B. Manning.
<http://www.ietf.org/rfc/rfc2929.txt>

IETF RFC 3066, *Tags for the Identification of Languages*.
<http://www.ietf.org/rfc/rfc3066.txt>

IETF RFC 3261, *SIP: Session Initiation Protocol*, J. Rosenberg, dynamicsoft, H. Schulzrinne, Columbia U., G. Camarillo, Ericsson, A. Johnston, Worldcom, J. Peterson, Neustar, R. Sparks, dynamicsoft, M. Handley, ICIR, E. Schooler, AT&T.
<http://www.ietf.org/rfc/rfc3261.txt>

IETF RFC 3267:2002, *Real-Time Transport Protocol (RTP) Payload Format and File Storage Format for the Adaptive Multi-Rate (AMR) and Adaptive Multi-Rate Wideband (AMR-WB) Audio*

Codecs, J. Sjöberg, M. Westerlund, Ericsson, A. Lakaniemi, Nokia, Q. Xie, Motorola.
<http://www.ietf.org/rfc/rfc3267.txt>

IETF RFC 3550:2003, *RTP: A Transport Protocol for Real-Time Applications*, H. Schulzrinne, Columbia University, S. Casner, Packet Design, R. Frederick, Blue Coat Systems Inc., V. Jacobson, Packet Design.
<http://www.ietf.org/rfc/rfc3550.txt>

IETF RFC 3551, *RTP Profile for Audio and Video Conferences with Minimal Control*, H. Schulzrinne, Columbia University, S. Casner, Packet Design.
<http://www.ietf.org/rfc/rfc3551.txt>

IETF RFC 3555, *MIME Type Registration of RTP Payload Formats*, S. Casner, Packet Design, P. Hoschka, W3C/INRIA/MIT.
<http://www.ietf.org/rfc/rfc3555.txt>

IETF RFC 3556, *Session Description Protocol (SDP) Bandwidth Modifiers for RTP Control Protocol (RTCP) Bandwidth*, S. Casner, Packet Design.
<http://www.ietf.org/rfc/rfc3556.txt>

IETF RFC 3640:2003, *RTP Payload Format for Transport of MPEG-4 Elementary Streams*, J. van der Meer, Philips Electronics, D. Mackie, Apple Computer, V. Swaminathan, Sun Microsystems Inc., D. Singer, Apple Computer, P. Gentric, Philips Electronics.
<http://www.ietf.org/rfc/rfc3640.txt>

IETF RFC 3927:2005, *Dynamic Configuration of IPv4 Link-Local addresses*, Stuart Cheshire, Apple Computer, B. Aboba, Microsoft Corporation, E. Guttman, Sun Microsystems.
<http://www.ietf.org/rfc/rfc3927.txt>

IETF RFC 3984, *RTP Payload Format for H.264 Video*, S. Wenger, M. M. Hannuksela, T. Stockhammer, M. Westerlund, D. Singer.
<http://www.ietf.org/rfc/rfc3984.txt>

IETF RFC 3986:2005, *Uniform Resource Identifier (URI): General Syntax*.
<http://www.ietf.org/rfc/rfc3986.txt>

IETF RFC 4184, *RTP Payload Format for AC-3 Audio*, B. Link T. Hager, Dolby Laboratories, J. Flanks, Microsoft.
<http://www.ietf.org/rfc/rfc4184.txt>

IETF RFC 4343, *Domain Name System (DNS) Case Insensitivity Clarification*.
<http://www.ietf.org/rfc/rfc4343.txt>

IETF RFC 4352:2006, *RTP Payload Format for the Extended Adaptive Multi-Rate Wideband (AMR-WB+) Audio Codec*, Johan Sjöberg, Magnus Westerlund, Ericsson, Ari Lakaniemi, Stephan Wenger, Nokia.
<http://www.ietf.org/rfc/rfc4352.txt>

IETF RFC 4585:2006, *Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-based Feedback (RTP/AVPF)*, Joerg Ott, Uni Bremen TZI, Stephan Wenger, TU Berlin, Noriyuki Sato, Oki, Carsten Burmeister, Matsushita, Joe Rey, Matsushita.
<http://www.ietf.org/rfc/rfc4585.txt>

IETF RFC 4588:2006, *RTP Retransmission Payload Format*, J. Rey, Panasonic, D. Leon, Nokia, A. Miyazaki, Panasonic, V. Varsa, Nokia, R. Hakenberg, Panasonic.
<http://www.ietf.org/rfc/rfc4588.txt>

IETF RFC 4646, *Tags for the Identification of Languages*.

<http://www.ietf.org/rfc/rfc4646.txt>

IETF RFC 5452, *Measures for Making DNS More Resilient against Forged Answers*.

<http://www.ietf.org/rfc/rfc5452.txt>

IETF RFC 5952, *A Recommendation for IPv6 Address Text Representation*.

<http://www.ietf.org/rfc/rfc5952.txt>

IETF RFC 5966, *DNS Transport over TCP – Implementation Requirements, Internet Engineering Task Force (IETF)*.

<http://www.ietf.org/rfc/rfc5966.txt>

ANSI/CEA-766-C, *U.S. and Canadian Rating Region Tables (RRT) and Content Advisory Descriptors for Transport of Content Advisory Information Using ATSC Programme and System Information Protocol (PSIP)*

ANSI/CEA-2033 A, *Specification for Electronic Programme Guide Data Interchange*. ANSI/CEA

ANSI/ICEA S-90-661, *Category 3, 5, & 5e Individually Unshielded Twisted Pair Indoor Cable for Use In General Purpose and LAN Communication Wiring Systems*, Insulated Cable Engineers Association.

<http://www.icea.net/>

ANSI/SCTE 128, *AVC Video Systems and Transport Constraints for Cable Television*

http://www.scte.org/documents/pdf/Standards/ANSI_SCTE%20128%202010-a.pdf

ANSI/SCTE 187-1, *Stereoscopic 3D Formatting and Coding for Cable*

http://www.scte.org/documents/pdf/Standards/ANSI_SCTE%20187-1%202012.pdf

AHRA, U.S. Audio Home Recording Act of 1992, United States Public Law 102-563, Subchapter D, Section 1008.

<http://thomas.loc.gov/cgi-bin/query/z?c102:S.1623.ENR>:

ARIB TR B-14, *Operational guidelines for Digital Terrestrial Television Broadcasting*

ARIB TR B-15, *Operational guidelines for Digital Satellite Broadcasting*

ASF, *Advanced System Format (ASF) Specification*, Microsoft Corporation.

<http://www.microsoft.com/windows/windowsmedia/format/asfspec.aspx>

ATSC Standard A/52B, *Digital Audio Compression (AC-3) Rev B, Advanced Television Systems Committee*.

http://www.atsc.org/standards/a_52b.pdf

CEA-708, *Digital Television (DTV) Closed Captioning: 3D Extensions*.

<http://www.ce.org/Standards/Standard-Listings/R4-3-Television-Data-Systems-Subcommittee/CEA-708-1.aspx>

HD-PLC Connectivity Verification, *Test Guide (111001)*

HDMI, *High-Definition Multimedia Interface, Specification*, HDMI LLC,

<http://www.hdmi.org/manufacture/specification.aspx>

HomePlug AV Specification, *HomePlug Alliance*

<http://www.homeplug.org/>

HomePlug AV Compliance, *HomePlug Alliance*
<http://www.homeplug.org/>

HomePlug AV Interoperability, *HomePlug Alliance*
<http://www.homeplug.org/>

MoCA MAC/PHY Specification, *Multimedia over Coax Alliance*
<http://www.mocalliance.org/>

MoCA Certification Test Plan, *Multimedia over Coax Alliance*
<http://www.mocalliance.org/>

OC-SP-CEP3.0-I04, *OpenCable™ Specifications Content Encoding Profiles 3.0 Specification*,
Cable Television Laboratories, Inc.
<http://www.cablelabs.com/specifications/OC-SP-CEP3.0-I04-121210.pdf>

RTP Payload format, *RTP Payload Format for Windows Media Audio (WMA) and Video (WMV)*,
Microsoft Corporation.
http://download.microsoft.com/download/5/5/a/55a7b886-b742-4613-8ea8-d8b8b5c27bbc/RTPPayloadFormat_for_WMAandWMV_v1.doc

Universal Unique Identifier, *DCE 1.1 Appendix for Universal Unique Identifiers*, *The Open Group*.
<http://www.opengroup.org/onlinepubs/9629399/apdx.htm>

Wi-Fi IEEE 802.11, with WPA2™, WPA™, and WEP⁷ System Interoperability Test Plan with
ASD Test Engine for IEEE 802.11a, b, and g Devices, *Wi-Fi Alliance*.
http://www.wi-fi.org/testing_information.php

Wi-Fi Simple Configuration:2011, *Wi-Fi Protected Test Plan*, *Wi-Fi Alliance*
http://www.wi-fi.org/testing_information.php

Wi-Fi Direct System Interoperability, *Test Plan*, *Wi-Fi Alliance*
http://www.wi-fi.org/testing_information.php

WMM Specification, *Wi-Fi WMM (Wireless Multimedia) Specification*, *Wi-Fi Alliance*.
<http://www.wi-fi.org>

WMM Test Plan, *Wi-Fi WMM System Interoperability Test Plan*, *Wi-Fi Alliance*.
http://www.wi-fi.org/testing_information.php

W3C Namespaces, *Namespaces in XML 1.0 (Third Edition)*
<http://www.w3.org/TR/xml-names/>

W3C XML:2004, *Extensible Markup Language (XML) 1.0 (Third Edition)*, W3C Recommendation.
<http://www.w3.org/TR/REC-xml>

W3C XQuery, *XQuery 1.0 and XPath 2.0 Functions and Operators (Second Edition)*
<http://www.w3.org/TR/2010/REC-xpath-functions-20101214/>

⁷ WEA2, WPA and WEP are examples of suitable products available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the products named.

XML Schema, for ContentDirectory:3 LastChange Event CDS:event-v1-2007
(cds-event-v3-20071128.xsd)
<http://www.upnp.org/schemas/specs/av/av3.asp>

3GPP TS 23.107, 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Quality of Service (QoS) concept and architecture.
http://www.3gpp.org/ftp/Specs/archive/23_series/23.107/23107-620.zip

3GPP TS 26.244, 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Transparent end to end packet switched streaming service (PSS); 3GPP file format (3GP).
http://www.3gpp.org/ftp/Specs/archive/26_series/26.244/26244-640.zip

3 Terms, definitions, symbols, abbreviated terms and conventions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 Terms and definitions

3.1.1

ADU

Application Data Unit

unit as used for the RTP Media Transport

Note 1 to entry: The definition of an ADU is different for each media stream. For audio media streams, an ADU is typically an audio frame. For video media streams, an ADU is typically a "slice" (e.g. an NAL unit) or in some cases a complete video picture. Also, as a special case when MPEG-2 TS encapsulation is used, each TS packet is an ADU

3.1.2

ACK

Acknowledge

term typically used to describe an action following a network packet being successfully received

3.1.3

AP

Access Point

specially configured Network Infrastructure Device on a wireless local area network (WLAN) that acts as a central transmitter and receiver of WLAN radio signals

Note 1 to entry: APs used in home networks are generally small, dedicated hardware devices featuring a built-in network adapter, antenna, and radio transmitter. These APs support Wi-Fi wireless communication standards

3.1.4

ARP

Address Resolution Protocol

protocol in the TCP/IP family that resolves an IPv4 address to a hardware address, such as an Ethernet address

3.1.5

ATSC

Advanced Television Systems Committee

one of the standard bodies for digital television broadcasting

3.1.6**AV****Audio with Video**

media content that contains both moving picture and sound

3.1.7**AVP****Audio/Visual Profile**

profile as used for the RTP Media Transport

3.1.8**AVPF****Extended Audio/Visual Profile for RTCP-based Feedback**

profile as used for the RTP Media Transport

3.1.9**AVT****AVTransport Service**

UPnP service that provides network-based control for common transport operations such as Play, Stop, Pause, Next, Previous, and Seek

Note 1 to entry: The AVTransport Service specification is a standard UPnP DCP.

3.1.10**Background Transfer**

media transfer mode where the target content binary is transferred at any rate up to the maximum achievable rate for the communication channel and the two communicating parties

Note 1 to entry: This mode is typically used for example when downloading or uploading content.

3.1.11**Basic Tuner**

minimal DLNA tuner implementation based on ISO/IEC 29341-20-12:2016.

3.1.12**BE****Best-Effort User Priority**

priority-based QoS level for Best-Effort User Priority

3.1.13**Bearer**

physical and link-level network transport, such as IEEE 802.11

3.1.14**BK****Background User Priority**

priority-based QoS level for Background User Priority

3.1.15**Byte-based Seek Operations**

identify the rendering endpoint request and the content source response that allows the former to obtain a segment of the content for playback, where such a segment is specified in units of bytes

3.1.16**Cacheable Content**

content binaries whose binary representations remain static over time and are considered cacheable content

Note 1 to entry: By default HTTP allows intermediate HTTP caches to store such items and respond to similar HTTP requests as a means to accelerate the interaction with the user.

Note 2 to entry: In these interoperability guidelines cacheable content includes (but it is not limited to)

- Image, Audio, AV content that exists as stored files,
- content resulting from transcoding or encoding operations when the output binaries can be preserved over time.

3.1.17

CDB

Coded Data Buffer

buffer space that is used to store compressed data before decoding, used for the RTP Media Transport

3.1.18

CDS

ContentDirectory Service

UPnP service that provides network-based discovery of content

Note 1 to entry: The ContentDirectory Service specification is a standard UPnP DCP.

3.1.19

CE

Consumer Electronics

class of devices used in the home, such as DVDs, DVRs, PVRs, PDAs, TVs, set-top boxes, cellular phones

3.1.20

Channel

one or more media streams that, together, constitute a unique entity for the purpose of announcement, selection, and rendering

Note 1 to entry: For example, for digital television sources, a Channel is equivalent to an ATSC "virtual channel", a DVB "service", or an MPEG-2 "Program". For digital radio sources, a Channel is equivalent to a single "station".

3.1.21

Channel Lineup Container

available tuner channels exposed in a CDS container for an Extended Tuner

Note 1 to entry: The content may or may not be streamed over the network.

3.1.22

Channelized Content

content that is available via a particular distribution channel such as a tuner and that is available on that channel according to a schedule

3.1.23

CMS

Connection Manager Service

UPnP service that provides information about the supported transport protocols and media formats of a UPnP device

Note 1 to entry: The ConnectionManager Service specification is a standard UPnP DCP.

3.1.24

CNAME

Canonical Name

name used for the RTP Media Transport

3.1.25

Content

aggregation of one or more works

3.1.26**Comply
Conform**

to be in accordance with referenced requirements; where the reference includes both mandatory and optional requirements, only the mandatory elements are considered necessary for compliance, optional requirements continue to be optional

Note 1 to entry: Any variation from these expectations shall be specifically noted.

Note 2 to entry: "Comply with" can be used interchangeably with "conform to" (includes variations of complies, complying, compliant, compliance, conforms, conforming, conformant, conformance)

3.1.27**Content Binary**

binary representation of content for the purpose of storage or transfer over communication links

3.1.28**Content Transformation**

transcoding, transrating, or scaling of a content binary

3.1.29**Content Source**

endpoint that places content onto the network for transfer to another endpoint

3.1.30**Content Receiver**

endpoint that consumes content received via a network transfer from another endpoint

3.1.31**Controller-byte Seek Operations**

identifies the Control Point request and the UPnP AV MediaRenderer response that allows the former to specify a segment of the content to be rendered by the latter, where such a segment is specified in units of bytes

3.1.32**Controller-time Seek Operations**

identifies the Control Point request and the UPnP AV MediaRenderer response that allows the former to specify a segment of the content to be rendered by the latter, where such a segment is specified in units of time

3.1.33**Converted Content**

content that is either transcoded, transcribed, remuxed, or transformed in any other way

3.1.34**CP****UPnP Control Point**

generic reference to any UPnP Control Point

3.1.35**CSRC****Contributing Source**

source used for the RTP Media Transport

3.1.36**CSS****Cascading Style Sheets**

format defined by W3C to add style information to documents

3.1.37

DA

Device Architecture 1.0

UPnP Device Architecture version 1.0 document

3.1.38

DCP

Device Control Protocol

specification that is standardized by the UPnP Forum. Related specifications produced by a UPnP working committee are often identified by the working committee name. For example, UPnP AV 1 DCP

3.1.39

DDC

Device Discovery and Control

subclause heading in the interoperability guidelines that defines the underlying interoperability architecture for the discovery and control devices

3.1.40

Decoder Friendly Point

point in the stream where the decoder can begin to process data without any other internal state information about the stream

Note 1 to entry: The decoder can begin processing at that point and create a valid output rendering.

3.1.41

Device Capability

set of Device Functions (at least 1) aggregated to support a system usage

Note 1 to entry: A Device Capability cannot stand alone, and shall be deployed in conjunction with an implementation of a valid DLNA Device Class. Since a Device Capability does not stand alone, it is not required to have components in all layers of the DLNA architecture. A Device Capability can have a one to one correspondence to a Device Function. A Device Capability is a certifiable entity only when it is implemented as an addition to at least one Device Class.

3.1.42

Device Category

group of Device Classes with the same environmental characteristics and sharing common system usages that are enabling home networking use case scenarios

Note 1 to entry: Examples of device categories used within this standard (IEC 62481-1-1) are HND (Home Network Device), and MHD (Mobile Handheld Device).

Note 2 to entry: While Device Classes are grouped within a Device Category, a single physical device can support Device Classes that fall into multiple Device Categories.

3.1.43

Device Class

set of Device Functions

Note 1 to entry: A Device Class specifies the features supported on a device regardless of its physical attributes.

Note 2 to entry: Examples used within this standard (IEC 62481-1-1) are DMS (Digital Media Server) and DMP (Digital Media Player).

Note 3 to entry: A single device can support multiple Device Classes. A DLNA device shall support at least one Device Class and can support one or more Device Capabilities.

Note 4 to entry: A Device Class is the certifiable entity in DLNA.

3.1.44

Device Function

non-decomposable operational property

EXAMPLE IP Connectivity

Note 1 to entry: Device Functions should be supported by existing standards.

3.1.45

Device Option

optional extensibility to existing DLNA architecture

Note 1 to entry: A Device Option can add optional extensibility to an existing Device Function or add new optional Device Function to the DLNA architecture

3.1.46

Device Type

device defined by its realization and its usage models

EXAMPLES DVD players, TVs, DVRs, Mobile Phones, Cameras, Picture Frames, etc.

Note 1 to entry: Device Types are primarily used for marketing descriptions, and they should not be used in guideline definitions.

DHCPv4

Dynamic Host Configuration Protocol for IPv4

protocol to automatically provide IPv4 addresses and other network configuration information to network nodes

3.1.47

DIDL

Digital Item Declaration Language

XML schema for representing the metadata of digital content

3.1.48

DIDL-Lite

Digital Item Declaration Language – Lite

XML schema used by the UPnP Forum for representing the metadata of digital content. The XML schema uses a subset of the DIDL schema with additional metadata properties defined by the UPnP Forum

3.1.49

DLNA

Digital Living Network Alliance

organization that created these guidelines

3.1.50

DLNA Recognized Rating Authorities

authorities referenced and recognized by DNLA

Note 1 to entry: DLNA recognizes certain rating authorities and their associated rating codes.

Note 2 to entry: These Rating Authorities and their codes are listed in Annex J.

3.1.51

DLNAQOS

DLNA defined QoS model used in this standard (IEC 62481-1-1)

3.1.52

DLNAQOS_UP

DLNA QoS User Priority

DLNA-defined QoS label used to correlate an underlying IEEE 802.1Q User Priority and WMM Access Category, HomePlug AV Channel Access Priority, or HD-PLC Priority to a DLNA Traffic Type(s)

3.1.53

DMC

Digital Media Controller

DLNA Device Class having home network environmental characteristics, with the role of finding content exposed by a DMS or M-DMS and matching it to the rendering capacities of a DMR and setting up the connections between the DMS and the DMR

3.1.54

DMP

Digital Media Player

DLNA Device Class having home network environmental characteristics, with the role of finding content exposed by a DMS or M-DMS and rendering the content locally

3.1.55

DMR

Digital Media Renderer

DLNA Device Class having home network environmental characteristics, with the role of rendering content it receives after being setup by another network entity

3.1.56

DMS

Digital Media Server

DLNA Device Class having home network environmental characteristics, with the role of exposing and distributing content throughout the home

3.1.57

DNS

Domain Name System

protocol that enables hierarchical names for Internet domains and addresses

Note 1 to entry: The protocol includes the means to translate between numerical IP addresses and text host names

3.1.58

DSCP

Differentiated Services (DiffServ) Code Point

QoS field, defined by the DiffServ discipline IETF RFC 2326:1998, found in the layer 3 header of IP packets

3.1.59

EPG Item

CDS item that describes a piece of content that usually does not reside on the local server

Note 1 to entry: It refers to a broadcast item that is available through a tuner, or it can be content accessible via a URL.

Note 2 to entry: In general there is a time associated with an EPG item that describes the broadcast time and duration of the content or the time period in which it is available for on demand retrieval via an URL. Items described by an EPG item can be recorded with the SRS service and can then actually reside on a local server.

3.1.60

ES

Elementary Stream

general term for a coded video, coded audio or other coded bitstream

3.1.61

Exposed

content that is listed by a UPnP AV ContentDirectory Service (CDS)

Note 1 to entry: Content does not necessarily exist at the time that it is exposed (for example, needs transcoding or conversion).

3.1.62**Extended Tuner**

DLNA tuner implementation based upon the TUNER Feature defined in ISO/IEC 29341-4-12:2008 and higher specifications

3.1.63**Full TS**

piece-wise constant rate MPEG-2 Transport Stream that is fully compliant with ISO/IEC 13818-1:2000, 2.4.2.2

Note 1 to entry: A Full TS is characterized by a consistent temporal relationship (or "even spacing") between any two adjacent TS Packets.

3.1.64**GOP****Group Of Pictures**

group of successive pictures within a coded video stream and the associated structure (GOP structure) that specifies the order in which intra- and inter-frames are arranged in MPEG

3.1.65**HD Capable Device**

DLNA Device Class that is certified for a DLNA AV Media Format Profile that has an HD video component

Note 1 to entry: For example, an AV Media Format Profile with a resolution greater than or equal to 1280 p × 720 p.

3.1.66**HDTV****High Definition Television**

higher quality display, with a vertical resolution display from 720p to 1080i and higher and an aspect ratio (the width to height ratio of the screen) of 16:9, for a viewing experience similar to watching a movie

3.1.67**HND****Home Network Device**

Device Category that groups together all the applicable DLNA Device Classes with home network environmental characteristics (requirements)

Note 1 to entry: Device Classes in this Device Category are: DMS, DMP, DMR and DMC

3.1.68**HTTP****Hyper Text Transfer Protocol**

protocol for transferring files across the Internet

Note 1 to entry: Requires an HTTP client program on one end, and an HTTP server program on the other end

3.1.69**ICMP****Internet Control Message Protocol**

protocol in the TCP/IP family that is used for out-of-band messages related to network operation

3.1.70**Ideal Network Conditions**

network state used only for testing and validation of guideline compliance

Note 1 to entry: The effective network capacity shall be substantially greater than the aggregate bandwidth of the content under test, and there are no additional devices competing for available network resources at the time of test.

3.1.71

IGD

Internet Gateway Device

multifunction Network Infrastructure Device that routes and/or bridges global internet with the local area network

3.1.72

Instance State Variable

state variable defined by AVTransport and RenderingControl services

Note 1 to entry: Instance State Variables are state variables associated with a virtual instance of a service. Both services use an evented state variable by the name of LastChange, to report a value change of an instance state variable.

3.1.73

Interactive Transfer

media transfer mode where the target content binary is transferred at the maximum achievable rate for the communication channel and the two communicating parties

Note 1 to entry: This mode is typically used when sending images for immediate display.

3.1.74

IPv4

Internet Protocol version 4

OSI network layer 3 protocol

3.1.75

IPv6

Internet Protocol Version 6

OSI network layer 3 protocol intended to replace IPv4

Note 1 to entry: In the DLNA architecture IPv4 and IPv6 are mandatory, with preference given to IPv4. They will run in a dual stack model.

3.1.76

JPEG

Joint Photographic Experts Group

coding standard for compression of still images (pictures)

3.1.77

LAN

Local Area Network

closely administered network segments such as within the home or office

3.1.78

Link-level Bearer

restricts the bearer concept to include only the physical layer and link-layers as described for the ISO's OSI model

3.1.79

Link Protection

protection of a content stream between two devices on a DLNA network from illegitimate observation or interception

3.1.80

LPCM

Linear Pulse Code Modulation

uncompressed audio encoding

3.1.81**M-DMC****Mobile Digital Media Controller**

DLNA Device Class having mobile handheld environmental characteristics, with the role of finding content exposed by a DMS or M-DMS and matching it to the rendering capacities of a DMR and setting up the connections between the DMS or M-DMS and the DMR

3.1.82**M-DMP****Mobile Digital Media Player**

DLNA Device Class having mobile handheld environmental characteristics, with the role of finding content exposed by DMS or M-DMS and rendering the content locally

3.1.83**M-DMS****Mobile Digital Media Server**

DLNA Device Class having mobile handheld environmental characteristics, with the role of exposing and distributing content throughout the home

3.1.84**Media Class**

type of media a Device Type or Device Class supports

Note 1 to entry: The Media Classes used in this standard are **Image**, **Audio** only, and Video with Audio (**AV**).

3.1.85**Media Collection File**

content binary whose purpose is to reference other content binaries usually for sequenced playback

Note 1 to entry: Media collection files are often used for audio or AV playlists or image slideshows.

3.1.86**Media Format**

format type for content of a Media Class that is exposed by a UPnP AV MediaServer contained in a device that acts as a DMS

Note 1 to entry: Examples for the Media Classes are: Image – JPEG; Audio – LPCM; AV – MPEG-2.

3.1.87**Media Stream**

single elementary stream or MPEG-2 TS or MPEG-2 PS multiplex

Note 1 to entry: This definition applies to Media Stream as used for the RTP Media Transport.

3.1.88**Media Transfer Mode**

type of transfer used to deliver content from a Content Source to a Content Receiver

Note 1 to entry: There are three types of DLNA media transfer modes: Streaming Transfer, Interactive Transfer, and Background Transfer.

3.1.89**MF****Media Formats**

collection of Media Format Profiles defined in IEC 62481-2:2017

3.1.90

MHD

Mobile Handheld Device

Device Category that groups together all the applicable DLNA Device Classes with mobile handheld environmental characteristics (requirements). Device Classes in this Device Category are: M-DMS, M-DMP and M-DMC.

3.1.91

MIME

Multipurpose Internet Mail Extension

standard system for identifying the type of data contained in a file. MIME is an Internet protocol that allows sending binary files across the Internet as attachments to e mail messages. This includes graphics, photos, sound, video files, and formatted text documents.

3.1.92

MM

Media Management

subclause heading in the interoperability guidelines

3.1.93

MPEG

Moving Picture Experts Group

organization for the development of standards related to audiovisual information

3.1.94

MRCP

MediaRenderer Control Point

UPnP control point that issues actions to an MRD

3.1.95

MRD

MediaRenderer Device (also known as MediaRenderer)

UPnP device that provides network-based control for the rendering of content

Note 1 to entry: Minimally, a MediaRenderer will have a RenderingControl Service and a ConnectionManager service. The MediaRenderer specification is a standard UPnP DCP

3.1.96

MSCP

MediaServer Control Point

UPnP AV control point that issues actions to an MSD

3.1.97

MSD

MediaServer Device

MediaServer

UPnP device that provides network-based discovery of content

Note 1 to entry: Minimally, a MediaServer will have a ConnectionManager Service and a ContentDirectory Service. The MediaServer specification is a standard UPnP DCP.

3.1.98

MT

Media Transport

subclause heading in the interoperability guidelines

3.1.99

Native Device

<server> device that creates a virtual server and adds functionality to an existing server in the network

Note 1 to entry: The existing server in the network is known as the Native Server.

Note 2 to entry: Either a Native Server or Native Renderer is known as a Native Device. These Native Devices are in contrast to a Virtual Server or Renderer (see 3.1.154 and 3.1.155).

3.1.100

Native Device

<renderer> device that creates a virtual renderer and adds functionality to an existing renderer in the network

Note 1 to entry: The existing renderer in the network is known as the Native Renderer.

Note 2 to entry: Either a Native Server or Native Renderer is known as a Native Device. These Native Devices are in contrast to a Virtual Server or Renderer (see 3.1.154 and 3.1.155).

3.1.101

NC

Networking and connectivity

subclause heading in the interoperability guidelines

3.1.102

Network De-Jitter Buffer

Buffer space that is used to store data for de-jittering and de-interleaving, including RTP header and payload

Note 1 to entry: This definition applies to Network De-Jitter Buffer as used for the RTP Media Transport.

3.1.103

NID

Network Infrastructure Device

devices that provide supporting functionality in the home network such as access points, bridges, Internet gateways, routers, and switches

Note 1 to entry: These devices facilitate a good user experience with DLNA devices but are only covered at this time in this document by informative recommendations in Annex A.

3.1.104

Non-Cacheable Content

content binaries whose binary representations are valid only for one particular transaction at a particular instant of time

Note 1 to entry: Intermediate HTTP caches need directives to prevent the default caching of such content. In the IEC 62481 series of standards, the non-cacheable content includes (but it is not limited to):

- live TV streams;
- content resulting from transcoding or encoding operations when the output binaries have been optimized for a particular transaction (e.g. encoding to match the channel conditions for a given transaction).

3.1.105

Non-Streamable Channel Object

non-streamable CDS objects (i.e. no <res> property value) which represent a single channel of a broadcast source that presents content in a “channelized” format

Note 1 to entry: Since these CDS items are not streamable, a <res> property value is not needed. But having a <res> property without a URI value can be useful by UPnP AV MediaServer control points in determining the DLNA Media Format Profile for the Non-Streamable Channel Object by examining the res@protocolInfo property's DLNA.ORG_PN value in the fourth field.

3.1.106

NTSC*

National Television Systems Committee

standard for broadcast and reception of analogue television signals

3.1.107

Open-end Recording

recording which the scheduled duration is not specified for

Note 1 to entry: The duration of an open-end recording is determined by the UPnP AV MediaServer.

3.1.108

OSI

Open Systems Interconnection

networking stack model (7 layers)

3.1.109

PAL*

Phase Alternating Line

standard for broadcast and reception of analogue television signals

3.1.110

Partial SPTS

partial MPEG-2 Transport Stream which is also a Single Programme Transport Stream (SPTS)

3.1.111

PCR

Programme Clock Reference

refer to MPEG-2 standard ISO/IEC 13818-1:2000

3.1.112

PNG

Portable Network Graphics

coding standard for compression of still images (pictures)

3.1.113

Post-decoder Buffer

buffer space used to store decompressed data before rendering

Note 1 to entry: This definition applies to Post-decoder Buffer as used for the RTP Media Transport.

3.1.114

Power Save Operation

support for intermediate power consumption states between zero (power OFF) to nominal power consumption during active use of a device

3.1.115

Pre-decoder Buffer

hypothetical reference decoder buffer that is used to contain a media (audio/video) stream after it has arrived from the network and before it is decoded into a renderable frame

Note 1 to entry: This definition applies to Pre-decoder Buffer as used for the RTP Media Transport.

3.1.116

Primary ProtocolInfo Set

first, second, and third fields of protocolInfo plus the additional DLNA.ORG_PN value that appears in the fourth field

Note 1 to entry: In other words, the primary set defines a transport method (first value), a mime type (third value), and a DLNA Media Format Profile.

3.1.117

PS

Programme Stream

usually in reference to an MPEG-2 AV stream format

3.1.118**QoS****Quality of Service**

service that provides guarantees on the ability of a network to deliver predictable results

3.1.119**RCS****Rendering Control Service**

UPnP service that provides network-based control for the adjustment of rendering attributes such as volume, brightness, contrast, and mute

Note 1 to entry: The RenderingControl Service specification is a standard UPnP DCP.

3.1.120**Receiver Buffer**

total buffer space used to store data received from the server before the decoding

Note 1 to entry: This definition applies to Receiver Buffer as used for the RTP Media Transport.

3.1.121**Receiving Endpoint**

defined specifically through guideline 11.4.4.5, which requires an RTP client and an RTSP client

3.1.122**Rendering Endpoint**

Content Receiver devices with the capability of rendering the content they receive

Note 1 to entry: These devices could play the content at the time of the transfer, right after the transfer has finished, or at a later time after the transfer has finished.

Note 2 to entry: For the purposes of this standard, devices in the following Device Classes constitute the only known Rendering Endpoints: DMP, DMR, M-DMP.

3.1.123**Remote UI**

user interface provided by an application on a server device, that can be rendered by one or more client devices

3.1.124**RTP****Real Time Protocol**

media transport that provides end-to-end network transport functions for transmitting real-time data, such as AV, and provides services such as payload type identification, sequence numbering, time-stamping, and delivery monitoring

3.1.125**RTP Media Transport**

mechanism for real-time media streams between DLNA device classes and capabilities

Note 1 to entry: This transport mechanism uses RTP, RTCP, RTSP, SDP protocols, and RTP payload formats with their associated media profiles.

3.1.126**RTP Session**

one or more RTP Streams that are transmitted to the same destination IP address and UDP port

Note 1 to entry: Typically, there is a one-to-one mapping between RTP Streams and RTP Sessions, but it is possible for multiple RTP Streams to use the same RTP Session (port multiplexing). Note that associated RTCP traffic is also part of that RTP Session although the packets are sent to the next higher UDP port number.

3.1.127

RTP Stream

Media Stream that is encapsulated in RTP

Note 1 to entry: All of the RTP packets have the same SSRC and are transmitted on the same RTP Session.

3.1.128

RTSP Session

complete RTSP "transaction", for example the viewing of a movie

Note 1 to entry: A session typically consists of a client creating one or more RTP Sessions (SETUP), starting the stream with PLAY or RECORD, and closing the RTSP Session with TEARDOWN. RTSP Sessions are identified using the RTSP "Session" header.

3.1.129

RUI

Remote User Interface

user interface provided by an application on a server device, that can be rendered by one or more client devices

3.1.130

Scaling

changing the visual extent of an image or video portion of an AV media stream

3.1.131

SCPD

Service Control Protocol Description

XML-encoded file describing a UPnP service

Note 1 to entry: This is also known as a service description file.

3.1.132

SEI

Supplemental Enhancement Information

message format carried in the 3D media content to inform decoders about any special attributes of the compressed video

3.1.133

Serving Endpoint

defined specifically through guideline 11.4.4.4, which includes the RTP server and RTSP server

3.1.134

SOAP

Simple Object Access Protocol

XML-based messaging protocol used to exchange service requests and responses over a network

3.1.135

SSDP

Simple Service Discovery Protocol

UPnP device discovery protocol

3.1.136

Streamable Channel Object

Non-Streamable Channel Object with one or more <res> properties containing valid URI values for an Extended Turner

Note 1 to entry: This enables content for a tuner channel to be streamed over the network.

3.1.137**Streaming Transfer**

Audio and AV streams in which the packets are transferred minimally at a rate sufficient for real-time rendering

Note 1 to entry: This definition does not imply that the receiving endpoint will always render content exchanged using Streaming Transfer (e.g. it might store the content).

3.1.138**System Usage**

device interaction model between Device Classes and/or Device Capabilities

Note 1 to entry: System usages are derived when enabling home networking use case scenarios.

3.1.139**TCP****Transmission Control Protocol**

protocol in the TCP/IP family used for the reliable exchange of data over a network

3.1.140**Test Conditions**

conditions that imply that all of the following are satisfied:

- there is only 1 Content Receiver and only 1 Content Source;
- there is only 1 active connection at any given time;
- both devices (Content Receiver and Content Source) are configured by vendors before testing begins to have sufficient resources to successfully complete the stated test requirements;
- devices interact with each other under Ideal Network Conditions

3.1.141**Thrashing**

situation occurring in a synchronization system that consists of a server and multiple clients

Note 1 to entry: Thrashing is a deadlocked system state where the clients are changing items on the server multiple times in the same way without user intervention. For example, in a system with a server (S) containing a single item (I) and two clients (A and B), if client A makes a change to I and that change causes client B to change I, thrashing can occur if A and B now continue to make the same changes that they had previously made to item I without user intervention or authorization. Because the change from A generates the automatic change from B which generates a repeat of the change from A, the system is deadlocked.

3.1.142**Time-based Seek Operations**

operations identifying the Rendering Endpoint request and the Content Source response that allows the former to obtain a segment of the content for playback, where such a segment is specified in units of time

3.1.143**Transcoding**

changing of the coding system used for a content binary

3.1.144**Transrating**

changing of the rate or compression parameters used within the coding system for a content binary

3.1.145**TS****Transport Stream**

usually in reference to an MPEG-2 AV stream format

3.1.146

TTS

Timestamped Transport Stream

Transport Stream which is composed of a timestamped TS packet

Note 1 to entry: The timestamped TS packet is a 192-byte packet consisting of a 188-byte ISO MPEG-2 TS packet plus a 4-byte timestamp in advance of the TS packet.

3.1.147

UDP

User Datagram Protocol

protocol in the TCP/IP family used for the unreliable exchange of data over a network

3.1.148

UP

User Priority

3-bit field of the QoS Control field in the WMM Specification and a Tag control information field in the VLAN tag header of IEEE 802.1Q:2003 that defines the relative priority of a packet

3.1.149

UHD Capable Device

DLNA Device Class that is certified for a DLNA AV Media Format Profile that has an UHD video component

Note 1 to entry: For example an AV Media Format Profile with a resolution greater than 1920 p × 1080 p.

3.1.150

UPnP

architecture for pervasive peer-to-peer network connectivity of devices of all form factors

Note 1 to entry: It is designed to bring easy-to-use, flexible, standards-based connectivity to ad-hoc or unmanaged networks whether in the home, in a small business, public spaces, or attached to the Internet. It is a distributed, open networking architecture that leverages TCP/IP and Web technologies to enable seamless proximity networking in addition to control and data transfer among networked devices in the home, office, and public spaces.

3.1.151

URI

Uniform Resource Identifier

W3C's codification of the name and address syntax of present and future objects on the Internet

Note 1 to entry: In its most basic form, a URI consists of a scheme name (such as file, http, ftp, news, mailto, gopher) followed by a colon, followed by a path whose nature is determined by the scheme that precedes it. URI is the umbrella term for URNs, URLs, and all other Uniform Resource Identifiers.

3.1.152

VI

Video User Priority

priority-based QoS level for Video User Priority

3.1.153

Virtual Instance

mechanism by which a UPnP device can have multiple instances of the same UPnP service

Note 1 to entry: Control points that interact with the AVTransport and RenderingControl services shall interact with a virtual instance of the service. Each virtual instance is identified by a non-negative InstanceID value.

3.1.154

Virtual Renderer

DMR that accepts content and sends it to another DMR within the network for rendering

Note 1 to entry: A Virtual Renderer accepts a wider range of content types, formats, rates, or sizes than the Native Device.

3.1.155

Virtual Server

DMS or M-DMS which exposes content existing on another DMS or M-DMS, possibly containing additional media types, through content transformation

3.1.156

Virtual Tuner Container

CDS container for an Extended Tuner that contains only CDS items (Virtual Tuner Objects) that allow channels to be streamed using a single connection (i.e. switch the content stream from one channel to another over the same URI connection)

3.1.157

Virtual Tuner Object

CDS item in an Extended Tuner that allow channels to be streamed using a single connection (i.e. switch the content stream from one channel to another over the same URI connection)

3.1.158

VLAN Tag

field on a layer-2 packet header defined by IEEE 802.1Q:2003

3.1.159

VO

Voice User Priority

priority-based QoS level for Voice User Priority

3.1.160

VSI

Vendor-Specific Infoframe

message sent from the HDMI source to inform the display device that the video signal is 3D and the type of 3D delivery format

3.1.161

WAN

Wide Area Network

network outside the home or office, typically in reference to the entire global Internet

3.1.162

WMM

Wi-fi MultiMedia

describes the QoS guidelines and associated test plans published by the Wi-Fi alliance for IEEE 802.11 wireless networks

3.1.163

XML

eXtensible Markup Language

text-based declarative language used to describe structured data for information exchange

3.2 Symbols

3.2.1

ΔT_{PCR}

as used for the RTP Media Transport, this value is the difference in time, measured in 90 kHz clock units, between successive PCR values in the TS stream. It is represented mathematically as:

$$\Delta T_{PCR} = PCR_{n+1} - PCR_n$$

This value is used in timestamp equations in 11.4.4.77.

3.3 Abbreviated terms

3DFC	3D Frame Compatible
AFD	Active Format Descriptor
DVB	Digital Video Broadcasting
DVD	digital versatile disc
DVR	digital video recorder
HD	high definition
IP	Internet protocol
OSD	on-screen display
PC	personal computer
PVR	personal video recorder
RTCP	real-time control protocol
RTSP	real-time streaming protocol
S3D	stereoscopic 3D
SAR	sample aspect ratio
SDES	session description item
SDP	session description protocol
SPTS	single programme transport stream
SSRC	synchronization source
URL	uniform resource locator
UTF	unicode transformation format
VLAN	virtual local area network

3.4 Conventions

In this document, a number of terms, conditions, mechanisms, sequences, parameters, events, states, or similar terms are printed with the first letter of each word in uppercase and the rest in lowercase (e.g., Move). Any lowercase uses of these words have the normal technical English meaning.

4 DLNA home network architecture

4.1 General

To achieve interoperability between connected digital media devices in the home, a common set of building blocks based on existing standards is needed as a basis to develop the DLNA Home Networked Device interoperability guidelines. Table 1 shows the specific functional components and technology ingredients that are covered in the interoperability guidelines. Figure 1 illustrates these functional components within the networking architecture of the interoperability guidelines. The interoperability guidelines define usage of these functional components to ensure interoperability among Device Classes defined in Clause 5. A brief overview of each functional component follows in the subsequent subclauses.

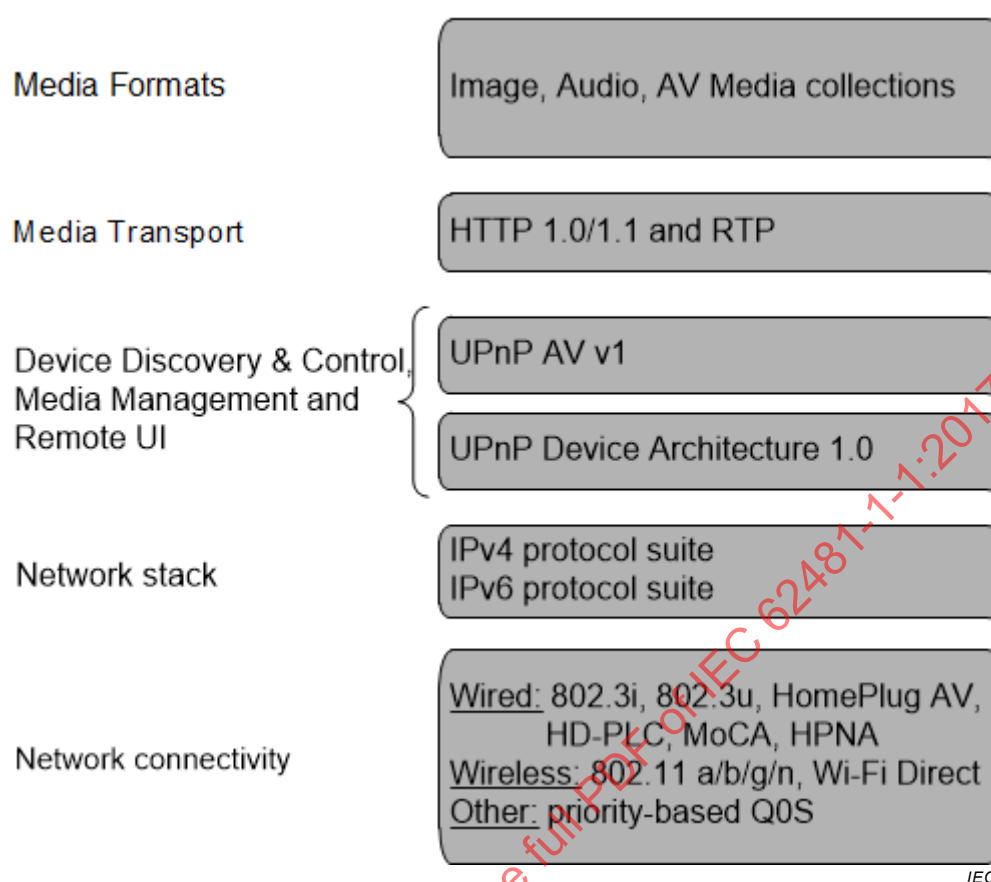


Figure 1 – DLNA functional components

4.2 Networking and connectivity

4.2.1 General

The Internet Protocol suites (IPv4 and IPv6) are the foundation for networking and connectivity for DLNA devices in the digital home. The general term IP refers to all versions of the Internet Protocol. DLNA requires support for IPv4 to ensure compatibility with a wide range of IPv4-only devices and defines an IPv6 device function to allow DLNA devices to interoperate with new IPv6-only devices going forward.

IP provides the underlying network communications for applications on the Internet. Based on industry-standard specifications from the IETF, IP is implemented and supported in a wide range of devices. IP has several advantages for use by DLNA devices:

- IP has demonstrated that it allows applications to run over different network topologies transparently;
- IP allows connecting every device in the home to the Internet;
- IP connectivity solutions are widely used and are cost effective. The most common ones are Ethernet (IEEE 802.3i and IEEE 802.3u) and wireless technologies (IEEE 802.11a, IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) for devices in the home networking environment. In the mobile handheld environment, Wi-Fi is the prevalent wireless technology in use.

Subclause 8 specifies the detailed guidelines to enable interoperability between DLNA devices in the digital home. In addition, the home environment requires supporting network infrastructure, such as access points, bridges, Internet gateways, routers, and switches. These non-normative devices are referred to in this standard as Network Infrastructure Devices (NID). Annex A

provides informative recommendations for Network Infrastructure Devices to facilitate a good user experience and interoperability with DLNA devices.

4.2.2 Network quality of service

Multimedia applications on IP networks benefit from quality of service (QoS) functionality to optimize the way shared network resources are allocated among different applications. Without QoS, all applications running on different devices have an equal opportunity to transmit data frames. Multimedia applications such as video streaming and music streaming are sensitive to excessive latency variations and throughput reductions. With prioritized QoS, application label (tag) packets indicate the User Priority (UP). UP dictates how the packets are allowed to access network resources.

The DLNA QoS model is intended to allow DLNA applications that wish to take advantage of User Priority to have common usage rules for tagging. Devices that do not wish to use QoS shall be tolerant of tagging. In addition to interoperability, the DLNA QoS model promotes fair and consistent usage of priorities and balanced performance across all DLNA traffic types, thus enhancing the overall user experience.

4.3 Device discovery and control

Device discovery and control enables a device on the home network to discover the presence and capabilities of other devices on the network and collaborate with these devices in a uniform and consistent manner. The UPnP Device Architecture, version 1.0 (ISO/IEC 29341-1:2011), addresses all of these needs and simplifies device networking in the home. For this reason, UPnP Device Architecture is the device discovery and control solution for DLNA devices. Clause 9 specifies the detailed guidelines to enable interoperability between DLNA devices in the digital home.

4.4 Media management

Media management enables devices and applications to identify, manage, and distribute media content across the home network devices. UPnP Audio/Video (AV) technology addresses all of these needs for the home network and is the media management solution for DLNA devices.

The UPnP AV architecture defines the interaction model between UPnP AV devices and associated control point applications. UPnP AV devices can instantiate themselves in a variety of form factors, including (but not limited to) TVs, VCRs, DVD players, Set-Top Boxes, stereo systems, still-image cameras, portable media players, cell phones, and PCs. The UPnP AV architecture allows devices to support entertainment content in any format using any media transfer protocol. The UPnP AV specification defines two types of UPnP devices on the home network: UPnP AV MediaServers and UPnP AV MediaRenderers. The specifications also define four services hosted by UPnP AV MediaServers and UPnP AV MediaRenderers, as stated below. The existence of UPnP control points that interact with UPnP AV devices and services is implied.

- a) Content Directory Service: Exposes the available content.
- b) Connection Manager Service: Determines how the content can be transferred from the UPnP AV MediaServer to the UPnP AV MediaRenderer devices.
- c) AV Transport Service: Controls the flow of the content.
- d) Rendering Control Service: Controls how the content is played.

See Clause 5 for further information on how UPnP technology components are mapped into DLNA Device Classes.

Subclause 9.2.37 specifies the detailed guidelines to enable interoperability between DLNA devices in the digital home.

4.5 Media formats

Media formats describe how content is encoded and formatted for transport and how it is rendering on the home network. The DLNA media format model is intended to achieve a baseline for network interoperability while encouraging continued innovation in media codec technology. For each Device Category, the DLNA media format model defines a set of mandatory and optional Media Format Profiles for each of the three classes of media: imaging, audio, and AV. A Media Format Profile is a set of attributes, parameters, and system and compression level details sufficient to describe the media format of a content binary to enable interoperability between DLNA devices in each Device Category. In order to support interoperability between devices of different Device Categories, the Media Interoperability Unit performs basic translation between the required Media Format Profiles of different Device Categories. In addition, the DLNA media format model specifies rules about conversion between optional and mandatory formats to ensure that content can be enjoyed on all devices. The interoperability guidelines Media Formats, IEC 62481-2:2017, specify the detailed guidelines to enable interoperability between DLNA devices in the digital home.

4.6 Media transport

Media transport defines how content travels across the home network. DLNA devices that source or receive media content across the home network shall support HTTP as the baseline transport mechanism for the transfer of content. In addition, the RTP transport can optionally be used as a media transport; but the mandatory requirements for HTTP shall always be supported. Subclause 11 specifies the detailed guidelines to enable interoperability between DLNA devices in the digital home.

4.7 Remote UI

Remote UI defines how UI content is described, formatted, and transported from one device to another over the network. This also includes mechanisms for sending events and UI updates between different devices.

5 DLNA device model

5.1 Overview

These guidelines address the requirements of devices with differing environmental characteristics, such as home network and mobile handheld devices. Home Network Devices (HNDs) and Mobile Handheld Devices (MHDs) are Device Categories that have a differing set of requirements in media formats and network connectivity. This clause provides a device model with consistent terms and usages for these Device Categories.

In summary, the key points about Device Categories are:

- each is uniquely optimized for the requirements of a particular environment;
- the device guidelines focus on interoperability of devices within a Device Category;
- there are guidelines for devices which facilitate interoperability between Device Categories;
- a device can choose to be a member of multiple Device Categories.

5.2 Device model elements

As described in Clause 4, devices adhering to the DLNA Home Networked Device interoperability guidelines have six architectural layers. In summary, they are Media Formats for describing conformant content, Media Management for describing how content is found and controlled to achieve different system usages, Device Discovery and Control for device control, Media Transport for the transfer of content, Network Stack for IPv6 and IPv4 protocol requirements, and Network Connectivity for supporting different network physical layers. The following are terms used within this clause and throughout the guidelines. Their interdependence is illustrated in Figure 2.

A Device Category is an aggregation of Device Classes with common environmental characteristics (e.g. mobile devices) and sharing system usages that enable home networking use case scenarios. An example of a Device Category is the set of all Device Classes with system usages that solve requirements in media formats and network connectivity in a home network environment, such as a HND. Device Classes are grouped within a Device Category, but a single physical device can fall into multiple Device Categories.

A system usage describes a device interaction model between Device Classes and/or Device Capabilities. System usages are derived when enabling home networking use case scenarios. An example is a rendering device with a dedicated user interface that is browsing, selecting, and playing content from a media server on the home network, such as the 2-box Pull system usage, see 5.7.2.

A Device Class is a set of Device Functions (at least one) aggregated to be used in a system usage that enables home networking AV use case scenarios. A Device Class shall provide support for all layers in the DLNA architecture except when defined within the Home Infrastructure Device Category which is providing interoperability between one or more layers in the DLNA architecture. A Device Class is a certifiable entity by DLNA and is derived from system usages. It specifies the capabilities supported by a device regardless of the device's physical attributes. An example of a Device Class is a device with the role of exposing and distributing content throughout the home such as a "DMS". A single physical device can support multiple Device Classes.

A Device Capability is a set of Device Functions (at least one) aggregated to be used in a system usage that is enabling home networking AV use case scenarios. A Device Capability does not provide support for all layers in the DLNA architecture. It typically contains Device Functions at the Device Discovery and Control, Media Management, and Media Transport layers only. A Device Capability is not a Device Class and cannot stand alone. It shall always be deployed in conjunction with an implementation of a valid Device Class. A Device Class might already contain some of the Device Functions required to provide a Device Capability. An example of a Device Capability is any DLNA device that incorporates the additional feature (capability) of pushing content to a rendering device, such as a "Push Controller".

A Device Function is a non-decomposable operational property. Device Functions should be supported by existing standards or specifications. A Device Function usually applies to a single layer within the DLNA architecture. An example of a Device Function is an operational component at the Device Discovery and Control layer of the DLNA architecture such as a "UPnP Device". Device Classes and Device Capabilities are composed of a set of Device Functions. Device Functions are the building blocks of DLNA devices.

A Device Option provides optional extensibility to an existing Device Class definition, such as upload or scheduled recording functionality added to a MediaServer Device (MSD), or it provides a new optional Device Function to the DLNA architecture, such as RTP. A Device Option differs from a Device Class or Device Capability in that it normally enables a Device Class or Device Capability to perform an existing system usage in a different way (e.g., RTP). In the case where a Device Option achieves a new system usage, it adds functionality to an existing Device Class or Device Capability to support a new interaction such as the Upload system usage.

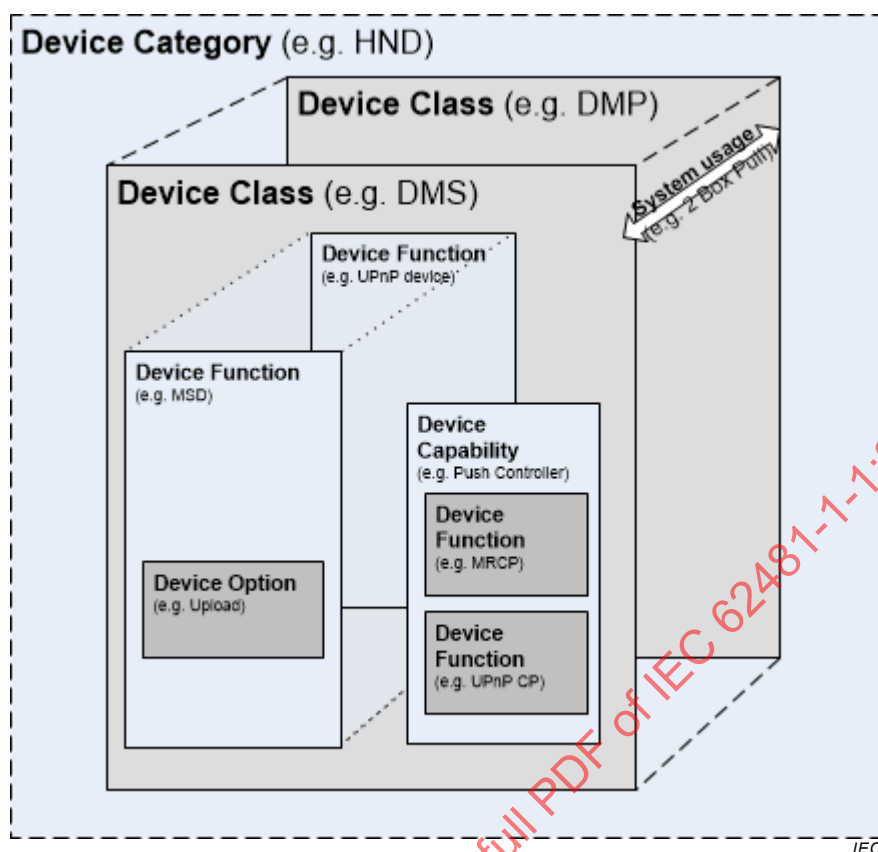


Figure 2 – DLNA device model terms hierarchy

5.3 Device Functions

For the interoperability guidelines and system usages, the Device Functions below are defined for the DLNA architecture.

- IP Connectivity – Network Connectivity and Network stack (8). This incorporates Ethernet (IEEE 802.3) and IEEE 802.11, with IP networking using the IPv4 protocol suite.
- IPv6 Connectivity – a Device Function that builds upon the basic connectivity of IP Connectivity by adding IPv6 to the Network Connectivity and Network stack.
- UPnP Device and UPnP Control Point (UPnP CP) – Device Discovery and Control based upon the UPnP Device Architecture (9). This incorporates the baseline device architecture used by all Device Classes and Device Capabilities.
- UPnP AV MediaServers (MSD), UPnP AV MediaServer control point (MSCP), UPnP AV MediaRenderer (MRD) and UPnP AV MediaRenderer control point (MRCP) – Media Management (9.2.37). This incorporates the control functionality that is layered on top of a UPnP Device or a UPnP control point to fulfill a role for a Device Class or a Device Capability in a system usage. An MSD provides methods to access content. An MSCP is a controller that can browse and select content provided by an MSD. An MRD provides methods to render content. An MRCP is a controller that selects the content to be rendered by an MRD.
- Media Transport Server and Media Transport Client – Media Transport (11). These are the Device Functions for the transport of content. The mandatory transport for content is HTTP which has the components of an HTTP Server and an HTTP Client. An optional transport for content is RTP which has the components of an RTP Serving Endpoint and an RTP Receiving Endpoint. RTP is an example of a Device Option which provides optional extensibility to system usages utilizing a Media Transport.
- Content – interoperability guidelines Media Formats, IEC 62481-2:2017, defines the DLNA mandatory and optional Media Format Profiles for content.

- Generic HTTP URLs (GENURL) – Media Management (7.4). This incorporates the DNS Client functionality which resolves domain names into IPv4 addresses. A GENURL Device Function provides support for HTTP protocol messages to request and receive media resources from servers internal or external to the home network.

5.4 Device Categories

Device Categories are a grouping of Device Classes that share common environmental characteristics (requirements) with system usages. There were no Device Categories explicitly defined in version 1.0 of the interoperability guidelines, as all of the Device Classes operated in the same environment. All of the version 1.0 guidelines were defined as if the following Device Category applied:

- Home Network Devices (HNDs) are a group of Device Classes that share system usages in the home network with the same media format and network connectivity requirements.

In these interoperability guidelines, the following two additional Device Categories are defined:

- Mobile Handheld Devices (MHDs) are a group of Device Classes that share the same system usages as the HND Device Category, but have different requirements for media format and network connectivity.

5.5 Device Classes and roles

In version 1.0 of the interoperability guidelines, the following two Device Classes were defined to support the 2-box Pull system usage for the HND Device Category.

- A Digital Media Server (DMS) with the role of exposing and distributing content.
- A Digital Media Player (DMP) with the role of finding content exposed by a DMS and playing the content locally on the DMP.

In these interoperability guidelines, the following three additional Device Classes are defined for the HND Device Category.

- A Digital Media Renderer (DMR) with the role of playing content it receives after being setup by another network entity.
- A Digital Media Controller (DMC) with the role of finding content exposed by a DMS and matching it to the rendering capacities of a DMR and setting up the connections between the DMS and DMR.

The following Device Classes are defined for MHD Device Category.

- A Mobile Digital Media Server (M-DMS) with the role of exposing and distributing content.
- A Mobile Digital Media Player (M-DMP) with the role of finding content exposed by an M-DMS and playing the content locally on the M-DMP.
- A Mobile Digital Media Controller (M-DMC) with the role of finding content exposed by an M-DMS and matching it to the rendering capabilities of a DMR and setting up the connections between the server and renderer.

Many of these mobile Device Classes have counterparts in the HND Device Category; however, they differ from their counterpart at the network connectivity layer and at the media format layer in the DLNA architecture. For example, an M-DMC can be connected via mobile specific network connectivity while a DMC has to meet the HND network connectivity requirements. This should not be taken to imply that MHD and HND devices cannot interact directly. The discussion above and in the definition of terms of the MHD and HND Device Classes, mobile Device Classes interact with other mobile Device Classes, such as an M-DMP interacting with an M-DMS. However, if the mobile and home devices have compatible network connectivity, and can exchange compatible Media Format Profiles, nothing in these statements should be taken to imply that an M-DMP cannot directly connect to a DMS to complete a system usage. See Table 2, and Table 4 for a listing of the required device interoperations and those that are only possible in consideration of compatible network and Media Format Profile capabilities.

The Device Functions that are incorporated in these Device Classes are illustrated in the figures that provide the details for system usages and their respective device interaction models in 5.7.2 through 5.7.10.

5.6 Device Capabilities and roles

In these interoperability guidelines, the following Device Capabilities are defined.

- A Push Controller (+PU+) with the role of pushing its local content to a DMR.
- An Upload Controller (+UP+) with the role of sending content to a DMS or M-DMS with upload functionality.
- A Download Controller (+DN+) with the role of downloading content from a DMS or M-DMS to itself.
- An Upload Synchronization Controller (+UPSYNC+) with the role of keeping locally changing content synchronized with a DMS or M-DMS supporting the Content Synchronization Device Option.
- A Download Synchronization Controller (+DNSYNC+) with the role of keeping remotely changing content synchronized with the local system. The remotely changing content shall be located on a DMS or M-DMS supporting the Content Synchronization Device Option.
- A Scheduled Recording Controller (+SR+) with the role of instructing a DMS or M-DMS to browse, create, modify, and/or cancel scheduled recordings of content.
- An EPG Controller (+EPG+) with the role of fetching EPG metadata from a DMS or M-DMS.

The Device Functions that are incorporated in these Device Capabilities are illustrated in the figures that provide the details for system usages and their respective device interaction models in 5.7.2 through 5.7.10.

5.7 System Usages

5.7.1 General

In describing the flow of content in the system usages, indicated by the largest arrow in the system usage diagrams in 5.7.2 through 5.7.10, the terms push and pull are used. The terms push and pull are used in system usages to characterize the user's perception of the source or sink location in the process of content transfer. That is, pull means that the content is traveling to the user, while push means that the content is traveling from the user. This perception is not a reflection of the technical underlying transport mechanism used to perform the transfer the content from the source to the sink (e.g. HTTP and RTP).

In these interoperability guidelines, the following system usages are defined that map to all of the use case scenarios being enabled by the detailed guidelines.

- 2-box Pull system usage
This usage involves a user at a DMP or an M-DMP, which enables the user to find and play content that is advertised and distributed by a DMS or M-DMS.
- 2-box Push system usage
This usage involves a user at a Push Controller, which enables the user to distribute content to a DMR for playback purposes.
- 3-box system usage
This usage involves a user at a DMC or an M-DMC, which enables the user to find content on a DMS or M-DMS that in turn will be played on a user selected DMR.
- Upload Synchronization system usage
This usage involves a user at an Upload Synchronization Controller, which enables the user to reflect any changes to the local store of content into a DMS or an M-DMS with the Content

Synchronization Device Option so that the DMS or the M-DMS can receive and distribute the new or changed content to other endpoints.

- Download Synchronization system usage

This usage involves a user at a Download Synchronization Controller, which enables the user to obtain any changes to the store of content on a DMS or an M-DMS supporting the Content Synchronization Device Option.

- Scheduled Recording system usage

This usage involves a user at a Scheduled Recording Controller, which enables the user to instruct a media server (DMS/M-DMS) to browse, create, modify, and cancel scheduled recordings.

- EPG system usage

This usage involves a user at an EPG Controller, which enables the user to view EPG metadata exposed by a DMS or M-DMS.

Subclauses 5.7.2 through 5.7.10 will briefly describe each of the system usages and their respective device interaction models. For clarity, the device interaction model diagrams in 5.7.2 through 5.7.10 show HND and MHD devices interacting directly. All these system usages are shown with Device Functions that are media transport agnostic. All of these system usages imply HTTP as the mandatory media transport and other optional media transports, such as RTP, can be substituted.

5.7.2 2-box Pull system usage

The 2-box Pull system usage pulls DLNA compliant content from a media server (DMS/M-DMS) to be rendered locally by the device pulling the content (DMP, M-DMP). The user perspective is that content is being pulled to the DMP or the M-DMP for immediate rendering on the device. The user is browsing and selecting content on the DMS or the M-DMS. This usage between a DMS and a DMP was the only system usage supported in the v1.0 interoperability guidelines. Note that the rendering function is not exposed onto the network in a DMP or an M-DMP implementation. Also note that in all of the following system usage diagrams, the Media Transport Client/Server is for the media transport layer only. The UPnP Device/CP has HTTP functions independent of the media transport layer and is implied as being part of the UPnP Device/CP Device Functions. Figure 3 illustrates this device interaction model. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.2 for description of impacts to these steps.

- 1) Invoke UPnP actions to browse and select content.
- 2) Request the content for playback.
- 3) Transport the content to the DMP or the M-DMP.

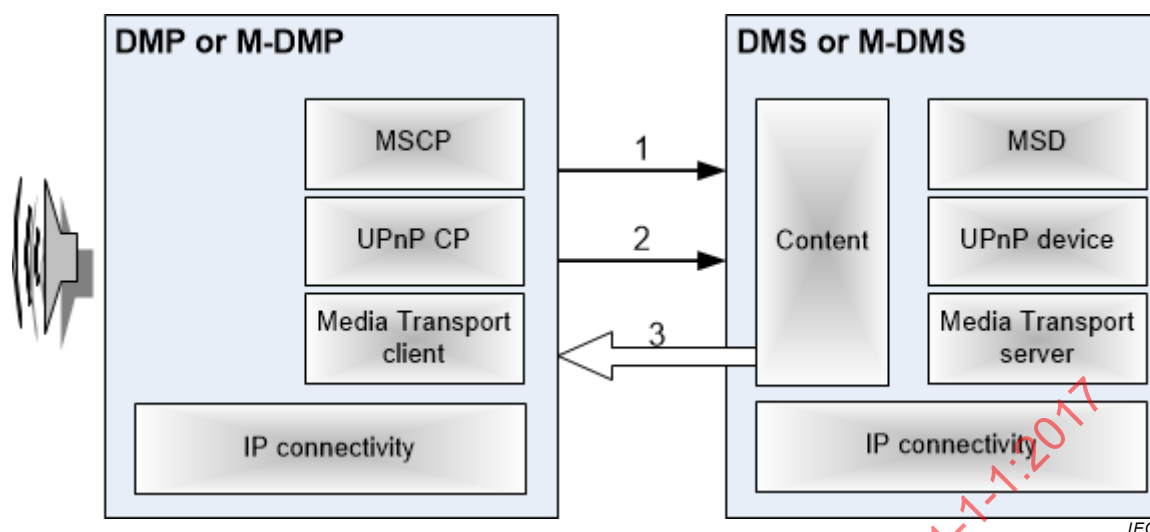


Figure 3 – 2-box Pull system usage interaction model

5.7.3 2-box Push system usage

The 2-box Push system usage pushes DLNA compliant content to a rendering device (DMR). The user perspective is that content is being pushed to the DMR even though content might actually be transported in a "pull" manner depending on the media transport used. The user is selecting content at the device where the content is resident. Figure 4 illustrates this device interaction model. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.3 for a description of impacts to these steps.

- 1) Invoke UPnP actions to browse and select content.
- 2) Request the content for playback.
- 3) Transport the content to the DMR.

Note that the Push Controller Device Capability functionality can only be incorporated as part of any physical device with a valid DLNA Device Class. It shall never appear as a stand-alone device. This is how the Push Controller Device Capability inherits other Device Functions (e.g. IP Connectivity) at other layers in the DLNA Device Architecture. This is applicable to Device Classes in both the HND and MHD Device Categories.

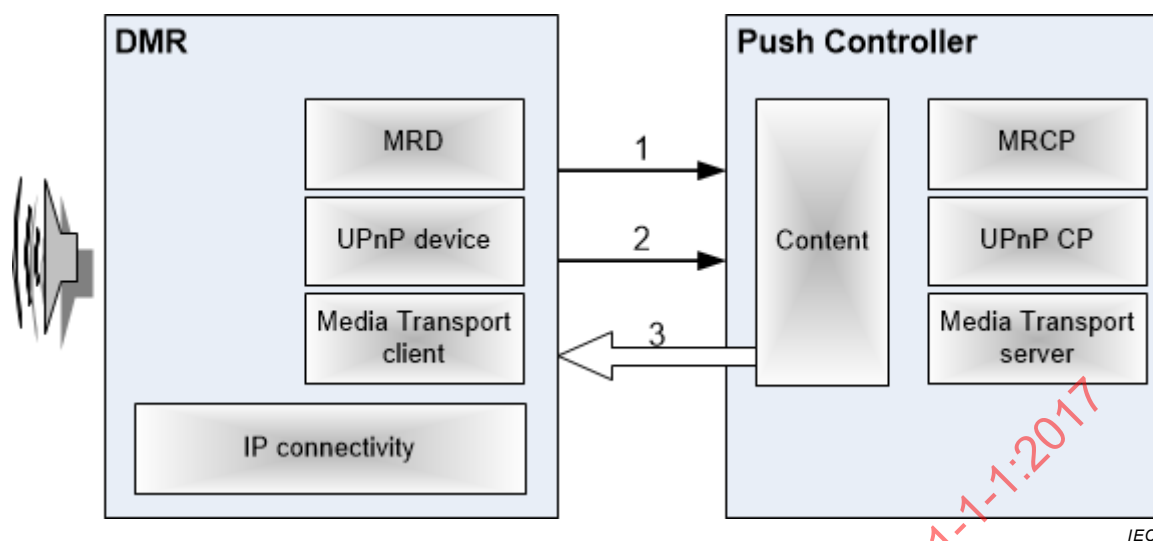


Figure 4 – 2-box Push system usage interaction model


5.7.4 3-box system usage

The 3-box system usage uses a device controller (DMC/M-DMC) to browse content on a media server (DMS/M-DMS) and to select a rendering device (DMR) to play the selected content. The DMC or the M-DMC is responsible for making sure a DMR can render the selected DLNA content.

Figure 5 illustrates this device interaction model. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.4 for a description of impacts to these steps.

- 1) Invoke UPnP actions to browse and select content.
- 2) Invoke UPnP actions to verify that the DMR has the capability to render the selected content and then set up a connection for the selected content between the DMR and the DMS or the M-DMS.
- 3) Request the content for playback.
- 4) Transport the content to the DMR.

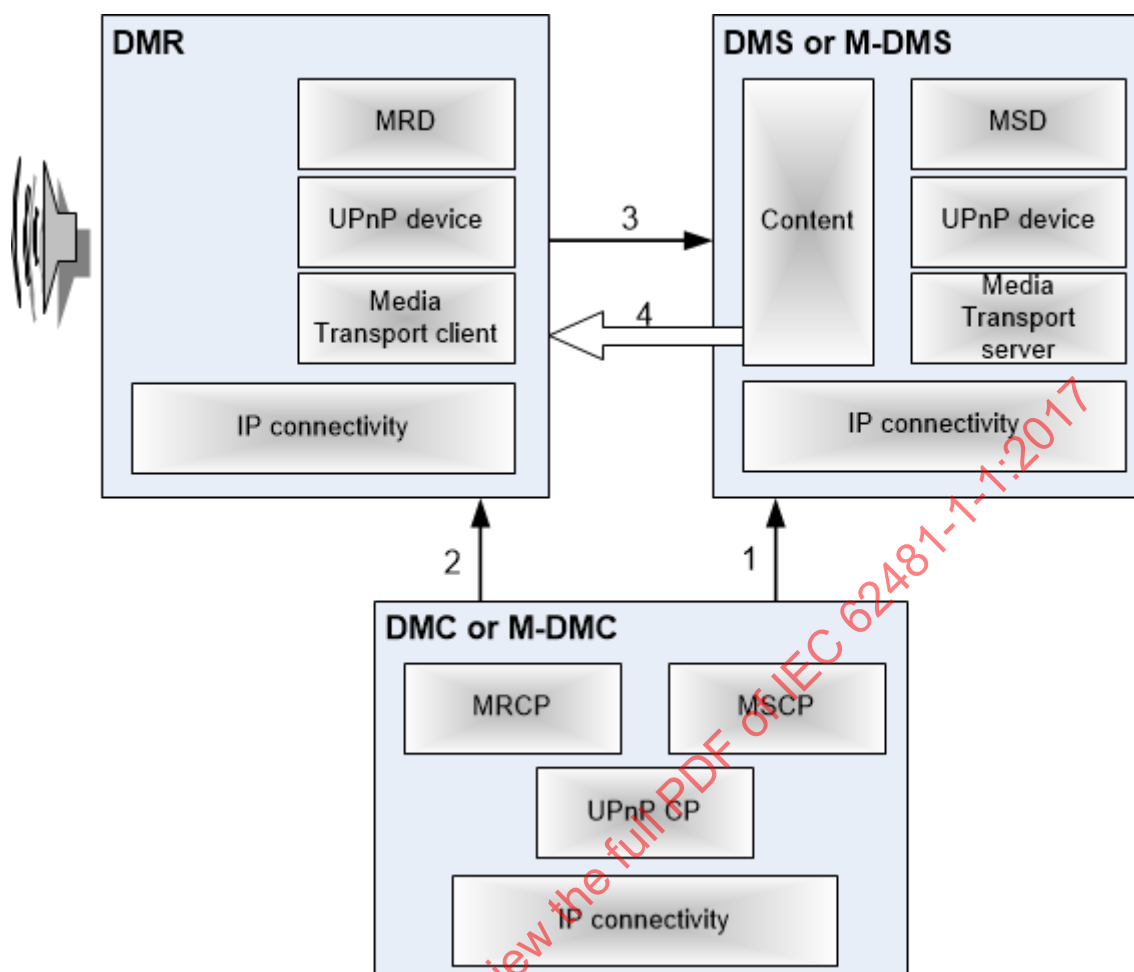

IEC

Figure 5 – 3-box system usage interaction model

5.7.5 Download system usage

The Download system usage allows a Download Controller to transfer and store DLNA content from a media server (DMS or M-DMS).

Figure 6 illustrates this device interaction model. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.2 for description of impacts to these steps.

- 1) Invoke UPnP actions to find content to download.
- 2) Request the content that needs to be downloaded.
- 3) Transport content to the Download Controller.

Note that the Download Controller Device Capability functionality can only be incorporated as part of any physical device with a valid DLNA Device Class. It can never appear as a stand-alone device. This is how the Download Controller Device Capability inherits other Device Functions (e.g. IP connectivity) at other layers in the DLNA Device Architecture.

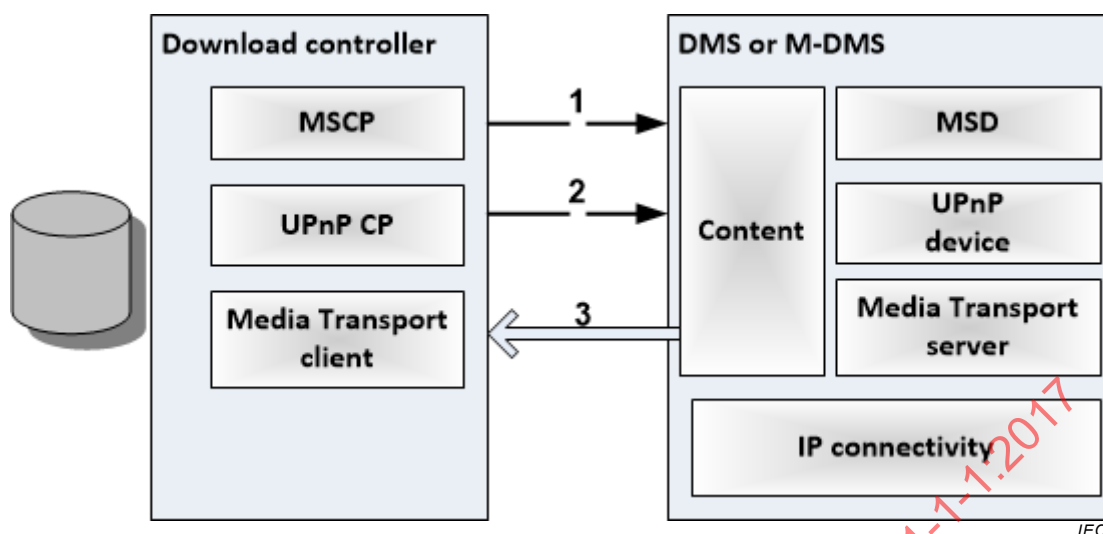


Figure 6 – Download system usage interaction model

5.7.6 Upload system usage


The Upload system usage has an Upload Controller Device Capability to instruct a media server (DMS/M-DMS) to accept some new content to be added to its list of available content.

Figure 7 illustrates this device interaction model. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.2 for a description of impacts to these steps.

- 1) Invoke UPnP actions to create a CDS entry for the content to be uploaded.
- 2) Transport the content being uploaded to the DMS or the M-DMS.

Note that the Upload Controller Device Capability functionality can only be incorporated as part of any physical device with a valid DLNA Device Class. It shall never appear as a stand-alone device. This is how the Upload Controller Device Capability inherits other Device Functions (e.g. IP connectivity) at other layers in the DLNA Device Architecture.

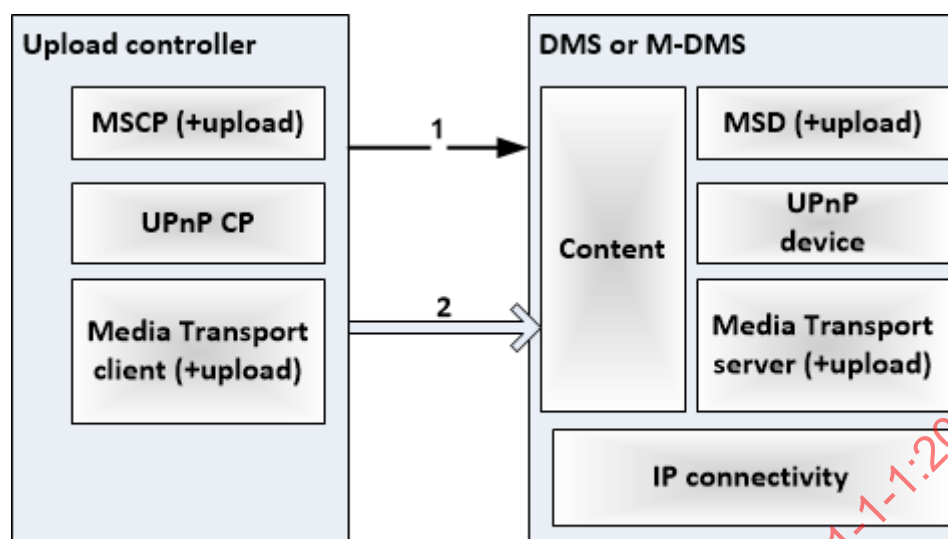

"+" Indicates additional functionality from v1.0 interoperability guidelines for a Device Function

IEC

Figure 7 – Upload system usage interaction model


5.7.7 Download Synchronization system usage

The Download Synchronization system usage has a Download Synchronization Controller Device Capability receive changes in the content or metadata stored on a media server (DMS/M-DMS) and apply those changes to the local storage. Figure 6 illustrates this device interaction model. The Media Server tracks changes within its metadata database and makes that information available to the controller. The controller decides which elements to download to the local storage. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.2 for a description of impacts to these steps.

- 1) The Download Synchronization Controller invokes UPnP actions to obtain a list of changes on the Media Server since the last synchronization.
- 2) The Download Synchronization Controller receives the resulting information from the Media Server on the changes that have occurred in the database.
- 3) The Download Synchronization Controller decides what actions to carry out to synchronize its local storage with the changes present on the Media Server.
- 4) The Download Synchronization Controller obtains the information necessary to download the required information (URLs and metadata)
- 5) If necessary, the Download Synchronization Controller transfers the relevant content from the Media Server to the controller.

Note that the Download Synchronization Controller Device Capability functionality can only be incorporated as part of any physical device with a valid DLNA Device Class. It shall never appear as a stand-alone device. This is how the Download Synchronization Controller Device Capability inherits other Device Functions (e.g. IP connectivity) at other layers in the DLNA Device Architecture. Figure 8 shows a model of a Download Synchronization.

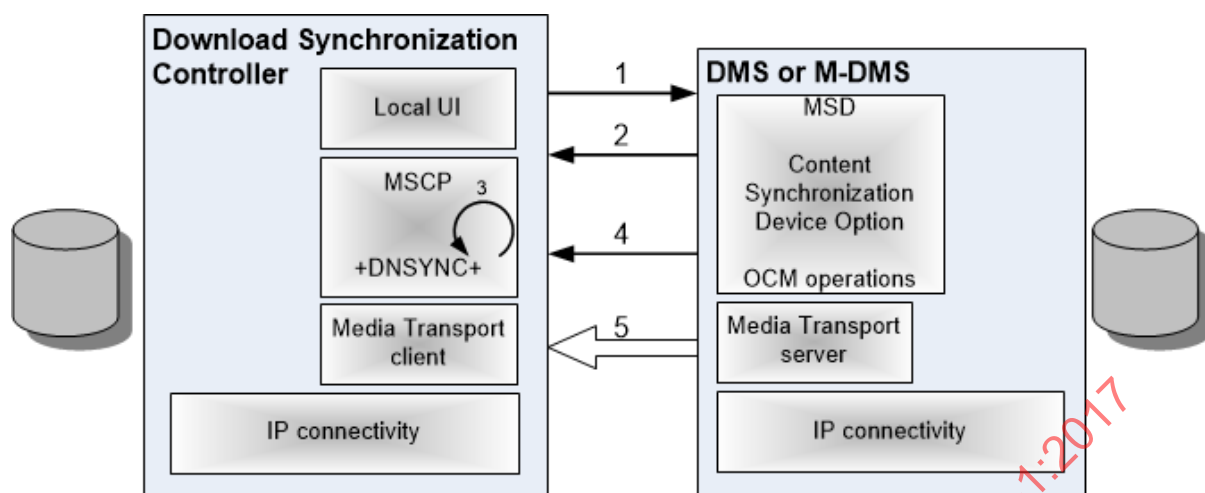

IEC

Figure 8 – Download Synchronization system usage interaction model


5.7.8 Upload Synchronization system usage

The Upload Synchronization system usage has an Upload Synchronization Controller Device Capability propagate changes in the local content or metadata to a media server (DMS/M-DMS) to be added to its list of available content. Figure 7 illustrates this device interaction model. The Upload Synchronization Controller tracks changes in the local storage and uploads those changes to a DMS or M-DMS with the CDS Tracking Changes Option. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 and 5.7.11.2 for a description of impacts to these steps.

- 1) The Upload Synchronization Controller determines that changes have been made in the local content storage area.
- 2) The Upload Synchronization Controller invokes UPnP actions on the media server to obtain a list of changes since the last synchronization.
- 3) The Upload Synchronization Controller receives the resulting information from the media server on the changes that have occurred in the CDS.
- 4) The Upload Synchronization Controller determines what changes need to occur on the DMS or M-DMS to properly represent the local changes.
- 5) The Upload Synchronization Controller performs OCM operations to reflect the local changes onto the media server.
- 6) If necessary the Upload Synchronization Controller transfers the relevant content from the controller to the media server.

Note that the Upload Synchronization Controller Device Capability functionality can only be incorporated as part of a physical device with a valid DLNA Device Class. It shall never appear as a stand-alone device. This is how the Upload Synchronization Controller Device Capability inherits other Device Functions (e.g. IP connectivity) at other layers in the DLNA Device Architecture. Please note that the Upload Synchronization Controller Device Capability contains the ability to use the OCM operations on the server to carry out the actions required for synchronization. Figure 9 shows a model of a Upload Synchronization.

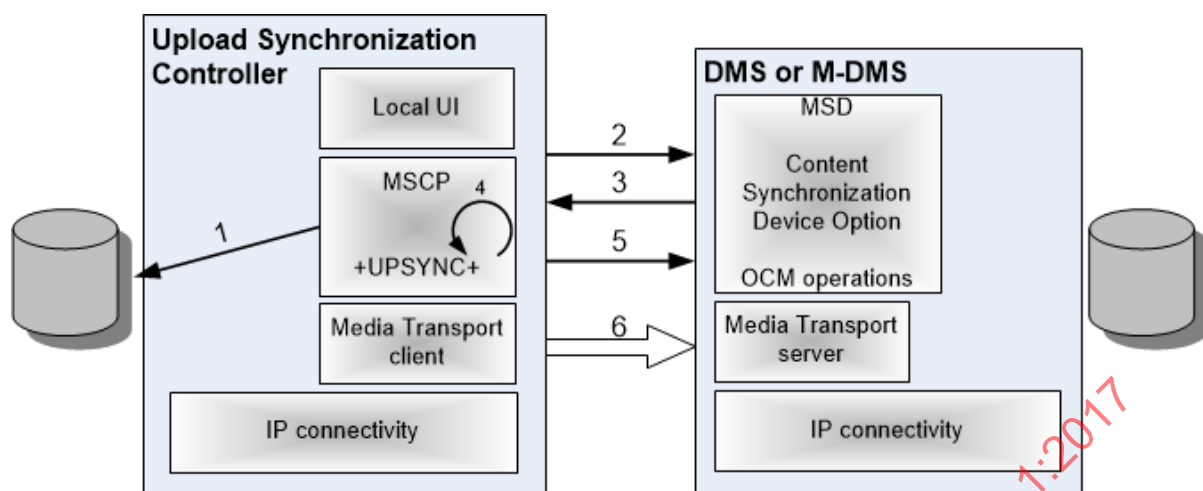

IEC

Figure 9 – Upload Synchronization system usage interaction model


5.7.9 Scheduled Recording system usage

The Scheduled Recording system usage has a Scheduled Recording (SR) Controller Device Capability to instruct a media server (DMS/M-DMS) to create, modify, and cancel a scheduled recording. Figure 10 illustrates this device interaction model. The following steps are performed in this system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 for a description of impacts to establishing UPnP Communications.

- 1) Invoke UPnP actions to obtain some or all of the values for the input parameters needed for setting up a scheduled recording.
- 2) Invoke UPnP actions to create a scheduled recording using the input parameters obtained in step 1.
- 3) Invoke UPnP actions to allow for the browsing, modification, and cancellation of existing scheduled recordings.

Note that the SR Controller Device Capability functionality can only be incorporated as part of any physical device with a valid DLNA Device Class. It shall never appear as a stand-alone device. This is how the SR Controller Device Capability inherits other Device Functions (e.g. IP connectivity) at other layers in the DLNA Device Architecture. Also note that the UPnP Scheduled Recording Service Device Option is a UPnP service integrated into a UPnP MediaServer Device. The SR Controller includes a MSCP with functionality for scheduled recording.

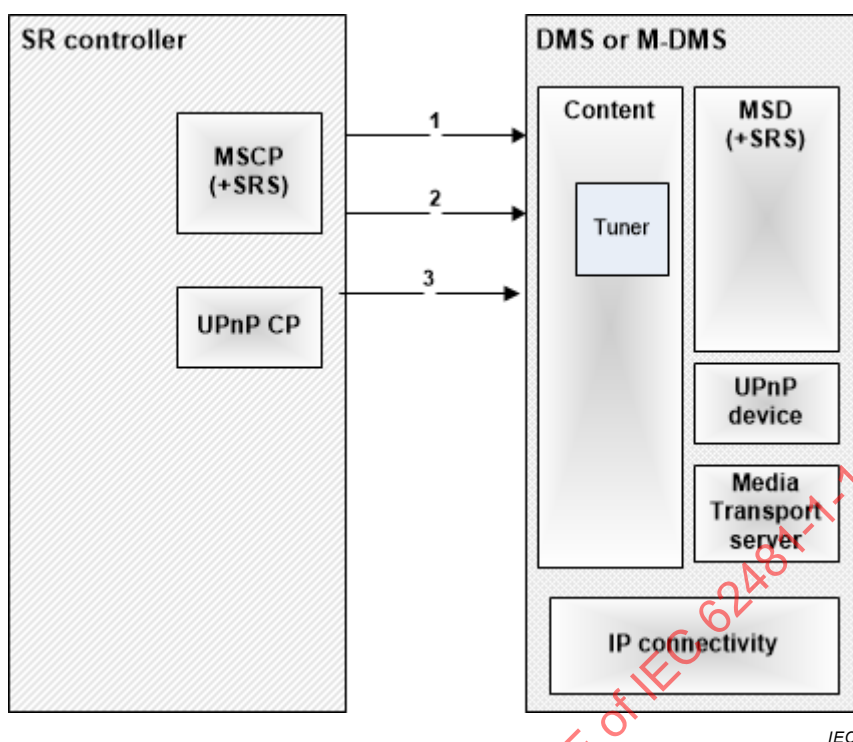

+ Indicates additional functionality from previous versions of the Interoperability Guide lines for a Device Function to implement this system usage.

Figure 10 – Scheduled Recording system usage interaction model

5.7.10 EPG system usage


The EPG system usage allows an EPG Controller to search EPG metadata exposed by a UPnP AV MediaServer (DMS/M-DMS). The EPG Controller Device Capability consists of an UPnP AV MediaServer control point with EPG client functionality. The following independent operations are performed in the system usage.

Where IPv6 Connectivity Device Function is present in addition to IP Connectivity, see 5.7.11.1 for a description of impacts to establishing UPnP Communications.

- 1) Invoke UPnP actions to search EPG metadata in the CDS based on certain criteria.
- 2) Optionally invoke UPnP actions to obtain channel line-up information.

Note that the EPG Controller Device Capability functionality can only be incorporated as part of any physical device with a valid DLNA Device Class. It shall never appear as a stand-alone device. This is how the EPG Controller Device Capability inherits other Device Functions (e.g. IP connectivity) at other layers in the DLNA Device Architecture.

To enable this system usage the EPG Server Device Option shall be implemented in a DMS or an M-DMS. The EPG Server obtains EPG metadata from an external source, and maps a set of mandatory properties to the Server's Content Directory Service. Mapping definitions are provided for OpenEPG, TV-Anytime, and DVB-SI. Servers can choose to export rich data provided by an OpenEPG, or TV-Anytime service by exposing such XML based information as Foreign Metadata embedded in EPG Items in the CDS. Figure 11 shows a EPG system usage interaction model.

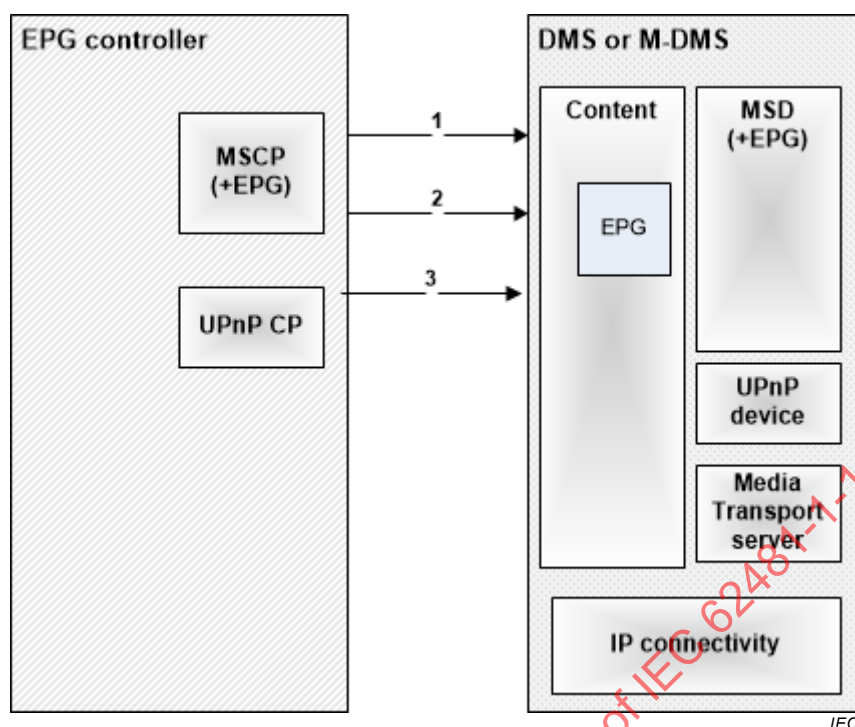

+ Indicates additional functionality from previous versions of the Interoperability Guidelines for a Device Function to implement this system usage.

Figure 11 – EPG system usage interaction model

5.7.11 IPv6 Connectivity system usage impacts

5.7.11.1 Impacts common to all system usages

The logic for determining which address to use for UPnP Communications in all system usages is as follows.

- 1) A UPnP CP that contains the IPv6 Connectivity Device Function will search for and discover the (M-)DMS using both IPv4 and IPv6 addresses.
- 2) If the (M-)DMS responds with only an IPv4 address, the IPv4 address will be used for future UPnP Communication.
- 3) If the (M-)DMS responds with both IPv4 and IPv6 addresses, the IPv4 address will be used for future UPnP Communication.
- 4) If the (M-)DMS responds with only an IPv6 address, the IPv6 address will be used for future UPnP Communication.

5.7.11.2 Impacts to 2-box Pull, Download, Upload, Download Sync, Upload Sync

These system usages involve a UPnP Device that serves (and stores) content and a UPnP CP that renders (but may also store) content.

If the IPv6 Connectivity Device Function is present on the DMP (2-box Pull), the Download Synchronization Controller (Download Sync), or the Upload Synchronization Controller (Upload Sync), then additional steps are required to ensure that any IP addresses in URIs provided by the DMS or M-DMS match the IP address family used for UPnP Connectivity between the UPnP CP and (M-)DMS.

The logic for determining which URIs will be returned by the (M-)DMS in these system usages is as follows:

- 1) if an IPv4 address is used for UPnP Communications and no filters (ALLIP, ALLINTIP) are specified, the (M-)DMS will respond to Browse/Search requests with URIs containing IPv4 addresses;
- 2) if an IPv6 address is used for UPnP Communications, the (M-)DMS will respond to Browse/Search requests with URIs containing IPv6 addresses.

5.7.11.3 Impacts to 2-box Push

These system usages involve a UPnP Device that renders content and a UPnP CP that serves content.

If the IPv6 Connectivity Device Function is present on the Push Controller (2-box Push), then additional steps are required to ensure that any IP addresses in URIs provided by the DMR or XDMR match the IP address family used for UPnP Connectivity between the UPnP CP and UPnP Device.

The logic for determining which URIs to send in these system usages is as follows. The UPnP CP invokes UPnP actions that involve the sending of URIs that point to content on the CP. URIs with literal IP addresses will include an IP address consistent with the IP address used for UPnP communications.

5.7.11.4 Impacts to 3-box

These system usages involve a UPnP CP that is instructing a UPnP device (that is also a renderer of content) to acquire content from a third device (a content server).

If the IPv6 Connectivity Device Function is present on the DMC or M-DMC (3-box), then additional steps are required to ensure that any IP addresses in URIs provided by the (M-)DMC match the IP address family used for UPnP Connectivity between the UPnP CP and rendering UPnP Device (DMR or XDMR).

The logic for determining which URIs to send to the rendering device in these system usages is as follows.

- 1) If an IPv4 address is used for UPnP Communications between the UPnP CP and the content server UPnP Device and no filters (ALLIP, ALLINTIP) are specified, the content server UPnP Device will respond to Browse/Search requests with URIs containing IPv4 addresses.
- 2) If an IPv6 address is used for UPnP Communications, the content server UPnP Device will respond to Browse/Search requests with URIs containing IPv6 addresses.
- 3) The UPnP CP invokes UPnP actions that involve the sending of URIs to the rendering UPnP device that point to content on the serving UPnP device. URIs with literal IP addresses will include an IP address consistent with the IP address used for UPnP communications with the rendering device.

5.8 Interoperability guidelines usage

The guideline requirements' tables presented in Clause 7 contain a column that specifies which Device Classes apply to a requirement. For the v1.0 interoperability guidelines, only DMS and DMP were applicable. For these interoperability guidelines, two new Device Classes are defined in addition to the two above for the HND Device Category. They are a DMC and DMR. The MHD Device Category with four new Device Classes is introduced in this version of the guidelines. Table 2 summarizes all of the Device Classes in the HND Device Category and the mnemonics used within these interoperability guidelines. Table 3 summarizes all of the Device Capabilities that can be deployed with any Device Class and the mnemonics used within these interoperability guidelines. Table 4 summarizes all of the Device Classes in the MHD Device Category and the mnemonics used for these Device Classes..

Table 2 – DLNA Device Classes in the HND Device Category

DLNA Device Class	Media Management components	Media Transport components	Functional description	Device Classes or Capabilities interacted with for defined system usages	Device Classes interacted with given compatible networking and Media Formats profiles
v1.0 Device Classes					
DMS (Digital Media Server)	MSD	Media Transport Server	Serves up media	DMP, DMC, DMR, other endpoints with +UP+or +DN+ capabilities	M-DMP, M-DMC
DMP (Digital Media Player)	MSCP	Media Transport Client	Selects, controls and renders the selected media	DMS	M-DMS
Device Classes new to v1.5					
DMC (Digital Media Controller)	MSCP MRCP	n/a	Controls the content selection and content rendering between networked devices	DMS, DMR	M-DMS
DMR (Digital Media Renderer)	MRD	Media Transport Client	Renders content	DMC, DMS, other endpoints with +PU+ capabilities	M-DMC, M-DMS

A new concept introduced in this version of the interoperability guidelines is a Device Capability. A Device Capability can be applied to any valid DLNA Device Class from any Device Category. Device Capabilities inherit the IP connectivity from the Device Category of the Device Classes it is combined with. There are no baseline (i.e. mandatory) Media Format interoperability requirements for Device Capabilities, unless otherwise specified by explicit guidelines. Table 3 summarizes all of the Device Capabilities used in the system usages and the mnemonics used within these interoperability guidelines to specify which requirements apply to them.

Table 3 – DLNA Device Capabilities

DLNA Device Capability	Device Capability Controller identifier	Media Management components	Media Transport components	Device Classes interacted with for defined system usages
Push Controller	+PU+	MRCP	Media Transport Server	DMR
Download Controller	+DN+	MSCP	Media Transport Client	DMS, M-DMS
Upload Controller	+UP+	MSCP	Media Transport Client	DMS, M-DMS
Upload Synchronization Controller	+UPSYNC+	MSCP	Media Transport Client	DMS, M-DMS
Download Synchronization Controller	+DNSYNC+	MSCP	Media Transport Client	DMS, M-DMS
Scheduled Recording Controller	+SR+	MSCP	n/a	DMS, M-DMS
EPG Controller	+EPG+	MSCP	n/a	DMS, M-DMS

The MHD Device Category has different media format and network connectivity requirements because of various device constraints. Table 4 summarizes all of the Device Classes in the MHD Device Category and the mnemonics used within these interoperability guidelines.

Table 4 – DLNA Device Classes in the MHD Device Category

DLNA Device Class	Media Management components	Media Transport components	Functional description	Device Classes interacted with for defined system usages	Device Classes or Capabilities interacted with given compatible networking and Media Formats profiles
M-DMS (Mobile Digital Media Server)	MSD	Media Transport Server	Serves up media	M-DMP, M-DMC,	DMP, DMC, DMR, other endpoints with +UP+ or +DN+ capabilities
M-DMP (Mobile Digital Media Player)	MSCP	Media Transport Client	Selects, controls and renders the selected media	M-DMS	DMS
M-DMC (Mobile Digital Media Controller)	MSCP MRCP	n/a	Controls the content selection and content rendering between networked devices	M-DMS, DMR	DMS

6 Guideline terminology and conventions

6.1 Guideline compliance classifiers

Reference IETF RFC 2119 provides a description of terminology conventions used in all IETF RFC documents. The terminology and conventions used by the DLNA Home Networked Device interoperability guidelines are adapted from this reference. The details of each guideline will carry a compliance classifier from the following set.

[M] Required, Shall: this is the minimum set of requirements that will ensure interoperability and/or robust operation between devices. All devices are expected to comply with these requirements when expressed in unconditional form. A conditional requirement expressed in the form, "If X, then Y shall be implemented", means that the requirement "Y" shall be met when the conditional aspect "X" applies to a given implementation.

[S]hould, Recommended: recommended items are optional items that are strongly recommended for inclusion in products. The difference between "recommended" items and "optional" items, below, is one of priority. When considering features for inclusion in a product, recommended items should be included first.

[O]ptional, May: optional items are suggestions for features that will enhance the user experience or are offered as a less preferred choice relative to another recommended feature. If optional features are included, they shall comply with the requirement to ensure interoperability with other implementations.

6.2 Standard or specification usage classifiers

When specifying guideline details, it is often useful to reiterate or clarify certain aspects of a standard or specification that are often violated or misunderstood. Furthermore, there might be

guidelines that intentionally contradict or restrict implementation of certain aspects of a standard or specification in order to ensure interoperability between DLNA devices. The following classifiers are used in the DLNA Home Networked Device interoperability guidelines to indicate the relationship of a specific guideline to a source standard or specification.

[A]dding: A guideline that adds to or supplements a standard or specification to enhance interoperability. A guideline that does not reference a standard or specification also uses this classifier.

[C]larifying: A guideline that addresses vague or ambiguous aspects of a standard or specification.

[F]ixing: A guideline that intentionally supersedes and fixes aspects of a standard or specification that is incorrect and would otherwise provide a poor user experience or prevent device interoperability.

[L]imiting: A guideline that narrows or specifies an exact behaviour in areas where a standard or specification provides for greater degrees of latitude in implementation.

[R]epeating: A guideline that repeats what is already in a standard or specification because of observed and repeated problems with implementations. Whenever a guideline with this usage classifier seems to be in conflict with the actual standard, the standard prevails over the guideline.

6.3 Guideline font usage conventions

The following font usage conventions are used within the DLNA Home Networked Device interoperability guidelines to provide additional clarity.

- Hyperlinks to reference citations are indicated as [reference number or text].
- UPnP action names are indicated as: [Service acronym]:[action name], such as CDS:Browse.
- Special terms are sometimes *italicized*. Sometimes a guideline will define a term for use within that guideline and the term will be *italicized*.

6.4 Guideline syntax notation conventions

The following are syntax (BNF) notation conventions used within the DLNA interoperability guidelines to provide readability.

- Linear whitespace (LWS) characters, such as carriage returns, spaces, tabs, or line feeds, are not implied anywhere in any of the syntax (BNF) definitions used within the interoperability guidelines.
- The use of LWS characters is restricted within the interoperability guideline unless explicitly specified in any of the syntax definitions with reference to UPnP HTTP communications.
- By default, text tokens and values have a case-sensitive treatment unless explicitly noted in the guidelines. This convention also applies to BNF definitions, XML tag names, XML tag values, capability IDs, and HTTP header values for HTTP headers used by the DLNA guidelines. One of the exceptions to this rule applies to the names of HTTP headers. HTTP header names have a case-insensitive treatment. For example, TimeSeekRange.dlna.org is the same as timeseekeRange.dlna.org (see 11.4.3.7). Other exceptions are described in each guidelines which define BNF syntax.

6.5 Guideline normative and informative text conventions

All text that appears in the DLNA interoperability guidelines is to be considered normative unless explicitly stated otherwise, such as informative references and informative annexes. Normative text includes text before guideline attribute tables, but testable guidelines are only contained within subclause guideline attribute tables.

6.6 DLNA XML namespaces and schemas

The DLNA interoperability guidelines make numerous references to XML elements and attributes that are defined for DLNA Device Classes and Device Capabilities. However, these namespaces are intentionally not defined through a formal DLNA XML schema. This allows the DLNA interoperability guidelines to define new XML elements and attributes in the future, without having to define a new namespace or schema definition. DLNA Devices Classes and Device Capabilities are expected to exhibit tolerant behaviour when encountering XML elements or attributes that are defined in the future, as required by existing guidelines 9.2.23 and 10.1.3.1. Table 5 lists the namespace values that are used by DLNA guidelines and the context for their usage.

Table 5 – DLNA namespace values

Namespace value	Usage context
urn:schemas-dlna-org:device-1-0	Used for XML elements and attributes defined by DLNA interoperability guidelines for use in UPnP device description files.
urn:schemas-dlna-org:metadata-1-0/	Used for XML elements and attributes defined by DLNA interoperability guidelines for use in DIDL-Lite documents and fragments.

6.7 General rules on XML documents and fragments

The DLNA interoperability guidelines use XML documents and fragments in UPnP communications. To clarify the responsibility of each DLNA Device Class and DLNA Device Capability, this subclause specifies the following general rules for XML documents and fragments.


- DLNA Device Classes and DLNA Device Capabilities that source XML documents or fragments have the responsibility to provide valid (semantically and syntactically correct) and well-formed XML documents and fragments. This also includes DLNA Device Classes and DLNA Device Capabilities that receive XML documents or fragments and modify them syntactically, semantically, or both.
- DLNA Device Classes and DLNA Device Capabilities that receive XML documents or fragments from DLNA Device Classes and DLNA Device Capabilities can assume that the received XML documents or fragments are valid and can forward them to other devices without validation.

7 Guideline requirements overview

7.1 General

This clause covers the guidelines that enable vendors to build interoperable products. Devices built to the DLNA Home Networked Device interoperability guidelines will be able to manage, transfer, and play personal media over a home network.

These guidelines are in a clause/subclause format as shown in Figure 12.

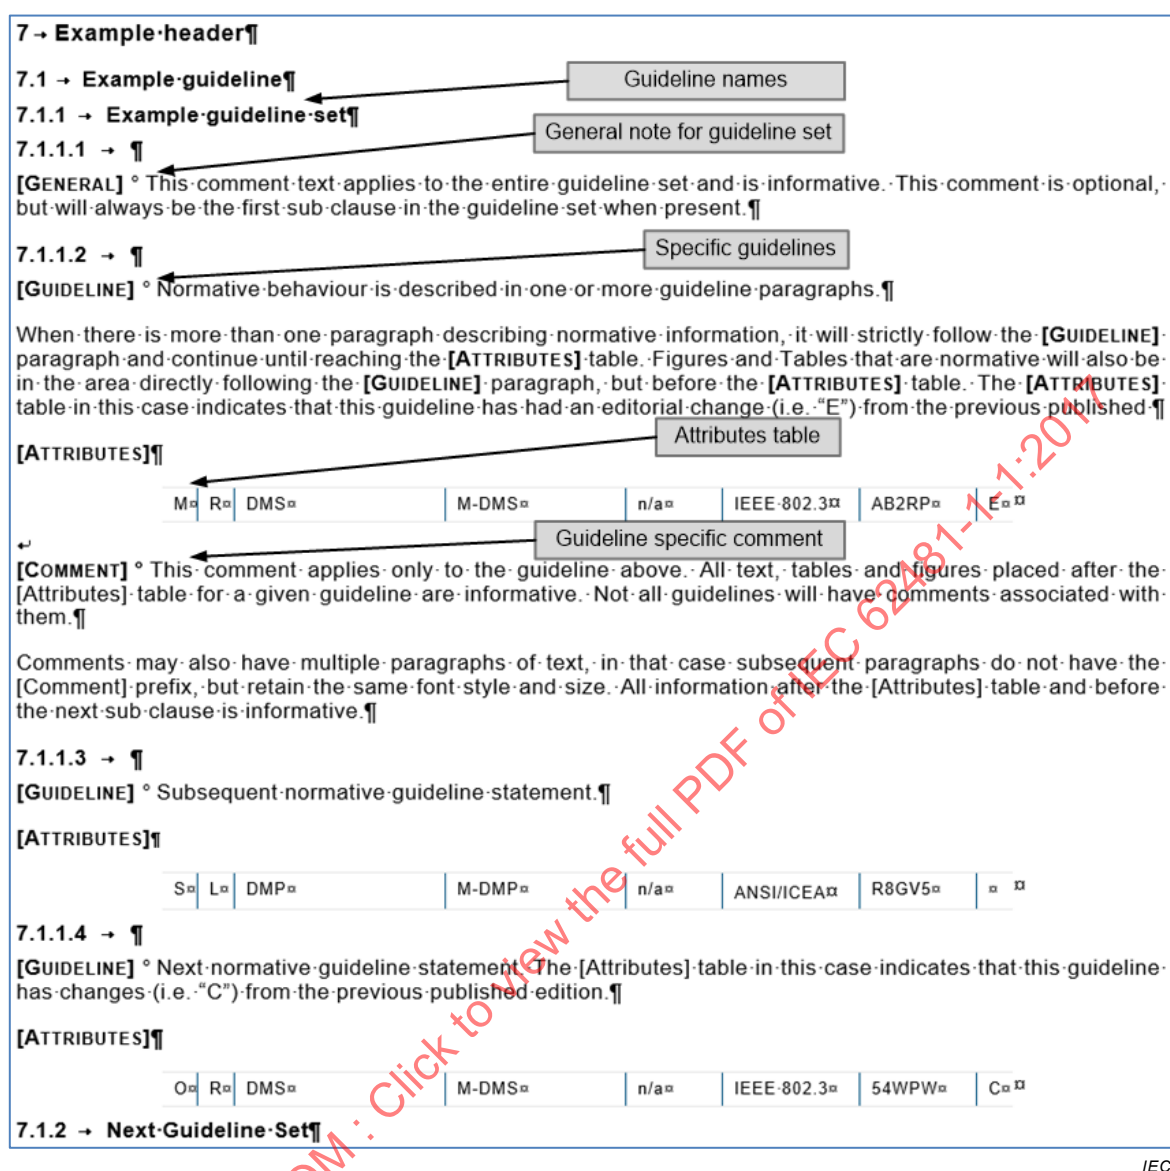

IEC

Figure 12 – Guideline layout and definitions


The following list describes the content of Figure 12.

- Name: a label for the guideline set. The label is preceded with a sequentially increasing number to allow easy lookup.
- Guidelines: the actual normative text of a guideline. A guideline is preceded with a sequentially increasing number in each part to allow easy lookup and the beginning of the paragraph starts with "**[GUIDELINE]**".
- Attribute table: a summary of the essential attributes of a guideline. The table is preceded with the paragraph text "**[ATTRIBUTES]**" and is a single row with the following definitions for the columns:
 - Compliance classifier: M/S/O (See 6.1 for the definition of guideline compliance classifiers).
 - The specification usage classifier: A/C/F/L/R: for the guideline. (See 6.2 for the definition of specification usage classifiers.)
 - HND Device Classes and Device Capabilities (see Table 2 and Table 3 for definitions). Device Capabilities are always listed in the HND column of the attribute table. Device Capabilities can also apply equally to the MHD Device Category but have been omitted from the MHD column in the attribute table to provide for better readability.

- MHD Device Classes(see Table 4 for definitions).
 - Standards citation: Standards that are referenced by the guideline. Standards citations are declared in Clause 2 and Bibliography.
 - Guideline unique number: an alpha-numeric string that uniquely identifies a guideline in all parts of this series of International Standards.
 - Change indicator: documents that indicate the change in the guideline that occurred since the last edition of the guideline (see Table 6 for definitions).
 - Guideline attribute columns that do not have a value have the designation "n/a" (not applicable). A visual map of possible values for the attribute tables is in Figure 13.
- d) Add supplementary informative information about a guideline such as a justification for the guideline, the specific interoperability issue that is addressed, etc. The first paragraph is preceded by the text "[COMMENT]".

Table 6 – Allowed values for change indicator fields in attribute tables

Value	Meaning
<blank>	No changes in the text or figures from the immediately-preceding version of this guideline.
A	Attribute table itself, excluding the change indicator, has changed. For example, a new device class was added.
C	Changes made to the guideline modify the testing, intent, or other normative behaviour relative to the immediately-preceding version of this guideline.
D	Guideline has been deleted.
E	Changes made that do not modify testable guideline, intent, or other normative behaviour.
N	New. Guideline did not exist in previous versions.

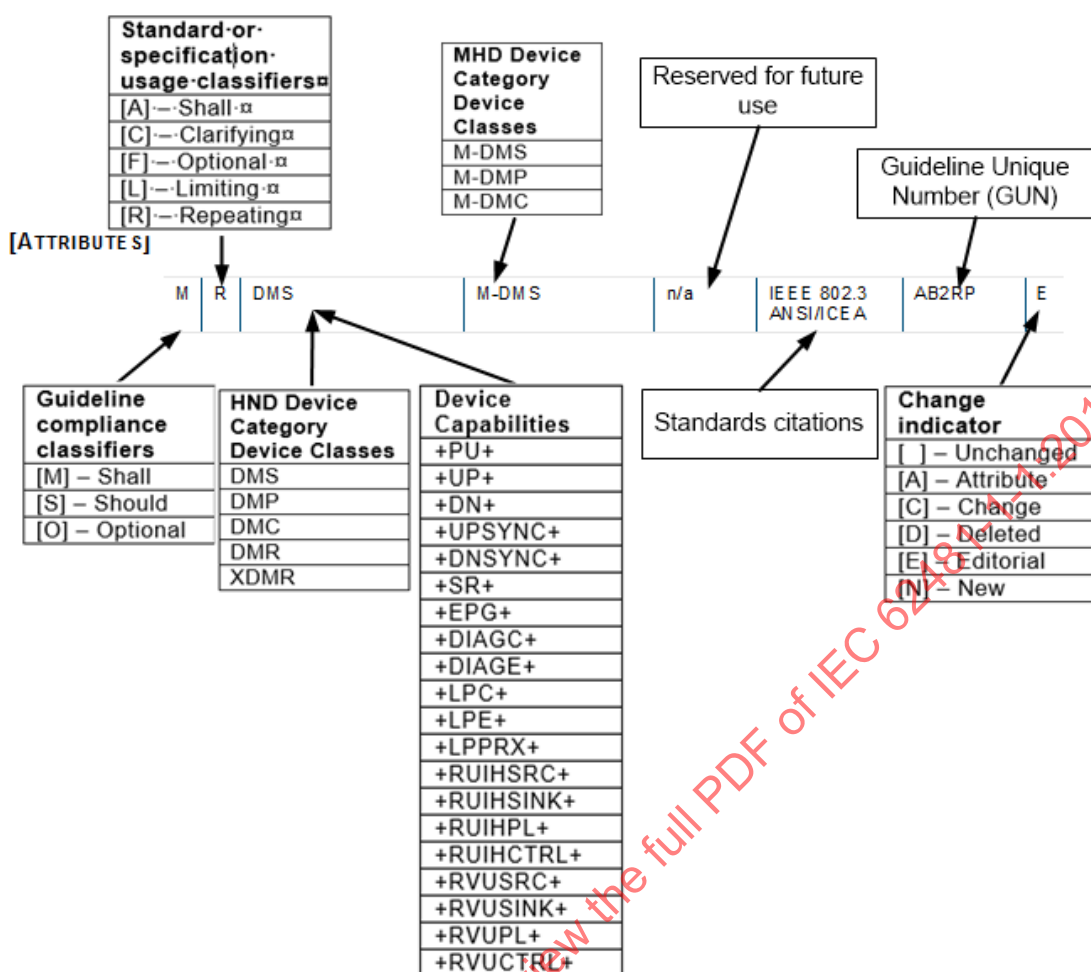

IEC

Figure 13 – Visual map of possible values for the attribute tables

7.2 Conditions for measuring time in message exchanges

These guidelines define in certain cases time constraints for the exchange of messages between two communicating endpoints. These time constraints have been defined as a means to provide some operational consistency between the two communicating endpoints. However, in best-effort networks, actual time measurements for exchanging messages show wide variations depending on perturbations derived from network conditions, traffic, available bandwidth, and others. For this reason, this subclause includes recommendations for conditions at the time of making these measurements.

- The two communicating endpoints should establish communications under Ideal Network Conditions.
- Time measurements at a given layer assume that the underlying layers preserve the communication channel. For example, time measurements at the HTTP layer cannot be valid if the underlying TCP/IP channel breaks during the measurements.
- Unless specified otherwise, time measurements assume that the communicating devices are both in active mode. This means that time measurements should not include transitions from sleep mode to active mode.

8 Networking and connectivity

8.1 General

Networking and connectivity between devices is fundamental to the DLNA Home Networked Device interoperability guidelines. The family of protocols known as the Internet Protocol (IP) is the backbone for home network connectivity. Clusters of devices in the home can use other interconnect technologies, but IP ties these clusters together within the home, and provides connectivity outside the home to the global Internet. IP is independent of physical media and therefore there are a variety of connectivity options for DLNA devices.

The Networking and connectivity guidelines are organized in the following subclauses.

- Networking and connectivity general capability requirements: 8.2.
- Networking and connectivity QoS requirements: 8.3
- Networking and connectivity device requirements: 8.4

8.2 Networking and connectivity: general capability requirements

8.2.1 General

The guidelines in 8.2 provide requirements for general capabilities. For example, these requirements describe the baseline capabilities of any Ethernet or Wi-Fi implementation.

8.2.2 General capability requirements for Ethernet

8.2.2.1 NC Ethernet: Base

[GUIDELINE] If Ethernet is supported, IEEE 802.3i (10BASE-T) and IEEE 802.3u (100BASE TX) with auto negotiation capability and a connection to the network provided by an RJ45 connector shall be required.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.3:2 002	2B2RQ	

8.2.2.2 NC Ethernet: Cabling

[GUIDELINE] If Ethernet is supported, any supplied network cabling should have a rating of Category 5e or better.

[ATTRIBUTES]

S	R	n/a	n/a	n/a	ANSI/ICEA	I8GV6	

8.2.2.3 NC Ethernet: Gigabit

[GUIDELINE] If Ethernet is supported, IEEE 802.3ab (1000BASE T) is recommended in addition to 8.2.2.1. An implementation shall support auto negotiation of gigabit operation with a similarly capable link partner and drop down to a lower speed as appropriate.

[ATTRIBUTES]

S	R	n/a	n/a	n/a	IEEE 802.3:2 002	79WPW	

[COMMENT] Gigabit Ethernet is becoming available and affordable for home networks.

8.2.2.4 NC Ethernet: QoS tolerance

[GUIDELINE] If Ethernet is supported, incoming tagged packets shall be tolerated. Tagged packets are Ethernet packets that include priority tags conformant with IEEE 802.3:2002, 3.5, entitled Elements of the Tagged MAC Frame. Here, tolerate means that the packet payload of any received tagged or untagged packet shall be properly passed up to the higher layers in the network stack.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.3:2002	U7GZE

[COMMENT] Packet tagging is the only QoS mechanism available on Ethernet at the link layer. Many devices on home networks are already capable of sending tagged frames, so all devices need to be able to tolerate them. For guidelines on tagging, see 8.3.2.1 and 8.3.2.2.

8.2.3 General capability requirements for IEEE 802.11

8.2.3.1 NC IEEE 802.11: Base

8.2.3.1.1

[GUIDELINE] If IEEE 802.11 is supported, one or more of the following radio selections is allowed:

- IEEE 802.11a
- IEEE 802.11b
- IEEE 802.11g
- IEEE 802.11n
- Wi-Fi Direct

For example, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11a/b, IEEE 802.11b/g, and IEEE 802.11a/b/g all meet this requirement.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	Wi-Fi IEEE 802.11 IEEE 802.11 Wi-Fi Direct System Interoperability	T4RMV

[COMMENT] There is no implied requirement that a device needs to support multiple radios nor is it prohibited.

See Annex A for recommendations on Wireless Access Points and how they will help enable interoperability between products with different radio selections.

See Annex H for guidance on Wi-Fi Direct for DLNA

8.2.3.1.2

[GUIDELINE] If IEEE 802.11 is supported, the implementation shall support infrastructure mode operation.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	Wi-Fi IEEE 802.11 IEEE 802.11 Wi-Fi Direct System Interoperability	PB3QQ	

[COMMENT] Some DLNA Device Classes might be required to support Ad-hoc (IBSS) mode for Wi-Fi conformance. However, the interoperability guidelines do not provide any requirements for Ad-hoc (IBSS) operation. Devices can assume infrastructure mode as the default.

8.2.3.2 NC IEEE 802.11: Wi-Fi and Wi-Fi protected setup conformance

8.2.3.2.1

[GUIDELINE] If an IEEE 802.11 radio interface is supported, the implementation shall conform to one or more of the WFA test plans for IEEE 802.11 a/b/g Wi-Fi IEEE 802.11, IEEE 802.11n IEEE 802.11, or Wi-Fi Direct Wi-Fi Direct System Interoperability at the time the product is offered to the market.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	Wi-Fi IEEE 802.11 IEEE 802.11 Wi-Fi Direct System Interoperability	YSXRI	

[COMMENT] WFA is the industry consortium that does IEEE 802.11 compatibility testing. Wi-Fi interoperability requirements are increasing with time as new capabilities and features are specified by IEEE 802.11.

Wi-Fi Direct devices that pass the P2P System Interoperability Test Plan Wi-Fi Direct System Interoperability will pass one or more of the following: IEEE 802.11 a/g Interoperability Test Plan Wi-Fi IEEE 802.11, or IEEE 802.11n System Interoperability Test Plan IEEE 802.11. Additional Wi-Fi Direct prerequisites include Wi-Fi WSC Test Plan Wi-Fi Simple Configuration:2011 and WMM Test Plan WMM Test Plan. IEEE 802.11b is not supported by Wi-Fi Direct.

8.2.3.2.2

[GUIDELINE] If Wi-Fi Direct is a supported radio interface, then the device will be WFA Wi-Fi Direct certified to support Intra-BSS Distribution.

[ATTRIBUTES]

M	A	n/a	n/a	n/a	Wi-Fi Direct System Interoperability	JWF45	

[COMMENT] Wi-Fi Intra-BSS Distribution is the name of the feature for bridging between members of the group.

8.2.3.2.3

[GUIDELINE] If Wi-Fi Simple Config is supported, the implementation shall conform to Wi-Fi Simple Config test plan requirements at the time the product is offered to the market.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	Wi-Fi Simple Configuration :2011	X4RS9	

8.2.4 General capability requirements for MoCA**8.2.4.1 NC MoCA: Connector**

[GUIDELINE] If MoCA is supported, then a 75 Ω Female F-Connector is required.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEC 60169-24	HWWT	

8.2.4.2 NC MoCA: MoCA conformance

[GUIDELINE] If MoCA is supported, the implementation shall conform to the MoCA Specification and MoCA Certification Test Plan requirements at the time the product is offered to the market.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	MoCA MAC/PHY MoCA	M6GKZ	

[COMMENT] MoCA is the Multimedia over Coax Alliance – an industry consortium that defines specifications for networking over the in-home coaxial cable MoCA MAC/PHY.

8.2.5 General capability requirements for HPNA**8.2.5.1 NC HPNA: Connector**

[GUIDELINE] If HPNA is supported, then a 75 Ω Female F-Connector is required.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEC 60169-24	STTML	

8.2.5.2 NC HPNA: HPNA conformance

[GUIDELINE] If HPNA is supported, the implementation shall conform to the HPNA Specification and HPNA Certification Test Plan requirements at the time the product is offered to the market.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	ITU-T G.9954	V5HT4	

8.2.6 General capability requirements for HomePlug AV and HD-PLC

8.2.6.1 NC HomePlug AV: HomePlug AV Conformance

[GUIDELINE] If Homeplug AV PHY is supported, the implementation shall conform to the HomePlug AV Specification, HomePlug AV Compliance and HomePlug AV Interoperability requirements at the time the product is offered to the market.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	HomePlug AV Specification HomePlug AV Compliance HomePlug AV Interoperability	V92Y2	

8.2.6.2 NC HD-PLC: HD-PLC conformance

[GUIDELINE] If HD-PLC PHY is supported, the implementation shall conform to the applicable mandatory HD-PLC PHY based sections of the IEEE 1901 and HD-PLC Connectivity Verification requirements at the time the product is offered to the market.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 1901 HD-PLC Connectivity Verification	G4AR9	

8.3 Networking and connectivity: QoS requirements

8.3.1 General

The guidelines in this subclause provide requirements for priority-based QoS, hereinafter referred to as DLNAQOS. With DLNAQOS, applications label (tag) packets with the User Priority (UP) that dictates how the packets are allowed to access the network media and device queues. The DLNAQOS guidelines are contained in several subclauses as illustrated in Figure 14. Table 7 summarizes the default DLNAQOS (User Priority) tag correlation between specific DLNA traffic types and different network media types. In this table, streaming, interactive, and background transfers are as defined in Table 40. The default priorities, or lower, are used if DLNAQOS is implemented. It is not permitted to use priorities above the default stated.

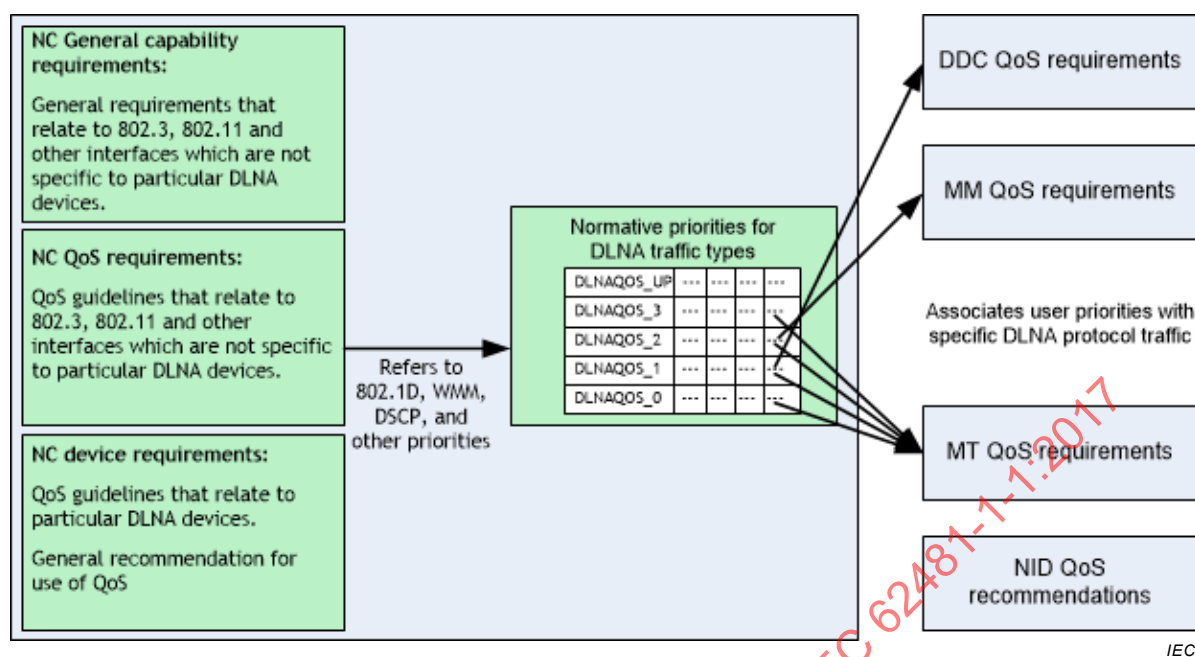


Figure 14 – DLNA QoS visual organization

Table 7 directly correlates IEEE 802.1Q:2003, WMM, MoCA, HPNA, HomePlug AV, HD-PLC and DSCP IETF RFC 2474 tags without any overlap, i.e. multiple IEEE 802.1Q/DSCP values for a single WMM access class or MoCA Priority, or HomePlug AV priority, but single 802.1Q/DSCP values for single HD-PLC priority.

Table 7 – Normative priorities for DLNA traffic types

DLNAQO S_UP	DLNA traffic types	IEEE 802.1Q User Priority	WMM Access Category	MoCA priority	HPN A	HomePlu g AV Channel Access Priority	HD-PLC Priority	DSCP	Subclause details
DLNAQO S_3 (Highest)	TCP messages generated by Content Receivers DLNA Link Protection key exchange messages	7	VO	High	6	CA3	7	0x38	11.4.4.19 8.3.2 (GUN TDFW2) in IEC 62481-3: 2017 9.2.2 in IEC 62481-3: 2017
DLNAQO S_2	Audio-only or A/V Streaming Transfers UPnP AVTransport stream control RTCP messages generated by Content Sources RTSP messages	5	VI	Medium	5	CA2	5	0x28	11.4.2.12 10.1.6.22 11.4.4.19 11.4.4.209
DLNAQO S_1	Default priority for any traffic defined by DLNA guidelines, unless specified otherwise Interactive transfers Remote User Interface messages	0	BE	Low	2	CA1	0	0x00	9.2.36 11.4.2.11
DLNAQO S_0 (Lowest)	Background transfers	1	BK	Low	0	CA0	1	0x08	11.4.2.10

8.3.2 DLNAQOS requirements: Ethernet

8.3.2.1 NC Ethernet DLNAQOS: Conformance

[GUIDELINE] If DLNAQOS is supported on an Ethernet network interface, then it shall be compliant with all mandatory requirements for tagging where Tagged packets are Ethernet packets that include priority tags conformant with IEEE 802.3:2002, 3.5, entitled Elements of the Tagged MAC Frame and Clause 9 of IEEE 802.1Q:2003.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 IEEE 802.3:2002	QQ463	

[COMMENT] Packet tagging is the QoS mechanism used for wired networks.

8.3.2.2 NC Ethernet DLNAQOS: Tagging

8.3.2.2.1

[GUIDELINE] If DLNAQOS is supported on an Ethernet network interface, then the implementation shall apply both the IEEE 802.1Q VLAN priority tag (except as noted in 8.3.2.2.4) as well as the DSCP tag to outgoing traffic in accordance with the DLNAQOS_UP value in Table 7 or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3).

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 IEEE 802.3:2 002	RIP7M	

[COMMENT] This guideline indicates that priorities above the values specified in Table 7 are not to be used.

For exchanges involving a request and response, the implementation returning a response might not know the required DLNAQOS_UP value until it has parsed the request. It is at that time when it needs to apply the appropriate DLNAQOS_UP value.

There can be TCP network traffic during connection establishment that uses an inappropriate DLNAQOS_UP value.

For an HTTP streaming operation, the server needs to ensure the appropriate DLNAQOS_UP value (or lower) is used for the Entity Body.

8.3.2.2.2

[GUIDELINE] The phrase "or a lower DLNAQOS_UP" value means that the highest permitted DLNAQOS_UP value should be used.

[ATTRIBUTES]

S	A	n/a	n/a	n/a	n/a	5NZMS	

8.3.2.2.3

[GUIDELINE] The phrase "or a lower DLNAQOS_UP" value also means that a lower DLNAQOS_UP value (indicated in the guideline) may be used.

[ATTRIBUTES]

O	A	n/a	n/a	n/a	n/a	V64Y4	

8.3.2.2.4

[GUIDELINE] For best-effort traffic on Ethernet, the implementation may omit the IEEE 802.1Q VLAN tag because frames with no tag are handled best-effort by default.

[ATTRIBUTES]

O	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 IEEE 802.3:2 002	6AZSX	

8.3.3 DLNAQOS requirements: IEEE 802.11

8.3.3.1 NC IEEE 802.11 DLNAQOS: Conformance

[GUIDELINE] If DLNAQOS is supported on an IEEE 802.11 network interface, then it shall conform to all mandatory requirements in the WiFi WMM Test Plan WMM Test Plan and specification WMM Specification.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	WMM Specification WMM Test Plan	VUO2Z	

[COMMENT] WMM provides the base level QoS specification for IEEE 802.11 network devices.

8.3.3.2 NC IEEE 802.11 DLNAQOS: Tagging

[GUIDELINE] If DLNAQOS is supported on an IEEE 802.11 network interface, then the implementation shall apply both the WMM tag as well as the DSCP tag to outgoing traffic in accordance with the appropriate DLNAQOS_UP value in Table 7 or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3).

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 IEEE 802.3:2 002 WMM Test Plan IETF RFC 2474	FGY4S	

[COMMENT] IEEE 802.1Q and DSCP correlation is in agreement with the WMM test plan recommendation.

This guideline indicates that priorities above the values specified in Table 7 are not to be used. For exchanges involving a request and response, the implementation returning a response might not know the required DLNAQOS_UP value until it has parsed the request. It is at that time when it needs to apply the appropriate DLNAQOS_UP value.

There can be TCP network traffic during connection establishment that uses an inappropriate DLNAQOS_UP value.

8.3.4 DLNAQOS requirements: MoCA

8.3.4.1 NC MoCA DLNAQOS: Conformance

[GUIDELINE] If DLNAQOS is supported on a MoCA network interface, then it shall be compliant with all mandatory requirements for Ethernet tagging where Tagged packets are Ethernet packets that include priority tags conformant with IEEE 802.3:2002, 3.5, entitled Elements of the Tagged MAC Frame and Clause 9 of IEEE 802.1Q:2003.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 MoCA MAC/PHY	TOVH8	

[COMMENT] Packet tagging is the QoS mechanism used for wired networks. MoCA requires an Ethernet convergence layer so that Ethernet packets are transported transparently across the MoCA network.

8.3.4.2 NC MoCA DLNAQOS: Tagging

[GUIDELINE] If DLNAQOS is supported on an MoCA network interface, then the implementation shall apply both the IEEE 802.1Q VLAN priority tag (except as noted in 8.3.2.2.4) as well as the DSCP tag to outgoing traffic in accordance with the DLNAQOS_UP value in Table 7 or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3).

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 MoCA MAC/PHY	Z4L9V	

[COMMENT] This guideline indicates that priorities above the values specified in Table 7 are not to be used.

For exchanges involving a request and response, the implementation returning a response might not know the required DLNAQOS_UP value until it has parsed the request. It is at that time when it is expected to apply the appropriate DLNAQOS_UP value.

There can be TCP network traffic during connection establishment that uses an inappropriate DLNAQOS_UP value.

For an HTTP streaming operation, the server needs to ensure the appropriate DLNAQOS_UP value (or lower) is used for the Entity Body.

8.3.5 DLNAQOS requirements: HPNA**8.3.5.1 NC HPNA DLNAQOS: Conformance**

[GUIDELINE] If DLNAQOS is supported on an HPNA network interface, then it shall be compliant with all mandatory requirements for Ethernet tagging where Tagged packets are Ethernet packets that include priority tags conformant with IEEE 802.3:2002, 3.5, entitled Elements of the Tagged MAC Frame and Clause 9 of IEEE 802.1Q:2003.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 ITU-T G.9954	39U8A	

[COMMENT] Packet tagging is the QoS mechanism used for wired networks. HPNA requires an Ethernet convergence layer so that Ethernet packets are transported transparently across the HPNA network.

8.3.5.2 NC HPNA DLNAQOS: Tagging

[GUIDELINE] If DLNAQOS is supported on an HPNA network interface, then the implementation shall apply both the IEEE 802.1Q:2003 VLAN priority tag (except as noted in 8.3.2.2.4) as well as the DSCP tag to outgoing traffic in accordance with the DLNAQOS_UP value in Table 7 or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3).

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 ITU-T G.9954	XQ6OB	

[COMMENT] This guideline indicates that priorities above the values specified in Table 7 are not to be used.

For exchanges involving a request and response, the implementation returning a response might not know the required DLNAQOS_UP value until it has parsed the request. It is at that time when it is expected to apply the appropriate DLNAQOS_UP value.

There can be TCP network traffic during connection establishment that uses an inappropriate DLNAQOS_UP value.

For an HTTP streaming operation, the server needs to ensure the appropriate DLNAQOS_UP value (or lower) is used for the Entity Body.

8.3.6 DLNAQOS requirements: HomePlug AV

8.3.6.1 NC HomePlug AV DLNAQOS: Conformance

[GUIDELINE] If DLNAQOS is supported on a HomePlug AV PHY network interface, then it shall be compliant with all mandatory requirements for Ethernet tagging where Tagged packets are Ethernet packets that include priority tags conformant with IEEE 802.3:2002, 3.5, entitled 'Elements of the Tagged MAC Frame' and Clause 9 of IEEE 802.1Q:2003.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 IEEE 802.3:2002 HomePlug AV Specification	J44NP	

[COMMENT] Packet tagging is the QoS mechanism used for wired networks. HomePlug AV requires an Ethernet convergence layer so that Ethernet packets are transported transparently across the Powerline network

8.3.6.2 NC HomePlug AV DLNAQOS: Tagging

[GUIDELINE] If DLNAQOS is supported on a HomePlug AV PHY network interface, then the implementation shall apply both the 802.1Q VLAN priority tag (except as noted in Requirement 8.3.2.2.4) as well as the DSCP tag to outgoing traffic in accordance with the DLNAQOS_UP value in Table 7 or a lower DLNAQOS_UP value (where "or a lower" is defined by the requirements of 8.3.2.2.2 and 8.3.2.2.3).

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 HomePlug AV Specification	5032M	

[COMMENT]

- 1) It is not permitted to use priorities above the values specified in Table 7.
- 2) For exchanges involving a request and response, the implementation returning a response may not know the required DLNAQOS_UP value until it has parsed the request. It is at that time when it should apply the appropriate DLNAQOS_UP value. Note: there can be TCP network traffic during connection establishment that uses an inappropriate DLNAQOS_UP value.
- 3) For an HTTP streaming operation, the server shall ensure the appropriate DLNAQOS_UP value (or lower) is used for the Entity Body.

8.3.7 DLNAQOS requirements: HD-PLC**8.3.7.1 NC HD-PLC DLNAQOS: Conformance**

[GUIDELINE] If DLNAQOS is supported on an HD-PLC PHY network interface, then it shall be compliant with all mandatory requirements for Ethernet tagging where Tagged packets are Ethernet packets that include priority tags conformant with IEEE 802.3:2002, 3.5, entitled 'Elements of the Tagged MAC Frame' and Clause 9 of IEEE 802.1Q:2003.

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q:2003 IEEE 802.3:2002 IEEE 1901	GR28V	

[COMMENT] Packet tagging is the QoS mechanism used for wired networks. HD-PLC requires an Ethernet convergence layer so that Ethernet packets are transported transparently across the Powerline network.

8.3.7.2 NC HD-PLC DLNAQOS: Tagging

[GUIDELINE] If DLNAQOS is supported on an HD-PLC PHY network interface, then the implementation shall apply both the 802.1Q VLAN priority tag (except as noted in Requirement 8.3.2.2.4) as well as the DSCP tag to outgoing traffic in accordance with the DLNAQOS_UP value in Table 7 or a lower DLNAQOS_UP value (where "or a lower" is defined by Requirements 8.3.2.2.2 and 8.3.2.2.3).

[ATTRIBUTES]

M	R	n/a	n/a	n/a	IEEE 802.1Q: 2003 IEEE 1901	IVHTK	

[COMMENT]

- 1) It is not permitted to use priorities above the values specified in Table 7.
- 2) For exchanges involving a request and response, the implementation returning a response may not know the required DLNAQOS_UP value until it has parsed the request. It is at that

time when it should apply the appropriate DLNAQOS_UP value. Note: there can be TCP network traffic during connection establishment that uses an inappropriate DLNAQOS_UP value.

- 3) For an HTTP streaming operation, the server shall ensure the appropriate DLNAQOS_UP value (or lower) is used for the Entity Body

8.4 Networking and connectivity: device requirements

8.4.1 General

The guidelines in this subclause specify the capabilities or combination of capabilities that DLNA devices specifically support. These specific device requirements reference the guidelines defined in 8.2, Table 7, and 8.2.6. For example, a specific requirement for DLNA HND devices is that they shall support either Ethernet or IEEE 802.11 connectivity. Ethernet and IEEE 802.11 capabilities are described in 8.2 and are referenced by name. Correspondingly, a specific requirement for DLNA MHD devices is that they shall support Ethernet, IEEE 802.11 connectivity where Ethernet, IEEE 802.11 is described in 8.2 and referenced by name.

8.4.2 Device requirements: common

8.4.2.1 NC Devices: IP stack

[GUIDELINE] DLNA Device Classes shall support a TCP/IP stack that includes IPv4, TCP, UDP, ARP, and ICMP components conformant to all required client aspects of IETF RFC 1122.

[ATTRIBUTES]

M	R	HND	MHD	n/a	IETF RFC 768 IETF RFC 791 IETF RFC 792 IETF RFC 793 IETF RFC 826 IETF RFC 1122	64Y4F	

[COMMENT] A DNS client is omitted because it is not strictly needed for UPnP operations on the network. Native IP addresses actually simplify the use of UPnP. Inclusion of DNS clients is out-of-scope for DLNA. This means that vendors are not prohibited from including a DNS client, but DLNA guidelines will not specify how to use DNS clients nor will the certification process test such behaviours.

8.4.2.2 NC Devices: IPv6 stack and address acquisition

[GUIDELINE] If a DLNA Device Class incorporates IPv6 connectivity, then it shall support IPv6 according to ISO/IEC 29341-1-2:2016 Annex A.

[ATTRIBUTES]

M	R	HND	MHD	n/a	ISO/IEC 29341-1-2:2016	UB9W4	N

[COMMENT] UPnP ISO/IEC 29341-1-2:2016 Annex A references a number of IETF RFCs that specify IPv6 behaviour.

8.4.2.3 NC Devices: IPv4 address acquisition

8.4.2.3.1

[GUIDELINE] DLNA Device Classes shall support DHCPv4 client functionality IETF RFC 2131 and obtain an IPv4 address and subnet mask from a home network DHCPv4 server if present.

They shall implement Auto IP as defined by the UPnP Device Architecture v1.0 specification (ISO/IEC 29341-1:2011) so that if a DHCPv4 server is not present on the home network, a link-local network address can be automatically acquired.

[ATTRIBUTES]

M	R	HND	MHD	n/a	IETF RFC 2131 ISO/IEC 29341-1:2011	NZMSY	

[COMMENT] This guideline includes an assumption that devices need to transition from DHCPv4 to Auto-IP, when devices fail to renew an expired IPv4 address (that was assigned by a DHCPv4 server). Likewise, Auto-IP requires the devices to make periodic attempts (once every 5 min) to acquire a DHCPv4-assigned IP address, when operating with a self-assigned IP address.

Although it is desirable for a device using a DHCPv4-assigned IP address to exhibit interoperability with a device using an Auto-IP address, DLNA states no requirement that full interoperability will occur in such scenarios.

8.4.2.3.2

[GUIDELINE] DLNA Device Classes that allocate addresses with the Auto-IP link local address allocation system of ISO/IEC 29341-1:2011 should adhere to all aspects of 2.7 of IETF RFC 3927:2005. No packet generated by a DLNA Device Class with an Auto-IP allocated address as the source or destination address should be sent to a router for forwarding.

[ATTRIBUTES]

S	R	HND	MHD	n/a	IETF RFC 3927:2005 ISO/IEC 29341-1:2011	IP7MK	

[COMMENT] Subclause 2.7 of IETF RFC 3927:2005 contains information how Auto-IP addresses are impacted by routed subnets.

8.4.2.3.3

[GUIDELINE] DLNA Device Classes that allocate addresses with the DHCP address allocation system should adhere to all aspects of 2.7 of IETF RFC 3927:2005. No packet generated by a DLNA Device Class with an Auto-IP allocated address as the destination address should be sent to a router for forwarding.

[ATTRIBUTES]

S	R	HND	MHD	n/a	IETF RFC 3927:2005	Q463H	

[COMMENT] Subclause 2.7 of IETF RFC 3927:2005 contains information how Auto-IP addresses are impacted by routed subnets.

8.4.2.3.4

[GUIDELINE] DLNA Device Classes that allocate addresses with the Auto-IP link local address allocation system of ISO/IEC 29341-1:2011 should attempt to interoperate with DLNA Device Classes that have allocated DHCPv4 addresses as indicated in Clause 3 of IETF RFC

3927:2005 as to the interaction between link-local and non-link-local addresses. A DLNA Device Class should attempt to send all packets on the local link.

[ATTRIBUTES]

S	R	HND	MHD	n/a	IETF RFC 3927:2005 ISO/IEC 29341-1:2011	VW6Y8	

8.4.2.3.5

[GUIDELINE] DLNA Device Classes that allocate addresses with the DHCPv4 address allocation system should attempt to interact with endpoints that have allocated link-local Auto-IP addresses as indicated in Clause 3 of IETF RFC 3927:2005. A DLNA Device Class should attempt to send all packets bound to a link-local address on the local link.

[ATTRIBUTES]

S	R	HND	MHD	n/a	IETF RFC 3927:2005	EENJB	

8.4.2.3.6

[GUIDELINE] When the lease on an IPv4 address expires, and the DLNA Device Class is unable to renew the lease on that IPv4 address, or obtain a lease on a new IPv4 address, the Device Class shall use an Auto-IP address. The Auto-IP address can be acquired before or after the DHCPv4 lease expires.

[ATTRIBUTES]

M	A	HND	MHD	n/a	IETF RFC 3927:2005 IETF RFC 2131 ISO/IEC 29341-1:2011	W7RVO	

[COMMENT] This guideline specifies that a DLNA Device Class will not use an expired DHCPv4 IPv4 address. The Auto-IP address can be previously obtained and defended while the DHCPv4 lease was active. Alternatively the Device Class can obtain a new Auto-IP address as defined in 8.4.2.3.1.

8.4.2.4 NC Devices: DLNAQOS support

8.4.2.4.1

[GUIDELINE] DLNA Device Classes should support DLNAQOS on all network interfaces.

[ATTRIBUTES]

S	A	HND	MHD	n/a	n/a	6YK2S	

8.4.2.4.2

[GUIDELINE] If DLNAQOS is supported on an Ethernet network interface by a DLNA Device Class, then it shall be conformant to all [NC Ethernet DLNAQOS:] labelled requirements in 8.3.

[ATTRIBUTES]

M	A	HND	MHD	n/a	n/a	QFZZ7	

8.4.2.4.3

[GUIDELINE] If DLNAQOS is supported on an IEEE 802.11 network interface by a DLNA Device Class, then it shall be conformant to all [NC IEEE 802.11 DLNAQOS:] labelled requirements in 8.3.

[ATTRIBUTES]

M	A	HND	MHD		n/a	FZZ7O	

8.4.2.4.4

[GUIDELINE] If DLNAQOS is supported on a MoCA network interface by a DLNA Device Class, then it shall be conformant to all [NC MoCA DLNAQOS:] labelled requirements in 8.3

[ATTRIBUTES]

M	A	HND	MHD	n/a	n/a	6UAFT	

8.4.2.4.5

[GUIDELINE] If DLNAQOS is supported on an HPNA network interface by a DLNA Device Class, then it shall be conformant to all [NC HPNA DLNAQOS:] labelled requirements in 8.3

[ATTRIBUTES]

M	A	HND	MHD	n/a	n/a	7L9NB	

8.4.2.4.6

[GUIDELINE] If DLNAQOS is supported on a HomePlug AV PHY network interface by a DLNA Device Class, then it shall be conformant to all [NC HomePlug AV DLNAQOS:] labelled requirements in the Networking and connectivity: QoS Requirements

[ATTRIBUTES]

M	A	HND	MHD	n/a	n/a	QAR95	

8.4.2.4.7

[GUIDELINE] If DLNAQOS is supported on an HD-PLC PHY network interface by a DLNA Device Class, then it shall be conformant to all [NC HD-PLC DLNAQOS:] labelled requirements in the Networking and connectivity: QoS Requirements

[ATTRIBUTES]

M	A	HND	MHD	n/a	n/a	J8HST	

8.4.3 Device requirements: HND

8.4.3.1 NC HND devices: required/optional connectivity

8.4.3.1.1

[GUIDELINE] DLNA Device Classes shall support at least one of the following connectivity selections:

- Ethernet conformant to all [NC Ethernet:] labelled requirements in the General Capability Requirements of 8.2.
- IEEE 802.11 conformant to all [NC IEEE 802.11:] labelled requirements in the General Capability Requirements of 8.2.

[ATTRIBUTES]

M	R	HND	n/a	n/a	n/a	7RVON	

8.4.3.1.2

[GUIDELINE] DLNA Device Classes may support the following connectivity selections:

- MoCA conformant to all [NC MoCA:] labelled requirements in the General Capability Requirements of 8.2.
- HPNA conformant to all [NC HPNA:] labelled requirements in the General Capability Requirements of 8.2.
- Homeplug AV PHY conformant to all [NC HomePlug AV:] labelled requirements in the General Capability Requirements of 8.2.
- HD-PLC PHY conformant to all [NC HD-PLC:] labelled requirements in the General Capability Requirements of 8.2.

[ATTRIBUTES]

O	R	HND	n/a	n/a	n/a	CD695	

[COMMENT] MoCA, HPNA, HomePlug AV and HD-PLC are optional networks and connectivity for DLNA Device Classes in the HND Device Category.

8.4.3.2 NC HND devices: recommended connectivity

[GUIDELINE] DLNA Device Classes should support all of the following connectivity selections:

- Ethernet conformant to all [NC Ethernet:] labelled requirements in the General Capability Requirements of 8.2.
- IEEE 802.11 conformant to all [NC IEEE 802.11:] labelled requirements in the General Capability Requirements of 8.2.

Any of the above selections can be supported via an add on card, dongle, or equivalent.

[ATTRIBUTES]

S	R	HND	n/a	n/a	n/a	ZSXY	

[COMMENT] This guideline is intended to ensure that a consumer does not have to understand the different network connectivity types when purchasing a DLNA product. A consumer will be assured a newly purchased product will work with other previously purchased DLNA products.

8.4.4 Device requirements: MHD

8.4.4.1 NC MHD devices: required/optional connectivity

8.4.4.1.1

[GUIDELINE] DLNA Device Classes shall support at least one of the following connectivity selections:

- Ethernet conformant to all [NC Ethernet:] labelled requirements in the General Capability Requirements of 8.2.
- IEEE 802.11 conformant to all [NC IEEE 802.11:] labelled requirements in the General Capability Requirements of 8.2.

[ATTRIBUTES]

M	R	MHD	n/a	n/a	n/a	O2ZUW

8.4.4.1.2

[GUIDELINE] DLNA Device Classes may support the following connectivity selections:

- MoCA conformant to all [NC MoCA:] labelled requirements in the General Capability Requirements of 8.2.
- HPNA conformant to all [NC HPNA:] labelled requirements in the General Capability Requirements of 8.2.
- HomePlug AV PHY conformant to all [NC HomePlug AV:] labelled requirements in the General Capability Requirements of 8.2.
- HD-PLC PHY conformant to all [NC HD-PLC:] labelled requirements in the General Capability Requirements of 8.2.

[ATTRIBUTES]

O	R	MHD	n/a	n/a	n/a	F855B

[COMMENT] MoCA, HPNA, HomePlug Av and HD-PLC are optional networks and connectivity for DLNA Device Classes in the HND Device Category.

9 Device discovery and control

9.1 General

This clause of the DLNA Home Networked Device Interoperability Guidelines covers the guidelines for implementing device discovery and control using the UPnP device architecture. These guidelines balance the needs for both devices and control points, and specify rules for a variety of protocol areas, such as SSDP, GENA events, SOAP actions, and HTTP transports for UPnP communications. It should be noted that HTTP guidelines in this clause apply only to UPnP-related transactions and not to content transfer transactions.

In this clause, the following terms are used.

- UPnP endpoints: refers to both UPnP devices and UPnP control points.
- HTTP clients: refers to the HTTP clients used for UPnP communications. HTTP client guidelines in this clause do not apply to HTTP transport for content transfers or playback.
- HTTP servers: refers to the HTTP servers used for UPnP communications. HTTP server guidelines in this clause do not apply to HTTP transport for content transfers or playback.

The general rules for handling XML documents and fragments are specified in 6.7.

9.2 Device discovery and control guidelines

9.2.1 DDC UPnP Device Architecture

9.2.1.1

[GUIDELINE] DLNA Device Classes and Device Capabilities shall fully support the applicable mandatory portions of the UPnP Device Architecture v1.0 (UPnP DA) for discovery, description, control, eventing, and presentation.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	YH2P3	

[COMMENT] DLNA specifies UPnP Device Architecture 1.0 (UPnP DA) as the basic protocol framework for Device Classes.

9.2.1.2

[GUIDELINE] A UPnP control point designed for a version of a UPnP Device Architecture, shall also be able to interoperate with later versions of the UPnP Device Architecture that have the same major versions.

"Interoperate" means that a control point that has certain capabilities for older devices can at least provide the same capabilities for newer devices. For example, a control point that can discover an older UPnP device, parse its device and service description files, and invoke its UPnP actions shall be able to do those same things with a UPnP device with a newer minor revision of the UPnP Device Architecture.

[ATTRIBUTES]

M	C	DMP DMC M-DMP +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMC	n/a	ISO/IEC 29341-1:2011	TT4PY	

[COMMENT] Clause 1 of ISO/IEC 29341-1:2011 indicates that advances in minor version of the UPnP Device Architecture are a superset of earlier (minor) versions with the same major version. This means that future UPnP devices with a newer minor revision will implement all of the behaviour required of the previous device architectures.

Although not explicitly stated by the UPnP Device Architecture, the intent of such backwards compatibility rules is to enable forward compatibility of control points with newer, minor revisions of the UPnP device architecture. Guidelines 9.2.1.2 and 9.2.1.3 formally require forward compatibility of control points, which is necessary for future interoperability.

The version of the UPnP Device Architecture appears in the <specVersion> element of the device and service descriptions and the SERVER header in SSDP, SOAP, and GENA messages.

One way to implement 9.2.1.2 is for the UPnP control point to treat the minor version of a UPnP device architecture as 0 (i.e. ignore the minor version).

9.2.1.3

[GUIDELINE] A UPnP control point designed for a version of a UPnP device type or service type shall be able to interoperate with later versions of the same device type or service type.

"Interoperate" means that a control point that has certain capabilities for an older device can at least provide the same capabilities for a newer device of the same type and services. For example, a control point that can discover an older UPnP AV MediaServer and invoke its CDS:Browse action shall be able to discover and invoke CDS:Browse on a newer UPnP MediaServer. The newer UPnP device can be newer because the device type and/or one of its associated UPnP services are of a newer version.

[ATTRIBUTES]

M	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	GZJXU	

[COMMENT] Subclause 2.1 of ISO/IEC 29341-1:2011 states that standardized device types and service types are required to be a superset of all previous versions of the same device/service type. This means that future UPnP device and service types will require all of the behaviour defined for previous versions.

Device version appears as part of the value in a <deviceType> element of a device description file. Similarly, the service version appears as part of the value in a <serviceType> element of a service description file. Version numbers also appear in NT, ST, and USN headers of SSDP messages. Furthermore, a service version appears in the xmlns namespace attributes of SOAP messages.

Older control points that interact with newer UPnP device/service types are not expected to interoperate with conventions established for the newer device or service type, but they will still use parts of the UPnP device/service that are compatible with the older conventions.

9.2.1.4

[GUIDELINE] If a SOAP action was defined in the specification of a previous service version, a UPnP control point may specify the xmlns namespace attribute for the service type and the SOAP ACTION header in the SOAP request with the earlier service version.

[ATTRIBUTES]

O	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	6S95W	

[COMMENT] In other words, if a SOAP action was defined in the specification of a previous service version (e.g. version 1), then a UPnP control point can invoke the SOAP action with the earlier service version regardless of the service version described in the device description.

9.2.1.5

[GUIDELINE] If a DLNA Device Class and Device Capability implements the IPv6 Connectivity Optional Device Function then it shall conform to Annex A of ISO/IEC 29341-1-2:2016 for discovery, description, control, eventing and presentation.

[ATTRIBUTES]

M	R	HND	MHD	n/a	ISO/IEC 29341-1-2:2016	6TRHC	N

[COMMENT] Annex A of ISO/IEC 29341-1-2:2016 references a number of IETF RFCs that specify IPv6 behaviour.

9.2.1.6

[GUIDELINE] If a UPnP Control Point that incorporates the IPv6 Connectivity Device Function is presented with both IPv4 and IPv6 addresses for UPnP Communications, then it shall use the IPv4 address for subsequent communications.

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1-2:2016	C5RCV	N

9.2.1.7

[GUIDELINE] DLNA Device Classes and Device Capabilities shall implement the IPv6 Connectivity Device Function.

[ATTRIBUTES]

M	R	HND	MHD	n/a	n/a	9RQFP	N

9.2.2 DDC UPnP Auto IP support

9.2.2.1

[GUIDELINE] UPnP devices and control points shall implement the Auto-IP behaviour defined in ISO/IEC 29341-1:2011 even if they implement a DHCPv4 server.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	G55WU	

[COMMENT] DLNA Device Classes that do not properly support DHCPv4 and AutoIP as required by the UPnP DA can cause IPv4 addressing problems for other UPnP entities. See Annex E for Auto-IP developer guidance and Annex G for guidance on address conflict resolution in Auto-IP

9.2.2.2

[GUIDELINE] Whenever a UPnP device switches to a new IPv4 address (whether assigned through Auto-IP or DHCPv4), the device should send an ssdp:byebye message for (and on) the old IPv4 address.

For (and on) the old IPv4 address means that the IPv4 address indicated in the (UDP header of the) ssdp:byebye matches the old IPv4 address of the UPnP device.

[ATTRIBUTES]

S	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	WANFQ	

[COMMENT] This allows control points that discovered the UPnP device on the old IPv4 address to know that the UPnP device is no longer available at the old address. However, this behaviour is not always possible for implementations built on some platforms.

9.2.2.3

[GUIDELINE] If UPnP devices and control points use a self-assigned IPv4 address, then they shall implement duplicate address detection before assigning the address.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	WS55I	

[COMMENT] This guideline repeats a UPnP DA requirement that prevents the assignment of conflicting IPv4 addresses (see 0.2 and 0.3 of ISO/IEC 29341-1:2011).

9.2.2.4

[GUIDELINE] If a DLNA device class implements a DHCPv4 server, it shall provide a mechanism to disable and enable the DHCPv4 server.

[ATTRIBUTES]

M	A	HND	MHD	n/a	ISO/IEC 29341-1:2011	JCPVD	

[COMMENT] This guideline clarifies the condition for DHCPv4 server support in a DLNA device. The user needs to be able to disable the DHCPv4 server function to avoid the presence of multiple DHCPv4 servers providing different network configurations on the same home network.

9.2.3 DDC UPnP SSDP default port

9.2.3.1

[GUIDELINE] UPnP devices shall receive and process M-SEARCH messages on port 1900.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	4NBO8	

[COMMENT] This requirement ensures that devices always listen on port 1900. Devices respond to M-SEARCH messages according to ISO/IEC 29341-1:2011.

9.2.3.2

[GUIDELINE] UPnP control points should receive and process NOTIFY messages on port 1900.

[ATTRIBUTES]

S	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	DEPDO	

[COMMENT] This guideline encourages UPnP control points to listen on port 1900 and use the information from NOTIFY messages (ssdp:alive and ssdp:byebye). However, some UPnP control points rely on M-SEARCH messages instead of NOTIFY messages to keep track of UPnP devices. For example, if UPnP control points connect sporadically to the network to perform media-related tasks.

9.2.3.3

[GUIDELINE] UPnP devices shall always explicitly specify port 1900 in every HOST header tag for every SSDP message.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	9MI39	

9.2.3.4

[GUIDELINE] UPnP control points receiving an SSDP message without the port number in the HOST header tag shall infer the port number is 1900.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	GQ888	

9.2.3.5

[GUIDELINE] UPnP control points shall send M-SEARCH messages using a source port greater than 1024 and not 1900.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	Q888R	

[COMMENT] These guidelines are based on a Microsoft technical advisory regarding security concerns for UPnP.

9.2.3.6

[GUIDELINE] UPnP devices may ignore M-SEARCH messages if the originating source port is less than or equal to 1024 or equal to 1900.

[ATTRIBUTES]

O	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	MI39Y	

9.2.4 DDC UPnP discovery robustness**9.2.4.1**

[GUIDELINE] UPnP endpoints (devices and control points) should wait a random amount of time, between 0 ms and 100 ms after acquiring a new IP address, before sending advertisements or initiating searches on the new IP address.

[ATTRIBUTES]

S	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	NBO8C	

[COMMENT] This suggestion avoids SSDP discovery flooding on home networks that contain a large number of UPnP endpoints.

9.2.4.2

[GUIDELINE] UPnP network devices shall not send more than 10 ssdp:alive messages from a single IP address in any given 200 ms period.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	CPVDX	

[COMMENT] This guideline prevents lost packets caused by buffer overflow of Ethernet drivers by UPnP devices with many services or embedded devices in the device hierarchy.

9.2.4.3

[GUIDELINE] UPnP devices shall send each advertisement set more than once on a single network interface. It is recommended that UPnP devices send a total of 2 or 3 advertisement sets.

An advertisement set refers to the set of 3+2d+k ssdp:alive messages that UPnP device sends as part of its periodic advertisements.

The repeated advertisement sets are referred to as duplicate sets.

The transmission windows for advertisement sets and duplicate sets cannot overlap in time.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	S55IQ	

[COMMENT] This guideline clarifies how a UPnP device needs to retransmit its advertisements. However, implementers are reminded that advertising too frequently runs the risk of flooding the SSDP channel.

9.2.4.4

[GUIDELINE] A UPnP device that uses the same UDN on multiple network interfaces, shall send each individual ssdp:alive message (from an advertisement set) on all interfaces within a 10 s transmission window.

Time intervals between individual ssdp:alive messages on a single interface are not restricted by this requirement.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	ANFQT	

[COMMENT] Control Points need a way to determine the most reliable network route to the UPnP device. This guideline ensures that control points will receive an individual ssdp:alive message on all network interfaces within a 10 s transmission window.

9.2.4.5

[GUIDELINE] The interval of sending these advertisement groups on a single network interface shall be less than half of the CACHE-CONTROL value.

The first advertisement set and the duplicate sets (transmitted on a single network interface) make up an advertisement group.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	55WUY	

[COMMENT] For consistency and interoperability, devices need to advertise more often than their notification cycle. However, implementers are reminded that advertising too frequently runs the risk of flooding the SSDP channel.


9.2.4.6

[GUIDELINE] The CACHE-CONTROL value should be at least 1 800, as recommended in the UPnP device architecture.

[ATTRIBUTES]

S	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	S95WV	

[COMMENT] Most devices that remain on the network for long periods have a CACHE-CONTROL value of 1 800. However, some devices (mobile, wireless, etc.) might want a smaller CACHE-CONTROL value.

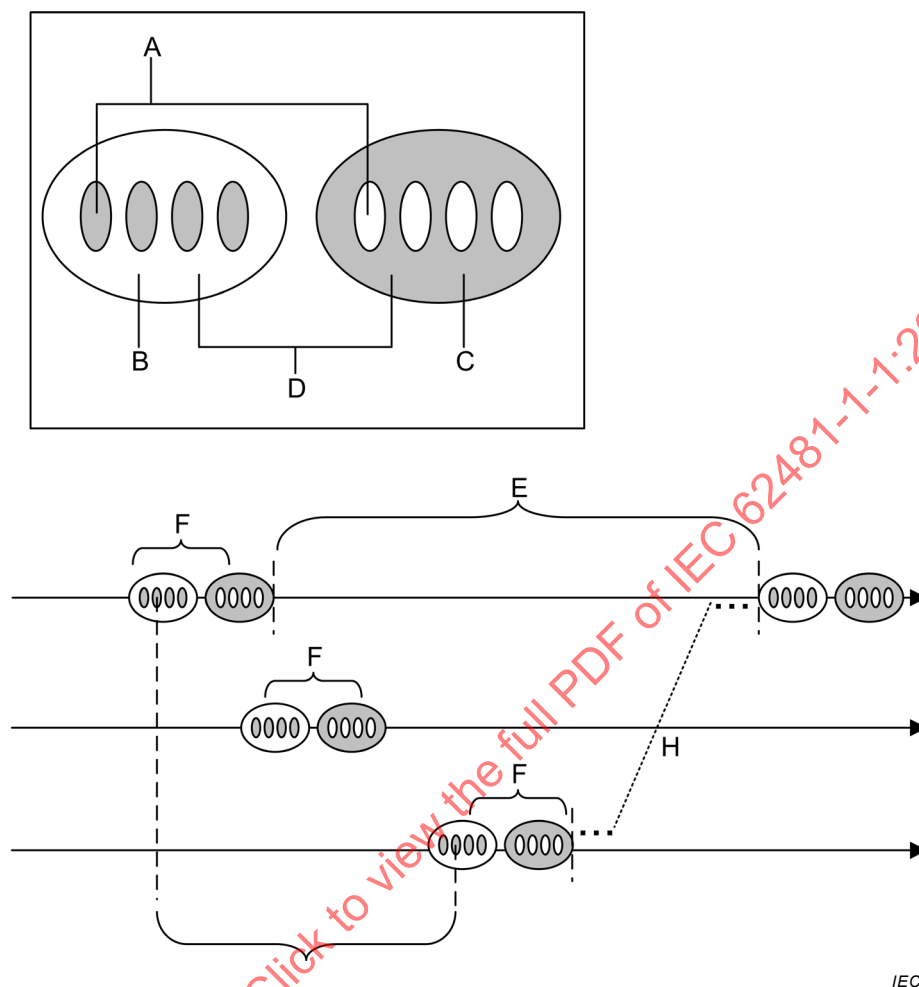

IEC

Key

- A One or more ssdp:alive messages, within advertisement sets and duplicate sets.
- B Advertisement set of $3+2d+k$ ssdp:alive messages.
- C Duplicate set of $3+2d+k$ ssdp:alive messages (see 9.2.4.3).
- D Combined advertisement set and duplicate sets make an advertisement group (see 9.2.4.5).
- E Delay between advertisement groups on same network is less than half of a CACHE-CONTROL value (see 9.2.4.5).
- F Any arbitrary window of 200 ms have 10 or fewer ssdp:alive messages (see 9.2.4.2). An entire advertisement set need not fit inside the 200 ms window.
- G An individual ssdp:alive message shall have all corresponding ssdp:alive sent within a 10 s transmission window (see 9.2.4.4).
- H This delay is not drawn to scale.

Figure 15 – UPnP discovery robustness

9.2.4.7

[GUIDELINE] Due to the unreliable nature of UDP, control points should send each M-SEARCH message more than once, not to exceed 10 M-SEARCH requests in a 200 ms period. An M-SEARCH message and its repeated duplicates should all be sent within a 10 s period. See Figure 15 for an example of UPnP discovery robustness.

[ATTRIBUTES]

S	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	ZJXUT	

[COMMENT] Wireless access points do not retry multicast traffic and can cause UPnP discovery problems. This recommendation repeats advice from the UPnP DA.

The 10 M-SEARCH messages per 200 ms period is consistent with maximum saturation limit of 10 ssdp:alive messages per 200 ms period for UPnP devices (9.2.4.2). Likewise, the sending of all the M-SEARCH messages in a window of 10 s is consistent with the requirement where all duplicates of an individual ssdp:alive message are sent within 10 s (9.2.4.4).

9.2.4.8

[GUIDELINE] The control point should wait at least the amount of time specified in the MX header for responses to arrive from devices. The time waited for responses should be extended by additional time (a second or two) to allow for network propagation and processing delays.

[ATTRIBUTES]

S	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	T4PYW	

9.2.4.9

[GUIDELINE] Upon startup, UPnP devices should broadcast an ssdp:byebye before sending the initial ssdp:alive onto the local network.

[ATTRIBUTES]

S	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	H2P3Y	

[COMMENT] The UPnP device architecture specification does not account for devices that reset without sending an ssdp:byebye. If devices do not send an ssdp:byebye when returning to the network after such an event, control points cannot tell if the received announcement is for a new device instance, or is merely a periodic announcement for the same device instance.

Sending an ssdp:byebye as part of the normal start up process for a UPnP device ensures that UPnP control points with information about the previous device instance will safely discard state information about the previous device instance before communicating with the new device instance.

9.2.4.10

[GUIDELINE] UPnP control points after acquiring a new IP address shall initiate searches (e.g. M-SEARCH) from the new IP address.

[ATTRIBUTES]

M	A	DMP DMC +UP+ +DN+ +PU+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	SSV9L	

[COMMENT] This guideline ensures a Control Point always discovers the available UPnP devices after the acquisition of the new IP address, independent of whether the IP address is IPv4 or IPv6. The timing of issuing M-SEARCH is as specified in guideline 9.2.4.1 as guidance.

9.2.5 DDC UPnP HTTP support and general rules**9.2.5.1**

[GUIDELINE] UPnP endpoints (devices and control points) shall support at least HTTP/1.0 (IETF RFC 1945) for performing UPnP communications, excluding SSDP communications.

For SSDP communications, UPnP endpoints shall use the HTTP/1.1 message format defined in ISO/IEC 29341-1:2011.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 1945 ISO/IEC 29341-1:2011	SV9LG	

[COMMENT] SSDP messages are based on the HTTP/1.1 message format with method and header extensions.

9.2.5.2

[GUIDELINE] UPnP devices shall support HTTP/1.1.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-1:2011	2P3YZ	

[COMMENT] Although HTTP/1.0 is the baseline for UPnP communications, HTTP/1.1 is encouraged.

9.2.5.3

[GUIDELINE] HTTP servers of UPnP control points shall support HTTP/1.1.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 2616:1999 ISO/IEC 29341-1:2011	4PYWQ	

9.2.5.4

[GUIDELINE] HTTP clients of UPnP control points should use and support HTTP/1.1.

[ATTRIBUTES]

S	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 2616:1999 ISO/IEC 29341-1:2011	JXUT6	

9.2.5.5

[GUIDELINE] The message format of HTTP responses (sent by HTTP servers of both devices and control points) shall be compliant with the version number specified by the request.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2145	95WVR	

[COMMENT] The clarifying IETF specification (IETF RFC 2145) states that HTTP/1.1 servers should return HTTP/1.1 even if the HTTP server receives a request marked with HTTP/1.0. The robustness rules, specified by the HTTP specification, enables clients and servers that employ different HTTP version numbers to coexist properly.

9.2.5.6

[GUIDELINE] HTTP/1.1 servers of UPnP endpoints (devices and control points) should return HTTP version 1.1 in the response header, regardless of the version specified in the HTTP client's request.

[ATTRIBUTES]

S	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2145	5WUY7	

9.2.5.7

[GUIDELINE] HTTP servers of UPnP endpoints (devices and control points) shall not report a higher version of HTTP than is actually supported by the implementation.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	NFQTX	

9.2.5.8

[GUIDELINE] The HTTP servers and clients of UPnP endpoints (devices and control points) shall be able to properly parse all HTTP headers provided to them. In particular, they shall

support HTTP header tags in any order and accept the tag name in a case insensitive manner and associated data in a case sensitive manner. If a header tag is not recognized by a UPnP endpoint, it shall ignore the header and continue parsing the packet.

This guideline applies to all HTTP headers, regardless of whether the DLNA guidelines define a BNF syntax for the HTTP header value. In other words, all endpoints shall implement a "parse and interpret" or "parse and ignore" when parsing an HTTP header field.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 1945 IETF RFC 2616:1999	55IQI	

[COMMENT] This guideline specifies a minimal robustness level for parsing HTTP headers. The HTTP headers include both HTTP headers defined in IETF RFC 2616:1999 and other headers, such as DLNA defined and vendor defined headers, used for DLNA interoperability.

9.2.5.9

[GUIDELINE] The HTTP servers and clients of UPnP endpoints (devices and control points) shall include the Content-Type header tag in every UPnP-related TCP-based HTTP transaction (SOAP, GENA, and device/service description) that contains an XML body. This content type shall always be marked as the following:

- text/xml; charset="utf-8"

Note that charset parameter value is case insensitive and double quotations may be omitted.

Furthermore, the XML shall be encoded in UTF-8.

UPnP endpoints (devices and control points) that receive a content type of text/xml shall infer UTF-8 character set encoding.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 1945 IETF RFC 2616:1999	PVDXI	

[COMMENT] Restricting UPnP communications to UTF-8 simplifies implementations so that devices need not implement a separate parsing engine for every local region.

9.2.5.10

[GUIDELINE] If the DLNA guidelines define a BNF syntax for an HTTP header, then the HTTP servers and clients of UPnP endpoints shall not include white spaces in the header-value of HTTP headers unless SP and LWS are explicitly specified in the syntax (BNF) definitions.

If the DLNA guidelines do not define a BNF syntax for an HTTP header, then the header shall conform to the message-header syntax in 4.2 of IETF RFC 2616:1999, regardless of whether the HTTP header is defined in IETF RFC 2616:1999 or if the HTTP header is vendor-defined. Note that the syntax for field-value permits LWS to separate tokens and other data in the field-value.

Implied LWS between the HTTP header-name and the HTTP header-value are permitted as specified in IETF RFC 2616:1999, regardless of whether the DLNA guidelines specify a BNF syntax for the HTTP header.

[ATTRIBUTES]

M	A	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	BO8CA	

[COMMENT] Conformance to 6.4, the restriction on the use of SP and LWS characters, is applied in UPnP HTTP communications. White spaces between header-name and header-value are still acceptable.

The header-name and header-value are defined by the field-name and field-value tokens of the message-header syntax in 4.2 of IETF RFC 2616:1999.

9.2.6 DDC UPnP HTTP/1.0 rules

9.2.6.1

[GUIDELINE] For all HTTP/1.0 transactions, the HTTP server shall close the TCP connection after sending the complete HTTP response. This guideline covers both kinds of HTTP/1.0 transactions:

- HTTP/1.1 server responds to an HTTP/1.0 request, and
- HTTP/1.0 server responds to an HTTP/1.1 request.

[ATTRIBUTES]

M	C	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 1945 IETF RFC 2616:1999	I39YP	

[COMMENT] The use of the Content-Length field greatly reduces the parsing complexity of HTTP message bodies on a UPnP control point.

When an HTTP server responds to an HTTP/1.0 request without closing the socket, the Content-Length field is the only method that a client can use to determine that the entire response was received.

9.2.6.2

[GUIDELINE] If a UPnP device's HTTP server responds to a SOAP request as part of an HTTP/1.0 transaction, then the UPnP device shall close the TCP connection after the response has been sent.

This guideline covers both kinds of HTTP/1.0 transactions:

- HTTP/1.1 server responds to an HTTP/1.0 request, and
- HTTP/1.0 server responds to an HTTP/1.1 request.

Also note that in both of the above cases, the UPnP device has the HTTP server and the UPnP control point issues the HTTP request.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	IETF RFC 1945 IETF RFC 2616:1999	39YPQ	

[COMMENT] This is the proper behaviour for a UPnP device, as it follows standard HTTP rules.

9.2.6.3

[GUIDELINE] If a UPnP control point's HTTP server responds to a GENA event as part of an HTTP/1.0 transaction, then the control point shall close the TCP connection after the response has been sent.

This guideline covers both kinds of HTTP/1.0 transactions:

- HTTP/1.1 server responds to an HTTP/1.0 request, and
- HTTP/1.0 server responds to an HTTP/1.1 request.

Also note that in both of the above cases, the UPnP control point has a HTTP server and the UPnP devices issue the HTTP request.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 1945 IETF RFC 2616:1999	88RDT	

[COMMENT] This is the proper behaviour for a UPnP control point.

9.2.7 DDC UPnP HTTP/1.1 transaction rules**9.2.7.1**

[GUIDELINE] A UPnP device's HTTP server shall close the TCP connection after responding to a SOAP request with the CONNECTION: CLOSE token.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	IETF RFC 2616:1999	O8CA7	

9.2.7.2

[GUIDELINE] A UPnP control point's HTTP server shall close the TCP connection after responding to an event that was sent with the CONNECTION: CLOSE token.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 2616:1999	VDXID	

9.2.7.3

[GUIDELINE] HTTP clients of UPnP endpoints (devices and control points) shall not report support for HTTP/1.1 unless they also support Chunked Transfer Coding and correctly parse a 100 (Continue Response), as required by the HTTP/1.1 specification.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	5IQI5	

[COMMENT] Only HTTP clients that support Chunked Transfer Coding and 100 (Continue Response) messages can initiate HTTP/1.1 transactions.

9.2.7.4

[GUIDELINE] The HTTP servers of UPnP endpoints (devices and control points) shall use the Content-Length HTTP header tag at all times, unless the connection will be closed after the response is sent or Chunked Transfer Coding is used.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	FQTXQ	

[COMMENT] When an HTTP/1.1 server sends a response back to the client without closing the socket afterwards, the client will not know when the entire response was received, unless the response was encoded with Chunked Transfer Coding, without interpreting the Content-Length header.

9.2.7.5

[GUIDELINE] The HTTP clients of UPnP endpoints (devices and control points) may issue HTTP/1.1 requests encoded with Chunked Transfer Coding.

[ATTRIBUTES]

O	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	WUY7P	

[COMMENT] These guidelines repeat the HTTP specification by noting the permitted use of Chunked Transfer Coding for HTTP/1.1 requests. HTTP clients of UPnP devices can use Chunked Transfer Coding for delivery of UPnP GENA events. HTTP clients of UPnP control points can use Chunked Transfer Coding for delivery of UPnP SOAP actions. As such, HTTP/1.1 servers of UPnP endpoints are required to support HTTP/1.1 requests encoded with Chunked Transfer Coding.

9.2.7.6

[GUIDELINE] The HTTP servers of UPnP endpoints (devices and control points) shall accept, decode, and respond to HTTP/1.1 requests encoded with Chunked Transfer Coding.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	5WVR8	

9.2.8 DDC UPnP HTTP persistent connections**9.2.8.1**

[GUIDELINE] The HTTP clients and servers of UPnP endpoints (devices and control points) should support persistent HTTP/1.1 connections and pipelining.

[ATTRIBUTES]

S	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	PYWQP	

[COMMENT] Persistent HTTP connections allow devices and control points to use fewer resources when communicating. Pipelining adds the ability for control points to queue requests onto an existing session.

9.2.8.2

[GUIDELINE] The HTTP clients of UPnP endpoints should use persistent HTTP/1.1 connections.

[ATTRIBUTES]

S	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	P3YZ8	

[COMMENT] The default behaviour for HTTP/1.1 is a persistent connection. Persistent connections result in no accumulation of TCP TIME-WAIT because the originator of the connection closes the socket.

9.2.8.3

[GUIDELINE] The HTTP clients of UPnP endpoints shall fall back to non-pipelining if the connection is closed after the first request and a second (or more) request from the same network entity is pending.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	V9LGQ	

[COMMENT] This guideline ensures consistent and correct behaviour between mixes of UPnP endpoints that might or might not support HTTP pipelining.

9.2.8.4

[GUIDELINE] The HTTP servers of UPnP endpoints (devices and control points) that do not support persistent connections shall answer the first HTTP request from the requesting UPnP control point and close the TCP connection to correctly ignore other requests.

[ATTRIBUTES]

M	C	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	9LGQX	

9.2.8.5

[GUIDELINE] The HTTP clients of UPnP endpoints that send multiple requests in a single HTTP session shall be ready to open new HTTP sessions if the device does not respond to all requests on the initial HTTP session.

[ATTRIBUTES]

M	C	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	3YZ8Z	

9.2.8.6

[GUIDELINE] The HTTP clients of UPnP endpoints shall close a persistent connection (HTTP/1.1) within 60 s of inactivity (i.e., no traffic and no pending requests).

This guideline applies to both UPnP devices and control points. Context of this guideline is specific to UPnP related communications, excluding SSDP communications. This guideline does not apply to the transport layer communications for media content transfers.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	YWQPE	

[COMMENT] This prevents control points and devices from holding network sockets for an unnecessarily long period.

9.2.9 DDC UPnP device responsiveness

9.2.9.1

[GENERAL] UPnP Device Architecture specification requires UPnP devices to complete the SOAP response in 30 s. However, this can be difficult to guarantee at the implementation layer for all types of UPnP actions. These guidelines attempt to strike a balance between ideal goals and practical implementation needs for both devices and control points.

That being stated, the original inspiration for these guidelines is that some UPnP AV MediaServer devices cannot guarantee that a response will complete within 30 s for a variety of reasons. Network bandwidth, query complexity, and hardware performance can vary. This being the case, such devices shall still begin their response within 30 s.

Also note that a UPnP AV MediaServer can reduce a long transmission time for a SOAP response (for a CDS:Browse or CDS:Search action) by reducing the number of returned items in the result. See Guideline 10.1.4.10.7 for more information.

9.2.9.2

[GUIDELINE] UPnP devices shall begin the transmission of a SOAP response within 27 s of receiving a complete SOAP request.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	UT6RC	

9.2.9.3

[GUIDELINE] UPnP devices should begin the transmission of SOAP responses as soon as possible.

[ATTRIBUTES]

S	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	WVR8Q	

9.2.9.4

[GUIDELINE] UPnP devices should complete the transmission of a SOAP response within 29 s.

[ATTRIBUTES]

S	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	UY7PT	

9.2.9.5

[GUIDELINE] A UPnP control point may terminate the TCP connection for a SOAP response transmission that exceeds 30 s.

[ATTRIBUTES]

O	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	QTXQ7	

9.2.10 DDC UPnP device description rules

9.2.10.1

[GUIDELINE] The total byte size of a device description file shall not exceed 20 480 B (20 KiB). This byte limit includes the HTTP headers.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	DXIDH	

[COMMENT] Provides a known maximum size for device description documents.

9.2.10.2

[GUIDELINE] DLNA UPnP devices shall employ the <dlna:X_DLNA DOC> XML element inside the <device> element of the device description document to indicate adherence to a particular DLNA Home Networked Device interoperability guidelines document version. The value of this element is the DLNA Device Class or DLNA Device Capability, a dash character, followed by the numeric version value of the interoperability guidelines document.

The <dlna:X_DLNA DOC> element indicates DLNA compliance for a specific <device>, excluding its embedded devices listed in <deviceList>.

The value of the <dlna:X_DLNA DOC> element is a string as defined below. Linear white spaces (LWS) are not implied in this definition below.

- dlndoc-value = dlndev-class | [dlndev-capability "/" capability-host] "-" dlndev-version
- dlndev-class = "DMS" | "DMR" | "M-DMS" | other-dev-class
- other-dev-class = *("<A" – "Z", "a" – "z", "-")>
- dlndev-capability = "+RUIHSNK+" | "+RUIHSRC+" | other-dev-capability
- other-dev-capability = *("<A" – "Z", "a" – "z", "+")>
- capability-host = "DMS" | "DMR" | "M-DMS" | "DMP" | "M-DMP" | "DMC" | "M-DMC"
- dlndev-version = major-version "." minor-version
- major-version = DIGIT
- minor-version = DIGIT DIGIT

The dlndev-class represents a Device Class of a DLNA device.

The dlndev-capability represents a (discoverable) Device Capability.

The capability-host represents a DLNA Device Class that hosts a DLNA Device Capability.

The dlndev-version represents a version of interoperability guidelines (defined in the Introduction, Version Number clause) supported by the DLNA Device Class.

An example of <dlna:X_DLNA DOC> element is shown as follows:

```
<dlna:X_DLNA DOC xmlns:dlna="urn:schemas-dlna-org:device-1-0">
  DMS-4.0
</dlna:X_DLNA DOC>
```

[ATTRIBUTES]

M	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	8CA7M	

[COMMENT] Provides an easy way of distinguishing UPnP devices that are claimed as being DLNA Device Classes or DLNA Device Capabilities.

This guideline specifies the scoping rules for the <dlina:X_DLNA DOC> element. Essentially, UPnP devices (in a device hierarchy) are to be marked explicitly as being DLNA devices. Although the subject matter is technically out of the scope of this guideline, the device hierarchy permits a non DLNA UPnP device to be listed in a device hierarchy that has DLNA devices.

The <dlina:X_DLNA DOC> element can appear multiple times such as is the case for a DMS and M-DMS combination device.

The value of capability_host can be a discoverable DLNA Device Class as well as a non-discoverable DLNA Device Class, since also non-discoverable DLNA Device Classes can host a discoverable DLNA Device Capability.

9.2.10.3

[GUIDELINE] The <dlina:X_DLNA DOC> element may appear multiple times.

[ATTRIBUTES]

O	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	9YPQX	

9.2.10.4

[GUIDELINE] UPnP control points shall be matched against multiple <dlina:X_DLNA DOC> elements. Specifically, a control point that claims to discover a particular type DLNA device class or device capability shall be able to discover that type of DLNA device class or device capability, even if the specific <dlina:X_DLNA DOC> element of interest is not the first <dlina:X_DLNA DOC> in the device description document.

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	8RDTJ	

9.2.10.5

[GUIDELINE] The namespace "urn:schemas-dlna-org:device-1-0" shall be specified in the <root> element or the <dlina:X_DLNA DOC> element and the namespace prefix shall be "dlina:".

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	RDTJ6	

9.2.10.6

[GUIDELINE] UPnP control points shall ignore the element value of <dlina:X_DLNA DOC>. For example, DLNA control points shall not filter out a DLNA device because the version value is different from what is expected.

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	YPQX5	

[COMMENT] In the near-term, the <dlna:X_DLNA> version number is useful for testing purposes. Future guidelines will specify behaviour for interoperability between newer and older DLNA devices and the purpose of this field might change.

9.2.10.7

[GUIDELINE] If a vendor builds an implementation of a Device Class (with zero or more Device Capabilities or Device Options) or a discoverable Device Capability, then the implementation shall comply with all mandatory portions of the interoperability guidelines for the specified dlna-version token 9.2.10.2. If a vendor implements an older version of the interoperability guidelines, then the vendor shall not implement guidelines defined in newer versions of interoperability guidelines with the following exception:

- Devices that implement older versions of the interoperability guidelines may support Media Format Profiles defined in newer versions.

[ATTRIBUTES]

M	C	HND	MHD	n/a	ISO/IEC 29341-1:2011	CA7MF	

[COMMENT] This guideline specifies that Vendors are not to selectively implement portions of newer versions of DLNA's interoperability guidelines.

For example, if a vendor wants to build a DMS that supports RTP in the DLNA-defined manner, then the vendor will implement the DMS according to the 1.50 (or newer) version of the interoperability guidelines, which includes using a value of "1.50" for the dlna-version token. A DMS implementation that uses a "1.00" value for the dlna-version but implements guidelines that are specific to newer versions of interoperability guidelines is a violation of this guideline.

The primary reason for this guideline is to ensure that newer implementations participate in the DLNA networking ecosystem in a manner that is consistent with the assumptions of those guidelines. Newer versions of interoperability guidelines are drafted with compatibility for previous versions, but newer versions sometimes have new mandatory requirements. The new mandatory guidelines often ensure the robustness of the network, which is needed when interoperability guidelines increase network complexity through new usages.

This guideline makes no claim on policy decisions about granting a DLNA logo/certification to implementations that use older versions of interoperability guidelines. DLNA reserves the right to require a baseline version of interoperability guidelines for future implementations.

9.2.11 DDC UPnP embedded device support

9.2.11.1

[GUIDELINE] DLNA UPnP devices shall not have more than 6 total UPnP devices in the device hierarchy with a maximum depth of 4. Root devices have a depth of 1.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	XIDHZ	

[COMMENT] A UPnP control point will handle DLNA devices that include a combination or an aggregate of devices and services. A specific limit sets a bound on memory and processing requirements for control points.

9.2.11.2

[GUIDELINE] UPnP control points shall support device hierarchies that have up to a total of 6 DLNA devices with a maximum depth of 4. Root devices have a depth of 1.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	QI57Q	

9.2.11.3

[GUIDELINE] DLNA UPnP devices shall be functionally independent even if they are in the same device hierarchy. In other words,

- a DLNA UPnP device is identified as a <device> with the <dlina:X_DLNA DOC> element,
- a DLNA UPnP device has no functional dependency with other UPnP devices in the device hierarchy,
- a DLNA UPnP device has no functional dependency with other DLNA UPnP devices in the device hierarchy.

A DLNA UPnP device (Device-A) is functionally independent if it does not require a control point to invoke a UPnP action of another UPnP device (Device-B) in order to put Device-A in a state for use with a DLNA compliant UPnP control point. Also note that the definition assumes Device-A and Device-B are in the same device hierarchy. Furthermore, Device-B might or might not be a DLNA device, as indicated by the presence of the <dlina:X_DLNA DOC> element.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	TXQ7Y	

[COMMENT] These guidelines simplify control point implementations by not requiring them to know about any functional dependencies between DLNA UPnP devices found in a device hierarchy.

Although the subject matter is technically out of scope, this guideline does not prohibit the use of a UPnP device that has functional dependence on another UPnP device. However, a device that has a functional dependence cannot be marked with a <dlina:X_DLNA DOC> element.

9.2.11.4

[GUIDELINE] DLNA control points shall not assume any functional dependency between embedded devices that contain the <dlina:X_DLNA DOC> element.

For example, a control point that requires UPnP actions to be called on one of the UPnP devices before calling UPnP actions on another UPnP device (both UPnP devices belong to the same hierarchy and have the <lna:X_DLNAOC> element) is in violation with this requirement.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	Y7PTR	

9.2.11.5

[GUIDELINE] UPnP devices may be implemented as a descendent of a UPnP root device, which might or might not be a standard UPnP device type.

[ATTRIBUTES]

O	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	VR8QA	

9.2.11.6

[GUIDELINE] UPnP control points shall interoperate with embedded DLNA devices that exist in device hierarchies where the root happens to be a non-standard UPnP device type (i.e. vendor-defined UPnP device type).

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	T6RCX	

9.2.11.7

[GUIDELINE] UPnP devices that are not DLNA-compliant may be listed in a device hierarchy.

These non-DLNA UPnP devices count against the maximum number of 6 total UPnP devices in the device hierarchy, indicated in 9.2.11.1.

[ATTRIBUTES]

O	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	WQPE7	

[COMMENT] This guideline permits that a device hierarchy to have UPnP devices that do not have the <lna:X_DLNAOC> element.

9.2.12 DDC UPnP service description rules

9.2.12.1

[GUIDELINE] Optional actions listed in the SCPD shall be supported and not return the NOT_IMPLEMENTED UPnP error in response to an invocation. Optional actions that are not implemented shall not be listed in the SCPD.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	YZ8ZI	

[COMMENT] UPnP devices fully and accurately reflect capabilities required by the standardized Device Control Protocol (DCP) and listed in the UPnP device's service control protocol document (SCPD).

9.2.12.2

[GUIDELINE] A UPnP state variable shall not be present unless it meets at least one of the following characteristics.

- The UPnP state variable is actually used by the device, either as an evented state variable or as an action parameter.
- The UPnP state variable is normatively defined by a UPnP service to neither be evented nor used for an action parameter.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	LGQXH	

[COMMENT] This guideline is in consideration of the fact that control points can run on a platform with limited resources.

9.2.12.3

[GUIDELINE] If an allowed value list or value range is specified, UPnP devices should accept all values in the state variable range, regardless of the stepping (as indicated by a <step> element of the UPnP state variable).

[ATTRIBUTES]

S	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	GQXHV	

[COMMENT] Although it is preferable for control points to employ logic for correctly checking an argument for compliance against a device's stepping, this is not always the case. For broader interoperability, this guideline is suggested for UPnP devices, but it is not mandatory. Note that the AVTransport, ContentDirectory, and ConnectionManager services do not have state variables that use stepping by default.

9.2.12.4

[GUIDELINE] Services with evented state variables shall support SUBSCRIBE and UNSUBSCRIBE operations.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	Z8ZIU	

[COMMENT] Specifies normative behaviour for services with evented state variables.

9.2.12.5

[GUIDELINE] DCP-required or SCPD-specified state variables with the attribute SendEvent="Yes" shall actually be evented.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	QPE7G	

9.2.12.6

[GUIDELINE] Service description files shall not exceed 51 200 B (50 KiB). This byte limit includes the HTTP headers.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	6RCXP	

[COMMENT] This provides a reasonable maximum length for service description files.

9.2.13 DDC UPnP XML namespace

[GUIDELINE] Default namespace defined by the UPnP DA shall be used in device and service descriptions.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	R8QAV	

[COMMENT] All standard elements in device and service descriptions do not use a namespace prefix.

9.2.14 DDC UPnP action argument encoding

9.2.14.1

[GUIDELINE] The number, names and ordering of arguments of SOAP actions in an SCPD shall be identical to what is specified in the standardized DCP.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	7PTRW	

9.2.14.2

[GUIDELINE] A UPnP device shall parse and interpret a SOAP action request in which the number, names and ordering of input arguments are identical to what is specified in the corresponding SCPD (which is the same as specified in the standardized DCP).

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	RW8QR	

9.2.14.3

[GUIDELINE] A UPnP device response to a SOAP action shall contain the number, name, and ordering of output arguments that are identical to what is specified in the corresponding SCPD (which is the same as specified in the standardized DCP).

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	9TZAV	

9.2.15 DDC UPnP SOAP packet size**9.2.15.1**

[GUIDELINE] UPnP devices shall be able to accept SOAP requests that are up to 20 480 B (20 KiB) in size. This byte limit includes the HTTP headers.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	XQ7YM	

[COMMENT] This guideline provides control points with a minimal SOAP packet size (total size for headers and body). It is understood that the support of larger SOAP requests is permitted.

9.2.15.2

[GUIDELINE] UPnP control points shall be able to accept SOAP responses that are up to 204 800 B (200 KiB) in size. This byte limit includes the HTTP headers.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSUNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	I57Q8	

[COMMENT] Security recommendations call out 200 KiB as a reasonable upper bound for SOAP responses (total size for headers and body).

9.2.15.3

[GUIDELINE] UPnP control points may refuse SOAP responses that are more than 204 800 B (200 KiB) in size. This byte limit includes the HTTP headers.

Control points may implement the not accept SOAP response behaviour by terminating the TCP connection after 200 KiB is reached.

[ATTRIBUTES]

O	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	IDHZZ	

9.2.16 DDC UPnP error codes

9.2.16.1

[GUIDELINE] Unless otherwise specified, UPnP endpoints (devices and control points) should use and return the proper error code when encountering an error condition for a UPnP operation. This includes using the proper HTTP error codes and method error codes for UPnP actions. In some extreme circumstances, it might be necessary to simply close a UPnP initiated connection upon encountering an error condition.

[ATTRIBUTES]

S	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	A7MFW	

[COMMENT] This requirement covers the proper expected behaviour for any UPnP endpoint and is repeated here due to its importance in gracefully recovering from error conditions on a distributed home network.

9.2.16.2

[GUIDELINE] UPnP control points shall be able to tolerate unknown method error codes for UPnP actions

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	PQX5U	

[COMMENT] Ideally, UPnP control points treat all unknown method error codes for UPnP actions as a generic error condition.

9.2.16.3

[GUIDELINE] HTTP clients for UPnP endpoints (devices and control points) are not required to understand unknown HTTP status code values, but they shall understand the class of the status code. The class of the status code is indicated by the first digit of the status code numeric value. HTTP clients shall treat unrecognized status code values as equivalent to the x00 code of the class.

[ATTRIBUTES]

M	C	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	DTJ6V	

9.2.16.4

[GUIDELINE] UPnP devices should not use the UPnP error code value of 402 when a received SOAP action request contains arguments with unknown argument names.

[ATTRIBUTES]

S	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	WC47X	

[COMMENT] The proper way of handling a SOAP action request that contains arguments with unknown argument names is to ignore those arguments (9.2.23) and process the request as if those arguments have never existed.

The UPnP DA 1.0 requires devices to ignore unknown elements in all XML fragments, including unknown arguments in SOAP requests. However, the UPnP DA 1.0 also allows the use of the UPnP error code value of 402 (Invalid Args) to indicate that unknown arguments are found in SOAP requests. This error in the specification has since been acknowledged and corrected in the draft version of the UPnP DA v1.1. As a result of this ambiguity, certain existing devices issue the UPnP error code value of 402 (Invalid Args) in the event of unknown arguments. This behaviour is discouraged, but it does enable backward compatibility.

9.2.17 DDC UPnP GENA packet size**9.2.17.1**

[GUIDELINE] UPnP control points shall be able to accept GENA event transmissions that are up to 20 480 B (20 KiB) in size. This byte limit includes the HTTP headers.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	TJ6VJ	

[COMMENT] This guideline specifies the minimum capability of control points to receive events of 20 KiB in size (for headers and body). Control points are permitted to support larger GENA events.

9.2.17.2

[GUIDELINE] UPnP control points may choose not to accept GENA event transmissions that are more than 20 KiB in size.

Control points may implement the not accept GENA event behaviour by terminating the TCP connection after 20 KiB is reached.

[ATTRIBUTES]

O	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	QX5U5	

9.2.18 DDC UPnP subscription handling

9.2.18.1

[GUIDELINE] The SUBSCRIBE response shall include the Content-Length: 0 HTTP header/value pair, if the response is not encoded with Chunked Transfer Coding.

The only exception to this rule is if the device can guarantee that a TCP FIN packet is sent before the initial event message is sent to the subscribing control point.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	7MFWJ

[COMMENT] In order for a control point to receive the initial event from a UPnP device, a control point needs to know the Subscription ID (SID) value. The SID is obtained in the response to a SUBSCRIBE request. Therefore, a control point will receive the entire SUBSCRIBE response before it receives the first event.

The HTTP clients of control points only have two ways to know when the SUBSCRIBE response has finished. The first is to complete the transaction when the Content-Length:0 values are specified. The second is to receive the TCP FIN flag in the TCP stream.

9.2.18.2

[GUIDELINE] UPnP devices shall assign a globally unique SID, where the global context is defined as the UPnP network. The format for the uuid is as specified in 9.2.19.

[ATTRIBUTES]

M	C	DMS DMR +	M-DMS	n/a	ISO/IEC 29341-1:2011	DHZSM

[COMMENT] See 9.2.20 for a way to generate a globally unique SID.

9.2.19 DDC UPnP UUID format

[GUIDELINE] The format of the SID is "uuid:" followed by a UUID, which is a 128-bit value represented in hexadecimal form, with optional hyphens throughout the encoding. The maximum length is 68 B, including the "uuid:" portion.

Example:
uuid:00000000-0000-0000-0000-000000000000

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	57Q8X

9.2.20 DDC UPnP UUID generation

[GUIDELINE] UPnP devices should use the DCE 1.1 methodology for generating a globally unique UUID value.

[ATTRIBUTES]

S	R	DMS DMR	M-DMS	n/a	Universal Unique Identifier	Q7YMT	

[COMMENT] There are several ways to generate a UUID value. The best way to generate a UUID involves using some form of a network address and the current time, such as the algorithm described in Universal Unique Identifier.

9.2.21 DDC UPnP event subscription renewals**9.2.21.1**

[GENERAL] This guideline instructs developers that the control point is responsible for renewing subscriptions in a timely manner.

9.2.21.2

[GUIDELINE] If UPnP control points want to continue receiving UPnP events, then they shall renew their subscriptions before the negotiated subscription TIMEOUT expires.

[ATTRIBUTES]

M	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	PTRWR	

9.2.22 DDC UPnP event notification handling**9.2.22.1**

[GUIDELINE] UPnP devices shall send events to all properly subscribed UPnP control points. The device shall enforce a subscription TIMEOUT value of 5 min.

The UPnP device behaviour of enforcing this 5 min TIMEOUT value is implemented by specifying "TIMEOUT: second-300" as an HTTP header/value pair.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	8QAVJ	

[COMMENT] A UPnP control point that subscribes to events and then subsequently leaves the UPnP network will cause a UPnP device to possess an event subscription to an invalid address. The device will not hold up events to other subscribing control points while, for example, the HTTP session with the absent UPnP control point times out. This scenario has been a major cause of UPnP control point disruption and usability problems. UPnP control points that stop receiving events might incorrectly indicate to the user that a device is stalled or is malfunctioning.

9.2.22.2

[GUIDELINE] UPnP devices should monitor their subscription lists and remove control points that fail to renew their subscription within the negotiated time.

[ATTRIBUTES]

S	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	RCXPQ	

9.2.23 DDC UPnP unknown header/tag/field robustness rule

[GUIDELINE] UPnP endpoints (devices and control points) shall be tolerant of unknown headers, tags, fields, attributes, and values for HTTP, SSDP, XML, SOAP, and GENA. Specifically, this tolerance guideline applies to

- HTTP headers, tokens, values,
- SSDP headers, tokens, values,
- unknown XML elements and attributes of SOAP or GENA fragments,
- unknown XML elements and attributes in device description files or service description files.

Tolerant behaviour is defined as being able to successfully "parse and interpret" or "parse and ignore" the unknown text.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 1945 IETF RFC 2616:1999 ISO/IEC 29341-1:2011	PE7GO	

[COMMENT] This guideline addresses forward compatibility and also ensures broader interoperability between implementations that employ vendor extensions in the manner described by the guideline.

9.2.24 DDC URI rules

9.2.24.1

[GUIDELINE] All absolute URIs used for UPnP communications shall use IP addresses (not host names).

UPnP communications specifically refers to the following areas:

- SOAP actions,
- GENA events,
- Device description files,
- Service description (SCPD) files,
- UPnP presentation files,
- SSDP messages.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	8ZIUM	

[COMMENT] These guidelines are mandatory because DLNA Device Classes cannot depend on DNS infrastructure within a home network environment.

9.2.24.2

[GUIDELINE] The a.b.c.d format for IPv4 addresses shall be used for UPnP communications, using IPv4, where each quad represents a byte in network byte order form.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	QXHV3	

9.2.24.3

[GUIDELINE] IPv6 addresses used for UPnP communications shall be formatted according to guidance in Clause A.4 of ISO/IEC 29341-1-2:2016.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD		ISO/IEC 29341-1-2:2016	Y27W4	

9.2.24.4

[GUIDELINE] HTTP URI escaping is always performed according to the URI specification IETF RFC 1738 as required in 3.2.1 of the HTTP/1.1 specification IETF RFC 2616:1999.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 1738 IETF RFC 2616:1999	XHV3H	

[COMMENT] This guideline specifies how to escape URI values.

9.2.24.5

[GUIDELINE] All URIs used for UPnP communications shall not exceed 256 B in URI-escaped UTF-8 encoded form. This guideline applies to both absolute URIs and complete URIs (relative URIs combined with a base path).

UPnP communications does not cover informational URIs for the manufacturer or product/model used inside UPnP Device Descriptions. It also does not cover indirectly referenced content, such as URIs inside the presentation files.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	ZIUM5	

[COMMENT] These guidelines provide a maximum URI length for the UPnP layer. See Guideline 10.1.3.10 subguideline 10.1.3.10.4 for the maximum URI length at the UPnP AV layer.

According to 2.10 of W3C XML:2004, white spaces are significant (i.e. non-markup characters) in XML elements that contain character data. Therefore XML elements that contain a single (absolute or relative) URI value cannot have preceding or trailing white spaces.

9.2.24.6

[GUIDELINE] All URIs (not used for UPnP communications) shall not exceed 1 024 B, in the URI-escaped UTF-8 encoded form. This guideline covers URIs, such as (but not limited to)

- URIs inside UPnP presentation files,
- URIs in the device description for product, model, or manufacturer information.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	E7GO8

9.2.24.7

[GUIDELINE] UPnP devices should not use the <URLBase> element in the device description document.

[ATTRIBUTES]

S	L	DMS DMR	M-DMS	n/a	IETF RFC 2396 ISO/IEC 29341-1:2011	CXPQK

[COMMENT] These requirements have several benefits. Since the device description and service description documents will no longer include IP addresses and port numbers, UPnP devices are simplified. The document can be sent even if the IP address changes or the device is multi homed. UPnP control points will have an easier time dealing with UPnP devices that meet these requirements, and will be able to handle any situation that arises.

The terms Base URI, Relative URI, and Absolute URI are used here in a manner consistent with their definitions introduced in IETF RFC 2396.

9.2.24.8

[GUIDELINE] If a URI in a device description is used for SOAP actions, GENA events, SCPD files, or UPnP presentation files, then the URI may be a Relative URI as defined in IETF RFC 2396 with its Base URI as defined in guideline 9.2.24.12.

[ATTRIBUTES]

O	R	DMS DMR	M-DMS	n/a	IETF RFC 2396 ISO/IEC 29341-1:2011	QAVJB

9.2.24.9

[GUIDELINE] UPnP control points shall work with UPnP devices that use a <URLBase> element and with those that do not use a <URLBase> element. Control points shall also work with UPnP devices that use Absolute or Relative URIs.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 2396 ISO/IEC 29341-1:2011	TRWRA	

9.2.24.10

[GUIDELINE] UPnP devices shall use the CALLBACK URI value sent by control points for event delivery, provided that the CALLBACK URI value is consistent with guidelines 9.2.24.1 to 9.2.24.5.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	7YMTP	

9.2.24.11

[GUIDELINE] UPnP control points shall not specify more than one CALLBACK URI value for the CALLBACK header in a request with the SUBSCRIBE method.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	7Q8XF	

[COMMENT] Simplifies a UPnP device's implementation for GENA eventing.

9.2.24.12

[GUIDELINE] If the <URLBase> element is used, it shall define the Base URI to be used for declaring Relative URIs. When this element is omitted, the LOCATION value (URL) in the device advertisement shall define the Base URI.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS		IETF RFC 2396 ISO/IEC 29341-1:2011	XZ95C	

9.2.24.13

[GUIDELINE] Relative URI and a Base URI shall be resolved into an Absolute URI according to the process defined in IETF RFC 3986:2005.

Examples.

- The ssdp:alive message has LOCATION value of http://172.16.0.2/MyDir/devicedesc.xml.

- The ssdp:alive message has LOCATION value of http://[fe80::1]:2869/MyDir/devicedesc.xml.
- The device description file does not have the <URLBase> element.
- One of the services has these element values:
 - <SCPDURL> has "/service_desc.xml";
 - <controlURL> has "control";
 - <eventSubURL> has "http://172.16.0.2:3000/sub".
- The Absolute URL for that service is as follows:
 - SCPDURL: http://172.16.0.2/service_desc.xml;
 - controlURL: http://172.16.0.2/MyDir/control;
 - eventSubURL: http://172.16.0.2:3000/sub.

[ATTRIBUTES]

M	R	DMP +SR+ +EPG+	n/a		IETF RFC 3986:2005 ISO/IEC 29341-1:2011	W8QR3	

[COMMENT] In terms of syntax, reference IETF RFC 3986:2005 defines an Absolute URI and a Relative URI. A Relative URI is further classified as belonging to one of three types:

- Network path (net_path);
- Absolute path (abs_path);
- Relative path (rel_path).

These 3 types of Relative URIs can be resolved into Absolute URIs following the procedures defined in IETF RFC 3986:2005.

In the example introduced in guideline 9.2.24.13, the <SCPDURL> value is an example of a Relative URI with an Absolute path. The <controlURL> value is an example of a Relative URI with a Relative path. The <eventSubURL> value is an example of an Absolute URI.

9.2.25 DDC UPnP device description usage

9.2.25.1

[GUIDELINE] If a DLNA UPnP device wants to change a device description or service description files, then the UPnP device shall

- first leave the UPnP network by sending an ssdp:byebye message,
- then change the desired device description or service description files, and
- finally join the UPnP network with the new XML files using an ssdp:alive message.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	HZSMF	

[COMMENT] UPnP control points often bind UDN values to device representations. Therefore, a device that changes its logical representation causes problems if it uses the same UDN. This guideline does not apply if the device sends an ssdp:byebye message. In such cases, the device can still keep its UDN value and change its logical representation before rejoining the UPnP network.

9.2.25.2

[GUIDELINE] A DLNA UPnP control point that removes a UPnP device from its list of active devices shall also invalidate its local representation of the device.

The control point removes a device for a variety of reasons, such as a CACHE-CONTROL timeout.

Invalidating the local representation of the device means that the control point shall reload the device description and service description files.

[ATTRIBUTES]

M	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	MFWJU	

[COMMENT] This guideline obligates a control point to refresh device description and service description documents the next time the device is discovered. This, for example, allows a device to add additional supported actions or services (via firmware update), without having to change the UDN of the device.

9.2.26 DDC UPnP UDN usage**9.2.26.1**

[GUIDELINE] UPnP devices should not change the UDN between reboots or application launch/shutdown.

[ATTRIBUTES]

S	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	X5U5G	

[COMMENT] Implementing this guideline enables usages such as my favorite devices. Preferably, UPnP device UDN values will be long-lived.
UPnP DA states as follows:

UDN: Shall be the same over time for a specific device instance (i.e., shall survive reboots).

9.2.26.2

[GUIDELINE] UPnP devices shall not change the UDN if only the <friendlyName> or IP addresses values are changed.

[ATTRIBUTES]

M	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	J6VJQ	

[COMMENT] UPnP control point can identify UPnP devices even if FriendlyName or IP addresses are changed.

9.2.26.3

[GUIDELINE] In conjunction with the restrictions in 9.2.26.2, UDN may be changed if a UPnP device changes its device description or any of its supported services.

[ATTRIBUTES]

O	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	6VJQP	

9.2.26.4

[GUIDELINE] If a UPnP device UDN changes, it shall re-advertise on the network using the new UDN.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	5U5GU	

[COMMENT] Control Points that receive the advertisement know that a new UPnP device is available. This is required by guideline 9.2.15.2.

9.2.26.5

[GUIDELINE] If a UPnP device UDN changes, it shall send an ssdp:byebye for the old UDN.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	FWJUQ	

[COMMENT] Without this guideline, UPnP control points will have no idea that the old UDN is no longer valid. This is required by guideline 9.2.15.2.

9.2.26.6

[GUIDELINE] A UPnP device shall limit their UDN to a UTF-8 encoded string value containing "uuid:" followed by a UUID as specified in 9.2.19.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	ZSMFB	

[COMMENT] See 9.2.20 for a way to generate a globally unique 128-bit value for the UDN.

9.2.27 DDC UPnP multi homing rules

9.2.27.1

[GENERAL] Multiple home network segments, wireless networking, and Auto IP can combine to create usability problems that can be avoided by following the specified rules.

9.2.27.2

[GUIDELINE] When a UPnP device has multiple IP addresses, the device may advertise on those IP addresses with the same or different UDN.

[ATTRIBUTES]

O	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	Q8XFC	

[COMMENT] Multiple home network segments, wireless networking, and Auto IP can combine to create usability problems that can be avoided by following the specified rules.

9.2.27.3

[GUIDELINE] The LOCATION URL value in a UPnP device advertisement shall contain the source IP address of the advertisement.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	YMTPX	

9.2.27.4

[GUIDELINE] Upon receiving multiple advertisements for the same UPnP device UDN, a UPnP control point should select the vendor-defined preferred advertisement as the route to the device.

[ATTRIBUTES]

S	C	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	RWRAB	

9.2.27.5

[GUIDELINE] When a UPnP control point gets an advertisement for a UPnP device UDN on a different IP address from the one it has previously selected, it may continue to use its selected IP address provided that it has received an advertisement on the selected IP address in the last 10 s. Otherwise, if the UPnP control point does not receive an advertisement for its selected IP address in the next 10 s, it may change its selection to the new IP address. Even if the control point keeps the selected IP address in this case, it should change its selection to the new IP address when an access to the selected IP address fails.

[ATTRIBUTES]

O	L	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	AVJBK	

[COMMENT] The "selected IP address" is as specified in guideline 9.2.27.3 and 9.2.27.4.

9.2.28 DDC UPnP device icons**9.2.28.1**

[GUIDELINE] If a UPnP device provides a device icon, the UPnP device shall provide two JPEG icons that conform to the 7.1.8 (GUN OFWYD) of IEC 62481-2:2017 and 7.1.9 (GUN VVWJZ) of IEC 62481-2:2017 Media Format Profiles and two PNG icons that conform to the 7.2.2 (GUN 6AXLT) of IEC 62481-2:2017 and 7.2.3 (GUN SMM78) of IEC 62481-2:2017 Media Format Profiles.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011 IEC 62481-2: 2017	XPQKE	

[COMMENT] This requirement will ensure device icon compatibility and good authoring practices. The reason for requiring PNG icons is that the lossless compression is much better for small size images. Furthermore, alpha-blending makes it possible to present better user interfaces.

9.2.28.2

[GUIDELINE] UPnP devices may provide additional icons in other formats besides PNG and JPEG.

[ATTRIBUTES]

O	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	7GO8Q	

9.2.28.3

[GUIDELINE] UPnP devices shall use <mimetype>, <width>, <height>, <depth>, and <url> sub-elements for an <icon> element within its device description.

The value of <mimetype>, <width>, and <height> elements for DLNA device icons shall conform to the DLNA icon Media Format Profiles 7.1.8 (GUN OFWYD) of IEC 62481-2:2017, 7.1.9 (GUN VVWJZ) of IEC 62481-2:2017, 7.2.2 (GUN 6AXLT) of IEC 62481-2:2017 and 7.2.3 (GUN SMM78) of IEC 62481-2:2017.

Values in Table 8 are recommended for the <depth> element which indicates colour bits per pixel for PNG and JPEG device icons.

Table 8 – Colour depth of device icons

Icon image data		<depth> Values
PNG	Grayscale: 8 bits	8
	Grayscale: 16 bits	16
	Truecolor: 24 bits (triplet of 8 bits R/G/B samples)	24
	Indexed – colour bits 24 bits (palette entry is a triplet of 8 bits R/G/B samples)	24
	Grayscale w/ alpha: 8 bits (with matching alpha channel depth)	8
	Grayscale w/ alpha: 16 bits (with matching alpha channel depth)	16
	Truecolor w/ alpha: 24 bits (triplet of 8 bit R/G/B samples, alpha channel shall be 8 bits)	24
JPEG (8 bits Y/Cr/Cb samples)		24

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011 IEC 62481-2: 2017	IUM5G	

[COMMENT] UPnP defines the way to indicate profiles for icon images.

Since <depth> value is unclear for PNG grayscale/index coloured/alpha blending and JPEG, this guideline encourages use of the values for <depth> element required by the UPnP DA. Note that the values for PNG do not help to identify colour types.

9.2.29 DDC UPnP UTF-8 support

[GUIDELINE] UPnP endpoints (devices and control points) shall use UTF-8 encoding of all XML fragments. UPnP endpoints shall be tolerant of the UTF-8 maximum of 4 B of Unicode character as required by XML processors.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2279 ISO/IEC 29341-1:2011 W3C XML:2004	HV3HU	

[COMMENT] Specifying UTF-8 as the encoding method for UPnP communications provides the right balance for supporting a wide variety of languages without necessarily requiring devices to support all languages.

Although UTF-8 has characters that are encoded in 6 B, W3C XML spec states that XML processors accept any character in Unicode. This means XML parsers will decode up to 4 B of character. Specifically, see 2.2 of W3C XML:2004 for more information. It calls out any Unicode character, excluding the surrogate blocks, FFFE, and FFFF.

9.2.30 DDC UPnP XML comments

9.2.30.1

[GENERAL] XML comments normally have to be skipped by XML parsers. This guideline ensures that comments do not prevent interoperation.

9.2.30.2

[GUIDELINE] UPnP endpoints (devices and control points) shall never source XML with comments.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	V3HUN	

9.2.30.3

[GUIDELINE] UPnP endpoints (devices and control points) may reject any XML provided with comments.

[ATTRIBUTES]

O	C	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	UM5G6	

9.2.31 DDC UPnP boolean types

[GUIDELINE] UPnP endpoints (devices and control points) shall use "0" for false and "1" for true when using the UPnP Boolean type.

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	ISO/IEC 29341-1:2011	GO8Q5	

[COMMENT] This simplifies control point implementations and also reduces the size of some UPnP traffic.

9.2.32 DDC CP versioning

9.2.32.1

[GUIDELINE] UPnP action requests (sent by a control point) shall include a DLNA-CP-version in a USER-AGENT HTTP header value.

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 1945 IETF RFC 2616:1999 ISO/IEC 29341-1:2011	PQKEA	

[COMMENT] The HTTP specifications specify the format of the USER-AGENT HTTP header and header value.

USER-AGENT HTTP header is not used exclusively for DLNA information.

9.2.32.2

[GUIDELINE] The syntax of DLNA-CP-version is a subset of the product token syntax (defined by HTTP) and is described below.

- DLNA-CP-version = "DLNADOC/" dlna-version

The dlna-version token is defined in guideline 9.2.10.2.

Examples:

- USER-AGENT: DLNADOC/4.0
- USER-AGENT: UPnP/1.0 DLNADOC/4.0
- USER-AGENT: CERN-LineMode/2.15 libwww/2.17b3 DLNADOC/4.0 UPnP/1.0

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	IETF RFC 1945 IETF RFC 2616:1999	VJBKF	

[COMMENT]

- a) The DLNA-CP-version token uses the syntax of a product token (as defined in the HTTP specifications) to identify the DLNA guidelines version.
- b) Space and separators cannot be used in a token, and the USER-AGENT header field uses the token syntax. For example, "My DLNA Device / 1234" does not comply with the token syntax because spaces are used in the string that is supposed to follow the token syntax.

9.2.32.3

[GUIDELINE] UPnP devices shall be tolerant of UPnP action requests that specify a newer dlina-version in the DLNA-CP-version token.

Tolerance means that the UPnP device responds according to the version indicated by the device's <dlina:X_DLNA> value.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	WRABY	

[COMMENT] This guideline is another clarification of the 9.2.23 in that it requires tolerance of unknown HTTP headers and values.

This guideline essentially requires a DLNA-compliant UPnP device to respond to newer control points using the DLNA-defined rules employed by the UPnP device.

9.2.33 DDC absolute and relative URI requests**9.2.33.1**

[GUIDELINE] The HTTP server of UPnP endpoints (devices and control points) shall accept an HTTP request that specifies an absolute or relative URI in the HTTP request.

[ATTRIBUTES]

M	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	MTPX7	

[COMMENT] The HTTP specification indicates that this behaviour is required.

Absolute URIs are permitted in HTTP requests.

9.2.33.2

[GUIDELINE] The HTTP client of UPnP endpoints (devices and control points) should specify a relative URI in the HTTP request.

[ATTRIBUTES]

S	R	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	8XFCs	

9.2.34 DDC maximum HTTP header size

[GUIDELINE] HTTP clients and servers of UPnP endpoints (devices and control points) shall generate and parse HTTP messages that have a total HTTP header size that is equal to or less than 4 096 B (4 kB) in all HTTP requests and responses.

The total HTTP header size is the total number of bytes from the first byte in the start-line token and the last byte of the CRLF token, as used in the generic-message token defined in 4.1 of IETF RFC 2616:1999, as quoted in the syntax below.

- generic-message = start-line *(message-header CRLF) CRLF [message-body]

[ATTRIBUTES]

M	L	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	IETF RFC 2616:1999	SMFBW	

[COMMENT] This provides a reasonable assumption as to how much memory is necessary for all HTTP headers used in a single transaction related to UPnP communication.

9.2.35 DDC Device Capabilities**9.2.35.1**

[GUIDELINE] The <dlina:X_DLNAcap> is a comma-separated list of Capability ID values that appears at most once for each <device> element in the device description document. The syntax of the <dlina:X_DLNAcap> value, dlnacap-value, is defined as follows:

- dlnacap-value = capID *("," capID);
- capID = *("<a"-"z", "A"-"Z", "0"-"9", "_", "-").

The capID token shall always be a value defined by the DLNA guidelines and the length of the token shall not exceed 512 B.

The name space for the <dlina:X_DLNAcap> shall be "urn:schemas-dlna-org:device-1-0" and the namespace prefix shall be "dlna:".

Example:

```
<dlina:X_DLNAcap
xmlns:dlna="urn:schemas-dlna-org:device-1-0">av-upload,image-upload,audio-upload</dlina:X_DLNAcap>
```

[ATTRIBUTES]

M	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011	WJUQC	

[COMMENT] Other guidelines define the Capability ID values that are permitted in the <dlina:X_DLNA CAP> element. The discovery of DLNA RUI Device Capabilities uses element <dlina:X_DLNA DOC> defined in IEC 62481-6-1:2017.

9.2.35.2

[GUIDELINE] UPnP control points shall be tolerant of unknown Capability ID values.

Tolerant behaviour is defined as being able to successfully "parse and interpret" or "parse and ignore" the unknown text.

[ATTRIBUTES]

M	A	DMP DMC +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMP M-DMC	n/a	ISO/IEC 29341-1:2011	U5GUW	

9.2.36 DDC DLNAQOS support

[GUIDELINE] If DLNAQOS as defined in 8 is implemented, all UPnP Device and Control Point traffic shall be tagged with DLNAQOS_1, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance with Table 7.

[ATTRIBUTES]

M	A	HND +DN+ +PU+ +UP+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	MHD	n/a	n/a	VJQP3	

9.2.37 DDC Power Save Operations support

[GUIDELINE] If a UPnP Device supports Power Save Operations then it shall comply with the guidelines for an +LPE+ as indicated in IEC 62481-10:2017.

[ATTRIBUTES]

M	A	DMR, DMS	M-DMS	n/a	IEC 62481-10 :2017	DDG5V	N

[COMMENT] This guideline enables a UPnP AV MediaRenderer control point or UPnP AV MediaServer control point to query Power Save Operations supported by a UPnP AV MediaRenderer or a UPnP AV MediaServer device by implementing the Low Power Controller (+LPC+) Device Capability and take appropriate steps to use available energy management functionality on the device, if needed, when its services are required.

9.2.38 DDC Diagnostics support

[GUIDELINE] A UPnP Device shall comply with the guidelines for an +DIAGE+ as indicated in IEC 62481-8:2017.

[ATTRIBUTES]

M	A	DMR, DMS	M-DMS	n/a	IEC 62481-8: 2017	HC2DO	N

[COMMENT] This guideline enables a UPnP AV MediaRenderer control point or UPnP AV MediaServer control point to query Diagnostics supported by a device by implementing the Diagnostics Controller (+DIAGC+) Device Capability to collect diagnostics data through test actions and queries.

10 Media management

10.1 AV media management

10.1.1 General

Subclause 10.1 of the DLNA Home Networked Device interoperability guidelines covers the guidelines for implementing media management using the UPnP AV architecture.

DLNA Home Networked Device interoperability guidelines version 1.0 had requirements for metadata that is distributed on the home network. These guidelines are now updated with new language for new Device Classes and Capabilities that implement the new system usages of DLNA v1.5.

It is important to note that DIDL-Lite can be used in multiple contexts such as the following items.

- Some UPnP AV action request can carry DIDL-Lite metadata as input argument values (e.g. CDS:CreateObject and AVT:SetAVTransportURI requests).
- Some UPnP AV action responses can carry DIDL-Lite metadata as output argument values (e.g. CDS:CreateObject, AVT:GetMediaInfo, and AVT:GetPositionInfo request).
- Some UPnP AV events can carry DIDL-Lite metadata (e.g. AVT.LastChange and virtual instance state variables such as AVT.CurrentTrackMetaData).

The general rules for handling XML documents and fragments are specified in 6.7.

AV media management guidelines is organized into multiple subclauses.

- 10.1.2 specifies the UPnP AV components that are needed for a DLNA Device Class or a DLNA Device Capability. For example, this subclause provides the guideline that specifies that a DMP shall implement a UPnP AV MediaServer control point.
- 10.1.3 specifies general UPnP AV requirements that are used by a variety of UPnP AV devices and control points. Guidelines that dictate rules for items like DIDL-Lite metadata, protocolInfo values, and DLNA-defined parameters for the 4th field of protocolInfo values are in this subclause.
- 10.1.4 provides guidelines that are specific to UPnP AV MediaServer devices. Occasionally, a related guideline that specifies behaviour for a UPnP AV MediaServer control point will also appear in this subclause.
- 10.1.6 provides guidelines that are specific to UPnP AV MediaRenderer devices. Occasionally, a related guideline that specifies behaviour for a UPnP AV MediaRenderer control point will also appear in this subclause.
- 10.1.7 provides UPnP AV guidelines that are related to the Upload system usage. Guidelines that specify behaviour for CDS:CreateObject and CDS:DestroyObject transactions appear in this subclause.

10.1.2 Device Classes and Device Capabilities requirements

10.1.2.1 MM UPnP AV compliance

10.1.2.1.1

[GENERAL] The following requirements define which version of the UPnP AV specifications are required to implement one or more DLNA system usages by DLNA Device Classes and Device Capabilities.

10.1.2.1.2

[GUIDELINE] The DLNA Device Classes and Device Capabilities that implement one or more of the MSCP, MSD, MRCP, and MRD Device Functions, as defined in 5.3, shall be compliant to the appropriate version of UPnP AV specifications as defined in guidelines 10.1.2.1.3 through 10.1.2.1.7.

[ATTRIBUTES]

M	R	DMS DMP DMR DMC +DN+ +UP+ +PU+ +DNSYNC+ +UPSYNC+ +SR+ +EPG+	M-DMS M-DMP M-DMC	n/a	n/a	JQP33	

10.1.2.1.3

[GUIDELINE] The DLNA Device Classes and Device Capabilities that implement one or more of the MSCP, MSD, MRCP, and MRD Device Functions, as defined in 5.3, shall implement at a minimum all of the mandatory portions for the appropriate ISO/IEC 29341-3-2 and ISO/IEC 29341-20-3 specifications to implement the Device Functions of the following system usages, as defined in 5.7, unless overridden by 10.1.2.1.6:

- 2-box Pull,
- 2-box Push,
- 3-box,
- Download,
- Upload.

[ATTRIBUTES]

M	R	DMS DMP DMR DMC +DN+ +UP+ +PU+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-10:2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12:2016 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3 ISO/IEC 29341-3-13	8IAT3	

[COMMENT] ISO/IEC 29341-3-2 and ISO/IEC 29341-20-3 specifications are the baseline architecture for the specified DLNA system usages.

10.1.2.1.4

[GUIDELINE] The DLNA Device Classes and Device Capabilities that implement one or more of the MSCP and MSD Device Functions, as defined in 5.3, shall implement at a minimum all of the mandatory portions for the ISO/IEC 29341-4-3 specification to implement the Device Functions of the following system usage, as defined in 5.7, unless overridden by 10.1.2.1.6.

- Scheduled Recording.

[ATTRIBUTES]

M	R	DMS +SR+	M-DMS	n/a	ISO/IEC 29341-4-10 ISO/IEC 29341-4-11 ISO/IEC 29341-4-12:2008 ISO/IEC 29341-4-3 ISO/IEC 29341-4-14:2011 ISO/IEC 29341-4-4	AT3QS

[COMMENT] ISO/IEC 29341-4-3 is the baseline architecture for the specified DLNA system usage.

10.1.2.1.5

[GUIDELINE] The DLNA Device Classes and Device Capabilities that implement one or more of the MSCP and MSD Device Functions, as defined in 5.3, shall implement at a minimum all of the mandatory portions for the ISO/IEC 29341-14-3 specification to implement the Device Functions of the following system usages, as defined in 5.7:

- Upload Synchronization;
- Download Synchronization;
- EPG.

[ATTRIBUTES]

M	R	DMS +UPSYNC+ +DNSYNC+ +EPG+	M-DMS	n/a	ISO/IEC 29341-4-10 ISO/IEC 29341-4-11 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3 ISO/IEC 29341-4-14:2011 ISO/IEC 29341-4-4	N7DWU

[COMMENT] ISO/IEC 29341-14-3 is the baseline architecture for the specified DLNA system usage.

10.1.2.1.6

[GUIDELINE] The DLNA Device Classes and Device Capabilities that implement the MSD Device Function, as defined in 5.3, to participate in more than one of the system usages, as defined in 5.7, shall implement at a minimum all of the mandatory portions for the highest UPnP AV version baseline requirement as defined in guidelines 10.1.2.1.3 through 10.1.2.1.5.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-10:2011 ISO/IEC 29341-4-10 ISO/IEC 29341-14-11 ISO/IEC 29341-4-11 ISO/IEC 29341-20-12:2016 ISO/IEC 29341-4-12:2008 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-4-3 ISO/IEC 29341-14-3 ISO/IEC 29341-4-14:2011 ISO/IEC 29341-4-4 ISO/IEC 29341-3-2 ISO/IEC 29341-4-2 ISO/IEC 29341-3-13 ISO/IEC 29341-4-13	4RS9F	

[COMMENT] The baseline AV architecture for a UPnP AV MediaServer is the highest mandated baseline for all of the system usages implemented on a UPnP AV MediaServer. For example, a DMS that implements the 2-box Pull, 3-box and the Upload Synchronization system usages, will need to implement to the ISO/IEC 29341-14-3 specification (i.e. cannot implement to a mixture of AV specification versions on a UPnP AV MediaServer).

10.1.2.1.7

[GUIDELINE] The DLNA Device Classes and Device Capabilities that implement one or more of the MSCP, MSD, MRCP, and MRD Device Functions, as defined in 5.3 and 5.7, may implement the mandatory portions of the UPnP AV specifications above its required baseline (i.e. higher version) for any of the DLNA system usages.

[ATTRIBUTES]

O	R	DMS DMP DMR DMC +DN+ +UP+ +PU+ +UPSYNC+ +DNSYNC+ +SR+ +EPG+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-10:2011 ISO/IEC 29341-4-10 ISO/IEC 29341-14-11 ISO/IEC 29341-4-11 ISO/IEC 29341-20-12:2016 ISO/IEC 29341-4-12:2008 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-3-2 ISO/IEC 29341-4-2 ISO/IEC 29341-20-3 ISO/IEC 29341-4-3 ISO/IEC 29341-14-3 ISO/IEC 29341-3-13 ISO/IEC 29341-4-13 ISO/IEC 29341-4-14:2011 ISO/IEC 29341-4-4	JZ3X6	

[COMMENT] Any of the DLNA system usages can be implemented using a version of the UPnP AV specification beyond its baseline. For example, devices implementing the 2-box Pull system usage need to implement to ISO/IEC 29341-3-2 and ISO/IEC 29341-20-3 at a minimum. But they are allowed to implement to ISO/IEC 29341-4-2, ISO/IEC 29341-4-3 and ISO/IEC 29341-14-3, or any future versions of the UPnP AV specifications.

10.1.2.2 MM DMP/M-DMP UPnP AV MediaServer control point definition

[GUIDELINE] A DMP and M-DMP shall implement a UPnP AV MediaServer control point for browsing a ContentDirectory service on a DMS and M-DMS respectively.

[ATTRIBUTES]

M	R	DMP	M-DMP	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	5GUWH	

[COMMENT] This guideline indicates that a DMP Device Class will use a UPnP control point that controls a UPnP AV MediaServer for browsing content.

10.1.2.3 MM DMP implies DMR

[GUIDELINE] Rendering Endpoints that claim to support the DLNA DMP Device Class shall also support the DLNA DMR Device Class.

[ATTRIBUTES]

M	A	DMP	n/a	n/a	n/a	HV5E4	

10.1.2.4 MM Download Controller definition

10.1.2.4.1

[GUIDELINE] A DLNA Device Class may implement the Download Controller Device Capability.

[ATTRIBUTES]

O	A	DMS DMP DMR DMC	M-DMS M-DMP M-DMC	n/a	n/a	96QAD	

10.1.2.4.2

[GUIDELINE] A Download Controller shall implement a UPnP AV MediaServer control point for browsing a ContentDirectory service on a DMS or M-DMS.

[ATTRIBUTES]

M	R	+DN+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	JUQCY	

[COMMENT] This guideline indicates that a Download Controller Device Capability will use a UPnP control point that controls a UPnP AV MediaServer for browsing content.

10.1.2.5 MM Upload Controller definition

10.1.2.5.1

[GUIDELINE] An Upload Controller shall implement a UPnP AV MediaServer control point for uploading content to a DMS and M-DMS respectively.

[ATTRIBUTES]

M	R	+UP+	n/a	n/a	n/a	MFBWX	

[COMMENT] This guideline indicates that an Upload Controller Device Capability will use a UPnP control point that controls a UPnP AV MediaServer for sending content to the MediaServer. See 10.1.8.3.2 and 10.1.8.3.3 for the functionality that needs to be implemented.

10.1.2.5.2

[GUIDELINE] An Upload Controller that only implements the upload AnyContainer operation may implement the CDS:Browse action as mandated in ISO/IEC 29341-20-12:2016. This guideline overrides the CDS:Browse action mandate for a UPnP AV MediaServer control point in 10.1.2.1.3.

[ATTRIBUTES]

O	C	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016	87Y4Q	N

[COMMENT] An Upload Controller (+UP+) is not obligated to implement the CDS:Browse action when only implementing the upload AnyContainer operation.

10.1.2.6 MM DMR UPnP AV MediaRenderer device definition**10.1.2.6.1**

[GUIDELINE] A DMR shall implement a UPnP AV MediaRenderer device that shall have one AVTransport service, one RenderingControl service, and one ConnectionManager service.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-3-2	XFCS3	

[COMMENT] DMR device will implement the baseline services for a UPnP AV MediaRenderer. This is in conjunction with the requirements for Rendering Endpoints described in 11.

10.1.2.6.2

[GUIDELINE] A UPnP AV MediaRenderer shall identify in the Device Description Document the AVTransport service, the RenderingControl service, and the ConnectionManager service using serviceType and serviceId elements with the values given in Table 9.

Table 9 – DMR serviceType and serviceID values

Service	Element	Value
ConnectionManager service	serviceType	urn:schemas-upnp-org:service:ConnectionManager:V ^a
	serviceId	urn:upnp-org:serviceId:ConnectionManager
AVTransport service	serviceType	urn:schemas-upnp-org:service:AVTransport:V ^a
	serviceId	urn:upnp-org:serviceId:AVTransport
RenderingControl service	serviceType	urn:schemas-upnp-org:service:RenderingControl:V ^a
	serviceId	urn:upnp-org:serviceId:RenderingControl
^a where V is the version number of the service.		

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-1:2011 ISO/IEC 29341-3-2	N3DAH	

[COMMENT] The serviceType and serviceId values uniquely identify the type of service. The table above lists the element values in compliance with the related UPnP specifications.

10.1.2.7 MM DMR AVTransport rules

[GUIDELINE] A DMR shall support the mandatory actions and state variables for a AVTransport service.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	TPX7T	

[COMMENT] This guideline specifies the minimum requirements for a DMR's AVTransport service.

10.1.2.8 MM DMR ConnectionManager rules

[GUIDELINE] A DMR shall support the mandatory actions and state variables for a ConnectionManager service.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-14-11	RABYC	

[COMMENT] This guideline specifies the minimum requirements for a DMR's ConnectionManager service.

10.1.2.9 MM DMR RenderingControl rules

[GUIDELINE] A DMR shall support the mandatory actions and state variables for a RenderingControl service.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-3-13	JBKFB	

[COMMENT] This guideline specifies the minimum requirements for a DMR's RenderingControl service.

10.1.2.10 MM DMC/M-DMC UPnP AV MediaServer and AV MediaRenderer control point definition

[GUIDELINE] A DMC and M-DMC shall implement a UPnP AV MediaServer control point and a UPnP AV MediaRenderer control point. The MediaServer control point interacts with the ContentDirectory service for browsing content. The MediaRenderer control point interacts with the AVTransport service and the ConnectionManager service to verify that the MediaRenderer can play the content and to start and stop the playback.

[ATTRIBUTES]

M	R	DMC	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	QKEAC	

[COMMENT] This guideline indicates that the DMC and M-DMC Device Classes will use a UPnP control point that controls a UPnP AV MediaServer and a UPnP AV MediaRenderer.

10.1.2.11 MM Push Controller definition**10.1.2.11.1**

[GUIDELINE] A DLNA Device Class may implement the Push Controller Device Capability.

[ATTRIBUTES]

O	A	DMS DMP DMR DMC	M-DMS M-DMP M-DMC	n/a	n/a	KK4QV	

10.1.2.11.2

[GUIDELINE] A Push Controller shall implement a UPnP AV MediaRenderer control point that interacts with the AVTransport service and the ConnectionManager service to verify that the MediaRenderer can play the content and to start and stop the playback.

[ATTRIBUTES]

M	R	+PU+	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-3-2	O8Q5K	

[COMMENT] A Push Controller is a capability that controls a DMR and serves the content directly to the DMR. In addition to this guideline, a Push Controller needs to implement additional guidelines related to MediaRenderer control points and Content Source endpoints.

10.1.2.12 MM DMS/M-DMS UPnP AV MediaServer device definition**10.1.2.12.1**

[GUIDELINE] A DMS and M-DMS shall implement a UPnP AV MediaServer device that shall have one ContentDirectory service and one ConnectionManager service.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-3	M5G6Y	

[COMMENT] DMS and M-DMS devices implement the minimum baseline services for a UPnP AV MediaServer.

10.1.2.12.2

[GUIDELINE] A UPnP AV MediaServer shall identify in the Device Description Document the ContentDirectory service and the ConnectionManager service using serviceType and serviceId elements with the values given in Table 10.

Table 10 – DMS/M-DMS serviceType and serviceId values

Service	Element	Value
ContentDirectory service	serviceType	urn:schemas-upnp-org:service:ContentDirectory:V ^a
	serviceId	urn:upnp-org:serviceId:ContentDirectory
ConnectionManager service	serviceType	urn:schemas-upnp-org:service:ConnectionManager:V ^a
	serviceId	urn:upnp-org:serviceId:ConnectionManager

^a where V is the version number of the service.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-1:2011 ISO/IEC 29341-20-3	MDNOR	

[COMMENT] These serviceType and serviceId values uniquely identify the type of service. Table 10 above lists the element values in compliance with the related UPnP specifications.

10.1.2.12.3

[GUIDELINE] A DMS and M-DMS may have a ScheduledRecording service in the UPnP AV MediaServer device.

[ATTRIBUTES]

O	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-3 ISO/IEC 29341-4-14:2011	LPXZY	

[COMMENT] When a UPnP AV MediaServer Device contains a ScheduledRecording service, it's indicating that it has implemented the DLNA ScheduledRecording Device Option as specified in 10.3.

10.1.2.12.4

[GUIDELINE] If a DMS or an M-DMS contains a ScheduledRecording service then it shall implement the DLNA ScheduledRecording Device Option as specified in 10.3.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-3 ISO/IEC 29341-4-14:2011	YR8Q6	

10.1.2.13 MM DMS/M-DMS ContentDirectory rules

[GUIDELINE] A DMS and M-DMS shall support the mandatory actions and state variables for a ContentDirectory service.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	HUNQQ	

10.1.2.14 MM DMS/M-DMS ConnectionManager rules

[GUIDELINE] A DMS and M-DMS shall support the mandatory actions and state variables for a ConnectionManager service.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-11	5G6YN	

[COMMENT] This guideline specifies the minimum requirements for a DMS's and M-DMS's ConnectionManager service.

10.1.3 General UPnP AV requirements**10.1.3.1 MM UPnP AV control point tolerance of unknown property**

[GUIDELINE] UPnP AV control points shall be tolerant of all properties that appear in a DIDL-Lite XML fragment. Properties are as defined in Annex B of ISO/IEC 29341-20-12:2016.

Tolerant behaviour is defined as being able to successfully "parse and interpret" or "parse and ignore" the DIDL-Lite XML elements and attributes.

[ATTRIBUTES]

M	C	DMP DMC +DN+ +PU+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	PX7T9	

[COMMENT] This guideline ensures that a UPnP AV MediaServer control point will continue to behave properly even if a UPnP AV MediaServer device improperly implements its support of the Filter argument for CDS:Browse and CDS:Search.

10.1.3.2 MM DIDL-Lite restrictions

[GUIDELINE] UPnP AV endpoints (devices and control points) shall never source the following in DIDL-Lite documents or fragments:

- [CDATA] payloads
- <!--> XML comments

DIDL-Lite documents and fragments are always assumed to have a UTF-8 encoding. The XML for DIDL-Lite documents and fragments shall never contain XML comments. UPnP AV endpoints may reject any XML that is not encoded with these restrictions.

[ATTRIBUTES]

M	L	DMS DMR DMC +PU+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	FCS3V	

[COMMENT] The flexibility of XML can cause problems for a number of XML parsers, especially those on resource-limited platforms. These requirements balance the needs of control points with the limitations of some devices.

The assumption of using only UTF-8 encoded DIDL-Lite documents and fragments enables wide language support without requiring control points to handle multiple encoding formats.

10.1.3.3 MM DIDL-Lite max metadata length

10.1.3.3.1

[GUIDELINE] Unless specified in another DLNA guideline, element values and attribute values, appearing in DIDL-Lite documents or fragments, that are length-unlimited shall not exceed 1 024 B each, in their XML-escaped form, encoded in UTF-8.

Length-unlimited data types are the data types with an unspecified maximum length in string form. These include string, URI, bin.hex, and base64 values.

[ATTRIBUTES]

M	L	DMS DMR DMC +PU+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	FBWX6	

[COMMENT] This guideline puts a worst-case limit on all other metadata values found in a DIDL-Lite document or fragment. This allows for smaller limits to be specified, but that at this time this is a true maximum.

This guideline applies only to simple element values that are string, URI, bin.hex and base64 values. It does not apply to element values of other data types. It also does not apply to complex elements that contain sub-elements.

10.1.3.3.2

[GUIDELINE] In DIDL-Lite documents or fragments, element and attribute values that are length-limited shall not exceed their implied lengths.

Length-limited data types are the data types with an implied maximum length in string form. These include signed/unsigned integers, floating point numbers, Boolean values, etc. Table 11 defines the maximum byte length for these data types that are used by the CDS and UPnP device architecture.

Table 11 – CDS and UPnP maximum byte length

Data type in CDS	Data type in UPnP device architecture	Maximum byte length
boolean	boolean	5
unsigned integer	ui4	10
integer	i4	11
unsigned long	n/a	20
long	n/a	21
n/a	ui1	3
n/a	ui2	5
n/a	i1	4
n/a	i2	6
n/a	int	11
n/a	r4	14
n/a	r8	22
n/a	number	22
n/a	fixed.14.4	20
n/a	float	110 ^a
n/a	char	1
n/a	date	10
n/a	dateTime	19
n/a	dateTime.tz	29
n/a	time	8
n/a	time.tz	18
^a Float shall be in the canonical representation.		

[ATTRIBUTES]

M	L	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	UQCYR

[COMMENT] A float value is $m \times 2^e$, where m is an integer whose absolute value is less than 2^{24} , and e is an integer between -149 and 104 , inclusive.

Lexical representation is as follows:

float-value = mantissa [("E" | "e") exponent] | "0" | "-0" | "INF" | "-INF" | "NaN";

mantissa = ["+" | "-"] 1*DIGIT ["." 1*DIGIT];

exponent = ["+" | "-"] 1*DIGIT.

The canonical representation is defined; but in the non-canonical representation, the byte length can be infinite. In the canonical representation, the maximum byte length is 110.

For example, $-1E4$, $1267.43233E12$, $12.78e-2$, 12 and INF are all legal literals for float.
See: <http://www.w3.org/TR/xmlschema-2/#float>.

A boolean value can be either "0", "1", "true", or "false". The maximum length is set to 5 which is the size for the value "false". Even though guideline 9.2.31 restricts using boolean values to "0" and "1" for DLNA Device Classes, it needs to be tolerant that "true" or "false" might be encountered for non DLNA devices. Hence the reason for setting the maximum length to 5.

10.1.3.3.3

[GUIDELINE] The dc:title metadata property should not exceed 256 B in the XML-escaped form encoded in UTF-8.

[ATTRIBUTES]

S	L	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	GUWHV	

[COMMENT] Although the maximum length for the dc:title is 1 024 B, many titles can fit in 256 B. The primary reason why title values are allowed to exceed 256 B is to accommodate the guideline 10.1.4.19.

10.1.3.3.4

[GUIDELINE] The following metadata properties shall not exceed 256 B each in the XML-escaped form encoded in UTF-8.

- upnp:class
- Any length-unlimited metadata property in Table 13. Recommended Metadata Properties.
- All length-unlimited DIDL-Lite schema defined attributes for <res>, except for the following:
 - URI properties (the length for URI is governed by guideline 10.1.3.10);
 - res@protocolInfo property (the length is governed by 10.1.3.3.1) unless limited by guideline 10.1.3.3.5.

[ATTRIBUTES]

M	L	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	QP334	

[COMMENT] This guideline provides devices and control points that receive metadata with some information about how much memory will be needed to represent a CDS object.

For example URIs include res@importUri, res@dlina:ifoFileURI, and res@dlina:importIfoFileURI.

10.1.3.3.5

[GUIDELINE] The res@protocolInfo metadata property shall not exceed 256 B when interacting (i.e. action request, action response, eventing state variables) with UPnP devices or UPnP control points implemented to a version of the DLNA protocol before 1.51. A UPnP Device implemented to a version of the DLNA protocol shall be as defined in 9.2.10.2. A UPnP control point implemented to a version of the DLNA protocol shall be as defined in 9.2.32.2.

[ATTRIBUTES]

M	L	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	A3LXJ	

[COMMENT] To maintain backwards compatibility with older DLNA Certified devices the size for res@protocolInfo is limited to 256 B. For example when a DMP browses a DMS for CDS objects,

a DMC issues a AVT:SetAVTransportURI action with metadata to a DMR, a DMR events track metadata to a DMC. To limit the size of res@protocolInfo property value when sending to a device with a DLNA protocol version before 1.51, parameters such as other-param, ps-param, maxsp-param, and ci-param can be omitted or modified from the 4th field of res@protocolInfo until the size of the res@protocolInfo metadata property is 256 B or less.

10.1.3.4 MM DIDL-Lite non-empty metadata values

10.1.3.4.1

[GENERAL] UPnP AV endpoints that provide DIDL-Lite metadata with empty values or values composed entirely of white-spaces can cause problems for other endpoints that receive them. More importantly, a user has little idea on how to interpret such values.

10.1.3.4.2

[GUIDELINE] UPnP AV endpoints (devices and control points) shall use non-empty and non-whitespace values for metadata properties in a DIDL-Lite XML fragment. The term, metadata properties, refers specifically to elements and attributes defined by the DIDL-Lite schema and applies only to guideline entries of 10.1.3.3.5.

Exceptions are explicitly allowed in other guidelines, such as 10.1.8.19 and 10.1.8.23.

[ATTRIBUTES]

M	L	DMS DMR DMC +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	P334S	

10.1.3.4.3

[GUIDELINE] UPnP AV endpoints (devices and control points) shall be tolerant of DIDL-Lite attributes and elements (whether defined by DIDL-Lite schema or not) that have empty values.

[ATTRIBUTES]

M	C	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	QCYRU	

10.1.3.5 MM DIDL-Lite Boolean values

10.1.3.5.1

[GUIDELINE] DIDL-Lite Boolean values shall use "0" for false and "1" for true.

[ATTRIBUTES]

M	L	DMS DMR DMC +PU+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	BWX6P	

[COMMENT] This simplifies control point implementations and also reduces the size of some UPnP traffic.

10.1.3.5.2

[GUIDELINE] UPnP AV endpoints (devices and control points) may parse and interpret DIDL-Lite Boolean values of "yes" and "true" as true ("1"), and "no" and "false" as false ("0"). Such values are interpreted in a case-sensitive manner.

[ATTRIBUTES]

O	A	DMS DMR DMC +PU+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	YYZDP	

10.1.3.6 MM upnp:class values

10.1.3.6.1

[GUIDELINE] UPnP AV MediaServer control point shall minimally treat derived classes in the same way as its ancestor class(es).

[ATTRIBUTES]

M	R	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	CS3V5	

[COMMENT] As an example, a UPnP AV MediaServer control point needs to be able to recognize a CDS object marked as an object.item.audioItem.vendorXYZ as an object.item.audioItem even though the UPnP AV MediaServer control point implementation does not understand the meaning behind the vendorXYZ extension. It is not the intent of DLNA to require UPnP AV MediaServer control points to show all CDS objects to a user because some UPnP AV MediaServer control points can be interested in certain types of content classes.

10.1.3.6.2

[GUIDELINE] A UPnP AV MediaServer control point shall be tolerant ("parse and interpret" or "parse and ignore") of unknown upnp:class values.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	X7T96	

[COMMENT] Tolerance of unknown values is required, regardless of whether the control point intends to show the CDS objects to a user.

10.1.3.7 MM DIDL-Lite dc:date format

[GUIDELINE] The syntax for the DIDL-Lite <dc:date> element value shall conform to the following subset profile of ISO 8601.

- date-value = date [%x54 time [time-offset]]
- date = 4 DIGIT "-" 2 DIGIT "-" 2 DIGIT; CCYY-MM-DD
- time = 2 DIGIT ":" 2 DIGIT ":" 2 DIGIT ["." 3 DIGIT]; hh:mm:ss(.sss)
- time-offset = %x5a | ("+" | "-") 2 DIGIT ":" 2 DIGIT; Z or +hh:mm or -hh:mm

Essentially, the following combinations are permitted

- CCYY-MM-DD
- CCYY-MM-DDThh:mm:ss
- CCYY-MM-DDThh:mm:ssZ
- CCYY-MM-DDThh:mm:ss+hh:mm
- CCYY-MM-DDThh:mm:ss-hh:mm
- CCYY-MM-DDThh:mm:ss.sss
- CCYY-MM-DDThh:mm:ss.sssZ
- CCYY-MM-DDThh:mm:ss.sss+hh:mm
- CCYY-MM-DDThh:mm:ss.sss-hh:mm

When the offset of local time to UTC cannot be determined, the <dc:date> string shall have no characters for the <time-offset> part of the date grammar.

[ATTRIBUTES]

M	R	DMS DMR DMC +UP+	M-DMS M-DMC		ISO 8601 IETF RFC 2234	BYCT4	

10.1.3.8 MM DIDL-Lite res@duration format

[GUIDELINE] The syntax of the res@duration shall be compliant to the following definition.

- duration = hours ":" minutes ":" seconds
- hours = 1*5 DIGIT; 0 to 99999
- minutes = 2 DIGIT; 00 to 59
- seconds = 2 DIGIT ["." 3 DIGIT]; 00 to 59 (.000 to .999)

[ATTRIBUTES]

M	R	DMC DMS DMR +UP+ +PU+	M-DMS M-DMC	n/a	IETF RFC 2234	KFB4S	

10.1.3.9 MM DIDL-Lite desc element use

10.1.3.9.1

[GUIDELINE] The text in the <desc> element, when included in a DIDL-Lite document, shall contain XML-based metadata. This includes the requirement that both the id and nameSpace attributes be included in the <desc> element. The nameSpace attribute shall identify the namespace of the contained XML-based metadata within the <desc> element.

[ATTRIBUTES]

M	R	DMS DMR DMC +UP+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	EACYX	

10.1.3.9.2

[GUIDELINE] The XML-based metadata contained within a <desc> element shall have its XML namespace defined within the containing DIDL-Lite document and its value shall be the same as that of the nameSpace attribute.

Shown below are some examples of proper <desc> usage.

EXAMPLE 1:

```
<DIDL-Lite xmlns="urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/"
  xmlns:dc="http://purl.org/dc/elements/1.1/"
  xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/">
  <container id="000000000000000016" searchable="1"
    parentID="0000000000000000A" restricted="0" childCount="1">
    <dc:title>some title</dc:title>
    <upnp:class>
      object.item
    </upnp:class>
    <desc id="someid" namespace="http://some.example.org/foobar/"
      xmlns="http://some.example.org/foobar/">
      <yada>
        some desc data
      </yada>
    </desc>
  </container>
</DIDL-Lite>
```

EXAMPLE 2:

```
<DIDL-Lite xmlns="urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/"
  xmlns:dc="http://purl.org/dc/elements/1.1/"
  xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
  xmlns:ve="http://some.example.org/foobar/">
  <container id="000000000000000016" searchable="1"
    parentID="0000000000000000A" restricted="0" childCount="1">
    <dc:title>
      some title
    </dc:title>
    <upnp:class>object.item</upnp:class>
    <desc id="someid" namespace="http://some.example.org/foobar/"
      <ve:yada>
        some desc data
      </ve:yada>
    </desc>
  </container>
</DIDL-Lite>
```

[ATTRIBUTES]

M	C	DMS DMR DMC +PU+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016 W3C XML:20 04	904R8

10.1.3.10 MM URI rules

10.1.3.10.1

[GUIDELINE] When a Server Endpoint provides a reference to a content binary it serves that conforms to a DLNA Media Format Profile, the Server Endpoint shall provide absolute URIs, with IPv4 or IPv6 literal addresses formatted according to IETF RFC 3986:2005 and IETF RFC 5952.

[ATTRIBUTES]

M	L	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-3 IETF RFC 3986:2005 IETF RFC 5952	Q5KY2	C

[COMMENT] This guideline mandates that content URIs will use absolute URIs that use IPv4 or IPv6 addresses when the content is located within the home network.

Content Binaries that are located on a device with an IP address outside the LAN can use a domain name in the URI, however legacy DMPs and DMRs with a version lower than 1.6 may not support the GENUURL requirements so may not be able to resolve domain names.

10.1.3.10.2

[GUIDELINE] URIs shall be properly URI-escaped in a UTF-8 encoded form.

[ATTRIBUTES]

M	L	DMS DMC +PU+ +UP+	M-DMS M-DMC	n/a	IETF RFC 1738 ISO/IEC 29341-20-12: 2016	G6YNK	

[COMMENT] This guideline requires UPnP AV endpoints to provide URI values that are URI-escaped in a UTF-8 encoded form. This guideline also allows a UPnP AV MediaServer control point to assume that URIs obtained from a UPnP AV MediaServer do not need any escaping.

10.1.3.10.3

[GUIDELINE] HTTP URI escaping shall be performed according to the URI specification IETF RFC 1738 as required in 3.2.1 of the HTTP/1.1 specification IETF RFC 2616:1999.

[ATTRIBUTES]

M	L	DMS DMC +PU+ +UP+	M-DMS M-DMC	n/a	IETF RFC 1738 IETF RFC 2616:1999	UNQQR	

10.1.3.10.4

[GUIDELINE] URI values that appear in DIDL-Lite documents or fragments shall not exceed 1 024 B, in the URI-escaped UTF-8 encoded form.

URI values shall not have preceding or trailing white space characters.

[ATTRIBUTES]

M	L	DMS DMC +PU+ +UP+	M-DMS M-DMC	n/a	IETF RFC 1738 ISO/IEC 29341-20-12: 2016 W3C XML:20 04	NQQRV	

[COMMENT] URI values are theoretically infinite in length. This guideline puts a reasonable limit on the length of advertised content URI values.

10.1.3.10.5

[GUIDELINE] If a content binary does not conform to a DLNA Media Format Profile, then the URI value may be a URI, with a domain name.

[ATTRIBUTES]

O	L	DMS DMC +PU+ +UP+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-3	6YNKQ	

[COMMENT] This guideline permits the use of content URIs that use domain names when content is not marked as conformant to a DLNA Media Format Profile. Content sourced from the Internet is considered out of range for DLNA. However, a ContentDirectory service still has a way of advertising Internet content in a DLNA manner using IP addresses. Rendering Endpoints that wish to support these types of URIs will need a DNS client. Inclusion of DNS clients is out-of-scope for DLNA. This means that vendors are not prohibited from including a DNS client, but DLNA guidelines will not specify how to use DNS clients nor will the certification process test such behaviours.

10.1.3.10.6

[GUIDELINE] All IP addresses appearing in a <res> element shall have the same address family.

[ATTRIBUTES]

M	L	DMS +PU+ DMC	M-DMS M-DMC	n/a	n/a	KGK7T	N

[COMMENT] For example if the <res> value is an IPv4 address, then the ifoFile value should be an IPv4 address as well. This guideline ensures address family consistency within a <res> element.

10.1.3.11 Generic HTTP URLs (GENURL) Device Function

10.1.3.11.1 Uniform Resource Identifiers (URI) support

[GUIDELINE] DLNA Device Classes and Device Capabilities shall be capable of using the HTTP GET and HEAD methods to request a resource or its header respectively identified by the following types of URIs:

- URI values that comply with guideline 10.1.3.10 (MM URI Rules), and
- Generic HTTP URL values defined in 3.2.2 of IETF RFC 3986:2005.

[ATTRIBUTES]

M	A	DMR DMP	M-DMP	n/a	IETF RFC 3986:2005	9GXZQ	

[COMMENT] This guideline indicates that a DMR is designed to work with URIs constrained to numeric IP addresses (as defined in guideline 10.1.3.10), but also with any type of URI that complies with HTTP URL specifications defined in IETF RFC 3986:2005. Generic HTTP URLs can be located anywhere in the local network or outside the local network.

10.1.3.11.2 Domain Name System (DNS) resolution

[GUIDELINE] DLNA Device Classes and Device Capabilities shall implement a DNS resolver and a mechanism to use the DNS resolver to convert host names to IP addresses (as defined in 6.1 of IETF RFC 1123:1989 and as updated in IETF RFC 2181, IETF RFC 4343, IETF RFC 5452 and IETF RFC 5966).

[ATTRIBUTES]

M	A	DMR DMP	M-DMP	n/a	IETF RFC 1123:1989 IETF RFC 2181 IETF RFC 4343 IETF RFC 5452 IETF RFC 5966	IIBXF	

[COMMENT]

- 1) All Device Classes and Device Capabilities that implements the GENURL Device Function, implement a DNS resolver and a mechanism to use this resolver to convert host names to IP addresses. A DNS resolver communicates with a DNS server as explained in IETF RFC 1123:1989.
- 2) The class of Digital Media Renderers does not need to implement DNS resolver functionality (see for example the notes for guidelines 8.4.2.1 and 9.2.24.1). Consequently, DLNA-compliant Control Points always send HTTP URLs that include numeric IPv4 address to DMR devices not implementing the GENURL Device Function. A UPnP Control Point that interacts with an DMR can send non-numeric URLs because a DMR implementing the GENURL Device Function is designed to resolve the URLs into numeric addresses using DNS.

10.1.3.11.3 DNS Server IPv4 address

[GUIDELINE] The DHCPv4 client for DLNA Device Classes and Device Capabilities shall support DHCPv4 Option 6 IETF RFC 2131 and obtain DNS server IPv4 address(es) from a home network DHCPv4 server if present.

[ATTRIBUTES]

M	A	DMR DMP	M-DMP	n/a	IETF RFC 2131	URK4D	

[COMMENT] This guideline indicates the protocol that a DMR uses to obtain the IPv4 address (or addresses) for a DNS server.

10.1.3.11.4 Tolerance to unavailable transferMode.dlna.org

[GUIDELINE] If a Rendering Endpoint sends an HTTP HEAD or GET request using generic HTTP URLs, and the response omits the transferMode.dlna.org HTTP header, then the Rendering Endpoint shall accept the response with the default transfer modes.

As described in guideline 11.4.3.32.2), the default transfer modes are 'streaming' for the audio and AV Media Classes, and 'interactive' for all other content binaries.

[ATTRIBUTES]

M	L	DMR DMP	M-DMP	n/a	IETF RFC 3986:2005	MMIKL	

[COMMENT] The DLNA guidelines indicate that client endpoints need to tolerate the absence of the transferMode.dlna.org header for DMS v1.0 servers. This guideline says that DMRs need to tolerate this omission for any type of server. Some of the HTTP URLs could point to servers located on the Internet that are not capable of including this header in response messages.

10.1.3.11.5 QoS level for a response that omits transferMode.dlna.org

[GUIDELINE] If a Rendering Endpoint sends an HTTP HEAD or GET request using generic HTTP URLs, and the response omits the transferMode.dlna.org HTTP header, then the Rendering Endpoint shall accept the response using a best effort QoS level.

[ATTRIBUTES]

M	L	DMR DMP	M-DMP	n/a	IETF RFC 3986:2005	H4WRY	

[COMMENT] The DLNA guidelines indicate that client endpoints need to tolerate the absence of the transferMode.dlna.org header for DMS v1.0 servers and use the best effort QoS level. This guideline indicates that DMRs need to use the same approach for all servers that omit the transferMode.dlna.org header in the response.

10.1.3.11.6 Tolerance to unavailable contentFeatures.dlna.org header

[GUIDELINE] If a Rendering Endpoint sends an HTTP HEAD or GET request using generic HTTP URLs including a valid getContentFeatures.dlna.org HTTP header, and if the response omits the contentFeatures.dlna.org HTTP header, then the Rendering Endpoint shall accept the response as if it included the header.

[ATTRIBUTES]

M	L	DMR DMP	M-DMP	n/a	IETF RFC 3986:2005	XWJCH	

[COMMENT]

- 1) Some legacy devices have been designed to retrieve res@protocolInfo information using the contentFeatures.dlna.org header instead of using the available resource metadata. Generic HTTP URLs could point to servers located in the Internet, which are not capable of including this header in a response message.
- 2) The contentFeatures.dlna.org HTTP header carries the same information as the res@protocolInfo property, which is always available for a Rendering Endpoint.

10.1.3.12 MM DIDL-Lite recommended metadata properties

10.1.3.12.1

[GUIDELINE] Content that conforms to the DLNA "Image" Media Class shall use object.item.imageItem or a derived class for the upnp:class value.

Content that conforms to the DLNA "Audio" Media Class shall use object.item.audioItem or a derived class for the upnp:class value.

Content that conforms to the DLNA "AV" Media Class shall use object.item.videoItem or a derived class for the upnp:class value.

[ATTRIBUTES]

M	A	DMS +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	5KY2U	

10.1.3.12.2

[GUIDELINE] Metadata properties defined in Annex B of ISO/IEC 29341-20-12:2016 (ContentDirectory Service specification) shall use the following namespace prefixes, see Table 12.

Table 12 – Namespace prefixes

Namespace	Prefix
DIDL-Lite	n/a
Dublin Core	dc:
UPnP	upnp:

[ATTRIBUTES]

M	L	DMS +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	ACYXD	

[COMMENT] "n/a" means that the prefix is not used.

10.1.3.12.3

[GUIDELINE] A UPnP AV MediaServer device should provide non-empty and non-whitespace values for metadata properties as shown in Table 13 for the purpose of content selection.

Table 13 – Recommended metadata properties

upnp:class value	Property names
object.item.audioItem	dc:creator, upnp:album, upnp:genre, res@duration, res@size
object.item.imageItem	dc:date, res@size
object.item.videoItem	dc:date, upnp:genre, res@duration, res@size
object.container.album.musicAlbum	dc:creator, upnp:genre, @childCount
object.item.videoItem.videoBroadcast object.item.audioItem.audioBroadcast	upnp:genre, upnp:channelName, upnp:channelNr (Applicability of upnp:channelNr depends on region)

This guideline also applies to classes derived from those listed in Table 13.

As a note, the dc:creator property is understood to contain a value representing the artist name or some equivalent content creator. Whenever possible, the original artist name or content creator should be used for dc:creator. In some cases, such as an audio playlist, a user is the original content creator of the media collection. While it might be appropriate to specify the user's name as the dc:creator for a playlist, it is not recommended to specify the user's name as the dc:creator value for individual audio items in the playlist.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	FB4S5

[COMMENT] This guideline recommends that some additional metadata properties be used for different Media Classes. Although not required, providing the user with an information-rich user experience is desirable.

When an Upload Controller creates an object on the MediaServer it will preferably provide these values as part of the DIDL-Lite in the CDS:CreateObject request, see Guidelines 10.1.8.23.4 and 10.1.8.24.2 for this requirement.

10.1.3.12.4

[GUIDELINE] A UPnP AV MediaServer device shall provide non-empty and non-whitespace values for metadata properties as shown in Table 14 that represent the maximum combined value for that parameter for the item for the purpose of content selection.

Table 14 – Required res@ metadata properties

upnp:class value	Property names
object.item.audioItem	res@bitRate, res@sampleFrequency, res@nrAudioChannels
object.item.imageItem	res@colorDepth, res@resolution
object.item.videoItem	res@bitRate, res@frameRate, res@resolution

This guideline also applies to classes derived from those listed in Table 14.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	F4CM8	N

[COMMENT] This metadata is supplied for the overall content item.

10.1.3.12.5

[GUIDELINE] A UPnP AV MediaServer device shall, in response to a CDS "upnp:resExt::componentInfo#" value (case sensitive) included as part of the Filter argument (in a CDS:Browse or CDS:Search request), provide a upnp:resExt::componentInfo metadata property as shown in Table 15 for the purpose of content selection for Media Format Profiles containing two or more audio streams, video streams or audio plus video streams. If the "upnp:resExt::componentInfo#" value is not included in the CDS:Browse or CDS:Search then the upnp:resExt::componentInfo metadata shall not be returned.

Table 15 – Conditionally Required ResExt metadata properties

upnp:class value	Property names
object.item.audioItem	upnp:resExt::componentInfo
object.item.videoItem	upnp:resExt::componentInfo

This guideline also applies to classes derived from those listed in Table 15.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	GBOX3	N

[COMMENT] This guideline restricts the return of the upnp:resExt::componentInfo metadata to CDS:Browse and CDS:Search request that specifically ask for it in order to reduce the size of the typical response for control points that cannot use the metadata. It also restricts the use of upnp:resExt::componentInfo metadata to content items that have metadata associated with alternative streams that are not easily derived from the top-level content item metadata of Media Format Profile.

10.1.3.12.6

[GUIDELINE] A UPnP AV MediaServer device shall, in response to a CDS "upnp:resExt::componentInfo#" value (case sensitive) included as part of the Filter argument (in a CDS:Browse or CDS:Search request), provide non-empty and non-whitespace values for metadata properties as shown in Table 16.

Table 16 – Conditionally Required ResExt metadata properties

All stream types	Property names
For each audio or video stream in the object.item.audioItem or object.item.videoItem	upnp:resExt::componentInfo::componentGroup upnp:resExt::componentInfo::componentGroup@groupID upnp:resExt::componentInfo::componentGroup@required upnp:resExt::componentInfo::componentGroup::component upnp:resExt::componentInfo::componentGroup::component@componentID upnp:resExt::componentInfo::componentGroup::component::componentClass upnp:resExt::componentInfo::componentGroup::component::contentType upnp:resExt::componentInfo::componentGroup::component::contentType@MIMEType upnp:resExt::componentInfo::componentGroup::component::contentType@extendedType
Specific stream types	Property names (resExt::compontntInfo::ComponentGroup::component::ComponentClass value)
• "Audio"	• upnp:resExt::componentInfo::componentGroup::component::contentType@bitrate • upnp:resExt::componentInfo::componentGroup::component::contentType@sampleFrequency • upnp:resExt::componentInfo::componentGroup::component::contentType@nrAudioChannels
• "Video"	• upnp:resExt::componentInfo::componentGroup::component::contentType@bitrate • upnp:resExt::componentInfo::componentGroup::component::contentType@resolution • upnp:resExt::componentInfo::componentGroup::component::contentType@framerate

This guideline also applies to classes derived from those listed in Table 16.

The res@sampleFrequency, res@nrAudioChannels, res@frameRate and res@resolution attributes may be absent when the upnp:resExt:componentInfo element is provided.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	F434U	N

[COMMENT] An example of a upnp:resExt:componentInfo metadata returned for a object.item.videoItem with two video streams and three audio streams is given below. All streams are embedded in an ".mp4" container resource as indicated by the <res> element.

```

<item id="100" parentID="200" restricted="0">
  <dc:title>KBS Sports</dc:title>
  <upnp:class>object.item.videoItem</upnp:class>
  <res id="100-res-1" protocolInfo="http-get:*:video/mp4:*" bitRate="11000100"
frameRate="30p"
  resolution="1920x1080">
    http://10.0.0.1/content/content?id=100-res
  </res>
  <upnp:resExt id="100-res-1">
    <upnp:componentInfo>
      <upnp:componentGroup groupID="vg1" required="0">
        <upnp:component componentID="vid_comp_0">
          <upnp:componentClass>Video</upnp:componentClass>
          <upnp:contentType MIMEType="mime/x-video; codecs=avc1.4D4029"
            extendedType="*" resolution="1920X1080" framerate="30p"
            bitrate="3300000"/>
        </upnp:component>
      </upnp:componentGroup>
      <upnp:componentGroup groupID="vg2" require="0">
        <upnp:component componentID="vid_comp_1">
          <upnp:componentClass>Video</upnp:componentClass>
          <upnp:contentType MIMEType="mime/x-video; codecs=avc1.42E01E"
            extendedType="*" resolution="720X480" framerate="30p"

```

```

        bitrate="800000"/>
      </upnp:component>
    </upnp:componentGroup>
    <upnp:componentGroup groupID="ag1" required="0">
      <upnp:component componentID="aud_comp_1">
        <upnp:componentClass>Audio</upnp:componentClass>
        <upnp:language>en-US</upnp:language>
        <upnp:contentType MIMEType="mime-x-audio; codecs=mp4a"
          extendedType="*" nrAudioChannels="2" bitrate="50000"/>
      </upnp:component>
    </upnp:componentGroup>
    <upnp:componentGroup groupID="ag2" required="0">
      <upnp:component componentID="aud_comp_2">
        <upnp:componentClass>Audio</upnp:componentClass>
        <upnp:language>en-US</upnp:language>
        <upnp:contentType MIMEType="mime/x-audio; codecs=ac-3"
          extendedType="*" nrAudioChannels="2" bitrate="500000"/>
      </upnp:component>
    </upnp:componentGroup>
    <upnp:componentGroup groupID="ag3" required="0">
      <upnp:component componentID="aud_comp_3">
        <upnp:componentClass>Audio</upnp:componentClass>
        <upnp:language>en-US</upnp:language>
        <upnp:contentType MIMEType="mime/x-audio; codecs=dtsh"
          extendedType="*" nrAudioChannels="6" bitrate="5000000"/>
      </upnp:component>
    </upnp:componentGroup>
  </upnp:componentInfo>
</upnp:resExt>

```

</item>

10.1.3.12.7

[GUIDELINE] If a UPnP AV MediaServer control point lists CDS objects with a particular base-class upnp:class value to users, then it shall also list CDS objects that have a upnp:class value that is derived from the supported base-class.

For example, a MediaServer control point displays content listings for images with a upnp:class value object.item.imageItem. needs also to display CDS objects with a upnp:class value of object.item.imageItem.xyz.

[ATTRIBUTES]

M	C	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	YCT43	

[COMMENT] Control Points will not match exclusively on base-class values because guideline 10.1.3.12.1 allows MediaServers to use derived-class values. Derived-class values allow a DMS to provide more information about a CDS object. Control points can use this additional information in a variety of ways, but using the upnp:class value to prevent users accessing valid content is not acceptable behaviour.

10.1.3.12.8

[GUIDELINE] CDS objects that use either object.item.videoItem or object.item.imageItem or a derived class value from either class may include <res> elements that describe image-based thumbnails.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	7XW9Y	

[COMMENT] Guideline 10.1.4.7.3 describes the mandatory requirements for thumbnails if a device chooses to use them.

10.1.3.12.9

[GUIDELINE] If a Content Source declares `res@colorDepth` for media resources of the Image Media Class, the value shall be one of the values defined in Table 8.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	I78Q2	N

10.1.3.12.10

[GUIDELINE] If a Content Source declares `res@resolution` for media resources of the Image or AV Media Classes, the device shall use the two-number format "HxV" described in ISO/IEC 29341-20-12:2016, whereby the first number (H) defines the horizontal frame resolution and the second number (V) defines the vertical frame resolution of the encoded raw-data stream.

The encoded raw-data stream is defined as the byte stream that represents the compressed image or video carried as payload in a file or transport format. The horizontal and vertical values in `res@resolution` describe values applicable to the raw-data stream before performing any transformations specified as file metadata.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	J5N79	

[COMMENT] This guideline defines the concept of resolution for images or video resources. The resolution is defined as two integer numbers represented jointly as HxV. The H value indicates the number of scanned pixels in the horizontal dimension. The V value indicates the number of scanned pixels in the vertical dimension. For example, the maximum size of a JPEG_SM image is 640 × 480, a typical size for HD video is 1 920 × 1 080, etc.

This guideline clarifies that the resolution is always computed from the encoded raw-data stream. The raw-data stream represents the compressed image or video carried as the payload of some file or transport format. Some file or transport formats include additional metadata to perform transformations on the raw-data stream. For example, a JPEG image of size 600 × 400 (raw-data) can have Exif orientation metadata to rotate the image 90 degrees.

Even though the Exif metadata leads to a final image displayed with a resolution of 400 × 600, the Content Source declares the image resolution as:

`res@resolution="600x400".`

Similarly, MP4 files include a transformation matrix that can be used to rotate the video frames at the time of rendering.

10.1.3.12.11

[GUIDELINE] A Content Source shall use the resolution or the encoded raw-data stream, as defined in 10.1.3.12.9, in order to assign a Profile ID to a media resource of the image or AV Media Classes.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	XVMH6	

[COMMENT] Many of the DLNA-defined Media Format Profiles include constraints on the resolution of image or video resources. This guideline clarifies that the resolution of an image or an A/V resource is defined in a manner consistent with the definition of res@resolution.

10.1.3.12.12

[GUIDELINE] A Content Source may use the res@dlina:rotation property to advertise a rotation angle to be applied at the time of rendering a resource of the image or AV Media Class.

[ATTRIBUTES]

O	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	HVHYH	

[COMMENT] JPEG/Exif images and MP4 files can include a file property that indicates the rotation angle that should be applied at the time of rendering the resource. This guideline gives Content Sources the option to expose such an angle as a CDS property.

10.1.3.12.13

[GUIDELINE] The res@dlina:rotation property value shall be of type ui4, between 0 and 359. This value represents the rotation angle in degrees such that when applied to an image or to video frames, it results in an image or video displayed with the correct orientation. The angle is measured using an anticlockwise direction.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	NPGDX	

[COMMENT] This guideline defines an optional property used to advertise the rotation angle that Content Receivers need to apply to an image or to video frames in order to display an image or video with the correct orientation.

For example, consider the case of a UPnP AV MediaServer that exposes an image with a resolution of 640 × 480. If the raw-data image is:



and, if the correct orientation for this image is:



then the Content Source exposes a rotation angle of 90 degrees. The rotation angle is always measured anticlockwise.

Some Content Sources will read the rotation metadata and perform rotation of the frame(s) before sending a resource across the network. These Content Sources do not expose the `res@dlna:rotation` property because the resource no longer needs to be rotated by the Content Receiver.

10.1.3.12.14

[GUIDELINE] If a Content Source uses the `res@dlna:rotation` property, its value shall be compatible with the value of the rotation (or orientation) angle described as a property in the file format.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	N9T4Y

[COMMENT] JPEG/Exif images and MP4 files can include a file property that indicates the rotation angle that should be applied at the time of rendering the resource. The value in the file property needs to be compatible with the value exposed in the CDS property.

10.1.3.12.15

[GUIDELINE] If a Content Source declares `res@bitRate` for media resources of the Audio or AV Media Classes then the value of `res@bitRate` shall correspond to the sum of the individual video component bitrate + audio component bitrate + average system overhead bitrate.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	CGXI6	N

[COMMENT] This guideline defines the concept of bitrate. An example of a maximum combined value for a bitrate parameter for an `object.item.videoitem` containing a video component of 5 Mbps, an audio track of 1 Mbps, and system overhead bitrate of 30 Kbps would be 6 030 000.

10.1.3.12.16

[GUIDELINE] If a Content Source declares `res@sampleFrequency` for media resources of the Audio Class or AV Media Class then the value of `res@sampleFrequency` shall correspond to the highest sample rate value of the individual audio tracks and shall be expressed in hertz.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	OQ7N4	N

[COMMENT] This guideline defines the concept of sampleFrequency. For example an audio raw-data stream encoded at a sample rate of 44,1 kHz would have res@sampleFrequency="44100".

If a content binary has multiple audio tracks then this guideline clarifies that the res@sampleFrequency represents the highest, e.g. if there are two audio tracks, one with a sample frequency of 44,1 kHz and another with 48 kHz then the value would be res@sampleFrequency="48000".

10.1.3.12.17

[GUIDELINE] If a Content Source declares res@nrAudioChannels for media resources of the Audio Class or AV Media Class then the value of res@ nrAudioChannels shall correspond to the highest "number of channels" value of the individual audio tracks for the raw audio stream.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	NXYPY	N

[COMMENT] This guideline defines the concept of nrAudioChannels. For example, if the audio raw-data stream is encoded as Dolby 6.1⁸, then res@nrAudioChannels="7", or if the audio raw-data stream is encoded as 2-channel stereo, then res@nrChannels="2".

10.1.3.12.18

[GUIDELINE] If a Content Source declares res@frameRate for media resources of the AV Media Class, then the value of res@frameRate shall correspond to the maximum frame rate of the individual video tracks for the encoded video raw-data stream.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	O66SO	N

[COMMENT] This guideline defines the concept of frameRate for video bit streams. For example, if the videoraw-data stream is encoded at 29,97 Hz interlaced, then res@frameRate="29.97i", or if the video raw-data stream is 60 Hz progressive, then res@frameRate="60p".

⁸ Dolby 6.1 is an example of a suitable product available commercially. This information is given for the convenience of users and does not constitute an endorsement by IEC of this product.

If a content binary has multiple video tracks, then this guideline clarifies that the `res@frameRate` represents the highest, e.g. if there are two video tracks, one with 29,97 Hz interlace and another with 60 Hz progressive, then the value would be `res@frameRate="60p"`.

10.1.3.12.19

[GUIDELINE] For CDS items exposed with a `upnp:resExt::componentInfo` element, one `upnp:resExt::componentInfo::componentGroup` element shall be exposed for each Audio or Video stream included in the content.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	ZK2NR	N

[COMMENT] The `upnp:resExt::componentInfo` metadata only describes the individual streams present in a container type file format such as MP4 in a flat heirachy style and does not describe other playback scenarios possible with [CDS:4 ref].

10.1.3.12.20

[GUIDELINE] For each `upnp:resExt::componentInfo::componentGroup` element, the following attributes shall be included:

- `upnp:resExt::componentInfo::componentGroup@groupID`,
- `upnp:resExt::componentInfo::componentGroup@required`.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	3M22S	N

[COMMENT] These attributes are mandated by ISO/IEC 29341-20-12:2016, IEC 62481-2:2017.

10.1.3.12.21

[GUIDELINE] The value of the `upnp:resExt::componentInfo::componentGroup@groupID` attribute shall be unique within the containing `upnp:resExt:componentInfo` element and shall not exceed 32 characters.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	9BAJK	N

[COMMENT] This is a unique identifier for groups within a multi-component `<res>` element.

10.1.3.12.22

[GUIDELINE] For each `upnp:resExt::componentInfo::componentGroup` element exposed, one `upnp:resExt::componentInfo::componentGroup::component` sub-element shall be exposed.

Exposure in a flat hierarchy is only required for devices exposing a `dlna-version` of "1.6". Future versions could enable other hierarchies.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	QQOFT	N

[COMMENT] Currently only one raw-data stream is included per `upnp:resExt::componentInfo::componentGroup`, thereby there is a 1-to-1-to-1 mapping between an audio or video raw-data stream, a `upnp:resExt::componentInfo::componentGroup`, and a `upnp:resExt::componentInfo::componentGroup::component`.

10.1.3.12.23

[GUIDELINE] For each `upnp:resExt::componentInfo::componentGroup::component` element the following attributes shall be included:

- `upnp:resExt::componentInfo::componentGroup::component@componentID`.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	DTDFR	N

[COMMENT] These attributes are mandated by ISO/IEC 29341-20-12:2016.

10.1.3.12.24

[GUIDELINE] The value of the `upnp:resExt::componentInfo::componentGroup::component@componentID` attribute shall be unique within the containing `upnp:resExt::componentInfo` element and shall not exceed 32 characters.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	PK5XP	N

[COMMENT] This is a unique identifier for groups within a multi-component `<res>` element.

10.1.3.12.25

[GUIDELINE] For each `upnp:resExt::componentInfo::componentGroup::component` element exposed, each of the following required sub-elements shall be exposed:

- upnp:resExt::componentInfo::componentGroup::component::componentClass,
- upnp:resExt::componentInfo::componentGroup::component::contentType.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	SCEVZ	N

[COMMENT] These elements are mandated by ISO/IEC 29341-20-12:2016.

10.1.3.12.26

[GUIDELINE] For CDS items exposed with a upnp:resExt::componentInfo element, one upnp:resExt::componentInfo::componentGroup element and its required sub-elements shall be exposed for each Audio or Video stream included in the content item, the required sub-elements are:

- upnp:resExt::componentInfo::componentGroup::component::contentType@MIMEType,
- upnp:resExt::componentInfo::componentGroup::component::contentType@extendedType

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	LQREA	N

[COMMENT] These attributes are mandated by ISO/IEC 29341-20-12:2016.

10.1.3.12.27

[GUIDELINE] The value of the upnp:resExt::componentInfo::componentGroup::contentType@MIMEType attribute shall be "mime/x-audio" and "mime/x-video" for audio raw-data streams and video raw-data streams respectively. It shall also include the codec extension parameter in the @MIMEType string as defined in IETF RFC 2045.

See example in 10.1.3.12.6.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:20 16 IEC 62481-2:20 17 IETF RFC 2045	Q9QWE	N

10.1.3.12.28

[GUIDELINE] The value of the `upnp:resExt::componentInfo::componentGroup::componentType@extended` attribute shall be "*" .

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	Z3JVU	N

10.1.3.12.29

[GUIDELINE] The value of the `upnp:resExt::componentInfo::componentGroup::component::class` element shall be either "Audio" if the `upnp:resExt::componentInfo::componentGroup::component` element corresponds to an audio raw-data stream or "Video" if it corresponds to a video raw-data stream.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	E4WVD	N

[COMMENT] Only audio and video multi-component `<res>` information is defined in ISO/IEC 29341-20-12:2016.

10.1.3.12.30

[GUIDELINE] If the value of the `upnp:resExt::componentInfo::componentGroup::component::class` element is "Audio" then the following attributes shall be provided:

- `upnp:resExt::componentInfo::componentGroup::component::contentType@bitrate`,
- `upnp:resExt::componentInfo::componentGroup::component::contentType@sampleFrequency`,
- `upnp:resExt::componentInfo::componentGroup::component::contentType@nrAudioChannels`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	3EBUI	N

[COMMENT] These are the attributes required to describe audio raw-data streams.

10.1.3.12.31

[GUIDELINE] In the case where the `upnp:resExt::componentInfo::componentGroup::component::contentClass` is "Audio" the value of the `upnp:resExt::componentInfo::componentGroup::component::contentType@bitRate` shall

correspond to the bitrate of the audio raw-data stream which is highest (system overhead is not included).

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	2XK4I	N

[COMMENT] This guideline defines the concept of bitrate for individual audio raw-data streams inside a multi-component <res> element.

See example in 10.1.3.12.6.

10.1.3.12.32

[GUIDELINE] If a Content Source declares
upnp:resExt::componentInfo::componentGroup::component::contentType@sampleFrequency
for media resources of the Audio Class then the value of
upnp:resExt::componentInfo::componentGroup::component::contentType@sampleFrequency
shall correspond to the sample rate value described in IEC 62481-2:2017 and shall be
expressed in hertz.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	Z9WUV	N

[COMMENT] This guideline defines the concept of sampleFrequency for individual audio raw-data streams inside a multi-component <res> element.

See example in 10.1.3.12.6.

10.1.3.12.33

[GUIDELINE] If a Content Source declares
upnp:resExt::componentInfo::componentGroup::component::contentType@nrAudioChannels
for media resources of the Audio Class then the value of
upnp:resExt::componentInfo::componentGroup::component::contentType@nrAudioChannels
shall correspond to the "number of channels" value described in IEC 62481-2:2017 for the audio
raw-data stream.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	V5BI7	N

[COMMENT] This guideline defines the concept of nrAudioChannels for individual audio raw-data streams inside a multi-component <res> element. See example in 10.1.3.12.6.

10.1.3.12.34

[GUIDELINE] If the value of the `upnp:resExt::componentInfo::componentGroup::component::class` element is "Audio" then the following sub-element shall be provided:

- `upnp:resExt::componentInfo::componentGroup::component::language`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	3NWAT	N

10.1.3.12.35

[GUIDELINE] If the value of the `upnp:resExt::componentInfo::componentGroup::component::class` element is "Video" then the following attributes shall be provided:

- `upnp:resExt::componentInfo::componentGroup::component::contentType@bitrate`,
- `upnp:resExt::componentInfo::componentGroup::component::contentType@resolution`,
- `upnp:resExt::componentInfo::componentGroup::component::contentType@frameRate`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	LLBKI	N

[COMMENT] These are the attributes required to describe video raw-data streams. See examples in 10.1.3.12.6.

10.1.3.12.36

[GUIDELINE] In the case where the `upnp:resExt::componentInfo::componentGroup::component::contentClass` is "Video" the value of the `upnp:resExt::componentInfo::componentGroup::component::contentType@bitRate` shall correspond to the bitrate of the video raw-data stream which is highest. If the actual bitrate is not known (e.g., live content), then the maximum bitrate for the video raw data streams as defined for the Media Format Profile shall be used.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	NI88X	N

[COMMENT] This guideline defines the concept of bitrate for individual video raw-data streams inside a multi-component <res> element. See examples in 10.1.3.12.6.

10.1.3.12.37

[GUIDELINE] If a Content Source declares

upnp:resExt::componentInfo::componentGroup::component::contentType@resolution then the value of

upnp:resExt::componentInfo::componentGroup::component::contentType@resolution shall correspond to the HxV value of the video track having the highest HxV pixel count.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	UK8QD	N

[COMMENT] This guideline defines the concept of resolution for individual video raw-data streams inside a multi-component <res> element. See example in 10.1.3.12.6.

10.1.3.12.38

[GUIDELINE] If a Content Source declares

upnp:resExt::componentInfo::componentGroup::component::contentType@frameRate then the value of upnp:resExt::componentInfo::componentGroup::component::contentType@frameRate shall correspond to the maximum frame rate described in IEC 62481-2:2017 for the video raw-data stream.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	K7DVB	N

[COMMENT] This guideline defines the concept of frameRate for individual video raw-data streams inside a multi-component <res> element. See example in 10.1.3.12.6.

10.1.3.13 MM protocolInfo context

10.1.3.13.1

[GUIDELINE] For all guidelines related to protocolInfo values, the following interpretation shall be applied when applying a context for the protocolInfo value. Additions, exceptions, and other clarifications to these baseline interpretation rules shall be indicated in other guidelines on a per-parameter basis.

[ATTRIBUTES]

M	C	DMP DMS DMR DMC +DN+ +PU+ +UP+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	7T96Y	

10.1.3.13.2

[GUIDELINE] The phrase "match by protocolInfo format" shall mean the following.

Given two protocolInfo values, the values shall match if both protocolInfo values have the same values as follows:

- first field of protocolInfo, except as noted below:
 - in order to match, equality for the first field is required for all scenarios, except for those involving upload AnyContainer or other optional content management (OCM) operations.
- DLNA.ORG_PN parameter in the fourth field of protocolInfo

If the two protocolInfo values fail to match above, then given two protocolInfo values, the value shall match if both protocolInfo values have the same values as follows:

- first field of protocolInfo, except as noted below:
 - in order to match, equality for the first field is required for all scenarios, except for those involving upload AnyContainer or other optional content management (OCM) operations.
- third field of protocolInfo.

[ATTRIBUTES]

M	C	DMP DMS DMR DMC +DN+ +PU+ +UP+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	S3V59	C

[COMMENT]

- a) This phrase is used throughout the guidelines related to protocolInfo values. The phrase applies to any protocolInfo value, regardless from where the values were obtained. ProtocolInfo values can be found on DMS and DMR devices, typically associated with res@protocolInfo metadata or UPnP AV connection information.
- b) If the DLNA.ORG_PN parameter in the fourth field of protocolInfo matches, then there is a greater chance that the content will be able to be played back.
- c) This guideline is to require Rendering Endpoints to try and render a content binary if it supports just the underlying protocol and MIME type in protocolInfo. This will enable DLNA Rendering Endpoints to match and play content not advertised with the DLNA profile ID, a DLNA Profile ID that's not supported, or a new DLNA Profile ID defined in the future.
- d) This requirement is also on a controller (e.g. application) to try and ask a UPnP AV MediaRenderer to play content where the UPnP AV MediaRenderer indicates it supports just the MIME type and protocol.

10.1.3.13.3

[GUIDELINE] If a UPnP AV MediaServer or UPnP AV MediaRenderer exposes a res@protocolInfo with a <res> element that includes a URI value, then the context of the protocolInfo shall be to describe the content and/or transport layer features for the indicated <res> URI value.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-20-10:2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12:2016	WX6PS

[COMMENT] DMS devices report `res@protocolInfo` values when responding to `ContentDirectoryService` requests, including those related to the Upload system usage or optional content management operations.

A DMR can create DIDL-Lite metadata to describe what it is currently rendering. See 10.1.3.13.16 for more information.

10.1.3.13.4

[GUIDELINE] If a UPnP AV MediaServer exposes a `res@protocolInfo` with a `<res>` element that omits the URI value but includes a `res@importUri` property, then the context of the `protocolInfo` shall be to describe the content that MediaServer expects to receive in a content transfer process.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	CYRUW

[COMMENT] When used with a `<res>` element that omits a URI value but includes a `res@importUri` property, the `DLNA.ORG_PN` parameter identifies the DLNA Media Format Profile that the DMS expects to receive for that particular `<res>` element. In some cases, DMS implementations will specify various parameters and flags in the 4th field that will become applicable after the content is uploaded and the DMS can serve the content.

10.1.3.13.5

[GUIDELINE] If a UPnP AV MediaServer exposes a `res@protocolInfo` with a `<res>` element that omits both the URI value and the `res@importUri` property in a CDS object with the `upnp:class` property value of `object.item.epgItem`, `object.item.epgItem`, `object.item.video.videoBroadcast`, `object.item.audio.audioBroadcast` or any of their derived classes, then the context of the `protocolInfo` shall be to describe the content and/or transport layer features of the content item associated with the CDS object, or of the media resource that the MediaServer expects to expose at a future time.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	W8JTY

[COMMENT] When used with a `<res>` element that omits both the URI value and the `res@importUri` property, the `DLNA.ORG_PN` parameter identifies the DLNA Media Format Profile of the content resource that the DMS expects to become available later for that particular `<res>` element. The additional information can allow controllers to make advance arrangements

or decisions regarding the content even before it is available. For example, a +SR+ controller can use this information to set up a future recording.

10.1.3.13.6

[GUIDELINE] If a UPnP AV MediaServer exposes a res@protocolInfo with a <res> element that omits the URI value but includes a res@importUri property, then the protocolInfo 4th field may contain parameters and flags intended for use when the <res> URI value is finally created by the MediaServer.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12:2016	WHVV8	

10.1.3.13.7

[GUIDELINE] A UPnP AV MediaServer's list of protocolInfo values in the CMS.SourceProtocolInfo state variable shall contain an additional protocolInfo value with only an "*" in the fourth field (wildcard) for each supported protocolInfo value with a DLNA.ORG_PN parameter in the fourth field.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12:2016	LVOXT	N

[COMMENT] Having a UPnP AV MediaServer advertise supported CMS.SourceProtocolInfo values with "*" in the fourth field will enable matching with only MIME type (third field) and protocol (first field) for legacy DLNA devices. For example, a CMS.SourceProtocolInfo value of "http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=01;DLNA.ORG_FLAGS=AD500000000000000000000000000000" will cause a value of "http-get:*:video/mpeg:*" to be included in the comma-separated values of the CMS.SourceProtocolInfo state variable as well.

10.1.3.13.8

[GUIDELINE] A UPnP AV MediaServer's list of protocolInfo values in the CMS.SourceProtocolInfo state variable shall be condensed into a single protocolInfo value for duplicate protocolInfo values in the CMS.SourceProtocolInfo state variable.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12:2016	3MEAB	N

[COMMENT] Guideline 10.1.3.13.7 could potentially create duplicate protocolInfo values and this guideline requires that they are condensed into a single protocolInfo value in the CMS.SourceProtocolInfo state variable.

10.1.3.13.9

[GUIDELINE] If a UPnP AV MediaServer lists a protocolInfo in the CMS.SourceProtocolInfo state variable, then the context of the protocolInfo shall be to describe the MediaServer's ability to support the described feature or content for the following:

- serving content to other endpoints on the network.

(That is, the parameters and flags represent a union of the MediaServer's features/capabilities for the specified DLNA Media Format Profile.)

This guideline works in conjunction with 10.1.3.14.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	334SX

[COMMENT] The phrase "MediaServer's ability to support the described feature or content" means that the UPnP AV MediaServer is capable of serving content binaries that are characterized by the protocolInfo. More specifically, for each protocolInfo listed in SourceProtocolInfo the UPnP AV MediaServer exposes zero or more content binaries that "match by protocolInfo format". In practice, UPnP AV MediaServers in some cases expose a static list of protocolInfo values to indicate all possible Media Format Profiles that they can serve. In other cases UPnP AV MediaServers will expose a dynamic list of protocolInfo values to indicate the Media Format Profiles that they can currently serve.

For example, if a MediaServer lists

"http-get:*:audio/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=01;DLNA.ORG_FLAGS= AD50000000000000000000000000000000", then the MediaServer is capable of serving MPEG_PS_NTSC content with the following characteristics.

- Some of that content might support the Range HTTP header under the "Full Random Access Data Availability" model due to the DLNA.ORG_OP value.
- Some of that content might support the Range HTTP header under the "Limited Random Access Data Availability" model because the lop-bytes flag is true.
- Some of that content might have the sp-flag set to true.
- Some of the content might have beginning point that increases with time (e.g. live content) because the s₀-increasing flag is true.
- Some of the content might have an ending point that increases with time (e.g. infinitely long live content or live content that is currently being saved to disk and will eventually reach a finite length) because the s_N-increasing flag is true.
- Some of the content might support Streaming and Background Transfer modes because the tm-s and tm-b flags are true.

The pn-param (DLNA.ORG_PN) is the only required parameter for DLNA Media Format Profiles. All other parameters and flags are optional for the syntax. (See also 10.1.3.15.3.)

10.1.3.13.10

[GUIDELINE] A UPnP AV MediaRenderer's list of protocolInfo values in the CMS.SinkProtocolInfo state variable shall contain an additional protocolInfo value with only an "*" in the fourth field (wildcard) for each supported protocolInfo values with a DLNA.ORG_PN parameter in the fourth field. Duplicate protocolInfo values in the CMS.SinkProtocolInfo state variable can be condensed to a single protocolInfo value.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10:2011 ISO/IEC 29341-14-11	AEJZ7	N

[COMMENT] Having a UPnP AV MediaRenderer advertise supported CMS.SinkProtocolInfo values with "*" in the fourth field will enable matching with only MIME type (third field) and protocol (first field) for legacy DLNA devices. For example, a CMS.SinkProtocolInfo value of "http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS" will cause a value of "http-get:*:video/mpeg:*" to be included in the comma-separated values of the CMS.SinkProtocolInfo state variable as well.

10.1.3.13.11

[GUIDELINE] A UPnP AV MediaRenderer's list of protocolInfo values in the CMS.SinkProtocolInfo state variable shall be condensed into a single protocolInfo value for duplicate protocolInfo values in the CMS.SourceProtocolInfo state variable.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10:2011 ISO/IEC 29341-14-11	KJONU	N

[COMMENT] Guideline 10.1.3.13.10 could potentially create duplicate protocolInfo values and this guideline requires that they are condensed into a single protocolInfo value in the CMS.SinkProtocolInfo state variable.

10.1.3.13.12

[GUIDELINE] If a UPnP AV MediaRenderer lists a protocolInfo in the CMS.SinkProtocolInfo state variable, then the context of the protocolInfo shall be to describe the MediaRenderer's ability to support that the indicated feature or content.

(That is, the parameters and flags represent a union of the MediaRenderer's features/capabilities for the specified DLNA Media Format Profile).

This guideline works in conjunction with 10.1.3.14.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11	34SXQ	

[COMMENT] The phrase "MediaRenderer's ability to support that the indicated feature or content" means that the DMR can use the specified feature when rendering content that is a "match by protocolInfo format". It is not a guarantee that the DMR will use that feature when rendering such content. Each DMR implementation determines when and how features are used to deliver a playback experience.

For example, if a MediaRenderer lists

"http-get:*:audio/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=01;DLNA.ORG_FLAGS=BD10000000000000000000000000000000" then the MediaRenderer is capable of rendering MPEG_PS_NTSC content for a variety of scenarios.

- It can render MPEG_PS_NTSC content regardless of whether the sp-flag, s₀-increasing, or s_N-increasing flags are set to true or false for that content.

- If the Content Source makes the Range HTTP header available, the Content Receiver is able to use the Range HTTP header for both "Full Random Access Data Availability" and "Limited Random Access Data Availability" models because the op-param and the lop-bytes flag.
- If given a PlayContainer URI, the DMR will also play MPEG_PS_NTSC content found during the traversal of the DMS because the playcontainer-param is set to true.
- The DMR uses Streaming transfers for the MPEG2_PS_NTSC content, as required for immediate rendering.

The pn-param (DLNA.ORG_PN) is the only required parameter for DLNA Media Format Profiles. All other parameters and flags are optional for the syntax.

10.1.3.13.13

[GUIDELINE] If a UPnP AV MediaServer or UPnP AV MediaRenderer uses a protocolInfo value in the ProtocolInfo output argument of a CMS:GetCurrentConnectionInfo response, then the context of the protocolInfo shall describe the content and the transport layer capabilities of the UPnP AV connection.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	HVV8S

[COMMENT] In this context, the protocolInfo value describes the content and/or transport layer capabilities of the UPnP AV connection from the server-side.

For example, if a UPnP AV connection indicates "http-get*:audio/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=01;DLNA.ORG_FLAGS=05100000000000000000000000000000" then the transport layer associated with the UPnP AV connection is configured to work in the following ways.

- The MPEG_PS_NTSC content has the sp-flag set to false and the tm-s flag is set to true to indicate that transport layer is using a Streaming transfer where the Content Source is not the Clock Source. This means the Content Source will ensure that it transmits at a throughput necessary for rendering but will also preserve the entire content bitstream even for lower transmission throughputs when network conditions are not able to support the bandwidth needed for the Streaming transfer.
- The Range HTTP header is available only under the "Full Random Access Data Availability" model.
- The content is growing with a fixed beginning because the s_0 -increasing flag is false and the s_N -increasing flag is true.

The phrase "describe the content and the transport layer capabilities of the UPnP AV connection" does not imply that actual data is actually being transported on the UPnP AV connection at the current moment because the Content Receiver endpoint might be in a playback state (such as stop or pause) that does not involve the ongoing transmission of content data.

10.1.3.13.14

[GUIDELINE] If a UPnP AV MediaServer control point creates a res@protocolInfo value for use with a CDS:CreateObject request that qualifies as one of the listed operations, then the context of the protocolInfo shall be to describe the content that is going to be uploaded to the MediaServer through a content transfer process.

- upload AnyContainer
- OCM: upload content

Furthermore, the default behaviour of the control point shall be to exclude 4th field parameters (except the DLNA.ORG_PN parameter, described in 10.1.3.18) or specify the parameter with a false value (such as in the case of the lop-npt flag, described in 10.1.3.28.4).

[ATTRIBUTES]

M	C	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016	YRUW7

[COMMENT] Unless specified otherwise, 4th field parameters do not apply to what the Upload Controller can do. Rather, the DMS will provide the appropriate 4th field parameters during the course of an Upload system usage or an optional content management operation. See 10.1.3.13.4 and 10.1.3.13.6 for more information.

10.1.3.13.15

[GUIDELINE] If a UPnP AV MediaRenderer control point creates a `protocollInfo` or `res@protocollInfo` value, then the context of the `protocollInfo` shall be to describe the Content Source's capabilities for the associated UPnP AV connection or `<res>`.

[COMMENT] "MediaRenderer control point creates a `protocollInfo` or `res@protocollInfo`" specifically refers to the following scenarios. This phrase is used in other guidelines related to `protocollInfo`.

- `res@protocollInfo` values that appear in CDS or DIDL-Lite metadata used as input arguments for `AVT:SetAVTransportURI`, or other UPnP AV actions.

[ATTRIBUTES]

M	C	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	X6PSO

[COMMENT] In the case of `AVT:SetAVTransportURI`, the `res@protocollInfo` can appear in the DIDL-Lite metadata of the `CurrentURIMetaData` input argument.

10.1.3.13.16

[GUIDELINE] A UPnP AV MediaRenderer may use `res@protocollInfo` values in the following ways.

- `res@protocollInfo` values may appear in any AVTransport virtual instance state variable, including but not limited to: `AVT.NextAVTransportURIMetaData`, `AVT.CurrentTrackMetaData`, and `AVT.AVTransportURIMetaData`.
- `res@protocollInfo` values may appear in output arguments of any AVTransport actions, including but not limited to:
 - `CurrentURIMetaData` of `AVT:GetMediaInfo`
 - `NextURIMetaData` of `AVT:GetMediaInfo`, or
 - `TrackMetadata` of `AVT:GetPositionInfo`.

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	3V59O	

[COMMENT] This guideline clarifies where a DMR can use res@protocolInfo values.

10.1.3.14 MM consistency of protocolInfo state variables and output arguments

[GUIDELINE] If the listed values for the CMS.SinkProtocolInfo or CMS.SourceProtocolInfo state variables' change, then the ConnectionManager service shall report the change through the GENA event mechanism, as defined by ISO/IEC 29341-1:2011.

CMS:GetProtocolInfo shall return the same protocolInfo list for SinkProtocolInfo output argument as the current list indicated by the CMS.SinkProtocolInfo state variable.

CMS:GetProtocolInfo shall return the same protocolInfo list for SourceProtocolInfo output argument as the current list indicated by the CMS.SourceProtocolInfo state variable.

[ATTRIBUTES]

M	R	DMS DMR	M-DMS	n/a	ISO/IEC 29341-1:2011 ISO/IEC 29341-14-11	T96YP	

[COMMENT] Many 4th_field DLNA guidelines refer to CMS:GetProtocolInfo arguments, without referring specifically to the associated ConnectionManager service state variables. This guideline repeats the ConnectionManager service's requirement that CMS:GetProtocolInfo accurately represent the data in the associated state variables, which in turn allows the DLNA syntax rules to apply to CMS state variables.

10.1.3.15 MM CMS:GetProtocolInfo rules

10.1.3.15.1

[GUIDELINE] The ConnectionManager service of a UPnP AV MediaServer shall list the union set of protocolInfo values supported by the device for protocolInfo values that share the same values in the first three fields and the same pn-param (DLNA.ORG_PN) value in the fourth field, but have different values in the additional parameters in the fourth field. This means that the ConnectionManager service shall list only one protocolInfo value to represent all such profiles.

The first three fields of the listed protocolInfo value shall be identical to the first three fields of the individual protocolInfo values. The pn-param (DLNA.ORG_PN) value in the fourth field shall be identical to the pn-param (DLNA.ORG_PN) value in the fourth fields of these protocolInfo values.

If additional parameters are included in the fourth field of the listed protocolInfo value, they shall appear in the order defined in 10.1.3.17, and their values shall be obtained as defined in 10.1.3.15.5.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-11	CT43W	

[COMMENT] This guideline makes it easier for control points to find servers that provide content for a given profile.

Use of the http-get:*:*: protocolInfo does not sufficiently communicate the supported Media Format Profiles. This guideline also requires implementations to explicitly list the individual protocolInfo values for supported DLNA Media Format Profiles.

10.1.3.15.2

[GUIDELINE] The sets of protocolInfo values returned in CMS:GetProtocolInfo shall list the protocolInfo values that use the http-get media transport and DLNA Media Format Profiles first.

[ATTRIBUTES]

M	L	DMS DMR	M-DMS	n/a	ISO/IEC 29341-14-11	B4S5U	

[COMMENT] Although the number of returned protocolInfo values might be large, control points can use this guideline to capture the subset of relevant DLNA protocolInfo values.

10.1.3.15.3

[GUIDELINE] The fourth field of the protocolInfo values (obtained from the ConnectionManager service) that have the pn-param parameter in the fourth field shall follow one of the formatting conventions.

- In addition to pn-param, provide one or more of the additional parameters as defined in guideline 10.1.3.17.1 (HTTP), or guideline 10.1.3.17.2 (RTP/RTSP).
- Provide only the pn-param parameter, as defined in guideline 10.1.3.18

[ATTRIBUTES]

M	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-14-11	Y8Y9W	

[COMMENT] This guideline allows UPnP AV MediaServer implementations to employ a verbose listing that includes trick/seek mode capabilities or simply provide a listing based on Media Format Profiles.

This guideline also allows UPnP AV MediaRenderer implementations to employ only primary protocolInfo sets (non-verbose listing), or in addition, to extend the list of declared 4th field parameters (verbose listing).

10.1.3.15.4

[GUIDELINE] If a CSV (Comma Separated Value) list contained in a CMS:GetProtocolInfo response has one or more embedded comma(s) in the individual substring entries of the CSV list, then those embedded commas shall be escaped as "\", in 2.3.1 of ISO/IEC 29341-20-12:2016.

[ATTRIBUTES]

M	A	DMS DMR	M-DMS		ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	WYAJV	

[COMMENT] There is no embedded comma escaping rules in ISO/IEC 29341-14-11. This guideline applies embedded comma escaping rules in CSV lists defined in ISO/IEC 29341-20-12:2016 to CMS:GetProtocolInfo response values.

10.1.3.15.5

[GUIDELINE] If a UPnP AV MediaServer lists additional parameters (besides the pn-param) in the 4th field of protocolInfo when combining multiple protocolInfo values as defined in 10.1.3.15.1, then they shall be obtained as follows.

- op-param: If none of the individual protocolInfo values contain an op-param value, the combined protocolInfo value shall omit the op-param value. If the a-val of the op-param in any of the individual protocolInfo values is "1", the a-val of the op-param in the combined protocolInfo value shall be "1". Otherwise, the a-val of the op-param in the combined protocolInfo value shall be "0". Similarly, if the b-val of the op-param in any of the individual protocolInfo values is "1", the b-val of the op-param in the combined protocolInfo value shall be "1". Otherwise, the b-val of the op-param in the combined protocolInfo value shall be "0".
- ps-param: If none of the individual protocolInfo values contain a ps-param value, the combined protocolInfo value shall omit the ps-param value. Otherwise, the ps-param value of the combined protocolInfo value shall be a comma-separated list of all the distinct ps-param values of the individual protocolInfo values.
- ci-param: If none of the individual protocolInfo values contain a ci-param value, the combined protocolInfo value shall omit the ci-param value. If the ci-param value in any of the individual protocolInfo values is "1", the ci-param value in the combined protocolInfo value shall be "1". Otherwise, the ci-param value in the combined protocolInfo value shall be "0".
- flags-param: If none of the individual protocolInfo values contain a flags-param value, the combined protocolInfo value shall omit the flags-param value. For each bit in the flags-param value, if the corresponding bit in any of the individual protocolInfo values is "1", that bit in the combined protocolInfo value shall be "1". Otherwise, that bit shall be "0".
- maxsp-param: If none of the individual protocolInfo values contain a maxsp-param value, the combined protocolInfo value shall omit the maxsp-param value. Otherwise, the maxsp-param value of the combined protocolInfo value shall be the maximum of all the maxsp-param values of the individual protocolInfo values.
- other-param: If none of the individual protocolInfo values contain an other-param value, the combined protocolInfo value shall omit the other-param value. Otherwise, the combined protocolInfo value shall contain the concatenated list of all the distinct other-param values in individual protocolInfo values.

Note that the combined protocolInfo value might not be a valid res@protocolInfo value for content items in a content directory. For example, it might contain contradicting flags which are prohibited by the DLNA guidelines.

For example, the union set of the following protocolInfo values:

- http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=01;DLNA.ORG_PS=2
- http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=10
- http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_PS=4

is either one of the following (depending on whether additional fourth-field parameters are included)

- http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC
- http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=11;DLNA.ORG_PS=2,4

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-11	928RT	

10.1.3.15.6

[GUIDELINE] The ConnectionManager service of a UPnP AV MediaRenderer shall list the collection of distinct Primary protocolInfo Sets that it is capable of rendering.

If one or more of the declared Primary protocolInfo Sets include additional 4th field parameters, they shall appear in the order defined in 10.1.3.17, and their values shall be as defined in 10.1.3.15.7.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-14-11	ETV64	

10.1.3.15.7

[GUIDELINE] If a UPnP AV MediaRenderer lists additional parameters (besides the pn-param) in the 4th field of protocolInfo when declaring the Primary protocolInfo Sets as defined in 10.1.3.15.6, then they shall comply with the following rules:

- op-param: This parameter shall not be included.
- ps-param: This parameter shall not be included.
- ci-param: This parameter shall not be included.
- flags-param: This parameter shall be included when the UPnP AV MediaRenderer is capable of rendering this type of content in a PlayContainer URI operation.
- maxsp-param: This parameter shall not be included.
- other-param: The inclusion or omission of this vendor-defined parameter is vendor dependent.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-14-11	TV648	

10.1.3.16 MM DIDL-Lite protocolInfo values**10.1.3.16.1**

[GUIDELINE] If the <res> value contains an HTTP URL, then the first field of the res@protocolInfo value shall be as shown below.

- http-get

[ATTRIBUTES]

M	R	DMS DMR +PU+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	KY2U3	

[COMMENT] Guidelines in 10.1.3.16 provide requirements on the protocolInfo values in DIDL-Lite documents.

For requirements around protocolInfo values used in the upload process, see Guideline 10.1.8.19.1.

Reiterates the protocol string value for DLNA content transported across HTTP. Note that the converse is not always true. Some scenarios involving upload operations can result with a <res> element that has no value (i.e. empty URI) but the res@protocolInfo value has "http-get" in the first field.

10.1.3.16.2

[GUIDELINE] If the <res> value contains an RTP URL, then the first field of the res@protocolInfo value shall be as shown below.

- rtsp-rtp-udp

[ATTRIBUTES]

M	R	DMS DMR +PU+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	YNKQ9	

10.1.3.16.3

[GUIDELINE] The third field of a protocolInfo value shall use the MIME types specified in Clause 5 of IEC 62481-2:2017 for DLNA normative Media Format Profiles when the protocol is "http-get" or "rtsp-rtp-udp".

[ATTRIBUTES]

M	F	DMS DMR DMC +PU+	M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	QQRVR	

[COMMENT] This guideline is consistent with the UPnP AV specifications for the case of "http-get", but this guideline also conflicts in the case of "rtsp-rtp-udp".

The UPnP AV specification indicates that the 4th field for RTP URIs is the payload type, but such a model fails to take into account that streaming of AV content with RTP generally requires multiple RTP payload types. For this reason, the DLNA guidelines require that the 3rd field is populated with the DLNA-specified mime-type of the Media Format Profile indicated in the pn-param.

10.1.3.16.4

[GUIDELINE] UPnP AV endpoints (devices and control points) shall use the DLNA.ORG_PN parameter (10.1.3.18) in the 4th field of protocolInfo for the following operations

- to identify content conforming to a DLNA Media Format Profile, or
- to specify that a UPnP device is capable of receiving, distributing, or rendering content conforming to a DLNA Media Format Profile.

[ATTRIBUTES]

M	L	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	QVR5	

[COMMENT] The MIME-type in the 3rd field of res@protocolInfo alone is not always sufficient to identify DLNA content.

10.1.3.16.5

[GUIDELINE] If a protocolInfo value has the first value of "http-get" and the 4th field includes the DLNA.ORG_PN parameter (10.1.3.18), then the binary data conformant to a DLNA Media Format Profile identified by the DLNA.ORG_PN parameter shall be transmitted via the HTTP Media Transport, without transport layer encryption.

[ATTRIBUTES]

M	L	DMS DMP DMR DMC +DN+ +PU+ +UP+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-14-11	NKQ9V	

[COMMENT] This means that the binary data via the HTTP Media Transport is not encrypted unless the guidelines of the DLNA Media Format Profile explicitly states it.

EXAMPLE 1: The following are example scenarios of creating 4th field values, and the DLNA device classes capabilities that apply to them.

- [C1] DMS, M-DMS: These endpoints populate res@protocolInfo in metadata responses and protocolInfo used in CMS:GetProtocolInfo.
- [C2] DMS, M-DMS, +PU+: These endpoints populate values for contentFeatures.dlna.org at the transport layer, either by creating a brand new 4th field value or modifying from existing 4th field value.
- [C3] DMC, M-DMC, +PU+: The control points of these endpoints can create a 4th field value for metadata given to a DMR, either by creating a brand new 4th field value or modifying an existing 4th field value.
- [C4] DMR: When reporting metadata of content that is currently playing, these endpoints can create a new 4th field value by modifying an existing 4th field value acquired from a DMS, DMC, or +PU+.
- [C5] +UP+: These endpoints create res@protocolInfo values in CDS:CreateObject requests and also create the contentFeatures.dlna.org value during the content transfer process.

EXAMPLE 2: The following are example scenarios of parsing 4th field values, and the DLNA device classes capabilities that apply to them.

- [P1] DMP, M-DMP DMR, DMC, M-DMC, +UP+, +DN+: Control points of these endpoints parse 4th field values in metadata responses obtained from a DMS or M-DMS.
- [P2] DMP, M-DMP, DMR, +DN+: These endpoints parse 4th field values from contentFeatures.dlna.org, at the transport layer.
- [P3] DMR: These endpoints can receive 4th field values in DIDL-Lite metadata, provided by a control point.
- [P4] DMC, M-DMC, +PU+: The control points of these endpoints can receive 4th field values in DIDL-Lite metadata that is exposed by a DMR.
- [P5] DMS, M-DMS: These endpoints parse res@protocolInfo values in CDS:CreateObject requests and also parse the contentFeatures.dlna.org value during the content transfer process.

10.1.3.17 MM protocolInfo values: 4th field**10.1.3.17.1**

[GUIDELINE] If a protocolInfo value has "http-get" as the first field value and the 4th field includes the pn-param token, then the following syntax shall be used for the fourth field.

- 4th_field = pn-param [op-param] [ps-param] [ci-param] [flags-param] [*(other-param)]

NOTE In all guidelines that relate to the syntax of the 4th field, the relative order of pn-param, op-param, ps-param, ci-param, flags-param, and *(other-param) used in 4th_field is mandatory. For example, pn-param cannot appear after op-param, ps-param, ci-param, flags-param, or *(other-params).

The syntax and definition of pn-param, op-param, ps-param, ci-param, flags-param, and *(other-param) are defined in the guidelines below.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	Y2U3H

[COMMENT] This guideline defines the syntax of the fourth field for a res@protocolInfo value that indicates content that is transported across HTTP.

This syntax prohibits the use of the "" value for content that conforms to a DLNA Media Format Profile. Content that does not conform to a DLNA Media Format Profile can use the "" value in the 4th field.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

Examples [C5] and [P5] do not apply to this guideline because 10.1.8.19 covers these cases.

10.1.3.17.2

[GUIDELINE] If a protocolInfo value has "rtsp-rtp-udp" as the first field value and the 4th field includes the pn-param token, then the following syntax shall be used for the fourth field.

- 4th_field-rtp = pn-param [op-param] [ps-param] [ci-param] [flags-param] [maxsp-param] [*(other-param)]

[ATTRIBUTES]

M	A	DMS DMP DMR DMC +DN+ +PU+ +UP+	MHD	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	YXD3U

[COMMENT] The 4th field syntax for rtsp-rtp-udp URIs is the same as for http-get URIs.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

+DN+ is listed because the associated control point is required to tolerate <res> elements that use the RTP Media Transport when browsing a MediaServer.

10.1.3.17.3

[GUIDELINE] If a `protocolInfo` value has the first field value that is neither equal to "http-get" nor "rtsp-rtp-udp", then the fourth field may have a syntax that differs from 10.1.3.17.1 and 10.1.3.17.2.

[ATTRIBUTES]

O	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	4S5UX

[COMMENT] This guideline permits a different syntax for the fourth field of a `protocolInfo` value when the content is not transported over a DLNA-specified transport.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

CDS:CreateObject syntax has restrictions on the 4th field syntax, as described in 10.1.8.19.

Examples of `protocolInfo` values that include the 4th field are shown below:

- `http-get*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC`
- `http-get*:video/mpeg:DLNA.ORG_PN=MPEG_PS_PAL;DLNA.ORG_OP=10`
- `http-get*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=10;
DLNA.ORG_PS=-1,30,-30`
- `http-get*:video/mpeg:DLNA.ORG_PN=MPEG_PS_PAL;DLNA.ORG_PS=-1,30,-30`
- `http-get*:video/mpeg:DLNA.ORG_PN=MPEG_PS_PAL;
DLNA.ORG_PS=-1,30,-30;VENDORXYZ.COM_FOO=bar`
- `http-get*:video/mpeg:DLNA.ORG_PN=MPEG_PS_PAL;DLNA.ORG_CI=1;
VENDORXYZ.COM_FOO=bar`
- `rtsp-rtp-udp*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_OP=10;
DLNA.ORG_PS=-1,2/3,4;DLNA.ORG_FLAGS=03100000000000000000000000000000;
DLNA.ORG_MAXSP=9.75`

10.1.3.18 MM pn-param (DLNA.ORG_PN parameter)

[GUIDELINE] The syntax definition of `pn-param` shall be as follows:

- `pn-param` = "DLNA.ORG_PN=" `pn-value`
- `pn-value` = * <"a"-"z", "A"-"Z", "0"-"9", "_">

The `pn-value` shall identify the DLNA Media Format Profile ID that is applicable for the context of the `protocolInfo`. (See 10.1.3.12.8 for determining an appropriate context for the `protocolInfo`.)

The `pn-param` is reserved for use with contexts where content conforms to a DLNA Media Format Profile. Use of `pn-param` for content not conformant with a DLNA Media Format Profile is expressly prohibited.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	T43WJ	

[COMMENT] This guideline defines the syntax of the DLNA.ORG_PN parameter. This parameter is used to identify DLNA content. This parameter cannot be used for non-DLNA content.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [C5], [P1], [P2], [P3], [P4], and [P5].

10.1.3.19 MM op-param (Operations Parameter – Common guidelines)

10.1.3.19.1

[GUIDELINE] The syntax definition of op-param shall be as follows:

- op-param = [op-param-delim] "DLNA.ORG_OP=" op-value
- op-param-delim = ";;"
- op-value = a-val b-val
- a-val = Boolean
- b-val = Boolean
- Boolean = "1" | "0"

The op-value is a string composed of two characters: a-val and b-val. The meaning of these values is described in these guidelines, depending on whether the context is for the HTTP Media Transport or RTP Media Transport.

- 10.1.3.20 MM op-param (Operations Parameter for HTTP)
- 10.1.3.21 MM op-param (Operations Parameter for RTP)

If the first field of protocolInfo is neither "http-get" nor "rtsp-rtp-udp" then the fourth field shall omit the op-param.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	96YPS	

[COMMENT] This guideline defines the DLNA.ORG_OP parameter.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

10.1.3.19.2

[GUIDELINE] If the op-param is present and if either a-val or b-val is "1", then the "Full Random Access Data Availability" model shall be the data access model that applies in the context of the protocolInfo value.

Specifically, this means that the transport operation (that is indicated by the a-val or b-val) shall be supported for the entire content binary, as defined in 11.4.2.15.1.

If the flags-param token is included in the 4th field, then the s₀-increasing, lop-npt, and lop-bytes bits of the primary-flags token shall be set to false.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	V59OT	

[COMMENT] The DLNA.ORG_OP parameter indicates support for transport layer headers responsible that facilitate random access operations on content binaries, under the "Full Random Access Data Availability" model.

For more information on the "Full Random Access Data Availability" model, see the following guidelines:

- 11.4.2.14 MT normative random access data availability models
- 11.4.2.15 MT Full Random Access Data Availability model

The "Full Random Access Data Availability" model is mutually exclusive with the "Limited Random Access Data Availability" model, which is why lop-npt/lop-bytes cannot be used with the op-param. For more information, see the following guidelines:

- 10.1.3.29 MM lop-npt, lop-bytes and lop-cleartextbytes (limited operations flags): Common
- 11.4.2.16 MT Limited Random Access Data Availability model

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.19.3

[GUIDELINE] In conjunction with the rules defined in 10.1.3.19.1 and 10.1.3.19.2, the fourth field of a protocolInfo may use the op-param for non-DLNA Media Format Profiles.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	6PSOW	

[COMMENT] This guideline permits the use of DLNA.ORG_OP for both DLNA and non-DLNA content, provided the DLNA-defined syntax and semantics are used.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.19.4

[GUIDELINE] If the b-val token is true and s_N-increasing flag is false, then the Content Source shall provide content length information in the res@size value of the CDS object.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	RUW7R

[COMMENT] This guideline helps resolve dependency issues that Content Receivers have on knowing the content length, and where Content-Length is not provided in a chunked response. Content Sources are also encouraged to provide a res@size value even in scenarios where byte Range is not supported.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.19.5

[GUIDELINE] If the a-val token is true and s_N-increasing flag is false, then the Content Source shall provide duration information in the res@duration value of the CDS object.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	VV8SU

[COMMENT] This guideline resolves dependency issues that Content Receivers have on knowing the content duration. If Content Sources support TimeSeekRange.dlna.org, duration information is important, and Content Sources are urged to provide it.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.19.6

[GUIDELINE] If the Pause media operation is supported, Rendering Endpoints shall support the Pause Release media operation even in the absence of Content-Length, res@size, or res@duration information.

[ATTRIBUTES]

M	L	DMR DMP	M-DMP	n/a	ISO/IEC 29341-20-12: 2016	4SXQQ

[COMMENT] Rendering Endpoints can issue a Range request using the "beginrange-" notation so as to avoid specifying an invalid range. Rendering Endpoints can issue a TimeSeekRange.dlna.org request using the "begintime-" notation so as to avoid specifying an invalid range.

The variants of examples [P1] and [P2] (see 10.1.3.16.5) that involve rendering of audio or AV content apply to this guideline.

10.1.3.20 MM op-param (Operations Parameter for HTTP)

10.1.3.20.1

[GUIDELINE] If the 4th field is associated with the "http-get" transport protocol, then the a-val and b-val tokens (of the op-param token) mean the following.

- a-val: indicates support of the TimeSeekRange.dlna.org HTTP header (see 11.4.3.23) for the context of the protocolInfo under the "Full Random Access Data Availability" model.
- b-val: indicates support of the Range HTTP header (see 11.4.3.22) for the context of the protocolInfo under the "Full Random Access Data Availability" model.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	SXQQ6	

[COMMENT] This guideline defines the op-param token's a-val and b-val tokens when HTTP is the transport protocol.

When used with a context involving HTTP, the DLNA.ORG_OP parameter identifies if the server supports the TimeSeekRange.dlna.org or Range HTTP headers for the associated content binary under the "Full Random Access Data Availability" model.

For more information on the "Full Random Access Data Availability" model for HTTP and these HTTP headers, see the following guidelines:

- 11.4.2.14 MT normative random access data availability models
- 11.4.2.15 MT Full Random Access Data Availability model
- 11.4.3.18 MT HTTP common random access data availability requirements
- 11.4.3.19 MT HTTP data range of Full Random Access Data Availability

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.20.2

[GUIDELINE] If the associated HTTP Server Endpoint returns HTTP error code 406 (Not Acceptable) because an HTTP specifies one of the above HTTP headers, then the op-param shall indicate that the HTTP header is not supported by using a value of "0" for the appropriate a-val or b-val.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	V8SUN	

[COMMENT] HTTP Server Endpoints use the 406 (Not Acceptable) status code to indicate that an HTTP request can never be satisfied with the specified HTTP headers.

The following examples apply to this guideline: 9.2.11.1 and 9.2.11.6.

10.1.3.20.3

[GUIDELINE] If the associated HTTP Server Endpoint always returns 406 (Not Acceptable) in response to requests that use either HTTP header for the context of the protocolInfo, then the 4th field shall omit the op-param.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	UW7RA

[COMMENT] Including an op-param with a value of "00" is prohibited. In cases where neither the TimeSeekRange.dlna.org nor the Range header are supported, the op-param is omitted.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.20.4

[GUIDELINE] If the associated HTTP Server Endpoint is capable of responding with a Target Response that appropriately corresponds to the data range indicated in the HTTP request's TimeSeekRange.dlna.org header value, then the a-val token shall be true.

(That is, the associated HTTP Server Endpoint does not return error code 406 (Not Acceptable), unless other HTTP headers are the cause of the error.)

Lastly, the Content Source shall be able to support TimeSeekRange.dlna.org on the entire content binary, as required by 10.1.3.19.2.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	PSOWQ

[COMMENT] An HTTP Server that can respond with content data occupying a particular npt time range needs to advertise this capability in the 4th field.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

"Appropriately corresponds" is clarified by 11.4.3.23.5 (MT HTTP Time-Based Seek (Server)), which permits returning data from a decoder-friendly point.

10.1.3.20.5

[GUIDELINE] If the associated HTTP Server Endpoint is capable of responding with a Target Response that corresponds exactly to the data range indicated in the HTTP request's Range header value, then the b-val token shall be true.

(That is, the associated HTTP Server Endpoint does not return error code 406 (Not Acceptable), unless other HTTP headers are the cause of the error.)

Lastly, the Content Source shall support Range on the entire content binary, as required by 10.1.3.19.2.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	59OTH

[COMMENT] An HTTP Server that can respond with content data occupying a particular byte range needs to advertise this capability in the 4th field.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.20.6

[GUIDELINE] If the associated HTTP Server Endpoint supports the `realTimeInfo.dlna.org` HTTP header with a finite `max-lag-time` value (as described in 11.4.3.56.2), then

- the `op-param` shall be omitted,
- `sp-flag` = true,
- `lop-bytes` = false,
- `lop-npt` = false.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	6YPST

[COMMENT] The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.21 MM op-param (Operations Parameter for RTP)

10.1.3.21.1

[GUIDELINE] If the 4th field is associated with the "rtsp-rtp-udp" transport protocol, then the `a-val` and `b-val` tokens (of the `op-param` token) mean the following.

- `a-val`: indicates support of the Range header (see 11.4.4.168 and 11.4.4.169) for the context of the `protocolInfo` under the "Full Random Access Data Availability" model.
- `b-val`: In scenarios involving the RTP Media Transport, the `b-val` shall have a value of "0".

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	43WJU

[COMMENT] For more information about the RTP Media Transport and the "Limited Random Access Data Availability" model, see the following guidelines:

- 11.4.2.14 MT normative random access data availability models
- 11.4.2.15 MT Full Random Access Data Availability model
- 11.4.4.168 MT RTP Receiving Endpoint Range header
- 11.4.4.169 MT RTP Serving Endpoint Range header

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.21.2

[GUIDELINE] If the Content Source assigns "0" to both a-val and b-val of the op-param, then the op-param shall be omitted from the 4th field.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	S5UX6

[COMMENT] The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.22 MM ps-param (Server-Side play-speeds parameter)

10.1.3.22.1

[GUIDELINE] The definition of ps-param shall be as follows:

- ps-param = [ps-param-delim] "DLNA.ORG_PS=" ps-value
- ps-param-delim = ";;"
- ps-value = [server-speed *("," server-speed)]
- server-speed = <conforms to the TransportPlaySpeed string, as specified in the AVTransport specification>

The ps-value shall be a comma-delimited list of play-speed values. The ps-value shall exclude the play-speed of "1" from its list. If the media transport component (either for a server, client) does not support additional server-side play-speeds beyond "1" for the context of the protocolInfo, then the fourth field shall omit the ps-param (i.e. "DLNA.ORG_PS=1" is prohibited).

The format of each play-speed value shall conform to the TransportPlaySpeed string, as specified in 2.2.8 of ISO/IEC 29341-20-10:2011.

If used in conjunction with a protocolInfo indicating "http-get" in the first field, then the use of the PlaySpeed.dlna.org HTTP header applies to the context of the protocolInfo. See 11.4.3.53 for more information.

If used in conjunction with a protocolInfo indicating "rtsp-rtp-udp" in the first field, then the use of the RTSP Scale header applies to the context of the protocolInfo. See 11.4.4.170 for more information.

If using the 4th_field syntax defined in 10.1.3.17.1 or 10.1.3.17.2 and if ps-param follows another parameter, then the ps-param shall include the ps-param-delim.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	XD3U5	

[COMMENT] This guideline defines the DLNA.ORG_PS parameter. The parameter indicates the transport layer's supported play-speeds.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4]. The ps-param is not used for image content.

A ps-value can have "," characters as delimiters for supporting server-side play-speeds and the DLNA guidelines defines a embedded comma escaping rule for a value of a CMS:GetProtocollInfo response. Refer to 10.1.3.15.4 for more information.

Each of the play-speed values in ps-param is listed as an integer or as a ratio of two integer values. It is highly recommended that implementers list play-speed values as close as possible to the actual speed used in the distribution of the content. Specifically, implementers need to avoid the use of rounding. For example, a speed value of 1,8× is represented as 9/5 and not rounded to 2. UPnP control points use the speed value in ps-param to compute elapsed time. Rounding errors accumulate quickly resulting in differences between the actual playtime and the value computed by the UPnP control point. The computed value is typically displayed in the control point UI.

10.1.3.22.2

[GUIDELINE] If the ps-param token appears in a res@protocollInfo or a protocollInfo of a UPnP AV connection, and if the first field of protocollInfo is "http-get", then the Content Source shall be capable of responding (with a Target Response) to requests that indicate a valid and supported play-speed for the content binary.

(That is, the associated HTTP Server Endpoint does not return error code 406 (Not Acceptable), unless other HTTP headers are the cause of the error.)

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	2U3HI	

[COMMENT] When used with a <res> element or UPnP AV connection, the DLNA.ORG_PS parameter identifies whether the server supports one or more optional server-side play-speed operations.

Guideline 11.4.3.53 describes more information about responding to HTTP requests that use the PlaySpeed.dlna.org HTTP header.

Variants of the [C1] and [C2] examples that involve sources of audio and/or AV content apply to this guideline.

10.1.3.22.3

[GUIDELINE] In conjunction with the rules defined in 10.1.3.22.1 and 10.1.3.22.2, the fourth field of a res@protocolInfo may use the ps-param for non-DLNA Media Format Profiles.

[ATTRIBUTES]

O	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	KQ9VQ	

[COMMENT] This guideline permits the use of DLNA.ORG_PS for both DLNA and non-DLNA content. This guideline also permits the parameter to be used for HTTP and RTP and other transports not specified by DLNA.

The following examples (see 10.1.3.16.5) apply to this guideline row: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4]. Although the download usage does not employ play-speeds to achieve the system usage in a normative way, control points that parse 4th field parameters need to tolerate the presence of the ps-param.

CDS:CreateObject syntax has restrictions on the 4th field syntax, as described in 10.1.8.19.

10.1.3.23 MM ci-param (conversion indicator flag)

10.1.3.23.1

[GUIDELINE] The syntax definition of ci-param shall be as follows:

- ci-param = ci-param-delim "DLNA.ORG_CI=" ci-value
- ci-param-delim = ";;"
- ci-value = Boolean
- Boolean = "1" | "0"

If the context of the protocolInfo involves a content binary that is converted from a different content binary, then ci-value is "1". Otherwise, the ci-value is "0". (See 10.1.3.12.8 for determining an appropriate context.)

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	RVR5L	

[COMMENT] The ci-param is a conversion indicator parameter.

An MSCP uses this parameter to select the most relevant resource from the available resources of a CDS object. If "1" is specified for this parameter value, then the resource is converted from a different content binary. Converted content usually has equal or worse quality. Examples of conversion include transcoding, system layer conversion, timestamps (e.g. TTS, PCR, PTS), scaling, and decoding.

This guideline also applies in upload AnyContainer and optional content management (OCM) operations. In those cases, a control point is responsible for setting this parameter when it knows the content related to the operation is a converted content binary. This applies to content that is intended for a content transfer process, as well as operations that involve a URI specified by the control point.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [C5], [P1], [P2], [P3], [P4], and [P5].

10.1.3.23.2

[GUIDELINE] In conjunction with the rules defined in 10.1.3.23.1, the fourth field of a res@protocolInfo may use ci-param for the following scenarios.

- The content is conformant to a DLNA Media Format Profile.
- The content is conformant to a non-DLNA Media Format Profile.
- The first field of protocolInfo is "http-get" or "rtsp-rtp-udp "
- The first field of protocolInfo is not "http-get" or "rtsp-rtp-udp "

[ATTRIBUTES]

O	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	VR5L6	

[COMMENT] This guideline permits the use of DLNA.ORG_CI for both DLNA and non-DLNA content. This guideline also permits the parameter to be used for HTTP and RTP and other transports not specified by DLNA.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [C5], [P1], [P2], [P3], [P4], and [P5].

10.1.3.23.3

[GUIDELINE] If the UPnP MediaServer knows that the content of a <res> element is a converted content binary, then the MediaServer should use the ci-param in the protocolInfo value.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	Q9VQY	

[COMMENT] The ci-param is not mandatory, but its use is strongly encouraged, especially for converted content.

How a Content Source knows if content is converted is out of scope for the guidelines. In some cases, the Content Source knows because it is the entity that actually converts the content. In other cases, the Content Source might know because the Content Source was informed in an implementation-specific manner.

This guideline applies to MediaServers because of examples [C1] and [C2] (see 10.1.3.16.5).

10.1.3.23.4

[GUIDELINE] The ci-param may be omitted.

[ATTRIBUTES]

O	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-12: 2016	U3HIZ	

[COMMENT] The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [C5], [P1], [P2], [P3], [P4], and [P5].

10.1.3.23.5

[GUIDELINE] If a protocolInfo value omits the ci-param, then UPnP MediaServer control points shall infer that the associated content is not converted content.

[ATTRIBUTES]

M	A	DMP DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	D3U5P	

[COMMENT] The following examples (see 10.1.3.16.5) apply to this guideline: [P1], [P2], [P3], [P4].

10.1.3.24 MM flags-param (flags parameter)

10.1.3.24.1

[GUIDELINE] The syntax definition of the flags-param shall be as follows:

- flags-param = flags-param-delim "DLNA.ORG_FLAGS=" flags-value
- flags-param-delim = ";"
- flags-value = primary-flags reserved-data
- primary-flags = 8 hexdigit
- reserved-data = 24 reserved-hexdigit
- hexdigit = <hexadecimal digit: "0"-"9", "A"-"F", "a"-"f">
- reserved-hexdigit = "0"

If the protocolInfo value omits the flags-param, then the default meaning for individual flags and values embedded in flags-param is determined by default value policies or is unknown (in the case where default values are not defined). As new flags and values are defined for flags-param, those guidelines will clarify the meaning for when flags-param is omitted or when "0" is used.

EXAMPLE

DLNA.ORG_FLAGS=03100000000000000000000000000000.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	5UX6U	

[COMMENT] Many DLNA binary-value flags that belong in the fourth field are encapsulated in this parameter. This helps reduce the length of the 4th field as the number of binary-value parameters increases in the future. In a simple usage, a single bit in the binary representation of flags-value maps to a single binary-value parameter. In some cases, DLNA might choose to define that a series of bits represents a small integer.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

10.1.3.24.2

[GUIDELINE] The primary-flags token shall be exactly 8 hexadecimal digits, and it shall represent a value composed of 32 binary bits. Each bit shall represent a binary flag. The least significant bit corresponds to bit-0 and the most significant bit corresponds to bit-31 (e.g. 10000000000000000000000000000000b = 0x80000000 where bit-31 is the only bit set to true).

The bit mapping of primary-flags shall be as follows:

- Bit-31: sp-flag (Sender Paced flag)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted or the dlina-v1.5-flag is false, then this flag shall have a value of unknown because sender-paced content and non sender paced content is permitted by previous versions of the DLNA guidelines. Content Receivers that fail to transfer and/or render content because they use transport flow control mechanisms are in violation of this guideline.
 - See the following for more information.
 - 10.1.3.28 MM sp-flag (sender paced flag).
- Bit-30: lop-npt (Limited Operations flag: Time-Based Seek)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted or the dlina-v1.5-flag is false, then this flag shall have an inferred value of false.
 - See the following for more information.
 - 10.1.3.29 MM lop-npt, lop-bytes and lop-cleartextbytes (limited operations flags): Common.
- Bit-29: lop-bytes (Limited Operations flag: Byte-Based Seek)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted or the dlina-v1.5-flag is false, then this flag shall have an inferred value of false.
 - See the following for more information.
 - 10.1.3.29 MM lop-npt, lop-bytes and lop-cleartextbytes (limited operations flags): Common.
- Bit-28: playcontainer-param (DLNA PlayContainer flag)
 - Applies to all DLNA transport protocols.

- If the flags-param is omitted or the *dlna-v1.5-flag* is false, then this flag shall have an inferred value of false because this flag applies only to DMR devices and the DLNA PlayContainer URI operation is optional for DMR devices.
- See the following for more information.
 - 10.1.3.32 MM playcontainer-param (DLNA PlayContainer flag)
 - 10.1.4.26 MM rendering media collection files
 - 10.1.4.29 MM DLNA PlayContainer URI
 - 10.1.4.30 MM control point rules for DLNA PlayContainer URI.
- Bit 27: *s₀-increasing* (UCDAM *s₀* Increasing flag)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted or the *dlna-v1.5-flag* is false, then the *s₀-increasing* flag shall have an inferred value of unknown. The previous guidelines do permit *s₀-increasing* behaviour, but the previous version of the DLNA guidelines (i.e. v1.0) do not define normative rules for using the Seek media operation (or the Range or TimeSeekRange.dlna.org headers) with such content.
 - See the following for more information.
 - 10.1.3.33 MM *s0-increasing* (UCDAM *s0* increasing flag).
- Bit 26: *s_N-increasing* (UCDAM *s_N* Increasing flag)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted or the *dlna-v1.5-flag* is false, then this flag shall have an inferred value of unknown because previous versions of the DLNA guidelines permit content that grows with time or has a fixed ending.
 - See the following for more information.
 - 10.1.3.34 MM *sN-increasing* (UCDAM *sN* increasing flag).
- Bit-25: *rtsp-pause* (Pause media operation support for RTP Serving Endpoints)
 - Applies only to RTP Media Transport
 - If the flags-param is omitted or the *dlna-v1.5-flag* is false, then this flag shall have an inferred value of false because previous versions of the DLNA guidelines do not support the RTP Media Transport.
- Bit 24: *tm-s* (Streaming mode flag)
 - Applies to all DLNA transport protocols.
 - AV and Audio Media Class content shall set at least the *tm-s* flag equal to true.
 - If the flags-param is omitted or the *dlna-v1.5-flag* is false, then this flag shall have an inferred value of true only for Audio-only and AV content. For all other content, the inferred value is false.
 - See the following for more information.
 - 10.1.3.35 MM *tm-s* (Streaming Mode Transfer flag).
- Bit 23: *tm-i* (Interactive mode flag)
 - Applies to all DLNA transport protocols.
 - Image Media Class content shall set at least the *tm-i* flag equal to true.
 - If the flags-param is omitted or the *dlna-v1.5-flag* is false, then this flag shall have an inferred value of true only for Image content and media collection files. For all other content, the inferred value shall be false.
 - See the following for more information.
 - 10.1.3.36 MM *tm-i* (Interactive Mode Transfer flag).
- Bit 22: *tm-b* (Background mode flag)
 - Applies to all DLNA transport protocols, except RTP.

- If the flags-param is omitted or the dlna-v1.5-flag is false, then this flag shall have an unknown value.
- See the following for more information.
 - 10.1.3.37 MM tm-b (Background Mode Transfer flag)
- Bit 21: http-stalling (HTTP Connection Stalling flag)
 - Applies only to the HTTP Media Transport.
 - If the flags-param is omitted, then this flag shall have an inferred value of false.
 - See the following for more information.
 - 10.1.3.38 MM http-stalling (HTTP Connection Stalling flag)
 - 10.1.4.7 MM DIDL-Lite Multiple Res: thumbnails.
- Bit 20: dlna-v1.5-flag (DLNA v1.5 versioning flag)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted, then this flag shall have an inferred value of false.
 - See the following for more information.
 - 10.1.3.25 MM dlna-v1.5-flag (DLNA v1.5 version flag)
- Bit 16: LP-flag (Link Protected content flag)
 - Applies to all DLNA transport protocols.
 - If the flags-param is omitted then this flag shall have an inferred value of false.
 - If the cleartextbytesseek-full flag or the lop-cleartextbytes-flag are set then this flag shall be set to true
 - See the following for more information.
 - 7.5.3.5 in IEC 62481-3:2017.
- Bit 15: cleartextbytesseek-full flag (Cleartext Byte Full Data Seek flag)
 - Applies to all DLNA transport protocols.
 - If the content described by this protocolInfo does not use a Link Protection system (i.e. the LP-flag is false or omitted), the cleartextbytesseek-full flag shall be omitted or set to false.
 - If the flags-param is omitted then the cleartextbytesseek-full flag shall have an inferred value of false.
 - See the following for more information.
 - 7.5.3.6 (GUN TLQ89) in IEC 62481-3:2017
(Byte based full seek data availability with the Cleartext Byte Seek Request Header).
- Bit 14: lop-cleartextbytes flag (Cleartext Limited Data Seek flag)
 - Applies to all DLNA transport protocols.
 - If the content described by this protocolInfo does not use a Link Protection System (i.e. the LP-flag is false or omitted), the lop-cleartextbytes flag shall be omitted or set to false.
 - If the dlna-v1.5 flag is false, then the lop-cleartextbytes flag shall have a value of false.
 - If the flags-param is omitted then the lop-cleartextbytes flag shall have an inferred value of false.
 - See the following for more information.
 - 7.5.3.7 (GUN RKJVV) in IEC 62481-3:2017
(Byte based limited seek data availability with Cleartext Byte Seek Request Header).

All other bits in primary-flags are reserved for future use and shall have a value of false.

[ATTRIBUTES]

M	C	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	3WJUU	

[COMMENT] The first 8 hexadecimal digits represent 32 binary flags. DLNA defines meaning for some of these bits. Other bits are reserved for future definition and are required to have a value of false at this time.

The usages of defined bits are defined in other DLNA guidelines.

When a protocolInfo represents the capabilities of a content binary, the bits are intended to be a representation of the applicability to the content binary, not on the current conditions of the network or the server's ability to stream data at the current time. When a stream is attempted on a content binary with the tm-s flag set, the DMS is still free to return an error that the stream cannot be completed at the current time due to internal conditions.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4]. In some cases, the flags-param will provide information that is of no use to certain endpoints. However, endpoints that parse the 4th field are required to tolerate the presence of the flags-param.

10.1.3.24.3

[GUIDELINE] The reserved-data shall be exactly 24 hexadecimal digits. These hexadecimal digits are reserved for future use and shall have a value "0".

[ATTRIBUTES]

M	C	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	YPSTR	

[COMMENT] The first 8 hexadecimal digits are used for primary-flags and the rest are reserved and undefined at this time.

When DLNA defines new normative flags and/or parameters for the 4th field, those flags and parameters are expected to be defined here. The alternative of declaring a new 4th field parameter is strongly discouraged for future authors of DLNA guidelines.

In general, definitions of new flags or parameters (that will occupy the current space allocated for reserved-bytes) need to define a syntax and semantics for DMS, DMR, DMC, and Push Controllers. Furthermore, parameter values that have short hexadecimal representations (such as new binary flags) preferably occupy hexadecimal digits that are more significant while parameter values that have longer hexadecimal representations occupy the less significant hexadecimal digits.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

10.1.3.24.4

[GUIDELINE] UPnP AV MediaServer control points shall be tolerant of reserved-data tokens that do not have "0" value hexadecimal digits.

[ATTRIBUTES]

M	C	DMP DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMC	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	9OTHY	

[COMMENT] The following examples (see 10.1.3.16.5) apply to this guideline: [P1], [P2], [P3], and [P4].

10.1.3.25 MM dlina-v1.5-flag (DLNAv1.5 version flag)

[GUIDELINE] If the dlina-v1.5-flag of the primary-flags token is true, then it shall mean the following.

- Bits [31,21] and Bits [16,14] (inclusive) of the primary-flags token are valid for use (i.e. those bits are valid for use).
- Bits [19,17] and Bits [13,0] of the primary-flags token have undefined values.

If the dlina-v1.5-flag of the primary-flags token is false, then it shall mean the following.

- Only Bit-21 of the primary-flags token is defined for use.
- All other bits in the primary-flags token have inferred values as described in 10.1.3.24.2 (MM flags-param (Flags Parameter)).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	SOWQ7	

[COMMENT] Bits [31,22] and Bits [16,14] are not defined for previous versions of the DLNA guidelines.

Bit-21 is the only bit defined in an erratum for the DLNA v1.0 guidelines.

10.1.3.26 MM maxsp-param (maximum RTSP Speed header value)

[GUIDELINE] The definition of maxsp-param shall be as follows:

- maxsp-param = maxsp-param-delim "DLNA.ORG_MAXSP=" maxsp-param-value
- maxsp-param-delim = ";
- maxsp-param-value = 1 *DIGIT ["." *DIGIT]

The value of maxsp-param-value shall be greater than or equal to 1.

If maxsp-param is specified, then the RTP Serving Endpoint shall support the Speed header in a RTSP PLAY request if the value of the "Speed" header is less than or equal to the attribute value of maxsp-param. The RTSP "Speed" header is defined in IETF RFC 2326:1998, 12.35.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	IETF RFC 2326:1998 ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	W7RAO	

[COMMENT] Excluding the variants that involve download, the following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4]. Endpoints that parse 4th field parameters need to tolerate the presence of this parameter.

10.1.3.27 MM other-param (vendor-defined 4th field parameters)

10.1.3.27.1

[GUIDELINE] The definition of other-param is as follows:

- other-param = other-param-delim IANA-name "_" other-param-name "=" other-param-value
- other-param-delim = ";;"
- IANA-name = <IANA-registered name, with top level domain (e.g. .net, .org, .com)>
- other-param-name = *<"a"-"z", "A"-"Z", "0"-"9">
- other-param-value = *<"a"-"z", "A"-"Z", "0"-"9", "_", ",", "+", "-">.

[ATTRIBUTES]

M	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	8SUNZ	

[COMMENT] This defines the syntax for vendor extensions in the fourth field of protocolInfo values.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

10.1.3.27.2

[GUIDELINE] Vendors may use other-param for vendor-specific parameters in the fourth field of a protocolInfo value.

[ATTRIBUTES]

O	A	DMP DMS DMC DMR +DN+ +UP+ +PU+	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	XQQ6Y	

[COMMENT] This guideline permits the use of vendor extensions in the fourth field.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [C5], [P1], [P2], [P3], and [P4].

10.1.3.27.3

[GUIDELINE] A UPnP AV MediaServer that receives a CDS:CreateObject request to create a <res> element with a res@protocolInfo that has optional and/or vendor-defined 4th field parameters and if the MediaServer returns a success response, then the MediaServer shall omit the unsupported 4th field parameters from the created <res> element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	QQ6YX	

[COMMENT] DMS devices are not required to interpret, understand, store, or maintain vendor-defined parameters in the 4th field.

This guideline is an extension of guideline 10.1.8.24.3, which requires a DMS to return only the supported metadata properties in a success response.

The following examples (see 10.1.3.16.5) apply to this guideline: [P5]. As a corollary, control points involved in example [C5] are expected to tolerate responses that omit unsupported 4th field parameters.

10.1.3.28 MM sp-flag (sender paced flag)

10.1.3.28.1

[GUIDELINE] The sp-flag indicates if the Content Source will act as the Clock Source, for the context of the protocolInfo.

- False = The Content Source is not the Content Clock Source
- True = The Content Source is the Content Clock Source

[ATTRIBUTES]

M	C	DMP +DN+ DMS +UP+ DMC +PU+	DMR	M-DMP M-DMS M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	SUNZV	

[COMMENT] The sp-flag provides a way for the Content Source to indicate that it will send packets at the rate of the normal Clock Source.

In normal HTTP operation the Content Receiver endpoint is the source for the Playback Clock which controls the pace of the rendering. The Content Receiver endpoint uses TCP flow control to match the pace of the transfer of content to the pace of the playback. In some cases, the Content Source might be the Content Clock Source, such as in the case of live broadcast content. This means that if the actual throughput (including any transmission delays caused by additional transmission loads on the network) is not sufficient for the Content Clock Source, then

the Content Source will take steps to ensure that the transmitted content binary matches the indicated Media Format Profile, but the bitstream can show discontinuities such as dropped frames.

Likewise, in RTP the Serving Endpoint is typically the Clock Source and controls the rate at which the content is sent to the network.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1], [C2], [C3], [C4], [P1], [P2], [P3], and [P4].

10.1.3.28.2

[GUIDELINE] In the context of SourceProtocolInfo values obtained from CMS:GetProtocolInfo for a UPnP AV MediaServer, the sp-flag shall mean the following.

- False = The Content Source is never the Content Clock Source for a protocolInfo when there is a "match by protocolInfo format".
- True = The Content Source is capable of being the Content Clock Source for a protocolInfo when there is a "match by protocolInfo format".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	7RAO4	

[COMMENT] Variants of the [C1] and [C2] examples that involve MediaServers apply to this guideline (see 10.1.3.16.5).

10.1.3.28.3

[GUIDELINE] In the context of SinkProtocolInfo values obtained from CMS:GetProtocolInfo for a UPnP AV MediaRenderer, the sp-flag shall always be true or the flags-param shall be omitted.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11	OWQ7V	

[COMMENT] Like DMP devices, DMR devices are required to support rendering of content, regardless of whether the Content Clock Source is determined by the Content Source.

10.1.3.28.4

[GUIDELINE] When a Content Source streams live content and does not support any UCDA random access modes for that content, the Content Source shall set the sp-flag (Sender Paced Flag, described in 10.1.3.28.1) to "true".

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	3HNHL	N

[COMMENT] Setting the sp-flag indicates that a Content Source will send packets based on the clock of the live content source when streaming from the "live position" (see 10.1.3.33.2 or 11.4.2.16.2 for more information). Live content refers to content that is available only up to the

"live position" at any given time.
See Annex L for live content use cases.

10.1.3.29 MM lop-npt, lop-bytes and lop-cleartextbytes (limited operations flags): Common

10.1.3.29.1

[GUIDELINE] If the flags-param is present and any of the the lop-npt, lop-bytes, or lop-cleartextbytes bits are true, then the "Limited Random Access Data Availability" model shall be the data access model that applies in the context of the protocolInfo value and the op-param shall be omitted from the 4th field of the protocolInfo value. In addition, for link protected content, the cleartextbytesseek-full flag shall be false.

Specifically, this means that the transport operation (that is indicated by the lop-npt or lop-bytes or lop-cleartextbytes) shall be supported for a limited data range for the context of the protocolInfo, as defined in 11.4.2.16.

The meaning of the lop-npt bit and the lop-bytes and lop-cleartextbytes flags are described in these guidelines, depending on whether the context is for the HTTP Media Transport or the RTP Media Transport.

- 10.1.3.30 MM lop-npt lop-bytes, and lop-cleartextbytes (limited operations flags): HTTP
- 10.1.3.31 MM lop-npt and lop-bytes (limited operations flags): RTP

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	OTHY2	

[COMMENT] The lop-npt indicates that the transport layer supports random access on a limited range of npt playback positions. Likewise the lop-bytes indicate that the transport layer supports random access on a limited range of byte positions. The lop-cleartextbytes flag indicates that the transport layer supports random access on a limited range of byte positions within the cleartext byte domain.

A fundamental difference between lop-npt/lop-bytes/ lop-cleartextbytes and the op-param is that lop-npt/ lop-bytes/ lop-cleartextbytes assumes that s_0 can change, while op-param only permits changes to s_N . For additional information on the assumptions for the "Limited Random Access Data Availability" model, see 11.4.2.16.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.29.2

[GUIDELINE] Content Receiver endpoints or UPnP AV MediaServer control points that acquire content data from a limited random access data range (defined in 11.4.2.16.1 shall be able to properly request a valid range, even if the limited data range continuously changes with time.

[ATTRIBUTES]

M	A	DMP DMR +DN+	M-DMP	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	PSTRZ	

[COMMENT] Content receiver endpoints and control points cannot assume anything special about the data range because the absolute beginning can change and the content can have no end (i.e. live content). See the following for more general information and examples of how this guideline applies to HTTP:

- 11.4.2.16 MT Limited Random Access Data Availability model
- 11.4.3.20 MT HTTP: data range of Limited Random Access Data Availability, Guidelines 11.4.3.20.2 and 11.4.3.20.10

The [P1], [P2], and [P3] examples (see 10.1.3.16.5) apply to the Content Receivers that are governed by this guideline.

The server defines when "Limited Random Access Data Availability" applies to the scenario using one or more of the lop-npt, lop-bytes and/or lop-cleartextbytes flags (see 10.1.3.24.2) in a content binary's res@protocolInfo 4th field.

An HTTP Client Endpoint is required to support seek operations (see 10.1.6.31.1) on all supported Media Format Profiles (see 11.4.3.52.1) regardless of the data availability model.

10.1.3.30 MM lop-npt lop-bytes, and lop-cleartextbytes (limited operations flags): HTTP

[GUIDELINE] If the 4th field is associated with the "http-get" transport protocol, then the lop-npt, lop-bytes and lop-cleartextbytes bits mean the following.

- lop-npt: indicates support of the TimeSeekRange.dlna.org HTTP header for the context of the protocolInfo under the "Limited Random Access Data Availability" model.
- lop-bytes: indicates support of the Range HTTP header for the context of the protocolInfo under the "Limited Random Access Data Availability" model.
- lop-cleartextbytes: indicates support of the Cleartext Byte Seek Request Header for the context of the protocolInfo under the "Limited Random Access Data Availability" model.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	WJUUP	

[COMMENT] This guideline defines the lop-npt, lop-cleartextbytes and lop-bytes bits, when HTTP is the transport protocol.

When used with a context involving HTTP, these bits identify if the server supports the TimeSeekRange.dlna.org or Range HTTP headers or the Cleartext Byte Seek Request Header for the associated content binary under the "Limited Random Access Data Availability" model.

For more information on the "Limited Random Access Data Availability" model for HTTP and these HTTP headers, see the following guidelines:

- 11.4.2.16 MT Limited Random Access Data Availability model
- 11.4.3.18 MT HTTP common random access data availability requirements
- 11.4.3.20 MT HTTP: data range of Limited Random Access Data Availability

And the following guideline in IEC 62481-3:2017:

- Clause A.5.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.31 MM lop-npt and lop-bytes (limited operations flags): RTP

[GUIDELINE] If the 4th field is associated with the "rtsp-rtp-udp" transport protocol, then the lop-npt and lop-bytes bits mean the following.

- lop-npt: indicates support of the Range header for the context of the protocolInfo under the "Limited Random Access Data Availability" model.
- lop-bytes: In scenarios involving the RTP Media Transport, the lop-bytes bit shall be set to false.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	UX6UW

[COMMENT] This guideline defines the lop-npt and lop-bytes bits, when RTP is the transport protocol.

When used with a context involving RTP, these bits identify if the server supports the Range header for the associated content binary under the "Limited Random Access Data Availability" model.

For more information on the "Limited Random Access Data Availability" model for RTP and these RTP headers, see the following guidelines:

- 11.4.2.16 MT Limited Random Access Data Availability model
- 11.4.4.181 MT RTP current limited data range indication

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.32 MM playcontainer-param (DLNA PlayContainer flag)

10.1.3.32.1

[GUIDELINE] The playcontainer-param flag indicates support for a DLNA PlayContainer URI operation. If the flag is true for a protocolInfo, then it means that the UPnP AV MediaRenderer can play that type of content in a DLNA PlayContainer URI operation.

The playcontainer-param flag shall be false when the context of the protocolInfo involves media collection binaries (e.g. DIDL_S and DIDL_V playlist files). Furthermore, when performing a DLNA PlayContainer URI, the MediaRenderer shall not render media collection binaries when traversing the CDS hierarchy. Note that this restriction against playing media collection binaries applies only to media collection binaries defined by the DLNA guidelines.

[ATTRIBUTES]

M	A	DMR DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	3U5PA	

[COMMENT] A DLNA PlayContainer URI allows a control point to instruct a DMR to browse a DMS and play content from it.

The playcontainer-param is used on a per-profile basis. For example, if the protocolInfo for "http-get" and "MPEG2_PS_NTSC" has playcontainer-param set to true, then MPEG2_PS_NTSC content will be played in playcontainer operation.

Example [C4] also applies to this guideline.

This guideline also applies to DMR devices because they can expose protocolInfo that has the playcontainer-param set to true through CMS:GetProtocolInfo.

This guideline also applies to control points that invoke CMS:GetProtocolInfo on a DMR because they have to parse 4th field values.

Since the res@dlina:trackTotal attribute is not required, there is not a consistent way to represent the individual tracks of media collection binaries. Furthermore, DLNA has no interoperability guidelines for navigating the tracks within a media collection binary. Therefore, these guidelines prohibit playback of media collection binaries until a future set of DLNA guidelines can adequately address these issues.

10.1.3.32.2

[GUIDELINE] In the context of the Source argument's protocolInfo values obtained from CMS:GetProtocolInfo for a UPnP AV MediaServer, the playcontainer-param flag shall always be false if the flags-param is included for a protocolInfo value.

Likewise, 4th field values provided by a Content Source shall set the playcontainer-param flag to false if the flags-param is included in the protocolInfo value.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-14-11	3HIZ9	

[COMMENT] The DMR device class is the only device class that sets the playcontainer-param to true.

The following examples (see 10.1.3.16.5) apply to this guideline: [C1] and [C2].

10.1.3.33 MM s_0 -increasing (UCDAM s_0 increasing flag)

10.1.3.33.1

[GUIDELINE] The s_0 -increasing indicates if the UCDAM s_0 boundary is increasing.

- True = The s_0 data boundary increases with time.
- False = The s_0 data boundary is fixed.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	9VQYF	

[COMMENT] If true, then the content does not have a fixed beginning. Otherwise, the content does have a fixed beginning (i.e. npt=0 and byte-pos=0 map to the beginning). Note that the s_0 data boundary can reset, as described in the comments 11.4.2.16 guideline 11.4.2.16.3.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.33.2

[GUIDELINE] If the s_0 -increasing flag is true then the following shall apply to the context of the protocolInfo.

- The op-param shall be omitted.
- If lop-npt and lop-bytes are both false, then the following shall also apply:
 - The s_0 data boundary shall map to a beginning that is not static.
 - The data range of [s_0 , s_N] shall map to the npt range of [npt-start-time, npt-last-time] and the byte range of [first-byte-pos, last-byte-pos], where npt-start-time and npt-last time are in units of npt and first-byte-pos and last-byte-pos are in bytes.
 - There exists a "live position" that shall be equal to the s_N data boundary.
- If the s_N data boundary is changing with time, then the "live position" shall shift forward in real-time.
- If the Content Source receives a transport layer request that is not a random access request (e.g. HTTP request that omits Range and TimeSeekRange.dlna.org) then the Content Source shall respond with content data from the "live point".
- If either lop-npt or lop-bytes is true, then the "Limited Random Access Data Availability" model shall apply. See 11.4.2.16 for more information.

The rules in this guideline shall apply even in scenarios where the transport server does not support random access requests (e.g. HTTP requests with Range or TimeSeekRange.dlna.org) for a content binary.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	R5L6Y	

[COMMENT] When s_0 -increasing is true, then the content binary has a beginning that can change. Since it is possible to set the s_0 -increasing flag to true and not support random access requests, it is necessary for this guideline to be applied in all scenarios.

For HTTP, this means that omitting the Range and TimeSeekRange.dlna.org headers in an HTTP GET request results in the HTTP Server Endpoint returning content data bytes from a "live position" (as described in 11.4.3.20.9). Furthermore npt = 0 or byte-pos = 0 has no meaning (as described by 11.4.3.20.16).

If `lop-npt` or `lop-bytes` is true, then the access model is governed by what is returned by `availableSeekRange.dlna.org` (as described in 11.4.3.19.10).

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.33.3

[GUIDELINE] If the s_0 -increasing flag is false, then the following shall apply to the context of the `protocolInfo`.

- The s_0 data boundary shall map to a fixed and non-changing beginning.
- The data range of $[s_0, s_N]$ shall occupy an `npt` range of $[0, \text{npt-last-time}]$ and a byte range of $[0, \text{last-byte-pos}]$, where `npt-last-time` is in `npt` and `last-byte-pos` is in bytes.
- The content binary's zero position (i.e. `npt-time = 0` and `byte-pos = 0`) shall map to the UCDAM's data position of s_0 .
- The `last-byte-pos` and `npt-last-time` shall map to the UCDAM's s_N data position and the s_N data boundary shall map to the end of the available content data.

This guideline shall apply even in scenarios where the transport server does not support random access requests (e.g. HTTP requests with `Range` or `TimeSeekRange.dlna.org`) for a content binary.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	5L6YK	

[COMMENT] When s_0 -increasing is false, then the content binary has a fixed beginning. Since it is possible to set the s_0 -increasing flag to false and not support random access requests, it is necessary for this guideline to be applied in all scenarios.

For HTTP, this guideline means that HTTP requests that omit the `Range` and `TimeSeekRange.dlna.org` headers results in the HTTP Server Endpoint returning content data from the absolute beginning of the content (as described in 11.4.3.19).

These assumptions and the required behaviour are consistent with assumptions of previous versions of the DLNA guidelines.

s_0 -increasing = false permits mutually exclusive use of either the `op-param` or the `lop-npt/lop-bytes` with values of true, while s_0 -increasing = true prohibits use of the `op-param` but allows use of `lop-npt` and `lop-bytes`.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.33.4

[GUIDELINE] In the context of Sink argument's `protocolInfo` values obtained from `CMS:GetProtocolInfo` for a UPnP AV MediaRenderer, the s_0 -increasing flag shall always be true or the `flags-param` shall be omitted.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	VQYFH	

[COMMENT] Like DMP devices, DMR devices are required to support normal playback rendering of content, regardless of the server's buffering model.

10.1.3.34 MM s_N -increasing (UCDAM s_N increasing flag)

10.1.3.34.1

[GUIDELINE] The s_N -increasing indicates if the UCDAM s_N boundary is increasing.

- True = The s_N data boundary increases with time.
- False = The s_N data boundary is fixed.

This flag applies regardless of whether the "Full Random Access Data Availability" or "Limited Random Access Data Availability" model is being used.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-12: 2016	HIZ9G

[COMMENT] If true, then the content does not have a fixed ending. Otherwise, the content has a fixed ending.

In conjunction with 10.1.3.33, it is possible to determine whether the server exhibits a growing or sliding buffering model.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.34.2

[GUIDELINE] In the context of SinkProtocolInfo values obtained from CMS:GetProtocolInfo for a UPnP AV MediaRenderer, the s_N -increasing flag shall always be true or the flags-param shall be omitted.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11	U5PAG

[COMMENT] Like DMP devices, DMR devices need to support normal playback rendering of content, regardless of the server's buffering model.

10.1.3.35 MM tm-s (Streaming Mode Transfer flag)

10.1.3.35.1

[GUIDELINE] If the tm-s flag is true, then the associated Media Transport Content Source shall be capable of supporting the Streaming Mode Transfer for the context of protocolInfo.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	X6UW9	

[COMMENT] See Table 40 for more information about Streaming Mode Transfer.

Content Sources can generate an error response if it does not have the resources to respond at the current time.

The tm-s flag is not equivalent to the sp-flag. When the tm-s flag is true, it means that the Content Source is able to transmit fast enough for immediate rendering. If the sp-flag is false and the sustained throughput is less than what is needed for immediate rendering, then the Content Source will preserve the content binary's bitstream because the Content Source does not act as the Clock Source.

When the sp-flag is also true, it means that the Content Source is also the Clock Source for the content, which means that the Content Source will take steps to ensure that the content binary meets the expectations of the Media Format Profile, but the rendering stream can have discontinuities (such as dropped frames).

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.35.2

[GUIDELINE] The tm-s flag shall be set to true for protocolInfo values where the pn-param indicates a Media Format Profile for audio-only or AV Media Class. Setting the tm-s flag to true for Images or media collection binaries is expressly prohibited.

This requirement does not apply in scenarios where a res@protocolInfo value exists for a <res> element that does not have a URI value. (That is, a CDS object that was created in an upload AnyContainer operation and has yet to receive the actual content binary.)

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	JUUPX	

[COMMENT] This ensures backwards compatibility with earlier DMP devices that always assume that audio-only and AV content is available for streaming.

See Guideline 11.4.2.3.1 (MT Transfer Mode Support) for information on the transfer modes that a Content Receivers can specify when issuing requests.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.36 MM tm-i (Interactive Mode Transfer flag)

10.1.3.36.1

[GUIDELINE] If the tm-i flag is true, then the associated Media Transport Content Source shall be capable of supporting the Interactive Mode Transfer for the context of protocolInfo.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	STRZQ	

[COMMENT] See Table 40 for more information about Interactive Mode Transfer.

Content Sources can generate an error response if it does not have the resources to respond at the current time.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.36.2

[GUIDELINE] The tm-i flag shall be set to true for protocolInfo values where the pn-param indicates a Media Format Profile for the Image Media Class or a media collection binary. Setting the tm-i flag to true for Audio-only or AV content is expressly prohibited.

This requirement does not apply in scenarios where a res@protocolInfo value exists for a <res> element that does not have a URI value. (That is, a CDS object that was created in an upload AnyContainer operation and has yet to receive the actual content binary.)

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	THY23	C

[COMMENT] This ensures backwards compatibility with earlier DMP devices that always assume that image content is available for immediate rendering.

See Guideline 11.4.2.3.1 (MT Transfer Mode Support) for information on the transfer modes that Content Receivers can specify when issuing requests.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.37 MM tm-b (Background Mode Transfer flag)

[GUIDELINE] If the tm-b flag is true, then the associated HTTP server shall be capable of supporting the Background Mode Transfer for the context of the protocolInfo.

In the context of a UPnP AV Connection, a res@protocolInfo value, or contentFeatures.dlna.org value, the following restrictions shall also apply.

- If the http-stalling flag is true, then tm-b flag shall be set to true.
- If the sp-flag is true, then tm-b flag shall be false.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	WQ7V6	

[COMMENT] See Table 40 for more information about Background Mode Transfer.

Content Sources can generate an error response if it does not have the resources to respond at the current time.

Unlike the tm-s and tm-i flags, the tm-b flag can be used with all Media Classes.

A server that supports the http-stalling flag will also support the tm-b flag because a device that supports indefinite stalling implicitly supports lower transmission throughputs that can result from actively managing TCP flow control for a Background transfer. The converse is not true

because the ability to support a Background transfer does not necessarily imply the ability to support indefinite stalling via TCP flow control.

Background transfer cannot be used in conjunction with server-paced content. Lower transmission throughputs resulting from a Background transfer can cause the server's buffer to overflow. Content Receivers that want to download content that have sp-flag = true need to use the streaming download media operation.

See Guideline 11.4.2.3.1 (MT Transfer Mode Support) for information on the transfer modes that a Content Receivers can specify when issuing requests.

The [C1] and [C2] examples (see 10.1.3.16.5) apply to this guideline.

10.1.3.38 MM http-stalling (HTTP Connection Stalling flag)

[GUIDELINE] If the http-stalling flag is true, then the associated HTTP server shall be capable of supporting the Connection Stalling method for the Pause and Pause-Release media operations on the content binary and in addition the sp-flag shall be false.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	RAO4V	

[COMMENT] The Connection Stalling is a mechanism where a Content Receiver and a Content Source cooperatively use standard TCP flow control to temporarily pause the transmission of data.

HTTP Server Endpoints are not to misinterpret HTTP-level transport inactivity as a symptom of a TCP disconnect because a properly stalled HTTP Client Endpoint will use standard TCP flow control to keep the TCP connection alive. HTTP Server Endpoints also need to be careful to not overflow their local network buffers when the Connection Stalling method is being used.

The [C1] and [C2] examples apply to this guideline when the scenario involves audio or AV content.

10.1.3.39 MM UPnP AV connection behaviours

10.1.3.39.1

[GUIDELINE] A UPnP AV MediaServer shall have a connection with a ConnectionID "0" to represent all transport layer connections that cannot be mapped to a particular transport layer connection.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	UNZVD	

[COMMENT] A UPnP AV MediaServer that implements this type of behaviour uses ConnectionID "0" to represent one or more transport layer connections. Specifically, UPnP AV MediaServers are required to have at least one UPnP AV connection with ConnectionID of "0" to represent an unknown number of connections (zero or more) to Content Receivers.

10.1.3.39.2

[GUIDELINE] A UPnP AV MediaRenderer shall have a connection with a ConnectionID value of "0" to represent the default connection whose access is always available to any UPnP AV MediaRenderer control point in the network.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	RBWYA	

[COMMENT] UPnP AV MediaRenderers maintain a default connection that can be accessed at any time by any networked UPnP AV MediaRenderer control point (DMC, M-DMC, +PU+). A ConnectionID value of "0" identifies this default connection.

10.1.3.40 MM Context of ConnectionID=0**10.1.3.40.1**

[GUIDELINE] UPnP AV MediaServer control points shall not rely on the accuracy of the ProtocolInfo and PeerConnectionManager output parameters from a CMS:GetCurrentConnectionInfo request to a UPnP AV MediaServer with a value of "0" for the ConnectionID input.

[ATTRIBUTES]

M	A	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-14-11	Q6YXR	

[COMMENT] In the case of the UPnP AV connection "0", the information is assumed to be inaccurate because the context of ConnectionID = "0" represents numerous requests for different content. For example, the same ConnectionID of value "0" can be used for simultaneously serving an image and an audio stream. Each of the media resources served in this scenario will have its own protocolInfo.

10.1.3.40.2

[GUIDELINE] When a UPnP AV MediaRenderer responds to a CMS:GetCurrentConnectionInfo request, the value of the ProtocolInfo output argument shall contain information that corresponds to the URI in the AVT.CurrentTrackURI virtual instance state variable of the corresponding AVTransport virtual instance. The corresponding AVTransport virtual instance has an InstanceID equal to the value of the AVTransportID output argument of the same response.

If content has been assigned to the AVTransport virtual instance (i.e. the corresponding AVT.CurrentTrackURI virtual instance state variable is not equal to the empty string), the value of the ProtocolInfo output argument to the CMS:GetCurrentConnectionInfo request shall at least include the Primary protocolInfo Set that describes the content.

If content has not been assigned yet to the AVTransport virtual instance (i.e. the corresponding AVT.CurrentTrackURI virtual instance state variable equals the empty string), the value of the ProtocolInfo output argument to the CMS:GetCurrentConnectionInfo request shall be an empty string.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	R2JS7	

[COMMENT] UPnP AV MediaRenderers always include the proper ProtocolInfo value when responding to CMS:GetCurrentConnectionInfo requests.

10.1.3.41 MM UPnP AV Connection ID and Instance ID assignment rules

10.1.3.41.1

[GUIDELINE] UPnP AV MediaServers and UPnP AV MediaRenderers may include non-zero ConnectionID values in addition to the zero value in the CMS.CurrentConnectionIDs state variable.

[ATTRIBUTES]

O	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	6YXRZ	

[COMMENT] Typically, UPnP AV MediaServers and UPnP AV MediaRenderers include only the value of 0 when responding to CMS:GetCurrentConnectionIDs. However, devices that implement CMS:PrepareForConnection and/or DLNA BCM guidelines will respond with a list that includes additional non-zero ConnectionID values.

10.1.3.41.2

[GUIDELINE] If a UPnP AV MediaServer does not implement the AVTransport service, then it shall return the value of "-1" for the AVTransportID argument in the CMS:GetCurrentConnectionInfo action.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11	AO4VF	

[COMMENT] This is normative per the UPnP AV specifications. The CMS:PrepareForConnection and CMS:GetCurrentConnectionInfo actions return the AVTransport service virtual instance ID value through the AVTransportID output argument.

10.1.3.41.3

[GUIDELINE] A UPnP AV MediaRenderer shall return the value of "0" in the AVTransportID and RcsID arguments in response to a CMS:GetCurrentConnectionInfo request where the ConnectionID argument has the value of "0".

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-3-2	Q7V6G	

[COMMENT] Guidelines 10.1.6.2 and 10.1.6.3 require the "default" virtual instances to be always present in the AVTransport and RenderingControl services. This guideline further requires these "default" virtual instances to be always associated with the "default" connection of the Connection Manager service.

10.1.3.41.4

[GUIDELINE] UPnP AV MediaServer and UPnP AV MediaRenderer value for the CMS.CurrentConnectionIDs state variable shall be a comma-separated list of all current ConnectionID values.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	B8T5G	

[COMMENT] Implementing support for the action CMS:GetCurrentConnectionIDs is a requirement for UPnP AV MediaServers and UPnP AV MediaRenderers. By default, one connection is always available. This default connection is identified with a ConnectionID value of 0.

10.1.3.41.5

[GUIDELINE] A UPnP AV MediaServer and a UPnP AV MediaRenderer shall respond to CMS:GetCurrentConnectionIDs requests. The ConnectionIDs output argument value shall have the same value as the CMS.CurrentConnectionsIDs state variable.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	I9O4R	

10.1.3.41.6

[GUIDELINE] UPnP AV MediaServers and UPnP AV MediaRenderers shall include a ConnectionID value of zero in the CMS.CurrentConnectionIDs state variable.

[ATTRIBUTES]

M	C	DMS DMR	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	BWYAJ	

[COMMENT] Guideline requirements 10.1.3.39.1 and 10.1.3.39.2 require that UPnP AV MediaServers and UPnP AV MediaRenderers always have a default connection with ConnectionID "0". This guideline indicates that this value needs to be included in the CMS.CurrentConnectionIDs state variable.

10.1.3.41.7

[GUIDELINE] A UPnP AV MediaServer shall return the value of "-1" for the RcsID argument in the CMS:GetCurrentConnectionInfo action.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	2JS7H	

[COMMENT] This guideline is a requirement repeated from ISO/IEC 29341-14-11. The CMS:PrepareForConnection and CMS:GetCurrentConnectionInfo actions return the RenderingControl service virtual instance ID value through the RcsID output argument.

10.1.4 MediaServer requirements

10.1.4.1 MM ObjectID usage

10.1.4.1.1

[GUIDELINE] UPnP AV MediaServers shall assign a unique object ID for each entry in their ContentDirectory service (CDS). This rule applies to both container and item objects in a CDS metadata hierarchy.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	TRZQR	

[COMMENT] This guideline is a requirement repeated from ISO/IEC 29341-20-12:2016. This guideline's scope for uniqueness is for the entire CDS hierarchy.

10.1.4.1.2

[GUIDELINE] UPnP AV MediaServers should maintain the object ID value on a persistent basis.

[ATTRIBUTES]

S	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	UUPXM	

[COMMENT] The purpose of this recommendation is to allow control points to implement features like "my favorite content". Although control points cannot assume that object ID values are persisted, this recommendation allows a control point to easily check if a CDS object is still available on the network.

The reason why this is not mandatory is that some embedded devices can have difficulty in persisting object ID values across device reboots.

10.1.4.1.3

[GUIDELINE] A UTF-8 encoded object ID shall not exceed 256 B in the XML escaped form encoded in UTF-8.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	6UW9O	

[COMMENT] Provides a reasonable maximum length for objectID values, which are essential for CDS object declarations.

This guideline only applies to the creation of object ID values.

10.1.4.1.4

[GUIDELINE] DIDL-Lite documents or fragments that contain one or more CDS objects (i.e. <item> or <container> element) shall have a unique value for each object's @id attribute.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	IZ9GG	

[COMMENT] This is a requirement of the CDS specification. This guideline's scope for uniqueness is limited to the DIDL-Lite document or fragment. For example, a UPnP AV MediaRenderer that reports metadata for a media collection cannot use the same object ID for each of the items in the media collection.

10.1.4.2 MM CDS:Browse unsorted order

[GUIDELINE] If a UPnP AV MediaServer responds to a CDS:Browse request that specifies BrowseFlag = BrowseDirectChildren and an empty SortCriteria argument, then the MediaServer shall preserve the indexed order of returned CDS objects for a given UpdateID output argument value.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	QYFH2	

[COMMENT] This requirement is implied in the CDS specification because the StartingIndex and RequestedCount input arguments are designed for incrementally browsing a CDS container. The only time when the unsorted order can be different between two CDS:Browse requests will be when the UpdateID output argument values are different in the two responses.

10.1.4.3 MM Exposing CDS Content Rule

[GUIDELINE] A UPnP AV MediaServer shall not expose a CDS object for a content binary that it cannot identify as a Mandatory Media Format Profile or expose as Converted Content into a Mandatory Media Format Profile (per 10.1.4.4.2) except when the UPnP AV MediaServer is interacting with a UPnP AV MediaServer control point implemented to a version of the DLNA protocol before 4.0.

A UPnP AV MediaServer control point implemented to a version of the DLNA protocol shall be as defined in 9.2.32.2.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	F8SCI	N

[COMMENT] This guideline mandates that at least one <res> element in the CDS object be identified with a Mandatory Media Format Profile ID. An exception to this guideline is when interacting with legacy UPnP AV MediaServer control points.

This guideline allows a UPnP AV MediaServer to expose a <res> element of a CDS object in a format for which there is no matching DLNA Media Format Profile provided that for interoperability purpose this CDS object also features at least one other <res> element in a Mandatory Media Format Profile.

As an example, an audio asset for which there is no matching DLNA Media Format Profile could be exposed through a CDS object featuring the two following <res> elements:

- a <res> element using the LPCM DLNA Media Format Profile, for interoperability purpose;
- a <res> element without any DLNA Media Format Profile, featuring the appropriate MIME type for the audio asset.

10.1.4.4 MM DIDL-Lite Multiple Res: Formats

10.1.4.4.1

[GUIDELINE] If exposing the same content in different Media Format Profiles, then the different Media Format Profiles shall be exposed through multiple <res> elements in a single CDS object.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	L6YK5	C

[COMMENT] This guideline mandates a UPnP AV MediaServer device to expose multiple <res> elements for a single CDS object. This allows a UPnP AV MediaServer control point to present a single CDS object to the user, without necessarily presenting each variant of the same content.

This guideline will enable a UPnP AV MediaRenderer to have access to all <res> elements during content playback to select an alternative content variant that it can actually play back.

This guideline applies when the DMS can determine that content binaries contain the same content. The following are some examples of how multiple <res> elements can be used.

- The DMS acquired the content binaries in such a way that it knows that they are the same content.
- The DMS has transcoded locally stored content to other formats.
- The DMS advertises tuner-sourced content in multiple Media Format Profiles.
- The DMS has a single, locally stored file that is advertised with multiple Media Format Profiles, without any conversions.
- The DMS advertises the same video or image content (even when the Media Format Profile is the same) but in different resolutions.

This requirement does not require a DMS to determine whether separate, locally stored files contain actually the same content because this is difficult to do computationally and relying on embedded metadata is not always accurate. Furthermore, a DMS is not required to determine that content binaries uploaded through multiple upload AnyContainer or OCM: upload content operations requests comprise the same content.

This guideline is required because the MediaServer can always determine if it is providing a content transformation (Converted Content).

10.1.4.4.2

[GUIDELINE] A CDS object item marked as an object.item.imageItem or any of its derived classes shall contain at least one <res> element that represents an Image Media Class Mandatory Media Format Profile. Within the context of this guideline, the Image Media Class DLNA Mandatory Media Format Profiles shall be as defined in Guideline 6.2.1 (GUN 69K5T) in IEC 62481-2:2017

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	6RDIF	N

[COMMENT] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an Image Media Class Mandatory Media Format Profile to improve content playback interoperability.

10.1.4.4.3

[GUIDELINE] A CDS object item marked as an object.item.audioItem or any of its derived classes shall contain at least one <res> element that represents an Audio Media Class Mandatory Media Format Profile.

Within the context of this guideline the Audio Media Class DLNA Mandatory Media Format Profiles shall be as defined in guideline 6.2.3 (GUN Q77AY) in IEC 62481-2:2017

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	U7XHF	N

[COMMENTS] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an Audio Media Class Mandatory Media Format Profile to improve content playback interoperability.

10.1.4.4.4

[GUIDELINE] A CDS object item marked as an object.item.videoItem or any of its derived classes shall contain at least one <res> element that represents an AV Media Class Mandatory Media Format Profile.

Within the context of this guideline, the AV Media Class DLNA Mandatory Media Format Profiles shall be as defined in Guidelines 6.2.5.2 (GUN QOSMM), 6.2.5.3 (GUN FHMVO), 6.2.5.4 (GUN OMCJY), 6.2.5.5 (GUN ZV5D5) and 6.2.5.6 (GUN E6DI6) in IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	O6RKQ	N

[COMMENTS] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an AV Media Class Mandatory Media Format Profile to improve content playback interoperability.

10.1.4.4.5

[GUIDELINE] If the native content binary contains an HD video component, then a CDS object exposing AV Media Class content shall contain at least one <res> element that represents an HD Mandatory Media Format Profile as defined in Guidelines 6.2.5.3 (GUN FHMVO) and 6.2.5.5 (GUN ZV5D5) in IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	377QS	N

[COMMENT] This guideline mandates that a UPnP AV MediaServer expose an alternate <res> element in an HD Mandatory Media Format Profile for any HD native content so an HD mandatory variant is available to an HD Capable Device for rendering.

This is in addition to exposing the content in the Mandatory Media Format Profile as defined in 10.1.4.4.2

10.1.4.4.6

[GUIDELINE] If the native content binary contains a UHD video component, then a CDS object exposing AV Media Class content shall contain at least one <res> element that represents a

UHD Mandatory Media Format Profile as defined in Guideline 6.2.5.6 (GUN E6DI6) in IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	Y62MY	N

[COMMENTS]

- This guideline mandates that a UPnP AV MediaServer expose an alternate <res> element in an UHD Mandatory Media Format Profile for any UHD native content so a UHD mandatory variant is available to a UHD Capable Device for rendering.
- This is in addition to exposing the content in the Mandatory Media Format Profile as defined in 10.1.4.4.2.
- This is in addition to exposing the content in the HD Mandatory Media Format Profile as defined in 10.1.4.4.3.

10.1.4.4.7

[GUIDELINE] When a UPnP AV MediaServer is interacting with a UPnP AV MediaRenderer that belongs to the HND Device Category and is implemented to a version of the DLNA protocol before 4.0, a CDS object item marked as an object.item.audioitem or any of its derived classes shall contain at least one <res> element that conforms to the LPCM Audio Format Profile as defined in Guideline 8.5 of IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	LQURR	N

[COMMENT] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an Audio Media Class Media Format Profile supported by UPnP AV MediaRenderers that belong to the HND Device Category and implement to a version of the DLNA protocol before 4.0, to improve content playback interoperability.

10.1.4.4.8

[GUIDELINE] When a UPnP AV MediaServer is interacting with a UPnP AV MediaRenderer that belongs to the MHD Device Category and is implemented to a version of the DLNA protocol before 4.0, a CDS object item marked as an object.item.audioitem or any of its derived classes shall contain at least one <res> element that conforms to either:

- the MP3 Audio Format Profile as defined in Guideline 8.8 of IEC 62481-2:2017, or
- the AAC_ISO_320 Audio Format Profile as defined in Guideline 8.9 of IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	9TYS9	N

[COMMENT] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an Audio Media Class Media Format Profile supported by UPnP AV MediaRenderers that belong to the MHD Device Category and implement to a version of the DLNA protocol before 4.0, to improve content playback interoperability.

10.1.4.4.9

[GUIDELINE] When a UPnP AV MediaServer is interacting with a UPnP AV MediaRenderer that belongs to the HND Device Category and is implemented to a version of the DLNA protocol before 4.0, a CDS object item marked as an object.item.videoItem or any of its derived classes shall contain at least one <res> element that conforms to a Regional AV Format Profile as defined in Table 21 of IEC 62481-2:2017 for each geographical region supported by the UPnP AV MediaServer.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	N5NXN	N

[COMMENT] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an AV Media Class Media Format Profile supported by UPnP AV MediaRenderers that belong to the HND Device Category **[GUIDELINE]** and implement to a version of the DLNA protocol before 4.0, to improve content playback interoperability.

10.1.4.4.10

[GUIDELINE] When a UPnP AV MediaServer is interacting with a UPnP AV MediaRenderer that belongs to the MHD Device Category and is implemented to a version of the DLNA protocol before 4.0, a CDS object item marked as an object.item.videoItem or any of its derived classes shall contain at least one <res> element that conforms to the AVC_MP4_BL_CIF15_AAC_520 AV Format Profile as defined in Guideline 9.3 of IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	Y8N5X	N

[COMMENT] This guideline mandates that a UPnP AV MediaServer exposes an alternate <res> element in an AV Media Class Media Format Profile supported by UPnP AV MediaRenderers that belong to the MHD Device Category and implement to a version of the DLNA protocol before 4.0, to improve content playback interoperability.

10.1.4.4.11

[GUIDELINE] If a CDS Object contains multiple <res> elements, then the URI values shall be such that the UPnP AV MediaServer will correctly return the contentFeatures.dlna.org HTTP header (see 11.4.3.11.6) for each <res> element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	GRRKZ	N

[COMMENT] This is to prevent issues for content binaries that match multiple Media Format Profiles and expose a <res> element for each matching Media Format Profile. This can be accomplished by having unique URIs for each <res> element.

10.1.4.4.12

[GUIDELINE] A UPnP AV MediaServer, in addition to exposing a Mandatory Media Format Profile in a CDS object, may concurrently expose additional optional Media Format Profiles in the CDS object.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	Z4JR6	N

[COMMENT] This guideline is to provide implementation guidance that a single CDS object could contain additional DLNA Optional Media Format Profiles that could also be Converted Content (e.g. transcoded content).

10.1.4.5 MM DIDL-Lite Multiple Res: Transports

[GUIDELINE] A CDS object (identified through an <item> or <container> element) that has the same content available for different media transport protocols shall expose the content through multiple <res> elements.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	6YK54	

[COMMENT] See the comments in 10.1.4.4.1 for more information.

10.1.4.6 MM DIDL-Lite Content: Multiple points of reachability

10.1.4.6.1

[GUIDELINE] A UPnP AV MediaServer that does not receive the ALLIP value (case sensitive) as part of the Filter argument (in a CDS:Browse or CDS:Search request) shall return only the URIs that are associated with (or treated as or assumed to be routable from) the network interface that received the SOAP request.

URIs with domain names may appear in these types of SOAP responses, according to the rules specified in 10.1.3.10.

This guideline applies to URIs in <res>.

This guideline applies to any URI value that uses an IP network address, regardless of whether the content conforms to a DLNA Media Format Profile.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	YFH2V	

[COMMENT] These guidelines explain how a UPnP AV MediaServer is to handle the reporting of <res> elements when the UPnP AV MediaServer has multiple network interfaces.

Essentially, the default behaviour is that a UPnP AV MediaServer will only return <res> elements where the URIs are known (or assumed to be) routable from the network interface that received the request. However, if a UPnP AV MediaServer control point wants to receive URIs for all network interfaces, then the DMP can specify the ALLIP value as part of the Filter argument. In such a scenario, a UPnP AV MediaServer is obliged to return all of the <res> elements for all of the active network interfaces that the UPnP AV MediaServer uses for media transport.

Because the guidelines language uses the UPnP AV MediaServer of a given UDN, a UPnP AV MediaServer device that uses a different UDN for each network interfaces (equivalent to multiple UPnP AV MediaServers for a single UPnP AV MediaServer device) does not need to return the <res> elements that are accessible on a different network interface (e.g., res element found on a different logical UPnP AV MediaServer).

Annex C describes the subtleties of multiple network interfaces and the role of these guidelines in more detail.

10.1.4.6.2

[GUIDELINE] A UPnP AV MediaServer that receives the ALLIP value in the Filter argument of a CDS:Browse or CDS:Search request shall return all URIs associated with the UPnP AV MediaServer of a given UDN, regardless of whether the URI is thought to be routable from the network interface that received the SOAP request.

A UPnP AV MediaServer shall expose all URI values either through multiple <res> elements for each CDS object or multiple CDS objects. Please see Guidelines 10.1.4.6.3 and 10.1.4.6.4 for how all URI values are exposed through multiple <res> elements or multiple CDS objects.

URIs with domain names may appear in these types of SOAP responses, according to the rules specified in 10.1.3.10.

This guideline applies to URIs in <res>.

This guideline applies to any URI value that uses an IPv4 or IPv6 network address, regardless of whether the content conforms to a DLNA Media Format Profile.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	Z9GG5

10.1.4.6.3

[GUIDELINE] In conjunction with guideline 10.1.4.6.2, a UPnP AV MediaServer that receives the ALLIP value should return CDS objects with multiple <res> elements, such that some of these <res> elements are URI values that point to the same content available on different network interfaces.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	PAGPN

[COMMENT] This guideline allows a UPnP AV MediaServer to report content availability on multiple networks through multiple <res> elements. The presence of multiple <res> elements is still governed by 10.1.4.6.2.

10.1.4.6.4

[GUIDELINE] A UPnP AV MediaServer that does not receive the ALLIP value (possibly with other filter values, including the asterisk, *, value) may return CDS objects with zero or more <res> elements.

Note that it is generally true that a UPnP AV MediaServer may return CDS objects with zero or more <res> elements.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	UW9OG	

[COMMENT] Although it is implied that a UPnP AV MediaServer is not required to provide a <res> element for a CDS object, this guideline states it explicitly. This guideline allows implementations that rely on multiple CDS objects (instead of multiple <res> elements to represent different versions of the same content) to comply with 10.1.4.6.1.

10.1.4.6.5

[GUIDELINE] A UPnP AV MediaServer that receives the ALLINTIP value in the Filter argument of a CDS:Browse or CDS:Search request shall return all URIs (both IPv4 and IPv6) associated with the network interface of the UPnP AV MediaServer that received the SOAP request.

A UPnP AV MediaServer shall expose all URI values through multiple <res> elements for each CDS object.

URIs with domain names may appear in these types of SOAP responses, according to the rules specified in 10.1.3.10.

This guideline applies to URIs in <res>.

This guideline applies to any URI value that uses an IPv4 or IPv6 network address, regardless of whether the content conforms to a DLNA Media Format Profile.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	BO8OX	N

[COMMENT] This guideline introduces a new Filter argument, ALLINTIP that is designed to support IPv6 URIs. A DMS will respond with IPv6 URIs associated with a network interface in addition to any IPv4 URIs associated with the same network interface when it receives the ALLINTIP Filter argument in a CDS:Browse or CDS:Search request. This functionality is being implemented to protect legacy IPv4-only devices from receiving IPv6 URIs that may not be supported.

This ALLINTIP filter differs from the ALLIP filter in that the ALLINTIP filter is relevant to a single network interface whereas the ALLIP filter is applicable to all network interfaces on a device. IPv6 support brings with it the new concept of network interfaces now supporting multiple IP addresses. This was not the case with IPv4 in which multiple IPv4 addresses referencing the

same element in URIs implied a single UPnP MediaServer instance was functioning on multiple network interfaces.

The inclusion of other values in a filter argument such as an asterisk *, are not prohibited when the ALLINTIP filter is present, but these arguments would typically not be used in conjunction with this new Filter argument.

10.1.4.6.6

[GUIDELINE] If the DMC negotiates an IPv6 address for UPnP Communications with a DMS, the DMC shall use an IPv6 address for UPnP Communication with a DMR.

[ATTRIBUTES]

M	A	DMC	M-DMC	n/a	ISO/IEC 29341-20-12: 2016	AHGDQ	N

[COMMENT] In a 3-box system usage, the DMC is responsible for negotiating the address family needed to communicate between the DMS and the DMR. If the DMC determines that the DMS is only reachable using an IPv6 address, it shall attempt UPnP Communications with the DMR using an IPv6 address to support communication between the DMS and DMR. If the DMR is not accessible using an IPv6 address, then it is not possible to provide a URI to the DMR.

10.1.4.6.7

[GUIDELINE] If the DMC negotiates an IPv6 address for UPnP Communications with a DMR, the DMC shall use an IPv6 address for UPnP Communication with a DMS.

[ATTRIBUTES]

M	A	DMC	M-DMC	n/a	ISO/IEC 29341-20-12: 2016	93PGX	N

[COMMENT] In a 3-box system usage, the DMC is responsible for negotiating the address family needed to communicate between the DMS and the DMR. If the DMC determines that the DMR is only reachable using an IPv6 address, this guideline ensures that the DMC will perform UPnP Communications with the DMS using an IPv6 address to support communication between the DMS and DMR. This guideline overrides the default guideline to prefer IPv4 over IPv6 for UPnP Communications (9.2.1.6). If the DMS is not accessible using an IPv6 address, then it is not possible to provide a URI to the DMR.

10.1.4.6.8

[GUIDELINE] When communicating with a DMR, the DMC's UPnP control point shall only send URIs containing IP addresses that are consistent with the IP address used for UPnP communication between the DMC and DMR.

[ATTRIBUTES]

M	A	DMC	M-DMC	n/a	ISO/IEC 29341-20-12: 2016	ER848	N

[COMMENT] This guideline adds support for the IPv6 Connectivity function in a 3-box usage. The DMC in this usage needs to verify that the URIs being sent to the DMR contain an IP address that is reachable by the DMR.

10.1.4.6.9

[GUIDELINE] Rendering and Serving Endpoints shall use the <lna:X_DLNA:CAP> element in the Device Description Document (as a child of the <device> element that represents the MediaRenderer or MediaServer Device) and include a Capability ID value of "IPv6" as described in 9.2.35.1 if they support the IPv6 Connectivity Device Function.

[ATTRIBUTES]

M	A	DMS DMR	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	PZZ8R	N

10.1.4.6.10

[GUIDELINE] If a UPnP AV MediaServer receives a CDS:Search or CDS:Browse action, and the action does not include the ALLIP or ALLINTIP filter parameter, then the response shall only include URIs using the same IP address family (and for IPv6, the same IPv6 prefix) as was used to invoke the UPnP action.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	E5599	N

[COMMENT] This means that when browsing a DMS using IPv4, it only returns IPv4 addresses, and when browsing a DMS using IPv6, it only returns IPv6 addresses, unless the request includes the ALLIP or ALLINTIP filter parameters.

10.1.4.6.11

[GUIDELINE] A UPnP AV MediaRenderer that supports the IPv6 Connectivity Device Function shall tolerate URIs with IPv4 and IPv6 addresses regardless of which IP address family is used when invoking an AVTransport service action.

[ATTRIBUTES]

M	A	DMR		n/a	ISO/IEC 29341-20-12: 2016	R9PO2	N

[COMMENT] This means that when a DMR receives a SetAVTransportURI request or a SetNextAVTransportURI request, it shall tolerate IPv6 URIs even if the request was received over IPv4, and vice versa.

10.1.4.7 MM DIDL-Lite Multiple Res: thumbnails**10.1.4.7.1**

[GUIDELINE] If a UPnP AV MediaServer exposes a CDS object with a <upnp:class> designation of object.item.imageItem (or any class derived from it), then the UPnP AV MediaServer should provide a <res> element for the thumbnail resource (multiple thumbnail <res> elements are also allowed).

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	UPXML	

[COMMENT] UPnP AV MediaServer devices that implement thumbnail support reduce the network load for themselves and for control points that display thumbnails to the user.

10.1.4.7.2

[GUIDELINE] If a UPnP AV MediaServer exposes a CDS object with a <upnp:class> designation of object.item.videoItem (or any class derived from it), then the UPnP AV MediaServer should provide a <res> element for the thumbnail resource (multiple thumbnail <res> elements are also allowed).

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	RZQRD	

10.1.4.7.3

[GUIDELINE] If a UPnP AV MediaServer exposes thumbnail images for image or video content, then a UPnP AV MediaServer shall provide a thumbnail that conforms to Guideline 7.1.7 (GUN 6SXDY) in IEC 62481-2:2017 Media Format Profile and be declared with the JPEG_TN designation in the fourth field of the res@protocolInfo attribute.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	Y23HQ	

[COMMENT] When thumbnails are provided, the minimal expectation is to provide JPEG thumbnails. However vendors can also provide additional thumbnails using the JPEG_TN or PNG_TN profiles.

10.1.4.7.4

[GUIDELINE] If a UPnP AV MediaServer exposes thumbnail images for image or video content, then a UPnP AV MediaServer may provide additional <res> elements for thumbnail images.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	7V6GS	

10.1.4.7.5

[GUIDELINE] A UPnP A/V Media Server shall not expose a <res> element with a thumbnail Media Format Profile ID (i.e. JPEG_TN, PNG_TN), without exposing at least one additional <res> element that is not one of the thumbnail Media Format Profile IDs.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	O4VF4	

[COMMENT] Thumbnails are designed to augment other content items of any Media Class (Audio, AV, or Images) which can include non-DLNA content. They are not meant to represent standalone images.

Images that will not be used as thumbnails but which match the thumbnail resolution will preferably be exposed using the appropriate smallest image Media Format Profile ID (e.g. JPEG_SM).

10.1.4.7.6

[GUIDELINE] If an UPnP AV MediaServer exposes video content, then the <item> element that describes the video content may include zero or more <res> elements that reference companion images of any size.

[ATTRIBUTES]

O	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	RL6MB	

[COMMENT] UPnP AV MediaServers that expose a video item can include in the <item> element zero or more <res> elements referencing companion images that provide additional descriptive information. Examples of companion images include larger versions of thumbnails, posters describing a movie, and others.

10.1.4.8 MM DIDL-Lite AudioItem album art**10.1.4.8.1**

[GUIDELINE] If a UPnP AV MediaServer exposes a CDS object with a <upnp:class> designation of object.item.audioItem or object.container.album.musicAlbum (or any class derived from either class), then the UPnP AV MediaServer should provide a <upnp:albumArtURI> element to present the URI for the album art.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	ZVDY7	

[COMMENT] Unlike image or video content, thumbnails for audio content will preferably be presented through the <upnp:albumArtURI> element.

10.1.4.8.2

[GUIDELINE] If a UPnP AV MediaServer exposes one or more <upnp:albumArtURI> elements for a single CDS object, then at least one of the URI values should point to thumbnail album art conforming to Guideline 7.1.7 (GUN 6SXDY) in IEC 62481-2:2017.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	YXRZ4	

[COMMENT] If album art thumbnails are provided, the desired expectation is to have JPEG thumbnails. Additional thumbnails can also be provided.

10.1.4.8.3

[GUIDELINE] If a UPnP AV MediaServer exposes a <upnp:albumArtURI> element with a URI pointing to a thumbnail conforming to a DLNA Media Format Profile, then the <upnp:albumArtURI> shall have the albumArtURI@dlna:profileID attribute that identifies the DLNA profile ID of the thumbnail.

The namespace for DLNA defined properties shall be "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix shall be "dlna:".

EXAMPLE:

```
<upnp:albumArtURI dlna:profileID="JPEG_TN"
  xmlns:dlna="urn:schemas-dlna-org:metadata-1-0/">
  http://192.168.1.1/album/albumArt1.jpg
</upnp:albumArtURI>
```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	XRZ4Y	

[COMMENT] This guideline allows control points a convenient way to identify thumbnails that conform to a DLNA Media Format Profile.

10.1.4.9 MM IFO file

10.1.4.9.1

[GUIDELINE] If a UPnP AV MediaServer exposes a content binary profiled according to MPEG-2 AV Format, Usage of Profile IDs, Profiles: MPEG_PS_NTSC and MPEG_PS_PAL, IEC 62481-2:2017, (MPEG_PS_NTSC or MPEG_PS_PAL profiles), then the UPnP AV MediaServer shall either ensure that there are no SCR and/or PTS discontinuities (as defined in 10.1.4.9.8) or generate an IFO file if it detects discontinuity.

Note that this guideline does not apply in the scenario where a DMS exposes a content binary that was imported by the DMS, except when such content is received from a DLNA source.

All guidelines in 10.1.4.9 do not apply in scenarios involving URIs and/or <res> elements for RTP Media Transport because RTP encapsulation and padding make the offsets in the IFO file inaccurate.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	VDY7V	

[COMMENT] Some decoders cannot handle the SCR/PTS discontinuous PS stream without proper additional decoder-specific control. This guideline provides the method that allows the DMP to obtain the information about the SCR/PTS discontinuous regions in programme stream-profiled content.

The following are examples of content where a UPnP AV Media Server needs to comply with this guideline when exposing such content.

- A DMS application running on an open platform, such as a PC, that directly records, generates, or edits content.

The following are examples of content where a UPnP AV Media Server does not have to comply with this guideline when exposing such content:

- A DMS application running on an open platform, such as a PC, that receives or copies content from a non-DLNA source (e.g. Internet)
- A DMS application running on an open platform, such as a PC, which has other separate applications that record, create, or edit content or that import content from non-DLNA sources (e.g. Internet).

Although the above comments give examples where this guideline does not apply, it is still strongly encouraged that vendors provide IFO files in all cases when exposing mandatory format profiles as specified in IEC 62481-2:2017 that have a discontinuity.

10.1.4.9.2

[GUIDELINE] If a UPnP AV MediaServer exposes a content binary profiled according to MPEG_PS_NTSC or MPEG_PS_PAL profiles (IEC 62481-2:2017), along with an associated IFO file, then it shall also expose the IFO file through the res@dlina:ifoFileURI attribute to present the URI for the IFO file as defined in 10.1.4.9.9.

The namespace for DLNA defined properties is "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix is "dlna:".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-3-2 IEC 62481-2: 2017	4VF4V	

10.1.4.9.3

[GUIDELINE] If a Push Controller serves a content binary profiled according to MPEG_PS_NTSC or MPEG_PS_PAL profiles (IEC 62481-2:2017), along with an associated IFO file, directly to a UPnP AV MediaRenderer, then the Push Controller shall include the res@dlina:ifoFileURI attribute in the CurrentURIMetaData input argument for the AVT:SetAVTransportURI request as defined in 10.1.6.8.3. The res@dlina:ifoFileURI attribute contains the URI for the IFO file as defined in 10.1.4.9.9.

The namespace for DLNA defined properties is "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix is "dlna:".

[ATTRIBUTES]

M	A	+PU+	n/a	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-3-2 IEC 62481-2: 2017	LQ8HI

10.1.4.9.4

[GUIDELINE] If a UPnP AV MediaServer exposes a content binary profiled according to MPEG_PS_NTSC or MPEG_PS_PAL profiles (IEC 62481-2:2017), without SCR or PTS discontinuities, the UPnP AV MediaServer may provide a res@dlna:ifoFileURI attribute to present the URI for the IFO file as defined in 10.1.4.9.9.

The namespace for DLNA defined properties is "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix is "dlna:".

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-3-2 IEC 62481-2: 2017	V6GS6

[COMMENT] An IFO file can contain other metadata which might be useful to the Rendering Endpoint.

10.1.4.9.5

[GUIDELINE] If a Push Controller serves a content binary, profiled according to MPEG_PS_NTSC or MPEG_PS_PAL profiles (IEC 62481-2:2017), without SCR or PTS discontinuities, directly to a MediaRenderer, then the Push Controller may include the res@dlna:ifoFileURI attribute in the CurrentURIMetaData input argument for the AVT:SetAVTransportURI request as defined in 10.1.6.8.3. The res@dlna:ifoFileURI attribute contains the URI for the IFO file as defined in 10.1.4.9.9.

The namespace for DLNA defined properties is "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix is "dlna:".

[ATTRIBUTES]

O	A	+PU+	n/a	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-3-2 IEC 62481-2: 2017	PAHZ5	

10.1.4.9.6

[GUIDELINE] If an IFO file is provided for a MPEG_PS_NTSC or MPEG_PS_PAL profiled content binary via an associated res@dlna:ifoFileURI attribute and/or the transport layer (such as described in 11.4.3.12), Rendering Endpoints shall render the content item even if the MPEG stream contains discontinuous SCR and/or PTS.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	23HQ6	

[COMMENT] If a MediaServer does not provide an IFO file (e.g. res@dlna:ifoFileURI is omitted) and a content binary, profiled according to MPEG-2 AV Format, usage of Profile IDs, Profiles: MPEG_PS_NTSC and MPEG_PS_PAL, IEC 62481-2:2017, has discontinuities, then the Rendering Endpoint can choose not to render the content binary.

10.1.4.9.7

[GUIDELINE] If a Rendering Endpoint attempts to render a content binary that is profiled according to MPEG-2 AV Format, usage of Profile IDs, Profiles: MPEG_PS_NTSC and MPEG_PS_PAL, IEC 62481-2:2017 that has discontinuities and no IFO file is available, then the Rendering Endpoint shall gracefully recover from the failure condition caused by any discontinuity.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IEC 62481-2: 2017	ZQRDX	

10.1.4.9.8

[GUIDELINE] An SCR or PTS discontinuity is defined as the occurrence of one of the following conditions in an MPEG2 PS (IEC 62481-2:2017) content binary.

Condition1:

If $SCR(0) + SCRMaxValue - SCR(-1) \leq 0.7$ (to cover wrap-around case)
 $SCR(0) + SCRMaxValue < SCR(-1) + PackDuration$
 Otherwise $SCR(0) < SCR(-1) + PackDuration$

Or

Condition2:

If $PTS(-1) > PTS(0)$ (to cover wrap-around case)
 $PTS(0) + PTSMaXValue - PTS(-1) > 0.61sec$
 Otherwise $PTS(0) - PTS(-1) > 0.61sec$

where

- SCR(0) is the SCR of the current pack.
- SCR(-1) is the SCR of the preceding pack.
- SCRMaxValue is $2^{32} * 300$
- PackDuration is $\text{int}((\text{PackSize} * 27000000) / (\text{program\_mux\_rate} * 50)) = \text{int}((2048 * 27000000) / (25200 * 50)) = 43885$
- PTS(0) is the PTS of the first picture of current GOP.
- PTS(-1) is the PTS of the first picture of preceding GOP.
- PTSMaxValue is 2^{32}

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	ISO/IEC 13818-1:2000 ISO/IEC 13818-9	PXMLN

[COMMENT] ISO/IEC 13818-1:2000, 2.7.1, gives the following definition:

"The Programme Stream shall be constructed such that the time interval between the bytes containing the last bit of system_clock_refrence_base fields in successive packs shall be less than or equal to 0,7 s."

SCR_base and PTS are limited to 32 bits in the guideline.

All the mathematical equations on calculating SCR/PTS discontinuity are expected to be performed using unsigned integer arithmetic as described in 2.4.3.7 of ISO/IEC 13818-1:2000.

10.1.4.9.9

[GUIDELINE] If a UPnP AV MediaServer provides an IFO file, then the URI of the IFO file shall be specified.

IFO file URIs are governed by guidelines in 10.1.3.10, except that the maximum length for an IFO file URI is 900 B.

Example:

```
<res protocolInfo="http-get:*:video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC"
duration="02:45:00" dlna:ifoFileURI="http://192.168.0.1:8080/IFO_101.ifo"
xmlns:dlna="urn:schemas-dlna-org:metadata-1-0/">
  http://192.168.0.1:8080/MPEG/ntsc001.mpg
</res>
```

In this case , the URI of the IFO file is http://192.168.0.1:8080/IFO_101.ifo

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	W9OGW

[COMMENT] Content Receivers can get the IFO file by issuing HTTP GET requests using this URI. The reason for a shorter IFO file URI is because they are included in HTTP headers where the length is constrained.

10.1.4.10 MM CDS Browse/Search action: Filter argument**10.1.4.10.1**

[GUIDELINE] A UPnP AV MediaServer shall respond to a CDS:Browse or CDS:Search request with the following five metadata properties in the DIDL-Lite response, even if the metadata properties are not specified in the Filter argument of a CDS:Browse or CDS:Search request:

- @id
- @parentID
- @restricted
- dc:title
- upnp:class

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	AGPNV	

[COMMENT] The Filter argument of the CDS:Browse and CDS:Search action instructs a UPnP AV MediaServer ContentDirectory to return only the specified metadata properties in the DIDL-Lite response of the Result output argument. This guideline clarifies that some metadata properties are required to be present even if they are not specified in the Filter argument.

10.1.4.10.2

[GUIDELINE] If an element of metadata property is specified, then the required attributes of the metadata element shall be presented.

For example:

- If a control point specifies "res" in the Filter, then res@protocolInfo is returned.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	9GG5U	

10.1.4.10.3

[GUIDELINE] A UPnP AV MediaServer control point should explicitly specify the desired metadata properties in the Filter input argument of a CDS:Browse or CDS:Search request.

[ATTRIBUTES]

S	R	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	FH2V5	

[COMMENT] This guideline recommends control points to limit the requested metadata to only the metadata that will be used by the control point. A Filter value of asterisk "*" will likely cause the UPnP AV MediaServer to send more metadata than what the control point can actually use.

10.1.4.10.4

[GUIDELINE] A UPnP AV MediaServer in conjunction with 10.1.4.10.1 and 10.1.4.10.7, shall not return metadata properties unless specified in the Filter argument.

For example:

- If a control point does not specify res@importUri in the Filter, then it is not returned.

Note that having an attribute property in the Filter automatically requires the MediaServer to return the element to which the attribute belongs.

For example:

- If the control point specifies res@importUri (without "res"), then the "res" is also returned.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	YK54Y	

10.1.4.10.5

[GUIDELINE] A UPnP MediaServer shall return DLNA metadata (i.e. attributes or elements with the dlna: prefix) only when the Filter argument indicates a request for the particular DLNA attribute(s) or element(s).

An "*" indicates a request for all attributes and elements.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-3	K54YH	

[COMMENT] This behaviour is required by the ContentDirectory specification and is consistent with the guideline 10.1.4.10.4. **[GUIDELINE]**

Guidelines that require DLNA-defined metadata do not overrule underlying rules specified by the UPnP AV ContentDirectory service.

For example, guideline 10.1.4.8.3 requires albumArtURI@dlna:profileID, but a MediaServer only includes albumArtURI@dlna:profileID in a response when the Filter argument indicates a request for it.

10.1.4.10.6

[GUIDELINE] A UPnP MediaServer should declare the dlna: namespace (i.e. "urn:schemas-dlna-org:metadata-1-0/") only when the Filter argument indicates a request for one or more DLNA attributes or elements and one or more DLNA attributes are included in the DIDL-Lite response.

An "*" indicates a request for all attributes and elements.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-3	H2V52	

[COMMENT] This guideline reduces the computational requirements of control points that employ validating schemas.

Although some guidelines require DLNA-defined elements and attributes in certain situations, the DLNA schema does not play a syntax enforcement role as all DLNA-defined elements and attributes are considered optional from the schema's perspective.

For example, guideline 10.1.4.8.3 albumArtURI@dlina:profileID when the associated URI points to an image that is compliant to a DLNA Media Format Profile. Since it is impossible for the DLNA schema to determine if a URI points to a DLNA Media Format Profile, the albumArtURI@dlina:profileID is considered optional attribute (from a schema perspective) even though it is required from a guidelines perspective.

10.1.4.10.7

[GUIDELINE] A UPnP AV MediaServer should respond to a CDS:Browse or CDS:Search request with any additional mandatory metadata properties above those required in requirement 10.1.4.10.1 in the DIDL-Lite response when required by the value in the upnp:class property or derived classes for that value, even if the metadata properties are not specified in the Filter argument of a CDS:Browse or CDS:Search request.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	FVTKX	

[COMMENT] The UPnP CDS specification ISO/IEC 29341-20-3 defines some additional classes through the upnp:class property that contains mandatory CDS properties above the 5 required in requirement 10.1.4.10.1. For example, there are derived classes of object.container that increases the number of required properties beyond the 5 basic properties defined in 10.1.4.10.1 as follows:

- upnp:class property value of object.container.storageSystem defines 5 additional required properties;
- upnp:class property value of object.container.storageVolume defines 4 additional required properties;
- upnp:class property value of object.container.storageFolder defines 1 additional required property.

This guideline is recommended rather than mandatory to maintain interoperability with implementations prior to this guideline addition, but provides new implementations to be forward-looking with this new recommendation.

10.1.4.11 MM CDS Browse/Search action: Reduced response behaviour

10.1.4.11.1

[GUIDELINE] A UPnP AV MediaServer device may reduce the number of CDS objects (<item> and <container> elements) in a response to a CDS:Browse or CDS:Search for the following scenarios only.

- The transmission of a SOAP response with a huge byte length (> 204 800 B).
- The transmission of a SOAP response that exceeds 30 s for the transmission time.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	GG5U7	

[COMMENT] This guideline allows a UPnP AV MediaServer to limit the number of CDS objects returned in the SOAP response, even if the control point specified a desire for more CDS objects in the RequestedCount input argument. The reason for permitting such behaviour is to allow UPnP AV MediaServer implementations to comply with other guidelines: 9.2.15 and 9.2.9.

10.1.4.11.2

[GUIDELINE] The number of CDS object entries (total <item> and <container> elements) in the Result output argument (containing the DIDL-Lite metadata) shall match the value specified in the NumberReturned output argument.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	GPNVY	

[COMMENT] This guideline will be followed, even if a UPnP AV MediaServer reduces the number of CDS objects returned in the SOAP response.

10.1.4.11.3

[GUIDELINE] If a UPnP AV MediaServer device reduces the number of CDS objects in a CDS:Browse(BrowseDirectChildren) or CDS:Search response then the number of returned CDS objects (as parsed in Result) shall be equal to the value of NumberReturned, which is less than RequestedCount.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	9OGWH	

[COMMENT] A UPnP AV MediaServer that limits the number of CDS objects is obliged to return a NumberReturned value that is consistent with the RequestedCount input argument.

10.1.4.11.4

[GUIDELINE] If a UPnP AV MediaServer control point uses a CDS:Browse with the BrowseMetadata option, then it shall use a RequestedCount of 0 or 1 and StartingIndex of 0.

This guideline does not apply to an Upload Controller that only implements the CDS:CreateObject action for only the upload AnyContainer operation.

[ATTRIBUTES]

M	L	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	QRDX5	C

[COMMENT]

- a) Improves expectations for CDS:Browse scenarios with BrowseMetadata.
- b) An Upload Controller (+UP+) is not obliged to implement the CDS:Browse action when only implementing the upload AnyContainer operation.

10.1.4.11.5

[GUIDELINE] A UPnP AV MediaServer device shall always return one CDS object (as indicated in TotalMatches and Result) when successfully responding to a CDS:Browse request with the BrowseMetadata option, regardless of the RequestedCount value.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	3HQ6W	

10.1.4.11.6

[GUIDELINE] If the UPnP AV MediaServer device returns more than zero CDS objects in a response to a CDS:Browse or CDS:Search query and if the UPnP AV MediaServer device does not provide an accurate value for the TotalMatches output argument, then the TotalMatches output value shall be set to zero.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	6GS6Q	

[COMMENT] This guideline allows control points to conclude that a TotalMatches == 0 condition indicates that the UPnP AV MediaServer could not accurately calculate the value in cases where the UPnP AV MediaServer actually returned CDS objects.

Although some UPnP AV MediaServer implementations might choose to report the accurate TotalMatches value, at the expense of violating the 30 s timeout rule, DLNA does not encourage that implementation option. The 9.2.9 guideline indicates that a control point is permitted to terminate a SOAP response that exceeds a 30 s transmission time.

10.1.4.11.7

[GUIDELINE] If a UPnP AV MediaServer device cannot find more than zero CDS objects (in 27 s, as described in 9.2.9.2), for a response to a CDS:Browse or CDS:Search query and if the UPnP AV MediaServer cannot calculate an accurate value for the TotalMatches output argument, then the UPnP AV MediaServer should return a SOAP error response code of 720 (Cannot process the request).

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	VF4V2	

[COMMENT] This guideline covers the scenario where a UPnP AV MediaServer can neither find any CDS objects that satisfy the query nor calculate the TotalMatches output argument accurately. Although some UPnP AV MediaServer implementations might choose to report the accurate TotalMatches value, at the expense of violating the 27 s timeout rule, such behaviour is not encouraged for the same reason stated in the previous guideline.

10.1.4.11.8

[GUIDELINE] A UPnP AV MediaServer control point should specify the desired number of CDS objects in the RequestedCount input argument of a CDS:Browse or CDS:Search query.

[ATTRIBUTES]

S	C	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	DY7V3	

[COMMENT] This guideline recommends control points to request a reasonable number of CDS objects in a single CDS query. The number of CDS objects that can be displayed to the user at a single time is a good measure of reasonableness. Using a RequestedCount of zero might cause the transmission of a huge SOAP response, which is undesirable.

10.1.4.11.9

[GUIDELINE] A UPnP AV MediaServer control point should specify smaller (about 10 to 30) RequestedCount input values for CDS:Browse and CDS:Search requests to receive a faster response time.

[ATTRIBUTES]

S	C	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	RZ4YU	

[COMMENT] Generally speaking, control points that specify smaller RequestedCount values will receive the response from the device sooner than if a larger value were specified.

10.1.4.11.10

[GUIDELINE] A UPnP AV MediaServer control point shall not assume that a UPnP MediaServer will return all of the CDS objects requested in a Browse request.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	Z4YU4	

[COMMENT] This places requirements on an AV MediaServer control point to not assume that its Browse request will return all of the CDS objects it requested.

10.1.4.11.11

[GUIDELINE] If a UPnP AV MediaServer control point wants to retrieve the remaining items in a reduced response, the UPnP AV MediaServer control point shall issue additional Browse requests to complete the original Browse request for CDS objects.

[ATTRIBUTES]

M	R	DMP DMC +DN+ +UP+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	Y7V3Y	

10.1.4.12 MM Container Update IDs event

[GUIDELINE] UPnP AV MediaServer devices should implement behaviour for the CDS.ContainerUpdateIDs state variable.

[ATTRIBUTES]

S	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	F4V2V	

[COMMENT] This guideline is a benefit to both devices and control points, although lightweight UPnP AV MediaServer ContentDirectory Service (CDS) implementations might have difficulty implementing it. The rationale for this guideline stems from the fact that UPnP AV MediaServer control points can rely on the CDS.ContainerUpdateIDs state variable to minimize the number of CDS:Browse requests. A control point that relies solely on the CDS.SystemUpdateID state variable will browse the entire CDS hierarchy. Use of the CDS.ContainerUpdateIDs state variable can limit the browse requests to the container objects that observed the metadata changes.

10.1.4.13 MM Search capabilities**10.1.4.13.1**

[GUIDELINE] A UPnP AV MediaServer shall implement CDS:Search with support for search queries with the following metadata properties:

- dc:title
- upnp:class
- res@protocolInfo
- @refID
- @parentID
- @id

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	GS6QV	

[COMMENT] This guideline mandates support for CDS:Search and describes the search capabilities for a UPnP AV MediaServer that supports search operations.

10.1.4.13.2

[GUIDELINE] All searchable properties shall be listed in the return value of CDS:GetSearchCapabilities if the device implements CDS:Search.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	HQ6WO	

[COMMENT] This guideline mandates that supported search properties be discoverable.

10.1.4.13.3

[GUIDELINE] If a UPnP AV MediaServer supports CDS:Search for an indicated property or a property with an indicated type, then it shall minimally support the operators as indicated in Table 17 for the specified property types. Note that rows in the table are not additive.

Table 17 – CDS:Search minimum support of operators

Property	Operators
@id	=, exists
@refID	=, exists
@parentID	=, exists
upnp:class	=, derivedfrom, exists
Any date, time, duration-based property types	<, <=, >=, >, =, !=, exists
All other string-based property types other than those listed in previous table entries	contains, =, exists
All URI-based property types	contains, =, exists
Integer or numerical property types	<, <=, >=, >, =, !=, exists
Boolean-based property types	=, !=, exists
All other attributes and elements	exists

Vendors are free to apply additional CDS-normative operators for these properties or property types.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	RDX57	

[COMMENT] This guideline specifies the minimum behaviour and capabilities for various query operators.

Vendors cannot change (override) the default behaviour of these required operations as specified; but additions of standard operators are allowed.

The existing operator only allows a value of "true" or "false" and those values are not quoted when used.

- VALID: @refID exists false
- INVALID: @refID exists 0
- INVALID: @refID exists "false"

10.1.4.13.4

[GUIDELINE] If a UPnP AV MediaServer reports a searchable property for a particular data type, then a UPnP AV MediaServer shall implement the associated operators for that data type.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	MLNQA	

[COMMENT] For example, if a UPnP AV MediaServer reports its search capabilities to be only dc:title, then it only needs to implement the exists, contains, and = operators.

10.1.4.13.5

[GUIDELINE] In response to a CDS:Search action, a UPnP AV Media Server may return CDS objects that represent content binaries that cannot be identified as a DLNA Mandatory Media Format Profile or converted in to a DLNA Mandatory Media Format Profile.

[ATTRIBUTES]

O	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	3JW2N	N

[COMMENT]

- 1) This guideline provides a method for UPnP AV MediaServers to expose content that is not accessible by the normal CDS:Browse due to 10.1.4.3.
- 2) A UPnP AV MediaServer control point can override this behaviour (as defined in 10.1.4.13.6) as mandated by a combination of 10.1.4.13.1 and 10.1.4.13.3.

10.1.4.13.6

[GUIDELINE] If a UPnP AV MediaServer control point only supports DLNA Media Format Profiles, then it shall include 'upnp:res@protocolInfo contains "DLNA.ORG_PN"' in the SearchCriteria argument when invoking CDS:Search action.

[ATTRIBUTES]

M	R	DMP DMC	M-DMP	n/a	ISO/IEC 29341-20-12: 2016	GB5KZ	N

[COMMENT] This ensures that the UPnP AV MediaServer will only return content that is in a DLNA Media Format Profile in response to a CDS:Search request, as with CDS:Browse.

10.1.4.14 MM Search all CDS Objects for a Media Class

10.1.4.14.1

[GUIDELINE] A UPnP AV MediaServer that implements the CDS:Search action should support the search with the following input parameters.

- ContainerID: 0
- SearchCriteria: upnp:class derivedfrom "[a upnp class for a supported Media Class]" and @refID exists false.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	OGWHP

[COMMENT] A ContentDirectory service can expose CDS objects in different collections, such as, lists by genres, lists by artists, lists of favorite items, etc. In such cases, reference items, which have @refID are used to represent CDS items that are references to other CDS items in the CDS hierarchy.

In some use case scenarios, a UPnP AV MediaServer control point wants to locate a set of CDS objects, excluding their duplicate references. For example, a UPnP AV MediaServer control point regenerates another presentation of CDS objects by using metadata properties of CDS objects. In this case, this search can be used.

Live AV and audio tuner content are also located by searching for object.item.videoItem.videoBroadcast and object.item.audioItem.audioBroadcast (and their derived classes). Note that the search results do not include the CDS container (i.e. ContainerID) that was specified in the request.

10.1.4.14.2

[GUIDELINE] If the UPnP AV MediaServer supports a DLNA Media Class, it shall support a corresponding object class as indicated in Table 18.

Table 18 – UPnP:class for searching all CDS objects

Media Class	upnp:class value
Audio	object.item.audioItem
Image	object.item.imageItem
AV	object.item.videoItem

The following is an example to search all video items which are stored in the ContentDirectory service.

request:

```
Search( "0", "upnp:class derivedfrom \"object.item.videoItem\" and @refID exists false",
"dc:date,upnp:genre,res@duration", 0, 40, "" )
```

response:

```

Search("<DIDL-Lite xmlns:dc=\"http://purl.org/dc/elements/1.1/\"
xmlns:upnp=\"urn:schemas-upnp-org:metadata-1-0/upnp/\"
xmlns=\"urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/\">
<item id=\"10\" parentID=\"4\" restricted=\"0\">
  <dc:title>Desire stones</dc:title>
  <dc:date >2004-07-04T20:00:00</dc:date>
  <upnp:genre>Movie</upnp:genre>

<upnp:class>object.item.videoItem</upnp:class>
<res protocolInfo=\"http-get:*:
video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_FLAGS=01100000000000000000000000000000
\" duration=\"0:59:53\">http://192.168.1.1/res?id=10
  </res>
</item>
  <item id=\"13\" parentID=\"12\" restricted=\"0\">
    <dc:title>Music Street in Asia</dc:title>
    <dc:date>2004-07-04T23:30:00</dc:date>
    <upnp:genre>Music</upnp:genre>

<upnp:class>object.item.videoItem</upnp:class>
  <res protocolInfo=\"http-get:*:
video/mpeg:DLNA.ORG_PN=MPEG_PS_NTSC;DLNA.ORG_FLAGS=01100000000000000000000000000000
\" duration=\"0:29:54\">http://192.168.1.1/res?id=13</res>
  </item>
</DIDL-Lite>\",
2, 2, 10434)

```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	PNVYT

10.1.4.14.3

[GUIDELINE] UPnP AV MediaServer responses for CDS:Search should only list CDS containers once. Duplicate CDS containers should be omitted from the results set.

Duplicate CDS containers are CDS containers that provide the same set of child CDS items.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	G5U7Z

[COMMENT] Duplicate CDS containers can be implemented in a ContentDirectory service that exposes the same content in different groupings.

For example, a music library can expose the same set of music tracks in two different CDS containers. In this example, the CDS containers could have a hypothetical path from the root as follows:

"0" => "All Albums" => "The Doors Greatest Hits"

"0" => "All Artists" => "The Doors" => "The Doors Greatest Hits"

This guideline recommends the MediaServer to return either of these containers rather than both of them in the CDS:Search response where the SearchCriteria is "upnp:class derivedfrom \"object.container.musicAlbum\"".

10.1.4.14.4

[GUIDELINE] The UPnP AV MediaServer that supports the recommended search criteria of guideline 10.1.4.14.1 shall return a SearchCaps output value (from CDS:GetSearchCapabilities) that includes upnp:class and @refID.

Example:

- request: GetSearchCapabilities
- response: GetSearchCapabilities("upnp:class,@refID")

The ContentDirectory service of this MediaServer shall provide the following properties and the values as metadata of the root Container.

- @searchable="1"
- <upnp:searchClass includeDerived="1">[upnp class]</upnp:searchClass> or <upnp:searchClass includeDerived="0">[upnp class]</upnp:searchClass>

The following DIDL-Lite fragment is an example of metadata for a root Container in the ContentDirectory service that supports Audio, Image and AV Media Classes.

Example:

```
<DIDL-Lite xmlns:dc="http://purl.org/dc/elements/1.1/"
xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
xmlns="urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/">
  <container id="0" parentID="-1" childCount="3" restricted="1" searchable="1">
    <dc:title>Root Container</dc:title>
    <upnp:class>object.container</upnp:class>
    <upnp:searchClass
      includeDerived="1">object.item.audioItem</upnp:searchClass>
    <upnp:searchClass
      includeDerived="1">object.item.imageItem</upnp:searchClass>
    <upnp:searchClass
      includeDerived="1">object.item.videoItem</upnp:searchClass>
  </container>
</DIDL-Lite>
```

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	2V52H	

[COMMENT] A UPnP AV MediaServer control point can know whether a ContentDirectory service supports the search defined in guideline 10.1.4.14.1 by checking the search capabilities and the metadata of the root container.

10.1.4.15 MM keyword search templates

[GUIDELINE] A UPnP AV MediaServer that implements the CDS:Search action should support the following types of CDS:Search requests, with the ContainerID input parameter set to "0".

- "dc:title contains " val1 " and @refID exists false"
- "dc:creator contains " val1 " and @refID exists false"
- "upnp:album contains " val1 " and @refID exists false"

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	54YHU	

[COMMENT] Some control points with an alphanumeric input mechanism (keyboards, virtual keyboards, cell phone keypad, etc.) can benefit from keyword searching capabilities.

10.1.4.16 MM/BT Basic Tuner container**10.1.4.16.1**

[GENERAL] DLNA defines two tuner implementations. They are indicated as either a Basic Tuner or an Extended Tuner. The Basic Tuner guidelines, as defined in 10.1.4.16 to 10.1.4.23 by the initial publishing of the design guidelines, are based upon the UPnP AV MediaServer:1 specifications and those guidelines have been relabelled as “MM/BT Basic Tuner”. The Extended Tuner guidelines, as defined in 10.4, are based upon the TUNER Feature defined in UPnP AV MediaServer:2 and higher specifications.

10.1.4.16.2

[GUIDELINE] If a UPnP AV MediaServer implements a Basic Tuner, then it shall conform to all of the requirements for a Basic Tuner as defined in 10.1.4.16.3 to 10.1.4.16.6 and 10.1.4.17 to 10.1.4.23.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-3	4BI9R	

[COMMENT] It is optional for a UPnP AV MediaServer to implement a Basic Tuner. The Basic Tuner implementation can be implemented by any version of the UPnP AV specifications.

10.1.4.16.3

[GUIDELINE] A UPnP AV MediaServer tuner should be represented as a container with a class of object.container or any derived class. A Basic Tuner container should have an associated name. The name is given by property dc:title.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	4YHUX	

[COMMENT] This guideline allows multiple tuners to be represented in CDS with a friendly name. Tuner channel ordering allows the control point to implement up/down by selecting the next item in the container.

See Annex B for recommendations on how to represent a tuner container.

Control Points: note that in compliance with UPnP guidelines (10.1.4.10), conformant DMS devices will not return the `dlna:containerType` property unless it is specifically requested as part of a CDS:Browse Filter argument.

10.1.4.16.4

[GUIDELINE] A UPnP AV MediaServer Basic Tuner container shall have a `dlna:containerType` property and the property shall have a value of `Tuner_1_0`.

The name space for DLNA defined properties shall be "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix shall be "dlna:".

The following is an example.

```
<dlna:containerType
xmlns:dlna="urn:schemas-dlna-org:metadata-1-0/">Tuner_1_0</dlna:containerType>
```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	V52H7	

10.1.4.16.5

[GUIDELINE] A UPnP AV MediaServer Basic Tuner container shall contain object items of class object.item.videoItem.videoBroadcast or object.item.audioItem.audioBroadcast or both. (Objects derived from either class also qualify.)

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	5U7ZK	

10.1.4.16.6

[GUIDELINE] The order of the object items (order of <item> elements in a CDS:Browse response) in a UPnP AV MediaServer Basic Tuner container should correspond to the tuner up/down operation. For example, channel number or channel preset order.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	NVYTV	

10.1.4.17 MM/BT Basic Tuner audio tuner

[GUIDELINE] If a UPnP AV MediaServer provides live audio content from a tuner, the UPnP AV MediaServer should use object.item.audioItem.audioBroadcast or any derived class as the upnp:class value.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	GWHPZ	

[COMMENT] These guidelines allow control points to identify content sourced from a tuner.

10.1.4.18 MM/BT Basic Tuner video tuner

[GUIDELINE] If a UPnP AV MediaServer provides live video or audio/video content from a tuner, the UPnP AV MediaServer should use object.item.videoItem.videoBroadcast or any derived class as the upnp:class value.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	LNQA9	

[COMMENT] See comment text for 10.1.4.17.

10.1.4.19 MM/BT Basic Tuner properties: Channel Title

[GUIDELINE] A UPnP AV MediaServer tuner dc:title property should describe the programme content if available otherwise should contain the contents of the upnp:channelName CDS property. If upnp:channelName CDS property is not available the upnp:channelNr property should be used.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	DX57C	

[COMMENT] This is to clarify the meaning of a title in context of a tuner. Some vendors might interpret the title as channel name.

10.1.4.20 MM/BT Basic Tuner properties: Channel Number**10.1.4.20.1**

[GUIDELINE] A UPnP AV MediaServer broadcast object item should have the associated property upnp:channelNr.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	Q6WOI	

[COMMENT] This guideline clarifies the intended usage of upnp:channelNr.

10.1.4.20.2

[GUIDELINE] If a UPnP AV MediaServer CDS object contains the upnp:channelNr property, then each upnp:channelNr number shall be unique within the context of its container.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	S6QVG	

[COMMENT] For usages where the same upnp:channelNr number indicates different media formats for the same content (e.g. SD and HD content), this would be realized by using the recommended practice in DLNA to use multiple <res> elements in the same CDS object 10.1.4.4.1.

10.1.4.21 MM/BT Basic Tuner properties: Channel Name

[GUIDELINE] If a UPnP AV MediaServer broadcast object item has the associated property upnp:channelName, then each upnp:channelName string should be unique within the context of

its container. The upnp:channelName should be used to identify the channels, not the programme content.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	4V2VO	

[COMMENT] This guideline clarifies the intended usage of upnp:channelName.

10.1.4.22 MM/BT Basic Tuner content URI

[GUIDELINE] The channel selection and the connection to the tuner are invoked through the connection establishment to the URI of the resource associated with the broadcast object item.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	7V3YS	

[COMMENT] This guideline essentially requires tuner content to be advertised and accessible through a URI.

10.1.4.23 MM/BT Basic Tuner Control Point assumptions

[GUIDELINE] The UPnP AV MediaServer control point should not assume that the currently viewed channel is the channel that it previously selected. Due to possible sharing of the tuner by multiple clients the channel can change without the client being aware of the change.

[ATTRIBUTES]

S	A	DMP DMC +DN+	M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016	4YU4Z	

[COMMENT] Because there is no feed back mechanism between the tuner and the control point, it is not possible to know the current channel when there are multiple Content Receivers connected as clients or if the tuner is being used by a local output device.

10.1.4.24 MM TakeOut contents

10.1.4.24.1

[GUIDELINE] A UPnP AV MediaServer may provide the DLNA defined property <dlina:takeOut> for a CDS object that belongs to a group of objects intended for unidirectional synchronization (from the server to a downloading endpoint).

The <dlina:takeOut > is a non-empty string value with a maximum length of 256 B.

The name space for DLNA defined properties shall be "urn:schemas-dlna-org:metadata-1-0/" and the namespace prefix shall be "dlna:".

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	YU4ZM	

[COMMENT] The guidelines for takeOut enable unidirectional synchronization scenarios. This allows a device to easily find a group of content that is intended for download. Control points find groups by using CDS:Search and specifying the <dlina:takeOut> property with the desired group name.

The general assumption is that a control point (bundled with a Download Controller) will find content with a particular group name and download it (unless it has already acquired it). The <dlina:takeOut> tag will generally persist on the DMS or M-DMS, such that if a CDS object is no longer part of a group, then the control point will know to remove the content from its local storage during the synchronization operation.

The process of assigning the value of the <dlina:takeOut> tag is vendor defined. One way is for the DMS or M-DMS to assign the value for a user when the user creates the group. Another way is to allow the user to name the group. An extremely simple way is to assign the same group name to all CDS objects.

DLNA suggests that DMS or M-DMS implementations provide a way for a user to specify a maximum storage quota when creating a group. This type of user interface feature is useful because users are generally aware that downloading endpoints have storage limitations for downloading groups.

This guideline does not imply any requirement that the downloader mirrors the CDS hierarchy when it downloads content from the CDS. This is especially true when the takeOut group includes CDS containers (i.e. the CDS container has the <dlina:takeOut> element).

10.1.4.24.2

[GUIDELINE] A CDS object (advertised by a UPnP AV MediaServer) may contain more than one <dlina:takeOut> element.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	V3YS5	

[COMMENT] A CDS object can belong to multiple groups.

This guideline provides for basic unidirectional synchronization of content from a DMS to UPnP Control Points. The primary mechanism used by a control point to identify content between reboots or application launches is through the object ID. The mechanism to indicate if content has been modified is to change the object ID but to change the value of the URI (i.e. value of the <res> element).

10.1.4.24.3

[GUIDELINE] If a UPnP AV MediaServer provides the <dlina:takeOut> property to a CDS object and wants to indicate that the content is identical between reboots or application launch/shutdown, then it shall not change the object ID of the CDS object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	V2VOM	

10.1.4.24.4

[GUIDELINE] If a UPnP AV MediaServer control point is synchronizing a particular take-out group, then under normal test conditions the control point should only transfer content binaries belonging to CDS objects that are part of the take-out group.

(That is, if a UPnP AV MediaServer control point is not able to find a take-out CDS object that was synchronized on a previous session or if the CDS object of the same @id value no longer has the <dlina:takeOut> property with the same group name, then the control point should assume that the CDS object is no longer part of the take-out group.)

[ATTRIBUTES]

S	A	+DN+	n/a	n/a	ISO/IEC 29341-20-12: 2016	6QVGY	

[COMMENT] The phrase under normal test conditions means no resource and network limitations.

10.1.4.24.5

[GUIDELINE] If a UPnP AV MediaServer control point is synchronizing a particular take-out group and finds a take-out CDS object that was not synchronized on a previous session, then under normal test conditions it should attempt to transfer at least one content binary from the associated CDS object.

(That is, if a UPnP AV MediaServer control point finds a take-out CDS object that was not synchronized on a previous session, then it should assume that the CDS object is a new member of the take-out group.)

[ATTRIBUTES]

S	A	+DN+	n/a	n/a	ISO/IEC 29341-20-12: 2016	6WOIW	

[COMMENT] The phrase under normal test conditions means no resource and network limitations.

10.1.4.24.6

[GUIDELINE] If a UPnP AV MediaServer provides the <dlina:takeOut> property to a CDS object and wants to indicate that a content binary is modified (e.g. editing), it shall change the @id value to a new and unique value, relative to the entire CDS hierarchy.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	X57CY	

10.1.4.24.7

[GUIDELINE] If a UPnP AV MediaServer supports the <dlina:takeOut> property, then it shall support the DLNA- defined CDS:X_GetTakeOutGroupNames action.

The action's definition in the service description is:

```
<action>
  <name>X_GetTakeOutGroupNames</name>
  <argumentList>
    <argument>
      <name>GroupNames</name>
      <direction>out</direction>
      <relatedStateVariable>
        X_A_ARG_Type_GroupNames
      </relatedStateVariable>
    </argument>
  </argumentList>
</action>
```

The X_A_ARG_TYPE_GroupNames state variable is defined:

```
<stateVariable sendEvents="no">
  <name>X_A_ARG_Type_GroupNames</name>
  <dataType>string</dataType>
</stateVariable>
```

The GroupNames output argument is a comma-separated value list of all take-out group names.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	NQA9W	

[COMMENT] The CDS:GetTakeOutGroupNames action allows a control point to easily acquire the list of group names for use in a CDS:Search request. DLNA has two normative search templates for finding groups. The only difference between the two is that vendors can specify a upnp:class value if desired.

10.1.4.24.8

[GUIDELINE] If a UPnP AV MediaServer supports the <dlina:takeOut> property, then it shall support searching the CDS as defined in guideline 10.1.4.14 and the additional searches with the following input parameters.

- Additional Search #1 input parameters::
 - ContainerID = 0
 - SearchCriteria: @refID exists false and dlina:takeOut="[group name]"
- Additional Search #2 input parameters:
- ContainerID = 0
- SearchCriteria: upnp:class derivedfrom "[a upnp class for a supported Media Class]" and @refID exists false and dlina:takeOut="[group name]"

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	WHPZV	

10.1.4.24.9

[GUIDELINE] A UPnP AV MediaServer that supports the search defined in guideline 10.1.4.24.8 shall return the SearchCaps that includes the <dlina:takeOut> element to the CDS:GetSearchCapabilities action.

Example:

- request: CDS:GetSearchCapabilities();
- response: CDS:GetSearchCapabilities("upnp:class,@refID, dlina:takeOut").

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	VYTV3	

[COMMENT] A UPnP AV MediaServer control point can know whether a ContentDirectory service supports the search defined in guideline 10.1.4.24.8 by checking the search capabilities.

10.1.4.25 MM CDS containers and media collection binaries

10.1.4.25.1

[GUIDELINE] Whenever possible a UPnP AV MediaServer should use a container object with a set of child item objects to indicate a media collection.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	U7ZKE	

[COMMENT] Using this model for media collections allows rendering devices to render media collections. Media collection file formats are useful in various ways, but v1.0 DMPs might lack the ability to parse media collection files.

10.1.4.25.2

[GUIDELINE] A UPnP AV MediaServer may associate a <res> element with a CDS container or item such that the <res> element's URI value points to a media collection file conforming to a Media Format Profile defined in Media Collection Profile guidelines, see Clause 10 of IEC 62481-2:2017 (e.g. DIDL_S, DIDL_V).

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 IEC 62481-2: 2017	52H79	

[COMMENT] Media collection files are a convenient way to allow a rendering device (e.g. DMR) to play a media collection.

10.1.4.25.3

[GUIDELINE] A UPnP AV MediaServer that advertises a <res> element for a media collection file should also use the res@dlina:trackTotal attribute, which is a ui4 value.

This guideline applies only to media collection files that are normative to the DLNA guidelines (e.g. DIDL_S and DIDL_V).

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	YHUXA	

[COMMENT] Controlling devices (e.g. DMC, M-DMC) can use this value when the calculating track index for the currently playing content in a DLNA PlayContainer URI operation.

10.1.4.25.4

[GUIDELINE] If present, the value of res@dlina:trackTotal shall equal the number of content entries (also known as sequenced tracks) in the media collection file.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	HUXAV	

10.1.4.25.5

[GUIDELINE] If a UPnP AV MediaServer wants to convey that the items (or tracks) in a media collection file have a 1:1 mapping to the child CDS objects in a particular container, then the UPnP AV MediaServer should associate the <res> element (for the media collection file) with the CDS container that has the child CDS objects. The ordering of the 1:1 mapping is the same for both the media collection file and the CDS objects in the CDS container (as obtained from a CDS:Browse request with an unspecified sorting criteria).

This methodology should be used even when the media collection file uses or references content intended for presentation-layer details. A UPnP AV MediaServer that uses this methodology claims an intent that the content in the media collection file maps to the child objects of the associated container.

Note that CDS container in this guideline means any CDS object with the object.container or similarly derived upnp:class designation.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	2H79M	

[COMMENT] This guideline urges UPnP AV MediaServer that wants to represent the child CDS objects encapsulated by a CDS container to associate a playlist file with the parent CDS container.

This guideline is only a recommendation because the file format of the media collection file could reference things intended for the presentation layer. For example, a slideshow file might have URI values that point to proprietary background music instructions and transitions. In such a

case, the MediaServer associates the slideshow file with a container that was the parent of image items because the general intent is to have a 1:1 mapping.

10.1.4.25.6

[GUIDELINE] If a UPnP AV MediaServer wants to convey that the items (or tracks) in media collection file do not have a direct mapping to a particular container, then the MediaServer should associate the <res> element (for the media collection file) with a CDS item that has the object.item.playlistItem (or similarly derived upnp:class) designation.

This methodology should be used whenever the media collection file has an intentional mapping of content in multiple CDS containers. Likewise, this methodology should be used when the media collection file references content (that is not associated with presentation-layer details).

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	7ZKEU	

[COMMENT] In cases where a vendor wants to provide a playlist file without implying any intent about the mapping of that content to a particular CDS container, then the vendor is encouraged to associate the media collection file with a CDS item object. This particular model (while easier for the DMS or M-DMS) can disadvantage rendering devices (e.g. DMP) that do not support media collection files because they rely solely on the CDS hierarchy to provide the rendering experience.

10.1.4.26 MM rendering media collection files

10.1.4.26.1

[GUIDELINE] A Rendering Endpoint may support rendering of media collection files.

[ATTRIBUTES]

O	A	DMP DMR	M-DMP	n/a	ISO/IEC 29341-3-2	YTV3Y	

[COMMENT] DMP, M-DMP and DMR devices are not required to render media collection files.

10.1.4.26.2

[GUIDELINE] A UPnP AV MediaRenderer should support playback of a DLNA PlayContainer URI.

[ATTRIBUTES]

S	A	DMR	n/a	n/a	ISO/IEC 29341-3-2	HPZV4	

[COMMENT] DMR devices are not required to support rendering of a DLNA PlayContainer URI because the feature requires the DMR to have a MediaServer control point. However, this feature is recommended for a DMR because DLNA recommends that DMS devices expose media collections through CDS container objects that have a set of child CDS item objects.

Implementing this feature implies adherence to additional guidelines, such as those in 10.1.6.10 and 10.1.4.29.

10.1.4.26.3

[GUIDELINE] If a UPnP AV MediaRenderer supports the DLNA PlayContainer URI operation, then it shall specify the <dlina:X_DLNACAP> element (as a child of the <device> element that represents the MediaRenderer) with the playcontainer-depth-strict token.

More formally, the syntax of the capability ID is as defined in Table 19.

Table 19 – Capability ID syntax

Capability ID	Description
playcontainer-depth-strict	The UPnP AV MediaRenderer supports the DLNA PlayContainer URI operation.
• "playcontainer-capability-id = "playcontainer" "-" depth-token "-" strict-token • "depth-token = <ui4 value> • "strict-token = "0" "1" The "playcontainer" portion of the capability ID is a literal, string value. The depth-token shall be a ui4 value, indicating the maximum depth the MediaRenderer will traverse when rendering a PlayContainer URI operation. A value of "0" means that no sibling containers of first-item-id-arg will be traversed. The strict-token portion of the capability shall be a "0" or "1". If the value is "1" then MediaRenderer supports a URI syntax where first-item-id-arg shall be an immediate child of container-id. If the value is "0" then MediaRenderer supports a URI syntax where first-item-id-arg shall be a descendent of container-id-arg and the parent of first-item-id-arg shall have a container depth that is less than or equal to depth.	

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-3-2	QA9W8

[COMMENT] Guideline 9.2.35.1 provides the syntax for the <dlina:X_DLNACAP> element.

In addition to indicating that the DLNA PlayContainer URI operation is supported by the MediaRenderer, the capability ID also indicates the URI limitations that are imposed by the MediaRenderer. The depth portion of the syntax allows the MediaRenderer to restrict the CDS container depth of a media collection. The strict portion of the syntax allows the MediaRenderer to require the first played CDS item to be an immediate child of the media collection's top CDS container. 10.1.4.29 gives more information on the DLNA PlayContainer URI syntax.

10.1.4.27 MM CDS DLNA PlaySingle URI values**10.1.4.27.1**

[GUIDELINE] A UPnP AV MediaServer may have CDS item objects that have a <res> element with a DLNA PlaySingle URI.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	57CYQ

[COMMENT] A DLNA PlaySingle URI is a URI that allows a DMS or M-DMS to reference a CDS object on the same or different DMS or M-DMS. This can be used for a variety of things, including a media collection composed of content from multiple DMS or M-DMS devices or for DMS virtualization.

10.1.4.27.2

[GUIDELINE] A <res> element with a DLNA PlaySingle URI value shall have a similar res@protocolInfo value as one of the <res> elements of the referenced CDS object.

A similar res@protocolInfo value has the following characteristics.

- The first field shall be a string in the form of "playsingle-"<transport>, where the transport shall be the DLNA transport identifier of the referenced <res> element.
- The 2nd, 3rd, and 4th fields shall be copied identically from the referenced <res> element.

Examples:

```
playsingle-http-get:*:audio/mpeg;DLNA.ORG_PN=MPEG_PS_NTSC;
DLNA.ORG_OP=01;DLNA.ORG_FLAGS=01100000000000000000000000000000
playsingle-rtsp-rtp-udp:*:video/mpeg;DLNA.ORG_PN=MPEG_PS_NTSC;
DLNA.ORG_OP=10;DLNA.ORG_PS=-1,2/3,4;
DLNA.ORG_FLAGS=03100000000000000000000000000000;DLNA.ORG_MAXSP=9.75
```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	WOIWZ

[COMMENT] DLNA PlaySingle URI values can only have a single protocolInfo value. Therefore, a single CDS object can have more than one <res> element with the same DLNA PlaySingle URI value and the different protocolInfo values. This allows UPnP AV MediaServer control points to know the media formats that are available on the referenced CDS object.

10.1.4.27.3

[GUIDELINE] A UPnP AV MediaServer may have more than one <res> element with the same DLNA PlaySingle URI associated with a CDS item object.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	QVGY4

10.1.4.27.4

[GUIDELINE] A CDS item that has one or more DLNA PlaySingle URI <res> elements may have other <res> elements that do not have a DLNA PlaySingle URI as a value.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	2VOMJ

[COMMENT] A MediaServer's CDS item can mix <res> elements that have different types of URI values. For example, a virtual DMS might have DLNA PlaySingle URI values for original content served by a different DMS while using RTP and HTTP URI values for the converted content that the virtualizing DMS will serve.

10.1.4.27.5

[GUIDELINE] A UPnP AV MediaServer shall only associate DLNA PlaySingle URI <res> elements with CDS item objects. DLNA PlaySingle URI <res> elements shall not be associated with CDS container objects. DLNA PlaySingle URI <res> elements shall not reference CDS container objects.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	3YS5B	

[COMMENT] DLNA PlaySingle URI values are allowed only when used in conjunction with audio, audio/video, or image content. Using DLNA PlaySingle URI <res> elements to reference CDS containers, media collection files, or other CDS objects with a DLNA PlaySingle URI <res> element can result in circular references.

10.1.4.27.6

[GUIDELINE] The res@protocolInfo value of a DLNA PlaySingle URI <res> element shall reference content that qualifies as audio, audio/video, or image content.

A res@protocolInfo value that identifies a media collection file is prohibited. Similarly, a <res> DLNA PlaySingle URI value that references a media collection file is also prohibited.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	U4ZMV	

10.1.4.27.7

[GUIDELINE] A DLNA PlaySingle URI shall only reference a CDS item object that does not have a DLNA PlaySingle URI <res> element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	4ZMVW	

10.1.4.27.8

[GUIDELINE] A DLNA PlaySingle URI shall only reference a CDS item object with a upnp:class that is the same or derived from one of the following:

- object.item.audioItem;
- object.item.videoItem;
- object.item.imageItem.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	YS5BS	

10.1.4.27.9

[GUIDELINE] A CDS item that has a DLNA PlaySingle URI <res> element shall have the same upnp:class value as the CDS object that is referenced or one of its super classes.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	VOMJU	

10.1.4.27.10

[GUIDELINE] A DLNA PlaySingle URI may be used with Media Format Profiles that are not defined by DLNA.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	VG43	

[COMMENT] The DLNA PlaySingle URI values can be used with undefined media formats. In such scenarios, the DLNA PlaySingle URI value still needs to comply with all the rules declared in guidelines of 10.1.4.27.

10.1.4.27.11

[GUIDELINE] The syntax of DLNA PlaySingle URI is as follows.

- dlna-playsingle-uri = "dlna-playsingle:// " cds-udn "?" service-id-arg item-id-arg.
- cds-udn = <the UDN of the UPnP AV MediaServer device>.
- service-id-arg = "sid=" service-id-val.
- service-id-val = <service ID of the CDS belonging to the MediaServer>.
- item-id-arg = "&iid=" item-id-val.
- item-id-val = <The @id string value of the CDS item to be referenced. The CDS item shall comply with guidelines 10.1.4.27.6 to 10.1.4.27.8>.

PlaySingleURI values shall be case-sensitive values, even though the general URI syntax is a case-insensitive value. The URI shall also be escaped as described by 10.1.3.10.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	OIWZO	

10.1.4.28 MM control point rules for DLNA PlaySingle URIs

10.1.4.28.1

[GUIDELINE] A UPnP AV MediaRenderer control point shall not invoke AVT:SetAVTransportURI with the CurrentURI input argument set to a DLNA PlaySingle URI.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	7CYQB	

[COMMENT] See 10.1.4.28.3 for more information.

10.1.4.28.2

[GUIDELINE] DLNA device classes and capabilities with a UPnP AV MediaServer control point and appropriate transport layer components may support the rendering or transporting of content referenced by DLNA PlaySingle URI values.

[ATTRIBUTES]

O	A	DMP DMR +DN+	M-DMP	n/a	ISO/IEC 29341-20-3	A9W8G	

[COMMENT] DMP, DMR, and Download Controllers are not required to render or transport DLNA PlaySingle URIs.

10.1.4.28.3

[GUIDELINE] A UPnP AV MSCP+MRCP that wants to instruct a UPnP AV MediaRenderer to play a DLNA PlaySingle URI shall resolve the DLNA PlaySingle URI to a URI for the actual audio, audio/video, or image content for use with the AVT:SetAVTransportURI request.

[ATTRIBUTES]

M	A	DMC	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	PZV4Y	

[COMMENT] Prior to invoking a AVT:SetAVTransportURI, the control point will set up a UPnP AV connection between the DMR and the Content Source. Since a DLNA PlaySingle URI is a URI pointer to a CDS object (and is not a pointer to an actual content binary), the MediaRenderer control point does not have sufficient information to create the logical connection prior to invoking AVT:SetAVTransportURI.

10.1.4.29 MM DLNA PlayContainer URI**10.1.4.29.1**

[GUIDELINE] The syntax of a DLNA PlayContainer URI shall be as described in the BNF notation. Assume no linear white space.

- dlna-playcontainer-uri = "dlna-playcontainer:/" cds-udn "?" service-id-arg container-id-arg first-item-id-arg first-item-index-arg [sort-arg] [max-depth-arg].
- cds-udn = <the UDN of the UPnP AV MediaServer device>.
- service-id-arg = "sid=" service-id-val.
- service-id-val = <service ID of the CDS belonging to the MediaServer>.
- container-id-arg = "&cid=" container-id-val.

- container-id-val = <The @id string value of the CDS container that represents the top container of the media collection.>
- first-item-id-arg = "&fid=" first-item-id-val.
- first-item-id-val = <The @id string value of the first CDS item that will be played as part of the PlayContainer URI operation. Note that 10.1.4.26.3 (MM Rendering Media Collection Files) places restrictions on first-item-id-val. Specifically, if the strict-token (defined in 10.1.4.26.3) is "1", then first-item-id-val shall be a CDS item that is an immediate child of container-id-val. If strict-token is "0", then first item-id-val shall be a CDS item that is descended from container-id-val, whose parent container has a container depth that is less than or equal to the depth-token (defined in 10.1.4.26.3).>
- first-item-index-arg = "&fii=" first-item-index-val first-item-index-val = <a ui4 value, as used in a CDS:Browse request. This value shall represent the zero-based index of the first-item-id-val CDS item, such that a CDS:Browse request where the following argument values will result in a response where the first returned CDS item has @id = first-item-id-val.
 - ObjectID = parent container of first-item-id-val,
 - BrowseFlag = "BrowseDirectChildren",
 - SortCriteria = sort-arg, and
 - StartingIndex = first-item-index-val.
- sort-arg = "&sc=" sort-val.
- sort-val = <A SortCriteria string, as defined for a CDS:Browse request. Equivalently, the value shall comply with the A_ARG_TYPE_SortCriteria syntax, defined by the ContentDirectory service. If sort-arg is omitted, then assume an effective value of an empty string.>
- max-depth-arg = "&md=" max-depth-val.
- max-depth-val = <A ui4 value that specifies the maximum descent level in the container. If max-depth-arg is omitted, then the value infers an effective value of "0". Note that 10.1.4.26.3 (MM Rendering Media Collection Files) places restrictions on max-depth-arg. Specifically the max-depth-val shall be less than or equal to the depth-token, as defined in 10.1.4.26.3.>

The cds-udn, service-id-val, object-id-val, sort-val, object-index-val, and max-depth-val tokens shall be URI-escaped according to IETF RFC 2396.

Ordering of tokens is significant.

The maximum length of a DLNA PlayContainer URI is 1 024 B.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	IETF RFC 2396 ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	TV3Y4

[COMMENT] This guideline defines the syntax of a DLNA PlayContainer URI.

10.1.4.29.2

[GUIDELINE] If a UPnP AV MediaRenderer supports the DLNA PlayContainer URI operation, then the MediaRenderer shall support the sort-arg and max-depth-arg portions of the dlna-playcontainer-uri syntax.

- **sort-arg:** This value determines the playback order, such that the playback order matches the order as observed from an equivalent CDS:Browse response.
- **max-depth-arg:** This value determines the maximum depth the MediaRenderer traverses when encountering child/descendent containers. A value of "0" means that child/descendent are not traversed.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	ZKEU4	

[COMMENT] These guidelines clarify that control points are not required to specify all parameters in a DLNA PlayContainer URI, but a DMR will operate correctly if a control point does provide the optional parameters.

A DLNA PlayContainer URI does not necessarily mean that the DMR will issue a single type of CDS:Browse request. For example, the DMR's control point might progressively issue multiple CDS:Browse requests that result in fewer results to ensure that the 200 KiB response limit is not exceeded by the DMS.

10.1.4.29.3

[GUIDELINE] If a UPnP AV MediaRenderer supports the DLNA PlayContainer URI operation and the URI specifies a max-depth-val that is greater than depth-token, as defined in 10.1.4.26.3, then the MediaRenderer shall return a UPnP AV error code of 716 (Resource not found) in the AVT:SetAVTransportURI response.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-3	H79M4	

10.1.4.29.4

[GUIDELINE] If performing a DLNA PlayContainer URI operation, a UPnP AV MediaRenderer shall only play CDS items as part of the DLNA PlayContainer URI and shall only render <res> elements of images, Audio-only, and AV content. This guideline works in conjunction with 10.1.3.32.1 (MM-playcontainer-param (DLNA PlayContainer Flag), which prohibits the playcontainer-param from having a value of true for <res> elements of media collection binaries.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	UXAV4	

10.1.4.29.5


[GUIDELINE] MediaRenderer control points may omit the sort-arg, and max-depth-arg tokens in the dlina-playcontainer-uri syntax.

[ATTRIBUTES]

O	C	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-3-2 ISO/IEC 29341-20-3	XAV44	

[COMMENT]

Figure 16 below provides an implementation example for this guideline.

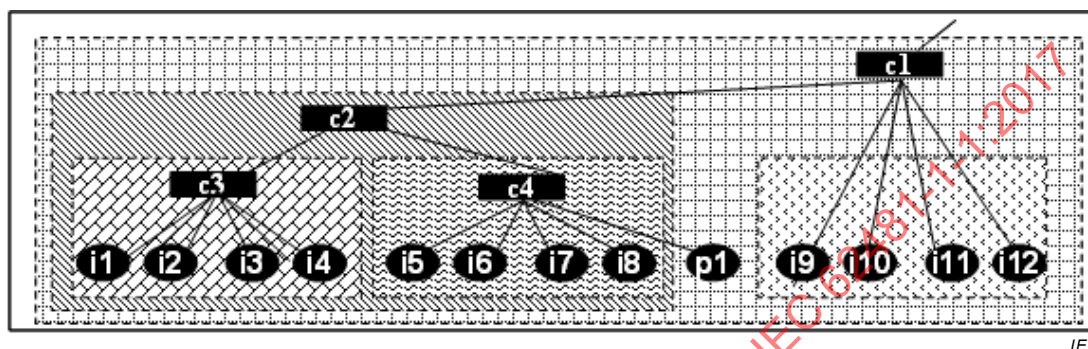

Collection, start at	container-id-arg	First-item id-arg	First-item index-arg	max-depth-arg	Default Ordered tracks in collection ^e	Track Index: item-AVT.CurrentTrack Index
"i1"	"c3"	"i1"	"0"	Value >= "0" or omitted	i1, i2, i3, i4	"i1"→1, "i2"→2, "i4"→4
"i6"	"c4"	"i6"	"1"	Value := "0" or omitted	i6, i7, i8, i5 ^a	"i6"→2, "i8"→4, "i5"→1
"c3"	This is not permitted because first-item-id-arg shall be a CDS item If first-item-id-arg was "i1", then playcontainer-strict shall be false (see next line/playlist)					
"i1"	"c2"	"i1"	"0"	Value := "1"	i1, i2, ...i4, i5, ... i8; ^a	"i1"→1, "i8"→8
"i12"	"c1"	"i12"	"4" ^b	Value = "0" or omitted	i12, i9, i10, i11	"i12"→4, "i9"→1, "i11"→3
"i1"	"c1"	"i1"; ^c	"0"	Value >= "2"	i1, i2, i3, i4, i5, i6, i7, i8, i9, i10, i11, i12	"i1"→1, "i4"→14, "i5"→5, "i8"→8, "i9"→10, "i12"→13; ^d
"i9"	"c1"	"i9"	"1"	Value >= "2"	i9, i10, i11, i12, i1, i2, i3, i4, i5, i6, i7, i8	"i9"→10, "i12"→13, "i1"→1, "i4"→4, "i5"→5, "i8"→8; ^d
^a Although "p1" is child of "c4", it is a CDS object with DIDL playlist file so it is automatically skipped. ^b "c2" is a child of "c1" that appears before "i9" when browsing the DMS. ^c This scenario is only permitted when playcontainer-strict is false. ^d Tracks after "i9" have an index number that is off by one because of p1, which is a CDS object with a DIDL-Lite playlist file. Also note that CDS containers are not rendered during a PlayContainer URI operation. ^e DMR shall follow the current AVT.PlayMode (i.e. in case of "Normal" play mode, it shall stop after playing the track of maximum AVT.CurrentTrack).						

Figure 16 – DLNA PlayContainer URI example

10.1.4.30 MM control point rules for DLNA PlayContainer URI

10.1.4.30.1

[GUIDELINE] A UPnP AV MediaRenderer control point may invoke AVT:SetAVTransportURI with the CurrentURI input argument set to a DLNA PlayContainer URI.

[ATTRIBUTES]

O	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	79M4Q	

[COMMENT] The usage of the DLNA PlayContainer URI requires the existence of a CDS at the content source. For this reason, a +PU+ can send the DLNA PlayContainer URI when its hosting Device Class contains a CDS or can interact with a CDS on the network.

10.1.4.30.2

[GUIDELINE] If a UPnP AV MediaRenderer control point that invokes AVT:SetAVTransportURI with the CurrentURI input argument set to a DLNA PlayContainer URI, then the UPnP AV MediaRenderer control point shall only do so with UPnP AV MediaRenderer devices that have at least one protocolInfo value in the SinkProtocolInfo that has the playcontainer-param flag set to true.

SinkProtocolInfo refers specifically to the Sink output argument of CMS:GetProtocolInfo responses and the CMS.SinkProtocolInfo state variable.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-14-11 ISO/IEC 29341-3-2	KEU4V	

[COMMENT] See 10.1.3.24.2 and 10.1.3.32 for more information.

10.1.5 Basic Connection Management (BCM) guidelines

10.1.5.1 MM/BCM UPnP AV connection rules

10.1.5.1.1

[GUIDELINE] UPnP AV MediaServers may provide support for basic connection management (BCM).

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	V3Y4Y	

[COMMENT] DMS devices are not required to support basic connection management (BCM). A DMS with BCM reports the existence of transport layer connections by using UPnP AV connections, which might be enumerated and terminated. This feature helps third-party

controllers and DMPs offer the users the ability to manage the connections according to their own desires (mainly for termination). This feature does not require any control point to support Basic Connection Management in order to operate basic browse/play operations. This feature does not require a control point to interact with the user.

Transport clients are encouraged to implement these guidelines to allow MediaServers with BCM support to properly deliver BCM functionality:

- 11.4.3.35 MT/BCM HTTP header:peerManager.dlna.org;
- 11.4.3.36 MT/BCM HTTP header:friendlyName.dlna.org;
- 11.4.4.155 MT RTP/BCM RTSP peerManager.dlna.org;
- 11.4.4.156 MT RTP/BCM RTSP friendlyName.dlna.org.

The DLNA guidelines use the AVT:Stop action to terminate streams on a DMR instead of using CMS:ConnectionComplete.

10.1.5.1.2

[GUIDELINE] If a UPnP AV MediaServer supports the BCM, then it shall create a UPnP AV Connection with a unique ConnectionID for each new Transport Layer request corresponding to a content request, including Background, Interactive, and Streaming requests. (Creating UPnP AV Connections for upload-related content transfer process is out-of-scope.)

The list of Transport Layer requests corresponding to a media stream request includes HTTP GET requests and the RTSP SETUP command. The list of Transport Layer requests excludes HTTP HEAD and HTTP POST requests and all HTTP requests not related to a content URI (i.e. URI for a <res> element exposed by a UPnP AV MediaServer).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	ZV4YE

[COMMENT] The creation of UPnP AV Connection is a result of a Transport Layer (HTTP or RTSP) connection request for a new media stream. (See 10.1.5.2 for request for an existing media stream). All other non media stream connection requests do not require the creation of UPnP AV Connection. The media stream is identified by the content URI in the transport layer request.

CMS:PrepareForConnection is not required for the creation of a UPnP AV Connection. However, using CMS:PrepareForConnection in conjunction with the creation of a transport layer is a permissible way to create UPnP AV Connection. Note that a UPnP AV MediaServer control point is not required to call the optional CMS:PrepareForConnection. Hence a DMS with BCM that also implements CMS:PrepareForConnection will also be able to create the UPnP AV Connection without requiring a control point to call CMS:PrepareForConnection execution.

The UPnP AV Media Server preferably stores internally all necessary information along with the newly created ConnectionID for later actions (CMS:ConnectionComplete and CMS:GetCurrentConnectionInfo). For example, relevant information is, but is not limited to, protocolInfo, URI, and TCP/IP socket handles. The protocolInfo is already available in the DMS to satisfy 11.4.3.11.

10.1.5.1.3

[GUIDELINE] A UPnP AV MediaServer that assigns a ConnectionID value in the range from "1" to "2147483647" should assign the value in an increasing manner with a rollover value of "1" when the vendor-defined-maximum-value is exceeded.

The vendor-defined-maximum-value is a vendor-defined value that is greater than or equal to "65535" and less than or equal to "2147483647".

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	9W8GK	

10.1.5.1.4

[GUIDELINE] A UPnP AV MediaServer that assigns a ConnectionID value in the range from "1" to "2147483647" should start value assignment with a random value.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	CYQBA	

10.1.5.1.5

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall expose the UPnP AV Connections using CMS:GetCurrentConnectionIDs.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	IWZOH	

10.1.5.1.6

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall remove the ConnectionID from the list of connections provided in CMS:GetCurrentConnectionIDs, when all transport layer connections (associated with the ConnectionID) are closed/terminated.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	GY43Y	

[COMMENT] The guideline clarifies the life-cycle of a ConnectionID. An active and advertised ConnectionID will be associated with at least one active media transport connection.

10.1.5.1.7

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall maintain the CMS.CurrentConnectionIDs state variable and deliver an event for the ConnectionManager service to signal that an update to the connection information has occurred.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	OMJU4	

[COMMENT] The guideline repeats the UPnP AV requirements.

10.1.5.1.8

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall implement CMS:GetCurrentConnectionInfo for all UPnP AV Connections reported by CMS:GetCurrentConnectionIDs.

The following arguments and values are returned by CMS:GetCurrentConnectionInfo:

- RemoteProtocolInfo contains the res@protocolInfo of the transported content on the given connection. The value corresponds to the protocolInfo used to set the contentFeatures.dlna.org HTTP header or RSTP header according to 11.4.3.11 and 11.4.4.194.
- PeerConnectionManager contains
 - an empty string if the information is not available, or
 - the PeerConnectionManager value provided by a DMR using the peerManager.dlna.org HTTP header (defined in 11.4.3.35) or the peerManager.dlna.org RTSP header (defined in 11.4.4.155),
 - the friendly name value provided by a DMP or M-DMP (that implements this version or a newer version of the DLNA interoperability guidelines) using the friendlyName.dlna.org HTTP header (defined in 11.4.3.36) or the friendlyName.dlna.org RTSP header (defined in 11.4.4.156).
- PeerConnectionID is set to "-1".
- Direction is set to "OUT".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	S5BS2	

[COMMENT] This guideline specifies the values returned by CMS:GetCurrentConnectionInfo for a given ConnectionID. Most arguments are compliant with the UPnP AV Architecture with the exception of PeerConnectionManager, which is not available for M-DMP implementations that adheres to v1.0 of the DLNA interoperability guidelines.

CMS:PrepareForConnection can also provide the PeerConnectionManager value when executed previously for the specified UPnP AV Connection.

10.1.5.1.9

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall use the following notation to advertise a DMP or M-DMP user friendly name (when provided) in the PeerConnectionManager parameter, returned by CMS:GetCurrentConnectionInfo.

- peerconnectionmanager_arg = "fnam" ":" friendly-name "/"
- friendly-name = <string, limited to 128 B in its UTF-8 encoded form>

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	ZMVW7

[COMMENT] The DMP user friendly name is provided on the Media Transport layer connection (see 11.4.3.36 or 11.4.4.156) and is used to identify the Content Receiver connected to the DMS or M-DMS.

The format of the PeerConnectionManager is different from the UPnP Architecture in such a way that it cannot be confused with a non-existing CMS Service (i.e. no CMS on DMP).
Example: "fnam:LivingRoom TV/" where "fnam" replaces "uuid" and the ServiceId token is left empty.

10.1.5.1.10

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall implement CMS:ConnectionComplete.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-20-3	MVW74

[COMMENT] The requirement for CMS:ConnectionComplete does not imply to support and implement CMS:PrepareForConnection in the ConnectionManager service.

CMS:ConnectionComplete is the UPnP action that instructs a UPnP MediaServer to tear down a UPnP AV Connection (and its underlying transport layer connection) when it is no longer required. When CMS:ConnectionComplete is executed for a given ConnectionID, the device is expected to respond with a success and terminate the associated HTTP or RTSP transport connections related to the UPnP AV Connection. Subsequently, all resources related to the connection are released. This behaviour is similar to a termination initiated by the connection creator on the Content Receiver endpoint. When a connection is terminated (e.g. DMP performs a Stop media operation, AVT:Stop is invoked on a DMR, the transport layer connection is broken, CMS:ConnectionComplete is called, etc.) it is expected that proper resource clean up takes place.

10.1.5.2 MM/BCM UPnP AV connection rules for HTTP

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall not create a new UPnP AV Connection when the ConnectionID is provided in the HTTP Request using the scid.dlna.org header. Instead it shall reuse the provided ConnectionID.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	n/a	5BS2H	

[COMMENT] This guideline provides a mechanism to identify a multiple transport layer request separated in time but related to the same media stream (identified by the URI). For example, during a pause operation and/or consecutive random access requests the HTTP Client might indicate in the HTTP Get request that all transport layer requests are related to the same media stream which does not require a new ConnectionID. With such mechanism the UPnP AV MediaServer is not required to maintain a local table containing the most recent requested URI with the associated ConnectionID per HTTP client. It is the HTTP client's responsibility to indicate the relationship between HTTP requests.

10.1.5.3 MM/BCM UPnP AV connection rules for RTP

[GUIDELINE] If a UPnP AV MediaServer supports BCM and it supports RTP Media Transport, then it shall not create a new UPnP AV Connection when the ConnectionID is provided in the RTSP session-id header. Instead it shall reuse the provided ConnectionID.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	n/a	MJU4Z	

10.1.5.4 MM/BCM-DMS CMS:ConnectionComplete and closing transport connections

10.1.5.4.1

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then when it responds successfully to a CMS:ConnectionComplete request for a valid ConnectionID it shall close all related Transport Layer connections.

Likewise, the corresponding ConnectionID shall be removed from the list of connections provided in CMS:GetCurrentConnectionIDs.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	Y43YT	

[COMMENT] This guideline clarifies the expected behaviour when UPnP MediaServers responds successfully to a CMS:ConnectioComplete. The guideline does not prohibit a UPnP MediaServer to return an error code (for example 704 Local Restriction) to indicate the impossibility to close the Transport Layer connections.

10.1.5.4.2

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall return 704 Local Restriction to the CMS:ConnectionComplete request if it does not accept to close all related Transport Layer connections.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	WZOH4	

10.1.6 MediaRenderer device requirements

10.1.6.1 MM UPnP AV MediaRenderer CMS:GetProtocolInfo behaviour

10.1.6.1.1

[GUIDELINE] A UPnP AV MediaRenderer that lists a protocolInfo in its SinkProtocolInfo shall be able to render that type of content when given a URI for that type of content.

SinkProtocolInfo refers specifically to the Sink output argument of CMS:GetProtocolInfo responses and the CMS.SinkProtocolInfo state variable.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2	YQBA6	

[COMMENT] DMR devices that claim support for a DLNA Media Format Profile will be able to render that content when instructed to do so by a DMC. A DMR device that supports playback of content but requires a control point to send a URI to a media collection file or a DLNA PlayContainer URI in the AVT:SetAVTransportURI request is not permissible.

10.1.6.1.2

[GUIDELINE] A UPnP AV MediaRenderer that supports playback of media collection files shall include the media collection file's protocolInfo value in its list of SinkProtocolInfo (as observed from the Sink output argument in CMS:GetProtocolInfo responses and its CMS.SinkProtocolInfo state variable).

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2	W8GKW	

[COMMENT] DMR uses protocolInfo values to report support for media collection files. Media collection files have mime types and Media Format Profile IDs. DMR devices are not required to support playback of media collection files because the feature requires a DMR to implement a MediaServer control point.

10.1.6.2 MM AVTransport default instance

[GUIDELINE] A UPnP AV MediaRenderer shall always have an AVTransport virtual instance identified with an InstanceID equal to "0".

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	3Y4Y3	

[COMMENT] This represents the "default" instance of the AVTransport service. This allows UPnP AV MediaServer control points to assume that the virtual instance with InstanceID value of "0" is always available. There is no need to invoke CMS:PreparForConnection when using default instances.

10.1.6.3 MM RenderingControl default instance

[GUIDELINE] A UPnP AV MediaRenderer shall always have a RenderingControl virtual instance identified with an InstanceID equal to "0".

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-3-13	9M4Q9	

[COMMENT] This represents the "default" instance of the RenderingControl service. This allows UPnP AV MediaRenderer control points to assume that the virtual instance with InstanceID value of "0" is always available. There is no need to invoke CMS:PrepareForConnection when using default instances.

10.1.6.4 MM AVTransport multiple instances

[GUIDELINE] A UPnP AV MediaRenderer may have multiple virtual instances of the AVTransport service.

[ATTRIBUTES]

O	R	DMR	n/a	n/a	ISO/IEC 29341-14-11	V44KU	

[COMMENT] Multiple virtual instances of the AVTransport service will include the default instance (InstanceID = 0) as per guideline 10.1.6.2. Multiple virtual instances of the AVTransport service are permitted but DLNA defines no interoperability guidelines for InstanceIDs that are not equal to "0".

10.1.6.5 MM RenderingControl multiple instances

[GUIDELINE] A UPnP AV MediaRenderer may have multiple virtual instances of the RenderingControl service.

[ATTRIBUTES]

O	R	DMR	n/a	n/a	ISO/IEC 29341-14-11	M4Q9J	

[COMMENT] Multiple virtual instances of the RenderingControl service will include the default instance (ID = 0) as per guideline 10.1.6.3. Multiple virtual instances of the RenderingControl service are permitted, but DLNA defines no interoperability guidelines for InstanceIDs that are not equal to 0.

10.1.6.6 MM LastChange

10.1.6.6.1

[GUIDELINE] UPnP MediaRenderers shall implement the AVT.LastChange and RCS.LastChange evented state variables as specified in ISO/IEC 29341-20-10:2011 and ISO/IEC 29341-3-13.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-13	U4VW4	

[COMMENT] All AVT and RCS state variables, except AVT.RelativeTimePosition, AVT.AbsoluteTimePosition, AVT.RelativeCounterPosition and AVT.AbsoluteCounterPosition, are evented indirectly through the AVT.LastChange and RCS.LastChange state variables as described in ISO/IEC 29341-3-13.

10.1.6.6.2

[GUIDELINE] If any of the instance state variables in the AVTransport Service or Rendering Control Service, except AVT.RelativeTimePosition, AVT.AbsoluteTimePosition, AVT.RelativeCounterPosition and AVT.AbsoluteCounterPosition, have changed, a UPnP MediaRenderer shall send an event containing the corresponding LastChange state variable. The content of the LastChange state variable shall contain the latest value of the state variables updated since the last event. The event shall be sent immediately, or 0,2 s after the last event was sent, whichever is later.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-13	95C3Y	

[COMMENT] This guideline enables control points to rely on UPnP events to track the playback status of the MediaRenderer device.

The Max Event Rate of the AVT.LastChange and RCS.LastChange state variables is one event every 0,2 s, which translates to a maximum of five events per second, or a minimum of 0,2 s between successive events.

As an example, if the values of AVT.TransportState and AVT.TransportURI instance state variables of instance 0 of the AVTransport service change to "Transitioning" and "http://192.168.0.1:8080/MPEG/ntsc001.mpg" respectively, the value of the AVT.LastChange state variable in an event sent by the AVTransport service contains the following text (prior to XML-escaping).

```
<Event xmlns="urn:schemas-upnp-org:metadata-1-0/AVT/">
  <InstanceID val="0">
    <TransportState val="Transitioning" />
    <AVTransportURI val="http://192.168.0.1:8080/MPEG/ntsc001.mpg" />
  </InstanceID>
</Event>
```

Similarly, if the values of RCS.Brightness and RCS.Contrast instance state variables of instance 0 of the Rendering Control service change to "20" and "50" respectively, the value of the RCS.LastChange state variable in an event sent by the Rendering Control service contains the following text (prior to XML-escaping).

```
<Event xmlns="urn:schemas-upnp-org:metadata-1-0/RCS/">
  <InstanceID val="0">
```

```

    <Brightness val="20 " />
    <Contrast val="50" />
  </InstanceID>
</Event>

```

10.1.6.6.3

[GUIDELINE] UPnP MediaRenderers shall not send AVT or RCS events with empty values for the LastChange state variable, except when sending the first event after a subscription.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-13	QR39T

[COMMENT] Sending empty events is a waste of both network and device resources.

10.1.6.7 MM LastChange frequency

[GUIDELINE] UPnP MediaRenderers should send no more than one AVT.LastChange or RCS.LastChange event for a single AVTransport or RenderingControl service action.

[ATTRIBUTES]

S	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-13	Y4Y37

[COMMENT] Although UPnP AV has a maximum frequency for sending AVTransport and RenderingControl events, the preference is to send fewer events to reduce the load on control points.

10.1.6.8 MM AVT:SetAVTransportURI

10.1.6.8.1

[GUIDELINE] If a UPnP AV MediaRenderer receives an AVT:SetAVTransportURI request and the current value of the AVT.TransportState virtual instance state variable is not "Stopped" or "No_Media_Present", then the UPnP AV MediaRenderer can return an error 705 (Transport is Locked) in addition to other errors defined in ISO/IEC 29341-20-10:2011.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	4YEOC

[COMMENT] This guideline requirement is an addition to ISO/IEC 29341-20-10:2011.

If a UPnP AV MediaRenderer control point encounters the 705 error code, then it can invoke AVT:Stop to stop the transport layer and then retry the AVT:SetAVTransportURI request followed by the AVT:Play request.

There can be reasons for the UPnP AV MediaRenderer to return an error, when the transport state is changed to “Stopped” following the AVT:Stop or AVT:Play requests.

10.1.6.8.2

[GUIDELINE] A UPnP AV MediaRenderer control point shall provide an empty string or a valid URI value, as defined in 10.1.3.10, in the CurrentURI input argument for an AVT:SetAVTransportURI request.

[ATTRIBUTES]

M	C	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	QQ8QS	

[COMMENT] This clarifies that an empty string can be used as a URI value in the CurrentURI input argument to clear the rendering state.

10.1.6.8.3

[GUIDELINE] If the CurrentURI input argument for the AVT:SetAVTransportURI request is not an empty string or a DLNA PlayContainer URI, then the CurrentURIMetaData input argument of the same request shall be a valid value, as defined in 10.1.6.14.8.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	USRWQ	

[COMMENT] This is a mandate over what UPnP normally allows as optional behaviour.

For a Push Controller (+PU+) that does not contain a CDS, the DIDL-Lite metadata can typically be created from a DIDL-Lite XML fragment template containing only the minimal properties as described in 10.1.6.14.8 or example, since the @id property value only needs to be unique within the scope of the DIDL-Lite XML fragment, the @id property value can be any value chosen by the Push Controller; the @parent property can have a value of -1, and the @restricted property value can be either 0 or 1.

10.1.6.8.4

[GUIDELINE] If the CurrentURI input argument for the AVT:SetAVTransportURI request contains the URI of a media collection file, then the CurrentURIMetaData input argument of the same request shall contain only one <res> element and its URI value shall be the same as the value contained in the CurrentURI input argument.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	G3HWW	

[COMMENT] Metadata for a media collection is only meaningful for a single <res> CDS object.

10.1.6.8.5

[GUIDELINE] If the CurrentURI input argument for the AVT:SetAVTransportURI request contains a DLNA PlayContainer URI, then the CurrentURIMetaData input argument of the same request shall be an empty string.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	OVM6G	

[COMMENT] Metadata has no meaning for the DLNA PlayContainer URI case.

10.1.6.8.6

[GUIDELINE] If the CurrentURI input argument for the AVT:SetAVTransportURI request is an empty string, then the CurrentURIMetaData input argument of the same request should be an empty string.

[ATTRIBUTES]

S	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	3HWWT	

[COMMENT] Metadata has no meaning when the CurrentURI input argument is an empty string (i.e. no content to be rendered). The behaviour for the UPnP AV MediaRenderer is vendor dependent when metadata is provided (some UPnP AV MediaRenderers will select a <res> element from the metadata to render as per guideline requirement 10.1.6.9.1; other UPnP AV MediaRenderers will reset the rendering state.)

10.1.6.9 MM UPnP AV MediaRenderer selects a different <res> element

10.1.6.9.1

[GUIDELINE] A UPnP AV MediaRenderer that receives an AVT:SetAVTransportURI request may override the CurrentURI input argument by selecting one of the <res> elements specified in the CurrentURIMetaData input argument.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	8GKWS	

[COMMENT] The general purpose is to allow a UPnP AV MediaRenderer control point to recommend a URI using the CurrentURI input argument while providing alternate choices to the UPnP AV MediaRenderer through the CurrentURIMetaData input argument of the AVT:SetAVTransportURI action.

If a UPnP AV MediaServer exposes multiple <res> elements, the UPnP AV MediaRenderer control point might not be able to determine the preferred <res> element for a given server/renderer pair. Examples of multiple <res> elements include:

- HTTP and RTP Media Transports;
- Transcoded content;
- Multi-homed content;
- PS and ES versions of content (RTP Media Transport only);
- Transrated content available at different bitrates.

The CMS:GetProtocolInfo action alone does not provide sufficient information for a UPnP AV MediaRenderer control point to always select the most appropriate URI to pass to AVT:AVTransportSetURI.

10.1.6.9.2

[GUIDELINE] A UPnP AV MediaRenderer that receives an AVT:SetAVTransportURI request shall continue selecting one of the <res> elements specified in the CurrentURIMetaData input argument until it selects one it can render.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	6NFSA	N

[COMMENT] This guideline requires a DMR to automatically select an alternate <res> element for rendering when it fails to render the content. This is to prevent having the DMR return an error and have the controlling application to select an alternate <res> element to render to improve playback latency.

10.1.6.9.3

[GUIDELINE] A Rendering Endpoint that fails to render the selected content shall try selecting and rendering the content in a different media format profile if available.

[ATTRIBUTES]

M	A	DMP	M-DMP	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	SFN5U	N

[COMMENT] This guideline requires a DMP/M-DMP to automatically select an alternate <res> element for rendering when it initially fails to render the content.

10.1.6.9.4

[GUIDELINE] If a UPnP AV MediaRenderer control point calls AVT:SetAVTransportURI and provides a DIDL-Lite XML fragment for the CurrentURIMetaData argument, then the DIDL-Lite fragment shall include all of the <res> elements associated with the object represented by the DIDL-Lite XML fragment in the initial request to play the content.

[ATTRIBUTES]

S	L	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	ZOH44	

[COMMENT] The DIDL-Lite XML fragment will at least required have the <res> element for the URI specified in request, as required by 10.1.6.14.8. Additional <res> elements are encouraged to allow the UPnP AV MediaRenderer to choose a different URI for playback. In addition, the DIDL-Lite XML fragment when sourced from a UPnP AV MediaServer is from a CDS object.

10.1.6.9.5

[GUIDELINE] If the initial request to play content fails as defined in 10.1.6.9.4, then the UPnP AV MediaRenderer control point shall reinvoke the AVT:SetAVTransportURI action after removing <res> elements associated with the object represented by the DIDL-Lite XML fragment in the CurrentURIMetaData argument.

[ATTRIBUTES]

M	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	YCGKU	N

[COMMENT] This guideline allows a UPnP AV MediaRenderer control point to remove <res> elements from the DIDL-Lite XML fragment to help aid in the playability of the content associated CDS object if the initial attempt in guideline 10.1.6.9.4 fails. <res> elements that could be first removed are unsupported MIME types and content that the renderer could not play. Failures could occur if the the metadata contained in the CurrentURIMetaData argument is too large.

10.1.6.9.6

[GUIDELINE] A UPnP AV MediaServer control point shall select a <res> element from a CDS object that is compatible with the capabilities of the Rendering Endpoint.

[ATTRIBUTES]

M	A	DMC DMP	M-DMC M-DMP	n/a	ISO/IEC 29341-20-12: 2016	A6OKQ	N

[COMMENT]

- 1) This guideline is to prevent implementations from always selecting the first <res> element in a CDS object for playback which might not be playable.
- 2) The best user experience would be achieved with the <res> element with the best match (e.g. best resolution).

10.1.6.10 MM UPnP AV MediaRenderer and DLNA PlayContainer URI

10.1.6.10.1

[GUIDELINE] A UPnP AV MediaRenderer that supports playback of a DLNA PlayContainer URI shall use a playcontainer-param set to true in the 4th field protocolInfo parameter of individual protocolInfo to indicate that the UPnP AV MediaRenderer will render that type of content when given a DLNA PlayContainer URI. This guideline specifically applies to the protocolInfo values

listed in the Sink output argument of CMS:GetProtocolInfo responses and the CMS.SinkProtocolInfo state variable.

All guideline requirements in 10.1.6.10 apply in the context of a UPnP AV MediaRenderer that supports the rendering of DLNA PlayContainer URIs.

All guideline requirements in 10.1.6.10 apply in conjunction with all other guideline requirements that govern a UPnP AV MediaServer control point.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-14-11 ISO/IEC 29341-3-2	43YT3

[COMMENT] A UPnP AV MediaRenderer indicates support for DLNA PlayContainer URI values by using the playcontainer-param flag. ProtocolInfo values that omit this parameter indicate that the UPnP AV MediaRenderer will not play that type of content as part of a DLNA PlayContainer URI operation.

Setting the playcontainer-param flag to true does not mean that a UPnP AV MediaRenderer requires the media type to be played only through a DLNA PlayContainer URI operation. (That is, the UPnP AV MediaRenderer control point can specify a URI that points to content of the specified protocolInfo, or the UPnP AV MediaRenderer control point can specify a DLNA PlayContainer URI that will result in the playback of content with the specified protocolInfo.)

10.1.6.10.2

[GUIDELINE] If a UPnP AV MediaRenderer supports playback of a DLNA PlayContainer URI, then it shall support playback of a DLNA PlaySingle URI as part of the DLNA PlayContainer URI operation.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-3-2	JU4ZA

[COMMENT] A UPnP AV MediaRenderer that can play a DLNA PlayContainer URI already has a UPnP AV MediaServer control point that enables it to browse a UPnP AV MediaServer.

10.1.6.10.3

[GUIDELINE] A UPnP AV MediaRenderer that supports rendering of DLNA PlayContainer URIs shall support rendering of a CDS object, if the CDS object meets the following criteria.

- The CDS object falls into the media collection that is defined by the DLNA PlayContainer URI.
- The CDS object has a <res> element with a res@protocolInfo that indicates a supported Media Format Profile, as described by 10.1.6.1.2.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	BS2HV

[COMMENT] This guideline essentially says that a UPnP AV MediaRenderer will render content that is supported by the UPnP AV MediaRenderer and can be found by traversing the CDS in the manner prescribed for a DLNA PlayContainer URI.

10.1.6.11 MM UPnP AV MediaRenderer AVT state variables

10.1.6.11.1

[GUIDELINE] A UPnP AV MediaRenderer that renders a content binary that is not part of a DLNA PlayContainer URI or media collection file shall use the following mapping for virtual instance state variables.

- The AVT.AVTransportURI value shall be the URI provided in the CurrentURI input argument of the AVT:SetAVTransportURI request or it shall be a URI obtained from a <res> element in the CurrentURIMetaData input argument of the same request.
- The AVT.CurrentTrackURI value shall be equal to the AVT.AVTransportURI value.
- The AVT.CurrentTrack and AVT.NumberOfTracks values shall be "1".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	W74MV	

[COMMENT] In conjunction with other DLNA guidelines that define general rules for ensuring consistency between different AVTransport state variables, this guideline clarifies how those other guidelines apply specifically, in the case where a control point instructs a UPnP AV MediaRenderer to render a single content binary.

Guideline requirement 10.1.6.9.1 permits a UPnP AV MediaRenderer to override the CurrentURI input argument with a URI from the CurrentURIMetaData input argument.

10.1.6.11.2

[GUIDELINE] A UPnP AV MediaRenderer that renders a media collection file shall use the following mapping for virtual instance state variables.

- The AVT.AVTransportURI value shall be the URI provided in the CurrentURI input argument of the AVT:SetAVTransportURI request.
- The AVT.CurrentTrackURI value shall be the URI for the track that is currently being rendered. (That is, the URI for the actual audio-only, audio/video, or image content that is actually rendered.)
- The AVT.CurrentTrack value shall be the index within the media collection file, where the URI for the track can be found. This value is 1 for the first track URI in the media collection file and is incremented by one for each successive track even if the track cannot be rendered.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	S2HVV	

[COMMENT] In conjunction with other DLNA guidelines that define general rules for ensuring consistency between different AVTransport state variables, this guideline clarifies how those

other guidelines apply specifically, in the case of media collection files. There could be some tracks in the media collection file that might not be able to be rendered by the UPnP AV MediaRenderer (e.g. unsupported Media Format Profile for a track URI).

The AVT.CurrentTrackURI virtual instance state variable value is never the URI of the media collection file.

10.1.6.11.3

[GUIDELINE] A UPnP AV MediaRenderer that renders a DLNA PlayContainer URI shall use the following mapping for virtual instance state variables.

- The AVT.AVTransportURI value shall be the URI provided in the CurrentURI input argument of the AVT:SetAVTransportURI request.
- The AVT.CurrentTrackURI shall be the URI for the track that is currently being rendered. (i.e. the URI for the actual audio-only, audio/video, or image content that is being rendered).

PlayContainerTrackIndex is defined as the index of a rendered content, relative to the sequenced set of content, represented by the DLNA PlayContainer URI.

PlayContainerTotalTracks is defined as the last index of rendered content in the sequenced set of content, represented by the DLNA PlayContainer URI.

PlayContainerTrackIndex and PlayContainerTotalTracks shall be calculated in a manner consistent with these rules.

- Index calculation shall always be done with a preorder traversal of the CDS hierarchy, such that the first CDS object that is played shall have an index of "1". A preorder traversal means that for a given CDS:Browse request (with sort-args applied), left subtrees and leaves (i.e. CDS objects that appear earlier in the CDS:Browse response) are processed before right subtrees and leaves (i.e. CDS objects that appear later in the CDS:Browse response).
- If encountered during traversal, CDS items shall always have a count of "1", regardless of whether they are played or skipped. A skipped CDS item is one where none of the CDS item's <res> elements are rendered by the UPnP AV MediaRenderer. If the CDS item has zero <res> elements, it shall be considered skipped.
- A CDS item with a media collection binary shall always have a count of "1". Furthermore, these CDS items shall be skipped. (See 10.1.4.29.4 MM DLNA PlayContainer URI for information on the prohibition of playing media collection binaries.)
- If rendered, a CDS item shall automatically render at least one <res> elements associated with the CDS item. If multiple <res> elements are rendered, then they shall be rendered simultaneously. (That is, a UPnP AV MediaRenderer does not render the same content (in different profiles or transports) multiple times, but a UPnP AV MediaRenderer is permitted to render an image in conjunction with an audio at the same time.)
- If encountered during traversal, a CDS container shall have a count of "0" because <res> elements of a CDS container shall never be played. (See 10.1.4.29.4 MM DLNA PlayContainer URI for information on the restriction for playing only CDS items.)

A CDS object shall be counted if and only if there are max-depth-val or fewer CDS containers between the CDS object and the CDS container identified by container-id-val, as defined in 10.1.4.29. (That is, these are the CDS objects that are traversed.)

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	U4ZAU	

[COMMENT] In conjunction with other DLNA guidelines that define general rules for ensuring consistency between different AVTransport state variables, this guideline clarifies how those other guidelines apply specifically, in the case of DLNA PlayContainer URI values.

The AVT.NumberOfTracks virtual instance state variable is often updated progressively because it is often difficult to count the number of tracks for all types of media collections, whether they be represented through a DLNA PlayContainer URI or a media collection file.

The AVT.CurrentTrackURI virtual instance state variable value is never the DLNA PlayContainer URI.

10.1.6.11.4

[GUIDELINE] A UPnP AV MediaRenderer that renders a media collection file should use the following mapping for virtual instance state variables.

- The AVT.NumberOfTracks value should be the number of content entries in the media collection file (which is often progressively calculated).

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	Q8QS5	

[COMMENT] Some UPnP AV MediaRenderers might not be able to immediately provide a count of the playback items in a media collection file. The AVTransport specification takes this into account and permits UPnP AV MediaRenderers to update the value in a progressive manner.

This guideline strongly recommends that a UPnP AV MediaRenderer provide the number of playback items in the current media collection file. Sometimes the final value is acquired in an immediate fashion; other times, the value has to be acquired through a counting process. The manner in which the UPnP AV MediaRenderer acquires the total track count is up to the implementer, but the obligation to provide an accurate value exists according to the intentions of the AVTransport specification.

10.1.6.11.5

[GUIDELINE] A UPnP AV MediaRenderer that renders a DLNA PlayContainer URI should use the following mapping for virtual instance state variables.

- The AVT.NumberOfTracks value should be the PlayContainerTotalTracks (which is often progressively calculated).

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	SRWQV	

[COMMENT] The AVT.NumberOfTracks virtual instance state variable is often updated progressively because it is often difficult to count the number of tracks for all types of media collections, whether they be represented through a DLNA PlayContainer URI or a media collection file.

This guideline strongly recommends that a UPnP AV MediaRenderer provide the number of playback items in the current DLNA PlayContainer URI. Sometimes the final value is acquired in an immediate fashion; other times, the value has to be acquired through a counting process. The manner in which the UPnP AV MediaRenderer acquires the total track count is up to the implementer, but the obligation to provide an accurate value exists according to the intentions of the AVTransport specification.

10.1.6.11.6

[GUIDELINE] A UPnP AV MediaRenderer that renders a DLNA PlayContainer URI shall use one of the following values for AVT.CurrentTrack virtual instance state variable.

- The value of PlayContainerTrackIndex as defined in 10.1.6.11.3.
- A value of "0" to indicate that the PlayContainerTrackIndex is being calculated.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	Q8ON2	

[COMMENT] A UPnP AV MediaRenderer cannot be able to immediately calculate the PlayContainerTrackIndex, as the calculation process could involve multiple interactions with the target UPnP AV MediaServer to traverse the CDS. This guideline states that a UPnP AV MediaRenderer uses a value of "0" for the AVT.CurrentTrack virtual instance state variable to indicate that the correct value of PlayContainerTrackIndex is not yet available.

10.1.6.11.7

[GUIDELINE] If no content has been assigned to the UPnP AV MediaRenderer for rendering or the UPnP AV MediaRenderer receives an AVT.SetAVTransportURI action with both the CurrentURI and CurrentURIMetaData input arguments set to an empty string, then the UPnP AV MediaRenderer shall use the following mapping for virtual instance state variables.

- The AVT.AVTransportURI and AVT.CurrentTrackURI values shall be "".
- The AVT.CurrentTrack and AVT.NumberOfTracks values shall have a value of "0".
- The AVT.TransportState shall have a value of "No_Media_Present".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	VM6GK	

[COMMENT] This is for the situation after a reset condition for a UPnP AV MediaRenderer or by a UPnP AV MediaRenderer control point through the AVT.SetAVTransportURI action (10.1.6.8.2) to clear the rendering state.

10.1.6.12 MM GetMediaInfo behaviour

10.1.6.12.1

[GUIDELINE] The CurrentURI output argument of the AVT:GetMediaInfo action shall return the value of the AVT.AVTransportURI virtual instance state variable.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	3YT3F	

[COMMENT] This requirement repeats what is already stated in the AVTransport specification. Some implementations have accidentally mistaken the CurrentURI output argument and the AVT.AVTransportURI values to be always equivalent to the TrackURI output argument of AVT:GetPositionInfo and the AVT.CurrentTrackURI virtual instance state variable.

10.1.6.12.2

[GUIDELINE] The NrTracks output argument of the AVT:GetMediaInfo action shall return the same value as the AVT.NumberOfTracks virtual instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	OH44W	

[COMMENT] These guidelines specify the behaviour for reporting the value for NrTracks (and AVT.NumberOfTracks).

10.1.6.12.3

[GUIDELINE] In conjunction with 10.1.6.11.2, 10.1.6.11.3, 10.1.6.11.4, and 10.1.6.11.5, a UPnP AV MediaRenderer that progressively updates the value of AVT.NumberOfTracks should provide the total count within 10 s of the previous call to AVT:SetAVTransportURI.

[ATTRIBUTES]

S	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	4Q9J4	

[COMMENT] DLNA recommends that UPnP AV MediaRenderers provide the count in a timely manner. Control points often display such information to a user and sometimes use the track count information to determine what a user can or cannot do.

This guideline is not required because media collection files can be very large and, in the case of DLNA PlayContainer URIs, CDS hierarchies can be very complex.

10.1.6.12.4

[GUIDELINE] The MediaDuration output argument of the AVT:GetMediaInfo action shall return the value of the AVT.CurrentMediaDuration virtual instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	44KUE	

10.1.6.12.5

[GUIDELINE] In conjunction with 10.1.6.12.9, a UPnP AV MediaRenderer may progressively update the value of AVT.CurrentMediaDuration, such that the total sum is not provided immediately.

The definition of update progressively is that the UPnP AV MediaRenderer updates the state variable (and appropriately sends GENA events) at a rate that does not exceed one GENA event every 0,2 s.

[ATTRIBUTES]

O	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	Q9J4K	

[COMMENT] Some UPnP AV MediaRenderers might not be able to immediately provide the duration sum for all playback items in a media collection. The AVTransport specification takes this into account and permits UPnP AV MediaRenderers to update the value in a progressive manner.

10.1.6.12.6

[GUIDELINE] In conjunction with 10.1.6.12.5, a UPnP AV MediaRenderer that progressively updates the value of AVT.CurrentMediaDuration should provide the total sum within 10 s of the previous call to AVT:SetAVTransportURI.

[ATTRIBUTES]

S	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	VW4BW	

[COMMENT] DLNA recommends that UPnP AV MediaRenderers provide the duration sum in a timely manner.

10.1.6.12.7

[GUIDELINE] Information returned by AVT:GetMediaInfo should be as accurate as possible. The output arguments that UPnP AV MediaRenderer control points will rely on most will be: NrTracks, CurrentURI, CurrentURIMetaData, and MediaDuration.

This also includes the following possibilities and assumptions.

- Some output arguments can be progressively updated as the device acquires more information (e.g., NrTracks).
- Some output arguments can have values to indicate that the information cannot be provided (e.g., NOT_IMPLEMENTED value for MediaDuration as defined in requirement 10.1.6.12.8).
- CurrentURIMetaData can have values as defined in guideline requirements 10.1.6.14.
- Some output arguments can have placeholder values to indicate information is not yet available. (That is, DIDL-Lite document with schema-compliant placeholder values.)

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	Y37DW	

[COMMENT] This suggestion permits devices to use placeholder values where appropriate, although the guideline strongly encourages information be as accurate as possible.

10.1.6.12.8

[GUIDELINE] A UPnP AV MediaRenderer shall do one of the following.

- Never set the value of the AVT.CurrentMediaDuration virtual instance state variable to "NOT_IMPLEMENTED".
- Always set the value of the AVT.CurrentMediaDuration virtual instance state variable to "NOT_IMPLEMENTED".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	8QS58	

[COMMENT] UPnP AV MediaRenderers are not allowed to selectively use the string "NOT_IMPLEMENTED" for some contents but not others.

10.1.6.12.9

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.CurrentMediaDuration virtual instance state variable to "NOT_IMPLEMENTED", the AVT.CurrentMediaDuration virtual instance state variable should be the total duration for the content specified in AVT.AVTransportURI. When the AVT.AVTransportURI is a media collection or a DLNA PlayContainer URI, the AVT.CurrentMediaDuration virtual instance state variable is the sum of all known playback durations for each item in the media collection or DLNA PlayContainer URI.

[ATTRIBUTES]

S	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	RWQV7	

[COMMENT] UPnP AV MediaRenderers often know the playback duration, of items in a media collection or DLNA PlayContainer URI, through summing the durations progressively or by using some metadata within the media collection or through the PlayContainer URI that provides the value in an immediate fashion.

This guideline places no mandatory requirement on the accuracy of the total media duration. If the UPnP AV MediaRenderer is not able to provide a value, then the value of the virtual instance state variable is vendor-dependent.

10.1.6.12.10

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.CurrentMediaDuration virtual instance state variable to "NOT_IMPLEMENTED", but the UPnP AV MediaRenderer cannot compute the duration of the associated content, then the value of state variable shall be set to either "0:00:00" or "00:00:00" to indicate an unknown duration.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	VHOQE	

[COMMENT] this guideline clarifies that a value of "0:00:00" or "00:00:00" in state variable AVT.CurrentMediaDuration indicates unknown duration for the content associated with AVT.AVTransportURI virtual instance state variable. For example, if the 5th entry in a media collection does not have a duration, then the duration for the entire media collection will be unknown. Another example: If the UPnP AV MediaRenderer is playing an image that is not part of a media collection or a PlayContainer operation, then the value of AVT.CurrentMediaDuration is the same as AVT.CurrentTrackDuration.

10.1.6.13 MM GetPositionInfo behaviour**10.1.6.13.1**

[GUIDELINE] The AVT:GetPositionInfo shall return values in the following manner.

- The Track output argument shall be equal to AVT.CurrentTrack value.
- The TrackURI output argument shall be equal to AVT.CurrentTrackURI value.

Note that there can be a time period where the URI and track values are temporarily non-synchronized for transitioning purposes.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	A68VL	

[COMMENT] When the UPnP AV MediaRenderer is in the "Transitioning" state, the URI values and track index values can be non-synchronized. When the UPnP AV MediaRenderer enters a

non-transitional state (e.g. "Playing", "Stopped", etc.), the URI and track values are expected to be accurate as described in the guideline.

10.1.6.13.2

[GUIDELINE] Information returned by AVT:GetPositionInfo should be as accurate as possible. The output arguments that control points will rely on most will be: RelTime, TrackDuration, Track, and TrackURI.

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	74MVR	

[COMMENT] This suggestion permits devices to use placeholder values where appropriate-although the guideline strongly encourages information be as accurate as possible.

10.1.6.13.3

[GUIDELINE] The TrackDuration output argument of the AVT:GetPositionInfo action shall return the value of the AVT.CurrentTrackDuration virtual instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	XTD3B	

10.1.6.13.4

[GUIDELINE] A UPnP AV MediaRenderer shall do one of the following:

- Never set the value of the AVT.CurrentTrackDuration virtual instance state variable to "NOT_IMPLEMENTED".
- Always set the value of the AVT. CurrentTrackDuration virtual instance state variable to "NOT_IMPLEMENTED".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	59RRB	

[COMMENT] UPnP AV MediaRenderers are not allowed to selectively use the string "NOT_IMPLEMENTED" for some tracks but not others.

10.1.6.13.5

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.CurrentTrackDuration virtual instance state variable to "NOT_IMPLEMENTED", then the AVT.CurrentTrackDuration virtual instance state variable should be the duration for the track specified in AVT.CurrentTrackURI.

[ATTRIBUTES]

S	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	8EII9	

[COMMENT] Provides baseline expectations for reporting the playback duration of the track that is currently being rendered. This guideline does not impose any mandatory accuracy requirements because methodologies for determining the playback duration varies between implementations and often has a dependency on the media formats. If the UPnP AV MediaRenderer is not able to provide a value, then the value of the virtual instance state variable is vendor-dependent.

10.1.6.13.6

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.CurrentTrackDuration virtual instance state variable to "NOT_IMPLEMENTED", but the UPnP AV MediaRenderer cannot compute the duration of the track (for example, if the track is an image), then the value of this state variable shall be set to either "0:00:00" or "00:00:00" to indicate an unknown duration.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	Y6LY5	

[COMMENT] This guideline clarifies that a value of "0:00:00" or "00:00:00" in state variable AVT.CurrentTrackDuration indicates unknown track duration for the current media resource.

10.1.6.13.7

[GUIDELINE] The RelTime output argument of the AVT:GetPositionInfo action shall return the value of the AVT.RelativeTimePosition virtual instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	P5VR2	

10.1.6.13.8

[GUIDELINE] A UPnP AV MediaRenderer shall do one of the following:

- Never set the value of the AVT.RelativeTimePosition virtual instance state variable to "NOT_IMPLEMENTED".
- Always set the value of the AVT.RelativeTimePosition virtual instance state variable to "NOT_IMPLEMENTED".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	TD3B8	

[COMMENT] UPnP AV MediaRenderers are not allowed to selectively use the string "NOT_IMPLEMENTED" for some tracks but not others.

10.1.6.13.9

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.RelativeTimePosition virtual instance state variable to "NOT_IMPLEMENTED", the AVT.RelativeTimePosition virtual instance state variable shall indicate the current playback position in terms of time for the content indicated by AVT.CurrentTrackURI. The value of the AVT.RelativeTimePosition virtual instance state variable shall not be "END_OF_MEDIA".

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	9RRBW	

[COMMENT] This guideline specifies the correct behaviour for reporting the RelTime output arguments. Reporting an empty string is not acceptable.

Reporting "END_OF_MEDIA" is not acceptable in the DLNA context.

DLNA only defines the usage of AVT.RelativeTimePosition. The use of AVT.AbsoluteTimePosition and the AbsTime output argument of the AVT:GetPositionInfo action is vendor dependent.

10.1.6.13.10

[GUIDELINE] The TrackMetaData output argument of the AVT:GetPositionInfo action shall return the value of the AVT.CurrentTrackMetaData virtual instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	EII9O	

10.1.6.13.11

[GUIDELINE] A UPnP AV MediaRenderer shall do one of the following:

- never set the value of the AVT.CurrentTrackMetaData virtual instance state variable to "NOT_IMPLEMENTED".
- always set the value of the AVT.CurrentTrackMetaData virtual instance state variable to "NOT_IMPLEMENTED".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	5VR2J	

[COMMENT] UPnP AV MediaRenderers are not allowed to selectively use the string "NOT_IMPLEMENTED" for some tracks but not others.

10.1.6.13.12

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.CurrentTrackMetaData virtual instance state variable to "NOT_IMPLEMENTED", the AVT.CurrentTrackMetaData virtual instance state variable shall be formatted in one of the following ways:

- The value shall specify a valid DIDL-Lite XML fragment as defined in 10.1.6.14.8, with a single <item> element that describes the track indicated by the AVT.CurrentTrackURI instance state variable.
- The value shall be an empty string when no metadata is available for the current track indicated by the AVT.CurrentTrackURI virtual instance state variable, or when the AVT.CurrentTrackURI virtual instance state variable is also an empty string (e.g. no content is set up for rendering).

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	D3B8T	

10.1.6.14 MM Metadata reporting**10.1.6.14.1**

[GUIDELINE] If a UPnP AV MediaRenderer always sets the value of the AVT.AVTransportURIMetaData virtual instance state variable to "NOT_IMPLEMENTED", then the UPnP AV MediaRenderer shall accept an AVT:SetAVTransportURI request as though an empty value was sent for the CurrentURIMetaData.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	4MVRM	

[COMMENT] This guideline essentially requires UPnP AV MediaRenderers to discard the CurrentURIMetaData value if the input argument is not supported. This guideline allows control points to use the CurrentURIMetaData input argument when invoking AVT:SetAVTransportURI, without having to implement logic for retrying the request without metadata.

Requirement 9.2.15.1 only requires UPnP devices to accept SOAP requests up to 20 480 B (20 KiB) in size.

10.1.6.14.2

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.AVTransportURIMetaData virtual instance state variable to "NOT_IMPLEMENTED", then the UPnP AV MediaRenderer may choose not to validate the CurrentURIMetaData input argument specified by the UPnP AV MediaRenderer control point in the AVT:SetAVTransportURI request.

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	HVW39	

[COMMENT] This guideline absolves UPnP AV MediaRenderers from having to parse or validate the DIDL-Lite metadata sent by a control point.

10.1.6.14.3

[GUIDELINE] The value of the CurrentURIMetaData output argument for the AVT:GetMediaInfo action shall be the same as the value of the AVT.AVTransportURIMetaData virtual instance state variable.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	T3FQL	

10.1.6.14.4

[GUIDELINE] A UPnP AV MediaRenderer shall update the AVT.AVTransportURI virtual instance state variable to indicate the "current URI" prior to changing the AVT.TransportState virtual instance state variable to "Playing".

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	44WMJ	

[COMMENT] This allows control points to know when the UPnP AV MediaRenderer has selected a different <res> element.

Control Points can rely on the GENA event to indicate when the UPnP AV Media Renderer has chosen an alternate URI.

This guideline applies generally, including these scenarios:

- The UPnP AV MediaRenderer uses the URI specified in the CurrentURI argument of the AVT:SetAVTransportURI request.
- The DMR overrides the specified URI (in the CurrentURI argument) with another one (from the CurrentURIMetaData argument) in the AVT:SetAVTransportURI request (as described in 10.1.6.9.1).

10.1.6.14.5

[GUIDELINE] UPnP AV MediaRenderers may specify a value for the AVT.AVTransportURIMetaData virtual instance state variable (and hence the

CurrentURIMetaData output argument of AVT:GetMediaInfo) that is different from the value of the CurrentURIMetaData argument of the last AVT:SetAVTransportURI request.

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	68VLX	

[COMMENT] UPnP AV MediaRenderers can have different values because of a variety of reasons.

- The device can parse different metadata from within the content file.
- The device can remove elements and attributes from the DIDL-Lite XML fragment (while remaining schema-compliant) to reduce memory use.
- The device can truncate values of elements and attributes to reduce memory use.

10.1.6.14.6

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.AVTransportURIMetaData virtual instance state variable to "NOT_IMPLEMENTED" and it specifies a value for the AVT.AVTransportURIMetaData virtual instance state variable (and hence the CurrentURIMetaData output argument of AVT:GetMediaInfo) that is different from the value of the CurrentURIMetaData argument of the last AVT:SetAVTransportURI request, then the UPnP AV MediaRenderer shall impose the following restrictions on the metadata.

- The provided metadata shall represent the metadata of the content indicated by the AVT.AVTransportURI virtual instance state variable.
- If the AVT.AVTransportURI virtual instance state variable points to a media collection, then the provided metadata shall be limited to the media collection. The provided metadata shall not include metadata for items within the media collection.
- The provided metadata shall specify a valid DIDL-Lite XML fragment as defined in 10.1.6.14.8.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	WSV39	

[COMMENT] Many control points have problems accepting large metadata values. This guideline limits the metadata for AVT.AVTransportURIMetaData and CurrentURIMetaData to refer specifically to the content indicated by the AVT.AVTransportURI virtual instance state variable. This guideline prohibits the general practice of collectively using the metadata of each item in a media collection to represent the metadata of a media collection.

10.1.6.14.7

[GUIDELINE] If a UPnP AV MediaRenderer is capable of playing a media collection and if the UPnP AV MediaRenderer has access to metadata of individual items in the collection, then the UPnP AV MediaRenderer should report these metadata through the AVT.CurrentTrackMetaData virtual instance state variable.

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	OC6RF	

[COMMENT] Control Points often use metadata provided by the UPnP AV MediaRenderer in user interfaces. UPnP AV MediaRenderers are strongly encouraged to provide such metadata whenever possible.

10.1.6.14.8

[GUIDELINE] If a UPnP AV MediaRenderer control point specifies a value for the CurrentURIMetaData argument of an AVT:SetAVTransportURI request, then the control point shall follow these restrictions for the value of the CurrentURIMetaData argument, as follows:

- compliant with the DIDL-Lite schema;
- exactly one <DIDL-Lite> element;
- exactly one <item> or <container> element;
- exactly one <dc:title> element and value;
- a minimum of zero and a maximum of one <dc:creator> element and value;
- exactly one <upnp:class> element and value;
- a minimum of one <res> element.

All other XML elements are permitted as long as they are properly declared with their namespaces.

The provided metadata shall represent the metadata of the content indicated by the CurrentURI input argument.

One of the <res> elements shall be the <res> element that contains the URI specified in the CurrentURI input argument.

If the CurrentURI input argument points to a media collection, then the provided metadata shall be limited to the media collection. The provided metadata shall not include metadata for items within the media collection.

[ATTRIBUTES]

M	L	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	37DW6	

[COMMENT] This guideline limits the scope of the CurrentURIMetaData to the metadata directly associated with the CurrentURI input argument. Metadata for a media collection is permitted, so long as value does not provide metadata for each of the individual items in the collection.

Many UPnP AV MediaRenderers have problems storing a large amount of metadata provided in the CurrentURIMetaData. Equally problematic is the fact that many control points cannot support a scenario where a UPnP device transmits a UPnP event or an AVT:GetMediaInfo response with a large amount of metadata.

The expected metadata to be sent in the CurrentURIMetaData argument is best described by the CDS:Browse response for the following request:

- ObjectID: The CDS object ID of that provided the URI specified in the CurrentURI input argument of AVT:SetAVTransportURI.
- BrowseFlag: BrowseMetadata.
- Filter: One or more of the following: ALLIP, res (and or any res attribute), dc:creator, and any other metadata that the control point wants to provide.

Whenever possible, control points are encouraged to provide all of the available <res> attributes that are normative for DIDL-Lite. Likewise, UPnP AV MediaRenderers are encouraged to accept and preserve these attributes.

The guideline permits control points to specify a single <res> element in the metadata, on behalf of a user request. In such cases, the CurrentURIMetaData argument only includes the <res> element that corresponds to the URI specified in the CurrentURI argument.

However, control points are encouraged to provide all available <res> elements. This allows UPnP AV MediaRenderers the opportunity to choose a <res> element that might provide a better rendering experience. See 10.1.6.9 for more information about UPnP AV MediaRenderers that select alternate URIs from the CurrentURIMetaData argument.

10.1.6.14.9

[GUIDELINE] UPnP AV MediaRenderer control points that receive metadata from a UPnP AV MediaRenderer shall be tolerant of DIDL-Lite metadata that is valid and conformant to DLNA restrictions.

Tolerant behaviour is defined as being able to parse-and-accept or parse-and-ignore the metadata. Failing to parse a DLNA-compliant UPnP action response or event because of metadata is unacceptable behaviour.

[ATTRIBUTES]

M	C	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	W4BWN	

[COMMENT] Control Points that invoke UPnP actions or subscribe to UPnP events that involve metadata needs to be prepared for the presence of metadata, even if metadata is not always provided.

10.1.6.14.10

[GUIDELINE] UPnP AV MediaRenderer control points that receive metadata from a UPnP AV MediaRenderer should be tolerant of DIDL-Lite metadata that is invalid or not conformant to DLNA restrictions.

Tolerant behaviour is defined as being able to parse-and-ignore the metadata.

[ATTRIBUTES]

S	C	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	9J4K4	

[COMMENT] UPnP AV MediaRenderer control points that can handle DIDL-Lite metadata that is not schema compliant exhibit a good level of robustness in an environment where DLNA UPnP AV MediaRenderer control points can be interacting with non-DLNA UPnP AV MediaRenderer devices.

10.1.6.14.11

[GUIDELINE] The UPnP AV MediaRenderer shall do one of the following:

- Never set the value of the AVT.AVTransportURIMetaData virtual instance state variable to "NOT_IMPLEMENTED".

- Always set the value of the AVT.AVTransportURIMetaData virtual instance state variable to "NOT_IMPLEMENTED".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	RRBWY	

[COMMENT] UPnP AV MediaRenderers are not allowed to selectively use the string "NOT_IMPLEMENTED" for some contents but not others.

10.1.6.14.12

[GUIDELINE] If a UPnP AV MediaRenderer never sets the value of the AVT.AVTransportURIMetaData virtual instance state variable to "NOT_IMPLEMENTED", then the AVT.AVTransportURIMetaData virtual instance state variable shall be formatted in one of the following ways.

- The value shall specify a valid DIDL-Lite XML fragment as defined in 10.1.6.14.8, with a single <item> element that describes the content indicated by the AVT.AVTransportURI virtual instance state variable.
- The value shall be an empty string when no metadata is available for the content indicated by the AVT.AVTransportURI virtual instance state variable, or when the AVT.AVTransportURI virtual instance state variable is also an empty string (e.g. no content is set up for rendering) or a DLNA PlayContainer URI.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	VR2JS	

[COMMENT] The UPnP AV MediaRenderer can obtain the metadata from the CurrentURIMetaData input argument in the AVT:SetAVTransportURI action, or by using other means (see also 10.1.6.14.5).

10.1.6.15 MM reporting transport information

10.1.6.15.1

[GUIDELINE] UPnP MediaRenderers that respond to an AVT:GetTransportInfo request shall reflect the play/transport state in the following manner.

- The CurrentTransportState output argument shall match the AVT.TransportState instance state variable.
- The CurrentTransportStatus output argument shall match the AVT.TransportStatus instance state variable.
- The CurrentSpeed output argument shall match the AVT.TransportPlaySpeed instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	KUEXL	

[COMMENT] This guideline makes it so that control points can safely assume that UPnP actions and instance state variables report the same transport state information.

10.1.6.15.2

[GUIDELINE] UPnP MediaRenderers that respond to an AVT:GetTransportSettings request shall accurately reflect the PlayMode output argument to match the AVT.CurrentPlayMode instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	UXLS	

10.1.6.16 MM normative MediaRenderer state transitions**10.1.6.16.1**

[GUIDELINE] If a UPnP MediaRenderer enters the "Transitioning" state, it shall change to the state desired by the control point within 30 s.

The longest period of time that a MediaRenderer device is permitted to remain in the "Transitioning" state is 30 s.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	J4K4Z	

[COMMENT] The "Transitioning" state is a way for a device to indicate that it is attempting to change into a different state, such as "Playing" or "Stopped".

10.1.6.16.2

[GUIDELINE] UPnP MediaRenderers may enter the "Transitioning" state at any time.

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	4BWN9	

[COMMENT] The AVTransport specification has an informative diagram that describes "Transitioning" to be used only between "Stopped" and "Playing" states. This diagram is not restrictive and it allows new transitions.

The "Transitioning" provides a useful cue to the user that the device is trying to do something. For example, entering the "Transitioning" state after a call to AVT:SetAVTransportURI acknowledges the user's request to change content even if playback has not yet begun. Likewise, if a device is in the "Playing" state and network problems interrupt playback, the device can go into the "Transitioning" state during the interruption.

10.1.6.16.3

[GUIDELINE] UPnP MediaRenderers shall not define a new intermediate state.

An intermediate state is a state that the device enters temporarily before entering the state requested by the control point.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	7DW6X	

[COMMENT] Defining a new intermediate state can confuse control points into believing other control points are trying to use the device. A control point that encounters a vendor-defined state of BUFFERING has no idea that this state is an intermediate state. Likewise, a control point that encounters a vendor-defined state of LOCKED has no idea that the device might remain in this state indefinitely. This guideline allows control points to always assume that vendor-defined states can last indefinitely and that "Transitioning" is the only intermediate state.

10.1.6.16.4

[GUIDELINE] UPnP MediaRenderers may define new non-intermediate states.

[ATTRIBUTES]

O	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	C6RFR	

[COMMENT] For example, defining a LOCKED state to indicate that the DMR cannot accept AVTransport requests is acceptable due to its current state (e.g. a local user is using the device directly).

However, creating a new state called BUFFERING to represent that the device is busy buffering data in preparation for rendering is not permitted.

The LOCKED and BUFFERING states are only examples. The key distinction between the examples is the former involves an out-of-scope scenario and the latter involves an in-scope scenario. In the case of LOCKED, an external stimulus (i.e. out-of-scope scenario) caused the device to enter the LOCKED state. In the case of BUFFERING, the DMR entered the BUFFERING state after a control point requested a normative state change request (e.g. play state change, track change, URI change, etc.).

10.1.6.16.5

[GUIDELINE] UPnP MediaRenderers may define new allowed values for the AVT.TransportStatus instance state variable.

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	SV393	

[COMMENT] In lieu of defining new intermediate states, vendors are permitted to use the TransportStatus instance state variable to convey additional information about the transport layer.

10.1.6.16.6

[GUIDELINE] UPnP MediaRenderers that define new allowed values for the AVT.TransportStatus instance state variable should begin the allowed value with "ERROR_" to indicate the value represents an error condition.

[ATTRIBUTES]

S	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	8VLXY	

[COMMENT] This guideline allows control points to mark status values as being informative or error-related. The normative error value for AVT.TransportStatus is ERROR_OCCURRED.

10.1.6.16.7

[GUIDELINE] If a UPnP AV MediaRenderer responds to an AVT:Seek action with the 200 (OK) response code and the value of the AVT.TransportState virtual instance state variable is "Paused_Playback" or "Stopped", then it shall set the AVT.TransportState virtual instance state variable to a value of "Transitioning". After the seek operation is completed (i.e. the desired playback position is reached), the UPnP AV MediaRenderer shall set the AVT.TransportState virtual instance state variable to the value before the transition to "Transitioning".

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	76CN7	

[COMMENT] This guideline allows UPnP AV MediaRenderer control points to detect a change to the transport state (AVT.TransportState) on the UPnP AV MediaRenderer through the eventing of the AVT.LastChange virtual state variable and could be used to trigger an invocation of the AVT.GetPositionInfo action. This guideline applies even when performing an instantaneous seek on cached content and remaining in the same transport state.

10.1.6.16.8

[GUIDELINE] A UPnP AV MediaRenderer control point should always invoke the AVT.GetPositionInfo action when the AVT.LastChange evented state variable contains an update to the AVT.TransportState virtual instance state variable with a value of "Paused_Playback" or "Stopped" even when the AVT.TransportState virtual instance state variable value is the same as currently cached in the UPnP AV MediaRenderer control point.

[ATTRIBUTES]

S	A	DMC+PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	VQ7SL	

[COMMENT] This guideline gives guidance to UPnP AV MediaRenderer control points to refresh their current position information when a UPnP AV MediaRenderer reports a transport state change to "Paused_Playback" or "Stopped".

For example, when a UPnP AV MediaRenderer control point, not actively controlling a UPnP AV MediaRenderer, observes over the network that a UPnP AV MediaRenderer is currently in the "Paused_Playback" or "Stopped" state, then seeks to a new position where it enters the "Transitioning" state, and then transitions back to the "Paused_Playback" or "Stopped" state when the seek completes, the UPnP AV MediaRenderer control point needs to invoke an AVT.GetPositionInfo action to the UPnP AV MediaRenderer after each transport state change including when the seek completes (i.e. returns to the "Paused_Playback" or "Stopped" state) to refresh the current position.

10.1.6.16.9

[GUIDELINE] If a UPnP AV MediaRenderer receives an AVT.Play request to play an image, then it shall transition into a "Playing" state as soon as it successfully decodes and starts rendering the image.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	6GN3G	

[COMMENT] This guideline together with 10.1.6.16.10 and 10.1.6.16.11 define the use of the "Playing" state for UPnP AV MediaRenderers that play image content.

10.1.6.16.10

[GUIDELINE] If a UPnP AV MediaRenderer is currently playing an image, it shall remain in the "Playing" state until it receives a new action that changes its state, or until some third-party application forces the UPnP AV MediaRenderer to adopt a different state using means outside the scope of DLNA.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	CFWQ5	

[COMMENT] This guideline together with 10.1.6.16.7 and 10.1.6.16.11 define the use of the "Playing" state for UPnP AV MediaRenderers that play image content.

For example, if a TV that is operating as a UPnP AV MediaRenderer receives a request to display a picture, the TV will change its state into "Playing" as soon as it starts displaying the picture on the screen. The TV will remain in this state, and will remain displaying the picture, until one of two things happen:

- the TV receives a request to change its state from a UPnP AV MediaRenderer Control Point in the network. The request source could be the original UPnP AV MediaRenderer Control Point or a different one;
- a different application forces the TV to change its state. Examples of the latter are: a user tunes to some channel for watching TV, or the TV starts a screen saver application after some time of inactivity.

10.1.6.16.11

[GUIDELINE] If a UPnP AV MediaRenderer that has been playing an image stops displaying the image due to the intervention of a third-party application, it shall enter into the "Stopped" or "No_Media_Present" states.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	93BWN	

[COMMENT] This guideline together with 10.1.6.16.7 and 10.1.6.16.10 define the use of the "Playing" state for UPnP AV MediaRenderers that play image content.

For example, if a TV operating as a UPnP AV MediaRenderer is displaying a picture and changes the picture due to some screen saver application, the TV will change its state into "Stopped" or "No_Media_Present" as long as the TV can still respond successfully to requests to play media from the network. Notice that some third-party applications do not allow the TV to receive control actions as long as the third-party application is controlling the device. For example, a TV that is currently used for watching broadcast channels could block action requests from the network to play media.

10.1.6.16.12

[GUIDELINE] If a UPnP AV MediaRenderer is currently playing an image, and it receives an AVT:Stop action, then it shall transition into the "Stopped" state.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	GWEVN	

10.1.6.16.13

[GUIDELINE] If in a UPnP AV MediaRenderer the value of the AVT.CurrentTrackURI virtual instance state variable is an image URI, and if the UPnP AV MediaRenderer is in the "Stopped" state, then the UPnP AV MediaRenderer shall not display the image.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	FAINZ	

[COMMENT] This guideline clarifies that when a UPnP AV MediaRenderer is in the "Stopped" state, and the currently available content is an image, the UPnP AV MediaRenderer needs to clear the screen and not show the image.

10.1.6.17 MM transport actions

10.1.6.17.1

[GUIDELINE] The comma-separated list of values listed in the AVT.CurrentTransportActions virtual instance state variable may change depending on what the device is doing and what content the device is accessing.

[ATTRIBUTES]

O	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	VLXYX	

[COMMENT] This guideline requirement references the permitted and expected behaviours of a device that dynamically enables/disables its AVTransport actions.

10.1.6.17.2

[GUIDELINE] The value returned in the Actions output argument of an AVT:GetCurrentTransportActions request shall match the value of the AVT.CurrentTransportActions virtual instance state variable.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	V393O	

10.1.6.17.3

[GUIDELINE] A UPnP AV MediaRenderer control point should provide a UI indicator to inform a user of disabled transport actions.

[ATTRIBUTES]

S	C	DMC +PU+	M-DMC	n/a	n/a	6RFRG	

[COMMENT] This guideline requires control points to provide UI indications to inform users that a playback feature is disabled. Without this information, a user can be misled into believing that the device is not working properly. Examples of user indicators include the following:

- gray-out the button for the disabled operation;
- an icon that flashes on the screen to indicate the disabled state when the user pushes the button.

Depending on UI form factor this guideline can be difficult to implement, such as a handheld remote with physical buttons.

10.1.6.17.4

[GUIDELINE] A UPnP AV MediaRenderer shall report the disabling of the Pause operation by excluding the value "Pause" from the Actions output argument of an AVT:GetCurrentTransportActions and the AVT.CurrentTransportActions virtual instance state variable.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	n/a	DW6X6	

10.1.6.17.5

[GUIDELINE] If a UPnP AV MediaRenderer's AVT.NumberOfTracks value is greater than 1, then the AVT:Next/AVT:Previous actions shall have the behaviour of incrementing/decrementing the AVT:CurrentTrack virtual instance state variable (and likewise properly reflecting other state change information required by the AVTransport specification).

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	BWN9C	

[COMMENT] This guideline defines the behaviour of AVT:Next and AVT:Previous in the context of playing a media collection. Behaviour for AVT:Next and AVT:Previous is not defined for other cases.

10.1.6.17.6

[GUIDELINE] If a UPnP AV MediaRenderer's AVT.NumberOfTracks value is equal to 1, then a UPnP AV MediaRenderer control point should not issue the AVT:Next and AVT:Previous actions, as the behaviour performed by a UPnP AV MediaRenderer is implementation dependent.

[ATTRIBUTES]

S	C	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	3B8T5	

[COMMENT] The behaviour is not defined in ISO/IEC 29341-20-10:2011 and preferably will not be used in this particular situation.

10.1.6.17.7

[GUIDELINE] If in a UPnP AV MediaRenderer, the value of the AVT.TransportURI virtual instance state variable is an image URI, then the value of the AVT.CurrentTransportActions virtual instance state variable should not include the value "Pause".

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	B2JKO	

[COMMENT] If a UPnP AV MediaRenderer plays an image, the relevant transport actions are "Play" and "Stop". The UPnP AV MediaRenderer could also accept "Pause", but the behaviour is vendor-dependent.

10.1.6.17.8

[GUIDELINE] If in a UPnP AV MediaRenderer, the value of the AVT.TransportURI virtual instance state variable is a DLNA PlayContainer URI, or a URI of a media collection file, and the AVT.CurrentTrackURI virtual instance state variable is an image URI, then the value of AVT.CurrentTransportActions virtual instance state variable may include the value "Pause".

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	B5DWR	

[COMMENT] If a UPnP AV MediaRenderer plays an image within a playlist, it could accept "Pause". The behaviour is described in 10.1.6.17.9.

10.1.6.17.9

[GUIDELINE] If in a UPnP AV MediaRenderer the value of the AVT.CurrentTrackURI virtual instance state variable is an image URI, and if the UPnP AV MediaRenderer lists "Pause" in the AVT.CurrentTransportActions virtual instance state variable, then upon receiving an AVT:Pause action, the UPnP AV MediaRenderer shall transition into the "Paused_Playback" state.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	MFW38	

[COMMENT] Some UPnP AV MediaRenderers will support Pause as a transport operation available when the current track is an image. This transport action is useful only when the AVT.AVTransportURI virtual instance state variable contains the URI of a media collection file or is a DLNA PlayContainer URI.

10.1.6.17.10

[GUIDELINE] If in a UPnP AV MediaRenderer the value of the AVT.CurrentTrackURI virtual instance state variable is an image URI, and if the UPnP AV MediaRenderer is in the "Paused_Playback" state, then the UPnP AV MediaRenderer may display the image.

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-3-2	O9GZ4	

[COMMENT] This guideline clarifies that when a UPnP AV MediaRenderer is in the "Paused_Playback" state, and the current track is an image, the UPnP AV MediaRenderer may continue displaying the image.

10.1.6.18 MM Play mode behaviour

10.1.6.18.1

[GUIDELINE] UPnP MediaRenderers that implement AVT:SetPlayMode shall implement the method such that changes to the current play mode are applied immediately.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	4K4ZY	

[COMMENT] An example of bad behaviour is a MediaRenderer that requires a control point to invoke AVT:Play after a call to AVT:SetPlayMode in order for the requested play mode to be applied.

10.1.6.18.2

[GUIDELINE] UPnP MediaRenderers that change the play mode may change the transport state so long as the new state is not "Stopped".

[ATTRIBUTES]

O	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	EXLSF	

10.1.6.18.3

[GUIDELINE] UPnP MediaRenderers should keep the same play mode after a call to AVT:SetAVTransportURI.

[ATTRIBUTES]

S	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	XLSFB	

[COMMENT] Automatically changing an unrelated portion of the device's state is not a good practice.

10.1.6.19 MM Play modes**10.1.6.19.1**

[GUIDELINE] UPnP MediaRenderers that implement the "Normal" play mode shall implement it the following manner.

- An AVT:Next request results in AVT.CurrentTrack being incremented by one.
- AVT:Next requests that attempt to change the track number beyond the last track shall result with no state change (i.e. request accepted and ignored) or a response with a UPnP AV error code 711 (illegal seek target).
- An AVT:Previous request results in AVT.CurrentTrack being decremented by one.
- AVT:Previous requests that attempt to change the track number before the first track shall result with no state change (i.e. request accepted and ignored) or a UPnP AV error code 711 (illegal seek target).
- If a new value is applied to AVT.CurrentTrack, then AVT.CurrentTrackURI is updated appropriately.
- If the play state before an AVT:Next or AVT:Previous request is "Playing" and a new track is applied, then the device continues playback with the new track.
- If the device is in the "Playing" state, with AVT.CurrentTrack = AVT.NumberOfTracks, and playback finishes for the content indicated by AVT.CurrentTrackURI, then the MediaRenderer enters the "Stopped" state and AVT.CurrentTrack is reset to 1. AVT.CurrentTrackURI is appropriately updated, but AVT.AVTransportURI remains the same. This bulleted item does not apply when AVT.NextAVTransportURI is set as a result of AVT:SetNextAVTransportURI.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	K4ZYS	

[COMMENT] The AVTransport specification does not specify the behaviour of different play modes. These guidelines specify the basic expectations, inspired largely from traditional consumer electronics devices that play optical media content. The AVTransport specification can require additional behaviours of the MediaRenderer.

10.1.6.19.2

[GUIDELINE] UPnP MediaRenderers that implement the "REPEAT_ONE" play mode shall implement it in the same manner as 10.1.6.19.1, except in the following manners.

- If the device is in the "Playing" state and playback reaches the end for the content indicated by AVT.CurrentTrackURI, then the MediaRenderer changes the playback position to "00:00:00" and continues playing the same content from the beginning.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	WN9C8	

10.1.6.19.3

[GUIDELINE] UPnP MediaRenderers that implement the "REPEAT_ALL" play mode shall implement it in the same manner as 10.1.6.19.1, with the following exceptions.

- AVT:Next requests that attempt to change the track number beyond the last track shall result with AVT.CurrentTrack set to "1".
- AVT:Previous requests that attempt to change the track number before the first track shall result with AVT.CurrentTrack set to AVT.NumberOfTracks.
- If the device is in the "Playing" state, with AVT.CurrentTrack = AVT.NumberOfTracks, and playback finishes for the content indicated by AVT.CurrentTrackURI, then the MediaRenderer resets AVT.CurrentTrack to 1 and AVT.CurrentTrackURI is appropriately updated. AVT.AVTransportURI remains unchanged and content playback continues with the new track.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	W6X6H	

10.1.6.19.4

[GUIDELINE] UPnP MediaRenderers that implement the "RANDOM" play mode shall implement it in the following manner.

- AVT:Next and AVT:Previous requests shall result with AVT.CurrentTrack set to a random value from "1" to AVT.NumberOfTracks, with the AVT.CurrentTrackURI getting updated appropriately. If the play state is "Playing", then content playback continues with the new track.
- If a new value is applied to AVT.CurrentTrack, then AVT.CurrentTrackURI getting updated appropriately.
- If the play state before an AVT:Next or AVT:Previous request is "Playing" and a new track is applied, then the device continues playback with the new track.
- If the device is in the "Playing" state and playback finishes for the content indicated by AVT.CurrentTrackURI, then the MediaRenderer sets a new random value for AVT.CurrentTrack and AVT.CurrentTrackURI is appropriately updated. AVT.AVTransportURI remains unchanged and content playback continues with the new track.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	RFRGK	

10.1.6.19.5

[GUIDELINE] UPnP MediaRenderers that implement the "SHUFFLE" play mode shall implement it in the same manner as "RANDOM" (see 10.1.6.19.4) except for the following manners.

- The device shall track the value history of AVT.CurrentTrack so that the new track value is not a repeat of a previously played track.
- When the MediaRenderer has played all of the items (i.e. all tracks have been played), then the device enters the "Stopped" state and the AVT.CurrentTrack changes to "1".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	39308	

10.1.6.19.6

[GUIDELINE] UPnP MediaRenderers should support the "REPEAT_ONE" "REPEAT_ALL" and either "SHUFFLE" or "RANDOM" play modes.

[ATTRIBUTES]

S	L	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	LXYXC	

[COMMENT] The "Normal" play mode is required, but these additional play modes are only recommended.

10.1.6.20 MM play-speed**10.1.6.20.1**

[GUIDELINE] UPnP AV MediaRenderers may include element <allowedValueList> to specify a list of allowed values for AVT.TransportPlaySpeed in the service description document as defined by the AVTransport specification ISO/IEC 29341-20-10:2011.

[ATTRIBUTES]

O	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	4WMJW	

[COMMENT] This guideline indicates that listing play-speed values in the service description document is optional.

Some UPnP AV MediaRenderers will only support a play-speed value of "1". These UPnP AV MediaRenderers could publish this value in the allowed-value list of the service description document.

Some UPnP AV MediaRenderers will rely on a UPnP AV MediaServer to provide support for play-speed operations. These UPnP AV MediaRenderers do not know a-priori the speed values that the servers will support. These UPnP AV MediaRenderers cannot list any values in the service description document.

Some UPnP AV MediaRenderers could rely only on themselves to provide play-speed support. In this case, these UPnP AV MediaRenderers could publish an exhaustive list of play-speed values in the service description document.

Finally, a fourth class of UPnP AV MediaRenderers will support both server-driven and renderer-driven play-speed operations. In this case, the UPnP AV MediaRenderers cannot publish an exhaustive list of speed values in the service description document and consequently, these UPnP AV MediaRenderers would also omit the allowed-value list.

If a UPnP AV MediaRenderer chooses not to specify a list of allowed play-speed values, then AVT.TransportPlaySpeed is defined in the service description document as follows:

```
<stateVariable sendEvents="no">
  <name>TransportPlaySpeed</name>
  <dataType>string</dataType>
</stateVariable>
```

10.1.6.20.2

[GUIDELINE] If a UPnP AV MediaRenderer includes the <allowedValueList> element for the AVT.TransportPlaySpeed state variable in the service description, the element shall contain all the play-speed values that the UPnP AV MediaRenderer accepts as the value of the Speed input argument in an AVT:Play action. In addition, each value shall be represented as a rational fraction in accordance with the UPnP AVTransport specification.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	28RT5	

[COMMENT] If a DMR specifies a list of values in the service description document, then UPnP AV MediaRenderer control points know a priori which speed values can never be used because they are unlisted. Notice that having a value in the list does not automatically indicate that the DMR will provide support for this value for a particular content resource. For any given content resource, the DMR will implement a subset of the allowed values published in the service description. The implemented values will be available to the controllers, as defined in 10.1.6.29.1.

Specifying allowed values like "Normal", "2x" or "Backwards Slow 0.25" are not allowed. Examples of correct representations are "1", "2", and "–1/4".

This guideline imposes no requirement on a control point to represent play-speeds on a user interface as a rational fraction.

For example, if a UPnP AV MediaRenderer that supports speeds 1 and 4 chooses to specify a list of allowed values, then AVT.TransportPlaySpeed will be defined in the service description document as follows:

```
<stateVariable sendEvents="no">
  <name>TransportPlaySpeed</name>
  <dataType>string</dataType>
  <allowedValueList>
    <allowedValue>1</allowedValue>
    <allowedValue>4</allowedValue>
  </allowedValueList>
</stateVariable>
```

10.1.6.20.3

[GUIDELINE] If a UPnP AV MediaRenderer specifies a list of allowed values for AVT.TransportPlaySpeed in the service description, then each of the speed values subsequently used in the X_DLNA_PS option of AVT.CurrentTransportActions virtual instance state variable shall be one of the listed values.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	J7LP5	

[COMMENT] The list of play-speed values exposed by a DMR in the AVT.CurrentTransportActions virtual instance state variable has to be included in the list of allowed values exposed by the DMR in the service description document. The following examples explain better this requirement:

Example 1 (correct use)

- Allowed value list = -2, 1, 3, 5, 7, 10, 15, 20, 40
- AVT.CurrentTransportActions includes the option X_DLNA_PS=-2\,3\,40 during playback of the 1st resource.
- AVT.CurrentTransportActions includes the option X_DLNA_PS=7\,10\,15\,40 during playback of the 2nd resource.
- AVT.CurrentTransportActions includes the option X_DLNA_PS=-2\,3\,5\,7\,10\,15\,20\,40 during playback of the 3rd resource.

Example 2 (incorrect use)

- Allowed value list = -2, 1, 5, 10, 20.
- AVT.CurrentTransportActions includes the option X_DLNA_PS=-8\,3\,40 during playback of the 1st resource.
- AVT.CurrentTransportActions includes the option X_DLNA_PS=1\,2\,5\,20 during playback of the 2nd resource.

UPnP AV MediaRenderer control points obtain the list of speed values defined by X_DLNA_PS using the AVT:GetCurrentTransportActions action or via AVT.LastChange events.

10.1.6.21 MM Renderer volume control**10.1.6.21.1**

[GUIDELINE] UPnP MediaRenderers that support volume control shall implement the RCS.Volume instance state variable with a range of 0 to 100, where 0 is audibly equivalent to mute and 100 is the maximum loudness. The stepping for the variable shall be 1.

A MediaRenderer implements volume control when it implements the RCS.Volume instance state variable.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-3-13	3FQLR	

[COMMENT] This guideline provides baseline expectations on how a control point can change the volume on a MediaRenderer.

The stepping of the RCS.Volume value does not have to correspond to that of actual sound volume. That is, the actual heard volume stepping can change per five steppings of the RCS.Volume instance state variable.

10.1.6.21.2

[GUIDELINE] UPnP MediaRenderers that support volume control shall implement RCS:SetVolume, RCS:GetVolume, RCS:SetMute, and RCS:GetMute.

[ATTRIBUTES]

M	L	DMR	n/a	n/a	ISO/IEC 29341-3-13	AU8BQ	

10.1.6.22 MM DLNAQOS support

[GUIDELINE] If DLNAQOS as defined in 8 is implemented, AVTransport SOAP actions shall be tagged with DLNAQOS_2, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), for both requests and responses in accordance with Table 7.

[ATTRIBUTES]

M	A	DMR DMC +PU+	M-DMC	n/a	n/a	VW39V	

[COMMENT] All other forms of UPnP AV traffic described in this subclause (e.g. CDS, Rendering Service) are tagged as per the default DLNAQOS_UP value in Table 7.

10.1.6.23 MM usage of AVT.CurrentTransportActions

10.1.6.23.1

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-time, controller-byte or play-speed operations for some content types, it shall implement AVT.CurrentTransportActions virtual instance state variable, and AVT:GetCurrentTransportActions action.

"UPnP AV MediaRenderers implementing a controller-time seek operation" means: A request from a UPnP AV MediaRenderer control point to seek to some time instant "t" causes playback to re-start from time "t" (where "t" has a value larger than or equal to 0 and less than or equal to the duration of the track).

"UPnP AV MediaRenderers implementing a controller-byte seek operation" means: A request from a UPnP AV MediaRenderer control point to seek to some byte value "b" causes playback to re-start from approximately byte "b" in the stream (where "b" has a value larger than or equal to 0 and less than the track size in bytes).

"UPnP AV MediaRenderers implementing a play-speed operation" means: A request from a UPnP AV MediaRenderer control point to play at speed "s" causes playback at approximately the speed of "s", where "s" is any value other than 1.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	V648E	

10.1.6.23.2

[GUIDELINE] If a UPnP AV MediaRenderer implements the AVT.CurrentTransportActions virtual instance state variable then it shall always list the available transport actions in this state variable including any of the DLNA-defined values (as indicated in guidelines 10.1.6.27.1 and 10.1.6.29.1)

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	M76XT	

[COMMENT] UPnP AV MediaRenderers that support controller-time seek, controller-byte seek, or play-speed operations have to implement AVT.CurrentTransportActions according to guideline 10.1.6.23.1. When these UPnP AV MediaRenderers play some content for which none of such operations are available, then the device still needs to show the proper list of transport actions in the state variable. For example, the available transport actions for an audio track could be: Play, Stop, Pause.

10.1.6.23.3

[GUIDELINE] If no content is currently being rendered (i.e. AVT.AVTransportURI is an empty string), then a UPnP AV MediaRenderer that implements AVT.CurrentTransportActions shall use an empty string ("") as the value of the AVT.CurrentTransportActions virtual instance state variable.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	8RT59

10.1.6.24 MM DLNA state variables for renderer control operations

10.1.6.24.1

[GUIDELINE] If a UPnP AV MediaRenderer implements the controller-byte seek operation for some content as defined in 10.1.6.23.1, then it shall include the X_DLNA_RelativeBytePosition, X_DLNA_AbsoluteBytePosition and X_DLNA_CurrentTrackSize state variables in the AVTransport service description, and shall implement the state variables.

These state variables are defined in Table 20.

Table 20 – DLNA state variables for Controller-byte seek operations

Variable name	Data type	Allowed value	Evented	Moderated event
X_DLNA_RelativeBytePosition	string	Empty string (""), or a string representing an integer number in the inclusive interval: [0, (2 ⁶⁴) – 1]	No	No
X_DLNA_AbsoluteBytePosition	string	Empty string (""), or a string representing an integer number in the inclusive interval: [0, (2 ⁶⁴) – 1]	No	No
X_DLNA_CurrentTrackSize	string	Empty string (""), or a string representing an integer number in the inclusive interval: [0, (2 ⁶⁴) – 1]	No	No

The AVT.X_DLNA_RelativeBytePosition, AVT.X_DLNA_AbsoluteBytePosition, and AVT.X_DLNA_CurrentTrackSize state variables shall not be evented via AVT.LastChange.

The X_DLNA_RelativeBytePosition state variable shall be defined in the service description document using the following XML fragment:

```
<stateVariable sendEvents="no">
  <name>X_DLNA_RelativeBytePosition</name>
  <dataType>string</dataType>
</stateVariable>
```

The X_DLNA_AbsoluteBytePosition state variable shall be defined in the service description document using the following XML fragment:

```
<stateVariable sendEvents="no">
  <name>X_DLNA_AbsoluteBytePosition</name>
  <dataType>string</dataType>
</stateVariable>
```

The X_DLNA_CurrentTrackSize state variable shall be defined in the service description document using the following XML fragment:

```
<stateVariable sendEvents="no">
  <name>X_DLNA_CurrentTrackSize</name>
  <dataType>string</dataType>
</stateVariable>
```

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	SM76X	

[COMMENT] This guideline defines new state variables for the UPnP AV MediaRenderer's AVTransport service. These state variables are implemented by renderers that support controller-byte seek operations.

The first state variable, X_DLNA_RelativeBytePosition, provides the playback position in bytes during playback. Controllers that implement controller-byte seek operations can poll this state variable to determine the current byte processed by the renderer.

The second state variable, X_DLNA_AbsoluteBytePosition, is for future use. DLNA does not currently define the behaviour of this state variable. Its value is vendor-dependent, as long as it conforms to the syntax defined in this guideline.

The third state variable, X_DLNA_CurrentTrackSize provides the file size information for the track currently being rendered. Controllers can poll this state variable to determine the file size.

10.1.6.24.2

[GUIDELINE] If a UPnP AV MediaRenderer implements the AVT.X_DLNA_RelativeBytePosition virtual instance state variable, its value shall indicate approximately the current byte in the stream processed for rendering (the current playback position measured in bytes). Byte 0 represents the first byte in the sequence. If L represents the file size in bytes, then byte $L - 1$ represents the final byte in the sequence. If no content is currently being rendered (i.e. AVT.AVTransportURI is an empty string), the value of the AVT.X_DLNA_RelativeBytePosition virtual instance state variable shall be an empty string ("").

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	76XTD	

10.1.6.24.3

[GUIDELINE] If a UPnP AV MediaRenderer implements the AVT.X_DLNA_CurrentTrackSize virtual instance state variable then its value shall be one of the following:

- an integer value indicating the size (in bytes) of the track currently being rendered;
- 0 to indicate that the size (in bytes) of the track currently being rendered is unknown;
- an empty string ("") when no track is currently being rendered (i.e. AVT.AVTransportURI is an empty string).

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	RT59R

10.1.6.24.4

[GUIDELINE] If a UPnP AV MediaRenderer does not implement the controller-byte seek operation for any type of resources, then it may omit the X_DLNA_RelativeBytePosition state variable from the AVTransport service description.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	48EII

10.1.6.24.5

[GUIDELINE] If a UPnP AV MediaRenderer does not implement the controller-byte seek operation for any type of resources, then it may omit the X_DLNA_AbsoluteBytePosition state variable from the AVTransport service description.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	7LP5V

10.1.6.24.6

[GUIDELINE] If a UPnP AV MediaRenderer does not implement the controller-byte seek operation for any type of resources, then it may omit the X_DLNA_CurrentTrackSize state variable from the AVTransport service description.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	648EI

10.1.6.25 MM DLNA actions for renderer control operations

[GUIDELINE] If a UPnP AV MediaRenderer implements the controller-byte seek operation for some content as defined in 10.1.6.23.1, then it shall implement the AVT:X_DLNA_GetBytePositionInfo action.

This action is defined in Table 21.

Table 21 – Arguments for AVT:X_DLNA_GetBytePositionInfo

Argument	Direction	relatedStateVariable
InstanceID	IN	A_ARG_TYPE_InstanceID
TrackSize	OUT	X_DLNA_CurrentTrackSize
RelByte	OUT	X_DLNA_RelativeBytePosition
AbsByte	OUT	X_DLNA_AbsoluteBytePosition

This action does not have any effect on the state. The error codes defined for this action are indicated in Table 22.

Table 22 – Error codes for AVT:X_DLNA_GetBytePositionInfo

ErrorCode	errorDescription	Description
402	Invalid Args	Could be any of the following: not enough "in" args, too many "in" args, no "in" arg by that name, one or more "in" args are of the wrong data type.
712	Invalid InstanceID	The specified instanceID is invalid for this AVTransport.

This action shall be defined in the service description document using the following XML fragment:

```

<action>
  <name>X_DLNA_GetBytePositionInfo</name>
  <argumentList>
    <argument>
      <name>InstanceID</name>
      <direction>in</direction>
      <relatedStateVariable>A_ARG_TYPE_InstanceID</relatedStateVariable>
    </argument>
    <argument>
      <name>TrackSize</name>
      <direction>out</direction>
      <relatedStateVariable>X_DLNA_CurrentTrackSize</relatedStateVariable>
    </argument>
    <argument>
      <name>RelByte</name>
      <direction>out</direction>
      <relatedStateVariable>
        X_DLNA_RelativeBytePosition
      </relatedStateVariable>
    </argument>
    <argument>
      <name>AbsByte</name>
      <direction>out</direction>
      <relatedStateVariable>
        X_DLNA_AbsoluteBytePosition
      </relatedStateVariable>
    </argument>
  </argumentList>
</action>

```

```
</argumentList>
</action>
```

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	6XTD3	

[COMMENT] This guideline defines a new action for the UPnP AV MediaRenderer AVTransport service. This action is implemented by renderers that support controller-byte seek operations. During media playback, UPnP AV MediaRenderer control points can invoke this action against the UPnP AV MediaRenderer to determine approximately the current byte position in the stream.

10.1.6.26 MM Seek behaviour (control points)**10.1.6.26.1**

[GUIDELINE] If a UPnP AV MediaRenderer control point issues an AVT:Seek request with the Unit input argument equal to REL_TIME, then the value specified in the Target input argument shall be a time value with the same syntax and semantics defined for res@duration in guideline 10.1.3.8. The value shall be greater than or equal to 0.

[ATTRIBUTES]

M	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	T59RR	

[COMMENT] In DLNA, UPnP AV MediaRenderer control points can issue AVT:Seek requests using controller-time and controller-byte variables in addition to seek operations searching for a particular track (required by ISO/IEC 29341-20-10:2011). This guideline specifies the range of values that can be used for the controller-time variables.

In DLNA the use of ABS_TIME is not specified. A UPnP AV MediaRenderer control point that needs to provide fast access in the case of playlists could jump between tracks (using the "seek track" mode of an AVT:Seek action), and then use controller-time, or controller-byte seek requests on the resource.

10.1.6.26.2

[GUIDELINE] If a UPnP AV MediaRenderer control point issues an AVT:Seek request with the Unit input argument equal to X_DLNA_REL_BYTE then the value specified in the Target input argument shall be a byte value with the same syntax and semantics defined for X_DLNA_RelativeBytePosition in guidelines 10.1.6.24.1 and 10.1.6.24.2 to indicate a byte position to seek. The value shall be greater than or equal to 0.

[ATTRIBUTES]

M	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	LP5VR	

[COMMENT] In DLNA, UPnP AV MediaRenderer control points can issue AVT:Seek requests using controller-time, and controller-byte variables in addition to seek operations searching for a particular track (required by ISO/IEC 29341-20-10:2011). This guideline specifies the range of values that can be used for the controller-byte variables.

In DLNA the use of a hypothetical X_DLNA_ABS_BYTE is not specified. A UPnP AV MediaRenderer control point that needs to provide fast access in the case of media collections could jump between tracks (using the "seek track" mode of an AVT:Seek action), and then use controller-time, or controller-byte-based seek requests on the resource.

10.1.6.26.3

[GUIDELINE] If a UPnP AV MediaRenderer does not specify support for the controller-time operation as defined in guideline 10.1.6.27.1 then UPnP AV MediaRenderer control points should not issue an AVT:Seek request with the Unit input argument equal to REL_TIME.

[ATTRIBUTES]

S	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	GY633

[COMMENT] This guideline recommends UPnP AV MediaRenderer control points to verify first if a DMR supports the controller-time seek operation before actually issuing a request.

10.1.6.26.4

[GUIDELINE] If a UPnP AV MediaRenderer does not specify support for the controller-byte operation as defined in guideline 10.1.6.27.1 then UPnP AV MediaRenderer control points should not issue an AVT:Seek request with the Unit input argument equal to X_DLNA_REL_BYTE.

[ATTRIBUTES]

S	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	4T7UO

[COMMENT] This guideline recommends UPnP AV MediaRenderer control points to verify first if a DMR supports the controller-byte seek operation before actually issuing a request.

10.1.6.26.5

[GUIDELINE] If a UPnP AV MediaRenderer provides the track duration according to 10.1.6.27.2, then when a UPnP AV MediaRenderer control point issues an AVT:Seek request with the Unit input argument equal to REL_TIME, the value of the Target input argument should be less than the track duration.

[ATTRIBUTES]

S	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	9Z83X

10.1.6.26.6

[GUIDELINE] If a UPnP AV MediaRenderer provides the track size (in bytes) according to 10.1.6.27.5, then when a UPnP AV MediaRenderer control point issues an AVT:Seek request with the Unit input argument equal to X_DLNA_REL_BYTE, the value of the Target input argument should be less than the track size (in bytes).

[ATTRIBUTES]

S	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	U48W2	

10.1.6.27 MM Seek behaviour (renderers)**10.1.6.27.1**

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-time seek operations for the track currently being rendered as defined in 10.1.6.23.1, a UPnP AV MediaRenderer shall include "Seek" and "X_DLNA_SeekTime" in the list of comma-separated values of the AVT.CurrentTransportActions virtual instance state variable.

If a UPnP AV MediaRenderer implements controller-byte seek operations for the track currently being rendered as defined in 10.1.6.23.1, a UPnP AV MediaRenderer shall include "Seek" and "X_DLNA_SeekByte" in the list of comma-separated values of the AVT.CurrentTransportActions virtual instance state variable.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	Y633R	

[COMMENT] In DLNA, UPnP AV MediaRenderer control points can issue AVT:Seek requests using controller-time and controller-byte seek operations. However, a UPnP AV MediaRenderer might or might not support some of these operations for a given media resource. This guideline requires UPnP AV MediaRenderers to use specific text entries in AVT.CurrentTransportActions virtual instance state variable to indicate support for these controller seek operations. UPnP AV MediaRenderer control points check the value of this state variable using action AVT.GetCurrentTransportActions or via AVT.LastChange events to determine if a UPnP AV MediaRenderer supports the respective seek operations.

10.1.6.27.2

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-time seek operations for the track currently being rendered as defined in 10.1.6.23.1, it should provide the track duration in the AVT.CurrentTrackDuration virtual instance state variable.

[ATTRIBUTES]

S	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	T7UOE	

[COMMENT] This guideline recommends UPnP AV MediaRenderers to provide the track duration for controller-time seek operations. Certain control points will be unable to use controller-time seek operations unless they know the playback duration.

10.1.6.27.3

[GUIDELINE] If a UPnP AV MediaRenderer includes the res@duration property in the <res> element that describes the resource currently being rendered, then the value of this property should be equal to the value of the AVT.CurrentTrackDuration virtual instance state variable. The <res> element that describes the resource currently being rendered is included in the AVT.CurrentTrackMetaData virtual instance state variable.

[ATTRIBUTES]

S	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	Z83XO	

[COMMENT] Providing a playback duration value is a recommendation (not a requirement) for UPnP AV MediaRenderers. Although in general res@duration and AVT.CurrentTrackDuration have the same value, in some cases there could be some differences due to distinct algorithms for computing duration, etc. The res@duration property is provided by a device external to the UPnP AV MediaRenderer and AVT.CurrentTrackDuration is provided by the UPnP AV MediaRenderer.

10.1.6.27.4

[GUIDELINE] If a UPnP AV MediaRenderer control point detects different values for the same media resource in the AVT.CurrentTrackDuration virtual instance state variable and the res@duration property in the AVT.CurrentTrackMetaData virtual instance state variable, the UPnP control point should use the former in any interactions with the UPnP AV MediaRenderer.

[ATTRIBUTES]

S	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	FZL57	

[COMMENT] Guideline 10.1.6.27.3 indicates that the values in res@duration and AVT.CurrentTrackDuration could be different because they are calculated by different devices using different algorithms. This guideline recommends UPnP control points to use the value in AVT.CurrentTrackDuration for interactions with the UPnP AV MediaRenderer; for example, sending an action to perform a controller-time seek operation.

10.1.6.27.5

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-byte seek operations for the track currently being rendered as defined in 10.1.6.23.1, it should provide the track size (in bytes) in the AVT.X_DLNA_CurrentTrackSize virtual instance state variable.

[ATTRIBUTES]

S	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	48W2W	

10.1.6.27.6

[GUIDELINE] If a UPnP AV MediaRenderer includes the res@size property in the <res> element that describes the resource currently being rendered, then the value of this property should be equal to the value of the AVT.X_DLNA_CurrentTrackSize virtual instance state variable. The <res> element that describes the resource currently being rendered is included in the AVT.CurrentTrackMetaData virtual instance state variable.

[ATTRIBUTES]

C	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	633RQ	

[COMMENT] Providing the resource size is a recommendation (not a requirement) for UPnP AV MediaRenderers. Although in general res@size and AVT.X_DLNA_CurrentTrackSize have the same value, in some cases there could be some differences due to content transformation, file modifications, etc. The res@size property is provided by a device external to the UPnP AV MediaRenderer and AVT.X_DLNA_CurrentTrackSize is provided by the UPnP AV MediaRenderer.

10.1.6.27.7

[GUIDELINE] If a UPnP AV MediaRenderer control point detects different values for the same media resource in the AVT.X_DLNA_CurrentTrackSize virtual instance state variable and the res@size property in the AVT.CurrentTrackMetaData virtual instance state variable, the UPnP control point should use the former in any interactions with the UPnP AV MediaRenderer.

[ATTRIBUTES]

S	A	DMC +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	R6BBG	

[COMMENT] Guideline 10.1.6.27.6 indicates that the values in res@size and AVT.X_DLNA_CurrentTrackSize could be different because of possible modifications to the media resource. This guideline recommends UPnP control points to use the value in AVT.X_DLNA_CurrentTrackSize for interactions with the UPnP AV MediaRenderer; for example, sending an action to perform a controller-byte seek operation.

10.1.6.27.8

[GUIDELINE] UPnP AV MediaRenderers shall not include the value X_DLNA_SeekTime in the AVT.CurrentTransportActions virtual instance state variable when rendering a track that does not belong to the Audio or AV Media Classes.

UPnP AV MediaRenderers shall not include the value X_DLNA_SeekByte in the AVT.CurrentTransportActions virtual instance state variable when rendering a track that does not belong to the Audio or AV Media Classes.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	7UOEU	

[COMMENT] Controller-time and controller-byte seek operations can only be used with audio or AV media resources. They cannot be used with other types of resources such as images.

10.1.6.27.9

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-byte seek operations, then it shall include X_DLNA_REL_BYTE in the allowed value list for the A_ARG_TYPE_SeekMode state variable in the AVTransport service description document.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	83XOG	

[COMMENT] DLNA defines a new type of seek mode for controller-byte seek operations. This new seek mode is triggered by using the value X_DLNA_REL_BYTE in the Unit argument of the

AVT:Seek action. This guideline requires UPnP AV MediaRenderers that support controller-byte seek to add this value to the allowed values of AVT.A_ARG_TYPE_SeekMode.

10.1.6.27.10

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-byte seek operations, and it receives an AVT:Seek request with a Unit value of X_DLNA_REL_BYTE and a Target value greater than or equal to the track size, then it shall respond with error code 711 (Illegal Seek Target).

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	8W2WO

[COMMENT] This guideline applies regardless of whether the UPnP AV MediaRenderer exposes the track size or not.

10.1.6.27.11

[GUIDELINE] If a UPnP AV MediaRenderer implements controller-time seek operations, and it receives an AVT:Seek request with a Unit value of REL_TIME and a Target value greater than the track duration, then it shall respond with error code 711 (Illegal Seek Target).

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	33RQQ

[COMMENT] This guideline applies regardless of whether the UPnP AV MediaRenderer exposes the track duration or not.

10.1.6.27.12

[GUIDELINE] If a UPnP AV MediaRenderer does not indicate support for controller-byte seek operations (as defined in guideline 10.1.6.27.1), and if it receives an AVT:Seek request with a Unit value of X_DLNA_REL_BYTE, then the UPnP AV MediaRenderer shall respond with error code 710 (Seek Mode Not Supported).

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	UOEUS

[COMMENT] This guideline defines the error code to be used when the UPnP AV MediaRenderer Control Point requests controller-byte seek operations for the current track but the UPnP AV MediaRenderer did not advertise support for this operation.

10.1.6.27.13

[GUIDELINE] If a UPnP AV MediaRenderer does not indicate support for controller-time seek operations (as defined in guideline 10.1.6.27.1), and if it receives an AVT:Seek request with a Unit value of REL_TIME, then the UPnP AV MediaRenderer shall respond with error code 710 (Seek Mode Not Supported).

[ATTRIBUTES]

M		DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	3XOG3	

[COMMENT] This guideline defines the error code to be used when the UPnP AV MediaRenderer Control Point requests controller-time seek operations for the current track but the UPnP AV MediaRenderer did not advertise support for this operation.

10.1.6.28 MM play-speed behaviour (renderers)

[GUIDELINE] A UPnP AV MediaRenderer Control Point that issues an AVT:Play action shall use a Speed argument with a value of "1" or one of the values specified by the UPnP AV MediaRenderer in the play-speed-list value (identified by X_DLNA_PS as defined in 10.1.6.29.2) of AVT.CurrentTransportActions virtual instance state variable.

[ATTRIBUTES]

M	A	DMC, +PU+	M-DMC	n/a	ISO/IEC 29341-20-10: 2011	W2WOV	

[COMMENT] UPnP AV MediaRenderer Control Points monitor AVT.CurrentTransportActions to determine the list of available play-speeds for the track currently being rendered. For example, if a UPnP AV MediaRenderer exhibits the following values:

Play, Stop, Pause, Seek, X_DLNA_SeekTime, X_DLNA_PS=1/2\,4

then, the UPnP AV MediaRenderer Control Point knows that it is possible to issue an AVT:Play action with speed values of 1, ½, or 4.

10.1.6.29 MM play-speed behaviour (renderers)**10.1.6.29.1**

[GUIDELINE] If a UPnP AV MediaRenderer implements play-speed operations for the track currently being rendered, it shall include the value "Play" and the list of available play-speeds in the AVT.CurrentTransportActions virtual instance state variable in accordance with guideline 10.1.6.29.2.

When including the list of available play-speeds into AVT.CurrentTransportActions virtual instance state variable, each comma (",") in the play-speed list shall be escaped as "\",."

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	3RQQ8	

[COMMENT] In DLNA, some UPnP AV MediaRenderers are capable of playback at different speeds without the help of a server (renderer-driven play-speeds). Other UPnP AV MediaRenderers are capable of playback at different speeds only if the server will generate such streams (server-driven play-speeds). Other UPnP AV MediaRenderers will be able to use both renderer- and server-driven play-speeds.

A UPnP AV MediaRenderer informs potential controllers of its ability to operate at play-speeds other than 1 for the track currently being rendered by entering an X_DLNA_PS field in the comma-separated list of AVT.CurrentTransportActions virtual instance state variable.

10.1.6.29.2

[GUIDELINE] A UPnP AV MediaRenderer that supports play-speeds other than "1" shall include a play-speed-list value in the comma-separated list of AVT.CurrentTransportActions. The syntax and semantics for the play-speed-list value is defined as follows:

- play-speed-list="X_DLNA_PS="speed-list;
- speed-list=speed*(","speed);
- speed=<conforms to the TransportPlaySpeed string, as specified in the AVTransport specification>;

The value "1" shall not be included.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	OEUSR

[COMMENT] UPnP AV MediaRenderers advertise support for play-speeds by adding the list of play-speeds to the available transport actions indicated in AVT.CurrentTransportActions virtual instance state variable. For example, a UPnP AV MediaRenderer that supports speeds of ½ and 4 for the current track will set AVT.CurrentTransportActions as follows:

Play, Stop, Pause, Seek, X_DLNA_SeekTime, X_DLNA_PS = 1/2\,4

10.1.6.29.3

[GUIDELINE] UPnP AV MediaRenderers shall not include the play-speed-list value (identified by X_DLNA_PS as defined in 10.1.6.29.2) in the AVT.CurrentTransportActions virtual instance state variable for a track that does not belong to the Audio or AV Media Classes.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	XOG3H

[COMMENT] The list of play-speed values exposed by a UPnP AV MediaRenderer via X_DLNA_PS in AVT.CurrentTransportActions can only be used with audio or AV media resources. The list cannot be used with other types of resources like images.

10.1.6.30 MM usage of AVT.PossiblePlaybackStorageMedia

[GUIDELINE] A UPnP AV MediaRenderer shall implement minimally the values "None" and "Network" for the AVT.PossiblePlaybackStorageMedia virtual instance state variable and the PlayMedia output parameter for the AVT:GetDeviceCapabilities action.

[ATTRIBUTES]

M	R	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	II9O4

[COMMENT] This is the minimal requirement to achieve the DLNA system usages.

10.1.6.31 MM mandatory media operations (renderers)**10.1.6.31.1**

[GUIDELINE] A Rendering Endpoint implementing audio or AV Media Classes shall implement all of the following media operations:

- Play (guideline 11.4.3.39 GUN:U6498);
- Stop (guideline 11.4.3.40.2 GUN:CWCV2);
- Pause (guideline 11.4.3.41.2 GUN:CZ794);
- Seek (guideline 11.4.3.44.2 GUN:PHT47));
- Pause-Release (guideline 11.4.3.42.1 GUN:3W5QP).

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	S4HXE	

[COMMENT] An HTTP Client is required to support media operations on all supported Media Format Profiles (see 11.4.3.52.1) regardless of the data availability model (see 10.1.3.29.2).

10.1.6.31.2

[GUIDELINE] A Rendering Endpoint implementing AV Media Class shall implement all of the following media operations:

- Fast Forward Scan (guideline 11.4.3.45.2 GUN:T24LR);
- Slow Forward Scan (guideline 11.4.3.46.2 GUN:Z9BD2);
- Fast Backward Scan (guideline 11.4.3.47.2 GUN:V46LS);
- Slow Backward Scan (guideline 11.4.3.48.2 GUN:A89O5).

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	XDI2P	

[COMMENT]

- 1) An operation might not always invoke the corresponding Media Operation due to buffering on the Rendering Endpoint.
- 2) An HTTP Client is required to support media operations on all supported Media Format Profiles (see 11.4.3.52.1) regardless of the data availability model (see 10.1.3.29.2)

10.1.6.32 MM mandatory media operations (servers)**10.1.6.32.1**

[GUIDELINE] For every AV content binary not using DLNA Link Protection that supports "Limited Random Access Data Availability" Mode 1 or "Full Random Access Data Availability" model (see 11.4.2.16 for details on mode), an HTTP Server Endpoint shall indicate support in the fourth field of the ProtocolInfo for at least one of the following:

- time-based seek;
- byte-based seek.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	22FAG	

[COMMENT] A content binary that is restricted to "Limited Random Access Data Availability" Mode 0 is considered live content and might have limited ability to support scan modes. (See 11.4.2.16.2).

10.1.6.32.2

[GUIDELINE] For every AV content binary not using DLNA Link Protection that supports "Limited Random Access Data Availability" Mode 1 or "Full Random Access Data Availability" model (see 11.4.2.16 for details on mode), an HTTP Server Endpoint should indicate support in the fourth field of the ProtocolInfo for the following:

- play-speed.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	T8DBH	

[COMMENT] A content binary that is restricted to "Limited Random Access Data Availability" Mode 0 is considered live content and might have limited ability to support scan modes. (See 11.4.2.16.2.)

10.1.7 AVT SetNextAVTransportURI action

10.1.7.1 General Requirements

10.1.7.1.1 Implementation of the SetNextAVTransportURI action

[GUIDELINE] A UPnP AV MediaRenderer shall implement the AVT:SetNextAVTransportURI action.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	9W968	

[COMMENT] A DMR always implements the ability to receive and process this action..

10.1.7.1.2 Implementation of the SetNextAVTransportURI action

[GUIDELINE] If a UPnP AV MediaRenderer receives a valid non-empty AVT:SetNextAVTransportURI action, then the renderer shall transfer the values in the NextURI and NextURIMetadata arguments to the corresponding AVT instance state variables AVT.NextAVTransportURI and AVT.NextAVTransportURIMetaData respectively. A valid non-empty AVT:SetNextAVTransportURI action is defined as an action for which:

- the action format is syntactically correct; as defined in Guideline 10.1.7.1.3;
- the content referenced by the action has a protocolInfo value that matches one of the protocolInfo values supported by the UPnP AV MediaRenderer.

This guideline applies to a UPnP AV MediaRenderer in the "Playing", "Stopped", and "Paused_Playback" states.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	H8UI6	

[COMMENT] This guideline describes the conventional way of setting the "next URI" state variables in compliance with the UPnP AVT service specifications ISO/IEC 29341-20-10:2011. This guideline also defines the conditions necessary to accept the action.

10.1.7.1.3 Syntactically correct AVT:SetNextAVTransportURI

[GUIDELINE] An AVT:SetNextAVTransportURI action is a syntactically correct action if it complies with the following requirements:

- the action shall comply with the syntax requirement defined in ISO/IEC 29341-20-10:2011 and ISO/IEC 29341-1:2011;
- the NextURI argument shall carry an empty string or a URI;
- if the NextURI argument is not an empty string or a DLNA PlayContainer URI, then the NextURIMetaData argument shall be a valid, non-empty value, as defined in 10.1.6.14.8;
- if the NextURI argument is an empty string or a DLNA PlayContainer URI, then the NextURIMetaData argument shall be an empty string.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011 ISO/IEC 29341-1:2011	SUBBH	

[COMMENT] This guideline describes the correct syntax for the AVT:SetNextAVTransportURI. In particular this guideline indicates that the same metadata conditions available for AVT:SetAVTransportURI apply to the use of AVT:SetNextAVTransportURI.

10.1.7.1.4 Responding to requests that set the next URI

[GUIDELINE] If a UPnP AV MediaRenderer receives a valid non-empty AVT:SetNextAVTransportURI action, then the renderer shall perform at least one of the following two tasks before providing a response to the action request:

- the renderer sends an HTTP HEAD request using one of the URIs available in the NextURIMetaData argument to validate availability of the server hosting the resource;
- the renderer sends a partial HTTP GET request using one of the URIs available in the NextURIMetaData argument to validate availability of the server hosting the resource.

This guideline applies to a UPnP AV MediaRenderer in the "Playing", "Stopped", and "Paused_Playback" states.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	XU5PW	

[COMMENT] This guideline describes the expected behaviour for DMR devices when they receive an AVT:SetNextAVTransportURI action.

10.1.7.1.5 Replacing the "next URI"

[GUIDELINE] If a UPnP AV MediaRenderer already includes a "next URI" and receives a valid non-empty AVT:SetNextAVTransportURI action, then the renderer shall replace the values in state variables related to the "next URI" with the values received in the recent AVT:SetNextAVTransportURI action.

This guideline applies to a UPnP AV MediaRenderer in the "Playing", "Stopped", and "Paused_Playback" states.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	D8B4X

[COMMENT] This guideline describes the process to replace the existing "next URI" data with different values received in a recent AVT:SetNextAVTransportURI action.

10.1.7.1.6 Clearing the "next URI"

[GUIDELINE] If a UPnP AV MediaRenderer already includes a "next URI" and receives an empty AVT:SetNextAVTransportURI action, then the renderer shall clear the state variables related to the "next URI".

This guideline applies to a UPnP AV MediaRenderer in the "Playing", "Stopped", and "Paused_Playback" states.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	A6KYE

[COMMENT] This guideline describes a method that UPnP MediaServer Control Points can use to clear the values included in the AVT.NextAVTransportURI and AVT.NextAVTransportURIMetaData instance state variables.

10.1.7.1.7 Resetting the "current URI"

[GUIDELINE] If a UPnP AV MediaRenderer already includes a "current URI" and a "next URI" and receives an AVT:SetAVTransportURI action carrying a valid non-empty URI, then the renderer shall replace the information in the "current URI" state variables with the information received in the AVT:SetAVTransportURI action. Simultaneously, the renderer shall clear the state variables related to the "next URI".

This guideline applies to a UPnP AV MediaRenderer in the "Playing", "Stopped", and "Paused_Playback" states.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	3YCD4

[COMMENT] This guideline describes the DMR behaviour in the following conditions. The DMR includes values for the "current URI" and "next URI". This DMR receives a new SetAVTransportURI action from the network with a non-empty and valid URI. The DMR accepts

the SetAVTransportURI request, replaces the "current URI", and clears all state variables related to the "next URI".

10.1.7.1.8 Effect of an empty AVT:SetAVTransportURI

[GUIDELINE] If a UPnP AV MediaRenderer includes a "current URI" and a "next URI" and receives an AVT:SetAVTransportURI action with an empty URI, then the renderer shall behave as described in guideline 10.1.6.11.7. In addition, the renderer shall clear the state variables related to the "next URI".

This guideline applies to a UPnP AV MediaRenderer in the "Playing", "Stopped", and "Paused_Playback" states.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	GH5GB	

[COMMENT] This guideline describes the DMR behaviour upon receiving an AVT:SetAVTransportURI action with an empty URI. As described in these guidelines, the DMR clears the state variables related to the "current URI". This guideline clarifies that the DMR also clears the state variables related to the "next URI". After clearing the state variables, the DMR enters the "No_Media_Present" state.

10.1.7.1.9 Prefetching content

[GUIDELINE] If a UPnP AV MediaRenderer receives a valid, non-empty AVT:SetNextAVTransportURI action, then the renderer shall comply with the following behaviours:

- if the URI in the action identifies content of the image class, and if the renderer has not cached the image resource, then the renderer shall issue an HTTP GET request using this URI (or one of the alternative URIs from the NextURIMetaData argument) to prefetch the image resource.
- if the URI in the action identifies content of the audio or A/V class, and if the renderer has not cached the media resource, then the renderer shall issue an HTTP GET request using this URI (or one of the alternative URIs from the NextURIMetaData argument) during playback of the "current URI" to prefetch partially or completely the media resource.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	JGXCT	

[COMMENT] This guideline indicates that a DMR needs to prefetch content when it receives an AVT:SetNextAVTransportURI request. Prefetching the next resource becomes necessary to provide a smooth transition when an DMR switches from the current to the "next URI". Image content is prefetched as soon as the DMR receives the action request. Audio or A/V content can be prefetched partially or completely at any time while the "current URI" plays.

10.1.7.2 State Management

10.1.7.2.1 Transitions from the "current URI" to the "next URI"

[GUIDELINE] If a UPnP AV MediaRenderer is playing the "current URI" and playback reaches the end of the stream, then the renderer shall start playing one of the resources of the media item associated with the "next URI" (if available). During the transition from the "current URI" to the "next URI", the renderer shall change its state using one of the following two options:

- from "Playing" into "Playing";
- from "Playing" into "Transitioning" and then into "Playing".

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	THURY	

[COMMENT] This guideline describes the expected transition procedures when an DMR moves from the "current URI" to the "next URI".

10.1.7.2.2 Stopping playback

[GUIDELINE] If a UPnP AV MediaRenderer is playing the "current URI" and it receives a request to stop playback, then the renderer shall enter the "Stopped" state. The renderer shall not automatically play the media item associated with the "next URI" (if available).

This guideline applies to all cases where the "current URI" describes a resource of the Audio, Image, or AV class.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	Y8FA9	

[COMMENT]

- 1) This guideline describes the expected behaviour if a user stops playing the content. If a user stops playing the content, the user normally assumes that playback will stop. The user does not know if the DMR has already stored information for the "next URI" or not.
- 2) This guideline does not apply to cases where the "current URI" describes collections of resources (i.e., Media Collections or PlayContainerURI).

10.1.7.2.3 Implementation of the AVT:Next action in the "Playing" and "Stopped" states

[GUIDELINE] If a UPnP AV MediaRenderer is in the "Playing" or "Stopped" states, and if the renderer has a "current URI" and a "next URI", then the renderer shall allow the use of the AVT:Next action.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	2CUUX	

[COMMENT] This guideline indicates that an DMR allows the AVT:Next action whenever the DMR has a "current URI" and a "next URI" in the "Playing" or "Stopped" states.

10.1.7.2.4 Implementation of the AVT:Next action in the "Paused_Playback" state

[GUIDELINE] If a UPnP AV MediaRenderer is in the "Paused_Playback" state, and if it has a "current URI" and a "next URI", then the renderer may allow the use of the AVT:Next action.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	8S5WZ	

[COMMENT] This guideline indicates that the AVT:Next action is an option in the "Paused_Playback" state.

10.1.7.2.5 Advertising the implementation of the AVT.Next action

[GUIDELINE] If a UPnP AV MediaRenderer allows the use of the AVT.Next action, then the renderer shall list the keyword 'Next' in the AVT.CurrentTransportActions instance state variable.

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	57Y7B	

[COMMENT] This guideline clarifies the need to advertise an implementation of AVT:Next using the AVT.CurrentTransportActions state variable.

10.1.7.2.6 Forced transition from the "current URI" to the "next URI" ("Playing" state)

[GUIDELINE] If a UPnP AV MediaRenderer has a "current URI" and a "next URI" in the "Playing" state, and if this renderer receives an AVT:Next action, then the renderer shall start playing one of the resources of the media item associated with the "next URI".

During the transition from the current to the "next URI", a UPnP AV MediaRenderer shall change its state using one of the following two options:

- from "Playing" into "Playing";
- from "Playing" into "Transitioning" and then into "Playing".

This guideline applies to all cases where the "current URI" describes a resource of the Audio, Image, or AV Media Class.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	DDXT5	

[COMMENT]

- 1) This guideline describes the use of the AVT:Next action as a method to force a transition from the "current URI" to the "next URI".
- 2) Images do not have playback duration like audio or A/V resources. For images, the only way to trigger a transition from the current to the "next URI" is by invoking the AVT.Next action.
- 3) This guideline does not apply to cases where the "current URI" describes collections of resources (i.e., Media Collections or PlayContainerURI).

10.1.7.2.7 Forced transition from the current to the next URI ("Stopped" state)

[GUIDELINE] If a UPnP AV MediaRenderer has a "current URI" and a "next URI" in the "Stopped" state, and if the renderer receives an AVT:Next action, then the renderer shall do the following:

- transfer the values from the "next URI" state variables to the "current URI" state variables;

- clear the "next URI" state variables;
- remain in the "Stopped" state.

This guideline applies to all cases where the "current URI" describes a resource of the Audio, Image, or AV Media Class.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	IXULC	

[COMMENT]

- 1) This guideline describes the use of the AVT:Next action as a method to force a transition from the "current URI" to the "next URI". Specifically, this guideline describes the DMR behaviour when the AVT:Next action is used in the "Stopped" state.
- 2) This guideline does not apply to cases where the "current URI" describes collections of resources (i.e. Media Collections or PlayContainerURI).

10.1.7.2.8 Forced transition from the "current URI" to the "next URI" ("Paused_Playback" state)

[GUIDELINE] If a UPnP AV MediaRenderer has a "current URI" and a "next URI" in the "Paused_Playback" state, and if the renderer allows the use of the AVT:Next action in this state, and if the renderer receives an AVT:Next action, then the renderer shall do the following:

- transfer the values from the "next URI" state variables to the "current URI" state variables;
- clear the "next URI" state variables;
- remain in the "Paused_Playback" state.

This guideline applies to all cases where the "current URI" describes a resource of the Audio, Image, or AV Media Class.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	OIVUH	

[COMMENT]

- 1) This guideline describes the use of the AVT:Next action as a method to force a transition from the "current URI" to the "next URI". Specifically, this guideline describes the DMR behaviour when the AVT:Next action is used in the "Paused_Playback" state.
- 2) This guideline does not apply to cases where the "current URI" describes collections of resources (i.e., Media Collections or PlayContainerURI).

10.1.7.2.9 Disallowed AVT:Next action

[GUIDELINE] If a UPnP AV MediaRenderer does not advertise support for the AVT:Next action in the AVT.CurrentTransportActions instance state variable, and if the renderer receives an AVT:Next action, then the renderer shall respond with error 711 (transition not available).

[ATTRIBUTES]

M	C	DMR	n/a	n/a	ISO/IEC 29341-20-10: 2011	VTJ8F	

[COMMENT] This guideline describes the case of a DMR that does not advertise support for the AVT:Next action but it receives an AVT:Next action, the DMR returns the error code specified in this guideline.

10.1.8 Upload and Optional Content Management requirements

10.1.8.1 MM/CM: DMS with Upload Device Option support definition

10.1.8.1.1

[GUIDELINE] A UPnP AV MediaServer may support the Upload Device Option by implementing the baseline upload AnyContainer (defined in 10.1.8.11) and optionally the optional content management operations (OCM operations, as defined in 10.1.8.2).

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	MVRMU	

[COMMENT] This guideline means that a DMS or M-DMS can implement the Upload Device Option (i.e. can receive uploaded content from an +UP+).

If the DMS or M-DMS implements the Upload Device Option, then it also implements upload AnyContainer. It can additionally support various OCM operations.

10.1.8.1.2

[GUIDELINE] If a UPnP AV MediaServer supports the Upload Device Option, it shall support the upload AnyContainer operation.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	WMJW5	

[COMMENT] The baseline requirement for a DMS or M-DMS that supports the Upload Device Option is to be able to receive a CDS:CreateObject request that specifies the "DLNA.ORG_AnyContainer" as the parent container for a new CDS item. The DMS or M-DMS needs to be able to receive the content through an HTTP POST request. The following is an example sequence of events for an upload scenario.

- The Upload Controller invokes CDS:CreateObject on the DMS. The metadata describes an image to be created in "DLNA.ORG_AnyContainer".
- The DMS approves the metadata from the CDS:CreateObject request to determine if it is valid. Since the parent container specifies "DLNA.ORG_AnyContainer", then the DMS decides that the new image object belongs in an existing CDS container (title of "New Photos") for all image uploads.
- The DMS sends the CDS:CreateObject response to the Upload Controller. The response indicates the object will be in the "New Photos" container. The response also includes a <res> element that omits a URI value but has a URI value for res@importUri.

- The Upload Controller uses an HTTP POST request to transfer the image file to the DMS.

When the DMS is able to serve the new image, it provides a URI value for the <res> element.

10.1.8.2 MM/CM: Optional Content Management operation definitions

[GUIDELINE] If a UPnP AV MediaServer supports optional content management (OCM) operations, it may support one or more of the following OCM operations.

- OCM: upload content. Use this to upload content to a specific CDS container. This operation has 2 steps: use CDS:CreateObject to create a CDS item and use HTTP POST to transfer the content.
- OCM: create child container. Use this to create a new CDS container in a specified CDS container. This operation has one step: use CDS:CreateObject to create a CDS container. This operation is generally used as a preceding step to an OCM: upload content operation.
- OCM: destroy object. Use this to destroy a CDS object. This operation has one step: use CDS:DestroyObject to destroy a CDS object.
- OCM:change metadata. Use this to alter the metadata of an existing CDS item. This operation has one step: use CDS:UpdateObject to update the CDS metadata. Note that this operation can be used to add, delete, or change an existing metadata element of an item.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	FQLR9

[COMMENT] The guidelines define interoperability specifically for the described usages. Vendors need to always implement behaviour that is consistent with the DLNA guidelines, even if the implementation will be used for an operation that has different preconditions. For example, a DMS that supports the OCM: create child container can allow control points to create CDS containers. In such a scenario, the DMS and control point need to abide by appropriate syntax rules for CDS:CreateObject.

The guideline also permits other forms of management operations, although the guidelines do not define interoperability rules for them.

OCM: destroy item has been replaced by OCM: destroy object. All original functionality on items is retained; however, revision to guidelines now allows Destroy operations on containers.

10.1.8.3 MM/CM: Upload Controller and Mobile Digital Media Uploader

10.1.8.3.1

[GUIDELINE] A DLNA device class may implement the Upload Controller Device Capability.

[ATTRIBUTES]

O	A	DMS DMP DMR DMC	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	U8BQB

10.1.8.3.2

[GUIDELINE] An Upload Controller shall implement a UPnP AV MediaServer control point capable of invoking the following actions.

- CDS:CreateObject.

[ATTRIBUTES]

M	C	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	W39VI	

[COMMENT] CDS:CreateObject is the action that allows an Upload Controller to upload content. The guidelines specify that the normative content transfer methodology involves HTTP POST, as described in guideline 11.4.3.65.1.

10.1.8.3.3

[GUIDELINE] An Upload Controller shall support the upload AnyContainer operation.

[ATTRIBUTES]

M	C	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	VRMUZ	

10.1.8.3.4

[GUIDELINE] An Upload Controller may implement a UPnP AV MediaServer control point capable of invoking the following actions.

- CDS:DestroyObject

By supporting these actions, an Upload Controller can be capable of supporting additional optional content management operations.

See 10.1.8.2 for more information about optional content management operations.

[ATTRIBUTES]

O	C	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	MJW54	

[COMMENT] CDS:DestroyObject is the action that allows an Upload Controller to destroy a CDS object when a content transfer failed or when the user wants to remove uploaded content from the DMS.

Upload Controllers are allowed to implement support for other CDS actions, but the DLNA guidelines do not specify the interoperability behaviour for other actions.

10.1.8.4 MM/CM: Determining Upload AnyContainer support**10.1.8.4.1**

[GUIDELINE] A UPnP MediaServer shall use the <dlina:X_DLNA CAP> element (as a child of the <device> element that represents the MediaServer) in the device description document and use the Capability IDs as indicated in Table 23 in the element's comma-separated value list to indicate support for uploading a Media Class.

Table 23 – Capability IDs for AnyContainer support

Capability ID	Description
audio-upload	The UPnP AV MediaServer supports the upload AnyContainer operation for the Audio Media Class.
image-upload	The UPnP AV MediaServer supports the upload AnyContainer operation for the image Media Class.
av-upload	The UPnP AV MediaServer supports the upload AnyContainer operation for the AV Media Class.
create-child-container	The UPnP AV MediaServer supports the OCM: create child container operation.
create-item-with-OCM-destroy-item	The UPnP AV MediaServer supports to create a CDS item with OCM: destroy object capability for the upload AnyContainer operation. This Capability ID shall coexist with at least one of audio-upload, image-upload or av-upload.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	QLR9B	

[COMMENT] DMS devices use the <dlina:X_DLNACAP> element to indicate support for the upload AnyContainer operation. The element is a comma separated value list that indicates whether the DMS can receive uploads of images, audio-only, or audio/video content.

A DMS that supports the upload AnyContainer operation is different from a DMS with an Upload Controller. The former is a DMS that can receive uploaded content. The latter is a DMS that can upload to a different DMS. It is possible to implement a DMS that supports the upload AnyContainer operation and the Upload Controller capability.

A DMS that supports OCM: create child container need to also support the creation of child containers where the DMS chooses the parent container (because the Upload Controller specified DLNA.ORG_AnyContainer as the parent). This guideline explains how Upload Controllers determine if OCM: create child container is supported for the DMS.

Guideline 9.2.35.1 gives the formal syntax of the <dlina:X_DLNACAP> element.

10.1.8.4.2

[GUIDELINE] A UPnP AV MediaServer may implement the CDS:X_GetDLNAUploadProfiles action to indicate the DLNA Media Format Profiles that it will accept in the CDS:CreateObject action.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	8BQBA	

10.1.8.4.3

[GUIDELINE] The CDS:X_GetDLNAUploadProfiles action's definition in the service description shall be defined as indicated below.

```

<action>
  <name>X_GetDLNAUploadProfiles</name>
  <argumentList>
    <argument>
      <name>UploadProfiles</name>
      <direction>in</direction>
      <relatedStateVariable>
        X_A_ARG_Type_UploadProfiles
      </relatedStateVariable>
    </argument>
    <argument>
      <name>SupportedUploadProfiles</name>
      <direction>out</direction>
      <relatedStateVariable>
        X_A_ARG_Type_SupportedUploadProfiles
      </relatedStateVariable>
    </argument>
  </argumentList>
</action>

```

The `X_A_ARG_TYPE_UploadProfiles` and `X_A_ARG_Type_SupportedUploadProfiles` state variables are defined below.

```

<stateVariable sendEvents="no">
  <name>X_A_ARG_Type_UploadProfiles</name>
  <dataType>string</dataType>
</stateVariable>
<stateVariable sendEvents="no">
  <name>X_A_ARG_Type_SupportedUploadProfiles</name>
  <dataType>string</dataType>
</stateVariable>

```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	39VIY

[COMMENT] The `UploadProfiles` input argument is an unordered, comma separated list of DLNA Media Format Profile names.

The `SupportedUploadProfiles` output argument is an unordered, comma separated list of DLNA Media Format Profile names, as described below:

- are listed in the `UploadProfiles` input argument and this MediaServer is willing to accept at the action is invoked;
- or, in case of an empty `UploadProfiles` input argument, the `SupportedUploadProfiles` list will contain the complete list of DLNA Media Format Profiles that this MediaServer is willing to accept at the time the action is invoked.

The DLNA media profile IDs that appear in `SupportedUploadProfiles` shall comply with these restrictions.

- Needs to be AV, Audio, or Image Media Classes.
- Media Format Profile IDs for icons, thumbnails and media collection files are expressly prohibited.

The response behaviour is summarized in the following way.

- If UploadProfiles is empty, then SupportedUploadProfiles contains a complete list of profiles that the MediaServer is willing to accept at the current time. Control points specify an empty value for UploadProfiles when they want to get a full list of profiles that the MediaServer will accept for uploads.
- If UploadProfiles contains one or more profiles, then SupportedUploadProfiles contains the subset of UploadProfiles that the MediaServer is willing to accept at the current time. Control points specify one or more profiles for UploadProfiles when they are interested in uploading specific formats to a MediaServer.

10.1.8.4.4

[GUIDELINE] If a UPnP AV MediaServer does not accept upload of all the DLNA Media Format Profiles that it lists in the CMS.SourceProtocolInfo state variable, then it shall implement the CDS:X_GetDLNAUploadProfiles action to indicate the DLNA Media Format Profiles that it will accept in the CDS:CreateObject action.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	N7IEV	

[COMMENT] A UPnP AV MediaServer does not need to implement the optional CDS:X_GetDLNAUploadProfiles action if it supports the same set of DLNA Media Format Profiles for upload and for content serving.

A UPnP AV MediaServer control point needs to realize that the presence of this action is the first indicator that there are restrictions in the uploadable Media Format Profiles.

Some UPnP AV MediaServers implement CMS.SourceProtocolInfo to expose the profiles of the currently available content instead of listing a fixed collection of profiles. In other words, at some time this state variable can show 0 profiles and at a different time it can show *N* profiles. In this case this guideline still applies. For this reason, it is good practice if a DMS that changes dynamically the entries in CMS.SourceProtocolInfo implements the CDS:X_GetDLNAUploadProfiles to advertise the set of uploadable profiles.

This guideline applies when a UPnP AV MediaServer does not accept the upload of a Media Class (see Guideline 10.1.8.4.1) but the CMS.SourceProtocolInfo state variable lists profiles in that Media Class.

10.1.8.4.5

[GUIDELINE] If a UPnP MediaServer supports the upload AnyContainer operation or OCM:create child container, then it shall adhere to the following guidelines (10.1.8.4 through 10.1.8.4.4).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	4R8S6	

10.1.8.5 MM/CM: operations that need CDS:CreateObject

[GUIDELINE] If a UPnP AV MediaServer supports one or more of these operations, then it shall implement CDS:CreateObject, as follows:

- upload AnyContainer operation;
- OCM: upload content;
- OCM: create child container.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	RMUZ5	

[COMMENT] The CDS:CreateObject action is used to create a CDS object that will represent the uploaded content.

In addition to these guidelines, a DMS or M-DMS with the ability to receive uploaded content needs to implement an HTTP server capable of processing HTTP POST requests, as described in 11.4.3.65 guidelines.

10.1.8.6 MM/CM: operations that need CDS:DestroyObject

[GUIDELINE] If a UPnP AV MediaServer supports this operation, then it shall implement CDS:DestroyObject.

- OCM: destroy object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	MUZ56	

[COMMENT] The CDS:DestroyObject action is used for a variety of OCM operations related to removing CDS objects from a DMS.

10.1.8.7 MM/CM: other CDS actions

[GUIDELINE] A UPnP AV MediaServer may implement CDS:DeleteResource, CDS:CreateReference, CDS:ImportResource, CDS:ExportResource, or CDS:StopTransferResource.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	9VIYY	

[COMMENT] These are normative UPnP AV CDS actions, but the DLNA guidelines do not define interoperability rules for them.

10.1.8.8 MM/CM: baseline Media Formats**10.1.8.8.1**

[GUIDELINE] A UPnP AV MediaServer that belongs to the HND Device Category and implements the upload AnyContainer operation for the DLNA A/V Media Class (as indicated by

guideline 10.1.8.4.1) shall accept content uploads of at least one of the Mandatory Media Format Profiles for each geographical region supported by the device.

A UPnP AV Media Server supports a geographical region when it is capable of exposing and streaming content (mandatory profiles) per region according to Guideline 6.1.2.2 (GUN VEJX7) of IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3 IEC 62481-2: 2017	BQBAR

[COMMENT] DLNA guidelines for HND Device Classes have an expressed goal to facilitate uploading of baseline media formats for exposing and rendering content. A DMS that only supports uploads of optional media formats detracts from the guidelines' interoperability message.

For example, consider the case of a DMS that exposes and streams content (mandatory profiles) for North America and Japan in the HND category. If this DMS implements the upload AnyContainer operation, it needs to support upload for at least one mandatory profile in the North American region and at least one mandatory profile in the Japanese region

10.1.8.8.2

[GUIDELINE] A UPnP AV MediaServer that belongs to the MHD Device Category and implements the upload AnyContainer operation for a DLNA Media Class (as indicated by guideline 10.1.8.4.1) shall accept the uploading of content uploads of all the Mandatory Media Format Profiles for that DLNA Media Class in the MHD Device Category.

[ATTRIBUTES]

M	A	n/a	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	SR7JJ

[COMMENT] DLNA guidelines for MHD Device Classes have an expressed goal to facilitate uploading of baseline media formats for exchanging content and exposing and rendering content. An M-DMS that only supports uploads of optional media formats detracts from the guidelines' interoperability message.

10.1.8.8.3

[GUIDELINE] A UPnP AV MediaServer control point that belongs to one of the DLNA-defined Device Categories and implements the upload AnyContainer operation for a DLNA Media Class shall be able to upload content items of at least one of the mandatory DLNA Media Format Profiles for that DLNA Media Class in its Device Category.

Being able to upload a content item of a DLNA Media Format Profile means that, given a content item of that DLNA Media Format Profile, the UPnP AV MediaServer control point shall be able to issue the CDS:CreateObject request with the correct DLNA.ORG_PN parameter in the fourth field of ProtocolInfo value of the <res> element to represent the DLNA Media Format Profile of the content item (see 10.1.3.18).

[ATTRIBUTES]

M	A	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016	ZRERW	

10.1.8.8.4

[GUIDELINE] A UPnP AV MediaServer that belongs to the DLNA-defined DMS Device Class and implements the Content Synchronization Device Option (as indicated by 10.2.5.2) shall support the upload of the mandatory DLNA Media Format Profiles in both the HND and MHD Device Categories for the supported DLNA Media Classes.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	XLZ4X	

[COMMENT] Facilitates the content synchronization process between MHD devices and HND devices (e.g. DMS). The guideline is not applicable to M-DMS devices.

See IEC 62481-2:2017, 6.2.

10.1.8.8.5

[GUIDELINE] A UPnP AV MediaServer that belongs to the DLNA-defined M-DMS Device Class and implements the Content Synchronization Device Option (as indicated by 10.2.5.2) shall support the upload of the mandatory DLNA Media Format Profiles in only the MHD Device Categories for the supported DLNA Media Classes.

[ATTRIBUTES]

M	A	n/a	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	8CGDS	

[COMMENT] MHD devices are only expected to Synchronize with other MHD devices.

See IEC 62481-2:2017, 6.2.

10.1.8.8.6

[GUIDELINE] A UPnP AV MediaServer that belongs to the HND Device Category and implements the upload AnyContainer operation for the DLNA Image class (as indicated by guideline Requirement 10.1.8.4.1) shall accept content uploads of at least one Mandatory Media Format Profile in that class.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3 IEC 62481-2: 2017	NPJOF	

[COMMENT] Currently there is only one Mandatory Media Format Profile defined in the Image class, but this guideline will apply if that changes in the future.

10.1.8.8.7

[GUIDELINE] A UPnP AV MediaServer that belongs to the HND Device Category and implements the upload AnyContainer operation for the DLNA Audio Class (as indicated by guideline Requirement 10.1.8.4.1) shall accept content uploads of at least one Mandatory Media Format Profile in that class.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3 IEC 62481-2: 2017	ZOQNJ	

[COMMENT] Currently there is only one Mandatory Media Format profile in the Audio Class, but this guideline will apply if that changes in the future.

10.1.8.8.8

[GUIDELINE] A UPnP AV Media Server that implements the upload AnyContainer operation (as indicated by guideline Requirement 10.1.8.4.1) shall expose and stream any content acquired using the upload operation.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3 IEC 62481-2: 2017	KJYGN	

[COMMENT] This guideline clarifies the connection between upload operations and the act of exposing and streaming content to the network. A UPnP AV MediaServer that acquires content using an upload operation always exposes and streams the content to the network. This behaviour applies to devices in the HND and MHD categories.

10.1.8.9 MM/CM: indicating support for OCM operations

10.1.8.9.1

[GUIDELINE] If a UPnP AV MediaServer supports one or more OCM operations, then the UPnP AV MediaServer may have one or more CDS objects with the @dlna:dlnaManaged attribute.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	LR9BX	

[COMMENT] The @dlna:dlnaManaged attribute indicates the OCM operations that the DMS or M-DMS is able to support for a given CDS object.

10.1.8.9.2

[GUIDELINE] If a UPnP AV MediaServer supports one or more OCM operations on a CDS object, then the UPnP AV MediaServer shall use the @dlna:dlnaManaged attribute to indicate support for those OCM operations on a CDS object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	JW54B	

10.1.8.9.3

[GUIDELINE] If a CDS object allows one or more OCM operations, then the CDS object shall have a @restricted value of "0".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	XYXC6	

[COMMENT] For CDS objects that do not allow OCM operations, the @restricted attribute can have a value of "0" or "1" to indicate that the object allows or disallows modifications through non-OCM operations respectively.

10.1.8.9.4

[GUIDELINE] The syntax definition for the value of @dlna:dlnaManaged attribute shall be as follows:

- dlnaManaged-value = 8 hexdigit;
- hexdigit = <hexadecimal digit: "0"-"9", "A"-"F", "a"-"f">.

The @dlna:dlnaManaged attribute is a 32-bit unsigned integer encoded into exactly 8 hexadecimal digits, with the following bit definitions. Bit-0 is the least significant bit. If a bit supports a particular operation, then the bit value is true. Otherwise, the bit value is false to indicate the operation is not supported (e.g. 00000000000000000000000000000001b = 0x00000001 where bit-0 is set to true).

Example:

- dlna:dlnaManaged="00000001"

The hexadecimal encoded form shall consist only of hexadecimal digits. The value shall omit the "0x" string that often precedes hexadecimal notation.

- Bit-0: indicates support for OCM: upload content
 - If true then the MediaServer allows a control point to create child CDS items in the container for the OCM: upload content operation.
 - Shall be false when used with a CDS item.
- Bit-1: indicates support for OCM: create child container
 - If true on a CDS container, then the MediaServer allows a control point to create child CDS containers that can support the OCM: upload content.
 - Shall be false when used with a CDS item.
- Bit-2: indicates support for OCM: destroy object operation
 - If true then the MediaServer allows a control point to perform an OCM: destroy object operation on the object.
- Bit-3: indicates support for OCM: upload content with OCM:destroy object operation capability
 - If true on a CDS container, then the MediaServer allows a control point to create CDS items for OCM:upload content operation that can support the OCM: destroy object.
 - If true on a CDS container, then Bit-0 value on the CDS container shall be true.
 - Shall be false when used with a CDS item.
- Bit 4: indicates support for OCM: change metadata operation
 - If true then the MediaServer allows a control point to change, add or delete metadata on an existing CDS Object.
- All other bits shall be false. All other bits are reserved for future use.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	9308Z	

[COMMENT] This guideline defines the syntax for the @dlna:dlnaManaged value. This attribute describes the DMS implementation's ability to support operations that affect the CDS object as a whole.

A false value for a bit means that the DMS or M-DMS does not claim support for the described operation. Control points are expected to honor the interpretation of these bits to maximize interoperability because when invoking a CDS action that is related to an unsupported OCM operation, this action is likely to receive respond with an error. CDS failure responses are not mandatory when a DMS or M-DMS detects a deviation because vendors are permitted to use normative CDS actions for vendor-defined operation.

There can be cases where a DMS (that is normally able to destroy the CDS item) is not able to destroy a CDS item at the time of the request. For example, the actual content binary file might be locked or a local management policy prevents the CDS item from being destroyed at the current moment.

10.1.8.9.5

[GUIDELINE] If the @restricted attribute is set to 1 all bits of the @dlna:dlnaManaged attribute shall be false, that is, no OCM operations are allowed.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	B73OL	

[COMMENT] Enforce consistency between the @restricted and the @dlna:dlnaManaged attributes.

10.1.8.9.6

[GUIDELINE] If a CDS object has "0" value for all hexadecimal digits in the @dlna:dlnaManaged attribute, then UPnP AV MediaServer should omit the @dlna:dlnaManaged attribute of the CDS object.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	YHXEF	

[COMMENT] This guideline provides guidance to UPnP AV MediaServer implementations to not assign the @dlna:dlnaManaged="00000000" attribute to a CDS object.

10.1.8.10 MM/CM: parallel upload AnyContainer and OCM operations**10.1.8.10.1**

[GUIDELINE] If a MediaServer control point attempts to do multiple upload AnyContainer or multiple OCM operations in parallel, and if the MediaServer fails one or more of the parallel attempts, then the MediaServer control point shall be able to perform the upload operations in a serialized manner.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	6X6HM	

[COMMENT] DMS devices are not required to support parallel attempts to upload or destroy content. Control points that attempt to do so are responsible for retrying in a serialized manner in the event of a failure. The exact user's process for retrying serialized uploads is a user interface issue and is out of scope of this standard.

10.1.8.10.2

[GUIDELINE] If a UPnP AV MediaServer supports the upload AnyContainer or other OCM operations, then it shall be capable of performing at least one upload AnyContainer or OCM operation at a time.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	N9C8F	

10.1.8.11 MM/CM: Upload AnyContainer operation

10.1.8.11.1

[GUIDELINE] If a UPnP AV MediaServer supports the upload AnyContainer operation, then it shall allow control points to specify a "DLNA.ORG_AnyContainer" value for the ContainerID input argument in a CDS:CreateObject request.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	4ZYSH	

[COMMENT] The "DLNA.ORG_AnyContainer" allows an Upload Controller to upload content to a UPnP AV MediaServer without having specific knowledge of where the content will be listed in the CDS hierarchy.

Where the MediaServer creates the new object is dependent on the MediaServer implementation.

The "DLNA.ORG_AnyContainer" is a magic container ID which is used only in the request and a container of this container ID does not actually exist.

A control point can attempt to deviate slightly from the restrictions listed in 10.1.8.11, but the result can be an error. For example, if the Upload Controller tries to use object.item.audioItem.audioBroadcast instead of object.item.audioItem, then the DMS can choose to fail the request.

10.1.8.11.2

[GUIDELINE] If a UPnP AV MediaServer supports the upload AnyContainer operation, then the @id value for each container shall be a value that is not equal to "DLNA.ORG_AnyContainer".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	LSFB4	

10.1.8.11.3

[GUIDELINE] If a UPnP AV MediaServer control point is going to start an upload AnyContainer operation, then it shall invoke CDS:CreateObject with the following rules.

- The ContainerID input argument shall be "DLNA.ORG_AnyContainer".
- The Elements input argument shall specify a CDS item with a single <res> element that does not have a URI value. The <res> element shall also conform to guideline 10.1.8.19. The <item> element shall also have a <upnp:class> value, see Table 24, (or similarly derived value) that corresponds to the Media Class of the content that is going to be uploaded.

Table 24 – Required Media Class UPnP values

Media Class	Required UPnP:class value
Audio	object.item.audioItem
Image	object.item.imageItem
AV	object.item.videoItem

[ATTRIBUTES]

M	A	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	SFB47

10.1.8.11.4

[GUIDELINE] If a UPnP AV MediaServer receives an upload AnyContainer request with a <upnp:class> value that is derived from a supported base class value, then the DMS may change the <upnp:class> value to the supported base class or to a similarly derived class, as indicated in the Result output argument of the CDS:CreateObject.

For example, if the request specifies object.item.audioItem.audioBroadcast, then the MediaServer can change the value to object.item.audioItem. Likewise, if the request specified object.item.imageItem, the MediaServer can change it to object.item.imageItem.photo.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	ZYSHA

[COMMENT] DMS devices are not required to support the full range of derived values for the <upnp:class> element.

10.1.8.11.5

[GUIDELINE] If a UPnP AV MediaServer returns a success response to an Upload Controller's request to start an upload AnyContainer operation, then the MediaServer shall do the following.

- The DMS or M-DMS device shall determine an appropriate CDS container where the new CDS object will be created.
- The MediaServer shall specify the object ID of the parent container as the <item> element's @parentID attribute value, which is returned in the Result output argument.
- The <res> element (found in the Result output argument) that provides the res@importUri value intended for the content transfer process shall comply with the guidelines in 10.1.8.19.2.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	9C8FT

[COMMENT] This guideline describes the proper DMS or M-DMS behaviour in a success scenario. The DMS needs to use an appropriate DMS error in the case of a failure.

10.1.8.11.6

[GUIDELINE] A UPnP AV MediaServer that supports the Upload AnyContainer operation shall be capable of participating in a content transfer process, as described in guideline 10.1.8.26.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	X6HMR	

[COMMENT] These guidelines introduce the second step to the Upload AnyContainer operation.

10.1.8.11.7

[GUIDELINE] A UPnP AV MediaServer control point that supports the Upload AnyContainer operation shall be capable of participating in a content transfer process, as described in guidelines 10.1.8.26.

[ATTRIBUTES]

M	A	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	RGKUS	

10.1.8.11.8

[GUIDELINE] A UPnP AV MediaServer that creates a new CDS item in an upload AnyContainer operation may create the CDS item in a CDS container with the @dlna:dlnaManaged attribute.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	308ZS	

[COMMENT] DMS or M-DMS devices can create the new CDS item in a CDS container that has the @dlna:dlnaManaged attribute.

10.1.8.11.9

[GUIDELINE] A UPnP AV MediaServer control point shall tolerate scenarios where the MediaServer changes values to metadata properties specified in a CDS:CreateObject request.

Tolerate means that the UPnP AV MediaServer control point is able to complete the necessary content transfer process (including the transfer of IFO files, if necessary) after creating the CDS object.

[ATTRIBUTES]

M	C	+UP+	n/a	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	YXC6T	

[COMMENT] The following are some examples of what a MediaServer is permitted to do.

- The @parentID changes from "DLNA.ORG_AnyContainer" to a different @parentID value.
- The <upnp:class> value changes to a derived class or to a base class of the current value.
- <dc:title>, <dc:creator>, and other string-based user-informational metadata properties are truncated to fit the maximum length supported by the MediaServer.

10.1.8.11.10

[GUIDELINE] A UPnP AV MediaServer that creates a new CDS item in an upload AnyContainer operation may change metadata values to indicate the support or unsupported nature of OCM operations.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	W54BN	

[COMMENT] MediaServers are permitted to change metadata values at any time. This behaviour is also permissible when the MediaServer actually creates the new CDS object.

10.1.8.12 MM/CM OCM: Upload content operation**10.1.8.12.1**

[GUIDELINE] If a UPnP AV MediaServer supports the OCM: upload content operation on a CDS container, then it shall specify one or more <upnp:createClass> elements to indicate the types of CDS objects that can be created in the container. The values of these upnp:createClass elements shall be equal to or derived from object.item.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	R9BXN	

[COMMENT] This guideline ensures that control points will know what type of CDS objects can be created in the container.

For example, if a container supports the creation of image and audio-only objects, then it would use a <upnp:createClass> element with object.item.imageItem and a <upnp:createClass> element with object.item.audioItem.

The CDS container can have <upnp:createClass> that are derived from object.container, as described in 10.1.8.13.

10.1.8.12.2

[GUIDELINE] If a UPnP AV MediaServer control point is going to start an OCM: upload content operation, then it shall invoke CDS:CreateObject with the following rules.

- The ContainerID input argument shall indicate a CDS container that supports the OCM: upload content operation.
- The Elements input argument shall be a DIDL-Lite XML fragment that has a CDS item whose <upnp:class> value matches one of the values in the set of <upnp:createClass> elements associated with the CDS container identified by the ContainerID input argument. If the upnp:createClass@includeDerived attribute has a value of "1", then the <upnp:class> value also matches against the classes derived from the <upnp:createClass> value. The <item> element shall also have a single <res> element that does not specify a URI value. The <res> element shall also conform with guidelines in 10.1.8.19.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	QBARR	

[COMMENT] If a MediaServer supports the operation, Upload Controllers can choose to upload content to specific CDS containers using the OCM: upload content operation.

A control point can attempt to deviate slightly from the restrictions listed in 10.1.8.12.2, but the result can be an error. For example, if the Upload Controller tries to specify multiple <res> elements, then the DMS can choose to fail the request.

10.1.8.12.3

[GUIDELINE] If a UPnP AV MediaServer responds with a success to a CDS:CreateObject request for an OCM: upload content operation, then the created CDS item (as returned in the Result output argument) shall comply with the following rules.

- The @parentID of the created CDS item shall match the request's specified ContainerID input argument.
- The <res> element that provides the res@importUri value intended for the content transfer process shall comply with the guidelines in 10.1.8.19.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	VIYY4	

10.1.8.12.4

[GUIDELINE] A UPnP AV MediaServer that supports the OCM: upload content operation shall be capable of participating in a content transfer process, as described in guideline 10.1.8.26.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	UZ56H	

[COMMENT] These guidelines introduce the second step to the OCM: content upload operation.

10.1.8.12.5

[GUIDELINE] A UPnP AV MediaServer control point that supports the OCM: content upload operation shall be capable of participating in a content transfer process, as described in guideline 10.1.8.26.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	Z56HE	

10.1.8.12.6

[GUIDELINE] A UPnP AV MediaServer that creates a new CDS item in an OCM: upload content operation may change metadata values to indicate the support or unsupported nature of OCM operations.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	IYY4H	

[COMMENT] For example, the DMS can automatically create the @dlna:dlnaManaged attribute or change the @restricted value to indicate support for one or more OCM operations.

10.1.8.13 MM/CM: OCM: Create child container operation**10.1.8.13.1**

[GUIDELINE] If a UPnP AV MediaServer supports the OCM: create child container operation on a CDS container, then it shall specify one or more <upnp:createClass> elements to indicate the types of CDS objects that can be created in the container.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	YY4H4	

[COMMENT] This guideline ensures that control points will know what type of CDS containers can be created in an existing container.

Destroying containers is out of scope for this version of DLNA guidelines. DLNA assumes that DMS have ownership of their CDS hierarchy, which includes the ability to remove containers through out-of-band mechanisms.

10.1.8.13.2

[GUIDELINE] If a UPnP AV MediaServer supports the OCM: create child container operation, then it shall allow control points to specify a "DLNA.ORG_AnyContainer" value for the ContainerID input argument in a CDS:CreateObject request.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	56HEF

[COMMENT] The "DLNA.ORG_AnyContainer" allows an Upload Controller to create a container on a UPnP AV MediaServer without having specific knowledge of where the content will be listed in the CDS hierarchy.

10.1.8.13.3

[GUIDELINE] A UPnP AV MediaServer that supports OCM: create child container shall also implement support for OCM: upload content.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	BXNX4

10.1.8.13.4

[GUIDELINE] If a UPnP AV MediaServer control point is going to start an OCM: create child container operation, then it shall invoke CDS:CreateObject with the following rules.

- The ContainerID input argument shall indicate "DLNA.ORG_AnyContainer" or a CDS container that supports the OCM: create child container operation.
- The Elements input argument shall be a CDS container whose <upnp:class> value matches one of the values in the set of <upnp:createClass> elements associated with the CDS container identified by the ContainerID input argument. If specifying "DLNA.ORG_AnyContainer" as the value for the ContainerID input argument, then the value shall be object.container or a similarly derived class.
- The Elements input argument shall include one or more <upnp:createClass> values that describe the types of CDS objects that will be created in the new container. If specifying "DLNA.ORG_AnyContainer" as the value for the ContainerID input argument, then the corresponding <upnp:createClass> (or similarly derived values) shall be used, see Table 25.

Table 25 – Required UPnP createClass elements

Media Class	Required upnp:class value (for upnp:createClass elements)
Audio	object.item.audioItem
Image	object.item.imageItem
AV	object.item.videoItem

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	9BXNX	

[COMMENT] If a MediaServer supports the operation, Upload Controllers can choose to create new CDS containers that can receive uploaded content in an organized way.

The <upnp:createClass> values that are declared in the CDS:CreateObject request indicate the types of media that the Upload Controller intends to upload into the new container.

The following conditions can cause the DMS to return an error because specific aspects of the syntax are optional.

- The <upnp:class> value is derived from object.container. DMS can fail this request because object.container is the only value that is mandatory.
- The <upnp:createClass> value is unsupported, even if it is derived from a supported type. DMS can fail this request because only the upnp:createClass values listed in the table are mandatory.
- There is more than one <upnp:createClass> value in the request. DMS can fail this request because only a single <upnp:createClass> is required.

10.1.8.13.5

[GUIDELINE] A UPnP AV MediaServer may change a <upnp:createClass> or <upnp:class> value to one of the supported base classes or one of the derived classes if the value is derived from that base class.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	54BN6	

[COMMENT] For example, if the Upload Controller specified a <upnp:createClass> value of object.item.imageItem.photo and a <upnp:class> value of object.container.album, then the DMS can automatically change the values of those elements to object.item.imageItem and object.container, respectively. Similarly, a DMS can change object.container to a derived value, such as object.container.storageFolder.

Creating a container that has <upnp:createClass> values derived from object.container are out of scope of this standard.

Guideline 10.1.8.25.3 instructs a DMS to return error code 712 if the specified value is not acceptable to the DMS.

10.1.8.13.6

[GUIDELINE] A UPnP AV MediaServer control point creates a new CDS container with intent to follow up with an OCM: upload content operation the new container, then the control point shall specify the @dlna:dlnaManaged attribute with bit-0 set to true.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	4BN6R	

[COMMENT] In conjunction with the <upnp:createClass> elements, this guideline ensures that a DMS knows the intent of the Upload Controller to upload content to the new container.

10.1.8.13.7

[GUIDELINE] A UPnP AV MediaServer that creates a new CDS container in an OCM: create child container operation may change the @restricted and/or @dlna:dlnaManaged metadata values to indicate the support or unsupported nature of OCM operations.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	XC6TY	

10.1.8.13.8

[GUIDELINE] If a UPnP AV MediaServer receives an OCM: create child container request and one or more of the <upnp:createClass> values specified in the request are unsupported, then the MediaServer shall return error code 712 (Bad Metadata).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	C6TY8	

10.1.8.13.9

[GUIDELINE] If a UPnP AV MediaServer responds with a success to a CDS:CreateObject request for an OCM: create child container operation, then the created CDS container shall have the @dlna:dlnaManaged attribute. Furthermore, the @parentID of the created CDS container (as returned in the Result output argument) shall match the request's specified ContainerID input argument.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	O8ZSQ	

[COMMENT] The @dlna:dlnaManaged attribute is always present in a recursive manner. However, the individual bits on the attribute value can have different true/false values.

Guideline 10.1.8.9.4 requires the created container to support the OCM:upload contents operation.

10.1.8.14 MM/CM: OCM: Destroy object operation**10.1.8.14.1**

[GUIDELINE] If a UPnP AV MediaServer control point is going to start an OCM: destroy object operation, then it shall invoke CDS:DestroyObject with the following rules.

- The ObjectID input argument shall indicate a CDS object that supports the OCM: destroy object operation.
- This ObjectID shall be for a CDS object that is to be removed from the CDS.

[ATTRIBUTES]

M	R	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	8ZSQB

[COMMENT] The primary usage of this operation is to allow an Upload Controller or Synchronization Controller to remove CDS objects from a MediaServer. A control point can make no assumptions about whether any content files will actually be removed.

10.1.8.14.2

[GUIDELINE] If a UPnP AV MediaServer responds with a success to a CDS:DestroyObject request for an OCM: destroy object operation, then the DMS shall remove the CDS item indicated by the request's ObjectID input argument. A MediaServer that cannot remove the indicated CDS item from the CDS hierarchy shall return a SOAP error response.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	6HMRW

[COMMENT] DLNA does not specify any mandatory behaviour for whether or not actual content binaries are removed from the local storage of the DMS. The primary expectation of this guideline is that the destroyed CDS item no longer appears in the CDS hierarchy.

10.1.8.14.3

[GUIDELINE] If a UPnP AV MediaServer supports the OCM:destroy object Operation and the control point invokes CDS:DestroyObject on a container where the container and all of its descendent objects have bit 2 of the @dlna.dlnaManaged attribute true, then the container and all of its descendent objects are removed.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	GAMUR

[COMMENT] Bit 2 of the @dlna.dlnaManaged attribute is the bit that defines whether the OCM: destroy object operation is allowed on an object. This guideline makes OCM:destroy object

operation recursive on containers. Any object that has bit 2 of the @dlna.dlnaManaged attribute true, will have the @restricted property set to "0".

10.1.8.14.4

[GUIDELINE] If a UPnP AV MediaServer supports the OCM: destroy object Operation and a control point invokes CDS:DestroyObject on a container with bit 2 of the @dlna.dlnaManaged attribute true and where any of that container's descendant objects have bit 2 of the @dlna.dlnaManaged attribute false then the following shall occur.

- The UPnP AV Media Server shall destroy all descendent objects that have bit 2 of the @dlna.dlnaManaged attribute true, except those preserved by c).
- The UPnP AV Media Server shall not destroy an object that has bit 2 of the @dlna.dlnaManaged attribute false.
- The UPnP AV Media Server shall not destroy any ancestor containers of an object from b) even if those ancestor containers have bit 2 of the @dlna.dlnaManaged attribute true.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	ZV8WT	

[COMMENT] If an object exists within the subtree to be deleted that has bit 2 of the @dlna.dlnaManaged attribute false, it cannot be deleted. In order to preserve the containers between the root of the subtree and that object, all of the containers leading from the root to that object will be retained. Those containers leading from the root of the subtree to that object are the ancestor containers of that object.

10.1.8.14.5

[GUIDELINE] If a server encounters objects within the subtree that cannot be deleted because they have bit 2 of the @dlna.dlnaManaged attribute false, the server shall return a success response to a call of the CDS:DestroyObject that was initiated by the OCM: destroy object operation and shall behave according to 10.1.8.14.4.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	5BVYZ	

[COMMENT] The return of success is required by UPnP AV, the control point will need to perform a CDS:Browse() operation to determine if the entire subtree was deleted.

10.1.8.14.6

[GUIDELINE] A control point shall not invoke a OCM: destroy object on an object if a bit 2 of the @dlna.dlnaManaged attribute is false for that object.

[ATTRIBUTES]

M	R	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	AMURA	

10.1.8.15 MM/CM: Use of valid values

[GUIDELINE] A UPnP AV MediaServer control point shall always specify values for XML attributes and elements in a manner that conforms with the XML attribute's or element's schema.

[ATTRIBUTES]

M	C	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	C8FTM	

[COMMENT] This is a general rule that applies whenever a control point creates or changes a metadata property.

10.1.8.16 M/CM: General use of 7xx error codes

[GUIDELINE] If a UPnP AV MediaServer responds to a CDS:CreateObject or CDS:UpdateObject request with a UPnP AV error code in the 700 to 799 range, then the UPnP AV MediaServer may use a localized, human-readable error message in the errorDescription tag of the SOAP response.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	HMRW8	

[COMMENT] The ContentDirectory service specification does not provide adequate granularity for many error scenarios. This guideline allows DMS or M-DMS vendors to provide an error message that can be used by a user for error recovery and/or troubleshooting.

10.1.8.17 MM/CM: general use of error code 720

[GUIDELINE] Unless a different error code is mandatory, if a UPnP AV MediaServer receives a CDS action request for a particular upload AnyContainer or any OCM operation that is not supported or invalid, then the UPnP AV MediaServer may return a UPnP error code of 720 (Cannot process the request). The errorDescription tag in the SOAP response may contain a localized, human-readable error message.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	8FTMQ	

[COMMENT] The ContentDirectory service specification does not provide adequate granularity for many error scenarios. As a workaround, DLNA allows implementations to return the error code 720 with a detailed error message. This error message can be used by a consumer for error recovery and/or troubleshooting.

10.1.8.18 MM/CM: invalid 4th field parameters

[GUIDELINE] A UPnP AV MediaServer that receives a CDS:CreateObject that conflicts with the guideline in 10.1.3.13.14 may return a UPnP AV error code 712 (Bad Metadata) or it may return a success response and change the conflicting flag to an appropriate value.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	YSHAB	

[COMMENT] In content upload usages, the DMS (not the Upload Controller) determines the transport layer options.

10.1.8.19 MM/CM: general rule for creating <res> elements: Content Transfer process

10.1.8.19.1

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject and specifies the creation of a <res> element that omits a URI value, then the control point shall specify a <res> element that conforms to the following rules.

- The first field of the res@protocolInfo value shall be "**".
- The second field of the res@protocolInfo value shall be "**".
- The third field of the res@protocolInfo value shall be a valid DLNA mime-type that correlates with the DLNA.ORG_PN value in the fourth field.
- The fourth field of the res@protocolInfo value shall have the DLNA.ORG_PN parameter and value. The value shall identify the DLNA Media Format Profile of the content binary that will be used in the content transfer process.

The fourth field of the res@protocolInfo value shall omit 4th field parameters defined by the DLNA guidelines, other than the required DLNA.ORG_PN and permitted DLNA.ORG_CI and other-param.

The <res> element shall omit the res@importUri attribute.

[ATTRIBUTES]

M	C	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	FB477	

[COMMENT] A control point that specifies a <res> element without a URI value indicates that it wants to upload content to the MediaServer. A control point can deviate from the restrictions described in this guideline, but the result might be an error. For example, if the control point does not specify a DLNA.ORG_PN parameter, then the MediaServer can return an error.

10.1.8.19.2

[GUIDELINE] If a UPnP AV MediaServer creates a <res> element as a result of a CDS:CreateObject and the <res> element specified in the CDS request omits a URI value, then the created <res> element shall comply with the following rules.

- The <res> element shall omit a URI value.
- The <res> element shall have a res@importUri attribute and value. The res@importUri value shall indicate a URI that supports a content-transfer process. The length of the URI shall be less than or equal to 1 024 B.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	B4773

[COMMENT] If a MediaServer creates a <res> element intended to receive uploaded content, then it needs to provide a res@importUri attribute and value. This URI tells an Upload Controller which URI to perform an HTTP POST operation.

The value of the <res> element needs to be empty until the content is actually available for serving as described in 10.1.8.27.4.

See 10.1.3.27.3 (GUN QQ6YX) for information on handling other-param.

It is permissible for the UPnP AV MediaServer to ignore or preserve a DLNA.ORG_CI and other-param parameters in the 4th field of the res@protocolInfo if the request specifies it.

10.1.8.19.3

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject and specifies the creation of a <res> element without a URI value and the content is profiled as MPEG_PS_NTSC or MPEG_PS_PAL and it has discontinuous SCR and/or PTS, then the MediaServer control point shall specify a res@dlna:ifoFileURI attribute with an empty value.

The prefix for res@dlna:ifoFileURI shall be "dlna:" and the namespace shall be "urn:schemas-dlna-org:metadata-1.0/".

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	4773Q

[COMMENT] Upload Controllers might need to upload an IFO file. Providing an empty res@dlna:ifoFileURI signals the MediaServer to provide a URI value for it. In many cases, the MediaServer will include the res@dlna:importIfoFileURI attribute in the CDS:CreateObject response to indicate that the MediaServer will receive the IFO file. Upload Controllers then perform a content transfer process to this URI in the same manner as a res@importUri.

10.1.8.19.4

[GUIDELINE] If a UPnP AV MediaServer creates a <res> element in response to a CDS:CreateObject request that has a res@dlna:ifoFileURI attribute with an empty value, then the UPnP AV MediaServer shall do one of the following to make the response.

- Preserve the res@dlna:ifoFileURI attribute with an empty value and add the res@dlna:importIfoFileURI attribute with a URI value that supports the content transfer process for the IFO file associated with the content binary. (Note that if a MediaServer implements this behaviour, the MediaServer is permitted to generate a new content binary

without discontinuities and generate a new IFO file for the new content binary. Similarly, a MediaServer is permitted to expose the uploaded content binary without modifications and generate a new IFO file.)

- Omit the `res@dlna:ifoFileURI` attribute and add the `res@dlna:importIfoFileURI` attribute with a URI value that supports the content transfer process for the IFO file associated with the content binary to indicate that the MediaServer will automatically generate an equivalent content binary without discontinuities after receiving both the IFO file and the content binary.
- Preserve the `res@dlna:ifoFileURI` attribute with an empty value and omit the `res@dlna:importIfoFileURI` attribute to indicate that the MediaServer will automatically create an IFO file (and expose it through the `res@dlna:ifoFileURI`) after a successful content transfer process on the `res@importUri`.
- Omit the `res@dlna:ifoFileURI` attribute and omit the `res@dlna:importIfoFileURI` attribute to indicate that the MediaServer will automatically generate an equivalent content binary without discontinuities after a successful content transfer process on the `res@importUri`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	HABYL

[COMMENT] If a UPnP AV MediaServer will expose an IFO file, the `res@dlna:ifoFileURI` attribute remains an empty value until the MediaServer is ready to serve the IFO file, such as described in 10.1.8.27.7. If a CDS object has a `<res>` URI value for discontinuous SCR and/or PTS MPEG2, then URI values for `<res>` and `res@dlna:ifoFileURI` will be provided after the content transfer process. Ideally, both URIs are provided within 30 s of completing the content transfer process of the content binary, but some implementations can take longer (e.g. MediaServer performs validation or post-processing on the uploaded content binary.)

10.1.8.19.5

[GUIDELINE] If a UPnP AV MediaServer provides `res@dlna:importIfoFileURI` and a control point has intention to transmit a MPEG_PS_NTSC/PAL content and an associated IFO file to the MediaServer, then the control point shall completely transmit the IFO file before sending the MPEG_PS_NTSC/PAL content.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	FTMQ2

[COMMENT] In the typical case, MediaServer uses the IFO file before receiving the content data to check its data size and boundary information in it.

10.1.8.19.6

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject and specifies the creation of a `<res>` element without a URI value, then the MediaServer control point should specify `res@size` attribute with a value equal to the byte length or equal to an estimated byte length of the content that will be sent during the content transfer process.

[ATTRIBUTES]

S	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	MRW8N	

[COMMENT] This allows a DMS or M-DMS to know how large the uploaded content will be and gives it the opportunity to reserve local storage space for the content.

- a) The size of the content binary that is sent during the content transfer process can be different from the res@size value. For example, an Upload Controller can upload a content binary that is actually a conversion from another media format. In such a scenario, it can be very difficult to anticipate the exact size, so the Upload Controller specifies a res@size value that is a bit larger than the estimated size. During the content transfer process, the DMS will be able to determine the correct size of the content.

10.1.8.19.7

[GUIDELINE] If a UPnP AV MediaServer successfully completes a content transfer process for the <res> element (and if res@size is present), then the MediaServer shall correct the res@size value to match the length of the content binary, if the indicated value does not match the byte length of the uploaded content binary.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	6TY85	

[COMMENT] This guideline specifies that once content has been uploaded and the DMS or M-DMS can serve the content to other endpoints, the res@size value needs to be accurate. Estimated values will cause problems for Rendering Endpoints that rely on that metadata.

10.1.8.19.8

[GUIDELINE] If a UPnP AV Media Server which supports the upload AnyContainer operation or OCM: upload content operation for a content item profiled as MPEG_PS_NTSC/PAL receives a CDS:CreateObject request, it shall be able to accept the request regardless of whether it contains the res@dlna:ifoFileURI attribute.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	BN6RG	

[COMMENT] The UPnP AV Media Server can fail the CDS:CreateObject for normal exceptions such as unavailable resources

10.1.8.19.9

[GUIDELINE] If a UPnP AV MediaServer creates a <res> element in response to a CDS:CreateObject request that omits the res@dlna:ifoFileURI attribute, then the UPnP AV MediaServer shall omit the res@dlna:importIfoFileURI attribute to indicate that the MediaServer is not expecting a content transfer process for an IFO file.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	XNX4I	

[COMMENT] An IFO file can contain metadata not related to SCR and/or PTS discontinuities. A UPnP AV MediaServer can create an IFO file and expose it as described in 10.1.4.9. The MediaServer's response can also omit the res@dlina:ifoFileURI attribute.

10.1.8.20 MM/CM: general rule for creating <res> elements: Resume Content Transfer process

10.1.8.20.1

[GUIDELINE] A UPnP AV MediaServer control point may support the resume content transfer operation. MediaServer control points may also make multiple resume content transfer operations.

The resume content transfer operation is a retry attempt for a failed content transfer process such that the content transfer starts from the point of transfer failure from a previous attempt.

[ATTRIBUTES]

O	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	Y4H43	

[COMMENT] This guideline specifies that Upload Controllers and Upload Synchronization Controllers are not required to support the ability to retry or resume a failed content transfer.

- a) The DLNA guidelines provide interoperability rules for resume content transfer. The DLNA guidelines do not provide any normative mechanism for a retry attempt such that the content transfer process retries from the beginning of the content binary.

10.1.8.20.2

[GUIDELINE] If resume content transfer is supported, then retry IFO attempt shall also be supported.

For MediaServers, this means that returning a CDS:CreateObject response that has res@dlina:resumeUpload="1" shall mean that resume content transfer and retry IFO attempt are supported.

For MediaServer control point, this means that issuing a CDS:CreateObject request with res@dlina:resumeUpload="1" shall mean the MediaServer control point is capable of using resume content transfer and retry IFO attempt if an error occurs during the transmission of the content binary or IFO file.

A retry IFO attempt is defined as a retry attempt for a failed content transfer process attempt for an IFO file, such that the transfer begins from byte index 0 of the IFO file and the correspond HTTP POST request omits the CONTENT-Range HTTP header.

[ATTRIBUTES]

M	A	DMS +UP+ +UPSYNC+	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	6HEFW	

10.1.8.20.3

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject and wants to create a <res> element that supports the resume content transfer operation, then it shall specify a res@dlina:resumeUpload attribute with "1" value in a call to CDS:CreateObject.

The prefix for res@dlina:resumeUpload shall be "dlina:" and the namespace shall be "urn:schemas-dlina-org:metadata-1-0/".

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	4H438	

[COMMENT] Upload and Upload Synchronization Controllers create <res> elements with a res@dlina:resumeUpload="1" to determine if the MediaServer supports the resume content transfer operation. These Controllers will not specify res@dlina:resumeUpload="1" unless they intend to recover from a failed content transfer process by using the CONTENT-Range HTTP header in an HTTP POST request (i.e. using resume content transfer). The only other normative recovery mechanism for failed content uploads is to restart from a new upload AnyContainer or OCM: upload content operation.

10.1.8.20.4

[GUIDELINE] If a UPnP AV MediaServer creates a new <res> element as a result of a CDS:CreateObject request that specified the res@dlina:resumeUpload attribute with a value of "1" and if the MediaServer supports the resume content transfer operation for the created item, then the MediaServer shall preserve the value "1" for the res@dlina:resumeUpload attribute.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	HEFWQ	

10.1.8.20.5

[GUIDELINE] If the MediaServer creates the <res> element, it will confirm the support of the resume content transfer operation by preserving the res@dlina:resumeUpload="1" attribute and value.

A MediaServer respond res@dlina:resumeUpload="1" should keep 30 min the object when upload has failed.

If a UPnP AV MediaServer receives a CDS:CreateObject that specifies res@dlina:resumeUpload="0" or omits res@dlina:resumeUpload, then the MediaServer's

CDS:CreateObject response shall specify res@dlna:resumeUpload="0" or omit res@dlna:resumeUpload.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	EFWQZ	

[COMMENT] MediaServers will never enable resume content transfer unless the Control Point requests that the feature apply to the upload operation because a control point can intentionally choose to rely on the required Auto-Destroy behaviour when resume content transfer is not supported.

- a) See 10.1.8.28.2 (MM/CM: Auto-Destroy Behaviour for a Failed or Partial Content Transfer Process) for more information on MediaServer behaviour when resume content transfer is not supported.

10.1.8.20.6

[GUIDELINE] If a UPnP AV MediaServer creates a new <res> element as a result of a CDS:CreateObject request that specified the res@dlna:resumeUpload attribute with a value of "1" and if the MediaServer cannot support the resume content transfer operation for the created item, then the MediaServer shall do one of the following:

- set the res@dlna:resumeUpload attribute to "0" in the created <res> element;
- omit the res@dlna:resumeUpload attribute in the created <res> element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	H4382	

[COMMENT] DMS implementations that do not support the resume content transfer operation will specify a value of "0" or omit the res@dlna:resumeUpload attribute to inform Upload and Upload Synchronization Controllers that the operation is not supported.

10.1.8.20.7

[GUIDELINE] If a UPnP AV MediaServer control point attempts to recover from a failed content transfer process and both of the following conditions are true, then the Upload Controller or Upload Synchronization Controller shall use the resume content transfer operation as the initial recovery attempt.

- MediaServer control point specified res@dlna:resumeUpload="1" in a CDS request.
- MediaServer preserved res@dlna:resumeUpload="1" in the CDS response that created the <res> element.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	OS33F	

[COMMENT] An Upload or Upload Synchronization Controller that specifies `res@dlna:resumeUpload="1"` will use an HTTP POST request with the CONTENT-Range HTTP header whenever possible. As a fallback, a Control Point is permitted to restart the upload process by restarting with an OCM: upload content operation. Some example scenarios using the fallback process are listed here.

- The CDS object or `<res>` element no longer exists on the DMS (e.g. the suspend period is too long).
- The resume content transfer attempt has failed for some reason. In this case, a Control Point can use an OCM: destroy object operation before restarting with an OCM: upload content operation.

10.1.8.20.8

[GUIDELINE] If a UPnP AV MediaServer control point attempts to recover from a failed content transfer process and at least one of the conditions are true, then the Control Point may attempt the recovery by starting over with an upload AnyContainer or OCM: upload content operation and follow up with a new content transfer process.

- MediaServer control point did not specify `res@dlna:resumeUpload="1"` in the CDS request that created the `<res>` element.
- MediaServer control point received a CDS response with `res@dlna:resumeUpload=0` or response omits `res@dlna:resumeUpload` attribute from the created `<res>` element.

[ATTRIBUTES]

O	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	ROS33	

[COMMENT] Usually the `res@dlna:uploadedSize` is omitted, but it is not mandatory because it can simplify the MediaServer implementation. There is no normative use for this property in such scenarios.

10.1.8.21 MM `res@dlna:uploadedSize`

10.1.8.21.1

[GUIDELINE] If a UPnP AV MediaServer supports the resume content transfer operation for a `<res>` element, then the `<res>` element shall have a `res@dlna:uploadedSize` attribute which has the same syntax and type as the `res@size` attribute.

The value of `res@dlna:uploadedSize` is the byte length of the content binary (not including the size of an uploaded IFO file) that was received during a content transfer process that failed.

The prefix for `res@dlna:uploadedSize` shall be "dlna" and the namespace shall be "urn:schemas-dlna-org:metadata-1-0/".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	X4IVO	

[COMMENT] An Upload Controller can perform a resume content transfer by using an HTTP POST request with the CONTENT-Range header.

- a) The `res@dnla:uploadedSize` does not represent the number of bytes that have been uploaded for an IFO file.

10.1.8.21.2

[GUIDELINE] If a UPnP AV MediaServer does not support the resume content transfer operation for a `<res>` element, then it may omit the `res@dnla:uploadedSize` attribute.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	NX4IV	

[COMMENT] Usually the `res@dnla:uploadedSize` is omitted, but it is not mandatory because it can simplify the MediaServer implementation. There is no normative use for this property in such scenarios.

10.1.8.22 MM/CM: General rules for `<res>` elements

10.1.8.22.1

[GUIDELINE] If a UPnP AV MediaServer creates a CDS object with a `upnp:class` value that is not equal to `object.item.epgItem`, `object.item.video.videoBroadcast`, `object.item.audio.audioBroadcast`, or any of their derived classes, then it shall have at least one of the following URI values for each `<res>` element.

- URI value for the `<res>` element.
- URI value for the `res@importUri` attribute.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	6RGWV	

[COMMENT] If both URI values are present, then the DMS indicates that uploading endpoints can overwrite the binary for a specific `<res>` element.

This guideline does not apply to CDS objects that represent EPG items or channel items, as these items can be available for streaming only at designated times, or might never be available for streaming at all.

10.1.8.22.2

[GUIDELINE] If a UPnP AV MediaServer creates a `<res>` element in response to a `CDS:CreateObject`, then the created `<res>` element may change the set of metadata attributes that were specified in the request.

[ATTRIBUTES]

O	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	N6RGW	

[COMMENT] This guideline allows a control point to create <res> elements without knowledge of attributes supported by the MediaServer.

For example, a control point can specify a new <res> element with the res@size attribute but the created <res> element can omit res@size because the attribute is not supported.

Another example is, when the DMS creates a <res> element that omits the res@dlina:ifoFileURI attribute when the request originally specified one. In this situation, the DMS created the <res> element because the DMS will create and serve an IFO file after it receives the movie file or the DMS will modify the movie file so that it does not have any discontinuities.

10.1.8.22.3

[GUIDELINE] If a <res> element of a CDS object with a upnp:class value that is equal to object.item.epgItem, object.item.video.videoBroadcast, object.item.audio.audioBroadcast, or any of their derived classes is not available for streaming, then a UPnP AV MediaServer shall omit the URI value from the <res> element.element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	8YMDF	

[COMMENT] In certain systems, a piece of content is available only at designated times. The URI pointing to the content will also only be valid at the designated times. This guideline specifies that a DMS will not expose the URI when the content is not available.

10.1.8.22.4

[GUIDELINE] If a <res> element of a CDS object with a upnp:class value that is equal to object.item.epgItem, object.item.video.videoBroadcast, object.item.audio.audioBroadcast, or any of their derived classes is available for streaming, then a UPnP AV MediaServer shall include the URI value in the <res> element.element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	VIUA9	

[COMMENT] In certain systems, a piece of content is available only at designated times. The URI pointing to the content will also only be valid at the designated times. This guideline specifies that a DMS will expose the URI when the content becomes available.

10.1.8.23 MM/CM: General rules for CDS:CreateObject request syntax

10.1.8.23.1

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject, then it shall apply the mandatory metadata encoding rules for the following guidelines in the Elements input argument.

- 10.1.3.1 MM UPnP AV control point tolerance of unknown property
- 10.1.3.2 MM DIDL-Lite restrictions
- 10.1.3.3 MM DIDL-Lite max metadata length
- 10.1.3.5 MM DIDL-Lite Boolean values

- 10.1.3.6 MM upnp:class values
- 10.1.3.7 MM DIDL-Lite dc:date format
- 10.1.3.9 MM DIDL-Lite desc element use
- 10.1.3.10 MM URI rules
- 10.1.3.12 MM DIDL-Lite recommended metadata properties
- 10.1.3.13 MM protocolInfo context
- 10.1.3.16 MM DIDL-Lite protocolInfo values
- 10.1.3.17 MM protocolInfo values: 4th field
- 10.1.3.18 MM pn-param (DLNA.ORG_PN parameter)
- 10.1.3.23 MM ci-param (conversion indicator flag)

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	Y855L

[COMMENT] This guideline specifies that control points honor basic metadata restrictions that govern CDS metadata.

10.1.8.23.2

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject, then it shall apply the rules specified in 10.1.3.4.2 (in MM DIDL-Lite Non-empty Metadata Values) to all metadata, except the <res> element and @id attribute.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	TY855

[COMMENT] The <res> element in a CDS:CreateObject is exempt from the non-empty value conventions because Upload Controllers do not specify the <res> URI value for some tasks, such as the upload AnyContainer or OCM: upload content operations.

10.1.8.23.3

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject, then it shall adhere to the following rules when specifying the Elements input argument.

- The XML shall exclude the <?xml> declarator and use UTF-8 encoding.
- The <DIDL-Lite> element shall be the top-most element.
- The <DIDL-Lite> element shall have a single <item> or a single <container> child element.
- At minimum, the <item> or <container> element shall specify the @id, @parentID, @restricted, dc:title, and upnp:class metadata properties.
- The @id value shall be an empty string ("").
- The @parentID value shall match the ContainerID input argument.

- The @restricted value shall be "0".
- The dc:title value shall comply with all DLNA-specified metadata restrictions.

Example request:

```
CDS:CreateObject("10","<DIDL-Lite xmlns:dc="http://purl.org/dc/elements/1.1/"
xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
xmlns="urn:schemas-upnp-org:metadata-1-0/DIDL-Lite">    <item id="" restricted="0"
parentID="10">        <dc:title>A picture in the park</dc:title>
<upnp:class>object.item.imageItem</upnp:class>        <res
protocolInfo="*:image/jpeg:DLNA.ORG_PN=JPG_LRG"></res>    </item> </DIDL-Lite>")
```

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	QBLX4

[COMMENT] This guideline specifies the baseline requirements for the metadata specified in a CDS:CreateObject request.

- a) Control Points need to be aware that the created object can have metadata that is slightly different from what is sent. For example:

The @id value of the new object will be set.

The @parentID of the new object will be set (in the case where DLNA.ORG_AnyContainer is used).

Informative metadata, such as dc:title and dc:creator, can be truncated.

The @restricted value can be changed.

The returned object can include @dlna:dlnaManaged attribute.

upnp:class or upnp:createClass values can be changed to a derived or a base class value for audio, image, audio/video, and container objects.

10.1.8.23.4

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject, then it should provide all metadata defined in 10.1.3.10.6 for the given upnp:class.

[ATTRIBUTES]

S	C	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	SQBLX

[COMMENT] Control Points are encouraged to provide recommended metadata, because they are useful for a user. If the MediaServer does not support the specified metadata, the CDS:CreateObject response will omit the unsupported metadata, as described in this guideline.

10.1.8.23.5

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject, then it may specify additional metadata properties in a call to CDS:CreateObject, than those specified in 10.1.8.23.3.

[ATTRIBUTES]

O	R	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	ERZ5I	

[COMMENT]

- a) Control Points are allowed to specify more than just the minimal metadata.
- b) Control Points are expected to handle a possible outcome described in 10.1.8.24.3.

10.1.8.23.6

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject with optional metadata, then the control point shall ensure that all necessary namespaces are properly declared.

[ATTRIBUTES]

M	R	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	SERZ5	

10.1.8.23.7

[GUIDELINE] A UPnP AV MediaServer that allows the creation of <dc:date> elements shall allow the control point to specify any valid form of <dc:date>, as defined by 10.1.3.7.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	W8N9T	

[COMMENT] This guideline allows the control point to specify any valid form for <dc:date>. Control points are not to assume that the format they specified in the request will be the final form of the <dc:date>.

10.1.8.23.8

[GUIDELINE] A UPnP AV MediaServer that allows the creation of <dc:date> elements may change the form of the <dc:date> value to match any valid form, as defined by 10.1.3.7.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	RW8N9	

[COMMENT] This guideline allows MediaServers the flexibility of using a consistent <dc:date> form for all of their CDS objects.

10.1.8.23.9

[GUIDELINE] If a UPnP AV MediaServer control point invokes CDS:CreateObject and the created object needs to support one or more OCM operations, then the MediaServer control point should specify the appropriate value for the @dlna:dlnaManaged attribute in the request.

[ATTRIBUTES]

S	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	MQ22G	

[COMMENT] For example, if a Control Point requires a created container to support the OCM: upload content operation, then the control point needs to specify a CDS container that supports the OCM: upload content operation in the CDS:CreateObject request by specifying the @dlna:dlnaManaged attribute with the appropriate bits set.

10.1.8.24 MM/CM: general rules for CDS:CreateObject response syntax**10.1.8.24.1**

[GUIDELINE] If a UPnP AV MediaServer that implements CDS:CreateObject, then it shall be able to support a request that specifies the properties specified in 10.1.8.23.3.

Example response:

```
CDS:CreateObject("12","<DIDL-Lite xmlns:dc="http://purl.org/dc/elements/1.1/"
xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
xmlns="urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/">    <item id="12" parentID="10"
restricted="0">        <dc:title>A picture in the park</dc:title>        <res
importUri="http://192.168.1.1/item?id=12"
protocolInfo="*:image/jpeg:DINA.ORG_PN=JPEG_LRG"/>
<upnp:class>object.item.imageItem</upnp:class>        <upnp:album>Photo
Folder1</upnp:album>    </item> </DIDL-Lite>")
```

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	BYLU6	

[COMMENT] A UPnP AV MediaServer is not required to support the creation of container objects. In such cases, the proper behaviour is to return UPnP error code 712, as described in guideline 10.1.8.23.2.

10.1.8.24.2

[GUIDELINE] If a UPnP AV MediaServer implements CDS:CreateObject, then it should accept the creation of recommended properties corresponding to the specified upnp:class, which are defined in the guideline 10.1.3.10.6

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	TMQ22	

[COMMENT] Although not required, metadata such as dc:creator and upnp:album can be useful to a user.

10.1.8.24.3

[GUIDELINE] If a UPnP AV MediaServer creates a new CDS object in response to a CDS:CreateObject request (that conforms to DLNA guidelines) and the request specifies metadata properties that are unsupported by the MediaServer, then the MediaServer shall return a success response with the Result output that includes the metadata supported by the MediaServer.

Furthermore, if the MediaServer is able to return a success for a CDS:CreateObject request that specifies only the baseline metadata properties, then it shall also return a success for a CDS:CreateObject request that specifies the same baseline metadata properties and values with additional optional metadata properties.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	ABYLU	

[COMMENT] The general approach for CDS:CreateObject is that a DMS tolerate the presence of optional metadata properties (XML elements and attributes). The tolerance requirement also extends to 4th field parameters of protocolInfo, as required by 10.1.3.27.3 (MM other-param (Vendor-defined 4th field Parameters)).

- a) The general exception to this approach is that a DMS is not required to tolerate <upnp:class> or <upnp:createClass> values that are unacceptable to a DMS. The primary reason for this exception is that derived classes can often imply a semantic difference. For example object.item.audioItem.audioBroadcast is not equivalent to an object.item.audioItem because the former implies that the stream is live. It is permissible for a DMS to tolerate a diversity of <upnp:createClass> and <upnp:class> values by automatically changing the specified values, but such behaviour is not required.
- b) A UPnP AV MediaServer that returns unsupported metadata in the Result but responds to CDS:Search and CDS:Browse without that metadata is behaving inconsistently. Returning with an error makes it difficult for control points to provide an information-rich experience. For this reason, DLNA requires that the CDS:CreateObject response includes only the metadata supported by the MediaServer as specified in this guideline. In this case, metadata supported by the MediaServer has the following characteristics:
 - needs to minimally include the MediaServer's supported metadata properties (XML elements and attributes) that was specified in the request,
 - and can optionally include additional metadata properties (XML elements and attributes) that the MediaServer added as part of the success CDS:CreateObject response.

10.1.8.24.4

[GUIDELINE] A UPnP AV MediaServer that creates a new CDS object, in response to a CDS:CreateObject request, may add additional metadata properties (XML elements or attributes) in the CDS:CreateObject response.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	73QLR	

[COMMENT] The following are some examples of cases when a DMS might add additional metadata properties.

- The DMS adds the @dlna:dlnaManaged attribute to indicate the supported OCM operations for a created CDS object.
- The DMS adds one or more upnp:createClass elements (in addition to those specified in the CDS:CreateObject request) to indicate additional objects that can be created in a new CDS container.

10.1.8.24.5

[GUIDELINE] A UPnP AV MediaServer that receives a CDS:CreateObject request may change the value of the @restricted attribute.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	3QLRK	

10.1.8.24.6

[GUIDELINE] If a UPnP AV MediaServer that indicates support for OCM operations (as defined in guideline 10.1.8.8.4) receives a CDS:CreateObject request that specifies the creation of a CDS object with support for one or more OCM operations that cannot be supported for the specified object, then the MediaServer shall return a failure with UPnP AV error code 712 (Bad Metadata).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	773QL	

10.1.8.24.7

[GUIDELINE] If a UPnP AV MediaServer that indicates support for OCM operations (as defined in guideline 10.1.8.8.4) receives a CDS:CreateObject request, it may change the value of the @dlna:dlnaManaged attribute as long as the new value indicates a superset of the requested OCM operation.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	EY8ZB	

[COMMENT] DMS or MDMS devices are always allowed to increase the set of supported operations on a created object. Otherwise, the DMS is required to return an error when the requested OCM operations cannot be provided for the CDS object described in the CDS:CreateObject request.

10.1.8.24.8

[GUIDELINE] If a UPnP AV MediaServer that does not indicate support for any OCM operations (as defined in guideline 10.1.8.8.4) receives a CDS:CreateObject request that specifies the creation of a CDS object with support for one or more OCM operations, and if the server creates a CDS object as a result of the CDS:CreateObject request, it shall ignore the @dlna:dlnaManaged attribute in the request and omit the @dlna:dlnaManaged attribute from the created object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	8Y9WS	

[COMMENT] DMS or M-DMS devices that do not support OCM operations might not understand @dlna:dlnaManaged attribute, and are required to drop the OCM flags from the created object regardless of the validity of the attribute in the request.

10.1.8.25 MM/CM: general rules for CDS:CreateObject errors

10.1.8.25.1

[GUIDELINE] If a UPnP AV MediaServer rejects a CDS:CreateObject request due to invalid metadata values in the request, then the MediaServer shall return UPnP AV error code 712 (Bad metadata).

Invalid values are values that are not valid for the data type (as defined by the appropriate schema) or values that are not supported by the MediaServer implementation.

Valid, non-empty values are values that are valid for the data type specified for the metadata property and also not composed entirely of white space characters.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	QLRK8	

[COMMENT] A UPnP MediaServer might choose to accept a CDS:CreateObject request despite invalid metadata values. For example, a MediaServer that always replaces a certain metadata value with a preset value can simply ignore that metadata value contained in the request.

- A UPnP AV MediaServer that removes the entire metadata property from the Result output is informing the control point that the specified property is not supported, rather than informing the control point that the value is invalid. This is described in 10.1.8.24.3.
- Although this guideline applies to the MediaServer, control points are expected to provide valid metadata values, as required by 10.1.8.15 and 10.1.8.24.

10.1.8.25.2

[GUIDELINE] If a UPnP AV MediaServer returns a CDS:CreateObject response with a UPnP error code, it shall not result in the creation of a new CDS object.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	YLU6X	

10.1.8.25.3

[GUIDELINE] If the UPnP AV MediaServer does not support the CDS:CreateObject action because the specified upnp:class or res@protocolInfo is not acceptable to the MediaServer, it shall respond with an error code 712 (Bad Metadata).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	LU6X9	

10.1.8.25.4

[GUIDELINE] If a UPnP AV MediaServer receives a CDS:CreateObject request with multiple <res> elements and the UPnP AV MediaServer does not allow the creation of objects with multiple <res> elements, then it shall return a UPnP AV error code of 712 (Bad Metadata).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	Q22GR	

[COMMENT] MediaServers are not required to support multiple <res> elements.

10.1.8.25.5

[GUIDELINE] If a UPnP AV MediaServer rejects a CDS:CreateObject request because the <res> element specifies a URI value or a res@importUri value, then it shall return a UPnP AV error code of 712 (Bad Metadata).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	22GRN	

10.1.8.25.6

[GUIDELINE] If a UPnP AV MediaServer cannot accept a CDS:CreateObject request due to the processing capacity or current state of the device, then it shall respond with error code 720 (Cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	8N9TA	

10.1.8.25.7

[GUIDELINE] If a UPnP AV MediaServer cannot accept a CDS:CreateObject request due to the lack of storage capacity, then the MediaServer shall return a UPnP error response with error code of 720 (Cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	N9TA4	

[COMMENT] A MediaServer can return this error code as a result of a res@size value specified in a CDS:CreateObject request. A DMS can also return this value when the upload capacity for the DMS has been reached.

10.1.8.25.8

[GUIDELINE] If a UPnP AV MediaServer receives a CDS:CreateObject request with zero <res> elements and the UPnP AV MediaServer does not allow the creation of objects with zero <res> elements, then it shall return a UPnP AV error code of 712 (Bad Metadata).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	3Y33M	

[COMMENT] This behaviour is conditionally mandatory because a UPnP AV MediaServer might be able to support the creation of a container object with zero <res> elements.

10.1.8.26 MM/CM: content transfer process

10.1.8.26.1

[GUIDELINE] If a UPnP AV MediaServer control point is going to initiate a content transfer process for the first file (either the IFO file or the actual content binary) of a CDS object, then it shall do so within 30 s of the last event described below.

- The CDS:CreateObject response from a Upload AnyContainer or an OCM: upload content operation.

If a UPnP AV MediaServer control point uploads an IFO file, then the IFO file shall be uploaded first and the transfer of the actual content binary shall be started within 30 s of completing the IFO file transfer.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	RZ5l6

[COMMENT] Within 30 s of creating the CDS object, the Control Point begins its first content transfer for the CDS object.

10.1.8.26.2

[GUIDELINE] A UPnP AV MediaServer control point shall use the URI provided in a res@importUri or a res@dlna:importIfoFileURI as the destination URI for a content transfer process.

UPnP AV MediaServer control points shall only upload content binaries to the res@importUri.

UPnP AV MediaServer control points shall only upload IFO files to the URI value of res@dlna:importIfoFileURI.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	Z5l6Y

[COMMENT] The CDS specification is ambiguous as to whether a <res> element's URI value can be used to overwrite content. These guidelines limit the control to using import URI values for both initial and overwriting content transfers. See 11.4.3.65 for HTTP client implications.

- IFO files are not considered content binaries, so uploading an IFO file to a res@importUri file is expressly prohibited.
- For additional information on performing a content transfer process for either a content binary or an IFO file, see 11.4.3.65.
- For additional information on creating a <res> element for uploading IFO files, see 10.1.8.19.3.

10.1.8.26.3

[GUIDELINE] If a UPnP AV MediaServer control point fails to completely upload an IFO file and if res@dlna:resumeUpload="1" and if the control point initiates a retry IFO attempt, then the control point shall initiate the retry IFO attempt within 30 min of the failure.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	BLX49	

[COMMENT] Retry attempts to transfer the IFO file needs to start within 30 min of the time of failure because the MediaServer will destroy the CDS object 35 min after the failure has occurred.

10.1.8.26.4

[GUIDELINE] If a UPnP AV MediaServer control point fails to completely upload a content binary and if res@dlna:resumeUpload="1" and if the control point initiates a resume content transfer, then the control point shall initiate the resume content transfer within 30 min of the failure.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	LX49K	

[COMMENT] Resume attempts to transfer the content binary file needs to start within 30 min of the time of failure because the MediaServer will destroy the CDS object 35 min after the failure has occurred.

10.1.8.26.5

[GUIDELINE] A UPnP AV MediaServer control point shall not attempt to use retry IFO transfer or resume content transfer unless res@dlna:resumeUpload="1".

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	855LC	

10.1.8.26.6

[GUIDELINE] A UPnP AV MediaServer shall facilitate a content transfer process by supporting an HTTP POST request on a URI for a res@importUri or a res@dlna:importIfoFileURI.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-20-3	55LC5	

[COMMENT] DLNA defines HTTP POST as the only mechanism for a content transfer process. DLNA might define additional mechanisms for a content transfer process in the future.

10.1.8.27 MM/CM: general rules after a successful content transfer process**10.1.8.27.1**

[GUIDELINE] If a UPnP AV MediaServer successfully completes a content transfer process, then the MediaServer may keep or remove the res@importUri attribute.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	RGVX	

[COMMENT] A MediaServer that keeps the res@importUri attribute is informing the network that an Upload Controller can overwrite the content that was uploaded.

10.1.8.27.2

[GUIDELINE] If a UPnP AV MediaServer keeps the res@importUri attribute and creates a URI value for the <res> element (to signal that the Content Source will serve the URI), then the MediaServer may specify the same URI value for both the res@importUri and the URI value of a <res> element.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	4IVOE	

[COMMENT] MediaServers are permitted to use the same URI for both the <res> URI value and the res@importUri value. In such cases, MediaServers need to ensure that the <res> value is not exposed until after the content has been received, as described in guideline 10.1.8.27.4.

10.1.8.27.3

[GUIDELINE] If a UPnP AV MediaServer keeps the res@dlina:ifoFileURI attribute and creates a res@dlina:importIfoFileURI value for the <res> element (to signal that the Content Source will serve the URI), then the MediaServer may specify the same URI value for both the res@dlina:importIfoFileURI and the res@dlina:ifoFileURI value of a <res> element.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	GWVX7	

[COMMENT] MediaServers are permitted to use the same URI for both the <res> URI value and the res@importUri value. In such cases, MediaServers need to ensure that the <res> value is not exposed until after the content has been received, as described in guideline 10.1.8.27.4.

10.1.8.27.4

[GUIDELINE] If a UPnP AV MediaServer is going to serve uploaded content to other endpoints, then the DMS shall provide the URI value of the <res> element only after the DMS can serve the content.

Example of <res> before content is uploaded to the DMS:

```
<res protocolInfo="http-get:*:image/jpeg*:DLNA.ORG_PN=JPEG_LRG"
importUri="http://192.168.1.10/upload?file=content-data-1234.jpg"/>
```

Example of <res> after content is uploaded to the DMS:

```
<res protocolInfo="http-get:*:image/jpeg*:DLNA.ORG_PN=JPEG_LRG">
http://192.168.1.10/content-data-1243.jpg</res>
```

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	IVOE5	

[COMMENT] A UPnP AV MediaServer that advertises a <res> URI value before the content can actually be served is making a false claim that the content is available.

- a) A DMS that serves partially uploaded content is responsible for conforming to the guidelines related to the Media Format Profile.

10.1.8.27.5

[GUIDELINE] A UPnP AV MediaServer may automatically create additional <res> elements (with network-accessible URI values and protocolInfo values) after a successful content transfer process.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	S33FG	

[COMMENT] MediaServers might want to provide additional <res> elements to support content transformations or additional transport protocols.

10.1.8.27.6

[GUIDELINE] If a UPnP AV MediaServer is going to serve uploaded content that has an IFO file, then the MediaServer shall provide the URI value of the <res> element after the Content Source can provide the IFO file.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	33FGH	

[COMMENT] Advertising content with SCR/PTS discontinuities without providing an IFO file is a violation of guideline 10.1.4.9.2.

10.1.8.27.7

[GUIDELINE] If a UPnP AV MediaServer is going to serve uploaded content that has an IFO file, and successfully receives an IFO file in a content transfer process, then the MediaServer shall provide a `res@dlna:ifoFileURI` attribute with a URI value for the IFO file. Until the MediaServer has the IFO file, the `res@dlna:ifoFileURI` shall have an empty value.

Example timeline (with additional comments for other hypothetical situations after ***) Letters in angle brackets, `<n>`, refer to steps in this timeline.

- a) Upload Controller invokes CDS:CreateObject with a `<res>` element for MPEG_PS_NTSC. The request includes `res@dlna:ifoFileURI=""` to indicate that it will also upload an IFO file. The request also includes `res@dlna:resumeUpload="1"` to indicate that the Upload Controller will use resume features if a failure occurs during a transfer. *** If the Upload Controller is not uploading an IFO file, it would have omitted `res@dlna:ifoFileURI`. If the Upload Controller was not going to use resume, it would have omitted `res@dlna:resumeUpload`.
- b) The DMS or M-DMS responds with success. The response includes a `res@importUri` and `res@dlna:importIfoFileURI`, with URI values that will receive the uploaded content. The response preserves the `res@dlna:resumeUpload="1"` to indicate resume is supported. *** If the DMS/M-DMS does not support resume, it would have omitted `res@dlna:resumeUpload` or set the value to "0". A DMS/M-DMS never returns `res@dlna:resumeUpload="1"` unless requested to do so.
- c) The Upload Controller begins uploading the IFO file.
- d) During the transfer from `<c>`, an error occurs and the transfer fails.
- e) Within 30 min of the error in `<d>`, the Upload Controller issues an HTTP POST to retry the transfer of the IFO file. The Upload Controller does not use CONTENT-Range when retrying an IFO transfer. *** If the Upload Controller does not do the retry, then the DMS/M-DMS would automatically destroy the new CDS object (from `<a>`). The DMS/M-DMS waits at least 35 min from the failure time in `<d>` before automatically destroying the CDS object. In scenarios where resume is not enabled, the DMS/M-DMS would destroy the CDS object (from `<a>`) at any time after the error in `<d>` occurred.
- f) After completing the retry IFO transfer from `<e>`, the Upload Controller initiates the transfer of the content binary within 30 s. *** If the Upload Controller is not uploading an IFO, then it would have started the content transfer within 30 s of receiving the CDS:CreateObject response.
- g) During the transfer from `<f>`, an error occurs and the transfer fails.
- h) Within 30 min of the error in `<g>`, the Upload Controller issues an HTTP POST with the CONTENT-Range header to resume the transfer from the byte position where the failure occurred. *** If the Upload Controller does not do the resume, then the DMS/M-DMS would automatically destroy the new CDS object (from `<a>`). The DMS/M-DMS waits at least 35 min from the failure time in `<g>` before automatically destroying the CDS object. In scenarios where resume is not enabled, the DMS/M-DMS would destroy the CDS object (from `<a>`) at any time after the error in `<g>` occurred.
- i) The content transfer from `<f>` succeeds and the DMS/M-DMS advertises URI values for the `<res>` element and the `res@ifoFileURI`.
- j) The DMS or M-DMS also automatically creates a new `<res>` element for its locally converted version of MPEG_PS_NTSC_XAC3

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	43829	

[COMMENT] Just as a MediaServer uses the <res> URI value to indicate that the content is available for Content Receivers, the MediaServer also uses the res@dlina:ifoFileURI attribute to indicate that the IFO file is available for Content Receivers.

10.1.8.28 MM/CM: Auto-Destroy behaviour for a failed or partial content transfer process

10.1.8.28.1

[GUIDELINE] If a UPnP AV MediaServer implements CDS:CreateObject for use with the listed operations, then it shall implement Auto-Destroy behaviour.

Listed operations:

- upload AnyContainer;
- OCM: upload content.

The Auto-Destroy behaviour shall be defined as removing the created CDS object from the CDS hierarchy exposed by the MediaServer, such that the CDS object cannot be found when browsing or searching the MediaServer.

The time when the CDS object is actually removed from the CDS hierarchy is not entirely defined by the guidelines. However, other guidelines in 10.1.8.28 have restrictions when the CDS object is automatically removed.

All guidelines in 10.1.8.28 assume Ideal Network Conditions and interoperability is not guaranteed in scenarios involving user-initiated or out-of-scope system events.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	FWQZZ	

[COMMENT] A DMS that supports the Upload system usage needs to automatically destroy CDS objects when the files are not properly received by the MediaServer.

- The guidelines guarantee interoperability only under Ideal Network Conditions. Scenarios that involve user-initiated events or out-of-scope system events do not guarantee interoperability. Examples include:
 - another control point invoking CDS:DestroyObject causes a failure during an upload AnyContainer operation;
 - the MediaServer product canceling all active uploads because it is starting to record a video broadcast to local storage.
- The actual time when the MediaServer destroys such CDS items is not defined by DLNA. Some examples include a 35 min timer mechanism, a clean-up mechanism that executes when the device has been idle for an extended period of time, or a cleanup operation that only executes when certain CDS actions are called.

10.1.8.28.2

[GUIDELINE] If `res@dlna:resumeUpload="0"` or `res@dlna:resumeUpload` is omitted, a UPnP AV MediaServer shall perform Auto-Destroy behaviour on CDS objects (created through upload AnyContainer or OCM: upload content) under these conditions:

- 35 s has elapsed since the CDS:CreateObject response was completely sent and the first content transfer process (for either the IFO file or the content binary) has not started;
- 35 s has elapsed since the CDS object's IFO was completely received and the content transfer process for the content binary has not started;
- the content transfer process of the content binary or the IFO file has failed.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	38293	

[COMMENT] This guideline explains when a MediaServer needs to automatically destroy CDS objects that were created from upload AnyContainer or OCM: upload content.

The guideline explicitly covers the case where resume content transfer, as described in 10.1.8.20, is not supported.

10.1.8.28.3

[GUIDELINE] If `res@dlna:resumeUpload="1"` a UPnP AV MediaServer shall perform Auto-Destroy behaviour on CDS objects (created through upload AnyContainer or OCM: upload content) under these conditions:

- 35 s has elapsed since the CDS:CreateObject response was completely sent and the first content transfer process (for either the IFO file or the content binary) has not started;
- 35 s has elapsed since the CDS object's IFO was completely received and the content transfer process for the content binary has not started;
- 35 min has elapsed since the failure of a content transfer process for the CDS object's IFO and retry IFO attempt has not started;
- 35 min has elapsed since the failure of a content transfer process for the CDS object's content binary and resume content transfer process has not started.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	WQZZF	

[COMMENT] This guideline explains when a MediaServer needs to automatically destroy CDS objects that were created from upload AnyContainer or OCM: upload content. The guideline explicitly covers the case where resume content transfer, as described in 10.1.8.20, is not supported.

10.1.8.28.4

[GUIDELINE] A UPnP AV MediaServer shall not automatically destroy a CDS object or any of its `<res>` element when the MediaServer is doing a content transfer process for the CDS object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	QZZFP	

[COMMENT] This guideline requires MediaServer implementations not to destroy CDS objects or <res> elements involved in an Upload system usage. As implied from the comment for 10.1.8.28.1, a MediaServer might choose to destroy such an object as a result of a CDS:DestroyObject request that was invoked from another control point. This type of a scenario is an unexpected user-initiated and is outside the scope of the Ideal Network Conditions assumption.

10.1.8.28.5

[GUIDELINE] If a UPnP AV MediaServer partially completes a content transfer process for a <res> element and res@dlna:resumeUpload="1", then the MediaServer shall keep all res@importUri and res@dlna:importInfoFileURI that are associated with the CDS object valid for at least another 35 min.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	293RE	

[COMMENT] This guideline clarifies that MediaServers needs to preserve the validity of URI values that are used for uploaded IFO files and content binaries.

- a) After a MediaServer partially receives a content binary, the device needs to extend the validity of the URI values (that have not completed a content transfer process) for at least 35 min. This provides a reasonable amount of time for an Upload Controller to retry or set up the next content transfer process.
- b) See 10.1.8.20.4 to 10.1.8.20.8 and 11.4.3.67 for more information about resuming a failed content transfer process.

10.1.8.28.6

[GUIDELINE] A UPnP AV MediaServer control point may use an OCM: destroy object operation to cancel the following operations: upload AnyContainer or OCM: upload content.

[ATTRIBUTES]

O	C	+UP+ +UPSYNC+	n/a	n/a	ISO/IEC 29341-20-12:2016 ISO/IEC 29341-14-12:2011 ISO/IEC 29341-20-3 ISO/IEC 29341-14-3	ZZFPW	

[COMMENT] A Control Point uses this operation to signal the DMS to undo its previous operations that resulted in the creation of a CDS object.

10.1.8.29 MM/CM: Content validation and advertisement**10.1.8.29.1**

[GUIDELINE] If a UPnP AV MediaServer successfully completes a content transfer process for a CDS resource that was created with the DLNA.ORG_PN parameter in the 4th field, then the MediaServer may advertise that content using the supplied DLNA Media Format Profile.

Advertise that content is meant specifically that the MediaServer provides a URI value for the <res> element. Before the MediaServer receives the content binary, the <res> element (without a URI value) will be advertised along with the res@importUri.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	8293R	

[COMMENT] DLNA UPnP AV MediaServers that support the Upload Device Option can assume that control points that claim content conforms to DLNA are actually going to upload DLNA-conformant content. However, it is still good practice for a UPnP AV MediaServer to examine the uploaded content against the profile definition before advertising the content as being DLNA conformant.

10.1.8.29.2

[GUIDELINE] If a UPnP AV MediaServer receives a content binary for a CDS resource that does not have the DLNA.ORG_PN parameter, and it intends to advertise the content, then the MediaServer shall validate the content before advertising it with the DLNA.ORG_PN parameter.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	FGH9D	

[COMMENT] Although an algorithm for validation is not specified, a UPnP AV MediaServer that determines that uploaded content is conformant to a DLNA Media Format Profile is permitted to advertise it as such. The guideline does not obligate a DMS to either support uploading or advertising of non-DLNA content.

10.1.8.29.3

[GUIDELINE] A UPnP AV MediaServer may change the value of a res@protocolInfo as part of the content validation process.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	3FGH9	

10.1.8.29.4

[GUIDELINE] If a UPnP AV MediaServer exposes uploaded content, then it should examine the uploaded content binaries to ensure that the metadata reported through the CDS is consistent with the content binary. In cases where a conflict is found, a UPnP AV MediaServer should appropriately correct the metadata reported through CDS.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	OE52V	

[COMMENT] This is a good behavioural practice and helps to prevent interoperability problems.

10.1.8.30 MM/CM: general rules for CDS:DestroyObject

[GUIDELINE] If a UPnP AV MediaServer implements CDS:DestroyObject, then a CDS:DestroyObject request on a CDS item, with the @dlna:dlnaManaged attribute, shall result in the complete removal of the CDS item.

If the CDS:DestroyObject is a success, then the CDS item is removed from the CDS hierarchy.

If the CDS:DestroyObject is a failure, then the CDS item remains unaltered.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016 ISO/IEC 29341-20-3	VOE52	

[COMMENT] Partially destroying a CDS item (such as some metadata or <res> elements) is problematic because control points have no way to recover the partially lost information.

- The related question of whether the actual content binaries are deleted from the local storage is vendor-defined.
- Information for developers: this guideline applies only to CDS Content Items (object.item) and not CDS Containers (object.container).

10.2 Content synchronization MM/CM guidelines

10.2.1 General

The guidelines contained in 10.2 apply only when the Upload or Download Synchronization Controller system usages are implemented by a UPnP AV MediaServer control point and a UPnP AV MediaServer.

10.2.2 MM/CM: Download Synchronization Controller

10.2.2.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The following conditionally mandatory requirements are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.2.2

[GUIDELINE] A Download Synchronization Controller shall implement a UPnP AV MediaServer control point for synchronizing content from a DMS or M-DMS respectively.

[ATTRIBUTES]

M	A	+DNSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	73OLY	

[COMMENT] This guideline indicates that a Download Synchronization Controller Device Capability will use a UPnP control point that controls a UPnP AV MediaServer for browsing, searching and synchronizing content from the Media Server.

10.2.2.3

[GUIDELINE] A Download Synchronization Controller shall implement a UPnP AV MediaServer control point capable of invoking the following actions.

- CDS:Search
- CDS:Browse

[ATTRIBUTES]

M	A	+DNSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	V8WTG	

[COMMENT] This guideline clarifies the UPnP CDS actions a Download Synchronization Controller needs to be able to invoke with a UPnP AV MediaServer.

10.2.2.4

[GUIDELINE] A Download Synchronization Controller may maintain synchronization of some or all of the metadata, items, and resources exposed by a DMS/M-DMS implementing Content Synchronization Device Option.

[ATTRIBUTES]

O	C	+DNSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	BVYZW	

[COMMENT] This guideline clarifies that it is the role of the Download Synchronization Controller to decide whether some or all of the items, metadata, and resources need to be tracked to constitute a completed synchronization.

10.2.3 MM/CM: Upload Synchronization Controller**10.2.3.1**

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The following conditionally mandatory requirements are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.3.2

[GUIDELINE] An Upload Synchronization Controller shall implement a UPnP AV MediaServer control point for synchronizing content to a DMS or M-DMS respectively.

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	3OLY3	

[COMMENT] This guideline indicates that an Upload Synchronization Controller Device Capability will use a UPnP control point that controls a UPnP AV MediaServer for sending content to the MediaServer.

10.2.3.3

[GUIDELINE] An Upload Synchronization Controller shall implement a UPnP AV MediaServer control point capable of invoking the following actions.

- CDS:CreateObject
- CDS:UpdateObject
- CDS:DestroyObject
- CDS:GetFeatureList
- CDS:Search
- CDS:Browse
- CDS:GetServiceResetToken

[ATTRIBUTES]

M	L	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	MURA8	

[COMMENT] The capability of invoking these actions is required for performing the following optional content management operations: OCM: upload content, OCM: create child container, OCM: destroy object and OCM: change metadata.

10.2.3.4

[GUIDELINE] An Upload Synchronization Controller shall be capable of invoking the OCM: upload content operation.

See 10.1.8.2 for more information about optional content management operations.

[ATTRIBUTES]

M	L	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	8WTGH	

[COMMENT] Allows an Upload Synchronization Controller to synchronize (add) new content to an AV MediaServer.

10.2.3.5

[GUIDELINE] An Upload Synchronization Controller shall be capable of invoking the OCM: create child Container operation.

See 10.1.8.2 for more information about optional content management operations.

[ATTRIBUTES]

M	L	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	VYZW3

[COMMENT] Allows an Upload Synchronization Controller to invoke a necessary synchronization (adding new containers) with an AV MediaServer.

10.2.3.6

[GUIDELINE] An Upload Synchronization Controller shall be capable of invoking the OCM: destroy object Operation.

See 10.1.8.2 for more information about optional content management operations.

[ATTRIBUTES]

M	L	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	URA8J

[COMMENT] Allows an Upload Synchronization Controller to invoke a necessary synchronization (removing non-restricted content or containers) from an AV Media Server.

10.2.3.7

[GUIDELINE] An Upload Synchronization Controller shall be capable of invoking the OCM: change metadata operation.

See 10.1.8.2 for more information about optional content management operations.

[ATTRIBUTES]

M	L	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	OLY3A

[COMMENT] Allows and Upload Synchronization Controller to invoke a necessary synchronization (modifying content) on an AV MediaServer.

10.2.3.8

[GUIDELINE] An Upload Synchronization Controller may upload some or all of the optional items, metadata, and resources it decides to track on a DMS/M-DMS implementing the Content Synchronization Device Option.

[ATTRIBUTES]

O	C	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	WTGHW	

[COMMENT] This guideline clarifies that it is the role of the Upload Synchronization Controller to decide what optional items, metadata and resources need to be uploaded and tracked to constitute a completed synchronization.

10.2.4 MM/CM general rules for thrashing avoidance

10.2.4.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.4.2

[GUIDELINE] An Upload Synchronization Controller shall not propagate without external input the local stored metadata or content to the Media Server for objects that have changed on the server but not on the client since the last synchronization.

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	YZW3Y	

[COMMENT] Limits the number of times competing Synchronization Controllers can change content on an AV Media Server without external input, such as user intervention.

10.2.5 MM/CM: DMS or M-DMS with Content Synchronization Device Option support definition

10.2.5.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.5.2

[GUIDELINE] A UPnP AV MediaServer shall advertise the Content Synchronization Device Option by specifying the <lna:X_DLNACAP> element (as a child of the <device> element that represents the MediaServer) with the content-synchronization token. Table 26 describes the Capability ID syntax.

Table 26 – Capability ID syntax

Capability ID	Description
content-synchronization	The UPnP AV MediaServer supports the DLNA Content Synchronization Device option.
The "content-synchronization" portion of the capability ID is a literal, string value.	

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	LY3AY

[COMMENT] An Upload/Download synchronization controller uses this method to determine if it can synchronize with a particular DMS/M-DMS.

10.2.5.3

[GUIDELINE] A UPnP AV MediaServer shall implement the following optional content management operations:

- OCM: update content
- OCM: create child container
- OCM: destroy object
- OCM: change metadata

as defined in 10.1.8.2.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	RA8JY

[COMMENT] These OCM operations allow content to be synchronized between an AV MediaServer and the +UPSYNC+ or +DNSYNC+ client capabilities.

10.2.5.4

[GUIDELINE] A UPnP AV MediaServer shall implement the Tracking Changes Option of the ContentDirectory service.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	TGHWY

[COMMENT] As well as changes that occur as the result of UPnP Actions when the Content Directory service is in the on-line state, changes to the underlying schema can occur through other mechanisms both in the online and off-line state. If, for example, a user deletes files manually from the schema that the Content Directory service is representing while it is in the off-line state, these changes will be visible to Control Points when the Content Directory Service comes back on line. Similarly, if a user deletes files manually from the schema when the Content Directory Service is on-line, these changes will be handled as if the changes occurred via UPnP Actions.

10.2.5.5

[GUIDELINE] A UPnP AV MediaServer shall implement the LastChange evented state variable.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	ZW3YH	

[COMMENT] The LastChange state variable allows the accumulation (buffering) and delivery (eventing) of all changes to an AV MediaServer's content. The LastChange state variable is a required feature of the Tracking Changes Option of the ContentDirectory service.

10.2.5.6

[GUIDELINE] A UPnP AV MediaServer shall form a LastChange state variable consisting of a properly formed XML document as indicated in XML Schema.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3 XML Schema	Y3AY5	

10.2.5.7

[GUIDELINE] A UPnP AV MediaServer shall send the LastChange event message within 10 s of a change occurring on the CDS.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	A8JYO	

10.2.5.8

[GUIDELINE] All UPnP AV MediaServer CDS container objects shall include the @searchable attribute with a value of "1".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	W3YHF	

[COMMENT] All containers on the CDS need to be searchable. A search can start from any container in the CDS.

10.2.5.9

[GUIDELINE] A UPnP AV Media Server shall list at least the following metadata items in the SearchCapabilities state variable.

- upnp:containerUpdateID
- upnp:objectUpdateID

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	3AY53	

[COMMENT] These values are the minimal set to allow searching for changes.

10.2.5.10

[GUIDELINE] A UPnP AV Media Server shall list at least the following metadata items in the SortCapabilities state variable.

- upnp:containerUpdateID
- upnp:objectUpdateID

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	8JYO5	

[COMMENT] These allow ordering of changes in the CDS:Search() results.

10.2.5.11

[GUIDELINE] A UPnP AV MediaServer shall implement at least the operators stated in Table 27 on the indicated metadata items within the SearchCriteria of the CDS:Search() operation.

Table 27 – UPnP AV MediaServer Metadata SearchCriteria

Metadata Item	Operator(s)
upnp:containerUpdateID	>,=,>=,<,<=,! =, exists
upnp:objectUpdateID	>,=,>=,<,<=,! =, exists

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	HWYRV	

10.2.5.12

[GUIDELINE] A UPnP AV Media Server shall implement in the SearchCriteria argument of the CDS:Search() action the logical "and" and "or" operators on at least 5 clauses containing the metadata and operators specified in 10.2.5.11.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	3YHFF	

10.2.5.13

[GUIDELINE] A UPnP AV MediaServer shall implement AV CDS Tracking Changes Option for all items and therefore the following metadata attributes for all CDS items.

- upnp:objectUpdateID
- upnp:res@updateCount

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	AY533

[COMMENT] These metadata items allow tracking of CDS content entries. There is no partial support of content tracking for some content on the server and not for other content.

10.2.5.14

[GUIDELINE] A UPnP AV MediaServer shall implement AV CDS Tracking Changes Option for all containers and therefore the following metadata attributes for all CDS containers.

- upnp:objectUpdateID
- upnp:totalDeletedChildCount
- upnp:containerUpdateID
- upnp:childCount

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	JYO5N

[COMMENT] These metadata items allow tracking of CDS container level changes. There is no partial support of content tracking for some content on the server and not for other content.

10.2.6 MM/CM: support for res@dlna:estimatedSize

10.2.6.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

The res@dlna:estimatedSize is used by the server to advertise an estimate of the size of a content binary in those cases where the exact size is not known. For example, if the content requires transcoding that will not be performed until a request for the content is received, the exact length of the transcoded version cannot be known. However, it can be useful for downloading or synchronizing endpoints to have an estimate of the size of a content binary to determine whether it is generally possible for that content to fit within the available storage.

10.2.6.2

[GUIDELINE] A UPnP AV Media Server may include the res@dlna:estimatedSize attribute for any resource within a content object returned as part of the result of a CDS:Browse() or CDS:Search() operation.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	WYRVV	

10.2.6.3

[GUIDELINE] A UPnP AV Media Server Upload Controller may include the res@dlna:estimatedSize attribute for any resource created as part of the CDS:CreateObject() call within an OCM: create object operation.

[ATTRIBUTES]

O	A	+UP+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	YHFF8	

10.2.6.4

[GUIDELINE] A UPnP AV Media Server Upload Synchronization Controller may include the res@dlna:estimatedSize attribute for any resource created as part of the CDS:CreateObject() call within an OCM: create object operation.

[ATTRIBUTES]

O	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	Y5337	

10.2.6.5

[GUIDELINE] If present the res@dlna:estimatedSize attribute shall have the same syntax and type as the res@size attribute.

[ATTRIBUTES]

M	A	DMS +UP+ +UPSYNC+	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	YO5NQ	

10.2.6.6

[GUIDELINE] If the res@Size attribute is present for any resource then the res@estimatedSize attribute shall not be present for the same resource.

[ATTRIBUTES]

M	A	DMS +UP+ +UPSYNC+	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	YRVVM	

10.2.7 MM/CM: operations that need CDS:UpdateObject

10.2.7.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.7.2

[GUIDELINE] A UPnP AV MediaServer shall implement the OCM: change metadata operation and therefore shall implement CDS:UpdateObject action.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011 ISO/IEC 29341-14-3	HFF8I

[COMMENT] The CDS:UpdateObject action is used to change metadata on an existing CDS object.

10.2.8 MM/CM: general rules for CDS:UpdateObject request syntax

10.2.8.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.8.2

[GUIDELINE] A UPnP AV MediaServer control point invoking CDS:UpdateObject shall apply the mandatory metadata encoding rules for the following guidelines in the NewTagValue input argument.

- 10.1.3.1 MM UPnP AV control point tolerance of unknown property
- 10.1.3.2 MM DIDL-Lite restrictions
- 10.1.3.3 MM DIDL-Lite max metadata length
- 10.1.3.5 MM DIDL-Lite Boolean values
- 10.1.3.6 MM upnp:class values
- 10.1.3.7 MM DIDL-Lite dc:date format
- 10.1.3.9 MM DIDL-Lite desc element use
- 10.1.3.10 MM URI rules
- 10.1.3.12 MM DIDL-Lite recommended metadata properties
- 10.1.3.13 MM protocolInfo context
- 10.1.3.16 MM DIDL-Lite protocolInfo values
- 10.1.3.17 MM protocolInfo values: 4th field
- 10.1.3.18 MM pn-param (DLNA.ORG_PN parameter)

- 10.1.3.23 MM ci-param (conversion indicator flag)

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	5337Q	

10.2.8.3

[GUIDELINE] A UPnP MediaServer Control Point invoking CDS:UpdateObject shall not include the

- @dlna:dlnaManaged
- res@dlna:ifoFileURI
- res@dlna:importIfoFileURI
- albumArtURI@dlna:profileID
- res@dlna:trackTotal
- res@dlna:resumeUpload
- @dlna:containerType
- res@dlna:uploadedSize

metadata properties in the NewTagValue input argument.

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	O5NQX	

[COMMENT] These values are set by the MediaServer capabilities and are defined as read-only attributes.

10.2.8.4

[GUIDELINE] A UPnP AV MediaServer control point invoking CDS:UpdateObject shall apply the rules specified in 10.1.3.4.1 and 10.1.3.4.2 to all metadata.

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	RVVM7	

10.2.8.5

[GUIDELINE] A UPnP AV MediaServer control point invoking CDS:UpdateObject, should not delete metadata properties as defined in guideline 10.1.3.10.6 for the given upnp:class.

[ATTRIBUTES]

S	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	FF8IA	

[COMMENT] The Control Point will preferably not delete metadata recommended for a given upnp:class.

10.2.8.6

[GUIDELINE] A UPnP AV MediaServer control point invoking CDS:UpdateObject with optional metadata shall properly declare all namespaces.

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	337QN	

10.2.8.7

[GUIDELINE] A UPnP AV MediaServer allowing an update to the <dc:date> elements shall allow the MediaServer control point to specify any valid form of <dc:date>, as defined by guideline 10.1.3.7.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	5NQX4	

[COMMENT] This guideline allows the control point to specify any valid form for <dc:date>. Control points are not to assume that the format they specified in the request will be the final form of the <dc:date>.

10.2.8.8

[GUIDELINE] A UPnP AV MediaServer implementing the OCM: change metadata operation shall ignore attempts to add unsupported metadata and only generate an error response if some other error occurs or there were no successful modifications to the target object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	VVM7J	

[COMMENT] The UPnP CDS behaviour allows error conditions to be generated when attempting to add unsupported metadata. Since the CP does not currently have a reliable method for determining which metadata is actually supported by the DMS/M-DMS, restricting this error response allows supported metadata to be accepted while simultaneously allowing unsupported metadata to have no effect.

10.2.9 MM/CM: general rules for server behaviour for CDS:UpdateObject

10.2.9.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.9.2

[GUIDELINE] A UPnP AV MediaServer implementing the OCM: change metadata operation for a particular object should accept the creation of recommended properties corresponding to the specified upnp:class, which are defined in the guideline 7.3.25 MM DIDL-Lite Recommended Metadata Properties.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	F8IAT	

10.2.9.3

[GUIDELINE] A UPnP AV MediaServer implementing the OCM: change metadata operation for a particular object shall be able to accept CDS:UpdateObject requests that specify changes to multiple properties.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	37QN7	

10.2.9.4

[GUIDELINE] A UPnP AV MediaServer implementing the OCM: change metadata operation for a particular object and receiving a request where the CurrentTagValue does not match the current state of the CDS, shall respond with an error code 702 (Invalid currentTagValue).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	NQX4R	

10.2.10 MM/CM: OCM: change metadata operation

10.2.10.1

[GENERAL] The Content Synchronization MM/CM guidelines subclause defines the DLNA Upload and Download Synchronization Controller system usage requirements for a UPnP AV MediaServer and a Synchronization Controller Device Capability. The conditionally mandatory requirements in this subclause are adhered to only when supporting the Upload or Download Synchronization system usages.

10.2.10.2

[GUIDELINE] A UPnP AV Media Server Control Point invoking an OCM: change metadata operation, shall invoke CDS:UpdateObject with the following rules.

- The ObjectID shall identify the CDS object that is to receive the metadata change and the CDS object shall support the OCM: change metadata operation.

[ATTRIBUTES]

M	A	+UPSYNC+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	7GY63	

10.2.10.3

[GUIDELINE] A UPnP AV MediaServer implementing the OCM: change metadata operation, shall ignore all <res> elements received in a NewTagValue argument of the CDS:UpdateObject request.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	84T7U	

[COMMENT] The resource data defines the nature of the content and cannot be changed without also changing the binary data. Creating a new <res> element is not supported, if the control point desires to upload content, it needs to create a new object with the Upload AnyContainer or OCM: upload content operations. Additionally, the OCM: change metadata operation is not used for changing the binary data of a <res> element, the object will be deleted and re-created.

10.3 Scheduled Recording Media Management guidelines

10.3.1 MM/SR system usage feature support

10.3.1.1

[GENERAL] Subclause 10.3 defines the DLNA Scheduled Recording system usage requirements for a UPnP AV MediaServer and a Scheduled Recording Controller Device Capability. The guidelines in 10.3 are mandatory if the Scheduled Recording system usage is implemented.

10.3.1.2

[GUIDELINE] If a DMS or M-DMS contains a UPnP ScheduledRecording service in the UPnP AV MediaServer device, then it shall conform to all of the guidelines for a UPnP AV MediaServer in 10.3 as defined in 10.3.1 to 10.3.30 inclusive.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-3 ISO/IEC 29341-4-14:2011	59OVP	

[COMMENT] This guideline classifies the group of guideline requirements that a DMS and M-DMS implements to support the Scheduled Recording Device Option for the Scheduled Recording system usage.

10.3.1.3

[GUIDELINE] A DLNA device class may implement the Scheduled Recording Controller Device Capability.

[ATTRIBUTES]

O	A	DMS DMP DMR DMC	M-DMS M-DMP M-DMC	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3 ISO/IEC 29341-4-14:2 011	AIOZ5	

10.3.1.4

[GUIDELINE] A Scheduled Recording Controller shall implement a UPnP AV MediaServer control point that interacts with the ContentDirectory service for browsing content and with the ScheduledRecording service for creating and managing recordings. It shall also conform to all of the guidelines for a Scheduled Recording Controller in 10.3 as defined in 10.3.1 through 10.3.30 inclusive.

[ATTRIBUTES]

M	A	+SR+	n/a	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3 ISO/IEC 29341-4-14:2 011	D7M8R	

[COMMENT] This guideline classifies the group of guideline requirements that a Scheduled Recording Controller implements to support the Scheduled Recording system usage.

10.3.2 MM/SR exposing recorded content

10.3.2.1

[GUIDELINE] A UPnP AV MediaServer should expose its recorded content in a ContentDirectory service for DLNA consumption.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3	K7CVW	

[COMMENT] Recording devices are ultimately built to offer consumption of their recorded content. There are cases where the content consumption method is not defined by DLNA system usages.

10.3.2.2

[GUIDELINE] If a UPnP AV MediaServer exposes recorded content in a ContentDirectory service, then the recorded content shall be exposed in the ContentDirectory service co-located with the ScheduledRecording service.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3	ATA6	

10.3.2.3

[GUIDELINE] If a UPnP AV MediaServer exposes recorded content in a ContentDirectory service, then at least one res property of the recorded content shall be conformant to a DLNA Media Format Profile as defined in 10.1.3.16.4.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3	WZAI	

10.3.2.4

[GUIDELINE] If a UPnP AV MediaServer supports simultaneous streaming and recording, then the recorded content CDS object with a res property should exist in the CDS as soon as the recordTask starts recording.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3	55MW8	

10.3.2.5

[GUIDELINE] If a UPnP AV MediaServer supports simultaneous streaming and recording, then the recorded content CDS object should follow the DLNA UCDAM buffer model guidelines 10.1.3.33, 10.1.3.34 and Annex D to allow a UPnP AV MediaServer control point to interact with the dynamic content binary size.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3	ZR24T	

10.3.2.6

[GUIDELINE] A UPnP AV MediaServer shall expose the arib:objectType property in the Japan region or dlina:objectType property in other geographical regions in the recorded content CDS

item with a value of the applicable broadcast system, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.

The namespace "urn:schemas-arib-or-jp:elements-1-0/" shall be specified in the <item> element or the <arib:objectType> element and the namespace prefix shall be "arib" when exposing the arib:objectType property.

The namespace "urn:schemas-dlna-org:device-1-0" shall be specified in the <item> element or the <dlna:objectType> element and the namespace prefix shall be "dlna" when exposing the dlna:objectType property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	9M53Q	

[COMMENT] This requirement provides UPnP AV MediaServer implementations with a CDS property which can be used by control points to identify content items that were created as a result of an execution of a recordTask. Values for the arib:objectType property need to be as specified in ARIB TR B-14 and ARIB TR B-15. Values for the dlna:objectType will need to be something meaningful for the applicable broadcast systems. Table 28 provides some initial guidance that can be updated and added to in future.

Table 28 – dlna:objectType values

Broadcast Systems	dlna:objectType Values
US Terrestrial Broadcast System	ATSC_TB
US Cable Broadcast Systems	TBD
European Broadcast Systems	TBD

10.3.2.7

[GUIDELINE] A UPnP AV MediaServer shall expose the dc:date property in the recorded content CDS item with a non-empty and non-whitespace value, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The CDS item of the recorded content exposes a upnp:class property with a value of object.item.audioItem or object.item.videoItem.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	LRZI6	

10.3.2.8

[GUIDELINE] A UPnP AV MediaServer shall set the value of the dc:date property in the recorded content CDS item with a value which indicates the actual start date and time of the recorded content, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The CDS item of the recorded content exposes the dc:date property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	HK2ET	

[COMMENT] This is the CDS property that is recommended for containing the actual date and time of the recorded content instead of using the upnp:recordedStartTime property. Usage of this property makes this consistent for all types of CDS items contained in the CDS.

10.3.2.9

[GUIDELINE] A UPnP AV MediaServer shall set the value of the res@duration property in the recorded content CDS item with a value which indicates the recorded duration of the recorded content after the completion of the recording, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The CDS item of the recorded content exposes the dc:duration property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	HMUQV	

[COMMENT] This is the CDS property that is recommended for containing the actual duration of the recorded content instead of using the upnp:recordedDuration property. Usage of this property makes this consistent for all types of CDS items contained in the CDS.

10.3.2.10

[GUIDELINE] A UPnP AV MediaServer shall conform to the guidelines listed in Table 29 when all the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The CDS srs:class property value is from the recordSchedule object that spawned the recordTask.

Table 29 – Guidelines for recorded CDS properties based on srs:class values

srs:class value	Guidelines for recorded CDS properties
OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG	10.3.9.5 to 10.3.9.11
OBJECT.RECORDSCHEDULE.DIRECT.MANUAL	10.3.10.5 to 10.3.10.7
OBJECT.RECORDSCHEDULE.DIRECT.CDSEPG	10.3.11.7 to 10.3.11.12
OBJECT.RECORDSCHEDULE.QUERY.CONTENTNAME	10.3.12.5
OBJECT.RECORDSCHEDULE.QUERY.CONTENTID	10.3.13.5

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	SXEV	

[COMMENT] Depending on the record class used to schedule a recording, these conformance guidelines provide the recommended CDS property values for the recorded content CDS item. Note that the same CDS properties defined for each class are semantically equivalent, but guidelines are duplicated for each applicable record class (e.g. upnp:channelID). Table 30 summarizes the recommended CDS properties for the recorded content for each srs:class.

Table 30 – Recommended recorded CDS properties based on srs:class value

srs:class value	Recommended recorded CDS properties
OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG	res@dlina:scheduledRecordedContent, dc:date, res@duration, dc:title, upnp:channelName, upnp:channelNr, upnp:genre, upnp:channelID, upnp:scheduledStartTime, upnp:scheduledEndTime
OBJECT.RECORDSCHEDULE.DIRECT.MANUAL	res@dlina:scheduledRecordedContent, dc:date, res@duration, dc:title, upnp:channelID, upnp:scheduledStartTime, upnp:scheduledEndTime
OBJECT.RECORDSCHEDULE.DIRECT.CDSEPG	res@dlina:scheduledRecordedContent, dc:date, res@duration, dc:title, upnp:channelName, upnp:channelNr, upnp:genre, upnp:channelID, upnp:scheduledStartTime, upnp:scheduledEndTime
OBJECT.RECORDSCHEDULE.QUERY.CONTENTNAME	res@dlina:scheduledRecordedContent, dc:date, res@duration, dc:title
OBJECT.RECORDSCHEDULE.QUERY.CONTENTID	res@dlina:scheduledRecordedContent, dc:date, res@duration, dc:title

10.3.3 MM/SR UPnP ScheduledRecording service

[GUIDELINE] A UPnP AV MediaServer shall implement the mandatory actions and state variables of a ScheduledRecording service.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-3 ISO/IEC 29341-4-14:2 011	UQXT8	

10.3.4 MM/SR CDS association

10.3.4.1

[GENERAL] This set of guidelines defines the association between the UPnP ScheduledRecording service and the UPnP ContentDirectory service.

10.3.4.2

[GUIDELINE] A UPnP AV MediaServer shall implement the DLNA Basic Tuner guidelines defined in 10.1.4.16 to 10.1.4.23 or the DLNA Extended Tuner guidelines defined in 10.4 to expose the device's channel lineup.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-3	TYFVG	

10.3.5 MM/SR SRS:GetSortCapabilities action

10.3.5.1

[GUIDELINE] A UPnP AV MediaServer shall respond to the SRS:GetSortCapabilities action with the SortCaps output argument containing the entire list of values that are allowed as defined in ISO/IEC 29341-4-14:2011 in the SortCriteria input argument for any UPnP ScheduledRecording action request.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	DCI2Z	

[COMMENT] The UPnP ScheduledRecording service only supports a single mechanism for UPnP AV MediaServers to advertise their support for sorting across the actions defined in the service. Consequently, the UPnP AV MediaServer has to provide a consistent level of implementation across all actions which accept a SortCriteria input argument so that a ScheduledRecording Controller can rely on the output values of the SRS:GetSortCapabilities across all actions.

10.3.5.2

[GUIDELINE] If a UPnP AV MediaServer does not implement sorting in the UPnP ScheduledRecording service, it shall return an empty string in the SortCaps and "0" (zero) in the SortLevelCap output arguments of the SRS:GetSortCapabilities action.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	EAOOX	

10.3.5.3

[GUIDELINE] If a UPnP AV MediaServer includes the value of "srs-conflict-resolution" in the <dlina:X_DLNACAP>, then it shall include the property srs:priority@orderedValue in the SortCaps output argument in response to a SRS:GetSortCapabilities request.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	JJOSD	

10.3.6 MM/SR SRS:BrowseRecordSchedules action

10.3.6.1

[GUIDELINE] If a UPnP AV MediaServer receives one or more property names in the Filter input argument which are not implemented by the UPnP AV MediaServer for the SRS:BrowseRecordSchedules action, then the request shall be processed as if these properties

were not included in the Filter input argument. If this results in an empty string, the UPnP AV MediaServer shall only return the required properties as defined in ISO/IEC 29341-4-14:2011 in the result.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	M8LZZ	

[COMMENT] This guideline clarifies UPnP AV MediaServer behaviour when invalid properties are included in the Filter input argument. A ScheduledRecording Controller can obtain the list of properties supported by the UPnP AV MediaServer using the SRS:GetPropertyList action.

10.3.6.2

[GUIDELINE] If a UPnP AV MediaServer receives one or more property names in the SortCriteria input argument for the SRS:BrowseRecordSchedules action which are not returned in the SortCaps output argument in the SRS:GetSortCapabilities action, then it shall return an Error Code 709 (Unsupported or invalid sort criteria).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	GB2EJ	

[COMMENT] This guideline clarifies the UPnP AV MediaServer response to an invalid SortCriteria input argument. A ScheduledRecording Controller can obtain the sort capabilities of the UPnP AV MediaServer by making a SRS:GetSortCapabilities request.

10.3.6.3

[GUIDELINE] A UPnP AV MediaServer device may reduce the number of recordSchedule objects in a response to a SRS:BrowseRecordSchedules action for the following scenarios only.

- The transmission of a SOAP response with a huge byte length (> 204 800 B).
- The transmission of a SOAP response that exceeds 30 s for transmission time

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	K007Z	

[COMMENT] This requirement is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.1.

10.3.6.4

[GUIDELINE] The number of recordSchedule object entries in the Result output argument (containing the XML escaped srs XML Document) shall match the value specified in the NumberReturned output argument.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	98W4S	

[COMMENT] This guideline needs to be followed, even if a UPnP AV MediaServer reduces the number of recordSchedule objects returned in the SOAP response. This requirement is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.2.

10.3.6.5

[GUIDELINE] If the UPnP AV MediaServer device cannot find more than zero recordSchedule objects (in 27 s, as described in 9.2.9.2), for a response to SRS:BrowseRecordSchedules request and if UPnP AV MediaServer cannot calculate an accurate value for the TotalMatches output argument, then the UPnP AV MediaServer should return a SOAP error response code of 720 (Cannot process the request).

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	ZJHU2	

[COMMENT] This guideline covers the scenario where a UPnP AV MediaServer can neither find any recordSchedule objects that satisfy the query nor calculate the TotalMatches output argument accurately. Although some UPnP AV MediaServer implementations may choose to report the accurate TotalMatches value, at the expense of violating the 27 s timeout rule, such behaviour is not recommended for the same reason stated in guideline 10.1.4.11.6. This guideline is to align with the guideline for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.7.

10.3.6.6

[GUIDELINE] A UPnP AV MediaServer control point should specify the desired number of recordSchedule objects in the RequestedCount input argument of a SRS:BrowseRecordSchedules request.

[ATTRIBUTES]

S	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	BYNOM	

[COMMENT] This guideline recommends control points to request a reasonable number of recordSchedule objects in a single query. The number of recordSchedule objects that can be displayed to the user at a single time is a good measure of reasonableness. Generally speaking, control points that specify smaller RequestedCount values will receive the response from the device sooner than if a larger value were specified. Using a RequestedCount of zero is prohibited by ARIB TR B-14. This guideline is to align with the guideline for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.8.

10.3.6.7

[GUIDELINE] A UPnP AV MediaServer control point shall tolerate a response with less recordSchedule objects than requested in a SRS:BrowseRecordSchedules request.

[ATTRIBUTES]

M	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	5ZXZL	

[COMMENT] This guideline provides implementation guidance to a UPnP AV MediaServer control point to not assume that its SRS:BrowseRecordSchedules request will return all of the recordSchedule objects it requested. This requirement is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.10.

10.3.6.8

[GUIDELINE] A UPnP AV MediaServer control point should retrieve the remaining items in a reduced response to a SRS:BrowseRecordSchedules request, when the value of TotalMatches is greater than the value of NumberReturned, by issuing additional SRS:BrowseRecordSchedules requests to complete the original SRS:BrowseRecordSchedules request for recordSchedule objects.

[ATTRIBUTES]

S	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	I7UFV	

[COMMENT] This guideline requirement provides implementation guidance to UPnP AV MediaServer control points when a UPnP AV MediaServer returns more than zero recordSchedule objects in a response to a SRS:BrowseRecordSchedules action request with a reduced response. This requirement is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.11.

10.3.7 MM/SR BrowseRecordTasks action**10.3.7.1**

[GUIDELINE] If a UPnP AV MediaServer receives one or more property names in the Filter input argument which are not implemented by the UPnP AV MediaServer for the SRS:BrowseRecordTasks action, then the request shall be processed as if these properties were not included in the Filter input argument. If this results in an empty string, the UPnP AV MediaServer shall only return the required properties as defined in ISO/IEC 29341-4-14:2011 in the result.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	RRNYM	

[COMMENT] This guideline clarifies UPnP AV MediaServer behaviour when invalid properties are included in the Filter input argument. A ScheduledRecording Controller can obtain the list of properties supported by the UPnP AV MediaServer using the SRS:GetPropertyList action.

10.3.7.2

[GUIDELINE] If a UPnP AV MediaServer receives one or more property names in the SortCriteria input argument for the SRS:BrowseRecordTasks action which are not returned in the SortCaps output argument in the SRS:GetSortCapabilities action, then it shall return an Error Code 709 (Unsupported or invalid sort criteria).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	RUICO	

[COMMENT] This guideline clarifies the UPnP AV MediaServer response to an invalid SortCriteria input argument. A ScheduledRecording Controller can obtain the sort capabilities of the UPnP AV MediaServer by making a SRS:GetSortCapabilities request.

10.3.7.3

[GUIDELINE] A UPnP AV MediaServer device may reduce the number of recordTask objects in a response to a SRS:BrowseRecordTasks action for the following scenarios only.

- The transmission of a SOAP response with a huge byte length (> 204 800 B).
- The transmission of a SOAP response that exceeds 30 s for transmission time.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	572H8	

[COMMENT] This guideline is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.1.

10.3.7.4

[GUIDELINE] The number of recordTask object entries in the Result output argument (containing the XML escaped srs XML Document) shall match the value specified in the NumberReturned output argument.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	6YLEZ	

[COMMENT] This guideline needs to be followed, even if a UPnP AV MediaServer reduces the number of recordTask objects returned in the SOAP response. This guideline is to align with the guideline for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.2.

10.3.7.5

[GUIDELINE] If the UPnP AV MediaServer device cannot find more than zero recordTask objects (in 27 s, as described in 9.2.9.2), for a response to SRS:BrowseRecordTasks request and if UPnP AV MediaServer cannot calculate an accurate value for the TotalMatches output argument, then the UPnP AV MediaServer should return a SOAP error response code of 720 (Cannot process the request).

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	683H9	

[COMMENT] This guideline covers the scenario where a UPnP AV MediaServer can neither find any recordTask objects that satisfy the query nor calculate the TotalMatches output argument accurately. Although some UPnP AV MediaServer implementations may choose to report the accurate TotalMatches value, at the expense of violating the 27 s timeout rule, such behaviour is not recommended for the same reason stated in guideline 10.1.4.11.6. This guideline is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.7.

10.3.7.6

[GUIDELINE] A UPnP AV MediaServer control point should specify the desired number of recordTask objects in the RequestedCount input argument of a SRS:BrowseRecordTasks request.

[ATTRIBUTES]

S	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	9OCYT	

[COMMENT] This guideline recommends control points to request a reasonable number of recordTask objects in a single query. The number of recordTask objects that can be displayed to the user at a single time is a good measure of reasonableness. Generally speaking, control points that specify smaller RequestedCount values will receive the response from the device sooner than if a larger value were specified. Using a RequestedCount of zero is prohibited by ARIB TR B-14. This requirement is to align with the guideline for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.8.

10.3.7.7

[GUIDELINE] A UPnP AV MediaServer control point shall tolerate a response with less recordTask objects than requested in a SRS:BrowseRecordTasks request.

[ATTRIBUTES]

M	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	OICAS	

[COMMENT] This guideline requirement provides implementation guidance to a UPnP AV MediaServer control point to not assume that its SRS:BrowseRecordTasks request will return all of the recordTask objects it requested. This requirement is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.10.

10.3.7.8

[GUIDELINE] A UPnP AV MediaServer control point should retrieve the remaining items in a reduced response to a SRS:BrowseRecordTasks request, when the value of TotalMatches is greater than the value of NumberReturned, by issuing additional SRS:BrowseRecordTasks requests to complete the original SRS:BrowseRecordTasks request for recordTask objects.

[ATTRIBUTES]

S	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	9AXKX	

[COMMENT] This guideline requirement provides implementation guidance to UPnP AV MediaServer control points when a UPnP AV MediaServer returns more than zero

recordSchedule objects in a response to a CDS:BrowseRecordTasks action request with a reduced response. This requirement is to align with the requirement for a SOAP response in CDS:Browse action and CDS:Search action defined in 10.1.4.11.11.

10.3.8 MM/SR representation of allowed values description

10.3.8.1

[GENERAL] These guideline allow a UPnP AV MediaServer to reduce the allowed values description returned in the PropertyInfo output argument from SRS:GetAllowedValues action. The allowed values description is described as an XML document with the format (syntax) specified in ISO/IEC 29341-4-4.

10.3.8.2

[GUIDELINE] The allowed values returned by the UPnP AV MediaServer in response to a SRS:GetAllowedValues request may contain <allowedValueDescriptor> elements which omit some <dependentField> sub-elements.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011 ISO/IEC 29341-4-4	BXUSP	

[COMMENT] The dependencies between certain properties are defined in the UPnP SRS Specification ISO/IEC 29341-4-14:2011. Therefore the <dependentField> sub-element is not always necessary in the <allowedValueDescriptor> elements for these properties. Vendors are strongly encouraged to omit unnecessary <dependentField> sub-elements to minimize the length of the output argument to SRS:GetAllowedValues.

The following examples show two cases in which some <dependentField> sub-elements could be omitted:

This example illustrates the allowed values description for the srs:scheduledCDSObjectID property.

```
<field>
  <name>srs:scheduledCDSObjectID</name>
  <dataType maxSize="1024">xsd:string</dataType>
  <allowedValueDescriptor>
    <dependentField>
      <name>srs:class</name>
      <valueList>
        <value>OBJECT.RECORDSCHEDULE.DIRECT.CDSEPG</value>
        <value>OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG</value>
      </valueList>
    </dependentField>
    <minCount>1</minCount>
    <allowAny/>
  </allowedValueDescriptor>
</field>
```

The SRS specification ISO/IEC 29341-4-14:2011 defines the srs:scheduledCDSObjectID property to be used only with the cdsNonEPG and cdsEPG record classes. Therefore the above XML fragment can be reduced to the following:

```
<field>
  <name>srs:scheduledCDSObjectID</name>
```

```

    <dataType maxSize="1024">xsd:string</dataType>
    <allowedValueDescriptor>
      <minCount>1</minCount>
      <allowAny/>
    </allowedValueDescriptor>
  </field>

```

This example illustrates the allowed values description for the srs:desiredPriority@type property.

```

<field>
  <name>srs:desiredPriority@type</name>
  <dataType maxSize="16">xsd:string</dataType>
  <allowedValueDescriptor>
    <dependentField>
      <name>srs:desiredPriority</name>
      <anyValue/>
    </dependentField>
    <minCount>1</minCount>
    <allowedValueList>
      <allowedValue>PREDEF</allowedValue>
      <allowedValue>OBJECTID</allowedValue>
    </allowedValueList>
  </allowedValueDescriptor>
</field>

```

An XML attribute can only exist in the context of its parent element. Therefore the above XML fragment can be reduced to the following:

```

<field>
  <name>srs:desiredPriority@type</name>
  <dataType maxSize="16">xsd:string</dataType>
  <allowedValueDescriptor>
    <minCount>1</minCount>
    <allowedValueList>
      <allowedValue>PREDEF</allowedValue>
      <allowedValue>OBJECTID</allowedValue>
    </allowedValueList>
  </allowedValueDescriptor>
</field>

```

10.3.8.3

[GUIDELINE] A UPnP AV MediaServer control point shall be able to parse and interpret <allowedValueDescriptor> elements that omit the <dependentField> sub-element.

[ATTRIBUTES]

M	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011 ISO/IEC 29341-4-4	55STS	

[COMMENT] Guideline requirement 10.3.8.2 allows UPnP AV MediaServers to omit the <dependentField> sub-elements.

10.3.9 MM/SR cdsNonEPG record class

10.3.9.1

[GENERAL] This defines the guidelines for a UPnP AV MediaServer when implementing the mandatory cdsNonEPG record class for the ScheduledRecording service.

10.3.9.2

[GUIDELINE] A UPnP AV MediaServer shall respond at a minimum with the value of "OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG" to the SRS:GetAllowedValues action for the srs:class property when the DataTypeID input argument is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	9JGNA	

[COMMENT] This reiterates the mandatory record class that is implemented by a UPnP AV MediaServer with a ScheduledRecording service.

10.3.9.3

[GUIDELINE] A UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:scheduledCDSObjectID property when the DataTypeID input argument is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with either of the following:

- a list of all of the CDS @id values, that are available to setup a RecordSchedule;
- a value of "<allowAny></allowAny>".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	I9VW2	

[COMMENT] The UPnP AV MediaServer uses the value "<allowAny></allowAny>" to indicate that it allows any CDS object with the upnp:recordable property set to "1".

10.3.9.4

[GUIDELINE] If a UPnP AV MediaServer responds to the SRS:GetAllowedValues action for the srs:scheduledCDSObjectID property with a list of the CDS @id values, then the corresponding CDS items shall exist and shall have the upnp:recordable property set to "1".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	OEABB	

10.3.9.5

[GUIDELINE] A UPnP AV MediaServer should set the value of the dc:title property in the recorded content CDS item with the same value as the dc:title property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	YTG5V	

[COMMENT] This guideline requirement is semantically equivalent to guideline 10.3.11.5 for the cdsEPG record class.

10.3.9.6

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelName property in the recorded content CDS item with the same value as the upnp:channelName property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:channelName property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	SUQGU	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.11.7 for the cdsEPG record class.

10.3.9.7

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelNr property in the recorded content CDS item with the same value as the upnp:channelNr property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:channelNr property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	72MV6	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.11.8 for the cdsEPG record class.

10.3.9.8

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:genre property in the recorded content CDS item with the same value as the upnp:genre property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:genre property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	GMGFV	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.11.9 for the cdsEPG record class.

10.3.9.9

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelID and upnp:channelID@type properties in the recorded content CDS item with the same values as the upnp:channelID and upnp:channelID@type properties contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:channelID and upnp:channelID@type properties.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	GPARX	

[COMMENT] This guideline requirement is semantically equivalent to guideline requirements 10.3.10.5 and 10.3.11.10 for the Manual and cdsEPG record classes respectively.

10.3.9.10

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:scheduledStartTime property in the recorded content CDS item with the same value as the srs:scheduledStartDateTime property contained in the recordSchedule object, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.

- The srs:scheduledStartDateTime property is from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	RZSWF	

[COMMENT] This value is not necessarily the actual start time of the recording, that value would be contained in the dc:date property.

- a) This guideline is semantically equivalent to guidelines 10.3.10.6 and 10.3.11.11 for the Manual and cdsEPG record classes respectively.

10.3.9.11

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:scheduledEndTime property in the recorded content CDS item with the same value as the sum of the srs:scheduledStartDateTime and srs:scheduledDuration properties contained in the recordSchedule object, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledStartDateTime and srs:scheduledDuration properties are from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	9N6I9	

[COMMENT] This value is not necessarily the actual end time of the recording, that value can be calculated by summing the dc:date and res@duration properties.

- a) This guideline is semantically equivalent to guidelines 10.3.10.7 and 10.3.11.12 for the Manual and cdsEPG record classes respectively.

10.3.10 MM/SR manual record class**10.3.10.1**

[GENERAL] This defines the requirements for a UPnP AV MediaServer when implementing the optional manual record class for the ScheduledRecording service.

10.3.10.2

[GUIDELINE] If a UPnP AV MediaServer implements the manual record class, then it shall include in the response the value of "OBJECT.RECORDSCHEDULE.DIRECT.MANUAL" to the SRS:GetAllowedValues action for the srs:class property when the DataTypeID input argument is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	8UMKG	

10.3.10.3

[GUIDELINE] If a UPnP AV MediaServer indicates support for the manual record class as defined in guideline 10.3.10.2, then a UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:scheduledChannelID property when the DataTypeID input argument is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with either of the following:

- a list of all of the CDS channelID values, that are available to setup a RecordSchedule;
- a value of "<allowAny></allowAny>".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	C4QMW	

[COMMENT] The UPnP AV MediaServer uses the value "<allowAny></allowAny>" to indicate that it allows any upnp:channelID value obtained from a Tuner channel item with the upnp:recordable property set to "1".

10.3.10.4

[GUIDELINE] If a UPnP AV MediaServer indicates support for the manual record class as defined in guideline requirement 10.3.10.2 and responds to the SRS:GetAllowedValues action for the srs:scheduledChannelID property with a list of the channelID values, then the corresponding CDS items containing those upnp:channelID properties shall have the upnp:recordable property set to "1".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	D2XAU	

10.3.10.5

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelID and upnp:channelID@type properties in the recorded content CDS item with the same values as the srs:scheduledChannelID and srs:scheduledChannelID@type properties contained in the recordSchedule object, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledChannelID and srs:scheduledChannelID@type properties are from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/s	ISO/IEC 29341-4-12:2 008	W5Q29	

[COMMENT] This guideline is semantically equivalent to guidelines 10.3.9.9 and 10.3.11.10 for the cdsNonEPG and cdsEPG record classes respectively.

10.3.10.6

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:scheduledStartTime property in the recorded content CDS item with the same value as the srs:scheduledStartDateTime property contained in the recordSchedule object, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledStartDateTime property is from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/s	ISO/IEC 29341-4-12:2 008	YSN9Y	

[COMMENT] The value is not necessarily the actual start time of the recording, that value would be contained in the dc:date property.

- a) This guideline requirement is semantically equivalent to guideline requirements 10.3.9.10 and 10.3.11.11 for the cdsNonEPG and cdsEPG record classes respectively.

10.3.10.7

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:scheduledEndTime property in the recorded content CDS item with the same value as the sum of the srs:scheduledStartDateTime and srs:scheduledDuration properties contained in the recordSchedule object, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledStartDateTime and srs:scheduledDuration properties are from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/s	ISO/IEC 29341-4-12:2 008	RYLAY	

[COMMENT] This value is not necessarily the actual end time of the recording, that value can be calculated by summing the dc:date and res@duration properties.

- a) This guideline requirement is semantically equivalent to guideline requirements 10.3.9.11 and 10.3.11.12 for the cdsNonEPG and cdsEPG record classes respectively.

10.3.11 MM/SR cdsEPG record class**10.3.11.1**

[GENERAL] This defines the requirements for a UPnP AV MediaServer when implementing the optional cdsEPG record class for the ScheduledRecording service.

10.3.11.2

[GUIDELINE] If a UPnP AV MediaServer implements the cdsEPG record class as defined in guidelines 10.3.11.3 to 10.3.11.5 respectively, then it shall implement the EPG Server Device Option, as defined in 10.5.2.3, by including a <Feature> element with the Feature@name

attribute equal to "EPG" in the FeatureList output argument in response to the CDS:GetFeatureList action.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-14:2 011	WE94G	

10.3.11.3

[GUIDELINE] If a UPnP AV MediaServer implements the cdsEPG record class, then it shall respond with the value of "OBJECT.RECORDSCHEDULE.DIRECT.CDSEPG" to the SRS:GetAllowedValues action for the srs:class property when the DataTypeID input argument is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	74ODB	

10.3.11.4

[GUIDELINE] If a UPnP AV MediaServer indicates support for the cdsEPG record class as defined in guideline 10.3.11.3, then a UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:scheduledCDSObjectID property when the DataTypeID input argument is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with either of the following:

- a list of all of the CDS @id values, that are available to setup a recordSchedule;
- a value of "<allowAny></allowAny>".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	D92QI	

[COMMENT] The UPnP AV MediaServer uses the value "<allowAny></allowAny>" to indicate that it allows any CDS object with the upnp:class property set to object.item.epgItem or its derived classes and the upnp:recordable property set to "1".

10.3.11.5

[GUIDELINE] If a UPnP AV MediaServer indicates support for the cdsEPG record class as defined in guideline 10.3.11.3 and responds to the SRS:GetAllowedValues action for the srs:scheduledCDSObjectID property with a list of the CDS @id values, then the corresponding CDS items shall exist, shall have the upnp:class property set to object.item.epgItem or its derived classes, and shall have the upnp:recordable property set to "1".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	NO8L4	

10.3.11.6

[GUIDELINE] A UPnP AV MediaServer should set the value of the dc:title property in the recorded content CDS item with the same value as the dc:title property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	HPIW2	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.9.5 for the cdsNonEPG record class.

10.3.11.7

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelName property in the recorded content CDS item with the same value as the upnp:channelName property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:channelName property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	G3MOE	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.9.6 for the cdsNonEPG record class.

10.3.11.8

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelNr property in the recorded content CDS item with the same value as the upnp:channelNr property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:channelNr property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	5H8V6	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.9.7 for the cdsNonEPG record class.

10.3.11.9

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:genre property in the recorded content CDS item with the same value as the upnp:genre property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:genre property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	5K399	

[COMMENT] This guideline is semantically equivalent to guideline 10.3.9.8 for the cdsNonEPG record class.

10.3.11.10

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:channelID and upnp:channelID@type properties in the recorded content CDS item with the same values as the upnp:channelID and upnp:channelID@type properties contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:channelID and upnp:channelID@type properties.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	32SPN	

[COMMENT] This guideline is semantically equivalent to guidelines 10.3.9.9 and 10.3.10.5 for the cdsNonEPG and Manual record classes respectively.

10.3.11.11

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:scheduledStartTime property in the recorded content CDS item with the same value as the upnp:scheduledStartTime property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:scheduledStartTime property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	4UDNI	

[COMMENT] This value is not necessarily the actual start time of the recording, that value would be contained in the dc:date property.

This guideline is semantically equivalent to guidelines 10.3.9.10 and 10.3.10.6 for the cdsNonEPG and Manual record classes respectively.

10.3.11.12

[GUIDELINE] A UPnP AV MediaServer should expose the upnp:scheduledEndTime property in the recorded content CDS item with the same value as the upnp:scheduledEndTime property contained in the CDS item specified by the srs:scheduledCDSObjectID property, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.
- The srs:scheduledCDSObjectID property is from the recordSchedule object that spawned the recordTask.
- The CDS item specified by the srs:scheduledCDSObjectID property exposes the upnp:scheduledEndTime property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	VF9KL	

[COMMENT] This value is not necessarily the actual end time of the recording, that value can be calculated from by summing the dc:date and res@duration properties.

This guideline is semantically equivalent to guidelines 10.3.9.11 and 10.3.10.7 for the cdsNonEPG and Manual record classes respectively.

10.3.12 MM/SR query content name record class**10.3.12.1**

[GENERAL] This defines the guidelines for a UPnP AV MediaServer when implementing the optional query contentType record class for the ScheduledRecording Service

10.3.12.2

[GUIDELINE] If a UPnP AV MediaServer implements the query content name record class, then it shall respond with the value of "OBJECT.RECORDSCHEDULE.QUERY.CONTENTNAME" to the SRS:GetAllowedValues action for the srs:class property when the input parameter DataTypeID is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	YXJ47	

10.3.12.3

[GUIDELINE] If a UPnP AV MediaServer indicates support for the query content name record class as defined in guideline requirement 10.3.12.2, then a UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:matchingName property when the input parameter DataTypeID contains the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with the following:

- A value of "<allowAny></allowAny>"

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	ZVPQ5	

10.3.12.4

[GUIDELINE] If a UPnP AV MediaServer indicates support for the query content name record class as defined in guideline requirement 10.3.12.2, then a UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:matchingName@type property when the input parameter DataTypeID contains the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with at least one of the following:

- A value of "PROGRAM"
- A value of "SERIES"

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	RCX7F	

10.3.12.5

[GUIDELINE] A UPnP AV MediaServer should set the value of the dc:title property in the recorded content CDS item with the title of the programme recorded, when all of the following conditions are met.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	TZUF6	

[COMMENT] For the OBJECT.RECORDSCHEDULE.QUERY.CONTENTNAME record class, the existence of the name of the programme depends on the external databases (like Service Information) and it might not be available in a CDS item.

This guideline requirement is semantically equivalent to guideline requirement 10.3.13.5 for the Query Content ID record class.

10.3.13 MM/SR query content ID record class

10.3.13.1

[GENERAL] This defines the requirements for a UPnP AV MediaServer when implementing the optional query contentID record class for the ScheduledRecording Service.

10.3.13.2

[GUIDELINE] If a UPnP AV MediaServer implements the query content ID record class, then it shall respond with the value of "OBJECT.RECORDSCHEDULE.QUERY.CONTENTID" to the SRS:GetAllowedValues action for the srs:class property when the input parameter DataTypeId is the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	GTDQA	

10.3.13.3

[GUIDELINE] If a UPnP AV MediaServer indicates support for the query content ID record class as defined in guideline requirement 10.3.13.2, then a UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:matchingID property when the input parameter DataTypeId contains the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with the following:

- A value of "<allowAny></allowAny>"

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	L8ZJP	

10.3.13.4

[GUIDELINE] If a UPnP AV MediaServer indicates support for the query content name record class as defined in guideline requirement 10.3.13.2, then a UPnP AV MediaServer shall respond to the SRS:GetAllowedValues action for the srs:matchingID@type property when the input parameter DataTypeId contains the value A_ARG_TYPE_RecordScheduleParts or A_ARG_TYPE_RecordSchedule with at least one of the following:

- A value of "SI_PROGRAMID"
- A value of "SI_SERIESID"

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	G5O6J	

10.3.13.5

[GUIDELINE] A UPnP AV MediaServer should set the value of the dc:title property in the recorded content CDS item with the title of the programme recorded, when all of the following conditions are met.

- The UPnP AV MediaServer exposes recorded content in a ContentDirectory service.
- The recorded content is a result of the execution of a recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	23T7R	

[COMMENT] For the OBJECT.RECORDSCHEDULE.QUERY.CONTENTID record class, the existence of the name of the programme depends on the external databases (like Service Information), and it might not be available in a CDS item.

- a) This guideline is semantically equivalent to guideline 10.3.12.5 for the Query Content Name record class.

10.3.14 MM/SR query record class and EPG

10.3.14.1

[GENERAL] This defines the guidelines for a UPnP AV MediaServer when implementing the optional query contentName or contentID record classes and its interaction with the EPG Server Device Option.

10.3.14.2

[GUIDELINE] If a UPnP AV MediaServer implements the query contentName or query contentID record class as defined in guideline requirements 10.3.12 and 10.3.13 respectively, then it should implement the EPG Server Device Option, as defined 10.5.2.3, by including a <Feature> element with the Feature@name attribute equal to "EPG" in the FeatureList output argument in response to the CDS:GetFeatureList action

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008 ISO/IEC 29341-4-14:2 011	CIZ2D	

[COMMENT] It is also possible for a UPnP AV MediaServer to have internally maintained EPG information that is not exposed by the CDS. In such a case this <Feature> element is not used.

10.3.14.3

[GUIDELINE] If a UPnP AV MediaServer implements the EPG Server Device Option as defined in 10.3.14.2 and returns the value of "PROGRAM" in the response to the SRS:GetAllowedValues action for the srs:matchingName@type property as defined in 10.3.12.4, then it should expose the upnp:programTitle property for one or more current or future EPG Programme Items.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	6KBDC	

[COMMENT] The object.recordSchedule.query.ContentName recording class requires a Series or Programme Title as the match string input. The query is done by matching the upnp:programTitle property, and that there is no way a matching EPG programme item would be found if the property is not exposed. Hence, it is strongly recommended that upnp:programTitle property be exposed.

10.3.14.4

[GUIDELINE] If a UPnP AV MediaServer implements the EPG Server Device Option as defined in 10.3.14.2 and returns the value of "SERIES" in the response to the SRS:GetAllowedValues action for the srs:matchingName@type property as defined in 10.3.12.4, then it should expose the upnp:seriesTitle property for one or more current or future EPG Programme Items.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	IQ7RP	

[COMMENT] The object.recordSchedule.query.ContentName recording class requires a Series or Programme Title as the match string input. The query is done by matching the upnp:seriesTitle property, and that there is no way a matching EPG programme item would be found if the property is not exposed. Hence, it is strongly recommended that upnp:seriesTitle property is exposed as specified in this guideline.

10.3.14.5

[GUIDELINE] If a UPnP AV MediaServer implements the EPG Server Device Option as defined in 10.3.14.2 and returns the value of "SI_PROGRAMID" in the response to the SRS:GetAllowedValues action for the srs:matchingID@type property as defined in 10.3.13.4, then it should expose the upnp:programID property for one or more current or future EPG Programme Items.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	SBZCD	

[COMMENT] The object.recordSchedule.query.ContentID recording class requires a Series or Programme ID as the match string input. The query is done by matching the upnp:programID property, and that there is no way a matching EPG programme item would be found if the property is not exposed. Hence, it is strongly recommended that upnp:programID property is exposed as specified in this guideline.

10.3.14.6

[GUIDELINE] If a UPnP AV MediaServer implements the EPG Server Device Option as defined in 10.3.14.2 and returns the value of "SI_SERIESID" in the response to the SRS:GetAllowValues action for the srs:matchingID@type property as defined 10.3.13.4, then it should expose the upnp:seriesID property for one or more current or future EPG Programme Items.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	SETOI	

[COMMENT] The object.recordSchedule.query.ContentID recording class requires a Series or Programme ID as the match string input. The query is done by matching the upnp:SeriesID property, and that there is no way a matching EPG programme item would be found if the property is not exposed. Hence, it is strongly recommended that upnp:seriesID property is exposed as specified in this guideline.

10.3.15 MM/SR conflict resolution

10.3.15.1

[GENERAL] This describes the general guidelines for supporting Conflict Resolution.

10.3.15.2

[GUIDELINE] If a UPnP AV MediaServer allows the ScheduledRecording control points to resolve conflicts, then it shall use the <dlna:X_DLNACAP> element (as a child of the <device> element that represents the UPnP AV MediaServer) in the device description document and include the Capability ID "srs-conflict-resolution" in the element's comma-separated value list.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	48KL9	

[COMMENT] DMS devices use the <dlna:X_DLNACAP> element to indicate support for SRS conflict resolution operation. The element is a comma separated value list that indicates whether the DMS can resolve schedule conflicts, receive uploads of images, audio-only, or audio/video content, etc. See Guideline 9.2.35.1 for the formal syntax of the <dlna:X_DLNACAP> element. A sample description is given below:

```
<dlna:X_DLNACAP
xmlns:dlna="urn:schemas-dlna-org:device-1-0">image-upload,audio-upload,srs-conflict-
resolution,srs-cr-partial-recording</dlna:X_DLNACAP>
```

10.3.15.3

[GUIDELINE] A UPnP AV MediaServer shall implement the SRS:GetRecordScheduleConflicts and SRS:GetRecordTaskConflicts actions.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	625J2	

[COMMENT] Since there is guideline 10.3.16.7 that mandates the creation of conflicting recordSchedule(s), the UPnP AV MediaServer needs to implement these two actions.

10.3.15.4

[GUIDELINE] If a UPnP AV Media Server contains the value of "srs-conflict-resolution" in the <dlna:X_DLNACAP> then it shall implement the following actions:

- SRS:EnableRecordSchedule;

- SRS:DisableRecordSchedule;
- SRS>DeleteRecordTask;
- SRS:EnableRecordTask;
- SRS:DisableRecordTask;
- SRS:ResetRecordTask.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	J3E9B	


10.3.15.5

[GUIDELINE] A UPnP AV MediaServer should enable partial recording of a conflict loser recordTask for the duration that is not conflicting with any other recordTask or a programme winner for that duration.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	8RV4U	

[COMMENT] A UPnP AV MediaServer should record the portions of the programmes described in the shaded regions in Figure 17.

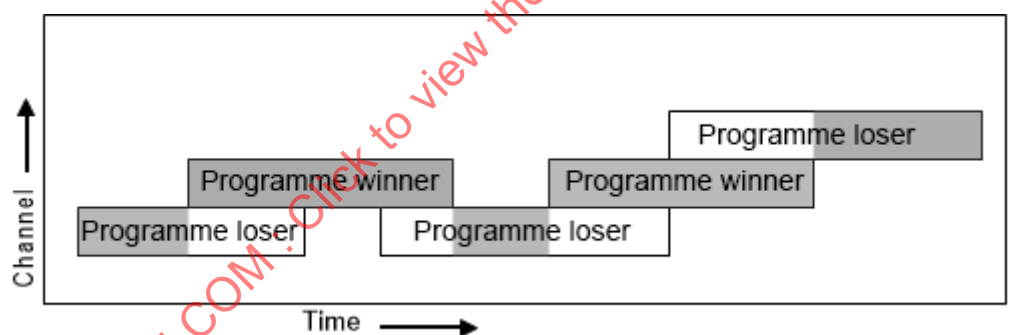

IEC

Figure 17 – Recording conflict behaviour

10.3.15.6

[GUIDELINE] If a UPnP AV MediaServer allows partial recordings as described in 10.3.15.5, then it shall use the <dlina:X_DLNA CAP> element (as a child of the <device> element that represents the UPnP AV MediaServer) in the device description document and include the Capability ID "srs-cr-partial-recording" in the element's comma-separated value list.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	3DN2V	

[COMMENT] Partial recordings can also result from other reasons, such as for example, SRS:DisableRecordTask or SRS>DeleteRecordTask actions on a recordTask that is in "ACTIVE" state. Those are not covered by this attribute.

DMS devices use the <dlina:X_DLNA CAP> element to indicate support for SRS partial recording operation. The element is a comma separated value list that indicates whether the DMS can create partial recordings, receive uploads of images, audio-only, or audio/video content, etc. See Guideline 9.2.35.1 for the formal syntax of the <dlina:X_DLNA CAP> element. A sample description is given below.

```
<dlina:X_DLNA CAP
xmlns:dlina="urn:schemas-dlna-org:device-1-0">image-upload,audio-upload,srs-conflict-resolution,srs-cr-partial-recording</dlina:X_DLNA CAP>
```

10.3.15.7

[GUIDELINE] A UPnP AV MediaServer that includes a value of "srs-conflict-resolution" in the <dlina:X_DLNA CAP> shall implement and expose the property srs:priority@orderedValue.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2011	SSUI7	

10.3.15.8

[GUIDELINE] When a UPnP AV MediaServer creates or modifies a recordTask and if that results in conflict(s) with one or more recordTask(s), then the UPnP AV MediaServer should add the value 402 (Conflicting Programme Winner) to the winning recordTask's srs:taskState@infoList property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2011	VHRPT	

10.3.15.9

[GUIDELINE] If a UPnP AV Media Server creates or modifies a recordTask and if that results in conflict(s) with one or more recordTask(s), then the UPnP AV MediaServer shall add the value 401 (Conflicting Programme Loser) to the srs:taskState@pendingErrors property of each of the losing recordTask(s). In addition, for each of the recordTask(s) that will be partially recorded, the UPnP AV MediaServer that includes "srs-cr-partial-recording" in <dlina:X_DLNA CAP> shall add the value 450 (DLNA Conflicting Partial Programme Loser) to the srs:taskState@infoList property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2011	4HIEY	

10.3.15.10

[GUIDELINE] When a UPnP AV MediaServer creates or modifies a recordTask and if that causes one or more active recordTask(s) to be stopped or suspended due to the conflict, then for each of those recordTask(s) the UPnP AV MediaServer shall add the value 401 (Conflicting Programme Loser) to the srs:taskState@currentErrors property. In addition, for each of the recordTask(s) that will be partially recorded, the UPnP AV MediaServer that includes "srs-cr-partial-recording" in <dlina:X_DLNA CAP> shall add the value 450 (DLNA Conflicting Partial Programme Loser) to the srs:taskState@infoList property.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	MOWUH	

10.3.15.11

[GUIDELINE] If a UPnP AV MediaServer creates or modifies a recordSchedule, it should create recordTask object(s) from the point it has all the necessary information in a reasonable time.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	HLLHB	

10.3.16 MM/SR SRS:CreateRecordSchedule action**10.3.16.1**

[GUIDELINE] If a UPnP AV MediaServer control point sends a SRS:CreateRecordSchedule request where the Elements input argument has the srs:class property with a value of "OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG" or "OBJECT.RECORDSCHEDULE.DIRECT.CDSEPG", then the srs:scheduledCDSObjectID property value shall contain the @id value for a CDS item with the upnp:recordable property value of "1".

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	NPXUH	

[COMMENT] The CDS object id values used to create a recordSchedule for either the cdsNonEPG or cdsEPG record classes needs to have the upnp:recordable property set to "1".

10.3.16.2

[GUIDELINE] If a UPnP AV MediaServer control point sends a SRS:CreateRecordSchedule request where the Elements input argument has the srs:class property with a value of "OBJECT.RECORDSCHEDULE.DIRECT.MANUAL", then the srs:scheduledChannelID property value shall contain the upnp:channelID property value for a CDS item with the upnp:recordable property value of "1".

[ATTRIBUTES]

M	C	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	Y75P3	

[COMMENT] The channelID values used to create a recordSchedule for the manual record class needs to have the upnp:recordable property set to "1".

10.3.16.3

[GUIDELINE] A UPnP AV MediaServer ScheduledRecording service shall return a success response to a SRS:CreateRecordSchedule request when the Elements input argument satisfies the following conditions.

- srs:class property has a value of "OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG" or "OBJECT.RECORDSCHEDULE.DIRECT.CDSEPG".
- There exists a CDS object which meets the following criteria:
 - the @id property is equal to the srs:scheduledCDSObjectID property value of the request;
 - the upnp:recordable property has a value of "1".

This guideline only applies when other error conditions are not satisfied (e.g. syntax errors, resource constraints, or content recording permissions).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	SO5WC	

10.3.16.4

[GUIDELINE] A UPnP AV MediaServer ScheduledRecording service shall return a success response to a SRS:CreateRecordSchedule request when the Elements input argument satisfies the following conditions.

- srs:class property has a value of OBJECT.RECORDSCHEDULE.DIRECT.MANUAL".
- There exists a CDS object which meets the following criteria:
 - the @id property is equal to the srs:scheduledCDSObjectID property value of the request;
 - the upnp:recordable property has a value of "1".

This guideline only applies when other error conditions are not satisfied (e.g. syntax errors, resource constraints, or content recording permissions).

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	ONPRA	

10.3.16.5

[GUIDELINE] If a UPnP AV MediaServer receives a SRS:CreateRecordSchedule action in which the Elements input argument is consistent with the set of allowed values returned by the SRS:GetAllowedValues action, then it may respond with 703 (Invalid Value) to indicate that the UPnP AV MediaServer is unable to create a recordSchedule using the requested input values.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	NCQ8F	

[COMMENT] The allowed values description returned by the SRS:GetAllowedValues action is static and does not reflect the internal real time constraints of the UPnP AV MediaServer. The UPnP AV Datastructure Template (AVDT) description cannot completely describe the semantics of a property. A UPnP AV MediaServer and a ScheduledRecording control point need to understand this limitation.

10.3.16.6

[GUIDELINE] If a UPnP AV MediaServer responds to a SRS:CreateRecordSchedule request with a UPnP AV error code, then the UPnP AV MediaServer should use a localized, human-readable error message in the <errorDescription> element of the SOAP response.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	QCK4X	

[COMMENT] The Elements input argument is an XML document and complex. Error description is helpful to identify which property generated the error response.

10.3.16.7

[GUIDELINE] A UPnP AV MediaServer shall not respond to SRS:CreateRecordSchedule request with 730 (Conflict).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	DZFPW	

[COMMENT] DLNA requires a UPnP AV MediaServer to always create a recordSchedule even in the event of a conflict.

10.3.16.8

[GUIDELINE] A UPnP AV MediaServer shall create a new recordSchedule and its associated recordTask(s) as per UPnP SRS priority model 2.8 of [ISO/IEC 29341-4-14:2011].

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	4W7K9	

10.3.16.9

[GUIDELINE] If a UPnP AV MediaServer implements the srs:priority@orderedValue, then it shall implement the additional priority model as described in the UPnP SRS priority model for orderedPriority in 2.8.2 of [ISO/IEC 29341-4-14:2011].

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	EHZ4X	

10.3.16.10

[GUIDELINE] If a UPnP AV MediaServer creates a recordSchedule in response to a SRS:CreateRecordSchedule request, it shall set new conflict winning and losing recordTask(s) as per UPnP priority model.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	YR2SY	

[COMMENT] The identification of the newly set conflict winning and losing recordTask(s) are described in guideline requirements 10.3.15.3 and 10.3.15.4.

10.3.17 MM/SR adjustment of property values for a recordSchedule or recordTask

10.3.17.1

[GENERAL] This defines the guidelines for a UPnP AV MediaServer when the UPnP AV MediaServer adjusts a recordSchedule or recordTask due to the device specific reasons.

10.3.17.2

[GUIDELINE] If a UPnP AV MediaServer creates a recordSchedule in response to the SRS:CreateRecordSchedule request, then any supported properties specified in the Elements input argument shall have the same values in the Result output argument.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	OSGDD	

[COMMENT] This guideline reiterates the behaviour described in 2.6.7.1.3 of ISO/IEC 29341-4-14:2011.

10.3.17.3

[GUIDELINE] A UPnP AV MediaServer may adjust the values of the following properties of the recordSchedule:

- srs:scheduledStartDateTime
- srs:scheduledDuration

after the UPnP AV MediaServer response to the SRS:CreateRecordSchedule request has been sent and a recordSchedule object has been created by the UPnP AV MediaServer.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	6FRXA	

[COMMENT] As described in 2.4.4 of ISO/IEC 29341-4-14:2011, the SRS.StateUpdateID state variable is incremented when a recordSchedule or recordTask is modified. The reasons of the object modification are not restricted only to any ScheduledRecording service action invocations. A ScheduledRecording control point needs to monitor the changes via the SRS.StateUpdateID state variable or the SRS.LastChange evented state variable.

10.3.17.4

[GUIDELINE] If a UPnP AV MediaServer adjusts the srs:scheduledStateDateTime or srs:scheduledDuration property values as defined in 10.3.17.3, then any adjustment shall be by a maximum of one minute.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	BZOPF	

10.3.17.5

[GUIDELINE] A UPnP AV MediaServer may adjust the value of the following properties of a recordTask to a value that is different from that of the parent recordSchedule object.

- srs:taskStartDateTime
- srs:taskDuration

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	84MAY	

[COMMENT] As described in 2.4.4 of ISO/IEC 29341-4-14:2011, the SRS.StateUpdateID state variable is incremented when a recordSchedule or recordTask is modified. The reasons of the object modification are not restricted only to any ScheduledRecording service action invocations. A ScheduledRecording control point needs to monitor the changes via the SRS.StateUpdateID state variable or the SRS.LastChange evented state variable.

10.3.17.6

[GUIDELINE] If a UPnP AV MediaServer creates a recorded content based on a recordTask and succeeds the recording of the recordTask, then the actual recorded start date and time and duration of the recorded content (i.e. upnp:recordedStartDateTime and upnp:recordedDuration properties of the resulting CDS object) may be different from the actual scheduled start date and time and duration (i.e. srs:taskStartDateTime and srs:taskDuration properties) of the recordTask.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	MZOBH	

[COMMENT] As described in 2.2.2.22 and 2.2.2.25 of ISO/IEC 29341-4-14:2011, the actual start date and time and duration of the recordTask may include any device specific latencies of record startup and/or teardown. A ScheduledRecording control point may not be able to retrieve the latencies from any properties of the recordTask.

10.3.17.7

[GUIDELINE] A UPnP AV MediaServer should start the recording at or before the value of srs:taskStartDateTime of a recordTask and should stop the recording at or after the scheduled end time of the recordTask.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	KTCGR	

[COMMENT] The scheduled end time of the recordTask is the result of combination of srs:taskStartDateTime and srs:taskDuration of the recordTask.

10.3.18 MM/SR SRS:GetPropertyList action

[GUIDELINE] If a UPnP AV MediaServer includes the value of "srs-conflict-resolution" in the <dlina:X_DLNAACAP>, then it shall include the property srs:priority@orderedValue in the PropertyList output argument in response to a SRS:GetPropertyList request.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	TUOEG	

10.3.19 MM/SR SRS:DeleteRecordSchedule action

10.3.19.1

[GUIDELINE] If a UPnP AV MediaServer that includes the value of "srs-conflict-resolution" in the <dlina:X_DLNAACAP> cannot ensure that all the intended recordTask(s) are deleted within 27 s in response to the SRS:DeleteRecordSchedule request then it shall respond with 720 (cannot process the request).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	GO7PJ	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.19.2

[GUIDELINE] If a UPnP AV MediaServer that does not include the value of "srs-conflict-resolution" in the <dlina:X_DLNAACAP> cannot ensure that all the intended recordTask(s) are deleted within 27 s in response to the SRS:DeleteRecordSchedule request then it should respond with 720 (cannot process the request).

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	7A2UX	

UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.20 MMSR SRS:GetRecordSchedule action

[GUIDELINE] If a UPnP AV MediaServer cannot process a SRS:GetRecordSchedule request within 27 s, then it shall respond with 720 (cannot process the request).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	MCWTT	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.21 MM/SR SRS:EnableRecordSchedule action

[GUIDELINE] If a UPnP AV MediaServer cannot ensure that the enabled recordTask(s) that resulted from SRS:EnableRecordSchedule action, and are in "ACTIVE" phase, cannot start within 60 s, then the SRS:EnableRecordSchedule action shall return with 720 (cannot process the request). The UPnP AV MediaServer shall return this error within 27 s.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	KZXAY	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.22 MM/SR SRS:DisableRecordSchedule action

[GUIDELINE] If a UPnP AV MediaServer, in response to SRS:DisableRecordSchedule action, cannot ensure that all the intended recordTask(s) are disabled within 27 s, then the SRS:DisableRecordSchedule action shall fail with a return error code 720 (cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	VH55K	

[COMMENT] A UPnP AV MediaServer can take a long time to disable all intended recordTask(s), but the UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5). So, in order to ensure a consistent UPnP AV MediaServer behaviour, a status response from the UPnP AV MediaServer within 30 s is useful for the UPnP control point.

10.3.23 MM/SR SRS:GetRecordTask action

[GUIDELINE] If a UPnP AV MediaServer cannot process SRS:GetRecordTask within 27 s, then the SRS:GetRecordTask action shall fail with a return error code 720 (cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	VUU6G	

[COMMENT] A UPnP control point may terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.24 MM/SR SRS:EnableRecordTask action

[GUIDELINE] If the target recordTask specified in the SRS:EnableRecordTask request is in the "ACTIVE" phase and if the UPnP AV MediaServer cannot ensure that the enabled recording

start within 60 s, then the SRS:EnableRecordTask action shall return with error code 720 (cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	A2QKT	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.25 MM/SR SRS:ResetRecordTask action

[GUIDELINE] If a UPnP AV MediaServer can not process SRS:ResetRecordTask request within 27 s, then this request shall return with error code 720 (cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	C787G	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.26 MM/SR SRS:GetRecordScheduleConflicts action

[GUIDELINE] If a UPnP AV MediaServer cannot process SRS:GetRecordScheduleConflicts request within 27 s, then it shall respond with 720 (cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	4SOLH	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.27 MM/SR SRS:GetRecordTaskConflicts action

[GUIDELINE] If a UPnP AV MediaServer cannot process SRS:GetRecordTaskConflicts request within 27 s, then it shall respond with 720 (cannot process the request).

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	TWZDX	

[COMMENT] A UPnP control point can terminate the TCP connection after 30 s (see 9.2.9.5), so in order to have a consistent behaviour, the UPnP AV MediaServer needs to return this error within 27 s.

10.3.28 MM/SR open-end recording**10.3.28.1**

[GENERAL] This defines the guidelines for a UPnP AV MediaServer when an open-end recording is requested by a ScheduledRecording control point. Duration of an "open-end" recording is determined by the UPnP AV MediaServer.

10.3.28.2

[GUIDELINE] A UPnP AV MediaServer may implement Open-end Recording.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	44YZR	

10.3.28.3

[GUIDELINE] If a UPnP AV MediaServer implements Open-end Recording, then the UPnP AV MediaServer shall implement Open-end Recording for at least one of the following record classes:

- OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG
- OBJECT.RECORDSCHEDULE.DIRECT.MANUAL

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	TV55X	

10.3.28.4

[GUIDELINE] The UPnP AV MediaServer shall not implement Open-end Recording for record classes other than the following:

- OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG
- OBJECT.RECORDSCHEDULE.DIRECT.MANUAL

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	D97BI	

10.3.28.5

[GUIDELINE] If a UPnP AV MediaServer implements Open-end Recording, it shall include the value of `dlna:openDuration` in response to the `SRS:GetPropertyList` action when the `DataTypeID` input argument is the value `A_ARG_TYPE_RecordScheduleParts`, `A_ARG_TYPE_RecordSchedule` or `A_ARG_TYPE_RecordTask`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	KJSNG	

10.3.28.6

[GUIDELINE] If a UPnP AV endpoint includes a `dlina:openDuration` element in `A_ARG_TYPE_RecordScheduleParts`, `A_ARG_TYPE_RecordSchedule` and `A_ARG_TYPE_RecordTask`, then it shall use the semantics and syntax as stated in Table 31.

Table 31 – `dlina:openDuration` Property Type and Multi Value

Property Name	Property Type	Multiple Value
<code>dlina:openDuration</code>	<code>xsd:boolean</code>	No

The value of `dlina:openDuration` element shall be one of the following. The default value is "0".

- "1" when the recording is Open-end recording.
- "0" when the recording is not Open-end recording.

The prefix for `dlina:openDuration` shall be "dlina" and the namespace shall be "urn:schemas-dlna-org:metadata-1-0/".

[ATTRIBUTES]

M	A	DMS +SR+	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	IDGSQ	

10.3.28.7

[GUIDELINE] If a UPnP AV MediaServer implements Open-end Recording, the UPnP AV MediaServer shall respond to the `SRS:GetAllowedValues` action for the `dlina:openDuration` property with the `PropertyInfo` output argument which contains an AVDT description for `dlina:openDuration` that is consistent with guidelines 10.3.28.3, 10.3.28.4, and 10.3.28.6.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	YU6OF	

[COMMENT] In case that the Open-end Recording is available for `cdsNonEPG` and manual class recordings, the concrete examples of `<field>` element in the AVDT description are as follows:

When the `DataTypeID` input argument is the value `A_ARG_TYPE_RecordScheduleParts`,

```
<field>
  <name>dlina:openDuration</name>
  <dataType>xsd:boolean</dataType>
  <allowedValueDescriptor>
    <defaultValue>0</defaultValue>
    <dependentField>
      <name>srs:class</name>
      <valueList>
        <value>OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG</value>
        <value>OBJECT.RECORDSCHEDULE.DIRECT.MANUAL</value>
      </valueList>
    </dependentField>
  </allowedValueDescriptor>
  <allowedValueList>
    <allowedValue>0</allowedValue>
    <allowedValue>1</allowedValue>
  </allowedValueList>
</field>
```

```

    </allowedValueList>
  </allowedValueDescriptor>
</field>

```

When the `DataTypeID` input argument is the value `A_ARG_TYPE_RecordSchedule`,

```

<field>
  <name>dlina:openDuration</name>
  <dataType>xsd:boolean</dataType>
  <allowedValueDescriptor>
    <minCount>1</minCount>
    <dependentField>
      <name>srs:class</name>
      <valueList>
        <value>OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG</value>
        <value>OBJECT.RECORDSCHEDULE.DIRECT.MANUAL</value>
      </valueList>
    </dependentField>
    <allowedValueList>
      <allowedValue>0</allowedValue>
      <allowedValue>1</allowedValue>
    </allowedValueList>
  </allowedValueDescriptor>
</field>

```

When the `DataTypeID` input argument is the value `A_ARG_TYPE_RecordTask`,

```

<field>
  <name>dlina:openDuration</name>
  <dataType>xsd:boolean</dataType>
  <allowedValueDescriptor>
    <minCount>1</minCount>
    <allowedValueList>
      <allowedValue>0</allowedValue>
      <allowedValue>1</allowedValue>
    </allowedValueList>
  </allowedValueDescriptor>
</field>

```

10.3.28.8

[GUIDELINE] If a UPnP AV MediaServer control point creates a recordSchedule in which the `dlina:openDuration` property has a value of "1", then it shall specify "P00:00:00" as the value of the `srs:scheduledDuration` element in the request of `SRS:CreateRecordSchedule` action.

[ATTRIBUTES]

M	A	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	KKQRH	

[COMMENT] ISO/IEC 29341-4-14:2011 requires a ScheduledRecording control point to always specify a value for the `srs:scheduledDuration` property when creating a `cdsNonEPG` or manual record class recordSchedule. This guideline defines the value to be used in the request when an Open-end Recording is desired.

10.3.28.9

[GUIDELINE] If a UPnP AV MediaServer implements Open-end Recording, the UPnP AV MediaServer shall return a success response to a SRS:CreateRecordSchedule request when the Elements input argument satisfies the following conditions.

- srs:class property has a value of "OBJECT.RECORDSCHEDULE.DIRECT.CDSNONEPG" or "OBJECT.RECORDSCHEDULE.DIRECT.MANUAL".
- srs:scheduledDuration has a value of "P00:00:00".
- dlina:openDuration property has a value of "1".

This guideline only applies when error conditions are not satisfied (e.g. syntax errors, resource constraints, or content recording permissions).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	VCTAV	

10.3.28.10

[GUIDELINE] If a UPnP AV MediaServer creates a recordTask based on a recordSchedule in which the dlina:openDuration property has a value of "1", the value of srs:taskDuration property of the recordTask shall be "P00:00:00" until the UPnP AV MediaServer determines the exact duration.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	JPYH6	

10.3.29 MM/SR media format specified recording**10.3.29.1**

[GENERAL] This contains guidelines which define the optional media format specified recording scheme using a DLNA Media Format Profile.

10.3.29.2

[GUIDELINE] A UPnP AV MediaServer may accept dlina:desiredPN as an element in A_ARG_TYPE_RecordScheduleParts for media format specified recording. The semantics and syntax of dlina:desiredPN element is defined in 10.3.29.4.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	4L8AD	

[COMMENT] DLNA introduces optional media format specified recording mechanism in this requirement. If a UPnP AV MediaServer control point uses this mechanism, then it can improve the playback of the recorded contents with its supported DLNA Media Format Profile.

10.3.29.3

[GUIDELINE] If a UPnP AV MediaServer accepts `dlna:desiredPN` element in `A_ARG_TYPE_RecordScheduleParts`, then it shall implement `dlna:PN` as an element in `A_ARG_TYPE_RecordTask` state variable for media format specified recording. The semantics and syntax of `dlna:PN` element is defined in 10.3.29.6.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	LESSU	

10.3.29.4

[GUIDELINE] If a UPnP AV MediaServer or UPnP AV MediaServer control point includes a `dlna:desiredPN` element in `A_ARG_TYPE_RecordScheduleParts`, `A_ARG_TYPE_RecordSchedule` or `A_ARG_TYPE_RecordTask`, then it shall use the following semantics and syntax.

The syntax definition of `dlna:desiredPN` element shall be as stated in Table 32.

Table 32 – `dlna:desiredPN` property type and multi value

Property name	Property type	Multiple value
<code>dlna:desiredPN</code>	CSV(String)	No

The value of `dlna:desiredPN` element shall be one of the following.

- One DLNA Media Format Profile.
- "AUTO" (This meaning is that the UPnP AV MediaServer is free to use any DLNA Media Format Profiles.).
- One CSV list which includes "AUTO" and/or DLNA Media Format Profile(s).

If the value of `dlna:desiredPN` is a CSV list, then the DLNA Media Format Profiles in the CSV list shall be ordered in the preferred formats for the recording, where the first format is the most preferred. If "AUTO" is included in the list, it shall appear as the last value in the list and it indicates that if none of the preceding values are available, then the UPnP AV MediaServer is free to use any DLNA Media Format Profiles to maximize the probability that the recording actually takes place.

In addition, the DLNA Media Format Profile shall omit the DLNA Link Protection prefix, e.g. "DTCP_" for DTCP-IP and "WMDRM_" for WMDRM-ND.

The prefix for `dlna:desiredPN` shall be "dlna" and the namespace shall be "urn:schemas-dlna-org:metadata-1-0/".

[ATTRIBUTES]

M	A	DMS +SR+	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	T9VRU	

[COMMENT] Example usages for `dlna:desiredPN` would be as follows:

- `<dlna:desiredPN>MPEG_TS_JP_T</dlna:desiredPN>`
- `<dlna:desiredPN>AUTO</dlna:desiredPN>`

- `<dlina:desiredPN> MPEG_TS_JP_T,MPEG_PS_NTSC,AUTO</dlina:desiredPN>`

10.3.29.5

[GUIDELINE] A UPnP AV MediaServer shall accept the value "AUTO" for the `dlina:desiredPN` element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	XYGA5	

[COMMENT] The value and semantics for "AUTO" needs to be implemented by a UPnP AV MediaServer.

10.3.29.6

[GUIDELINE] If a UPnP AV MediaServer includes a `dlina:PN` element in `A_ARG_TYPE_RecordTask`, then it shall use the following semantics and syntax.

The syntax definition of a `dlina:PN` element shall be as stated in Table 33.

Table 33 – `dlina:PN` property type and multi value

Property name	Property type	Multiple value
<code>dlina:PN</code>	String	No

The value of `dlina:PN` element shall be one DLNA Media Format Profile which will be used the recording. When the `recordTask` is in the "IDLE" phase, this property shall contain a best-known estimate of DLNA Media Format Profile for the recording. When the `recordTask` is in the "ACTIVE" or "DONE" phase, this property shall contain one of the DLNA Media Format Profiles supported by the UPnP AV MediaServer for the actual recording.

In addition, the property value shall not include any profile that has the DLNA Link Protection prefix, e.g. "DTCP_" for DTCP-IP and "WMDRM_" for WMDRM-ND.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	9K9SU	

[COMMENT] "AUTO" is not allowed for the value of this element. An example usage for the `dlina:PN` element would be as follows:

- `<dlina:PN>MPEG_PS_NTSC</dlina:PN>`

10.3.29.7

[GUIDELINE] If a UPnP AV MediaServer control point does not specify DLNA Media Format Profile(s), then it shall omit a `dlina:desiredPN` element or specify only "AUTO" as the value of the `dlina:desiredPN` element in the request of `SRS:CreateRecordSchedule` action.

[ATTRIBUTES]

M	A	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	FZIUX	

[COMMENT] If a UPnP AV MediaServer control point omits a `dlna:desiredPN` element or specifies only "AUTO" as the value of the `dlna:desiredPN` element, then the UPnP AV MediaServer is free to select a DLNA Media Format Profile for the recording.

10.3.29.8

[GUIDELINE] If a UPnP AV MediaServer control point requests to record a content using one DLNA Media Format Profile from the CSV list of the `dlna:desiredPN` element, then it shall not include "AUTO" in the CSV list of `dlna:desiredPN` element on the request of `SRS:CreateRecordSchedule` action.

[ATTRIBUTES]

M	A	+SR+	n/a	n/a	ISO/IEC 29341-4-14:2 011	JUP3C	

[COMMENT] This guideline enables a UPnP AV MediaServer control point to request to record a content using the DLNA Media Format Profile which is specified on the request of `SRS:CreateRecordSchedule` action.

10.3.29.9

[GUIDELINE] If a UPnP AV MediaServer accepts `dlna:desiredPN` element, then it shall create one or more `recordTask(s)` with `dlna:PN` element regardless of whether the UPnP AV MediaServer control point specifies the `dlna:desiredPN` element or not.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	ZI2N7	

[COMMENT] A UPnP AV MediaServer control point can retrieve the selected DLNA Media Format Profile for the recording via the response of `SRS:BrowseRecordTasks` action which has the `dlna:PN` element in advance.

10.3.29.10

[GUIDELINE] If a UPnP AV MediaServer accepts a `dlna:desiredPN` element, then it shall adhere to the following rules for selecting a DLNA Media Format Profile for a `dlna:PN` element and a level of recording quality for a `srs:recordQuality` element.

- If a UPnP AV MediaServer control point omits `dlna:desiredPN` element or specifies only "AUTO" in the `dlna:desiredPN` element, then the UPnP AV MediaServer shall select the acceptable and most preferable level of recording quality from CSV list of a `srs:desiredRecordQuality` element and the corresponding DLNA Media Format Profile.
- If there are some acceptable combinations that the selected value of `dlna:desiredPN` is not "AUTO", then the UPnP AV MediaServer shall select the acceptable and the best combination of level of recording quality from the CSV list of the `srs:desiredRecordQuality` element and DLNA Media Format Profile from the CSV list of `dlna:desiredPN` element with an acceptable and most preferable DLNA Media Format Profile.
- If a UPnP AV MediaServer control point doesn't include "AUTO" in a `dlna:desiredPN` element and there is no acceptable combination, then the UPnP AV MediaServer shall select the acceptable and most preferable specified DLNA Media Format Profile from the CSV list of

a `dlna:desiredPN` element and the corresponding level of recording quality from CSV list of `srs:desiredRecordQuality`.

- If a UPnP AV MediaServer control point omits a `srs:desiredRecordQuality` element or specifies only "AUTO" in the `srs:desiredRecordQuality` element, then the UPnP AV MediaServer shall select the acceptable and most preferable specified DLNA Media Format Profile from the CSV list of a `dlna:desiredPN` element and the corresponding level of recording quality.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	73XFC	

[COMMENT] This requirement for a UPnP AV MediaServer provides selection criteria of recording quality and the DLNA Media Format Profile that a UPnP AV MediaServer control point specified.

In this guideline, there are four criteria according to the following combination of specified recording qualities and DLNA Media Format Profiles.

- 1) Only recording qualities are specified.
- 2) Both recording qualities and DLNA Media Format Profiles are specified
 - A UPnP AV MediaServer will be able to record using one of the requested recording qualities and one of the DLNA Media Format Profiles.
 - A UPnP AV MediaServer will not be able to record using one of the requested recording qualities and one of DLNA Media Format Profiles.
- 3) Only DLNA Media Format Profiles are specified.
- 4) If a UPnP AV MediaServer control point specifies DLNA Media Format Profiles, then the DLNA Media Format Profiles take precedence of the recording qualities since the control point wants to play back the recorded content with the specified DLNA Media Format Profiles. The timing of the selection is vendor dependent.

10.3.29.11

[GUIDELINE] If a UPnP AV MediaServer implements `dlna:desiredPN` property, it shall include the value of `dlna:desiredPN` in response to the `SRS:GetPropertyList` action when the `DataTypeID` input argument is the value `A_ARG_TYPE_RecordScheduleParts`, `A_ARG_TYPE_RecordSchedule` or `A_ARG_TYPE_RecordTask`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	36UYV	

10.3.29.12

[GUIDELINE] If a UPnP AV MediaServer implements `dlna:PN` property, it shall include the value of `dlna:PN` in response to the `SRS:GetPropertyList` action when the `DataTypeID` input argument is the value `A_ARG_TYPE_RecordTask`.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	HWUAU	

10.3.29.13

[GUIDELINE] If a UPnP AV MediaServer implements `dlna:desiredPN` property, then it shall respond to the `SRS:GetAllowedValues` action for the `dlna:desiredPN` property with the `PropertyInfo` output argument which contains an AVDT description for `dlna:desiredPN` that is consistent with guideline 10.3.29.4. The allowed values in the AVDT description shall be listed in order of quality from highest quality to lowest. The value "AUTO" shall always be present and appear as the last item in the list.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	TKB45	

[COMMENT] DLNA does not define the ordering of quality between DLNA Media Format Profiles. The specific ordering is vendor-dependent, and is communicated through the AVDT description. For example, if the vendor defines the ordering of the recording quality for DLNA Media Format Profiles to be `MPEG_TS_JP_T` > `MPEG_PS_NTSC` and the `DataTypeID` input argument value is `A_ARG_TYPE_RecordScheduleParts`, the concrete example of the AVDT description that adheres to this requirement is as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<AVDT
  xmlns:xsd=http://www.w3.org/2001/XMLSchema
  xmlns="urn:schemas-upnp-org:av:avdt"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="urn:schemas-upnp-org:av:avdt
    http://www.upnp.org/schemas/av/avdt-v1-20060531.xsd">
  <contextID>
    uuid:device-UUID::urn:schemas-upnp-org:service:ScheduledRecording:1
  </contextID>
  <dataStructType>A_ARG_TYPE_RecordScheduleParts</dataStructType>
  <fieldTable>
    <field>
      <name>dlna:desiredPN</name>
      <dataType csv="xsd:string" maxSize="256">xsd:string</dataType>
      <maxListSizeTotal>UNBOUNDED</maxListSizeTotal>
      <allowedValueDescriptor>
        <defaultValue>AUTO</defaultValue>
        <allowedValueList>
          <allowedValue>MPEG_TS_JP_T</allowedValue>
          <allowedValue>MPEG_PS_NTSC</allowedValue>
          <allowedValue>AUTO</allowedValue>
        </allowedValueList>
      </allowedValueDescriptor>
    </field>
  </fieldTable>
</AVDT>
```

10.3.29.14

[GUIDELINE] If a UPnP AV MediaServer implements `dlna:PN` property, then it shall respond to the `SRS:GetAllowedValues` action for the `dlna:PN` property with the `PropertyInfo` output argument which contains an AVDT description for `dlna:PN` that is consistent with guideline requirement 10.3.29.6. The allowed values in the AVDT description shall be listed in order of quality from highest quality to lowest.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	ORUDT	


[COMMENT] In case that the ordering of the recording quality of DLNA Media Format Profile is MPEG_TS_JP_T > MPEG_PS_NTSC, the concrete example of the AVDT description that adheres to this requirement is as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<AVDT
  xmlns:xsd=http://www.w3.org/2001/XMLSchema
  xmlns="urn:schemas-upnp-org:av:avdt"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="urn:schemas-upnp-org:av:avdt
http://www.upnp.org/schemas/av/avdt-v1-20060531.xsd">
  <contextID>
    uuid:device-UUID::urn:schemas-upnp-org:service:ScheduledRecording:1
  </contextID>
  <dataStructType>A_ARG_TYPE_RecordTask</dataStructType>
  <fieldTable>
    <field>
      <name>dlna:PN</name>
      <dataType maxSize="256">xsd:string</dataType>
      <allowedValueDescriptor>
        <minCount>1</minCount>
        <allowedValueList>
          <allowedValue>MPEG_TS_JP_T</allowedValue>
          <allowedValue>MPEG_PS_NTSC</allowedValue>
        </allowedValueList>
      </allowedValueDescriptor>
    </field>
  </fieldTable>
</AVDT>
```

10.3.30 EPG, SRS, and CDS object lifespan guidelines

10.3.30.1 General

Subclause 10.3.30 defines the guidelines for a UPnP AV MediaServer when implementing the optional EPG Server Device Option and the Scheduled Recording Device Option. It defines the "lifespan" requirements for recordSchedule and recordTask of cdsEPG record class, CDS objects generated by a recordTask, and EPG Programme Items, see Figure 18.

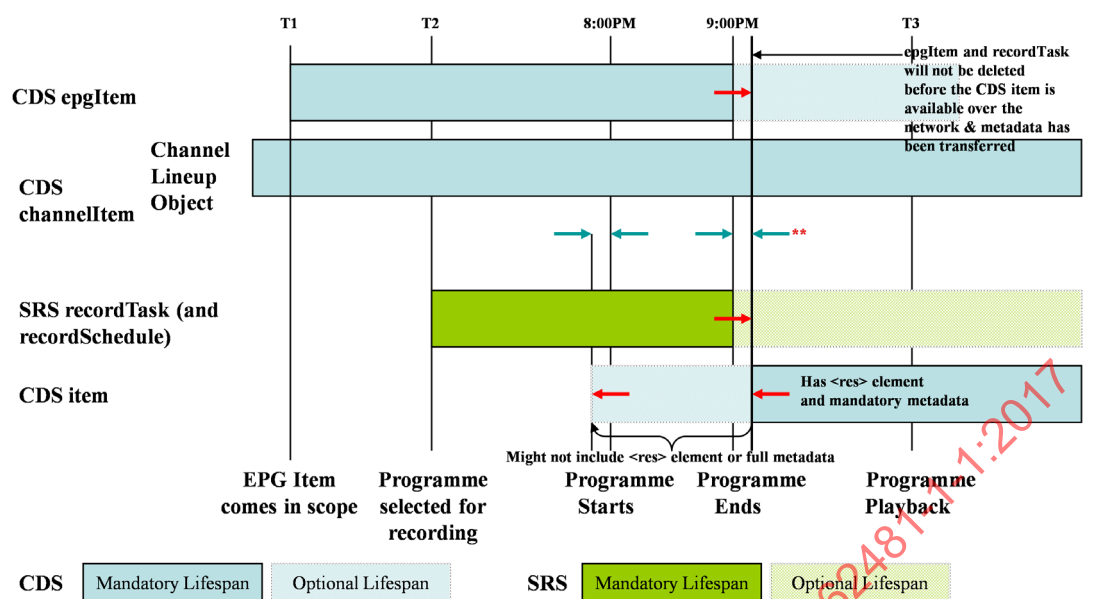

IEC

Figure 18 – CDS and SRS object lifetimes

10.3.30.2 MM/SR EPG Programme Items lifetime

10.3.30.2.1

[GUIDELINE] An EPG Programme Item shall exist until the `upnp:scheduledEndTime`.

[ATTRIBUTES]

M	A	DMS	M-MDS	n/a	ISO/IEC 29341-4-12:2 008	VRL2U	

[COMMENT] An EPG Programme Item could be assumed to exist before the `upnp:scheduledStartTime`.

10.3.30.2.2

[GUIDELINE] If an EPG Programme Item has a `upnp:channelID` property value which refers to a CDS channel item, then the CDS channel item shall exist in a Tuner container.

[ATTRIBUTES]

M	A	DMS	M-MDS	n/a	ISO/IEC 29341-4-12:2 008	SPUWB	

10.3.30.3 MM/SR recordTask lifespan

10.3.30.3.1

[GENERAL] 10.3.30.3 defines the guidelines for a UPnP AV MediaServer when implementing the Scheduled Recording Device Option. It defines the "lifespan" requirements for recordTask.

10.3.30.3.2

[GUIDELINE] For the purposes of these guidelines, if the UPnP AV MediaServer does not expose the recorded content in the CDS, then an SRS recordTask is considered "Completed" when the srs:taskState property is set to one of the following values.

- DONE.FULL
- DONE.PARTIAL
- DONE.EMPTY

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	9SQV4

[COMMENT] This guideline defines the meaning of "Completed" for an SRS recordTask. The completion of a recordTask is a key event for guidelines defining the lifespan of EPG, SRS, and CDS objects.

10.3.30.3.3

[GUIDELINE] For the purposes of these guidelines, if the UPnP AV MediaServer exposes the recorded content in the CDS, an SRS recordTask is considered "Completed" when one of the following two conditions are met.

- The srs:taskState property value is set to DONE.EMPTY.
- The srs:taskState property value is set to DONE.FULL or DONE.PARTIAL and
 - the CDS object associated with the recordTask exists, and
 - res property with a URI for streaming playback is available.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	U8MPL

[COMMENT] This guideline defines the meaning of "Completed" for an SRS recordTask. The completion of a recordTask is a key event for guidelines defining the lifespan of EPG, SRS, and CDS objects.

10.3.30.3.4

[GUIDELINE] A UPnP AV MediaServer shall retain the recordTask object that is in "ACTIVE" phase until the scheduled endtime of the recordTask, regardless of whether errors, conflicts, or other conditions that allow the recordTask to complete successfully or not.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	4OZNM

[COMMENT] UPnP AV MediaServer control points need to retrieve the current status of a recordTask via the SRS:BrowseRecordTasks action during the expected recording time.

10.3.30.3.5

[GUIDELINE] When a UPnP AV MediaServer receives an SRS:DeleteRecordTask action on a recordTask, it shall delete the recordTask object. This guideline overrides the guideline 10.3.30.3.4 for the SRS:DeleteRecordTask case.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	7OTK7	

10.3.30.3.6

[GUIDELINE] A UPnP AV MediaServer shall retain a recordSchedule object until all its associated recordTask objects have been deleted.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	84KL6	

[COMMENT] A recordTask can only exist with a parent recordSchedule and when it is never orphaned. The recordScheduleID property contains the value of the @id property of the recordSchedule that generated the recordTask. A SRS:DeleteRecordSchedule action on a recordSchedule object with one or more associated recordTask objects in the "ACTIVE" phase will generate error 705.

10.3.30.3.7

[GUIDELINE] A UPnP AV MediaServer should retain a recordTask after the associated recording is completed, where "completed" is defined in 10.3.30.3.2 and 10.3.30.3.3.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	CT53F	

[COMMENT] When a recordTask's end time is reached (that is: the content is no longer available) or a fatal error is detected, the associated recording finishes. If the UPnP AV MediaServer retains a recordTask after the associated recording finishes, the srs:taskState@phase attribute of the recordTask has the value of "DONE". A recordTask in which the srs:taskState@phase attribute has the value of "DONE" may have information about a recorded content and/or error(s). Some UPnP AV MediaServers may not be able to retain a recordTask in which the srs:taskState@phase attribute has the value of "DONE" due to the device specific reasons. Furthermore, some UPnP AV MediaServers may not be able to retain a recordSchedule in which the srs:scheduleState property has the value of "COMPLETED" due to the device specific reasons.

10.3.30.3.8

[GUIDELINE] If a UPnP AV MediaServer always retains a recordTask which has the srs:taskState@phase attribute with a value of "DONE", then it shall use the <dlna:X_DLNACAP> element (as a child of the <device> element that represents the UPnP AV MediaServer) in the device description document and include the CapabilityID "srs-rt-done-retained" in the element's comma-separated value list. Conversely, if a UPnP AV MediaServer does not always retain a recordTask which has the srs:taskState@phase attribute with a value of "DONE", it shall

not include the Capability ID "srs-rt-done-retained" in the <dlina:X_DLNACAP> element's comma-separated value list in the device description document.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	EXKO4	

[COMMENT] A UPnP MediaServer control point can understand that it may be able to retrieve the result of a recordTask in the UPnP AV MediaServer.

10.3.30.3.9

[GUIDELINE] If a UPnP AV MediaServer can always indicate the unsuccessful completion of a recordTask by retaining the recordTask after the srs:scheduledEndTime, then it shall use the <dlina:X_DLNACAP> element 9.2.35.1 in the device description document and include the Capability ID "srs-rt-can-report-unsuccessful-completion" in the element's comma-separated value list.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	8NYC7	

10.3.30.3.10

[GUIDELINE] If a UPnP AV MediaServer always retains a recordTask as per 10.3.30.3.8 or 10.3.30.3.9 then it shall use the <dlina:X_DLNACAP> element (as a child of the <device> element that represents the UPnP AV MediaServer) in the device description document and include the capability ID and its value in the element's comma-separated value list in the format "srs-rt-retention-period-duration" where "srs-rt-retention-period-" is a literal string. The duration portion shall be a ui4 value or "infinity", indicating the number of seconds the recordTask is retained by the device after the recording is completed or aborted. The duration portion cannot be zero.

More formally, the syntax of the capability ID is defined in Table 34.

Table 34 – Capability ID syntax

Capability ID	Description
srs-rt-retention-period-duration	The UPnP AV MediaServer supports retaining recordTask for a specific duration after "ACTIVE" state.
- srs- retention- capability-id = "srs-rt-retention-period-" duration - duration = <ui4 value> "infinity" - The "srs-rt-retention-period-" is a literal. The duration shall have a non-zero ui4 value or the literal "infinity". If it is ui4 value, then it represents the number of seconds the recordTask will be retained by the device. The literal "infinity" represents that the device will retain the recordTask until it is explicitly deleted.	

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	CJ6IL	

[COMMENT] AV MediaServer devices use the <dlna:X_DLNAAP> element to indicate to control points their recordTask retention periods. See Guideline 9.2.35.1 for the formal syntax of the <dlna:X_DLNAAP> element. Sample descriptions are given below.

```
<dlna:X_DLNAAP xmlns:dlna="urn:schemas-dlna-org:device-1-0">
  srs-rt-retention-period-100
</dlna:X_DLNAAP>
```

```
<dlna:X_DLNAAP xmlns:dlna="urn:schemas-dlna-org:device-1-0">
  srs-rt-retention-period-128
</dlna:X_DLNAAP>
```

```
<dlna:X_DLNAAP xmlns:dlna="urn:schemas-dlna-org:device-1-0">
  srs-rt-retention-period-infinity
</dlna:X_DLNAAP>
```

10.3.30.3.11

[GUIDELINE] If a UPnP AV MediaServer returns a <Feature> element in response to the CDS:GetFeatureList request with the Feature@name attribute set to a value of "DLNA.ORG_SRS_CONTENT", then it should implement srs:recordedCDSObjectID property for recordTask(s).

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	6VDID	

[COMMENT] This guideline is a clarification that a recordTask is able to have a srs:recordedCDSObjectID property value.

10.3.30.3.12

[GUIDELINE] If a UPnP AV MediaServer returns a <Feature> element in response to the CDS:GetFeatureList request with the Feature@name attribute set to a value of "DLNA.ORG_SRS_CONTENT", and the srs:recordedCDSObjectID property of a recordTask exists, then the srs:recordedCDSObjectID property shall have the value of the @id property of a CDS object which exists in the CDS and represents the content recorded by the recordTask.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	CHAAK	

10.3.30.3.13

[GUIDELINE] If a UPnP AV MediaServer returns a <Feature> element in response to the CDS:GetFeatureList request with the Feature@name attribute set to a value of "DLNA.ORG_SRS_CONTENT", and the srs:recordedCDSObjectID property of a recordTask exists, then the value of srs:recordedCDSObjectID property of a recordTask should be set in 27 s after the recordTask is created.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	MDYI4	

[COMMENT] It is recommended to create the srs:recordedCDSObjectID as early as possible (possibly before the recording starts) so that it can be tracked. However it is possible for some implementations to set this property after the recording is complete.

10.3.30.3.14

[GUIDELINE] A UPnP AV MediaServer may change the values of the srs:taskStartDateTime and/or srs:taskDuration properties of a recordTask due to the updates of the associated programme information in the device internal programme information source in the case of cdsEPG record class.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-14:2 011	PT2EL


[COMMENT] A ScheduledRecording control point may be able to know the occurrence of changes via the event notifications.

10.4 Extended Tuner media management guidelines

10.4.1 General

The Basic Tuner guidelines were based on initial version of the DLNA interoperability guidelines and were not based on the UPnP TUNER feature. DLNA is aligning devices that implement to UPnP AV MediaServer:2 and above to implement the UPnP TUNER feature.

The UPnP TUNER feature allows UPnP AV MediaServers to implement one or more tuner containers and each of these container's CDS object ids as listed in the UPnP TUNER feature. In the DLNA Extended Tuner these tuner containers are modeled as Channel Lineup Containers, Presets Containers, and Virtual Tuner Containers. An Extended Tuner will contain at least one Channel Lineup Container. The Presets Container and Virtual Tuner Containers are optional. Figure 19 illustrates an Extended Tuner and its containers.

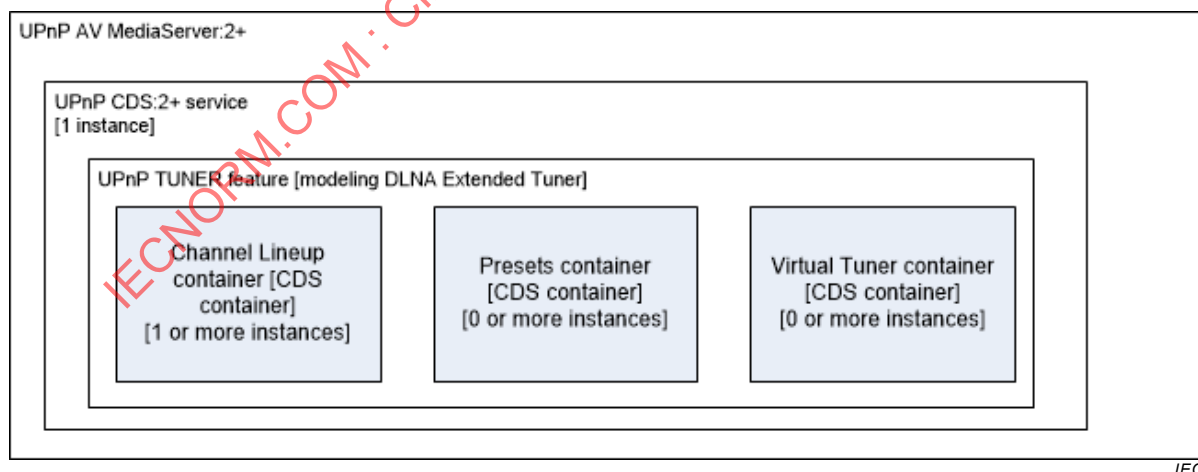

IEC

Figure 19 – Extended Tuner and its containers

10.4.2 MM/ET Extended Tuner guidelines

10.4.2.1

[GUIDELINE] A UPnP AV MediaServer that implements to ISO/IEC 29341-4-3 may implement an Extended Tuner.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-3	UCVFO	

[COMMENT] Implementation of the DLNA Extended Tuner guidelines is optional in DLNA.

10.4.2.2

[GUIDELINE] If a UPnP AV MediaServer implements the EPG Server Device Option, as defined in 10.5.2.3, by including a <Feature> element with the Feature@name attribute equal to "EPG" in the FeatureList output argument in response to the CDS:GetFeatureList action and the ScheduledRecording Device Option, then it shall implement an Extended Tuner.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-3	MNH6T	

[COMMENT] Implementation of the DLNA Extended Tuner guidelines is mandated when implementing both the ScheduledRecording Device Option and EPG Server Device Options in DLNA.

10.4.2.3

[GUIDELINE] If a UPnP AV MediaServer implements an Extended Tuner, then it shall implement to ISO/IEC 29341-4-3 (i.e. UPnP AV MediaServer:2 or higher) and conform to guidelines 10.4.3 to 10.4.9.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-3	JAUDH	

[COMMENT] Tuners implemented on a UPnP AV MediaServer:2 or higher are recommended to implement the Extended Tuner.

10.4.2.4

[GUIDELINE] A UPnP AV MediaServer control point that interacts with a UPnP AV MediaServer tuner, shall be able to browse CDS items for both the DLNA Basic Tuner (defined in guidelines 10.1.4.16 through 10.1.4.23) and the DLNA Extended Tuner (defined in guidelines 10.4.3 through 10.4.5 and 10.4.7 through 10.4.8).

[ATTRIBUTES]

M	A	DMP DMC +SR+	M-DMP M-DMC	n/a	ISO/IEC 29341-4-3	DC6OF	

[COMMENT] UPnP AV MediaServers are allowed to select which DLNA Tuner (Basic or Extended) to implement. To maintain a minimum level of interoperability a UPnP AV MediaServer control point needs to work with both of the DLNA Tuner implementations. UPnP AV MediaServer control points are not required to interact with Presets Containers (10.4.6) or Virtual Tuners Containers (10.4.9).

10.4.3 MM/ET Extended Tuner common guidelines

10.4.3.1

[GENERAL] These common guideline requirements for an Extended Tuner define the relationship between the DLNA Extended Tuner and the UPnP AV MediaServer ContentDirectory service TUNER feature. They define Channel Lineup Containers which expose the available channels to UPnP AV MediaServer control points. In addition, they define the common guidelines for CDS items (i.e. Non-Streamable Channel Objects and Streamable Channel Objects) that represent available channels. Non-Streamable Channel Objects in a Channel Lineup Container would be used for Extended Tuners that do not stream their content over the network, but provide CDS object IDs for internal Tuner resources that can be used to setup a Scheduled Recording with identifying channel information (cdsNonEPG record class). Optionally, Non-Streamable Channel Objects in a Channel Lineup Container could be used for Extended Tuners that implement Virtual Tuner Objects in a Virtual Tuner Container to stream selected channel content over the network through a single connection. Figure 20 illustrates a Channel Lineup Container.

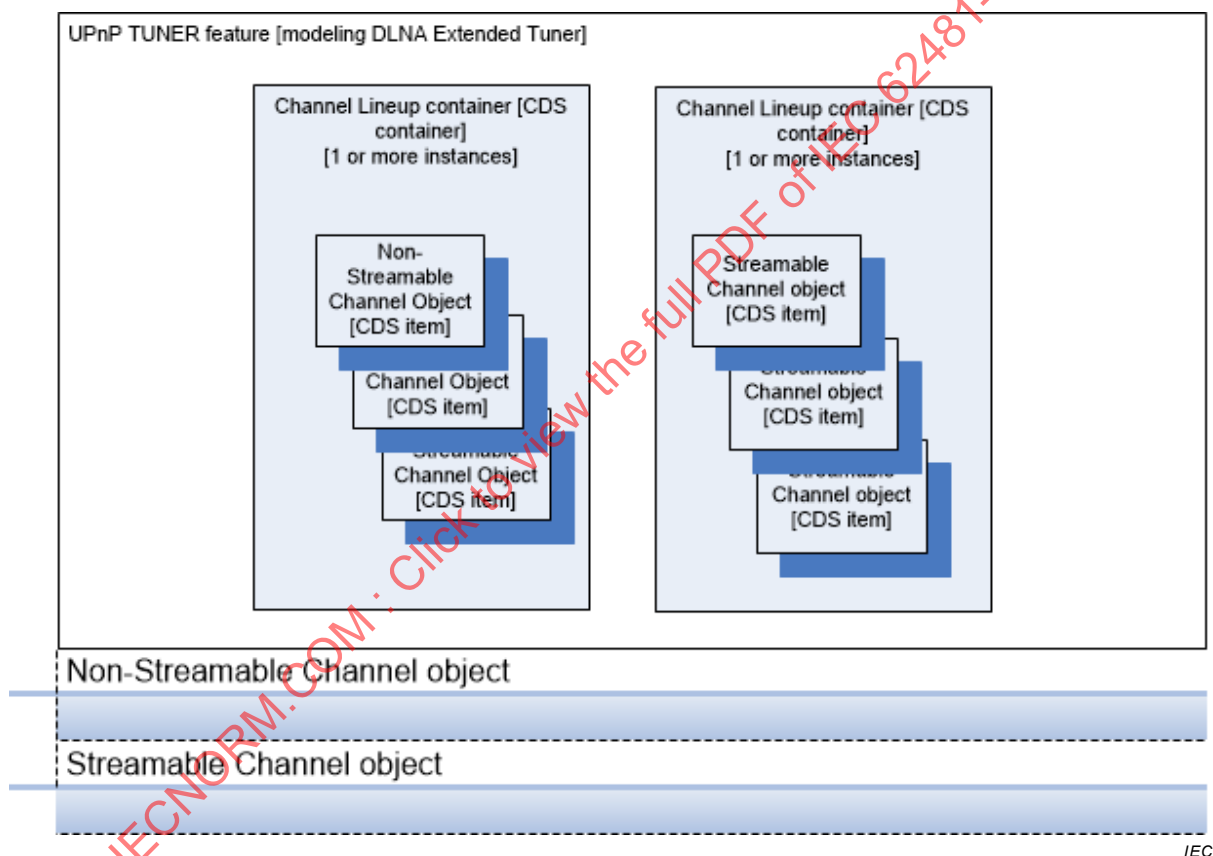


Figure 20 – Modelling DLNA Extended Tuner

10.4.3.2

[GUIDELINE] A UPnP AV MediaServer shall conform to all of the requirements of the TUNER Feature defined in Clause E.2 of ISO/IEC 29341-4-12:2008.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2008	BOAGO	

[COMMENT] The DLNA Tuner requirements are built upon the UPnP TUNER feature defined in the ContentDirectory service of ISO/IEC 29341-4-12:2008.

10.4.3.3

[GUIDELINE] A UPnP AV MediaServer shall return a <Feature> element indicating the TUNER feature is implemented in response to the CDS:GetFeatureList action.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	RMIPF	

[COMMENT] The TUNER feature allows a UPnP AV MediaServer control point to determine whether a device supports the Extended Tuner functionality, and where the Channel Lineup Containers are located in the larger ContentDirectory service Container hierarchy.

10.4.3.4

[GUIDELINE] A UPnP AV MediaServer shall expose at least one Channel Lineup Container in the ContentDirectory service which conforms to the requirements for Channel Lineup Containers as defined in 10.4.3.5 to 10.4.3.10.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	7TB6O	

[COMMENT] Implementation of the DLNA Extended Tuner guidelines requires at least one Channel Lineup Container be exposed by a UPnP AV MediaServer.

10.4.3.5

[GUIDELINE] A UPnP AV MediaServer shall set the upnp:class property value of a Channel Lineup Container to one of the following:

- object.container.channelGroup;
- object.container.channelGroup.audioChannelGroup;
- object.container.channelGroup.videoChannelGroup;
- class derived from any of the above classes.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	PI9Z2	

[COMMENT] ISO/IEC 29341-20-12:2016 requires channel containers to have the upnp:class of object.container.channelGroup or any of its derived classes, which gives more precise guidance on upnp:class usage than the requirement in the guideline 10.1.4.16.3 for a Basic Tuner.

- ISO/IEC 29341-4-12:2008, C.2.2.5 specifies that object.container.channelGroup.audioChannelGroup only contains object.item.audioItem.audioBroadcast items and object.container.channelGroup.videoChannelGroup only contains object.item.videoItem.videoBroadcast items.

10.4.3.6

[GUIDELINE] A UPnP AV MediaServer with a Channel Lineup Container that contains both audioBroadcast and videoBroadcast items shall set the upnp:class property value to object.container.channelGroup or a derived class of object.container.channelGroup.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	RBSWW	

[COMMENT] ISO/IEC 29341-20-12:2016 provides this guidance.

10.4.3.7

[GUIDELINE] A UPnP AV MediaServer Channel Lineup Container should include a value for the upnp:channelGroupName property. The value represents the user-friendly name of the Channel Lineup Container.

[ATTRIBUTES]

S	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	CPID4	

[COMMENT] A channel group defines a group of channels. A device that has multiple tuners can provide multiple channel groups. Moreover, a physical tuner device can provide multiple channel groups (for example, a set-top-box that contains a single tuner but supports three different input connections: terrestrial, cable, and satellite).

10.4.3.8

[GUIDELINE] A UPnP AV MediaServer Channel Lineup Container that includes a value for the upnp:channelGroupName property shall include the upnp:channelGroupName@id property. The upnp:channelGroupName@id property contains the ID of a channel group to differentiate it from other channel groups implemented in a ContentDirectory service. The format of the upnp:channelGroupName@id property is as follows:

<ICANN registered domain> "_" <channel group id defined in the domain>

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	G9RUP	

[COMMENT] Vendors are allowed to use the DLNA.ORG_DefaultChannelGroup if there is no external registered domain reference available. An example for a valid value for the upnp:channelGroupName@id property is "megaserviceprovider.com_DigitalSatellite". The datatype defined in ISO/IEC 29341-4-12:2008 for the upnp:channelGroupName@id property is xsd:string, so any characters allowed by xsd:string can be used within <channel group id defined in this domain>. For example, "DLNA.ORG_Any valid characters-&23" would be valid syntax though not semantically useful.

10.4.3.9

[GUIDELINE] A UPnP AV MediaServer Channel Lineup Container dc:title property should be set to the value of the upnp:channelGroupName property when included.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	3E7UL	

[COMMENT] The `upnp:channelGroupName` property contains the user-friendly name for the Channel Lineup Container. Duplicating this value in the `dc:title` will provide a user-friendly (and hopefully informative) name to UPnP MediaServer control points that do not understand the `upnp:channelGroupName` property.

10.4.3.10

[GUIDELINE] A UPnP AV MediaServer Channel Lineup Container shall contain CDS Items that are either all streamable (Streamable Channel Object) or all non-streamable (Non-Streamable Channel Object).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	8N7XW	

[COMMENT] This requirement clarifies that a Channel Lineup Container cannot contain a mixture of both streamable and non-streamable CDS items. Non-Streamable Channel Objects in a Channel Lineup Container would be used for Extended Tuners that do not stream their content over the network, but provides a CDS object IDs for internal Tuner resources that can be used to setup a Scheduled Recording with identifying channel information (`cdsNonEPG` record class). Optionally, Non-Streamable Channel Objects in a Channel Lineup Container could be used for Extended Tuners that implement Virtual Tuner Objects in a Virtual Tuner Container 10.4.9 to stream selected channel content over the network through a single connection.

10.4.3.11

[GUIDELINE] A UPnP AV MediaServer CDS Item (i.e. Non-Streamable Channel Objects or Streamable Channel Objects) contained within a Channel Lineup Container shall conform to the requirements as defined in 10.4.3.12 to 10.4.3.22.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	BC57O	

[COMMENT] This defines the common requirements for CDS Items that represent available channels whether they are non-streamable (Non-Streamable Channel Objects) or streamable (Streamable Channel Objects).

10.4.3.12

[GUIDELINE] A UPnP AV MediaServer shall set the `upnp:class` property value of a Non-Streamable Channel Object or Streamable Channel Object to one of the following:

- `object.item.videoItem.videoBroadcast`;
- `object.item.audioItem.audioBroadcast`;
- class derived from either of the above classes.

The `upnp:class` value shall match the DLNA Media Class of the content carried by either the Non-Streamable Channel Object or the Streamable Channel Object (i.e. supports content streaming) as defined in 10.4.5 of these guidelines.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	4I38R	

[COMMENT] A UPnP AV MediaServer needs to select a `upnp:class` value consistent with the defined DLNA Media Classes (Audio Only or Audio Video).

10.4.3.13

[GUIDELINE] A UPnP AV MediaServer should expose at least one `upnp:channelID` property for each Non-Streamable Channel Object or Streamable Channel Object.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	T3WE7	

[COMMENT] A UPnP AV MediaServer Non-Streamable Channel Object or Streamable Channel Object would expose the `upnp:channelID` property whether the `upnp:class` property is `object.item.videoItem.videoBroadcast`, `object.item.audioItem.audioBroadcast`, or their derived classes.

10.4.3.14

[GUIDELINE] A UPnP AV MediaServer Non-Streamable Channel Object or Streamable Channel Object that includes a value for the `upnp:channelID` property shall include the `upnp:channelID@type` property.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	NYKYZ	

10.4.3.15

[GUIDELINE] If a UPnP AV MediaServer exposes a `upnp:channelID` property and a `upnp:channelID@type` property for a Non-Streamable Channel Object or Streamable Channel Object, then the combination of the `upnp:channelID`, `upnp:channelID@type`, and `upnp:channelID@distriNetworkID` (if exposed) property values shall be unique within all the exposed Channel Lineup Containers.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	U4XE8	

[COMMENT] The `upnp:channelID` property, together with the `upnp:channelID@type` and optionally the `upnp:channelID@distriNetworkID` property, uniquely identifies a Non-Streamable Channel Object or Streamable Channel Object. Per ISO/IEC 29341-14-12:2011, when the `upnp:channelID@distriNetworkID` property is exposed it needs to be exposed for every

upnp:channelID property in the CDS. Therefore uniqueness will be determined by either upnp:channelID and upnp:channelID@type property pairs or upnp:channelID, upnp:channelID@type, and upnp:channelID@distriNetworkID property triplets. The upnp:channelID property is used to identify a video broadcast channel within the Extended Tuner. It is also used in the CDS Items in the EPG Server Device Option to identify the associated Non-Streamable Channel Object or Streamable Channel Object and in the recordSchedule and recordTask objects in the Scheduled Recording Device Option to identify the associated Non-Streamable Channel Object or Streamable Channel Object.

The upnp:channelID@distriNetworkID property was defined in ISO/IEC 29341-14-12:2011 as an additional channelID qualifier.

10.4.3.16

[GUIDELINE] If a UPnP AV MediaServer exposes a upnp:channelID property for a Non-Streamable Channel Object or Streamable Channel Object, and the upnp:channelID@type property value is either "ANALOG" or "DIGITAL", then it should expose the upnp:channelNr property.

[ATTRIBUTES]

S	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	CWJWS	

[COMMENT] This maintains compatibility with the DLNA Basic Tuner guideline 10.1.4.20.1.

10.4.3.17

[GUIDELINE] If a UPnP AV MediaServer exposes a upnp:channelID property for a Non-Streamable Channel Object or Streamable Channel Object, and the upnp:channelID@type property is not "ANALOG" or "DIGITAL", then it shall not expose the upnp:channelNr property.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	KRMVP	

[COMMENT] This is repeating a clarification from ISO/IEC 29341-20-12:2016.

10.4.3.18

[GUIDELINE] If a UPnP AV MediaServer exposes the upnp:channelNr property, upnp:channelID property, and a upnp:channelID@type property with the value of "DIGITAL" for a Non-Streamable Channel Object or Streamable Channel Object, then the upnp:channelNr property value shall be set to the same value as the major channel number in the upnp:channelID property.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	5BXZZ	

[COMMENT] This is repeating a clarification from ISO/IEC 29341-20-12:2016.

10.4.3.19

[GUIDELINE] If a UPnP AV MediaServer exposes the upnp:channelNr property, upnp:channelID property, and a upnp:channelID@type property with the value of "ANALOG" for a Non-Streamable Channel Object or Streamable Channel Object, then the upnp:channelNr property value shall be set to the same value as the upnp:channelID property.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	Z3YWP	

[COMMENT] This is repeating a clarification from ISO/IEC 29341-20-12:2016.

10.4.3.20

[GUIDELINE] If a UPnP AV MediaServer exposes the upnp:channelID property with a value of "SI" for the upnp:channelID@type property, then the following definitions shall apply to the value for the upnp:channelID property.

- The <Network ID> term is a non-negative numerical value with a range of 0 to 0xFFFF. The value is network specific and shall be represented as a decimal or hexadecimal value. The value shall be omitted (i.e. empty string) to indicate an unknown <network ID> term.
- The <Transport Stream ID> term is a non-negative numerical value with a range of 0 to 0xFFFF. The value is network specific and shall be represented as a decimal or hexadecimal value. The value shall be omitted (i.e. empty string) to indicate an unknown <Transport Stream ID> term.
- The <Service ID> term is a non-negative numerical value with a range of 0 to 0xFFFF. The value is network specific and can be represented as a decimal or hexadecimal value.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	Z6TAR	

[COMMENT] This guideline provides clarification for the values contained within the upnp:channelID property for the "SI" type that's lacking in ISO/IEC 29341-20-12:2016. Examples of valid values for the upnp:channelID are as follows:

- <upnp:channelID type="SI">0x1234,0xFEDC,0x0102</upnp:channelID>
- <upnp:channelID type="SI">12345,23456,32109</upnp:channelID>
- <upnp:channelID type="SI">,1,0x0102</upnp:channelID>
- <upnp:channelID type="SI">,,0x0102</upnp:channelID>

10.4.3.21

[GUIDELINE] If a UPnP AV MediaServer exposes the upnp:channelID property with the upnp:channelID@type property with a value of "DLNA.ORG_FPF", then the value of the upnp:channelID property shall contain a CSV (comma-separated value list) triplet containing values for frequency, programme number, and modulation format respectively, where the frequency value contains the channel frequency in hertz, the programme number value is a 16-bit value as defined in ISO/IEC 13818-1:2000 and shall be represented as a decimal or hexadecimal value, and the modulation format value contains a vendor defined string representing the modulation format being used. Valid values for the modulation format are defined in Table 35.

Table 35 – Modulation format values

Broadcast systems	Modulation format values
US Terrestrial System	ATSC-8VSB
US Cable System	SCTE65-QPSK SCTE65-BPSK SCTE65-OQPSK SCTE65-VSB8 SCTE65-VSB16 SCTE65-QAM16 SCTE65-QAM32 SCTE65-QA64M SCTE65-QAM80 SCTE65-QAM96 SCTE65-QAM112 SCTE65-QAM128 SCTE65-QAM160 SCTE65-QAM192 SCTE65-QAM224 SCTE65-QAM256 SCTE65-QAM320 SCTE65-QAM384 SCTE65-QAM448 SCTE65-QAM512 SCTE65-QAM640 SCTE65-QAM768 SCTE65-QAM896 SCTE65-QAM1024

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 13818-1:2000 ISO/IEC 29341-4-12:2 008	WNKRA	

[COMMENT] This is a DLNA extension to the `upnp:channelID@type` property values as defined in B.8.5 of ISO/IEC 29341-4-12:2008.

Examples for `upnp:channelID` values are as follows:

- `<upnp:channelID type="DLNA.ORG_FPF">867000000,0x0002, SCTE65-QAM32</upnp:channelID>`
- `<upnp:channelID type="DLNA.ORG_FPF">867000000,20,ATSC-8VSB</upnp:channelID>`

10.4.3.22

[GUIDELINE] A UPnP AV MediaServer should implement Basic Tuner guideline requirement 10.1.4.16.6 which returns Non-Streamable Channel Objects or Streamable Channel Objects in the order that corresponds to the up / down operation.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	YH5P3	

[COMMENT] The order of the `<item>` elements in a CDS:Browse response (without a Sort input specified) should represent the order of an up / down "channel surfing" action to allow UPnP AV MediaServer control points to provide this functionality.

10.4.4 MM/ET Non-Streamable Extended Tuner guidelines

10.4.4.1

[GENERAL] These guidelines define the baseline requirements for Non-Streamable Channel Objects. Non-Streamable Channel Objects are non-streamable CDS objects (i.e. no res property value) which represent a single channel of a broadcast source which presents content in a "channelized" format. Implementers should note that Non-Streamable Channel Objects are not restricted to representing traditional terrestrial, cable, or satellite broadcast channels and can be used to represent Webcasts, so called "Internet Radio" and "Internet TV" stations, and other emerging content delivery mediums, so long as the content is organized or presented to the user through the upnp:channelID property.

10.4.4.2

[GUIDELINE] If a UPnP AV MediaServer exposes Non-Streamable Channel Objects (i.e. non-streamable), then it shall conform to guideline requirements 10.4.4.3 and 10.4.4.4.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	JUT5C	

10.4.4.3

[GUIDELINE] A UPnP AV MediaServer that advertises support for the TUNER Feature as defined in 10.4.3.2 through 10.4.3.4 shall not include the dlna:containerType property (10.1.4.16.4) in any Channel Lineup Containers that contain only Non-Streamable Channel Objects.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	N4X7P	

[COMMENT] UPnP AV MediaServer control points can differentiate between implementation levels by looking for the presence or absence of the dlna:containerType property.

10.4.4.4

[GUIDELINE] A UPnP AV MediaServer Non-Streamable Channel Object shall omit the URI value from all the res properties.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	A9D7O	

[COMMENT] Since these CDS items are not streamable, a res property is not needed. But having res properties without a URI value (a non streamable Channel Object can have multiple res elements) can be useful by UPnP AV MediaServer control points in determining the DLNA Media Format Profile for the Non-Streamable Channel Object by examining the res@protocolInfo property's DLNA.ORG_PN value in the fourth field.

10.4.5 MM/ET Streamable Extended Tuner guidelines

10.4.5.1

[GUIDELINE] These guidelines define the baseline requirements for Streamable Channel Objects. Streamable Channel Objects are streamable CDS objects which represent a single channel of a broadcast source which presents content in a "channelized" format. Implementers should note that Streamable Channel Objects are not restricted to representing traditional terrestrial, cable, or satellite broadcast channels and can be used to represent Webcasts, so called "Internet Radio" and "Internet TV" stations, and other emerging content delivery mediums, so long as the content is organized or presented to the user through the upnp:channelID property. Streamable Channel Objects expose one or more res properties with URI values. Content Receivers establish a connection to the URI to initiate a streaming session. This connection implicitly attempts to change the channel of the underlying broadcast source to the channel represented by the Streamable Channel Object. Whether the channel is changed and the streaming connection established is ultimately determined by the vendor-specific arbitration logic which is outside the scope of these guidelines. UPnP AV MediaServer control points can switch the channel of the broadcast source by establishing a connection to the URI in a different Streamable Channel Object.

10.4.5.2

[GUIDELINE] If a UPnP AV MediaServer exposes Streamable Channel Objects, then it shall conform to guideline requirements 10.4.5.3 to 10.4.5.8.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	FIDAZ	

10.4.5.3

[GUIDELINE] A UPnP AV MediaServer Streamable Channel Object shall expose one or more res properties. Each res property shall include a valid URI value.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	4DHUP	

[COMMENT] A Streamable Channel Object is identified as a CDS Item with one or more res properties with a valid URI value.

10.4.5.4

[GUIDELINE] A UPnP AV MediaServer that advertises support for the TUNER Feature as defined in 10.4.3.2 through 10.4.3.4 shall include the dna:containerType property and conform to guideline 10.1.4.16.4 in any Channel Lineup Container that contains only Streamable Channel Objects.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	VJFVP	

[COMMENT] UPnP AV MediaServer control points can differentiate between implementation levels by looking for the presence or absence of the dna:containerType property. This is to

ensure backwards compatibility with UPnP AV MediaServer control points that will only interoperate with Basic Tuners.

10.4.5.5

[GUIDELINE] A UPnP AV MediaServer implementation for a Streamable Extended Tuner shall conform to Basic Tuner guidelines defined in 10.1.4.16 to 10.1.4.22.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	M5B39	

[COMMENT] This is to ensure backwards compatibility with UPnP AV MediaServer control points that will only interoperate with Basic Tuners. This implies that a Streamable Extended Tuner is a superset of a Basic Tuner.

10.4.5.6

[GUIDELINE] A UPnP AV MediaServer shall support at least one streaming connection for a Streamable Channel Object. A UPnP AV MediaServer can refuse a connection if the underlying broadcast source is unavailable due to resource limitations associated with other active streaming connections or local playback operations.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	UTQBZ	

[COMMENT] A UPnP AV MediaServer will not have sufficient resources sometimes to support multiple streaming connections to a single Streamable Channel Object. If a UPnP AV MediaServer cannot accept a new streaming connection it can refuse the connection as defined in the relevant Media Transport guideline (e.g. 11.4.3.5.2).

10.4.5.7

[GUIDELINE] A UPnP AV MediaServer shall terminate all streaming connections if the channel of the underlying broadcast source changes and is no longer represented by the Streamable Channel Object.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	N6C39	

[COMMENT] A UPnP AV MediaServer control point establishes a connection to a Streamable Channel Object for purposes of steaming that channel. If the UPnP AV MediaServer is no longer able to stream that channel's content, it needs to terminate any active streaming connections.

10.4.5.8

[GUIDELINE] If a UPnP AV MediaServer implements a "time shift buffer" or similar feature on the broadcast source associated with a Streamable Channel Object, then this buffer should be exposed using the DLNA UCDAM model.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	JRP9S	

[COMMENT] The DLNA UCDAM buffer model is designed to allow a UPnP AV MediaServer control point to interoperate with "time shift buffers" and similar features. Vendors should pay particular attention to guidelines in 10.1.3.33 regarding the UCDAM s_0 boundary increasing, and guideline in 10.1.3.34 describing the UCDAM s_N boundary increasing requirements.

10.4.6 MM/ET Presets Containers

10.4.6.1

[GENERAL] These guidelines define the optional Presets Containers. Many broadcast receivers use objects that can be described as "Favourites", "Presets", or other terms, which associate a user-defined set of channel identifiers with channel objects. Vendors can use one or more Presets Containers to communicate these mappings or associations to a UPnP AV MediaServer control point. A Presets Container needs to have ContentDirectory service Reference Items that associate channel identifiers with channel objects.

10.4.6.2

[GUIDELINE] A UPnP AV MediaServer may expose a Presets Container.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	DSZKQ	

10.4.6.3

[GUIDELINE] If a UPnP AV MediaServer exposes a Presets Container, then it shall conform to the guidelines in 10.4.6.4 to 10.4.6.10.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	PYVZ5	

10.4.6.4

[GUIDELINE] A UPnP AV MediaServer shall set the upnp:class property value of a Presets Container to one of the following:

- object.container.channelGroup;
- object.container.channelGroup.audioChannelGroup;
- object.container.channelGroup.videoChannelGroup;
- class derived from any of the above classes.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	7X69R	

[COMMENT] ISO/IEC 29341-20-12:2016 requires channel containers to have the upnp:class of object.container.channelGroup or any of its derived classes, which gives more precise guidance on upnp:class usage than the requirements in the guideline 10.1.4.16.3 for a Basic Tuner.

ISO/IEC 29341-4-12:2008, C.2.2.5 specifies that
object.container.channelGroup.audioChannelGroup only contains
object.item.audioItem.audioBroadcast items and
object.container.channelGroup.videoChannelGroup only contains
object.item.videoItem.videoBroadcast items.

10.4.6.5

[GUIDELINE] A UPnP AV MediaServer Presets Container that contains @refID properties to CDS Items (10.4.6.10) that are both audioBroadcast and videoBroadcast items shall set the upnp:class property value to object.container.channelGroup or a derived class of object.container.channelGroup.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	7ZYL	

[COMMENT] ISO/IEC 29341-20-12:2016 profiles this guidance.

10.4.6.6

[GUIDELINE] A UPnP AV MediaServer Presets Container shall include a value for the upnp:channelGroupName property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	5IQ4C	

[COMMENT] A channel group defines a group of channels. A device that has multiple tuners may provide multiple channel groups. Moreover, a physical tuner device may provide multiple channel groups (for example, a set-top-box that contains a single tuner, but supports three different input connections: terrestrial, cable, and satellite). Note that this mandates a similar requirement for Channel Lineup Container. The upnp:channelGroupName property value represents the user-friendly name of the Presets Container, as described in B.9.1 of ISO/IEC 29341-4-12:2008.

10.4.6.7

[GUIDELINE] A UPnP AV MediaServer Presets Container shall include the upnp:channelGroupName@id property which shall be set to the value DLNA.ORG_Presets for Presets Containers.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	7CB26	

[COMMENT] The value "DLNA.ORG_Presets" identifies the channelGroup container as a Presets Container to UPnP AV MediaServer control points.

10.4.6.8

[GUIDELINE] A UPnP AV MediaServer Presets Container dc:title property should be set to the value of the upnp:channelGroupName property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	6JR4D	

[COMMENT] The upnp:channelGroupName property contains the user-friendly name for the Presets Container. Duplicating this value in the dc:title will provide a user-friendly (and hopefully informative) name to UPnP MediaServer control points that do not understand the upnp:channelGroupName property.

10.4.6.9

[GUIDELINE] A UPnP AV MediaServer Presets Container shall not include the dlna:containerType property (10.1.4.16.4).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	UA9XW	

10.4.6.10

[GUIDELINE] A UPnP AV MediaServer Presets Container shall expose a @refID property in each CDS Item contained in a Presets Container. The @refID property shall contain a value equal to the @id property value of a Non-Streamable Channel Object or Streamable Channel Object exposed in the same ContentDirectory service.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	V8GLU	

[COMMENT] The purpose of a Preset reference is to associate a user-friendly "channel identifier" with a Non-Streamable Channel Object or Streamable Channel Object. The UPnP AV MediaServer exposes this user-friendly identifier in the upnp:channelName of a videoBroadcast or audioBroadcast item and associates this with the Non-Streamable Channel Object or Streamable Channel Object using the @refID property.

10.4.7 MM/ET EPG Server Device Option additional tuner guidelines**10.4.7.1**

[GENERAL] These guidelines are additional requirements on an Extended Tuner when a UPnP AV MediaServer implements the EPG Server Device Option.

10.4.7.2

[GUIDELINE] If a UPnP AV MediaServer implements the EPG Server Device Option, as defined in 10.5.2.3, by including a <Feature> element with the Feature@name attribute equal to "EPG" in the FeatureList output argument in response to the CDS:GetFeatureList action, then it shall conform to guideline requirements 10.4.7.3 and 10.4.7.4.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	MNO39	

10.4.7.3

[GUIDELINE] A UPnP AV MediaServer Channel Lineup Container shall include a value for the upnp:channelGroupName property. The value represents the user-friendly name of the Channel Lineup Container.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	PCLAV	

[COMMENT] For the EPG Server Device Option, Channel Lineup Containers have to expose the upnp:channelGroupName property.

10.4.7.4

[GUIDELINE] A UPnP AV MediaServer shall expose at least one upnp:channelID property for each Non-Streamable Channel Object or Streamable Channel Object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	4OQNX	

[COMMENT] For the EPG Server Device Option, Non-Streamable Channel Objects and Streamable Channel Objects have to expose the upnp:channelID property.

10.4.8 MM/ET Scheduled Recording Device Option additional tuner guidelines**10.4.8.1**

[GENERAL] These guidelines are additional requirements on an Extended Tuner when a UPnP AV MediaServer implements the Scheduled Recording Device Option.

10.4.8.2

[GUIDELINE] If a UPnP AV MediaServer implements the Scheduled Recording Device Option, then it shall conform to guideline 10.4.8.3.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	9EJWK	

10.4.8.3

[GUIDELINE] A UPnP AV MediaServer shall implement guideline 10.4.3.13 (i.e. upnp:channelID property) as mandatory instead of recommended.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	I4Z7F	

[COMMENT] For the Scheduled Recording Device Option, Non-Streamable Channel Objects and Streamable Channel Objects have to expose the upnp:channelID property.

10.4.9 MM/ET Virtual Tuners**10.4.9.1**

[GENERAL] These optional guidelines for an Extended Tuner implementing a Virtual Tuner feature allow modeling a physical tuner through a single connection. A Virtual Tuner Object is capable of streaming the output of multiple channels over a single URI (res property URI) connection.

10.4.9.2

[GUIDELINE] A UPnP AV MediaServer may implement a Virtual Tuner as defined in guidelines requirements 10.4.9.3 to 10.4.9.35.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	AFKWK	

10.4.9.3

[GUIDELINE] If a UPnP AV MediaServer implements a Virtual Tuner, then it shall conform to the guidelines requirements 10.4.9.4 to 10.4.9.35.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	KUQR9	

10.4.9.4

[GUIDELINE] A UPnP AV MediaServer shall set the upnp:class property value of a Virtual Tuner Container to one of the following:

- object.container.virtualStreamGroup;
- class derived from the above class.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	Z4AG6	

10.4.9.5

[GUIDELINE] A UPnP AV MediaServer Virtual Tuner Container shall include a value for the upnp:channelGroupName property. The value represents the user-friendly name of the Virtual Tuner Container.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	DA6UG	

10.4.9.6

[GUIDELINE] A UPnP AV MediaServer Virtual Tuner Container shall include the upnp:channelGroupName@id property which shall be set to the value DLNA.ORG_VirtualTuner for Virtual Tuner Containers.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	927R6	

[COMMENT] The value "DLNA.ORG_VirtualTuner" identifies the UPnP container as a Virtual Tuner Container to UPnP AV MediaServer control points.

10.4.9.7

[GUIDELINE] A UPnP AV MediaServer Virtual Tuner Container dc:title property should be set to the value of the upnp:channelGroupName property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	TB9HA	

[COMMENT] The upnp:channelGroupName property contains the user-friendly name for the Virtual Tuner Container. Duplicating this value in the dc:title will provide a user-friendly (and hopefully informative) name to UPnP AV MediaServer control points that do not understand the upnp:channelGroupName property.

10.4.9.8

[GUIDELINE] A UPnP AV MediaServer Virtual Tuner Container shall not include the dlina:containerType property (10.1.4.16.4).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	6LRLP	

[COMMENT] This allows UPnP AV MediaServer control points to differentiate that this is not a Basic Tuner.

10.4.9.9

[GUIDELINE] CDS items (Virtual Tuner Objects) as defined in guideline 10.4.9.10 contained in a UPnP AV MediaServer Virtual Tuner Container shall be streamable through a single connection and shall reflect in the res@protocolInfo 4th field value for the Virtual Tuner Object the content currently being streamed over the connection as defined in 10.1.3.16.4 and 10.1.3.17.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	SLJVJ	

[COMMENT] This requirement clarifies that a Virtual Tuner Container contains CDS items that stream tuner channels through a single connection.

10.4.9.10

[GUIDELINE] A UPnP AV MediaServer CDS Item (i.e. Virtual Tuner Object) contained within a Virtual Tuner Container shall conform to the requirements as defined in 10.4.9.11 to 10.4.9.35.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	RSZXO	

[COMMENT] This defines the requirements for a CDS Item that represents the current streamed output of a tuner (Virtual Tuner Objects).

10.4.9.11

[GUIDELINE] A UPnP AV MediaServer shall set the upnp:class property value of a Virtual Tuner Object to one of the following:

- object.item.videoItem.virtualTuner;
- object.item.audioItem.virtualTuner;
- class derived from either of the above classes.

The upnp:class value shall match the DLNA Media Class of the content carried by the Virtual Tuner Object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	VDBHA	

[COMMENT] A UPnP AV MediaServer needs to select a upnp:class value consistent with the defined DLNA Media Classes (Audio Only or Audio Video).

10.4.9.12

[GUIDELINE] A UPnP AV MediaServer shall expose the dlina:channelGroupList property for each Virtual Tuner Object. The value of the dlina:channelGroupList property is a CSV (comma-separated value) list containing one or more upnp:channelGroup@id values, where each upnp:channelGroup@id value corresponds to a Channel Lineup Container that the Virtual Tuner Object can use for access to a Tuner.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	XU9MQ	

[COMMENT] This guideline provides UPnP AV MediaServer control points a method to determine which Channel Lineup Container(s) are associated with which Virtual Tuner Object.

10.4.9.13

[GUIDELINE] A UPnP AV MediaServer shall expose at least one upnp:channelID property for each Virtual Tuner Object. The upnp:channelID property value represents the channel last selected by the Virtual Tuner Object. When more than one upnp:channelID property is exposed, they shall each resolve to the same underlying channel, but represented differently (i.e. different upnp:channelID@type property values as defined in 10.4.9.14).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	BTGLV	

[COMMENT] The values for multiple instances of the upnp:channelID property represent the same underlying channel currently being selected.

10.4.9.14

[GUIDELINE] A UPnP AV MediaServer Virtual Tuner Object that includes a value for the upnp:channelID property shall include the upnp:channelID@type property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	VRLN5	

10.4.9.15

[GUIDELINE] If a UPnP AV MediaServer exposes more than one upnp:channelID property for a Virtual Tuner Object then each upnp:channelID property shall have a distinct upnp:channelID@type property value.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	KXMVM	

[COMMENT] Each upnp:channelID property exposed in a Virtual Tuner Object will always have different upnp:channelID@type values.

10.4.9.16

[GUIDELINE] If a UPnP AV MediaServer's upnp:channelID@type property value is either "ANALOG" or "DIGITAL" for a Virtual Tuner Object, then it should expose the upnp:channelNr property.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	Y49CI	

[COMMENT] This is aligning with a clarification from ISO/IEC 29341-4-12:2008.

10.4.9.17

[GUIDELINE] If a UPnP AV MediaServer's upnp:channelID@type property is not "ANALOG" or "DIGITAL" for a Virtual Tuner Object, then it shall not expose the upnp:channelNr property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	OYZ6Q	

[COMMENT] This is aligning with a clarification from ISO/IEC 29341-4-12:2008.

10.4.9.18

[GUIDELINE] If a UPnP AV MediaServer exposes the upnp:channelNr property, upnp:channelID property, and a upnp:channelID@type property with the value of "DIGITAL" for a Virtual Tuner Object, then the upnp:channelNr property value shall be set to the major channel number from that upnp:channelID property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	YKSPG	

[COMMENT] This is aligning with a clarification from ISO/IEC 29341-4-12:2008.

10.4.9.19

[GUIDELINE] If a UPnP AV MediaServer exposes the upnp:channelNr property, upnp:channelID property, and a upnp:channelID@type property with the value of "ANALOG" for a Virtual Tuner Object, then the upnp:channelNr property value shall be set to the value of that upnp:channelID property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	723RJ	

[COMMENT] This is aligning with a clarification from ISO/IEC 29341-4-12:2008.

10.4.9.20

[GUIDELINE] A UPnP AV MediaServer should implement the DLNA defined value of "DLNA.ORG_OBJECT_ID" for the upnp:channelID@type property as defined in 10.4.9.21.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	QUV45	

10.4.9.21

[GUIDELINE] If a UPnP AV MediaServer Virtual Tuner Object exposes the upnp:channelID property with the upnp:channelID@type property with a value of "DLNA.ORG_OBJECT_ID",

then the value of the upnp:channelID property shall contain the @id property value of a Streamable Channel Object as defined in guideline requirements 10.4.3.11 and 10.4.5.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	L943V	

[COMMENT] This is a DLNA extension to the upnp:channelID@type property values as defined in B.8.5 of ISO/IEC 29341-4-12:2008.

10.4.9.22

[GUIDELINE] A UPnP AV MediaServer Virtual Tuner Object shall expose the following physical tuner status-related properties:

- upnp:tuned;
- upnp:signalStrength;
- upnp:signalLocked.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	YACS6	

[COMMENT] These UPnP properties are mandated for all Virtual Tuner Objects.

10.4.9.23

[GUIDELINE] A UPnP AV MediaServer that exposes a Virtual Tuner Object shall implement the CDS:X_DLNA_SelectChannel action with the following syntax:

The action is defined as stated in Table 36.

Table 36 – CDS:X_DLNA_SelectChange action parameters

Argument	Direction	relatedStateVariable
VirtualTunerObjectID	In	A_ARG_TYPE_ObjectID
ChannelID	In	A_ARG_TYPE_DLNAChannelID
ClientConnectionID	In	A_ARG_TYPE_DLNAConnectionID
ServerConnectionID	Out	A_ARG_TYPE_DLNAConnectionID

The value of the VirtualTunerObjectID input argument shall be the object ID of a Virtual Tuner Object.

The value of the ChannelID input argument shall be a upnp:channelID XML Fragment. See B.8.5 of ISO/IEC 29341-20-12:2016 for details with the exception that only a single instance is allowed (i.e. not multi-valued). The ChannelID input argument shall be in escaped XML when used with this action.

The value of the ClientConnectionID input argument shall be a value obtained by any of the following methods.

- The ServerConnectionID output argument value from a previous CDS:X_DLNA_SelectChannel action response.
- The ConnectionID output argument value from a CMS:PrepareForConnection action response.
- -1 when this action is used to establish a new connection.

The value of the ServerConnectionID output argument shall be the same value as the ClientConnectionID unless the ClientConnectionID input argument value is -1, in which case the UPnP AV MediaServer shall respond with a ServerConnectionID value that is unique to the connection.

When the ClientConnectionID input argument is -1 the UPnP AV MediaServer control point is initiating a new connection and requesting a unique connection ID in the ServerConnectionID output argument in the action response. If the action succeeds the UPnP AV MediaServer shall use the value returned in the ServerConnectionID output argument for BCM operations.

The error codes defined for this action are defined in Table 37.

Table 37 – CDS:X_DLNA_SelectChange action error codes

ErrorCode	errorDescription	Description
400-499	TBD	See UPnP Device Architecture section on Control [].
500-599	TBD	See UPnP Device Architecture section on Control.
600-699	TBD	See UPnP Device Architecture section on Control.
701	No such object	The X_DLNA_SelectChannel action failed because the specified VirtualTunerObjectID does not exist or is not a Virtual Tuner Object.
712	Bad metadata	The X_DLNA_SelectChannel action failed because the ChannelID input argument is an invalid XML Fragment.
715	Source resource access denied	The X_DLNA_SelectChannel action failed because a specified ChannelID resource is busy.
720	Cannot process the request	The X_DLNA_SelectChannel action failed because it will not be able to tune to the channel specified in the ChannelID resource.
801	Invalid connection reference	The X_DLNA_SelectChannel action failed because the connection reference argument does not refer to a valid connection established by the Connection Manager Service (CMS).

This action shall be defined in the service description document using the following XML fragment:

```
<action>
  <name> X_DLNA_SelectChannel </name>
  <argumentList>
    <argument>
      <name>VirtualTunerObjectID</name>
      <direction>in</direction>
      <relatedStateVariable>A_ARG_TYPE_ObjectID</relatedStateVariable>
    </argument>
    <argument>
      <name>ChannelID</name>
      <direction>in</direction>
      <relatedStateVariable>A_ARG_TYPE_DLNAChannelID</relatedStateVariable>
    </argument>
    <argument>
      <name>ClientConnectionID</name>
      <direction>in</direction>
      <relatedStateVariable>A_ARG_TYPE_DLNAConnectionID</relatedStateVariable>
    </argument>
  </argumentList>
</action>
```



```

</argument>
<argument>
  <name>ServerConnectionID</name>
  <direction>out</direction>
  <relatedStateVariable>A_ARG_TYPE_DLNAConnectionID</relatedStateVariable>
</argument>
</argumentList>
</action>

```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	UDADM	

[COMMENT] This guideline defines a new action for the UPnP AV MediaServer ContentDirectory service. This action is implemented by servers that expose Virtual Tuner Objects. Semantic behaviour for this action is defined in 10.4.9.24 to 10.4.9.32. Examples of valid values for the ChannelID input argument are as follows.

```

<upnp:channelID xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
type="ANALOG">5</upnp:channelID>

```

```

<upnp:channelID xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
type="DLNA.ORG_OBJECT_ID">TunerObj_001</upnp:channelID>

```

- a) The values of the ClientConnectionID input argument and the ServerConnectionID output argument allow the CDS:X_DLNA_SelectChannel action to be used as a new connection initiator or to be associated with an existing connection.

10.4.9.24

[GUIDELINE] A UPnP AV MediaServer control point should first verify if the Virtual Tuner Object is currently in use in an active session with another UPnP AV MediaRenderer (e.g. `dlna:peerManager` property as defined in 10.4.9.35) before executing the `X_DLNA_SelectChannel` action.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	2KYHG	

[COMMENT] This guideline provides implementation guidance for UPnP AV MediaServer control points to not interrupt an existing session before executing the action.

10.4.9.25

[GUIDELINE] A UPnP AV MediaServer that exposes a Virtual Tuner Object shall include the `A_ARG_TYPE_DLNAChannelID` state variable in the ContentDirectory service description. This state variable shall be defined as type information for the ChannelID input argument in the `CDS:X_DLNA_SelectChannel` action.

This state variable is defined in Table 38.

Table 38 – A_ARG_TYPE_DLNAChannelID state variable

Variable name	Data type	Allowed value	Evented	Moderated event
A_ARG_TYPE_DLNAChannelID	string	upnp:channelID XML Fragment See B.8.5 of ISO/IEC 29341-4-12:2008 with the exception that only a single instance is allowed	No	No

The A_ARG_TYPE_DLNAChannelID state variable shall be defined in the service description document using the following XML fragment:

```
<stateVariable sendEvents="no">
  <name>A_ARG_TYPE_DLNAChannelID</name>
  <dataType>string</dataType>
</stateVariable>
```

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2008	YEMMQ	

[COMMENT] This guideline defines a new state variable for the UPnP AV MediaServer ContentDirectory service. This state variable is used by the new CDS:X_DLNA_SelectChannel action for the ChannelID input argument. Example values for this state variable are as follows:

```
<upnp:channelID xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
type="ANALOG">5</upnp:channelID>
```

```
<upnp:channelID xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
type="DLNA.ORG_OBJECT_ID">TunerObj_001</upnp:channelID>
```

10.4.9.26

[GUIDELINE] A UPnP AV MediaServer that exposes a Virtual Tuner Object shall include the A_ARG_TYPE_DLNAConnectionID state variable in the ContentDirectory service description. This state variable shall be defined as type information for the ClientConnectionID input argument and the ServerConnectionID output argument in the CDS:X_DLNA_SelectChannel action.

This state variable is defined in Table 39.

Table 39 – A_ARG_TYPE_DLNAConnectionID state variable

Variable name	Data type	Allowed value	Evented	Moderated event
A_ARG_TYPE_DLNAConnectionID	i4	Connection ID value established by a UPnP AV MediaServer. The value -1 is a special value indicating an unsolicited action requesting a new connection.	No	No

The A_ARG_TYPE_DLNAConnectionID state variable shall be defined in the service description document using the following XML fragment:

```
<stateVariable sendEvents="no">
  <name>A_ARG_TYPE_DLNAConnectionID</name>
  <dataType>i4</dataType>
```

</stateVariable>

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	GVCIJ	

[COMMENT] This guideline defines a new state variable for the UPnP AV MediaServer ContentDirectory service. This state variable is used by the new CDS:X_DLNA_SelectChannel action for the ClientConnectionID input argument and ServerConnectionID output argument.

10.4.9.27

[GUIDELINE] If a UPnP AV MediaServer has successfully executed the CDS:X_DLNA_SelectChannel action and the content is being streamed or available to be streamed, then it shall expose the upnp:tuned property with a value of "1" for the Virtual Tuner Object, otherwise the value shall be "0"

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	GFP9J	

[COMMENT] This provides UPnP AV MediaServer control points a method to determine if content (e.g. channel) is currently being streamed or available to be streamed by the Virtual Tuner Object.

10.4.9.28

[GUIDELINE] If a UPnP AV MediaServer has successfully executed the CDS:X_DLNA_SelectChannel action, then it should only return a success response after it has stopped streaming content for the previously selected channel.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	TNROB	

[COMMENT] This allows UPnP AV MediaServer control points to know that content from the previously selected channel has completed streaming content to a rendering device.

If a DLNA Media Format Profile supports DIT (Discontinuity Information Table), then the DIT is inserted into the content stream at the discontinuity point as defined in Media Format guidelines IEC 62481-2:2017. This provides a mechanism for a UPnP AV MediaRenderer to detect a change in channel content.

10.4.9.29

[GUIDELINE] If a UPnP AV MediaServer control point has successfully executed the CDS:X_DLNA_SelectChannel action, then its co-located UPnP AV MediaRenderer control point should execute the AVT:SetAVTransportURI action with the CurrentURIMetadata input parameter containing the updated CDS metadata of the Virtual Tuner Object resulting from the CDS:X_DLNA_SelectChannel action to the UPnP AV MediaRenderer that is rendering the content being streamed as defined in 10.4.9.27.

[ATTRIBUTES]

S	A	DMC	M-DMC	n/a	ISO/IEC 29341-4-12:2 008	UWUZ3	

[COMMENT] In the 3-box system usage, the UPnP AV MediaRenderer needs to have knowledge of the updated metadata (i.e. channelId value) when the CDS:X_DLNA_SelectChannel action is successfully executed. The updated CDS metadata is obtained by executing a CDS:Browse action on the Virtual Tuner Object after executing the CDS:X_DLNA_SelectChannel action.

A possible implementation of a 3-box system usages scenario to achieve a channel change user experience that is consistent with the commercial TV services offered by content service providers is as follows: Upon a user's request for a channel change, the UPnP AV control point (i.e. UPnP AV MediaRenderer + UPnP AV MediaServer control point) invokes the AVT:Stop action to a UPnP AV MediaRenderer (e.g. DMR), followed by the CDS:X_SelectChannel action to a UPnP AV MediaServer (e.g. DMS) to tune to a new channel. After the UPnP AV MediaServer returns a successful response, the UPnP AV control point invokes the CDS:Browse action on the Virtual Tuner Object to obtain the updated CDS metadata, followed by invoking the AVT:SetAVTransportURI action to the UPnP AV MediaRender with the updated content item metadata, and then finally invokes the AVT:Play action to the UPnP AV MediaRenderer.

10.4.9.30

[GUIDELINE] If a UPnP AV MediaServer has successfully executed the CDS:X_DLNA_SelectChannel action, then it shall remove all instances of the upnp:channelID property for the Virtual Tuner Object as specified in the VirtualTunerObjectID input parameter, and it shall expose a upnp:channelID property with the value in the ChannelID input parameter.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	GV22A	

[COMMENT] This exposes the new channel that has been selected in the Virtual Tuner Object.

10.4.9.31

[GUIDELINE] If a UPnP AV MediaServer has successfully executed the CDS:X_DLNA_SelectChannel action, then it may expose additional upnp:channelID property values that conforms to guideline 10.4.9.13.

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	633AS	

[COMMENT] This allows a UPnP AV MediaServer to expose additional instances of the upnp:channelID property when it resolves to the same underlying channel as the ChannelID input parameter.

10.4.9.32

[GUIDELINE] If a UPnP AV MediaServer has successfully executed the CDS:X_DLNA_SelectChannel action, then it shall update the res@protocolInfo 4th field value for the Virtual Tuner Object as specified in the VirtualTunerObjectID input parameter to identify the content for the selected channel as defined in 10.1.3.16.4 and 10.1.3.17.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	J7NPO	

[COMMENT] This requires the `res@protocolInfo` property to reflect the correct Media Format Profile for the content on the newly selected channel as specified in the `ChannelID` input parameter.

10.4.9.33

[GUIDELINE] A UPnP AV MediaServer that exposes a Virtual Tuner Object shall implement the BCM (Basic Connection Management) feature as defined in guidelines in 10.1.5.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	A4FJW	

[COMMENT] This guideline requires a UPnP AV MediaServer to implement the BCM feature when implementing Virtual Tuners.

10.4.9.34

[GUIDELINE] A UPnP AV MediaServer that exposes the `dlina:peerManager` property shall have the following definition.

- Namespace: `dlina`
- Property data type: `xsd:string`
- Multi-Value: NO
- The `dlina:peerManager` property semantic behaviour is defined and exposed as defined in 10.4.9.35.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	JO94M	

[COMMENT] This guideline describes a new DLNA namespace property for CDS items.

10.4.9.35

[GUIDELINE] If a UPnP AV MediaServer exposes a Virtual Tuner Object that is being used for content transfers, then it shall expose the `dlina:peerManager` property with one of the following values.

- The `PeerConnectionManager` value provided by a UPnP AV MediaRenderer (i.e. DMR) using the `peerManager.dlna.org` HTTP header (defined in 11.4.3.35) when the Virtual Tuner Object is currently being used for content transfer.
- The `PeerConnectionManager` value provided by a UPnP AV MediaRenderer (i.e. DMR) using the `peerManager.dlna.org` RTSP header (defined in 11.4.4.155) when the Virtual Tuner Object is currently being used for content transfer.
- An empty value if the information is not available (i.e. the UPnP AV MediaRenderer or UPnP AV MediaRenderer control point does not implement BCM).

- The friendly name value provided by a UPnP AV MediaServer control point with embedded rendering (i.e. DMP and M-DMP) using the friendlyName.dlna.org HTTP header (defined in 11.4.3.36) when the Virtual Tuner Object is currently being used for content transfer.
- The friendly name value provided by a UPnP AV MediaServer control point with embedded rendering (i.e. DMP and M-DMP) using the friendlyName.dlna.org RTSP header (defined in 11.4.4.156) when the Virtual Tuner Object is currently being used for content transfer.

Otherwise, the UPnP AV MediaServer shall not expose the `dlna:peerManager` property for the Virtual Tuner Object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-4-12:2 008	CBPIN

[COMMENT] This allows a UPnP AV MediaRenderer control point to know which device is currently rendering the content being transferred by the Virtual Tuner Object.

10.5 EPG Media management guidelines

10.5.1 MM/EPG foreign metadata feature advertisement

10.5.1.1

[GUIDELINE] If one or more CDS items exposes foreign metadata using the `upnp:ForeignMetadata` property, a UPnP AV MediaServer shall include a `<Feature>` element with the `@name` attribute equal to "FOREIGN_METADATA" in the FeatureList output argument in response to the CDS:GetFeatureList action. The `@version` attribute of the same `<Feature>` element shall have a value of "1".

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	EDCBT

10.5.2 MM/EPG Server Device Option advertisement

10.5.2.1

[GENERAL] This subclause defines the DLNA Electronic Programme Guide system usage guidelines for a UPnP AV MediaServer that implements the EPG Server Device Option.

10.5.2.2

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option shall implement all mandatory requirements of the UPnP EPG Feature as defined in Clause E.1 of ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	NU8GR

10.5.2.3

[GUIDELINE] A UPnP AV MediaServer shall include a `<Feature>` element with the `@name` attribute equal to "EPG" or "DLNA.ORG_EPGDataOnly" in the FeatureList output argument in

response to the CDS:GetFeatureList action. If the EPG Server Device Option is being implemented solely for purpose of providing EPG metadata to other devices, then the Feature@name attribute shall be "DLNA.ORG_EPGDataOnly". Otherwise, the Feature@name attribute shall be "EPG". In both cases the @version attribute of the same <Feature> element shall have a value of "1". The <Feature> element shall include an <objectIDs> element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	3JAIN	

[COMMENT] DLNA.ORG_EPGDataOnly usage is encouraged in cases where a DLNA EPG Server Device Option is used solely as a mechanism for supplying ancillary metadata to control points on the home-network.

10.5.2.4

[GUIDELINE] If a UPnP AV MediaServer exposes one or more CDS containers with a upnp:class value of object.container.epgContainer, the object@id attribute value of the root of each EPG subtree shall be exposed in the <objectIDs> element of the <Feature> element.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	IZOWC	

[COMMENT] UPnP AV MediaServer control points can use the objectID to initiate a query starting from that subtree to obtain EPG data.

10.5.2.5

[GUIDELINE] If a UPnP AV MediaServer implements the CDS:FreeFormQuery action, it shall include a <Feature> element with the @name attribute equal to "FFQ" in the FeatureList output argument of the CDS:GetFeatureList action. The @version attribute of the same <Feature> element shall have a value of "1". This <Feature> element shall contain one or more <ObjectID> elements. Each <ObjectID> element shall contain the @id property of a CDS container which satisfies both of the following conditions:

- the CDS:FreeFormQuery action is supported for the CDS container and each of its descendant containers;
- the CDS:FreeFormQuery action is not supported for the parent of the CDS container.

Additionally the @level attribute of each <ObjectID> element shall indicate the support level for XQuery requests for the container represented by that <ObjectID> element as defined in 10.5.7.

[ATTRIBUTES]

M	R	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	XXZDZ	

[COMMENT] This guideline repeats the UPnP requirements for the FFQ <Feature>. In ISO/IEC 29341-20-12:2016.

10.5.2.6

[GUIDELINE] If a UPnP AV MediaServer exposes EPG Programme items that represent channelized content, it shall implement the DLNA Extended Tuner to expose the device's channel lineup as specified in 10.4.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	JEKB7	

[COMMENT] The channel lineup provides UPnP AV MediaServer control points with the values which can be used to search the EPG items using the channelId property. The channels are represented as a collection of videoBroadcastItems or audioBroadcast Items. These videoBroadcastItems and audioBroadcast items do not need to provide a URL in their <res>-elements. If the channelId@type of an EPG item is "NETWORK" then the channelId contains the actual URL of the content. If the channelId@type is not "NETWORK" then channelId contains a identifier that is resolved to a tuner item. Therefore, a device which implements the UPnP AV Media Server EPG Device Option does not need to stream content from a physical tuner. Such a device might not even have a physical tuner.

10.5.3 MM/EPG EPG object persistence guidelines**10.5.3.1**

[GENERAL] This subclause defines the object persistence requirements for a UPnP AV MediaServer when implementing the optional EPG Server Device Option as defined in guideline 10.5.2.

10.5.3.2

[GUIDELINE] A UPnP AV MediaServer should use the same CDS Programme Item (i.e. a CDS Programme Item with the same @id property) to represent an EPG event throughout the lifetime of that EPG event, except when executing the Service Reset Procedure described in 2.3.7.1 of ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	VVDED	

[COMMENT] Some UPnP AV MediaServer implementations delete a CDS object representing an EPG event and recreate a new CDS object for that same event when an update is received from an EPG source. Such behaviour makes it difficult for UPnP AV MediaServer control points to keep track of EPG events of interest, and it is discouraged by DLNA.

10.5.3.3

[GUIDELINE] If a UPnP AV MediaServer implements the ScheduledRecording Device Option and indicates support for the cds EPG record class as defined in guideline 10.3.11, then it shall use the same CDS Programme Item (i.e. a CDS Programme Item with the same @id property) to represent an EPG event throughout the lifetime of that EPG event, except when executing the Service Reset Procedure described in 2.3.7.1 of ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	58U9B	

10.5.3.4

[GUIDELINE] If a UPnP AV MediaServer always uses the same CDS Programme Item to represent an EPG event throughout the lifetime of that EPG event (except when executing the Service Reset Procedure described in 2.3.7.1 of ISO/IEC 29341-14-12:2011), then it shall use the <dlina:X_DLNA CAP> element (as a child of the <device> element that represents the UPnP AV MediaServer) in the device description document and include the Capability ID "epg-object-persistence" in the element's comma-separated value list.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	JGDW8	

10.5.4 MM/EPG EPG Controller definition

10.5.4.1

[GUIDELINE] A DLNA device class may implement the EPG Controller Device Capability.

[ATTRIBUTES]

O	A	DMS DMP DMR DMC	M-DMS M-DMP	n/a	n/a	BG2YK	

10.5.4.2

[GUIDELINE] An EPG Controller shall implement a UPnP AV MediaServer control point for interacting with a ContentDirectory service on a DMS or M-DMS.

[ATTRIBUTES]

M	R	+EPG+	n/a	n/a	ISO/IEC 29341-14-12: 2011 ISO/IEC 29341-14-3	DKIL9	

[COMMENT] This guideline indicates that an EPG Controller Device Capability will use a UPnP control point that controls a UPnP AV MediaServer for browsing content.

10.5.5 MM/EPG mandatory EPG programme item properties

10.5.5.1 MM/EPG general

This defines the mandatory properties that a UPnP AV MediaServer needs to expose for EPG Programme Items.

10.5.5.2 MM/EPG upnp:class property

10.5.5.2.1

[GUIDELINE] A UPnP AV MediaServer shall use the object.item.epgItem class or a derived class thereof for all EPG Programme Items exposed in an EPG Container. The specific value of the upnp:class property shall conform to the requirements defined in 10.5.5.2.2 to 10.5.5.2.4.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	426J3	

[COMMENT] All EPG Programme Items will be derived from the object.item.epgItem base class.

10.5.5.2.2

[GUIDELINE] If a UPnP AV MediaServer is unable to determine the DLNA Media Class to which the Content Binary associated with the EPG Programme Item conforms, it shall set the value of the upnp:class property to object.item.epgItem.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	7VCPH	

[COMMENT] A UPnP AV MediaServer may not be able to determine the Media Format of the Content Binary associated with an EPG Programme Item when that EPG Programme Item is initially exposed, or even during the entire lifespan of the EPG Programme Item. In that case, a UPnP AV MediaServer will set the upnp:class value to object.item.epgItem, and will not use one of the media format-specific derived classes. If the Media Format becomes known during the lifespan of the EPG Programme Item, the UPnP AV MediaServer will update the value of the upnp:class property as specified in 10.5.5.2.3 and 10.5.5.2.4.

10.5.5.2.3

[GUIDELINE] If a UPnP AV MediaServer determines that the Content Binary associated with an EPG Programme Item conforms to the DLNA AV Media Class, the value of the upnp:class property shall be set to object.item.epgItem.videoProgram.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	3CGXD	

[COMMENT] A UPnP AV MediaServer will use the object.item.epgItem.videoProgramme class for all EPG Programme Items whose associated Content Binaries conform to the DLNA AV Media Class. It is not required that the DLNA Media Format Profile ID be exposed in the <res> element of the EPG Programme Item.

10.5.5.2.4

[GUIDELINE] If a UPnP AV MediaServer determines that the Content Binary associated with an EPG Programme Item conforms to the DLNA Audio Only Media Class, the value of the upnp:class property shall be set to object.item.epgItem.audioProgram.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	8WDPK	

[COMMENT] A UPnP AV MediaServer will use the object.item.epgItem.audioProgramme class for all EPG Programme Items whose associated Content Binaries conform to the DLNA Audio Only Media Class.

10.5.5.2.5

[GUIDELINE] If a UPnP AV MediaServer determines that the Content Binary associated with an EPG Programme Item does not conform to a DLNA Media Format Profile in the AV or Audio Only Media Classes, then it shall not expose the dlna.org_PN parameter in the 4th Field of the protocolInfo property.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	N6QVH	

[COMMENT] In order to support the DLNA mission of interoperability, EPG Programme Items whose content is not currently supported by the DLNA ecosystem will not be identified as DLNA content.

10.5.5.2.6

[GUIDELINE] If a UPnP AV MediaServer determines that the Content Binary associated with an EPG Programme Item conforms to a DLNA Media Format Profile in the AV or Audio Only Media Classes, then it should expose the dlna.org_PN parameter in the 4th Field of the protocolInfo property.

[ATTRIBUTES]

S	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	UHE9C	

10.5.5.3 MM/EPG dc:title property**10.5.5.3.1**

[GUIDELINE] A UPnP AV MediaServer shall provide a value for the dc:title property that identifies the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	TDXMQ	

[COMMENT] The value of the dc:title property will represent the programme or title of the EPG Programme Item.

10.5.5.3.2

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item that does not have a DLNA Recognized Metadata Source, the value of dc:title should be set to best represent a user-friendly title for the contents represented by the EPG Programme Item.

[ATTRIBUTES]

S	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	4FBKE	

10.5.5.3.3

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, the value of the dc:title property shall be set to the value of the highest priority metadata (as listed below in order of decreasing priority) available for that EPG Programme Item in the source metadata.

- Content.ContentTitle
- ContentServiceSource.Name
- ContentService.ContentServiceMapping.Channel
- ContentService.ContentServiceMapping.URLSource

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	LY378	

[COMMENT] At least one of the above-mentioned OpenEPG metadata elements will be present so that there will always be a value available to populate the dc:title property.

10.5.5.3.4

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, the value of the dc:title property shall be set to the value of the highest priority metadata (as listed below in order of decreasing priority) available for that EPG Programme Item in the source metadata.

- ProgramLocation.InstanceDescription.Title
- ProgramInformation.BasicDescription.Title

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	IWD2N	

[COMMENT] At least one of the above-mentioned TV-Anytime metadata elements will be present so that there will always be a value available to populate the dc:title property.

10.5.5.3.5

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, the value of the dc:title property shall be set to the value of the highest priority metadata (as listed below in order of decreasing priority) available for that EPG Programme Item in the source metadata.

- short_event_descriptor.event_name
- service_descriptor.service_name

If neither the event_name nor the service_name are available, a vendor defined value shall be assigned.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468	LADLI	

[COMMENT] At least one of the above-mentioned DVB-SI metadata elements will be present so that there will always be a value available to populate the dc:title property.

10.5.5.4 MM/EPG upnp:longDescription property

10.5.5.4.1

[GUIDELINE] If a detailed description of the EPG Programme Item is available, a UPnP AV MediaServer shall expose the upnp:longDescription property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	XR6OP	

[COMMENT] The value of the upnp:longDescription property provides a summary or synopsis for the EPG Programme Item. If a suitable source for this property is not present in the source metadata, this property is omitted in the EPG Programme Item.

10.5.5.4.2

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item that does not have a DLNA Recognized Metadata Source, the value of the upnp:longDescription property shall provide the most descriptive summary of the EPG Programme Item contents.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	74NJM	

10.5.5.4.3

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, the value of the upnp:longDescription property shall be set to the value of the highest priority metadata (as listed below in order of decreasing priority) available for that EPG Programme Item in the source metadata.

- Content.LongDescription
- Content.ShortDescription

If neither of these metadata elements are present in the source metadata, then the upnp:longDescription property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	LC78K	

10.5.5.4.4

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, the value of the upnp:longDescription property shall be set to the value of the highest priority metadata (as listed below in order of decreasing priority) available for that EPG Programme Item in the source metadata.

- (ProgramLocation.)InstanceDescription.Synopsis
- ProgramInformation.BasicDescription.Synopsis

If neither of these metadata elements are present in the source metadata, then the upnp:longDescription property shall be omitted from the EPG Programme Item.

If multiple descriptions with different length attributes ("short", "medium", or "long") exist in the source metadata, the instance with the highest length attribute ("long" > "medium" > "short") shall be assigned to the upnp:longDescription property.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	DBUAV	

10.5.5.4.5

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, the value of the upnp:longDescription property shall be set to the value of the metadata listed below for that EPG Programme Item in the source metadata.

- short.event.descriptor.text_char

If this metadata element is not present in the source metadata, then the upnp:longDescription property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468	JMW5D	

10.5.5.5 MM/EPG dc:language property**10.5.5.5.1**

[GUIDELINE] If a list of languages is available (as different audio tracks of the EPG Programme Item), each of these languages shall be exposed using an instance of the multi-valued dc:language property. Languages shall be represented in conformance with IETF RFC 3066, for example, "en-US".

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 IETF RFC 3066	Q477D	

[COMMENT] The dc:language property is a multi-valued property allowing all languages to be represented (as separate instances of the dc:language property) when an EPG Programme Item has multiple audio tracks, each in a different language.

10.5.5.5.2

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item which does not have a DLNA Recognized Metadata Source, the EPG Programme Item shall provide an instance of the dc:language property, set to the appropriate value, for each of the languages of the audio tracks of the associated Content Binary.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	V2ALV	

10.5.5.5.3

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, then the following applies (in order of decreasing priority).

- If the OpenEPG Event.AudioLanguages metadata is present, a dc:language property instance shall be exposed and appropriately populated for each of the languages available in the OpenEPG Event.AudioLanguages metadata.
- If the OpenEPG Content.PrimaryLanguage is present, an instance of the dc:language property shall be exposed and appropriately populated with that value. In addition, for each Content.Alternative.Language that is present, an instance of the dc:language property shall be exposed and appropriately populated with each respective value.
- If the DistributionNetwork.ContentService.ContentServiceMapping.ServiceAudioLanguages metadata is present, a dc:language property instance shall be exposed and appropriately populated for each of the languages available in the OpenEPG DistributionNetwork.ContentService.ContentServiceMapping.ServiceAudioLanguages metadata.

In this guideline, "appropriately populated" means a conversion from IETF RFC 4646 language code used in the OpenEPG metadata to language representations in conformance with IETF RFC 3066 is required.

If none of these metadata elements are present in the source metadata the dc:language, then property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A IETF RFC 4646 IETF RFC 3066	58A90	

10.5.5.5.4

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, then the following applies (in order of decreasing priority).

- If one or more TV-Anytime (ProgramLocation.)InstanceDescription.AVAttributes.AudioAttributes.AudioLanguage metadata elements are present, a dc:language property instance shall be exposed and appropriately populated for each of the languages available in the TV-Anytime ProgramLocation.)InstanceDescription.AVAttributes.AudioAttributes.AudioLanguage metadata elements. This requires a conversion from the ISO_639-1 language code, used in the TV-Anytime metadata to language representations in conformance with IETF RFC 3066.

- If one or more TV-Anytime ProgramInformation.AVAttributes.AudioAttributes.AudioLanguage metadata elements are present, an instance of the dc:language property shall be exposed and appropriately populated for each of the TV-Anytime BasicDescription.AVAttributes.AudioAttributes.AudioLanguage metadata elements. This requires a conversion from the ISO_639-1 language code, used in the TV-Anytime metadata to language representations in conformance with IETF RFC 3066.
- If the TV-Anytime ProgramInformation.BasicDescription.Language metadata is present, an instance of the dc:language property shall be exposed and populated with that value. This requires a conversion from the ISO_639-1 language code, used in the TV-Anytime metadata to language representations in conformance with IETF RFC 3066.
- If the TV-Anytime ServiceInformation.ServiceLanguage metadata is present, a dc:language property instance shall be exposed and populated with that value. This requires a conversion from the ISO_639-1 language code, used in the TV-Anytime metadata to language representations in conformance with IETF RFC 3066.

In this guideline, "appropriately populated" means a conversion from IETF RFC 4646 language code used in the TV-Anytime metadata to language representations in conformance with IETF RFC 3066 is required.

If none of these metadata elements are present in the source metadata the dc:language property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3 IETF RFC 4646	F5TY7	

10.5.5.5.5

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, then the following applies (in order of decreasing priority):

- If one or more DVB-SI event_information_section.component_descriptor metadata elements are present, a dc:language property instance shall be exposed and appropriately populated for each of the DVB-SI event_information_section.component_descriptor metadata elements. This requires a conversion from the ISO_639 language code, used in the DVB-SI metadata to language representations in conformance with IETF RFC 3066.
- If one or more DVB-SI service_description_section.component_descriptor metadata elements are present, a dc:language property instance shall be exposed and appropriately populated for each of the DVB-SI service_description_section.component_descriptor metadata elements. This requires a conversion from the ISO_639 language code, used in the DVB-SI metadata to language representations in conformance with IETF RFC 3066.

In this guideline, "appropriately populated" means a conversion from IETF RFC 4646 language code used in the DVB-SI metadata to language representations in conformance with IETF RFC 3066 is required.

If none of these metadata elements are present in the source metadata the dc:language property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468 IETF RFC 4646	P2K7P	

10.5.5.6 MM/EPG upnp:rating property

10.5.5.6.1

[GUIDELINE] If Content Rating information is available for an audioProgramme or videoProgramme EPG Programme Item, it shall be exposed using the upnp:rating property. The property shall include the upnp:rating@type property. DLNA recognized rating systems are listed in Annex J. When metadata source systems contain rating information that conforms to one of the DLNA recognized systems defined in Annex J the upnp:rating@type property shall be populated with a Domain name from Annex J and the upnp:rating property shall be populated with a rating value from Annex J that corresponds to the domain in the upnp:rating@type property. If the source metadata does not include Content Rating information, the upnp:rating property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 IETF RFC 3066	JMC5Q	

10.5.5.6.2

[GUIDELINE] If the rating domain exposed by a metadata schema is one of the systems listed in Annex J, then the properties shall be filled out as follows.

- If the system makes a parental rating available, and the <domain> is listed in the "Domain" column of Annex J then the rating@type property shall be <domain>.
- If the system makes a parental rating available, the rating property shall be rating, where rating is one of the valid ratings listed in the "Valid Ratings" column of Annex J for the appropriate <domain>.
- If the rating specified in the system has an age equivalence, the device shall expose a second rating@equivalentAge property with the value of age, where age is the age listed in the "Age Equivalence" column of Annex J for the appropriate <domain>.
- If the rating also includes advice, the device should expose a rating@advice property with the value of advice, where advice is a comma separated list of all the advice values that apply to this rating, as listed in the "Valid Advice" column of Annex J for the appropriate <domain>.

Example:

```
<rating type="ACMA.GOV.ORG" equivalentAge="15" advice="V,L,S">MA15+</rating>
```

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	V9QX3	

[COMMENT] The age column is intended to be used programmatically.

10.5.5.6.3

[GUIDELINE] If there is more than one rating for an individual rating authority then only the most restrictive rating should be exposed.

[ATTRIBUTES]

S	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	AHP4I	

10.5.5.6.4

[GUIDELINE] If the rating system does not match any of the ratings systems listed in Annex J, but the rating system can be recognized by a unique and valid ICANN domain, then the device shall expose the rating system using the rules in 10.5.5.6.2 with a <domain> value that is a valid ICANN domain. The values of rating, equivalentAge and advice are set to any values that are specified for that domain, where the valid values are outside the scope of these DLNA guidelines.guidelines. The rating@type property shall be:

<domain> + "_PR" or <domain> + "_MA"

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	A23TJ	

10.5.5.6.5

[GUIDELINE] If the rating system does not match any of the ratings systems listed in Annex J, and the rating system cannot be recognized by a unique and valid ICANN domain, then the device shall use the value "DLNA.ORG_UNKNOWN_PR:<rating system>" as the upnp:rating@type value.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	83AX3	

[COMMENT] The age column is intended to be used programmatically.

10.5.5.6.6

[GUIDELINE] If the value of rating@type is one of the following:

- "cbasc.ca/english"
- "cbasc.ca/french"
- "mpaa.org"
- "kbc.go.kr"
- "gio.gov.tw"

The rating and rating@advice property should be exposed as defined in ANSI/CEA-766-C.

[ATTRIBUTES]

S	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011 ANSI/CEA-76 6-C	N66VU	

[COMMENT] In order to programme the V-Chip, content will maintain its CEA-766 rating. This CEA-766 rating requires that all advice fields be maintained in the EPG, so that they can be translated back to the appropriate V-Chip bits. For more information, refer to ANSI/CEA-766-C.

10.5.5.6.7

[GUIDELINE] If the rating authority is listed in Annex J and the <rating> property value is a valid value in the Valid Ratings column for that domain then if the rating@equivalentAge property is empty, the device shall use the associated Age Equivalence value from Annex J as the value of rating@equivalentAge.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	Q6UBE

10.5.5.6.8

[GUIDELINE] If the rating authority is listed in Annex J and the rating@equivalentAge value is a valid value in the Age Equivalent column for that domain then if the rating property is empty, the device shall use the associated rating value from Annex J as the value of the rating property.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	8YGTV

10.5.5.6.9

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, then the following applies (in order of decreasing priority).

- Rating metadata in OpenEPG is found in three places. It may be associated with the Event, the Content, or the Service. If rating data is found in more than one of these elements associated with a single Event only the most specific metadata should be exposed. If there is Rating metadata in the Event object then the Event Rating metadata shall be used. If there is no metadata in the Event and there is Rating metadata in the Content object then the Content object Rating metadata shall be used. If neither the Event nor the Content object has Rating metadata then the rating metadata in the service object shall be used. Once the source of the rating metadata has been determined by the above rules then the mapping is done according to the following rules where <OpenEPGObject> is one of Event.EventContentAdvisory, Content.ContentAdvisory, or DistributionNetwork.ContentService.ContentServiceMapping.ContentAdvisory as determined above.
- If the OpenEPG RatingAuthority metadata conforms to one of the DLNA recognized rating authorities, in Annex J, then the upnp:rating@type property instance shall be exposed and populated as follows. The <domain> parameter shall be set to the <OpenEPGObject>.RatingAuthority metadata value as described in 10.5.5.6.2 through 10.5.5.6.6.
 - upnp:rating@type = <domain>
- If the OpenEPG RatingAuthority metadata does not conform to one of the DLNA recognized rating authorities but a valid ICANN domain name can be established that uniquely identifies that rating authority, a upnp:rating@type property instance shall be exposed and the following syntax and assignment shall be used:
 - upnp:rating@type = <OpenEPGObject>.RatingAuthority + "_PR"

- If the OpenEPG RatingAuthority metadata does not conform to one of the DLNA recognized rating authorities and no valid ICANN domain name can be established that uniquely identifies that rating authority, a upnp:rating@type property instance shall be exposed and the following syntax and assignment shall be used:
 - upnp:rating@type = "DLNA.ORG_UNKNOWN_PR:" + <OpenEPGObject>.RatingAuthority
- If the OpenEPG RatingAuthority metadata conforms to one of the DLNA recognized rating authorities, in Annex J, then the upnp:rating property shall be exposed and populated as follows. The <OpenEPGObject>.ParentalRating metadata value shall be mapped to the appropriate Rating Value in Annex J.
 - upnp:rating = mapped Rating Value
- If the OpenEPG RatingAuthority metadata does not conform to one of the DLNA recognized rating authorities in Annex J, then the upnp:rating shall be set to the ParentalRating value
 - upnp:rating = <OpenEPGObject>.ParentalRating
- If the OpenEPG <OpenEPGObject>.ContentAdvisory metadata is present and contains MinimumAge then, a upnp:rating@equivalentAge instance shall be exposed and assigned the minimum age value.
 - upnp:rating@equivalentAge = <OpenEPGObject>.MinimumAge

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	UNCGW	

10.5.5.6.10

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, then the following applies (in order of decreasing priority).

- If the tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation/tva:BasicDescription/tva:ParentalGuidance metadata is present and indicates that the Programme Item conforms to one of the DLNA recognized rating authorities listed in Annex J, then a upnp:rating and upnp:rating@type property pair instance shall be exposed and appropriately populated: the rating@type property shall be set to the DOMAIN value in Annex J that maps to the /tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation/tva:BasicDescription/tva:ParentalGuidance/mpeg7:Region metadata value and the <rating> property shall be set to the Annex J "Valid Ratings" value that maps to the tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation/tva:BasicDescription/tva:ParentalGuidance.ParentalRating metadata value.
- If the TV-Anytime BasicDescription/tva:ParentalGuidance/mpeg7:ParentalRating metadata is present and indicates that the Programme Item does not conform to one of the DLNA recognized rating authorities but a valid ICANN domain name can be established that uniquely identifies that rating authority, then a upnp:rating and upnp:rating@type property pair instance shall be exposed and the following syntax and assignments shall be used:
 - upnp:rating = /tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation/tva:BasicDescription/tva:ParentalGuidance/mpeg7:ParentalRating
 - upnp:rating@type = <valid ICANN domain name> + "_PR"
- If the TV-Anytime BasicDescription.ParentalGuidance .ParentalRating metadata is present and indicates that the Programme Item does not conform to one of the DLNA recognized rating authorities and no valid ICANN domain name can be established that uniquely identifies that rating authority, then a upnp:rating and upnp:rating@type property pair instance shall be exposed and the following syntax and assignments shall be used:

- upnp:rating =
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:ParentalRating
- upnp:rating@type = "DLNA.ORG_UNKNOWN_PR:" +
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:Region
- If the TV-Anytime BasicDescription.ParentalGuidance metadata is present and contains MinimumAge metadata and a valid ICANN domain name can be established that uniquely identifies that rating authority, then a upnp:rating and upnp:rating@type property pair instance shall be exposed and the following syntax and assignments shall be used:
 - upnp:rating@equivalentAge =
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:MinimumAge
 - upnp:rating =
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:MinimumAge
 - upnp:rating@type = < domain name> + "_MA"
- If the TV-Anytime
tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation/tva:
BasicDescription/tva:ParentalGuidance metadata is present and contains MinimumAge
metadata and indicates that the Programme Item conforms to one of the DLNA recognized
rating authorities listed in Annex J, then a upnp:rating and upnp:rating@type property pair
instance shall be exposed and the following syntax and assignments shall be used:
 - upnp:rating@equivalentAge =
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:MinimumAge
 - upnp:rating@type = <domain name> (from Annex J)
- If the TV-Anytime BasicDescription.ParentalGuidance metadata is present and contains MinimumAge metadata and no valid ICANN domain name can be established that uniquely identifies that rating authority, then a upnp:rating and upnp:rating@type property pair instance shall be exposed and the following syntax and assignments shall be used:
 - upnp:rating@equivalentAge =
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:MinimumAge
 - upnp:rating =
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:MinimumAge
 - upnp:rating@type = "DLNA.ORG_UNKNOWN_MA:" +
/tva:TVAMain/tva:ProgramDescription/tva:GroupInformationTable/tva:GroupInformation
/tva:BasicDescription/tva:ParentalGuidance/mpeg7:Region

If none of these metadata elements are present in the source metadata, then the upnp:rating property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	F7NL9	

10.5.5.6.11

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, then the following applies (in order of decreasing priority).

- If the DVB-SI event_information_section.parental_rating_descriptor metadata is present, then a upnp:rating and upnp:rating@type property pair instance shall be exposed. The 24-bit

country code metadata shall be converted according to ISO 3166 and the resulting <Country> code shall be used as follows:

- If a rating system in Annex J can be determined from the country code then
 - upnp:rating@type = <domain>
 - If the value of the <Rating> metadata is less than 16 then
 - <Rating> = <Rating> + 3
 - upnp:rating@equivalentAge= <Rating>
 - upnp:rating = rating that matches the equivalentAge value
- If the rating can be mapped to a valid rating value for the specified domain then
 - rating = rating value from Annex J
 - upnp:rating = rating
- If a rating system in Annex J cannot be determined from the country code then the value shall be used in the assignments below. Likewise, the 8-bit <Rating> code shall be used as follows:
 - If the value of the <Rating> metadata is less than 16 then
 - <Rating> = <Rating> + 3
 - upnp:rating@equivalentAge= <Rating>
 - upnp:rating@= <Rating>
 - upnp:rating@type = "DLNA.ORG_UNKNOWN" + "_MA:" + <Country>
 - else
 - upnp:rating = "Broadcaster Defined:" + <Rating>
 - upnp:rating@type = "DLNA.ORG_UNKNOWN" + "_PR:" + <Country>

If the metadata element is not present in the source metadata, then the upnp:rating property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468 ISO 3166	LIPFO	

10.5.5.7 MM/EPG upnp:channelID property

10.5.5.7.1

[GUIDELINE] An EPG Programme Item CDS object may expose one or more instances of the upnp:channelID property.

[ATTRIBUTES]

O	L	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	F953R	

[COMMENT] The upnp:channelID property is used across the SRS and EPG system usages as the common identifier for channels.

10.5.5.7.2

[GUIDELINE] If a UPnP AV MediaServer exposes one or more instances of the upnp:channelID property, each shall have a value that identifies the channel source of the EPG Programme Item.

Each `upnp:channelID` property shall include the `upnp:channelID@type` property. The `upnp:channelID` property is multi-valued so that different formats can be used to identify a particular channel. When multiple instances of the `upnp:channelID` property are exposed, they shall refer to the same channel item in the CDS channel lineup. The value of the `upnp:channelID@type` property shall conform to the guidelines in 10.5.5.7.3 to 10.5.5.7.11.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	WW3W8	

10.5.5.7.3

[GUIDELINE] If a UPnP AV MediaServer exposes a vendor-specific channel type, then the `upnp:channelID@type` value shall incorporate a valid ICANN registered domain name that uniquely identifies the vendor.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	BFQIE	

10.5.5.7.4

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item with a `upnp:channelID@type` value of "ANALOG", then the value of the `upnp:channelID` property shall be a positive integer.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	GZNAJ	

[COMMENT] This enumerated type is potentially misleading as the source is not required to be an analog broadcast source. Vendors are encouraged to use this enumerated type for any channel items which are represented by a channel identifier consisting of a single integer.

10.5.5.7.5

[GUIDELINE] A UPnP AV MediaServer shall not use the `upnp:channelID@type` value of "ANALOG" to represent a major/minor channel number using "aliasing" (such as multiplying the major channel number by 1 000 then adding the minor channel number). Channel numbers with a major / minor channel number shall be exposed using the `upnp:channelID@type` value of "DIGITAL" as defined in 10.5.5.7.6.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	E7I45	

[COMMENT] The terms analog and digital do not refer to the broadcast system. The meaning is only distinguishing the numbering system.

10.5.5.7.6

[GUIDELINE] If a UPnP AV Media Server exposes an EPG Programme Item with a `upnp:channelID@type` value of "DIGITAL", then the value of the `upnp:channelID` property shall consist of a "major" and "minor" channel number pair in the format.

- <Major Channel Number>,<Minor Channel Number>

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	LI5G3	

[COMMENT] Implementers need to note that UPnP uses a comma to separate the major and minor channel numbers while they are often separated with a period.

10.5.5.7.7

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item with a `upnp:channelID@type` value of "SI", then the value of the `upnp:channelID` property shall consist of a Service Information Triplet in the format.

- The <Network ID> term is a non-negative numerical value with a range of 0 to 0xFFFF. The value is network specific and shall be represented as a decimal or hexadecimal value. The value shall be omitted (i.e. empty string) to indicate an unknown <network ID> term.
- The <Transport Stream ID> term is a non-negative numerical value with a range of 0 to 0xFFFF. The value is network specific and shall be represented as a decimal or hexadecimal value. The value shall be omitted (i.e. empty string) to indicate an unknown <Transport Stream ID> term.
- The <Service ID> term is a non-negative numerical value with a range of 0 to 0xFFFF. The value is network specific and can be represented as a decimal or hexadecimal value.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	3C6H7	

[COMMENT] This provides clarification for the values contained within the `upnp:channelID` property for the "SI" type that is lacking in ISO/IEC 29341-14-12:2011. Examples of valid values for the `upnp:channelID` are as follows:

- <upnp:channelID type="SI">0x1234,0xFEDC,0x0102</upnp:channelID>
- <upnp:channelID type="SI">12345,23456,32109</upnp:channelID>
- <upnp:channelID type="SI">,,1,0x0102</upnp:channelID>
- <upnp:channelID type="SI">,,0x0102</upnp:channelID>

10.5.5.7.8

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item with a `upnp:channelID@type` value of "NETWORK", then the value of the `upnp:channelID` property shall consist of a properly formatted URI.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	CDIET	

[COMMENT] The NETWORK type is used for non-traditional broadcast sources which present content to the consumer using a "channel metaphor".

10.5.5.7.9

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, then the values of the upnp:channelID and the upnp:channelID@type properties shall be obtained from the metadata as defined below (in order of decreasing priority).

- If the OpenEPG DistributionNetwork.ContentService.ContentServiceMapping is present and contains both the Channel and MinorChannel metadata elements, then:
 - upnp:channelID = Channel + "," + MinorChannel
 - upnp:channelID@type = "DIGITAL"
- If the OpenEPG DistributionNetwork.ContentService.ContentServiceMapping is present and contains only the Channel metadata element, then:
 - upnp:channelID = Channel
 - upnp:channelID@type = "ANALOG"
- If the OpenEPG DistributionNetwork.ContentService.ContentServiceMapping is present and contains the URLSource metadata element, then:
 - upnp:channelID = URLSource
 - upnp:channelID@type = "NETWORK"

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	X6ZPW	

10.5.5.7.10

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, then the values of the upnp:channelID and the upnp:channelID@type properties shall be obtained from the metadata as defined below (in order of decreasing priority).

- If the TV ProgramLocationTable.ProgramURL is present and its value starts with the string "dvb://", then:
 - upnp:channelID = <Network ID> + "," + <Transport Stream ID> + "," + <Service ID> as parsed from the ProgramURL metadata according to ETSI TS 102 822-3 and ETSI TS 102 822-4
 - upnp:channelID@type = "SI"
- If the TV ProgramLocationTable.ProgramURL is present and its value starts with the string "PAL://", "NTSC://", or "SECAM://" then:
 - upnp:channelID = <channel> as parsed from the ProgramURL metadata according to ETSI TS 102 822-3 and ETSI TS 102 822-4
 - upnp:channelID@type = "ANALOG"

If none of these properties are present in the source metadata the upnp:channelID property shall be omitted for the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3 ETSI TS 102 822-4	EAR7P	

10.5.5.7.11

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, then the value of the upnp:channelID shall be obtained from the SDT table metadata as defined below.

- upnp:channelID = original_network_id + "," + transport_stream_id + "," + service_id
- upnp:channelID@type = "SI"

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468	TDN6K	

10.5.5.7.12

[GUIDELINE] If a UPnP AV MediaServer exposes a Channelized EPG Programme Item, then it shall include one or more instances of the upnp:channelID property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	FBS7S	

[COMMENT] The upnp:channelID property identifies the channel through which the Programme Item will be delivered through for channelized content.

10.5.5.8 MM/EPG upnp:channelID@distriNetworkID property**10.5.5.8.1**

[GUIDELINE] A UPnP AV MediaServer EPG Programme Item shall include the upnp:channelID@distriNetworkID property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	W5EQB	

[COMMENT] The upnp:channelID@distriNetworkID property identifies the Distribution Network from which the channel is sourced.

10.5.5.8.2

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item which does not have a DLNA Recognized Metadata Source, then the value of the upnp:channelID@distriNetworkID property shall reflect the distribution source of the channel.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	2PPZ2	

[COMMENT] The `upnp:channelID@distriNetworkID` property is used by the user/application to determine which server/service will provide the content.

10.5.5.8.3

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, then the value of the `upnp:channelID@distriNetworkID` property shall be set to the value of the OpenEPG `DistributionNetwork.DistributionNetworkID` metadata.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	LA35C	

10.5.5.8.4

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, then the `upnp:channelID@distriNetworkID` property shall contain information that allows the user/application to determine the server/service providing the content identified by the EPG metadata.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	ANNC2	

10.5.5.8.5

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, then the value of the `upnp:channelID@distriNetworkID` property shall be set to the `network_id` of the NIT table

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468	J3BRD	

10.5.5.9 MM/EPG `upnp:channelID@distriNetworkName` property

10.5.5.9.1

[GUIDELINE] A UPnP AV MediaServer EPG Programme Item should include the `upnp:channelID@distriNetworkName` property.

[ATTRIBUTES]

S	A	DMS	M-DMS	Na	ISO/IEC 29341-14-12: 2011	NZF7S	

[COMMENT] The `upnp:channelID@distriNetworkName` property identifies the Distribution Network from which the channel is sourced.

10.5.5.9.2

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item which does not have a DLNA Recognized Metadata Source, the value of the `upnp:channelID@distriNetworkName` property should reflect the distribution source of the channel.

[ATTRIBUTES]

S	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	W7ETL	

10.5.5.9.3

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, then the value of the `upnp:channelID@distriNetworkName` property shall be set to the value of the highest priority metadata (as listed below in order of decreasing priority) available for the specific EPG Programme Item in the source metadata.

- DistributionNetwork.Name
- DistributionNetwork.DistributionNetworkID

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	7XVTL	

10.5.5.9.4

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, then the value of the `upnp:channelID@distriNetworkName` property shall be set to the

- Network_name_descriptor in the NIT

If this property is not present in the source metadata the `upnp:channelID@distriNetworkName` property shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468	HUM35	

10.5.5.10 MM/EPG time related properties

10.5.5.10.1

[GUIDELINE] An EPG Programme Item should include the `upnp:scheduledStartTime`, `upnp:scheduledStartTime@usage`, `upnp:scheduledEndTime`, and `upnp:scheduledDuration` properties.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	ISO/IEC 29341-20-12: 2016	CGDZ5	

[COMMENT] The `upnp:scheduledStartTime` property indicates the time the Programme Item is scheduled to start or become available. The `upnp:scheduledEndTime` property indicates the time the Programme Item is scheduled to end or cease to be available. The `upnp:scheduledDuration` property indicates the actual duration of the programme content. Control points need to examine the `upnp:scheduledStartTime@usage` property to obtain the context of the time values.

10.5.5.10.2

[GUIDELINE] If an EPG Programme Item exposes the `upnp:scheduledStartTime` or `upnp:scheduledEndTime` property, the property value shall represent local time.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	O3SSH	

10.5.5.10.3

[GUIDELINE] If a UPnP AV MediaServer exposes an EPG Programme Item which does not have a DLNA Recognized Metadata Source, then the values of the upnp:scheduledStartTime, upnp:scheduledStartTime@usage, upnp:scheduledEndTime, and upnp:scheduledDuration properties shall be set as follows.

- If the Programme Item refers to scheduled programme content, then the value of the upnp:scheduledStartTime property shall reflect the time the programme content is scheduled to start. The value of the upnp:scheduledEndTime property shall reflect the time the programme content is scheduled to end. The upnp:scheduledStartTime@usage property shall be set to "SCHEDULED_PROGRAM". The value of the upnp:scheduledDuration property shall reflect the duration of the programme content. One of the fields, upnp:scheduledDuration or upnp:scheduledEndTime, could be empty. Its value can be calculated from the other field and upnp:scheduledStartTime.
- If the Programme Item refers to on-demand programme content, then the value of the upnp:scheduledStartTime property shall indicate the beginning of the time window during which the on-demand content is available for consumption. The value of the upnp:scheduledEndTime property shall indicate the end of the time window during which the on-demand content is available for consumption. The upnp:scheduledStartTime@usage property shall be set to "ON_DEMAND". The value of the upnp:scheduledDuration property shall reflect the duration of the programme content and never the length of the time window during which the on-demand content is available for consumption.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ISO/IEC 29341-14-12: 2011	3GTOF	

10.5.5.10.4

[GUIDELINE] If the EPG Programme Item metadata source is OpenEPG, then the values of the upnp:scheduledStartTime, upnp:scheduledStartTime@usage, upnp:scheduledEndTime, and upnp:scheduledDuration properties shall be set as follows.

- If the OpenEPG Event.StartTime is present, then:
 - upnp:scheduledStartTime = Event.StartTime
 - upnp:scheduledStartTime@usage = "SCHEDULED_PROGRAM"
- If the OpenEPG Event.EndTime metadata is present, then:
 - upnp:scheduledEndTime = Event.EndTime
 - upnp:scheduledDuration = Event.Duration or Event.EndTime – Event.StartTime
- If the OpenEPG Event.Duration metadata is present, then:
 - upnp:scheduledEndTime = Event.EndTime or Event.StartTime + Event.Duration
 - upnp:scheduledDuration = Event.Duration
- If the OpenEPG Event.VODStartTime and Event.VODEndTime metadata are present, then:
 - upnp:scheduledStartTime = Event.VODStartTime
 - upnp:scheduledStartTime@usage = "ON_DEMAND"
 - upnp:scheduledEndTime = Event.VODEndTime

- upnp:scheduledDuration = Event.Duration
- If both OpenEPG Event.Duration and OpenEPG Event.scheduledEndTime are missing:
 - upnp:scheduledEndTime = OpenEPG Event.StartTime (of the following Event)
 - upnp:scheduledDuration = OpenEPG Event.StartTime (of the following Event) – OpenEPG Event.StartTime (of this Event)

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ANSI/CEA-20 33 A	2Z8FJ	

[COMMENT] If one of the fields, Event.Duration or Event.scheduledEndTime, is empty its value needs to be calculated from the other field and Event.StartTime. If both are missing the Event.StartTime of the following event can be used as the Event.EndTime for this event.

10.5.5.10.5

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime, then the values of the upnp:scheduledStartTime, upnp:scheduledStartTime@usage, upnp:scheduledEndTime, and upnp:scheduledDuration properties shall be set or omitted as follows in 10.5.5.10.6 and 10.5.5.10.7.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	2Z2FIY	

10.5.5.10.6

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime and the programURL is published with the schedule metadata and

- it is a ScheduleEvent then:
 - upnp:scheduledStartTime =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:Schedule/tva:ScheduleEvent/tva:PublishedStartTime
 - upnp:scheduledEndTime =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:Schedule/tva:ScheduleEvent/tva:PublishedEndTime
 - upnp:scheduledDuration =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:Schedule/tva:ScheduleEvent/tva:PublishedDuration
 - upnp:scheduledStartTime@usage property = "SCHEDULED_PROGRAM"
- it is a BroadcastEvent then:
 - upnp:scheduledStartTime =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:BroadcastEvent/tva:PublishedStartTime
 - upnp:scheduledEndTime =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:BroadcastEvent/tva:PublishedEndTime
 - upnp:scheduledDuration =
tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:BroadcastEvent/tva:PublishedDuration
 - upnp:scheduledStartTime@usage property = "SCHEDULED_PROGRAM"
- it is a OnDemandProgramme then:

- upnp:scheduledStartTime =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:OnDemandProgram/tva:StartOfAvailability
- upnp:scheduledEndTime =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:OnDemandProgram/tva:EndOfAvailability
- upnp:scheduledDuration =
/tva:TVAMain/tva:ProgramDescription/tva:ProgramLocationTable/tva:OnDemandProgram/tva:PublishedDuration
- upnp:scheduledStartTime@usage property = "ON DEMAND"

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	G5BHR	

10.5.5.10.7

[GUIDELINE] If the EPG Programme Item metadata source is TV-Anytime and the programURL is the result of resolving a CRID into a locator then:

- upnp:scheduledStartTime@usage =
/cr:ContentReferencingTable/cr:Result/cr:LocationsResult/cr:DecomposedLocator@mode
(scheduled or ondemand) -> upnp:scheduledStartTime@usage
 - A broadcast event, which is a non-scheduled event (e.g. a news flash) is not concerned by CRID resolution.
- upnp:scheduledStartTime =
/cr:ContentReferencingTable/cr:Result/cr:LocationsResult/cr:DecomposedLocator@start ->
- upnp:scheduledDuration =
/cr:ContentReferencingTable/cr:Result/cr:LocationsResult/cr:DecomposedLocator@duration
- upnp:scheduledEndTime =
/cr:ContentReferencingTable/cr:Result/cr:LocationsResult/cr:DecomposedLocator@end

If neither of these properties are present in the source metadata, then the upnp:scheduledStartTime, upnp:scheduledStartTime@usage, upnp:scheduledEndTime, and upnp:scheduledDuration properties shall be omitted from the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI TS 102 822-3	IYW6R	

[COMMENT] The programURL can be available from different sources. It is published with the schedule metadata and TV-Anytime addresses three types of programmes: Broadcast events (for instance an unscheduled news announcement), schedule events (or SCHEDULED PROGRAMME) and on-demand programmes. The mode upnp:scheduledStartTime@usage is derived from the root (inc. onDemand).

10.5.5.10.8

[GUIDELINE] If the EPG Programme Item metadata source is DVB-SI, then the values of the upnp:scheduledStartTime, upnp:scheduledStartTime@usage, upnp:scheduledEndTime, and upnp:scheduledDuration properties shall be set as follows:

- upnp:scheduledStartTime = event.information.section.start_time
+time_offset_section.local_time
- upnp:scheduledStartTime@usage = "SCHEDULED_PROGRAM"

- `upnp:scheduledEndTime` = `event.information.section.start_time` + `event.information.section.duration` + `time_offset_section.local_time`
- `upnp:scheduledDuration` = `event.information.section.duration`

If one or more of the properties are not present in the source metadata, then the `upnp:scheduledStartTime`, `upnp:scheduledStartTime@usage`, `upnp:scheduledEndTime`, and `upnp:scheduledDuration` properties shall be omitted for the EPG Programme Item.

[ATTRIBUTES]

M	A	DMS	n/a	n/a	ETSI EN 300 468	ZSIPA	

10.5.5.11 MM/EPG @daylightSaving properties

[GUIDELINE] A EPG Programme Item shall include the `upnp:scheduledStartTime@daylightSaving` and `upnp:scheduledEndTime@daylightSaving` properties. Both properties shall have the same value and this property. The value of the property shall indicate whether the time values are expressed in Standard Time or Daylight Saving Time, and shall accurately reflect the application of Daylight Saving Time to the local time of the EPG Server.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 IETF RFC 3066	NHECC	

[COMMENT] The `upnp:scheduledStartTime` property will be expressed in local time including the indication of Daylight Saving Time. When an EPG Server is in a location where Daylight Saving Time is not observed, this property is still needed and all times will indicate Standard Time.

10.5.6 MM/EPG exposing foreign metadata

10.5.6.1

[GUIDELINE] The `upnp:foreignMetadata::fmEmbeddedXML` property of an EPG Item shall only contain information pertaining to the single programme event that this EPG Item represents. The property value shall be a valid XML document in the format indicated by the `upnp:foreignMetadata@type` property.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	WJLQV	

10.5.6.2

[GUIDELINE] For foreign metadata from TVAnytime the `@type` property of `a::fmEmbeddedXML` property in a CDS Event object shall have the value of "tv-anytime.org_1" to indicate TV-Anytime based metadata.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	EHTZM	

10.5.6.3

[GUIDELINE] If the value of the @type property of a::fmEmbeddedXML property in a CDS Event object is "tv-anytime.org_1", then the::TVAMain property shall include a::ProgramInformationTable property which shall include a BasicDescription property for the current EPG Item. TV-Anytime information from different tables shall be integrated into a single <TVAMain> element.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	889NO	

[COMMENT] An example of an EPGItem with TV-Anytime foreign metadata is provided below. It contains a single programme description as well as a location description of this program.

```
<upnp:foreignMetadata type="tv-anytime.org_1">
  <upnp:fmId></upnp:fmId>
  <upnp:fmClass></upnp:fmClass>
  <upnp:fmProvider>dlna.examples.com</upnp:fmProvider>
  <upnp:fmBody xmlFlag="1" mimeType="text/xml">
    <upnp:fmEmbeddedXML>
      <TVAMain xmlns='urn:tva:metadata:2005' xmlns:mpeg7='urn:tva:mpeg7:2005'
xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance' xml:lang='en'>
        <ProgramDescription>
          <ProgramInformationTable>
            <ProgramInformation programId="crid://dlna.examples.com
/8730311156">
              <BasicDescription>
                <Title><Hot tech></Title>
                <Synopsis length="short">Popular science programme
explaining the wonders of DLNA home networks.</Synopsis>
                <Genre href="urn:tva:metadata:cs:IntentionCS:2004:1.2">
                  <Name>Information</Name>
                </Genre>
              </BasicDescription>
              <AVAttributes>
                <AudioAttributes>
                  <NumOfChannels>2</NumOfChannels>
                </AudioAttributes>
                <VideoAttributes>
                  <AspectRatio>16:9</AspectRatio>
                </VideoAttributes>
              </AVAttributes>
            </ProgramInformation>
          </ProgramInformationTable>
          <ProgramLocationTable>
            <Schedule serviceIDRef='HotSci' start='2007-06-01T00:00:00Z'
end='2007-06-01T23:59:59Z'>
              <ScheduleEvent>
                <Programme
crid="crid://dlna.examples.com/8730311156"></Programme>
                <ProgramURL>dvb://277f.ff00.2250;787@2007-06-01T21:00:00Z/PT01H45M</ProgramURL>
                <PublishedStartTime>2007-06-01T21:00:00Z</PublishedStartTime>
                <PublishedDuration>PT01H45M00S</PublishedDuration>
              </Schedule>
            </ProgramLocationTable>
          </TVAMain>
        </upnp:fmEmbeddedXML>
      </upnp:fmBody>
    </upnp:fmBody>
  </upnp:fmBody>
</upnp:foreignMetadata>
```

```

        </ScheduleEvent>
      </Schedule>
    </ProgramLocationTable>
  </ProgramDescription>
</TVAMain>
</upnp:fmEmbeddedXML>
</upnp:fmBody>
</upnp:foreignMetadata>

```

10.5.6.4

[GUIDELINE] If the value of the @type property of a::fmEmbeddedXML property in a CDS Event object is "tv-anytime.org_1", then the <ProgramDescription> element of::TVAMain property may contain other tables having with information related to the current EPG Item (such as the ProgramLocationTable).

[ATTRIBUTES]

O	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	C3FU7	

10.5.6.5

[GUIDELINE] For foreign metadata from OpenEPG the @type property of a::fmEmbeddedXML property in a CDS Event object shall have the value of "openepg.org_v1" to indicate OpenEPG-based metadata.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	OFZPQ	

10.5.7 MM/EPG search guidelines

10.5.7.1

[GENERAL] This defines the search requirements for UPnP AV MediaServers that implement the EPG Server Device Option. The mechanism to obtain EPG data from a server is based on search queries using the CDS:FreeFormQuery() action. A subset of the XQuery language is defined to allow for efficient implementations.

10.5.7.2

[GUIDELINE] A UPnP AV MediaServer implementing the EPG Server Device Option shall implement the CDS:FreeFormQuery action.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	9TP5W	

[COMMENT] UPnP AV MediaServer control points rely on FreeFormQuery searches to select EPGItems exposed by the CDS.

10.5.7.3

[GUIDELINE] If the full XQuery language is supported for a certain sub-tree, its ObjectID@level attribute as defined in 10.5.2.5 shall be set to "0". If a subset of XQuery is supported, the ObjectID@level shall be a comma separated value list containing values that identify the subset(s) being supported. The comma separated value list shall not contain the value "0". The first value in the comma separated value list shall be "DLNA_EPG".

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	6ZJXJ	

[COMMENT] Control points can use the ObjectID@level to check what level of XQuery complexity this server can handle. Vendors can define additional values to indicate support of additional XQuery subsets. The definition and usage of these vendor-defined values are out of scope.

10.5.7.4

[GUIDELINE] If a UPnP AV MediaServer includes the @id attribute of a CDS container in the <ObjectIDs> element of the <Feature> element defined in 10.5.2.3 (i.e. the EPG, EPGDataOnly <Feature> element), then one of the <ObjectID> elements of the <Feature> element defined in 10.5.2.5 (i.e. the FFQ <Feature> element) shall contain the @id attribute of that CDS container or one of its ancestor containers.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	EC7BH	

[COMMENT] DLNA requires the CDS:FreeFormQuery action to be at least supported for all exposed EPG Containers. For example, when a UPnP AV MediaServer exposes two EPG trees, the ObjectIDs are listed in the result of the CDS:GetFeatureList action for the EPG feature. The FFQ <Feature> element indicates that CDS:FreeFormQuery is supported for these two EPG containers. This means that the FFQ <Feature> element can list these two ObjectIDs, one of the listed ObjectIDs plus an ancestor ObjectID, two different ancestors, or one common ancestor. An example of the latter case is a UPnP AV MediaServer which allows CDS:FreeFormQuery actions on all containers. In this case the FFQ <Feature> element will contain the root ObjectID.

10.5.7.5

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option shall support the XQuery language subset defined by the following EBNF notation. This subset is referred to as the "DLNA_EPG" level XQuery.

This level of XQuery uses the constructor to produce a DIDL-Lite compliant document.

- Query ::= ConstructorSTag EnclosedExpression ConstructorETag

The DIDL-Lite fragment is specified as a constructor. The start tag shall have namespace declarations for the specified properties used in the query body.

- ConstructorSTag ::= '<DIDL-Lite' DidlliteNSAttName DcNSAttName? UpnpNSAttName? OtherNSAttName* '>'
- DidlliteNSAttName ::= 'xmlns= "urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/ "'
- DcNSAttName ::= 'xmlns:dc="http://purl.org/dc/elements/1.1/"'

- UpnpNSAttName ::= 'xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"'
- OtherNSAttName ::= <Any other namespaces used in the query body shall be declared. See <http://www.w3.org/TR/REC-xml-names/> for the syntax definitions.>

The main query body uses a Flwor expression. Like StartCount and RequestedCount arguments of a CDS::Browse action, an EPG Controller can limit the returned items to the specified range from the entire result with "fn:position".

- EnclosedExpression ::= '{ SingleMainExpr }'
- SingleMainExpr ::= FlworExpr | (' FlworExpr ') [' fn:position() '=' (' Integer "to" Integer ') '']
- FlworExpr ::= ForClause WhereClause? OrderByClause? ReturnClause

The For clause is static. Only items of epgItem or its derived class can be queried. DIDL-Lite is always specified as a root document even if the query is scoped in an EPG tree of the CDS. The UPnP AV MediaServer that implements the EPG Server Device Option shall limit the search scope within the subtree specified in the CDS::FreeFormQuery action. NoRef shall be specified in this level. This removes all duplicated epgItems from the result.

- ForClause ::= 'for' '\$x' 'in' 'DIDL-Lite//item' [' EPGItem 'AND' NoRef '']
- EPGItem ::= 'fn:starts-with(upnp:class,'object.item.epgItem')'
- NoRef ::= 'fn:not(fn:exists(@refID))'

An EPG Controller can request filtering of the epgItems out by time range, channel, title and long description. Channel line up can be structured per distribution network.

- WhereExpr ::= 'where' TimeExpr ('AND' ChannelExpr)? ('AND' StringExpr)?
- TimeExpr ::= '\$x/upnp:scheduledStartTime' '>=' TimeLiteral 'AND' '\$x/upnp:scheduledEndTime' '<' TimeLiteral
- TimeLiteral ::= <search value. see x.x.x.x for the syntax of timeliteral properties.>
- ChannelExpr ::= Channel | (' ChannelList ') | ChannelDistr | ('ChannelDistrList ')
- ChannelList ::= Channel ('OR' Channel)*
- ChannelDistrList ::= ChannelDistr ('OR' ChannelDistr)*
- Channel ::= '\$x/upnp:channelID' '=' Identifier
- ChannelDistr ::= '\$x/upnp:channelID/@distrNetworkID' '=' Identifier 'AND' (Channel | (' ChannelList '))
- Identifier ::= <search target value>
- StringExpr ::= StrCmpANDList | ('StrCmpORList ')
- StrCmpANDList ::= StrCmp ('AND' StrCmp)*
- StrCmpORList ::= StrCmp ('OR' StrCmp)*
- StrCmp ::= 'fn:contains(' '\$x/' StrCmpProp ',' Identifier '")'
- StrCmpProp ::= 'dc:title' | 'upnp:longDescription'

An EPG Controller can request sorting of the result by start time and channel. Channel line up can be structured per distribution network. Only ascending order is allowed.

- OrderByClause ::= 'order by' SortList
- SortList ::= ((SortDistrNetworkID ",")? SortChannelID ",")? SortStartTime
- SortDistrNetworkID ::= '\$x/upnp:channelID/@distrNetworkID' 'ascending'
- SortChannelID ::= '\$x/upnp:channelID' 'ascending'
- SortStartTime ::= '\$x/upnp:scheduledStartTime' 'ascending'

When the FilterPropList notation is used, the specified properties will return like the Filter argument of CDS::Browse action. When "\$x" is specified, all properties in each epgItem will return like the "*" specification in the argument. In the former case, the UPnP AV MediaServer that implements the EPG Server Device Option shall complement mandatory properties (i.e. @id, @parentID, etc) in the result document to keep the returned DIDL-Lite document valid. In the latter case, when the returned item includes properties whose namespaces are not declared in the requested ConstructorSTag, the UPnP AV MediaServer that implements the EPG Server Device Option shall add appropriate namespace declarations in the returned DIDL-Lite start tag.

- ReturnClause ::= 'return' ('<item>' '{' FilterPropList '}' '</item>' | '\$x')
- FilterPropList ::= FilterProp (',' FilterProp)*
- FilterProp ::= elem-spec | att-spec
- elem-spec ::= direct-elem-spec | nested-elem-spec
- direct-elem-spec ::= '\$x/' element-name
- element-name ::= char*
- nested-elem-spec ::= '{' nested-elem-constBegin '{' nested-elem-val-spec '}' nested-elem-constEnd '}'
- nested-elem-constBegin ::= elemBegin*
- elemBegin ::= '<' element-name '>'
- nested-elem-constEnd ::= elemEnd*
- elemEnd ::= '</' element-name '>'
- nested-elem-val-spec ::= '\$x/' element-name '/' (element-name '/') * text()
- att-spec ::= item-att-spec | property-att-specs
- item-att-spec ::= '\$x/@' attribute-name
- attribute-name ::= char*
- property-att-specs ::= '{' nested-elem-constBegin '{' nested-elem-val-spec nested-elem-att-spec* '}' nested-elem-constEnd '}'
- nested-elem-att-spec ::= '\$x/' element-name '/' (element-name '/') * '@' attribute-name
- ConstructorETag ::= '</DIDL-Lite>'

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12:2011	GHIF3	

[COMMENT] A UPnP AV MediaServer that implements the EPG Server Device Option does not need to support the full XQuery language. This guideline defines a subset of the XQuery language ISO/IEC 29341-14-12:2011. The goal of this subset is to allow for efficient implementations (on embedded platforms). This subset is referred to as level "DLNA_EPG". In Annex I further explanation of this subset is provided.

10.5.7.6

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option may support the XQuery language subset defined by the following EBNF notation. This subset is referred to as the "DLNA_EPG_EXPANDED" XQuery level.

- QueryBody ::= NamespaceDecl EnclosedExpression | prologConstructor
- NamespaceDecl ::= DidlLiteNSDecl DcNSDecl? UpnpNSDecl? OtherNSDecl*
- DidlLiteNSDecl ::= 'declare' 'default' 'namespace' DidlLiteNSAttName;
- DcNSDecl ::= 'declare' 'namespace' DcNSAttName;

- UpnpNSDecl::= 'declare' 'namespace' UpnpNSAttName;
- OtherNSDecl::= 'declare' 'namespace' OtherNSAttName;

Some of definitions are from 10.5.7.5.

- prologConstructor::= ConstructorSTagEnclosedExpressionConstructorETag
- EnclosedExpression ::= '{' SingleMainExpr '}'
- SingleMainExpr::= FlworExpr | ('(' FlworExpr ')' '[' 'fn:position()' '=' Integer 'to' Integer ')' ']')
- FlworExpr::= ForClause WhereClause? OrderByClause? ReturnClause
- ForClause::= 'for' Variable 'in' ForExpr
- Variable::= '\$' 'VarName'
- VarName::= QName
- QName::= PrefixedName | UnprefixedName
- PrefixName::= Prefix ':' LocalPart
- UnprefixedName::= LocalPart

[COMMENT] "Prefix" and "LocalPart" are from the XML specification. The detail definitions are defined in W3C Namespaces.

- ForExpr::= (PathStart PathExpr) | 'fn:distinct-values' '(' PathStart PathExpr ')'
- PathStart::= 'DIDL-Lite//item' | 'DIDL-Lite//container'
- PathExpr::= (('/' Pname) | ('//' Pname) | Predicate)*
- Predicate::= '[' Expr* ']'
- Pname::= QName | ('@' UnprefixedName)
- WhereClause::= 'where' Expr
- Expr::= Property | Comparison | (Expr 'or' Expr) | (Expr 'and' Expr) | ('(' Expr ')') | Function
- Property::= (Variable PathExpr)+ PathExpr
- Comparison ::= Property CompOperator Literal
- CompOperator::= '=' | '!=' | '<' | '<=' | '>' | '>='

"Function" is defined in W3C XQuery.

- OrderByClause::= 'order by' SortList
- SortList::= (Property SortDirection?) | (',' Property SortDirection?)*
- SortDirection::= 'Ascending' | 'Descending'
- ReturnClause::= ('return' Variable PathExpr?) | ('return' Constructor)
- Constructor ::= ('<' UnprefixedName DirAttributeList? '/>') | ('<' UnprefixedName DirAttributeList? '>' DirElemContent '</' UnprefixedName '>' ReturnExpression?)
- DirAttributeList::= (UnprefixedName '=' '"' Literal '"')+
- DirElemContent::= '{' Expr (',' Expr)* '}'
- ReturnExpression::= '[' Expr* ']'
- Literal::=NumericLiteral | StringLiteral
- NumericLiteral::=IntegerLiteral | DecimalLiteral | DoubleLiteral
- IntegerLiteral::=Digits [195] DecimalLiteral::=("." Digits) | (Digits "." [0-9]*)
- DoubleLiteral::=("." Digits) | (Digits ("." [0-9]*)?) ("e" | "E") ("+" | "-")? Digits
- StringLiteral::=('"' ('"' "'') [^"]* '"') | ('"' ('"' "'') [^"]* '"')

[ATTRIBUTES]

O	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011 W3C Namespaces W3C XQuery	PIUCS	

[COMMENT] A UPnP AV MediaServer that implements the EPG Server Device Option does not need to support the full XQuery language. This requirement defines a subset of the XQuery language ISO/IEC 29341-14-12:2011. The goal of this subset is to allow for searching and retrieval of most typically needed EPG items. This subset is referred to as level "DLNA_EPG_EXPANDED". In Annex I further explanation of this subset is provided.

10.5.7.7

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option shall support the following properties in the ForClause, WhereClause, OrderByClause, and ReturnClause of the XQuery expression.

- dc:title
- upnp:channelName
- upnp:channelID
- upnp:scheduledStartTime

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	Q66BU	

[COMMENT] The CDS:GetFreeFormQueryCapabilities action returns an XML-based capability list in the FFQCapabilities argument. This list defines which properties are allowed in the XQuery, hence it defines the minimum set of properties which can be used for searching, sorting, and filtering.

10.5.7.8

[GUIDELINE] A UPnP AV MediaServer that implements the "DLNA_EPG" level XQuery subset shall support the following additional properties in the ForClause, WhereClause and ReturnClause of the XQuery expression.

- dc:class
- upnp:channelID/@type
- upnp:scheduledEndTime
- upnp:scheduledDuration

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	74T34	

[COMMENT] Sorting of these properties is optional.

10.5.7.9

[GUIDELINE] A UPnP AV MediaServer that implements the "DLNA_EPG_EXPANDED" level XQuery subset shall support the following additional properties in the ForClause, WhereClause and ReturnClause of the XQuery expression.

- didl-lite:item/@id
- didl-lite:item/@parentid
- didl-lite:container/@id
- didl-lite:container/@parentid
- didl-lite:res/@protocolInfo
- didl-lite:res/@refID
- dc:creator
- upnp:class
- upnp:channelID/@type
- upnp:channelID/@distriNetworkName
- upnp:scheduledEndTime
- upnp:scheduledDuration
- upnp:longDescription

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	8DWDW	

[COMMENT] Sorting of these properties is optional.

10.5.7.10

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option shall implement the CDS:GetFreeFormQueryCapabilities action as defined in ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	85U35	

10.5.7.11

[GUIDELINE] If the UPnP AV MediaServer supports a subset of XQuery the CDS:GetFreeFormQueryCapabilities action, and there are properties that are allowed anywhere in the XQuery except the "order-by" clause, it shall return a list defined by <searchOnlyPropertyList>. This list shall at least contain the <propertyName> elements, defined in 10.5.7.5 unless that property is already listed in the <propertyList> (see ISO/IEC 29341-20-12:2016).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	OXGLO	

[COMMENT] This list defines the properties that can be used for searching, but not for sorting, and complements the list defined in ISO/IEC 29341-14-12:2011. When a UPnP AV MediaServer allows sorting on more properties than the minimal required set, e.g. sorting on upnp:class, these properties will be added to the <propertyList> and will not appear in the <searchOnlyPropertyList>.

10.5.7.12

[GUIDELINE] If a UPnP AVMediaServer allows for searching and sorting using foreign-metadata properties in an XQuery, then these properties shall be listed in the <propertyList> as defined in ISO/IEC 29341-14-12:2011. Each property shall be fully qualified as defined in ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	TOUKX	

10.5.7.13

[GUIDELINE] If a UPnP AVMediaServer allows for searching but not sorting using foreign-metadata properties in an XQuery, then these properties shall be listed in the <searchOnlyPropertyList> as defined in 10.5.7.11. Each property shall be fully qualified as defined in ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	YFF39	

10.5.7.14

[GUIDELINE] The <namespaceList> element in the FFQCapabilities argument returned by the CDS:GetFreeFormQueryCapabilities action shall list the namespaces used for the properties in the <propertyList> and the <searchOnlyPropertyList>. This includes the namespaces of foreign-metadata properties that are present in the <propertyList> or the <searchOnlyPropertyList>. It shall at least contain the following <namespaceName> elements:

- dc=http://purl.org/dc/elements/1.1/
- upnp=urn:schemas-upnp-org:metadata-1-0/upnp/
- didl-lite=urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	3MRW2	

10.5.7.15

[GUIDELINE] If a UPnP AV MediaServer that implements the "DLNA_EPG" level XQuery subset cannot process a query because it does not conform to the subset defined in 10.5.7.5, it shall return the UPnP error 728 (Unsupported Query Request Instruction(s)).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	A42Y2	

[COMMENT] UPnP AV MediaServer implementing more than the required "DLNA_EPG" level subset can execute a query it can understand. In this case no error is reported.

10.5.7.16

[GUIDELINE] If a UPnP AV MediaServer that implements the "DLNA_EPG_EXPANDED" level XQuery subset cannot process a query because it does not conform to the subset defined in 10.5.7.6, it shall return the UPnP error 726 (Unsupported Query Request Instruction(s)).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	I5TEA	

[COMMENT] UPnP AV MediaServer implementing more than the required "DLNA_EPG" level subset can execute a query it can understand. In this case no error is reported.

10.5.7.17

[GUIDELINE] If the QueryRequest input argument of the CDS:FreeFormQuery action contains an XQuery that specifies a property that is not listed in neither the <propertyList> nor the <searchOnlyPropertyList> as defined in 10.5.7.11, a UPnP AV MediaServer shall return the UPnP error 708 (Unsupported or invalid search criteria).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	DKXM4	

10.5.7.18

[GUIDELINE] If the QueryRequest input argument of the CDS:FreeFormQuery action contains an XQuery that specifies in the "order by"-clause a property that is not listed in the <searchOnlyPropertyList> as defined in 10.5.7.11, a UPnP AV MediaServer shall return the UPnP error 708 (Unsupported or invalid search criteria).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	WYN2C	

10.5.7.19

[GUIDELINE] The CDSView input argument passed to the CDS:FreeFormQuery action shall be set to "0" indicating DIDL-Lite view.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	XF9K8	

10.5.8 MM/EPG event moderation

10.5.8.1

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option shall implement the ContainerUpdateIDs state variable.

[ATTRIBUTES]

M	L	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	KJNK4	

[COMMENT] Control points can subscribe to CDS events. The ContainerUpdateIDs state variable signals changes to containers. This means that a subscribed control point will be notified in case of changes in the EPG container. The ContainerUpdateIDs state variable is a CSV list of ordered pairs, where each pair contains the @id of a container and its ContainerUpdateIDValue. The @id indicates the container in which a change occurred. If multiple changes occurred in a container since the last event was sent, there will be only one occurrence of the container's @id and the ContainerUpdateIDValue will reflect the most recent change.

10.5.8.2

[GUIDELINE] When a large number of EPG items are changed, a UPnP AV MediaServer should not send ContainerUpdateIDs events before completion of the update.

[ATTRIBUTES]

S	L	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	5MGBH	

[COMMENT] A large EPG update that sends interim update events can trigger UPnP AV control points to prematurely issue a search to obtain updated EPG information. To further reduce the chance of issuing searches while an EPG update is in progress, UPnP AV control points can wait a reasonable amount of time (to ensure a smooth user experience), before requesting new EPG data.

10.5.8.3

[GUIDELINE] A UPnP AV MediaServer that implements the EPG Server Device Option may implement the Track Changes Option as defined in ISO/IEC 29341-14-12:2011.

[ATTRIBUTES]

O	L	DMS	M-DMS	n/a	ISO/IEC 29341-14-12: 2011	ENS95	

[COMMENT] A UPnP AV MediaServer can choose to event changes to individual objects. A UPnP AV control point can use such an event to take action when, for example, the broadcast time of an EPGItem was changed. When a large number of EPGItems are modified, added or deleted, the UPnP AV MediaServer can set the stUpdate attribute of individual objects to 1. A control point can make use of this information to ignore individual changes and only take action when it sees the stDone event.

11 Media Transport

11.1 General

This subclause of the DLNA Home Networked Device interoperability guidelines covers the requirements for the media transport layer. In the DLNA interoperability guidelines v1.0 there was a single transport protocol (HTTP) available for the transfer of media across a home network and all media transfers were assumed to be for the purpose of immediate playback. In addition, all media transfers under DLNA interoperability guidelines v1.0 occurred with a default, best effort, quality of service specification. With the increase in the system usages in v1.5, the introduction of priority-based QoS, and the addition of another transport protocol (RTP), there exists a need to define different modes of media transfer and other protocol-agnostic requirements for the transport layer. Table 40 summarizes the types of media transfer now available. The DLNA transfer mode terms are consistent with those found in 6.3 of 3GPP TS 23.107.

Table 40 – DLNA Media Transfer modes

Transfer mode	Transfer rate	Example usages	Default DLNAQOS level
Streaming Transfer	For Audio and AV streams the Content Source and Content Receiver maintain under Ideal Network Conditions an average transfer rate equal to or higher than the rate sufficient for real-time rendering.	Immediate rendering by the Content Receiver of content binaries with an inherent time base (e.g. Audio or AV media). Real time generated AV media transfer followed by store/record at the Content Receiver.	DLNAQOS_2
Interactive Transfer	The transfer rate is limited to the lesser of the maximum transfer rate of the Content Source and the maximum transfer rate of the Content Receiver without degrading any Streaming Transfer originating from the Content Source.	Immediate rendering by the Content Receiver of content binaries with no inherent time base (e.g. images).	DLNAQOS_1
Background Transfer	The Content Source transfers the content binary at a rate determined by the Content Source, but no faster than the rate at which the Content Receiver can accept the content binary from the network.	Transfer and store of file-based media.	DLNAQOS_0 (Lowest Priority)

Table 41 summarizes the combinations of permitted DLNAQOS priorities and transfer modes for each Media Class. The relationship between the different columns is described here.

- Media Class: Indicates a Media Class.
- Transfer Mode: Indicates a transfer mode.
- Combination Permitted: Indicates if the indicated Media Class and Transfer Mode values can be combined. The "Yes" and "No" values indicate if the combination is permitted. A "Default" value means that Content Sources are required to support the combination. The permissible combinations are described in the following guidelines:
 - 10.1.3.35 MM tm-s (Streaming Mode Transfer flag)
 - 10.1.3.36 MM tm-i (Interactive Mode Transfer flag)
 - 10.1.3.37 MM tm-b (Background Mode Transfer flag)

- Permitted DLNAQOS_UP: Indicates the DLNAQOS_UP values that the Content Source is permitted to use when responding to transport requests. The guidelines do not require Content Sources to always respond with the highest DLNAQOS_UP value that is listed in this column. The following guidelines describe the permitted DLNAQOS_UP values for a given Media Class.
 - 11.4.2.3.1 in 11.4.2.3 MT Transfer Mode support
 - 11.4.2.10 MT DLNAQOS Background Transfer
 - 11.4.2.11 MT DLNAQOS Interactive Transfer
 - 11.4.2.12 MT DLNAQOS Streaming

Table 41 – Permitted combinations of DLNAQOS_UP and Transfer Mode per Media Class

Media Class	Transfer mode	Combination permitted	Permitted DLNAQOS_UP
Image or Media Collection File.	Streaming	No	n/a
	Interactive	Default	DLNAQOS_1, DLNAQOS_0
	Background	Yes	DLNAQOS_0
Audio	Streaming	Default	DLNAQOS_2, DLNAQOS_1, DLNAQOS_0
	Interactive	No	n/a
	Background	Yes	DLNAQOS_0
AV	Streaming	Default	DLNAQOS_2, DLNAQOS_1, DLNAQOS_0
	Interactive	No	n/a
	Background	Yes	DLNAQOS_0

A Streaming Transfer supports two media usages. The first case is where a content binary is being immediately rendered for a user and contains inherent timing that shall be met. The second case is where a content binary is being generated in real time at a fixed rate (such as a live broadcast stream), regardless of whether the item is being immediately rendered or stored for later use. In either of these cases, a delay in packet delivery can adversely impact the user's perception of the system. If the content binary contains inherent timing information (such as Audio or AV content) and is being immediately rendered, a delay in packet delivery can cause data to not be available on the Content Receiver at the time it needs to be played. This can lead to a dropout in the playback of the media. If a real time stream is being generated on the Content Source and the throughput across the network (which can be affected by the Content Receiver's use of flow control) is not equal to the data rate of the generated content, a buffer overrun can occur on the Content Source. This can lead to a loss of data in the content binary.

If the content is being generated at an average fixed rate, such as the capture of audio or AV content from an external source, and the network has a period where the throughput is less than the rate of generation of the content, the Content Source will typically buffer the data for sending at a later time. However, if this period lasts long enough, the Content Source may exhaust its ability to buffer the captured content. At this point, some data samples will be lost. If the Content Receiver is rendering the stream immediately, the user will perceive the loss of the data as skipped content samples. If the Content Receiver is storing the stream for later use, such as in a download operation, the stored content will have missing samples. Content Sources and Receivers may have any amount of buffering to mitigate this situation and the network cannot be controlled to guarantee a bandwidth for the transfer. Any content that is transitory (i.e. not stored on disk) and may cause a buffer overrun on the Content Source due to network delays should always be sent as a Streaming Transfer.

An Interactive Transfer is used for the case where a content binary is being immediately rendered for a user but it does not have any inherent timing information, such as image media. In this case, a delay in packet delivery of a few milliseconds will not cause an adverse impact for rendering, but sufficiently long delays will adversely impact the user's perception of the system.

A Background Transfer is used for the case where the content binary is not being transferred for immediate rendering or where the user might be satisfied with a transfer executed at the lowest priority. It is typically reserved for the download or upload of content that is not being generated in real time by the Content Source. For example, this transfer mode would be used for downloading a content binary that has been stored in a file on the Content Source. The Content Source is free to internally prioritize the Background Transfer lower than other transfer modes.

The DLNA QoS levels are shown in the above tables as an indication that each of the transfer modes are handled at a different QoS level. Further discussion of QoS can be found in Clause 8.

Each of the Transfer Modes is implemented differently for the transport chosen (HTTP versus RTP). In addition, a transport may choose to not allow a particular Transfer Mode. For instance, RTP will not support Background Transfers. The Transfer Modes available to a particular content resource are specified in 9.2.37.

For most transfers, the Content Receiver issues a request for the content binary with a specific Transfer Mode and Media Transport based on the type of usage involved. An Upload content transfer is the exception to this rule. It is initiated by the Content Source.

However, the choice of Transfer Mode is made in the same way, based on the type of usage and the content binary to be transferred.

The definitions of the Transfer Modes introduced in this subclause apply only to a state of the network referred to as Ideal Network Conditions. Under Ideal Network Conditions no congestion from other communicating parties or from bandwidth restrictions on the network exists. Furthermore, under Ideal Network Conditions, Content Sources and Content Receivers have moved away from the startup conditions, and have reached steady-state transfers. From the perspective of measurements, Ideal Network Conditions can be approximated by having a single Content Source send data to a single Content Receiver over a high-speed link with bandwidth equal to or exceeding the bandwidth required by the transmission.

This system provides a robust set of Transfer Modes that support streaming for immediate rendering or download of content for later consumption. It also provides a structure for fine grained QoS control. A DLNA interoperability guidelines v1.0 transfer most closely maps to a Streaming Transfer Mode in terms of functionality. However, the Streaming Transfer Mode allows for higher QoS priority than the default best effort of the DLNA interoperability guidelines v1.0.

11.2 Uniform Client Data Availability Model

The Uniform Client Data Availability Model (UCDAM) provides a mechanism for describing the data available for a content stream. It defines a content stream in mathematical terms, with special attention focused on the data range that can be transmitted by the Content Source. The model applies regardless of whether the content is stored, converted (e.g. transcoded, transrated, transscaled, etc.), or "live". Although the DLNA guidelines do not specify buffering implementations or requirements for either the Content Source or the Content Receiver, the uniform data availability model takes into account the diversity of buffering models that are available to implementers. These guidelines can then focus on normative high level behaviours that are common, regardless of details at the transport layer. Figure 21 graphically shows the UCDAM model.

$[d_x, d_y]$: informative

- Represents the entire stream
- Beginning may be undefined
- May be infinitely long

$[s_0, s_N]$: normative


- Content Source is able to transmit this data range on the network
- Data range can slide and/or grow

$[r_0, r_N]$: normative

- Content Source can perform random access requests on this data range
- If random access is supported, then this range is always equal to $[s_0, s_N]$

$[d_0, d_N]$: informative

- Content Receiver has access to this data range
- Data range can slide and/or grow
- Content Receiver can store/cache/buffer data such that $[d_0, d_N] \neq [s_0, s_N]$

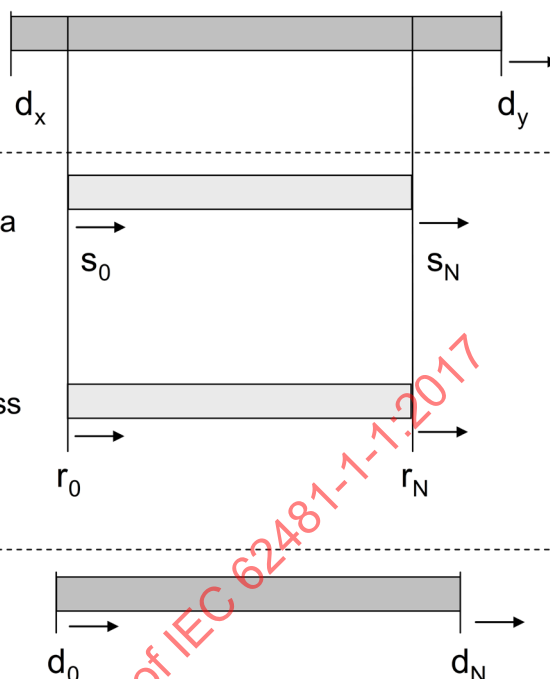

IEC

Figure 21 – UCDAM summary

The list below specifies the various aspects of the UCDAM.

- The first aspect of the UCDAM is the definition of a content stream. A content stream is media with a beginning (d_x) and end (d_y), where both values are defined by the Content Source. In some cases, a content stream never ends (d_y increases with time). This data range is an assumed condition but is not referenced in the guidelines.
- The second aspect of the UCDAM is the data range available from the Content Source for transport to the Content Receiver. This range is defined as $[s_0, s_N]$. For content stored within a file on the Content Source, s_0 could be equal to d_x and s_N could be equal to d_y . For content captured by the Content Source from a live AV or audio feed, the range represents the amount of data buffered by the Content Source. This data range is normative and is referenced in the guidelines.
- The third aspect of the UCDAM is the data range available to the Content Receiver. The range of data available to the Content Receiver, defined inclusively as $[d_0, d_N]$, is determined by two aspects: what the Content Source can transmit (i.e. some data range of $[s_0, s_N]$) and, in addition, what might be buffered on the Content Receiver in a local manner. This data range is an assumed condition, but is not referenced in the guidelines.

NOTE Neither the UCDAM model, nor the DLNA Media Transport guidelines specify how clients have access to data in a local manner as implementers can use a variety of memory-based and disk-based mechanisms to define the range of data that a Content Receiver can access without the Content Source having to transfer data.

- The fourth aspect of the UCDAM is the Content Source's data range that supports random access requests. The $[r_0, r_N]$ data range represents the data range where random access operations are supported. If this capability is supported, then the $[r_0, r_N]$ interval is always equal to the $[s_0, s_N]$ data range. If the Content Source does not allow random access within the content stream, then a Content Receiver can only request content starting from s_0 . This data range is normative and is referenced in the guidelines.
- The fifth aspect of the UCDAM is that the data range available to the Content Receiver can change with time. This is really a clarification of the third aspect. As time passes, the data

range that the Content Source can provide to the Content Receiver can also change. There are three aspects that determine how the data range available to the Content Receiver will change.

- Does the Content Source guarantee that s_0 is fixed or can s_0 increase with time? If s_0 is fixed, then the Content Source is characterized as operating under a fixed s_0 model. Otherwise, the Content Source is characterized as operating under an increasing s_0 model. An example of a possible fixed s_0 model is content data read from a file on the Content Source. An increasing s_0 model can be used to represent content being captured from an incoming AV feed.
- Does the Content Source guarantee that s_N is fixed or can s_N increase with time? If s_N is fixed, then the Content Source is characterized as operating under a fixed s_N model. Otherwise, the Content Source is characterized as operating under an increasing s_N model. The same examples as above can be used in this case. An example of a fixed s_N model is content data read from a file on the Content Source. An increasing s_N model can be used to represent content being captured from an incoming AV feed.³
- Does the Content Receiver save data ⁴ such that ($d_0 < s_0$)? (i.e. the Content Receiver has accessible data that the Content Source can no longer provide.)

NOTE This model is very flexible in that it can easily represent all of the common types of media streams. For example, a media stream originating from a file can be represented as $d_0 = d_x$ and $d_N = d_y$ – the entire extent of the content is available to the user. An unbuffered live stream can be represented as $d_0 = d_N$, so that only the current moment in time is available. In addition to above simple examples, many more complex buffering systems can be represented by UCDAM. Please see Annex D for more details.

Keep in mind that most of the UCDAM model is conceptual and outside the scope of the DLNA guidelines. However, the $[s_0, s_N]$ and $[r_0, r_N]$ data ranges describe what data can be requested in Media Transfer operations over the network, and as such are within the scope of these guidelines. Therefore, those data ranges will be used in the following guidelines where appropriate to define the range of content that can be transferred using DLNA defined Media Operations.

11.3 Media Operations

A Media Operation is the network level operation that supports a user interaction with a content binary. At a high level, they define the network operations that shall occur in order to support a Streaming Transfer mode data transfer. The core set of Media Operations that an endpoint can perform are defined in Table 42.

Table 42 – DLNA Streaming Media Operation definitions

Term	Definition
Play	Initiate a Streaming Transfer for playback of media. The transfer occurs at a rate that supports normal playback of the content binary. The transfer begins at s_0 and proceeds at a rate sufficient to support normal (1x) playback of the content binary. The operation completes after transfer of a fixed s_N value. Under the increasing s_N model the transfer does not complete.
Stop	Terminate a Streaming Transfer.
Pause	Temporarily suspend a Streaming Transfer.
Pause-Release	A Pause media operation has suspended a Streaming Transfer, complete the Pause media operation and re-establish the flow of data over the network to support the Streaming Transfer.
Seek	Move the transfer point to a particular point in a stream in the range $[r_0, r_N]$, that represents the seek-able range. (The seek-able data range is the same random access data range, although the former term is used for Streaming transfers and the latter term applies to Streaming, Interactive, and Background transfers.) If a seek-able range exists, it shall equal $[s_0, s_N]$. The next set of transferred data will be from the indicated point in the content binary. DLNA defines two types of seek operations: • byte-based seek: a seek operation where the transfer point is specified in bytes; • time-based seek: a seek operation where the transfer point is specified in units of time.
Fast Forward Scan	Perform data transfers that will support a positive play-speed greater than 1x.
Slow Forward Scan	Perform data transfers that will support a positive play-speed greater than 0 but less than 1x.
Fast Backward Scan	Perform data transfers that will support a negative play-speed less than -1x.
Slow Backward Scan	Perform data transfers that will support a negative play-speed less than 0 but greater than -1x.
Streaming Download	Initiate a Streaming Transfer for the purpose of storing media for later playback. The transfer begins at s_0 and proceeds at a rate defined by the internal timing information of the content. The operation completes after transfer of a fixed s_N value. Under the increasing s_N model the transfer does not complete until the Content Receiver terminates the transaction.

The listed media operations are defined in terms of how the media transfer occurs over the network for a given transport protocol in the guidelines below.

11.4 Media Transport protocols

11.4.1 General

The following subclauses contain guidelines for the use of media transports in DLNA devices. The guidelines are organized as a table that covers requirements common among all media transports and then subclauses/tables that cover requirements for specific media transport protocols such as HTTP and others.

11.4.2 Media Transport common guidelines

11.4.2.1 MT mandatory transport support

[GUIDELINE] Content Sources and Content Receivers shall support HTTP as the mandatory transport as specified in the following subclauses.

- 11.4.3.2 to 11.4.3.37: HTTP transport: common requirements
- 11.4.3.38 to 11.4.3.58: HTTP transport: Streaming Transfer guidelines
- 11.4.3.59 to 11.4.3.61: HTTP transport: Interactive Transfer guidelines
- 11.4.3.62 to 11.4.3.64: HTTP transport: Background Transfer guidelines
- 11.4.3.65 to 11.4.3.69: HTTP transport: POST guidelines

[ATTRIBUTES]

M	A	DMP DMR DMS +PU+ +UP+ +DN+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	n/a	H9DD7	

11.4.2.2 MT optional transport support

[GUIDELINE] Content Sources and Content Receivers may support RTP as an optional transport as specified in subclause 11.4.4.

[ATTRIBUTES]

O	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	n/a	FPWW5	

11.4.2.3 MT Transfer Mode support**11.4.2.3.1**

[GUIDELINE] A content binary shall be transferred using one of the Transfer Modes indicated in Table 43 for its Media Class.

The list of available Transfer Modes for a Media Class is as specified below. This may be further limited by the transport protocol chosen.

Table 43 – MT Media Class Transfer Modes

Media Class	Transfer Mode
Media Collection Binary:	Background, Interactive
Image:	Background, Interactive
Audio-only:	Background, Streaming
AV:	Background, Streaming

[ATTRIBUTES]

M	A	DMP DMR +UP+ +DN+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	n/a	PWW5H	

[COMMENT] This can be either a Content Receiver requesting a particular Transfer Mode for content that it will receive, or it can be a Content Source specifying the Transfer Mode when performing an upload operation.

11.4.2.3.2

[GUIDELINE] A Content Source may constrain the transfer of audio-only or AV content binaries to Streaming Transfer only if it is not able to support the Background Transfer mode for that content binary and transport protocol.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	n/a	RE5VM	

[COMMENT] For example, a Content Source might do this because it is capturing content from a live stream and could potentially overflow its buffer if the network transfer is handled below the nominal rate of the content.

11.4.2.3.3

[GUIDELINE] A Content Source shall indicate the Media Transfer Modes that are available for a content binary by setting the tm-s, tm-i, and tm-b flags in the 4th field of the protocolInfo.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	2V7PF	

[COMMENT] See Guidelines 10.1.3.24.2, 10.1.3.35.1, 10.1.3.36.1, and 10.1.3.37 for more information.

11.4.2.3.4

[GUIDELINE] An endpoint responding to the initiation of a media transfer shall generate an appropriate transport protocol error response if the requested Transfer Mode is not currently available for the given content binary.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	E5VMH	

[COMMENT] This can be either the Content Source responding to an incorrectly requested Transfer Mode by a Content Receiver or in the case of an upload operation it can be the Content Receiver responding to an incorrectly requested Transfer Mode by a Content Source. See Guideline 11.4.3.32.4 for HTTP error codes used in various scenarios.

Guideline 11.4.2.3.1 defines the possible transfer mode given the media type and Guideline 11.4.2.3.2 allows Content Sources to constrain the available transfer mode for a given item (for example if RTP is used as the transport protocol). This guideline requires an endpoint to generate an error if the request for the content is not of the allowed modes for the media item.

11.4.2.4 MT Transfer Mode support for Device Classes

11.4.2.4.1

[GUIDELINE] A DMS, M-DMS, or +PU+ that supports the AV or Audio Media Classes shall support acting as a Content Source for Streaming Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	DD7KP	

11.4.2.4.2

[GUIDELINE] A DMS, M-DMS, or +PU+ that supports the Image Media Class shall support acting as a Content Source for Interactive Mode Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	V7PF7	

11.4.2.4.3

[GUIDELINE] A DMS or M-DMS that supports the download system usage shall support acting as a Content Source for Background Mode Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	7YPY8	

[COMMENT] The requirement is not that background will be used for the transfer. Rather, the guideline states that the Background Transfer mode needs to be supported for one or more Content Binaries. See Guideline 10.1.3.37 for more information about reporting Background transfer mode support for a Content Binary.

11.4.2.4.4

[GUIDELINE] A DMS or M-DMS that supports the upload AnyContainer or OCM: upload content operations shall support acting as a Content Receiver for Background Mode Transfers as part of the Content transfer process as defined in this subclause.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	W7YPY	

11.4.2.4.5

[GUIDELINE] A DMS or M-DMS that supports the upload AnyContainer or OCM: upload content operations should support acting as a Content Receiver for Streaming and Interactive Mode Transfers as part of the Content transfer process as defined in this subclause.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	n/a	HC83V	

[COMMENT] Allows the server to support the upload of content that cannot be sent via Background Transfer Mode such as live content captured from a tuner.

11.4.2.4.6

[GUIDELINE] A DMP, M-DMP, or DMR that supports the Audio or AV Media Classes shall support acting as a Content Receiver for Streaming Mode Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	BHC83	

11.4.2.4.7

[GUIDELINE] A DMP, M-DMP, or DMR that supports the Image Media Class shall support acting as a Content Receiver for Interactive Mode Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	78IWW	

11.4.2.4.8

[GUIDELINE] An +DN+, or +DNSYNC+ shall support acting as a Content Receiver for Background Mode Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	+DN+ +DNSYNC+	n/a	n/a	n/a	M93FM	

[COMMENT] The requestor isn't obliged to use background transfer if the server defines that only streaming of this content is supported.

11.4.2.4.9

[GUIDELINE] An +DN+, or +DNSYNC+ may support acting as a Content Receiver for Streaming Mode Transfers as defined in this subclause.

[ATTRIBUTES]

O	A	+DN+ +DNSYNC+	n/a	n/a	n/a	TQPSF	

[COMMENT] Supports the download of content that cannot be sent via Background Transfer Mode.

11.4.2.4.10

[GUIDELINE] An +UP+, or +UPSYNC+ shall support acting as a Content Source for Background Mode Transfers as defined in this subclause.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	n/a	8IWW3	

11.4.2.5 MT low throughput tolerance

[GUIDELINE] Content Receivers shall tolerate scenarios where the Content Source is not able to sustain a particular transmission throughput.

Tolerate means that the Content Receiver is able to do one of the following actions gracefully (i.e. without crashing or requiring the user to power-cycle or reset the device):

- continue receiving content data despite the low throughput, or
- terminate the transport layer connection.

[ATTRIBUTES]

M	A	DMP DMR DMS +DN+ +DNSYNC+	M-DMS M-DMP	n/a	n/a	93FM8	

[COMMENT] This guideline is mandatory because a home network does not always operate under Ideal Network Conditions (i.e. the transmission rate remains dependent on the network throughput between the server and client). Products that crash, require a reset, or a similar type of power-cycle operation due to low transmission throughput rate violate this guideline.

DLNA devices are permitted to have user interactions in meeting the tolerance portion of this requirement. For example, a DMP is permitted to report to ask the user if they want to stop rendering or download because the throughput is extremely slow.

11.4.2.6 MT requirements for Background Transfer

[GUIDELINE] If Background Transfer is available for a given content binary, a downloading endpoint (an +DN+, or +DNSYNC+) shall use the Background Transfer Mode when performing a download operation.

[ATTRIBUTES]

M	A	+DN+ +DNSYNC+	n/a	n/a	n/a	XAZ2Z	

[COMMENT] Examples of where this wouldn't be the case are the downloading of live media streams. On download, the server will mark them as only transportable with Streaming Transfer mode.

11.4.2.7 MT Streaming Transfer rate assumptions

11.4.2.7.1

[GUIDELINE] A Content Receiver operating in Streaming Transfer mode shall be able to receive content from the network at rates required to sustain Streaming Transfer for the profiles that the Content Receiver supports.

[ATTRIBUTES]

M	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	n/a	5YE9G	

[COMMENT] A Content Receiver needs to be able to receive and consume content at a rate that will allow it to render the content in real-time. This guideline does not apply where the Content Source and Content Receiver have negotiated transfer characteristics within the transport protocol, such as negotiated buffer agreements within RTP. This guideline applies only in the absence of an existing agreement between the Content Receiver and the Content Source.

11.4.2.7.2

[GUIDELINE] A Content Source operating in Streaming Transfer mode shall be able to send content to the network at rates required to sustain Streaming Transfer for the content binary.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+ +UPSYNC+	M-DMS	n/a	n/a	3KP2E	

11.4.2.8 MT Interactive Transfer rate assumptions

11.4.2.8.1

[GUIDELINE] Content Sources and Content Receivers using an Interactive Transfer should tolerate all transmission throughputs.

In this case, tolerate means that Content Sources and Content Receivers do not terminate the transport connection simply because the throughput is too low, unless user intervention has caused it to happen.

[ATTRIBUTES]

S	A	DMS DMP DMR +PU+ +DN+ +DNSYNC+	M-DMS M-DMP	n/a	n/a	Z5YE9	

[COMMENT] This guideline covers the case of sending an image over the network for rendering; and it indicates that the transfer can occur at any rate depending on the network and server load. This guideline recommends that devices support a wide range of throughputs but the actual maximum and minimum depend on external factors.

11.4.2.8.2

[GUIDELINE] Content Sources and Content Receivers using an Interactive Transfer may affect the actual rate of data delivery using transport layer flow control, regardless of the content's internal timing information.

[ATTRIBUTES]

O	C	DMS DMP DMR +PU+ +DN+ +DNSYNC+	M-DMS M-DMP	n/a	n/a	83KP2	

11.4.2.9 MT Background Transfer rate assumptions

11.4.2.9.1

[GUIDELINE] Content Sources and Content Receivers using a Background Transfer should tolerate all transmission throughputs.

In this case, tolerate means that Content Sources and Content Receivers do not terminate the transport connection simply because the throughput is too low, unless user intervention has caused it to happen.

[ATTRIBUTES]

S	A	DMS +PU+ +DN+ +UP+ +UPSYNC+ +DNSYNC+	M-DMS	n/a	n/a	E9GK5	

[COMMENT] This guideline covers the case of downloading content sourced from a file on the Content Source; and it indicates that the transfer can occur at any rate (e.g. higher or lower than the internal timing information of the content data for audio and A/V content). This guideline recommends that devices support a wide range of throughputs but the actual maximum and minimum depend on external factors.

11.4.2.9.2

[GUIDELINE] Content Sources and Content Receivers using a Background Transfer may affect the actual rate of data delivery using transport layer flow control, regardless of the content's internal timing information.

[ATTRIBUTES]

O	C	DMS +PU+ +DN+ +UP+ +UPSYNC+ +DNSYNC+	M-DMS	n/a	n/a	3FM8E	

11.4.2.10 MT DLNAQOS Background Transfer

11.4.2.10.1

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, Background Transfer requests shall be tagged with DLNAQOS_0 in accordance with Table 7.

[ATTRIBUTES]

M	R	DMS +DN+ +DNSYNC+	M-DMS	n/a	n/a	Z2ZFW	

11.4.2.10.2

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, Background Transfers of content binaries shall be tagged with DLNAQOS_0 in accordance with Table 7.

[ATTRIBUTES]

M	R	DMS +UP+ +UPSYNC+	M-DMS	n/a	n/a	Z2FW6	

11.4.2.10.3

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented by a Content Source and it receives a Background Transfer request for content that it cannot transfer at DLNAQOS_0, then it shall respond with an error within the transport used, at DLNAQOS_0, in accordance with Table 7.

For HTTP as a transport, see Guideline 11.4.3.63 for the specific error.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	n/a	P2EZ3	

[COMMENT] For example, a Content Receiver that tries to use a Background Transfer to acquire a live stream might receive an error response from the Content Source because it cannot transmit a live stream at DLNAQOS_0.

11.4.2.11 MT DLNAQOS Interactive Transfer

11.4.2.11.1

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, Interactive Transfer requests shall be tagged with DLNAQOS_1, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance with Table 7, independent of the transport used. Note that this guideline applies only when the transfer request is not marked as a Background Transfer.

[ATTRIBUTES]

M	R	DMP DMR	M-DMP	n/a	n/a	YE9GK	

[COMMENT] This transfer is part of an interactive experience and therefore the default is a higher QoS level than a Background Transfer.

11.4.2.11.2

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, Interactive Transfers of content binaries shall be tagged with DLNAQOS_1, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance with Table 7, independent of the transport used.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	n/a	FM8EP	

11.4.2.12 MT DLNAQOS Streaming Transfer

11.4.2.12.1

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, Streaming Transfer requests shall use DLNAQOS_2, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance with Table 7.

[ATTRIBUTES]

M	R	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	n/a	C83VQ	

[COMMENT] For example, a Client Endpoint issues an HTTP GET request for AV content with DLNAQOS_2. The Content Source will then respond to the request with media that is tagged with DLNAQOS_2. The Content Source response (transfer of the actual media) will be tagged with DLNAQOS_2. Subsequent TCP ACK messages will use the existing TCP connection and therefore be tagged with DLNAQOS_2.

For the RTP transport, this priority is applicable to both audio and video streams encompassing TS, PS, and ES formats.

See 8.3.2.2 for considerations around the TCP connection establishment phase.

11.4.2.12.2

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, Streaming Transfer of content binaries shall use DLNAQOS_2, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance with Table 7.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	n/a	WW3DT	

11.4.2.13 MT normative syntax for npt-time

[GUIDELINE] The syntax of the npt-time token shall be as follows:

- npt time = npt sec | npt hhmmss;
- npt sec = 1*DIGIT ["." 1*3DIGIT];
- npt hhmmss = npt hh ":" npt mm ":" npt ss ["." 1*3DIGIT];
- npt hh = 1*DIGIT; any positive number;
- npt mm = 1*2DIGIT; 0-59;
- npt ss = 1*2DIGIT; 0-59.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2326:1998	83VQW	

[COMMENT] This guideline provides a consistent syntax for NPT time positions for both DLNA's extensions to HTTP and RTP Media Transport.

11.4.2.14 MT normative random access data availability models**11.4.2.14.1**

[GUIDELINE] If a Content Source supports random access requests on a content binary, then the Content Source shall use only one of the following random access data availability models.

- "Full Random Access Data Availability" model, as defined in 11.4.2.15.
- "Limited Random Access Data Availability" model, as defined in 11.4.2.16.

These random access data availability models shall be used in a mutually exclusive manner.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	YPY8R	

[COMMENT] Previous versions of the DLNA guidelines do not formally define either random access data model, but the "Full Random Access Data Availability" model has been defined to match the assumptions used in previous versions of the DLNA guidelines.

Other guidelines explain how to detect which random access data availability model is being used. Specifically, the op-param is tied solely to the "Full Random Access Data Availability" model and the lop-npt/lop-bytes flags are tied solely to the "Limited Random Access Data Availability". For more information, see the following guidelines:

- 10.1.3.19 MM op-param (Operations Parameter – Common guidelines)
- 10.1.3.29 MM lop-npt, lop-bytes and lop-cleartextbytes (limited operations flags): Common

The "Full Random Access Data Availability" model is the only model that can be used for Content Sources when serving image content. This limitation is inherent to the nature of such content, which neither have changing $[s_0, s_N]$ data boundaries nor have any sender-pacing requirements.

11.4.2.14.2

[GUIDELINE] The UCDAM data range of $[s_0, s_N]$ shall represent the entire data range that the Content Source can serve to other network endpoints.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	7PF7U	

[COMMENT] Although not testable by itself, these guidelines repeat normative portions Figure 21. Other DLNA guidelines can normatively refer to the $[s_0, s_N]$ data range.

Considering how the s_0 and s_N boundaries change, other DLNA guidelines explain how to represent these abstract data boundaries in terms of zero-based byte indices or npt playback positions.

Generally, the s_0 and s_N data boundaries increase with time, although in some scenarios the values can reset, as is sometimes necessary when the integer value rolls over. Other guidelines specify the details on how these data boundaries can change.

11.4.2.14.3

[GUIDELINE] The $[s_0, s_N]$ may change with time. Specifically, the following can happen.

- The s_0 data boundary may change with time.
- The s_N data boundary may change with time.

How these data boundaries change with time is undefined by the guidelines because these data boundaries are abstract. In some cases, other DLNA guidelines will impose restrictions that require a data boundary to remain fixed.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	n/a	PY8RW

11.4.2.14.4

[GUIDELINE] If a Content Source supports random access requests on content data, then the following rules shall apply.

- The UCDAM data range of $[r_0, r_N]$ shall represent the data range where random access operations are permitted.
- The $[r_0, r_N]$ data range shall be equal to the $[s_0, s_N]$ data range.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	PF7UZ

[COMMENT] If random access requests are supported, then they need to be supported for the entire range that the Content Source can access.

This guideline is consistent with the following introductory material:

- Figure 21 – UCDAM summary
- The prerequisites used for the Seek Media Operation definition, in Table 40.

11.4.2.15 MT Full Random Access Data Availability model

11.4.2.15.1

[GUIDELINE] If a Content Source uses the Full Random Access Data Availability model, then following rules shall apply.

- The entire content binary shall be defined as the $[s_0, s_N]$ data range.
- The s_0 data boundary shall map to a fixed and non-changing beginning. This requirement is a restriction of 11.4.2.14.3.
- The data range of $[s_0, s_N]$ shall occupy an npt range of $[0, \text{npt-last-time}]$ and a byte range of $[0, \text{last-byte-pos}]$, where npt-last-time is in units of npt and last-byte-pos is in bytes.
- The content binary's zero position (i.e. npt-time=0 and byte-pos=0) shall map to the UCDAM's data position of s_0 .
- The last-byte-pos and npt-last-time shall map to the UCDAM's s_N data position and the s_N data boundary shall map to the end of the available content data. (This requirement works in conjunction with 11.4.2.14.3.)

- The $[r_0, r_N]$ and $[s_0, s_N]$ data ranges shall have the same equality.
- Responses to random access requests on the $[r_0, r_N]$ data range shall be timely under Ideal Network Conditions.

Timely means that the Content Source (under Ideal Network Conditions) is able to begin responding with the requested content data within 27 s of receiving the request.

Note that the npt-last-time, last-byte-pos, and byte-pos tokens for this guideline are relative to the complete content binary that is currently available, rather than being relative to the content data returned in response.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	D7KPW

[COMMENT] This guideline defines the behavioural model for the Full Random Access Data Availability model.

For guidelines on the data range for HTTP under Full Random Access Data Availability, see the following guidelines:

- 11.4.3.18 MT HTTP common random access data availability requirements
- 11.4.3.19 MT HTTP data range of Full Random Access Data Availability

The "relative to the complete content binary" phrase means that the tokens apply in the context of the whole content binary. It is incorrect to interpret these tokens as they are used in actual response data. For example, if last-byte-pos = 100 then it is correct to conclude that the complete content binary currently has 101 B. It is not necessarily true that a response with the Content-Range header's last-byte-pos = 50 means that the complete content binary has 51 B because the last-byte-pos token in this context simply means that the last byte in the entity body is the 51st byte of the complete content binary.

11.4.2.15.2

[GUIDELINE] The values for npt-last-time and last-byte-pos (as specifically used in 11.4.2.15.1) may increase with time.

[ATTRIBUTES]

O	A	DMS, +PU+	M-DMS	n/a	n/a	5VMHZ

[COMMENT] The concept of entire content range is relative to the current moment in time, in the context for the op-param. This means the s_N position can increase with time, causing the duration of the content binary to also increase (although the beginning has to remain fixed).

This model can apply when streaming content that is being recorded to local storage. The absolute beginning (s_0) never changes and as time passes, the end (s_N) increases.

11.4.2.16 MT Limited Random Access Data Availability model

11.4.2.16.1

[GUIDELINE] If a Content Source uses the Limited Random Access Data Availability model, then only one of the two modes of operation shall be used.

- Mode=0
- Mode=1

Furthermore, the following rules shall be true for both Mode=0 and Mode=1.

- The $[r_0, r_N]$ and $[s_0, s_N]$ data ranges shall have the same equality.
- The $[r_0, r_N]$ data range shall be the limited data range.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	7KPWX	

[COMMENT] This guideline explains the behaviour of the s_0 data boundary when it is used with the Limited Random Access Data Availability model.

For guidelines on the data range for HTTP under Limited Random Access Data Availability, see the following guidelines:

- 11.4.3.18 MT HTTP common random access data availability requirements;
- 11.4.3.20 MT HTTP: data range of Limited Random Access Data Availability.

The limited data range is the data range that supports seek media operations, as clarified in the other rows of this guideline.

11.4.2.16.2

[GUIDELINE] If a Content Source uses the Limited Random Access Data Availability model under Mode=0, then the following shall be true.

- The s_0 data boundary shall map to a beginning that shall change with time.
- The data range of $[s_0, s_N]$ shall map to the npt range of [npt-start-time, npt-last-time] and the byte range of [first-byte-pos, last-byte-pos], where npt-start-time and npt-last-time are in units of npt and first-byte-pos and last-byte-pos are in units of bytes.
- There exists a "live position" that shall be equal to the s_N data boundary.
- If the s_N data boundary is changing with time, then the "live position" shall shift forward in real-time.
- Responses to random access requests on the $[r_0, r_N]$ data range shall be timely under Ideal Network Conditions.
- If the Content Source receives a transport layer request that is not a random access request (e.g. HTTP request that omits Range and TimeSeekRange.dlna.org) then the Content Source shall respond with content data from the "live position". (See 11.4.3.20.9 for an example of how this guideline applies specifically to HTTP.)

Timely means that the Content Source (under Ideal Network Conditions) is able to begin responding with the requested content data within 27 s of receiving the request.

Real-time is the data rate necessary for immediate rendering.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	W5HZV	

[COMMENT] This guideline defines Mode=0 behaviours for the Limited Random Access Data Availability model. This mode of operation is generally useful for live content streams that use a fixed data buffer that map to the $[s_0, s_N]$ and $[r_0, r_N]$ data ranges. Live television broadcast streams are ideal candidates for this data availability model.

The reason why $[r_0, r_N]$ is a limited data range in this context is that the values for npt-start-time, npt-last-time, first-byte-pos, and last-byte-pos change over time. For example, the value of first-byte-pos changes

- at time-0, the first-byte-pos is 1 024. Random access requests that attempt to access before byte position 1 024 will not work.
- at time-60, the first-byte-pos becomes 14 749 767 106. Random access requests that attempt to access before byte position 14 749 767 106 will not work, even though byte position 1 024 was valid at time-60.

See the comment in 11.4.2.15.1 of 11.4.2.15 for help with interpreting the "relative to the complete content binary" phrase.

The npt-start-time, npt-last-time, first-byte-pos, last-byte-pos, and byte-pos tokens for this guideline are relative to the complete content binary that is currently available, rather than being relative to the content data returned in response.

11.4.2.16.3

[GUIDELINE] If using Limited Random Access Data Availability Mode=0, then a Content Source shall use increasing values for npt-start-time and first-byte-pos when reporting the available random access data range, unless one of the following conditions is true.

- 180 min has elapsed since the last transport layer request for the content binary.
- The value of last-byte-pos or npt-last-time causes a rollover because the maximum permitted value defined for the data type has been exceeded.

This guideline only applies when Limited Random Access Data Availability mode is applied to the scenario.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	KPW XV

[COMMENT] As time passes, the data range that is accessible can also change with time because the server's s_0 position can change. Furthermore, the s_N position can increase with time, usually causing the duration of the content binary to either temporarily increase when s_0 is temporarily non-changing or remain relatively constant over time when s_0 slides with s_N .

Given the nature of infinite streams (e.g. live content), Content Sources are permitted to use a lesser values for first-byte-pos and npt-start-time.

The following example is an example timeline that exhibits this behaviour.

- At time-0, the first-byte-pos is 0.
- Content requests occur for 180 min.
- At time-180, the first-byte-pos is 1 474 976 710 655.
- No content requests for 180 min.
- At time-360, the first-byte-pos is 0.
- Content requests occur for 360 min.
- At time-720, the last-byte-pos exceeds 281 474 976 710 655, so the server changes first-byte-pos to 0.

A Content Receiver endpoint cannot seek to a position which it remembers if it does not request the content for over 180 min.

11.4.2.16.4

[GUIDELINE] If a Content Source uses the Limited Random Access Data Availability model under Mode=1, then the following shall be true.

- The s_0 data boundary shall map to a fixed and non-changing beginning. This requirement is a restriction of 11.4.2.14.3.
- The s_0 data position shall be the static and absolute beginning for the content. (i.e. The s_0 position is the beginning of the content that does not change with time.)
- The data range of $[s_0, s_N]$ shall map to the npt range of $[0, \text{npt-last-time}]$ and the byte range of $[0, \text{last-byte-pos}]$, where npt-last time is in units of npt and last-byte-pos is in units of bytes.
- The content binary's zero position (i.e. npt-time=0 and byte-pos=0) shall map to the UCDAM's data position of s_0 .
- The last-byte-pos and npt-last-time shall map to the UCDAM's s_N data position and the s_N data boundary shall map to the end of the available content data. (This requirement works in conjunction with 11.4.2.14.3.)
- Random access operations on $[r_0, r_N]$, where units are in npt, shall be timely for the entire range of $[r_0, r_N]$.
- Random access operations on $[r_0, r_N]$, where units are in bytes, shall be timely only for a limited subset of $[r_0, r_N]$. Random access operations outside this subset are guaranteed to be satisfied but timeliness is not guaranteed.
- If the Content Source receives a transport layer request that is not a random access request (e.g. HTTP request that omits Range and TimeSeekRange.dlna.org) then the Content Source shall respond with content data from the beginning (i.e. npt=0 or byte-pos=0).

Timely means that the Content Source (under Ideal Network Conditions) is able to begin responding with the requested content data within 27 s of receiving the request.

Note that the npt-last-time, npt-time, last-byte-pos, and byte-pos tokens for this guideline are relative to the complete content binary that is currently available, rather than being relative to the content data returned in response.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	VMHZL

[COMMENT] This guideline defines Mode=1 behaviours for the Limited Random Access Data Availability model. Mode=1 is most useful for converted content, where Content Sources have access to a fixed beginning for the content, but can lack the computational power to respond in a timely manner to byte-based random access positions. In such cases, the Content Source's indicated values for bytes-range represent the range where the server can provide a fast response, which is often the portion of converted content that is available at the current moment. Content Receivers are permitted to request data outside those ranges (assuming the requested data falls within the $[s_0, s_N]$ data range, but the server might have a significant delay before responding.

Live broadcast streams are generally not ideal candidates for using this data availability model. Live broadcast streams will likely favor a sliding s_0 data boundary. For implementations that can support live broadcast streams where the s_0 data boundary is fixed (e.g. by buffering/recording the data to a local hard disk), the Full Random Access Data Availability model is more appropriate when the buffered content is served without having to go through a content transformation.

See the comment in 11.4.2.15.1 of 11.4.2.15 for help with interpreting the "relative to the complete content binary" phrase.

11.4.3 HTTP transport

11.4.3.1 General

There are many possible transport protocols that can be used for the transfer of content. The baseline mandatory media transport protocol for DLNA devices is HTTP. For HTTP the following terms are used:

- HTTP Client Endpoint – the DLNA entity that issues the HTTP GET or POST request;
- HTTP Server Endpoint – the DLNA entity that receives the HTTP GET or POST request and issues an HTTP response (possibly including data);
- Streaming HTTP (Client/Server) Endpoint – An HTTP Client or Server Endpoint that processes Streaming Transfers;
- Target Response: When a client makes a GET request to obtain a certain resource from the server, the server normally responds with a message that includes a representation of the resource as its entity body. This type of response is called here a Target Response to differentiate it from other equally valid responses that do not involve transferring the requested resource (e.g., redirections, authorization requests, error messages, etc). Similarly, for HEAD requests, a Target Response is the same response that servers would form to satisfy the matching GET request, but without carrying the resource representation as its entity body.

The generic term "HTTP endpoint" is used to represent either an HTTP Client Endpoint or an HTTP Server Endpoint.

Also note that the guidelines specified in this subclause apply to DLNA content transactions between DLNA Device Classes or Device Capabilities. These guidelines do not specify behaviour for non-DLNA devices. A DLNA Device Class or Device Capability may be implemented by software running on a more general-purpose device/platform. For example, the HTTP server of a DMS may be used to serve DLNA and non-DLNA content. These guidelines apply only when the DLNA content is being served to a DLNA device.

This subclause is organized into the following subclauses.

- 11.4.3.2 to 11.4.3.37: contains guidelines that are common to all HTTP transfers. These guidelines are independent of the Transfer Mode.
- 11.4.3.38 to 11.4.3.58: contains guidelines that are specific to the use of HTTP for Streaming Transfers.
- 11.4.3.59 to 11.4.3.61: contains guidelines that are specific to the use of HTTP for Interactive Transfers.
- 11.4.3.62 to 11.4.3.64: contains guidelines that are specific to the use of HTTP for Background Transfers.
- 11.4.3.65 to 11.4.3.69: contains guidelines that are specific to HTTP POST transactions. HTTP POST transactions always work in conjunction with all other applicable HTTP guidelines.

11.4.3.2 MT baseline transport: HTTP

11.4.3.2.1

[GUIDELINE] A DLNA device shall implement HTTP as the mandatory media transport with constraints and extensions defined in subsequent entries of this subclause.

Guidelines 11.4.3.8 and 11.4.3.25 define the HTTP version expectations for HTTP servers and clients.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	5HZVT	

[COMMENT] DLNA specifies HTTP as the baseline media transport.

11.4.3.2.2

[GUIDELINE] DLNA devices shall follow the syntax rules for HTTP headers defined in IETF RFC 2616:1999 unless DLNA defines syntax for the HTTP header value.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	MHZLQ	

[COMMENT] The BNF rules used in IETF RFC 2616:1999 is slightly different from that in DLNA. For example, the default treatment of literals in IETF RFC 2616:1999 is case-insensitive. Furthermore, IETF RFC 2616:1999 uses implied LWS between tokens and separator.

11.4.3.2.3

[GUIDELINE] If the DLNA guidelines define a BNF syntax for an HTTP header, then DLNA devices shall not include white spaces in the header-value of HTTP headers unless SP and LWS are explicitly specified in the syntax (BNF) definitions.

If the DLNA guidelines do not define a BNF syntax for an HTTP header, then the header shall conform to the message-header syntax in 4.2 of IETF RFC 2616:1999, regardless of whether the HTTP header is defined in IETF RFC 2616:1999 or if the HTTP header is vendor-defined. Note that the syntax for field-value permits LWS to separate tokens and other data in the field-value.

Implied LWS between the HTTP header-name and the HTTP header-value are allowed as specified in IETF RFC 2616:1999, regardless of whether the DLNA guidelines specify a BNF syntax for the HTTP header.

The following cases are allowed examples:

Range: bytes=1539686400-

Content-Range:bytes 21010-47021/47022

TimeSeekRange.dlna.org: npt=00:05:35.3-00

The following examples are not allowed:

Range: bytes = 1539686400-

Content-Range:bytes 21010-47021/47022

TimeSeekRange.dlna.org: npt = 00: 05: 35.3-00

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	HZVTL	

[COMMENT] IETF RFC 2616:1999 allows, including white spaces, between any two adjacent words (token or quoted-string), and between adjacent words and separators, e.g. "=", SP, "/", ":" (See "implied *LWS" in 2.1 of IETF RFC 2616:1999), but this guideline restricts "implied *LWS" to simplify white space rules for HTTP headers.

White spaces can still be included between header-name and header-value. The header-name and header-value are defined in 4.2 of IETF RFC 2616:1999.

This guideline applies to HTTP headers defined in IETF RFC 2616:1999 and other HTTP headers, e.g. DLNA and vendor defined headers, with the DLNA guidelines. At least one LWS will be inserted between tokens in case of the "*" rule" syntax (e.g. USER-AGENT and SERVER headers).

11.4.3.3 MT HTTP graceful recovery

[GUIDELINE] HTTP Client or Server Endpoints should not require a hardware reset or a power cycle to return to normal operating conditions after encountering improperly terminated HTTP connections.

[ATTRIBUTES]

S	A	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	n/a	ZVTLZ	

[COMMENT] This guideline specifies that a media endpoint needs to be able to handle scenarios where an HTTP connection is not properly terminated. Network conditions and/or HTTP Server Endpoint behaviour can cause this scenario to occur. Although a full definition for graceful recovery is not provided, a baseline expectation is that users will not need to reset or power cycle the device simply because a content transfer was interrupted.

11.4.3.4 MT HTTP DLNA URI usage

[GUIDELINE] HTTP Client Endpoints that issue HTTP requests on DLNA URIs (such as those obtained from a UPnP AV ContentDirectory service implementation) may assume that the URI value is properly URI escaped. No additional URI escaping logic is required of a client endpoint.

[ATTRIBUTES]

O	C	DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2396 IETF RFC 2616:1999 ISO/IEC 29341-20-3	8RWS4	

[COMMENT] This guideline permits an endpoint to use URI values (obtained from a DLNA endpoint) without having to implement logic for escaping the URI. This guideline is a clarification of 10.1.3.10, which states that DMS devices will advertise URI values that are URI escaped. Although an endpoint can implement additional logic for validating a URI, such logic is useful only for interoperability with non DLNA devices.

This guideline applies generally, including HTTP GET, HEAD, and POST requests.

11.4.3.5 MT valid HTTP response

11.4.3.5.1

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP request, then the endpoint shall send a valid HTTP response provided it has sufficient platform resources (network sockets, stored file in readable state, available tuner hardware, etc.) for sending the response.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 IETF RFC 2396	HZLQD

[COMMENT] This guideline essentially obliges an endpoint to send an HTTP response to an HTTP request.

Also, the HTTP specification already obliges a server to return a valid HTTP response for each received HTTP request. Valid HTTP responses include among others: content byte data responses, requests for authorization, HTTP error responses, etc.

11.4.3.5.2

[GUIDELINE] If an HTTP Server Endpoint cannot respond to an HTTP request by sending or receiving content byte data due to the server capacity, network capacity, or current state of the device (such as a tuner locked in a recording state), then the HTTP server should respond with an HTTP error response code of 503 (Service Unavailable).

[ATTRIBUTES]

S	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	F7UZS

[COMMENT] This guideline covers the case where the endpoint has the resources to send an error response but lacks the resources to send or accept content data. Sending an HTTP error is better than denying the TCP connection request because it explicitly tells the requesting endpoint that content cannot be handled at this moment. HTTP servers will respond with other HTTP error codes when responding to other error scenarios, as indicated in the HTTP specification.

11.4.3.5.3

[GUIDELINE] If an HTTP Server Endpoint cannot respond to an HTTP request by sending or receiving content byte data due to the device's lack of available network sockets, then the endpoint may refuse to create new TCP connections for answering content requests.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	IETF RFC 793 IETF RFC 2616:1999	PWXV6

[COMMENT] This guideline permits an HTTP server to refuse the creation of new TCP connections when it lacks the resources for transporting content. Although this behaviour is allowed by standard convention, endpoints can continue to retry the creation of a TCP connection. Therefore, whenever the situation is both appropriate and possible, HTTP servers are encouraged to respond with an HTTP 503 error.

11.4.3.5.4

[GUIDELINE] HTTP Client Endpoints that issue requests (e.g. for playback, download operation, or any normative system usage) shall be capable of performing such operations even if the HTTP Server Endpoint accepts only a single open HTTP connection at any given time.

HTTP Client Endpoints that claim support for a media operation for a particular content binary shall be capable of performing such operations even if the HTTP Server Endpoint accepts only a single open HTTP connection at any given time.

[ATTRIBUTES]

M	C	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	3DTU5

[COMMENT] Some HTTP Server Endpoints can accept multiple simultaneous HTTP connections, but others can accept only one. This guideline ensures that HTTP Client Endpoints provide reliable services even with the most constrained case (only one HTTP connection available).

For example, the following procedures in HTTP Client Endpoints will not work with HTTP Server Endpoints that support a single HTTP connection:

- obtaining an IFO file in parallel to a content transfer connection;
- playback transitions between normal speed playback and trick mode playback with multiple HTTP sessions that overlap in time, and
- tuner channel changes where one HTTP connection is used for the current channel and another time-overlapping HTTP connection is used for the new channel selection.

11.4.3.5.5

[GUIDELINE] HTTP Server Endpoints should support more than one simultaneous HTTP media transport connection.

[ATTRIBUTES]

S	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	7UZS4

[COMMENT] It is a good practice for an HTTP Server Endpoint to support multiple HTTP Client Endpoints simultaneously.

11.4.3.5.6

[GUIDELINE] If an HTTP Server Endpoint has not completed the transmission of an HTTP response and the HTTP Client Endpoint wants to stop the current data flow to issue a new request, then the HTTP Client Endpoint should close the existing TCP connection and then create a new TCP connection for the new HTTP request.

[ATTRIBUTES]

S	C	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	Y8RWS

[COMMENT] Since clients cannot assume that endpoints can support multiple HTTP connections, this guideline recommends that clients use one TCP connection. Implementers of HTTP servers and clients should also consider this guideline in conjunction with guidelines

11.4.3.49.1 and 11.4.3.49.2, which deal with scan operation playback (also known as trick-modes) for streaming transfers.

11.4.3.5.7

[GUIDELINE] An HTTP Server Endpoint shall begin sending a response message to an HTTP requests within 27 s of receiving the request. Valid response messages shall be either the response with content byte data, or appropriate error messages.

[ATTRIBUTES]

M	L	DMS +PU+	MDMS	n/a	IETF RFC 2616:1999	VQWR3

[COMMENT] This guideline defines the maximum response time for an HTTP Server Endpoint for a request for content.

in conjunction with 11.4.3.5.9, these guidelines ensure HTTP transactions for media transport.

The time-out value is for the worst case. HTTP Server Endpoints are urged to respond to a request as soon as possible.

11.4.3.5.8

[GUIDELINE] An HTTP Client Endpoint shall wait at least 30 s before closing the TCP connection if it has not received any response from the HTTP Server Endpoint to an HTTP GET request for content.

[ATTRIBUTES]

M	L	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	3VQWR

[COMMENT] This guideline is not subject to scenarios involving user cancellation. A connection can be cancelled through user intervention at any time.

This does not imply that the entire content binary will be received within the 30 s, only that it has started.

11.4.3.5.9

[GUIDELINE] HTTP Server Endpoints shall be capable of providing at least one media transport HTTP connection and it shall also be capable of processing sequential HTTP requests without responding with an HTTP error response code 503 (Service Unavailable).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	W3DTU

[COMMENT] This guideline ensures that rendering endpoints are capable of rendering a content binary using one media transport HTTP connection (see 11.4.3.5.4).

This guideline is not subject to preventing Content Sources to respond with 503 (Service Unavailable) when it currently is unable to process a HTTP request (see 11.4.3.5.2). But a Content Source will never return 503 (Service Not Available) under "Test Conditions".

11.4.3.5.10

[GUIDELINE] An HTTP Server Endpoint shall use the HTTP status code of 503 (Service Unavailable) for an HTTP request only on the conditions that the Content Source does not have sufficient platform resources (network sockets, stored file in readable state, available tuner hardware, etc.) for sending the response with content byte data. On other conditions, the HTTP Server Endpoint shall not use the HTTP status code of 503 (Service Unavailable) for an HTTP request.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	FHYQ8	

[COMMENT] This guideline defines the maximum response time for an HTTP Server Endpoint for a request for content.

In conjunction with 11.4.3.5.9, these guidelines ensure HTTP transactions for media transport.

Time-out value is for the worst case. HTTP Server Endpoints are urged to respond to a request as soon as possible.

11.4.3.5.11

[GUIDELINE] An HTTP Client may treat HTTP Status code 503 (Service Unavailable) as equivalent to HTTP Status code 500 (Internal Server Error).

[ATTRIBUTES]

O	C	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	M8EP7	

[COMMENT] The guideline clarifies a Content Receiver behaviour for response message 503 with or without Retry-After. Hence, no retry is required.

11.4.3.6 MT HTTP header tolerance**11.4.3.6.1**

[GUIDELINE] HTTP Client and Server Endpoints shall be tolerant of unknown HTTP headers.

Tolerant behaviour is defined as being able to successfully "parse and interpret" or "parse and ignore" the HTTP headers and their values.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 1945 IETF RFC 2616:1999	8EP7N	

[COMMENT] This guideline addresses forward compatibility and allows for broader interoperability with implementations that employ transport layer vendor extensions by way of HTTP headers.

11.4.3.6.2

[GUIDELINE] Each HTTP header line (including the header's name and value but excluding the last carriage-return/line-feed sequence, CRLF) shall not exceed 998 B.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999 IETF RFC 2822:2001	SFHYQ	

[COMMENT] These guidelines limit the length of an HTTP header line according to 2.2.1 of IETF RFC 2822:2001. The guidelines also specify the normative way to encode HTTP headers that span multiple lines.

Multi-line HTTP headers are always split at LWS characters.

11.4.3.6.3

[GUIDELINE] If an HTTP header line (header's name and value but excluding the last CRLF) exceeds 998 B, then the HTTP header shall span multiple lines. HTTP headers that span multiple lines shall prefix the additional lines with at least one space (SP) or horizontal tab (HT) as described in 4.2 of IETF RFC 2616:1999.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999 IETF RFC 2822:2001	9GK5S	

11.4.3.7 MT HTTP header case-sensitivity

[GUIDELINE] Names of HTTP headers shall be treated as case insensitive tokens.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 1945 IETF RFC 2616:1999	FW6L8	

[COMMENT] This is normative according to the HTTP specification.

11.4.3.8 MT baseline transport: HTTP Server Endpoints

11.4.3.8.1

[GUIDELINE] HTTP Server Endpoints used for media transport purposes shall be compliant with HTTP/1.1, which also requires HTTP/1.0 compliance.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	2EZ3F	

[COMMENT] HTTP servers need to support both HTTP/1.0 and HTTP/1.1 requests to ensure wide interoperability.

11.4.3.8.2

[GUIDELINE] HTTP/1.1 Server Endpoints used for media transport should return HTTP version 1.1 in the response header, regardless of the version specified in the HTTP client's request.

[ATTRIBUTES]

S	R	DMS +PU+	M-DMS	n/a	IETF RFC 2145	ZFW6L	

[COMMENT] IETF RFC 2145 clarifies that HTTP/1.1 servers are expected to return HTTP/1.1 even if the HTTP server receives a request marked with HTTP/1.0. The robustness rules, specified by the HTTP specification, enables clients and servers that employ different HTTP version numbers to coexist properly.

Message format refers to both the HTTP headers and HTTP response body. As described by IETF RFC 2145, the version field in a response message header indicates the protocol level that the server is capable of understanding. However, a server that understands protocol version 1.1 can generate messages compatible with version 1.0 in order to communicate with clients capable of handling only the lower 1.0 version. When this happens, the response message has a version header equal to 1.1, but the format of the message contains only version 1.0 headers. Reference IETF RFC 2145 provides more details for interoperability between hosts with different HTTP versions.

11.4.3.8.3

[GUIDELINE] When responding to a request of version 1.0, an HTTP Server Endpoint shall format the response message in such a way that the result of decoding and processing the message does not depend on headers outside the scope of the HTTP 1.0 specification.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2145 IETF RFC 2616:1999	GK5S4	

11.4.3.8.4

[GUIDELINE] HTTP Server Endpoints shall not report a higher version of HTTP than is actually supported by the implementation.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	EZ3F6	

11.4.3.8.5

[GUIDELINE] Interoperability between HTTP Client and Server Endpoints that implement different versions of the HTTP protocol shall follow the provisions and recommended actions defined in IETF RFC 2145.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSUNC+	M-DMS M-DMP	n/a	IETF RFC 2145	Z3F6V	

[COMMENT] Reference IETF RFC 2145 defines the significance of HTTP version numbers, the rules for interoperability between hosts with different version numbers, and rules for the actual version number to be included when creating messages.

11.4.3.8.6

[GUIDELINE] HTTP Server Endpoints should support persistent HTTP/1.1 connections and pipelined HTTP/1.1 requests.

[ATTRIBUTES]

S	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	3F6V6	

[COMMENT] The default behaviour for HTTP servers responding to HTTP/1.1 requests is to support persistent connections, which means that the HTTP server can respond to multiple HTTP/1.1 requests on one HTTP session. Pipelined requests can be used to facilitate seek operations. See 11.4.3.69 for more information.

11.4.3.9 MT HTTP header: scmsFlag.dlna.org

11.4.3.9.1

[GUIDELINE] HTTP Client and Server Endpoints may use the scmsFlag.dlna.org HTTP header, which indicates copyright assertion and copy status flags when transporting audio only content. HTTP Server Endpoints that serve DLNA media content and non-DLNA media content may also use this flag for the latter. HTTP Client Endpoints that encounter this HTTP header may implement behaviour to enforce regional copyright provisions.

[ATTRIBUTES]

O	A	DMS DMP +PU+ +UP+ +DN+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999 AHRA	L8OUB	

[COMMENT] These guidelines make it possible to comply with regional legal requirements, such as in AHRA. The flag is to be used with both DLNA and non DLNA audio only content. The syntax of the value is strictly defined by these guidelines.

11.4.3.9.2

[GUIDELINE] The notation of scmsFlag.dlna.org header field is defined as follows.

- scmsFlag.dlna.org = "scmsFlag.dlna.org" *LWS ":" *LWS flagValue
- flagValue = "00" | "01" | "10" | "11"

The value of the scmsFlag.dlna.org header shall be a two letter string from the following list: "00", "01", "10" or "11". The first and second characters can be set to 0 or 1 independently according to the rules below:

Definition of the value of the 1st character (i.e. left most) of the scmsFlag.dlna.org HTTP header:

- 0: copyright is asserted
- 1: no copyright is asserted

Definition of the value of the 2nd character of scmsFlag.dlna.org HTTP header:

- 0: Original recording

- 1: First generation or higher recording

The following example means copyright is asserted and first-generation or higher recording.

- scmsFlag.dlna.org: 01

[ATTRIBUTES]

M	A	DMS +PU+ +UP+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999 AHRA	F6V65	

11.4.3.10 MT HTTP header: Content-Type

11.4.3.10.1

[GUIDELINE] HTTP Server Endpoints shall specify the Content-Type HTTP header in the HTTP response header fields whenever it returns a Target Response to an HTTP GET operation.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	S4NTS	

[COMMENT] It is imperative that endpoints specify the Content-Type field to allow the receiver to know the MIME TYPE for the content that is to be sent in the HTTP response message.

MIME-TYPE values appear in the Content-Type HTTP header.

11.4.3.10.2

[GUIDELINE] The MIME-TYPE values that appear in Clause 5 of IEC 62481-2:2017 shall be used as values for Content-Type when an HTTP message describes DLNA media contents.

[ATTRIBUTES]

M	L	DMS +PU+ +UP+ +UPSYNC+	M-DMS	n/a	IEC 62481-2: 2017	K5S4N	

[COMMENT] This guideline specifies the correct mime type values for use with the Content-Type header field when transporting content encoded in a DLNA media format.

11.4.3.10.3

[GUIDELINE] HTTP Client Endpoints shall specify the Content-Type HTTP header in the HTTP request if using a POST operation to send data.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	6L8OU	

11.4.3.11 MT HTTP header: contentFeatures.dlna.org

11.4.3.11.1

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP GET or HEAD request with the getContentFeatures.dlna.org HTTP header, then the HTTP server shall use the contentFeatures.dlna.org HTTP header if it responds with a Target Response.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	7NKR8	

[COMMENT] As noted, this guideline permits an HTTP Server endpoint to use the contentFeatures.dlna.org in an HTTP response.

11.4.3.11.2

[GUIDELINE] An HTTP Server Endpoint may respond with the contentFeatures.dlna.org HTTP header to an HTTP GET or HEAD request that does not have the getContentFeatures.dlna.org HTTP header.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	5S4NT	

11.4.3.11.3

[GUIDELINE] HTTP Client Endpoints may use the getContentFeatures.dlna.org when issuing GET or HEAD requests.

[ATTRIBUTES]

O	A	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	Q868P	

[COMMENT] These guidelines describe how an HTTP client endpoint can request an HTTP server to use the contentFeatures.dlna.org in the response.

11.4.3.11.4

[GUIDELINE] The notation of getContentFeatures.dlna.org header field is defined as follows:

- getContentFeatures.dlna.org = "getContentFeatures.dlna.org" *LWS ":" *LWS "1"

The only value possible is "1".

Example:

- getContentFeatures.dlna.org: 1

[ATTRIBUTES]

M	A	DMS DMP DMR +DN+ +UP+ +PU+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	W6L8O	

11.4.3.11.5

[GUIDELINE] If an HTTP Server Endpoint receives any value except "1" in the getContentFeatures.dlna.org header it shall return an error code response of 400 (Bad Request).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	EP7NK	

11.4.3.11.6

[GUIDELINE] The value of the contentFeatures.dlna.org HTTP header shall be the same value as the fourth field of the content's res@protocolInfo value, as described in the 10.1.3.17 MM protocolInfo values: 4th Field guideline.

The notation of contentFeatures.dlna.org header field for DLNA media transport is defined as follows:

- contentFeatures-line = "contentFeatures.dlna.org" *LWS ":" *LWS 4th-field;
- 4th-field = <case sensitive 4th field value defined in guideline 10.1.3.17.1>.

[ATTRIBUTES]

M	A	DMS +PU+ +UP+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	TU5R3	

[COMMENT] This guideline allows HTTP transport transactions to carry information (that is normally only accessible at the UPnP AV ContentDirectory service layer) about the requested content (and the server capabilities for that content).

This header can be used by Content Sources for non-DLNA content.

11.4.3.11.7

[GUIDELINE] HTTP Client Endpoints shall not include the following headers in HTTP requests, unless the appropriate protocolInfo 4th field parameters indicate support for them.

- Range
- TimeSeekRange.dlna.org
- PlaySpeed.dlna.org
- getAvailableSeekRange.dlna.org

[ATTRIBUTES]

M	A	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	P7NKR	

[COMMENT] The 4th field of a protocolInfo is obtained from contentFeatures.dlna.org. Devices can also directly check metadata in the CDS, without using contentFeatures.dlna.org.

These guidelines do not define interoperability guidelines for a scenario where an HTTP Client Endpoint attempts to use an optional transport layer feature when the 4th field does not indicate support for the transport layer feature.

11.4.3.11.8

[GUIDELINE] An HTTP client that issues a POST request for uploading DLNA-conformant content shall use the contentFeatures.dlna.org HTTP header. The value sent shall match the 4th field that was sent in the CDS:CreateObject request, as defined in 10.1.8.19.6.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	YQ868	

[COMMENT] These guidelines explain how contentFeatures.dlna.org is used in POST transactions.

11.4.3.11.9

[GUIDELINE] If an HTTP Server Endpoint receives a POST request

- without the contentFeatures.dlna.org HTTP header, or
- with a DLNA.ORG_PN parameter that is inconsistent with guideline 11.4.3.11.8,

then the HTTP Server Endpoint may respond with an HTTP error.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	U5R3P	

[COMMENT] This guideline allows an HTTP Server Endpoint to accept upload of non-DLNA content or allow it to reject such content.

11.4.3.12 MT HTTP header: dlna pragma-directive (ifoFileURI.dlna.org)

11.4.3.12.1

[GUIDELINE] If an HTTP Server Endpoint provides a res@dlna:ifoFileURI for a resource (see 10.1.4.9) and the HTTP Server Endpoint receives an HTTP GET or HEAD request with the Pragma-with-getIfoFileURI-pragma-directive in the HTTP request, then the HTTP Server Endpoint shall provide the Pragma-with-ifoFileURI-pragma-directive (with the res@dlna:ifoFileURI value associated with the target URI) if it responds with a Target Response.

If an HTTP Server Endpoint does not provide a res@dlna:ifoFileURI for a resource, then the HTTP server shall not provide the Pragma-with-ifoFileURI-pragma-directive in the HTTP response.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	HYQ86	

[COMMENT] Subclause 14.32 of IETF RFC 2616:1999 defines the Pragma as a general-header for implementation-specific directives.

The DLNA.ORG_PN parameter in the contentFeatures.dlna.org header field indicates the DLNA Media Format Profile ID. Furthermore, as described in 10.1.4.9, content profiled as MPEG_PS_NTSC or MPEG_PS_PAL can have an IFO file. If the HTTP response to a request with the Pragma-with-getIfoFileURI-pragma-directive does not include the Pragma-with-ifoFileURI-pragma-directive, then the HTTP client endpoint needs to be aware that the AV content does not have an IFO file.

Implementers need to be careful not to exceed the maximum 998 B limit for HTTP header lines when using the Pragma-with-IfoFileURI-pragma-directive.

11.4.3.12.2

[GUIDELINE] HTTP Client Endpoints may use the Pragma-with-getIfoFileURI-pragma-directive when issuing GET or HEAD requests.

[ATTRIBUTES]

O	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	R368A

11.4.3.12.3

[GUIDELINE] The notation of the PRAGMA header field with the getIfoFileURI-pragma-directive is defined as follows:

- Pragma-with-getIfoFileURI-pragma-directive = "PRAGMA" *LWS ":" *LWS *(pragma-directive *LWS "," *LWS) getIfoFileURI-pragma-directive *(*LWS "," *LWS pragma-directive)
- pragma-directive = "no-cache" | extension-pragma
- extension-pragma = token ["=" (token | quoted-string)]
- getIfoFileURI-pragma-directive = "getIfoFileURI.dlna.org"

Note that the PRAGMA header name, pragma-directive token, and the getIfoFileURI-pragma-directive token are case insensitive.

Examples:

- PRAGMA: getIfoFileURI.dlna.org
- PRAGMA: getIfoFileURI.dlna.org, no-cache

[ATTRIBUTES]

M	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3 MoCA	QWR36

[COMMENT] The "1#token" syntax means a comma separated list including one or more elements. LWS can appear before and after the separator comma ',' in this syntax. See 2.1 of IETF RFC 2616:1999.

The Pragma-with-getIfoFileURI-pragma-directive can be used by endpoints issuing an HTTP request on non-DLNA content.

11.4.3.12.4

[GUIDELINE] The notation of the PRAGMA header field with the ifoFileURI-pragma-directive is defined as follows:

- Pragma-with-ifoFileURI-pragma-directive = "PRAGMA" *LWS ":" *LWS *(pragma-directive *LWS "," *LWS) ifoFileURI-pragma-directive *(*LWS "," *LWS pragma-directive);
- pragma-directive = "no-cache" | extension-pragma;
- extension-pragma = token ["=" (token | quoted-string)];
- ifoFileURI-pragma-directive = "ifoFileURI.dlna.org" "=" quoted-absolute-uri-string;
- quoted-absolute-uri-string = <same value as the corresponding res@dlna:ifoFileURI attribute value, as described in 10.1.4.9. It shall be quoted by "">

Example:

- PRAGMA: ifoFileURI.dlna.org=http://192.168.0.1:8080/IFO_101.ifo.

The PRAGMA HTTP header name, the pragma-directive token, and the ifoFileURI-pragma-directive token are case insensitive.

A Content Source that provides the Pragma-with-ifoFileURI-pragma-directive with non-DLNA content shall also provide an IFO file that conforms to the guidelines 9.3.2.7 to 9.3.2.9 (GUNS UDJLP, IT8C6, RDA5X) in IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3 IEC 62481-2: 2017	DTU5R	

11.4.3.13 MT HTTP HEAD requests

11.4.3.13.1

[GUIDELINE] HTTP Server Endpoints (HTTP/1.1 and HTTP/1.0) shall respond to HTTP HEAD requests, using the guidelines described below.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	WR368	

[COMMENT] There are several interpretations to the format of HEAD responses. These guidelines provide consistent interpretation.

11.4.3.13.2

[GUIDELINE] A Target Response to a HEAD request shall be composed of only HTTP headers and a zero-length response entity body.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	RWS43	

11.4.3.13.3

[GUIDELINE] Target Responses to identical HTTP version HEAD and GET requests for a given content binary shall use consistent transfer encoding headers. For example, if Content-Length is included in a HEAD Target Response then Content-Length shall also be present in the GET Target Response for the same content binary.

This guideline assumes that the content binary has not changed between the different HTTP requests.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	S4397

[COMMENT] This guideline forbids HTTP Server Endpoints from responding to a GET request using a different encoding method than the HEAD Target Response. For example, a DMS could not respond to a HEAD request with Content-Length and respond to a GET request using chunked encoding.

11.4.3.13.4

[GUIDELINE] If an HTTP server does not know the length of a requested resource, such as in the case when Chunked Transfer Coding is employed in HTTP/1.1, the Content-Length field shall be omitted from the HEAD Target Response.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	WS439

11.4.3.13.5

[GUIDELINE] If an HTTP Server Endpoint (HTTP/1.1 and HTTP/1.0) responds to an HTTP GET request with a non-error response, the HTTP server should respond to the equivalent HEAD request with a non-error response.

A successful response is defined as an HTTP response with a status code in the 1xx or 2xx range.

[ATTRIBUTES]

S	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	ZS4J4

[COMMENT] HTTP specification requires HTTP servers to respond to HEAD requests. This guidelines clarifies that HTTP servers cannot respond with an error code for HEAD requests that target a valid URI for the HTTP server.

This is not mandatory because conditions can be different than for those of the GET request (e.g. server saturation, etc).

11.4.3.13.6

[GUIDELINE] The HTTP headers of a HEAD Target Response shall include the Content-Type HTTP header.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	S4J4Y	

[COMMENT] Ideally, an HTTP server can know all of the HTTP headers (for requests that use TimeSeekRange.dlna.org, Range, PlaySpeed.dlna.org, or other HTTP headers) that will be sent in an HTTP response without doing any of the computational work to buffer content data, but some scenarios (such as those involving transcoding, live streams, random access requests, etc.) require a lot of computational cycles. For these reasons, these guidelines specify minimal expectations for HEAD responses while recommending the ideal expectations.

11.4.3.13.7

[GUIDELINE] HTTP HEAD Target Responses should have the exact same HTTP headers as those in the equivalent HTTP GET Target Response.

[ATTRIBUTES]

S	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	U2S4J	

11.4.3.13.8

[GUIDELINE] An HTTP client should not issue an HTTP HEAD request to a URI intended for a file upload (e.g. res@importUri, res@dlna:importIfFileURI).

[ATTRIBUTES]

S	C	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	V6QW5	

[COMMENT] The MediaServers behaviour of a HEAD request is undefined because implementations that use the same URI value for res@importUri and the <res> value might choose to only respond in the manner of a GET request.

11.4.3.14 MT image file size acquisition via HTTP HEAD

[GUIDELINE] An HTTP Server that serves an image content binary should respond to HTTP/1.0 HEAD requests with the Content-Length header to indicate the length of the image content binary.

[ATTRIBUTES]

S	L	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	XV6QW	

[COMMENT] HTTP/1.0 HEAD requests allow control points to query a server for the length of an image file, when res@size metadata is not available. The reason why HTTP/1.0 is used for this purpose is that chunked transfer coding and Content-Length are used in a mutually exclusive manner. Since HTTP servers are required to support HTTP/1.1, many servers use chunked transfer coding. Furthermore, DLNA guidelines require HTTP headers to be the same for equivalent GET and HEAD requests. Therefore, using HTTP/1.0 for the HEAD request improves the odds of success.

11.4.3.15 MT HTTP header parsing (server)

[GUIDELINE] HTTP Server Endpoints shall gracefully skip over unsupported HTTP header fields. Under no circumstances can an HTTP server fail to process a properly formatted HTTP request because of an unrecognized or unsupported HTTP header field.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	LZU6X	

[COMMENT] Incorrect HTTP header parsing has been the source of numerous compatibility issues during plugfest events.

11.4.3.16 MT HTTP header: Content-Length**11.4.3.16.1**

[GUIDELINE] If the Content-Length HTTP header is present in an HTTP message with a message body, then the message shall not use Chunked Transfer Coding.

[ATTRIBUTES]

M	C	DMS +PU+ +UP+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999	WXV6Q	

[COMMENT] The usage of Content-Length is not allowed under 4.4 of the HTTP spec in IETF RFC 2616:1999.

Applies to both HTTP GET response messages and POST request messages.

11.4.3.16.2

[GUIDELINE] If the Content-Length HTTP header is omitted from an HTTP GET response, then the HTTP Server Endpoint shall do one of the following.

- The HTTP server will close the TCP connection after sending the last byte of the response message. Furthermore, if the HTTP server is responding to an HTTP/1.1 transaction, then the HTTP server shall also use the CONNECTION: CLOSE header and value to explicitly indicate that it will close the connection. Lastly, any additional byte sequence following the headers shall be treated as entity-body bytes until the instant when the connection is closed.
- The HTTP/1.1 server will use chunked transfer-coding for the response when communicating with an HTTP/1.1 client.

This guideline applies in all scenarios with the following exceptions.

- Response messages that are prohibited from having an entity-body (such as the 1xx, 204, and 304 responses).
- The HTTP server returns an HTTP/1.1 response with no entity-body, Chunked Transfer Coding is not used, and the CONNECTION:CLOSE header is not used (i.e. persistent connection).

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	VTLZU	

[COMMENT] These guidelines clarify the expected behaviour regarding Content-Length usage for response messages.

For pipelined requests, if the server decides to close a TCP connection for some response, any additional requests submitted afterwards will not be processed by the server.

If the Content-Length is used in messages with no entity body, then the accurate value of "0" is required per guideline 11.4.3.16.5. Likewise messages encoded with Chunked Transfer Coding will use the accurate value of "0" for the chunk-size.

11.4.3.16.3

[GUIDELINE] If the Content-Length HTTP header is omitted from an HTTP POST request, then the HTTP Client Endpoint shall use Chunked Transfer Coding for the request.

[ATTRIBUTES]

M	C	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	ZLQDW

[COMMENT] See 4.4 of IETF RFC 2616:1999.

11.4.3.16.4

[GUIDELINE] An HTTP message that carries no content binary data in the entity body, and which uses Chunked Transfer Coding shall use a single chunk with chunk-size indicator equal to 0.

[ATTRIBUTES]

M	R	DMS +PU+ +UP+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999	LQDWQ

[COMMENT] Some response messages do not carry content binary data in the message payload. If the HTTP Server Endpoint is using Chunked Transfer Coding to produce this message, then the message has a single one-line chunk-size indicator with a value of 0.

11.4.3.16.5

[GUIDELINE] When operating under persistent connections (including pipelining), an HTTP/1.1 client shall detect the existence of a message entity body when it receives a message with

- a non-zero Content-Length header,
- non-zero chunk-size values when using Chunked Transfer Coding,
- non-zero content bytes following the message headers when the HTTP server declares that it will close the connection. (An HTTP server declares that it will close the connection by using the "CONNECTION: CLOSE" header in the response.)

If the Content-Length header and the CONNECTION:CLOSE header are not provided and Chunked Transfer Coding is not used in the HTTP/1.1 response, then the message has no entity body.

[ATTRIBUTES]

M	C	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	TLZU6

[COMMENT] This guideline clarifies the process used by a client to parse and extract the body (if any) of received response messages.

Response messages that do not carry a Content-Length, and do not use transfer encoding, could carry content bytes if the server closes the connection after sending the last byte. The server needs to explicitly announce that the connection will be closed by using the adequate header.

11.4.3.16.6

[GUIDELINE] When operating under persistent connections (including pipelining), an HTTP/1.1 Server shall detect the existence of a message entity body when it receives a POST message with

- a non-zero Content-Length header,
- non-zero chunk-size values when using Chunked Transfer Coding.

[ATTRIBUTES]

M	C	DMS	M-DMS	n/a	IETF RFC 2616:1999	6XJSB	

[COMMENT] This guideline clarifies the process used by a server to parse and extract the body (if any) of a request messages.

11.4.3.16.7

[GUIDELINE] If an HTTP Server Endpoint knows the byte length of a response body, then the HTTP server should use the Content-Length HTTP header in the HTTP Target Response.

[ATTRIBUTES]

S	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	ZU6XJ	

[COMMENT] As a general rule, the Content-Length provides useful information to HTTP clients. However, the Content-Length HTTP header is not required because it is difficult to provide an accurate byte length in some scenarios. For example, HTTP servers that are transmitting live content (and some transcoded content) might not know the value for the Content-Length HTTP header field. In cases when the Content-Length is provided, the value needs to match the byte length of the response body.

11.4.3.16.8

[GUIDELINE] If the HTTP Server Endpoint does not know the byte length of the response entity body or if Content-Length cannot be used due to some exceptions listed in IETF RFC 2616:1999, 4.4, then HTTP servers shall omit the Content-Length HTTP header from HEAD, and GET Target Responses.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	U6XJS	

11.4.3.16.9

[GUIDELINE] If an HTTP Server Endpoint sends an HTTP GET Target Response with the Content-Length HTTP header, then the byte length of the response entity body shall match the value of the Content-Length HTTP header.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	DWQ3K	

11.4.3.16.10

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP/1.0 GET request and sends an HTTP Target Response that does not have a Content-Length HTTP header, then the HTTP server shall close the TCP connection when all data is transferred.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	QW58V	

[COMMENT] The HTTP server is required to close the TCP connection in this scenario because only the HTTP server knows when it has finished sending the bytes for the requested URI.

11.4.3.16.11

[GUIDELINE] If an HTTP Client Endpoint knows the byte length of the entity-body in a POST request, then the HTTP client should use the Content-Length HTTP header in the HTTP request.

[ATTRIBUTES]

S	R	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	Q3KYV	

11.4.3.16.12

[GUIDELINE] If the HTTP Client Endpoint does not know the byte length of the entity-body in a POST request or if Content-Length cannot be used, the HTTP Client Endpoint shall omit the Content-Length HTTP header from the POST request and use the Chunked Transfer Coding as specified in IETF RFC 2616:1999, 4.4.

[ATTRIBUTES]

M	R	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	6QW58	

11.4.3.16.13

[GUIDELINE] If an HTTP Client Endpoint sends an HTTP POST Request with the Content-Length HTTP header, then the byte length of the entity-body shall match the value of the Content-Length HTTP header.

[ATTRIBUTES]

M	R	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	WQ3KY	

11.4.3.17 MT maximum byte size transfers**11.4.3.17.1**

[GUIDELINE] HTTP Client and Server Endpoints shall not use values that exceed 281474976710655 (i.e. $2^{48} - 1$) for the following HTTP fields:

- Content-Length header;
- first byte pos and last byte pos (as defined in 14.35.1 and 14.16 of IETF RFC 2616:1999 and Guideline 11.4.3.22.2);
- instance-length (as defined in 14.16 of IETF RFC 2616:1999);
- chunk-size (as defined in 3.6.1 of IETF RFC 2616:1999).

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	4J4YC	

[COMMENT] The HTTP specification, IETF RFC 2616:1999, does not limit the maximum content length. Note that a 32-bit integer is not sufficient, especially, for a 2-h MPEG-2 stream that exceeds 4 GB. The specified range covers the maximum size of a DLNA content binary.

Chunk-size is in hexadecimal form, while the other fields are in decimal form.

11.4.3.17.2

[GUIDELINE] An HTTP Client or Server Endpoint shall parse and interpret values up to 281 474 976 710 655 (i.e. $2^{48} - 1$) for the Content-Length header field, Range Units in bytes, and chunk-size field that are represented in HTTP requests/responses.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	W58V5	

11.4.3.18 MT HTTP common random access data availability requirements**11.4.3.18.1**

[GUIDELINE] If an HTTP Server Endpoint supports the Range header field or TimeSeekRange.dlna.org header fields for a content binary, it should support and process an HTTP HEAD request to get the current random access data range for the content binary while it is processing the HTTP GET request to transmit the Target Response.

The process for acquiring the random access data ranges for Full Random Access Data Availability and Limited Random Access Data Availability model are described in 11.4.3.19 and 11.4.3.19.10, respectively.

All guidelines in this subclause apply for both Full Random Access Data Availability and Limited Random Access Data Availability models.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	J4YC9	

[COMMENT] Guideline 11.4.3.5.4 states that HTTP clients will not assume that HTTP servers accept more than one media transport HTTP connection at a time. Although an HTTP client will not assume that the HTTP server accepts more than one HTTP GET request simultaneously, this guideline clarifies the intent for HEAD requests. In cases where a random access data range is updated while an HTTP client is receiving streaming data from a HTTP GET request, it is

useful for the HTTP client to use an HTTP HEAD request to get the current random access data range simultaneously.

11.4.3.18.2

[GUIDELINE] If an HTTP Server Endpoint supports the TimeSeekRange.dlna.org header field for the specified URI, it shall process any requested range in the random access data range at the time.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	97ES2	

[COMMENT] This is a general requirement that random access requests be supported on the entire $[r_0, r_N]$ data range.

11.4.3.18.3

[GUIDELINE] If an HTTP Server Endpoint supports the Range header field for the specified URI, it shall process any requested range in the random access data range at the time.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	397ES	

[COMMENT] This is a general requirement that random access requests be supported on the entire $[r_0, r_N]$ data range.

11.4.3.19 MT HTTP data range of Full Random Access Data Availability

11.4.3.19.1

[GUIDELINE] When using the Full Random Access Data Availability model, the byte position corresponding to the npt value of 0 and for the TimeSeekRange.dlna.org header field shall refer to one of the following:

- byte position 0;
- the decoder-friendly position (see 11.4.3.23.5, GUN ES2RR).

All guidelines in this subclause apply only in the case of Full Random Access Data Availability model.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	4397E	

[COMMENT]

- 1) These guidelines clarify guidelines 11.4.2.15 by explaining how npt values and byte indices are used with the TimeSeekRange.dlna.org and Range headers.
- 2) For some media formats, the decoder-friendly position is not byte position 0. For example, in the case of DLNA-compliant MP4 files, the GOP for time 0 could be located up to 1 MB away from the beginning of the file

11.4.3.19.2

[GUIDELINE] If the end position is not specified in a GET request with Range or TimeSeekRange.dlna.org, then the HTTP Server Endpoint's transmission of the Target Response shall include the content data that is currently available and the content data that will be available in the future for the current stream. (That is, assuming s_N is changing with time, the server keeps transmitting data until s_N becomes permanently fixed.)

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	8A57U	

11.4.3.19.3

[GUIDELINE] The byte position of 0 for the Range header field shall refer to the beginning of the content binary.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+ +DN+ +DNSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	3PU8U	

11.4.3.19.4

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP GET request that omits the Range and TimeSeekRange.dlna.org HTTP headers, then the HTTP Server Endpoint shall infer a byte-pos of 0 (i.e. respond from the beginning of the content binary).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	368A5	

[COMMENT] This guideline ensures that HTTP clients will receive content in a manner consistent with the conventions established by HTTP.

11.4.3.19.5

[GUIDELINE] If an HTTP Server Endpoint supports the Range HTTP header (as defined in the 11.4.3.22) with the Full Random Access Data Availability model, the HTTP Server Endpoint should specify the instance-length in the Content-Range HTTP header field of the Target Response to a HTTP GET/HEAD request with the Range HTTP header field.

[ATTRIBUTES]

S	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	R3PU8	

[COMMENT] This guideline clarifies 14.16 of IETF RFC 2616:1999. The asterisk "*" can be used instead of the instance-length if the instance-length is unknown at the time when the response was generated or when s_N increasing is true. However, DLNA recommends that HTTP servers provide an instance-length.

11.4.3.19.6

[GUIDELINE] If an HTTP Client Endpoint wants to get the instance-length of a content binary, then it should use an HTTP HEAD request with the Range HTTP header that specifies 0 for the first-byte position and omits the end-byte position.

[ATTRIBUTES]

S	C	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	68A57	

[COMMENT] The response will include the Content-Range header. If the instance length is known, then it will be a number of bytes in the UCDAM [s_0 , s_N] data range. Otherwise, the instance-length token will be "".

11.4.3.19.7

[GUIDELINE] If an HTTP Server Endpoint is serving stored content it shall provide the instance-length in the Content-Range header.

[ATTRIBUTES]

M	A	DMS +PU+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999	5R3PU	

11.4.3.19.8

[GUIDELINE] If an HTTP Server Endpoint supports the TimeSeekRange.dlna.org HTTP header (as defined in guideline 11.4.3.23) with the Full Random Access Data Availability model, the HTTP Server Endpoint shall specify the duration of the entire content binary in the instance-duration field of the TimeSeekRange.dlna.org HTTP header sent in response to an HTTP GET/HEAD request with the TimeSeekRange.dlna.org HTTP header field.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	8PW38	

[COMMENT] This guideline clarifies guideline 11.4.3.23.2.

11.4.3.19.9

[GUIDELINE] In conjunction with the guideline 11.4.3.19.8, if an HTTP Server Endpoint supports both byte-based seek and time-based seek operations for a resource, it shall specify the byte length of the entire content binary in the instance-length field of the TimeSeekRange.dlna.org HTTP header field sent in response to an HTTP GET/HEAD request with the TimeSeekRange.dlna.org HTTP header field.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	6V65V	

11.4.3.19.10

[GUIDELINE] If an HTTP Client Endpoint wants to get the instance-duration of a content binary, then it should use an HTTP HEAD request with the TimeSeekRange.dlna.org HTTP header that specifies 0 for the npt-start-time and omits the npt-end-time.

[ATTRIBUTES]

S	C	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	QHQQZ	N

[COMMENT] The response will include the TimeSeekRange.dlna.org header. If the instance duration is known, then it will be the duration of the UCDAM [s_0 , s_N] data range. Otherwise, the instance-duration token will be "".

11.4.3.20 MT HTTP: data range of Limited Random Access Data Availability**11.4.3.20.1**

[GUIDELINE] If the end position is not specified in a GET request with Range or TimeSeekRange.dlna.org, then the HTTP Server Endpoint's transmission of the Target Response shall include the content data that is currently available and the content data that will be available in the future for the current stream. (That is, assuming s_N is changing with time, the server keeps transmitting data until s_N becomes permanently fixed.)

All guidelines in this subclause apply only in the case of Limited Random Access Data Availability model.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	OUBZ3	

[COMMENT] In the case of live content, the end of the content binary is undefined. If the end position is not specified in the request, it means the client wants to continue receiving data until the absolute end of the stream.

11.4.3.20.2

[GUIDELINE] Since the random access data range of [r_0 , r_N] is able to change at any time, the HTTP Client Endpoint should not assume that a GET request (with either Range or TimeSeekRange.dlna.org) that specifies a range with a previous random access data range will always return the requested data range when mode-flag is "0".

[ATTRIBUTES]

S	C	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	KR8WA	

[COMMENT]

- When mode-flag is 0, an HTTP byte seek or time seek request can return a range response that differs from the requested range due to the continuously changing random access data range. So long as there is some overlap between the seek request and the currently available content, the Client Endpoint can determine the effective range of a seek via the Content-Range or TimeSeekRange.dlna.org response headers.
- A seek request that falls completely outside the random access data range will return error code 416 (Requested Range Not Satisfiable) (see 11.4.3.22.5).
- Note that if s_N is increasing, and an end position is not specified in the range request, the end position and content length/duration will not be provided in the seek response header (see 11.4.3.20.1).

11.4.3.20.3

[GUIDELINE] If the HTTP Client Endpoint includes both the TimeSeekRange.dlna.org HTTP header field and the PlaySpeed.dlna.org HTTP header field in an HTTP GET request for a content binary in case of the Limited Random Access Data Availability model, it shall specify the end position of the request range in the range specifier of the TimeSeekRange.dlna.org HTTP header. This guideline applies to both positive speed value (forward scan mode) and negative speed value (backward scan mode).

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	68PW3	

[COMMENT] Even if the HTTP server supports the PlaySeed.dlna.org HTTP header field for server side's trick mode, it cannot process it beyond the current available data in case of Limited Random Access Data Availability.

11.4.3.20.4

[GUIDELINE] If an HTTP Server Endpoint supports either the Range HTTP header (as defined in guideline 11.4.3.22) or the TimeSeekRange.dlna.org HTTP header (as defined in guideline 11.4.3.23) with the Limited Random Access Data Availability model for a content binary, the HTTP Server Endpoint shall support the getAvailableSeekRange.dlna.org HTTP header field and availableSeekRange.dlna.org HTTP header field in HTTP GET/HEAD requests for the content binary.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	868PW	

[COMMENT] Essentially, a server that supports the Limited Random Access Data Availability model for HTTP needs to implement support for the getAvailableSeekRange.dlna.org and availableSeekRange.dlna.org HTTP headers. These headers allow clients to request the random access data range and allow servers to respond with that information.

11.4.3.20.5

[GUIDELINE] If an HTTP Server Endpoint that supports the availableSeekRange.dlna.org HTTP header field (for a content binary) receives an HTTP HEAD/GET request with the getAvailableSeekRange.dlna.org HTTP header, it shall respond with the availableSeekRange.dlna.org HTTP header field to return the current random access data range.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	NKR8W	

11.4.3.20.6

[GUIDELINE] The notation of getAvailableSeekRange.dlna.org header field shall be as follows:

- getAvailableSeekRange-line = "getAvailableSeekRange.dlna.org" *LWS ":" *LWS "1"

The only value possible is "1". Any other values sent shall result in the HTTP server responding with an error code of 400 (Bad Request).

Example:

- `getAvailableSeekRange.dlna.org: 1`

[ATTRIBUTES]

M	A	DMS DMP DMR +DN+ +PU+ +DNSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	R8WAA

11.4.3.20.7

[GUIDELINE] If an HTTP Server Endpoint receives any value except "1" in the `getAvailableSeekRange.dlna.org` header it shall return an error code response of 400 (Bad Request).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	8OUBZ

11.4.3.20.8

[GUIDELINE] The notation of the `availableSeekRange.dlna.org` header field for DLNA media transport shall be as follows:

- `availableSeekRange-line` = "availableSeekRange.dlna.org" *LWS ":" *LWS mode-flag SP range specifier;
- mode-flag = "0" | "1"
- range specifier = npt range [SP byte-range] | byte-range;
- npt range = "npt" "=" npt time "-" npt time;
- npt time = <syntax defined in 11.4.2.13>;
- byte range = "bytes" "=" first byte pos "-" last byte pos;
- first byte pos = 1*DIGIT;
- last byte pos = 1*DIGIT;

Note that literals, "npt" and "bytes", are case sensitive.

Examples:

`availableSeekRange.dlna.org: 0 bytes=214748364-224077003`

`availableSeekRange.dlna.org: 0 npt=00:05.30.12-00:10:34`

`availableSeekRange.dlna.org: 1 npt=00:05.30.12-00:10:34 bytes=214748364-224077003`

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	UBZ33

11.4.3.20.9

[GUIDELINE] If mode-flag is "0", then the following behaviours shall be implemented by the HTTP Server Endpoint when responding with the `availableSeekRange.dlna.org` HTTP header.

- The HTTP Server Endpoint shall implement rules in 11.4.2.16, guideline 11.4.2.16.2 and guideline 11.4.2.16.3 for Mode=0.

- The range-specifier (i.e. npt-range and/or bytes-range) shall indicate the $[r_0, r_N]$ data range, effective at the time the response with the availableSeekRange.dlna.org header is generated.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	NTSXZ	

[COMMENT] This guideline clarifies the Mode=0 rules described in 11.4.2.16, Requirement 11.4.2.16.2, by explaining how specific syntax tokens refer to the UCDAM data boundaries.

The npt and byte positions provided in the range-specifier indicate the available data range for Range or TimeSeekRange.dlna.org seek requests.

11.4.3.20.10

[GUIDELINE] An HTTP Client Endpoint operating on Limited Random Access Data Availability model content with mode-flag set to "0" may specify a value for the first-byte-pos or the npt-start-time tokens in a request that precedes the available seek range and expect a seek response so long as the last-byte-pos or npt-end-time do not also precede the available seek range.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	V65V8	C

[COMMENT]

- While a Client Endpoint can use the getAvailableSeekRange.dlna.org request to establish the available seek range on the Server Endpoint at an instant in time, the available range may change on the Server by the time a byte-seek or time-seek request based on the available seek range is received. The Client Endpoint can still expect a seek response so long as there's some overlap between the requested range and the available range.
- A client can expect a Range request with "bytes=0–" or TimeSeekRange.dlna.org request with "npt=0–" to return all the data in the available seek range. When s_N is increasing, these requests will return all the data in the available seek range and additional data as it becomes available (see 11.4.3.20.1).
- A GET request with no Range or TimeSeekRange.dlna.org header will return data as the data becomes available ("live") when s_N is increasing (see 11.4.2.16.2).

11.4.3.20.11

[GUIDELINE] If mode-flag is "1", then the following behaviours shall be implemented by the HTTP Server Endpoint when responding with the availableSeekRange.dlna.org HTTP header.

- The HTTP Server Endpoint shall implement rules in 11.4.2.16.4 (MT Limited Random Access Data Availability model) for Mode=1.
- If present, the npt-range shall map to $[r_0, r_N]$ such that if the HTTP Server Endpoint receives a request that specifies an npt-range that is inclusively within the server's range-specifier (as indicated in availableSeekRange.dlna.org), then the HTTP Server Endpoint shall be able to serve the requested data bytes in a timely manner.
- If present, the bytes-range map to a subset of $[r_0, r_N]$ such that if an HTTP Server Endpoint receives a request that specifies a bytes-range that is inclusively within the server's range-specifier (as indicated in availableSeekRange.dlna.org), then the HTTP Server Endpoint shall be able to serve the requested data bytes in a timely manner.
- The npt-pos and byte-pos of "0" shall be valid and shall point to the beginning of the content.

- Servers that receive a GET request that omits both Range and TimeSeekRange.dlna.org shall respond with content data from the absolute beginning (i.e. s_0) of the content.

A timely response is defined in 11.4.2.16.4.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	4NTSX	

[COMMENT] This guideline clarifies the Mode=1 rules described in 11.4.2.16, Requirement 11.4.2.16.4, by explaining how syntax tokens refer to the UCDAM data boundaries.

The byte range in the range-specifier indicate the data range for use in requests that use Range where the response will return in a timely manner.

Unlike Range, responses with TimeSeekRange.dlna.org are timely for the entire content binary.

Unlike Mode=0, a request that omits the Range and TimeSeekRange.dlna.org headers results with content data from the beginning of the content binary, which is required to be static and non-changing.

11.4.3.20.12

[GUIDELINE] If mode-flag is "1", then the HTTP Server Endpoint shall be able to respond with the requested data bytes, even if the request specifies a bytes-range (in the HTTP request) that is not inclusively within the server's range-specifier (as indicated in the HTTP server's responses with availableSeekRange.dlna.org).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	TSXZZ	

[COMMENT] The content data mapped by range-specifier is where timely responses are mandatory.

The content data for $[s_0, s_N]$ is always available for transmission although the computational complexity to perform responses for the portions outside of the server's indicated range-specifier (in the availableSeekRange.dlna.org header value) can cause in responses that are not timely.

11.4.3.20.13

[GUIDELINE] If mode-flag is "1" and the HTTP Server Endpoint responds with data bytes that is not inclusively within the server's range-specifier (as indicated in the HTTP server's responses with availableSeekRange.dlna.org), then the HTTP server, may begin its response with content data after 27 s.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	65V8D	

11.4.3.20.14

[GUIDELINE] If an HTTP Server Endpoint supports the TimeSeekRange.dlna.org HTTP header for a content binary that operates under the Limited Random Access Data Availability model, it

shall provide the npt-range in the availableSeekRange.dlna.org HTTP header field of the Target Response to an HTTP request with the getAvailableSeek.Range.dlna.org header HTTP header field.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	ZZXWQ

[COMMENT] The availableSeekRange.dlna.org and getAvailableSeekRange.dlna.org HTTP headers apply in scenarios where the HTTP server and content are governed by the Limited Random Access Data Availability model. Using these HTTP headers for other scenarios (such as those involving Full Random Access Data Availability model) is out-of-scope of this standard.

11.4.3.20.15

[GUIDELINE] If an HTTP Server Endpoint supports the Range HTTP header for a content binary that operates under the Limited Random Access Data Availability model, it shall provide the bytes-range in the availableSeekRange.dlna.org HTTP header field of the Target Response to an HTTP request with the getAvailableSeek.Range.dlna.org header HTTP header field.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	SXZZX

11.4.3.20.16

[GUIDELINE] If the mode-flag=0, then an HTTP Client Endpoint shall not assume an npt value 0 or a byte position of 0 returned in an availableSeekRange.dlna.org HTTP header has any special significance.

[ATTRIBUTES]

M	C	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	8DU64

[COMMENT] When the mode-flag is zero, then the "beginning of the content" becomes undefined. Clients are not to assume that npt or byte positions of 0 map to the beginning of the content or that the same content will be associated with time/byte 0. See 10.1.3.33.2 for conditions that can cause the Content Source to reset the s_0 position.

11.4.3.20.17

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP GET request when s_0 increasing is false and neither Range nor TimeSeekRange.dlna.org are supported by the HTTP Server Endpoint, then the HTTP Server Endpoint shall infer a byte-pos of 0 (i.e. respond from the beginning of the content binary).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	5V8DU

[COMMENT] This guideline ensures that HTTP clients will receive content in a manner consistent with the conventions established by HTTP.

11.4.3.21 MT HTTP mapping for byte-based seek and time-based seek

11.4.3.21.1

[GUIDELINE] The Range HTTP header shall be used as the mechanism for byte-based seek operations on the HTTP transport protocol. The seek-able data range shall be equivalent to the random access data range of $[r_0, r_N]$.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	BZ33H	

[COMMENT] Byte-based seek is a generic, transport layer term that applies only to Streaming Transfer. The Range header is a specific transport layer mechanism for HTTP.

Range header is valid for Interactive Transfer and Background Transfer, as described in 11.4.3.61 and 11.4.3.64. However, the byte-based seek operation is only valid for Streaming Transfer.

11.4.3.21.2

[GUIDELINE] The TimeSeekRange.dlna.org HTTP header shall be used as the mechanism for time-based seek operations on the HTTP transport protocol. The seek-able data range shall be equivalent to the random access data range of $[r_0, r_N]$.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	XZZXW	

[COMMENT]

- Time-based seek is a generic, transport layer term that applies only Streaming Transfer. The TimeSeekRange.dlna.org header is a specific transport layer mechanism for HTTP.
- Time-based seek operation is valid only for Streaming Transfer. Using the TimeSeekRange.dlna.org header is expressly prohibited for Background Transfer and Interactive Transfer.

11.4.3.22 MT HTTP header: Range (server)

11.4.3.22.1

[GUIDELINE] If the Content Source indicates support for the Range HTTP header for a content binary (as defined in guidelines 10.1.3.20.1 and 10.1.3.28.4), then the HTTP Server Endpoint shall respond to Range HTTP requests for that content binary as defined in IETF RFC 2616:1999 with clarifications and constraints defined in guidelines 11.4.3.22.2 to 11.4.3.22.8.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	V8DU6	

[COMMENT] HTTP Server Endpoints that receive an HTTP request with a Range header field are expected to respond in a specific manner. The rules below describe what an HTTP server needs if the URI can or cannot support requests with a specified Range.

11.4.3.22.2

[GUIDELINE] The notation of Range header field for DLNA media transport shall be as defined in IETF RFC 2616:1999 with the restriction that only one interval is allowed.

The restricted syntax is as defined below:

- range-line = "Range" *LWS ":" *LWS range specifier
- range specifier = byte range specifier
- byte range specifier = bytes unit "=" byte range set
- bytes unit = "bytes"
- byte range set = byte range spec
- byte range spec = first byte pos "-" [last byte pos]
- first byte pos = 1*DIGIT
- last byte pos = 1*DIGIT

Note that the literal, "bytes", is case sensitive.

Examples:

- Range: bytes=1539686400-
- Range: bytes=1539686400-1540210688

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+ +UP+ +DN+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	Z33H5	

[COMMENT] This guideline simplifies the implementation of HTTP Server Endpoints by requiring only a subset of the allowed Range syntax afforded by IETF RFC 2616:1999. Essentially, DLNA implementations of HTTP clients can only assume that a DLNA implementation of an HTTP server will support Range values that indicate the first byte index and an optional last byte index. In summary, this restriction means that only a single range will be used within the Range header field.

While this guideline limits the number of range intervals to a single one, any other rules on syntax or semantics from IETF RFC 2616:1999 remain applicable.

11.4.3.22.3

[GUIDELINE] If an HTTP Server Endpoint returns data including the requested range (Target Response) with the HTTP response code 206 (Partial Content), then it shall specify the Content-Range header field.

Example of Content-Range header.

- Content-Range: bytes 1539686400-1540210688/9238118400

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	8WAAX	

[COMMENT] This guideline obliges an HTTP Server Endpoint to respond with a 206 response code for a request that is satisfiable according to IETF RFC 2616:1999 10.4.7 and 14.35.1. This allows HTTP Client Endpoints to depend on the availability of this response header, simplifying their implementations.

Subclause 14.16 in IETF RFC 2616:1999 has examples on this guideline usage.

This guideline does not explain the relationship between first-byte-pos and last-byte-pos and the s_0 and s_N data boundaries. For example, if first-byte-pos = 50 and last-byte-pos = 200, then the response entity body will contain 151 B. The first byte of the entity-body will correspond to the 51st byte of the complete file and the last byte of the entity body will correspond to the 201st byte, relative to the complete content binary. This scenario does not at all imply that the 51st or 201st bytes (of the complete content binary) have any specific relationship to the s_0 or s_N data boundaries. Building on this example, if the s_N increasing flag is true, then the complete binary is still increasing size. This results in a scenario where the 201st byte does not map to the s_N data boundary.

11.4.3.22.4

[GUIDELINE] If the HTTP Server Endpoint uses the Content-Range HTTP header, then the provided values shall be accurate with respect to the entity response body. Specifically,

- the value indicating the first-byte-pos shall properly match the first byte of the response entity body;
- the first-byte-pos in the response shall match the first-byte-pos in the request message;
- the value indicating the last-byte-pos shall properly match the last byte of the response entity body;
- the value indicating the instance-length shall indicate the length of the entire content binary or asterisk (*) if unknown.

Note that "accurate with respect to the entity response body" means that the guideline explains that the values used for the Content-Range header's first-byte-pos and last-byte-pos tokens need to correspond to the actual content data that is returned in the response entity body.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	38J7V	

11.4.3.22.5

[GUIDELINE] If the requested range does not overlap the available content for the resource with a URI specified in the HTTP request, the HTTP Server Endpoint shall respond with the HTTP response code of 416 (Requested Range Not Satisfiable).

When encountering syntax errors with the Range HTTP header as defined in IETF RFC 2616:1999, the HTTP server shall respond using one of the following:

- sending an HTTP response code 400 (Bad Request), or
- ignoring the erroneous RANGE header

If the requested range is syntactically correct as defined in IETF RFC 2616:1999 but does not comply with guideline 11.4.3.22.2, the HTTP server shall respond using one of the following:

- sending an HTTP response code 400 (Bad Request), or
- ignoring the erroneous RANGE header, or
- sending an HTTP response, as defined in IETF RFC 2616:1999.

[ATTRIBUTES]

M	F	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	AAX28	

[COMMENT] Ignoring the erroneous RANGE header means that the server will process the request as if such a header were not present in the request.

IETF RFC 2616:1999, 14.35.1 defines what constitutes a valid range request and when the request is invalid. For example, for a file of size 500, a request for bytes 200 to 800 is valid. A request for bytes 700 to 800 is invalid. Similarly, when a resource is operating under the Limited Data Availability model in mode "0" with an available byte range of 200-500, a request for bytes 100-400 is valid. But a request for bytes 0-100 is invalid.

11.4.3.22.6

[GUIDELINE] If an HTTP Server Endpoint can support HTTP requests with a specified Range for a particular URI, then the HTTP Server Endpoint should support persistent connections (HTTP/1.1) for that URI.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	WAAX2	

[COMMENT] Content that is requested with the Range option can often get many Range requests in a short period of time, potentially causing content serving devices to run out of available sockets.

11.4.3.22.7

[GUIDELINE] An HTTP Server Endpoint should accept and honor an HTTP/1.0 GET or HEAD requests for media transfers with the Range header field.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	PW38J	

[COMMENT] Although the Range option is not covered in the HTTP/1.0 specification, HTTP/1.0 clients can still benefit from having the ability to issue GET requests with a specified Range.

11.4.3.22.8

[GUIDELINE] If the Content Source does not indicate support for the Range HTTP header for a content binary (as defined in guidelines 10.1.3.20.1 and 10.1.3.28.4), then the HTTP Client Endpoint shall not issue HTTP GET and HEAD requests with the Range HTTP header.

[ATTRIBUTES]

M	L	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	A57UJ	

[COMMENT] This prohibition includes HTTP GET and HEAD requests with Range: bytes=0-.

11.4.3.22.9

[GUIDELINE] If the Range request is syntactically correct and the requested range is valid, and if the HTTP Server Endpoint returns data including the requested range (Target Response), then it shall respond to the HTTP GET request with the 206 (Partial Content) HTTP response code.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	7XZ95	

[COMMENT] Comment in requirement 11.4.3.22.3 also applies to this requirement.

11.4.3.23 MT HTTP time-based seek (server)**11.4.3.23.1**

[GUIDELINE] If the Content Source indicates support for the TimeSeekRange.dlna.org HTTP header for a content binary (as defined in guidelines 10.1.3.20.1 and 10.1.3.28.4), then the HTTP Server Endpoint shall respond to the TimeSeekRange.dlna.org HTTP requests for that content binary with clarifications and constraints defined in guidelines 11.4.3.23.2 to 11.4.3.23.12.

[ATTRIBUTES]

M	A	DMS +PU+.	M-DMS	n/a	IETF RFC 2616:1999	U8UZX	

[COMMENT] HTTP requests with the Range header field do not provide a very accurate experience when seeking to playback positions in variable bitrate encoded content. This HTTP header provides a way for DLNA HTTP clients to request an HTTP server to send the content bytes for a specified range of time.

HTTP clients can also use seek operations to implement a forward/backward variable speed playback capability.

11.4.3.23.2

[GUIDELINE] The notation of the TimeSeekRange.dlna.org header field is defined as follows.

- TimeSeekRange-line = "TimeSeekRange.dlna.org" *LWS ":" *LWS range specifier
- range specifier = npt range [SP bytes-range]
- npt range = "npt" "=" npt-start- time "-" [npt-end- time] [instance-duration]
- npt-start-time = npt-time
- npt-end-time = npt-time
- instance-duration = "/" (npt-time | "**")
- npt time = <syntax as defined in 11.4.2.13>
- bytes range = "bytes" "=" first byte pos "-" last byte pos instance-length
- first byte pos = 1*DIGIT
- last byte pos = 1*DIGIT
- instance-length = "/" (1*DIGIT | "**")

Note that literals, "npt" and "bytes", are case sensitive.

The npt-range specifies the range in normal playing time as found in 3.6 of IETF RFC 2326:1998 with the exception of the concept of the "now" literal. It is used in the request and response.

The bytes-range specifies the range in bytes and it is used only in the response. Refer to 11.4.3.23.4.

The instance-duration specifies the duration of an entire content binary and is mandatory in the response and prohibited in the request. The asterisk "*" character indicates that the instance-duration is unknown at the time the response is generated. Refer to 11.4.3.23.6 for more information.

The instance-length specifies the byte length of an entire content binary and bytes-range shall include instance-length in the response. The asterisk "*" character indicates that the instance-length is unknown at the time the response is generated. Refer to 11.4.3.23.4 for more information.

Examples:

- TimeSeekRange.dlna.org: npt=335.11-336.08;
- TimeSeekRange.dlna.org: npt=00:05:35.3-00:05: 37.5.

Specifying the range value in the combination of npt-sec and npt-hhmmss, e.g. 335.11-00:05:37.5, is allowed, but not recommended.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2616:1999 IETF RFC 2326:1998	S2RRM	

[COMMENT] The field value specifies the requested range of a resource in absolute time. The range is specified by the start point and the endpoint. When both points are specified, the range value adopts the form:

- TimeSeekRange.dlna.org: npt=time1-time2
- The first value (time1) defines the start time, while the second value (time 2) defines the end time.
- In forward scan mode (positive play-speed values): time1 <= time2 (as defined in 11.4.3.23.10).
- In backward scan mode (negative play-speed values): time1 >= time2 (as defined in 11.4.3.23.10).
- The end time can be omitted resulting in a expression of the form:
 - TimeSeekRange.dlna.org: npt=time1-

If the end time is omitted in forward scan mode, it means the end of the resource is specified. If the end time is omitted in backward scan mode, it means the beginning of the resource is specified.

11.4.3.23.3

[GUIDELINE] If an HTTP Server Endpoint returns data in forward scan mode including the requested time range (Target Response), then it shall return the content bytes for a time-range that starts at or before the requested start time and ends at or after the requested end time.

If an HTTP Server Endpoint returns data in backward scan mode including the requested time-range (Target Response), then it shall return the content bytes for a time-range that starts at or after the requested start time and ends at or before the requested end time.

The following exceptions are allowed for the Full Random Access Data Availability model.

- In forward scan mode an HTTP Server Endpoint may ignore the requested end time and return the range data up to the end of the content data.
- In backward scan mode an HTTP Server Endpoint may ignore the requested end time and return the range data up to the beginning of the content data.

The following exceptions are allowed for the Limited Random Access Data Availability model when the mode-flag is 0.

- In forward scan mode an HTTP Server Endpoint may ignore the requested start time if it precedes the available seek range and return the range data from the start of the available content data.
- In backward scan mode an HTTP Server Endpoint may ignore the requested end time if it precedes the available seek range and return the range data up to the start of the available content data.

The following exception is allowed for both the Full Random Access Data Availability model and the Limited Random Access Data Availability model.

- HTTP Server Endpoint may round up or down to one decimal place, the npt time values specified in the HTTP response TimeSeekRange.dlna.org, compared to the actual returned data in the response body.

Examples:

- TimeSeekRange.dlna.org: npt=335.1-336.1/40445.4;
- TimeSeekRange.dlna.org: npt=00:05:35.2-00:05:38.1/*.

In forward scan mode, if the requesting endpoint specifies an end time beyond the end of the content data, then the HTTP Server Endpoint shall return the range data to the end of the content data.

In backward scan mode, if the requesting endpoint specifies a start time beyond the end of the content data, then the HTTP Server Endpoint shall return the range data to the end of the content data.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	57UJY	C

[COMMENT] This guideline obliges an HTTP server to respond with a time range (of bytes) that is close to the time range specified in the request.

11.4.3.23.4

[GUIDELINE] If an HTTP Server Endpoint supports both byte-based seek and time-based-seek operations for a resource, then in addition to an npt-range value the byte range corresponding with the npt time range and the byte length of an entire content binary shall be provided in the bytes-range value of the HTTP Target Response to the HTTP request with the TimeSeekRange.dlna.org header field, unless one of the following exceptions apply.

Exceptions:

- The data access model is the Limited Random Access Data Availability model and the mode-flag (as indicated in availableSeekRange.dlna.org) is "1".
- The HTTP request includes a valid PlaySpeed.dlna.org header.
- The Media Format Profile corresponding to the requested resource requires a modified form of the content binary in a time-seek response (e.g. MP4 container-based media profiles).

Examples:

- TimeSeekRange.dlna.org: npt=335.1-336.1/40445.4
bytes=1539686400-1540210688/304857907200
- TimeSeekRange.dlna.org: npt=00:05:35.2-00:05:38.1/* bytes=1539686400-1540210688/*

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	7UJYL	C

[COMMENT] The time-based-seek capability is useful for seeking to playback positions in variable bitrate encoded content; but it is not useful to retrieve subsequent data blocks. For Trick Mode playback after an initial time-based-seek, use of multiple HTTP GET requests with the Range header field to retrieve subsequent content data is encouraged. To support this functionality, byte range value is also specified in addition to time range value for the response to a time-based-seek only when byte-seek is also supported for the resource.

This functionality requires an HTTP server (that supports both TimeSeekRange.dlna.org and Range) to specify both the time-range and a byte-range in the HTTP response's headers.

11.4.3.23.5

[GUIDELINE] If an HTTP Server Endpoint returns data (Target Response) from a GET request with time range, then the response entity body data should start at a decoder friendly point (for example the start of the GOP in a video sequence).

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	ES2RR	

[COMMENT] This guideline recommends that stream segments returned by servers start, if possible, with a recognizable decoding entry point, such as the headers in a group of pictures (GOP) in MPEG-2.

11.4.3.23.6

[GUIDELINE] If an HTTP Server Endpoint returns data including the requested time range (Target Response) with the HTTP response code 200 (OK), then it shall specify the TimeSeekRange.dlna.org header field to indicate the time range of the content data that is returned in the HTTP response.

The npt-range shall include the instance-duration.

Examples:

- TimeSeekRange.dlna.org: npt=335.10-336.10/40445.4;
- TimeSeekRange.dlna.org: npt=00:05:35.3-00:05: 37.5/*;
- For a response in backward scan mode: TimeSeekRange.dlna.org: npt=897.5-241.5/3966.3.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	YC9LA	

[COMMENT] These guidelines oblige an HTTP server to respond with either a 200 response code (for a time range request that can be honored) or a 416 response code (for time range requests that cannot be honored). The guideline simplifies HTTP client implementations as it makes limits the behaviour of the HTTP server more predictable.

11.4.3.23.7

[GUIDELINE] If the requested time range is not valid for the resource with URI specified in the HTTP GET request, then the HTTP streaming server shall respond with the HTTP response error code of 416 (Requested Range Not Satisfiable).

Interpretation of not valid includes the following types of errors.

- The requested time range does not overlap the time boundaries of the actual content.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	9LACX	

[COMMENT] The HTTP server indicates support for the TimeSeekRange.dlna.org header in the DLNA.ORG_OP parameter in guideline 10.1.3.20.1. IETF RFC 2616:1999 reserves the definition for error 416 (Requested Range Not Satisfiable) to cases where none of the range request values overlap the current extent of the content. This requirement clarifies the IETF RFC 2616:1999 definition of this error for time range requests.

11.4.3.23.8

[GUIDELINE] If the requested time range is not syntactically correct, then the HTTP streaming server shall return the HTTP response error code of 400 (Bad Request).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	YV45Z	

11.4.3.23.9

[GUIDELINE] If the Content Source does not indicate support for the TimeSeekRange.dlna.org HTTP header for a content binary (as defined in guidelines 10.1.3.20.1 and 10.1.3.28.4), then the HTTP Client Endpoint shall not issue HTTP GET and HEAD requests with the TimeSeekRange.dlna.org HTTP header.

[ATTRIBUTES]

M	L	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	8V5NG	

11.4.3.23.10

[GUIDELINE] In forward scan mode (positive play-speed values) the start time in the range defined by the TimeSeekRange.dlna.org header shall be smaller than or equal to the end time.

In backward scan mode (negative play-speed values) the start time in the range defined by the TimeSeekRange.dlna.org header shall be larger than or equal to the end time.

Non-compliance with these requirements results in a syntax error in the TimeSeekRange.dlna.org header. See Guideline 11.4.3.23.8 for behaviour in the presence of a syntactically wrong TimeSeekRange.dlna.org header.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	n/a	ENIDK	

11.4.3.23.11

[GUIDELINE] If the TimeSeekRange.dlna.org request is syntactically correct and the requested time range is valid, and if the HTTP Server Endpoint returns data including the requested time range (Target Response) then it shall respond to the HTTP GET request with the 200 (OK) HTTP response code.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	WS9TZ	

11.4.3.23.12

[GUIDELINE] If an HTTP Content Source returns data (Target Response) from a GET request with time range, then the response entity body data shall be compliant with the Media Format Profile indicated in the corresponding <res> element.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	X8GZD	N

[COMMENT] This guideline requires an HTTP Content Source to respond to a TimeSeekRange.dlna.org request with data that is compliant with the profile associated with the resource being requested. This may require the Content Source to add headers and other metadata not present in the raw content binary necessary for the client to properly process the response data.

11.4.3.24 MT HTTP Chunked Transfer Coding

11.4.3.24.1

[GUIDELINE] HTTP Servers Endpoints may use Chunked Transfer Coding in response to HTTP/1.1 GET requests.

[ATTRIBUTES]

O	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	58V5N	

[COMMENT] Chunked Transfer Coding is an HTTP response encoding methodology that can only be used in response to HTTP/1.1 requests by HTTP/1.1 servers.

11.4.3.24.2

[GUIDELINE] HTTP Server Endpoints shall not use Chunked Transfer Coding in response to HTTP/1.0 GET requests.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	3KYV4	

11.4.3.24.3

[GUIDELINE] HTTP Client Endpoints may use Chunked Transfer Coding in HTTP/1.1 POST requests.

[ATTRIBUTES]

O	R	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	XJSB3	

11.4.3.25 MT baseline transport: HTTP Client Endpoints**11.4.3.25.1**

[GUIDELINE] HTTP Client Endpoints used for Media Transport purposes shall implement HTTP/1.0, HTTP/1.1, or both.

[ATTRIBUTES]

M	L	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	KYV45	

[COMMENT] HTTP client endpoints are restricted to HTTP versions that HTTP server endpoints are prepared to support.

11.4.3.25.2

[GUIDELINE] HTTP Client Endpoints shall not report a higher version of HTTP than is actually supported by the implementation.

[ATTRIBUTES]

M	R	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	TF57C	

[COMMENT] For example an HTTP client endpoint that does not support Chunked Transfer Coding responses will never issue an HTTP/1.1 GET request.

11.4.3.25.3

[GUIDELINE] HTTP/1.1 Client endpoints shall be able to process HTTP/1.1 Chunked Transfer Coding responses.

[ATTRIBUTES]

M	R	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	GAA77	

[COMMENT] When making HTTP/1.1 requests, it is important that HTTP client endpoints properly handle responses encoded with Chunked Transfer Coding.

11.4.3.25.4

[GUIDELINE] HTTP/1.1 Client Endpoints shall be prepared to properly handle an HTTP response code of 1xx from HTTP servers, even when not expected.

[ATTRIBUTES]

M	R	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	3TF57	

[COMMENT] A 1xx can be generated by the server regardless of whether or not the client issued an HTTP request encoded with Chunked Transfer Coding.

See 10.1 of IETF RFC 2616:1999 for more information.

11.4.3.26 MT HTTP header: range (client)

[GUIDELINE] HTTP Client Endpoints shall not use multiple range specifiers nor use suffix byte range spec (as defined in IETF RFC 2616:1999) in HTTP requests.

[ATTRIBUTES]

M	L	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	B3TF5	

[COMMENT] This guideline simplifies the implementation of HTTP servers by not requiring support of multiple ranges or suffix byte range specification.

11.4.3.27 MT HTTP persistent connection usage for clients

[GUIDELINE] HTTP/1.1 Client Endpoints should use HTTP/1.1 persistent connections.

[ATTRIBUTES]

S	R	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	45Z8H	

[COMMENT] Implementing this guideline reduces the setup/teardown load on HTTP Server Endpoints. Furthermore, HTTP Server Endpoints will be able to reserve the allocated socket for the requesting client. Clients that do not use HTTP/1.1 persistent connections can encounter a scenario where an HTTP Server Endpoint does not answer the subsequent requests because it has run out of sockets.

11.4.3.28 MT HTTP inactivity timeout**11.4.3.28.1**

[GUIDELINE] HTTP Client Endpoints should close persistent (HTTP/1.1) connections after completing all outstanding HTTP transactions and within 30 s of inactivity has passed.

[ATTRIBUTES]

S	A	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	V45Z8	

[COMMENT] This ensures that sockets do not remain consumed after a content transfer has successfully completed.

11.4.3.28.2

[GUIDELINE] If an HTTP server detects 5 min of inactivity after a POST transaction, then the HTTP server should close persistent (HTTP/1.1) connections.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	NGAA7	

[COMMENT] This ensures that sockets do not remain consumed by an Upload Controller.

11.4.3.29 MT HTTP header parsing (client)

[GUIDELINE] HTTP Client Endpoints shall gracefully skip over unsupported HTTP header fields. Under no circumstances can an HTTP client fail to process a properly formatted HTTP response because of an unrecognized or unsupported HTTP header field.

[ATTRIBUTES]

M	R	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	5NGAA	

[COMMENT] Incorrect HTTP header parsing has been the source of numerous compatibility issues during plugfest events.

11.4.3.30 MT HTTP maximum header size

[GUIDELINE] HTTP Client and Server Endpoints shall use a total HTTP header size that is less than or equal to 8 192 B (8 KiB) when sending an HTTP request or HTTP response.

The total HTTP header size is the total number of bytes from the first byte in the start-line token and the last byte of the CRLF token, as used in the generic-message token defined in 4.1 of IETF RFC 2616:1999, as quoted in the syntax below.

- generic-message = start-line *(message-header CRLF) CRLF [message-body]

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	CX7UF	

[COMMENT] This provides a reasonable assumption as to how much memory is necessary is for all HTTP headers in an HTTP request or response.

If determined to be necessary, future DLNA guidelines can define a parameter in the USER-AGENT to indicate a DLNA version for governing total HTTP header sizes.

11.4.3.31 MT HTTP status code precedence

[GUIDELINE] If a DLNA guideline specifies an HTTP status code that involves a DLNA defined HTTP header, then the DLNA guideline's HTTP status code shall take precedence over those specified in IETF RFC 2616:1999.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	ACX7U	

[COMMENT] As a general rule, HTTP status codes for DLNA defined HTTP headers take precedence over HTTP status codes. For standard HTTP headers, IETF RFC 2616:1999 status codes apply. For HTTP responses that involve DLNA defined HTTP headers, the DLNA specified status code applies when there exists an ambiguity between using a DLNA-specified error code and an error code made by IETF RFC 2616:1999. Whenever possible, DLNA guidelines align with IETF RFC 2616:1999.

11.4.3.32 MT transfer mode indication

11.4.3.32.1

[GUIDELINE] The syntax for the transferMode.dlna.org HTTP header value is as follows.

- transferMode-line= "transferMode.dlna.org" *LWS ":" *LWS mode
- mode = "Streaming" | "Interactive" | "Background"

A value of "Background" for an HTTP request indicates that the HTTP client would like the transfer of content to be a Background Transfer.

A value of "Interactive" for an HTTP request indicates that the HTTP client is requesting an Interactive Transfer.

A value of "Streaming" for an HTTP request indicates that the HTTP client wishes a Streaming Transfer of the content.

A value of "Background" for an HTTP response indicates that the HTTP server is attempting a Background Transfer of the content.

A value of "Interactive" for an HTTP response indicates that the HTTP server is attempting an Interactive Transfer of the content.

A value of "Streaming" for an HTTP response indicates that the HTTP server is attempting a Streaming Transfer of the content.

Note that the mode token values ("Streaming", "Interactive", and "Background") are case sensitive values.

Example

- transferMode.dlna.org: Interactive

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	LACX7	

[COMMENT] This header carries the transfer mode as listed in the introduction.

11.4.3.32.2

[GUIDELINE] An HTTP server that receives an HTTP request from an HTTP client of a DLNA endpoint that omits the transferMode.dlna.org header shall treat it as equivalent to the header-value pair of transferMode.dlna.org:Streaming for content binaries of the AV or Audio Media Classes or transferMode.dlna.org:Interactive for all other content binaries.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	RRM6T	

[COMMENT] HTTP transfers that do not include this header are treated as Streaming Transfers for AV or Audio Media Classes and as Interactive Transfers for all other content binaries.

11.4.3.32.3

[GUIDELINE] The transferMode.dlna.org header may be used by HTTP clients and servers in requests and responses. The transferMode.dlna.org header is used to convey the transfer mode information as specified in guideline 11.4.2.3.

[ATTRIBUTES]

O	C	DMS DMP DMR +PU+ +DN+ +UP+ +UPSYNC+ +DNSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	YL6RN	

[COMMENT] This guideline clarifies the use of the transferMode.dlna.org, according to guideline 11.4.2.3.

11.4.3.32.4

[GUIDELINE] If an HTTP Client Endpoint requests a transfer mode that is not valid for the Media Class of data that is being exchanged or is not supported by an HTTP Server Endpoint for the given content binary, the HTTP Server Endpoint shall respond with error code 406 (Not Acceptable).

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	2RRM6	

[COMMENT] The list of transfer modes for the given Media Class is given in guideline 11.4.2.3.1. However, a server might restrict the list further if the content warrants it. For example, for live captured content, Background Transfer might not be available. For details on the Media Transfer Modes that are available for a particular content binary within a DMS structure, see Guideline 10.1.3.24.2.

11.4.3.32.5

[GUIDELINE] All DLNA endpoints communicating with a v1.0 DMS shall tolerate HTTP responses that omit the transferMode.dlna.org HTTP header.

Tolerate means that the HTTP client shall "parse and ignore" or "parse and interpret" the HTTP response.

(That is, all DLNA endpoints communicating with a v1.0 DMS shall assume that the media will be returned without the transferMode.dlna.org HTTP header and using a best effort QoS level.)

[ATTRIBUTES]

M	C	DMP DMR +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	RM6TQ	

[COMMENT] All v1.0 DMS media transfers were assumed to be for immediate rendering and at a default best effort QoS level. A v1.5 entity communicating with a v1.0 DMS needs to allow any media transfer to have these parameters.

11.4.3.33 MT caching directives for HTTP 1.0

11.4.3.33.1

[GUIDELINE] If applicable-http-endpoints want to modify the default caching behaviour of intermediate HTTP caches, they shall do so in a manner compliant with IETF RFC 1945.

Applicable-http-endpoints specifically refers to HTTP Server and Client Endpoints participating in transfer operations of cacheable content using

- HTTP/1.0, and
- GET requests and responses.

This definition of applicable-http-endpoints is valid only for this guideline.

[ATTRIBUTES]

M	C	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS M-DMP	n/a	IETF RFC 1945	JYL6R	

[COMMENT] Per HTTP/1.0 specifications, intermediate caching operations are allowed by default when content is transferred using the GET method.

11.4.3.33.2

[GUIDELINE] If an HTTP Server Endpoint transfers non-cacheable content using HTTP/1.0 GET responses, then the HTTP Server Endpoint shall prevent intermediate caching by including this directive amongst the HTTP headers in the response.

- Pragma: no-cache

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 1945	J7V9I	

[COMMENT] Non-cacheable content includes the following:

- live content and other forms of broadcast streams;
- content data that includes the TimeSeekRange.dlna.org or PlaySpeed.dlna.org HTTP headers;
- content binaries that are dynamically generated in such a way that the content binary streams can differ on 2 different transactions (e.g. smart transcoding engines that perform transrating based on network throughput).

11.4.3.33.3

[GUIDELINE] If HTTP Server Endpoints transfer Audio or AV content binaries and the response includes one or both of listed HTTP headers, then the responses shall prevent caching, per guidelines 11.4.3.34.1 and 11.4.3.34.2.

- TimeSeekRange.dlna.org
- PlaySpeed.dlna.org

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	UJYL6	

[COMMENT] In HTTP 1.0 no method exists to signal the different bit stream variations that result from the use of Time Seek and play-speed operations. For this reason, intermediate caching operations have to be avoided.

11.4.3.34 MT caching directives for HTTP 1.1**11.4.3.34.1**

[GUIDELINE] If applicable-http-endpoints want to modify the default caching behaviour of intermediate HTTP caches, they shall do so in a manner compliant with IETF RFC 2616:1999.

Applicable-http-endpoints specifically refers to HTTP Server and Client Endpoints participating in transfer operations of cacheable content using the following:

- HTTP/1.1, and
- GET requests and responses.

This definition of applicable-http-endpoints is valid only for this guideline.

[ATTRIBUTES]

M	C	DMS DMP DMR +PU+ +DN+ +UP+ +DNSYNC+ +UPSUNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	XTY7C	

[COMMENT] Per HTTP/1.1 specifications, intermediate caching operations are allowed by default when content is transferred using the GET method.

11.4.3.34.2

[GUIDELINE] HTTP Server Endpoints that transfer non-cacheable content using HTTP/1.1 GET responses shall prevent intermediate caching by including among the HTTP response headers both of the following directives.

- Pragma: no-cache
- Cache-control: no-cache

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	ZXTY7	

11.4.3.34.3

[GUIDELINE] If an HTTP Server Endpoint transfers Audio or AV content binaries using HTTP/1.1 GET responses that include one or both of these HTTP headers, then such transfers should be marked as cacheable.

- TimeSeekRange.dlna.org
- PlaySpeed.dlna.org

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	n/a	X28MG	

[COMMENT] Unlike HTTP/1.0, the newer version HTTP/1.1 includes caching directives that, when used, enable transparent caching even when the transferred objects include headers that modify the object's binary representation. In DLNA, Time Seek and play-speed headers modify the binary representation of the object that is transferred using the HTTP protocol. The "Vary" header described below can be used to restore transparent caching for these objects.

11.4.3.34.4

[GUIDELINE] If an HTTP Server Endpoint transfers Audio or AV content binaries that permit variable play-speed and time-based seek operations for cacheable content transported in an HTTP/1.1 GET response, then the HTTP Server Endpoint shall include a "Vary" HTTP header as defined in IETF RFC 2616:1999.

The "Vary" header shall list either or both of the following two arguments to inform caches of the corresponding supported operations:

- TimeSeekRange.dlna.org
- PlaySpeed.dlna.org

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	UZXTY	

[COMMENT] The "Vary" header serves to indicate potential intermediate caches that certain headers create variants of the object binaries defined by its URI. For example, a 30 min media stream requested in full is a different object variant when only the first 3 min of the stream are requested using Time Seek operations.

Per IETF RFC 2616:1999 the "Vary" header has to be included whenever the server responds to a client request for the CDS object. The "Vary" header has to be included even if the request does not include Time Seek or play-speed headers.

11.4.3.34.5

[GUIDELINE] If applicable-http-endpoints want to supersede the default caching prohibition for POST transfers, they shall do so in a manner compliant with IETF RFC 2616:1999.

Applicable-http-endpoints specifically refers to HTTP Server and Client Endpoints participating in upload transaction using

- HTTP/1.1 and
- POST requests and responses.

[ATTRIBUTES]

M	C	DMS +UP+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999	8J7V9

[COMMENT] Per HTTP/1.1 specifications, intermediate caching operations are prohibited by default when content is transferred using the POST method.

11.4.3.35 MT/BCM HTTP header:peerManager.dlna.org**11.4.3.35.1**

[GUIDELINE] HTTP Client Endpoints may use the peerManager.dlna.org HTTP header to communicate the identity of the UPnP AV ConnectionManager service to the Content Source Endpoint in HTTP GET requests.

[ATTRIBUTES]

O	A	DMR	n/a	n/a	IETF RFC 2616:1999	AX28M

[COMMENT] The peerManager.dlna.org HTTP Header is not required. However, this feature is useful for HTTP Clients that want to facilitate BCM on DMS with BCM support.

11.4.3.35.2

[GUIDELINE] The value of the peerManager.dlna.org HTTP header shall be the same value as the PeerConnectionManager, as described in the UPnP AV Architecture.

The notation of the peerManager.dlna.org HTTP header field is defined as follows:

- peerManager-line = "peerManager.dlna.org" *LWS ":" *LWS peer-connection-manager;
- peer-connection-manager = udn-token "/" serviceId-token;
- udn-token = <case-insensitive UDN of the UPnP AV MediaRenderer device>;
- serviceId-token = <case-sensitive ServiceID of the ConnectionManager service, associated with the MediaRenderer device identified by udn-token>.

Example:

- peerManager.dlna.org:
uuid:12345678123456781234567812345678/urn:schemas-upnp-org:serviceId:Connection
Manager.

[ATTRIBUTES]

M	A	DMR	n/a	n/a	IETF RFC 2616:1999	7V9I4	

11.4.3.36 MT/BCM HTTP header:friendlyName.dlna.org

11.4.3.36.1

[GUIDELINE] HTTP Client Endpoints may use the friendlyName.dlna.org HTTP header to communicate a user-friendly name to the Content Source Endpoint in HTTP GET requests.

[ATTRIBUTES]

O	A	DMP +UP+ +DN+ +DNSYNC+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	H53W5	

[COMMENT] The friendlyName.dlna.org HTTP Header is not required. However, this feature is useful for HTTP Clients that want to facilitate BCM on DMS with BCM support.

11.4.3.36.2

[GUIDELINE] The notation of the friendlyName.dlna.org header field is defined as follows:

- friendlyName-line = "friendlyName.dlna.org" *LWS ":" *LWS "friendly-name-token;
- friendlyName-token = <case sensitive string, limited to 128 B in its UTF-8 encoded form>.

[ATTRIBUTES]

M	A	DMP +UP+ +DN+ +DNSYNC+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	28MG8	

11.4.3.37 MT/BCM scid.dlna.org HTTP header

11.4.3.37.1

[GUIDELINE] If a UPnP AV MediaServer supports BCM, then it shall use the scid.dlna.org HTTP header in HTTP responses to identify the ConnectionID associated with the underlying transport layer connection.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	3H53W	

11.4.3.37.2

[GUIDELINE] The syntax of the scid.dlna.org HTTP header shall be as follows:

- scidheader = "scid.dlna.org" *LWS ":" *LWS connection-id;
- connection-id = <the ConnectionID value associated with the underlying transport connection>.

[ATTRIBUTES]

M	A	DMS DMP DMR +UP+ +DN+ +DNSYNC+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999	ZXWQG	

11.4.3.37.3

[GUIDELINE] HTTP Client Endpoints may use scid.dlna.org in subsequent HTTP requests to identify a known and associated UPnP AV Connection only if the HTTP requests are for the same URI.

[ATTRIBUTES]

O	A	DMP DMR +UP+ +DN+ +DNSYNC+ +UPSYNC+	M-DMP	n/a	IETF RFC 2616:1999	53W5Q	

[COMMENT] This guideline allows Content Receivers to provide the ConnectionID in the transport layer requests. This guideline assumes the HTTP client of the Content Receiver acquired the ConnectionID in an earlier HTTP response. This mechanism can be used to combine logically related, but separated transport layer requests for the same content URI.

11.4.3.38 MT streaming transferMode.dlna.org HTTP header**11.4.3.38.1**

[GUIDELINE] If an HTTP Client Endpoint requests a streaming transfer of data, then it shall specify the transferMode.dlna.org HTTP header and the header shall have a value of "Streaming".

[ATTRIBUTES]

M	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	DU649	

[COMMENT] Legacy clients will still request streaming transfers without using the transferMode.dlna.org HTTP header. Guideline 11.4.3.32.2 requires that servers that receive such a request treat it as equivalent to a request for a streaming transfer for Audio and AV Media Classes.

11.4.3.38.2

[GUIDELINE] Unless a streaming HTTP Server Endpoint responds with an error response code, it shall respond to HTTP HEAD or GET requests for a streaming transfer (as defined in 11.4.3.38.1) by sending a response that contains the transferMode.dlna.org HTTP header and gives it a value of "Streaming".

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	6498V	

11.4.3.39 MT HTTP Play media operation

[GUIDELINE] A streaming HTTP Client Endpoint shall use the HTTP GET method when using the HTTP transport protocol for initiating the Play media operation.

[ATTRIBUTES]

M	L	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	U6498	

[COMMENT] This guideline specifies the normative way to request content.

11.4.3.40 MT HTTP Stop media operation

11.4.3.40.1

[GUIDELINE] A streaming HTTP Client Endpoint should implement the Stop media operation by disconnecting the TCP connection of the HTTP transaction.

[ATTRIBUTES]

S	A	+DN+ +DNSYNC+	n/a	n/a	IETF RFC 2616:1999	XWQGT	

[COMMENT] This guideline recommends the way to stop a media stream. Although HTTP clients can technically stall the TCP connection, that technique is discouraged. The preferred technique makes better use of an HTTP Server Endpoint's platform resources, which can be limited.

This guideline specifies that HTTP Client endpoints visually and/or aurally stop rendering of content, although the continuation of data streaming from the HTTP Server Endpoint is permissible for data buffering/caching purposes.

11.4.3.40.2

[GUIDELINE] An audio or AV streaming HTTP Client Endpoint shall implement the Stop media operation by disconnecting the TCP connection of the HTTP transaction.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	CWCV2	

[COMMENT] This technique makes better use of an HTTP Server Endpoint's platform resources, which can be limited.

This guideline specifies that HTTP Client endpoints visually and/or aurally stop rendering of content, although the continuation of data streaming from the HTTP Server Endpoint is permissible for data buffering/caching purposes.

11.4.3.41 MT HTTP Pause/Pause-Release media operation

11.4.3.41.1

[GUIDELINE] A streaming HTTP Client Endpoint should implement the Pause media operation by the following method.

- Connection Stalling: Suspending the reading of data from the HTTP connection. Resuming the reading of data from the HTTP connection is the mechanism for Pause-Release.

[ATTRIBUTES]

S	L	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	WQGTQ	

11.4.3.41.2

[GUIDELINE] If a streaming HTTP Client Endpoint performs a Pause media operation, then the HTTP Client Endpoint shall support all of the following Pause media operation methods.

- Disconnecting and Seeking: Disconnecting the HTTP connection and using byte-based seek transport layer features as the mechanism for Pause-Release.
- Disconnecting and Seeking: Disconnecting the HTTP connection and using time-based seek transport layer features as the mechanism for Pause-Release.

[ATTRIBUTES]

M	L	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	CZ794	

[COMMENT] This guideline is applicable to audio Media Class and AV Media Class.

11.4.3.41.3

[GUIDELINE] If a streaming HTTP Client Endpoint wants to pause the current media stream, it shall first ensure that all of the necessary media operations and information are available to resume the play (Pause-Release) of the media stream.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	498VR	

[COMMENT] The ability to do a Pause-Release media operation depends on both the Content Receiver and the Content Source sharing support for at least one of the following HTTP transport features: byte-based seek, time-based seek, or Connection Stalling.

11.4.3.42 MT HTTP Pause/Pause-Release media operation: Disconnecting and Seeking Method

11.4.3.42.1

[GUIDELINE] If a streaming HTTP Client Endpoint performs a Pause media operation using the Disconnecting and Seeking method, it shall support the Pause-Release operation by using byte-based seek or time-based seek transport layer features. Before using this form of Pause/Pause-Release mechanism, the streaming HTTP Client Endpoint shall verify that the Content Source supports the necessary transport layer feature.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	3W5QP	

[COMMENT] The HTTP connection can be closed for different reasons. If the connection is disconnected, the streaming HTTP Client Endpoint can use a Seek media operation (see 11.4.3.44.1) to Pause-Release the playback.

11.4.3.42.2

[GUIDELINE] If a streaming HTTP Client Endpoint supports the Pause media operation using the Disconnecting and Seeking method, it should support the byte-based seek transport layer feature.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	98VRE	

[COMMENT] This guideline recommends that a Content Source supports byte-based seek, as defined in 11.4.3.22.

11.4.3.42.3

[GUIDELINE] If a streaming HTTP Client Endpoint supports the Pause media operation using the Disconnecting and Seeking method, it may perform the Pause media operation by first suspending the reading of data from the HTTP connection (as described for the Connection Stall method). When the streaming HTTP Client Endpoint detects a TCP-layer disconnect, it may perform the Pause-Release media operation using the time-based seek or byte-based seek transport layer feature that is supported by the Content Source.

[ATTRIBUTES]

O	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	W5QPO	

[COMMENT] Using TCP flow control to stall/pause the flow of data can enable quick Pause-Release behaviour. Content Sources are recommended to support the Connection Stalling method, in addition to byte-based seek or time-based seek transport layer features.

11.4.3.43 MT HTTP Pause/Pause-Release media operation: Connection Stalling method

11.4.3.43.1

[GUIDELINE] If a streaming HTTP Client Endpoint performs a Pause media operation using the Connection Stalling method it shall verify the http-stalling parameter in the 4th field of the res@protocolInfo is present and set to true for a content binary.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	8MG85	

[COMMENT] A Pause media operation initiated by the Connection Stalling method does not require the use of time-based seek or byte-based seek since the Content Source maintains the TCP connection, using standard TCP flow control. Content Sources can choose to support only the Connection Stalling method for some content binaries, such as those created by dynamic, real-time transcoding.

11.4.3.43.2

[GUIDELINE] When the HTTP connection is lost for any reason, the streaming HTTP Client Endpoint may attempt to use time-based seek or byte-based seek transport layer features to Pause-Release the media stream.

[ATTRIBUTES]

O	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	MG857	

[COMMENT] This guideline assumes that both the Content Receiver and Content Source support the same transport layer features.

11.4.3.43.3

[GUIDELINE] If the http-stalling flag is true for a content binary, then the streaming HTTP Server Endpoint shall allow Connection Stalling for an indefinite amount of time on that content binary.

Equivalently, streaming HTTP Server Endpoints that support the Connection Stalling method for a content binary shall be able to maintain the HTTP connection and shall not use an HTTP connection inactivity timeout to terminate the HTTP connection.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	V9I4U	

[COMMENT] This guideline prohibits using an HTTP-inactivity timeout to terminate HTTP connections that are being paused through Connection Stalling.

The guideline permits the streaming HTTP Server Endpoint to terminate HTTP connections for the following scenarios:

- when the Content Receiver terminates the HTTP connection;
- the underlying TCP transport session is broken or disconnected;
- system events on the streaming HTTP Server Endpoint (user-initiated termination of streams, scheduled recording events, configurable policies for idle connections, etc.).

Although this guideline requires a streaming HTTP Server Endpoint to allow Connection Stalling for an indefinite period of time, a streaming HTTP Server Endpoint can provide users with the ability to terminate the HTTP connections. Many details in this area are out of scope, but this guideline accounts for the following types of possibilities:

- a local UI, associated with the Content Source, allows the user to manually terminate the HTTP connections;
- the Content Source has user-configurable policies that can overrule the default behaviour of indefinite connection stalling by terminating HTTP connections that have been inactive for a lengthy time. These guidelines do not define a minimum time but the suggested minimum HTTP inactivity timeout is 5 min;
- UPnP AV MediaServer control points invoke CMS (ConnectionComplete to terminate connections).

11.4.3.43.4

[GUIDELINE] If the http-stalling flag is true for a content binary, then the streaming HTTP Server Endpoint shall not change encoding rate based on the HTTP throughput.

[ATTRIBUTES]

M	A	DMS +PU+	M_DMS	n/a	IETF RFC 2616:1999	OBPDK	

[COMMENT] If a Rendering Endpoint has already opened a normal (1x) GET request, then it does not need to inform the server of the slow-motion playback since the Rendering Endpoint could simply consume the data more slowly. This is similar to the connection stalling approach to pause/resume, except that the client does not completely pause, it continues to consume and decode the content, but configures its decoder to do so at a slower rate. If the server supports stalling, then this is indistinguishable on the server side from a client that is doing pause/resume.

11.4.3.43.5

[GUIDELINE] If the http-stalling flag is true for a content binary, then the streaming HTTP Server Endpoint shall allow streaming at rates slower than real-time, while in streaming transfer mode, to support a Slow Forward Scan media operation using Connection Stalling to accommodate slower decode and display of the streamed content.

[ATTRIBUTES]

M	A	DMS +PU+	M_DMS	n/a	IETF RFC 2616:1999	Q5ABD	

11.4.3.44 MT HTTP Seek media operation

11.4.3.44.1

[GUIDELINE] An HTTP Client Endpoint should implement the Seek media operation by using the Range header fields, if those header fields are supported by the HTTP Server for the content binary.

[ATTRIBUTES]

S	A	+DN+ +DNSYNC+	n/a	n/a	IETF RFC 2616:1999	9I4UN	

[COMMENT] This guideline recommends two ways to implement the seek operation on content. The method used by the client is conditional on whether or not the HTTP server supports the capability for that content.

See Guideline 10.1.3.19 and 10.1.3.28.4 for information on discovering server seek capabilities.

See 11.4.3.22 guidelines for more information on Range header fields.

11.4.3.44.2

[GUIDELINE] For every content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Seek media operation, then the HTTP Client Endpoint shall support all of the following Seek media operation methods:

- the Range header field;
- the TimeSeekRange.dlna.org header field.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	PHT47	

[COMMENT] This guideline is applicable to Audio Media Class and AV Media Class.

11.4.3.45 MT HTTP Fast Forward Scan media operation

11.4.3.45.1

[GUIDELINE] If an audio streaming HTTP Client Endpoint wants to perform a Fast Forward Scan media operation (positive play-speed greater than 1x), then it should use one of these methods, provided that the given header fields are supported by the server.

- Issuing multiple HTTP GET requests with a specified Range header field.
- Issuing multiple HTTP GET requests with a specified TimeSeekRange.dlna.org header field.

- Issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	TY7CW	

[COMMENT] Forward Scan and backward Scan operations fall into a category of playback capabilities referred to as trick modes. These guidelines specify three general techniques for implementing trick modes:

- The first technique is to issue multiple HTTP requests with specified byte ranges, such that the byte data can be rendered sequentially, giving the effect of a trick mode playback. With this technique, the HTTP Client endpoint is responsible for specifying the appropriate byte ranges that will achieve the desired effect.
- The second technique is a variant of the first, and it works by requesting the HTTP server to return time ranges (instead of byte ranges). In this technique, the HTTP Client endpoint is responsible for choosing the appropriate time ranges that achieve the desired effect.
- The third technique works by having the HTTP Client endpoint instruct the HTTP Server Endpoint to return byte data that is already time scaled for a particular play-speed.

See 11.4.3.22, 11.4.3.23, and 11.4.3.53 guidelines for more information on Range, TimeSeekRange.dlna.org, and PlaySpeed.dlna.org header fields.

11.4.3.45.2

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Fast Forward Scan media operation (positive play-speed greater than 1x), then the HTTP Client Endpoint shall support all of the following methods.

- Issuing multiple HTTP GET requests with a specified Range header field.
- Issuing multiple HTTP GET requests with a specified TimeSeekRange.dlna.org header field.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	T24LR	

11.4.3.45.3

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Fast Forward Scan media operation (positive play-speed greater than 1x), then the HTTP Client Endpoint should support the following method.

- Issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	TYB9P	

11.4.3.46 MT HTTP Streaming Slow Forward Scan media operation**11.4.3.46.1**

[GUIDELINE] If an audio streaming HTTP Client Endpoint wants to perform a Slow Forward Scan media operation (positive play-speed less than 1x), then it should use one of these methods:

- issuing multiple HTTP GET requests with a specified Range header field;

- issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	L6RNZ	

11.4.3.46.2

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Slow Forward Scan media operation (positive play-speed less than 1x), then the HTTP Client Endpoint shall support all of the following methods:

- issuing multiple HTTP GET requests with a specified Range header field;
- issuing a single HTTP GET request and subsequently using Connection Stalling Method (see 11.4.3.43) to accommodate slower decode and display of the streamed content.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	Z9BD2	

11.4.3.46.3

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Slow Forward Scan media operation (positive play-speed less than 1x), then the HTTP Client Endpoint should support the following method:

- issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	3W8KS	

11.4.3.47 MT HTTP Streaming Fast Backward Scan media operation

11.4.3.47.1

[GUIDELINE] If an audio streaming HTTP Client Endpoint wants to perform a Fast Backward Scan operation (negative play-speed less than -1x), then it should use one of these methods:

- issuing multiple HTTP GET requests with a specified Range header field;
- issuing multiple HTTP GET requests with a specified TimeSeekRange.dlna.org header field;
- issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	Y7CWO	

11.4.3.47.2

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Fast Backward Scan media operation (negative play-speed less than -1x), then the HTTP Client Endpoint shall support all of the following methods:

- issuing multiple HTTP GET requests with a specified Range header field;
- issuing multiple HTTP GET requests with a specified TimeSeekRange.dlna.org header field.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	V46LS	

11.4.3.47.3

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Fast Backward Scan media operation (negative play-speed less than $-1x$), then the HTTP Client Endpoint should support the following method:

- issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	ZHSEA	

11.4.3.48 MT HTTP Streaming Slow Backward Scan media operation**11.4.3.48.1**

[GUIDELINE] If an audio streaming HTTP Client Endpoint wants to perform a Slow Backward Scan media operation (negative play-speed greater than or equal to $-1x$), then it should use one of these methods:

- issuing multiple HTTP GET requests with a specified Range header field; or
- issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	6RNZ6	

11.4.3.48.2

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Slow Backward Scan media operation (negative play-speed less than zero and greater than or equal to $-1x$), then the HTTP Client Endpoint shall support the following methods:

- issuing multiple HTTP GET requests with a specified Range header field.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	A89O5	

11.4.3.48.3

[GUIDELINE] For every AV content binary not using DLNA Link Protection, if a streaming HTTP Client Endpoint performs a Slow Backward Scan media operation (negative play-speed less than zero and greater than or equal to $-1x$), then the HTTP Client Endpoint should support the following method:

- issuing a single HTTP GET request with a specified PlaySpeed.dlna.org header field.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	2DQOQ	

11.4.3.49 MT HTTP streaming scan media operations

11.4.3.49.1

[GUIDELINE] If a streaming HTTP Client Endpoint wants to stop a normal playback stream in order to start a scan operation playback using the Range header under conditions where 11.4.3.5.6 applies, then it should close the original HTTP connection before issuing a GET request with the Range header to perform scan operations (also known as trick modes). After closing the original connection, the streaming HTTP Client Endpoint should open a new HTTP connection for the scan operation. Please observe that the new HTTP connection might be a persistent connection, which allows the client to issue multiple GET requests on a single HTTP connection.

[ATTRIBUTES]

S	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	6TQT3	

[COMMENT] Transitions from scan operations to normal playback can be achieved by making open ended (i.e. last-byte-pos value in Range header is absent) GET requests with the Range option.

11.4.3.49.2

[GUIDELINE] If a streaming HTTP Client Endpoint wants to stop a normal playback stream in order to start a scan operation playback using the PlaySpeed.dlna.org header under conditions where 11.4.3.5.6 applies, then it should close the original HTTP connection before issuing a GET request with the PlaySpeed.dlna.org header to perform scan operations (also known as trick modes). After closing the original connection, the streaming HTTP Client should open a new HTTP connection for the scan operation. Please observe that the new HTTP connection might be a persistent connection, which allows the client to issue multiple GET requests on a single HTTP connection.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	M6TQT	

[COMMENT] Transitions from scan operations to normal playback can be achieved by closing the HTTP connection that provides scan operations and opening a new HTTP connection for normal playback speed.

11.4.3.50 MT HTTP streaming download media operation

[GUIDELINE] An HTTP Client Endpoint shall initiate a streaming download media operation with the HTTP GET method when using the HTTP transport protocol for content, and it shall specify the transferMode.dlna.org HTTP header with a value of "Streaming".

[ATTRIBUTES]

M	L	+DN+ +DNSYNC+	n/a	n/a	IETF RFC 2616:1999	X7UF4	

11.4.3.51 MT HTTP prohibited operations for streaming download

[GUIDELINE] An HTTP Client Endpoint performing a streaming download media operation shall not use any of the following media operations as specified in these guidelines, see Table 44.

Table 44 – HTTP prohibited operations references

Operation	Reference
Pause	11.4.3.41 MT HTTP Pause/Pause-Release media operation
Fast Forward Scan	11.4.3.45 MT HTTP Fast Forward Scan media operation
Slow Forward Scan	11.4.3.46 MT HTTP Streaming Slow Forward Scan media operation
Fast Backward Scan	11.4.3.47 MT HTTP Streaming Fast Backward Scan media operation
Slow Backward Scan	11.4.3.48 MT HTTP Streaming Slow Backward Scan media operation

[ATTRIBUTES]

M	L	+DN+ +DNSYNC+	n/a	n/a	IETF RFC 2616:1999	AA772

11.4.3.52 MT HTTP media operation support within a profile**11.4.3.52.1**

[GUIDELINE] If the following conditions are true, then the HTTP Client Endpoint shall support that media operation on all content with that Media Format Profile.

- The HTTP Client Endpoint supports a media operation on a DLNA Media Format Profile.
- The HTTP Server Endpoint supports the necessary protocol elements to support the media operation.

[ATTRIBUTES]

M	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	n/a	8H8X2

[COMMENT] Necessary protocol elements can include optional parameters such as byte Range and TimeSeekRange.dlna.org.

11.4.3.52.2

[GUIDELINE] If an HTTP Server Endpoint supports byte Range and/or TimeSeekRange.dlna.org capabilities on the content for a particular DLNA Media Format Profile, it should support that on all content with that Media Format Profile.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	n/a	Z8H8X

[COMMENT] In some cases, such as transcoded or live content, it can be difficult to support byte Range and/or TimeSeekRange.dlna.org.

11.4.3.53 MT HTTP PlaySpeed.dlna.org header

11.4.3.53.1

[GUIDELINE] If the Content Source indicates support for the PlaySpeed.dlna.org HTTP header for a content binary (as defined in guideline 10.1.3.22), then the HTTP Server Endpoint shall respond to PlaySpeed.dlna.org HTTP requests for that content binary with the clarifications and constraints defined in guidelines 11.4.3.53.2 to 11.4.3.53.10.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	F57CP

[COMMENT] The PlaySpeed.dlna.org HTTP header allows HTTP clients to request the HTTP server to return content in a time scaled form.
For example, a DLNA HTTP client can request a DLNA HTTP server to return DLNA content in a 4x playback speed. The HTTP server's response would send content that gives the appearance of 4x playback speed.

This HTTP header can be used by DLNA servers for content conforming to DLNA Media Format Profiles and content that does not conform to DLNA Media Format Profiles.

11.4.3.53.2

[GUIDELINE] If a streaming HTTP Server Endpoint receives the PlaySpeed.dlna.org HTTP header in a HEAD request, then the HTTP server may respond without the PlaySpeed.dlna.org HTTP header.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	7UF4F

[COMMENT] HTTP servers are required to support the HEAD method. When an HTTP server gets a HEAD request with this option, the HTTP server can omit it from the response.

If HTTP clients need to determine if the PlaySpeed.dlna.org is supported for a URI, then the client are supposed to use the mandatory getContentFeatures.dlna.org HTTP header and examine the DLNA_ORG_PS parameter.

The reason why HEAD responses do not require the use of PlaySpeed.dlna.org is that the computational effort to respond with only the headers for a request that includes PlaySpeed.dlna.org is significant.

11.4.3.53.3

[GUIDELINE] If the streaming HTTP Endpoint uses the PlaySpeed.dlna.org HTTP header, then the Endpoint shall use the following syntax for the HTTP header and its value.

- play-speed-line = "PlaySpeed.dlna.org" *LWS ":" *LWS play-speed specifier
- play-speed specifier = "speed" "=" transport-play-speed
- transport-play-speed = <use the same notation for the AVT.TransportPlaySpeed state variable defined in the UPnP AV Transport service type>

NOTE The "speed" token is case sensitive.

Examples:

- PlaySpeed.dlna.org: speed=10;
- PlaySpeed.dlna.org: speed=-1/2

When encountering syntax errors with the PlaySpeed.dlna.org HTTP header, the HTTP server shall use the HTTP response code 400 (Bad Request).

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	A772R

[COMMENT] The field value specifies a play-speed to scale content data of a resource. The value is represented as same as TransportPlaySpeed state variable defined by AV Transport service type (e.g. 5, 10, -1/2, -10, -3/2, etc.).

11.4.3.53.4

[GUIDELINE] If the streaming HTTP Server Endpoint returns data (Target Response) for scaled content to be decoded for a scan operation (also known as variable play-speed) with the HTTP response code 200 (OK), then the HTTP response message shall specify the PlaySpeed.dlna.org HTTP header field to indicate the play-speed of the scaled content.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	57CPW

[COMMENT] This guideline requires the HTTP server to indicate if content bytes in the HTTP response represent content that has been time scaled.

11.4.3.53.5

[GUIDELINE] If the requested play-speed is not valid for the resource with the URI specified in the HTTP GET request, then the HTTP server shall respond with the HTTP response error code 406 (Not Acceptable). Interpretation of not valid includes the following types of errors.

If an HTTP server supports the PlaySpeed.dlna.org header and the requested play-speed is not valid for the resource with the URI specified in the HTTP GET request, then the HTTP server shall respond with the HTTP response error code 406 (Not Acceptable). Interpretation of not valid includes the following types of errors:

- the requested TransportPlaySpeed is not supported for the content.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	H8X2Y

[COMMENT] This guideline specifies the error code to be used in scenarios where the HTTP server cannot accommodate a request to time scale content.

The HTTP Server Endpoint indicates support for the PlaySpeed.dlna.org header in the DLNA_ORG_PS parameter which is in the contentFeatures.dlna.org in guideline 10.1.3.22.

11.4.3.53.6

[GUIDELINE] The scaled data (returned by the streaming HTTP Server Endpoint as a Target Response) shall be compliant the Media Format Profile associated with the requested resource.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	7CPWA	

[COMMENT] This guideline obliges an HTTP Server Endpoint to return content bytes that are conformant to the characteristics described for that content by its Media Format Profile. For example, if the content is exposed as MPEG2_PS_NTSC content, the returned content conforms to the MPEG syntax defined for that Media Format Profile, or, if the Media Format Profile definition calls for MPEG-2 video compression, that same media format applies during trick modes.

11.4.3.53.7

[GUIDELINE] The scaled data stream (returned by the streaming HTTP Server Endpoint as a Target Response) may use different media format parameters than the original (unscaled) stream, as long as these differences do not impact its compliance with the Media Format Profile of the original (unscaled) content binary. Generating scaled data streams by dropping or adding frames to the stream is called Decimation and Augmentation.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999 ISO/IEC 29341-20-3	CSWJC	

[COMMENT] This guideline provides considerable leeway in the Serving Endpoint's implementation of scaled content. For example, consider a Serving Endpoint A that implements a Scale value of 2 by dropping every other frame in a 30 frames per second stream resulting in a content stream that still contains 30 frames per second, but that appears to be playing at twice the normal speed. Next, consider Serving Endpoint B that implements the same Scale value of 2 by sending 4 I-Frames a second with a presentation time of 250 ms per frame, which will also appear to be playing twice as fast. Finally, consider a Serving Endpoint C that implements a Scale value of 2 by transcoding the original stream into a new stream with the same Format Profile, and which gives the appearance of playing twice as fast. For slow speed trick modes, consider a serving endpoint D that implements a Scale value of ½ by duplicating each I-Frame in a 30 fps stream playing at 30 frames per second thus appearing to play at half speed. The technique of dropping or adding frames to generate scaled streams is called Decimation and Augmentation. Such streams may contain partial "P" frames for MPEG-2 content and non-conformant values for Presentation Time Stamp (PTS). In addition to using Decimation and Augmentation, servers may also choose to omit audio tracks, in order to minimize the bitrate of scaled streams.

11.4.3.53.8

[GUIDELINE] If the Content Source does not indicate support for the PlaySpeed.dlna.org HTTP header for a content binary (as defined in guideline 10.1.3.22), then the HTTP Client Endpoint shall not issue HTTP GET and HEAD requests with the PlaySpeed.dlna.org HTTP header.

[ATTRIBUTES]

M	L	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	ZAVEC	

11.4.3.53.9

[GUIDELINE] If the PlaySpeed.dlna.org request is syntactically correct and the requested play-speed is valid, and if the HTTP Server Endpoint returns data including the requested play-speed (Target Response) then it shall respond to the HTTP GET request with the 200 (OK) HTTP response code.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	9WS9T	

11.4.3.53.10

[GUIDELINE] An HTTP Client Endpoint should mute audio content when rendering scaled data streams requested using the PlaySpeed.dlna.org header.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	9C9YV	

[COMMENT] While the requirements for AV stream formats mandate that there be an audio component in the stream, the actual playback of audio from scaled streams requested using the PlaySpeed.dlna.org header would be problematic and likely to result in a poor user experience. It is preferable that client devices mute audio when rendering scaled streams.

11.4.3.54 MT HTTP play-speed position

[GUIDELINE] If the Content Source indicates support for the PlaySpeed.dlna.org HTTP header for a content binary (as defined in guidelines 10.1.3.22), then the HTTP Server Endpoint may provide NPT and byte-pos (byte offset) information in chunk header when transferring data in chunked transfer when play-speed is not equal to 1x. The NPT and byte-pos values in a chunk header should correspond to the chunk data. The format of chunk extension to provide NPT and byte-pos information shall be

- chunk extension to pass NPT information
npt=npt-time as defined in guideline 11.4.2.13 (npt sec | npt h:mm:ss),
- chunk extension to pass byte offset:
byte-pos=byte-offset-value.

The format of chunk header with the above two chunk extensions is as follows:

- chunk-size"; npt="npt-time"; byte-pos="byte-offset-value CRLF.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	6U8UB	

[COMMENT] The client endpoint uses this information to keep track of elapsed time accurately. This is specifically useful when there are discontinuities in PTS. One possible scenario where PTS discontinuities are expected is segmented recordings.

11.4.3.55 MT HTTP header: chunkEncodingMod.dlna.org

11.4.3.55.1

[GUIDELINE] If a serving endpoint receives an HTTP Get request with ChunkEncodingMode.dlna.org header and play-speed different than 1, the serving endpoint may send the response using HTTP chunked transfer coding.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	J25AL	

11.4.3.55.2

[GUIDELINE] The notation for the ChunkEncodingMode.dlna.org header is defined as follows:

- ChunkEncodingMode -line = "ChunkEncodingMode.dlna.org" * LWS ":" 1.

The only value possible is "1".

[ATTRIBUTES]

M	A	DMS +PU+ DMP DMR	M-DMS	n/a	IETF RFC 2616:1999	ES67D	

[COMMENT] An example is

- ChunkEncodingMode:1.

11.4.3.55.3

[GUIDELINE] A receiving endpoint may use the ChunkEncodingMode.dlna.org header to request chunked transfer encoding from a serving endpoint.

[ATTRIBUTES]

O	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	EUYJG	

11.4.3.56 MT combined range, time based seek, and play-speed HTTP requests

11.4.3.56.1

[GUIDELINE] If a streaming HTTP Server Endpoint receives an HTTP GET request with both the PlaySpeed.dlna.org and the TimeSeekRange.dlna.org header fields, the endpoint shall understand that a scan operation is requested for the specified time range.

If the streaming HTTP Server Endpoint can never process either or both time-scaling and time-seek, the error code for time-scaling, 406 (Not Acceptable) shall be returned.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	PWAEV	

[COMMENT] This guideline covers what a streaming HTTP server endpoint needs to do if it receives an HTTP request for both time based seek and play-speed. This guideline also infers how a streaming HTTP Client endpoint can expect an HTTP Server Endpoint to behave.

11.4.3.56.2

[GUIDELINE] If a streaming HTTP Server Endpoint receives an HTTP GET request with Range and (TimeSeekRange.dlna.org or PlaySpeed.dlna.org) header fields, then the Range header field shall take the highest precedence and the server shall ignore the other time seek and play-speed fields.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	CPWAE	

[COMMENT] This guideline covers what a streaming HTTP Server Endpoint needs to do if it receives an HTTP request with Range and other DLNA fields for play-speed or time based seek. This guideline also infers how a streaming HTTP Client endpoint can expect an HTTP Server Endpoint to behave.

11.4.3.57 MT HTTP header: realTimeInfo.dlna.org**11.4.3.57.1**

[GUIDELINE] HTTP Client Endpoints may use realTimeInfo.dlna.org in GET or HEAD requests to specify the desired policy for content delivery.

[ATTRIBUTES]

O	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	IETF RFC 2616:1999	WAEVZ	

[COMMENT] By using this header, an HTTP Client Endpoint (e.g. DMP) informs an HTTP Server Endpoint (e.g. DMS) the way it wants to receive content byte data (unmodified or in a real-time manner). In the second case, the loss of content quality (i.e. drop data bytes) is possible.

In the case of real-time delivery, it provides a hint to an HTTP Client Endpoint on how long to pre-buffer content data bytes before beginning the playback.

11.4.3.57.2

[GUIDELINE] If an HTTP Client Endpoint request contains the realTimeInfo.dlna.org header, then the HTTP Server Endpoint reply should include the realTimeInfo.dlna.org header.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	2Y963	

[COMMENT] An HTTP Client Endpoint (e.g. DMP) shall be ready to receive an undesired value for the max-delay-time from an HTTP Server Endpoint (e.g. DMS).

It is worth to mention that for a live content the max-lag-time value can't be set as infinite.

11.4.3.57.3

[GUIDELINE] If an HTTP Server Endpoint responds with a realTimeInfo.dlna.org header with an infinite max-lag-time (i.e. with value of """), then it shall not drop and/or modify any portion of content byte data.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	X2Y96	

11.4.3.57.4

[GUIDELINE] If an HTTP Server Endpoint responds with a `realTimeInfo.dlna.org` header with a finite `max-lag-time`, then it shall not send stale data when the delay time is more than the `max-lag-time`. In this case an HTTP Server Endpoint shall omit the `Content-Length` header from HTTP response.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	2R2GY	

11.4.3.57.5

[GUIDELINE] An HTTP Server Endpoint should include the `realTimeInfo.dlna.org` header in each HTTP reply.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	8X2Y9	

[COMMENT] It is desirable to provide an HTTP Client Endpoint (e.g. DMP) the information for the delivery manner each time.

11.4.3.57.6

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP GET or HEAD request with a `Range` and `realTimeInfo.dlna.org` header, then an HTTP Server Endpoint shall never reply with a finite `max-lag-time` parameter value.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	R2GYQ	

[COMMENT] This guideline obliges an HTTP Server Endpoint to not change the content data bytes in a reply to a request with a `Range` header.

11.4.3.57.7

[GUIDELINE] The notation for the `realTimeInfo.dlna.org` HTTP header is defined as follows:

- `realTimeInfo-line` = "realTimeInfo.dlna.org" *LWS ":" *LWS `max-lag-time`;
- `max-lag-time` = "DLNA.ORG_TLAG" "=" duration;
- duration = npt-sec | "**";
- npt-sec = 1 *DIGIT["." 1 *3DIGIT].

Note that the literal, "DLNA.ORG_TLAG" is case sensitive.

The `max-lag-time` is the maximum allowed delay between the current time and the time at which a particular portion of content data shall be sent in order to meet the real-time delivery

requirements for content. If the delay for a particular portion of content data exceeds the max-lag-time, then an HTTP Server Endpoint shall drop it instead of sending it. The value "*" indicates that the content data bytes will never expire. This guarantees that an HTTP Client Endpoint will receive all of the content data bytes.

Duration shall be given in seconds.

Example:

- realTimeInfo.dlna.org: DLNA.ORG_TLAG=1.75;
- realTimeInfo.dlna.org: DLNA.ORG_TLAG=*

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+ +DN+ +DNSYNC+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	72R2G	

[COMMENT] The max-lag-time value provides information to an HTTP Client Endpoint (e.g. DMP) on how the content will be delivered. When it is infinite, all requested bytes of the original content will be delivered without any modifications (i.e. data loss). Otherwise, an HTTP Client Endpoint (e.g. DMP) cannot expect to receive the content unmodified (i.e. it can contain some data loss).

In the case for real-time delivery of content, the max-lag-time negotiation aids an HTTP Client Endpoint (e.g. DMP) to adjust its pre-buffering time and for an HTTP Server Endpoint (e.g. DMS) its delay buffer. This negotiation aids an HTTP Server Endpoint from sending stale content data bytes instead of up-to-date ones.

11.4.3.58 MT HTTP media operations support

11.4.3.58.1

[GUIDELINE] If a media operation (play, stop, pause/release, seek, scan operations) is supported for a content binary, Content Receivers shall support the media operation for the entire known length of the content binary.

[ATTRIBUTES]

M	A	DMP DMR +DN+ +DNSYNC+	M-DMP	n/a	n/a	772R2	

11.4.3.58.2

[GUIDELINE] If an op-param (10.1.3.19.1) capability (for play, stop, pause/release, seek, scan operations) is supported for a content binary, Content Sources shall support the media operation for the entire length of the content binary.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IEC 62481-2: 2017	F658Q	

[COMMENT] In the case of time seek range, HTTP Server Endpoints are still allowed to align responses to frame boundaries as specified in IEC 62481-2:2017, 9.3.2.7.1 (GUN UDJLP).

11.4.3.59 MT HTTP Interactive Transfer initiation

11.4.3.59.1

[GUIDELINE] An HTTP Client Endpoint requesting a content binary from an HTTP Server Endpoint with an Interactive Transfer shall use the HTTP GET method.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	QT357	

[COMMENT] Interactive Transfers with GET are used to get Image content for immediate rendering.

11.4.3.59.2

[GUIDELINE] If an HTTP Client Endpoint requests an Interactive Transfer, then it shall specify the transferMode.dlna.org HTTP header and the header shall have a value of "Interactive".

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	NZ6EY	

[COMMENT] Version 1.0 clients will still request Interactive Transfer of images without using the transferMode.dlna.org HTTP header. Guideline 11.4.3.32.2 requires that servers that receive such a request treat it as equivalent to a request for an Interactive Transfer for image Media Classes.

11.4.3.59.3

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP GET or HEAD request with a transferMode.dlna.org HTTP header with the value of "Interactive" and the requested URI supports Interactive Transfer mode (as defined in 10.1.3.36.1), then the Target Response shall replicate this HTTP header.

[ATTRIBUTES]

M	A	DMS+PU+	M-DMS	n/a	IETF RFC 2616:1999	UF4F6	

11.4.3.60 MT Interactive Transfer headers interactions

[GUIDELINE] An HTTP Client Endpoint shall not use the following headers when requesting an Interactive Transfer:

- TimeSeekRange.dlna.org;
- PlaySpeed.dlna.org;
- realTimeInfo.dlna.org.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 2616:1999	4F658	

[COMMENT] See 11.4.3.23, and 11.4.3.53 guidelines for more information on the operations of these headers

11.4.3.61 MT range behaviour for Interactive Transferred content

[GUIDELINE] The Range HTTP header may be used for Interactive Transfers.

[ATTRIBUTES]

O	C	DMS DMR DMP +PU+	M-DMS M-DMP	n/a	IETF RFC 2616:1999	F4F65	

[COMMENT] The behaviour and usage model for the Range header are governed by other guidelines. Specifically:

- 10.1.3.19 describes how the op-param indicates whether the Range header is supported under the "Full Random Access Data Availability" model;
- 10.1.3.28.4 describes how lop-bytes indicates whether the Range header is supported under the "Limited Random Access Data Availability" model;
- 11.4.3.18, 11.4.3.19, and 11.4.3.19.10 explain details about both models.

Interactive Transfers involving stored content generally fall under the category of Full Random Access Data Availability model. In some cases, an Interactive Transfer involving converted content will fall under the Limited Random Access Data Availability model when the mode-flag is 1. The Limited Random Access Data Availability model when the mode-flag is 0 does not apply to content that is transferred with Interactive Mode because that content is not time-based.

11.4.3.62 MT HTTP Background Transfer initiation**11.4.3.62.1**

[GUIDELINE] An HTTP Client Endpoint downloading a content binary from an HTTP Server Endpoint with a Background Transfer request shall use the HTTP GET method.

[ATTRIBUTES]

M	A	+DN+ +DNSYNC+	n/a	n/a	IETF RFC 2616:1999	3577T	

11.4.3.62.2

[GUIDELINE] An HTTP Client Endpoint uploading a content binary to an HTTP Server Endpoint with a Background Transfer request shall use the HTTP POST method.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	Z6EYR	

11.4.3.62.3

[GUIDELINE] If an HTTP Client Endpoint requests a Background Transfer, then it shall specify the transferMode.dlna.org HTTP header and the header shall have a value of "Background".

[ATTRIBUTES]

M	A	+DN+ +UP+ +DNSYNC+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	RNZ6E	

11.4.3.62.4

[GUIDELINE] If an HTTP Server Endpoint receives an HTTP GET or HEAD request with a transferMode.dlna.org HTTP header with the value of "Background" and the requested URI supports the Background Transfer mode (as defined in 10.1.3.37), then the Target Response shall replicate this HTTP header.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2616:1999	6EYR3	

11.4.3.63 MT Background Transfer header interactions

[GUIDELINE] An HTTP Client Endpoint shall not use the following headers when requesting a Background Transfer with either the GET or POST methods:

- TimeSeekRange.dlna.org;
- PlaySpeed.dlna.org;
- realTimeInfo.dlna.org.

[ATTRIBUTES]

M	A	+DN+ +UP+ +DNSYNC+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	7CWOV	

[COMMENT] See 11.4.3.23, and 11.4.3.53 guidelines for more information on the operations of these headers.

11.4.3.64 MT range behaviour for Background Transferred content

[GUIDELINE] The Range HTTP header may be used for Background Transfers.

[ATTRIBUTES]

O	C	DMS +PU+ +DN+ +UP+ +DNSYNC+ +UPSYNC+	M-DMS	n/a	IETF RFC 2616:1999	CWOVY	

[COMMENT] The behaviour and usage model for the Range header are governed by other guidelines. Specifically:

- 10.1.3.19 describes how the op-param indicates whether the Range header is supported under the "Full Random Access Data Availability" model;
- 10.1.3.28.4 describes how lop-bytes indicates whether the Range header is supported under the "Limited Random Access Data Availability" model;
- 11.4.3.18, 11.4.3.19, and 11.4.3.19.10 explain details about both models.

Background Transfers involving stored content generally fall under the category of "Full Random Access Data Availability" model. In some cases, a Background Transfer involving converted content will fall under the "Limited Random Access Data Availability" model when the mode-flag is 1. The "Limited Random Access Data Availability" model when the mode-flag is 0 is not recommended for content that is transferred with the Background Mode since the server response cannot be guaranteed to be accurate for "live contents" when using the Range HTTP header, as described in 11.4.2.16.2.

11.4.3.65 MT content management HTTP POST content acquisition**11.4.3.65.1**

[GUIDELINE] An Upload Controller or Upload Synchronization Controller shall implement a content transfer process by using an HTTP/1.1 POST request.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	I4UNM

[COMMENT] See 10.1.8.26 for more information.

11.4.3.65.2

[GUIDELINE] HTTP Client Endpoints shall not use HTTP POST with an HTTP/1.0 indicator.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	57N7M

[COMMENT] HTTP POST is defined only for HTTP/1.1.

11.4.3.65.3

[GUIDELINE] An Upload Controller or Upload Synchronization Controller requesting a content transfer process by using the HTTP/1.1 POST request, should set the transferMode.dlna.org HTTP header to a value of "Background" in the request.

[ATTRIBUTES]

S	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	UNMYS

[COMMENT] Values other than "Background" can be used when uploading certain contents, such as "live" content.

11.4.3.65.4

[GUIDELINE] A DMS or M-DMS that implements the Upload Device Option (i.e. the upload AnyContainer) as indicated by the <dlna:X_DLNA CAP> element described in guideline 10.1.8.4.1), shall accept HTTP POST requests for receiving content in a content transfer operation.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	IETF RFC 2616:1999	NMYS5

[COMMENT] This is required by the ContentDirectory specification as the baseline manner of transferring content to a UPnP AV MediaServer.

11.4.3.65.5

[GUIDELINE] The HTTP Client Endpoint shall issue its first HTTP POST request (to upload content) within 30 s of the CDS:CreateObject response.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	POVK7	

[COMMENT] See 10.1.8.26 for more information.

11.4.3.65.6

[GUIDELINE] If an HTTP Client Endpoint is using a persistent connection to perform multiple content transfer processes, then the HTTP client should issue subsequent HTTP POST requests within 5 min of the previous HTTP POST request's completion.

[ATTRIBUTES]

S	C	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	4UNMY	

[COMMENT] Upload Controllers, or Upload Synchronization Controllers are urged to use persistent HTTP connections to upload multiple content binaries. Ideally, these content transfers happen with little delay between them. However, HTTP clients are discouraged from exceeding 5 min of inactivity between transfers.

11.4.3.65.7

[GUIDELINE] The HTTP Server Endpoint that is receiving an HTTP POST request is free to terminate the connection at any time by closing the TCP connection.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	IETF RFC 2616:1999	7N7MB	

[COMMENT] DMS or M-DMS devices implement this behaviour to indicate an error during the content transfer. For example, if the DMS no longer has enough space, it can terminate the TCP connection.

A DMS that does a TCP disconnection can automatically destroy CDS objects or <res> elements. However, if possible and appropriate, the DMS is encouraged to allow an Upload Controller to retry a content transfer process, by not destroying the CDS object or <res> element.

11.4.3.65.8

[GUIDELINE] The HTTP Server Endpoint that supports HTTP POST requests shall support requests that are encoded with Chunked Transfer Coding.

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	IETF RFC 2616:1999	G857N	

[COMMENT] HTTP clients can use either the default HTTP message encoding or Chunked Transfer Coding.

11.4.3.65.9

[GUIDELINE] The HTTP Client Endpoint shall provide the EXPECT HTTP header field with the value of "100-continue" in the request.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	857N7	

[COMMENT] Subclause 8.2.3 Use of the 100 (Continue) Status in IETF RFC 2616:1999 defines the behaviour when a HTTP client uses "Expect: 100-continue" in the request.

The HTTP client waits to send POST message body, i.e. a content binary, until it receives a response to the request.

11.4.3.65.10

[GUIDELINE] If an HTTP Server Endpoint receives a POST request without the "EXPECT: 100-continue", then it should return an HTTP error of 400 (Bad Request) and terminate the TCP connection.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	QPOVK	

11.4.3.65.11

[GUIDELINE] If an HTTP Server Endpoint that receives a POST request's HTTP headers and the HTTP server cannot accept the POST request's message body, then the HTTP Server Endpoint shall not return an HTTP status code of 100 (Continue).

[ATTRIBUTES]

M	R	DMS	M-DMS	n/a	IETF RFC 2616:1999	5QPOV	

[COMMENT] The guideline 11.4.3.65.13 and 11.4.3.65.14 provides examples of error cases.

11.4.3.65.12

[GUIDELINE] An HTTP Client Endpoint that uses Chunked Transfer Coding shall use a zero-length chunk to indicate the end of the content binary.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	T6KSW	

[COMMENT] DMS and M-DMS devices look for the zero-length chunk to know if the content binary was completely sent.

11.4.3.65.13

[GUIDELINE] If the HTTP Server Endpoint cannot accept an HTTP POST request due to the processing capacity or current state of the device, then the HTTP Server Endpoint should respond with an HTTP status code of 503 (Service Unavailable).

[ATTRIBUTES]

S	R	DMS	M-DMS	n/a	IETF RFC 2616:1999	OVK7Y	

11.4.3.65.14

[GUIDELINE] If the HTTP Server Endpoint cannot accept an HTTP POST request due to the lack of storage capacity, then the HTTP Server Endpoint should respond with an HTTP status code 507 (Insufficient Storage).

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	TQT6K	

[COMMENT] This error code aligns with IETF RFC 2518. DLNA does not use WebDAV as a normative reference.

11.4.3.65.15

[GUIDELINE] If the HTTP Server Endpoint receives an entire entity body, then the HTTP Server Endpoint shall respond with either an HTTP status code of 200 (OK) or an HTTP status code of 201 (Created).

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	QT6KS	

11.4.3.65.16

[GUIDELINE] If an HTTP Server Endpoint rejects a POST entity body in the middle of data transfer (due to the processing capacity, current status of the device, storage capacity, etc.) then the HTTP server may terminate the TCP connection.

[ATTRIBUTES]

O	R	DMS	M-DMS	n/a	IETF RFC 2616:1999	8VREB	

[COMMENT] Vendors can determine whether or not data is actually stored.

11.4.3.65.17

[GUIDELINE] If an HTTP Server Endpoint rejects a POST entity body in the middle of data transfer, then it should also send an HTTP error response right before terminating the TCP connection.

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	EBUTB	

[COMMENT] HTTP error responses allow the HTTP server to provide more details on the cause of the error. It is imperative that the HTTP server close the TCP connection after sending the error response because the error can interfere with the logic associated with pipelined HTTP requests.

The requirement for HTTP clients to be tolerant of these scenarios means that the HTTP client can gracefully handle the TCP disconnect (i.e. devices that crash as a result of a TCP disconnect exhibit bad behaviour). There is no requirement that the HTTP client make the HTTP error response available to the user.

HTTP clients can use pipelined POST requests, but these guidelines do not recommend their usage because the Upload system usage model favours a model where an Upload Controller uses a set of CDS:CreateObject and HTTP POST transactions, rather than a set of CDS:CreateObject requests followed by a set of HTTP POST transactions.

Clients are encouraged to terminate the connection after receiving the POST response from the server because HTTP/1.1 POST transactions operate under persistent connection rules.

11.4.3.65.18

[GUIDELINE] If an HTTP Server Endpoint rejects a POST entity body in the middle of data transfer by sending an HTTP error response, then it shall terminate the TCP connection after sending the error response.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	VREBU	

11.4.3.65.19

[GUIDELINE] HTTP Client Endpoints shall be tolerant of a TCP layer disconnect during an HTTP POST transaction, including those scenarios where the HTTP Server Endpoint sends an HTTP error response before the HTTP Client Endpoint has finished transmitting the POST request's message-body.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	BUTB4	

11.4.3.65.20

[GUIDELINE] If the HTTP Server Endpoint detects or initiates a TCP disconnect during a content transfer process that does not support the resume content transfer option, then the MediaServer shall be capable of accepting the same upload AnyContainer or OCM: upload content request that created the CDS object, which has the failed content transfer.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	n/a	KSWAC	

[COMMENT] In other words, the DMS is expected to not return an UPnP error in response to a new CDS:CreateObject request when the Upload Controller attempts to retry a failed upload AnyContainer or OCM: upload content operation.

A DMS can implement a variety of behaviours to comply with this guideline.

- The DMS can immediately destroy the CDS object associated with the failed content transfer.
- The DMS can leave the CDS object in the CDS hierarchy for 30 min or less, from the point of the failure. The CDS:CreateObject response returns a new CDS object.

- The DMS can leave the CDS object in the CDS hierarchy for 30 min or less, from the point of failure. The CDS:CreateObject response returns the same CDS object because the metadata specified in the request is exactly the same.

11.4.3.65.21

[GUIDELINE] When the HTTP Client Endpoint detects a TCP disconnection before receiving the final response to the HTTP POST request, it shall not assume that the HTTP Server Endpoint will store the transferred portion of the entity body. Specifically, this means the following.

- If the HTTP Client Endpoint wants to retry an upload process without using the resume content transfer or retry IFO attempt features, it shall start completely over by doing the CDS:CreateObject request (as part of the upload AnyContainer or OCM: upload content operation) and following up with a new content transfer process. (Note that retry IFO attempt applies only to the transfer of IFO files and only is available when resume content transfer is also available.)
- If the HTTP Client Endpoint wants to use the resume content transfer operation, then it shall specify a first-byte-pos of res@dlna:uploadedSize for the Content-Range header in an HTTP POST request. In this case, CDS:CreateObject is not invoked.

[ATTRIBUTES]

M	C	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	VK7YF

[COMMENT] If resume content transfer is not supported and the HTTP Client attempts to retry the HTTP POST transaction without invoking CDS:CreateObject again, then the retry attempt can fail. This type of a retry attempt is not covered by the DLNA guidelines.

11.4.3.66 MT HTTP content transfer error detection during HTTP POST

11.4.3.66.1

[GUIDELINE] If an HTTP Server Endpoint observes a TCP disconnect under all of the following conditions, then the HTTP server shall assume that the HTTP Client Endpoint failed to transfer the content:

- HTTP POST request does not use Chunked Transfer Coding;
- the number of received bytes is less than the specified Content-Length.

If an HTTP Server Endpoint detects that the HTTP Client Endpoint failed to transfer the content and more than 35 min has elapsed since the end of the failed transfer attempt, then the MediaServer is obliged by 10.1.8.28 to automatically destroy the created CDS object.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	N7MBJ

[COMMENT] HTTP Client Endpoints are required to use the Content-Length in HTTP POST requests that do not use Chunked Transfer Coding.

Guideline 11.4.3.16 clarifies the uses of Content-Length for media transfers.

11.4.3.66.2

[GUIDELINE] An HTTP Server Endpoint receiving a POST request shall observe at least 30 s of data inactivity before closing the TCP connection and assuming that the HTTP Client Endpoint failed to transfer the content.

Data inactivity is defined as the HTTP Server Endpoint not receiving content data from the HTTP Client Endpoint even though there is an established TCP connection.

This guideline works in conjunction with 11.4.3.65.7 because this guideline assumes Ideal Network Conditions and also assumes that neither user-initiated causes nor out-of-band system events cause the connection to be closed.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	MYS54	

[COMMENT] These guidelines specify a 5 min timeout for stalled content transfer.

11.4.3.65.7 permits HTTP Servers to close the connection at any time.

11.4.3.67 MT client Content-Range

11.4.3.67.1

[GUIDELINE] An HTTP Client Endpoint that uses the resume content transfer operation shall specify the Content-Range HTTP header field in a POST request to specify the range of content data sent in the request.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	VY6R4	

[COMMENT] The Content-Range header is defined in IETF RFC 2616:1999, 14.16.

11.4.3.67.2

[GUIDELINE] An HTTP Client Endpoint that uses the resume content transfer operation shall include and specify the instance-length parameter on the Content-Range HTTP header and last-byte position on the Content-Range HTTP header shall be instance-length –1.

[ATTRIBUTES]

M	L	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	EYR3R	

[COMMENT] The instance-length parameter (see IETF RFC 2616:1999, 14.16) specifies the total size of the object being uploaded.

The instance-length parameter shall specify a valid value, so "*" shall not be used for the instance-length parameter.

This guideline applies even when the HTTP client uses chunked transfer coding.

11.4.3.67.3

[GUIDELINE] If an HTTP Client Endpoint specifies the Content-Range HTTP header the first-byte-pos shall be equal to the content length already stored in a peer HTTP server.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	577T6	

[COMMENT] Length of already stored data (on a peer HTTP server) can be known through the res@dlna:uploadedSize in a CDS:Browse response.

The first-byte-pos parameter is defined in IETF RFC 2616:1999, 14.16.

11.4.3.67.4

[GUIDELINE] An HTTP client shall use the Content-Range HTTP header only with POST requests that are part of a resume content transfer operation (i.e. use with GET nor HEAD request is prohibited).

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	658QX	

11.4.3.67.5

[GUIDELINE] An HTTP Client Endpoint shall not specify the Content-Range HTTP header for a POST request addressed to res@importUri included in an object that does not support the resume content transfer functionality.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	2GYQ2	

[COMMENT] An Upload Controller or Upload Synchronization Controller is able to know if the MediaServer supports resume functionality by res@dlna:resumeUpload in CDS:CreateObject.

11.4.3.67.6

[GUIDELINE] An HTTP Client Endpoint shall not specify the Content-Range HTTP header for a POST request addressed to res@dlna:importIfoFileURI.

[ATTRIBUTES]

M	A	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	Y9634	

[COMMENT] The resume content transfer operation can be supported for res@importUri and cannot be used for res@dlna:importIfoFileURI. To recover from a failed transfer of an IFO file, the HTTP client simply does a retry IFO attempt, which is an HTTP POST request without the Content-Range HTTP header. Please note that type of transfer recovery is out of scope for res@importUri values.

11.4.3.68 MT server receiving Content-Range

11.4.3.68.1

[GUIDELINE] If an HTTP Server Endpoint has resume functionality and receives a POST request with Content-Range addressed to res@importUri which includes a syntax error, it should respond an HTTP response which status code is 400 (Bad Request).

[ATTRIBUTES]

S	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	VZ5SV	

[COMMENT] If an instance-length is "*", in the Content-Range, DMS is expected to respond with an HTTP response with a status code of 400.

11.4.3.68.2

[GUIDELINE] If an HTTP Server Endpoint has resume functionality and receives a POST request with the Content-Range header in which the content-range-spec has a first-byte-pos value that is equal to the object byte size already stored (i.e. res@dlina:uploadedSize), then the HTTP Server Endpoint shall append the incoming uploaded data to the stored one.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	96343	

[COMMENT] The Content-Range header and the first-byte-pos parameter are defined in IETF RFC 2616:1999, 14.16.

A client can get the value of res@dlina:uploadedSize from a browse operation after the failure.

11.4.3.68.3

[GUIDELINE] If an HTTP Server Endpoint has resume functionality and receives a POST request with the Content-Range header in which the content-range-spec has a first-byte-pos value that is not equal to the object byte size already stored, then the HTTP server shall send an HTTP response which status code is 409 (Conflict).

This guideline is applied only when another error condition is not satisfied.

[ATTRIBUTES]

M	A	DMS	M-DMS	n/a	IETF RFC 2616:1999	6343S	

11.4.3.69 MT HTTP POST pipelining**11.4.3.69.1**

[GUIDELINE] If an HTTP Client Endpoint initiates pipelined HTTP POST transactions, a subsequent pipelined POST request shall happen after the previous message-body has been sent completely.

[ATTRIBUTES]

M	C	+UP+ +UPSYNC+	n/a	n/a	IETF RFC 2616:1999	YQ2KA	

[COMMENT] An Upload Controller or Upload Synchronization Controller that starts a subsequent POST transaction before having sent the message-body for the previous POST transaction will confuse the HTTP Server Endpoint into thinking the subsequent POST transaction is the message-body for the first POST transaction.


11.4.3.69.2

[GUIDELINE] An HTTP Server Endpoint may terminate the HTTP session after responding to a POST request with the 200 (OK) or 201 (Created) responses.

[ATTRIBUTES]

O	C	DMS	M-DMS	n/a	IETF RFC 2616:1999	GYQ2K	

[COMMENT] DMS devices are not required to support pipelined HTTP POST transactions. Therefore, it remains the responsibility of the Upload Controller to retry an attempted pipelined POST transactions when the HTTP server does not support pipelined POST transactions, see Figure 22.

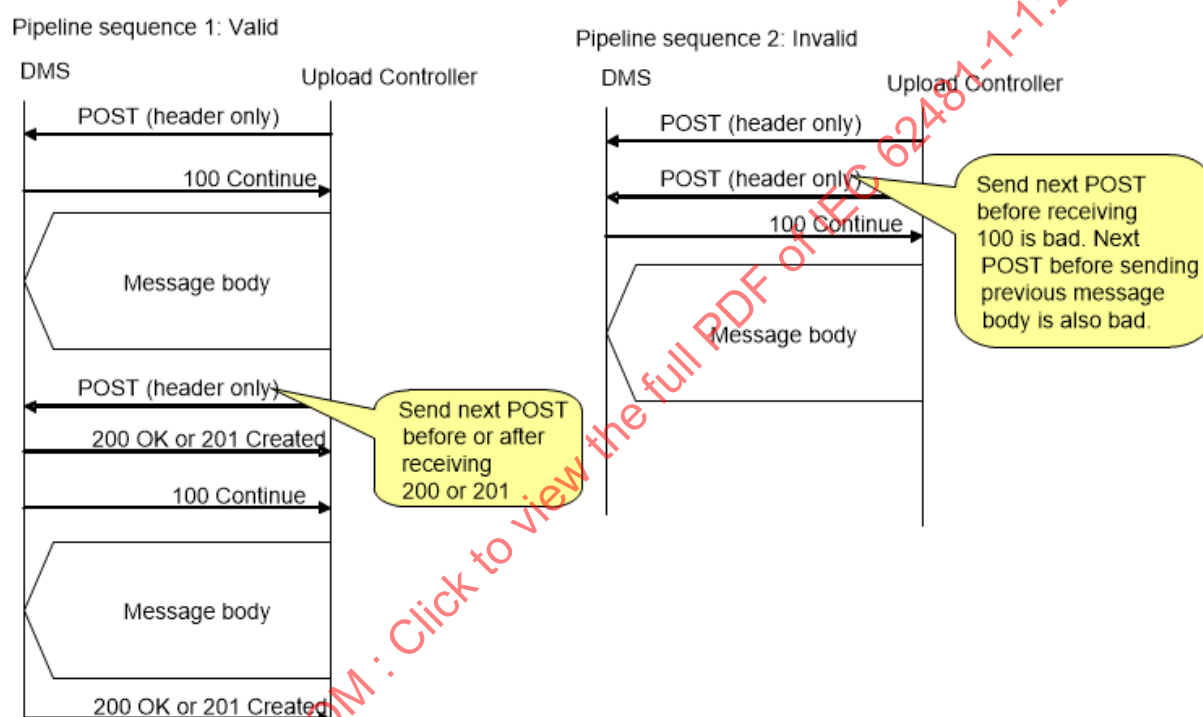

IEC

Figure 22 – Example of a valid and invalid pipelined POST transaction

11.4.4 RTP Media Transport

11.4.4.1 General

The Real-time Transport Protocol (RTP) IETF RFC 3550:2003 together with its companion protocol (RTCP) constitutes the basis of a transport mechanism for real-time media streams. In DLNA, RTP is used in combination with the RTSP protocol IETF RFC 2326:1998, SDP protocol IETF RFC 2327:1998, RTP payload formats and their associated Media Format Profiles. These protocols define the DLNA RTP media transport which is optionally supported in DLNA, in addition to the required HTTP transport.

The subclauses in 11.4.4 define guidelines for the implementation of the RTP Media Transport in the context of home networking. These apply to the playback of DLNA content and the streaming transactions between DLNA device classes. These guidelines do not specify behaviour for non-DLNA device entities. A device class can be implemented by software running on a more general-purpose device/platform. For example, the RTP server of a Serving Endpoint can be used to serve DLNA and non-DLNA content. These guidelines would apply only when the DLNA-content is being served.

For these DLNA guidelines, RTP/RTCP is a protocol which is carried over UDP/IP for unicast connections. A graphical representation of the reference protocol stack for the RTP Media Transport is shown in Annex F. The RTP Media Transport is enriched with the support of advanced features. For example, RTP retransmission can be used to increase reliability of media delivery. The RTP Media Transport also supports mechanisms for adaptive media delivery to improve continuous playback even in adverse network conditions. These guidelines also cover the RTSP protocol, which is carried over TCP connections. RTSP supports pause, seek and scan media operations (fast forward, slow forward, fast backward and slow backward).

Lastly, the DLNA guidelines do not specify interoperability for the transfer of content for either the Upload system usage or the Download system usage. Likewise, the DLNA guidelines also assume that the RTP Media Transport applies only to the Streaming Transfer Mode. The Interactive and Background Transfer modes do not apply to the RTP Media Transport.

The guidelines for RTP are organized as follows.

- RTP/RTCP Protocols: 11.4.4.2 through 11.4.4.19 provides general RTP media transport guidelines. 11.4.4.20 through 11.4.4.42 provides RTP Serving Endpoints guidelines, while 11.4.4.43 through 11.4.4.58 provides RTP guidelines for Receiving Endpoints. These subclauses also include guidelines for RTCP.
- Adaptation of Media Format Profiles 11.4.4.60 through 11.4.4.127 provides guidelines on adapting several Media Format Profiles for use with RTP and RTP payload formats.
- RTSP/SDP Protocols: 11.4.4.129 through 11.4.4.211 includes guidelines for the support of the Real-Time Streaming Protocol IETF RFC 2326:1998 and the support for the Session Description Protocol IETF RFC 2327:1998.

The terms Serving Endpoint and Receiving Endpoint are specific to RTP, and they are defined specifically in 11.4.4.4 and 11.4.4.5. Respectively, they represent the different RTP, RTCP, RTSP, and SDP server/client components needed for a Content Source or Content Receiver using RTP.

[COMMENT] In v1.0 of the DLNA guidelines, Serving Endpoint and Receiving Endpoint were used. Since the system usages for v1.5 is greatly expanded, those terms were deemed insufficient to represent the different content roles on the network.

11.4.4.2 MT RTP optional transport: RTP

[GUIDELINE] DLNA devices may implement RTP over UDP as an optional media transport. guidelines in

- 11.4.4.2 to 11.4.4.19: RTP Media Transport: RTP/RTCP protocols;
- 11.4.4.20 to 11.4.4.42: RTP Serving Endpoint requirements;
- 11.4.4.43 to 11.4.4.58: RTP Receiving Endpoint requirements;
- 11.4.4.60 to 11.4.4.65: A/V Media Format Profiles in the context of RTP transmission;
- 11.4.4.66 to 11.4.4.76: Adaptation of Audio-only and Audio component of A/V Media Format;
- 11.4.4.77 to 11.4.4.83: Guidelines for encapsulation of MPEG-2 streams;
- 11.4.4.84 to 11.4.4.90: Guidelines for encapsulation of WMA and WMV elementary streams;
- 11.4.4.91 to 11.4.4.98: Guidelines for the encapsulation for AVC elementary streams,
- 11.4.4.99 to 11.4.4.103: Guidelines for the encapsulation for MPEG-4 part 2 elementary streams;
- 11.4.4.104 to 11.4.4.113: Guidelines for the encapsulation of MPEG-4 AAC streams;
- 11.4.4.114 to 11.4.4.117: Guidelines for the encapsulation of H.263 streams;
- 11.4.4.118 to 11.4.4.121: Guidelines for the encapsulation AMR streams;
- 11.4.4.122 to 11.4.4.127: Guidelines for the encapsulation AMR-WBplus streams; and

- 11.4.4.129 to 11.4.4.211: RTP Media Transport: RTSP/SDP,

only when the RTP Media Transport is implemented.

[ATTRIBUTES]

O	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	n/a	8QX8V	

[COMMENT] RTP is an optional media transport. If RTP is optionally implemented by Serving Endpoints and Receiving Endpoints, the guidelines that follow in these Tables shall be implemented as described.

RTP is recommended for certain applications, e.g. Streaming Transfer of live content.

11.4.4.3 MT RTP applicable Media Class

[GUIDELINE] Serving Endpoints and Receiving Endpoints using this media transport shall use it only for Audio or Audio/Video Media Classes

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	n/a	58QX8	

11.4.4.4 MT RTP on Serving Endpoints

[GUIDELINE] Serving Endpoints shall comply with required features of RFC 3550 with constraints and additions as specified in 11.4.4.20 to 11.4.4.42: RTP Serving Endpoint requirements.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	7T63U	

[COMMENT] Serving Endpoints in DLNA have no need to receive RTP packets.

11.4.4.5 MT RTP on Receiving Endpoints

11.4.4.5.1

[GUIDELINE] Receiving Endpoints shall comply with required features of IETF RFC 3550:2003 (RFC 3550) with constraints and additions as specified in 11.4.4.43 to 11.4.4.58: RTP Receiving Endpoint requirements.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	R3RVS	

[COMMENT] Receiving Endpoints in DLNA have no need to transmit RTP packets.

11.4.4.6 MT RTP RTSP/SDP

11.4.4.6.1

[GUIDELINE] Serving Endpoints and Receiving Endpoints shall use RTSP and SDP as defined in 11.4.4.129 to 11.4.4.211: RTP Media Transport: RTSP/SDP.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	n/a	77T63	

[COMMENT] Certain RTP session parameters, such as UDP port, RTP clock frequency and RTP payload type, shall be communicated before RTP packets can be exchanged. These parameters shall be communicated using RTSP and SDP as defined in 11.4.4.129 to 11.4.4.211: RTP Media Transport: RTSP/SDP.

11.4.4.7 MT RTP profile support**11.4.4.7.1**

[GUIDELINE] The following RTP profile shall be supported by Serving Endpoints and Receiving Endpoints:

RTP Profile for Audio and Video Conferences with Minimal Control as defined in IETF RFC 3551, also called RTP/AVP.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003 IETF RFC 3551	YR3RV	

11.4.4.7.2

[GUIDELINE] The following RTP profile may optionally be supported by Serving Endpoints and Receiving Endpoints:

Extended audio/visual profile for RTCP based feedback as defined in IETF RFC 4585:2006 also called RTP/AVPF.

[ATTRIBUTES]

O	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 4585:2006	6R47M	

11.4.4.8 MT RTP Serving Endpoint DLNA Media Format Profile support**11.4.4.8.1**

[GUIDELINE] A Serving Endpoint shall support at least one "RTP support level" as detailed below (in the rest of 11.4.4.8).

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	Y6R47	

[COMMENT] RTP support levels (A or B) enable better understanding of the extent to which Serving Endpoints support RTP.

11.4.4.8.2

[GUIDELINE] If a Serving Endpoint claims "RTP support level A" it shall support transmitting at least one Media Format Profile over RTP.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	S5486	

[COMMENT] This is a very basic requirement: an RTP-capable Serving Endpoint shall be able to stream at least something over RTP (otherwise it is simply not an RTP-capable Serving Endpoint).

11.4.4.8.3

[GUIDELINE] If a Serving Endpoint claims "RTP support level B" for each Media Format Profile that it supports transmitting over HTTP, it shall also support transmitting that Media Format Profile over RTP.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	YS548	

[COMMENT] All devices of level B also satisfy level A.

This level of support avoids confusion by the end-user. If a level B Serving Endpoint supports a certain set of media formats and it supports RTP, then RTP is supported for all these media formats.

11.4.4.9 MT RTP Receiving Endpoint DLNA Media Format Profile support**11.4.4.9.1**

[GUIDELINE] A Receiving Endpoint shall support at least one "RTP support level", as detailed below.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	MBJYV	

[COMMENT] RTP support levels (A or B) enable better understanding of the extent to which a Receiving Endpoint supports RTP.

RTP support levels are not signaled between the serving endpoints and the Receiving Endpoints.

11.4.4.9.2

[GUIDELINE] If a Receiving Endpoint claims "RTP support level A", it shall support receiving at least one Media Format Profile over RTP.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	7MBJY	

[COMMENT] This is a very basic requirement: an RTP-capable Receiving Endpoint shall be able to receive at least something over RTP (otherwise it is simply not an RTP-capable Receiving Endpoint).

11.4.4.9.3

[GUIDELINE] If a Receiving Endpoint claims "RTP support level B" for each Media Format Profile that it supports receiving over HTTP, it shall also support receiving that Media Format Profile over RTP.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	7YFSY	

[COMMENT] All devices of level B are also satisfying level A.

This level of support avoids confusion by the end-user. If a level B Receiving Endpoint supports a certain set of media formats and it supports RTP, then RTP is supported for all these media formats.

11.4.4.9.4

[GUIDELINE] If a Receiving Endpoint claims "RTP support level B" and supports a Programme Stream based Media Format Profile (over RTP), then it shall also support the corresponding Elementary Stream based Media Format Profile for transport over RTP. In particular:

- if Receiving Endpoint supports MPEG_PS_PAL, then it shall also support MPEG_ES_PAL;
- if Receiving Endpoint supports MPEG_PS_NTSC, then it shall also support MPEG_ES_NTSC;
- if Receiving Endpoint supports MPEG_PS_PAL_XAC3, then it shall also support MPEG_ES_PAL_XAC3;
- if Receiving Endpoint supports MPEG_PS_NTSC_XAC3, then it shall also support MPEG_ES_NTSC_XAC3.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	K7YFS	

[COMMENT] This enables a Serving Endpoint to choose PS or ES encapsulation depending on application requirements.

The ES based Media Format Profiles are defined for the RTP media transport only (not for HTTP media transport).

11.4.4.10 MT RTP payload type definitions

[GUIDELINE] Serving Endpoints shall use the payload type(s) defined in 11.4.4.60 to 11.4.4.65 when transmitting DLNA Media Format Profile content over RTP.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	WACXX	

[COMMENT] For each Media Format Profile exactly one RTP encapsulation is defined, except for full TS with zero TTS. This implies that the RTP encapsulation can be inferred from the Media Format Profile as carried in the 4th protocolInfo field except for full TS with zero TTS. Full TS with zero TTS encapsulation can be determined using a=rtmap in SDP.

Transport Stream and Programme Stream based Media Format Profiles are encapsulated as a single RTP stream, whereas other file formats (e.g. MP4, 3GPP) are encapsulated as two separate RTP streams for AV.

11.4.4.11 MT RTP header timestamps during PLAY requests with Speed or Scale headers

11.4.4.11.1

[GUIDELINE] A Serving Endpoint shall maintain RTP Header Timestamp values that correspond to playback timing during scaled playback (i.e. a PLAY request with a Scale header with a value not equal to 1) as defined in IETF RFC 2326:1998, Appendix B. The output of the Serving Endpoint during scaled playback shall be compliant with the syntax rules of the Media Format Profile. The values of the RTP Header timestamps shall be compliant with the requirements for the RTP payload format in use (e.g. video/MP2P, video/MP2T, or video/MPV).

For example, a Receiving Endpoint requests a Scale value of 2 for a PLAY request. The Serving Endpoint could comply by dropping every other video frame (or use some other algorithm) while maintaining the original frame rate of the content. Assuming a 90 kHz RTP Header timestamp clock timebase and PS encapsulation, the RTP Header timestamp values would increase by 90 000 for each second of playback, even though the NPT time reference would increase by 2 000 each second.

As a further example, if the Scale value were –4 (backwards at 4 times the nominal playback rate), the RTP Header timestamp values will also increase by 90 000 for each second, but the NPT time reference would decrease by –4 000 during the same time period.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2326:1998	SWACX

[COMMENT] This guideline clarifies the relationship between the RTP Header Timestamps and the temporal scale of the content being transmitted when the Scale value is not equal to 1. (A Scale value of 1 implies normal playback scale and direction). The output produced by scaling is essentially a "normal" 1X sequence of RTP packets which would have RTP Header Timestamps that are equivalent to a non-scaled content stream. This is expected to be true regardless of the algorithm used by the Serving Endpoint to generate the content.

For example, consider a Serving Endpoint A which implements a Scale value of 2 by dropping every other frame in a 30 frames per second stream resulting in a content stream which still contains 30 frames per second, but which appears to be playing at twice the normal speed. Next consider Serving Endpoint B which implements the same Scale value of 2 by sending 4 I-Frames a second with a presentation time of 250 ms per frame, which will also appear to be playing twice as fast. In both cases the RTP Header Timestamp values would increase by 90 000 each second.

11.4.4.11.2

[GUIDELINE] A Serving Endpoint shall not change the RTP Header Timestamp values that correspond to playback timing in response to a PLAY request with a Speed Header.

For example, a Receiving Endpoint requests a Speed value of 2 for a PLAY request. The Serving Endpoint would transmit the content at twice the nominal playback rate while maintaining the nominal RTP header timestamp values within each packet.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 2326:1998	TB44G

[COMMENT] This only applies to the RTP header timestamp and not to the wall clock as carried within the RTP extension header.

11.4.4.11.3

[GUIDELINE] If a PLAY request includes both Speed and Scale headers, the Serving Endpoint shall satisfy the parameters of the Scale header, and then deliver the resultant sequence of RTP packets to the network as specified in the Speed header.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2326:1998	UTB44	

[COMMENT] This guideline clarifies the order operations if both Scale and Speed headers are included in a PLAY request. Details on the Scale and Speed headers can be found in 11.4.4.170 to 11.4.4.173.

11.4.4.12 MT RTP/RTCP shall use UDP transport

[GUIDELINE] Serving Endpoints and Receiving Endpoints shall send and receive any RTP and RTCP packets as UDP packets.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	B44G2	

11.4.4.13 MT RTP unicast support

[GUIDELINE] Serving Endpoints and Receiving Endpoints shall support the transmission of RTP and RTCP packets to unicast IP addresses.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	n/a	ACXX8	

11.4.4.14 MT RTP RTCP support required

[GUIDELINE] RTCP shall be implemented as specified in RFC 3550 and as specified by the RTP profile in use with the constraints defined in 11.4.4.2 through 11.4.4.58, and 11.4.4.129 through 11.4.4.211.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	CXX84	

[COMMENT] RTCP is necessary for rate control and synchronization of RTP streams.

11.4.4.15 MT RTP/RTCP UDP port number usage

[GUIDELINE] RTP Media transport shall be done over an even RTP/UDP port number (i.e. $2n$). RTCP control shall be done over the next incremented UDP port number (i.e. $2n+1$).

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	44G2V	

11.4.4.16 MT RTP unknown RTCP packet types

[GUIDELINE] Serving Endpoints and Receiving Endpoints shall tolerate unknown RTCP packet types.

Tolerate means that the endpoints shall be able to parse and interpret or parse and ignore such packets.

[ATTRIBUTES]

M	C	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	XX84R	

11.4.4.17 MT RTP RTCP simplified report interval calculation

11.4.4.17.1

[GUIDELINE] RTCP reports shall be sent at the rate that is in accordance with the SDP provisions (if any).

[ATTRIBUTES]

M	C	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	YFSYN	

[COMMENT] If SDP specifies an RTCP reporting rate, then this rate has the highest precedence (see 11.4.4.199).

11.4.4.17.2

[GUIDELINE] In the absence of SDP provisions, any RTCP reports shall be generated and sent at the rate that is in accordance to one of the following:

- the RTP profile (AVP or AVPF) in use;
- once every 5 s randomized within the interval [0,5, 1,5] times, such that the resulting RTCP transmission interval is a random number in the interval [2,5, 7,5] s.

[ATTRIBUTES]

M	C	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	4G2VZ	

[COMMENT] The rules for calculating RTCP report intervals in RFC 3550 are complex to accommodate large multicast sessions.

11.4.4.18 MT RTP version number

[GUIDELINE] Serving Endpoints and Receiving Endpoints shall set the version number in the RTP header to be 2. Serving Endpoints and Receiving endpoints shall accept RTP packets with versions of 2.

[ATTRIBUTES]

M	R	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3550:2003	SYN4F	

11.4.4.19 MT RTP DLNAQOS RTCP traffic

11.4.4.19.1

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, all RTCP messages generated by a Serving Endpoint shall be tagged with DLNAQOS_2, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance with Table 7.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	n/a	FSYN4	

[COMMENT] Because RTP is defined only for UDP, RTCP messages are not subject to the same constraints as HTTP messages sent over TCP. RTCP requests do not have to be the same priority that the server will use to deliver the content.

RTCP packets from a DMS will contain Sender Report (SR) messages when the server is streaming, or Receiver Report (RR) messages when the server is idle. The SR and RR messages are important, but arguably not any more important than the RTP packets, because if the network is experiencing congestion, then the RTP stream has more serious problems than any information lost in these messages (e.g. clock sync).

11.4.4.19.2

[GUIDELINE] If DLNAQOS as defined in Clause 8 is implemented, all RTCP messages generated by a Receiving Endpoint shall be tagged with DLNAQOS_3, or a lower DLNAQOS_UP value (where "or a lower" is defined by 8.3.2.2.2 and 8.3.2.2.3), in accordance Table 7.

[ATTRIBUTES]

M	R	DMP DMR	M-DMP	n/a	n/a	YV47A	

[COMMENT] All feedback messages are time critical, and especially important at times when the DLNAQOS_2 RTP traffic is suffering from congestion.

RTCP messages sent by a DMP include Receiver Report (RR) messages and RTCP payload types of 205 and 206. In the RTP/AVPF profile, RTCP payload type 205 is defined as a transport-layer feedback message and 206 is defined as a payload-specific feedback message. This will cover not only RTCP NACK messages, but also other kinds of RTCP-based feedback that we might want to add in the future.

RTCP RR messages contain statistics about lost RTP packets, so they are time critical if the server makes any decisions based on those statistics. Also, all RTCP packets that the client sends shall include a RR message. Even if the client just wants to send a NACK, the RTCP packet shall also include a RR message.

11.4.4.20 MT RTP timestamp offset

11.4.4.20.1

[GUIDELINE] All RTP Timestamp values should have an Offset component which is a fixed 32-bit value which is added to the RTP clock value as each RTP Timestamp is created.

[ATTRIBUTES]

S	C	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	JYV47	

11.4.4.20.2

[GUIDELINE] The Serving Endpoint may select an Offset value at the start of the RTP stream, and this value shall be maintained throughout the RTP stream unless a Timestamp Discontinuity is indicated.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	86GVI	

[COMMENT] Some RTP payload formats allow a Timestamp Discontinuity to be indicated using the "M" bit in the RTP packet header, or through other means.

11.4.4.21 MT RTP SSRC uniqueness: Serving Endpoints

[GUIDELINE] Serving Endpoints shall ignore SSRC collisions.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	5486G	

[COMMENT] RTP was designed for large multicast conferencing-type of applications.

SSRC collisions can occur in large conferences where multiple receivers/senders choose their own SSRC.

In a unicast environment, the RTP Serving Endpoint shall ignore SSRC collisions and continue the session with the negotiated SSRC values.

11.4.4.22 MT RTP Serving Endpoint RTP retransmission support

[GUIDELINE] A Serving Endpoint may retransmit RTP packets if it and the Receiving Endpoint both are using the RTP/AVPF profile.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 4585:2006	BJYV4	

11.4.4.23 MT RTP Serving Endpoint RTP retransmissions

11.4.4.23.1

[GUIDELINE] A Serving Endpoint that retransmits RTP packets shall use one of the following two retransmission methods.

- The retransmitted packet is formatted using the RTP payload format audio/rtx or video/rtx, in accordance with IETF RFC 4588:2006.
- The retransmitted packet is sent as an identical copy of the original packet and is sent to the same UDP port as the original RTP packet.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 4588:2006	486GV	

[COMMENT] For interoperability reasons, it is suggested that the Serving Endpoint implement both transmission methods and chooses the one supported by the Receiving Endpoint, as announced in 11.4.4.158.

Implementation suggestion: If Serving Endpoint implements a buffering scheme for retransmissions, any encoding rate adaptation techniques, such as bit stream switching, trans-rating and frame skipping, it is recommended not to flush the retransmission buffer, as it can be difficult to reconstruct the original data.

11.4.4.23.2

[GUIDELINE] A Serving Endpoint that retransmits RTP packets should format the retransmitted packet using the RTP payload format audio/rtx or video/rtx, in accordance with IETF RFC 4588:2006.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 4588:2006	7MJSW	

11.4.4.23.3

[GUIDELINE] A Serving Endpoint that retransmits RTP packets may send the retransmitted packet as an identical copy of the original packet, and it is sent to the same UDP port as the original RTP packet.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	IETF RFC 4588:2006	RVS55	

11.4.4.24 MT RTP packet size**11.4.4.24.1**

[GUIDELINE] A Serving Endpoint should limit the size of the RTP packet so that the size of the entire packet including protocol headers will not exceed the Maximum Transmission Unit (MTU) used in the home network.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	IETF RFC 1191	T63U3	

[COMMENT] The purpose of this recommendation is to avoid IP Packet fragmentation and the performance penalty associated with this.

A Serving Endpoint can determine the maximum MTU size for a given connection dynamically using the algorithm described in RFC 1191. If the Serving Endpoint chooses not to, or is unable to determine the size dynamically, it can assume an MTU of size of 1 492 B is safe.

11.4.4.24.2

[GUIDELINE] A Serving Endpoint shall not select an RTP packet size in excess of 4 096 B.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 1191	47MJS	

[COMMENT] This provides the Receiving Endpoint with an upper limit on the size of an incoming RTP packet.

11.4.4.25 MT RTP UDP port usage

11.4.4.25.1

[GUIDELINE] If an RTP Media Format Profile encapsulation (see 11.4.4.60 through 11.4.4.65) mandates that content be sent as multiple RTP streams, the Serving Endpoint shall support sending them to the same $(2n, 2n+1)$ UDP port pair, even if the Receiving Endpoint requests them to be the same.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	3RVS5	

[COMMENT] When RTSP is used, the Receiving Endpoint selects the UDP ports for each RTP stream, and although not recommended by IETF RFC 3550:2003, it can choose the same UDP port pair for multiple RTP streams.

11.4.4.25.2

[GUIDELINE] If an RTP Media Format Profile encapsulation (see 11.4.4.60 through 11.4.4.65) mandates that content be sent as multiple RTP streams, the Serving Endpoint shall support sending them to different $(2n, 2n+1)$ UDP port pairs.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	R47MJ	

[COMMENT] This results in each RTP stream being sent on a different RTP session, which is recommended by IETF RFC 3550:2003.

11.4.4.26 MT RTP RTCP first sender report

[GUIDELINE] A Serving Endpoint should transmit a sender report as soon as possible after sending the first RTP packet of an RTP stream.

[ATTRIBUTES]

S	L	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	8VQ94	

[COMMENT] This allows Receiving Endpoints to synchronize RTP streams.

11.4.4.27 MT RTP required RTCP SDES items

[GUIDELINE] The only RTCP SDES item required is CNAME.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	VS556	

[COMMENT] The CNAME item is required as per IETF RFC 3550:2003, 6.1.

11.4.4.28 MT RTP RTCP BYE packets recommended

[GUIDELINE] Serving endpoints should send an RTCP BYE packet when leaving an RTP session.

[ATTRIBUTES]

S	L	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	Q2KAJ	

11.4.4.29 MT RTP RTCP Receiver Reports tolerance

[GUIDELINE] Serving Endpoint shall tolerate RTCP Receiver Reports.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	X8VQ9	

11.4.4.30 MT RTP RTCP transmission interval in case of RTP translators

[GUIDELINE] If a Serving Endpoint acts as an RTP translator, each received RTCP packet shall be forwarded immediately upon packet arrival. The rule 11.4.4.17.2 shall not be applied.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	3U3AZ	

[COMMENT] This rule is compliant to IETF RFC 3550:2003 (RTCP processing in translators).

11.4.4.31 MT RTP uniqueness of RTP SSRC

[GUIDELINE] Each RTP stream shall use a different SSRC.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	QX8VQ	

[COMMENT] This is especially helpful to the Receiving Endpoint if multiple RTP streams are sent to the same UDP port.

11.4.4.32 MT RTP Buffer Fullness Report processing

11.4.4.32.1

[GUIDELINE] The Serving Endpoint may use Buffer Fullness Reports (BFRs) to compute the average rate of depletion of the Receiving Endpoint's buffer.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	n/a	63U3A	

[COMMENT] This information can be used to detect network congestion and transrate the media stream.

11.4.4.32.2

[GUIDELINE] If BFRs indicate that the Receiving Endpoint's buffer levels are low, then the Serving Endpoint may temporarily increase the transmission rate to fill the Receiving Endpoint's buffer.

Low buffer level is defined as being below the Target Buffer Duration value.

Temporarily increase the transmission rate means that the transmission rate increases until the Serving Endpoint gets a report indicating the buffer level is equal to or greater than the Target Buffer Duration value.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	n/a	KAJB3	

[COMMENT] This can be used for faster startup and to make the Receiving Endpoint more tolerant to network jitter.

11.4.4.32.3

[GUIDELINE] If the Serving Endpoint changes the transmission rate in response to a BFR, RTP timestamps shall not be adjusted to reflect the changed transmission rate.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	43SYB	

11.4.4.33 MT RTP transmission rate adaptation

11.4.4.33.1

[GUIDELINE] If the SETUP request included the Buffer-Info.dlna.org header (guideline 11.4.4.145), and the parameter "BFR=1" was specified on that header, then the Serving Endpoint may perform transmission rate adaptation.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	n/a	2KAJB	

11.4.4.33.2

[GUIDELINE] If the Serving Endpoint has indicated that transmission rate adaptation is possible (guideline 11.4.4.208.1) and the Receiving Endpoint specified a Target Buffer Duration for an RTP stream using the Buffer-Info.dlna.org header (guideline 11.4.4.145), then the Serving Endpoint may perform transmission rate adaptation for the first Target Buffer Duration of NPT.

[ATTRIBUTES]

O	A	DMS +PU+	M-DMS	n/a	n/a	3SYBK	

[COMMENT] Example: If the SETUP request included "TD=5000" on the Buffer-Info.dlna.org header, the Serving Endpoint does not need to pace the data when transmitting the first 5 s worth of data.

11.4.4.34 MT RTP Wall Clock Time samples

[GUIDELINE] If a Receiving Endpoint requests the Serving Endpoint to add Wall Clock Time samples using the RTSP header WCT.dlna.org, as described in guideline 11.4.4.166.1, then it is strongly recommended for the Serving Endpoint to add Wall Clock Time samples to RTP packets conforming to the guidelines 11.4.4.35 through 11.4.4.40 below.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	n/a	SVX64	

[COMMENT] The Wall Clock Time Sample denotes the actual transmission time of the RTP packet very accurately. This enables Receiving Endpoints to perform clock recovery to enable seamless A/V rendering.

It is up to the Receiving Endpoint whether it chooses to perform clock recovery or not. These guidelines just strongly recommend that the Serving Endpoint does the minimum necessary to make it possible.

For MPEG-2 TS or PS encapsulation, the RTP time stamps provide an alternate means for clock recovery. However, RTP time stamps only denote the actual moment of transmission as accurately as the pacing has been (i.e. 35 ms worst case), whereas the Wall Clock Time Sample is within 2,5 ms accurate. This enables more reliable clock recovery.

For encapsulation of elementary streams the RTP timestamps denote sample time and not transmission time, making them unsuitable for clock recovery.

11.4.4.35 MT RTP Wall Clock Time sample source**11.4.4.35.1**

[GUIDELINE] The Wall Clock Time samples in the RTP packets shall be obtained from the Wall Clock Time source that is used for generating the NTP timestamp in the RTCP SR messages.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 1305 IETF RFC 3550:2003	5SVX6	

[COMMENT] The RTCP SR contains a sample of the Wall Clock Time – "NTP timestamp" – when the RTCP packet was sent, along with a sample of the clock generating the RTP timestamps for the RTP stream involved.

This means that the respective RTCP Sender Reports for the different RTP streams (for this media format) can be used to relate all RTP timestamps to the common Wall Clock Time.

This can in turn be used for inter-media synchronization (i.e. "lip sync").

Guidelines 11.4.4.34 through 11.4.4.40 effectively enable reconstruction of the serving endpoint Wall Clock Time at the Receiving Endpoint, and thereby serve the same role as e.g. NTP in more conventional RTP implementations.

11.4.4.35.2

[GUIDELINE] The Wall Clock Time source shall be at least as accurate as specified by the System Clock specification (if any) of the RTP payload content concerned.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	343SY	

[COMMENT] For example, with MPEG-2 content the 90 kHz clock source shall be accurate to within ± 30 parts per million (ppm) and have a slew rate of less than 0,075 Hz per second as defined in ISO/IEC 13818-1:2000.

11.4.4.36 MT RTP Wall Clock Time samples for all packets

[GUIDELINE] If a Serving Endpoint adds Wall Clock Time samples, then they shall be added to each RTP packet of each RTP stream associated with the media format being served.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	Z5SVX	

[COMMENT] Sampling the Wall Clock Time for each packet of each RTP stream results in the largest number of clock samples per second.

For proper clock reconstruction it is advantageous to have as many samples per second as possible.

11.4.4.37 MT RTP Wall clock Time sample accuracy

[GUIDELINE] The Wall Clock Time sample in an RTP packet shall represent the moment that the packet is handed over to the network. The standard deviation of the distribution of the errors shall be less than 2,5 ms.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-9	64JRV	

[COMMENT] Puts upper bound on additional jitter imposed by the serving endpoint's implementation (i.e. "OS jitter"). Typically, network jitter will dominate over "OS jitter".

The RTP timestamps (y -axis) versus the actual arrival time on the network (x -axis) will be plotted against each other, and a line calculated using a [simple average / least mean squares] fitting

algorithm. The slope of the Calculated Line will be unity if the clock source is accurate. A positive or negative slope will indicate a frequency error or "drift". The second derivative or "curve" of the line represents the slew rate of the clock source.

For testing suggestions, this guideline needs to be tested by connecting a packet capturing device directly to the Device Under Test (DUT) using a crossover Ethernet cable for IEEE 802.3 interfaces and/or an IEEE 802.11 station or another access point in close proximity with no observable radio interference. This will allow the arrival time on the network to be measured as accurately as possible by minimizing the effect of network jitter. However, it needs to be noted that presence of network jitter does not invalidate the accuracy of this test with respect to clock source accuracy.

The accuracy of the Wall Clock Time samples will be determined by comparing each Wall Clock Time sample with the actual time the RTP packet is placed on the network as described in ISO/IEC 13818-9 over a period of 10 min. The slope of the Calculated Line (see Figure 23) using a least mean squares will be used to determine accuracy of the Wall clock time samples.

The distribution of the distance between the observed samples and the Calculated Line (see Figure 23) shall be such that 2 standard deviations of the distribution is $\pm 2,5$ ms as shown below in Figure 24.

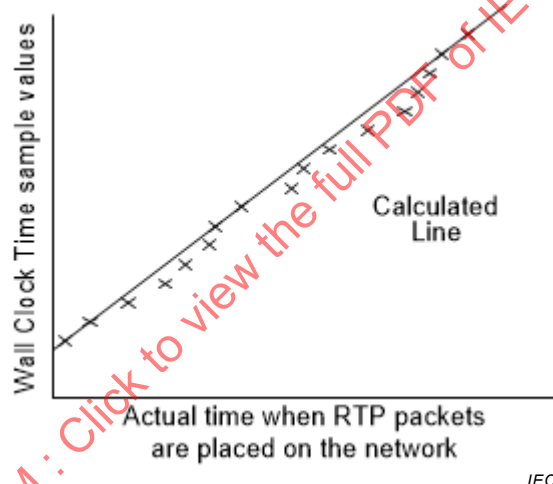


Figure 23 – Calculated Line

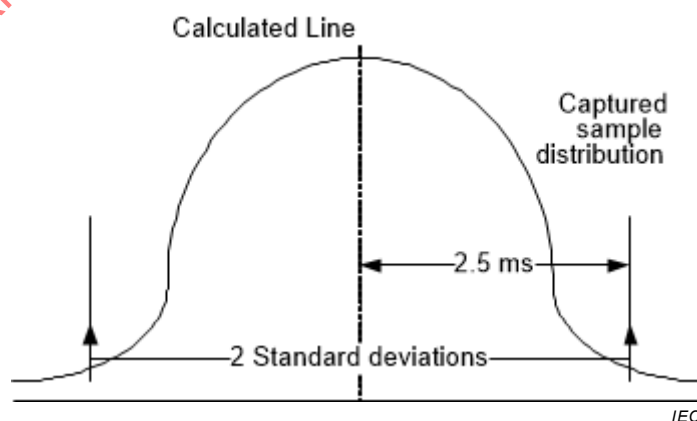


Figure 24 – Wall Clock Time sample accuracy distribution

11.4.4.38 MT RTP Wall Clock Time sample unaffected by Speed, Scale, and BFR

11.4.4.38.1

[GUIDELINE] Wall Clock Time samples shall represent the "Actual" transmission time, irrespective of whether the nominal transmission rate is used or not.

Transmission rates other than nominal can occur when

- a) a rate other than 1,0 is requested by the use of the Speed header, or
- b) transmission rate adaptation is performed as described in guidelines 11.4.4.208.2 and 11.4.4.208.4.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	n/a	VX64J	

[COMMENT] The Wall Clock Time Sample will be unaffected by Scale header, Speed header, or BFR, as it is not tied to the media stream in any way. When the transmission rate is increased, the Wall Clock Time samples of adjacent packets will have smaller temporal distance compared to normal rate. When the transmission rate is decreased the temporal distances will increase.

11.4.4.38.2

[GUIDELINE] Wall Clock Time samples shall represent the "Actual" transmission time, irrespective of whether the content is scaled (Scale header not 1) or not.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	n/a	YBKM5	

11.4.4.39 MT RTP Wall Clock Time sample representation

[GUIDELINE] The middle 32 bits of the Wall Clock Time sample shall be stored in the RTP packet.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 1305 IETF RFC 3550:2003	B3TYK	

[COMMENT] Use of the middle 32 bits reduces packet header overhead and is more commonly used in IETF RFC 3550:2003. It still features a resolution of about 65 kHz (same order of magnitude as 90 kHz RTP timestamps used for PS/TS encapsulation) and a wrap around time of about 18 h.

From IETF RFC 3550:2003: Wall Clock Time (absolute date and time) is represented using the timestamp format of the Network Time Protocol (NTP), which is in seconds relative to 0 h UTC on 1 January 1900. The full resolution NTP timestamp is a 64-bit unsigned fixed-point number with the integer part in the first 32 bits and the fractional part in the last 32 bits. In some fields where a more compact representation is appropriate, only the middle 32 bits are used; that is, the low 16 bits of the integer part and the high 16 bits of the fractional part. The high 16 bits of the integer part is determined independently.

11.4.4.40 MT RTP Wall Clock Time Sample RTP header extension**11.4.4.40.1**

[GUIDELINE] The 32-bit Wall Clock Time sample in an RTP packet shall be encoded by means of a header extension.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	X64JR	

[COMMENT] Header extensions offer full backward compatibility: an implementation that does not recognize a header extension shall silently ignore it.

11.4.4.40.2

[GUIDELINE] The X bit in the RTP header shall be set to "1" to indicate the presence of a header extension.

[ATTRIBUTES]

M	R	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	SYBKM	

11.4.4.40.3

[GUIDELINE] For RTP streams using the RTP/AVP profile the "defined by profile" field in the header extension header shall be set to 0x2356 to uniquely define this DLNA "Wall Clock Time Sample" header extension.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	BKM5V	

11.4.4.40.4

[GUIDELINE] For RTP streams using the RTP/AVPF profile the "defined by profile" field in the header extension header shall be set to 0x2356 to uniquely define this DLNA "Wall Clock Time Sample" header extension.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	Q94XX	

11.4.4.40.5

[GUIDELINE] If no additional header extensions (in addition to Wall Clock Time Sample) are required in the RTP packet header, the "length" field in the header extension header shall be set to 1 to indicate a single 32-bit word in the header extension contents.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	JB3TY	

[COMMENT] To cater to future needs, optionally, another header extension can follow the Wall Clock Time Sample header extension. In this case the "length" field shall indicate the total length of the header extension(s) following the header of the Wall Clock Time Sample header extension.

Note that future DLNA guidelines might apply this rule recursively. The case of a single Wall Clock Time Sample header extension is illustrated in Figure 23. The case of another header extension following it, is illustrated in Figure 24.

11.4.4.40.6

[GUIDELINE] Another RTP header extension may follow the Wall Clock Time Sample header extension, as described in IETF RFC 3550:2003.

[ATTRIBUTES]


O	R	DMS +PU+	M-DMS	n/a	IETF RFC 3550:2003	AJB3T	

11.4.4.40.7

[GUIDELINE] If another header extension follows the Wall Clock Time Sample header extension, the "length" field in the Wall Clock Time Sample header extension header shall be set to the total size of the header extension following it (including its header) plus 1 to indicate the single 32-bit word in the Wall Clock Time Sample header extension contents as shown in Figure 25 and Figure 26.


[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	VQ94X	

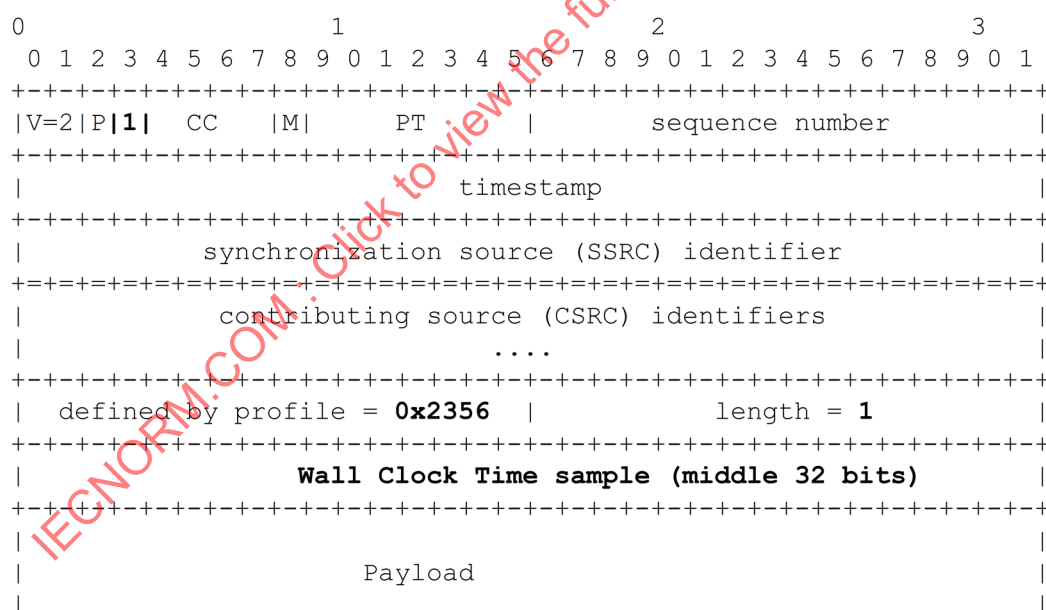

IEC

Figure 25 – Packet with Wall Clock Time Sample header extension

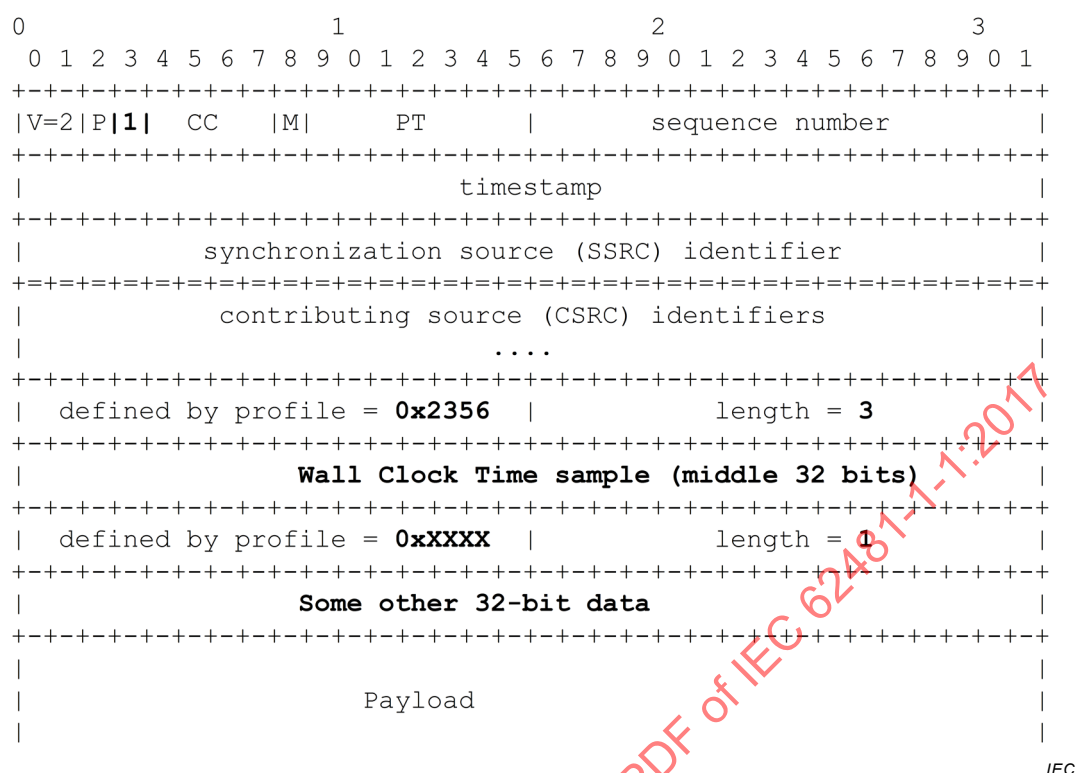

IEC

Figure 26 – Packet with another header extension following Wall Clock Time Sample

11.4.4.41 MT RTP pacing of RTP packets

11.4.4.41.1

[GUIDELINE] In the absence of network congestion, the Serving Endpoint shall be capable of delivering individual RTP packets to the network within 35 ms of a valid "Target Transmission Time". "Target Transmission Time" is defined in guideline 11.4.4.41.2 below.

The above does not apply when the Serving Endpoint performs transmission rate adaptation as described in guidelines 11.4.4.208.2 and 11.4.4.208.4.

The accuracy of the RTP packet delivery will be determined by capturing the Observed Network Arrival Time as defined in 11.4.4.37 and comparing it to a valid Target Transmission Time.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	566IS

[COMMENT] The pace with which RTP packets are delivered to the network shall be such that no pre-decoder buffer overflow can occur at the Receiving Endpoint. This means that RTP packets shall be paced in accordance with the standard decoder buffer model of the media format concerned. The standard decoder buffer model determines which are valid delivery times – "Target Transmission Times" – for packets.

For TS/PS encapsulation a valid "Target Transmission Time" is present in the RTP timestamp (see Guideline 11.4.4.83).

For ES encapsulation the "Target Transmission Time" is not explicit in the packet, but can be derived from the multiplex of the source material (if present).

35 ms is a hard limit, no packets are allowed to exceed these bounds.

11.4.4.41.2

[GUIDELINE] For payload types other than the ones mentioned in 11.4.4.83, the "Target Transmission Time" of an RTP packet shall be defined as the intended delivery time of the first byte of its payload into the pre-decoder buffer of the Receiving Endpoint in a way that is consistent with the standard decoder buffer model applicable to the payload type.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	U3AZW	

11.4.4.42 MT RTP maximum reception packet rates

11.4.4.42.1

[GUIDELINE] Upon reception of the header Max-Prate.dlna.org (see Guideline 11.4.4.83), the Serving Endpoint should understand this header and adjust (if necessary) the packet rate based on the max-packet-rate parameter, in order to conform to the maximum packet rate capability of the Receiving Endpoint.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	n/a	94XXR	

[COMMENT] This rule recommends the Serving Endpoint not to exceed the maximum packet rate specified by the Receiving Endpoint. Otherwise, the Receiving Endpoint might not be able to play all packets

11.4.4.42.2

[GUIDELINE] A Serving Endpoint that supports the Max-Prate.dlna.org header shall also understand the feature tag dlna:Max-Prate (see Guideline 11.4.4.157.2) in a Require header.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	IETF RFC 2326:1998	AZWPN	

11.4.4.43 MT RTP interpret the P and X bits in the RTP header

[GUIDELINE] Receiving Endpoints shall correctly interpret P bit and the X bit in the RTP packet header.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	3AZWP	

[COMMENT] If the P bit is 1, the Receiving Endpoint shall remove the padding before processing the packet.

If the X bit is 1, the Receiving Endpoint shall correctly parse the packet and process any headers that it understands, and tolerate any other headers.

11.4.4.44 MT RTP tolerate CSRC fields in the RTP header

[GUIDELINE] Receiving Endpoints shall tolerate contributing sources (CSRCs) in the RTP packet header.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	5566I	

[COMMENT] Contributing sources are created only by RTP mixers, which are not required by DLNA.

11.4.4.45 MT RTP SSRC uniqueness: Receiving Endpoints

[GUIDELINE] Receiving Endpoints shall ignore SSRC collisions.

[ATTRIBUTES]

M	L	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	MJSWV	

[COMMENT] RTP was designed for large multicast conferencing-type of applications.

SSRC collisions can occur in large conferences where multiple receivers/senders choose their own SSRC.

In a unicast environment, the RTP Receiving Endpoint shall ignore SSRC collisions and continue the session with the negotiated SSRC values.

11.4.4.46 MT RTP expect random starting RTP sequence number

[GUIDELINE] A Receiving Endpoint shall accept an arbitrary starting sequence number.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	S5566	

[COMMENT] Subclause 5.1 of IETF RFC 3550:2003 recommends random starting sequence numbers, so Receiving Endpoints shall expect a random starting sequence number.

11.4.4.47 MT RTP expect random starting RTP timestamp

[GUIDELINE] A Receiving Endpoint shall accept an arbitrary starting RTP timestamp.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	JSWVF	

[COMMENT] Subclause 5.1 of IETF RFC 3550:2003 recommends random starting RTP timestamps, so Receiving Endpoints shall expect a random starting timestamp.

11.4.4.48 MT RTP required RTCP SDES items

[GUIDELINE] The only RTCP SDES item required is CNAME.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	VIW5Y	

[COMMENT] The CNAME item is required as per IETF RFC 3550:2003, 6.1.

11.4.4.49 MT RTP robust handling of RTCP BYE packet

[GUIDELINE] A Receiving Endpoint shall either accept or gracefully discard RTP data packets received after the reception of the RTCP BYE packet.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	6GVIW	

[COMMENT] BYE packets can be received before or after the transmission of RTP packets has actually ended because of network reordering or retransmission.

11.4.4.50 MT RTP unknown RTP extensions

[GUIDELINE] Receiving Endpoints shall tolerate RTP header extensions they do not support.

Tolerate means that the Receiving Endpoint is able to "parse and interpret" or "parse and ignore" header extensions.

[ATTRIBUTES]

M	R	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	SWVFR	

11.4.4.51 MT RTP out of order RTP packets and jitter conditions

11.4.4.51.1

[GUIDELINE] Receiving Endpoints receiving RTP packets shall accept out-of-order packets.

"Shall accept" means that the Receiving Endpoint is able to "receive and reorder" or "receive and ignore" header extensions.

[ATTRIBUTES]

M	R	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	47AI8	

11.4.4.51.2

[GUIDELINE] A Receiving Endpoint should be capable of processing RTP packets that arrive with up to 200 ms of total jitter.

[ATTRIBUTES]

S	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	GVIW5	

[COMMENT] This jitter is the sum of the OS jitter (which is 35 ms) plus the network induced jitter.

11.4.4.51.3

[GUIDELINE] If a Receiving Endpoint sends Buffer Fullness Reports, it shall tolerate variable rate transmission of RTP packets for a period up to the duration of the Receiving Endpoint's buffer.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	YN4FN	

11.4.4.52 MT RTP/AVPF support

[GUIDELINE] A Receiving Endpoint may use the RTP/AVPF profile, and send RTCP-based feedback messages of the types that Serving Endpoint has indicated are acceptable.

[ATTRIBUTES]

O	C	DMP DMR	M-DMP	n/a	IETF RFC 4585:2006	V47AI	

[COMMENT] The Serving Endpoint uses SDP to indicate if RTP/AVPF is used, and which feedback message types are acceptable.

11.4.4.53 MT RTP retransmission requests

[GUIDELINE] If the RTP/AVPF profile is used, and if the Serving Endpoint has indicated that RTCP nack feedback messages are acceptable, then the Receiving Endpoint shall use RTCP nack feedback message to request any desired RTP packet retransmissions.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 4585:2006	7AI8E	

11.4.4.54 MT RTP audio/rtx and video/rtx support**11.4.4.54.1**

[GUIDELINE] A Receiving Endpoint which requests retransmission of RTP packets should support the audio/rtx and video/rtx RTP payload formats for retransmitted packets.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 4588:2006	4FNJE	

11.4.4.54.2

[GUIDELINE] A Serving Endpoint that supports the audio/rtx and video/rtx RTP payload formats for retransmitted packets shall use the SSRC-multiplexing method described in Clause 5 of IETF RFC 4588:2006 and shall not use the session-multiplexing method (also described in Clause 5 of IETF RFC 4588:2006).

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 4588:2006	84R9I	

11.4.4.55 MT RTP packets that are retransmitted as identical copies

[GUIDELINE] A Receiving Endpoint which requests retransmission of RTP packets may support that RTP packets are retransmitted as identical copies of the original RTP packets.

[ATTRIBUTES]

O	A	DMP DMR	M-DMP	n/a	n/a	N4FNJ	

11.4.4.56 MT RTP rules for counting RTP packets when retransmission requests are supported

11.4.4.56.1

[GUIDELINE] A Receiving Endpoint which requests the retransmission of an RTP packet using an RTCP nack feedback message, shall count that packet as a lost packet in RTCP Receiver Reports, even if the RTP packet is subsequently received.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	X84R9	

11.4.4.56.2

[GUIDELINE] A Receiving Endpoint which requests the retransmission of an RTP packet using an RTCP nack feedback message, shall not include that packet when computing the value for the "interarrival jitter" field in RTCP Receiver Reports, even if the RTP packet is subsequently received.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	4R9IZ	

11.4.4.57 MT RTP Buffer Fullness Reports

11.4.4.57.1

[GUIDELINE] If the RTP/AVPF profile is used, and if the Serving Endpoint has indicated that RTCP bfr feedback messages are acceptable, then the Receiving Endpoint should include Buffer Fullness Reports (BFR's) with all RTCP Receiver Reports that it sends.

[ATTRIBUTES]

S	A	DMP DMR	M-DMP	n/a	IETF RFC 4585:2006	VZTX5	

[COMMENT] BFR's can be used to detect network congestion and ensure the RENEDERING ENDPOINTS jitter buffer remains full.

11.4.4.57.2

[GUIDELINE] A Receiving Endpoint that sends BFR's shall send them at the rate that is in accordance with SDP provisions (if any).

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 3556	G2VZT	

[COMMENT] See Guideline 11.4.4.204.2 for SDP provisions that define the rate at which BFRs shall be sent. The Serving Endpoint requires BFR's to be sent at this rate to detect congestion.

11.4.4.57.3

[GUIDELINE] A Receiving Endpoint that sends BFRs shall use the following syntax.

- An RTCP feedback message as defined in RTP/AVPF IETF RFC 4585:2006, 6.1 shall be used.
- The FMT field shall be set to 3 indicating the BFR feedback message type.
- The PT field shall be set to 205 indicating a transport layer feedback message.
- The feedback control information (FCI) section consists of ten fields. The fields shall occur in the FCI in the order listed below.
- N1: (32 bits) shall be set to the number of free bytes in the Receiving Endpoint's network de-jitter buffer.
- N2: (32 bits) shall be set to the current size, in bytes, of the Receiving Endpoint's network de-jitter buffer. The current size is the current maximum size and not the current utilization or amount of data in the buffer.
- N3: (16 bits) shall be set to the amount of data queued in the Receiving Endpoint's network de-jitter buffer counted in milliseconds. If this information is not available, this field shall be set to 0xFFFF. If the amount of data is more than 65 534 ms, the fields shall be set to 0xFFFE.
- Playout Delay: (16 bits) Shall be set to the difference between the scheduled playout time of the next ADU (Application Data Unit) to be transferred to the coded data buffer or decoded if coded data buffer is not presented and the time of sending the BFR, as measured by the media playout clock, expressed in milliseconds. If this information is not available, the Receiving Endpoint shall set this value to 0xFFFF. In case of an empty buffer, the playout delay is not defined and the field shall be set to 0xFFFF.
- NSN: (16 bits) shall be set to the RTP sequence number of the next ADU to be transferred or decoded for the SSRC reported on. In the case where the buffer does not contain any packets for this SSRC, the next not yet received RTP sequence number shall be reported, i.e. an NSN value that is one larger than the least significant 16 bits of the RTCP SR or RR report block's "extended highest sequence number received".
- NUN: (16 bits) shall be set to the unit number (within the RTP packet) of the next ADU to be transferred or decoded as defined in the payload format subclause of these guidelines, 11.4.4.60 to 11.4.4.65, for the given RTP payload format. The first unit in a packet has a unit number equal to zero. The unit number is incremented by one for each ADU in an RTP packet. In the case of RTP payload formats where each packet carries a single ADU, or where the ADU is not defined, the NUN field shall be set to zero.
- D1: (32 bits) shall be set to the number of free bytes in the Receiving Endpoint's coded data buffer, or 0 if the pre-decoder buffer is combined with the network de-jitter buffer. The field shall be set to 0 if the RTSP Buffer-Info.dlna.org header did not provide a size for the coded data buffer.
- D2: (32 bits) shall indicate the current size, in bytes, of the Receiving Endpoint's coded data buffer, or 0 if the pre-decoder buffer is combined with the network de-jitter buffer. The field shall be set to 0 if the RTSP Buffer-Info.dlna.org header did not provide a size for the coded data buffer.
- D3: (16 bits) shall be set to the amount of data queued in the Receiving Endpoint's coded data buffer counted in milliseconds. If this information is not available, this field shall be set to 0xFFFF. If the amount of data is more than 65 534 ms, the fields shall be set to 0xFFFE.

- TD: (16 bits) shall be set to the current value of Target Buffer Duration, as defined in guideline 11.4.4.145. The field shall be set to 0 if the Buffer-Info.dlna.org header was not included in the RTSP SETUP request, or if the "TD" parameter on that header was not present.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 4585:2006	ZTX53

[COMMENT] The fields N2 and D2 are necessary because the Receiving Endpoint can decide to increase the sizes of these buffers as a result of headers in the PLAY response, or as a result of network congestion, for example.
See Figure 26 for more information.

The definition of Application Data Unit is specific to each RTP payload format. See definitions in 11.4.4.60 to 11.4.4.65, and the comments about the NUN field, below.

In the two-buffer model where no RTP header is available in the coded data buffer, the reported NSN and the associated playout delay and NUN shall use the next to be transferred RTP packet's sequence number in the transmission (network) jitter buffer.

For the NUN field:


for example in the case of H.264 (AVC), an ADU is defined as a NAL unit and for audio profiles, an ADU is an audio frame.

In the case of RTP payload formats where each packet carries a single ADU (for example H.263 and MPEG-4 Visual Simple Profile) the NUN field will be set to zero.

MPEG-2 PS streams consist of a stream of bytes without payload-level framing. Therefore NUN shall always be 0 for such streams.

Future additions of media encoding or transports capable of having more than one ADU in each RTP payload shall define what shall be counted as an ADU for this format.

A BFR packet format is shown in Figure 27.

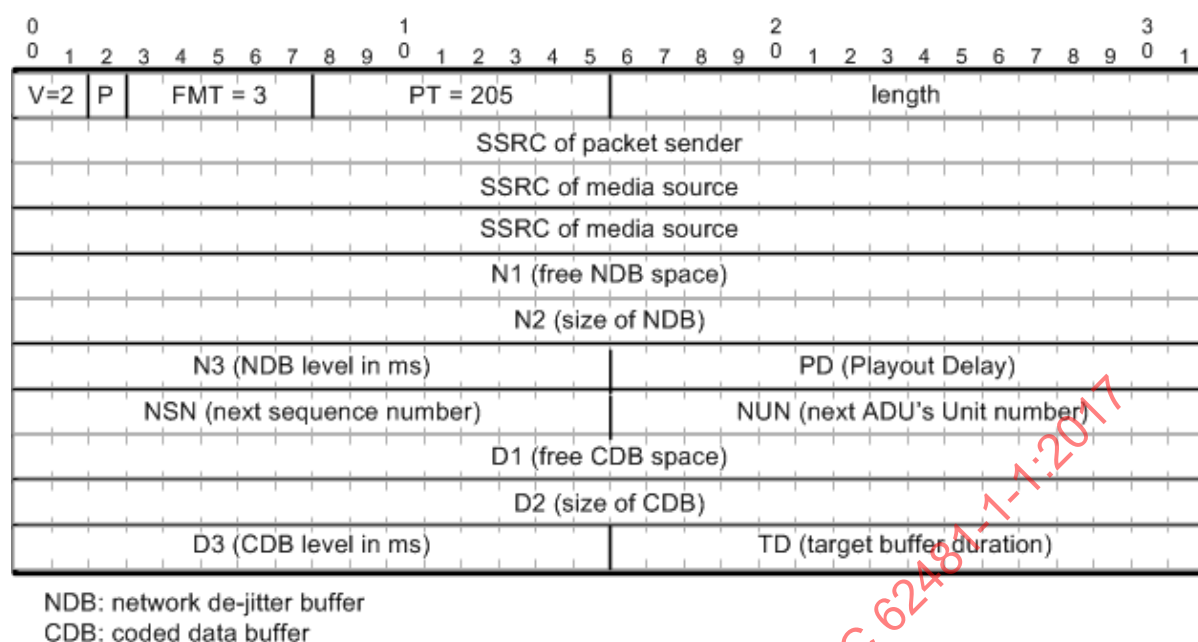

IEC

Figure 27 – BFR packet format

11.4.4.58 MT RTP tolerate Wall Clock Time Sample RTP header extension

[GUIDELINE] Receiving Endpoint shall tolerate the Wall Clock Time sample RTP header extension as defined in guidelines 11.4.4.34 to 11.4.4.40.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3550:2003	5398X	

[COMMENT] IETF RFC 3550:2003 already mandates RTP header extensions be silently ignored if they cannot be interpreted.

The aim of the referenced guidelines is for a Receiving Endpoint to actively use the Wall Clock Time samples to perform clock recovery. As stated before, this is not mandatory.

11.4.4.59 RTP Media Transport: adaptation of Media Format Profiles – General

IEC 62481-2:2017 specifies audio, video, and encapsulation characteristics for media content that conforms to the list of DLNA mandatory and optional Media Format Profiles when the transport protocol is HTTP. 11.4.4.60 to 11.4.4.65 uses IEC 62481-2:2017 as the basis, and defines additional constraints and requirements necessary to reuse the Profile ID values and exchange content using RTP. This subclause describes an adaptation layer or filtering layer to tailor the Media Format Profiles defined in IEC 62481-2:2017 for usage over RTP.

11.4.4.60 MT RTP Profile ID usage

[GUIDELINE] For transport over RTP, A/V content shall use the same Profile ID values defined in IEC 62481-2:2017.

[ATTRIBUTES]

M	C	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	IZ5XA	

11.4.4.61 MT RTP MPEG-2 Media Format Profiles

11.4.4.61.1

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-2 video with any type of companion audio;
- Full Single Programme Transport Stream encapsulation;
- DLNA Transport Packets without Timestamp fields (188 byte ISO profiles).

The RTP encapsulation shall use either

- the payload format MP2T as defined in IETF RFC 2250 and IETF RFC 3555 with constraints in Guideline 11.4.4.78, or
- the payload format vnd.dlna.mpeg-mp2t as defined in Guideline 11.4.4.79.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 2250	NJEQX

[COMMENT] Full Single Programme Transport Streams with zero TTS carrying MPEG-2 Media Format Profiles.

11.4.4.61.2

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-2 video with any type of companion audio;
- Partial Single Programme Transport Stream encapsulation;
- DLNA Transport Packets without Timestamp fields (188 byte ISO profiles).

The RTP encapsulation shall use payload format vnd.dlna.mpeg-mp2t as defined in Guideline 11.4.4.79.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	AI8EX

[COMMENT] Partial Single Programme Transport Streams with zero TTS carrying MPEG-2 Media Format Profiles.

11.4.4.61.3

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-2 video with any type of companion audio;
- Partial or Full Single Programme Transport Stream encapsulation;
- Non-zero TTS.

The RTP encapsulation shall use payload format vnd.dlna.mpeg-tts as defined in Guideline 11.4.4.80.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	X5398	

[COMMENT] Partial or Full Single Programme Transport Streams with non-zero TTS carrying MPEG-2 Media Format Profiles.

11.4.4.61.4

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-2 video with any type of companion audio;
- Programme Stream encapsulation.

The RTP encapsulation shall use payload format MP2P as defined in IETF RFC 2250 and IETF RFC 3555.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 2250 IETF RFC 3555	9I25X	

[COMMENT] Programme Streams carrying MPEG-2 Media Format Profiles.

11.4.4.61.5

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-2 video with any type of companion audio;
- MPEG-2 Elementary Stream encapsulation IETF RFC 2250.

The RTP encapsulation for video shall use payload format MPV as defined in IETF RFC 2250 and the RTP encapsulation for audio shall comply with 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 2250	FNJEQ	

[COMMENT] MPEG-2 Elementary Streams carrying MPEG-2 Media Format Profiles.

11.4.4.62 MT RTP AVC Media Format Profiles**11.4.4.62.1**

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- AVC video with any type of companion audio;
- Full Single Programme Transport Stream encapsulation;
- DLNA Transport Packets without Timestamp fields (188 byte ISO profiles).

The RTP encapsulation shall use either

- the payload format MP2T as defined in IETF RFC 2250 and IETF RFC 3555 with constraints in guideline 11.4.4.78, or
- the payload format vnd.dlna.mpeg-mp2t as defined in Guideline 11.4.4.79.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 2250	TX539	

[COMMENT] Full Single Programme Transport Streams with zero TTS carrying AVC Media Format Profiles.

11.4.4.62.2

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- AVC video with any type of companion audio;
- Partial Single Programme Transport Stream encapsulation;
- DLNA Transport Packets without Timestamp fields (188 B ISO profiles).

The RTP encapsulation shall use payload format vnd.dlna.mpeg-mp2t as defined in guideline 11.4.4.79 with the following additional constraints. The TS packet size shall be 188 B and the 4 B TTS defined in IEC 62481-2:2017 shall be excluded.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	R9IZ5	

[COMMENT] Partial Single Programme Transport Streams with zero TTS carrying AVC Media Format Profiles.

11.4.4.62.3

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- AVC video with any type of companion audio;
- Partial or Full Single Programme Transport Stream encapsulation;
- Non-zero TTS.

The RTP encapsulation shall use payload format vnd.dlna.mpeg-tts as defined in guideline 11.4.4.80.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	Z5XAW	

[COMMENT] Partial or Full Single Programme Transport Streams with non-zero TTS carrying AVC Media Format Profiles.

11.4.4.62.4

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- AVC video with any type of companion audio;

- Profile ID indicating MP4 or 3GPP encapsulation.

When these Profile ID values are used in conjunction with RTP all of the following shall apply.

- Audio and Video shall be encapsulated as elementary streams (no use of the MPEG-4 file format or 3GPP file format).
- The RTP encapsulation for video shall use payload format H.264 IETF RFC 3984 with constraints in 11.4.4.91 to 11.4.4.98.
- The RTP encapsulation for audio shall comply with 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 3984	JEQXQ

[COMMENT] AVC Media Format Profiles that indicate MP4 or 3GPP encapsulation.

11.4.4.63 MT RTP MPEG-4 Part 2 Media Format Profiles

11.4.4.63.1

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-4 Part 2 video with any type of companion audio;
- Full Single Programme Transport Stream encapsulation;
- DLNA Transport Packets without Timestamp fields (188 byte ISO profiles).

The RTP encapsulation shall use either

- the Payload format MP2T (IETF RFC 2250, IETF RFC 3555) with constraints in 11.4.4.78, or
- the Payload format vnd.dlna.mpeg-mp2t as defined in guideline 11.4.4.79.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 2250	I8EXF

[COMMENT] Full Single Programme Transport Streams with zero TTS carrying MPEG-4 Part 2 Media Format Profiles.

11.4.4.63.2

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-4 Part 2 video with any type of companion audio;
- Partial Single Programme Transport Stream encapsulation;
- DLNA Transport Packets without Timestamp fields (188 B ISO profiles).

The RTP encapsulation shall use payload format vnd.dlna.mpeg-mp2t as defined in guideline 11.4.4.79.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	IW5Y5	

[COMMENT] Partial Single Programme Transport Streams with zero TTS carrying MPEG-4 Part 2 Media Format Profiles.

11.4.4.63.3

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-4 Part 2 video with any type of companion audio;
- Partial or Full Single Programme Transport Stream encapsulation;
- Non-zero TTS.

The RTP encapsulation shall use payload format vnd.dlna.mpeg-tts as defined in guideline 11.4.4.80 with the following additional constraints. The TS packet size shall be 192 B and the 4 B TTS defined in IEC 62481-2:2017 shall be included.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	EQXQ6	

[COMMENT] Partial or Full Single Programme Transport Streams with non-zero TTS carrying MPEG-4 Part 2 Media Format Profiles.

11.4.4.63.4

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- MPEG-4 Part 2 video with any type of companion audio;
- Profile ID indicating MP4 or ASF encapsulation.

When these Profile ID values are used in conjunction with RTP all of the following shall apply.

- Audio and Video shall be encapsulated as elementary streams (no use of the MPEG-4 or ASF file format).
- The RTP encapsulation for video shall use payload format mpeg4-generic IETF RFC 3640:2003 with constraints in 11.4.4.99 through 11.4.4.103: Guidelines for the encapsulation for MPEG-4 part 2 elementary streams.
- The RTP encapsulation for audio shall comply with 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 IETF RFC 3640:2003	8EXFY	

[COMMENT] MPEG-4 Part 2 Media Format Profiles that indicate MP4 or ASF encapsulation.

11.4.4.64 MT RTP H.263 Media Format Profiles

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- H.263 video with any type of companion audio;

- Profile ID indicating MP4 encapsulation.

When these Profile ID values are used in conjunction with RTP all of the following shall apply.

- Audio and Video shall be encapsulated as elementary streams (no use of the MPEG-4 file format).
- The RTP encapsulation for video shall use payload format H263-2000 IETF RFC 3555, IETF RFC 2429 with constraints in 11.4.4.114 to 11.4.4.117: Guidelines for the encapsulation of H.263 streams.
- The RTP encapsulation for audio shall comply with 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3555 IEC 62481-2: 2017 IETF RFC 2429	W5Y5T

[COMMENT] H.263 Media Format Profiles that indicate MP4 encapsulation.

11.4.4.65 MT RTP WMV Media Format Profiles

[GUIDELINE] For A/V Profile ID values in IEC 62481-2:2017 for which the following holds:

- WMV video with any type of companion audio;
- Media Format Profiles indicating use of ASF encapsulation.

When these Profile ID values are used in conjunction with RTP all of the following shall apply.

- Audio and Video shall be encapsulated as elementary streams (no use of the ASF file format).
- The RTP encapsulation for video shall use payload format WMV RTP Payload format with constraints in guideline 11.4.4.84 through 11.4.4.90.
- The RTP encapsulation for audio shall comply with 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017 RTP Payload format	Y5T9R

[COMMENT] WMV Media Format Profiles.

11.4.4.66 MT RTP Media Format Profile ID usage

[GUIDELINE] For transport over RTP, Audio-only content shall use the same Profile ID values defined in IEC 62481-2:2017.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2: 2017	EXFYZ

11.4.4.67 MT RTP Audio Elementary Streams of A/V Media Format Profiles

[GUIDELINE] Audio components of A/V profiles in IEC 62481-2:2017 transmitted over RTP as separate elementary streams shall follow the adaptation guidelines defined in 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2:2017	5Y5T9	

11.4.4.68 MT RTP Elementary Streams of Audio-only Media Format Profiles

[GUIDELINE] Audio content of Audio-only profiles in IEC 62481-2:2017 shall be transmitted over RTP as elementary streams using the adaptation guidelines defined in 11.4.4.66 to 11.4.4.76.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IEC 62481-2:2017	RXG3B	

11.4.4.69 MT RTP LPCM Media Format Profiles

[GUIDELINE] The RTP encapsulation for LPCM shall use payload format L16 IETF RFC 3551.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3551	ISH26	

11.4.4.70 MT RTP MP3,MP3X, MPEG-2 L2 Media Format Profiles

[GUIDELINE] The RTP encapsulation for MP3, MP3X, and MPEG-2 L2 shall use payload format MPA IETF RFC 2250.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2250	WPN9Z	

11.4.4.71 MT RTP AC3, XAC3 Media Format Profiles

[GUIDELINE] The RTP encapsulation for AC-3 and XAC3 shall use payload format ac3 IETF RFC 4184.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	ATSC Standard IETF RFC 4184	4XXRY	

11.4.4.72 MT RTP AAC, HE-AAC Media Format Profiles

[GUIDELINE] The RTP encapsulation for AAC and HE-AAC shall use payload format mpeg4-generic IETF RFC 3640:2003 with constraints in 11.4.4.104 to 11.4.4.113: Guidelines for the encapsulation of MPEG-4 AAC streams.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3640:2003	FRXG3	

11.4.4.73 MT RTP G726 Media Format Profiles

[GUIDELINE] The RTP encapsulation for G726 shall use payload format G726-32 IETF RFC 3551.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3551	6ISH2	

11.4.4.74 MT RTP WMA Media Format Profiles

[GUIDELINE] The RTP encapsulation for WMA shall use payload format WMA RTP Payload format with constraints in 11.4.4.84 to 11.4.4.90.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	RTP Payload format	ZWPN9	

11.4.4.75 MT RTP AMR Media Format Profiles

[GUIDELINE] The RTP encapsulation for AMR shall use payload format AMR IETF RFC 3267:2002 with constraints in 11.4.4.118 to 11.4.4.121.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3267:2002 IEC 62481-2: 2017	VFRXG	

11.4.4.76 MT RTP AMR-WBPlus Media Format Profiles

[GUIDELINE] The RTP encapsulation for AMR-WBplus shall use payload format AMR-WB+ IETF RFC 4352:2006 with constraints in 11.4.4.122 to 11.4.4.127.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 4352:2006 IEC 62481-2: 2017	66ISH	

11.4.4.77 MT RTP Payload Formats for MPEG TS encapsulated content**11.4.4.77.1**

[GUIDELINE] The guidelines in 11.4.4.77 apply to guidelines 11.4.4.78, 11.4.4.79 and 11.4.4.80.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000 IETF RFC 2250	WVFRX	

11.4.4.77.2

[GUIDELINE] All RTP Timestamps for MPEG TS encapsulated content will be in 90 kHz clock units.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2250	SH26Q	

11.4.4.77.3

[GUIDELINE] The 90 kHz clock used as the basis for the RTP Header Timestamp field shall be synchronized with the MPEG System Clock of the content.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000 IETF RFC 2250	PN9ZA	

11.4.4.77.4

[GUIDELINE] The RTP Timestamp values may differ from the MPEG program_clock_reference_base value in the PCR field.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	IETF RFC 2250	XXRYP	

11.4.4.77.5

[GUIDELINE] An ADU (Application Data Unit) shall be one complete TS packet as specified in the guidelines for the RTP payload format in use.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 2250	3TYKK	

[COMMENT] The size of a TS packet differs depending on the RTP payload format in use.

11.4.4.78 MT RTP MP2T RTP Payload format definition

11.4.4.78.1

[GUIDELINE] The MP2T RTP Payload format can only be used to transfer Full SPTS streams in RTP. If this RTP Payload format definition is used, the RTP packets shall meet the following guidelines.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 2250	N9ZAL	

[COMMENT] This RTP payload format definition is a strict definition of IETF RFC 2250 using Full SPTS streams.

11.4.4.78.2

[GUIDELINE] Each MPEG TS Packet shall be 188 B in length and conform to the requirements of ISO/IEC 13818-1:2000. The MP2T Payload format can only be used with DLNA Media Format Profiles that use MPEG2 TS encapsulation and have 188 byte TS Packets. Specifically MP2T is not a valid RTP payload format for DLNA Media Format Profiles utilizing the 192 byte TS packet syntax.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000	XRYPY	

11.4.4.78.3

[GUIDELINE] The RTP Timestamp shall represent the ideal transmission time of the first byte of the first MPEG TS Packet contained within the RTP Payload as defined in IETF RFC 2250 and further clarified below.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 2250	KM5VI	

11.4.4.78.4

[GUIDELINE] The ideal transmission time of the first byte of an MPEG2 TS Packet shall be calculated as follows:

$$T_{\text{TimestampY}} = \text{Offset} + 90\text{KHZX} + ((\Delta T_{\text{PCR}} / N) \times I)$$

where

I is the Index value of the TS Packet relative to the last TS Packet containing a PCR value. The first TS Packet after a PCR value will have an Index of 1, the second TS Packet an Index of 2, and so on.

N is the Number of TS Packets between TS Packets with PCR values plus one for the TS Packet with the PCR value. For example, if a SPTS has 2 000 TS Packets per second, and PCR values occur every 100 ms, the value of N would be 200.

90KHZX is the value of the 90 kHz clock associated with the last TS Packet containing a PCR value.

ΔT_{PCR} is the Delta time value between PCR values as defined in 3.2.

Offset is the RTP Timestamp Offset as defined in 11.4.4.20.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	n/a	YKK6T	

11.4.4.78.5

[GUIDELINE] The Serving Endpoint shall use either a static Payload ID of "33" or a dynamic Payload Format of "MP2T" in the SDP Media Description Fields as defined in 11.4.4.195.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	n/a	M5VI8	

11.4.4.79 MT RTP vnd.dlna.mpeg-mp2t RTP Payload format definition

11.4.4.79.1

[GUIDELINE] The vnd.dlna.mpeg-mp2t RTP Payload format definition can be used to transfer Partial or Full SPTS streams in RTP. If this TS Payload definition is used, the RTP packets shall meet the following guidelines 11.4.4.79.2, 11.4.4.79.3 and 11.4.4.79.4.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	n/a	4JRVZ	

[COMMENT] This RTP TS Payload format definition is a looser definition of IETF RFC 2250 MP2T that allows both Partial and Full SPTS streams. The RTP Timestamp calculations are identical even though the temporal relationship between any two adjacent TS Packets is not always the same.

11.4.4.79.2

[GUIDELINE] This payload format definition is identical to MP2T as defined in guideline 11.4.4.78.2, except for the name, and that it can also be used to carry partial SPTS streams.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	n/a	RYPY6	

11.4.4.79.3

[GUIDELINE] The RTP Packet Timestamp shall be calculated in the same manner as described in 11.4.4.78.3 and 11.4.4.78.4 for the MP2T Payload format definition.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	n/a	KK6T3	

11.4.4.79.4

[GUIDELINE] The Serving Endpoint shall use a dynamic Payload Format of vnd.dlna.mpeg-mp2t in the SDP Media Description Fields as defined in 11.4.4.195.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	n/a	5VI84	

11.4.4.79.5

[GUIDELINE] To reduce jitter on the transmission of PCR timestamps, the Serving Endpoint should send RTP packets as soon as it contains a TS packet with a PCR, without waiting for the maximum payload size to be reached.

[ATTRIBUTES]

S	A	DMS +PU+	M-DMS	n/a	n/a	JRVZQ	

11.4.4.80 MT RTP vnd.dlna.mpeg-tts RTP Payload format definition**11.4.4.80.1**

[GUIDELINE] The vnd.dlna.mpeg-tts RTP Payload format definition can be used to transfer Partial or Full SPTS streams in RTP. If this RTP Payload format definition is used, the RTP packets shall meet guidelines 11.4.4.80.2, 11.4.4.80.7 and 11.4.4.80.8.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	VI84D	

[COMMENT] This RTP Payload format definition is designed to preserve individual TS Packet timing references in a Partial SPTS stream.

11.4.4.80.2

[GUIDELINE] The vnd.dlna.mpeg-tts RTP Payload format definition can only be used with DLNA Media Format Profiles that use MPEG2 TS encapsulation and have 192 byte TS Packets. It shall be used for DLNA Media Format Profiles using the DLNA-defined 192 byte TS packet format with timestamp.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000	RVZQ5	

[COMMENT] The individual timestamps in each TS Packet are designed to preserve the temporal relationship between each TS packet and its two adjacent packets.

11.4.4.80.3

[GUIDELINE] Each TS Packet shall be 192 B in length consisting of a 4 byte TTS Timestamp field followed by a 188-byte MPEG TS packet conforming to the requirements of ISO/IEC 13818-1:2000.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000	VZQ5R	

11.4.4.80.4

[GUIDELINE] The TTS Timestamp field shall be in 27 MHz clock units. The 27 MHz clock used as the basis for the TTS Timestamps shall be synchronized with the MPEG System Clock of the content.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000	RMVJ9	

11.4.4.80.5

[GUIDELINE] The TTS Timestamp value is a 32-bit binary counter and is not defined using the same syntax as the PCR field. If this TS Definition is used, the Serving Endpoint shall ensure that the individual TTS Timestamp values have an accuracy of ±500 ns.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000	Q5RMV	

11.4.4.80.6

[GUIDELINE] The TTS Timestamp field shall contain valid timestamp values.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000	5RMVJ	

[COMMENT] This is different from how the TTS Timestamps are used in HTTP.

11.4.4.80.7

[GUIDELINE] The RTP Timestamp shall be derived from the TTS Timestamp of the first TS Packet in the RTP Payload using the following equations.

For the first RTP Timestamp (TSRTP) in the RTP stream, or after a Programme System Clock discontinuity:

$$\text{TSRTP} = \text{Offset} + (\text{TSTTS} / 300)$$

where

Offset is the RTP Offset defined in 11.4.4.77 and

TSTTS is the 27 MHz TTS 32-bit Timestamp.

For subsequent RTP Timestamps:

$$\text{TSRTP}_N = \text{TSRTP}_{N-1} + ((\text{TSTTS}_N - \text{TSTTS}_{N-1}) / 300)$$

where

TSRTP_N is the RTP time stamp of the Nth RTP packet; and

TSTTS_N is the TTS time stamp of the first TS packet in the payload of the Nth RTP packet.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	ZQ5RM	

[COMMENT] These equations compensate for the difference in time base between the TTS Timestamp (27 MHz) and the RTP Timestamp (90 kHz). It allows the RTP Timestamp to reach its full value (roll over at 232). Implementers shall account for roller in the TSTTS_N – TSTTS_{N-1} expression.

11.4.4.80.8

[GUIDELINE] The Serving Endpoint shall use a dynamic Payload Format of vnd.dlna.mpeg-tts in the SDP Media Description Fields as defined in 11.4.4.194.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	n/a	I84D8	

11.4.4.81 MT RTP payload format support for TS without TTS

[GUIDELINE] If a Receiving Endpoint claims to support TS without TTS then it shall support both RTP payload format definitions MP2T and vnd.dlna.mpeg-mp2t.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	n/a	6T3VG	

[COMMENT] For full TS its up to the serving endpoint whether MP2T or vnd.dlna.mpeg-mp2t is used, this implies the Receiving Endpoint shall be able to accept either one.

11.4.4.82 MT RTP clock accuracy for MPEG-2 TS and MPEG-2 PS

[GUIDELINE] The RTP timestamps applied to MPEG-2 TS and PS encapsulated content shall use a 90 kHz clock source that is accurate to within ± 30 parts per million (ppm) and have a slew rate of less than 0,075 Hz per second as defined in ISO/IEC 13818-1:2000.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	ISO/IEC 13818-1:2000 IETF RFC 2250	Y6YTG	

[COMMENT] Only that way the clock recovered by the Receiving Endpoint can meet the specifications needed for decoding.

11.4.4.83 MT RTP Target Transmission Time for MPEG TS and PS encapsulated content

[GUIDELINE] For payload types MP2P, MP2T, vnd.dlna.mpeg-mp2t, and vnd.dlna.mpeg-tts, the "Target Transmission Time" of an RTP packet is defined by its RTP Timestamp field.

[ATTRIBUTES]

M	A	DMS +PU+	M-DMS	n/a	n/a	LCW9F	

11.4.4.84 MT RTP ADU usage

[GUIDELINE] An ADU (Application Data Unit) shall be one complete MAU (Media Access Unit) as specified in RTP Payload format.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	RTP Payload format	84D89	

11.4.4.85 MT RTP WMA time stamps in ASF are presentation time stamps

11.4.4.85.1

[GUIDELINE] The "Timestamp" field in the RTP header shall be set to a value reflecting the presentation time of the first payload in the RTP packet. The "Presentation Time" field of a WMA Media Object in ASF specifies the presentation time of the WMA Media Object.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	ASF RTP Payload format	T3VG6	

11.4.4.85.2

[GUIDELINE] The "Decode Time" field shall not be included in the RTP Payload Format header, unless the decode time of the WMA media object is known.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	ASF RTP Payload format	6YTGX	

[COMMENT] When WMA is stored in an ASF container, decode times of WMA Media Objects are not available.

11.4.4.86 MT RTP WMV time stamps in ASF are decode time stamps

11.4.4.86.1

[GUIDELINE] The "Timestamp" field in the RTP header shall be set to a value reflecting the decode time of the first payload in the RTP packet. The "Presentation Time" field of a WMV Media Object in ASF specifies the decode time of the WMV Media Object.

[ATTRIBUTES]

M	L	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	ASF RTP Payload format	4D898	

11.4.4.86.2

[GUIDELINE] The a=fmtp line in SDP shall specify ts=DTS to indicate this usage.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	RTP Payload format	D8980	

11.4.4.86.3

[GUIDELINE] The "Presentation Time" field of a WMV media object in ASF shall not be used as the Presentation Time field of the RTP packet.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	ASF RTP Payload format	3VG6O	

[COMMENT] When WMV is stored in an ASF container, presentation times of WMV Media Objects are not explicitly available.

11.4.4.87 MT RTP determining the value of the SDP "profile" parameter for WMV

[GUIDELINE] If the ASF Meta Data Object exists, and if it contains a "DeviceConformanceTemplate" attribute for the WMV media stream, then that attribute may be used to determine the value for the "profile" parameter in the WMV SDP syntax.

The first two characters in the "DeviceConformanceTemplate" value determine the SDP "profile" parameter as follows:

- SP: profile = 0;
- MP: profile = 1.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	ASF RTP Payload format	QS3WN	

11.4.4.88 MT RTP determining the value of the SDP "level" parameter for WMV

[GUIDELINE] If the ASF Meta Data Object exists, and if it contains a "DeviceConformanceTemplate" attribute for the WMV media stream, then that attribute may be used to determine the value for the "level" parameter in the WMV SDP syntax.

The last two characters in the "DeviceConformanceTemplate" value determine the SDP "level" parameter as follows:

- LL: level = 0;
- ML: level = 1;
- HL: level = 2.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	ASF RTP Payload format	ALCW9	

11.4.4.89 MT RTP determining the value of the SDP "aspect" parameter for WMV

[GUIDELINE] If the ASF Meta Data Object exists, and if it contains both an "AspectRatioX" attribute and an "AspectRatioY" attribute for the WMV media stream, then those attributes can be used to determine the value for the "aspect" parameter in the WMV SDP syntax.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	ASF RTP Payload format	PY6YT	

11.4.4.90 MT RTP determining the value of the SDP "profile" parameter for WMA

[GUIDELINE] If the ASF Meta Data Object exists, and if it contains a "DeviceConformanceTemplate" attribute for the WMA media stream, then that attribute may be used to determine the value for the "profile" parameter in the WMA SDP syntax.

If the first character in the "DeviceConformanceTemplate" value is "L", then the second character may be used as the value for the SDP "profile" parameter.

[ATTRIBUTES]

O	C	DMS +PU+	M-DMS	n/a	ASF RTP Payload format	K6T3V	

11.4.4.91 MT RTP H.264 RTP Payload format

[GUIDELINE] If H.264/AVC elementary streams are transmitted over RTP, then IETF RFC 3984 shall be used as specified in 11.4.4.92 to 11.4.4.98 inclusive.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3984	6QS3W	

11.4.4.92 MT RTP H.264 ADU usage

[GUIDELINE] An ADU shall be a complete a NAL unit.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3984	ZALCW	

11.4.4.93 MT RTP H.264 packetization

[GUIDELINE] A Serving Endpoint shall use one of the following packetization modes:

- single NAL unit mode;
- non-interleaved mode;
- interleaved mode.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 3984	YPY6Y	

[COMMENT] For the single NAL unit mode, non-interleaved mode, and interleaved mode, the values of the packetization-mode MIME/SDP parameter are equal to 0, 1, and 2, respectively.

11.4.4.94 MT RTP H.264 interleaved mode

11.4.4.94.1

[GUIDELINE] If rtp-h264-deint-buf-cap.dlna.org header (see Guideline 11.4.4.97) is not present in the RTSP DESCRIBE request, then a Serving Endpoint shall set the value of sprop-interleaving-depth parameter in the a=fmtp line of the SDP equal to 0.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 3984	9ZALC	

[COMMENT] When sprop-interleaving-depth equals 0, the interleaved packetization mode can be used to encapsulate coded data from multiple coded pictures into the same RTP payload, without incurring any implementation complexity associated with interleaving of data. For Low bit-rate media streams, this aggregation mechanism can help in avoiding a drop in the available bitrate for the whole WLAN segment and decreases the RTP/UDP/IP header overhead for the RTP stream.

11.4.4.94.2

[GUIDELINE] A Receiving Endpoint shall support the interleaved packetization mode with the value of the sprop-interleaving-depth parameter in the a=fmtp line of the SDP equal to 0.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 3984	H26QS	

11.4.4.95 MT RTP H.264 single NAL unit mode

[GUIDELINE] A Receiving Endpoint shall support the single NAL unit packetization mode.

[ATTRIBUTES]

M	C	DMP DMR	M-DMP	n/a	IETF RFC 3984	26QS3	

11.4.4.96 MT RTP H.264 non-interleaved mode

[GUIDELINE] A Receiving Endpoint shall support the non-interleaved packetization mode.

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 3984	BWT85	

11.4.4.97 MT RTP H.264 de-interleaving buffer capability

[GUIDELINE] If a Receiving Endpoint supports the interleaved packetization mode and a value of the sprop-interleaving-depth MIME/SDP parameter greater than 0, then the Receiving Endpoint shall include the rtp-h264-deint-buf-cap.dlna.org header in the DESCRIBE request. The syntax of the header is specified as follows:

- rtp-h264-deint-buf-cap.dlna.org = "rtp-h264-deint-buf-cap.dlna.org" *LWS ":" *LWS 1*DIGIT.

The value of rtp-h264-deint-buf-cap.dlna.org shall be in the range of 0 to 4294967295, inclusive.

The value of the rtp-h264-deint-buf-cap.dlna.org header is interpreted identically to the deint-buf-cap MIME/SDP parameter specified in IETF RFC 3984.

Example:

- rtp-h264-deint-buf-cap.dlna.org: 32 768.

This specifies that the Receiving Endpoint is capable of supporting such RTP streams that require a de-interleaving buffer up to 32 768 B (inclusive).

[ATTRIBUTES]

M	A	DMP DMR	M-DMP	n/a	IETF RFC 3984	ZVEJZ	

[COMMENT] This indicates how big a buffer a Receiving Endpoint can allocate for the de-interleaving process of interleaved H.264 RTP streams.

11.4.4.98 MT RTP H.264 de-interleaving buffer requirement

[GUIDELINE] A serving endpoint shall set the value of the sprop-deint-buf-req parameter of H.264/AVC in the a=fmtp line of the SDP equal to or less than the value of the rtp-h264-deint-buf-cap.dlna.org header in the RTSP DESCRIBE request.

[ATTRIBUTES]

M	L	DMS +PU+	M-DMS	n/a	IETF RFC 3984	9RX99	

11.4.4.99 MT RTP payload format for MPEG-4 Part 2 elementary streams

[GUIDELINE] If MPEG-4 Part 2 elementary streams are transmitted over RTP, then the RTP payload format mpeg4-generic shall be used as specified in guidelines 11.4.4.100 to 11.4.4.103, inclusive.

[ATTRIBUTES]

M	A	DMS DMP DMR +PU+	M-DMS M-DMP	n/a	IETF RFC 3640:2003	G3BWT	

[COMMENT] "mpeg4-generic" is defined in IETF RFC 3640:2003.

11.4.4.100 MT RTP MPEG-4 Part 2 uses generic mode

[GUIDELINE] A Serving Endpoint that transmits MPEG-4 Part 2 elementary streams over RTP shall only use the "generic" mode of the RTP payload format mpeg4-generic.

[ATTRIBUTES]

M	C	DMS +PU+	M-DMS	n/a	IETF RFC 3640:2003	RX99P	

[COMMENT] Generic mode is the only mode defined in IETF RFC 3640:2003 that is applicable to MPEG-4 Part 2.

The usage of generic mode is signaled by "mode=generic" on the a=fmtp line in SDP. See IETF RFC 3640:2003, 3.3.2.

11.4.4.101 MT RTP MPEG-4 Part 2 ADU usage

[GUIDELINE] An ADU (Application Data Unit) shall be a complete AU (Access Unit) as specified in IETF RFC 3640:2003.