

INTERNATIONAL STANDARD



**Digital living network alliance (DLNA) home networked device interoperability
guidelines**
Part 1-2: Architecture and protocols – Extended Digital Media Renderer

IECNORM.COM : Click to view the full PDF of IEC 62481-1-2:2017



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 60384-12:2017

INTERNATIONAL STANDARD



**Digital living network alliance (DLNA) home networked device interoperability
guidelines**
Part 1-2: Architecture and protocols – Extended Digital Media Renderer

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160; 35.100.05; 35.110

ISBN 978-2-8322-4522-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms, definitions and conventions.....	7
3.1 General terms.....	7
3.2 Conventions.....	8
4 Networking architecture, device models and guideline conventions	9
4.1 DLNA home networking architecture	9
4.2 DLNA system usages.....	10
4.3 Document conventions and conventions	11
5 XDMR guidelines.....	11
5.1 General.....	11
5.2 Combined renderer-player functionality.....	11
5.2.1 Architecture and protocols	11
5.2.2 Media Format profiles	15
Annex A (informative) Evolution of DMR and DMP device classes into an XDMR.....	16
Figure 1 – Main components in the XDMR Device Class.....	10
Figure 2 – 2-box Pull usage model for an XDMR.....	10
Figure 3 – 2-box Push usage model for an XDMR.....	11
Figure 4 – 3-box usage model for an XDMR.....	11
Figure A.1 – DMP protocol layers.....	17
Figure A.2 – DMR protocol layers.....	17
Figure A.3 – Protocols layers for the XDMR.....	17

IECNORM.COM : Click to view the full PDF of IEC 62481-1-2:2017

INTERNATIONAL ELECTROTECHNICAL COMMISSION

—————

**DIGITAL LIVING NETWORK ALLIANCE (DLNA) HOME
NETWORKED DEVICE INTEROPERABILITY GUIDELINES**

**Part 1-2: Architecture and protocols –
Extended Digital Media Renderer**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62481-1-2 has been prepared under technical area 8: Multimedia home systems and applications for end-user network IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this International Standard is based on the following documents:

CDV	Report on voting
100/2736/CDV	100/2885/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 62481 series, published under the general title *Digital Living Network Alliance (DLNA) home networked device interoperability guidelines*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 62481-1-2:2017

INTRODUCTION

Consumers are acquiring, viewing, and managing an increasing amount of digital media (photos, music, and video) on devices in the consumer electronics (CE), mobile, and personal computer (PC) domains. As such, they want to conveniently enjoy the content, regardless of the source, across different devices and locations in the home. The digital home vision integrates the Internet, mobile, and broadcast networks through a seamless, interoperable network, which will provide a unique opportunity for manufacturers and consumers alike. In order to deliver on this vision, a common set of industry design guidelines is needed that allows vendors to participate in a growing marketplace, leading to more innovation, simplicity, and value for consumers. This document serves that purpose and provides vendors with the information needed to build interoperable networked platforms and devices for the digital home.

IECNORM.COM : Click to view the full PDF of IEC 62481-1-2:2017

DIGITAL LIVING NETWORK ALLIANCE (DLNA) HOME NETWORKED DEVICE INTEROPERABILITY GUIDELINES

Part 1-2: Architecture and protocols – Extended Digital Media Renderer

1 Scope

The DLNA Guidelines Parts 1 to 3 introduce a number of device classes to identify specific roles that connected endpoints implement in the network. Devices can act as content sources (e.g., Digital Media Servers, Push Controllers), and as content sinks (Digital Media Renderers or Digital Media Players).

Having two types of content sinks has been a useful strategy to accelerate the initial deployment phase. However, many of the modern receiver devices now include both types. Consequently, there is a need to define a receiver device that combines both types. This document addresses this issue and, specifically, it describes a device class for an Extended Digital Media Renderer (XDMR) and implementation guidelines for combining a Digital Media Renderer and a UPnP Media Server Control Point.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62481-1-1:2017, *Digital living network alliance (DLNA) Guidelines – Part 1-1: Architecture and protocols*

IEC 62481-2:2017, *Digital living network alliance (DLNA) Guidelines – Part 2: Media format profiles*

IEC 62481-3:2017, *Digital living network alliance (DLNA) Guidelines – Part 3: Link Protection*

IEC 62481-4:2017, *Digital living network alliance (DLNA) Guidelines – Part 4: DRM Interoperability Solutions*

ISO/IEC 29341-1, *Information Technology – UPnP Device Architecture – Part 1-1: UPnP Device Architecture Version 1.0*

ISO/IEC 29341-3-10, *Information Technology – UPnP Device Architecture – Part 3-10: Audio Video Device Control Protocol – Audio Video Transport Service*

ISO/IEC 29341-3-11, *Information Technology – UPnP Device Architecture – Part 3-11: Audio Video Device Control Protocol – Connection Manager Service*

ISO/IEC 29341-3-13, *Information Technology – UPnP Device Architecture – Part 3-13: Audio Video Device Control Protocol – Rendering Control Service*

3 Terms, definitions and conventions

For the purposes of this document, the terms and definitions given in IEC 62481-1-1:2017 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 General terms

3.1.1 comply conform

be in accordance with referenced requirements

Note 1 to entry: Where the reference includes both mandatory and optional requirements, only the mandatory elements are considered necessary for compliance.

Note 2 to entry: "Comply with" can be used interchangeably with "conform to" (includes the variations of complies, complying, compliant, compliance; conforms, conforming, conform, conformant).

Note 3 to entry: Optional requirements continue to be optional. Any variation from these expectations shall be specifically noted.

3.1.2 Extended Digital Media Renderer XDMMR

Digital Media Renderer (DMR) that also implements a Media Server Control Point (MSCP); this device class defines the combined implementation of a Digital Media Renderer and a Digital Media Player

Note 1 to entry: The guidelines established in this document define the requirements for implementing an Extended Digital Media Renderer (XDMMR) device class.

3.1.3 AVT AVTransport Service

UPnP service that provides network-based control for common transport operations such as play, stop, pause, next, previous, and seek

Note 1 to entry: The AVTransport Service specification is a standard UPnP DCP.

3.1.4 CDS ContentDirectory Service

UPnP service that provides network-based discovery of content

Note 1 to entry: The ContentDirectory Service specification is a standard UPnP Device Control Protocol.

3.1.5 CMS ConnectionManager Service

UPnP service that provides information about the supported transport protocols and media formats of a UPnP device

Note 1 to entry: The ConnectionManager Service specification is a standard UPnP Device Control Protocol.

3.1.6

DMP

Digital Media Player

DLNA Device Class having home network environmental characteristics with the role of finding content exposed by a DMS and rendering the content locally

3.1.7

DMR

Digital Media Renderer

DLNA Device Class having home network environmental characteristics, with the role of rendering content it receives after being setup by another network entity

3.1.8

DMS

Digital Media Server

DLNA Device Class having home network environmental characteristics, with the role of exposing and distributing content throughout the home

3.1.9

DNS

Domain Name System

protocol that enables hierarchical names for Internet domains and addresses

Note 1 to entry: The protocol includes the means to translate between numerical IP addresses and text host names.

3.1.10

MRCP

MediaRenderer Control Point

UPnP control point that issues actions to a DMR or and XDMS

3.1.11

MSCP

MediaServer Control Point

UPnP AV control point that issues actions to a DMS

3.1.12

RCS

RenderingControl Service

UPnP service that provides network-based control for the adjustment of rendering attributes such as volume, brightness, contrast, and mute

Note 1 to entry: The RenderingControl Service specification is a standard UPnP Device Control Protocol.

3.1.13

XDMS

Extended DMR

device class defined to combine the functionality of a Digital Media Renderer (DMR) and a Media Server Control Point (MSCP)

Note 1 to entry: This device class is equivalent to combining previous device classes known as a DMR and a DMP.

3.2 Conventions

In this document, a number of terms, conditions, mechanisms, sequences, parameters, events, states, or similar terms are printed with the first letter of each word in uppercase and the rest in lowercase (e.g., Move). Any lowercase uses of these words have the normal technical English meaning.

4 Networking architecture, device models and guideline conventions

4.1 DLNA home networking architecture

See Clause 4 in IEC 62481-1-1:2017 for a full description of the DLNA home networking architecture, which is augmented in this document as follows.

This document describes a device model referred to as an Extended Digital Media Renderer (XDMM) matching the following DLNA classification.


- An XDMM is a Device Class that belongs to the Home Network Device (HND) category.
- The XDMM Device Class unifies previous Device Classes known as Digital Media Renderer (DMR) and Digital Media Player (DMP). Consequently, an XDMM behaves as a Content Receiver for the following system usages: 2-box Pull, 2-box Push, and 3-box. These system usages are defined in 5.7 of IEC 62481-1-1:2017. See Annex A regarding the evolution of DMR and DMP device classes into XDMM.

The XDMM Device Class includes the following functionality.

- A UPnP AV MediaRenderer combined with a UPnP AV MediaServer control point. Sub-clause 5.2 specifies the corresponding implementation guidelines.
- A DNS Client that resolves domain names into IPv4 addresses as defined in IEC 62481-1-1:2017.
- Support for HTTP protocol messages to request and receive media resources from servers internal or external to the home network as defined in IEC 62481-1-1:2017.
- Support for the AVT:SetNextAVTransportURI action as defined in IEC 62481-1-1:2017.

Because an XDMM implements a UPnP AV MediaRenderer, any UPnP Control Point can send AVT, RCS, and CMS actions to the XDMM and transfer URIs (and HTTP URLs) for playback. Because an XDMM implements a UPnP AV MediaServer Control Point, an XDMM can send CDS actions to UPnP AV MediaServers. Using terminology defined in IEC 62481-1-1:2017, an XDMM integrates previous functionality from the DMR device class and from the DMP device class. Figure 1 shows the main components that characterize the XDMM device class.

Because an XDMM implements a DNS Client, the XDMM can process HTTP URLs that include textual domain names. The DNS Client is used to resolve domain names into IPv4 addresses. As defined in IEC 62481-1-1:2017, an XDMM is capable of using generic HTTP URLs that identify media resources located inside or outside the home network.

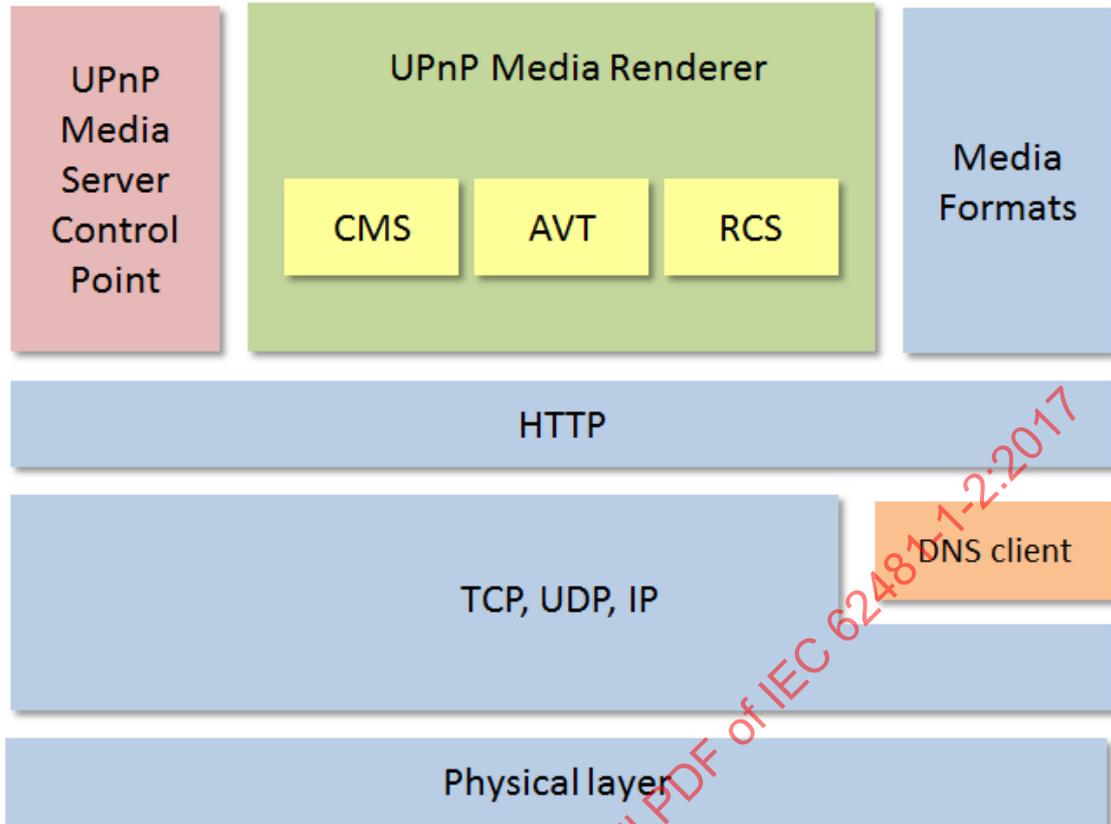


IEC

Figure 1 – Main components in the XDMR Device Class

4.2 DLNA system usages

Figure 2, Figure 3, and Figure 4 illustrate the XDMR Device Class interactions with other Device Classes according to the 2-box Pull, 2-box Push, and 3-box system usages respectively and as defined in 5.7 of IEC 62481-1-1:2017.

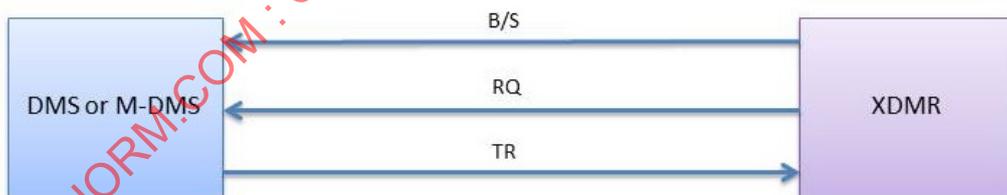

IEC

Key


B/S Invoke UPnP actions to browse and/or search for content.

RQ Request content for playback.

TR Transfer the content binary data to the XDMR.

SET Invoke UPnP actions to determine the XDMR supported formats and to set up a playback session.

Figure 2 – 2-box Pull usage model for an XDMR

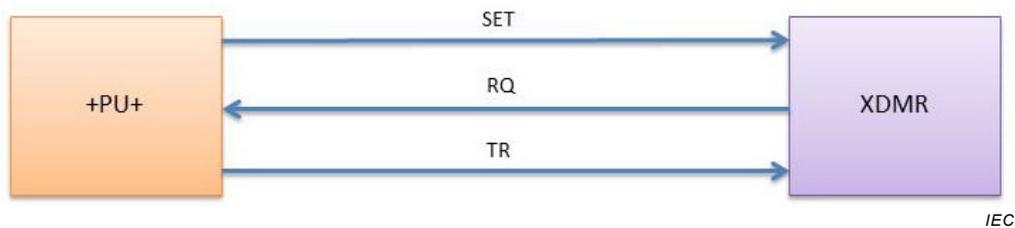**Key**


B/S Invoke UPnP actions to browse and/or search for content.

RQ Request content for playback.

TR Transfer the content binary data to the XDMR.

SET Invoke UPnP actions to determine the XDMR supported formats and to set up a playback session.

Figure 3 – 2-box Push usage model for an XDMR

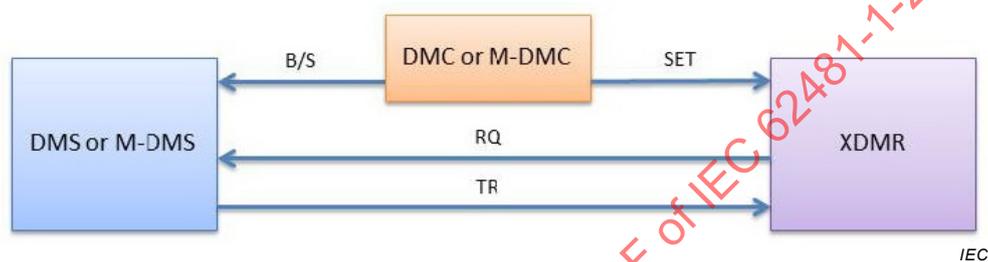**Key**

B/S Invoke UPnP actions to browse and/or search for content.

RQ Request content for playback.

TR Transfer the content binary data to the XDMR.

SET Invoke UPnP actions to determine the XDMR supported formats and to set up a playback session.

Figure 4 – 3-box usage model for an XDMR

4.3 Document conventions and conventions

See Clause 6 in IEC 62481-1-1:2017 for a full description of the DLNA document conventions.

5 XDMR guidelines

5.1 General

See 7.1 in IEC 62481-1-1:2017, for guideline and attribute table layout descriptions.

5.2 Combined renderer-player functionality

5.2.1 Architecture and protocols

5.2.1.1 Baseline rendering functionality

[GUIDELINE] An Extended Digital Media Renderer shall comply with all the guidelines for the DMR Device Class defined in IEC 62481-1-1:2017, IEC 62481-2:2017, IEC 62481-3:2017, and IEC 62481-4:2017.

[ATTRIBUTES]

M	R	XDMR	n/a	n/a	IEC 62481-1-1:2017 IEC 62481-2:2017 IEC 62481-3:2017 IEC 62481-4:2017	8ARO3	
---	---	------	-----	-----	--	-------	--

[COMMENT] An Extended DMR Device Class is simply a DMR as defined in IEC 62481-1-1:2017 that additionally implements an AV Media Server Control Point (MSCP). The MSCP component brings the ability to do browse/search operations to the DMR. The original DLNA Guidelines IEC 62481-1-1:2017 leave the MSCP component as an optional function for any DMR. This document simply clarifies the expected behaviour for DMR devices that implement the MSCP component.

5.2.1.2 Baseline Control Point functionality

[GUIDELINE] An Extended Digital Media Renderer shall comply with all the guidelines for a UPnP control point and UPnP AV MediaServer control point defined in IEC 62481-1-1:2017, IEC 62481-2:2017, IEC 62481-3:2017, and IEC 62481-4:2017.

[ATTRIBUTES]

M	R	XDMR	n/a	n/a	IEC 62481-1-1:2017 IEC 62481-2:2017 IEC 62481-3:2017 IEC 62481-4:2017	6B5AM	
---	---	------	-----	-----	--	-------	--

[COMMENT] An Extended DMR includes functionality for a DMR and for a Media Server Control Point (MSCP). The MSCP allows an XDMR to communicate with DMS or M-DMS devices using the Content Directory and Connection Manager Services.

5.2.1.3 Root device

[GUIDELINE] The root device in a device description document may describe an Extended Digital Media Renderer.

[ATTRIBUTES]

O	R	XDMR	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-1	IRWDP	
---	---	------	-----	-----	---------------------------------------	-------	--

[COMMENT] An Extended DMR is simply a more complex DMR. An implementation can declare a DMR or an XDMR as the root device in the device description document.

5.2.1.4 Embedded device

[GUIDELINE] An embedded device in a device description document may describe an Extended Digital Media Renderer.

[ATTRIBUTES]

O	R	XDMR	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-1	LRQAA	
---	---	------	-----	-----	---------------------------------------	-------	--

[COMMENT] An Extended DMR is simply a more complex DMR. An implementation can declare a DMR or an XDMR as one of the embedded devices in the device description document.

5.2.1.5 Identifier in device description document

[GUIDELINE] An XDMR shall advertise a DMR implementation using <dlina:X_DLNADOC> in the device description document with a value of DMR-1.50.

In addition, an XDMR shall use a second instance of the same element to advertise the implementation of the guidelines described in this document with a value of XDMR-1.50.

[ATTRIBUTES]

M	A	XDMR	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-1	EQ5D7	
---	---	------	-----	-----	---------------------------------------	-------	--

[COMMENT] An Extended DMR advertises the implementation of a DMR in the device description document. This is necessary for backward compatibility. Control Points access the device description document to determine essential device characteristics. In addition to advertising the DMR function, an Extended DMR advertises adherence to the XDMR guidelines. Hence, the XDMR includes the following XML fragment in its device description document:

```
<dlina:X_DLNADOC xmlns:dlina="urn:schemas-dlna-org:device-1-0">DMR-1.50</dlina:X_DLNADOC>
<dlina:X_DLNADOC xmlns:dlina="urn:schemas-dlna-org:device-1-0">XDMR-1.50</dlina:X_DLNADOC>
```

5.2.1.6 Value of protocolInfo for selected content

[GUIDELINE] An XDMR shall be able to play any content with a protocolInfo value matching one of the values listed in the CMS.SinkProtocolInfo instance state variable.

[ATTRIBUTES]

M	A	XDMR	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-3-11	JGNTH	
---	---	------	-----	-----	--	-------	--

[COMMENT] An Extended DMR obtains content for playback using two methods. In one method, the XDMR receives an action request to play content from a UPnP Control Point. In the second method, the XDMR can browse or search for external content using the UPnP AV MediaServer Control Point component. This guideline indicates that regardless of the method used to obtain content, the CMS.SinkProtocolInfo state variable describes the complete list of playable protocolInfo values in an XDMR.

5.2.1.7 CMS state variables

[GUIDELINE] The XDMM shall describe, expose, and update the CMS instance state variables as a result of interactions in either mode of operation:

- the state variables are updated if the XDMM is externally controlled by a UPnP control point;
- the state variables are updated if the XDMM uses its UPnP AV MediaServer control point to browse/search for content and then acquire the content directly from a UPnP AV MediaServer.

[ATTRIBUTES]

M	A	XDMM	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-3-11	LL5G6	
---	---	------	-----	-----	--	-------	--

5.2.1.8 AVT state variables

[GUIDELINE] The XDMM shall describe, expose, and update the AVT instance state variables as a result of interactions in either mode of operation:

- the state variables are updated if the XDMM is externally controlled by a UPnP control point;
- the state variables are updated if the XDMM uses its UPnP AV MediaServer control point to browse/search for content and then acquire the content directly from a UPnP AV MediaServer.

[ATTRIBUTES]

M	A	XDMM	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-3-10	3NKWF	
---	---	------	-----	-----	--	-------	--

5.2.1.9 RCS state variables

[GUIDELINE] The XDMM shall describe, expose, and update the RCS instance state variables as a result of interactions in either mode of operation:

- the state variables are updated if the XDMM is externally controlled by a UPnP control point;
- the state variables are updated if the XDMM uses its UPnP AV MediaServer control point to browse/search for content and then acquire the content directly from a UPnP AV MediaServer.

[ATTRIBUTES]

M	A	XDMM	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-3-13	7IR4T	
---	---	------	-----	-----	--	-------	--

5.2.1.10 Current track URI

[GUIDELINE] As a corollary of Guideline 5.2.1.8, the AVT.CurrentTrackURI instance state variable shall describe the URI of the track currently playing in an XDMM. The XDMM obtains the URI from a UPnP AV MediaRenderer control point or from a UPnP AV MediaServer.

[ATTRIBUTES]

M	A	XDMR	n/a	n/a	IEC 62481-1-1:2017 ISO/IEC 29341-3-10	FOQQM	
---	---	------	-----	-----	--	-------	--

[COMMENT]

The AVT.CurrentTrackURI state variable always includes the URI of the track that is currently playing. This guideline simply clarifies that, for an XDMR, the URI could have been obtained from interactions with a UPnP AV MediaRenderer Control Point or from interactions with a UPnP AV MediaServer.

If an XDMR interacts with a UPnP AV MediaRenderer control point, the track URI is obtained from action arguments included in AVT:SetAVTransportURI and AVT:SetNextAVTransportURI. The track URI can also be obtained from entries in media collections. If an XDMR interacts with a DMS or M-DMS, the Media Server control point (MSCP) component in an XDMR makes CDS:Browse or CDS:Search requests against the server. The track URI is obtained from <res> elements included in the response to CDS:Browse or CDS:Search actions.

5.2.2 Media Format profiles

[GUIDELINE] An XDMR shall select content for playback with a Media Format Profile value that matches one of the values included in the CMS.SinkProtocolInfo instance state variable.

[ATTRIBUTES]

M	R	XDMR	n/a	n/a	IEC 62481-1-1:2017 IEC 62481-2:2017 IEC 62481-3:2017 ISO/IEC 29341-3-11	LANIR	
---	---	------	-----	-----	--	-------	--

[COMMENT] An Extended DMR obtains content for playback using two methods. In one method, the XDMR receives an action request to play content from a UPnP Control Point. In the second method, the XDMR can browse or search for external content using the UPnP AV MediaServer Control Point component. This guideline indicates that regardless of the method used to obtain content, the CMS.SinkProtocolInfo state variable describes the complete list of playable Media Format Profiles in an XDMR.

This guideline applies to all Media Format Profiles including those defined for Link Protection.