

INTERNATIONAL STANDARD



Multimedia systems and equipment – Multimedia e-publishing and e-book technologies – Texture map for auditory presentation of printed texts

IECNORM.COM : Click to view the full PDF of IEC 62665:2015



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full PDF © IEC 60665:2015

INTERNATIONAL STANDARD



Multimedia systems and equipment – Multimedia e-publishing and e-book technologies – Texture map for auditory presentation of printed texts

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160.60; 35.240.20; 35.240.30

ISBN 978-2-8322-3043-5

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
INTRODUCTION	6
1 Scope	7
2 Terms and definitions	7
3 Texture map	7
3.1 Names of elements	7
3.2 Size and data volume	9
3.3 Encoding scheme of a texture map from texts	9
3.3.1 General	9
3.3.2 Processing by SpeechioEncode function	11
3.3.3 Processing by SpeechioSymbol function	12
3.4 Decoding scheme of a texture map to texts	13
3.5 Example of use of the functions	15
4 Printing of texture map image	16
4.1 General	16
4.2 Size of image	16
4.3 Position of the texture map and margin on paper	16
Annex A (informative) Input processing (Japanese texts)	19
A.1 General	19
A.2 Removal of control codes for text	19
A.3 Specification of particular pronunciation of Kanji	19
A.4 Specification of voice properties	19
Annex B (informative) Input processing (English texts)	22
Annex C (informative) Notch, auditory presentation equipment, and etc.	23
C.1 Notch to designate a texture map position	23
C.2 Printing paper	23
C.3 Printing and printer	23
C.4 Copy	24
C.5 Extension to a texture map	24
C.6 Examples of auditory presentation equipment	25
Annex D (informative) Example of Reed Solomon error correction encoding using Galois field GF(2048)	27
Bibliography	42
Figure 1 – Shape and elements of a texture map	8
Figure 2 – Process of generating texture map from texts	10
Figure 3 – Process of text-decoding from texture map	14
Figure 4 – Positioning of texture map and margin in paper	17
Figure 5 – Example of texture map arrangement	18
Figure C.1 – Notch to designate a texture map position	23
Figure C.2 – A texture map with broken alignment lines on two sides	24
Figure C.3 – A texture map with broken alignment lines on four sides	24
Figure C.4 – An example of auditory presentation equipment: Speechio™	25
Figure C.5 – Another example of auditory presentation equipment: Speechio Plus™	26

Table 1 – Sizes and data volume of texture maps 9

Table 2 – Size of printed texture map..... 16

Table A.1 – Control codes for speech 20

Table A.2 – Characters (character strings) for identifying the end of a sentence 21

Table B.1 – Characters (character strings) for identifying the end of a sentence 22

Table B.2 – Abbreviation or acronym with "."..... 22

IECNORM.COM : Click to view the full PDF of IEC 62665:2015

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MULTIMEDIA SYSTEMS AND EQUIPMENT –
MULTIMEDIA E-PUBLISHING AND E-BOOK TECHNOLOGIES –
TEXTURE MAP FOR AUDITORY PRESENTATION OF PRINTED TEXTS****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

International Standard IEC 62665 has been prepared by technical area 10: Multimedia e-publishing and e-book technologies, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This second edition cancels and replaces the first edition published in 2012 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition.

- a) Two different control codes are described by the different terms: "control codes for text" and "control codes for speech".
- b) Pack processing and LZSS processing are shown in their additional subclauses.
- c) An example of the header file "Speechio.h" is added.
- d) An example of error correction encoding is shown in additional Annex D.

The text of this standard is based on the following documents:

CDV	Report on voting
100/2431/CDV	100/2507/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

Information interchange via printed documents between blind or visually impaired people has been carried out by using Braille. However, in order to be able to read Braille, particular tuition is required. Learning Braille is very difficult for aged as well as visually non-impaired people.

Printed documents with texts and text-encoded texture maps can be interchanged by ordinary circulation or publication mechanisms. They are readable as ordinary printed materials and comprehensible by blind or visually impaired people with the support of decoding and auditory presentation equipment.

Today, interchanging of printed documents has become wide-spread and international. The text-encoding scheme to generate a texture map should therefore be standardized at an international level.

Patent

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of patents as listed below:

PATENT No. 3499220 (Japan)
PATENT No. 4439756 (Japan)
PATENT No. 4744745 (Japan)
PATENT No. 4772631 (Japan)

IEC takes no position concerning the evidence, validity and scope of these patent rights.

The holder of these patent rights has assured the IEC that he/she is willing to negotiate licences either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of these patent rights is registered with IEC. Information may be obtained from:

Original Design Inc.
4-16-2 Ikebukuro, Toshima-ku
Tokyo 171-0014 Japan

Kosaido Co., Ltd.
4-6-12 Shiba, Minato-ku
Tokyo 108-8378 Japan

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

ISO (www.iso.org/patents) and IEC (<http://patents.iec.ch>) maintain on-line data bases of patents relevant to their standards. Users are encouraged to consult the data bases for the most up to date information concerning patents.

MULTIMEDIA SYSTEMS AND EQUIPMENT – MULTIMEDIA E-PUBLISHING AND E-BOOK TECHNOLOGIES – TEXTURE MAP FOR AUDITORY PRESENTATION OF PRINTED TEXTS

1 Scope

In order to generate a texture map for auditory presentation of printed text information, this International Standard specifies

- a text encoding scheme to generate a texture map,
- a physical shape and dimension of the texture map for printing,
- additional features for texture map printing,
- texture map decoding and an auditory presentation of decoded texts

These specifications enable the interchange of documents and publications between visually impaired and non-impaired people.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

texture map

two dimensional cell patterns which include alignment lines and a data matrix which is generated from text data compression and error correction encoding

2.2


auditory presentation equipment

equipment including an engine to carry out a text-to-speech

3 Texture map

3.1 Names of elements

A shape and names of a texture map are indicated in Figure 1. The shape represents the M size in Table 1.

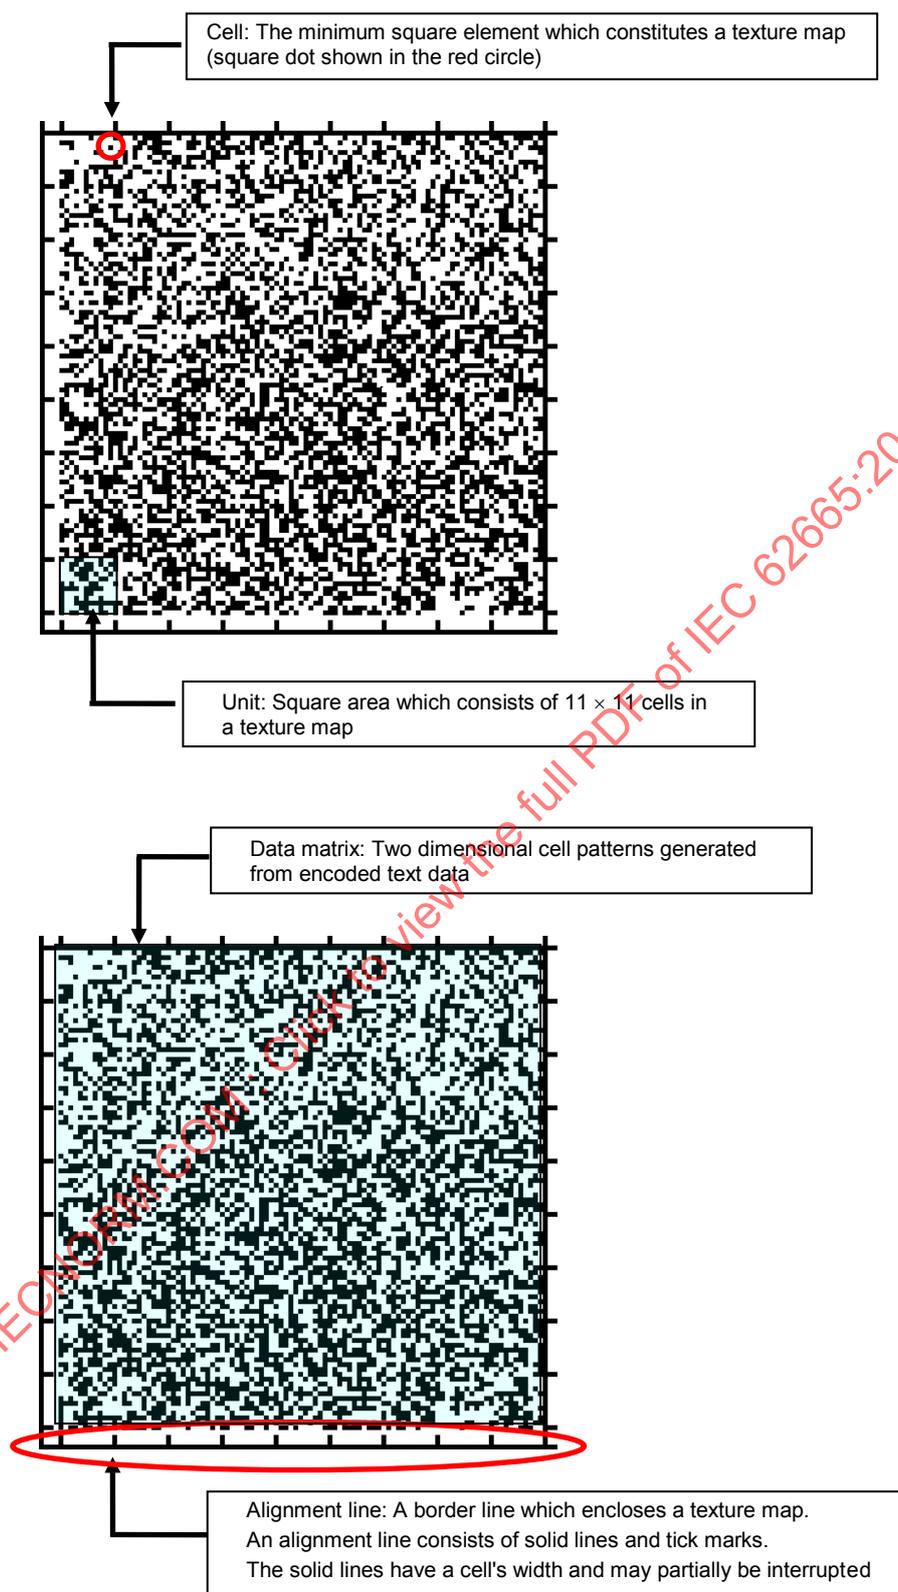

IEC

Figure 1 – Shape and elements of a texture map

3.2 Size and data volume

Texture maps have four sizes: XS, S, M and L. The corresponding data volumes are shown in Table 1.

Table 1 – Sizes and data volume of texture maps

Size	Number of cells	Number of units	Dimensions at printing mm	Error correction level	Data volume (Double byte characters)
XS	40 × 40	3 × 3	6,8 × 6,8	strong	41
				medium	48
				weak	51
S	73 × 73	6 × 6	12,4 × 12,4	strong	250
				medium	298
				weak	329
M	106 × 106	9 × 9	17,9 × 17,9	strong	651
				medium	768
				weak	840
L	117 × 117	10 × 10	19,8 × 19,8	strong	793
				medium	921
				weak	1 027

NOTE 1 Number of cells: Cells including alignment line.

NOTE 2 Dimensions at printing: Dimensions of a BMP (bitmap) image created by the SpeechioSymbol¹ function (see 3.3.2.2) at printing with 600 dpi resolution.

NOTE 3 Error correction: One of the 3 levels of error correction: strong, medium and weak, is specified by the SpeechioEncode function at encoding texts to a texture map.

NOTE 4 Data volume: The values in this table depend on a compression of text data.


3.3 Encoding scheme of a texture map from texts

3.3.1 General

The process of generating a texture map from texts is shown in Figure 2. The SpeechioEncode function encodes input texts to create cell data that are stored in a buffer called bit string. Then, the SpeechioSymbol function processes the buffered cell data to generate image data of a texture map.

¹ Speechio™ is the trade mark of a product supplied by KOSAIDO Co., Ltd.

This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

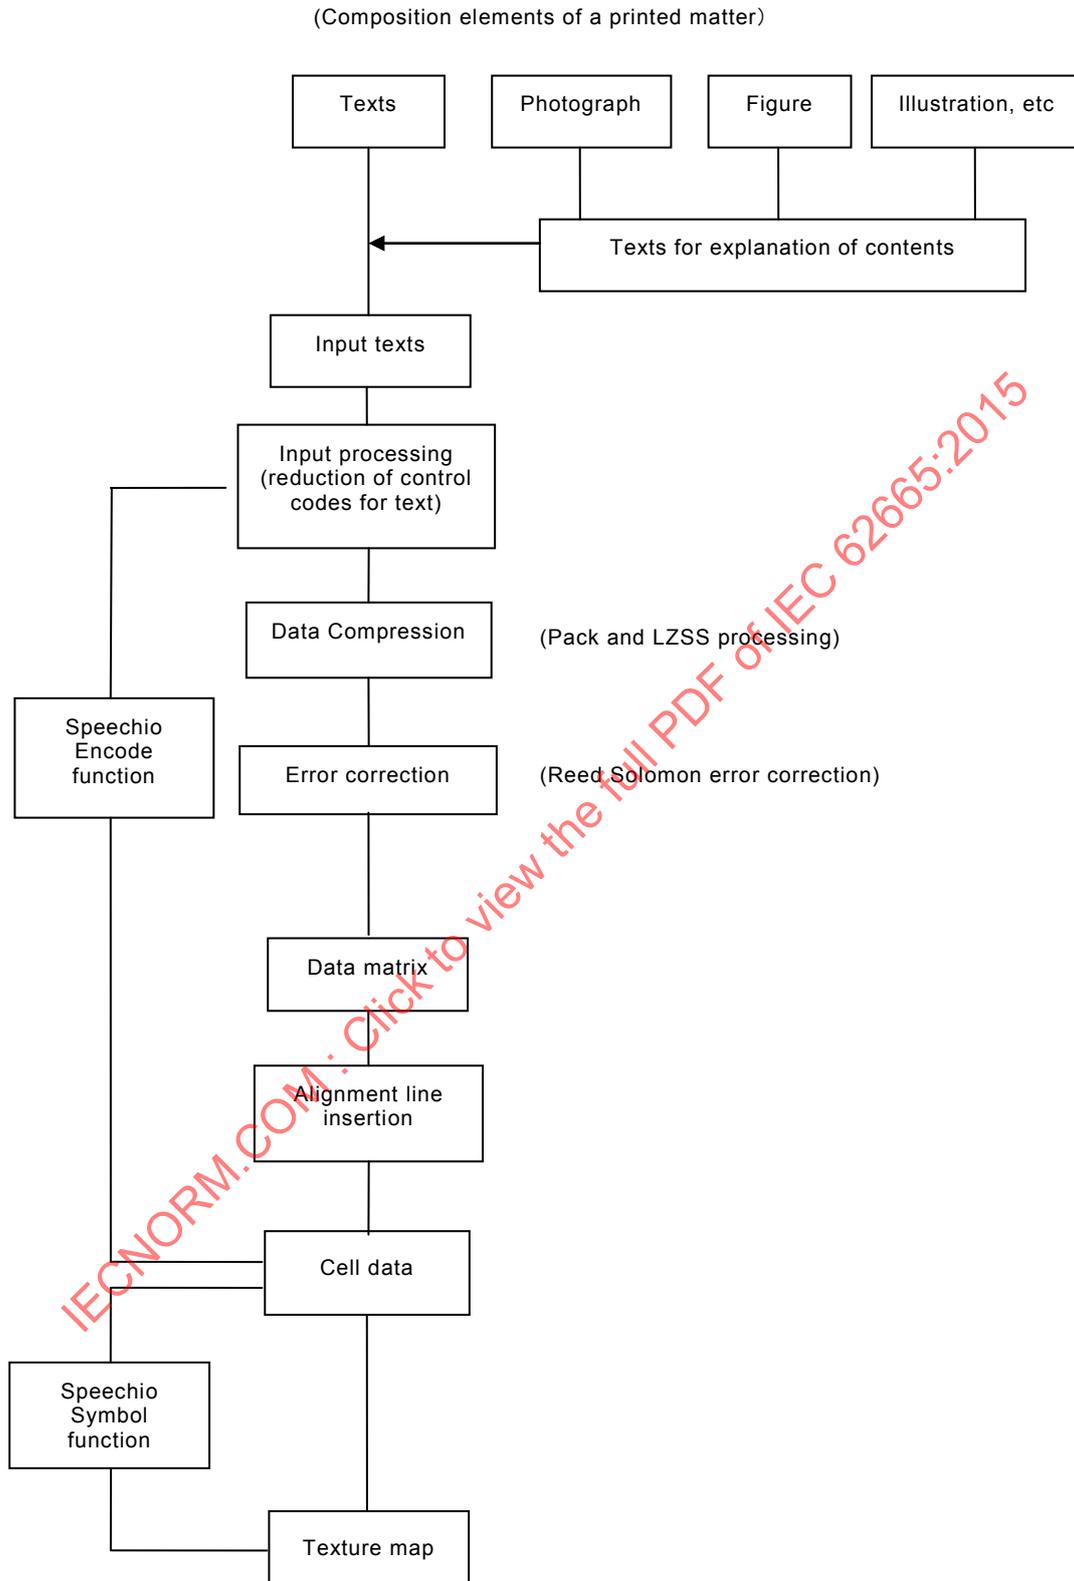

IEC

Figure 2 – Process of generating texture map from texts

3.3.2 Processing by SpeechioEncode function

3.3.2.1 Input processing

Input texts represented by Shift JIS code (JIS X 0208) are processed to remove the control codes for text: 0x01 through 0x08, 0x0b, 0x0c, 0x0e through 0x1f and 0x7f (hexadecimal representation). Input text data are delimited by 0x00.

Some control codes for speech are added in the input processing. See Annex A.

3.3.2.2 Data compression

The input processed text data are compressed by pack and LZSS processing, as follows.

a) Pack processing

2-byte codes of Katakana and other characters are converted to the corresponding 1-byte codes. The sequence of the codes converted from 2-byte Katakana or other characters is identified by the Katakana mode identifier SO(0x0e) or default mode identifier SUB(0x1a) respectively, at the beginning of the sequence. The sequence of the 1-byte code of Hankaku characters is identified by the Hankaku mode identifier SI(0x0f) at the beginning of the sequence.

b) LZSS processing

The LZSS algorithm with slide dictionary of 1 024-byte length is employed. Character codes are processed byte by byte and stored in the output buffer from the MSB of the first byte. When the last byte of the output buffer has unused bits, they will be filled with “0”.

The position and length of matched characters are indicated by the preceding 2 bits “10”, and 10 bits unsigned integer of the offset from the beginning of slide dictionary and 3 bits unsigned integer of the actual length minus 2.

3.3.2.3 Error correction

The Reed Solomon error correction using Galois field GF(2 048) is employed. An example of the error correction encoding is shown in Annex D.

3.3.2.4 Data matrix

The error corrected data are allocated into units consists of 11 × 11 cells to configure a data matrix.

3.3.2.5 Alignment line insertion

Alignment lines are inserted to the data matrix to create cell data, which show the values of cells (“0” (0x30) for white cell, “1” (0x31) for black cell) from the top left to the bottom right of a texture map. The cell data are stored in a buffer called bit string.

3.3.2.6 SpeechioEncode function

The SpeechioEncode function is shown below.

SpeechioEncode

```
short __stdcall SpeechioEncode(  
    char data_type[],  
    char cell_type[],  
    char recover_level[],  
    char copyright[],  
    short data_size,
```

```

    unsigned char data_code[],
    char path_name[],
    unsigned char bit_string[]
);

```

Functionarity

Encoding of input texts

Argument value

```

data_type
    Type of text data
    ="T" (Japanese text, shift-JIS), "E" (English text, ascii)
cell_type
    Size of texture map
    ="s" (XS) /="S" (S) /="m" (M) /="M" (L)
recover_level
    Strength of error correction
    ="S" (strong) /="N" (medium) /="P" (weak)
    NOTE "N"(medium) is recommended for ordinary printing quality of a texture map. For poor
    printing quality, "S"(strong) is required.
data_size
    Byte number of input data
data_code
    Input data
bit_string
    Buffer for encoded data
    NOTE The area for the buffer has to be reserved for the calling side.

```

Returned value

```

>0 Normal end: encode data put away to bit_string
=0 Error: failure of encoding
<0 Data volume over: =(byte number of over flow) ×-1)

```

3.3.3 Processing by SpeechioSymbol function

3.3.3.1 Generation of bitmap image

The cell data stored in a buffer called bit string are processed to create a texture map where a cell is configured with 4 × 4 pixels.

3.3.3.2 SpeechioSymbol function

The SpeechioSymbol function is shown below.

SpeechioSymbol

```

short __stdcall SpeechioSymbol(
    short col,
    short row,
    unsigned char symbol_data[]
);

```

Functionality

Generating (symbolizing) a texture map from encoded data.

Argument value

col
Number of cells for horizontal symbol
=40 (XS) /=73 (S) /=106 (M) /=117 (L)
Row
Number of cells for vertical symbol
=40 (XS) /=73 (S) /=106 (M) /=117 (L)
symbol_data
Designated bit_string generated by SpeechioEncode function

Returned value


=0 Normal end
<0 Error

3.4 Decoding scheme of a texture map to texts

The process of generating texts from a texture map is shown in Figure 3.

IECNORM.COM : Click to view the full PDF of IEC 62665:2015

(Printed matter with texture map)

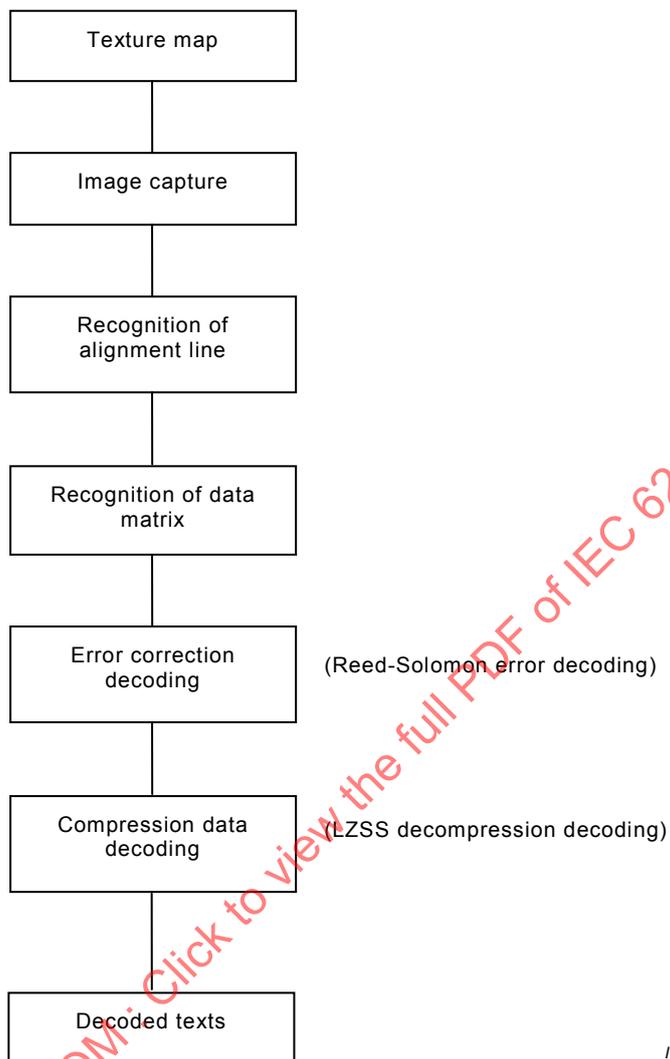

IEC

Figure 3 – Process of text-decoding from texture map

3.5 Example of use of the functions

As an example of use of SpeechioEncode and SpeechioSymbol functions, Windows library "Speechio.dll" with the API functions is shown. The Speechio.dll (200 KB) can be downloaded at http://www.y-adagio.com/public/committees/iec_tc100_aggs/data/IEC62665/Speechio.dll

```

/*****
 *
 * Example of use of SpeechioEncode and SpeechioSymbol functions
 * Link to Speechio.lib file. "Speechio.dll" is allocated to a
 * given/transmitted holder (system holder or program holder)
 *
 *****/
#include <stdio.h>
#include <string.h>
#include "Speechio.h"/* declaration of function prototype, header of
definitional
SP_MAX_BIT_SIZE */
int main(void){
unsigned char text[] = " example of generated texture map";
/* input text data */
unsigned char bit_str[SP_MAX_BIT_SIZE];/* bit_string buffer */
short rc;/*variables of returned value of function*/

/* encoding process*/
rc = SpeechioEncode( "T", "m", "N", "", (short)strlen(text), text, "",
bit_str);
if(rc <= 0){
if(rc == 0)
printf( "failure of encoding process\n");
else if(rc < 0)
printf( "%hd byte over\n", -rc);
return 1;
}

/* process of generating texture map image */
rc = SpeechioSymbol(106, 106, bit_str);
if(rc < 0){
printf("failure of image generating process\n");
return 1;
}

printf("texture map image is transferred to clipboard\n");

return 0;
}

```

Example of the description of header file "Speechio.h" is shown below:

```

/*****
 * Speechio.h
 *****/
#define MAX_DATA_SIZE 4096/* max length of data_code */
#define MAX_BIT_SIZE 19600/* max length of bit_string */

short __stdcall SpeechioEncode(
char data_type[],
char cell_type[],
char recover_level[],
char copyright[],

```

```

short data_size,
unsigned char data_code[],
char path_name[],
unsigned char bit_string[]
);

short __stdcall SpeechioSymbol(
short col,
short row,
unsigned char symbol_data[]
);

/*
-----
SpeechioEncode
    Encodes input texts to create cell data.
SpeechioSymbol
    Creates bit image of a texture map and forward it to clipboard.
-----
*/

```

4 Printing of texture map image

4.1 General

It is necessary to print a texture map at an appropriate position with a correct size on paper, because an auditory presentation equipment reads the texture map at a fixed position.

4.2 Size of image

Cells are composed of 4 × 4 pixels of the texture map BMP (bitmap) image. An auditory presentation equipment is designed to read a texture map printed on paper with a 600 dpi resolution. The image size of the texture map printed with a 600 dpi on paper is shown in Table 2.

Table 2 – Size of printed texture map

Size	Number of cell	Size when converted to 600 dpi mm
XS	40 × 40	40 × 4 × 25,4 / 600 = 6,77
S	73 × 73	73 × 4 × 25,4 / 600 = 12,36
M	106 × 106	106 × 4 × 25,4 / 600 = 17,95
L	117 × 117	117 × 4 × 25,4 / 600 = 19,81

In case of a higher image resolution, the size of printing of the texture map image shall be the same as shown in Table 2.


4.3 Position of the texture map and margin on paper

The texture map shall be printed in an appropriate position. When using a camera scanner as shown in Figure C.5, the position is less critical.

The texture map is normally positioned at the bottom right. Regardless of the size of the texture map, the centre position shall be 25 mm ± 0,5 mm from the right edge and bottom edge of the paper. Overlap with another character or another picture should be avoided. To recognize the texture map the white margin surrounding it should be more than 4 mm, as shown in Figure 4.

If there is a reason for not wanting to position the texture map at the bottom right, it is possible to position it at the bottom left or top left or top right. The auditory presentation equipment can recognize a texture map orientation automatically. A right angle rotation of paper is not a problem, but the position of paper is important in order to insert the auditory presentation equipment properly, as shown in Figure 5.


Dimensions in millimetres

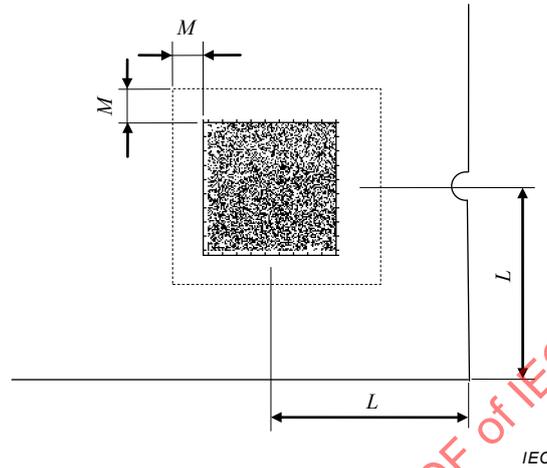

The margin surrounding the texture map shall be not less than 4 mm.

The centre position of the texture map shall be arranged at $25 \text{ mm} \pm 0,5 \text{ mm}$ from the edge of the paper.

Figure 4 – Positioning of texture map and margin in paper

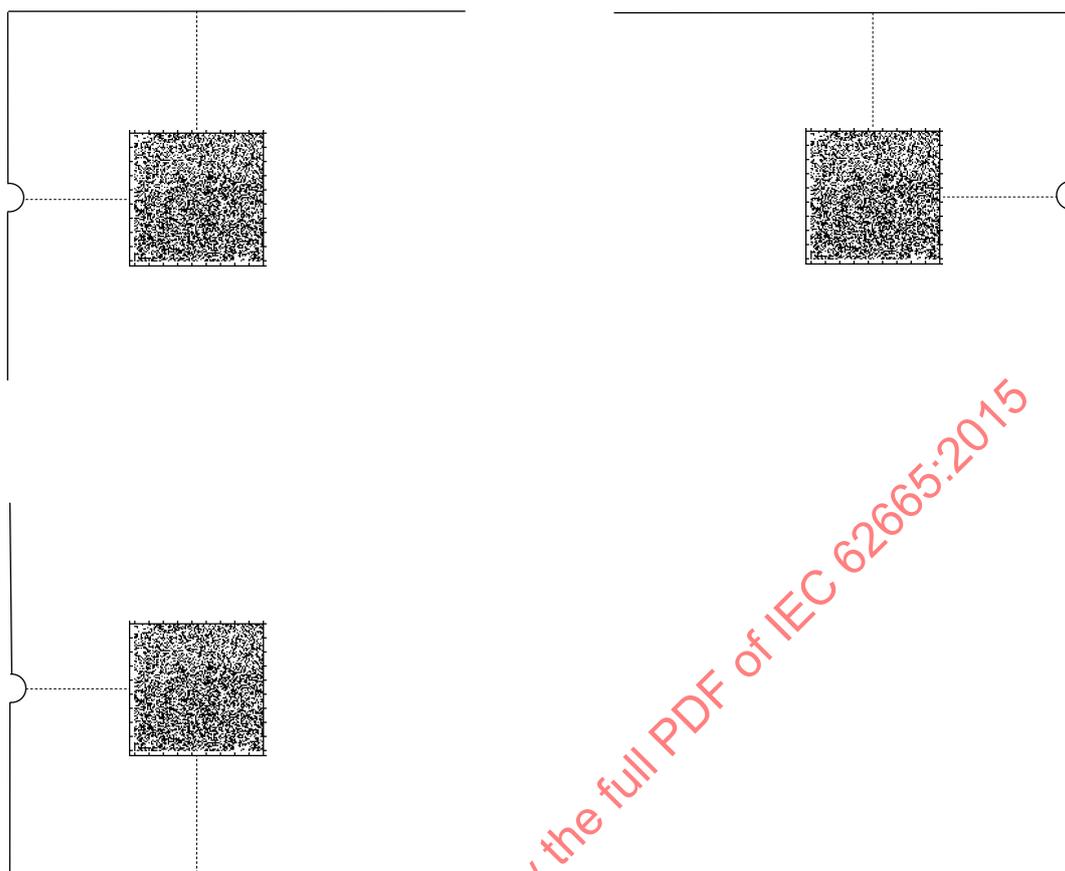

IEC

The centre position of the texture map shall be arranged at $25\text{ mm} \pm 0,5\text{ mm}$ from the edge of the paper.
Right angle rotation of the texture map is automatically detected by the auditory presentation equipment.

Figure 5 – Example of texture map arrangement

IECNORM.COM : Click to view the full PDF of IEC 62665:2015

Annex A (informative)

Input processing (Japanese texts)

A.1 General

The auditory presentation equipment synthesizes voice from text data encoded in a texture map. If the text data contain control codes for text, the text-to-speech cannot correctly be worked. Those control codes for text have to be removed in the input processing.

For the text-to-speech some voice properties (male/female, etc.) can be specified and a particular pronunciation of Kanji can be specified by adding control codes for speech in the input processing.

A.2 Removal of control codes for text

For appropriate text-to-speech working, the control codes for text: 0x01 through 0x08, 0x0b, 0x0c, 0x0e through 0x1f and 0x7f (hexadecimal representation of Shift JIS code, JIS X 0208) have to be removed. In the auditory presentation equipment, tab (0x09) is converted to Toten (end of sentence in Japanese) and line feed (0x0a) is converted to 0x0d0a and to Kuten (pause in sentence in Japanese).

Other special characters that cannot correspond to an appropriate text-to-speech should be removed from input texts.

A.3 Specification of particular pronunciation of Kanji

When input texts include Kanji characters that should be converted to voice with a particular pronunciation by the auditory presentation equipment, the pronunciation of Kanji(s) can be specified by succeeding a colon and the Hankaku Katakana string representing the pronunciation. The sequence of Kanji(s), a colon and the Hankaku Katakana string shall be enclosed in a parenthesis, as shown below.

(Kanji(s):Hankaku Katakana string representing the Kanji(s) pronunciation)

Example

((金田一君:カネタハジメクン))

When input texts include alpha-numeric characters that should be converted to voice with a particular pronunciation by the auditory presentation equipment, the alpha-numeric characters shall be replaced with corresponding Kanji(s) or Zenkaku Katakana(s). Then the pronunciation shall be specified by succeeding a colon and the Hankaku Katakana string representing the pronunciation. The sequence of Kanji(s) or Zenkaku Katakana(s), a colon and the Hankaku Katakana string shall be enclosed in parentheses.

A.4 Specification of voice properties

In the auditory presentation equipment, some voice properties can be specified by adding control codes for speech just preceding a sentence. The control code for speech can be specified in each sentence for controlling its voice properties. It is possible, for example, that the first sentence is spoken in a male voice and the second sentence in a female voice.

The control codes for speech are shown in Table A.1.

Table A.1 – Control codes for speech

Voice property	Control code	Value	Coding of control characters
Voice quality	^V0	male voice(default)	^V=0x16
	^V1	female voice	
Pitch	^H0	Level 0 (minimum)	^H=0x08
	^H1	Level 1	
	^H2	Level 2	
	^H3	Level 3 (default male voice)	
	^H4	Level 4 (default female voice)	
	^H5	Level 5	
	^H6	Level 6	
	^H7	Level 7 (maximum)	
Loudness	^P0	Level 0 (minimum)	^P=0x10
	^P1	Level 1	
	^P2	Level 2	
	^P3	Level 3	
	^P4	Level 4 (default)	
	^P5	Level 5	
	^P6	Level 6	
	^P7	Level 7 (maximum)	
Control code consists of control characters and a succeeding numerical value.			

To the sentence without control codes at its beginning, control codes of the preceding sentence apply. Examples of the control codes for speech are shown below:

^V0^H3^P4 (male voice, pitch level 3, loudness level 4)

^V1^H4 (female voice, pitch level 4)

^V0^H3 (male voice, pitch level 3)

If no control code is specified, the default values of voice properties in Table A.1 apply. It is the case equivalent to the specification of voice properties with control codes ^V0^H3^P4 (male voice, pitch level 3, loudness level 4).

Identifying a page boundary, input texts in a page are encoded to a texture map. If a sentence contains a page boundary, it is dealt with on the next page.

The auditory presentation equipment identifies the end of a sentence by the characters or character strings shown in Table A.2 and separates each sentence from input texts. After the end of sentence, NULL (0x00) is inserted as a delimiter.

Table A.2 – Characters (character strings) for identifying the end of a sentence

。)	。)	?)	?)	!)	!)	。
。]	。]	?]	?]	!]	!]	。
。]	。]	?]	?]	!]	!]	?
。 }	。 }	? }	?}	! }	!}	?
。 >	。 >	? >	?>	! >	!>	!
。 》	。 》	? 》	?》	! 》	!》	!
。]	。]	?]	?]	!]	!]	CR+LF
。 』	。 』	? 』	?』	! 』	!』	
。 】	。 】	? 】	?】	! 】	!】	
。)	。)	?)	?)	!)	!)	
。]	。]	?]	?]	!]	!]	
。 }	。 }	? }	?}	! }	!}	
。]	。]	?]	?]	!]	!]	
。 ”	。 ”	? ”	?”	! ”	!”	
。 ’	。 ’	? ’	?’	! ’	!’	

In tables, descriptions in a cell are dealt with as a sentence.

IECNORM.COM : Click to view the full PDF of IEC 62665:2015

Annex B (informative)

Input processing (English texts)

Identifying a page boundary, input texts in a page are encoded to a texture map. If a sentence contains a page boundary, it is dealt with on the next page.

The end of sentence is identified by the character strings shown in Table B.1. In case of a duplication of the character strings, the last character string specifies the end of sentence. However, an abbreviation or acronym with "." (see Table B.2) does not identify the end of sentence. After the end of sentence, NULL (0x00) is inserted as a delimiter.

Table B.1 – Characters (character strings) for identifying the end of a sentence

"," + SP (0x2e + 0x20)	":" + SP (0x3a + 0x20)
"!"+ SP (0x21 + 0x20)	";" + SP (0x3b + 0x20)
"?" + SP (0x3f + 0x20)	CR + LF (0x0d + 0x0a)

Table B.2 – Abbreviation or acronym with "."

Mr.	Ans.	Dec.
Mrs.	Jan.	Mt.
Ms.	Feb.	LTD.
Dr.	Mar.	Ltd.
Jr.	Apr.	INC.
A.D.	May.	Inc.
B.C.	Jun.	Co.
a.m.	Jul.	vs.
p.m.	Aug.	VS.
U.S.	Sep.	St.
U.S.A.	Oct.	Vol.
N.Y.	Nov.	Aus.

In tables, descriptions in a cell are dealt with as a sentence.

Annex C (informative)

Notch, auditory presentation equipment, and etc.

C.1 Notch to designate a texture map position

It is recommended to make a notch in an edge of paper to designate a texture map position for blind people as shown in Figure C.1. The notch is cut out by using ordinary punching tools for paper binding.

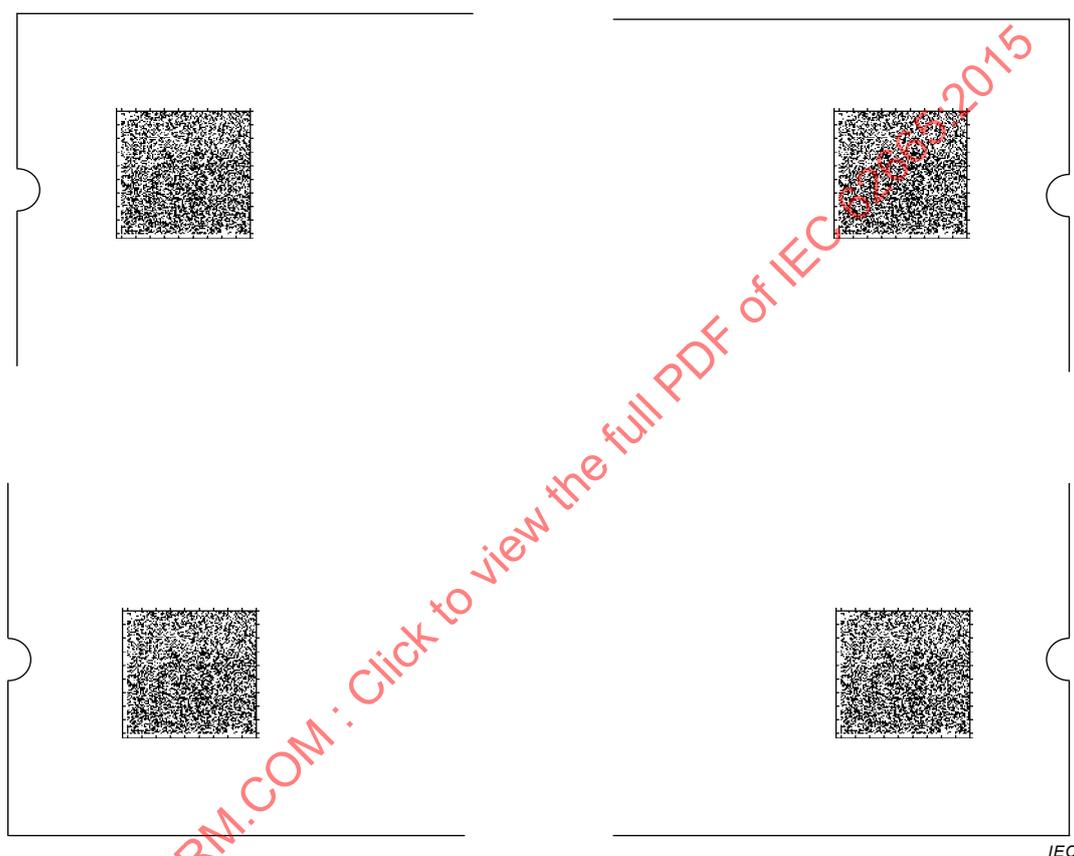


Figure C.1 – Notch to designate a texture map position

C.2 Printing paper

An appropriate paper for printing a texture map is specified in IEC 62875 to maintain printing quality.

C.3 Printing and printer

A texture map shall be printed with a resolution of 600 dpi or more.

The printing quality can be satisfied by ordinary offset printers or electrographic laser printers. Some inkjet printers may have a possibility to produce such a poor image of texture map as cannot be decoded correctly, due to a blot of ink. It can be expected, however, that an inkjet printer with a higher resolution will soon be developed.

C.4 Copy

Occasionally, a copied texture map cannot be decoded correctly due to a degradation of image quality. It is expected, however, that a copier with a higher resolution will soon be developed.

C.5 Extension to a texture map

In Figure 1, a texture map has solid alignment lines on four sides. Regarding alignment lines, the following extensions can be introduced.

- a) A texture map has broken alignment lines on two sides as shown in Figure C.2.

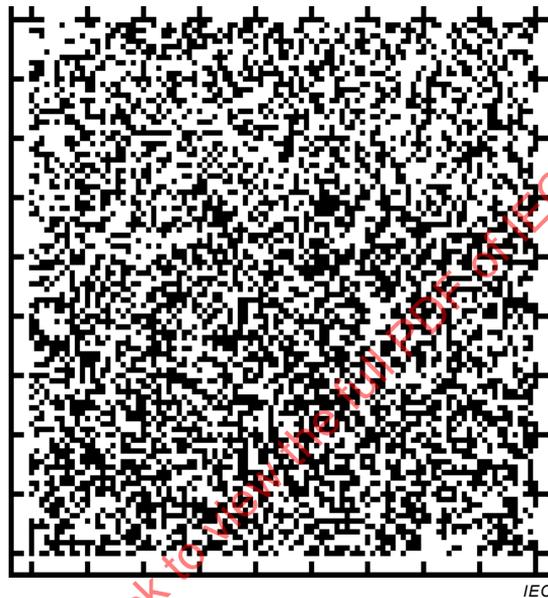


Figure C.2 – A texture map with broken alignment lines on two sides

- b) A texture map has a broken line on four sides, as shown in Figure C.3.

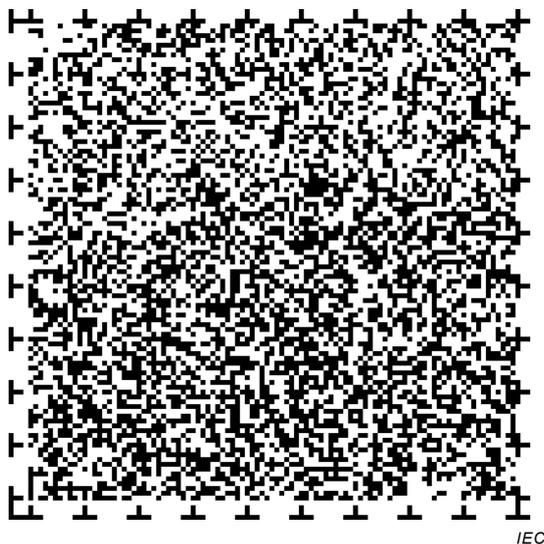


Figure C.3 – A texture map with broken alignment lines on four sides

C.6 Examples of auditory presentation equipment

An example of auditory presentation equipment is shown in Figure C.4. A paper with a printed texture map is inserted into the gap of the equipment and the texture map is captured by a CCD camera in the equipment. The data is converted into a voice using the text-to-speech functionality within the equipment.



Figure C.4a – Front view



Figure C.4b – Rear view

Figure C.4 – An example of auditory presentation equipment: Speechio™²

Another example of auditory presentation equipment is shown in Figure C.5, where a camera scanner captures a printed texture map on paper and installed software in a personal computer (PC) decodes the texture map and carries out the text-to-speech conversion.

² Speechio™ is the trade mark of a product supplied by KOSAIDO Co., Ltd.

This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.



IEC



IEC

Figure C.5a – Camera scanner

Figure C.5b – PC and camera scanner

Figure C.5 – Another example of auditory presentation equipment: Speechio Plus™³

³ Speechio Plus™ is the trade mark of a product supplied by KOSAIDO Co., Ltd.

This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

Annex D (informative)

Example of Reed Solomon error correction encoding using Galois field GF(2048)

As an example, a program of Reed Solomon error correction encoding using Galois field GF(2048) in the library "Speechio dll" is shown:

```

/*****/
#include <stdio.h>

#define TRUE 1
#define FALSE 0
// #define GF256
#define GF2048
typedef unsigned short ushort;

/*-----
 *Public Function
 *-----*/
void InitLogTables(int power);
int GFmul(int p1, int p2);
int GFdiv(int p1, int p2);
void CalcChecks(ushort poly[], ushort sym[], int dsize, int csize);
int CorrectErrs(ushort sym[], int dsize, int csize);

/*-----
 *Internal Function
 *-----*/
static void CalcSyndromes(ushort sym[], int size, int rssize, int isize, int v);
static int NormlZToeplitz(int size);
static void SolveToeplitz(int size);
static int ChienSearch(int size);
static void ErrLocInit(int size);

/*-----
 *Internal value
 *-----*/

#ifndef _DYNAMIC_INITIALIZE
static ushort gfpwr[GF];
static ushort gflog[GF];
#else
#include "GFTable.c"
#endif
static int gf_power;
static int gf_dim;
static int gf_1;
static int gf_2;
static const int power2[]={1,2,4,8,16,32,64,128,256,512,1024,2048};

//unsigned char sym[255*8];
/*****
 *
 *A table is changed the first stage.
 *

```

```

*****/
#define GEN 0x2d
void InitLogTables(int power)
{
gf_power = power;
gf_dim=power2[gf_power];
gf_1=gf_dim-1;
gf_2=gf_dim-2;

}

/*****
*
*Galois multiplication.
*
*****/
int GFmul(int p1, int p2)
{
int i;
if((p1==0)||(p2==0)){
return(0);
}
i=(int)gflog[p1]+(int)gflog[p2];
if(i>gf_2){
i-=gf_1;
}
i=(int)gfpwr[i];
return(i);
}
/*****
*
*Galois division.
*
*****/
int GFdiv(int p1, int p2)
{
int i;
if(p2==0){
printf("\ndivideby0\n");
return(0);
}
if(p1==0){
return(0);
}
i=(int)gflog[p1]-(int)gflog[p2];
if(i<0){
i+=gf_1;
}
if(i>gf_2){
i-=gf_1;
}
i=(int)gfpwr[i];
return(i);
}

/*****
*
*RS mark is generated.
*

```

ECNORM.COM : Click to view the full PDF of IEC 62665:2015

```

*****/
void CalcChecks(ushort poly[],ushort sym[],int dsize,int csize)
{
int t, i, n, v, isize;

isize=1;

for(v=0;v<isize;v++){
for(n=dsize;n<dsize+csize;n++){
sym[v+(n*isize)]=0;
}
}

for(v=0;v<isize;v++){
for(n=0;n<dsize;n++){
t=sym[v+(dsize*isize)]^sym[v+(n*isize)];
for(i=0;i<csize-1;i++){
sym[v+((dsize+i)*isize)]=
sym[v+((dsize+i+1)*isize)]^GFmul(t,poly[i]);
}
sym[v+((dsize+csize-1)*isize)]=GFmul(t,poly[csize-1]);
}
}

return;
}
#define MAXBUF256
#define MAXBUFGF

#define MAXTOEPLITZ37
#define MAXTOEPLITZ1024

ushort logsym[MAXBUF];
ushort pwrlogsym[MAXBUF];
ushort syndrome[MAXBUF];
ushort tpltzarray[MAXTOEPLITZ*(MAXTOEPLITZ+10)];
ushort tpltzrslt[MAXTOEPLITZ];
ushort errloc[MAXTOEPLITZ];
intssize;

int CorrectErrorCount;

/*****
*
*An error is discovered and corrected.
*
*****/
int CorrectErrs(ushort sym[],int dsize,int csize)
{
int i,errcnt,v;
intisize=1;
inte=0;

ssize=dsize+csize;
for(v=0;v<isize;v++){
CalcSyndromes(sym,ssize,csize/2,isize,v);
errcnt=NormIzToeplitz(csize/2);
if(errcnt>0){
if(tpltzarray[0]==0){

```

```

CorrectErrorCount = e + errcnt;
return(-1);
}
SolveToeplitz(errcnt);
if(!ChienSearch(errcnt)){
CorrectErrorCount = e + errcnt;
return(-2);
}
ErrLocInit(errcnt);
if(NormlzToeplitz(errcnt)!=errcnt){
CorrectErrorCount = e + errcnt;
return(-3);
}
SolveToeplitz(errcnt);
for(i=0;i<errcnt;i++){
sym[v+((ssize-(errloc[i]==0)?gf_1:errloc[i]))*isize)]^=tpltzrslt[i];
}
}
e+=errcnt;
}
CorrectErrorCount = e;
return(e);
}


/*****
*
*A syndrome is calculated.
*
*****/
void CalcSyndromes(ushort sym[], int size, int rssize, int isize, int v)
{
int i, i1, j, n;

for(i=0;i<size;i++){
i1=((sym[i]==0)?gf_1:gflog[sym[i]]);
if(i1!=gf_1){
i1=i1+(size-i);
i1=((i1>gf_2)?(i1-gf_1):i1);
}
logsym[i]=i1;
}

for(j=0;j<rssize*2;j++){
syndrome[j]=0;
for(i=0;i<size;i++){
if(logsym[i]!=(gf_dim-1)){
syndrome[j]^=gfpowr[logsym[i]];
n=logsym[i]+(size-i);
logsym[i]=((n>gf_2)?(n-gf_1):n);
}
}
}

for(j=n=0;j<MAXTOEPLITZ*rssize;j+=MAXTOEPLITZ,n++){
for(i=0;i<=rssize;i++){
tpltzarray[j+i]=syndrome[n+i];
}
}
}

```

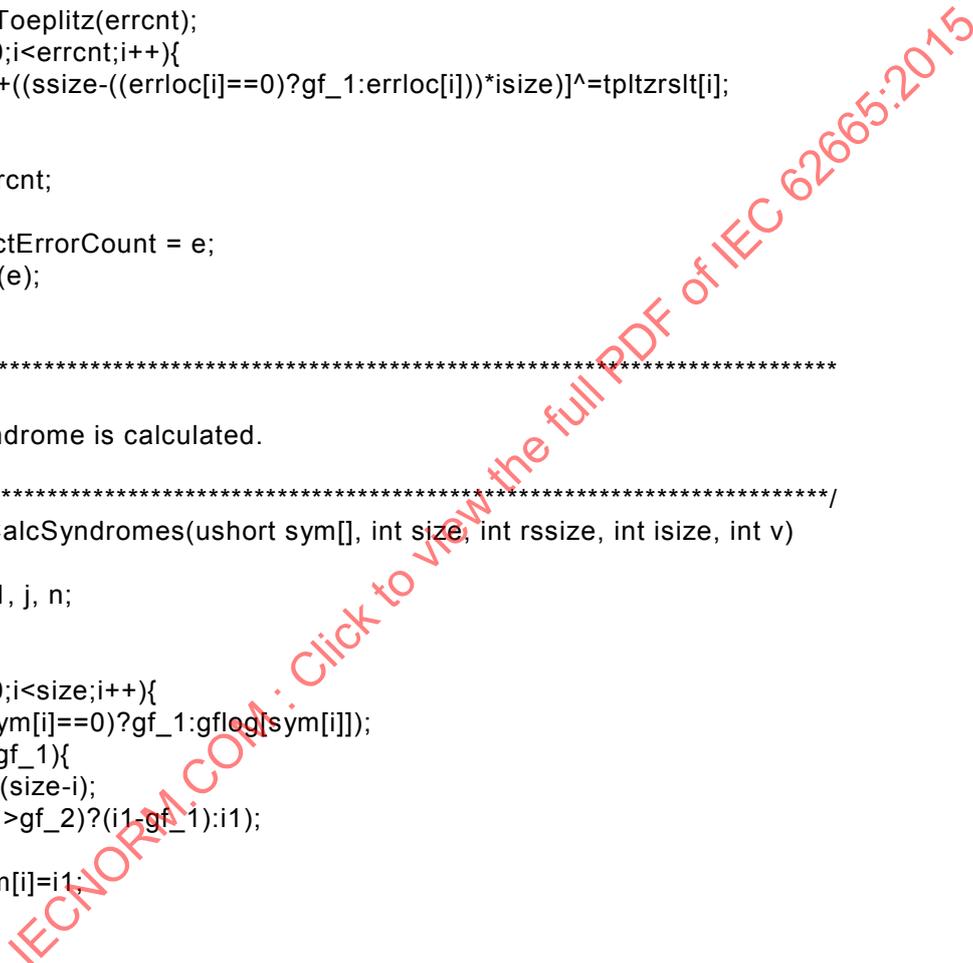

```

}

/*-----
*
*NormlzToeplitz
*
*-----*/
int NormlzToeplitz(int size)
{
int x, y, x1, y1, n;

for(x=y=0;x<size;x++,y++){

if(tpltzarray[x+(MAXTOEPLITZ*y)]==0){
for(y1=y+1;y1<size;y1++){
if(tpltzarray[x+(MAXTOEPLITZ*y1)]!=0){
for(x1=x;x1<=size;x1++){

n=tpltzarray[x1+(MAXTOEPLITZ*y1)];
tpltzarray[x1+(MAXTOEPLITZ*y1)]=tpltzarray[x1+(MAXTOEPLITZ*y)];
tpltzarray[x1+(MAXTOEPLITZ*y)]=n;
}
break;
}
}

if(y1==size){
y--;
continue;
}
}

for(y1=y+1;y1<size;y1++){
if(tpltzarray[x+(MAXTOEPLITZ*y1)]!=0){
n=GFdiv(tpltzarray[x+(MAXTOEPLITZ*y1)],tpltzarray[x+(MAXTOEPLITZ*y)]);
tpltzarray[x+(MAXTOEPLITZ*y1)]=0;
for(x1=x+1;x1<=size;x1++){
tpltzarray[x1+(MAXTOEPLITZ*y1)]^=GFmul(n,tpltzarray[x1+(MAXTOEPLITZ*y)]);
}
}
}
}
return(y);
}

/*-----
*
*SolveToeplitz
*
*-----*/
void SolveToeplitz(int size)
{
int x, x1, r;

for (x = size-1; x >= 0; x--) {
r = tpltzarray[size + (MAXTOEPLITZ*x)];

for(x1=size-1;x1>x;x1--){
r^=GFmul(tpltzrslt[x1],tpltzarray[x1+(MAXTOEPLITZ*x)]);
}
}
}
}

```

```
}
tpltzrslt[x]=GFdiv(r,tpltzarray[x+(MAXTOEPLITZ*x)]);
}
}

/*-----
*
*ChienSearch
*-----*/
int ChienSearch(int size)
{
int i, j, r, e = 0;
intlog[MAXTOEPLITZ];

for(i=0;i<size;i++){
log[i]=gflog[tpltzrslt[size-1-i]];
}
for(j=1;j<=ssize;j++){
r=1;
for(i=0;i<size;i++){
if((log[i]-=i+1)<0){
log[i]+=gf_1;
}
}
r^=gfpwr[log[i]];
}
if(r==0){
errloc[e]=j<gf_1?j:0;
e++;
if(e==size)break;
}
}
return(e==size);
}

/*-----
*
*ErrLoclnit
*-----*/
void ErrLoclnit(int size)
{
int i, j;
int log[MAXTOEPLITZ],log1[MAXTOEPLITZ];

for(i=0;i<size;i++){
log[i]=log1[i]=errloc[i];
}
for(j=0;j<size;j++){
for(i=0;i<size;i++){
tpltzarray[i+(MAXTOEPLITZ*j)]=gfpwr[log1[i]];
if((log1[i]+=log[i])>gf_2){
log1[i]-=gf_1;
}
}
}
tpltzarray[i+(MAXTOEPLITZ*j)]=syndrome[j];
}
}
```

IECFORM.COM : Click to view the full PDF of IEC 62665:2015

/*****/

```
#ifndef __GF_TABLE__  
#define __GF_TABLE__
```

```
static unsigned short gfpwr[GF]={  
1, 2, 4, 8, 16, 32, 64, 128,  
256, 512, 1024, 45, 90, 180, 360, 720,  
1440, 877, 1754, 1433, 799, 1598, 1105, 143,  
286, 572, 1144, 221, 442, 884, 1768, 1533,  
983, 1966, 1905, 1743, 1459, 843, 1686, 1281,  
559, 1118, 145, 290, 580, 1160, 317, 634,  
1268, 453, 906, 1812, 1541, 1063, 99, 198,  
396, 792, 1584, 1101, 183, 366, 732, 1464,  
861, 1722, 1369, 671, 1342, 593, 1186, 361,  
722, 1444, 869, 1738, 1465, 863, 1726, 1361,  
655, 1310, 529, 1058, 105, 210, 420, 840,  
1680, 1293, 567, 1134, 241, 482, 964, 1928,  
1853, 1623, 1155, 299, 598, 1196, 373, 746,  
1492, 901, 1802, 1593, 1119, 147, 294, 588,  
1176, 285, 570, 1140, 197, 394, 788, 1576,  
1149, 215, 430, 860, 1720, 1373, 663, 1326,  
625, 1250, 489, 978, 1956, 1893, 1767, 1507,  
1003, 2006, 1921, 1839, 1651, 1227, 443, 886,  
1772, 1525, 967, 1934, 1841, 1615, 1203, 331,  
662, 1324, 629, 1258, 505, 1010, 2020, 2021,  
2023, 2019, 2027, 2043, 2011, 1947, 1819, 1563,  
1051, 27, 54, 108, 216, 432, 864, 1728,  
1453, 887, 1774, 1521, 975, 1950, 1809, 1551,  
1075, 75, 150, 300, 600, 1200, 333, 666,  
1332, 581, 1162, 313, 626, 1252, 485, 970,  
1940, 1797, 1575, 1123, 235, 470, 940, 1880,  
1693, 1303, 515, 1030, 33, 66, 132, 264,  
528, 1056, 109, 218, 436, 872, 1744, 1421,  
823, 1646, 1265, 463, 926, 1852, 1621, 1159,  
291, 582, 1164, 309, 618, 1236, 389, 778,  
1556, 1029, 39, 78, 156, 312, 624, 1248,  
493, 986, 1972, 1861, 1703, 1379, 747, 1494,  
897, 1794, 1577, 1151, 211, 422, 844, 1688,  
1309, 535, 1070, 113, 226, 452, 904, 1808,  
1549, 1079, 67, 134, 268, 536, 1072, 77,  
154, 308, 616, 1232, 397, 794, 1588, 1093,  
167, 334, 668, 1336, 605, 1210, 345, 690,  
1380, 741, 1482, 953, 1906, 1737, 1471, 851,  
1702, 1377, 751, 1502, 913, 1826, 1641, 1279,  
467, 934, 1868, 1717, 1351, 675, 1350, 673,  
1346, 681, 1362, 649, 1298, 521, 1042, 9,  
18, 36, 72, 144, 288, 576, 1152, 301,  
602, 1204, 325, 650, 1300, 517, 1034, 57,  
114, 228, 456, 912, 1824, 1645, 1271, 451,  
902, 1804, 1589, 1095, 163, 326, 652, 1304,  
541, 1082, 89, 178, 356, 712, 1424, 781,  
1562, 1049, 31, 62, 124, 248, 496, 992,  
1984, 1965, 1911, 1731, 1451, 891, 1782, 1473,  
943, 1886, 1681, 1295, 563, 1126, 225, 450,  
900, 1800, 1597, 1111, 131, 262, 524, 1048,  
29, 58, 116, 232, 464, 928, 1856, 1709,  
1399, 707, 1414, 801, 1602, 1193, 383, 766,  
1532, 981, 1962, 1913, 1759, 1427, 779, 1558,
```

1025, 47, 94, 188, 376, 752, 1504, 1005,
2010, 1945, 1823, 1555, 1035, 59, 118, 236,
472, 944, 1888, 1773, 1527, 963, 1926, 1825,
1647, 1267, 459, 918, 1836, 1653, 1223, 419,
838, 1676, 1333, 583, 1166, 305, 610, 1220,
421, 842, 1684, 1285, 551, 1102, 177, 354,
708, 1416, 829, 1658, 1241, 415, 830, 1660,
1237, 391, 782, 1564, 1045, 7, 14, 28,
56, 112, 224, 448, 896, 1792, 1581, 1143,
195, 390, 780, 1560, 1053, 23, 46, 92,
184, 368, 736, 1472, 941, 1882, 1689, 1311,
531, 1062, 97, 194, 388, 776, 1552, 1037,
55, 110, 220, 440, 880, 1760, 1517, 1015,
2030, 2033, 1999, 1971, 1867, 1723, 1371, 667,
1334, 577, 1154, 297, 594, 1188, 357, 714,
1428, 773, 1546, 1081, 95, 190, 380, 760,
1520, 973, 1946, 1817, 1567, 1043, 11, 22,
44, 88, 176, 352, 704, 1408, 813, 1626,
1177, 287, 574, 1148, 213, 426, 852, 1704,
1405, 727, 1454, 881, 1762, 1513, 1023, 2046,
2001, 1935, 1843, 1611, 1211, 347, 694, 1388,
757, 1514, 1017, 2034, 1993, 1983, 1875, 1675,
1339, 603, 1206, 321, 642, 1284, 549, 1098,
185, 370, 740, 1480, 957, 1914, 1753, 1439,
787, 1574, 1121, 239, 478, 956, 1912, 1757,
1431, 771, 1542, 1057, 111, 222, 444, 888,
1776, 1485, 951, 1902, 1777, 1487, 947, 1894,
1761, 1519, 1011, 2022, 2017, 2031, 2035, 1995,
1979, 1883, 1691, 1307, 539, 1078, 65, 130,
260, 520, 1040, 13, 26, 52, 104, 208,
416, 832, 1664, 1325, 631, 1262, 497, 994,
1988, 1957, 1895, 1763, 1515, 1019, 2038, 1985,
1967, 1907, 1739, 1467, 859, 1718, 1345, 687,
1374, 657, 1314, 617, 1234, 393, 786, 1572,
1125, 231, 462, 924, 1848, 1629, 1175, 259,
518, 1036, 53, 106, 212, 424, 848, 1696,
1389, 759, 1518, 1009, 2018, 2025, 2047, 2003,
1931, 1851, 1627, 1179, 283, 566, 1132, 245,
490, 980, 1960, 1917, 1751, 1411, 811, 1622,
1153, 303, 606, 1212, 341, 682, 1364, 645,
1290, 569, 1138, 201, 402, 804, 1608, 1213,
343, 686, 1372, 661, 1322, 633, 1266, 457,
914, 1828, 1637, 1255, 483, 966, 1932, 1845,
1607, 1187, 363, 726, 1452, 885, 1770, 1529,
991, 1982, 1873, 1679, 1331, 587, 1174, 257,
514, 1028, 37, 74, 148, 296, 592, 1184,
365, 730, 1460, 837, 1674, 1337, 607, 1214,
337, 674, 1348, 677, 1354, 697, 1394, 713,
1426, 777, 1554, 1033, 63, 126, 252, 504,
1008, 2016, 2029, 2039, 1987, 1963, 1915, 1755,
1435, 795, 1590, 1089, 175, 350, 700, 1400,
733, 1466, 857, 1714, 1353, 703, 1406, 721,
1442, 873, 1746, 1417, 831, 1662, 1233, 399,
798, 1596, 1109, 135, 270, 540, 1080, 93,
186, 372, 744, 1488, 909, 1818, 1561, 1055,
19, 38, 76, 152, 304, 608, 1216, 429,
858, 1716, 1349, 679, 1358, 689, 1378, 745,
1490, 905, 1810, 1545, 1087, 83, 166, 332,
664, 1328, 589, 1178, 281, 562, 1124, 229,

Copyright © IEC. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of IEC. For more information, contact IEC at www.iec.ch.
View the full PDF of IEC 62665:2015