

INTERNATIONAL STANDARD



**Consumer terminal function for access to IPTV and open internet multimedia services –
Part 6: Procedural application environment**

IECNORM.COM : Click to view the full PDF of IEC 62766-6:2017



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 61766-0:2017

INTERNATIONAL STANDARD



**Consumer terminal function for access to IPTV and open internet multimedia services –
Part 6: Procedural application environment**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.170 35.240.95

ISBN 978-2-8322-4616-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
2 Normative references	8
3 Terms, definitions and abbreviated terms	10
3.1 Abbreviated terms.....	10
4 General considerations and conventions	10
4.1 Overview.....	10
4.2 Relation between DVB-GEM and PAE definitions.....	11
4.2.1 General	11
4.2.2 DVB-GEM Compliance.....	11
4.2.3 Functional equivalents.....	12
5 Architecture and deployment options	13
5.1 Architecture	13
5.2 Deployment options	14
5.2.1 Combined IG-AG-OITF STB and OITF TV (“headed configuration”)	14
5.2.2 Combined AG-IG with multiple OITFs (“headless configuration”).....	15
5.2.3 AG-IG, OITF-IG, multiple OITFs.....	16
5.2.4 Combined OITF-AG TV and IG-WAN Gateway (“headed configuration”)	16
5.3 Remote UI server.....	17
6 Protocols	17
6.1 Broadcast channel protocols	17
6.2 Interaction channel protocols	17
6.3 Transport protocols for application loading over the interaction channel.....	17
6.4 IPTV protocols	18
6.4.1 Streaming protocols.....	18
6.4.2 Metadata protocols	18
6.4.3 Content download protocols.....	18
6.5 Home network protocols.....	18
7 Content formats.....	18
7.1 Static formats.....	18
7.2 Streaming formats.....	18
7.3 Fonts	19
7.3.1 Resident fonts	19
7.3.2 Downloadable fonts	19
8 Void.....	19
9 Application model	19
9.1 Overview.....	19
9.2 Broadcast applications	21
9.3 DVB-J model.....	21
9.4 Stored and cached applications	21
9.5 Unbound applications.....	21
10 Application signalling / metadata	21
10.1 XML AIT.....	21
10.2 Stored and cached applications	22
11 The Java platform.....	23

11.1	Fundamentals	23
11.2	GEM 1.3	23
11.3	Extensions and mappings to GEM APIs	24
11.3.1	Broadcast transport protocol access API (org.dvb.dsmcc).....	24
11.3.2	Application listing and launching API (org.dvb.application)	24
11.3.3	Streaming media APIs	24
11.3.4	GEM 3D API	24
11.4	APIs defined by this part	24
11.4.1	Content and service protection API	24
11.4.2	User authentication API	24
11.4.3	UI server API	24
11.4.4	Content download API	24
11.4.5	Service API	25
11.5	PVR APIs.....	25
11.6	Content referencing	25
12	Security	25
12.1	Authentication of applications	25
12.2	Permission request file.....	26
12.3	Security policy for applications.....	26
12.4	Certificate management	26
13	Graphics reference model.....	26
14	System integration aspects.....	26
15	Detailed profile definitions	27
16	PVR.....	34
16.1	General.....	34
16.2	Mandatory Responsibilities.....	34
16.3	Optional responsibilities	35
16.4	Visibility of recording requests and recordings between applications and service providers	36
17	Minimum terminal capabilities	36
18	HTTP adaptive streaming	36
18.1	General.....	36
18.2	HAS support	36
Annex A	(informative) Headless behaviour of UI-related APIs	37
A.1	General.....	37
A.2	PBP	37
A.3	JavaTV	37
Annex B	(informative) Void	39
Annex C	(normative) Package org.oipf.download	40
C.1	Interface ApplicationDownloadRequest	40
C.2	Class LocatorDownloadSpec.....	40
C.3	Class ApplicationDownloadException.....	41
C.4	Class ApplicationDownloadSpec	41
Annex D	(normative) Package org.oipf.service – interface ServiceCreator	43
Annex E	(normative) org.oipf.auth.....	44
E.1	Class HTTPDigestCredentials	44
E.2	Class UserAuthenticationPermission.....	44
E.3	Class UserAuthenticationManager	45

E.4	Class UserCredentials	46
E.5	Class CookieCredentials	46
Annex F (normative)	org.oipf.uiserver – class UIServerManager	47
Annex G (normative)	org.oipf.drm	48
G.1	General.....	48
G.2	Class DRMAgentEvent.....	48
G.3	Class DRMAgentPermission	49
G.4	Interface DRMAgentListener	50
G.5	Class DRMAgent.....	50
G.6	Class DRMAgentException	52
G.7	Class DRMRightsErrorEvent	52
Annex H (normative)	org.oipf.pvr	54
H.1	Class RecordingAccessPermissions	54
H.2	Class RecordingProperties.....	55
Bibliography	57
Figure 1	– PAE architecture block diagram	13
Figure 2	– Combined IG-AG-OITF STB and OITF TV (“headed configuration”).....	14
Figure 3	– Combined AG-IG with multiple OITFs (“headless configuration”)	15
Figure 4	– AG-IG, OITF-IG, multiple OITFs	16
Figure 5	– Combined OITF-AG TV and IG-WAN Gateway (“headed configuration”).....	16
Table 1	– Status of XML AIT descriptors and elements	22
Table 2	– Mapping of GEM clauses relating to content referencing	25
Table 3	– Locators and corresponding text representations.....	26
Table 4	– Platform profile definitions.....	27
Table 5	– Applicability of GEM specification sections	28
Table 6	– Summary of functional equivalents (informative).....	31
Table 7	– Responsibilities of GEM recording specifications.....	34
Table 8	– Events during normal playback and resulting behaviour	35
Table 9	– Optional responsibilities of GEM recording specifications	35

IEC NORM.COM: Click to view the full PDF of IEC 62766-6:2017

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CONSUMER TERMINAL FUNCTION FOR ACCESS
TO IPTV AND OPEN INTERNET MULTIMEDIA SERVICES –****Part 6: Procedural application environment**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62766-6 has been prepared by IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this International Standard is based on the following documents:

CDV	Report on voting
100/2550/CDV	100/2664/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62766 series, published under the general title *Consumer terminal function for access to IPTV and open internet multimedia services*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 62766-6:2017

INTRODUCTION

The IEC 62766 series is based on a series of specifications that was originally developed by the OPEN IPTV FORUM (OIPF). They specify the user-to-network interface (UNI) for consumer terminals to access IPTV and open internet multimedia services over managed or non-managed networks as defined by OIPF.

IECNORM.COM : Click to view the full PDF of IEC 62766-6:2017

CONSUMER TERMINAL FUNCTION FOR ACCESS TO IPTV AND OPEN INTERNET MULTIMEDIA SERVICES –

Part 6: Procedural application environment

1 Scope

This part of IEC 62766 specifies the procedural application environment (PAE) component of the OIPF terminal function (OITF). It also defines the UNI reference point UNIS-12 of the OIPF functional architecture summarised in Annex B of IEC 62766-1:2017.

The PAE is an application environment for IPTV services based on Java¹. Like other specifications such as OCAP, ACAP and Blu-ray², which are, or include, GEM terminal specifications, this document follows the structure of ETSI TS 102 728.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62766-1:2017, *Open IPTV Forum (OIPF) consumer terminal function and network interfaces for access to IPTV and open Internet multimedia services – Part 1: General*

IEC 62766-2-1, *Open IPTV Forum (OIPF) consumer terminal function and network interfaces for access to IPTV and open Internet multimedia services – Part 2-1: Media Formats*

IEC 62766-2-2, *Open IPTV Forum (OIPF) consumer terminal function and network interfaces for access to IPTV and open Internet multimedia services – Part 2-1: HTTP Adaptive Streaming*

IEC 62766-3:2016, *Open IPTV Forum (OIPF) consumer terminal function and network interfaces for access to IPTV and open Internet multimedia services – Part 3: Content Metadata*

IEC 62766-4-1:2017, *Open IPTV Forum (OIPF) consumer terminal function and network interfaces for access to IPTV and open Internet multimedia services – Part 4-2: Protocols*

IEC 62766-5-1:2017, *Open IPTV Forum (OIPF) consumer terminal function and network interfaces for access to IPTV and open Internet multimedia services – Part 5-1: Declarative Application Environment*

ISO/IEC 14496-18, *Information technology – Coding of audio-visual objects – Part 18: Font compression and streaming*

¹ Javascript is a programming language that has been standardised by ECMA as ECMAScript® and as ISO/IEC 16262

² Blu-ray is a trademark owned by the Blu-ray Disc Association. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

ETSI EN 300 468, *Digital Video Broadcasting (DVB); Specification for Service Information (SI) in DVB systems*

ETSI TS 101 211 v1.9.1, *Digital Video Broadcasting (DVB); Guidelines on implementation and usage of Service Information (SI)*

ETSI TS 101 600 V1.1.1 (2012-05), *Digital Video Broadcasting (DVB); GEM Profile for Plano-Stereoscopic 3DTV*

ETSI TS 102 727 V1.1.1 (2010-01), *Digital Video Broadcasting (DVB); Multimedia Home Platform (MHP) Specification 1.2.2*

ETSI TS 102 728 V1.2.1 (2011-09), *Digital Video Broadcasting (DVB); Globally Executable MHP (GEM) Specification 1.3 (including OTT and hybrid broadcast/broadband)*

ETSI TS 102 539 V.1.1.1, *Digital Video Broadcasting (DVB); Carriage of Broadband Content Guide (BCG) information over Internet Protocol (IP)*

ETSI TS 102 809, *Digital Video Broadcasting (DVB); Signalling and carriage of interactive applications and services in Hybrid broadcast/broadband environments*

ETSI, TS 102 816 V1.1.1, *Digital Video Broadcasting (DVB); Personal Video Recorder (PVR)/Personal Data Recorder (PDR) Extension to the Multimedia Home Platform*

ETSI TS 102 817 V1.1.1, *Digital Video Broadcasting (DVB); Digital Recording Extension to Globally Executable Multimedia Home Platform (GEM)*

3GPP TS 26.234, *Transparent end-to-end Packet-switched Streaming Service (PSS) Protocols and codecs (Release 9)*

DAVIC 1.4.1, *Specification part 9, Information Representation*

Available from

<http://docbox.etsi.org/Reference/DAVIC/DAVIC%201.4.1%20Specification%20part%209.pdf>

DVB, Blue Book A127, *Application Gateway and Media Server Fragment*

Available from

http://www.mhp.org/specs/a127.application_gateway_and_media_server_fragment.pdf

Java Community Process, Java Specification Request JSR-217, *Personal Basis Profile (PBP) 1.1 (or later)*

The latest release of JSR 217 is available at <http://www.jcp.org/en/jsr/detail?id=217>

Java Community Process, Java Specification Request JSR-218, *Connected Device Configuration (CDC) 1.1 (or later)*

The latest release of JSR 218 is available at <http://www.jcp.org/en/jsr/detail?id=218>

Java Community Process, Java Specification Request JSR-219, *Foundation Profile (FP) 1.1 (or later)*

The latest release of JSR 219 is available at <http://www.jcp.org/en/jsr/detail?id=219>

Java Community Process, Java Specification Request JSR-927, *Java TV, Version 1.1.1 (or later)*

The latest release of JSR 927 is available at <http://www.jcp.org/en/jsr/detail?id=927>

Java Community Process, JAR File Specification, part of Java SDK 1.4.2 specification, 1999
Available from <http://java.sun.com/j2se/1.4.2/docs/guide/jar/jar.html>

CableLabs, OpenCable Application Platform (OCAP) Version 1.1.2, September 2009, Available from <https://apps.cablelabs.com/specification/opencable-application-platform-ocap/>

3 Terms, definitions and abbreviated terms

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 Abbreviated terms

For the purposes of this document the abbreviated terms given in IEC 62766-1:2017 as well as the following apply.

DSMCC	Digital Storage Media Command and Control
FP	Foundation Profile
GEM	Globally Executable MHP
HAS	HTTP Adaptive Streaming
JSSE	Java Secure Sockets Extension
MHP	Multimedia Home Platform
MPD	Media Presentation Description
PBP	Personal Basis Profile

4 General considerations and conventions

4.1 Overview

Subclause 4.2 covers general considerations and conventions, in particular the relationship with DVB-GEM.

Clause 5 explains the relationship between DVB-GEM and the PAE platform, the basic architecture and positioning of the procedural application environment in the OIPF landscape.

Clause 6 includes details on the supported transport protocols by cross-referencing the OIPF protocols specification IEC 62766-4-1.

Clause 7 defines static and streaming media formats for the representation of images, sound, videos, colours and fonts by cross-referencing the OIPF media formats specification IEC 62766-2-1.

Clause 8 is intentionally void.

Clauses 9 and 10 describe the application model for Java applications for the PAE and application signalling.

Clause 11 describes features of the Java platform, such as class loading behaviour, event model and specifies all APIs that are contained in the platform.

Clause 12 deals with security aspects of the platform such as the security framework for applications, application authentication, secure network connections and certificate management.

Clause 13 deals with the graphics reference model.

Clause 14 deals with system integration aspects.

Clause 15 defines which parts of the specification are mandatory or optional for the 3 different device types addressed by this volume.

Clause 16 deals with PVR functionalities.

Clause 17 defines the minimum terminal capabilities.

Clause 18 deals with HTTP Adaptive Streaming support.

The annexes contain API definitions at class and method level and clarifications of referenced specifications.

4.2 Relation between DVB-GEM and PAE definitions

4.2.1 General

The GEM/MHP notion of "broadcast application" should be interpreted as meaning applications that are bound to a specific scheduled content service or a content-on-demand item.

Unbound applications are persistent applications that are not tied to any service.

The GEM term "interaction channel" is the network connection channel of the OIPF architecture summarised in Annex B of IEC 62766-1:2017.

4.2.2 DVB-GEM Compliance

All mandatory requirements for the GEM IPTV target shall be supported by the PAE.

The following optional parts of the GEM IPTV target shall be supported by the PAE:

- OpenType;
- internet access applications;
- stored applications, stored services and corresponding APIs;
- unbound applications and corresponding APIs;
- content referencing for IPTV;
- service discover and selection for IPTV.

The following optional part of the GEM IPTV target shall be supported by the PAE under specific circumstances:

- TV-Anytime content referencing and metadata.

The following optional parts of the GEM IPTV target may be supported by this document:

- file storage API;
- Smart Card API (JSR177);
- providers ;
- privileged applications.

Where a service provider is specifying a device including the PAE, the service provider may choose to require these optional features.

The following optional parts of the GEM IPTV target should not be supported by the PAE:

- DVB-HTML;
- the MHP functional equivalent called application authentication;
- section filtering API (org.davic.mpeg.sections), tuning API, basic MPEG concepts and common error reporting;
- MPEG 2 video drips and corresponding APIs;
- MPEG 2 I-frames and corresponding APIs;
- credentials;
- certificate revocation mechanism of ETSI TS 102 727;
- root certificate management mechanism defined in ETSI TS 102 727;
- externally authorized applications.

4.2.3 Functional equivalents

The functional equivalents to GEM-IPTV are listed in Table 6.

The main concepts are as follows:

- DVB Service Discovery and Selection and Broadband Content Guide are used for SI.
- Applications are distributed in JAR files, using HTTP for unicast and FLUTE for multicast.

NOTE FLUTE is conceptually different from DSMCC object carousel and cannot be considered a functional equivalent.

- Application authentication is based on the signing capabilities for JAR files.

5 Architecture and deployment options

5.1 Architecture

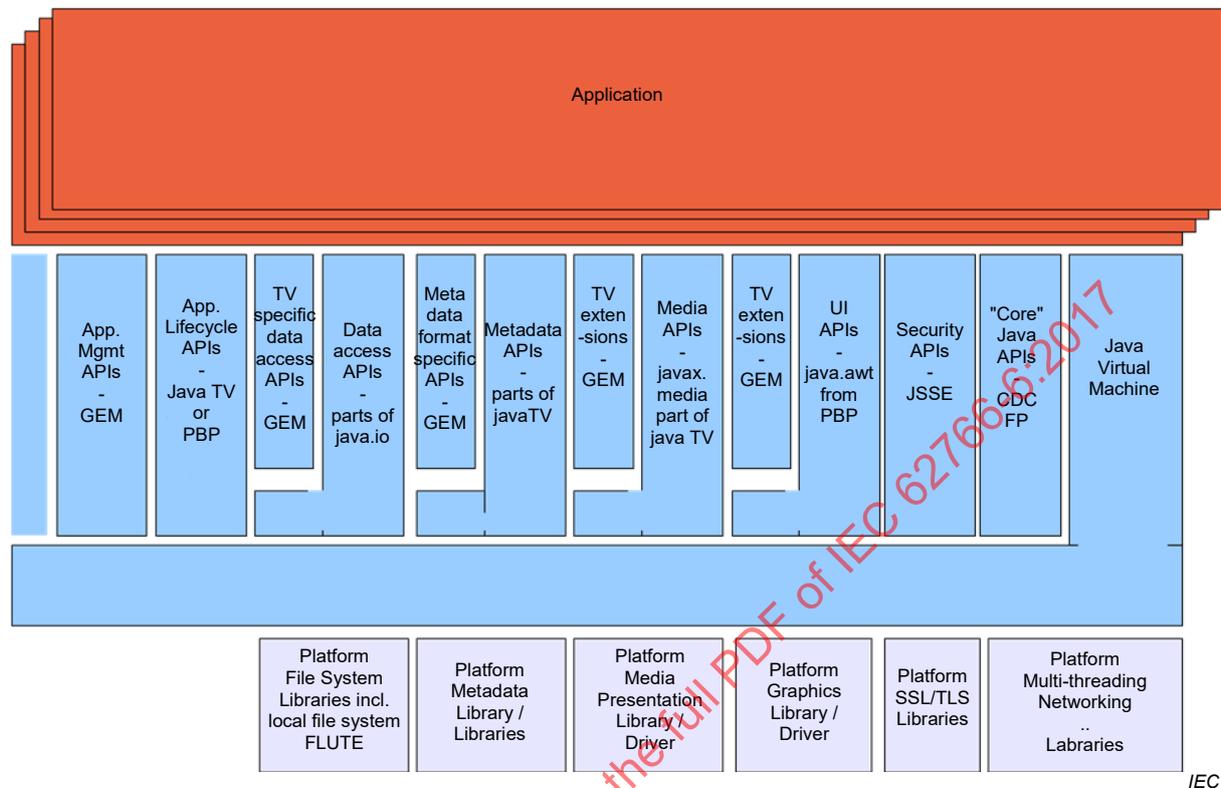


Figure 1 – PAE architecture block diagram


Figure 1 shows a number of the key components of the architecture and indicates their origin – GEM, JavaTV, PBP or components of PBP (JSSE, CDC or FP). Below is a short summary of each component ordered from left to right of Figure 1.

- App. Mgmt APIs: these enable one application to obtain lists of other applications and start or stop other them.
- App. Lifecycle APIs: these are the first APIs to be called by the implementation when starting an application.
- TV specific data access APIs: these provide access to data in ways which are specific to TV environments.
- Data access APIs: these provide generic access to data – files, sockets, streams, etc.
- Metadata format specific APIs: these provide access to the details of metadata in a format dependent way.
- Metadata APIs: these provide access to metadata and are independent of any specific metadata format.
- TV extensions: these provide control over A/V media in ways which are specific to TV environments.
- Media APIs: these provide access to and control over A/V media.
- TV extensions: these provide UI features specific to TV environments.
- UI APIs: these provide the basic UI capabilities.
- Security APIs: these provide the basic security capabilities.
- Core Java APIs: these provide the basic capabilities of the Java language.

- Java virtual machine: this provides the basic Java capabilities of the environment.

5.2 Deployment options

5.2.1 Combined IG-AG-OITF STB and OITF TV (“headed configuration”)

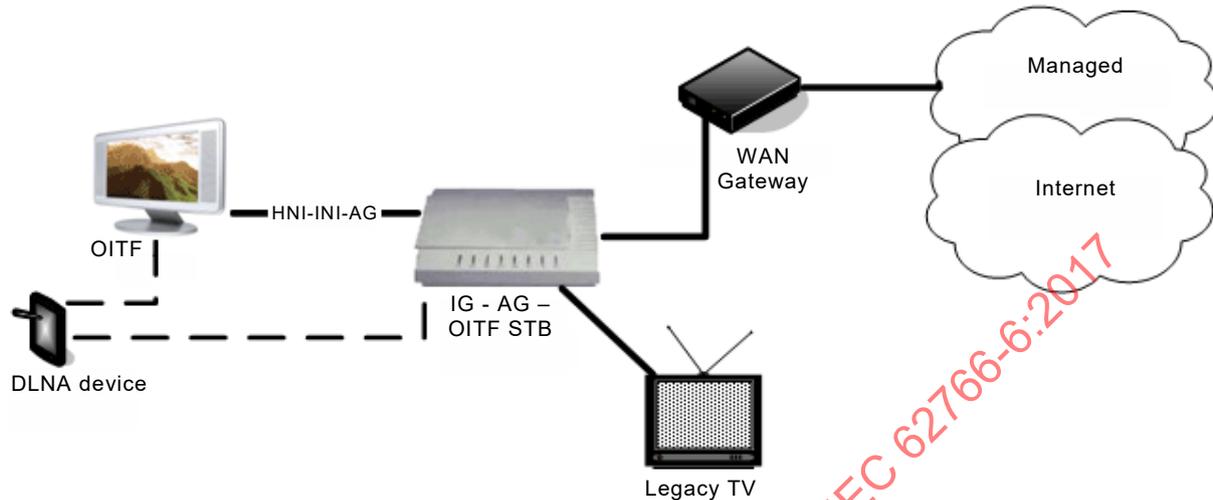

IEC


Figure 2 – Combined IG-AG-OITF STB and OITF TV (“headed configuration”)

This deployment as shown in Figure 2 supports both managed and unmanaged services, with DAE and PAE applications, presented on an OITF TV and a legacy TV. The following devices are deployed:

- A WAN Gateway.
- Combined IG, AG and OITF STB: a set top box including IG, AG and OITF functionality that exposes HNI-INI-AG to other OITFs in the residential network. It connects to the legacy TV using some non-OIPF specified mechanism, such as HDMI.
- OITF TV: this is a TV containing an OITF.

Optionally, the IG-AG-OITF STB or the OITF TV may act as a DLNA DMS to make OIPF services available to DLNA devices. They may also act as a DLNA DMP to access content from other DLNA devices on the home network.

5.2.2 Combined AG-IG with multiple OITFs (“headless configuration”)

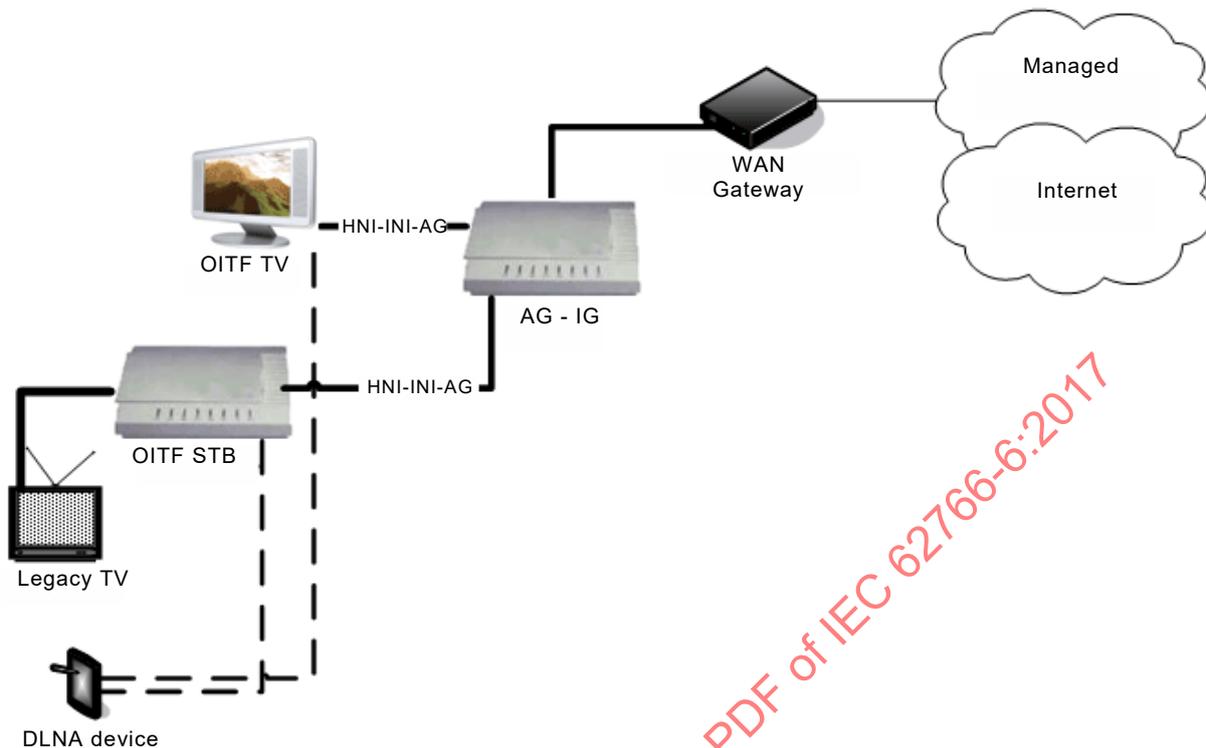

IEC

Figure 3 – Combined AG-IG with multiple OITFs (“headless configuration”)

This deployment as shown in Figure 3 supports both managed and unmanaged services, with DAE and PAE applications, presented on an OITF TV and a legacy TV. The following devices are deployed:

- A WAN Gateway.
- Combined AG-IG device: a device including both IG and AG functionality that exposes HNI-INI-AG to OITFs in the residential network.
- OITF STB: a set-top box containing an OITF. It connects to the legacy TV using some non-OIPF specified mechanism, such as HDMI or SCART.
- OITF TV: a TV containing an OITF.

Optionally, the OITF STB or the OITF TV may act as a DLNA DMS to make OIPF services available to DLNA devices. They may also act as a DLNA DMP to access content from other DLNA devices on the home network.

5.2.3 AG-IG, OITF-IG, multiple OITFs

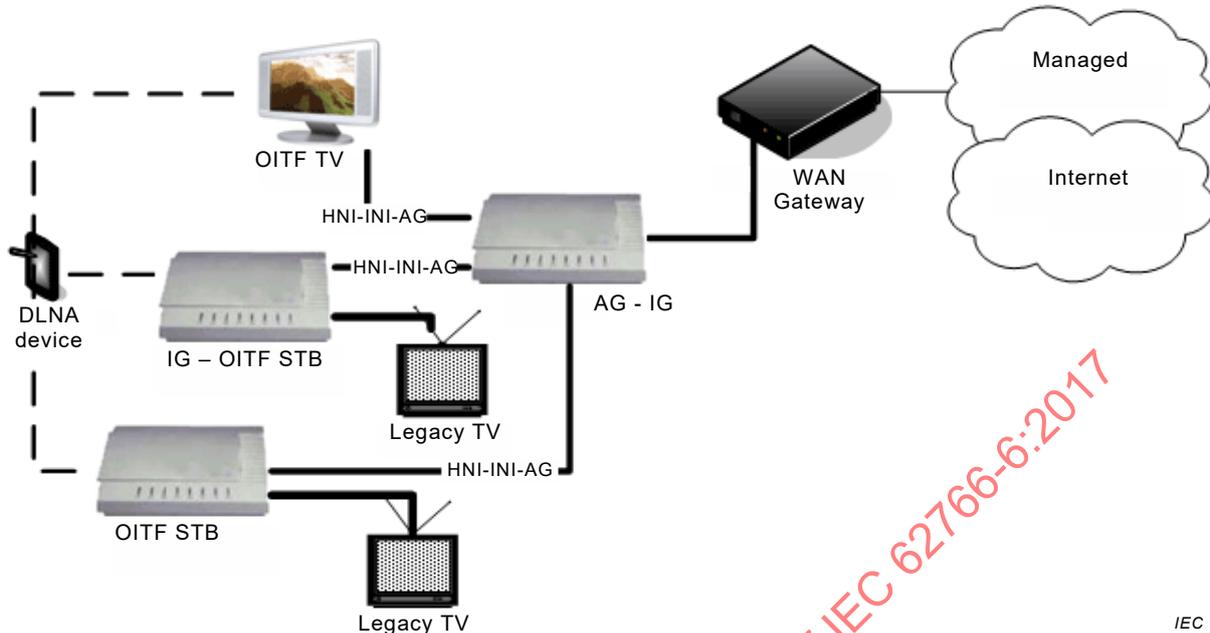


Figure 4 – AG-IG, OITF-IG, multiple OITFs

This deployment as shown in Figure 4 supports managed and unmanaged services, and DAE and PAE applications. The following devices are deployed:

- A WAN Gateway.
- Combined AG-IG device: a device including both IG and AG functionality that exposes HNI-INI-AG to OITFs in the residential network.
- OITF STB: a set-top box containing an OITF. It connects to the legacy TV using some non-OIF specified mechanism, such as HDMI.
- IG-OITF STB: a set-top box containing both an IG and an OITF.
- OITF TV: a TV containing an OITF.

In this deployment, there are multiple IGs. Only one IG can be active in the residential network at any point in time. The ISIM application shall always be in the AG-IG in this case.

5.2.4 Combined OITF-AG TV and IG-WAN Gateway (“headed configuration”)

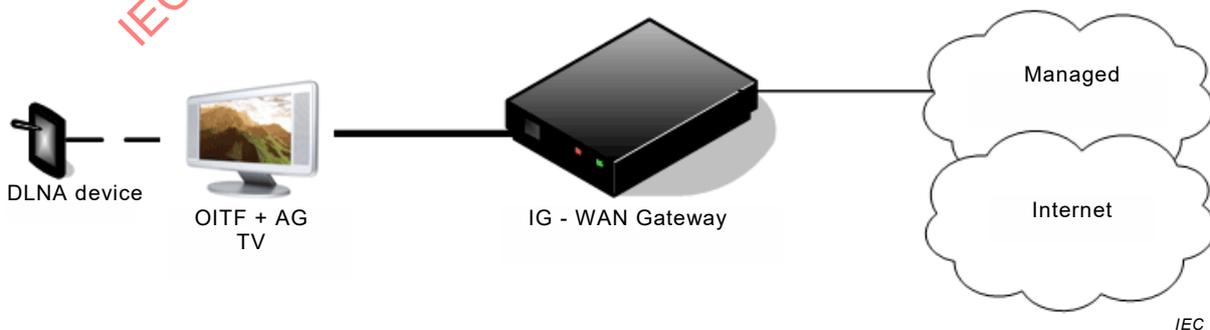


Figure 5 – Combined OITF-AG TV and IG-WAN Gateway (“headed configuration”)

This deployment as shown in Figure 5 supports managed and unmanaged services, and DAE and PAE applications. The following devices are deployed:

- Combined IG-WAN Gateway: a single physical device including an IG and WAN Gateway functionality.
- Combined AG-OITF TV: a TV including both an OITF and an AG.

Optionally, the OITF-AG TV may act as a DLNA DMS to make OIPF services available to DLNA devices. It may also act as a DLNA DMP to access content from other DLNA devices on the home network.

5.3 Remote UI server

NOTE This subclause is given for information only.

PAE applications may offer a CE-HTML remote UI to other devices. The org.oipf.uiserver package allows applications to register as providing a remote UI. When an application registers, it provides information about itself in the XML format defined by the CEA-2014-A remote UI. The PAE implementation listens for UPnP search requests for the schema “urn:oipf-org:device:ag:1” as defined in IEC 62766-4-1:2017, 11.3.2. When such a request is received, the implementation combines the remote UI information provided by all currently registered applications and returns it.

6 Protocols

6.1 Broadcast channel protocols

The broadcast channel protocols defined by Clause 6.2 of ETSI TS 102 728 are not included in the present document.

6.2 Interaction channel protocols

The following protocols shall be supported with the definition in IEC 62766-4-1 superseding that in ETSI TS 102 728:

- TCP;
- UDP;
- IP;
- DNS;
- HTTP;
- HTTPS.

6.3 Transport protocols for application loading over the interaction channel

Subclause 6.4.1 of ETSI TS 102 728 need not be supported.

Applications loading over the interaction channel shall be implemented using signed JAR-files as defined in the JAR file specification.

The FLUTE protocol shall be supported as defined in IEC 62766-4-1.

When the application signalling for an application includes one or more FLUTE transport protocol descriptors (see Annex AR.2 in ETSI TS 102 728, “Extensions to XML AIT”), the following shall apply.

- The implementation shall attempt to connect to each specified FLUTE session or sessions (unless already connected for another application).
- Requests to load files shall be checked against the files available through FLUTE before fetching them from a unicast network.

- When a FLUTE session is not used by any running applications, the session shall be closed. It is implementation-dependent whether this happens immediately or at some later time when implementation resources used by the closed session may be needed for other purposes. Closed FLUTE sessions may be subsequently re-used; however, the implementation shall ensure the contents are current, as if a new session had been created.

6.4 IPTV protocols

6.4.1 Streaming protocols

The following protocols shall be supported as defined in IEC 62766-4-1:

- RTP;
- IGMP;
- RTSP.

6.4.2 Metadata protocols

The following protocol shall be supported:

- DVB-STP as required by IEC 62766-3.

6.4.3 Content download protocols

The following protocol shall be supported as defined in IEC 62766-4-1:

- HTTP.

6.5 Home network protocols

This is the procedure for AG discovery defined in IEC 62766-4-1.

7 Content formats

7.1 Static formats

Requirements on still image support are defined in referenced specifications. The following is a summary:

- JPEG support is required by ETSI TS 102 728 and JSR-217 with the precise details defined in ETSI TS 102 728.
- PNG support is required by ETSI TS 102 728 and JSR-217 with the precise details defined in ETSI TS 102 728.
- GIF support is required by JSR-217.

The optional MPEG-2 I-frames and video "drips" in ETSI TS 102 728 shall not be used.

7.2 Streaming formats

The following shall be supported for streaming content as defined by IEC 62766-2-1:

- H.264/AVC;
- HE-AAC.

The following shall be supported as monomedia formats for audio clips as defined by IEC 62766-2-1:

- HE-AAC.

MPEG-1 layer 3 may be supported for streaming content and for audio-clips as defined by IEC 62766-2-1.

Subtitles shall be supported as defined by IEC 62766-2-1.

OIPF HTTP Adaptive Streaming may be supported as defined by IEC 62766-2-2.

7.3 Fonts

7.3.1 Resident fonts

The RNIB/DTG "Tiresias" font or equivalent shall be supported with the "Basic Euro Latin" character set defined in ETSI TS 102 727.

Other resident fonts may be supported as required.

7.3.2 Downloadable fonts

The OpenType format as defined by ETSI TS 102 728 shall be supported. The PFR font format as required by ETSI TS 102 728 is not required to be supported.

8 Void

This clause is kept intentionally void to harmonize with the Forum specifications.

9 Application model

9.1 Overview

NOTE This clause is given for information only.

The model for procedural applications is that defined by ETSI TS 102 728. Individual applications are grouped into services. Services may include streaming video and audio, but this is not required. Services that contain only applications are permitted and indeed may be more common in this context. The organisation that packages a set of applications into a service is responsible for ensuring that those applications behave reasonably when deployed together. Applications within a service carry a control code, one of which is AUTOSTART. Applications with this control code will be started automatically when the service is selected.

An application gateway becomes aware of services either from the IPTV service discovery process (see Annex B of IEC 62766-1:2017) or as a result of an API call made by an application. This signalling supports applications that run all the time (called "unbound applications" in ETSI TS 102 728), and applications which are bound to a scheduled content service. Practically, this signalling does not support applications which are bound to a particular item of content in a scheduled content service. Applications are signalled by information placed in an ApplicationList which may be placed in the following three places.

- In the SD&S service provider discovery record for the service provider who owns or subsidises the device including the application gateway (called the "subsidising service provider" in ETSI TS 102 728). Any such applications, which are signalled as needing to be started automatically, will be started when the SD&S is first processed. Such applications are unbound applications and may run all the time. See also 4.3.2 of IEC 62766-3:2016.
- In a Package entry in SD&S. Such applications are bound to the set of services in the package and run while a service from that package is selected.

- In an IPService entry in SD&S. Such applications are bound to the service (or services) where they are included and only run while a service is selected where those SD&S entries include them.

Additionally, an application offering a user interface to on-demand content may associate one or more applications with individual items of content using an API which associates the application signalling information with the locator for the on-demand content.

There are a number of different API calls which an application can use to add or update the services known to an application gateway.

- An application may install a service (and the applications it contains) in persistent memory in the application gateway (known as "stored services" in ETSI TS 102 728).
- An application may select a service by specifying the location of a file containing the signalling information for that service, (e.g. using an HTTP URL pointing to a file on a server). Such a service will just run without being installed in persistent memory. (These are known as "Applications loaded from the interaction channel" in ETSI TS 102 727.)
- An application may install services containing unbound applications by passing in the same information as would be acquired from SD&S.

The present document only requires application signalling that is in an XML format, either distributed as part of SD&S or distributed as a stand-alone file. Practically, this signalling is not suitable for dynamic uses such as applications that are related to a particular content item in a scheduled content service. In this document, the in-band MPEG-2 table-based signalling from MHP could be used for this purpose. However, it is optional for both networks and application gateways.

In addition to the mechanisms specified above, applications and services containing them may be included as part of the basic software of the application gateway and start automatically when power is applied. Such applications would be updated by software downloads. Such applications would likely be unbound applications running all the time. For networks where SD&S is not deployed, one possibility would be for an application to load an initial set of applications by some other means, e.g. from a service provider specific URL, either unicast or multicast.

In this document, all procedural applications are distributed in JAR files, one JAR file per application. Due to the file format, it is necessary to download the end of the JAR file before any of the individual files inside can be accessed, practically therefore the entire JAR file is downloaded before an application starts. This is in contrast to the broadcast object carousel based systems where individual class files can be downloaded as required. These JAR files may be distributed by unicast (HTTP) or multicast (FLUTE).

Applications and their associated metadata may be stored in persistent, non-volatile storage in the terminal or downloaded from the network into volatile memory when required. The following three possibilities are defined.

- Both application and metadata stored in persistent storage. These applications can run with no further access to the network. These are called Stored Applications in GEM.
- Applications stored in persistent storage whose metadata is not stored. For these applications, the persistent storage effectively functions as a cache. The metadata for the application is retrieved from the network. At this point, the implementation determines that the correct version of the application is held locally in persistent storage.
- Neither application nor metadata is stored in persistent storage. In this case, once the metadata is downloaded, the corresponding application file(s) shall also be downloaded. At least the JAR file shall be downloaded before the application can run.

9.2 Broadcast applications

In the present document, what ETSI TS 102 728 calls “broadcast applications” are applications which are associated with one or more scheduled content services. These shall be supported using the “XML Encoding for AIT” found in Annex AR of ETSI TS 102 727 as follows.

- Signalling them in a Package entry in SD&S. Such applications are bound to the set of services in the package and are permitted to run while any service from that package is selected.
- Signalling them in an IPService entry in SD&S. Such applications are bound to the service (or services) where they are included and only run while any service is selected where those SD&S entry includes them.

These shall also be supported where an application offering a user interface to on-demand content associates one or more applications with individual items of content manually.

Applications may also be associated with scheduled content using the MPEG-2 table based encoding of the AIT defined in ETSI TS 102 727. Support for this is OPTIONAL in both networks and application gateways.

9.3 DVB-J model

Application gateways are not required to monitor for changes in SD&S frequently enough to change applications at boundaries between individual content items in a scheduled content service. Effectively dynamic update of a service's application signalling is not supported. The language in ETSI TS 102 728, Section 9.2 about the packaged media target also applies to application gateways.

NOTE SD&S information changes only if a new service is added. This does not happen too frequently so that a check once a day is considered to be sufficient.

9.4 Stored and cached applications

Stored applications shall be supported.

Cached applications may be supported.

9.5 Unbound applications

Unbound applications shall be supported.

10 Application signalling / metadata

10.1 XML AIT

The application description shall be the XML encoding of the AIT as defined in ETSI TS 102 727 Annex AR, “XML encoding for AIT”, and modified by IEC 62766-3 with the following modifications as stated in Table 1.

Table 1 – Status of XML AIT descriptors and elements

Descriptor or Element in MHP	Summary	Status or comments in present document
AR.3.1 ApplicationList	List of applications	Required
AR.3.2 Application	Name, identifier, type specific descriptor, provider descriptors	Required
AR.3.3 ApplicationIdentifier	2 numbers	Required
AR.3.4 ExternalApplicationIdentifier	Already running applications not signalled in this service	This should not be used.
AR.3.5 ApplicationDescriptor	Numerous application attributes	Required
AR.3.6 VisibilityDescriptor	Attribute – indicate if application can be visible to users and/or other applications	Required
AR.3.7 IconDescriptor	Icon for application	The filename in the IconDescriptor shall either be a relative filename within the jar file carrying the application or shall be an HTTP URL.
AR.3.8 AspectRatio	Preferred aspect ratio for applications	Required
AR.3.9 MhpVersion	Specification version	As defined by GEM for the application version fields in clause 10.4.3 "Content of the application description"
AR.3.10 StorageCapabilities	Can the application be stored or cached	Support for stored applications required.
AR.3.11 StorageType	Enumeration used in AR.3.10	As AR.3.10
AR.3.12 ApplicationType	Application type	The "DVB-J" application type shall be used for GEM-IPTV applications. The "OIPTV-headless" type shall be used for headless applications.
AR.3.13 DvbApplicationType	Enumeration for AR.3.12	Application type DVB-J shall be used for GEM-IPTV applications.
AR.3.14 ApplicationControlCode	Enumeration for AR.3.5	Required except for REMOTE (see external application identifier)
AR.3.15 ApplicationSpecificDescriptor	Container	Required
AR.3.16 DVBJDescriptor	Application location	The first location element shall point to a JAR file containing the first class of the application. No other JAR files shall be referenced.
AR.3.17 ApplicationStructure	Classpath and initial class for use with AR.3.16	This shall not be used. (The information is found in the JAR file manifest).
AR.3.18 AbstractIPService	Supports grouping of unbound applications	Required
AR.3.19 UnboundApplicationDescriptor	Unbound application support	Required

Where FLUTE is supported as defined in IEC 62766-4-1, the FLUTESessionDescriptor defined in Clause B.6 of IEC 62766-3:2016 shall be supported. Where FLUTE is not supported, this descriptor shall be silently ignored.

10.2 Stored and cached applications

For stored and cached applications, the application description file shall be ignored. The JAR file or its entire contents shall be stored.

11 The Java platform

11.1 Fundamentals

The PAE Java Platform is based on the IPTV target of the DVB-GEM specification ETSI TS 102 728 which is based on the Personal Basis Profile 1.1 (JSR-217) and Java TV 1.1 (JSR-927) as described below.

In the case of a conflict, the following precedence rules apply:

- a) The normative guarantees of "Personal Basis Profile 1.1" shall always take precedence.
- b) The normative guarantees of "Java TV 1.1" shall always take precedence, except when in conflict with rule 1.
- c) The normative guarantees of GEM-IPTV take precedence except when in conflict with rules a) and b) above.

The PAE Java Platform is based on the "Personal Basis Profile 1.1". PAE implementations shall fully comply with the "Personal Basis Profile 1.1".

The PAE implementation shall be fully compliant with:

- JSR-217 – "Personal Basis Profile 1.1";
- JSR-218 – "Connected Device Configuration 1.1";
- JSR-219 – "Foundation Profile 1.1".

The PAE Java Platform is based on "Java TV 1.1". PAE implementations shall fully comply with "Java TV 1.1".

- JSR-927 – "Java TV 1.1.1".

NOTE Failure modes of JavaTV in devices without a display are summarized in Annex A.

The namespaces of the specifications above shall be protected. It is not permitted to implement any additional method that is not defined in these specifications. Subsetting of any class or package is also not permitted.

11.2 GEM 1.3

The PAE Java Platform is based on IPTV target of the DVB-GEM 1.3 specification ETSI TS 102 728 and the "Application Gateway and Media Server Fragment" specification Blue Book A127.

PAE implementations in devices with a display shall be fully compliant with the mandatory requirements of the IPTV target of the DVB-GEM 1.3 specification (see ETSI TS 102 728 and ETSI TS 102 727) with the clarifications, definitions and extensions contained in this document.

When 3D is supported, PAE implementations in devices with a display shall also be fully compliant with the mandatory requirements of the Plano-stereoscopic 3DTV GEM Profile specified in ETSI TS 101 600.

PAE implementations in devices without a display shall be fully compliant with the requirements of the "Application Gateway and Media Server Fragment" specification.

PAE applications shall not define classes in the namespace of any package specified by the PAE specification. The fully qualified class name of any class defined by an application shall not start with "java.", "javax.microedition.", "javax.crypto.", "javax.net.",

"javax.security.", "javax.media.", "javax.tv.", "org.davic.",
"org.dvb.", or "org.havi." or "org.oipf.".

11.3 Extensions and mappings to GEM APIs

11.3.1 Broadcast transport protocol access API (org.dvb.dsmcc)

Instances of DSMCCObject corresponding to files in a JAR file shall be supported as defined by Clause P.3 of ETSI TS 102 728.

Instances of ServiceDomain shall correspond to JAR files. Use of the attach(Locator) method with a Locator referencing a JAR file delivered using HTTP shall be supported.

This document does not define support for instances of DSMCCStream and DSMCCStreamEvent corresponding to files in a JAR file.

11.3.2 Application listing and launching API (org.dvb.application)

This API shall be mapped onto the XML encoding of the AIT.

11.3.3 Streaming media APIs

If the Locator, MediaLocator or URL passed to the methods listed below references a content access streaming descriptor (as defined in Clause C.2 of IEC 62766-5-1:2017) that contains one or more content items, then the client shall use the first such content item as the source of the media to be presented by each of the APIs listed. This applies to the following methods:

- javax.tv.service.SIManager.getService(...);
- javax.media.Manager.createDataSource(...);
- javax.media.Manager.createPlayer(...)

11.3.4 GEM 3D API

The org.dvb.stereoscopicpackages shall be supported as defined in ETSI TS 101 600.

11.4 APIs defined by this part

11.4.1 Content and service protection API

This is the org.oipf.drm package defined in Annex G.

When the permission request file requests the permission to communicate with a CA system for any CA system ID and this is granted, a DRMPermission shall be created with name "*".

11.4.2 User authentication API

This is the org.oipf.auth package defined in Annex E.

When an application is started, it shall be given an instance of org.oipf.auth.UserAuthenticationPermission where the domain is the domain from which the application was delivered.

11.4.3 UI server API

This is the org.oipf.uiserver package defined in Annex F.

11.4.4 Content download API

This is the org.oipf.download package defined in Annex C.

If the locator references a content access download descriptor (as defined in Clause C.1 of IEC 62766-5-1:2017) which contains one or more content items, then the client shall use the data inside the abstract content access descriptor to initiate the download of those content items. Where multiple content items are to be downloaded, all items shall be downloaded in an order as defined by the client.

11.4.5 Service API

This is the org.oipf.service package defined in Annex D.

11.5 PVR APIs

The basic APIs for PVR are included as a result of the reference to ETSI TS 102 817 in Clause 16.

These are the following packages:

- the org.dvb.tvanytime.pvr package and sub-packages from ETSI TS 102 816;
- the org.oipf.pvr package defined in Annex H.

11.6 Content referencing

Table 2 lists the types of locators defined in Clause 14 and their mapping to the APIs required by ETSI TS 102 728.

Table 2 – Mapping of GEM clauses relating to content referencing

GEM clause	Mapping
11.11.1 Transport stream	Not required for GEM-IPTV target
11.11.2 Network	Not required for GEM-IPTV target
11.11.3 Bouquet	Not included in GEM
11.11.4 Service	As specified by GEM.
11.11.5 DVB event	Not required for GEM-IPTV target.
11.11.6 MPEG elementary stream	As specified by GEM.
11.11.7 File	Implementations shall support the use of URLs to reference files in JAR files. The details of this may be implementation specific.
11.11.8 Directory	Implementations shall support the use of URLs to reference directories in JAR files. The details of this may be implementation specific.
11.11.9 Drip feed decoder	Not required for GEM-IPTV target.
11.11.10 Irrelevant	Not relevant.
11.11.11 Methods working on many locator types	As specified by GEM.
11.11.12 Support for the HTTP Protocol in DVB-J	As specified by GEM.
11.11.13 MHP Applications	As specified by GEM.

12 Security

12.1 Authentication of applications

Application authentication shall be done using the signing mechanisms defined for JAR files in the JAR File Specification. The MHP application authentication mechanism need not be supported by the present document.

12.2 Permission request file

The semantics of the "cappermission" element are modified as defined in 11.4.5.

12.3 Security policy for applications

The permission request file defined in ETSI TS 102 728 shall be supported except as follows:

- the credentials mechanism should not be supported;
- permissions, where the corresponding permission class is not included in the present document, shall be parsed but then ignored.

12.4 Certificate management

The certificate revocation mechanism defined in ETSI TS 102 727 should not be supported. Certificate revocation may optionally be checked using IETF RFC 2560.

The root certificate management mechanism defined in ETSI TS 102 727 should not be supported. No replacement is defined by the present document. Updating of root certificates may be performed by software update.

13 Graphics reference model

The following applies in addition to the requirements defined in ETSI TS102 728:

- graphics resolutions for standard definition (as required by ETSI TS102 728 Clause G.1.1) shall be as defined in IEC 62766-5-1.

14 System integration aspects

Table 3 lists the types of entity that it shall be possible to address by locators in this document and any corresponding text representation.

Table 3 – Locators and corresponding text representations

Entity	Text representation	Comment
Service	For services delivered via unicast, "rtsp:" URL defined in ETSI TS102 539. For services delivered via multicast, "rtp:" and "udp" URLs defined in ETSI TS102 539.	Relevant for devices with a display and for devices without a display but with media handling capabilities.
Service Domain	"http:" or "https:" URL	Used to reference a JAR file.
MPEG elementary stream	No standardized text representation	Relevant for devices with a display and for devices without a display but with media handling capabilities.
File	"file:", "http:" and "https:" URLs as referred to in ETSI TS102 728.	
Directory	"file:", "http:" and "https:" URLs as referred to in ETSI TS102 728.	

NOTE 1 FLUTE carousels do not appear as a file system. Hence they do not have a unique URL.

NOTE 2 "rtp:", "udp:" and "rtsp:" are considered as transport-dependent locators. The present document does not define support for transport-independent locators.

15 Detailed profile definitions

Table 4 lists the subclauses of this document that are required or optional for the three different device types addressed by this volume.

Table 4 – Platform profile definitions

Area	Clause	Devices with display	Devices without Display	
			Without media handling	With media handling
	4.2.2 DVB-GEM Compliance	M	–	–
Protocols	6.1 Broadcast channel protocols	–	–	–
	6.2 Interaction channel protocols	M	M	M
	6.3 Transport protocols for application loading over the interaction channel	M	M	M
	6.4.1 Streaming protocols	M	–	M
	6.4.2 Metadata protocols	M	M	M
	6.4.3 Content download protocols	O	–	O
	6.5 Home network protocols	O	M	M
Content formats	7.1 Static formats	M	–	–
	7.2 Streaming formats	M	–	O
	7.3.1 Resident fonts	M	–	–
	7.3.2 Downloadable fonts	M	–	–
Application Model	9.2 Broadcast applications	M	–	–
	9.3 DVB-J model	M	M	M
	9.4 Stored and cached applications	M	M	M
	9.5 Unbound applications	M	M	M
Application Signalling	10.1 XML AIT	M	M	M
	10.2 Stored and cached applications	M	M	M
Java Platform	11.1 Fundamentals	M	M	M
	11.3 Extensions and mappings to GEM APIs	M	M	M
	11.4.1 Content and service protection API	M	–	M
	11.4.2 User authentication API	M	M	M
	11.4.3 UI server API	M	M	M
	11.4.4 Content download API	O	–	O
	11.4.5 Service API	M	–	M
	11.5 PVR APIs	O	–	O
Security	12.1 Authentication of applications	M	M	M
	12.2 Permission request file	M	M	M
	12.4 Certificate management	M	M	M
	13 Graphics reference model	M	M	M
	14 System integration aspects	M	M	M
	16 PVR	O	–	O
	17 Minimum terminal capabilities	M	M	M
Key				
– Not applicable/Not required/ Clause does not contain normative requirements				

O	Optional feature
M	Required feature in the GEM terminal

Table 5 contains a list of the sections of the GEM specification, showing their applicability to the GEM IPTV target and PAE devices.

Table 5 – Applicability of GEM specification sections

Area	GEM specification section	GEM IPTV target	PAE devices with display	PAE devices without display	
				Without media handling	With media handling
Static Formats					
Bitmap pictures	7.1.1.3, "PNG" and 15.1, "PNG – restrictions"	M	M	–	–
	7.1.1.3, "PNG" without restrictions	–	–	–	–
	7.1.1.4, "GIF"	–	M Required by PBP	–	–
	7.1.2, "MPEG-2 I-Frames"	O	SN	–	–
	7.1.1.2, "JPEG" + 15.3, "JPEG – restrictions"	–	–	–	–
	7.1.1.2, "JPEG" without restrictions	M	M	–	–
Audio clips	7.1.4, "Monomedia format for audio clips"	M	M-FE	–	O-FE
Video drips	7.1.3, "MPEG-2 Video "drips"	O	SN	–	–
Text encoding	7.1.5, "Monomedia format for text"	M	M	M	M
Media Streaming formats					
Video	7.2.2, "Video"	M	M-FE	–	–
Audio	7.2.1, "Audio"	M	M-FE	–	O-FE
Subtitles	7.2.3, "Subtitles"	–	O	–	–
Fonts					
Built in	Character, set see annex E Metrics see annex D Face: UK RNIB "Tiresias"	O	M	–	–
Downloadable	7.4.1, "PFR"	M	SN	–	–
	7.4.2, "OpenType"	O	M	–	–
Broadcast channel protocols					
	6.2.2, "MPEG-2 sections"	O	Not visible to GEM applications	–	Not visible to GEM applications
	6.2.5, "Object carousel"	O	M/– partial functional equivalent	M/– partial functional equivalent	M/– partial functional equivalent

Area	GEM specification section	GEM IPTV target	PAE devices with display	PAE devices without display	
				Without media handling	With media handling
	IP Multicast stack based on: 6.2.6, "Protocol for delivery of IP multicast over the broadcast channel", 6.2.7, "Internet Protocol (IP)", 6.2.8, "User Datagram Protocol (UDP)", 6.2.10, "IP signalling"	–	–	–	–
Interaction channel protocols					
TCP/IP	6.3.3, "Transmission Control Protocol", 6.3.2, "Internet Protocol"	M	M	M	M
UDP/IP	6.3.2, "Internet Protocol", 6.3.9, "User Datagram Protocol"	M	M	M	M
HTTP	6.3.7.1, "HTTP 1.1"	O	M	M	M
	6.3.7.2, "MHP profile of HTTP 1.0"	M	–	–	–
DSMCC-UU RPC	6.3.4, "UNO-RPC", 6.3.5, "UNO-CDR", 6.3.6, "DSM-CC User to User"	–	–	–	–
DNS	6.3.10, "DNS"	M	M	M	M
HTTPS	6.3.7.3, "HTTPS"	M	M	M	M
Interaction Channel File System	6.4.1, "File system implemented only by the interaction channel"	O	–	–	–
DSMCC / HTTP hybrid	6.4.2, "Hybrid between broadcast stream and interaction channel"	O	–	–	–
IPTV	5, "Basic architecture"	M	–	–	–
Application Model					
Application Model	All parts of Clause 9, "Application model" except those clauses (and their subclauses) identified below	M	M	M	M
	9.3 "DVB-HTML model"	O	SN	SN	SN
	9.7 "Lifecycle of internet access applications"	O	M/O Only web browser support is REQUIRED	–	–
	9.9, "Stored and Cached applications"	O	M/O Stored application support REQUIRED	M/O Stored application support REQUIRED	M/O Stored application support REQUIRED
	9.13, "Unbound Applications"	–	M	M	M
Application Signalling					
Application Signalling	10, "Application signalling"	M	M-FE XML encoding of AIT does not support full syntax of binary encoding.	M-FE XML encoding of AIT does not support full syntax of binary encoding.	M-FE XML encoding of AIT does not support full syntax of binary encoding.
DVB-J					

Area	GEM specification section	GEM IPTV target	PAE devices with display	PAE devices without display	
				Without media handling	With media handling
	All parts of clause 11, "DVB-J platform" except those clauses (and their subclauses) identified below	M	M	Subset as defined by Blue Book A127	Subset as defined by Blue Book A127
	11.4.1 "HAVi UI Widgets"	O	O	-	-
	11.5.2, "Support for Multicast IP over the Broadcast Channel"	-	-	-	-
	11.5.3, "Support for IP over the Return Channel"	M	M	M	M
	11.5.4, "MPEG-2 Section Filter API"	O	SN	SN	SN
	11.5.5, "Mid-Level Communications API" as modified by 11.5, "Data access APIs"	M	M	M	M
	11.5.7 "File storage device access"	O	O	O	O
	11.6.3, "Tuning API"	O	-	-	-
	11.6.4, "Conditional access API"	-	-	-	-
	11.6.6, "Service discovery and selection for IPTV"	O	M	M	M
	11.6.7, "Integration between protocol independent SI API and TV-Anytime"	O	M/- Mandatory if broadband content guide is supported otherwise not applicable	M/- Mandatory if broadband content guide is supported otherwise not applicable	M/- Mandatory if broadband content guide is supported otherwise not applicable
	11.7.4, "Basic MPEG concepts"	O	-	-	-
	11.7.6 "Content referencing"	O	M	M	M
	11.7.7, "Common error reporting"	O	-	-	-
	11.7.8, "Plug-in APIs"	O	O	O	O
	11.7.9, "Provider API"	O	O	O	O
	11.7.10, "Content referencing for IPTV"	O	M	-	M
	11.7.11, "TV-Anytime content referencing and metadata"	O	M/- Mandatory if broadband content guide is supported otherwise not applicable	M/- Mandatory if broadband content guide is supported otherwise not applicable	M/- Mandatory if broadband content guide is supported otherwise not applicable
	11.8.2, "APIs for return channel security"	M	M	M	M
	11.8.3, "Additional permissions classes"	O	-	-	-
	11.8.6, "DVB Extensions for Cryptography"	O	O	O	O
	11.9.5.2, "JDOM"	O	M	M	M
	11.9.6, "MHP terminal hardware API"	O	O	O	O
	11.11.1 "Transport stream"	O	-	-	-
	11.11.2 "Network"	O	-	-	-

Area	GEM specification section	GEM IPTV target	PAE devices with display	PAE devices without display	
				Without media handling	With media handling
	11.11.4.3, "Content referencing for IPTV"	M	M	–	M
	11.11.5, "DVB event"	O	–	–	–
	11.11.9, "Drip feed decoder"	O	SN	SN	SN
	11.12.2, "Stored services"	O	M	M	M
	11.15, "APIs defined in OCAP"	O	M/O Only org.ocap.service is required	M/O Only org.ocap.serv ice is required	M/O Only org.ocap.serv ice is required
	11.14, "Internet Access"	O	M/O Only web browser support is required	–	–
	17, "Internet access clients"	O	M/O Only web browser support is required	–	–

Key	
–	Not applicable/Not required
O	Optional feature
SN	Feature should not be supported
M	Mandatory feature
M-FE	Mandatory feature – functional equivalent
O-FE	Optional feature – functional equivalent

Table 6 gives an overview of the functional equivalents that are available in the GEM-IPTV target and are defined in the PAE.

Table 6 – Summary of functional equivalents (informative)

Name	GEM clause(s)	MHP definition	Details
Arch	5, "Basic architecture"	ETSI TS102 727 Clause 5, "Basic Architecture"	See 5.1
Carousel	6.2.5, "Object carousel"	ETSI TS102 727 Clause 6.2.5, "DSMCC User-to-user Object Carousel" as modified by Clause 15.6.1.1, "Carousel"	No complete functional equivalent defined. JAR files are a partial functional equivalent. See 6.3
IP MPE	6.2.6, "Protocol for delivery of IP multicast over the broadcast channel"	ETSI TS102 727 Clause 6.2.6, "DVB Multiprotocol Encapsulation"	Not applicable
SI	6.2.9, "Service information"	ETSI TS102 727 Clause 6.2.9, "DVB Service Information" DVB Service Information as defined in ETSI EN 300 468 and ETSI TS101 211.	DVB-SD&S and BCG.

Name	GEM clause(s)	MHP definition	Details
	11.6.1, "Signalling-bound service information API"	ETSI TS102 727 Clause 11.6.1, "DVB Service Information API" ETSI TS102 727 Clause 11.11.3, "Bouquet"	Not defined.
	Annex O, "Integration of the JavaTV SI API"	ETSI TS102 727 Annex O, "Integration of the JavaTV SI API"	MHP Annex AP mapping between JavaTV SI API and SD&S / BCG.
Broadcast IP signalling	6.2.10, "IP signalling"	ETSI TS102 727 Clause 6.2.10, "IP signalling"	Not applicable
IPTV Protocols	6.5, "IPTV protocols"	ETSI TS102 727 clause 6.5, "IPTV protocols"	RTP, RTSP, IGMP, DVB-STP as defined in section 6.4.
Audio	7.2.1, "Audio" At least 1 audio format.	ETSI TS102 727 Clause 7.2.1, "Audio"	HE-AAC – see Section 7.2
Video	7.2.2, "Video" At least 1 video format.	ETSI TS102 727 Clause 7.2.2, "Video"	H.264/AVC – see Section 7.2
Subtitles	7.2.3, "Subtitles"	ETSI TS102 727 Clause 7.2.3, "Subtitles"	Optional in the present document
	11.4, "Presentation APIs" – classes related to subtitles	ETSI TS102 727 Clause 11.4.2.5.1, classes related to subtitles	If no subtitle format selected then APIs do nothing.
Audio Clips	7.1.4, "Monomedia format for audio clips"	ETSI TS102 727 Clause 7.1.4: Functional equivalent to MPEG-1 Audio (Layer 1 and 2) ISO/IEC 11172-3	HE-AAC required and MPEG-1 layer 3 optional – see Section 7.2.
Resident Fonts	7.3, "Resident fonts"	ETSI TS102 727 Clause 7.3 At least the font Tiresias ("The RNIB/DTG "Tiresias" font version 8.03", usage as specified in Annex C of ETSI TS102 809) shall be provided.	Tiresias or equivalent with extended latin character set.
Downloadable Fonts	7.4, "Downloadable fonts"	ETSI TS102 727 Clause 7.4 PFR0 as in DAVIC 1.4.1 part 9 OpenType® as defined in ISO/IEC 14496-18 as the font format for MPEG-4	OpenType REQUIRED with clarifications from GEM.
Application Signalling	10.2, "Program specific information" 10.4, "Application description" 10.5, "DVB-J specific application description"	ETSI TS102 727 Clause 10	XML encoding of AIT defined in MHP Annex AR.
	11.7.2, "Application discovery and launching APIs"	ETSI TS102 727 Clause 11.7.2, "Application discovery and launching APIs"	Same mapping as MHP. See clause 11.3.2.

Name	GEM clause(s)	MHP definition	Details
Application Authentication	12.2, "Authentication of applications" NOTE 1 See also text in Clause 12.6.2.6, "Credentials" and text in Clause 12.9, "Certificate management" NOTE 2 See also text in Clause 12.9.2, "Root certificate management."	ETSI TS102 727 Clause 12.2, "Authentication of applications"	Signed JAR files.
	12.9.1, "Certificate Revocation Lists"	MHP [1] Clause 12.9.1, "Certificate Revocation Lists"	Optional in the present document.
Conditional Access	11.4, "Presentation APIs," classes related to conditional access	ETSI TS102 727 Clause 11.4.2.5.1, classes related to conditional access	Failure modes due to content protection are included.
	11.6.4, "Conditional access API"	ETSI TS102 727 Clause 11.6.4, "Conditional Access API" ETSI TS102 727 Clause 14.10, "CA system"	Not included in the present document.
Content Referencing	11.7.6, "Content referencing"	ETSI TS102 727 Clause 11.7.6, "Content Referencing" This API is formed of DAVIC 1.4.1 part 9 Locator, DvbLocator, javax.tv.locator, org.dvb.locator.packages	Supported as defined in GEM. Classes corresponding to "dvh:" URI scheme not included.
	11.11.11, "Methods working on many locator types"	ETSI TS102 727 Clause 11.11.11, "Methods working on many Locator types"	There are no transport independent locators defined in the present document.
	14.1, "Namespace mapping"	ETSI TS102 727 Clause 14.1, "Namespace mapping (DVB Locator)"	See Section 14.
	14.9, "Content referencing for IRTV" 14.10, "Service identification"	ETSI TS102 727 Clause 14.9, "Service identification"	Not applicable.
Graphics Resolution	D.2, "Horizontal resolution"	ETSI TS102 727 Clause D.3.4.2, "Horizontal resolution"	
	G.1.1, "Device resolution for Standard Definition"	ETSI TS102 727 Clause G.1.1, "Device capabilities"	See IEC 62766-5-1.
	G.4, "Resident fonts and text rendering"	ETSI TS102 727 Clause G.4, "Resident fonts and text rendering"	
Text Wrapping	D.3, "Text wrapping setting is true"	ETSI TS102 727 Clause D.3.7.2, "Text wrapping setting is true"	
RCMM	12.9.2, "Root certificate management"	ETSI TS102 727 Clause 12.9.2, "Root Certificate Management"	Not defined in the present document.
Active Format Descriptor	N.1, "Active Format Definition"	Described in the present document, Clause N.1.1, "MHP Signalling for Active Format Definition"	Not defined in the present document.

16 PVR

16.1 General

Where local PVR functionality is exposed to the PAE, this shall be done as specified by ETSI TS102 817. The details, which GEM recording specifications are required to provide by that specification, are defined in Tables 7, 8 and 9.

16.2 Mandatory Responsibilities

Table 7 elaborates the responsibilities of the GEM recording specifications mapped to the PAE.

Table 7 – Responsibilities of GEM recording specifications

Responsibility	Definition
Which types of stream are to be considered as "recordable streams".	All streams defined by IEC 62766-2-1 shall be considered recordable. To the extent that the terminal supports subtitles, subtitle streams shall be considered recordable.
Minimum capabilities for the number of streams (or number of streams of each type) that a GEM recording terminal shall be able to record.	For scheduled recording, the simultaneous recording of at least one video elementary stream, at least two audio elementary streams and at least two subtitle streams to the extent they are supported.
The definition of which applications are recordable in both scheduled and timeshift recording (which need not be the same).	Not applicable. The present document does not require support for applications in-band in broadcast services.
The requirements on a GEM recording terminal to monitor for dynamic data and behaviour of applications during scheduled and timeshift recording (which need not be the same).	Not applicable. The present document does not require support for data in-band in broadcast services.
Requirements on reconstructing the dynamic behaviour of recorded applications during playback of scheduled and timeshift recordings (which need not be the same).	Not applicable. The present document does not require support for applications in-band in broadcast services.
The definitions of which streams are to be recorded in scheduled and timeshift recording	If the number of streams of each type present is less than or equal to the limits in the recording capability of the device, then all the streams of that type shall be recorded. Where more streams of any one type exist than the terminal can record, the decision on what to record shall be according to Clause 11.4.2.3 of ETSI TS102 727.
How accurately the expiration period should be enforced by implementations.	There is no requirement for this to be accurately enforced, either by deleting the recording or by making it inaccessible through the API.
The definition of at least one protocol for transmitted time lines	Not defined in the present document.
The conditions when a JMF player or service context has a time-shift buffer attached.	The implementation shall support at least one time-shift buffer. If only one video stream is being presented, this time-shift buffer shall be associated with that video stream. If more than one video stream is being presented, the present document does not define which stream the time-shift buffer is associated with. The present document does not define mechanisms to associate timeshift buffers with other service contexts.
A mechanism to associate security attributes with individual recording requests	See org.oipf.pvr.RecordingAccessPermissions
The mechanism for resolving parent recording requests including setting the initial state of a parent recording request.	When a request is made to record a group CRID, the terminal shall resolve this into its constituent elements.
The events generated during playback when the start and end of a recording a reached.	See Table 8 below.

Table 8 – Events during normal playback and resulting behaviour

Table 8 lists the events during normal playback and the resulting behaviour.

Event	Behaviour	Result on screen	Java event
Fast forward to end of stream when recording is in progress	End of media event generated to any registered applications	Playback continues at rate 1.0 at the end of the stream	EndOfContentEvent
Rewind to beginning of stream	Switch to pause mode	First frame frozen	org.ocap.shared.media.BeginningOfContentEvent
Fast forward to end of stream when recording is not in progress and play to end of stream	End of media generated to any registered applications	Last frame frozen	EndOfMediaEvent

16.3 Optional responsibilities

Table 9 identifies where in the present document the optional responsibilities listed in ETSI TS102 817 can be found or if they are not defined.

Table 9 – Optional responsibilities of GEM recording specifications

Responsibility	Definition
Mechanisms for controlling the extent to which one application can read or modify scheduled recordings and completed recordings made by another application.	The requestedRecording and completedRecording parameters in the RecordingProperties.
Sub-classes of RecordingListFilter to filter the list of recordings in ways not supported by the present document.	See org.dvb.tvanytime.pvr.navigation.
Rules governing which recordings an application can access.	As defined in 16.4.
Additional JMF controls to be supported for RecordedServices or the contents of a timeshift buffer. Different sets of JMF controls may be specified for these two cases.	None defined in the present document.
Delays in re-starting applications after the return to normal play if this is believed to improve the end-user experience, for example when repeated cycles of fast-forward / play / fast-forward / play.	When playback leaves trick-mode and returns to normal, terminals may delay re-starting applications for up to one minute. The behaviour for this minute is implementation dependent.
A mechanism to permit highly trusted applications to obtain instances of RecordingPermission whose action parameter is "*".	No such mechanism defined in the present document.
That the optional behaviour defined in the class description of ServiceContextRecordingSpec, where the contents of the time-shift buffer are stored when the startTime parameter is in the past, becomes mandatory in that particular GEM recording specification.	Not mandatory in the present document.
Mechanisms for automatically removing requests from the list of recordings in a pending state if it appears the recording will never happen.	Once the validity period of a request has expired, a terminal may discard recording requests which are still in a pending state.
Mechanisms for automatically removing requests from the list of recordings in a failed state based on some criteria they define.	Once the validity period of a request has expired, a terminal may discard failed recording requests.
Any requirements to re-resolve ParentRecordingRequests after the request has first been made and to update the state accordingly	For incompletely resolved CRIDs, the terminal shall monitor when additional resolution information becomes available and shall act on that additional information.

16.4 Visibility of recording requests and recordings between applications and service providers

The ETSI TS102 817 specification requires users of that specification to define a mechanism to manage visibility of recording requests between applications from different organisations – referred to as "RecordingRequest specific security attributes". The mechanism defined in this specification is the following.

When a recording request is made, the application making the request has to specify which other applications can access that recording request and any resulting recordings as part of the RecordingRequest. Each of these is specified using an instance of the class RecordingAccessPermissions.

The "RecordingRequest specific security attributes" controlling the visibility of a RecordingRequest instance are defined by the "requestedRecording" parameter regardless of the state of the recording request.

The "RecordingRequest specific security attributes" controlling the visibility of a RecordedService are defined by the "completedRecording" parameter.

How access to a recording request or recorded service is controlled by an instance of RecordingAccessPermissions is defined in the specification for that class.

17 Minimum terminal capabilities

PAE devices with a display shall comply with the union of the minimum terminal capabilities of IEC 62766-5-1 and ETSI TS102 728.

18 HTTP adaptive streaming

18.1 General

When the AG supports HTTP Adaptive Streaming (HAS), the Player object shall accept URL, MediaLocator and DataSource objects pointing to a Media Presentation Descriptor (MPD). The MPD shall be delivered with the MIME type as specified for the MPD in 3GPP TS 26.234, i.e. "video/vnd.3gpp.mpd" and in IEC 62766-2-2.

The Player, during the *Realizing* state, shall fetch the MPD from the URL, after which the MPD shall be interpreted and an initial (set of partial) Representation(s) selected. If all the operations are completed successfully, the player moves to the *Realized* state and then to the *Prefetching* and *Prefetched* state. After this, playback can be started (e.g.: invoking the start() method of the Player).

If the MPD is not valid according to the XML Schema and semantics as defined in Annex A, the Player object shall move to the *Unrealized* state. In this case, a javax.media.ResourceUnavailableEvent will be sent to all subscribed listeners.

If the MIME type specified for the MPD cannot be handled by the AG (i.e.: the AG does not support HAS), the creation of a Player object with URL, MediaLocator and DataSource objects pointing to a MPD will throw a NoPlayerException exception.

18.2 HAS support

HAS support shall be signaled by setting the following System Property:

- org.oipf.supportsHTTPAdaptiveStreaming:
The PAE supports HAS (Yes / Null).

Annex A (informative)

Headless behaviour of UI-related APIs

A.1 General

The behaviour of certain APIs in headless mode (device without a directly connected display) requires a closer consideration. Some APIs were specifically designed for headless operation such as the PBP 1.1 specification (see JSR-217), which defines a headless mode and provides methods to enquire the presence of a display.

A.2 PBP

The Personal Basis Profile specification /ref PBP/ introduced a headless operation mode starting in version 1.1 (see JSR-217).

The class `java.awt.GraphicsEnvironment` contains a method `public static boolean isHeadless()` which tests whether or not a display and some form of input device can be supported in this environment. If this method returns true, a `HeadlessException` is thrown from areas of the Toolkit and `GraphicsEnvironment` that are dependent on a display or input device.

A.3 JavaTV

The following section discusses the behaviour of JavaTV in headless devices. The analysis shows that there are well defined modes of operation for JavaTV on a headless device. All methods that handle display related parameters have a defined behaviour for devices without a display. The following section calls out all these methods and gives a short analysis of the behaviour.

```
javax.tv.graphics.AlphaColor
```

Summary: this just extends `java.awt.Color` which in PBP includes alpha.

Analysis: no additional functionality above PBP.

Conclusion: no special behaviour or spec change needed for headless JavaTV.

```
javax.tv.graphics.TVContainer
```

Summary: gets the top level container for an Xlet

Analysis: cannot fail to return a Container unlike `javax.microedition.xlet.XletContext.getContainer`.

"If the Xlet is the only Xlet that is currently active to invoke this method, it will return an instance of `java.awt.Container` that is initially invisible, with an undefined size and position."

Spec presumably would allow this to return a "new `java.awt.Container`", which cannot be used.

`XletContext.getContainer` says "Calling `c.setVisible(true)` will make the container visible." This language is missing in `TVContainer`.

Conclusion: on a headless device, `XletContext.getContainer` will return an invisible container where the `setVisible` method fails silently (this is the normal failure mode for this method). No spec change needed for headless JavaTV.

```
javax.tv.media.AWTVideoSizeControl and MediaSelectControl
```

Summary: controls video scaling and media component selection.

Analysis: on a headless device, a JMF player simply fails to support these controls. `Player.getControl` would return null. `Player.getControls` would not include these controls in the returned array. I cannot see any language in the JavaTV spec requiring players to support these controls.

Conclusion: on a headless device, these controls are simply not returned by `getControl/getControls`. No spec change needed for headless JavaTV.

```
javax.tv.service.Selection
```

Summary: presentation of (TV) services.

Analysis: selecting a service which a device cannot present will fail with a `SelectionFailedEvent`. Two reason codes are possible – `MISSING_HANDLER` and `INSUFFICIENT_RESOURCES`. The JavaTV specification does not seem to require support for decoding or presenting TV services.

Conclusion: on a headless device, there is no TV service for which `ServiceContext.select(..)` would succeed. No spec change needed for headless JavaTV.

```
javax.media
```

Summary: presentation of media.

Analysis: the entry point to JMF is via `Manager.createPlayer` and `Manager.createDataSource`. These throw `NoPlayerException` and `noDataSourceException` if no player or datasource can be found.

On a headless device, these exceptions would always be thrown.

NOTE Additionally, `javax.media.Player` has a state model. The most relevant states for headless devices are *Unrealized* and *Realizing*. "While *Realizing*, the Controller performs the communication necessary to locate all of the resources it needs to function". On a headless device, all attempts to leave the *Unrealized* state would fail. The player would transiently enter the *Realizing* state and immediately fail with a `ResourceUnavailableEvent` being sent to any `ControllerListeners`.

Conclusion: on a headless device, there is no service for which `Manager.createPlayer(..)` would succeed. No spec change needed for headless JavaTV.

Annex B
(informative)

Void

This annex is kept intentionally void.

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of IEC 62766-6:2017

Annex C (normative)

Package org.oipf.download

C.1 Interface ApplicationDownloadRequest

```

package org.oipf.download;
import java.io.RandomAccessFile;
/**
 * Represents a content download to be performed by an application.
 * Requests of this type are handled totally by an application. They are
 * created in the PENDING_NO_CONFLICT_STATE. The application handling the
 * request is responsible for downloading the content and all resulting
 * state changes.<p>
 * Requests of this type shall always be visible to the application specified
 * when the corresponding ApplicationDownloadSpec was created regardless of
 * recording request specific security attributes.
 * The methods defined in this class shall always fail with a
ApplicationDownloadException
 * if called by any application other than the one specified when
 * the corresponding ApplicationDownloadSpec was created.
 */
public interface ApplicationDownloadRequest
    extends org.ocap.shared.dvr.LeafRecordingRequest {
    /**
     * Return a file to which downloaded data can be written and from
     * which downloaded data can be read.
     * @return a File
     * @throws ApplicationDownloadException if the caller is not permitted
     * to call this method as defined above
     */
    RandomAccessFile getFile() throws ApplicationDownloadException;
    /**
     * Set the state of the download.
     * @param state the new state of the recording
     * @throws ApplicationDownloadException if the caller is not permitted
     * to call this method as defined above
     */
    public void setState( int state );

    /**
     * Set the reason to use for the exception returned by
getFailedException.
     * The reason must be one valid for the constructor of
     * RecordingFailedException.
     * @param reason the reason to use when constructing a
     * RecordingFailedException
     */
    public void setFailedReason( int reason );
}

```

C.2 Class LocatorDownloadSpec

```

package org.oipf.download;

import javax.tv.service.selection.InvalidServiceComponentException;
import javax.tv.locator.Locator;
import java.util.Date;
import org.ocap.shared.dvr.RecordingProperties;
/**
 * Specifies a recording request in terms of a Locator to a file.
 * The identified file is asynchronously downloaded from the network.<p>
 * When instances of this class are passed to RecordingManager.record(..),
 * the following additional failure mode shall apply - if the locator
 * does not reference a file then the record method shall throw an
 * IllegalArgumentException.<p>

```

```

* No additional failure modes are defined for RecordingRequest.reschedule.<p>
* For recording requests resulting from a recording spec of this type,
* downloading shall start immediately. Such recording requests will never be
* in a pending or a IN_PROGRESS_INCOMPLETE_STATE state.
*/

public class LocatorDownloadSpec extends org.ocap.shared.dvr.RecordingSpec
{
    /**
     * Constructor
     * @param source Source of content to be downloaded
     * @param properties the definition of how the recording is to be done
     */
    public LocatorDownloadSpec(Locator source, RecordingProperties
properties)
    { super(properties); }

    /**
     * Returns the source of the content to be downloaded
     * @return the source passed into the constructor
     */
    public Locator getSource()
    { return null; }
}

```

C.3 Class ApplicationDownloadException

```

package org.oipf.download;
/**
 * Thrown when an application calls methods on ApplicationDownloadRequest
 * which it is not permitted to call.
 */
public class ApplicationDownloadException extends Exception {
    /**
     * Constructs a ApplicationDownloadException with
     <code>null</code>
     * as its error detail message.
     */
    public ApplicationDownloadException() { super(); }

    /**
     * Constructs a ApplicationDownloadException with the
     specified detail
     * message. The error message string <code>s</code> can later be
     * retrieved by the {@link java.lang.Throwable#getMessage}</code>
     * method of class java.lang.Throwable.
     *
     * @param s the detail message.
     */
    public ApplicationDownloadException(String s) { super(s); }
}

```

C.4 Class ApplicationDownloadSpec

```

package org.oipf.download;
import org.dvb.application.AppID;
import org.ocap.shared.dvr.RecordingProperties;
/**
 * Represents a content download to be performed by an application.
 * The application to handle the request and the source of the content
 * to download must be specified when the request is created.
 * No other application is permitted to handle the request.
 * The format of the source must be co-ordinated between the application
 * requesting the download and the application handling the download request.
 */
public class ApplicationDownloadSpec extends org.ocap.shared.dvr.RecordingSpec
{
    /**
     * Create a request for content download by application.

```

```
* @param app the application to perform the download
* @param source the source of the download
* @param properties the properties for the download
*/
public ApplicationDownloadSpec(AppID app, String source,
                               RecordingProperties properties)
    {super(properties);}
/**
 * Return the application ID specified.
 * @return an application ID
 */
public AppID getAppID(){return null;}
/**
 * Return the source specified.
 * @return a String
 */
public String getSource(){return null;}
}
```

IECNORM.COM : Click to view the full PDF of IEC 62766-6:2017

Annex D (normative)

Package org.oipf.service – interface ServiceCreator

```

package org.oipf.service;
import javax.tv.locator.Locator;
import javax.tv.service.Service;
import javax.tv.locator.InvalidLocatorException;
/**
 * This interface extends javax.tv.service.SIManager with overloaded methods
 * for creating IPTV services.
 */
public interface ServiceCreator {
    /**
     * Get a service from a locator for the streaming component
     * and an XML AIT fragment for the application component.
     * This permits service bound applications to be used without
     * application signalling in-band in the A/V content.
     * @param locator A locator identifying a service
     * @param ait An XML AIT fragment
     * @return a Service
     * @throws InvalidLocatorException If locator does not identify a valid
     * Service.
     * @throws java.lang.SecurityException If the caller does not have
     * javax.tv.service.ReadPermission(locator)
     */
    public abstract Service getService( Locator locator, String ait );

    /**
     * Get a service from a piece of SDP information describing some A/V
     * content.
     * @param sdp the piece of SDP information
     * @return a Service
     * @throws InvalidLocatorException If locator n the SDP information
     * does not identify a valid Service.
     * @throws java.lang.SecurityException If the caller does not have
     * javax.tv.service.ReadPermission for the locator in the SDP information
     */
    public abstract Service getService( String sdp );

    /**
     * Get a service from a piece of SDP information describing some A/V
     * content and
     * an XML AIT fragment for the application component. This permits
     * service bound
     * applications to be used without application signalling in-band in the
     * A/V
     * content.
     * @param sdp the piece of SDP information
     * @param ait An XML AIT fragment
     * @return a Service
     * @throws InvalidLocatorException If locator n the SDP information does
     * not
     * identify a valid Service.
     * @throws java.lang.SecurityException If the caller does not have
     * javax.tv.service.ReadPermission for the locator in the SDP information
     */
    public abstract Service getService( String sdp, String ait );
}

```

Annex E (normative)

org.oipf.auth

E.1 Class HTTPDigestCredentials

```
package org.oipf.auth;
/**
 * Credentials to be used
 */
public class HTTPDigestCredentials extends UserCredentials
{
    /**
     * Create an HTTPDigestCredentials.
     * @param domain the domain
     * @param realm the realm
     * @param username the username
     * @param password the password
     */
    public HTTPDigestCredentials( String domain, String realm, String
username,
    String password ) {super(domain);}
    /**
     *
     */
    public String getRealm(){return null;}
    /**
     *
     */
    public String getUsername() {return null;}
    /**
     *
     */
    public String getPassword(){ return null;}
}

```

E.2 Class UserAuthenticationPermission

```
package org.oipf.auth;
/**
 * This class represents a Permission to access user authentication
information
 * for a particular domain.
 * The name string is a fully qualified domain name. The actions string is
unused.
 */
public final class UserAuthenticationPermission extends
java.security.BasicPermission {
    /**
     * Creates a new UserAuthenticationPermission.
     */
    public UserAuthenticationPermission() {super("toto");}

    /**
     * Creates a new UserAuthenticationPermission.
     * The actions string is currently unused and should be null.
     * The name string shall be a fully qualified domain name.
     * @param name the name of the permission
     * @param actions the actions string
     */
    public UserAuthenticationPermission(String name, String actions)
        {super(name);}

    /**
     * Returns the list of actions that had been passed to the

```

```

    * constructor - it shall return null.
    *
    * @return a null String.
    */
    public String getActions() { return null;}

    /**
     * Checks if this UserAuthenticationPermission object "implies" the
     * specified permission.
     * @param permission the specified permission to check.
     * @return true if and only if the specified permission is an instanceof
     * and the domain in this object domain-matches
     * the domain in the specified permission as defined by RFC2965.
     */
    public boolean implies(java.security.Permission permission) {return
true;}

    /**
     * Checks for equality against this UserAuthenticationPermission object.
     * @param obj the object to test for equality with this
     * UserAuthenticationPermission object.
     * @return true if and only if obj is an UserAuthenticationPermission and
     * the two domain names are equal.
     */
    public boolean equals(Object obj) { return true;}

    /**
     * Returns the hash code value for this object.
     * @return the hash code value for this object.
     */
    public int hashCode() { return 0;}
}

```

E.3 Class UserAuthenticationManager

```

package org.oipf.auth;
/**
 *
 */
public class UserAuthenticationManager {
    /**
     */
    private UserAuthenticationManager() {}

    /**
     * Return a UserAuthenticationManager
     * @return a UserAuthenticationManager
     */
    public static UserAuthenticationManager getUserAuthenticationManager()
    {return null;}

    /**
     * Get credentials which authenticate the current user to the specified
     * domain.
     * @param domain the domain
     * @return an array of credentials objects
     * @throws SecurityException if the calling application does not have
     * UserAuthenticationPermission for the domain
     */
    public UserCredentials[] getCredentials( String domain ) { return null;}

    /**
     * Set credentials
     * @param credentials the credentials to set
     * @throws SecurityException if the calling application is not permitted
     * to set credentials for the domain
     */
    public void setCredentials( UserCredentials credentials ){}
}

```

E.4 Class UserCredentials

```

package org.oipf.auth;
/**
 * Base class for different kinds of credentials
 */
public abstract class UserCredentials
{
    /**
     * Create a UserCredentials
     * @param domain the domain to which the credentials apply
     */
    public UserCredentials( String domain ){}
    /**
     * Return the domain for which a set of credentials apply
     * @return a domain
     */
    public String getDomain() { return null; }
}

```

E.5 Class CookieCredentials

```

package org.oipf.auth;
import java.util.Date;
/**
 * Represents a HTTP Cookie.
 * This class is purely a container for the information passed in
 * through the constructor. No checking of the information is
 * performed. The accessor methods return the values passed in
 * through the constructor.
 */
public class CookieCredentials extends UserCredentials
{
    /**
     * Construct a cookie
     * @param domain the domain to which the cookie is sent
     * @param path the path within the domain
     * @param name the name of the cookie
     * @param value the value of the cookie
     * @param expiry the expiry date of the cookie or null if none is set
     */
    public CookieCredentials( String domain, String path, String name,
        String value, Date expiry )
    {super(domain); }
    /**
     * return the name of the cookie
     * @return the name as passed to the constructor
     */
    public String getName() { return null;}
    /**
     * return the value of the cookie
     * @return the value as passed to the constructor
     */
    public String getValue() { return null;}
    /**
     * return the expiry date of the cookie
     * @return the expiry date of the cookie or null if none is set
     */
    public Date getExpiry() { return null;}
    /**
     * return the path of the cookie
     * @return the path as passed to the constructor
     */
    public String getPath() { return null;}
}

```

Annex F (normative)

org.oipf.uiserver – class UIServerManager

```
package org.oipf.uiserver;
/**
 * Enables applications to register as providing a remote UI.<p>
 * This class is intended to be used as follows;<ul>
 * <li>The application starts listening on one or more ports.
 * <li>For each service offered, the application constructs URLs
 * from the IP address of the device, the port number and any
 * path element used by the application.
 * <li>For each service offered, the application constructs XML
 * fragments as specified by CEA-2014.
 * <li>The remote UIs provided by all registered applications are combined
 * into a single remote UI listing as defined by CEA-2014.
 * <li>The results are made available to remote UI clients as defined
 * by CEA-2014.
 * </ul>
 */
public class UIServerManager {
    /*
     * Private constructor to stop javadoc generating one.
     */
    private UIServerManager() {}
    /**
     * Obtain a UIServerManager
     */
    public static UIServerManager getManager(){ return null;}
    /**
     * Register as providing a remote UI service.
     * @param desc the entry for the service or services available on
     * this port formatted according to CEA-2014.
     * @throws IllegalArgumentException if there are errors in the
     * descriptions provided
     */
    public void registerUIServer( String desc[]){}
    /**
     * Unregister from providing a remote UI service
     */
    public void unregisterUIServer(){}
}
```