

INTERNATIONAL STANDARD



**Printed electronics –
Part 202-7: Materials – Printed film – Measurement of peel strength for printed
layer on flexible substrate by the 90° peel method**

IECNORM.COM : Click to view the full PDF of IEC 62899-202-7:2021



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF of IEC 61859-202-7:2021

INTERNATIONAL STANDARD



**Printed electronics –
Part 202-7: Materials – Printed film – Measurement of peel strength for printed
layer on flexible substrate by the 90° peel method**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.035.01; 31.180

ISBN 978-2-8322-9466-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms and definitions	6
4 Standard atmospheric conditions	7
5 Test sample.....	7
5.1 General.....	7
5.2 Size of test sample	7
5.3 Applicability of the method	7
6 Testing method and test apparatus.....	8
6.1 General.....	8
6.2 Test apparatus.....	8
6.3 Test procedure.....	9
7 Data analysis.....	10
7.1 Peel strength calculation.....	10
7.2 Report of the results	10
Bibliography.....	12
Figure 1 – Schematic of peel test of the printed layer on a flexible substrate	8
Figure 2 – Apparatus for peel test of the printed layer on a flexible substrate.....	9
Figure 3 – Typical peeling curve measured during the peel test	10

IECNORM.COM : Click to view the full PDF of IEC 62899-202-7:2021

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRINTED ELECTRONICS –

Part 202-7: Materials – Printed film – Measurement of peel strength for printed layer on flexible substrate by the 90° peel method

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62899-202-7 has been prepared by IEC technical committee 119: Printed Electronics. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
119/342/FDIS	119/345/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 62899 series, published under the general title *Printed electronics*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

IECNORM.COM : Click to view the full PDF of IEC 62899-202-7:2021

INTRODUCTION

A printed layer on a flexible substrate is widely employed as an electrode or interconnection for flexible devices. An integral component of this conductive body of the devices is conductive composite material and is commercialized as conductive ink.

A simple tape test method has been widely used for qualitative adhesion measurement, but it cannot be used to measure strong adhesion between the printed layer and the flexible substrate.

A conventional peel test method is widely used in the printed circuits industry to evaluate the adhesion between a thin printed layer with dense microstructure and the flexible substrate.

Peel strength value can be measured after an additional metal electroplating process on a thin printed layer to increase the printed layer thickness to provide a stable grip in an adhesion testing machine. However, it is not suitable for testing a printed layer which has a porous structure susceptible to contamination of the interface between the printed layer and flexible substrate during the electroplating process.

Therefore, a quantitative and reliable adhesion test method is used to measure and understand interfacial adhesion of the printed layer to the flexible substrate and its long-term reliability.

In this document, a new standard test method to measure the peel strength of a printed layer on a flexible substrate is proposed. This method calls for peeling the flexible substrate instead of an additional metal electroplating on the printed layer. It is useful to monitor and compare the thickness dependence of the peel strength of a layer on the same flexible substrate.

IECNORM.COM : Click to view the full text of IEC 62899-202-7:2021

PRINTED ELECTRONICS –

Part 202-7: Materials – Printed film – Measurement of peel strength for printed layer on flexible substrate by the 90° peel method

1 Scope

This part of IEC 62899 provides a test method to measure the peel strength of a printed layer on a flexible substrate. This method calls for peeling the flexible substrate instead of an additional metal electroplating on the printed layer. The method described in this document can be used to compare the peel strengths of the printed layers on the same flexible substrate and thickness conditions. It can be used when the adhesion between the printed layer and flexible substrate is weaker than any other interface between the printed layer and the adhesive, the adhesive and the panel.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62899-202:2016, *Printed electronics – Part 202: Materials – Conductive ink*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

conductive material

ingredient of a printing or coating material, which itself is electrically conductive or becomes electrically conductive by post treatment such as heating

[SOURCE: IEC 62899-202:2016, 3.1]

3.2

conductive ink

printable fluid intended for printing in which one or more molecules, polymers, or particles are dissolved or dispersed, which becomes an electrically conductive layer by post treatment such as heating

[SOURCE: IEC 62899-202:2016, 3.2, modified – in the definition, "fluid" has been replaced with "printable fluid intended for printing".]

3.3

printed layer

conductive body made of conductive ink and of uniform thickness which is very small in proportion to length and width

EXAMPLE Printed Ag, printed Cu.

3.4

peel strength

strength required to separate the printed layer from the flexible substrate at a constant pulling force

Note 1 to entry: Peel strength is calculated as the average peel load/sample width.

Note 2 to entry: Average peel load is obtained by several measurements at a steady state load displacement after the initial load increase.

3.5

flexible substrate

substrate with flexibility such that it can bend during the 90° peel test and on which conductive ink is printed

Note 1 to entry: Examples of flexible polymers are polyimide, polyethylene terephthalate, polyethylene naphthalate, and polyester).

4 Standard atmospheric conditions

Standard atmospheric conditions for measurement for the peel strength of a printed layer on flexible substrate shall apply as specified in IEC 62899-202:2016, Clause 4:

- a) temperature: (23 ± 2) °C
- b) relative humidity: (50 ± 5) %

5 Test sample

5.1 General

The test sample for the peel strength test shall be prepared using a printed layer on a flexible substrate.

5.2 Size of test sample


For uniform adhesion test, a rectangular shape is recommended. The size of the test panel can be 50 mm × 120 mm, for example. Stable peel strength data can be obtained with substrate thickness ranges from 25 µm to 125 µm. The size of the printed layer shall be 10 mm ± 0,2 mm in width and 100 mm in length. Measure the print width on three positions to 0,1 mm accuracy and use the average width for peel strength calculation.

5.3 Applicability of the method

The schematic of the peel test is illustrated in Figure 1. With the peel test, the adhesion between printed layer and flexible substrate can be measured. The flexible substrate is fixed by narrowing the gap in the grip part in Figure 1. This measurement method is applicable only when the peel strength between the flexible substrate and the printed layer is smaller than the cohesive force of the printed layer, the peel strength between the printed layer and adhesive, the peel strength between the adhesive and panel and the strength of the flexible substrate.

- $F(\text{sub-layer}) < F(\text{layer}), F(\text{layer-ad}), F(\text{ad-panel}), F(\text{sub});$
- $F(\text{sub-layer})$: peel strength between the flexible substrate and printed layer;

- F (layer): cohesive force of the printed layer;
- F (layer-ad): peel strength between the printed layer and adhesive;
- F (ad-panel): peel strength between the adhesive and test panel;
- F (sub): tension strength of the flexible substrate.

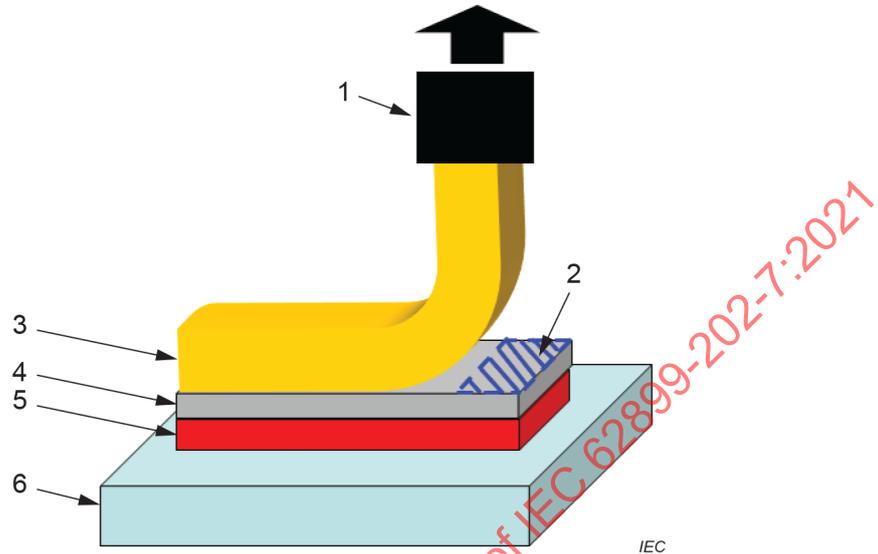

- 1 Grips
- 2 Initial delamination
- 3 Flexible substrate
- 4 Printed layer
- 5 Adhesive
- 6 Test panel

Figure 1 – Schematic of peel test of the printed layer on a flexible substrate

6 Testing method and test apparatus


6.1 General

The 90° adhesion test requires a 90° peel tester fixture to determine the adhesive strength between a flexible substrate and printed layer, where the printed layer lies together with the flexible substrate on the test panel. The gripped end of the flexible substrate is stuck on perpendicularly to the printed layer while the rest of the substrate is bonded to the printed layer so that it forms a 90° bend.

6.2 Test apparatus

Using a peel tester as shown in Figure 2, a peeling force shall be applied to a flexible substrate. As shown in Figure 2, a peel tester to apply a peeling motion on samples shall be used. The linear length shall be at least 50 mm.

Flip over the test sample and attach a printed layer on the test panel and cure at $(23 \pm 2) ^\circ\text{C}$ and $(50 \pm 5) \%$ humidity. Place the test panel with the test sample applied on it on the table of the peel tester. Fasten the test panel using a bolt and nut to perform the peel test with a peel force applied to the test sample. The sample to be tested is held on a table which moves horizontally and at the same velocity is pulled from the specimen vertically. As the peeled layer is pulled vertically up and off, the sample is free to move horizontally, maintaining a 90° angle. The flexible substrate is fixed by narrowing the gap in the grip part in Figure 2. The load and the displacement shall be measured using a load cell and displacement sensors installed on the universal testing machine during the test. The range of the load cell is from 20 N to 100 N. Stable peel strength data can be obtained with ranges from 0,01 N/mm to 2,0 N/mm. Perform preliminary tests in order to achieve the appropriate failure mode. Specify the requirements of related equipment such as a load cell, and allow setting up the appropriate speed.

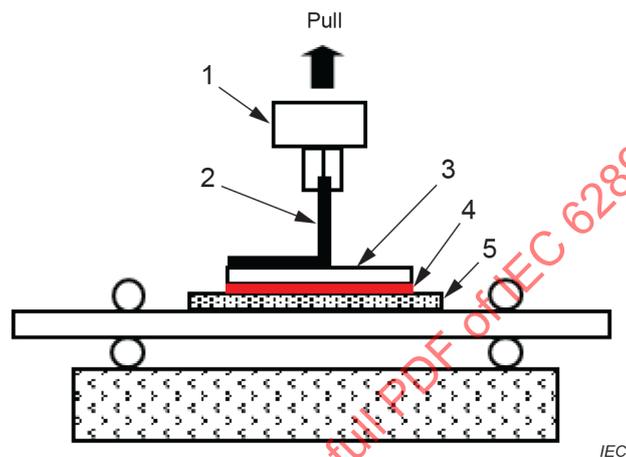

- 1 Load cell
- 2 Flexible substrate
- 3 Printed layer
- 4 Adhesive
- 5 Test panel

Figure 2 – Apparatus for peel test of the printed layer on a flexible substrate

6.3 Test procedure

The test procedure is as follows.

- a) Initiate the edge delamination formation by marking with a typical marker pen (permanent marker or indelible marker) on the flexible substrate edge (approximately 30 mm long) before ink printing.
- b) Apply conductive ink printing and curing to form the printed layer. The printed layer should be uniform and adhere to the substrate perfectly.
- c) Apply adhesive on the printed layer surface. The thickness of the cured adhesive shall be $(500 \pm 50) \mu\text{m}$. The thickness of the adhesive may be decided between the supplier and the consumer.
- d) Flip over the specimen and attach a printed layer on the test panel and cure at room temperature in air. The liquid adhesive becomes solid when cured. The size of the test panel is 50 mm × 100 mm.
- e) Place the test panel with the specimen applied on it on the table of the peel tester. Fasten the test panel using a bolt and nut to perform the peel test with a peel force applied to the specimen. The gripped end of the flexible substrate is stuck up perpendicularly to the printed layer while the rest is bonded to the test panel so that it forms a 90° bending.
- f) Measure the value of the load cell against the displacement

For example, the conditions can be selected as below:

The peeling speed shall be 50 mm/min.

However, if there are special requirements, the peeling speed can be determined by a reasonable agreement between the user and the supplier.

7 Data analysis

7.1 Peel strength calculation

As shown in Figure 3, the peel strength is defined as the average peel load value divided by the sample width for more than three sample measurements of the steady-state load-displacement behavior after the initial load increase. Steady-state is a section in which the load is constant. After the peel test of three or more samples, the derived data shall be checked and similar values of peel strength shall be used.

$$P = F/W$$

where

P is the peel strength, in N/mm,

F is the average load in N,

W is the width of test sample in mm.

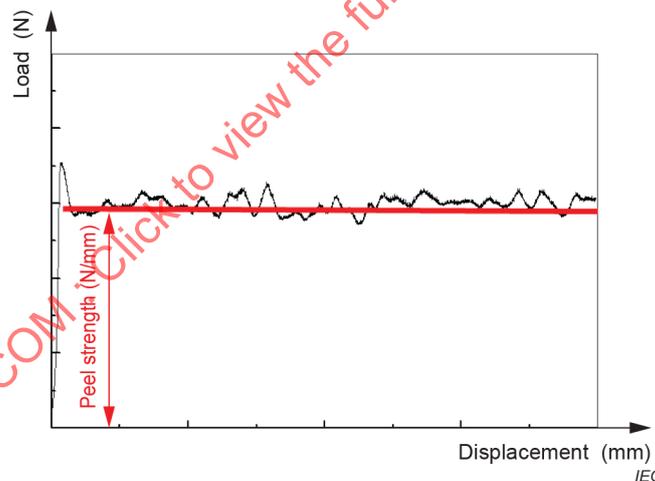


Figure 3 – Typical peeling curve measured during the peel test

7.2 Report of the results

The report shall include the following items:

- a) test environment (temperature, humidity)
- b) specimen identification (including film thickness, sample size and film materials)
- c) material of the adhesive layer (type, thickness and rigidity of the adhesive)
- d) peeling speed
- e) peel strength
- f) identification of the peeling interface selected from the following:
 - 1) printed layer / substrate