

PUBLICLY AVAILABLE SPECIFICATION PRE-STANDARD

**Fibre optic connector optical interfaces –
Part 3-32: Optical interface – 8 degrees angled-PC end-face thermoset
rectangular ferrule, single mode fibres**

IECNORM.COM: Click to view the full file of IEC PAS 61755-3-32:2007

WithNorm



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

IECNORM.COM: Click to view the PDF of IEC PAC 61755-3:2007

PUBLICLY AVAILABLE SPECIFICATION PRE-STANDARD

**Fibre optic connector optical interfaces –
Part 3-32: Optical interface – 8 degrees angled-PC end-face thermoset
rectangular ferrule, single mode fibres**


INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

M

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references.....	5
3 Description	5
4 Optical interface parameters	6
4.1 End-face parameters related to attenuation.....	6
4.2 End-face parameters related to physical contact	11
Figure 1 – Fibre core lateral location	6
Figure 2 – Alignment pin	8
Figure 3 – End-face parameters related to attenuation.....	8
Figure 4 – End-face geometry parameters related to physical contact.....	11
Table 1 – Optical interface parameter values related to attenuation for 4,4 mm x 2,5 mm rectangular ferrules with two fibres fixed.....	9
Table 2 – Optical interface parameter values related to attenuation for 4,4 mm x 2,5 mm rectangular ferrules with four, eight, ten and twelve fibres fixed	9
Table 3 – Optical interface parameter values related to attenuation for 6,4 mm x 2,5 mm rectangular ferrules with two fibres fixed.....	10
Table 4 – Optical interface parameter values related to attenuation for 6,4 mm x 2,5 mm rectangular ferrules with four, eight, ten and twelve fibres fixed	10
Table 5 – End-face geometry parameters related to physical contact	12

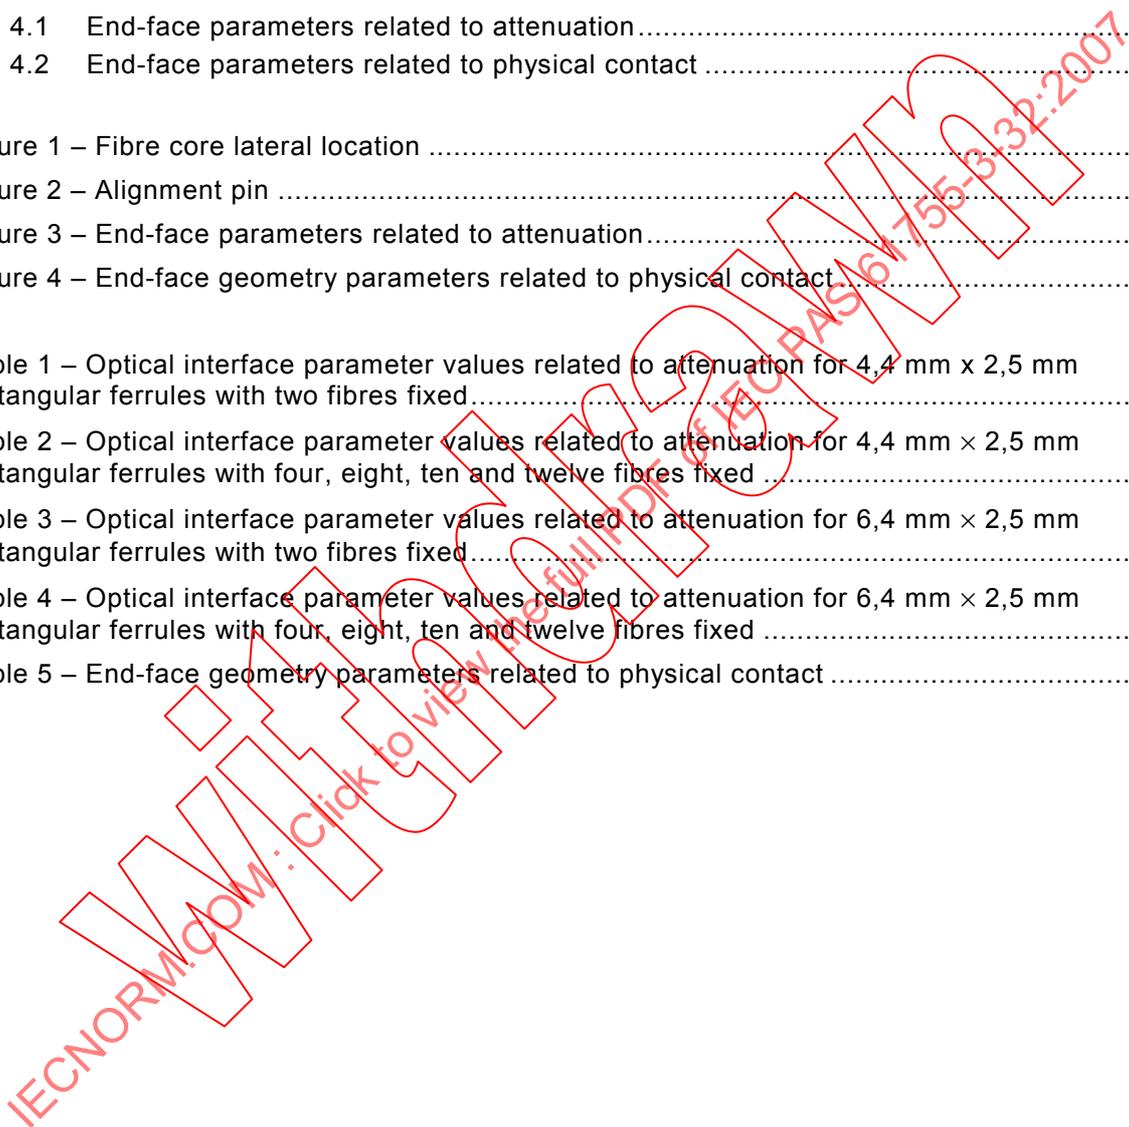

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC CONNECTOR OPTICAL INTERFACES –

Part 3-32: Optical interface – 8 degrees angled-PC end-face thermoset rectangular ferrule, single mode fibres

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of one or more of three patents concerning the fibre protrusion given in Clause 4, Figure 4 and Table 5.

IEC takes no position concerning the evidence, validity and scope of this patent right.

The holders of these patent rights have assured the IEC that he/she is willing to negotiate licenses under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with the IEC. Information may be obtained from:

Corning Cable Systems LLC
c/o Legal Department
P.O. Box 489
800 17th Street NW
Hickory, NC 28603-0489
USA

Intellectual Property Center
Nippon Telegraph and Telephone Corporation
3-9-11, Midoricho, Musashino-shi, Tokyo 180-8585
Japan

US Conec Ltd.
1555 4th Avenue SE
PO Box 2306
Hickory, NC 28603-2306
USA

Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

A PAS is a technical specification not fulfilling the requirements for a standard but made available to the public.

IEC-PAS 61755-3-32 has been processed by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.


The text of this PAS is based on the following document:

This PAS was approved for publication by the P-members of the committee concerned as indicated in the following document:

Draft PAS	Report on voting
86B/2444/NP	86B/2499/RVN

Following publication of this PAS, which is a pre-standard publication, the technical committee or subcommittee concerned will transform it into an International Standard.

This PAS shall remain valid for an initial maximum period of three years starting from 2007-10. The validity may be extended for a single three-year period, following which it shall be revised to become another type of normative document or shall be withdrawn.

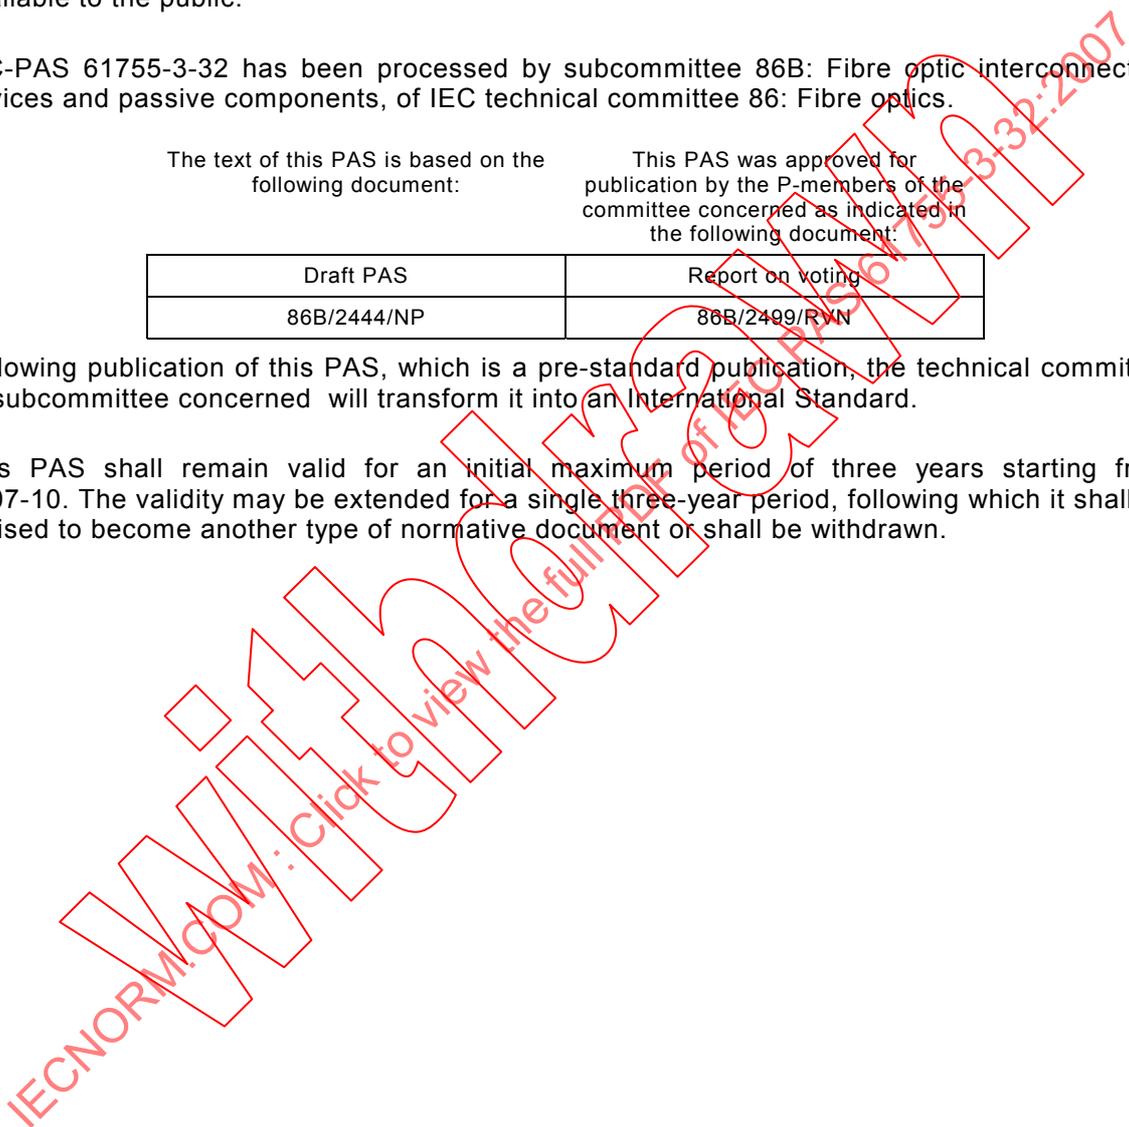

FIBRE OPTIC CONNECTOR OPTICAL INTERFACES –

Part 3-32: Optical interface – 8 degrees angled-PC end-face thermoset rectangular ferrule, single mode fibres

1 Scope

This PAS defines certain dimensional limits that an angled PC end-face multi-fibre rectangular ferrule having two guide-holes for positioning two alignment pins and using a thermoset material with a Young's modulus of 20-25 GPa has to meet in order to comply with specific requirements for interconnections. Ferrules made from the material specified in this PAS are suitable for use in category C as defined in IEC 61753-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61753-1, *Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standard*

IEC 61754-5, *Fibre optic connector interface – Part 5: Type MT connector family*

IEC 61754-7, *Fibre optic connector interfaces – Part 7: Type MPO connector family*

IEC 61754-10, *Fibre optic connector interfaces – Part 10: Type Mini-MPO connector family*

IEC 61754-18, *Fibre optic connector interfaces – Part 18: Type MT-RJ connector family*

IEC 61755-1, *Fibre optic connector optical interfaces – Part 1: Optical interfaces for single mode non-dispersion shifted fibre – General and guidance*

3 Description

The performance of the optical interface for an angled PC end-face multi-fibre rectangular ferrule is determined by the accuracy with which the optical datum targets of two mating ferrules are aligned with each other. There are three conditions affecting the alignment of two optical datum targets, lateral alignment, angular alignment and axial alignment.

The specified end face parameters in this PAS are required to provide physical contact between all fibre cores in the mated rectangular ferrules when the ferrules are placed in fibre optic connector interfaces described in IEC 61754-5, IEC 61754-7, IEC 61754-10, and IEC 61754-18 and tested to conditions for a controlled environment as defined category C in IEC 61755-1.

The specified lateral and angular parameters are required to provide the performance grades as specified IEC 61753-1.

Parameters influencing the lateral and angular alignment of the optical fibre axes include

- fibre hole position deviation from designated distance;
- clearance between fibre hole diameter and fibre cladding diameter;
- fibre hole angular misalignment;

- fibre core concentricity relative to the cladding diameter;
- clearance between guide hole diameter and alignment pin diameter;
- the amount of angled PC polishing in axial direction.

Parameters influencing the axial alignment of the optical fibre axes include

- end-face flatness;
- end-face angle in the X-axis;
- end-face angle in the Y-axis;
- fibre protrusion/undercut;
- maximum difference in fibre height among all fibres;
- maximum adjacent fibre height differential. Ferrule compression force and ferrule material shall be considered together with these parameters.

4 Optical interface parameters

This standard defines the dimensional limits of the angled PC end-face multi-fibre rectangular ferrule with single mode fibres. It is applicable for up to 12 fibres with an alignment pitch of 0,25 mm.

The optical interface parameters are defined as shown in Figures 1, 2 and 3.

The parameter values are described as shown in Tables 1 to 4.

4.1 End-face parameters related to attenuation

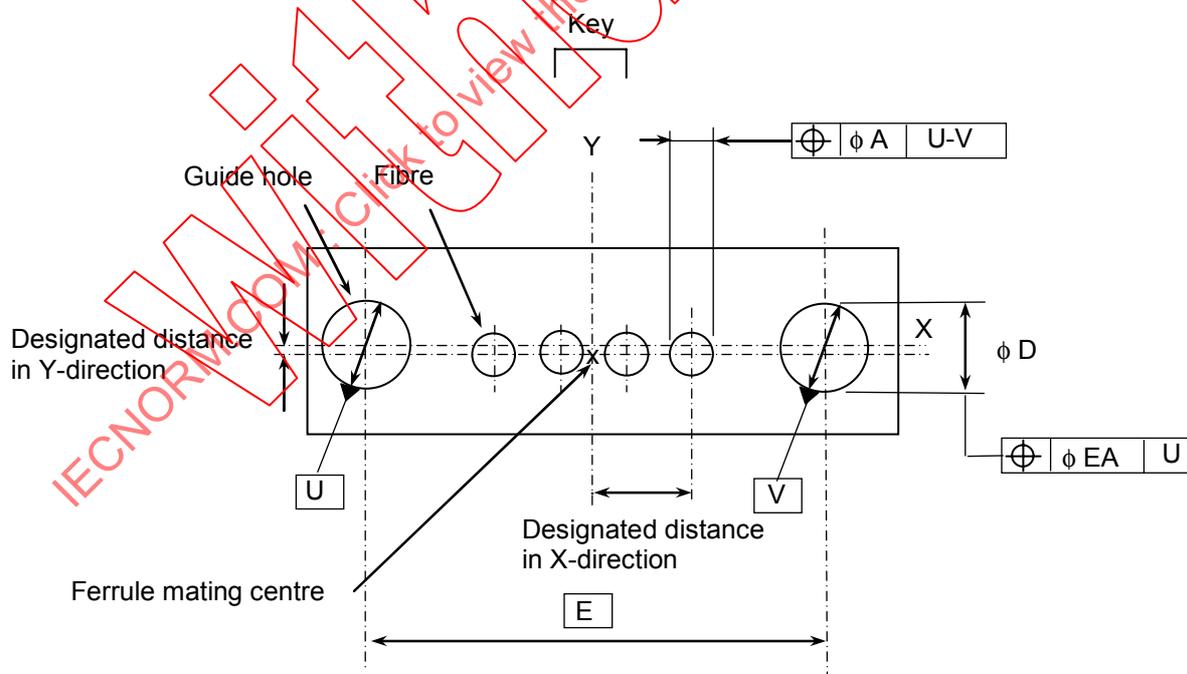


Figure 1 – Fibre core lateral location

The X-axis is the line passing through two guide hole centres.

The Y-axis is the line perpendicular to X-axis and passing through the midpoint of the line connecting the two guide hole centres.

The designated distance in X-direction is $(0,125 + (n/2 - 1) \times 0,25)$ mm in the right and left directions, where $n = 2, 4, 8, 10, 12$ (number of fibres) for 6,4 mm \times 2,5 mm rectangular ferrules, and $n = 2, 4$ for 4,4 mm \times 2,5 mm rectangular ferrules.

The designated distance in Y-direction (basic dimension of guide hole diameter D – basic dimension of alignment pin diameter I) / 2.

Here, the basic dimension of I is 0,6985 mm. The basic dimension of D is a nominal value which is an average of the minimum and maximum values in Tables 1 and 2, and it will be slightly shifted according to the designed minimum and maximum values.

A is the position tolerance of fibre-core centre.

EA is the position tolerance of guide-hole centre.

IECNORM.COM: Click to view the full PDF of IEC PAS 61755-3-32:2007

WithDRAWN


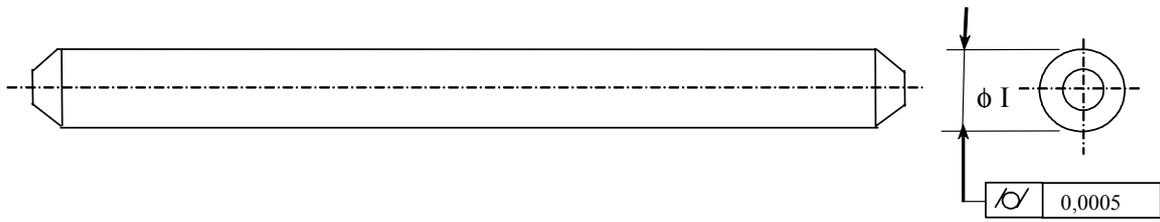


Figure 2 – Alignment pin

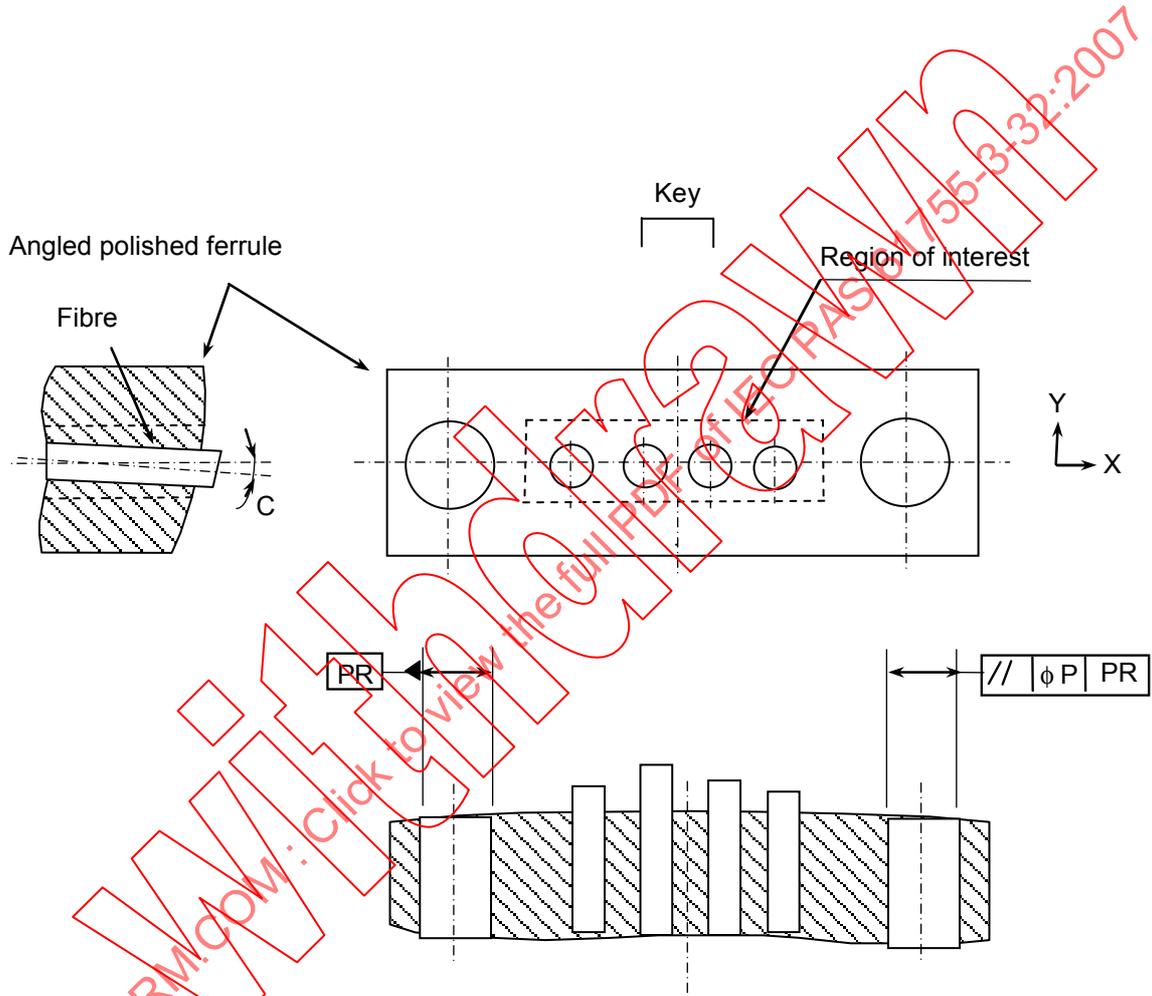

NOTE The region of interest is set on the ferrule surface and defined by a rectangular region which is chosen to cover the intended contact zone of the ferrule end face when the ferrules are mated.

Figure 3 – End-face parameters related to attenuation

Table 1 – Optical interface parameter values related to attenuation for 4,4 mm x 2,5 mm rectangular ferrules with two fibres fixed

Reference	Parameter values						Notes
	Grade B		Grade C		Grade D		
	Minimum mm	Maximum mm	Minimum mm	Maximum mm	Minimum mm	Maximum mm	
A	0	0,0015	0	0,0020	0	0,0032	
C	–	0,2°	–	0,2°	–	0,5°	
D	0,6990	0,6996	0,699	0,700	0,699	0,700	1
E	2,6		2,6		2,6		Basic dimension, 1
EA	–	0,004	–	0,004	–	0,004	1
P	–	0,002	–	0,002	–	0,002	2, 3
I	0,6984	0,6986	0,698	0,699	0,698	0,699	

NOTE 1 Each guide-hole should accept a gauge pin as shown in Figure 4 of IEC 61754-10 and IEC 61754-18 to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two guide-holes should accept a gauge as shown in Figure 5 of IEC 61754-10 to a depth of 5,5 mm with a maximum force of 3,4 N.

NOTE 2 These values should be specified in the central surface region surrounding fibres of 0,900 mm wide and 0,675 mm high. Furthermore, the outside surface region should be lower than the central surface region of interest.

NOTE 3 These values should be applied to ferrule materials with a Young's modulus of 20-25 GPa. Ferrule compression force should be 7,8 N minimum and 11,8 N maximum.

Table 2 – Optical interface parameter values related to attenuation for 4,4 mm x 2,5 mm rectangular ferrules with four, eight, ten and twelve fibres fixed

Reference	Parameter values						Notes
	Grade B		Grade C		Grade D		
	Minimum	Maximum	Minimum mm	Maximum mm	Minimum mm	Maximum mm	
A			0	0,0020	0	0,0032	
C			–	0,2°	–	0,5°	
D			0,699	0,700	0,699	0,700	1
E			2,6		2,6		Basic dimension, 1
EA			–	0,004	–	0,004	1
P			–	0,002	–	0,002	2, 3
I			0,698	0,699	0,698	0,699	

NOTE 1 Each guide-hole should accept a gauge pin as shown in Figure 4 of IEC 61754-10 and IEC 61754-18 to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two guide-holes should accept a gauge as shown in Figure 5 of IEC 61754-10 to a depth of 5,5 mm with a maximum force of 3,4 N.

NOTE 2 These values should be specified in the central surface region surrounding fibres of 0,900 mm wide and 0,675 mm high. Furthermore, the outside surface region should be lower than the central surface region of interest.

NOTE 3 These values should be applied to ferrule materials with a Young's modulus of 20-25 GPa. Ferrule compression force should be 7,8 N minimum and 11,8 N maximum.

Table 3 – Optical interface parameter values related to attenuation for 6,4 mm × 2,5 mm rectangular ferrules with two fibres fixed

Reference	Parameter values						Notes
	Grade B		Grade C		Grade D		
	Minimum mm	Maximum mm	Minimum mm	Maximum mm	Minimum mm	Maximum mm	
A	0	0,0015	0	0,0020	0	0,0032	
C	–	0,2°	–	0,2°	–	0,5°	
D	0,6990	0,6996	0,699	0,700	0,699	0,700	1
E	2,6				4,6		Basic dimension, 1
EA	–	0,004	–	0,004	–	0,006	1
P	–	0,002	–	0,002	–	0,002	2, 3
I	0,6984	0,6986	0,698	0,699	0,698	0,699	

NOTE 1 Each guide-hole should accept a gauge pin as shown in Figure 2a of IEC 61754-5 to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two guide-holes should accept a gauge as shown in Figure 2e of IEC 61754-5 to a depth of 5,5 mm with a maximum force of 3,4 N.

NOTE 2 These values should be specified in the central surface region surrounding fibres of 2,900 mm wide and 0,675 mm high. Furthermore, the outside surface region should be lower than the central surface region of interest.

NOTE 3 These values should be applied to ferrule materials with a Young's modulus of 20-25 GPa. Ferrule compression force should be 7,8 N minimum and 11,8 N maximum.

Table 4 – Optical interface parameter values related to attenuation for 6,4 mm × 2,5 mm rectangular ferrules with four, eight, ten and twelve fibres fixed

Reference	Parameter values						Notes
	Grade B		Grade C		Grade D		
	Minimum	Maximum	Minimum mm	Maximum mm	Minimum mm	Maximum mm	
A			0	0,0020	0	0,0032	
C			–	0,2°	–	0,5°	
D			0,699	0,700	0,699	0,700	1
E			4,6		4,6		Basic dimension, 1
EA			–	0,004	–	0,006	1
P			–	0,002	–	0,002	2, 3
I			0,698	0,699	0,698	0,699	

NOTE 1 Each guide-hole should accept a gauge pin as shown in Figure 2a of IEC 61754-5 to a depth of 5,5 mm with a maximum force of 1,7 N. In addition, two guide-holes should accept a gauge as shown in Figure 2e of IEC 61754-5 to a depth of 5,5 mm with a maximum force of 3,4 N.

NOTE 2 These values should be specified in the central surface region surrounding fibres of 2,900 mm wide and 0,675 mm high. Furthermore, the outside surface region should be lower than the central surface region of interest.

NOTE 3 These values should be applied to ferrule materials with a Young's modulus of 20-25 GPa. Ferrule compression force should be 7,8 N minimum and 11,8 N maximum.