

IEC/PAS 61883-7

Edition 1.0
2001-08

Consumer audio/video equipment —
Digital interface —
Part 7: Transmission of Rec. ITU-R BO. 1294
System B Transport 1.0

PUBLICLY AVAILABLE SPECIFICATION



INTERNATIONAL
ELECTROTECHNICAL
COMMISSION



Reference number
IEC/PAS 61883-7

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2007

Withdrawn



TA Document 1998017

Transmission of Rec. ITU-R BO.1294 System B Transport 1.0

August 18, 2000

Sponsored by:
1394 Trade Association

Accepted for Release by:
1394 Trade Association Board of Directors.

Abstract:
This specification defines packetization and transmission of the transport streams for Recommendation ITU-R BO.1294 System B, which is known as a DirecTV/DSS system over IEEE Std. 1394-1995. The transmission scheme is similar to the MPEG2 transmission over IEEE std. 1394-1995, but designed for 130bytes DirecTV/DSS transport packet.

Keywords:
Audio, Video, 1394, Digital, Interface, DirecTV, DSS.

Copyright © 1996-2001 by the 1394 Trade Association.
Regency Plaza Suite 350, 2350 Mission College Blvd., Santa Clara, CA 95054, USA
<http://www.1394TA.org>
All rights reserved.

Permission is granted to members of the 1394 Trade Association to reproduce this document for their own use or the use of other 1394 Trade Association members only, provided this notice is included. All other rights reserved. Duplication for sale, or for commercial or for-profit use is strictly prohibited without the prior written consent of the 1394 Trade Association.

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2007

Withdrawn

INTERNATIONAL ELECTROTECHNICAL COMMISSION

CONSUMER AUDIO/VIDEO EQUIPMENT — DIGITAL INTERFACE —

Part 7: Transmission of Rec. ITU-R BO. 1294
System B Transport 1.0

FOREWORD

A PAS is a technical specification not fulfilling the requirements for a standard, but made available to the public and established in an organization operating under given procedures.

IEC-PAS 61883-6 was submitted by the 1394 Trade Association and has been processed by IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this PAS is based on the following document:

This PAS was approved for publication by the P-members of the committee concerned as indicated in the following document:

Draft PAS	Report on voting
100/201/PAS	100/269/RVD

Following publication of this PAS, the technical committee or subcommittee concerned will investigate the possibility of transforming the PAS into an International Standard.

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this PAS may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

1394 Trade Association Specifications are developed within Working Groups of the 1394 Trade Association, a non-profit industry association devoted to the promotion of and growth of the market for IEEE 1394-compliant products. Participants in working groups serve voluntarily and without compensation from the Trade Association. Most participants represent member organizations of the 1394 Trade Association. The specifications developed within the working groups represent a consensus of the expertise represented by the participants.

Use of a 1394 Trade Association Specification is wholly voluntary. The existence of a 1394 Trade Association Specification is not meant to imply that there are not other ways to produce, test, measure, purchase, market or provide other goods and services related to the scope of the 1394 Trade Association Specification. Furthermore, the viewpoint expressed at the time a specification is accepted and issued is subject to change brought about through developments in the state of the art and comments received from users of the specification. Users are cautioned to check to determine that they have the latest revision of any 1394 Trade Association Specification.

Comments for revision of 1394 Trade Association Specifications are welcome from any interested party, regardless of membership affiliation with the 1394 Trade Association. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments.

Interpretations: Occasionally, questions may arise about the meaning of specifications in relationship to specific applications. When the need for interpretations is brought to the attention of the 1394 Trade Association, the Association will initiate action to prepare appropriate responses.

Comments on specifications and requests for interpretations should be addressed to:

Editor, 1394 Trade Association
Regency Plaza Suite 350
2350 Mission College Blvd.
Santa Clara, Calif. 95054, USA

1394 Trade Association Specifications are adopted by the 1394 Trade Association without regard to patents which may exist on articles, materials or processes or to other proprietary intellectual property which may exist within a specification. Adoption of a specification by the 1394 Trade Association does not assume any liability to any patent owner or any obligation whatsoever to those parties who rely on the specification documents. Readers of this document are advised to make an independent determination regarding the existence of intellectual property rights, which may be infringed by conformance to this specification.

Table of Contents

1. Overview	6
1.1 Purpose	6
2. References	7
3. Definitions	8
3.1 Conformance Levels	8
3.2 Glossary of Terms	8
3.3 Acronyms and Abbreviations	8
4. DSS Transport Stream	9
5. Construction of a 1394 Packet	11
5.1 Source Packets	11
5.1.1 Structure of a Source Packet	11
5.1.2 DSS Packet Header	11
5.1.3 Source Packet Header	12
5.1.4 Fractions	12
5.2 Isochronous Packets	13
5.2.1 CIP Header for DSS Transport Stream	13
5.2.2 DBC Values	13
5.2.3 FDF Data	13
6. Transmission of Isochronous Packets	15
6.1 Late Packets	15
Annex A: Buffer Size for DSS Transmission	17

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2001

List of Figures

Figure 4.1 – Steps in the transmission of transport stream	9
Figure 4.2 – DSS stream processing block diagram	10
Figure 5.1 – Structure of a source packet	11
Figure 5.2 – DSS packet header structure.....	11
Figure 5.3 – Structure of the source packet header.....	12
Figure 5.4 – FDF structure.....	14

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2007
Withdrawn

List of Tables

Table 5.1 – Fields in the DSS Packet Header	12
Table 5.2 – Fields in the CIP Header	13
Table A.1 – Buffer for jitter example	18
Table A.2 – Buffer for MPEG smoothing example	18

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2001
Withdrawn

1. Overview

1.1 Purpose

This specification defines packetization and transmission for transport streams of Recommendation ITU-R BO.1294 system B (DirecTV system/DSS) over IEEE Std. 1394-1995.

In this document, the name “DSS” is used instead of “Recommendation ITU-R BO.1294 system B”.

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2001
Withdrawn

2. References

The following standards contain provisions, which through reference in this document constitute provisions of this standard. All the standards listed are normative references. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below.

- [R1] IEEE Std 1394-1995, Standard for a High Performance Serial Bus.
- [R2] IEC 61883-1, Consumer audio/video equipment – Digital interface – Part 1: General.
- [R3] IEC 61883-4: Consumer audio/video equipment - Digital interface - Part 4: MPEG2-TS data transmission
- [R4] Recommendation ITU-R BO.1294, Common Functional Requirements for the Reception of Digital Multiprogramme Television Emissions by Satellites Operating in the 11/12 GHz Frequency Range, 1997

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-4:2001

Without watermark

3. Definitions

3.1 Conformance Levels

3.1.1 expected: A key word used to describe the behavior of the hardware or software in the design models *assumed* by this Specification. Other hardware and software design models may also be implemented.

3.1.2 may: A key word that indicates flexibility of choice with *no implied preference*.

3.1.3 shall: A key word indicating a mandatory requirement. Designers are *required* to implement all such mandatory requirements.

3.1.4 should: A key word indicating flexibility of choice with a strongly preferred alternative. Equivalent to the phrase *is recommended*.

3.1.5 reserved fields: A set of bits within a data structure that are defined in this specification as reserved, and are not otherwise used. Implementations of this specification shall zero these fields. Future revisions of this specification, however, may define their usage.

3.1.6 reserved values: A set of values for a field that are defined in this specification as reserved, and are not otherwise used. Implementations of this specification shall not generate these values for the field. Future revisions of this specification, however, may define their usage.

NOTE—The IEEE is investigating whether the “may, shall, should” and possibly “expected” terms will be formally defined by IEEE. If and when this occurs, draft editors should obtain their conformance definitions from the latest IEEE style document.

3.2 Glossary of Terms

3.2.1 byte: Eight bits of data, used as a synonym for octet.

3.2.2 CSR Architecture: A convenient abbreviation of the following reference (see clause 2): ISO/IEC 13213 : 1994 [ANSI/IEEE Std 1212, 1994 Edition], Information Technology—Microprocessor systems— Control and Status Register (CSR) Architecture for Microcomputer Buses.

3.2.3 quadlet: Four bytes of data.

3.3 Acronyms and Abbreviations

AV/C	Audio Video Control
CIP	Common Isochronous Packet
CTR	Cycle Time Register
HD	High Definition
IEEE	The Institute of Electrical and Electronics Engineers, Inc.
MPEG	Motion Picture Expert Group
TSP	Transport Stream Package

4. DSS Transport Stream

A DSS transport stream consists of transport stream packets with a length of 130 bytes.

Refer to Appendix 1 to Annex 1 of reference [R4], "System B transport stream characteristics", for more information.


A stream may contain several programs. In Figure 4.1, an example is given of a transport stream, which consists of several programs. Often, only one or a few programs need to be transmitted. If a program selection is carried out, then only those transport stream packets from that particular transport stream are transmitted. In this situation, the occupied bandwidth on the 1394 interface can be reduced. Reduction of the bit rate is carried in a smoothing buffer. As a result of the smoothing operation, the transport stream packets will be shifted in time.

The transport stream packets at the output of the smoothing buffer are transmitted over the 1394 interface. During transmission, this interface will introduce some jitter on the arrival time of the transport stream packets in the receiver.

In the DSS transport stream, there are strong requirements on the timing of the transport stream packets. The jitter introduced by the both the smoothing buffer and the transmitter of the interface must be compensated. This is done by adding a time stamp to the transport stream packets

- at the moment it arrives at the input of the smoothing buffer, or
- at the input of the digital interface, if smoothing is not applied

The receiver of the interface contains a receiver buffer, which compensates for the introduced jitter.

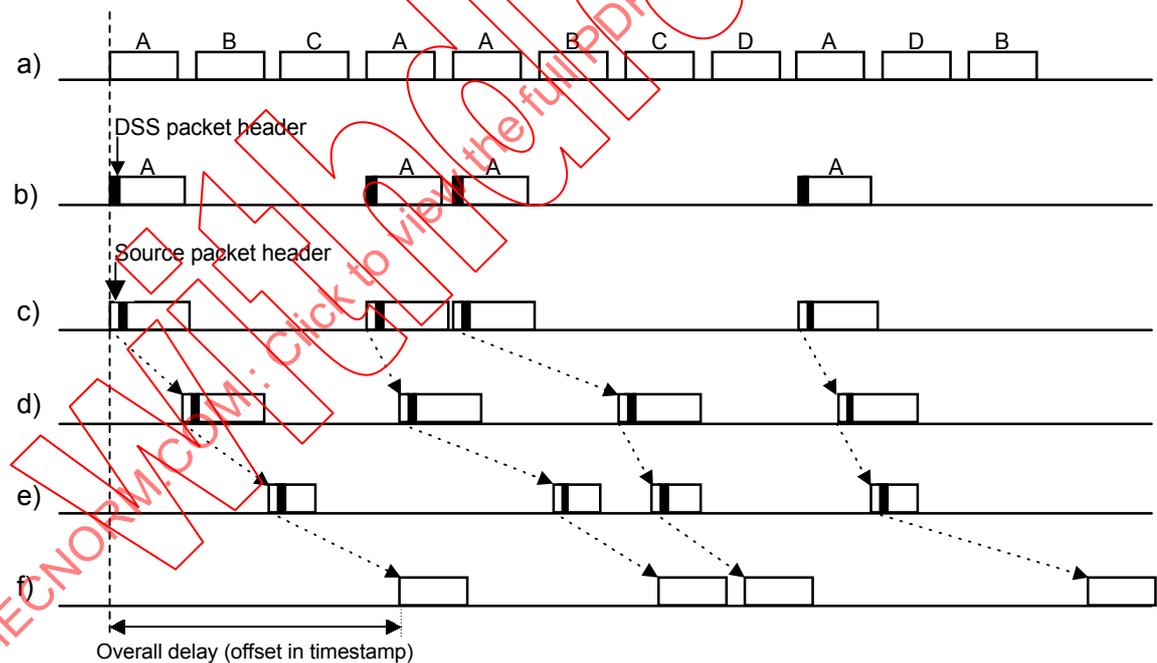

- a) Complete transport stream with multiplex of programs (A,B,C,D)
- b) Transport stream of the selected program A with DSS packet header (=DSS source packets)
- c) Source packets with source packet header
- d) Source packets at the output of the smoothing buffer
- e) Source packets at the input of the 1394 receiver
- f) Reconstructed timing for the transport stream

NOTE: The clock frequency for transferring the bytes of a transport stream packet may be different in every situation

Figure 4.1 – Steps in the transmission of transport stream

The following figure shows how the DSS stream is processed between the original multiplex signal, the 1394 interface, and the decoder.

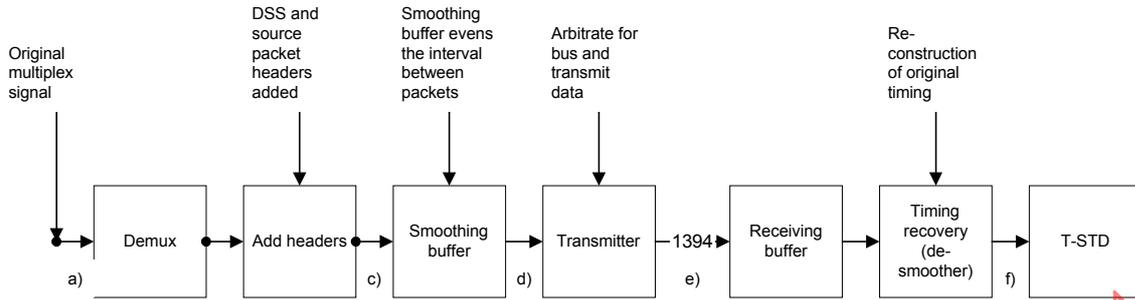


Figure 4.2 – DSS stream processing block diagram

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2001
 Without watermark

5. Construction of a 1394 Packet

5.1 Source Packets

5.1.1 Structure of a Source Packet

The length of the source packet is 140 bytes as shown in Figure 5.1. The source packet consists of one DSS transport stream packet with a length of 130 bytes and a DSS packet header of 10 bytes.

The source packet header is additionally added before transmitted to the smoothing buffer. The source packet header contains a time stamp.

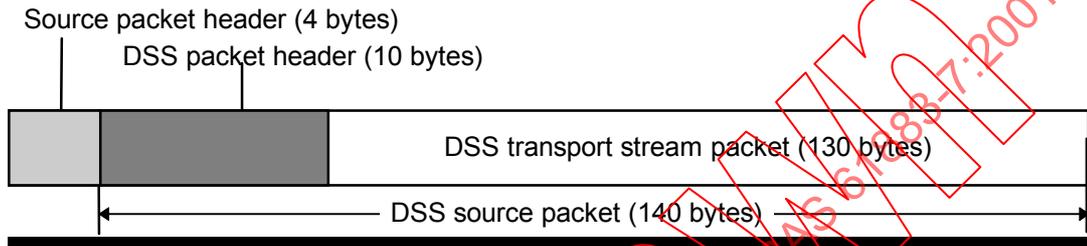


Figure 5.1 – Structure of a source packet

5.1.2 DSS Packet Header

Figure 5.2 shows the structure of DSS packet header

	msb							lsb
MSB	SIF	System Clock Count (23bit)						
	EF	Reserved (0000000 ₂)						
		Reserved byte 0 (00 ₁₆)						
		Reserved byte 1 (00 ₁₆)						
		Reserved byte 2 (00 ₁₆)						
		Reserved byte 3 (00 ₁₆)						
		Reserved byte 4 (00 ₁₆)						
LSB		Reserved byte 5 (00 ₁₆)						

Figure 5.2 – DSS packet header structure

The DSS packet header contains the following.

Table 5.1 – Fields in the DSS Packet Header


Field	Definition
SIF	System clock count Invalid Flag (1: invalid, 0: valid)
System clock count (23 bits)	A 23 bit field that is set to the lowest 23 bits of the 27MHz clock counter, which is synchronized with MPEG system clock. The value of this counter may be different from the byte time stamp counter used to generate the byte time stamp in the auxiliary data packet (defined in 4.1 of Appendix 1 of Annex 1 in [R4]).
EF	Error Flag (1: Error, 0: no Error) Set to value 1 when the associated transport stream packet is erroneous

The system clock count is used by bit stream recorders, like DVHS, to lock its system clock phase to the source stream without needing to look into the DSS transport stream packet for clock information. If a stream contains video and/or audio application packets, then the stream shall contain packets with a valid system clock count. The maximum interval between valid system clock counts (or “ticks”) shall be 200ms. Therefore many audio and video packets in between may not contain a valid system clock count.

If a stream does not contain video or audio application packets, then the system clock count is not required.

5.1.3 Source Packet Header

Figure 5.3 shows the structure of the source packet header.

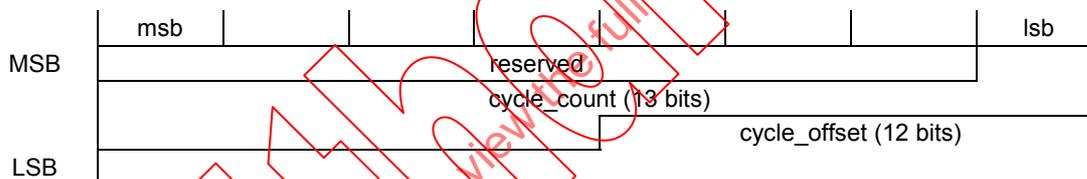**Figure 5.3 – Structure of the source packet header**

The reserved bits are zero. The cycle_count and cycle_offset fields represent a time stamp.

The time stamp is used by isochronous data receivers for reconstructing a correct timing of the transport stream packets at their output. The time stamp indicates the intended delivery time of the first bit/byte of the transport stream packets from the receiver output to the T-STD (Transport Stream Target Decoder). The time stamp represents the 25 bits of the IEEE1394 CYCLE_TIME register (CTR) at the moment the first bit/byte of the transport stream packet arrives from the application, plus an offset which is equal to the constant overall delay of the transport stream packet between the moment of arriving (of the first bit) and the moment the transport stream packet (first bit) is delivered by the receiver to the application.

5.1.4 Fractions

A source packet is split into 4 data blocks with a length of 9 quadlets. Zero or more data blocks are packed in a IEEE1394 isochronous packet. A receiver of the isochronous packets collects the data blocks of one source packet and combines them in order to reconstruct the source packet before sending this source packet to the application. There are restrictions on the transmission of fractions (5.2.2).

5.2 Isochronous Packets

5.2.1 CIP Header for DSS Transport Stream

The structure of the CIP header (see figure 3) for DSS transport stream is compliant with the two quadlets CIP header format explained in PART 1 chapter 6.2.1 of reference [R2]. The values of the CIP header components are as follows.

Table 5.2 – Fields in the CIP Header

Field	Value	Description
SID	...	depends on configuration
DBS	00001001 ₂	9 quadlets
FN	10 ₂	4 data blocks in one source packet
QPC	000 ₂	no padding
SPH	1	source packet header is present
DBC	0 ... 255	see clause 5.2.2
FMT	100001 ₂	Format type of DSS (Recommendation ITU-R Bo.1294 System B)
FDF	see clause 5.2.3

5.2.2 DBC Values

The first data block of a source packet (data block containing the source packet header) corresponds to a DBC value from which the two LSBs are **00**₂.

An isochronous packet contains 0, 1, or 2 data blocks, or an integer number of source packets.

- If the isochronous packet contains :
One data block, then the DBC value increments by 1.
Two data blocks, then the DBC value is a multiple of 2, the LSB is **0**₂.
- If the isochronous packet contains *n* source packets (*n* is an integer) then the DBC value is a multiple of 4. The two LSBs are **00**₂.

5.2.3 FDF Data

The structure of the CIP header is shown in Figure 5.4.

TSF (Timeshift_flag): Indicates a time-shifted stream

- 0 = the stream is not time-shifted
- 1 = the stream is time-shifted

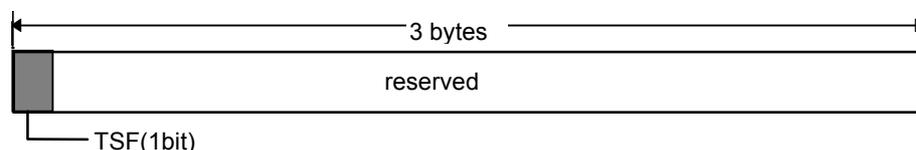


Figure 5.4 – FDF structure

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2007
Withdrawn

6. Transmission of Isochronous Packets

Active transmitters send an isochronous packet in every cycle. If data is insufficient to transmit in the isochronous packet, then an empty packet is transmitted.

6.1 Late Packets

The time stamp in the transmitted source packet header points to a value in the future. If the delay in the transmitter is too long and results in a time stamp which points in the past (late packet), then this source packet is not transmitted.

A late packet occurs if the actual value of the CTR becomes equal to the value represented in the time stamp from the source packet header and before transmission of the isochronous packet(s) which contain the source packet (including CRC).

- If 1 source packet/cycle is transmitted, the interval needed to transmit the complete isochronous packet can be calculated (the clock frequency and the number of bits is known). If a late packet occurs, then an empty packet or the next valid packet should be sent and the late packet is discarded.
- If more than 1 source packet /cycle is transmitted, then the same procedure is followed. It is allowed to discard all source packets from the isochronous packet if one source packet turns out to be a late packet.
- If fractions are transmitted, it is recommended to collect first a complete source packet in the transmitter.
- If a late packet occurs, then the complete source packet should be discarded.
- If a late packet occurs when some data blocks of the source packet have already been transmitted (e.g. at a bus reset), then data blocks remaining in the transmitting buffer are removed.

IECNORM.COM: Click to view the PDF @ IEC Norms 61883:2001

This page is left blank intentionally

IECNORM.COM: Click to view the full PDF of IEC PAS 61883-7:2007
Withdrawn