

PUBLICLY
AVAILABLE
SPECIFICATION

IEC
PAS 62473

Pre-Standard

First edition
2007-04

**Clothes washing machines
for household use –
Methods for measuring the mechanical
action in household washing machines**

IECNORM.COM : Click to view the full PDF of IEC PAS 62473:2007



Reference number
IEC/PAS 62473:2007(E)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Customer Service Centre: www.iec.ch/webstore/cusiserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

PUBLICLY
AVAILABLE
SPECIFICATION

IEC
PAS 62473

Pre-Standard

First edition
2007-04

**Clothes washing machines
for household use –
Methods for measuring the mechanical
action in household washing machines**

IECNORM.COM : Click to view the full PDF of IEC PAS 62473:2007



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

V

For price, see current catalogue

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	5
1 Scope	6
2 Normative references	6
3 Terms, definitions and symbols	6
4 General conditions for measurements	6
4.1 General.....	6
4.2 Resources and ambient conditions.....	7
5 Materials	7
5.1 Base load.....	7
5.2 Test materials.....	7
5.2.1 Thread removal material	7
5.2.2 Dot removal material	8
5.2.3 Fraying specimens.....	8
5.3 Preparation	8
5.4 Amount of test specimens used.....	8
5.5 Detergent.....	9
6 Instrumentation and accuracy	9
7 Test procedure	9
7.1 Loading	9
7.2 Unloading and drying of test specimens	9
7.3 Repeating of test procedure	9
8 Evaluation	10
8.1 Thread removal method.....	10
8.2 Dot removal method.....	10
8.3 Fraying method.....	10
9 Data to be reported.....	10
10 Sources of test materials	10
10.1 Thread removal method (5.2.1)	10
10.2 Dot removal method (5.2.2).....	10
10.3 Fraying method (5.2.3)	11
Annex A (normative) Thread removal material – Preparation of test specimen.....	12
Annex B (normative) Loads and loading	13
B.1 General	13
B.2 Test load mass	13
B.3 Loading	15
Annex C (normative) Thread removal material – Evaluation	27
C.1 General	27
C.2 Evaluation	28
Annex D (normative) Dot removal material – Evaluation.....	31
D.1 Evaluation	31

Annex E (normative) Fraying material – Evaluation.....	33
E.1 General.....	33
E.2 Evaluation.....	33
Figure 1 – Thread removal specimen.....	7
Figure 2 – Dot removal specimen.....	8
Figure 3 – Fraying specimen.....	8
Figure B.1 – General loading direction for horizontal axis machines.....	17
Figure B.2 – How to load towel/pillowcase with strip.....	17
Figure B.3 – How to load towel without strip.....	18
Figure B.4 – How to load pillowcases without strip.....	18
Figure B.5 – How to load bed sheets.....	19
Figure B.6 – General loading directions for vertical axis machines.....	21
Figure B.7 – How to load towels/pillowcases with strip.....	22
Figure B.8 – How to load towels without strips.....	22
Figure B.9 – How to load pillowcases without strip.....	23
Figure B.10 – How to load bed sheets.....	23
Figure C.1 – Thread removal specimen after test run.....	27
Figure C.2 – “Not remaining” and “remaining” threads.....	28
Figure C.3 – Thread counting after test run.....	28
Figure C.4 – Square counting after test run: left and right side examples.....	29
Figure D.1 – Measuring spots on dot removal specimen.....	31
Figure E.1 – Part of fraying specimen after test run.....	33
Figure E.2 – Evaluation for test specimen 1.....	34
Table B.1 – Cotton test load mass.....	13
Table B.2 – Synthetics/blends test load mass.....	14
Table B.3 – Polyester test load mass.....	15
Table B.4 – Loading sequence step by step for horizontal axis machine.....	20
Table B.5 – Small loads without sheet (1,0 to 2,5 kg).....	24
Table B.6 – Average loads with two sheets (3,0 to 7,0 kg).....	25
Table B.7 – Large loads with three sheets (7,5 to 8,5 kg).....	25
Table B.8 – Extra large loads with four sheets (9,0 to 10,0 kg).....	26

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CLOTHES WASHING MACHINES FOR HOUSEHOLD USE –
METHODS FOR MEASURING THE MECHANICAL ACTION
IN HOUSEHOLD WASHING MACHINES**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

A PAS is a technical specification not fulfilling the requirements for a standard but made available to the public.

IEC-PAS 62473 has been processed by IEC subcommittee 59D: Home laundry appliances, of IEC technical committee 59: Performance of household and similar electrical appliances.

The text of this PAS is based on the following document:

This PAS was approved for publication by the P-members of the committee concerned as indicated in the following document:

Draft PAS	Report on voting
59D/305/NP	59D/308/RVN

Following publication of this PAS, which is a pre-standard publication, the technical committee or subcommittee concerned will transform it into an International Standard.

This PAS shall remain valid for an initial maximum period of three years starting from 2007-04. The validity may be extended for a single three-year period, following which it shall be revised to become another type of normative document or shall be withdrawn.

INTRODUCTION

Mechanical action is a main parameter in a washing process. On the positive side, this parameter improves washing performance but can cause damage to textile goods. In today's IEC standards, mechanical action has not been determined as a single parameter in washing processes.

Mechanical action has a high relevance for consumers as well as for manufacturers of washing machines, and therefore a comparison of this parameter (especially in relation or comparison to the achieved washing performance as measured in IEC 60456) in different washing machines is very important.

The object is finally to state and define a method for the determination of mechanical action. Due to the fact that washing programmes cover a wide range of mechanical action (gentle cycles to heavy-duty cotton programmes, single cycles to multiple cycles), three systems

- the thread removal method;
- the dot removal method;
- the fraying method

can cover this area and are at the same time sensitive enough to show smaller differences.

CLOTHES WASHING MACHINES FOR HOUSEHOLD USE – METHODS FOR MEASURING THE MECHANICAL ACTION IN HOUSEHOLD WASHING MACHINES

1 Scope

This PAS deals with methods for measuring the “gentleness of action” (GoA) of clothes washing machines for household use, with or without heating devices and for cold and/or hot water supply. It is also applicable to appliances for both washing and drying textiles (called washer-dryers) with respect to the washing phase.

“Gentleness of action” defines the influence of washing machine parameters to irreversible changes of the textile properties. These changes can be visible or not visible.

Examples of these irreversible changes are:

- loss of tensile tear strengths;
- surface friction (abrasion, pilling);
- dimensional changes (shrinkage or elongation);
- creasing;
- “structural disorientation”.

Three methods for different ranges of mechanical action are described to measure and quantify the influences of the machine parameters by measuring one or several of these irreversible changes:

- thread removal method (TRM – preferable for low to medium mechanical action);
- dot removal method (DRM – preferable for high mechanical action);
- fraying method (FM – preferable for medium to high mechanical action).

2 Normative references

The following referenced document including all reference documents cited there are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60456, *Clothes washing machines for household use – Methods for measuring the performance*

3 Terms, definitions and symbols

For the purposes of this document, the terms, definitions and symbols of IEC 60456 apply.

4 General conditions for measurements

4.1 General

The measurements shall generally be carried out on a machine installed and used in accordance with the manufacturer’s instructions, except as required by this document. If there is more than one option for installation, the one chosen for testing shall be reported. If the

machine is new, the machine shall be run for two complete test **cycles** according to IEC 60456.

4.2 Resources and ambient conditions

Electricity and water supply as well as the ambient temperature shall be maintained at specified values stated in IEC 60456.

5 Materials

5.1 Base load

The base loads used shall consist of the items described for cotton, easy-care (synthetics/blends) or polyester base loads according to IEC 60456.

The base loads are adjusted and treated according to IEC 60456.

The number of items is specified in Annex B.

5.2 Test materials

5.2.1 Thread removal material

5.2.1.1 Characteristics

The thread removal material is a woven fabric having an open structure to all sides allowing loosening of threads by mechanical impact (see Figure 1).

5.2.1.2 Specification

Size:	about 29,5 × 29,5 cm
Weave:	plain woven
Yarn:	DTEX 228 F34 PA 66
Yarn count per cm:	Warp/Filling 17/17
Weight:	about 85 g/m ²

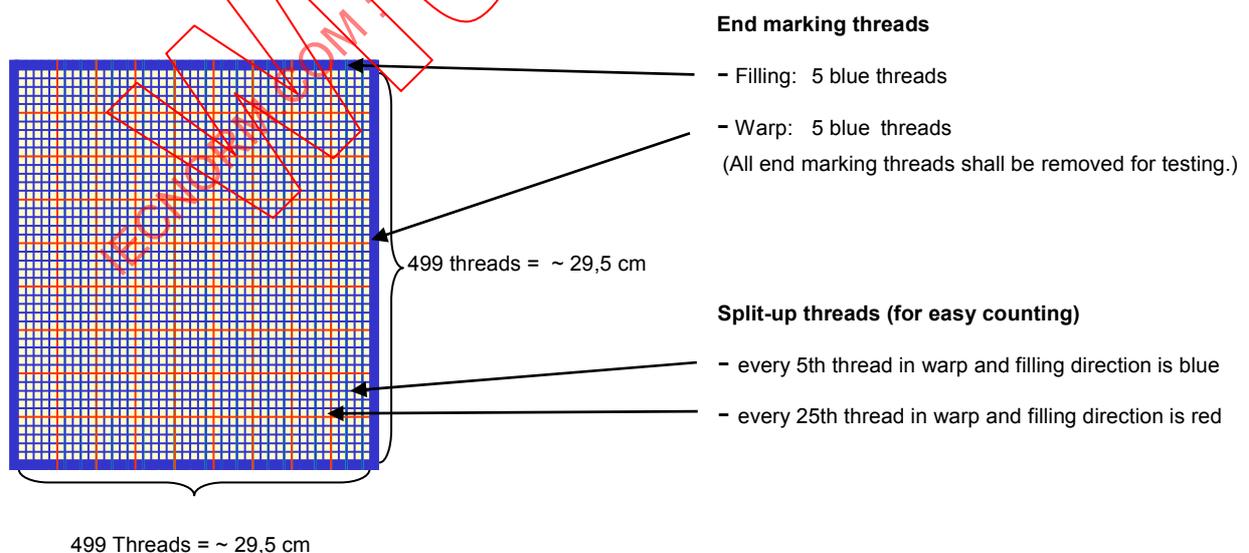


Figure 1 – Thread removal specimen

5.2.2 Dot removal material

5.2.2.1 Characteristics

The dot removal material is a stiff fabric with bonded coloured dots which are removed by mechanical impact (see Figure 2).

5.2.2.2 Specification



Size:	34 × 34 cm
Basic fabric:	00 % Cotton, plain woven, white, 125 g/m ²
Yarn:	Nm 34/34
Yarn count per cm:	Warp/Filling 19,5/19,5
Dots:	100 % PA, coloured
Density of dots:	45,5/cm ²
Density of dots:	about 45,5/ cm ²
Weight	about 140 g/m ²


Figure 2 – Dot removal specimen

5.2.3 Fraying specimens

5.2.3.1 Characteristics

The fraying specimen is a cotton fabric with five punched holes having an open structure allowing loosening of threads by mechanical impact.

5.2.3.2 Specification

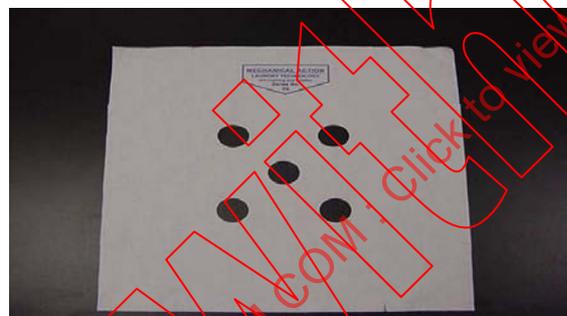

Size:	40 × 40 cm
Circular holes diameter:	35 mm
Fibre content:	100 % pure natural cotton of 27 mm minimum length
Yarn size - linear density:	single yarn 30 + 2 tex
Yarn twist:	Z 700 + 25
Warp strength:	at least 500 N
Warp yarn count:	25 + 2 threads per cm
Filling yarn count:	25 + 2 threads per cm

Figure 3 – Fraying specimen

5.3 Preparation

All test specimens shall be marked with a unique identifying reference, using an indelible marking system.

The thread removal material shall be prepared before use as described in Annex A.

The dot removal specimens have to be measured before use as described in Annex D.

5.4 Amount of test specimens used

For each wash cycle, four test specimens of only one type regardless of test load size and type shall always be used.

5.5 Detergent

The detergent used for this test shall be reference detergent A* described in IEC 60456

6 Instrumentation and accuracy

Instrumentation and accuracy of IEC 60456 apply.

For the fraying method the following tools are needed:

- magnifying glass;
- black background for assistance in counting threads;
- needle or similar instrument;
- rule calibrated in millimetres.

7 Test procedure

The test is basically run in accordance to the test of washing performance described in IEC 60456 except that, additionally, the test specimens according to this document are added to the load in the drum according to the following description.

7.1 Loading

The way of loading the machine influences the results. To get reproducible results it is necessary to define the way of loading the machine and to follow the instructions accurately.

The loading scheme of IEC 60456 is only applicable for one type of washing machine (horizontal axis). The loading procedure as described in Annex B applies to all types of washing machines and will probably be included in a future edition of IEC 60456.

The test specimens for measuring the gentleness of action according to this procedure are added as described in Annex B.

The test specimens should be placed as flat as possible.

The location of each mechanical action specimen shall be recorded (using identifying reference – number of test specimen)

7.2 Unloading and drying of test specimens

Mechanical action specimens shall be carefully removed from the load, taking care not to pull, stretch or distort the test specimens.

Base load as well as soil strips shall be dried according to the procedure described in IEC 60456.

Do not dry the mechanical action test specimens in a tumble dryer. The mechanical action test specimens are dried by laying them out flat. Take care not to apply any further mechanical action. If possible, the dot removal test specimens and the fraying test specimens should be carefully flattened by hand to avoid wrinkles.

7.3 Repeating of test procedure

The test procedure is run according to IEC 60456. A test series consists of five test runs.

For each test run new mechanical action test specimens shall be used.

NOTE It is possible to use the same specimens for more than one test run, especially for very low mechanical action.

8 Evaluation

8.1 Thread removal method

The evaluation of the thread removal specimen will be done by counting the removed threads (considered as “not remaining”).

The evaluation is described in Annex C.

8.2 Dot removal method

The evaluation of the dot removal specimens is done with a colour matching system.

The evaluation is described in Annex D.

8.3 Fraying method

The evaluation of the thread removal specimen will be done by counting of loose threads.

The evaluation is described in Annex E.

9 Data to be reported

The following data shall be recorded for all runs: cycle identification, water hardness and temperature, and number of cycles on test loads. The following information may also be recorded: total cycle time, wash time, speed, water temperature, water usage, supply voltage and frequency to the washer.

Cycle information including optional control settings shall be recorded.

10 Sources of test materials

Items may be obtained from:

10.1 Thread removal method (5.2.1)

EMPA Testmaterialien AG
Mövenstrasse 12
CH-9015 St. Gallen
Switzerland
Tel: ++41-71-311-8055
Fax: ++41 -71-311-8057
www.empa-testmaterials.ch

10.2 Dot removal method (5.2.2)

EMPA Testmaterialien AG
Mövenstrasse 12
CH-9015 St. Gallen
Switzerland
Tel: ++41 71 311 8055
Fax: ++41 -71-311-8057
www.empa-testmaterials.ch

10.3 Fraying method (5.2.3)

Teknologisk Institute
Gregersensvej
DK-2630 Taastrup
Denmark
Tel: ++45 22 70 56 46
Fax: ++45 22 70 56 44
www.danishtechnology.dk

IECNORM.COM : Click to view the full PDF of IEC PAS 62473:2007
Withdrawn


Annex A (normative)

Thread removal material – Preparation of test specimen


The thread removal material is delivered with five pieces in the filling direction. Both sides of the material have a selvedge in warp direction. (The width of the material is about 170 cm.)

The test specimen shall be prepared in the following way.


- a) The samples shall be cut between the two areas of (blue) end marking threads.

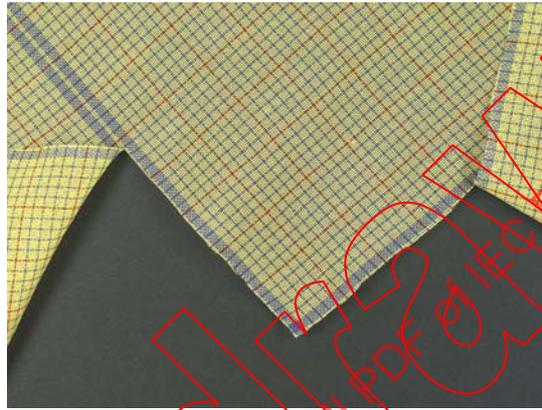

- b) The sample and warp direction shall be marked in the middle of the specimen.

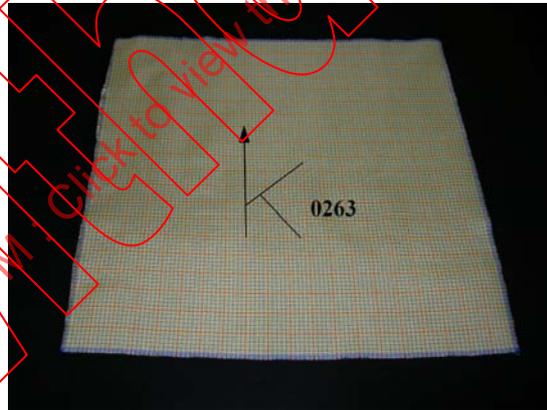

- c) Right before testing, the blue end marking threads shall be removed.

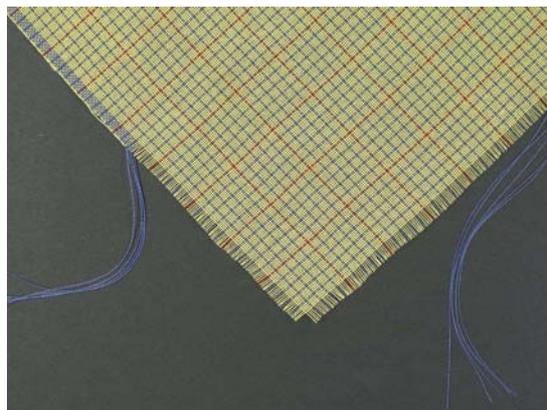

Annex B (normative)

Loads and loading

B.1 General

The cotton test load and the synthetics/blends test load consist of the base load and the soiled test strips. The polyester test load consists of the base load and three wool shrinkage specimens.

The four test specimens for measuring the mechanical action (only one type for each test) will be added to test loads as add on. Only the test load mass (base load + strips) is adjusted so that it corresponds to the required test load mass for the specified programme of the machine under test.

B.2 Test load mass

a) Cotton test load mass

Table B.1 – Cotton test load mass

Test load mass ^a kg	Approx. base load mass kg	Number of soiled test strips	Number of sheets	Number of pillowcases	Number of hand-towels ^b
1	0,96	2	0	2	5
1,5	1,46	2	0	3	7
2	1,96	2	0	4	9
2,5	2,44	3	0	5	11
3	2,94	3	2	4	5
3,5	3,42	4	2	4	9
4	3,92	4	2	4	14
4,5	4,4	5	2	6	14
5	4,9	5	2	6	18
5,5	5,38	6	2	8	18
6	5,88	6	2	8	23
6,5	6,36	7	2	10	23
7	6,86	7	2	12	23
7,5	7,34	8	3	12	21
8	7,84	8	3	12	25
8,5	8,32	9	3	14	25
9	8,82	9	4	14	23
9,5	9,30	10	4	14	28
10	9,80	10	4	16	28

a For test loads other than those specified, the number of sheets and pillowcases and strips in the test load shall be equal to that specified for the next lower test load listed, adding hand-towels to reach the required weight for the test load.

b The number of hand-towels shall be adjusted to make the test load as close as possible (± 60 g) to the required weight of the test load. The actual number may differ from the listed number.

The numbers of sheets, pillowcases and hand-towels in the cotton base load for various required test load masses are given in Table B.1. The number of soiled test strips used for a washing performance test shall be proportional to the required test load mass as shown in Table B.1. Final adjustment of the test load mass, including the soiled test strips, is made by adding or removing hand towels so that the total mass is as close as possible (± 60 g) to the required test load mass.

The location of the four test specimens for cotton test loads is marked in Tables B.4 and B.5.

b) Synthetics/blends test load mass

The numbers of pillowcases and shirts in the synthetics/blends base load for various required test load masses are given in Table B.2. The number of soiled test strips used for a washing performance test shall be proportional to the required test load mass as shown in Table B.2. The synthetics/blends base load consists of an equal number of shirts and pillowcases. Final adjustment of the test load is made after adding the soiled test strips, by adding or subtracting one shirt or one pillowcase whichever adjusts the test load to be closest to the nominal weight of the test load.

Table B.2 – Synthetics/blends test load mass

Test load mass ^b kg	Approx. base load mass kg	Number of soiled test strips	Number of shirts ^a	Number of pillowcases ^a
1	0,96	2	2	3
1,5	1,46	2	4	4
2	1,96	2	5	4
2,5	2,44	3	7	6
3	2,94	3	8	7
3,5	3,42	4	9	9
4	3,92	4	11	10
4,5	4,4	5	12	12
5	4,9	5	13	13

a The number shall be adjusted to make the mass of the test load as close as possible to the required weight of the test load. The actual number of items may differ from the listed number. The difference between the number of shirts and pillow cases shall be not more than one.

b For loads of more than 5 kg, the number of items is specified as follows. The load consists of an equal number of shirts and pillowcases. Adjustment of the test load is made after adding the soiled test strips, by adding or subtracting one shirt or one pillowcase whichever adjusts the test load to be closest to the nominal weight of the test load.

c) Polyester test load mass

The calculated number of base load items for various required test load masses is given in Table B.3. The test load should be adjusted by adding or subtracting the number of base load items to be closest to the nominal weight of the test load.

Table B.3 – Polyester test load mass

Test load mass kg	Approx. base load mass kg	Number of shrinkage specimen	Number of base load items ^a
1	0,95	3	27
1,5	1,45	3	42
2	1,95	3	56
2,5	2,45	3	70
3	2,95	3	94
3,5	3,45	3	98
4	3,95	3	113
4,5	4,45	3	127
5	4,95	3	141

a The number shall be adjusted to make the base load as close as possible to the required weight of the base load.


B.3 Loading

B.3.1 General

The way in which the washing machine is loaded can have an influence on the results obtained, especially for the washing performance. To obtain the most reproducible results, it is therefore necessary to specify the sequence and position that load items are placed into the machine for performance tests.

For the purposes of loading, there are two machine types defined as follows.


Type A: Horizontal axis machines
Definition:
 The load is placed in a drum which rotates around an axis which is usually horizontal or close to horizontal (for the purposes of this PAS, any axis which is less than, or equal to, 45° to horizontal shall be classified as horizontal axis).



Type B: Vertical axis machines

Definition:

The load is placed in a bowl which rotates around an axis which is usually vertical or close to vertical (for the purposes of this PAS, any axis which is more than 45° to horizontal shall be classified as horizontal axis).



Components, protrusions or mechanical devices of different style (for example, agitator, impeller) inside the bowl drum of a machine of type B may necessitate slight variations and cause a slightly different loading scheme from that described. These variations are covered in the loading sequence for Type B machines.

NOTE The reference machine is always machine Type A – horizontal axis

B.3.2 General requirements for loading

Washers are always loaded item by item in layers from bottom to top. Excessive force should not be used.

Items shall be placed with alternating orientation.

Items with attached soiled test strips are always laid flat in the washing machine with the four soils of the strip side facing upwards. Items with soiled test strips attached should not be placed one top of each other.

a) Cotton loads

Follow the loading sequence step by step as given in Table B.4 for Type A horizontal axis machines and Tables B.5 to B.8 for Type B vertical axis machines. The load items defined for each step are evenly distributed in a single level of the drum Type A machine or one-quarter of the bowl for Type B machines.

b) Synthetics/blends load

The test load shall be evenly spread in the washing machine. Shirts and pillowcases are loaded alternating for Type A machines from the bottom to the top, for Type B machines clockwise with one item per quarter. Pillowcases with soiled test strips attached are evenly distributed, for example, every second pillowcase is one with soiled test strip attached.

The four test specimens for measuring the mechanical action should be evenly distributed from the bottom to the top for Type A machines and one item per quarter for Type B machines, for example, on the pillowcases without test strip.

c) Polyester load

The test load shall be evenly spread in the washing machine.

The four test specimens for measuring the mechanical action should be evenly distributed from the bottom to the top for Type A machines and one item per quarter for Type B machines.

B.3.2.1 Loading of Type A machine (horizontal axis)

Figure B.1 shows the general loading directions

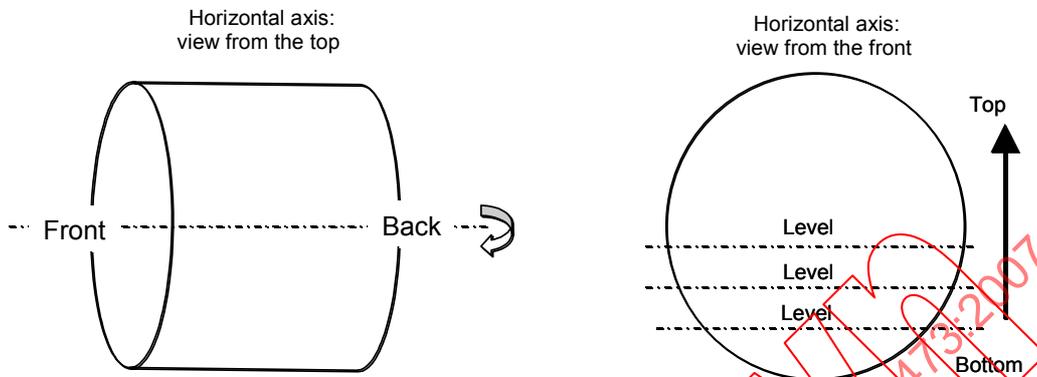


Figure B.1 – General loading direction for horizontal axis machines

Figures B.2 to B.5 show how to load items.

a) Towel/pillowcase with strip

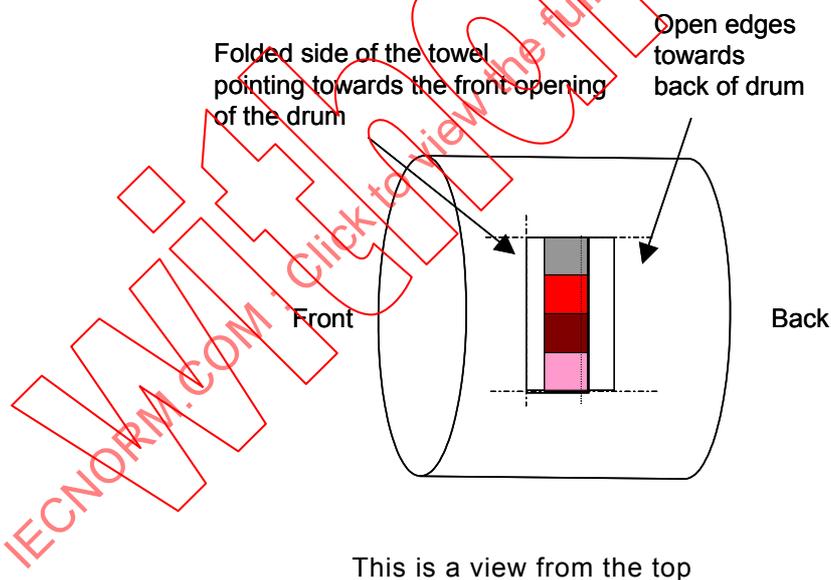


Figure B.2 – How to load towel/pillowcase with strip

b) Towel without strip

This is a view from the top:

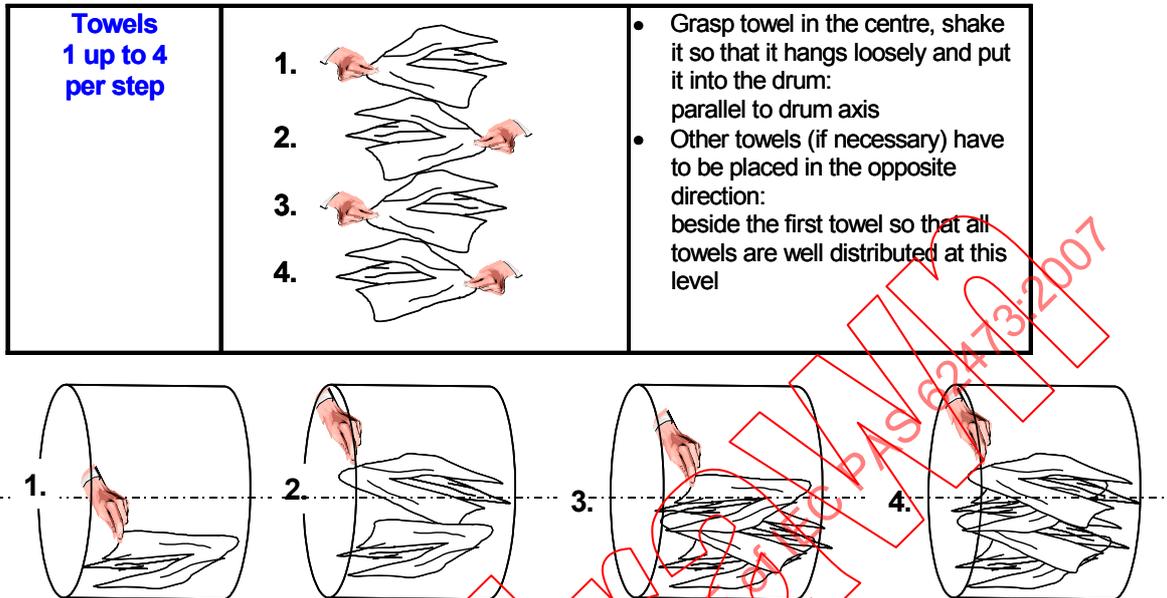


Figure B.3 – How to load towel without strip

c) Pillowcases without strip

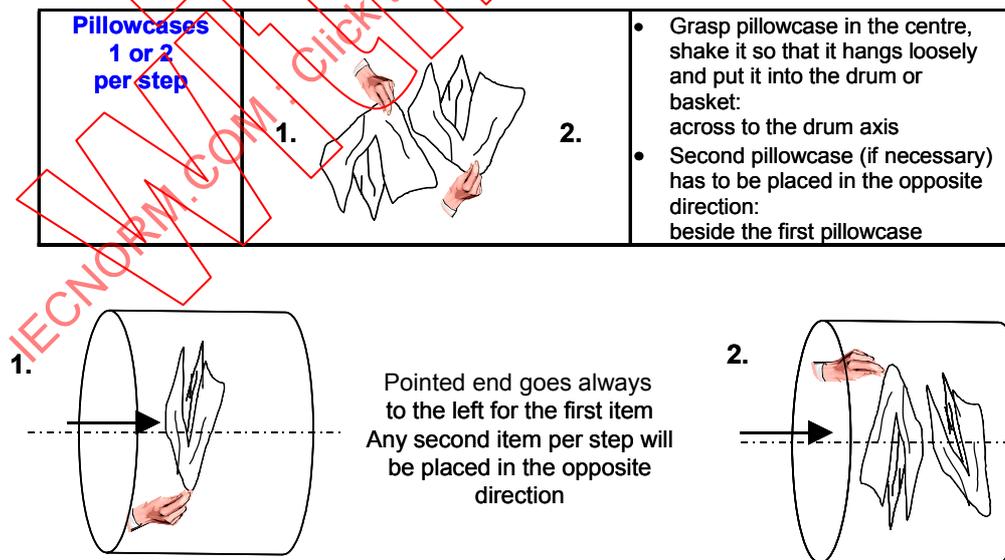


Figure B.4 – How to load pillowcases without strip

d) Bed sheet

<p>Bed sheet max. 1 per step</p>		<ul style="list-style-type: none">• Bed sheets are folded in thirds to form letter "Z". It should be loaded as laying Z
---	---	---

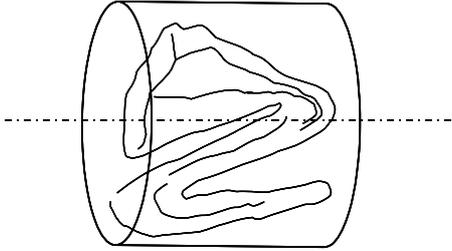


Figure B.5 – How to load bed sheets

IECNORM.COM : Click to view the full PDF of IEC PAS 62473:2007

Without watermark

Table B.4 – Loading sequence step by step for horizontal axis machine

step	horizontal axis	10,00	9,50	9,00	8,50	8,00	7,50	7,00	6,50	6,00	5,50	5,00	4,50	4,00	3,50	3,00	2,50	2,00	1,50	1,00
1	pillow	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1
2	towels adjust number here	4	4	4	4	4	4	4	4	4	3	3	2	3	2	1	2	2	2	1
3	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	pillow	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1
5	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
6	sheet	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
7	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
8	pillow	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1
9	towels adjust number here	3	3	3	3	3	3	3	3	3	2	2	2	2	2	1	1	1	1	1
10	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
11	sheet	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
12	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
13	pillow	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
14	towels adjust number here	4	4	2	2	3	1	2	2	3	2	2	3	1	1	1	2	1	1	1
15	pillow	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
16	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
17	sheet	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
18	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
19	towels adjust number here	3	3	2	3	3	2	3	3	3	2	2	2	2	2	1	1	1	1	1
20	pillow	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
21	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
22	sheet	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
23	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
24	pillow	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1
25	towel + strip	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
26	towels adjust number here	4	4	4	4	4	4	4	4	4	3	3	2	3	2	1	2	2	2	1
27	pillow	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1

The four test specimens for measuring the mechanical action are distributed evenly:


1. specimen after step 1 (pillow);
2. specimen after step 8 (pillow);
3. specimen before step 20 (pillow);
4. specimen before step 27 (pillow).

For loads of 1,5 and 1 kg consider using less than four test specimens.




B.3.2.2 Type B machine (vertical axis machine)

Figure B.6 shows the general loading directions.

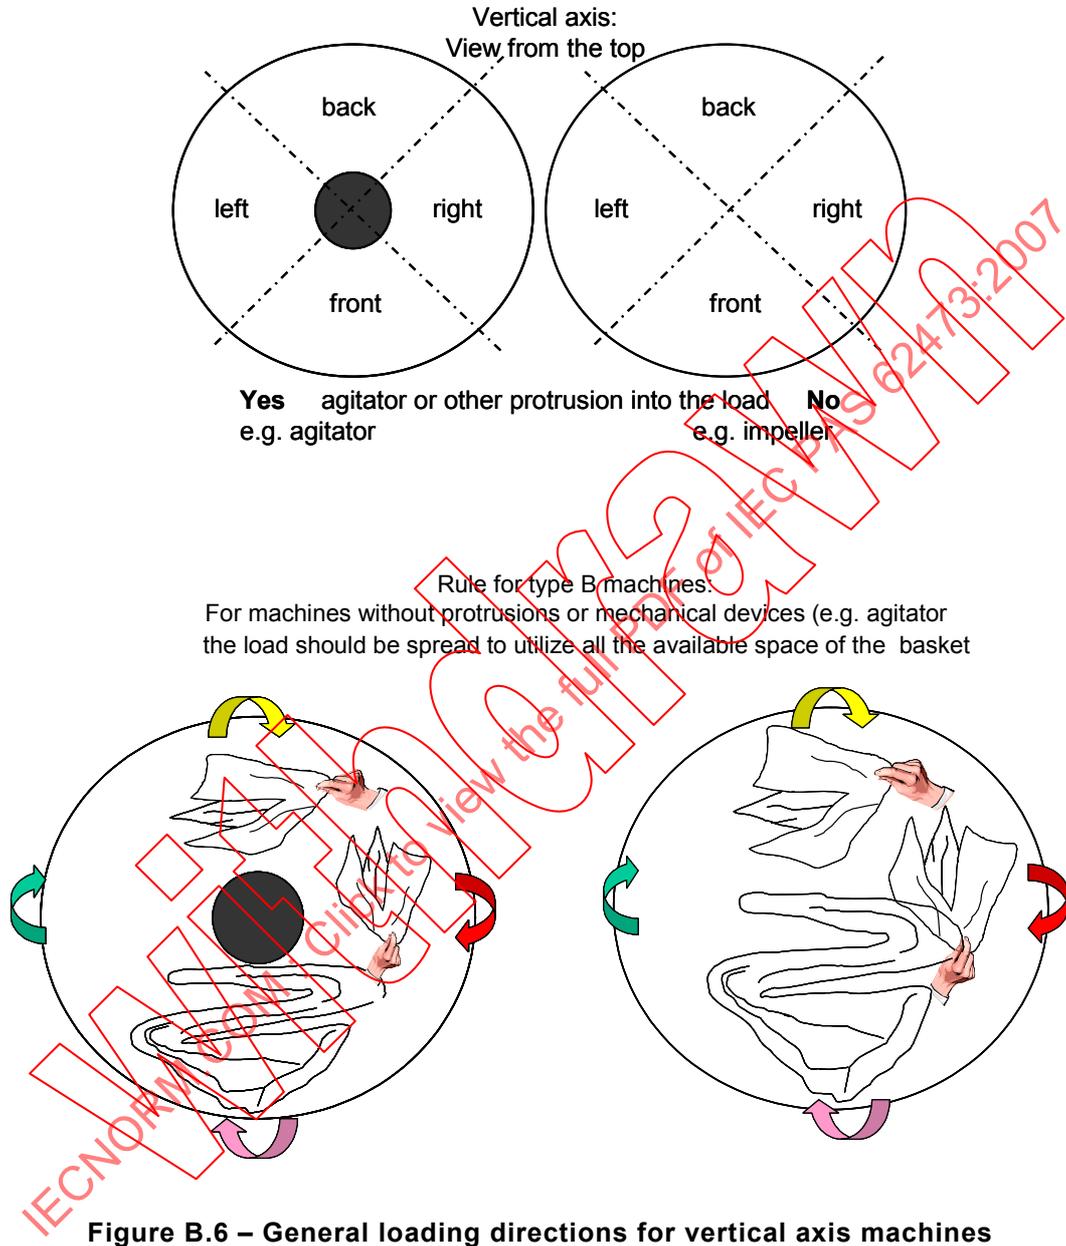

Figures B.7 to B.B.10 show how to load items


a) Towels/pillowcases with strip

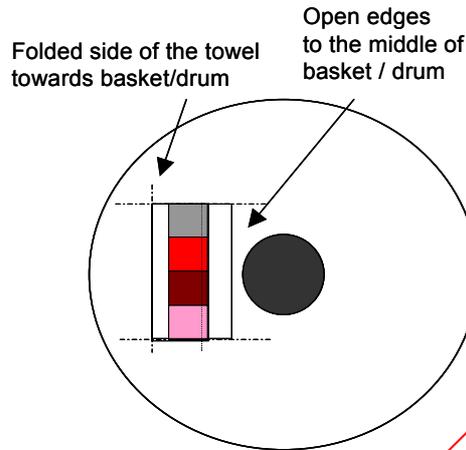

This is a view from the top

Figure B.7 – How to load towels/pillowcases with strip

b) Towels without strip

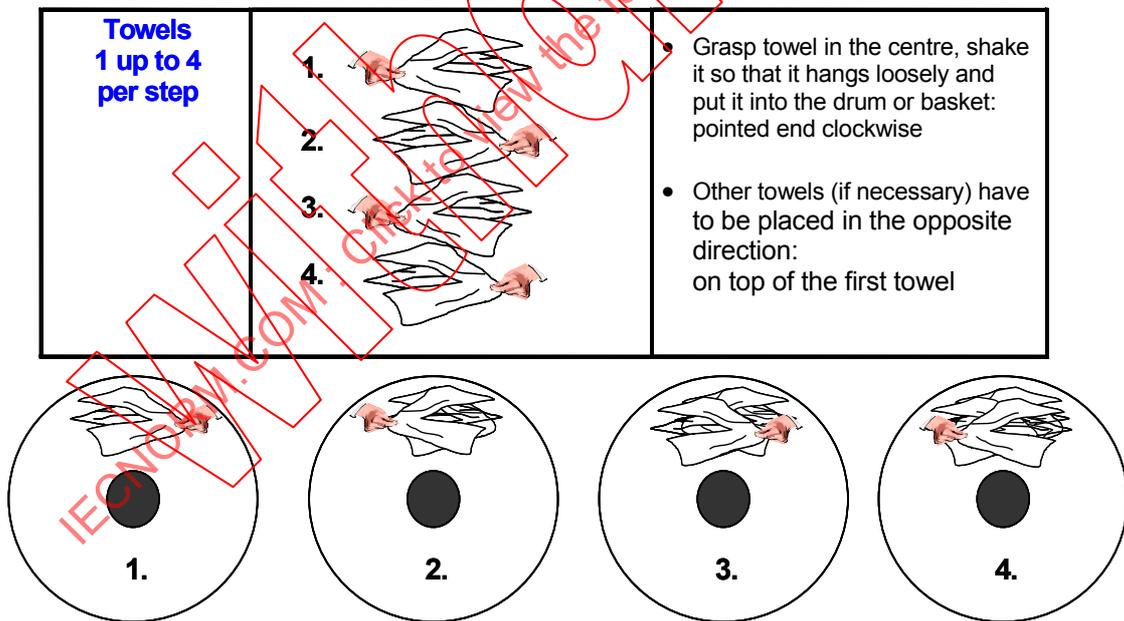


This is a view from the top

Figure B.8 – How to load towels without strips


c) Pillowcases without strip

<p>Pillowcases 1 or 2 per step</p>		<ul style="list-style-type: none"> • Grasp pillowcase in the centre, shake it so that it hangs loosely and put it into the drum: pointed end clockwise • Second pillowcase (if necessary) has to be placed in the opposite direction: on top of the first
---	---	---



1.

Pointed end goes always clockwise for the first item
Any second item per step will be placed in the opposite direction




2.

This is a view from the top

Figure B.9 – How to load pillowcases without strip

d) Bed sheets

<p>Bed sheet max. 1 per step</p>		<ul style="list-style-type: none"> • Bed sheets are folded in thirds to form letter "Z". It should be loaded as laying Z
---	---	---



Laying Z

This is a view from the top

Figure B.10 – How to load bed sheets

e) Loading step by step

The loading scheme depends on the number of sheets.

Four sheets: One goes into each quadrant

Three sheets: First goes to the front, second to left-back area, third to back-right area

Two sheets: One to the right quadrant, one to the left quadrant

In general there are four main groups, each starting in another quadrant. The number of steps for each is no more than six but depends on load size. For smaller loads, fewer steps are required.

The four test specimens for measuring the mechanical action are distributed evenly. For loads of 1,5 kg and 1 kg consider using less than four test specimens.

First specimen after step 1 of group 1 (on top of pillow – front quadrant).

Second specimen after step 1 of group 2 (on top of pillow – left quadrant).

Third specimen after step 1 of group 3 (on top of pillow – back quadrant).

Fourth specimen after step 1 of group 4 (on top of pillow – right quadrant).

Table B.5 – Small loads without sheet (1,0 kg to 2,5 kg)

step	group	vertical axis	2,50	2,00	1,50	1,00	
1	1	Pillowcases	1	1	1	1	front
2		Towels	1	1	1	1	left
3		Towel+strip	1	1	1	1	left
4		Pillowcases					back
5		Towel+strip					back
6		Sheets					
1	2	Pillowcases	1	1			left
2		Towels	1	1			back
3		Towel+strip					back
4		Pillowcases					right
5		Towel+strip					right
6		Sheets					
1	3	Pillowcases	1	1	1	1	back
2		Towels	1	1	1	1	right
3		Towel+strip	1	1	1	1	right
4		Pillowcases					front
5		Towel+strip					front
6		Sheets					
1	4	Pillowcases	1	1			right
2		Towels	1	1			front
3		Towel+strip					front
4		Pillowcases					left
5		Towel+strip					left
6		Sheets					
1	5 add on	Pillowcases	1		1		left
2		Towels	1				front
3		Towel+strip					front
4		Pillowcases					right
5		Towel+strip	1				back
6		Towels adjust number here	3	3	3	1	spread on top

Table B.6 – Average loads with two sheets (3,0 to 7,0 kg)

step	group	vertical axis	7,00	6,50	6,00	5,50	5,00	4,50	4,00	3,50	3,00		
1	1	Pillowcases	2	2	1	1	1	1	1	1	1	front	
2		Towels	2	2	2	2	2	2	2	1	1	left	
3		Towel+strip	1	1	1	1	1	1	1	1	1	left	
4		Pillowcases	1	1	1	1	1	1				back	
5		Towel+strip	1	1	1	1	1	1				back	
6		Sheets		1	1	1	1	1	1	1	1	1	right
1	2	Pillowcases	2	1	1	1	1	1	1	1	1	left	
2		Towels	2	2	2	2	2	2	2	2	1	back	
3		Towel+strip	1	1	1	1	1	1	1	1	1	back	
4		Pillowcases	1	1	1	1						right	
5		Towel+strip	1	1								right	
6		Sheets											
1	3	Pillowcases	2	2	1	1	1	1	1	1	1	back	
2		Towels	2	2	2	2	2	2	2	2	1	right	
3		Towel+strip	1	1	1	1	1	1	1	1	1	right	
4		Pillowcases	1	1	1	1	1	1				front	
5		Towel+strip	1	1	1	1						front	
6		Sheets		1	1	1	1	1	1	1	1	1	left
1	4	Pillowcases	2	1	1	1	1	1	1	1		right	
2		Towels	2	2	2	2	2	2	2	2		front	
3		Towel+strip	1	1	1	1	1	1	1	1	1	front	
4		Pillowcases	1	1	1	1						left	
5		Towel+strip											
6		Sheets											
1	5 add on	Pillowcases										left	
2		Towels										front	
3		Towel+strip										front	
4		Pillowcases										right	
5		Towel+strip									1	back	
6		Towels adjust number here		8	8	9	4	5	1	2	1	1	spread on top

Table B.7 – Large loads with three sheets (7,5 to 8,5 kg)

step	group	vertical axis	8,50	8,00	7,50	
1	1	Pillowcases	2	2	2	front
2		Towels	2	2	2	left
3		Towel+strip	1	1	1	left
4		Pillowcases	1	1	1	back
5		Towel+strip	1	1	1	back
6		Sheets		1	1	1
1	2	Pillowcases	2	2	2	left
2		Towels	2	2	2	back
3		Towel+strip	1	1	1	back
4		Pillowcases	1	1	1	right
5		Towel+strip	1	1	1	right
6		Sheets		1	1	1
1	3	Pillowcases	2	2	2	back
2		Towels	2	2	2	right
3		Towel+strip	1	1	1	right
4		Pillowcases	1	1	1	front
5		Towel+strip	1	1	1	front
6		Sheets		1	1	1
1	4	Pillowcases	2	2	2	right
2		Towels	2	2	2	front
3		Towel+strip	1	1	1	front
4		Pillowcases	1	1	1	left
5		Towel+strip	1	1	1	left
6		Sheets				
1	5 add on	Pillowcases	1			left
2		Towels	2			front
3		Towel+strip	1			front
4		Pillowcases	1			right
5		Towel+strip				back
6		Towels adjust number here		6	9	5

Table B.8 – Extra large loads with four sheets (9,0 to 10,0 kg)

step	group	vertical axis	10,00	9,50	9,00	
1	1	Pillowcases	2	2	2	front
2		Towels	3	3	3	left
3		Towel+strip	1	1	1	left
4		Pillowcases	1	1	1	back
5		Towel+strip	1	1	1	back
6		Sheets	1	1	1	right
1	2	Pillowcases	2	2	2	left
2		Towels	3	3	3	back
3		Towel+strip	1	1	1	back
4		Pillowcases	1	1	1	right
5		Towel+strip	1	1	1	right
6		Sheets	1	1	1	front
1	3	Pillowcases	2	2	2	back
2		Towels	3	3	3	right
3		Towel+strip	1	1	1	right
4		Pillowcases	1	1	1	front
5		Towel+strip	1	1	1	front
6		Sheets	1	1	1	left
1	4	Pillowcases	2	2	2	right
2		Towels	3	3	3	front
3		Towel+strip	1	1	1	front
4		Pillowcases	1	1	1	left
5		Towel+strip	1	1	1	left
6		Sheets	1	1	1	back
1	5 add on	Pillowcases	2	1	1	left
2		Towels	3	3	1	front
3		Towel+strip	1	1	1	front
4		Pillowcases	2	1	1	right
5		Towel+strip	1	1		back
6		Towels adjust number here	3	3	1	spread on top

IECNORM.COM : Click to view the FULL PAS 62473 © IEC:2007

Annex C (normative)

Thread removal material – Evaluation

C.1 General

The evaluation of the thread removal specimen after test run (Figure C.1) will be carried out by counting the removed threads (considered as “not remaining”).

The specimen shall be gently flattened out by hand and all threads which are considered as “not remaining” from the specimen removed.

All threads with direct contact to the remaining “fabric” count as “remaining” and stay in the fabric. All threads which have no direct contact to the remaining “fabric” shall be removed and count as “not remaining”.



Figure C.1 – Thread removal specimen after test run

Threads which hang loose in the open threads count as “not remaining” and shall be removed – see Figure C.2a and Figure C.2c.

Threads which are all over the length very close to the remaining “fabric” but have no direct contact (see Figure C.2b) count as “not remaining”.

Threads which are mainly away from the remaining “fabric” but have contact on a short zone (more than three red squares in a row – see Figure C.2d) and/or several contacts (within three red squares – see Figure C.2e) count as “remaining”

In the very unlikely event that a thread comes out of the centre of the fabric (for example, if a single thread from the middle gets blocked and held back somewhere during the washing process), this thread will be removed but is considered as “remaining”.

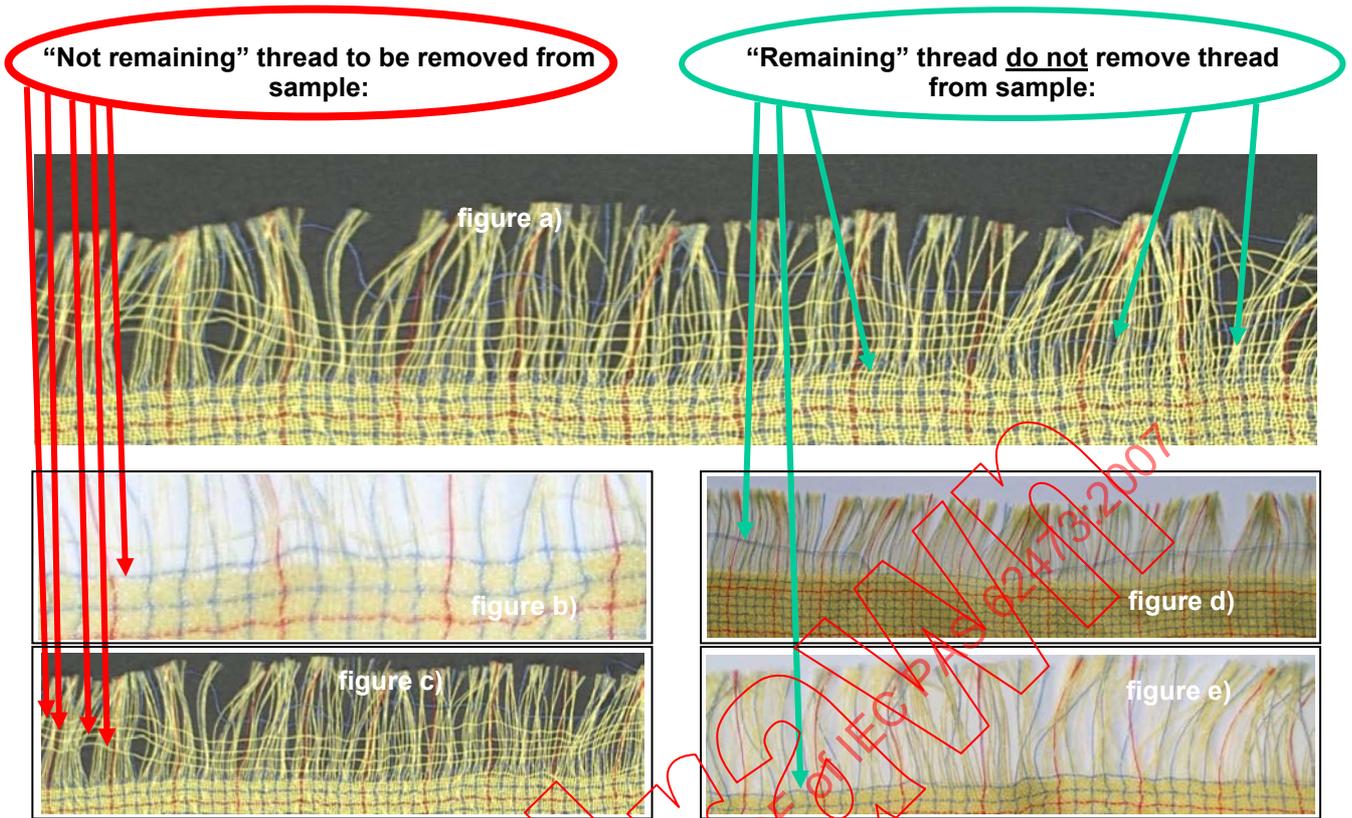


Figure C.2 – “Not remaining” and “remaining” threads

NOTE Remove all “not remaining” threads before counting.

C.2 Evaluation

a) Full remaining squares marked by a red thread in warp directions are counted first. Each square has 25 threads (first yellow thread to next red thread). Additionally, the first red thread shall be counted. See Figure C.3 for an example.

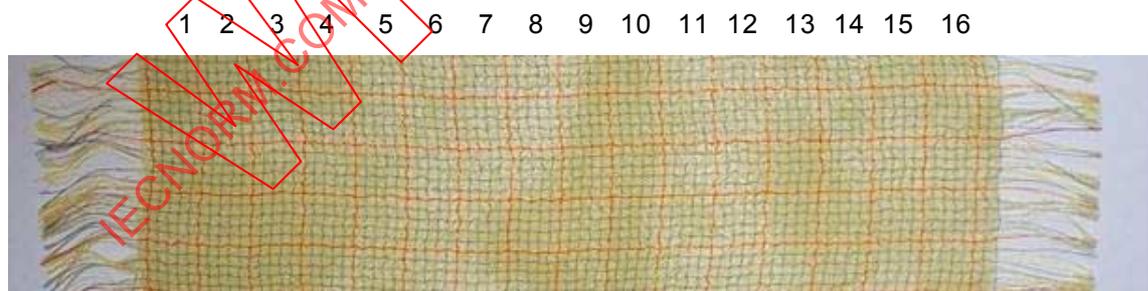


Figure C.3 – Thread counting after test run

Example: 16 left squares equals 16 × 25 threads = 400 threads
 plus one red thread at the beginning, in total = 401 threads