

# PUBLICLY AVAILABLE SPECIFICATION

## PRE-STANDARD



---

**Position statement on germicidal UV-C irradiation UV-C safety guidelines**

IECNORM.COM : Click to view the full PDF of IEC PAS 63313:2021



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

#### IEC online collection - [oc.iec.ch](http://oc.iec.ch)

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full text of IEC standards 63543:2021

# PUBLICLY AVAILABLE SPECIFICATION

## PRE-STANDARD



---

**Position statement on germicidal UV-C irradiation UV-C safety guidelines**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 29.140.01

ISBN 978-2-8322-9843-5

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD.....	3
INTRODUCTION TO THE PAS .....	5
Foreword to this guidance document.....	6
1 Introduction .....	6
2 Scope of this guidance document .....	7
3 UV-C radiation safety requirements .....	7
3.1 Summary of UV-C safety requirements of photobiological safety standard IEC 62471.....	7
3.1.1 Effective UV-C irradiance .....	8
3.1.2 Effective irradiance at a distance $d_2$ .....	9
3.1.3 Effective irradiance at a distance $d_2 = 200$ mm.....	9
3.1.4 UV-C risk groups .....	9
3.2 Effective UV-C irradiance distribution.....	10
3.3 UV-C irradiance safeguards .....	10
4 Ozone safety requirements.....	10
4.1 Long-term exposure limits for ozone .....	10
4.2 Ozone safeguard requirements .....	11
5 Information requirements.....	11
5.1 Warning symbols .....	11
5.2 Warning labels.....	11
5.3 Installation instructions and user manual .....	12
5.4 Instructional training .....	13
6 Compliance .....	13
7 Terms and definitions .....	13
8 References.....	14
Appendix A.....	15
Appendix B .....	16
Figure 1 – UV-C Risk Groups (UV-C RGs).....	9
Figure 2 – Example of UV-C warning label.....	12
Figure 3 – Example of an ozone warning label.....	12
Table 1 – Spectral weighting $S(\lambda)$ .....	8
Table 2 – Maximum exposure time per UV-C RG for an 8 hours' time interval.....	10
Table 3 – Alternative ozone exposure levels .....	11
Table 4 – Instructional safeguards for ultraviolet hazard 180 nm to 280 nm .....	12

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## POSITION STATEMENT ON GERMICIDAL UV-C IRRADIATION UV-C SAFETY GUIDELINES

### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

A PAS is an intermediate specification made available to the public and needing a lower level of consensus than an International Standard to be approved by vote (simple majority).

IEC PAS 63313 has been processed by IEC technical committee 34: Lighting.

The text of this PAS is based on the following document:

This PAS was approved for publication by the P-members of the committee concerned as indicated in the following document

Draft	Report on voting
34/795/DPAS	34/812/RVDPAS

Following publication of this PAS, which is a pre-standard publication, the technical committee or subcommittee concerned may transform it into an International Standard.

It is based on the Global Lighting Associations's *Position Statement on Germicidal UV-C Irradiation – UV-C Safety Guidelines*. The structure and editorial rules used in this publication reflect the practice of the organization which submitted it.

This PAS shall remain valid for an initial maximum period of 2 years starting from the publication date. The validity may be extended for a single period up to a maximum of 2 years, at the end of which it shall be published as another type of normative document, or shall be withdrawn.

**IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

IECNORM.COM : Click to view the full PDF of IEC PAS 63313:2021

## INTRODUCTION TO THE PAS

UV-C irradiation is a proven methodology for inactivating microorganisms (including viruses) in water, in air and on solid surfaces. UV-C devices, that intentionally generate effective UV-C radiation, are considered safe if they meet the electrical, thermal, mechanical, human exposure to electromagnetic fields (EMF) and photobiological safety requirements provided in international safety standards. Guidance on the effectiveness of UV-C irradiation is given in publications like CIE 155. Currently, a few UV-C devices are supported by dedicated product standards, like for air purifiers (IEC 60335-2-65, which also provides information on ozone limits). However, related to the present COVID-19 pandemic, many UV-C devices are entering the market for which no adequate product standards exist yet. IEC/TC 34 recognizes this standardization gap and will start working on the development of required product standards.

Pending the development and publication of comprehensive product safety standards, the Global Lighting Association (GLA) issued the GLA "UV-C Safety Guidelines" (May 2020) with safety measures and compliance criteria, these to be taken in conjunction with the requirements of IEC 62471:2006/CIE S 009:2002 (in the GLA document abbreviated to IEC 62471). In addition, the GLA "UV-C Safety Guidelines" include safety measures and compliance criteria to avoid excessive ozone exposure.

IEC/TC 34 considers the GLA "UV-C Safety Guidelines" as a good starting point for developing any missing IEC safety standard(s) for UV-C devices, although it is recognized that the GLA "UV-C Safety Guidelines" were considered as initial guidance and its contents are not complete. For example, the photobiological safety assessment is limited to the actinic hazard in the UV-C spectral region, referring to risk groups specified in IEC 62471:2006/CIE S 009:2002; additional radiation such as UV-B/A is not addressed. Furthermore, the effects of ozone production are only mentioned with limited guidance.

However, since the development and publication of a full IEC safety standard will take at least 2 to 3 years, it has been agreed to publish the GLA "UV-C safety guidelines" as an intermediate IEC Publicly Available Specification (PAS), to offer an IEC document that helps manufacturers introducing safe UV-C devices which tackle the present COVID-19 pandemic. The IEC PAS document is a copy of the existing GLA document. This approach was already offered for consideration to IEC/TC 34 members who concluded that there is indeed a need for publication of the GLA "UV-C Safety Guidelines" as an IEC PAS. This PAS will serve as an interim measure to fill gaps in the present standardization landscape, it is not intended to predetermine any future TC 34 responsibility in the field of germicidal UV radiation. Aspects of this PAS document might serve as a basis for future standard(s) in subsequent project(s) as advised by TC 34 Advisory Group 17 and for execution by IEC/TC 34 or any other standardization body, as appropriate.

## POSITION STATEMENT ON GERMICIDAL UV-C IRRADIATION UV-C SAFETY GUIDELINES

### Foreword to this guidance document

#### About the Global Lighting Association

The Global Lighting Association (GLA) is the voice of the lighting industry on a global basis. GLA shares information on political, scientific, business, social and environmental issues of relevance to the lighting industry and advocates the position of the global lighting industry to relevant stakeholders in the international sphere. See [www.globallightingassociation.org](http://www.globallightingassociation.org).

#### UV-C and urgent need for safety guidelines

UV-C<sup>1</sup> irradiation is a proven germicidal methodology for inactivating bacteria and viruses in water, air and solid surfaces. For effective disinfection purposes, the UV-C energy of UV-C devices is much higher than normal sunlight. These high UV-C energies can be a hazard to exposed humans and materials if proper safety measures are not observed.

In this context, and in the midst of a global COVID-19 epidemic, GLA is concerned at the proliferation of UV-C disinfecting devices – particularly being sold on the internet – with dubious safety features and inadequate safety instructions.

There is an urgent need for comprehensive technical safety standards for UV-C devices. Standards are expected to be developed by the International Electrotechnical Commission (IEC), Underwriters Laboratories (UL) and other standards development organisations (SDOs), but will take many months before they are published. Pending development and publication of such standards, the Global Lighting Association has published this document as an intermediate measure to draw attention to safety issues associated with UV-C products and to provide guidance on their safe use.

### 1 Introduction

UV-C devices are considered safe if they meet the electrical, thermal, mechanical, human exposure to electromagnetic fields (EMF) and photobiological safety requirements provided in IEC and UL standards. Regional safety codes or policies may reference these standards and other regional safety requirements. An overview of applicable IEC and UL safety standards is given in Appendix A.

Additionally, special attention should be given to UV-C **irradiance** hazards [1] which can damage the human eye and cause severe sunburn-like reaction to the human skin. UV-C **irradiance** can damage materials. It can also produce ozone (O<sub>3</sub>), a known human toxin. Ozone can be produced in air due to exposure to optical radiation at wavelengths below 240 nm.

The information in this document represents current UV-C safety knowledge. Pending publication of comprehensive safety standards by SDOs, this document provides safeguards to avoid human exposure to **irradiance** hazards (section 3) and to excessive ozone concentrations

---

1 UV-C forms part of the ultraviolet (UV) spectrum and is defined within ISO standard ISO-21348 as having wavelengths between 100 – 280 nm. In practice, 100 nm – 200 nm wavelengths are strongly absorbed by atmospheric oxygen which means they can only be used effectively under vacuum conditions. (This is also the reason the scope of the IEC standard *Photobiological safety of lamps and lamp systems* starts at 200 nm). This document changed the lower boundary from 200 nm to 180 nm to include low-pressure mercury lamps.

(section 4). The associated information requirements and compliance criteria are given in section 5 and 6 respectively. Definitions of **bold-marked** terms are given in section 7.

The Global Lighting Association strongly recommends applying these guidelines during safety assessments of UV-C devices in conjunction with applicable IEC and/or UL standards and/or other regional safety requirements.

## 2 Scope of this guidance document

The safety advice in this document applies to UV-C sources and UV-C products which emit in the wavelength range of 180<sup>2</sup> nm to 280<sup>3</sup> nm.

Not within the scope are:

- devices having their own product safety standard, such as IEC 60335-2-109 applicable to UV-C water disinfection equipment and IEC 60335-2-65 applicable to UV-C air disinfection equipment
- application environments of UV-C devices
- products combining UV-C **irradiance** with chemicals and additives
- products that do not emit UV-C radiation such as UV-A, UV-B and near-UV devices
- requirements for performance and functional characteristics
- requirements for preventing material degradation and material damage

## 3 UV-C radiation safety requirements

Section 3.1 summarises UV-C safety requirements identified in the photobiological safety standard IEC 62471 [3]. It also alters the lower wavelength boundary from 200 nm to 180 nm to extend safety considerations to common 185 nm sources as outlined in the scope of this document. Section 3.2 supplements these requirements with quantification of the effective UV-C **irradiance** distribution. Section 3.3 describes the safeguards which should be taken to avoid human exposure to **irradiance** hazards.

### 3.1 Summary of UV-C safety requirements of photobiological safety standard IEC 62471

[Source: IEC 62471 modified to lower 180 nm wavelength boundary and limited to upper 280 nm wavelength boundary]

---

2 The lower wavelength boundary of the UV-C wavelength range has been adjusted from 200 nm to 180 nm to include 185 nm low-pressure mercury lamps. The product safety requirements for this wavelength extension are derived from ICNIRP 2004 Guidelines [1].

3 There are also broadband UV-C devices with UV emission above 280 nm. These broadband UV-C devices have additional product safety requirements described in IEC 62471.

NOTE The product safety requirements for the wavelength extension are derived from ICNIRP 2004 Guidelines [1].

### 3.1.1 Effective UV-C irradiance

To determine the effective **irradiance** of broadband UV-C devices, the device **irradiance** should be weighted against the peak of the spectral effectiveness curve (270 nm) according to Equation 1.

$$E_{eff} = \sum_{180\text{ nm}}^{280\text{ nm}} E_{\lambda} \cdot S(\lambda) \cdot \Delta(\lambda) \quad [Equation\ 1]$$

For monochromatic UV-C devices Equation 1 can be simplified to Equation 2.

$$E_{eff} = E_{\lambda} \cdot S(\lambda) \quad [Equation\ 2]$$

where:

$E_{eff}$  = effective **irradiance** at a distance  $d_1$  from the UV-C device in  $\mu\text{W}/\text{cm}^2$  or  $\text{W}/\text{m}^2$  and weighted against a 270 nm source

$E_{\lambda}$  = spectral device **irradiance** in  $\mu\text{W}/\text{cm}^2/\text{nm}$  or  $\text{W}/\text{m}^2/\text{nm}$  measured at a distance  $d_1$  from the UV-C device

$S(\lambda)$  = relative spectral effectiveness as given in Table 1

$\Delta\lambda$  = bandwidth in nanometres of the calculation or measurement intervals

**Table 1 – Spectral weighting S(λ)**

UV-range	λ (nm)	S (λ)
UV-C	180	0.012
	185*	0.015
	200	0.03
	220	0.12
	222	0.13
	240	0.30
	254*	0.50
	260	0.65
	270	1.00
	280	0.88

NOTE 1 Values marked \* are mercury lines.

NOTE 2 Wavelengths chosen are representative. Other values should be obtained by logarithmic interpolation at intermediate wavelengths.

NOTE 3 CIE 239:2020 TR Goniospectroradiometry of Optical Radiation Sources gives guidance on spectral distribution measurements for 200 nm-2500 nm. Effective UV-C spectral **irradiance** distribution acquisition needs spectroradiometers or detectors sensitive in the range of interest: 180 nm-280 nm. Below 200 nm, there are difficulties in measuring **irradiance** distributions in typical air conditions. A nitrogen environment may be required due to ozone blocking of the UV.

NOTE 4 Broadband UV-C devices that emit in the 280 nm to 400 nm range should be evaluated according to IEC 62471 as such devices have additional product safety requirements.

### 3.1.2 Effective irradiance at a distance $d_2$

The effective **irradiance** from a UV-C device can be determined at any distance  $d_2$  by the inverse square law as given in Equation 3.

$$E_{eff@d_2} = \left( \frac{d_1}{d_2} \right)^2 \cdot E_{eff} \quad [Equation 3]$$

where:

$E_{eff}$  = effective irradiance at a distance  $d_1$  from the UV-C device in  $\mu\text{W}/\text{cm}^2$  or  $\text{W}/\text{m}^2$  and weighted against a 270 nm source

$E_{eff@d_2}$  = effective irradiance at a distance  $d_2$  from the UV-C device in  $\mu\text{W}/\text{cm}^2$  or  $\text{W}/\text{m}^2$  and weighted against a 270 nm source

For devices unable to be modelled by the inverse square law (such as collimated sources), the effective irradiance should be measured at all relevant distances.

### 3.1.3 Effective irradiance at a distance $d_2 = 200$ mm

The effective **irradiance** from UV-C devices should be determined in the direction where the highest **irradiance** occurs and at a fixed distance  $d_2$  of 200 mm.

NOTE The distance  $d_2$  of 200 mm derives from IEC 62471 [1] and should be used for all UV-C devices to make them comparable and to categorize them in the correct UV-C risk group

### 3.1.4 UV-C risk groups

The UV-C risk group of UV-C devices should be determined by  $E_{eff@d_2 = 200\text{mm}}$  according to section 3.1.3, the exposure time (t) per 8 hours' time interval and the flow-chart of Figure 1.

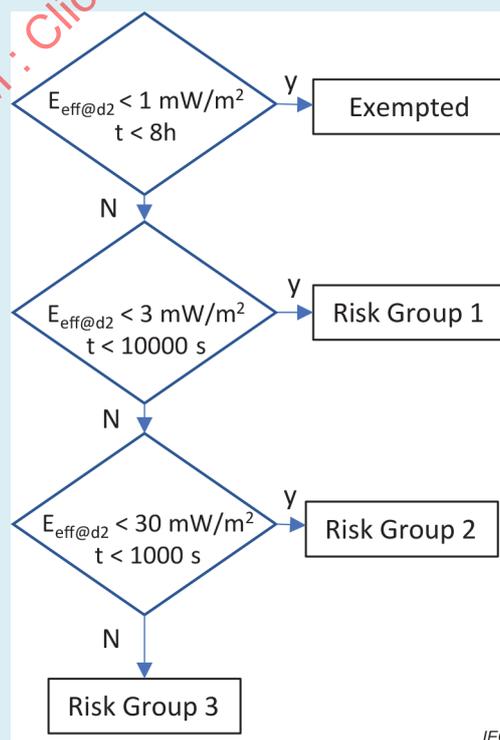


Figure 1 – UV-C Risk Groups (UV-C RGs)

**3.2 Effective UV-C irradiance distribution**

To provide adequate installation instructions (see section 5) for **Partially Open Enclosures**, the effective UV-C **irradiance** of UV-C devices should be determined according to Equation 3, at all relevant directions and at a distance  $d_2$  which the device is intended to have during far-field or near-field operation.

**3.3 UV-C irradiance safeguards**

UV-C devices belonging to the exempted UV-C Risk Group (UV-C RG) require no safeguard.

Devices accessible to **Ordinary Persons** and which have a UV-C RG higher than or equal to 1 (UV-C RG  $\geq 1$ ) require at least:

- I. an Instructional Safeguard AND
- II. a Time Safeguard which should limit the exposure times per UV-C RG as given in Table 2, OR an Equipment Safeguard OR a Containment Safeguard which should reduce the effective irradiation to below  $1\text{mW/m}^2$ .

**Table 2 – Maximum exposure time per UV-C RG for an 8 hours’ time interval**

UV-C Risk Group (UV-C RG)	Maximum exposure time, t in seconds
1	10 000
2	1 000
3	$< 30 \text{ J/m}^2 / E_{\text{eff}@d2}$

Devices which are only accessible to **Skilled Persons** and which have a UV-C RG higher than or equal to 1 (UV-C RG  $\geq 1$ ) require at least an **Instructional Safeguard** AND a **Personal Safeguard**.

The **bold-marked** terms are defined in section 7.

**4 Ozone safety requirements**

This section includes ozone safety requirements to protect humans against long-term toxic effects from high ozone concentrations generated by UV-C devices with emission wavelengths below 240 nm.

**4.1 Long-term exposure limits for ozone**

The limits are derived from section 7.3 in IEC 62368-1 [4] and are for long-term ozone exposures limited to 0.1 ppm per volume ( $\approx 200 \mu\text{g/m}^3$ ) calculated as an eight hours’ time-weighted average concentration. Alternative ozone exposure levels are provided in Table 3.

**Table 3 – Alternative ozone exposure levels<sup>4</sup>**

Country/ organisation	Level [µg/m <sup>3</sup> ]	Source
WHO	100	World Health Organisation ambient (outdoor) air pollution <a href="https://www.who.int/news-room/fact-sheets/detail/ambient-(outdoor)-air-quality-and-health">https://www.who.int/news-room/fact-sheets/detail/ambient-(outdoor)-air-quality-and-health</a>
EU	120	Directive 2008/50/EC, annex 7
US (EPA)	140	2015 National Ambient Air Quality Standards (NAAQS) for Ozone <a href="https://www.epa.gov/ground-level-ozone-pollution/ozone-national-ambient-air-quality-standards-naaqs">https://www.epa.gov/ground-level-ozone-pollution/ozone-national-ambient-air-quality-standards-naaqs</a>
China	160	TOAR: China is Hot Spot of Ground-Level Ozone Pollution 29 August 2018 <a href="https://esrl.noaa.gov/csl/news/2018/244_0829.html">https://esrl.noaa.gov/csl/news/2018/244_0829.html</a>

## 4.2 Ozone safeguard requirements

UV-C devices which exceed the long-term ozone exposure limits require ozone instructional safeguards. See section 5.

## 5 Information requirements

Unless exempted in section 4 and section 5, the following product information requirements apply to UV-C devices.

### 5.1 Warning symbols

- a) A UV-C warning symbol  according to IEC 61549, data sheet 310-1. Other regional required or accepted warning symbols may be utilized.
- b) An ozone warning symbol<sup>5</sup> such as  should be applied. Other regional required or accepted warning symbols may be utilized.

### 5.2 Warning labels

- a) A UV-C warning label with the following elements:

- 1) The UV-C warning symbol  according to IEC 61549, data sheet 310-1
- 2) UV-C risk group marking
- 3, 4 and 5) Text recommendations for these warning label elements are provided in Table 4 according to the appropriate UV-C risk group for the UV-C source or UV-C product.


<sup>4</sup> California Code of Regulations Title 17 [5] limits the ozone concentration to 0.05 ppm per volume calculated over 24 hours.

<sup>5</sup> The yellow background of the ozone warning symbol is not required. The IEC reference for the ozone warning symbol is not yet defined.

**Table 4 – Instructional safeguards for ultraviolet hazard 180 nm to 280 nm**

Element	Exempt Group	UV-C Risk Group 1	UV-C Risk Group 2	UV-C Risk Group 3
3	Not required	<b>NOTICE UV-C</b> emitted from this product	<b>CAUTION UV-C</b> emitted from this product	<b>WARNING UV-C</b> emitted from this product
4	Not required	Minimize exposure to eyes or skin. Use appropriate shielding.	Eye or skin irritation may result from exposure. Use appropriate shielding.	Avoid eye and skin exposure to unshielded product.
5	Not Required	Follow the installation instruction and user manual		

The elements 1, 3, 4 and 5 should be black on a yellow background, as illustrated in Figure 2.

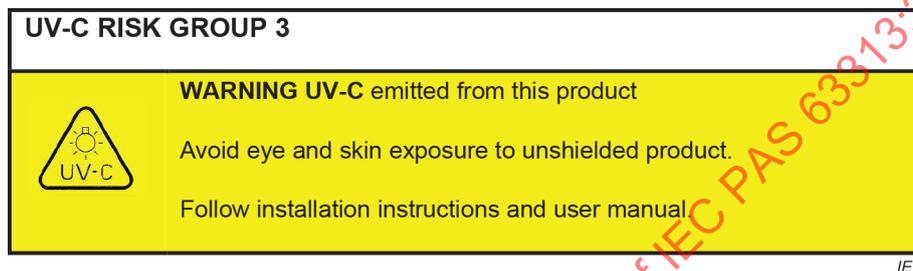

**Figure 2 – Example of UV-C warning label**

b) Ozone warning label



**Figure 3 – Example of an ozone warning label**

Environments in which a high ozone concentration is expected should be marked with an additional safety label that summarises the emergency overview, the safeguards, first aid procedures, fire procedures and spill procedures. An example of such a warning label is given in Appendix B.

If the size or design of the UV-C device makes marking impractical, the marking should be included in the packaging and with appropriate web-based links. Other regional required or accepted colour schemes may be utilized.

### 5.3 Installation instructions and user manual

The following information should be included in the installation instructions and user manual:

- Warning labels in section 5.2
- UV-C wavelength or wavelength range (for broadband sources)
- Effective device irradiance at a distance  $d_2 = 200$  mm as defined in section 3.1
- Detailed description of the **Time, Equipment, Containment** and/or **Personal Safeguards** that are needed to avoid possible hazardous exposure to UV-C radiation and/or ozone concentrations
- In case of an **Equipment Safeguard** with a **Partially Open Enclosure**, the effective UV-C irradiance distribution as defined in section 3.2

- Adequate instructions for proper assembly, installation, maintenance and safe use, to avoid possible hazardous exposure to UV-C radiation and/or ozone concentrations
- Advice on safe operating procedures and warnings concerning reasonably foreseeable misuse, malfunctions and hazardous failure modes. Where servicing and maintenance procedures are detailed, they should wherever possible include explicit instructions on safe procedures to be followed.

#### 5.4 Instructional training

**Containment Safeguards**<sup>6</sup> should be provided with instructional training (e.g. instructional manual or video) which includes all relevant elements of the installation instructions and user manual as defined in section 5.3.

## 6 Compliance

Compliance is determined by evaluation of the installation instructions and user manual, by inspection and by measurements<sup>7</sup>.

## 7 Terms and definitions<sup>8</sup>

### Closed Enclosure

Enclosures which completely enclose the hazardous UV-C irradiance. A Closed Enclosure which can be opened by an ordinary person without tools and which would expose this person to a UV-C risk group should be equipped with an automatic shut-off switch.

### Containment Safeguard

Cabinets or **Controlled Access Locations**, not being a physical part of the equipment, which block physical access to the UV-C device while it is operating or prevent the device from operating when it is physically accessible.

### Controlled Access Location

An area where an engineering and/or administrative control measure is established to prevent access during UV-C operation.

### Equipment Safeguard

Closed Enclosure, Partially Open Enclosure and/or Presence Detection System that are a physical part of the equipment.

### Instructional Safeguard

Details on the Instructional Safeguard are given in section 5.

### Irradiance (at a point on a surface)

Quotient of the radiant flux  $d\phi$  incident on an element of a surface containing the point, by the area  $dA$  of that element, i.e.,

$$E = d\phi/dA \quad \text{Unit: W/m}^2$$

### Ordinary Person

A person not being a **Skilled Person**.

6 It is the responsibility of the containment owner to address hazardous exposure risks and to ensure that people entering the containment area while the UV-C system is operating are aware of the risks and that appropriate controls and safeguards are in place.

7 For guidance on measuring techniques, see the relevant part of the IEC 62471 series. For guidance on measuring ozone emission and concentration from light sources and products see UL 867 Standard for Safety for Electrostatic Air Cleaners, UL 867, Section 37 Ozone Test. [6]

8 Definitions are derived from [4] – see Section 8 REFERENCES.

**Partially Open Enclosure**

Enclosure which partially encloses hazardous UV-C **irradiance**. Partially Open Enclosures should have a defined installation position and defined mounting properties based on the effective UV-C **irradiance** distribution as defined in section 3.2. Properly installed Partially Open Enclosures protect occupants of a space during their normal activity while irradiating unoccupied portions of a space. An example application is upper-room air disinfection.

**Personal Safeguard**

Personal protective equipment that is worn on the body and that reduces exposure to the UV-C device. Examples are shields, goggles, gloves, aprons, dose-meters, face masks and breathing apparatus. The UV-C personal safeguard normally complies with section 7.4. of IEC 62368-1 [3].

**Presence Detection System**

A system of sensors and controls which detects the presence of people. A single motion detection sensor is not a presence detection system. A risk assessment should be performed on the system of sensors and controls to determine if it qualifies as an **Equipment Safeguard**.

**Skilled person**

A person with relevant education or experience to enable him or her to identify hazards and take appropriate actions to reduce risk of injury to themselves and others.

**Time Safeguard**

A timer that switches off the UV-C power to stay below the human exposure energy of 30 J/m<sup>2</sup> within an 8-hours' time interval.

**8 References**

- [1] ICNIRP Guidelines "On limits of exposure to Ultraviolet radiation of wavelengths between 180 nm and 400 nm (incoherent optical radiation)" published in: HEALTH PHYSICS 87(2):171-186; 2004
- [2] Product Chemical Properties CB6851738
- [3] IEC 62471:2006 "Photobiological safety of lamps and lamp systems"
- [4] IEC 62368-1:2018 "Audio/video, information and communication technology equipment – Part 1: Safety requirements"
- [5] California Code of Regulations Title 17. "Public Health" – Division 3. "Air Resources" – Chapter 1. "Air Resources Board" – Subchapter 8.7. "Indoor Air Cleaning Devices" – Article 1. "Indoor Air Cleaning Devices"
- [6] UL 867 – "Safety for Electrostatic Air Cleaners, UL 867, Section 37 Ozone Test"