

TECHNICAL REPORT

Home laundry appliances – Uncertainty reporting of measurements

IECNORM.COM: Click to view the full PDF of IEC TR 62617:2010

WithNorm



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

IECNORM.COM: Click to buy the full PDF of IEC TR 62617:2010

TECHNICAL REPORT

Home laundry appliances – Uncertainty reporting of measurements

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE


M

ICS 97.060

ISBN 978-2-88910-929-6

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms and definitions	6
4 The approach to uncertainty measurement	7
4.1 The importance of the uncertainty	7
4.2 Ways to access uncertainty	7
5 Expanded uncertainty calculation	8
6 Reporting uncertainty	9
7 Expanded uncertainty values	9
7.1 General.....	9
7.2 Expanded uncertainty of measurement in IEC 60456:2003, 4 th edition.....	9
7.3 Expanded uncertainty of measurement in IEC 60456:2010, 5 th edition.....	10
7.4 Expanded uncertainty of measurement in IEC 61121:2002, 3 rd edition.....	10
Bibliography.....	12
Table 1 – Expanded uncertainty of measured values of IEC 60456:2003, 4 th Edition for horizontal drum washing machine	10
Table 2 – Expanded uncertainty of measured values of IEC 60456 5 th Edition	10
Table 3 – Expanded uncertainty of measured values of IEC 61121:2002, 3 rd Edition for condenser tumble dryers.....	11

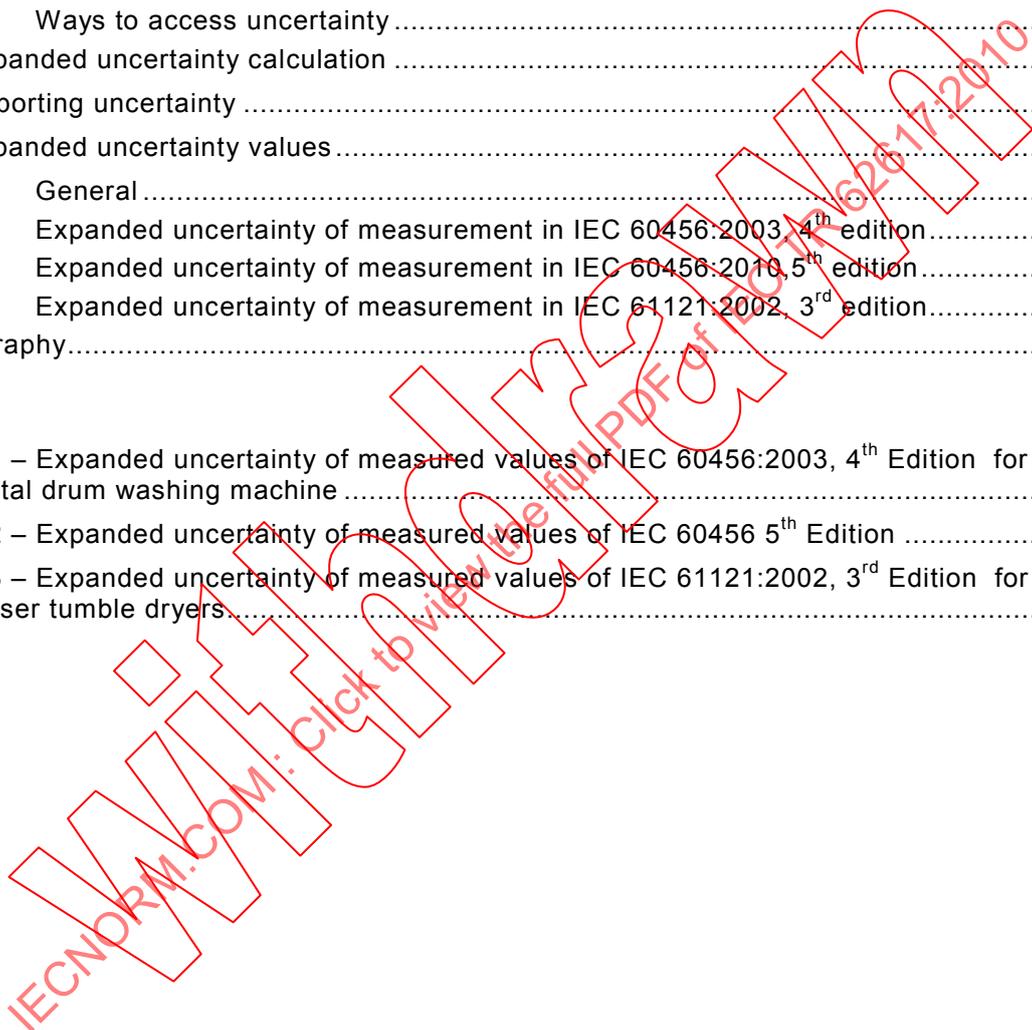

INTERNATIONAL ELECTROTECHNICAL COMMISSION

HOME LAUNDRY APPLIANCES – UNCERTAINTY REPORTING OF MEASUREMENTS

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 62617, which is a technical report, has been prepared by subcommittee 59D: Home laundry appliances, of IEC technical committee 59: Performance of household and similar electrical appliances.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
59D/355/DTR	59D/356/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IECNORM.COM: Click to view the full PDF of IEC TR 62617:2010
Withdrawn

INTRODUCTION

To encourage the efficient use of energy and other resources, National governments and regional authorities have issued regulations, which mandate the provision of information to consumers regarding the energy and water consumption of household appliances and associated performance characteristics. This information is usually conveyed by labels attached to appliances at the point of sale and also by brochures provided by manufacturers.

Methods for measuring declared values for energy and water consumption and performance characteristics must be of sufficient accuracy to provide confidence to governments, consumers and manufacturers. The accuracy of a test method is expressed in terms of bias and precision. Precision, when evaluating test methods, is expressed in terms of two measurement concepts: repeatability and reproducibility. Therefore, standard procedures are required for determining the repeatability and the reproducibility of test methods developed by technical committee 59 and its subcommittees. The repeatability of a test method must be sufficiently accurate for comparative testing. The reproducibility of a test method must be sufficiently accurate for the determination of values which are declared and for checking these declared values.

Uncertainty reporting is essential to ensure measured data are interpreted in a correct way. Especially when data of measurements are to be compared between laboratories or when normative requirements are set up, it is necessary to know the uncertainty with which data can be measured.

IECNORM.COM: Click to view the full PDF of IEC TR 62617:2010

HOME LAUNDRY APPLIANCES – UNCERTAINTY REPORTING OF MEASUREMENTS

1 Scope

This Technical Report (TR) applies to uncertainty reporting of home laundry electrical appliances.

It allows to estimate the uncertainty of a measured result and to predict the range of values that may be measured when the same appliance is measured in another laboratory following the same measurement method.

NOTE The provisions in this TR can also be used to evaluate other kinds of products.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC Guide 98-3:2008, *Uncertainty of measurement – Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

IEC 61923:1997, *Household electrical appliances – Method of measuring performance – Assessment of repeatability and reproducibility*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 repeatability conditions

conditions where independent test results are obtained with the same method on identical test items in the same laboratory by the same operator using the same equipment within short intervals of time

[IEC 61923:1997, 3.6]

3.2 repeatability standard deviation

standard deviation of test results obtained under **repeatability conditions**

[IEC 61923:1997, 3.7]

3.3 reproducibility conditions

conditions where test results are obtained with the same method on identical test items in different laboratories with different operators using different equipment

[IEC 61923:1997, 3.9]

3.4

reproducibility standard deviation

standard deviation of test results obtained under **reproducibility conditions**

[IEC 61923:1997, 3.10]

3.5

statistical uncertainty

repeatability standard deviation obtained in one laboratory under **repeatability conditions**

3.6

expanded uncertainty

confidence interval, which allows to calculate the minimum and maximum value where the average measured result may be found when the measurement is re-done at any other laboratory following **reproducibility conditions**

4 The approach to uncertainty measurement

4.1 The importance of the uncertainty

When a measurement has been performed giving a figure as a result for some quantity (i.e. the measurand), how sure is this figure? In other words:

- if the measurement is repeated, will the same figure be achieved as the result?
- if another group or another laboratory performs the measurement, how close will the results expected to be?

By means of an uncertainty amount an uncertainty interval $y \pm U$ may be calculated, where y is the measurement result and U the **expanded uncertainty** that is determined to give the interval a high probability (often 95 %) to cover the true value, Y , of the measurand. U is said to be the uncertainty associated with the result y .

The uncertainty interval of a measurement is therefore a basis for qualifying the measurement. The more narrow the confidence interval is desired, i.e. the smaller the value of the uncertainty U is pursued, the more careful the measurement method, the measuring equipment, the training of the operators and the number of repetitions of the same experiment have to be.

4.2 Ways to access uncertainty

There are in principle two ways to estimate uncertainty: a bottom up method and a top down method. The two methods should often be used in parallel to achieve a reliable uncertainty amount.

- a) The bottom up method (Refer to Clause 2, *Guide to the Expression of Uncertainty in Measurement*)

In this method the test result y is expressed as a function of input quantities. This function is often the formula used for the calculation of the result.

In the case of home laundry appliances, the y may be one of the final test results like water consumption, energy consumption, washing performance, spin speed, spin drying performance, program duration or rinsing efficiency. The input quantities may be temperature, masses, times, power etc.

The magnitude of all the uncertainty contributions of each input quantity is estimated.

By combining the uncertainties of the input quantities according to the law of propagation of uncertainty (see Clause 2, *Guide to the Expression of Uncertainty in Measurement*) the uncertainty of the result y can be calculated.

With this calculation it can be seen how a specific uncertainty contribution from an input quantity does influence the combined uncertainty of the final result and therefore how a reduction in an uncertainty contribution from an input quantity will influence the combined uncertainty of the final result.

Uncertainties may usually be reduced at some cost by making more measurements, using other methods or other equipment. This means that different approaches can be followed to reduce the uncertainty of the final result in the most cost effective way.

b) The top down method (see IEC 61923)

In this method the **reproducibility standard deviation** is estimated from testing of the same machine (or the same model) in different laboratories using the same measurement method. This testing is in general named 'ring test' or 'round robin test'. The **reproducibility standard deviation** of the test results can then be seen as the inherent uncertainty of the measuring method as it may be influenced by remaining differences in the ambient, the people and whatever else may be different between different measurements in different laboratories. In principle it is only valid for the machine investigated in each ring test, but results may be also true for similar types of machines.

Therefore the two methods 'bottom up' and 'top down' may be used in parallel to achieve a reliable uncertainty quantification. But both methods depend on the validity of the model (for the bottom up method) or the data (for the top down method) used.

5 Expanded uncertainty calculation

The uncertainty of a measured result has two sources:

- the **statistical uncertainty** of what is measured, as expressed in the **repeatability standard deviation**, showing the accuracy of the measurement in the laboratory having done the measurement;
- the uncertainty of the measuring method itself. This is expressed as **expanded uncertainty** where it is common to set the borders at a 95 % confidence interval, which give the minimum and maximum value where the average measured result may be found when the measurement is re-done at any other laboratory.

To be meaningful, the uncertainty statement must have an associated confidence level: i.e. it is necessary to state the probability that the true value lies within the range given. The reasons for choosing a 95 % confidence level in this standard are as follows:

- it is established practice throughout much of Europe, North America and Asia;
- the GUM assumes that the combined uncertainty has a distribution that is a close approximation to a normal distribution. A 95 % confidence level approximates to a range of 2 standard deviations. It is a widely held view that, for most measurement systems, the approximation to a normal distribution for the distribution of the combined uncertainty is reliable out to 2 standard deviations, but beyond that the approximation is less reliable.

If a normal distribution may be assumed the 95 % confidence interval is given by multiplying the reproducibility standard deviation by a factor of 2.

6 Reporting uncertainty

When reporting test results all information should be given to allow a full judgement of the measurement: average measured value, **repeatability standard deviation** and **expanded uncertainty**.

Example:

- measurement of the energy consumption

Average measured:	1,44 kWh
Repeatability standard deviation of measurement:	0,05 kWh
Expanded uncertainty : 10 % (of 1,44 kWh =)	0,14 kWh
- reporting of the result

Average measured:	1,44 kWh
Repeatability standard deviation :	± 0,05 kWh
Expanded uncertainty :	± 0,14 kWh
- meaning: testing the same machine in another laboratory following **reproducibility conditions**, the expected average value (at 95 % confidence) is between 1,30 kWh and 1,58 kWh.

7 Expanded uncertainty values

7.1 General

Expanded uncertainty values reported in the followings define the level of **expanded uncertainty** as estimated from the results of performed round robin tests. They are only valid for the assessed machine types. Other machine types may behave different, also affecting the uncertainty values.

Laboratories must ensure to meet the requirements of the relevant measurement method and the **reproducibility conditions** of testing and should check their alignment with other laboratories participating in inter-laboratory testing.

The uncertainty figures are established on the basis of the evaluation of round robin tests. Uncertainty figures of different parameters may be based on different round robin tests and will be updated whenever necessary. The respective sources are referred to with the data.

7.2 Expanded uncertainty of measurement in IEC 60456:2003, 4th edition

In 2004/2005 a round robin test was performed with 25 laboratories participating from all over Europe. One of the objectives was to check the robustness and precision of IEC 60456:2003, 4th Ed.. Four washing machines, 2 horizontal drum washing machines and 2 reference machines, were tested in a total of eleven different washing cycles. Household washing machines under test were calibrated to be as identical to each other as possible and delivered to all participating laboratories.

Results were analysed by WG18 of SC59D and **expanded uncertainties**, rounded to integer, were calculated as shown in Table 1.

Table 1 – Expanded uncertainty of measured values of IEC 60456:2003, 4th Edition for horizontal drum washing machine

Measured parameter	Relative expanded uncertainty of measured value ($k=2$)
Wash performance ratio q	4 %
Total energy W_{total} (in kWh)	10 %
Total water V_{total} (in l)	5 %
Remaining moisture RM (in %)	5 %
Programme time (in min) ⁵	6 %

7.3 Expanded uncertainty of measurement in IEC 60456:2010, 5th edition

In 2008 a round robin test was performed with 31 laboratories participating from all over the world. One of the objectives was to check the robustness and precision of IEC 60456:2010, 5th Ed.. Six types of washing machines, 2 horizontal axis, 2 vertical axis (agitator type), 2 vertical axis (impeller type) machines, plus reference machines were tested in four different washing cycles. Household washing machines under test were calibrated to be as identical to each other as possible and delivered to all participating laboratories.

Results were analysed by WG18 of SC59D and **expanded uncertainties**, rounded to integer, were calculated as shown in Table 2.

Table 2 – Expanded uncertainty of measured values of IEC 60456 5th Edition

Measured parameter	Relative expanded uncertainty of measured value ($k=2$)
Wash performance ratio q	<i>Expanded uncertainty values under consideration</i>
Total energy W_{total} (in kWh)	
Total water V_{total} (in l)	
Remaining moisture content RMC (in %)	
Programme time (in min)	
<i>Other parameters under consideration</i>	

7.4 Expanded uncertainty of measurement in IEC 61121:2002, 3rd edition

In 2006 a round-robin test was organised in Europe including 19 laboratories. Three condensation dryers, checked before to behave equal, were sent around and were measured in regular cupboard dry and iron dry programme according to IEC 61121 3rd edition.

Analysis of the data shows no influence of the individual dryer, therefore the 19 laboratories could be considered a set of laboratories fulfilling the requirements of IEC 61923, Subclause 5.2.

Results were analysed by WG18 of SC59D, and **expanded uncertainties**, rounded to integer, were calculated as shown in Table 3.