

TECHNICAL SPECIFICATION

**Electric vehicles conductive charging system –
Part 3-6: DC EV supply equipment where protection relies on double or
reinforced insulation – Voltage converter unit communication**

IECNORM.COM : Click to view the full PDF of IEC TS 61851-3-6:2023



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full PDF IEC 60364-4-41:2023

TECHNICAL SPECIFICATION

**Electric vehicles conductive charging system –
Part 3-6: DC EV supply equipment where protection relies on double or
reinforced insulation – Voltage converter unit communication**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 43.120

ISBN 978-2-8322-5752-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	10
INTRODUCTION.....	12
1 Scope.....	13
2 Normative references	13
3 Terms and definitions	13
4 Symbols and abbreviated terms.....	13
5 Operating principles	14
5.1 General.....	14
5.2 Voltage converter unit specific FSA.....	14
5.3 State definitions	15
5.4 Transitions in the FSA for VCUs	17
6 Object dictionary.....	18
6.1 General.....	18
6.2 Additional definitions to general application objects	18
6.2.1 General	18
6.2.2 Object 6001 _h : Control word	18
6.2.3 Object 6002 _h : Status word.....	18
6.3 Produced application objects by AC-DC converter functionality (mandatory)	19
6.3.1 General	19
6.3.2 Object 60A0 _h : AC-DC converter capability.....	19
6.4 Produced application objects by AC-DC converter (optional).....	23
6.4.1 General	23
6.4.2 Object 60A1 _h : AC-DC converter minimum AC voltage	23
6.4.3 Object 60A2 _h : AC-DC converter maximum AC voltage.....	24
6.4.4 Object 60A3 _h : AC-DC converter maximum AC current.....	26
6.4.5 Object 60A4 _h : AC-DC converter maximum AC power	28
6.4.6 Object 60A5 _h : AC-DC converter power transfer time	29
6.4.7 Object 60AB _h : AC-DC converter discharging power transfer time	31
6.4.8 Object 60AC _h : AC-DC converter power transfer Ah counter.....	32
6.4.9 Object 60AD _h : AC-DC converter discharging Ah counter	34
6.4.10 Object 60AE _h : AC-DC converter power transfer Wh counter	36
6.4.11 Object 60AF _h : AC-DC converter discharging Wh counter.....	37
6.4.12 Object 60B0 _h : AC-DC converter actual AC voltage	39
6.4.13 Object 60B1 _h : AC-DC converter actual AC current	40
6.4.14 Object 60B2 _h : AC-DC converter actual AC power	42
6.4.15 Object 60B3 _h : AC-DC converter power transfer count number	44
6.4.16 Object 60B4 _h : AC-DC converter discharging count number	45
6.4.17 Object 60B5 _h : AC-DC converter temperature switch off counter	47
6.4.18 Object 60B6 _h : AC-DC converter short cuts switch off counter	48
6.4.19 Object 60B7 _h : AC-DC converter minimum DC voltage	50
6.4.20 Object 60B8 _h : AC-DC converter maximum DC voltage	52

6.4.21	Object 60B9 _h : AC-DC converter maximum DC current.....	53
6.4.22	Object 60BA _h : AC-DC converter maximum DC power.....	55
6.5	Produced application objects by voltage converter unit (optional).....	56
6.5.1	General	56
6.5.2	Object 60A5 _h : VCU position and class.....	56
6.5.3	Object 60D0 _h 3P topology DC1 positive voltage	59
6.5.4	Object 60D1 _h 3P topology DC1 negative voltage	61
6.5.5	Object 60D2 _h 3P topology DC2 positive voltage	62
6.5.6	Object 60D3 _h 3P topology DC2 negative voltage	64
6.5.7	Object 60D4 _h Overload capability DC1	65
6.5.8	Object 60D5 _h Overload capability DC2	67
6.5.9	Object 60D6 _h Overload capability AC1	69
6.5.10	Object 60D7 _h Overload capability AC2	71
6.5.11	Object 60D8 _h VCU frequency thresholds AC1	72
6.5.12	Object 60D9 _h VCU frequency thresholds AC2	74
6.5.13	Object 60DA _h Maximum L1 apparent power AC1.....	76
6.5.14	Object 60DB _h Maximum L2 apparent power AC1.....	77
6.5.15	Object 60DC _h Maximum L3 apparent power AC1.....	79
6.5.16	Object 60DD _h Maximum L1 apparent power AC2.....	81
6.5.17	Object 60DE _h Maximum L2 apparent power AC2.....	82
6.5.18	Object 60DF _h Maximum L3 apparent power AC2.....	84
6.5.19	Object 60E1 _h Maximum L1 real power AC1	85
6.5.20	Object 60E2 _h Maximum L2 real power AC1	87
6.5.21	Object 60E3 _h Maximum L3 real power AC1	89
6.5.22	Object 60E4 _h Maximum L1 real power AC2	90
6.5.23	Object 60E5 _h Maximum L2 real power AC2	92
6.5.24	Object 60E6 _h Maximum L3 real power AC2	93
6.5.25	Object 60E7 _h Maximum L1 reactive power AC1.....	95
6.5.26	Object 60E8 _h Maximum L2 reactive power AC1.....	97
6.5.27	Object 60E9 _h Maximum L3 reactive power AC1.....	98
6.5.28	Object 60EA _h Maximum L1 reactive power AC2	100
6.5.29	Object 60EB _h Maximum L2 reactive power AC2	101
6.5.30	Object 60EC _h Maximum L3 reactive power AC2	103
6.5.31	Object 60ED _h Maximum L1 current AC1	105
6.5.32	Object 60EE _h Maximum L2 current AC1	106
6.5.33	Object 60EF _h Maximum L3 current AC1	108
6.5.34	Object 609A _h Maximum L1 current AC2.....	109
6.5.35	Object 609B _h Maximum L2 current AC2.....	111
6.5.36	Object 609C _h Maximum L3 current AC2	113
6.5.37	Object 609D _h Maximum N current AC1.....	114
6.5.38	Object 609E _h Maximum N current AC2.....	116

6.5.39	Object 603F _h : DC-DC converter actual current side B	117
6.5.40	Object 6041 _h : DC-DC converter actual voltage side B	119
6.6	Consumed application objects by AC-DC converter (optional).....	121
6.6.1	General	121
6.6.2	Object 60BE _h : AC-DC converter set maximum AC power	121
6.7	Consumed application objects for power transfer	122
6.7.1	General	122
6.7.2	Object 60F0 _h : Connected battery systems data - Instance.....	122
6.7.3	Object 60F1 _h : Connected battery system data - Node-ID.....	125
6.7.4	Object 60F2 _h : Connected battery system data - Device alarm capability (optional)	126
6.7.5	Object 60F3 _h : Connected battery system data - Type of battery cells	128
6.7.6	Object 60F4 _h : Connected battery system data - Battery system rated Wh capacity.....	130
6.7.7	Object 60F5 _h : Connected battery system maximum voltage	131
6.7.8	Object 60F6 _h : Connected battery system minimum voltage	132
6.7.9	Object 60F7 _h : Connected battery system maximum input current during charge	133
6.7.10	Object 60F8 _h : Requested battery system charge limit.....	134
6.7.11	Object 60F9 _h : Connected battery system data - maximum charge temperature (optional)	136
6.7.12	Object 60FA _h : Connected battery system data - Battery system minimum charge temperature (optional).....	137
6.7.13	Object 60FB _h : Connected battery system data - Device alarm status (optional).....	138
6.7.14	Object 60FC _h : Connected battery system data - Control word	140
7	Consumed application objects by VCU in stationary applications (optional)	141
7.1	General.....	141
7.2	Object 60BF _h : Frequency setpoint AC1.....	141
7.3	Object 60C0 _h : Frequency setpoint AC2.....	142
7.4	Object 60C4 _h : Current setpoint AC1	143
7.5	Object 60C1 _h : Current setpoint AC2	145
7.6	Object 60C2 _h : Voltage setpoint AC1	146
7.7	Object 60C3 _h : Voltage setpoint AC2	147
7.8	Object 60A8 _h : Reactive power control	148
7.9	Object 60A9 _h : Power limitation setpoint.....	150
7.10	Object 60AA _h : Constant reactive power setpoint.....	151
7.11	Object 60AB _h : Constant power factor cos φ setpoint.....	152
7.12	Object 60AC _h : Characteristic curve cos φ (P_N).....	154
7.13	Object 60AD _h : Characteristic curve $Q(U)$	157
	Bibliography.....	162
	Figure 1 – FSA for voltage converter unit.....	15
	Figure 2 – Value structure.....	19

Figure 3 – Object structure	57
Figure 4 – Object structure	65
Figure 5 – Object structure	67
Figure 6 – Object structure	69
Figure 7 – Object structure	71
Figure 8 – Object structure	72
Figure 9 – Object structure	74
Figure 10 – Object structure supported virtual devices (informative)	122
Figure 11 – Object structure (informative)	126
Figure 12 – Object structure constant reactive power setpoint	151
Figure 13 – Object structure constant reactive power setpoint	153
Figure 14 – Object structure fitting point	154
Figure 15 – Object structure power factor	155
Figure 16 – Object structure fitting point control	158
Table 1 – States behaviour	16
Table 2 – Transitions, events and actions	17
Table 3 – Value definition for VD specific FSA control	18
Table 4 – Value definition for virtual device FSA state	19
Table 5 – Value definition	20
Table 6 – Object description	21
Table 7 – Entry description	21
Table 8 – Object description	23
Table 9 – Entry description	23
Table 10 – Object description	25
Table 11 – Entry description	25
Table 12 – Object description	26
Table 13 – Entry description	26
Table 14 – Object description	28
Table 15 – Entry description	28
Table 16 – Object description	29
Table 17 – Entry description	30
Table 18 – Object description	31
Table 19 – Entry description	31
Table 20 – Object description	33
Table 21 – Entry description	33
Table 22 – Object description	34
Table 23 – Entry description	34
Table 24 – Object description	36
Table 25 – Entry description	36
Table 26 – Object description	37
Table 27 – Entry description	38
Table 28 – Object description	39

Table 29 – Entry description	39
Table 30 – Object description	41
Table 31 – Entry description	41
Table 32 – Object description	42
Table 33 – Entry description	42
Table 34 – Object description	44
Table 35 – Entry description	44
Table 36 – Object description	45
Table 37 – Entry description	46
Table 38 – Object description	47
Table 39 – Entry description	47
Table 40 – Object description	49
Table 41 – Entry description	49
Table 42 – Object description	50
Table 43 – Entry description	50
Table 44 – Object description	52
Table 45 – Entry description	52
Table 46 – Object description	53
Table 47 – Entry description	54
Table 48 – Object description	55
Table 49 – Entry description	55
Table 50 – Value definition	57
Table 51 – Object description	58
Table 52 – Entry description	58
Table 53 – Object description	59
Table 54 – Entry description	59
Table 55 – Object description	61
Table 56 – Entry description	61
Table 57 – Object description	62
Table 58 – Entry description	63
Table 59 – Object description	64
Table 60 – Entry description	64
Table 61 – Object description	66
Table 62 – Entry description	66
Table 63 – Object description	67
Table 64 – Entry description	68
Table 65 – Object description	69
Table 66 – Entry description	69
Table 67 – Object description	71
Table 68 – Entry description	71
Table 69 – Object description	73
Table 70 – Entry description	73
Table 71 – Object description	74

[ECNORD.COM](https://www.ecnord.com) - Click to view the full PDF of IEC TS 61851-3-6:2023

Table 72 – Entry description	75
Table 73 – Object description	76
Table 74 – Entry description	76
Table 75 – Object description	78
Table 76 – Entry description	78
Table 77 – Object description	79
Table 78 – Entry description	79
Table 79 – Object description	81
Table 80 – Entry description	81
Table 81 – Object description	82
Table 82 – Entry description	83
Table 83 – Object description	84
Table 84 – Entry description	84
Table 85 – Object description	86
Table 86 – Entry description	86
Table 87 – Object description	87
Table 88 – Entry description	87
Table 89 – Object description	89
Table 90 – Entry description	89
Table 91 – Object description	90
Table 92 – Entry description	91
Table 93 – Object description	92
Table 94 – Entry description	92
Table 95 – Object description	94
Table 96 – Entry description	94
Table 97 – Object description	95
Table 98 – Entry description	95
Table 99 – Object description	97
Table 100 – Entry description	97
Table 101 – Object description.....	98
Table 102 – Entry description	99
Table 103 – Object description.....	100
Table 104 – Entry description	100
Table 105 – Object description.....	102
Table 106 – Entry description	102
Table 107 – Object description.....	103
Table 108 – Entry description	103
Table 109 – Object description.....	105
Table 110 – Entry description	105
Table 111 – Object description.....	106
Table 112 – Entry description	107
Table 113 – Object description.....	108
Table 114 – Entry description	108

Table 115 – Object description.....	110
Table 116 – Entry description	110
Table 117 – Object description.....	111
Table 118 – Entry description	111
Table 119 – Object description.....	113
Table 120 – Entry description	113
Table 121 – Object description.....	114
Table 122 – Entry description	115
Table 123 – Object description.....	116
Table 124 – Entry description	116
Table 125 – Object description.....	118
Table 126 – Entry description	118
Table 127 – Object description.....	119
Table 128 – Entry description	119
Table 129 – Object description.....	121
Table 130 – Entry description	121
Table 131 – Value definition for bit fields (informative).....	122
Table 132 – Object description.....	124
Table 133 – Entry description	124
Table 134 – Value definition.....	125
Table 135 – Object description.....	125
Table 136 – Entry description	125
Table 137 – Value definition (informative).....	126
Table 138 – Object description.....	127
Table 139 – Entry description	128
Table 140 – Object description.....	129
Table 141 – Entry description	129
Table 142 – Object description.....	130
Table 143 – Entry description	130
Table 144 – Object description.....	131
Table 145 – Entry description	131
Table 146 – Object description.....	132
Table 147 – Entry description	132
Table 148 – Object description.....	133
Table 149 – Entry description	134
Table 150 – Value definition.....	135
Table 151 – Object description.....	135
Table 152 – Entry description	135
Table 153 – Object description.....	136
Table 154 – Entry description	136
Table 155 – Object description.....	137
Table 156 – Entry description	138
Table 157 – Object description.....	139

Table 158 – Entry description 139

Table 159 – Object description..... 140

Table 160 – Entry description 140

Table 161 – Object description..... 141

Table 162 – Entry description 141

Table 163 – Object description..... 142

Table 164 – Entry description 143

Table 165 – Object description..... 144

Table 166 – Entry description 144

Table 167 – Object description..... 145

Table 168 – Entry description 145

Table 169 – Object description..... 146

Table 170 – Entry description 146

Table 171 – Object description..... 147

Table 172 – Entry description 147

Table 173 – Value definition for reactive power control 148

Table 174 – Object description..... 149

Table 175 – Entry description 149

Table 176 – Object description..... 150

Table 177 – Entry description 150

Table 178 – Value definition for constant reactive power setpoint 151

Table 179 – Object description..... 151

Table 180 – Entry description 152

Table 181 – Value definition for constant reactive power setpoint 153

Table 182 – Object description..... 153

Table 183 – Entry description 153

Table 184 – Value definition fitting point control..... 155

Table 185 – Value definition for constant reactive power setpoint 155

Table 186 – Object description..... 155

Table 187 – Entry description 155

Table 188 – Value definition fitting point control..... 158

Table 189 – Object description..... 158

Table 190 – Entry description 158

ECNORM.COM . Click to view the full PDF of IEC TS 61851-3-6:2023

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ELECTRIC VEHICLES CONDUCTIVE CHARGING SYSTEM –**Part 3-6: DC EV supply equipment where protection relies on double or reinforced insulation – Voltage converter unit communication**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TS 61851-3-6 has been prepared by IEC technical committee 69: Electrical power/energy transfer systems for electrically propelled road vehicles and industrial trucks. It is a Technical Specification.

The text of this Technical Specification is based on the following documents:

Draft	Report on voting
69/652/DTS	69/673/RVDTS
	69/673A/RVDTS

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Specification is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

In this document, the following print types are used:

- requirements: in roman type;
- notes: in small roman type;
- **text formatted in bold and using mixed capital and underline are used as state names and are not to be translated.**

A list of all parts in the IEC 61851 series, published under the general title *Electric vehicles conductive charging system*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC TS 61851-3-6:2023

INTRODUCTION

This document is published in separate parts according to the following structure:

IEC TS 61851-3-1, *Electric vehicles conductive charging system – Part 3-1: DC EV supply equipment where protection relies on double or reinforced insulation – General rules and requirements for stationary equipment*

IEC TS 61851-3-2, *Electric vehicles conductive charging system – Part 3-2: DC EV supply equipment where protection relies on double or reinforced insulation – Particular requirements for portable and mobile equipment*

IEC TS 61851-3-4, *Electric vehicles conductive charging system – Part 3-4: DC EV supply equipment where protection relies on double or reinforced insulation – General definitions and requirements for CANopen communication*

IEC TS 61851-3-5, *Electric vehicles conductive charging system – Part 3-5: DC EV supply equipment where protection relies on double or reinforced insulation – Pre-defined communication parameters and general application objects*

IEC TS 61851-3-6, *Electric vehicles conductive charging system – Part 3-6: DC EV supply equipment where protection relies on double or reinforced insulation – Voltage converter unit communication*

IEC TS 61851-3-7, *Electric vehicles conductive charging system – Part 3-7: DC EV supply equipment where protection relies on double or reinforced insulation – Battery system communication*

IECNORM.COM : Click to view the full PDF of IEC TS 61851-3-6:2023

ELECTRIC VEHICLES CONDUCTIVE CHARGING SYSTEM –

Part 3-6: DC EV supply equipment where protection relies on double or reinforced insulation – Voltage converter unit communication

1 Scope

This part of IEC 61851, which is a Technical Specification, applies to CANopen communication for the conductive transfer of electric power between the supply network and an electric road vehicle or a removable RESS or traction-battery of an electric road vehicle.

This document provides application objects provided by the AC/DC VCU or DC/DC VCU.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC TS 61851-3-2:2023, *Electric vehicles conductive charging system – Part 3-2: DC EV supply equipment where protection relies on double or reinforced insulation – Particular requirements for portable and mobile equipment*

IEC TS 61851-3-4: 2023, *Electric vehicles conductive charging system – Part 3-4: DC EV supply equipment where protection relies on double or reinforced insulation – General definitions and requirements for CANopen communication*

IEC TS 61851-3-5: 2023, *Electric vehicles conductive charging system – Part 3-5: DC EV supply equipment where protection relies on double or reinforced insulation – Pre-defined communication parameters and general application objects*

EN 50325-4:2002, *Industrial communications subsystem based on ISO 11898 (CAN) for controller device interfaces – Part 4: CANopen*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC TS 61851-3-4:2023 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Symbols and abbreviated terms

For the purposes of this document, the symbols and abbreviated terms given in IEC TS 61851-3-4:2023 apply.

5 Operating principles

5.1 General


In addition to the finite state automaton (FSA) defined by IEC TS 61851-3-4:2021, this document defines an additional VCU specific FSA to operate voltage converters in a common way. The FSA consists of mandatory and optional FSA states and sub-states. Any VCU supports the mandatory FSA states. Optional FSA states are only supported in case the related functionality is supported. State transitions within the FSA are based on device internal events (e.g. occurrence of device errors) or on the reception of the FSA command. The VCU typically has at least a voltage input at one side and a voltage output at the other side. In this document, the VCU is defined as a device that transfers power from the "side A" to the "side B" and from "side B" to "side A" as defined in Annex B of IEC TS 61851-3-2:2023.

5.2 Voltage converter unit specific FSA

The VCU specific FSA as defined in Figure 1 shall start with the initial entry in the EMS FSA state "**Operating**" and shall exist as long as the running state is not left.

The FSA defines the application behaviour of the VCU (see also Table 1). Due to the requirement that the VCU provides local control even when the CAN network is not working properly, the NMT slave FSA (VCU) as defined in EN 50325-4:2002, the EMS FSA and the VCU FSA are only coupled in the following way: a state change in any of the involved FSAs may trigger state changes in the other FSAs.

For state transitions (numbers in Figure 1), see Table 2.

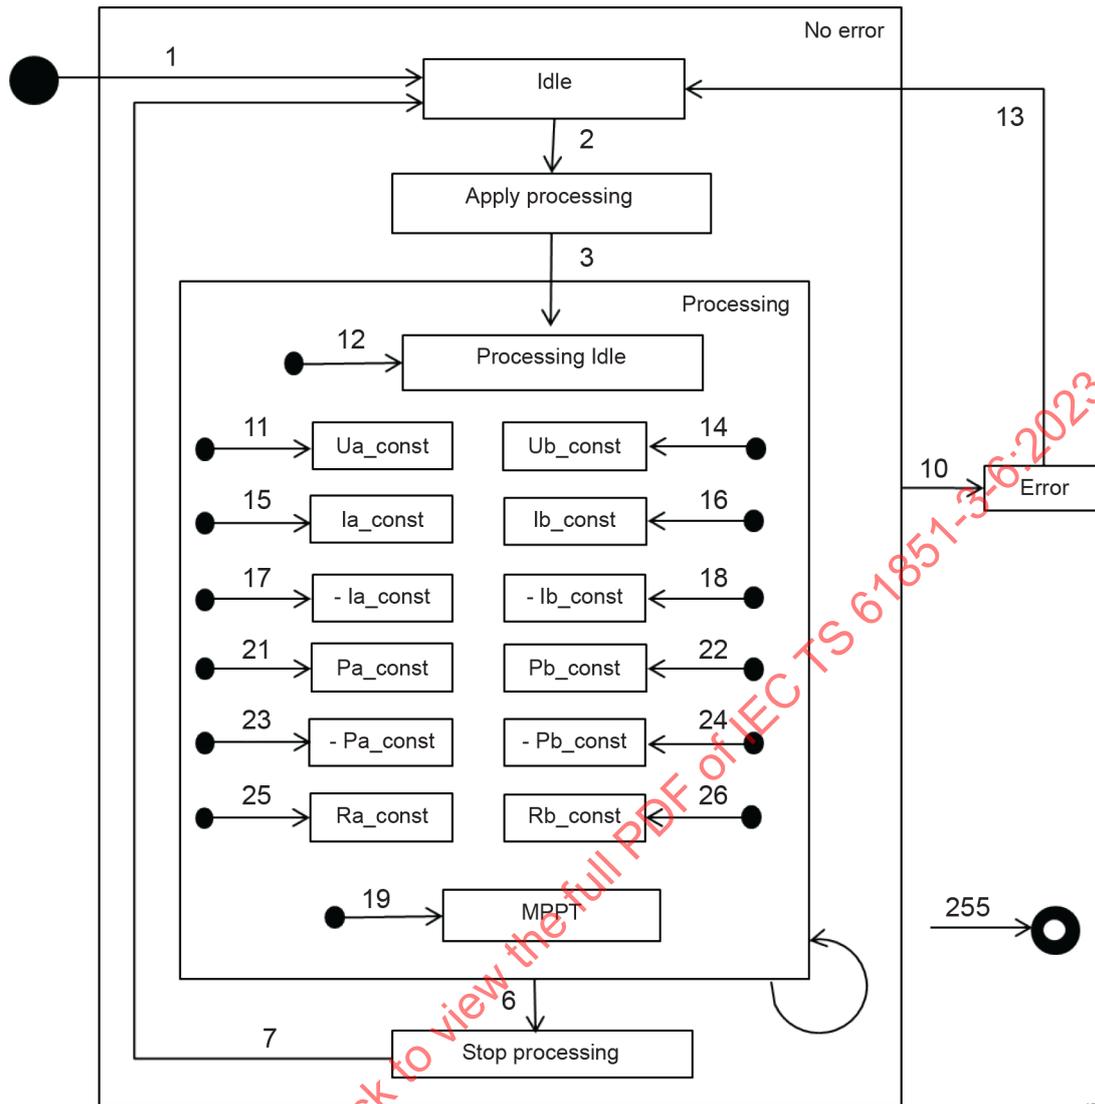

IEC

Figure 1 – FSA for voltage converter unit

5.3 State definitions

The FSA for voltage converters as shown in Figure 1 shall provide the following states with the described behaviour in Table 1 and state transitions in Table 2.

Table 1 – States behaviour

Name	Behaviour	Category of sub states
Initial	This shall be a pseudo state indicating the start when the FSA is activated during the initial entry into the running state.	-
IDLE	The VCU shall transit to this state after the initial entry in the running state of the EMS FSA (see 9.1 of IEC TS 61851-3-4:2021). The VCU shall be in IDLE state, when it is not in any other of the defined states.	-
Apply_Processing	Preparation of the VCU's process interface so that power transfer from one side to the other is possible.	-
Processing	State where the VCU operates. The VCU applies the adjusted power to the output lines at side A or B.	-
Processing_IDLE	Sub state of Processing; the VCU is ready to operate in principle. There is no power transferred from one side to the other.	-
Ua_const	Sub state of Processing; the power transfer shall be active in a way, that Ua remains constant.	o
Ub_const	Sub state of Processing; the power transfer shall be active in a way, that Ub remains constant.	m
Ia_const	Sub state of Processing; the power transfer shall be active in a way, that Ia remains constant and the current flow is from the VCU's side A into the power line.	o
Ib_const	Sub state of Processing; the power transfer shall be active in a way, that Ib remains constant and the current flow is from the VCU's side B into the power line.	m
-Ia_const	Sub state of Processing; the power transfer shall be active in a way, that Ia remains constant and the current flow is from the power line into VCU's side A.	o
-Ib_const	Sub state of Processing; the power transfer shall be active in a way, that Ib remains constant and the current flow is from the power line into VCU's side B.	o
Pa_const	Sub state of Processing; the power transfer from VCU's side A to the power line shall be active and PA remains constant.	o
Pb_const	Sub state of Processing; the power transfer from VCU's side B to the power line shall be active and Pb remains constant.	o
-Pa_const	Sub state of Processing; the power transfer from the power line to VCU's side A shall be active and Pa remains constant.	o
-Pb_const	Sub state of Processing; the power transfer from the power line to VCU's side B shall be active and Pb remains constant.	o
Ra_const	Sub state of Processing; the power transfer shall be active in a way, that Ra remains constant.	o
Rb_const	Sub state of Processing; the power transfer shall be active in a way, that Rb remains constant.	o
MPPT	Sub state of Processing; a maximum power point tracker shall set the output voltage to that value, where the maximum output of a power source such as e.g. a photo voltaic module is reached.	o
Stop_Processing	The power transfer between side A and B is stopped. The VCU's process interface is disabled.	-
Error	The VCU application is in an error condition. There is no power transferred from one side to the other. See also Clause 7 of IEC TS 61851-3-4:2021.	-
Final	Pseudo state, indicating the deactivation of the FSA; e.g. by leaving the EMS FSA Running state.	-
NOTE 1 For VCUs according to Figure BB.1, BB.2, BB.3, BB.4 and BB.6 of IEC TS 61851-3-2:2023 the sub states of processing "m" shall be supported, sub states of processing "o" may be supported.		
NOTE 2 For VCUs according to Figure BB.5 of IEC TS 61851-3-2:2023 the sub states of processing m) and o) may be supported.		

5.4 Transitions in the FSA for VCU

The FSA for VCU shall support the transitions as given in Table 2.

Table 2 – Transitions, events and actions

Transition	Event(s)	Action(s)
1	Power on	Update VCU status word
2	Trigger Apply processing in control word remotely	Apply processing at VCU's process interface; update status word
3	Transition as soon as processing is active	Processing is enabled in principle; Update status word
6	Switch off processing command in control word remotely or local command ^a	Disable processing at VCU's process interface; update status word
7	Transition as soon as processing at VCU's process interface is disabled	Update status word
10	Transition in case an Error is detected ^b .	Update status word; execute manufacturer-specific counter measures.
11	Enter processing method Ua_const in control word remotely or via local command	Start processing Ua_const at VCU's process interface; update status word
12	Enter Processing_IDLE in control word remotely or via local command	Stop current processing method but processing remains enabled in principle; update status word
13	State transition in case all occurred errors are removed	The VCU's process interface is disabled and no error is active; update status word
14	Enter processing method Ub_const in control word remotely or via local command	Start processing Ub_const at VCU's process interface; update status word
15	Enter processing method la_const in control word remotely or via local command	Start processing la_const at VCU's process interface; update status word
16	Enter processing method lb_const in control word remotely or via local command	Start processing lb_const at VCU's process interface; update status word
17	Enter processing method -la_const in control word remotely or via local command	Start processing -la_const at VCU's process interface; update status word
18	Enter processing method -lb_const in control word remotely or via local command	Start processing -lb_const at VCU's process interface; update status word
19	Enter processing method MPPT in control word remotely or via local command	Start processing MPPT at VCU's process interface; update status word
21	Enter processing method Pa_const in control word remotely or via local command	Start processing Pa_const at VCU's process interface; update status word
22	Enter processing method Pb_const in control word remotely or via local command	Start processing Pb_const at VCU's process interface; update status word
23	Enter processing method -Pa_const in control word remotely or via local command	Start processing -Pa_const at VCU's process interface; update status word
24	Enter processing method -Pb_const in control word remotely or via local command	Start processing -Pb_const at VCU's process interface; update status word
25	Enter processing method Ra_const in control word remotely or via local command	Start processing Ra_const at VCU's process interface; update status word
26	Enter processing method Rb_const in control word remotely or via local command	Start processing Rb_const at VCU's process interface; update status word
255	Local shut down	Abort running operation and leave state machine

Transition numbers are shown in Figure 1.

^a Leaving the EMS FSA Operating state may trigger this local command as well.

^b Leaving the EMS FSA Operating state may be considered as an error.

6 Object dictionary

6.1 General

Clause 6 defines the application objects of a VCU unit. As the AC/DC converter functionality is an important functionality in the application field of EVs, the objects for this functionality are described separately from the objects related to the other converter functionalities.

6.2 Additional definitions to general application objects

6.2.1 General

Subclause 6.2 provides additional definitions to the general application objects that are specified in IEC TS 61851-3-5:2021.

6.2.2 Object 6001_h: Control word

The bit field "VD specific FSA control" shall control the virtual device specific FSA for VCUs; as specified in Table 3.

Table 3 – Value definition for VD specific FSA control

Value	Description
00 _h	No action
02 _h	Prepare processing
06 _h	Switch off processing
0B _h	Enter processing method Ua_const
0C _h	Enter Processing idle
0E _h	Enter processing method Ub_const
0F _h	Enter processing method Ia_const
10 _h	Enter processing method Ib_const
11 _h	Enter processing method -Ia_const
12 _h	Enter processing method -Ib_const
13 _h	Enter processing method MPPT
15 _h	Enter processing method Pa_const
16 _h	Enter processing method Pb_const
17 _h	Enter processing method -Pa_const
18 _h	Enter processing method -Pb_const
19 _h	Enter processing method Ra_const
1A _h	Enter processing method Rb_const
All other values shall be reserved.	

6.2.3 Object 6002_h: Status word

The bit field "Virtual device FSA state" shall indicate the current state of the virtual device in the virtual device specific FSA for VCUs; as specified in Table 4.

Table 4 – Value definition for virtual device FSA state

Value	FSA state
00 _h	VD specific FSA not active
01 _h	IDLE
02 _h	Apply_Processing
03 _h	Processing_IDLE
06 _h	Stop_Processing
0A _h	Error
0B _h	Processing sub state Ua_const
0E _h	Processing sub state Ub_const
0F _h	Processing sub state Ia_const
10 _h	Processing sub state Ib_const
11 _h	Processing sub state -Ia_const
12 _h	Processing sub state -Ib_const
13 _h	Processing sub state Pa_const
14 _h	Processing sub state Pb_const
15 _h	Processing sub state -Pa_const
16 _h	Processing sub state -Pb_const
17 _h	Processing sub state MPPT
18 _h	Processing sub state Ra_const
19 _h	Processing sub state Rb_const
All other values shall be reserved.	


6.3 Produced application objects by AC-DC converter functionality (mandatory)

6.3.1 General

Subclause 6.3 defines the application objects produced by the AC-DC converter functionality, which is a subset of the VCU functionality. The application object range for the AC-DC converter functionality is from 6096_h to 60E0_h.

6.3.2 Object 60A0_h: AC-DC converter capability

This object shall provide basic information about the capability of the AC-DC converter. Figure 2 illustrates the value structure and Table 5 shall provide the value definition. Table 6 specifies the object description and Table 7 specifies the entry description.

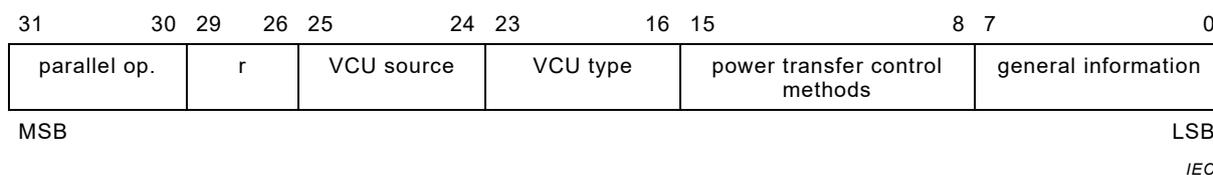

IEC

Figure 2 – Value structure

Table 5 – Value definition

Name	Bit	Value	Description
general information	0	0 _b	EV VCU not supported
		1 _b	EV VCU supported
	1	0 _b	EV supply device VCU not supported
		1 _b	EV supply device VCU supported
	2	0 _b	Isolated VCU (only for EV VCU) not supported
		1 _b	Isolated VCU (only for EV VCU) supported
	3	0 _b	Non-isolated VCU (only for EV VCU) not supported
		1 _b	Non-isolated VCU (only for EV VCU) supported
	4	0 _b	Maximum power point tracker not supported
		1 _b	Maximum power point tracker supported
	5	0 _b	Not capable to create AC grid
		1 _b	Capable to create AC grid
	6	0 _b	2-point topology on side B
		1 _b	3-point topology on side B
	7	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
power transfer control methods	8	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
	9	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
	10	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
	11	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
	12	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
	13	0 _b	Reserved (always 0)
		1 _b	Reserved (always 0)
	14	Reserved (always 0)	
	15	Reserved (always 0)	
VCU type	16	0 _b	Pulse VCU not supported
		1 _b	Pulse VCU supported
	17	0 _b	Wireless power transfer (WPT) not supported
		1 _b	Wireless power transfer (WPT) supported
	18	0 _b	Power Factor Correction (PFC) VCU not supported
		1 _b	Power Factor Correction (PFC) VCU supported
19	0 _b	USB-based VCU not supported	

Name	Bit	Value	Description
		1 _b	USB-based VCU supported
	20 to 23	0 _b	Reserved
		1 _b	
VCU source	24	0 _b	AC not supported
		1 _b	AC supported
	25	0 _b	Solar panel not supported
		1 _b	Solar panel supported
	26 to 29	0 _b	Reserved
		1 _b	
Parallel operation	30 to 31	00 _b	No parallel operation supported
		01 _b	Droop control supported (voltage difference of the battery systems is considered during power transfer)
		10 _b	Single changing master switch control supported (consecutive power transfer from/to the battery systems)
		11 _b	Wired/Wireless switch control (power transfer not decided by the VCU)

Table 6 – Object description

Attribute	Value
Index	60A0 _h
Name	AC-DC converter capability
Object code	ARRAY
Data type	UNSIGNED32
Category	Mandatory

Table 7 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	AC-DC converter capability VDN 1
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	See value definition
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter capability VDN 2
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	See value definition
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter capability VDN 127
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	See value definition
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter capability external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter capability external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEPIV.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.4 Produced application objects by AC-DC converter (optional)

6.4.1 General

Subclause 6.4 defines the application objects produced by the AC-DC converter functionality, which is a subset of the VCU functionality. This function is typically implemented in EVs, for example for VCU applications. The application object range for the AC-DC converter is from 6096_h to 60E0_h.

6.4.2 Object 60A1_h: AC-DC converter minimum AC voltage

This object shall provide the minimum AC voltage of the AC-DC converter and describes the external power source, outside the EMS. The values shall be given in multiples of 1 mV. Table 8 specifies the object description and Table 9 specifies the entry description.

Table 8 – Object description

Attribute	Value
Index	60A1 _h
Name	AC-DC converter minimum AC voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 9 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 minimum AC voltage
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	AC-DC converter VDN 2 minimum AC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 minimum AC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter minimum AC voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter minimum AC voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.3 Object 60A2_h: AC-DC converter maximum AC voltage

This object shall provide the maximum AC voltage of the AC-DC converter and describes the external power source, outside the EMS. The values shall be given in multiples of 1 mV. Table 10 specifies the object description and Table 11 specifies the entry description.

Table 10 – Object description

Attribute	Value
Index	60A2 _h
Name	AC-DC converter maximum AC voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 11 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 maximum AC voltage
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 maximum AC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 maximum AC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	AC-DC converter maximum AC voltage 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter maximum AC voltage 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.4 Object 60A3_h: AC-DC converter maximum AC current

This object shall provide the maximum AC current limit of the AC-DC converter and describes the external power source, outside the EMS. The values shall be given in multiples of 1 mA. Table 12 specifies the object description and Table 13 specifies the entry description.

Table 12 – Object description

Attribute	Value
Index	60A3 _h
Name	AC-DC converter maximum AC current
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 13 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	AC-DC converter VDN 1 maximum AC current
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 maximum AC current
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter 8 maximum AC current
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter maximum AC current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter maximum AC current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.5 Object 60A4_h: AC-DC converter maximum AC power

This object shall provide the maximum AC power limit of the device, required for the external power source, outside the EMS. The values shall be given in multiples of 1 mW. Table 14 specifies the object description and Table 15 specifies the entry description.

Table 14 – Object description

Attribute	Value
Index	60A4 _h
Name	AC-DC converter maximum AC power
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 15 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 maximum AC power
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 maximum AC power
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	

Attribute	Value
Sub-index	7F _h
Description	AC-DC converter VDN 127 maximum AC power
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	AC-DC converter maximum AC power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter maximum AC power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.6 Object 60AA_h: AC-DC converter power transfer time

This object shall provide the statistical value of the sum of power transfer time over the AC-DC converter lifetime. The values shall be given in multiples of 1 min. Table 16 specifies the object description and Table 17 specifies the entry description.

Table 16 – Object description

Attribute	Value
Index	60AA _h
Name	AC-DC converter power transfer time
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 17 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
to	
Sub-index	01 _h
Description	AC-DC converter VDN 1 power transfer time
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 power transfer time
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	08 _h
Description	AC-DC converter VDN 127 power transfer time
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter charging time external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	AC-DC converter charging time external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.7 Object 60AB_h: AC-DC converter discharging power transfer time

This object shall provide the statistical value of the sum of discharging time over the AC-DC converter lifetime. The values shall be given in multiples of 1 min. Table 18 specifies the object description and Table 19 specifies the entry description.

Table 18 – Object description

Attribute	Value
Index	60AB _h
Name	AC-DC converter discharging time
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 19 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 discharging time
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	AC-DC converter VDN 2 discharging time
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 discharging time
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter discharging time external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter discharging time external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.8 Object 60AC_n: AC-DC converter power transfer Ah counter

This object shall provide the statistical sum of the counter over the AC-DC converter lifetime. The values shall be given in multiples of 1 Ah. Table 20 specifies the object description and Table 21 specifies the entry description.

Table 20 – Object description

Attribute	Value
Index	60AC _h
Name	AC-DC converter power transfer Ah counter
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 21 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
to	
Sub-index	01 _h
Description	AC-DC converter VDN 1 power transfer Ah counter
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 power transfer Ah counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 power transfer Ah counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	AC-DC converter charging Ah counter external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter charging Ah counter external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.9 Object 60AD_h: AC-DC converter discharging Ah counter

This object shall provide the statistical sum of the counter over the AC-DC converter lifetime. The values shall be given in multiples of 1 Ah. Table 22 specifies the object description and Table 23 specifies the entry description.

Table 22 – Object description

Attribute	Value
Index	60AD _h
Name	AC-DC converter discharging Ah counter
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 23 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	AC-DC converter VDN 1 discharging Ah counter
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 discharging Ah counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 discharging Ah counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter discharging Ah counter external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter discharging Ah counter external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.10 Object 60AE_h: AC-DC converter power transfer Wh counter

This object shall provide the statistical sum of the counter over the AC-DC converter lifetime. The values shall be given in multiples of 1 Wh; measured at DC-side. Table 24 specifies the object description and Table 25 specifies the entry description.

Table 24 – Object description

Attribute	Value
Index	60AE _h
Name	AC-DC converter counter power transfer Wh
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 25 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN1 power transfer Wh counter
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 power transfer Wh counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	AC-DC converter VDN 127 power transfer Wh counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	AC-DC converter charging Wh counter external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter charging Wh counter external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.11 Object 60AF_h: AC-DC converter discharging Wh counter

This object shall provide the statistical sum of the counter over the AC-DC converter lifetime. The values shall be given in multiples of 1 Wh. Table 26 specifies the object description and Table 27 specifies the entry description.

Table 26 – Object description

Attribute	Value
Index	60AF _h
Name	AC-DC converter discharging Wh counter
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 27 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 discharging Wh counter
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 discharging Wh counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 discharging Wh counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	AC-DC converter charging Wh counter external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	AC-DC converter charging Wh counter external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.12 Object 60B0_h: AC-DC converter actual AC voltage

This object shall provide the AC voltage value in case the power transfer is measured. The values shall be given in multiples of 1 mV. Table 28 specifies the object description and Table 29 specifies the entry description.

Table 28 – Object description

Attribute	Value
Index	60B0 _h
Name	AC-DC converter actual AC voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 29 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 actual AC voltage
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	AC-DC converter VDN 2 actual AC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 actual AC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter actual AC voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter actual AC voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.13 Object 60B1_h: AC-DC converter actual AC current

This object shall provide the AC current value in case the power transfer is measured. The values shall be given in multiples of 1 mA. Table 30 specifies the object description and Table 31 specifies the entry description.

NOTE A positive value indicates a current flow from the AC-DC converter to the EMS. A negative value indicates a current flow from the EMS to the AC-DC converter.

Table 30 – Object description

Attribute	Value
Index	60B1 _h
Name	AC-DC converter actual AC current
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 31 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
to	
Sub-index	01 _h
Description	AC-DC converter VDN 1 actual AC current
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 actual AC current
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 actual AC current
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	AC-DC converter capability external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter capability external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.14 Object 60B2_h: AC-DC converter actual AC power

This object shall provide the AC power value in case the power transfer is measured. The values shall be given in multiples of 1 mW. Table 32 specifies the object description and Table 33 specifies the entry description.

Table 32 – Object description

Attribute	Value
Index	60B2 _h
Name	AC-DC converter actual AC power
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 33 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	AC-DC converter VDN 1 actual AC power
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 actual AC power
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 actual AC power
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter actual AC power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter actual AC power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.15 Object 60B3_h: AC-DC converter power transfer count number

This object shall provide the statistical sum of the count numbers over the AC-DC converter lifetime. The value shall be dimensionless. Table 34 specifies the object description and Table 35 specifies the entry description.

Table 34 – Object description

Attribute	Value
Index	60B3 _h
Name	AC-DC converter power transfer count number
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 35 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 power transfer count number
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 power transfer count number
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	

Attribute	Value
Sub-index	08 _h
Description	AC-DC converter VDN 127 power transfer count number
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	AC-DC converter charging count number external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter charging count number external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.16 Object 60B_{4h}: AC-DC converter discharging count number

This object shall provide the statistical sum of the count numbers over the AC-DC converter lifetime. The value shall be dimensionless. Table 36 specifies the object description and Table 37 specifies the entry description.

Table 36 – Object description

Attribute	Value
Index	60B _{4h}
Name	AC-DC converter discharging count number
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 37 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
to	
Sub-index	01 _h
Description	AC-DC converter VDN 1 discharging count number
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 discharging count number
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 discharging count number
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter discharging count number external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	AC-DC converter discharging count number external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.17 Object 60B5_h: AC-DC converter temperature switch off counter

This object shall provide the switch-off counts of the AC-DC converter in case temperature limits exceed. The value shall be dimensionless. Table 38 specifies the object description and Table 39 specifies the entry description.

Table 38 – Object description

Attribute	Value
Index	60B5 _h
Name	AC-DC converter temperature switch off counter
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 39 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 temperature switch off counter
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	AC-DC converter VDN 2 temperature switch off counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	08 _h
Description	AC-DC converter VDN 127 temperature switch off counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter temperature switch off counter external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter temperature switch off counter external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.18 Object 60B6_h: AC-DC converter short cuts switch off counter

This object shall provide the switch-off counts of the AC-DC converter in case of shortcuts. The value shall be dimensionless. Table 40 specifies the object description and Table 41 specifies the entry description.

Table 40 – Object description

Attribute	Value
Index	60B _h
Name	AC-DC converter short cuts switch off counter
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 41 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 short cuts switch off counter
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 short cuts switch off counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN127 short cuts switch off counter
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	AC-DC converter short cuts switch off counter external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter short cuts switch off counter external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.19 Object 60B7_h: AC-DC converter minimum DC voltage

This object shall provide the minimum DC voltage of the AC-DC converter. The values shall be given in multiples of 1 mV. Table 42 specifies the object description and Table 43 specifies the entry description.

NOTE This object enables the control of additional DC/DC converter capability. The DC parameter given in this object describes the external power source, outside of the EMS.

Table 42 – Object description

Attribute	Value
Index	60B7 _h
Name	AC-DC converter minimum DC voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 43 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	AC-DC converter VDN 1 minimum DC voltage
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	AC-DC converter VDN 2 minimum DC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 minimum DC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter minimum DC voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter minimum DC voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.20 Object 60B8_h: AC-DC converter maximum DC voltage

This object shall provide the maximum DC voltage of the AC-DC converter. The values shall be given in multiples of 1 mV. Table 44 specifies the object description and Table 45 specifies the entry description.

NOTE This object enables the control of additional DC/DC converter capability. The DC parameter given in this object describes the external power source, outside of the EMS.

Table 44 – Object description

Attribute	Value
Index	60B8 _h
Name	AC-DC converter maximum DC voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 45 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 maximum DC voltage
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 maximum DC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	

Attribute	Value
Sub-index	08 _h
Description	AC-DC converter VDN127 maximum DC voltage
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	AC-DC converter maximum DC voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter maximum DC voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.21 Object 60B9_h: AC-DC converter maximum DC current

This object shall provide the maximum DC current limit of the AC-DC converter. The values shall be given in multiples of 1 mA. Table 46 specifies the object description and Table 47 specifies the entry description.

NOTE This object enables the control of additional DC/DC converter capability. The DC parameter given in this object describes the external power source, outside of the EMS.

Table 46 – Object description

Attribute	Value
Index	60B9 _h
Name	AC-DC converter maximum DC current
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 47 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 maximum DC current
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	AC-DC converter VDN 2 maximum DC current
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 maximum DC current
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	AC-DC converter maximum DC current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	AC-DC converter maximum DC current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.4.22 Object 60BA_h: AC-DC converter maximum DC power

This object shall provide the maximum DC power limit of the device. The values shall be given in multiples of 1 mW. Table 48 specifies the object description and Table 49 specifies the entry description.

NOTE This object enables the control of additional DC/DC converter capability. The DC parameter given in this object describes the external power source, outside of the EMS.

Table 48 – Object description

Attribute	Value
Index	60BA _h
Name	AC-DC converter maximum DC power
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 49 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 maximum DC power
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	AC-DC converter VDN 2 maximum DC power
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 maximum DC power
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	AC-DC converter maximum DC power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	AC-DC converter maximum DC power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5 Produced application objects by voltage converter unit (optional)

6.5.1 General

Subclause 6.5 defines application objects produced by the VCU. The VCU is assumed as a device that is capable to transfer AC or DC voltages from a "side A" to AC or DC voltages on a "side B" and from a "side B" to "side A".

6.5.2 Object 60A5_h: VCU position and class

This object shall provide information about the position of the VCU in the system and about the device class to which the VCU belongs at the connected power lines. The object structure is specified in Figure 3. Byte 0 shall provide the power transfer direction. Byte 1 shall provide the involved power lines on "side A" and side B of the VCU. Bytes 2 and 3 contain the device class for each of the referenced power lines from byte 1. For the device class the same value definition as for Object 6000_h bit field device class.

In the description of the value definition for the bit field "power transfer direction", a "1" in DC1 or in AC1 denotes the "side A" of the converter while the "2" in DC2 or AC2 denotes the "side B" of the inverter. Because of the possibility of bidirectional power transfer, it shall be resigned to use the terms input and output sides. Bit fields "power line number side A/side B" contain the position of the VCU as power lines are concerned. The EMSC may allocate two sorts of lists of power lines, one for up to 16 AC and one for up to 16 DC power lines. These power line numbers are configured to appoint the position of the device in the system and to define the membership of the component to a certain power line. Bit fields "device class side A/side B" define the device class of the "side A" and "side B". Table 50 provides the value definition. Table 51 and Table 52 provide the object description and the entry description.

NOTE DC to AC power transfer is not covered by this document.

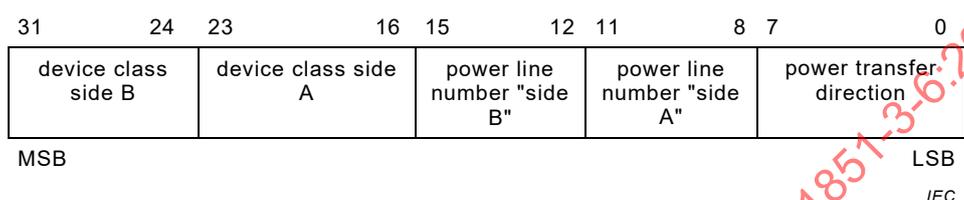


Figure 3 – Object structure

Table 50 – Value definition

Name	Byte	Bit	Value	Description
power transfer direction	0	0	0	DC1 to DC2 not supported
			1	DC1 to DC2 supported
		1	0	DC2 to DC1 not supported
			1	DC2 to DC1 supported
		2	0	DC1 to AC1 not supported
			1	DC1 to AC1 supported
		3	0	AC1 to DC1 not supported
			1	AC1 to DC1 supported
		4	0	AC1 to AC2 not supported
			1	AC1 to AC2 supported
5	0	AC2 to AC1 not supported		
	1	AC2 to AC1 supported		
6 to 7	0	Reserved		
power line number DC	1 low nibble	0 to 3	0-15	power line number
power line number AC	1 high nibble	0 to 3	0-15	power line number
device class DC	2	0 to 3	0 to 255	see IEC TS 61851-3-5:2021 Object 6000h bit field "device class" [24:31]
device class AC	3	0 to 3	0 to 255	

Table 51 – Object description

Attribute	Value
Index	60A5 _h
Name	VCU position and class
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 52 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	VCU VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	See value definition
Default value	No
Sub-index	02 _h
Description	VCU VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	See value definition
Default value	No
to	
Sub-index	7F _h
Description	VCU VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	See value definition
Default value	No

Attribute	Value
Sub-index	80 _h
Description	VCU external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	VCU external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.3 Object 60D0_h 3P topology DC1 positive voltage

This object shall provide the positive voltage for the DC1 side in case of a three-point topology on the DC side. The data type shall be INTEGER32. The value shall be given in multiples of 1 V, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mV.

Table 53 and Table 54 provide object description and entry description.

Table 53 – Object description

Attribute	Value
Index	60D0 _h
Name	3P topology DC1 positive voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 54 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	positive voltage VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	positive voltage VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	08 _h
Description	positive voltage VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	positive voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	positive voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEED.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.4 Object 60D1_h 3P topology DC1 negative voltage

This object shall provide the negative voltage for the DC1 side in case of a three point topology on the DC side. The data type shall be INTEGER32. The value shall be given in multiples of 1 V, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mV.

Table 55 and Table 56 provide the object description and the entry description.

Table 55 – Object description

Attribute	Value
Index	60D1 _h
Name	3P topology DC1 negative voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 56 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	negative voltage VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	negative voltage VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	negative voltage VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	negative voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	negative voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.5 Object 60D2_h 3P topology DC2 positive voltage

This object shall provide the positive voltage for the DC2 side in case of a three point topology on the DC side. The data type shall be INTEGER32. The value shall be given in multiples of 1 V, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mV.

Table 57 and Table 58 provide the object description and the entry description.

Table 57 – Object description

Attribute	Value
Index	60D2 _h
Name	3P topology DC2 positive voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 58 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	positive voltage VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	positive voltage VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	positive voltage VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	positive voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	positive voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.6 Object 60D3_h 3P topology DC2 negative voltage

This object shall provide the negative voltage for the DC2 side in case of a three point topology on the DC side. The data type shall be INTEGER32. The value shall be given in multiples of 1 V, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mV.

Table 59 and Table 60 provide the object description and the entry description.

Table 59 – Object description

Attribute	Value
Index	60D3 _h
Name	3P topology DC2 negative voltage
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 60 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	negative voltage VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	negative voltage VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	negative voltage VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	negative voltage external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	negative voltage external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.7 Object 60D4_h Overload capability DC1

This object shall provide the overload capability for the DC1 side. The object code shall be ARRAY and the data type UNSIGNED32. Overload values shall be given relative to the nominal power of the device. Overloads shall be given in multiples of 0,01 % and overload times shall be given in multiples of 1 second. Figure 4 provides the object structure. Table 61 and Table 62 provide the object description and the entry description.

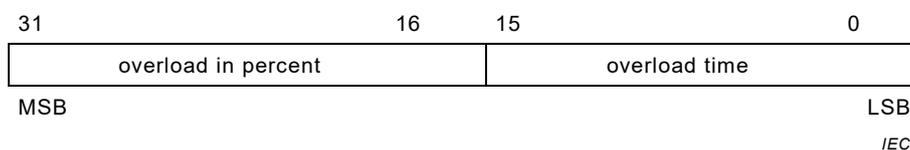


Figure 4 – Object structure

Table 61 – Object description

Attribute	Value
Index	60D _h
Name	Overload capability DC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 62 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Overload and time VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
Sub-index	02 _h
Description	Overload and time VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	7F _h
Description	Overload and time VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Overload and time external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Overload and time external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.8 Object 60D5_h Overload capability DC2

This object shall provide the overload capability for the DC2 side. The object code shall be ARRAY and the data type UNSIGNED32. Overload values shall be given relative to the nominal power of the device. Overloads shall be given in multiples of 0,01 % and overload times shall be given in seconds. Figure 5 provides the object structure. Table 63 and Table 64 provide the object description and the entry description.

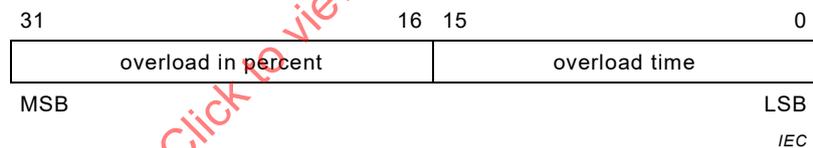


Figure 5 – Object structure

Table 63 – Object description

Attribute	Value
Index	60D5 _h
Name	Overload capability DC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 64 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Overload and time VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
Sub-index	02 _h
Description	Overload and time VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	08 _h
Description	Overload and time VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
Sub-index	80 _h
Description	Overload and time external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

IECWEB.COM: Click to view the full PDF of IEC TS 61851-3-6:2023

Attribute	Value
Sub-index	01 _h
Description	Overload and time VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	02 _h
Description	Overload and time VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	7F _h
Description	Overload and time VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	80 _h
Description	Overload and time external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Overload and time external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEED.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.10 Object 60D7_h Overload capability AC2

This object shall provide the overload capability for the AC2 side. The object code shall be ARRAY and the data type UNSIGNED32. Overload values shall be given relative to the nominal power of the device. Overloads shall be given in multiples of 0,01 % and overload times shall be given in seconds. Figure 7 provides the object structure. Table 67 and Table 68 provide the object description and the entry description.

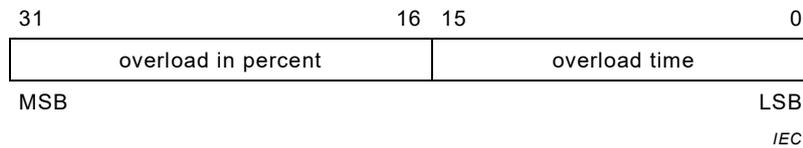


Figure 7 – Object structure

Table 67 – Object description

Attribute	Value
Index	60D7 _h
Name	Overload capability AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 68 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Overload and time VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Overload and time VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	7F _h
Description	Overload and time VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	See object structure
Default value	No
to	
Sub-index	80 _h
Description	Overload and time external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Overload and time external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.11 Object 60D8_h VCU frequency thresholds AC1

This object shall provide the minimum and maximum frequencies for the AC1. The data type shall be UNSIGNED32. The value shall be given in multiples of 0,01 Hz. Figure 8 provides the object structure. Table 69 and Table 70 provide the object description and the entry description.

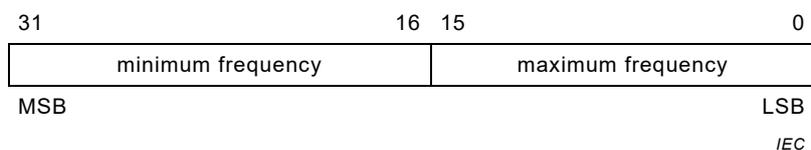


Figure 8 – Object structure

Table 69 – Object description

Attribute	Value
Index	60D8 _h
Name	VCU frequency thresholds AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 70 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to 7F _h
Default value	No
Sub-index	01 _h
Description	frequency thresholds VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	frequency thresholds VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
	to
Sub-index	08 _h
Description	frequency thresholds VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Table 72 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	frequency thresholds VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	frequency thresholds VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	frequency thresholds VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Frequency thresholds external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	Frequency thresholds external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.13 Object 60DA_h Maximum L1 apparent power AC1

This object shall provide the maximum apparent power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 VA, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mVA.

Table 73 and Table 74 provide the object description and the entry description.

Table 73 – Object description

Attribute	Value
Index	60DA _h
Name	Maximum L1 apparent power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 74 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum apparent power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Maximum apparent power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum apparent power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum apparent power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum apparent power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.14 Object 60DB_h Maximum L2 apparent power AC1

This object shall provide the maximum apparent power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 VA, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mVA.

Table 75 and Table 76 provide the object description and the entry description.

Table 75 – Object description

Attribute	Value
Index	60DB _h
Name	Maximum L2 apparent power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 76 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum apparent power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum apparent power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum apparent power VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Maximum apparent power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum apparent power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.15 Object 60DC_h Maximum L3 apparent power AC1

This object shall provide the maximum apparent power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 VA, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mVA.

Table 77 and Table 78 provide the object description and the entry description.

Table 77 – Object description

Attribute	Value
Index	60DC _h
Name	Maximum L3 apparent power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 78 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	Maximum apparent power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	Maximum apparent power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum apparent power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum apparent power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum apparent power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEPIV.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.16 Object 60DD_h Maximum L1 apparent power AC2

This object shall provide the maximum apparent power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 VA, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mVA.

Table 79 and Table 80 provide the object description and the entry description.

Table 79 – Object description

Attribute	Value
Index	60DA _h
Name	Maximum L1 apparent power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 80 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum apparent power 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum apparent power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	Maximum apparent power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Maximum apparent power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum apparent power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.17 Object 60DE_h Maximum L2 apparent power AC2

This object shall provide the maximum apparent power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 VA, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mVA.

Table 81 and Table 82 provide the object description and the entry description.

Table 81 – Object description

Attribute	Value
Index	60DB _h
Name	Maximum L2 apparent power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 82 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum apparent power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum apparent power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum apparent power VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Maximum apparent power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	Maximum apparent power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.18 Object 60DF_h Maximum L3 apparent power AC2

This object shall provide the maximum apparent power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 VA, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mVA.

Table 83 and Table 84 provide the object description and the entry description.

Table 83 – Object description

Attribute	Value
Index	60DC _h
Name	Maximum L3 apparent power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 84 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum apparent power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Maximum apparent power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum apparent power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum apparent power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum apparent power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.19 Object 60E1_h Maximum L1 real power AC1

This object shall provide the maximum real power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 W, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mW.

Table 85 and Table 86 provide the object description and the entry description.

Table 85 – Object description

Attribute	Value
Index	60DA _h
Name	Maximum L1 real power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 86 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
to	
Sub-index	01 _h
Description	Maximum real power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	Maximum real power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	08 _h
Description	Maximum real power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Maximum real power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum real power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.20 Object 60E2_h Maximum L2 real power AC1

This object shall provide the maximum real power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 W, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mW.

Table 87 and Table 88 provide the object description and the entry description.

Table 87 – Object description

Attribute	Value
Index	60E2 _h
Name	Maximum L2 real power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 88 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	Maximum real power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	Maximum real power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum real power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum real power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum real power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEED.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.21 Object 60E3_h Maximum L3 real power AC1

This object shall provide the maximum apparent power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 W, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mW.

Table 89 and Table 90 provide the object description and the entry description.

Table 89 – Object description

Attribute	Value
Index	60E3 _h
Name	Maximum L3 real power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 90 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum real power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum real power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	Maximum real power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Maximum real power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum real power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.22 Object 60E4_h Maximum L1 real power AC2

This object shall provide the maximum real power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 W, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mW.

Table 91 and Table 92 provide the object description and the entry description.

Table 91 – Object description

Attribute	Value
Index	60E4 _h
Name	Maximum L1 real power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 92 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum real power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum real power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum real power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Maximum real power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	Maximum real power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.23 Object 60E5_h Maximum L2 real power AC2

This object shall provide the maximum real power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 W, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mW.

Table 93 and Table 94 provide the object description and the entry description.

Table 93 – Object description

Attribute	Value
Index	60E5 _h
Name	Maximum L2 real power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 94 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum real power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Maximum real power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum real power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum real power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum real power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.24 Object 60E6_h Maximum L3 real power AC2

This object shall provide the maximum real power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 W, multiplied with the prefix given in IEC TS 61851-3-5:2021 Object 6053_h.

NOTE The recommended resolution is multiples of 1 mW.

Table 95 and Table 96 provide the object description and the entry description.

Table 95 – Object description

Attribute	Value
Index	60E6 _h
Name	Maximum L3 real power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 96 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum real power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum real power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum real power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Maximum real power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum real power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.25 Object 60E7_h Maximum L1 reactive power AC1

This object shall provide the maximum reactive power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 var, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mvar.

Table 97 and Table 98 provide the object description and the entry description.

Table 97 – Object description

Attribute	Value
Index	60E7 _h
Name	Maximum L1 reactive power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 98 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	Maximum reactive power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	Maximum reactive power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum reactive power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum reactive power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum reactive power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECWP.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.26 Object 60E8_h Maximum L2 reactive power AC1

This object shall provide the maximum reactive power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 var, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mvar.

Table 99 and Table 100 provide the object description and the entry description.

Table 99 – Object description

Attribute	Value
Index	60E8 _h
Name	Maximum L2 reactive power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 100 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum reactive power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum reactive power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	Maximum reactive power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Maximum reactive power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
Sub-index	FE _h
Description	Maximum reactive power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.27 Object 60E9_h Maximum L3 reactive power AC1

This object shall provide the maximum apparent power for the AC1 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 var, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mvar.

Table 101 and Table 102 provide the object description and the entry description.

Table 101 – Object description

Attribute	Value
Index	60E9 _h
Name	Maximum L3 reactive power AC1
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 102 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum reactive power VDN 1
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum reactive power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum reactive power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	80 _h
Description	Maximum reactive power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	Maximum reactive power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.28 Object 60EA_h Maximum L1 reactive power AC2

This object shall provide the maximum reactive power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 var, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mvar.

Table 103 and Table 104 provide the object description and the entry description.

Table 103 – Object description

Attribute	Value
Index	60EA _h
Name	Maximum L1 reactive power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 104 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum reactive power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Maximum reactive power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum reactive power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum reactive power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum reactive power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.29 Object 60EB_h Maximum L2 reactive power AC2

This object shall provide the maximum reactive power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 var, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mvar.

Table 105 and Table 106 provide the object description and the entry description.

Table 105 – Object description

Attribute	Value
Index	60EB _h
Name	Maximum L2 reactive power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 106 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum reactive power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
Sub-index	02 _h
Description	Maximum reactive power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum reactive power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Maximum reactive power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum reactive power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.30 Object 60EC_h Maximum L3 reactive power AC2

This object shall provide the maximum reactive power for the AC2 side. The data type shall be UNSIGNED32. The value shall be given in multiples of 1 var, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mvar.

Table 107 and Table 108 provide the object description and the entry description.

Table 107 – Object description

Attribute	Value
Index	60EC _h
Name	Maximum L3 reactive power AC2
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 108 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	Maximum reactive power VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	02 _h
Description	Maximum reactive power VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	7F _h
Description	Maximum reactive power VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	UNSIGNED32
Default value	No
to	
Sub-index	80 _h
Description	Maximum reactive power external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum reactive power external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEPIV.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.31 Object 60ED_h Maximum L1 current AC1

This object shall provide the maximum L1 current for the AC1 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 109 and Table 110 provide the object description and the entry description.

Table 109 – Object description

Attribute	Value
Index	60ED _h
Name	Maximum L1 current AC1
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 110 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	Maximum current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	Maximum current VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	Maximum current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.32 Object 60EE_h Maximum L2 current AC1

This object shall provide the maximum L2 current for the AC1 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 111 and Table 112 provide the object description and the entry description.

Table 111 – Object description

Attribute	Value
Index	60EE _h
Name	Maximum L2 current AC1
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 112 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	Maximum current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Maximum current VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	Maximum current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	Maximum current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.33 Object 60EF_h Maximum L3 current AC1

This object shall provide the maximum L3 current for the AC1 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 113 and Table 114 provide the object description and the entry description.

Table 113 – Object description

Attribute	Value
Index	60EF _h
Name	Maximum L3 current AC1
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 114 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Maximum current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Maximum current VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	Maximum current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.34 Object 609A_h Maximum L1 current AC2

This object shall provide the maximum L1 current for the AC2 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 115 and Table 116 provide the object description and the entry description.

Table 115 – Object description

Attribute	Value
Index	609A _h
Name	Maximum L1 current AC2
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 116 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	Maximum current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Maximum current VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Maximum current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.35 Object 609B_h Maximum L2 current AC2

This object shall provide the maximum L2 current for the AC2 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 117 and Table 118 provide the object description and the entry description.

Table 117 – Object description

Attribute	Value
Index	609B _h
Name	Maximum L2 current AC2
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 118 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	Maximum current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	Maximum current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Maximum current VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	Maximum current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

IECNEED.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.5.36 Object 609C_h Maximum L3 current AC2

This object shall provide the maximum L3 current for the AC2 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 119 and Table 120 provide the object description and the entry description.

Table 119 – Object description

Attribute	Value
Index	609C _h
Name	Maximum L3 current AC2
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 120 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	Maximum current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
	to

Attribute	Value
Sub-index	7F _h
Description	Maximum current VDN127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	Maximum current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.37 Object 609D_h Maximum N current AC1

This object shall provide the maximum neutral line current for the AC1 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 121 and Table 122 provide the object description and the entry description.

Table 121 – Object description

Attribute	Value
Index	609D _h
Name	Maximum neutral line current AC1
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 122 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum neutral line current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	Maximum neutral line current VDN 2
Category	Optional
Access	Ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Maximum neutral line current VDN 127
Category	Optional
Access	Ro
PDO mapping	No
Value range	INTEGER32
Default value	No
Sub-index	80 _h
Description	Maximum neutral line current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	

Attribute	Value
Sub-index	FE _h
Description	Maximum neutral line current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.38 Object 609E_h Maximum N current AC2

This object shall provide the maximum neutral line current for the AC2 side. The data type shall be INTEGER32. The value shall be given in multiples of 1 A, multiplied with the prefix given in IEC TS 61851-3-5:2021, Object 6053_h.

NOTE The recommended resolution is multiples of 1 mA.

Table 123 and Table 124 provide the object description and the entry description.

Table 123 – Object description

Attribute	Value
Index	609E _h
Name	Maximum neutral line current AC2
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 124 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Maximum neutral line current VDN 1
Category	Mandatory
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	02 _h
Description	Maximum neutral line current VDN 2
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Maximum neutral line current VDN 127
Category	Optional
Access	ro
PDO mapping	No
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	Maximum neutral line current external data 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Maximum neutral line current external data 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.5.39 Object 603F_h: DC-DC converter actual current side B

This object shall provide the device actual current that is measured at the device on side B. The positive current value shall indicate the current flow from the device to the EMS. The negative current value shall indicate the current flow from the EMS to the device. The values shall be given in multiples of 1 mA. Table 125 specifies the object description and Table 126 specifies the entry description.

NOTE The actual current of DC-DC converter's side A is given in IEC TS 61851-3-5:2021, Object 603E_h.

Table 125 – Object description

Attribute	Value
Index	603F _h
Name	DC-DC converter actual current side B
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 126 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Current VDN 1
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
Sub-index	02 _h
Description	Current VDN 2
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Current VDN 127
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No

Attribute	Value
Sub-index	80 _h
Description	Other device current 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Other device current 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific

6.5.40 Object 6041_h: DC-DC converter actual voltage side B

This object shall provide the actual voltage that is measured at the device side B. The values shall be given in multiples of 1 mV. Table 127 specifies the object description and Table 128 specifies the entry description.

NOTE The actual voltage measured at the DC-DC converter's side A is provided in Object 6040_h.

Table 127 – Object description

Attribute	Value
Index	6041 _h
Name	DC-DC converter actual voltage side B
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 128 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No

Attribute	Value
Sub-index	01 _h
Description	Voltage VDN 1
Entry category	Mandatory
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	02 _h
Description	Voltage VDN 2
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	7F _h
Description	Voltage VDN 127
Entry category	Optional
Access	ro
PDO mapping	Optional
Value range	INTEGER32
Default value	No
to	
Sub-index	80 _h
Description	Other device voltage 1
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Other device voltage 127
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific

IECNEPIV.COM · Click to view the full PDF of IEC TS 61851-3-6:2023

6.6 Consumed application objects by AC-DC converter (optional)

6.6.1 General

Subclause 6.6 defines the application objects consumed by the AC-DC converter functionality, which is a subset of the VCU functionality.

6.6.2 Object 60BE_h: AC-DC converter set maximum AC power

This object shall indicate the maximum AC power limitation value. This allows application to limit power of the device. The values shall be given in multiples of 1 mW. Table 129 specifies the object description and Table 130 specifies the entry description.

Table 129 – Object description

Attribute	Value
Index	60BE _h
Name	AC-DC converter set maximum AC power
Object code	ARRAY
Data type	INTEGER32
Category	Optional

Table 130 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to 7F _h
Default value	No
Sub-index	01 _h
Description	AC-DC converter VDN 1 set maximum AC 1 power
Entry category	Mandatory
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific

Attribute	Value
Sub-index	02 _h
Description	AC-DC converter VDN 2 set maximum AC 1 power
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific
to	
Sub-index	7F _h
Description	AC-DC converter VDN 127 set maximum AC 1 power
Entry category	Optional
Access	rw
PDO mapping	Optional
Value range	INTEGER32
Default value	Manufacturer-specific

6.7 Consumed application objects for power transfer

6.7.1 General

Subclause 6.7 provides parameters that are required to learn from a VCU’s point of view the attributes of the battery systems that shall be connected to an EMS, in use cases, for example 8.3 of IEC TS 61851-3-4:2021.

6.7.2 Object 60F0_h: Connected battery systems data - Instance

This object shall provide the global instance number of the battery systems to be connected to a power system as well as the virtual instance number of the battery system within the CANopen device. Value definition and object structure shall comply with those of Object 6000_h.

For informative reasons, Figure 10 illustrates the object structure and Table 131 provides the value definition (see also Table 8 of IEC TS 61851-3-5:2021). Table 132 specifies the object description, and Table 133 specifies the entry description.

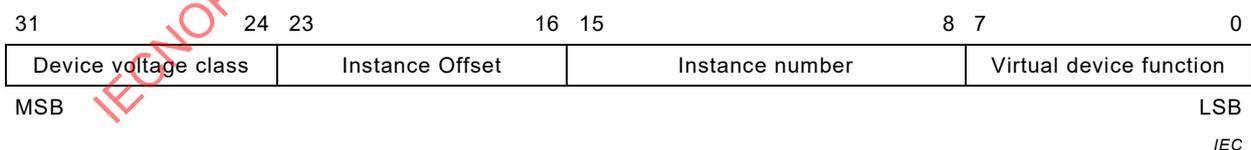


Figure 10 – Object structure supported virtual devices (informative)

Table 131 – Value definition for bit fields (informative)

Name	Value [hex]	Description
Virtual device function	00 to 01	Reserved
	02	GAO
	03	Reserved
	04	EMSC
	05	Voltage converter unit

Name	Value [hex]	Description
	06	Battery system
	07	Motor control unit ^a
	08	Load monitoring unit ^a
	09	HMI control unit ^a
	0A	Security unit
	0B	Sensor unit ^a
	0C	Gateway unit ^a
	0D	Generator unit ^a
	0E	Load unit ^a
	0F to 7F	Reserved
	80	Manufacturer-specific VD
	81 to FF	Reserved
Instance number	00	Reserved
	01 to 7F	Local instance number
	80 to FF	Reserved
Instance offset	00	Default
	01 to 7F	Instance offset
	80 to FF	Reserved
Device voltage class	00	Device does not consume energy from the EMS and is only powered by an AUX voltage (passive device)
	01	Device operating at 12 V _{DC} to 48 V _{DC} nominal voltage
	02	Device operating at more than 48 V _{DC} to 96 V _{DC} nominal voltage
	03	Device operating at more than 96 V _{DC} to 200 V _{DC} nominal voltage
	04	Device operating at more than 200 V _{DC} to 400 VDC nominal voltage
	05	Device operating at more than 400 VDC nominal voltage
	06 to 7F	Reserved
	80	Device operating at 85 to 127 V _{AC} , single phase
	81	Device operating at 200 to 265 V _{AC} , single phase
	82 to BF	Reserved
	C0	Device operating at 85 to 127 V _{AC} , three phase, (Y-connection)
	C1	Device operating at 200 to 265 V _{AC} , three phase, (Y-connection)
	C2	Device operating at 85 to 127 V _{AC} , three phase, (Δ-connection)
	C3	Device operating at 200 to 265 V _{AC} , three phase, (Δ-connection)
	C4 to FD	Reserved
	FE	Device class provided in 60A5h
	FF	Reserved
^a This virtual device is not specified in this document. For details, refer to IEC TS 61851-3-4.		

Table 132 – Object description

Attribute	Value
INDEX	60F0 _h
Name	Connected battery system data Instance
Object code	ARRAY
Data type	UNSIGNED32
Category	Mandatory

Table 133 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	Ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
to	
Sub-index	01 _h
Description	Battery system 1
Entry category	Mandatory
Access	rw, ro
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	02 _h
Description	Battery system 2
Entry category	Optional
Access	rw, ro
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Battery system 254
Entry category	Optional
Access	rw, ro
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.7.3 Object 60F1_h: Connected battery system data - Node-ID

This object shall provide the node-ID of the battery system to be connected to an EMS. The value shall be dimensionless. Table 134 provides the value definition. Table 135 specifies the object description, and Table 136 specifies the entry description.

Table 134 – Value definition

Value [hex]	Description
00	Reserved
01 to 7F	CANopen node-ID of the battery system to be connected to a DC power circuit
80 to FE	Reserved
FF	No battery system assigned

Table 135 – Object description

Attribute	Value
INDEX	60F1 _h
Name	Connected battery system data – Node-ID
Object code	ARRAY
Data type	UNSIGNED8
Category	Mandatory

Table 136 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	Ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Battery system 1
Entry category	Mandatory
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

Attribute	Value
Sub-index	02 _h
Description	Battery system 2
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Battery system 254
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.7.4 Object 60F2_h: Connected battery system data - Device alarm capability (optional)

This object shall provide the supported device alarm capability of the battery system to be connected to an EMS. Value definition and object structure shall comply with those of object 600A_h. For informative reasons, Figure 11 illustrates the value structure and Table 137 provides the value definition. Table 138 specifies the object description and Table 139 specifies the entry description.

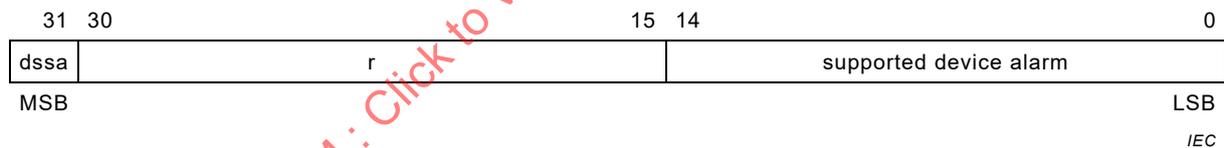


Figure 11 – Object structure (informative)

Table 137 – Value definition (informative)

Name	Bit	Value	Description
supported device alarm	0	0 _b	Over voltage alarm not supported
		1 _b	Over voltage alarm supported
	1	0 _b	Under voltage alarm not supported
		1 _b	Under voltage alarm supported
	2	0 _b	Output over current alarm not supported
		1 _b	Output over current alarm supported
	3	0 _b	Input over current alarm not supported
		1 _b	Input over current alarm supported
4	0 _b	Electronic over temperature alarm not supported	
	1 _b	Electronic over temperature alarm supported	

Name	Bit	Value	Description
	5	0 _b	Battery cells over temperature alarm not supported
		1 _b	Battery cells over temperature alarm supported
	6	0 _b	Communication error alarm not supported
		1 _b	Communication error alarm supported
	7	0 _b	Battery system compatibility error alarm not supported
		1 _b	Battery system compatibility error alarm supported
	8	0 _b	Electronic power stage defect alarm not supported
		1 _b	Electronic power stage defect alarm supported
	9	0 _b	Fuse blown alarm not supported
		1 _b	Fuse blown alarm supported
	10	0 _b	Cell damaged alarm not supported
		1 _b	Cell damaged alarm supported
	11	0 _b	Connected to a power system over temperature alarm not supported
		1 _b	Connected to a power system over temperature alarm supported
	12	0 _b	Discharge over temperature alarm not supported
		1 _b	Discharge over temperature alarm supported
	13	0 _b	Sensor damaged alarm not supported
		1 _b	Sensor damaged alarm supported
14	0 _b	Wire broken alarm not supported	
	1 _b	Wire broken alarm supported	
15	0 _b	Isolation damaged alarm not supported	
	1 _b	Isolation damaged alarm supported	
R	16 to 30	0 _b	Reserved (always 0)
		1 _b	
dssa: device specific supported alarm	31	0 _b	Alarm not supported
		1 _b	Alarm supported

Table 138 – Object description

Attribute	Value
Index	60F2 _h
Name	Connected battery system data - Supported device alarm
Object code	ARRAY
Data type	UNSIGNED32
Category	Optional

Table 139 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Battery system 1
Entry category	Mandatory
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
Sub-index	02 _h
Description	Battery system 2
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
to	
Sub-index	FE _h
Description	Battery system 254
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.7.5 Object 60F3_h: Connected battery system data - Type of battery cells

This object shall provide the battery cells type of the battery system to be connected to a power system. The value definition shall comply with those provided in battery systems object 6100_h. Table 140 specifies the object description and Table 141 specifies the entry description.

NOTE The battery system is specified in IEC TS 61851-3-7:2021.

Table 140 – Object description

Attribute	Value
Index	60F3 _h
Name	Connected battery system data - Type of battery cells
Object code	ARRAY
Data type	UNSIGNED16
Category	Mandatory

Table 141 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Battery system 1
Entry category	Mandatory
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
Sub-index	02 _h
Description	Battery system 2
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific
	to
Sub-index	FE _h
Description	Battery system 254
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	See value definition
Default value	Manufacturer-specific

6.7.6 Object 60F4_h: Connected battery system data - Battery system rated Wh capacity

This object shall provide the rated battery Wh capacity of the battery systems to be connected to a power system. The values shall comply with battery system’s Object 6102_h and shall be given in multiples of 1 mWh. The value 0 shall indicate that the entry is not supported. Table 142 specifies the object description and Table 143 specifies the entry description.

NOTE The battery system is specified in IEC TS 61851-3-7:2021.

Table 142 – Object description

Attribute	Value
Index	60F4 _h
Name	Connected battery system data - Battery system rated Wh capacity
Object code	ARRAY
Data type	UNSIGNED32
Category	Mandatory

Table 143 – Entry description

Attribute	Value
Sub-index	00 _h
Description	Highest sub-index supported
Entry category	Mandatory
Access	ro
PDO mapping	No
Value range	01 _h to FE _h
Default value	No
Sub-index	01 _h
Description	Battery system 1
Entry category	Mandatory
Access	ro,rw
PDO mapping	Optional
Value range	UNSIGNED32
Default value	Manufacturer-specific
Sub-index	02 _h
Description	Battery system 2
Entry category	Optional
Access	ro, rw
PDO mapping	Optional
Value range	UNSIGNED32
Default value	Manufacturer-specific
	to