
Identification cards — Test methods —

Part 9:

**Optical memory cards — Holographic
recording method**

Cartes d'identification — Méthodes d'essai —

*Partie 9: Cartes à mémoire optique — Méthode d'enregistrement
holographique*

IECNORM.COM : Click to view the full PDF of ISO/IEC 10373-9:2011

IECNORM.COM : Click to view the full PDF of ISO/IEC 10373-9:2011



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Default items applicable to the test methods	2
4.1 Test environment.....	2
4.2 Pre-conditioning	2
4.3 Selection of test methods.....	2
4.4 Default tolerance	2
4.5 Total measurement uncertainty	2
5 Test methods	3
5.1 Location of accessible optical area and reference track.....	3
5.1.1 Procedure.....	3
5.1.2 Test report.....	3
5.2 Skew.....	3
5.2.1 Apparatus for skew measurement.....	4
5.2.2 Procedure for skew measurement.....	4
5.2.3 Test report.....	5
5.3 Hologram size	5
5.3.1 Apparatus for hologram size measurement	5
5.3.2 Procedure for hologram size measurement	5
5.3.3 Test report.....	5
5.4 Arrangement of multiple holograms	5
5.4.1 Apparatus for measuring the arrangement of multiple holograms	6
5.4.2 Procedure for measuring the arrangement of multiple holograms	6
5.4.3 Test report.....	6
5.5 Optical properties of the media	6
5.5.1 Apparatus for measuring the optical properties of the media.....	7
5.5.2 Procedure for measuring the optical properties of the media.....	7
5.5.3 Test report.....	8
Bibliography.....	9

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 10373-9 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

ISO/IEC 10373 consists of the following parts, under the general title *Identification cards — Test methods*:

- *Part 1: General characteristics*
- *Part 2: Cards with magnetic stripes*
- *Part 3: Integrated circuit cards with contacts and related interface devices*
- *Part 5: Optical memory cards*
- *Part 6: Proximity cards*
- *Part 7: Vicinity cards*
- *Part 8: USB-ICC*
- *Part 9: Optical memory cards — Holographic recording method*

Introduction

ISO/IEC 10373 defines test methods in support of ISO/IEC 11695, which specifies optical holographic memory cards and the use of such cards for the storage and interchange of digital data.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this document may involve the use of patents.

ISO and the IEC take no position concerning the evidence, validity and scope of these patent rights.

The holders of these patent rights have assured ISO and the IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of these patent rights are registered with ISO and the IEC. Information may be obtained from:

Certego GmbH
Lichtenbergstrasse 8
85748 Garching
Germany

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and the IEC shall not be held responsible for identifying any or all such patent rights.

IECNORM.COM : Click to view the full PDF of ISO/IEC 10373-9:2011

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of ISO/IEC 10373-9:2017

Identification cards — Test methods —

Part 9:

Optical memory cards — Holographic recording method

1 Scope

This part of ISO/IEC 10373 defines test methods for characteristics of identification cards according to the definition given in ISO/IEC 7810. It is specific to optical memory cards that use the holographic recording method technology. Each test method is cross-referenced to one or more base standards, i.e. ISO/IEC 7810 or one or more of the supplementary International Standards that define the information storage technologies employed in identification card applications.

NOTE 1 Criteria for acceptability do not form part of ISO/IEC 10373, but will be found in the International Standards mentioned above.

NOTE 2 Test methods defined in this part of ISO/IEC 10373 are intended to be performed separately. A given card is not required to pass through all the tests sequentially.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11695-2, *Identification cards — Optical memory cards — Holographic recording method — Part 2: Dimensions and location of accessible optical area*

ISO/IEC 11695-3, *Identification cards — Optical memory cards — Holographic recording method — Part 3: Optical properties and characteristics*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 test method

method for testing characteristics of identification cards for the purpose of confirming their compliance with International Standards

3.2 testably functional

surviving the action of some potentially destructive influence to the extent that:

- any magnetic stripe present on the card shows a relationship between signal amplitudes before and after exposure that is in accordance with the base standard;

- any integrated circuit(s) present in the card continues to show an Answer to Reset response¹⁾ which conforms to the base standard;
- any contacts associated with any integrated circuit(s) present in the card continue to show electrical resistance and impedance which conform to the base standard;
- any optical memory present in the card continues to show optical characteristics which conform to the base standard

3.3 normal use
use as an identification card (see ISO/IEC 7810:2003, 4.1), involving equipment processes appropriate to the card technology and storage as a personal document between equipment processes

4 Default items applicable to the test methods

4.1 Test environment

Unless otherwise specified, testing shall take place in an environment of temperature $23\text{ °C} \pm 3\text{ °C}$ ($73\text{ °F} \pm 5\text{ °F}$) and of relative humidity 40 % to 60 %.

4.2 Pre-conditioning

Where pre-conditioning is required by the test method, the identification cards to be tested shall be conditioned to the test environment for a period of 24 h before testing.

4.3 Selection of test methods

Unless otherwise specified, the tests in this part of ISO/IEC 10373 shall be applied exclusively to optical memory cards using the holographic recording method, as defined in ISO/IEC 11693 and ISO/IEC 11695 (all parts).

4.4 Default tolerance

Unless otherwise specified, a default tolerance of $\pm 5\%$ shall be applied to the quantity values given to specify the characteristics of the test equipment (e.g. linear dimensions) and the test method procedures (e.g. test equipment adjustments).

4.5 Total measurement uncertainty

The total measurement uncertainty for each quantity determined by these test methods shall be stated in the test report.

¹⁾ This part of ISO/IEC 10373 does not define any test to establish the complete functioning of integrated circuit cards. The test methods require only that the minimum functionality (testably functional) be verified. This may, in appropriate circumstances, be supplemented by further, application-specific functionality criteria which are not available in the general case.

5 Test methods

5.1 Location of accessible optical area and reference track

The purpose of this test is to measure the location of the accessible optical area and the reference track in the card. Refer to ISO/IEC 11695-2.

5.1.1 Procedure

Construct two perpendicular axes of reference x and y intersecting at O . Mark three reference points on the axes: points P_2 and P_3 , measured 11,25 mm and 71,25 mm from O are marked on the x axis and point P_1 , 27,00 mm from O , on the y axis. Place the card to be tested, accessible optical area side up, on a flat hard surface. The card shall be held down by a load of $2,2 \pm 0,2$ N.

Apply force F_1 (1 N to 2 N) and F_2 (2 N to 4 N) so that the reference edge of the card touches points P_2 and P_3 and the right edge touches P_1 (see Figure 1).

Measure dimensions X_a , X_b , Y , C and D with equipment having an accuracy of 0,05 mm.

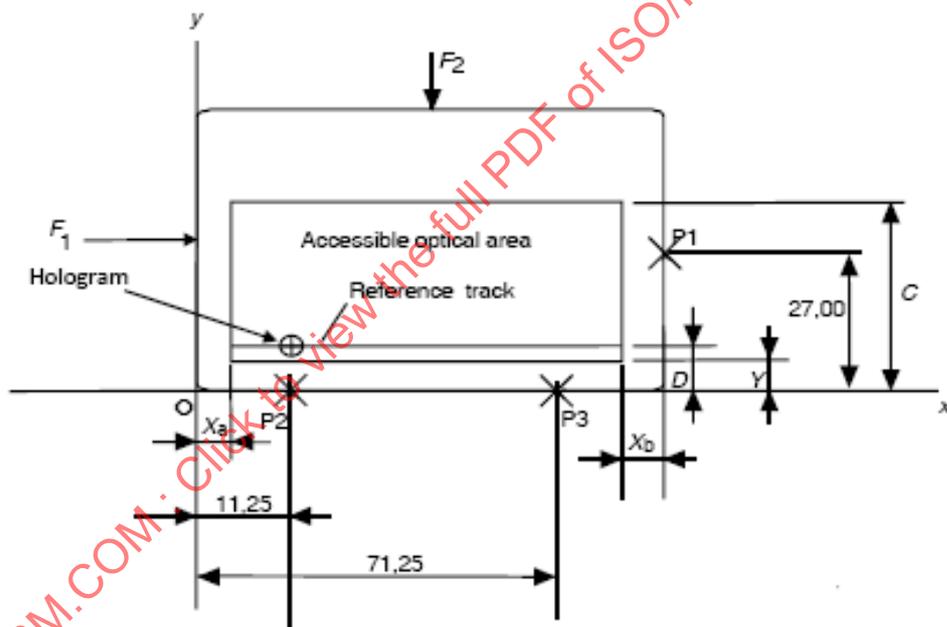


Figure 1 — Location of accessible optical area and reference track

5.1.2 Test report

The test report shall give the values of the dimensions measured.

5.2 Skew

The purpose of this test is to measure the skew of the reference track to the bottom edge of the optical memory card. Refer to ISO/IEC 11695-2.

5.2.1 Apparatus for skew measurement

The apparatus is shown in Figure 2. It comprises

- an xy stage with an xy position indicator, and
- an optical microscope.

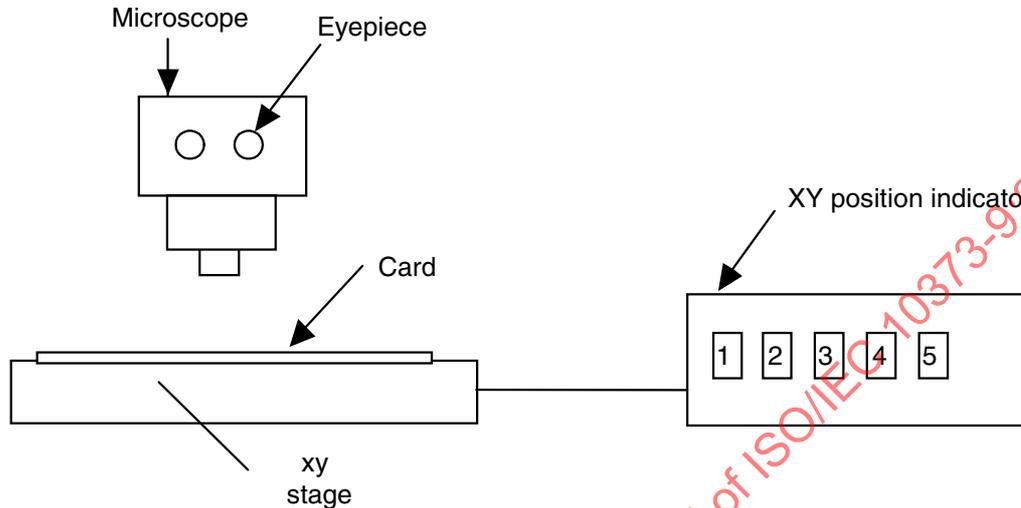


Figure 2 — Apparatus for the skew measurement

5.2.2 Procedure for skew measurement

Place the sample card to be tested, flat, accessible optical area side up, on the xy stage.

Look into the eyepiece of the microscope, move the xy stage so that the reference track on the left side of the card can be seen. (see Figure 3), and adjust the xy stage so that the xy cross-point in the eyepiece is on the reference track. Then record the xy coordinate value (X_0, Y_0) .

Next, move the stage in the y direction so that the bottom edge of the card can be seen, adjust the stage and record the value (X_0, Y_2) similarly.

Then move the stage so that the reference track in the right part of the card can be seen, adjust the stage and record the coordinate value (X_1, Y_1) . However the value of $|X_0 - X_1|$ shall be not less than 60 mm.

Lastly move the stage in the y direction so that the bottom edge of the card can be seen, and record the value (X_1, Y_3) in the same way.

The skew, φ , is calculated by the following expression:

$$\varphi = \text{ABS}[\arctan\{(Y_1 - Y_0)/(X_1 - X_0)\} - \arctan\{(Y_3 - Y_2)/(X_1 - X_0)\}]$$

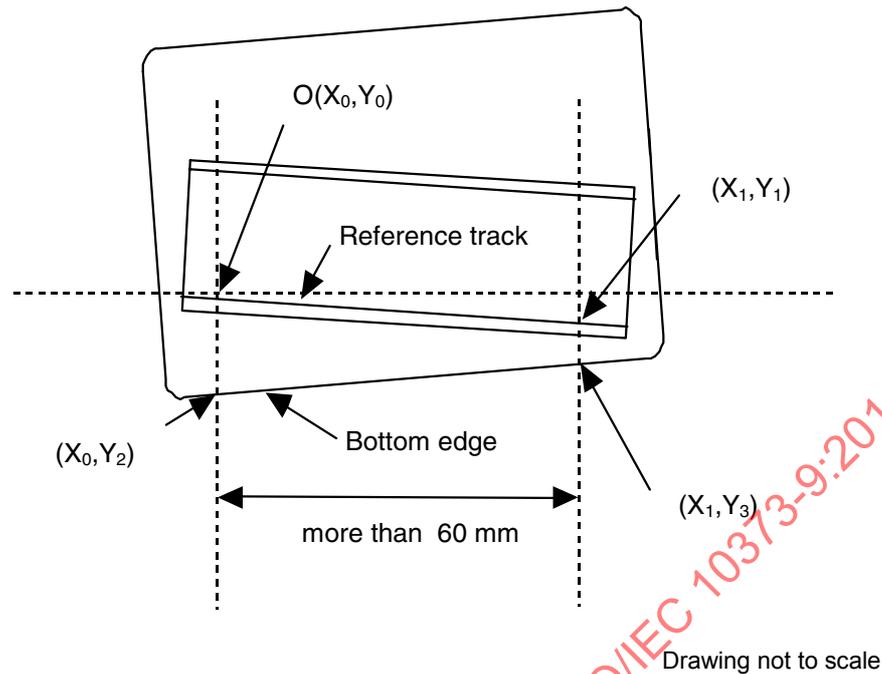


Figure 3 — Procedure for the skew measurement

5.2.3 Test report

The test report shall give the value of the angle measured.

5.3 Hologram size

The hologram size is not fixed, but shall be left to each industry user group to specify for those applications requiring interchange. Refer to ISO/IEC 11695-2.

5.3.1 Apparatus for hologram size measurement

The hologram size shall be measured with a microscope.

5.3.2 Procedure for hologram size measurement

The hologram size shall be measured using a microscope.

5.3.3 Test report

The test report shall give the hologram size measured.

5.4 Arrangement of multiple holograms

The optical area can contain data in form of one or more holograms. The location of the reference hologram is at location X , Y relative to the reference edges of the card, while additional holograms are arranged on the reference track or on tracks parallel to the reference track; see Figure 1 and Figure 4. Refer also to ISO/IEC 11695-2.

A minimum distance between the holograms has to be considered to avoid crosstalk from neighbouring holograms when reading out one hologram. The distance (d_x , d_y) depends on the size of holograms; refer to ISO/IEC 11695-2.

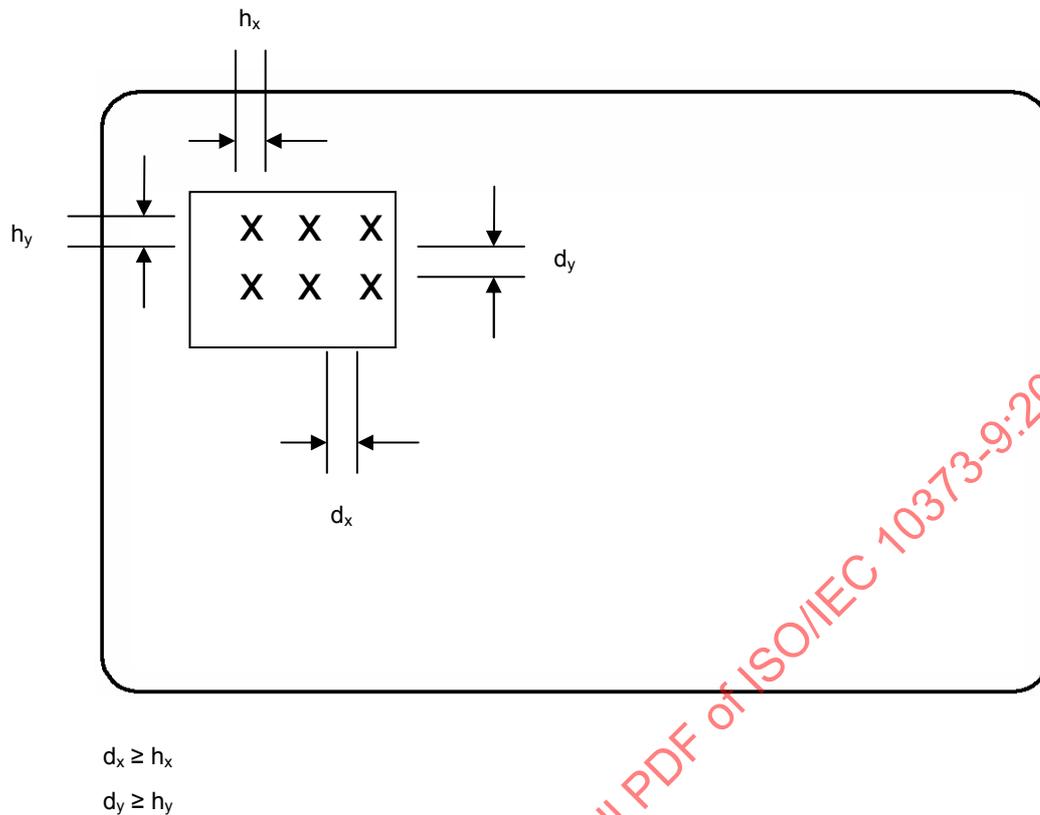


Figure 4 — Arrangement of multiple holograms

5.4.1 Apparatus for measuring the arrangement of multiple holograms

The location of the reference hologram size as well as the position relative to the reference hologram shall be measured with a microscope.

5.4.2 Procedure for measuring the arrangement of multiple holograms

For measuring the hologram size a microscope shall be used.

In a first step the position of the reference hologram is measured in relation to the reference edges.

In a second step the position and size of the corresponding holograms is measured.

5.4.3 Test report

The test report shall give the position of the reference hologram as well as the position of the other holograms relative to the reference hologram.

5.5 Optical properties of the media

For testing the holographic memory card, diffraction gratings recorded in the storage layer shall be measured in reference to ISO/IEC 11695-3.