

---

---

**Identification cards — Optical memory  
cards — Linear recording method —**

Part 3:

**Optical properties and characteristics**

*Cartes d'identification — Cartes à mémoire optique — Méthode  
d'enregistrement linéaire —*

*Partie 3: Propriétés et caractéristiques optiques*

IECNORM.COM : Click to view the full PDF of ISO/IEC 11694-3:2008

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11694-3:2008



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any of all such patent rights.

ISO/IEC 11694-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information Technology*, Subcommittee SC 17, *Cards and personal identification*.

This third edition cancels and replaces the second edition (ISO/IEC 11694-3:2001), which has been technically revised.

ISO/IEC 11694 consists of the following parts, under the general title *Identification cards — Optical memory cards — Linear recording method*:

- *Part 1: Physical characteristics*
- *Part 2: Dimensions and location of the accessible optical area*
- *Part 3: Optical properties and characteristics*
- *Part 4: Logical data structures*
- *Part 5: Data format for information interchange for applications using ISO/IEC 11694-4, Annex B*
- *Part 6: Use of biometrics on an optical memory card*

## Introduction

This part of ISO/IEC 11694 is one of a series of standards specifying the parameters for optical memory cards and the use of such cards for the storage and interchange of digital data.

The standards recognize the existence of different methods for recording and reading information on optical memory cards, the characteristics of which are specific to the recording method employed. In general, these different recording methods will not be compatible with each other. Therefore, the standards are structured to accommodate the inclusion of existing and future recording methods in a consistent manner.

This part of ISO/IEC 11694 is specific to optical memory cards using the linear recording method. Characteristics which apply to other specific recording methods are specified in separate standards documents.

This part of ISO/IEC 11694 defines the optical properties and characteristics and the extent of compliance with, addition to, and/or deviation from the relevant base document, ISO/IEC 11693.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11694-3:2008

# Identification cards — Optical memory cards — Linear recording method —

## Part 3: Optical properties and characteristics

### 1 Scope

This part of ISO/IEC 11694 specifies the optical properties and characteristics of optical memory cards using the linear recording method.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11693, *Identification cards — Optical memory cards — General characteristics*

ISO/IEC 11694-4, *Identification cards — Optical memory cards — Linear recording method — Part 4: Logical data structures*

ISO/IEC 10373-5, *Identification cards — Test methods — Part 5: Optical memory cards*

### 3 Reading/writing test conditions

#### 3.1 Test methods


The test methods specified in ISO/IEC 10373-5 apply.

#### 3.2 Default test environment and conditioning

The default test environment and conditioning parameters specified in ISO/IEC 11693 apply.

### 4 Optical characteristics

These characteristics are expected to be achieved under the test conditions defined in ISO/IEC 10373-5. If test conditions change then the optical characteristics specified herein will change. Refer to Figure 1 for a definition of the parameters to be measured.

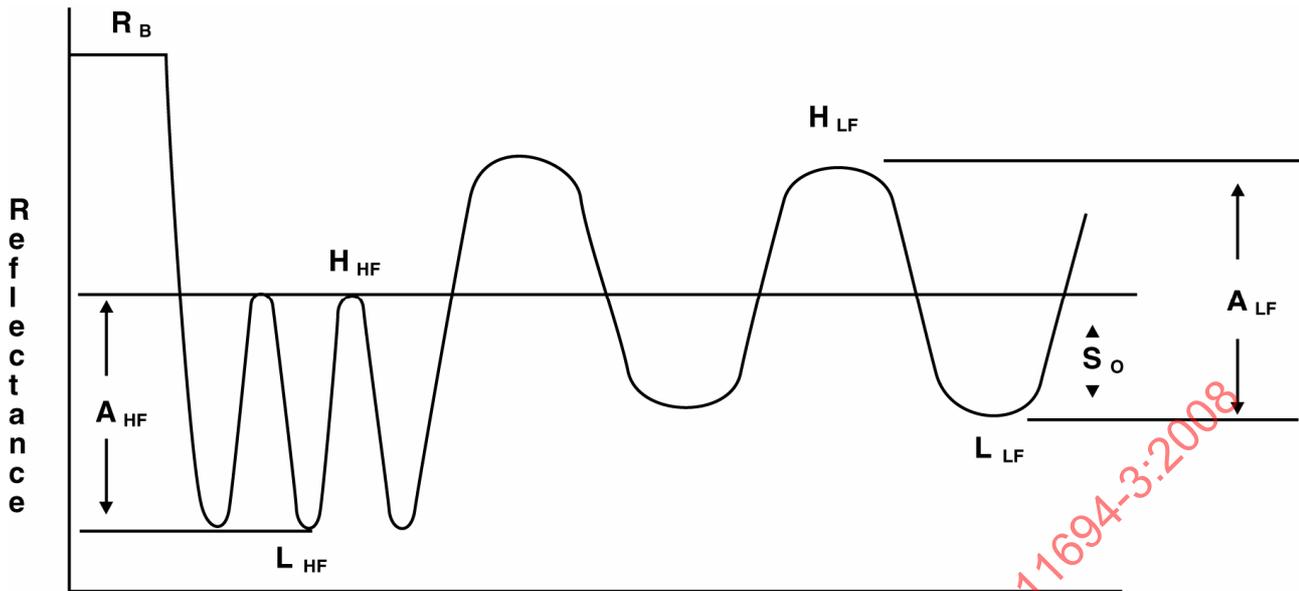

NOTE 1 Low frequency recovery — the high reflectance value of the low frequency data pattern ( $H_{LF}$ ) divided by the background reflectance ( $R_B$ ).

NOTE 2 Amplitude comparison — the high frequency amplitude ( $A_{HF}$ ) divided by the low frequency amplitude ( $A_{LF}$ ).

NOTE 3 High frequency amplitude ( $A_{HF}$ ) — the high reflectance value of the high frequency data pattern ( $H_{HF}$ ) minus the low reflectance value of the high frequency data pattern ( $L_{HF}$ ).

NOTE 4 Low frequency amplitude ( $A_{LF}$ ) — the high reflectance value of the low frequency data pattern ( $H_{LF}$ ) minus the low reflectance value of the low frequency data pattern ( $L_{LF}$ ).

NOTE 5 Signal overlap ( $S_O$ ) — the high reflectance value of the high frequency data pattern ( $H_{HF}$ ) minus the low reflectance value of the low frequency data pattern ( $L_{LF}$ ).

Figure 1 — Contrast parameters

#### 4.1 Minimum performance characteristics

The values contained in this subclause represent the minimum acceptable levels for interchange purposes. Therefore, they represent characteristics that optical cards shall meet or surpass during their *useful life*, exclusive of physical damage to the card.

NOTE Useful life can be defined differently from application to application and therefore is left to the card manufacturer and the card issuer to properly define for their particular implementation.

##### 4.1.1 Background reflectivity

The reflectivity of the area measured midway between adjacent track guides shall be between 27 % and 68 %. The reflectivity within one card shall not vary more than 10 % relative to the mean value.

##### 4.1.2 Track guide contrast

The contrast of preformatted track guides, measured when scanning perpendicular to the guides, shall have a minimum contrast of 0,3 when compared to the measured background signal level.

NOTE Track guide contrast is the background signal level minus the track guide signal level divided by the background signal level.

#### 4.1.3 Written or preformatted data contrast

Written or preformatted data bits shall have a minimum contrast of 0,3 when compared to the measured background signal level.

NOTE Written data contrast is the background signal level minus the written data signal level divided by the background signal level.

#### 4.1.4 Card surface reflectivity

The reflectivity at the entry face of the data side of the card shall be less than or equal to 7 %.

### 4.2 Preformatted data characteristics

To ensure compatibility, the values for low frequency recovery, amplitude comparison, and signal overlap ( $S_O$ ) divided by high frequency amplitude ( $A_{HF}$ ), shall all be verifiable when scanning a portion of the accessible optical area containing preformatted data.

The actual values shall be as specified in ISO/IEC 11694-4.

### 4.3 Written data characteristics

To ensure compatibility, the values for low frequency recovery, amplitude comparison, and signal overlap ( $S_O$ ) divided by high frequency amplitude ( $A_{HF}$ ), shall all be verifiable when scanning a portion of the accessible optical area containing written data.

The actual values shall be as specified in ISO/IEC 11694-4.

### 4.4 Optical path length

The optical path length shall be in the range of 1,036 mm to 1,431 mm and the variation shall not exceed  $\pm 15$  % in any single card, or in cards of different lots.

### 4.5 Optical retardation

The variation in optical retardation through the transparent layer from card to card and within a card is not specified in this part of ISO/IEC 11694.

## 5 Reading characteristics

The card shall be subjected to 10 000 successive read passes in the same region within the accessible optical area. The orientation of the card shall then be changed by  $90^\circ$  and the reflectivity of that region examined. The relative change in reflectivity shall not exceed  $\pm 10$  %.

## 6 Defects

These defect criteria apply unless other specific defect criteria are specified in ISO/IEC 11694-4.

Definition: a defect is any anomaly located within the accessible optical area whose cross-section exceeds  $2,5 \mu\text{m}$ . It is assumed that defects are nominally circular in their cross-section.

NOTE Both drop-ins and drop-outs are considered defects.

## 6.1 Density

The raw uncorrected defect ratio within the entire accessible optical area shall be less than  $5,0 \times 10^{-4}$ .

## 6.2 Transparent layer

The transparent layer shall have no defects whose cross-section exceeds 100  $\mu\text{m}$ .

IECNORM.COM : Click to view the full PDF of ISO/IEC 11694-3:2008