
**Identification cards — Contactless
integrated circuit cards — Proximity
cards —**

**Part 1:
Physical characteristics**

*Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact —
Cartes de proximité —*

Partie 1: Caractéristiques physiques

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-1:2008

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-1:2008



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Physical characteristics	2
4.1 General	2
4.2 Antenna	2
4.3 Additional requirements for PICC classes	2
4.4 Alternating magnetic field	2
Annex A (normative) PICC class definitions	3
A.1 “Class 1”	3
A.1.1 Antenna location	3
A.1.2 Electrical requirement	3
Annex B (informative) Standards compatibility	4

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-1:2008

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 14443-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

This second edition cancels and replaces the first edition (ISO/IEC 14443-1:2000), which has been technically revised.

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit cards — Proximity cards*:

- *Part 1: Physical characteristics*
- *Part 2: Radio frequency power and signal interface*
- *Part 3: Initialization and anticollision*
- *Part 4: Transmission protocol*

Introduction

Contactless card standards encompass a variety of types as embodied in ISO/IEC 10536 (close-coupled cards), ISO/IEC 14443 (proximity cards) and ISO/IEC 15693 (vicinity cards). These device types are intended, respectively, for operation when very near, nearby and at a longer distance from associated coupling devices.

ISO/IEC 14443 defines the technology-specific requirements for identification cards conforming to ISO/IEC 7810 and thin flexible cards conforming to ISO/IEC 15457-1 and the use of such cards to facilitate international interchange. However, it also recognises that the technology offers the possibility that proximity objects may be provided in forms other than that of the International Standard card formats. Furthermore, it does not preclude the incorporation of other standard technologies on the card, such as those referenced in the informative Annex B.

ISO/IEC 14443 accommodates the operation of proximity cards in the presence of other contactless cards conforming to ISO/IEC 10536 and ISO/IEC 15693.

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-1:2008

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-1:2008

Identification cards — Contactless integrated circuit cards — Proximity cards —

Part 1: Physical characteristics

1 Scope

This part of ISO/IEC 14443 defines the physical characteristics of proximity cards (PICCs).

It is to be used in conjunction with other parts of ISO/IEC 14443.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7810, *Identification cards — Physical characteristics*

ISO/IEC 10373-6, *Identification cards — Test methods — Part 6: Proximity cards*

ISO/IEC 15457-1, *Identification cards — Thin flexible cards — Part 1: Physical characteristics*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 7810, ISO/IEC 15457-1 and the following apply.

3.1 integrated circuit IC

electronic component designed to perform processing and/or memory functions

3.2 contactless

pertaining to the achievement of signal exchange with, and supply of power to, the card without the use of galvanic elements (i.e. the absence of an ohmic path from the external interfacing equipment to the integrated circuit(s) contained within the card)

3.3 contactless integrated circuit card

card into which integrated circuit and coupling means have been placed, such that communication to such integrated circuit is done in a contactless manner

3.4
operate as intended

operates in the manner described by the manufacturer's specification in accordance with ISO/IEC 14443

3.5
PICC

contactless integrated circuit card or other object with which communication and power transfer are done by inductive coupling in proximity of a coupling device

NOTE Commonly called a proximity card.

3.6
PICC class

combination of antenna dimension and loading effect

NOTE See Annex A.

4 Physical characteristics

4.1 General

The PICC may be in the form of a card compliant with ISO/IEC 7810 or ISO/IEC 15457-1, or an object of any other dimension.

4.2 Antenna

If the PICC dimensions are not compliant with ISO/IEC 7810 or ISO/IEC 15457-1, the dimensions of the PICC antenna shall not exceed 86 mm × 54 mm × 3 mm.

NOTE This antenna size restriction stems from the fact that the radio frequency power and signal interface defined in ISO/IEC 14443-2 and its test methods in ISO/IEC 10373-6 are based on ID-1 cards.

4.3 Additional requirements for PICC classes

It has been established that the use of a prescribed PICC class within an industry sector may enhance interoperability within that sector. The use of a PICC class is optional. If used, PICCs shall comply with the requirements given in Annex A.

4.4 Alternating magnetic field

The PICC, whichever form the PICC has according to 4.1, shall continue to operate as intended after continuous exposure to a magnetic field of an average level of 10 A/m rms at 13,56 MHz. The averaging time is 30 seconds and the maximum level of the magnetic field is limited to 12 A/m rms.

Annex A (normative)

PICC class definitions

A.1 “Class 1”

A “Class 1” PICC shall fulfil the requirements in A.1.1 and A.1.2.

A.1.1 Antenna location

The antenna of a “Class 1” PICC shall be located within a zone defined by two rectangles, as shown in Figure A.1:

- external rectangle: 81 mm × 49 mm;
- internal rectangle: 64 mm × 34 mm, centred in the external rectangle, with 3 mm corner radii, except for the connections to the ends of the antenna coil, with a maximum area of 300 mm².

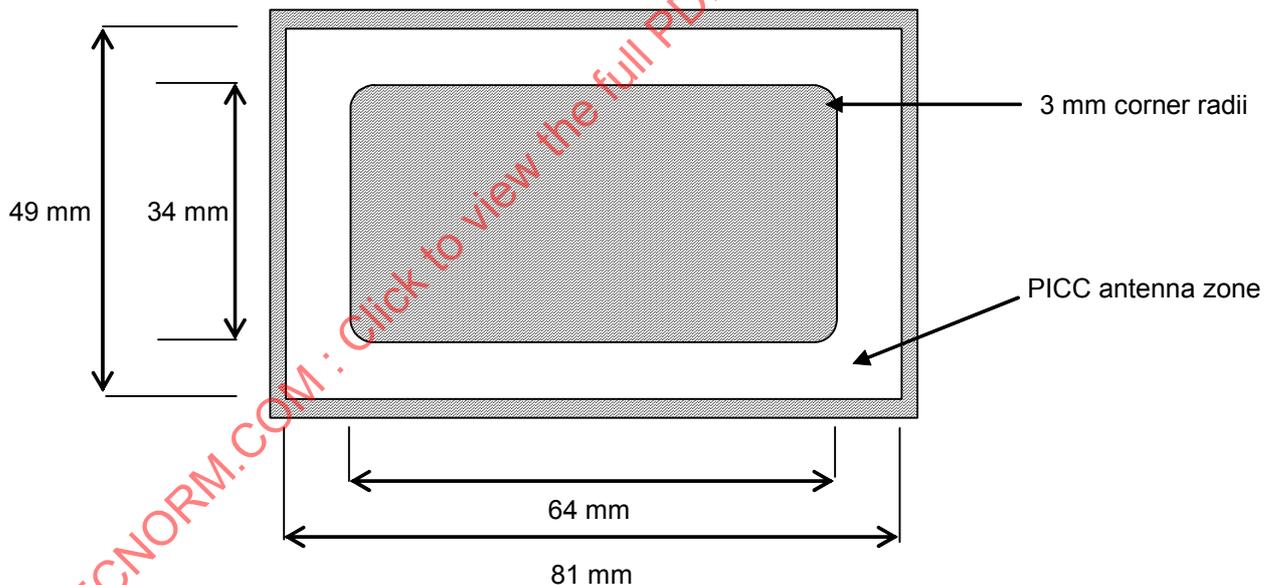


Figure A.1 — Location of the antenna of the “Class 1” PICC

A.1.2 Electrical requirement

The “Class 1” PICC shall also be testably functional after subjecting the PICC to maximum loading effect as defined in ISO/IEC 10373-6.