

---

---

**Identification cards — Contactless  
integrated circuit cards — Proximity  
cards —**

**Part 2:  
Radio frequency power and signal  
interface**

**AMENDMENT 1: Limits of electromagnetic  
disturbance levels parasitically generated by  
the PICC**

*Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact —  
Cartes de proximité —*

*Partie 2: Interface radiofréquence et des signaux de communication*

*AMENDEMENT 1: Limites des niveaux de perturbations  
électromagnétiques générées de façon parasite par la PICC*

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-2:2010/AMD1:2011



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO/IEC 14443-2:2010 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-2:2010/Amd.1:2011

IECNORM.COM : Click to view the full PDF of ISO/IEC 14443-2:2010/AMD1:2017

# Identification cards — Contactless integrated circuit cards — Proximity cards —

## Part 2: Radio frequency power and signal interface

### AMENDMENT 1: Limits of electromagnetic disturbance levels parasitically generated by the PICC

Page 2, Clause 4

Insert the following new symbols and abbreviated terms:

EMD     electromagnetic disturbance, parasitically generated by the PICC

$V_{E,PICC}$      EMD limit, PICC

$V_{E,PCD}$      EMD limit, PCD

Page 24

Insert the following new clause after 9.2.5:

## 10 Electromagnetic disturbance levels

### 10.1 PCD limits

The PCD shall not detect any load modulation amplitude below  $V_{E,PCD}$  at a field strength  $H$  [A/m (rms)], when measured as specified in ISO/IEC 10373-6:2011/Amd.2.

$V_{E,PCD}$  is:

—  $2/3 + 3/H^2$  [mV (peak)] for  $H_{\min} \leq H \leq 4,5$  A/m (rms)

— 0,81 mV (peak) for  $4,5$  A/m (rms)  $< H \leq H_{\max}$

**WARNING — This limit is referenced to "Class 1" only and may be detrimental to communication with PICCs of the other classes. Values for other classes will be specified in the future.**

### 10.2 PICC limits

This EMD requirement is applicable for "Class 1" PICC only.

**WARNING — Requirements for the classes other than "Class 1" will be specified in the future. However, the PICC limit for "Class 1" may ultimately be applied to "Class 2" and "Class 3" PICCs.**

The EMD level before PICC data transmission shall be below  $V_{E,PICC}$  at a field strength  $H$  [A/m (rms)], for at least the duration of the low EMD time  $t_{E,PICC}$ , when measured as specified in ISO/IEC 10373-6:2011/Amd.2.

$V_{E,PICC}$  for "Class 1" PICC is:

- $2/3 + 3/H^2$  [mV (peak)] for  $H_{min} \leq H \leq 4,5$  A/m (rms)
- 0,81 mV (peak) for  $4,5$  A/m (rms)  $< H \leq H_{max}$

During this low EMD time, the EMD level may exceed  $V_{E,PICC}$  for no more than two short periods of  $16/fc$  if:

- it never exceeds  $4 \times V_{E,PICC}$  and
- in case of two periods, the time between the two periods is greater than 1 etu.

Figure 18 shows an illustration of such allowed EMD spikes.

NOTE The low EMD time  $t_{E,PICC}$  is defined in ISO/IEC 14443-3:2011/Amd.1.

**WARNING** — This limit is referenced to "Class 1" only and values for the other classes may be specified in the future.

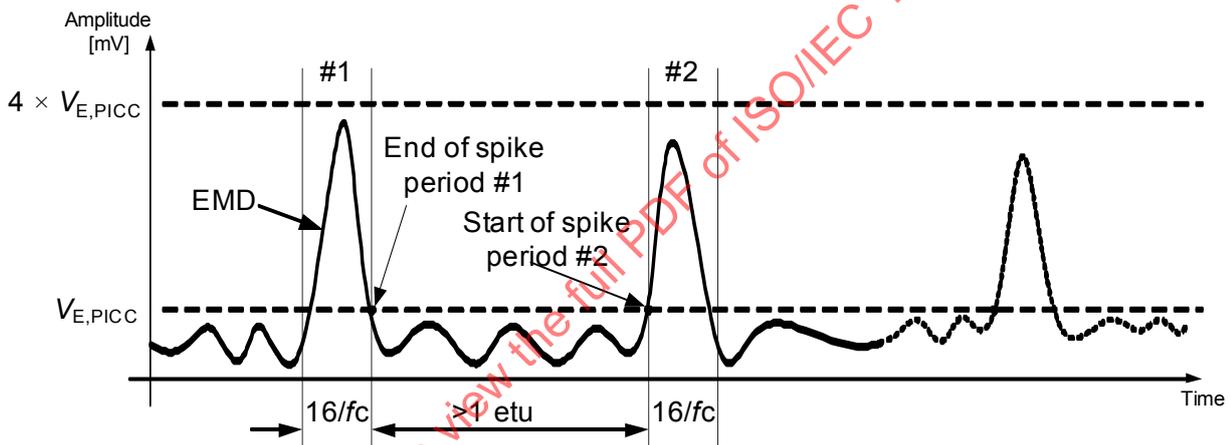


Figure 18 — Illustration of allowed EMD spikes