
**Information technology — JPEG 2000
image coding system —**

**Part 1:
Core coding system**

*Technologies de l'information — Système de codage d'image
JPEG 2000 —*

Partie 1: Système de codage de noyau

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

© ISO/IEC 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Published by ISO in 2001

Printed in Switzerland

CONTENTS

| | | |
|---------|--|-----|
| | Foreword | xii |
| 1 | Scope | 1 |
| 2 | References | 1 |
| 3 | Definitions | 2 |
| 4 | Abbreviations and symbols | 7 |
| | 4.1 Abbreviations | 7 |
| | 4.2 Symbols | 7 |
| 5 | General description | 8 |
| | 5.1 Purpose | 9 |
| | 5.2 Codestream | 9 |
| | 5.3 Coding principles | 9 |
| 6 | Encoder requirements | 11 |
| 7 | Decoder requirements | 11 |
| | 7.1 Codestream syntax requirements | 12 |
| | 7.2 Optional file format requirements | 12 |
| 8 | Implementation requirements | 12 |
| Annex A | Codestream syntax | 13 |
| | A.1 Markers, marker segments, and headers | 13 |
| | A.2 Information in the marker segments | 15 |
| | A.3 Construction of the codestream | 16 |
| | A.4 Delimiting markers and marker segments | 21 |
| | A.5 Fixed information marker segment | 26 |
| | A.6 Functional marker segments | 29 |
| | A.7 Pointer marker segments | 44 |
| | A.8 In bit stream marker and marker segments | 52 |
| | A.9 Informational marker segments | 54 |
| Annex B | Image and compressed image data ordering | 57 |
| | B.1 Introduction to image data structure concepts | 57 |
| | B.2 Component mapping to the reference grid | 57 |
| | B.3 Image area division into tiles and tile-components | 58 |
| | B.4 Example of the mapping of components to the reference grid (informative) | 60 |
| | B.5 Transformed tile-component division into resolution levels and subbands | 62 |
| | B.6 Division of resolution levels into precincts | 64 |
| | B.7 Division of the subbands into code-blocks | 65 |
| | B.8 Layers | 65 |
| | B.9 Packets | 65 |
| | B.10 Packet header information coding | 68 |

| | | | |
|---------|------|--|-----|
| | B.11 | Tile and tile-parts | 72 |
| | B.12 | Progression order | 75 |
| Annex C | | Arithmetic entropy coding | 79 |
| | C.1 | Binary encoding (informative) | 79 |
| | C.2 | Description of the arithmetic encoder (informative) | 80 |
| | C.3 | Arithmetic decoding procedure | 91 |
| Annex D | | Coefficient bit modeling | 99 |
| | D.1 | Code-block scan pattern within code-blocks | 99 |
| | D.2 | Coefficient bits and significance | 99 |
| | D.3 | Decoding passes over the bit-planes | 100 |
| | D.4 | Initializing and terminating | 103 |
| | D.5 | Error resilience segmentation symbol | 106 |
| | D.6 | Selective arithmetic coding bypass | 106 |
| | D.7 | Vertically causal context formation | 108 |
| | D.8 | Flow diagram of the code-block coding | 108 |
| Annex E | | Quantization | 111 |
| | E.1 | Inverse quantization procedure | 111 |
| | E.2 | Scalar coefficient quantization (informative) | 113 |
| Annex F | | Discrete wavelet transformation of tile-components | 115 |
| | F.1 | Tile-component parameters | 115 |
| | F.2 | Discrete wavelet transformations | 115 |
| | F.3 | Inverse discrete wavelet transformation | 115 |
| | F.4 | Forward transformation (informative) | 125 |
| Annex G | | DC level shifting and multiple component transformations | 135 |
| | G.1 | DC level shifting of tile-components | 135 |
| | G.2 | Reversible multiple component transformation (RCT) | 136 |
| | G.3 | Irreversible multiple component transformation (ICT) | 136 |
| | G.4 | Chrominance component sub-sampling and the reference grid | 137 |
| Annex H | | Coding of images with regions of interest | 139 |
| | H.1 | Decoding of ROI | 139 |
| | H.2 | Description of the Maxshift method | 139 |
| | H.3 | Remarks on region of interest coding (informative) | 140 |
| Annex I | | JP2 file format syntax | 145 |
| | I.1 | File format scope | 145 |
| | I.2 | Introduction to the JP2 file format | 145 |
| | I.3 | Greyscale/Colour/Palettized/multi-component specification architecture | 148 |
| | I.4 | Box definition | 150 |
| | I.5 | Defined boxes | 154 |
| | I.6 | Adding intellectual property rights information in JP2 | 176 |

| | | | |
|---------|------|---|-----|
| | I.7 | Adding vendor specific information to the JP2 file format | 176 |
| | I.8 | Dealing with unknown boxes. | 181 |
| Annex J | | Examples and guidelines. | 183 |
| | J.1 | Software conventions adaptive entropy decoder | 183 |
| | J.2 | Selection of quantization step sizes for irreversible transformations. | 185 |
| | J.3 | Filter impulse responses corresponding to lifting-based irreversible filtering procedures | 186 |
| | J.4 | Example of discrete wavelet transformation | 187 |
| | J.5 | Row-based wavelet transform | 192 |
| | J.6 | Scan-based coding | 199 |
| | J.7 | Error resilience. | 199 |
| | J.8 | Compatibility requirement with JFIF/SPIFF files | 200 |
| | J.9 | Implementing the Restricted ICC method outside of a full ICC colour management engine | 200 |
| | J.10 | An example of the interpretation of multiple components. | 206 |
| | J.11 | An example of decoding showing intermediate steps | 206 |
| | J.12 | Visual frequency weighting | 211 |
| | J.13 | Encoder sub-sampling of components | 213 |
| | J.14 | Rate control | 213 |
| Annex K | | Bibliography | 219 |
| | K.1 | General | 219 |
| | K.2 | Quantization and entropy coding | 219 |
| | K.3 | Wavelet transformation | 219 |
| | K.4 | Region of interest coding | 220 |
| | K.5 | Visual frequency weighting | 220 |
| | K.6 | Error resilience. | 220 |
| | K.7 | Scan-based coding | 220 |
| | K.8 | Colour. | 220 |
| Annex L | | Patent Statement | 223 |
| | | Index | 225 |

LIST OF FIGURES

| | | |
|-------------|---|----|
| Figure 5-1 | Specification block diagram | 10 |
| Figure A-1 | Example of the marker segment description figures | 15 |
| Figure A-2 | Construction of the codestream | 18 |
| Figure A-3 | Construction of the main header | 19 |
| Figure A-4 | Construction of the first tile-part header of a given tile | 20 |
| Figure A-5 | Construction of a non-first tile-part header | 20 |
| Figure A-6 | Start of tile-part syntax | 22 |
| Figure A-7 | Image and tile size syntax | 26 |
| Figure A-8 | Coding style default syntax | 29 |
| Figure A-9 | Coding style parameter diagram of the SGcod and SPcod parameters | 31 |
| Figure A-10 | Coding style component syntax | 34 |
| Figure A-11 | Coding style parameter diagram of the SPcoc parameters | 34 |
| Figure A-12 | Region of interest syntax | 36 |
| Figure A-13 | Quantization default syntax | 38 |
| Figure A-14 | Quantization component syntax | 40 |
| Figure A-15 | Progression order change tile syntax | 42 |
| Figure A-16 | Tile-part lengths | 44 |
| Figure A-17 | Tile-part length syntax | 44 |
| Figure A-18 | Packets length, main header syntax | 46 |
| Figure A-19 | Packet length, tile-part header syntax | 48 |
| Figure A-20 | Packed packet headers, main header syntax | 49 |
| Figure A-21 | Packed packet headers, tile-part header syntax | 51 |
| Figure A-22 | Start of packet syntax | 52 |
| Figure A-23 | Component registration syntax | 54 |
| Figure A-24 | Comment syntax | 56 |
| Figure B-1 | Reference grid diagram | 58 |
| Figure B-2 | Component sample locations on the reference grid for different XRsiz and YRsiz values | 59 |
| Figure B-3 | Example of upper left component sample locations | 59 |
| Figure B-4 | Tiling of the reference grid diagram | 60 |
| Figure B-5 | Reference grid example | 61 |
| Figure B-6 | Example tile sizes and locations for component 0 | 62 |
| Figure B-7 | Example tile sizes and locations for component 1 | 63 |
| Figure B-8 | Precincts of one reduced resolution | 64 |
| Figure B-9 | Code-blocks and precincts in subband b from four different tiles | 66 |
| Figure B-10 | Diagram of precincts of one resolution level of one component | 67 |
| Figure B-11 | Diagram of code-blocks within precincts at one resolution level | 67 |
| Figure B-12 | Example of a tag tree representation | 69 |
| Figure B-13 | Example of the information known to the encoder | 72 |
| Figure B-14 | Example of progression order volume in two dimensions | 77 |
| Figure B-15 | Example of the placement of POC marker segments | 78 |
| Figure C-1 | Arithmetic encoder inputs and outputs | 79 |
| Figure C-2 | Encoder for the MQ-coder | 81 |
| Figure C-3 | ENCODE procedure | 82 |
| Figure C-4 | CODE1 procedure | 82 |

| | | |
|-------------|--|-----|
| Figure C-5 | CODE0 procedure | 82 |
| Figure C-6 | CODELPS procedure with conditional MPS/LPS exchange | 83 |
| Figure C-7 | CODEMPS procedure with conditional MPS/LPS exchange | 86 |
| Figure C-8 | Encoder renormalisation procedure | 87 |
| Figure C-9 | BYTEOUT procedure for encoder | 88 |
| Figure C-10 | Initialisation of the encoder | 89 |
| Figure C-11 | FLUSH procedure | 90 |
| Figure C-12 | Setting the final bits in the C register | 91 |
| Figure C-13 | Arithmetic decoder inputs and outputs | 91 |
| Figure C-14 | Decoder for the MQ-coder | 92 |
| Figure C-15 | Decoding an MPS or an LPS | 93 |
| Figure C-16 | Decoder MPS path conditional exchange procedure | 94 |
| Figure C-17 | Decoder LPS path conditional exchange procedure | 95 |
| Figure C-18 | Decoder renormalisation procedure | 96 |
| Figure C-19 | BYTEIN procedure for decoder | 96 |
| Figure C-20 | Initialisation of the decoder | 97 |
| Figure D-1 | Example scan pattern of a code-block bit-plane | 99 |
| Figure D-2 | Neighbors states used to form the context | 100 |
| Figure D-3 | Flow chart for all coding passes on a code-block bit-plane | 110 |
| Figure F-1 | Inputs and outputs of the IDWT procedure | 116 |
| Figure F-2 | The IDWT (NL=2) | 116 |
| Figure F-3 | The IDWT Procedure | 117 |
| Figure F-4 | Inputs and outputs of the 2D_SR procedure | 117 |
| Figure F-5 | One level of reconstruction from four subbands (2D_SR procedure) into subbands | 117 |
| Figure F-6 | The 2D_SR procedure | 118 |
| Figure F-7 | Parameters of 2D_INTERLEAVE procedure | 118 |
| Figure F-8 | The 2D_INTERLEAVE procedure | 119 |
| Figure F-9 | Inputs and outputs of the HOR_SR procedure | 119 |
| Figure F-10 | The HOR_SR procedure | 120 |
| Figure F-11 | Inputs and outputs of the VER_SR procedure | 120 |
| Figure F-12 | The VER_SR procedure | 121 |
| Figure F-13 | Parameters of the 1D_SR procedure | 121 |
| Figure F-14 | The 1D_SR procedure | 122 |
| Figure F-15 | Periodic symmetric extension of signal | 122 |
| Figure F-16 | Parameters of the 1D_FILTR procedure | 123 |
| Figure F-17 | Inputs and outputs of the FDWT procedure | 125 |
| Figure F-18 | The FDWT (NL=2) | 126 |
| Figure F-19 | The FDWT procedure | 126 |
| Figure F-20 | Inputs and outputs of the 2D_SD procedure | 127 |
| Figure F-21 | One-level decomposition into four subbands (2D_SD procedure) | 127 |
| Figure F-22 | The 2D_SD procedure | 127 |
| Figure F-23 | Inputs and outputs of the VER_SD procedure | 128 |
| Figure F-24 | The VER_SD procedure | 128 |
| Figure F-25 | Inputs and outputs of the HOR_SD procedure | 128 |
| Figure F-26 | The HOR_SD procedure | 129 |
| Figure F-27 | Parameters of 2D_DEINTERLEAVE procedure | 129 |

| | | |
|-------------|--|-----|
| Figure F-28 | The 2D_DEINTERLEAVE procedure | 130 |
| Figure F-29 | Parameters of the 1D_SD procedure | 130 |
| Figure F-30 | The 1D_SD procedure | 131 |
| Figure F-31 | Parameters of the 1D_FILTD procedure | 131 |
| Figure G-1 | Placement of the DC level shifting with component transformation | 135 |
| Figure G-2 | Placement of the DC level shifting without component transformation | 135 |
| Figure H-1 | The inverse wavelet transformation with the 5-3 reversible filter | 141 |
| Figure H-2 | The inverse wavelet transformation with the 9-7 irreversible filter | 142 |
| Figure I-1 | Conceptual structure of a JP2 file | 146 |
| Figure I-2 | Example of the box description figures | 149 |
| Figure I-3 | Example of the superbox description figures | 150 |
| Figure I-4 | Organization of a Box | 150 |
| Figure I-5 | Illustration of box lengths | 151 |
| Figure I-6 | Organization of the contents of a File Type box | 155 |
| Figure I-7 | Organization of the contents of a JP2 Header box | 157 |
| Figure I-8 | Organization of the contents of an Image Header box | 158 |
| Figure I-9 | Organization of the contents of a Bits Per Component box | 160 |
| Figure I-10 | Organization of the contents of a Colour Specification box | 161 |
| Figure I-11 | Organization of the contents of the Palette box | 164 |
| Figure I-12 | Organization of the contents of a Channel Definition box | 166 |
| Figure I-13 | Organization of the contents of a Channel Definition box | 167 |
| Figure I-14 | Organization of the contents of the Resolution box | 170 |
| Figure I-15 | Organization of the contents of the Capture Resolution box | 171 |
| Figure I-16 | Organization of the contents of the Default Display Resolution box | 173 |
| Figure I-17 | Organization of the contents of the Contiguous Codestream box | 175 |
| Figure I-18 | Organization of the contents of the XML box | 176 |
| Figure I-19 | Organization of the contents of the UUID box | 177 |
| Figure I-20 | Organization of the contents of a UUID Info box | 178 |
| Figure I-21 | Organization of the contents of a UUID List box | 179 |
| Figure I-22 | Organization of the contents of a Data Entry URL box | 180 |
| Figure J-1 | Initialisation of the software-conventions decoder | 183 |
| Figure J-2 | Decoding an MPS or an LPS in the software-conventions decoder | 184 |
| Figure J-3 | Inserting a new byte into the C register in the software-conventions decoder | 185 |
| Figure J-4 | The FDWT_ROW procedure | 193 |
| Figure J-5 | The GET_ROW procedure | 194 |
| Figure J-6 | The INIT procedure | 194 |
| Figure J-7 | The START_VERT procedure | 195 |
| Figure J-8 | The RB_VERT_1 procedure | 195 |
| Figure J-9 | The RB_VERT_2 procedure | 196 |
| Figure J-10 | The END_1 procedure | 197 |
| Figure J-11 | The END_2 procedure | 198 |
| Figure J-12 | Illustration of code-block contributions to bit-stream layers | 215 |

LIST OF TABLES

| | | |
|------------|--|----|
| Table A-1 | Marker definitions | 14 |
| Table A-2 | List of markers and marker segments | 15 |
| Table A-3 | Information in the marker segments | 17 |
| Table A-4 | Start of codestream parameter values | 21 |
| Table A-5 | Start of tile-part parameter values | 22 |
| Table A-6 | Number of tile-parts, TNsot, parameter value | 23 |
| Table A-7 | Start of data parameter values | 24 |
| Table A-8 | End of codestream parameter values | 25 |
| Table A-9 | Image and tile size parameter values | 27 |
| Table A-10 | Capability Rsiz parameter | 27 |
| Table A-11 | Component Ssiz parameter | 28 |
| Table A-12 | Coding style default parameter values | 30 |
| Table A-13 | Coding style parameter values for the Scod parameter | 30 |
| Table A-14 | Coding style parameter values of the SGcod parameter | 30 |
| Table A-16 | Progression order for the SPcod, SPcoc, and Ppoc parameters | 31 |
| Table A-15 | Coding style parameter values of the SPcod and SPcoc parameters | 31 |
| Table A-17 | Multiple component transformation for the SPcod parameters | 32 |
| Table A-18 | Width or height exponent of the code-blocks for the SPcod and SPcoc parameters | 32 |
| Table A-19 | Code-block style for the SPcod and SPcoc parameters | 32 |
| Table A-20 | Transformation for the SPcod and SPcoc parameters | 33 |
| Table A-21 | Precinct width and height for the SPcod and SPcoc parameters | 33 |
| Table A-22 | Coding style component parameter values | 35 |
| Table A-23 | Coding style parameter values for the Scoc parameter | 35 |
| Table A-24 | Region of interest parameter values | 36 |
| Table A-25 | Region-of-interest parameter values for the Srgn parameter | 36 |
| Table A-26 | Region-of-interest values from SPRgn parameter (Srgn = 0) | 37 |
| Table A-27 | Quantization default parameter values | 39 |
| Table A-28 | Quantization default values for the Sqcd and Sqcc parameters | 39 |
| Table A-29 | Reversible step size values for the SPqcd and SPqcc parameters (reversible transform only) | 39 |
| Table A-30 | Quantization values for the SPqcd and SPqcc parameters (irreversible transformation only) | 39 |
| Table A-31 | Quantization component parameter values | 41 |
| Table A-32 | Progression order change, tile parameter values | 43 |
| Table A-33 | Tile-part length parameter values | 45 |
| Table A-34 | Size parameters for Stlm | 45 |
| Table A-35 | Packets length, main header parameter values | 46 |
| Table A-36 | Iplm, Iplt list of packet lengths | 47 |
| Table A-37 | Packet length, tile-part headers parameter values | 48 |
| Table A-38 | Packed packet headers, main header parameter values | 50 |
| Table A-39 | Packet header, tile-part headers parameter values | 51 |
| Table A-40 | Start of packet parameter values | 52 |
| Table A-41 | End of packet header parameter values | 53 |
| Table A-42 | Component registration parameter values | 55 |
| Table A-43 | Comment parameter values | 56 |
| Table A-44 | Registration values for the Rcom parameter | 56 |

| | | |
|------------|--|-----|
| Table B-1 | Quantities (x_{0b}, y_{0b}) for subband b | 64 |
| Table B-2 | Example of layer formation (only one component shown) | 66 |
| Table B-3 | Example of packet formation | 68 |
| Table B-4 | Codewords for the number of coding passes for each code-block | 70 |
| Table B-5 | Example packet header bit stream | 73 |
| Table C-1 | Encoder register structures | 80 |
| Table C-2 | Q_e values and probability estimation | 83 |
| Table C-3 | Decoder register structures | 92 |
| Table D-1 | Contexts for the significance propagation and cleanup coding passes | 101 |
| Table D-2 | Contributions of the vertical (and the horizontal) neighbors to the sign context | 102 |
| Table D-3 | Sign contexts from the vertical and horizontal contributions | 102 |
| Table D-4 | Contexts for the magnitude refinement coding passes | 103 |
| Table D-5 | Run-length decoder for cleanup passes | 104 |
| Table D-6 | Example of sub-bit-plane coding order and significance propagation | 104 |
| Table D-7 | Initial states for all contexts | 105 |
| Table D-8 | Arithmetic coder termination patterns | 105 |
| Table D-9 | Selective arithmetic coding bypass | 107 |
| Table D-10 | Decisions in the context model flow chart | 109 |
| Table D-11 | Decoding in the context model flow chart | 109 |
| Table E-1 | Subband gains | 112 |
| Table F-1 | Decomposition level n_b for subband b | 116 |
| Table F-2 | Extension to the left | 122 |
| Table F-3 | Extension to the right | 122 |
| Table F-4 | Definition of lifting parameters for the 9-7 irreversible filter | 124 |
| Table F-5 | Definition of coefficients g_n | 124 |
| Table F-6 | Intermediate expressions (r_0, r_1, s_0, t_0) | 125 |
| Table F-7 | Intermediate expressions | 125 |
| Table F-8 | Extension to the left | 131 |
| Table F-9 | Extension to the right | 131 |
| Table I-1 | Binary structure of a box | 151 |
| Table I-2 | Defined boxes | 151 |
| Table I-3 | Legal Brand values | 155 |
| Table I-4 | Format of the contents of the File Type box | 156 |
| Table I-5 | Format of the contents of the Image Header box | 159 |
| Table I-6 | BPC values | 159 |
| Table I-7 | Format of the contents of the Bits Per Component box | 160 |
| Table I-8 | BPC^i values | 160 |
| Table I-9 | Legal METH values | 162 |
| Table I-10 | Legal EnumCS values | 163 |
| Table I-11 | Format of the contents of the Colour Specification box | 163 |
| Table I-12 | Format of the contents of the Palette box | 164 |
| Table I-13 | B^i values | 165 |
| Table I-14 | $MTYP^i$ field values | 166 |
| Table I-15 | Format of the contents of the Component Mapping box | 166 |
| Table I-16 | Typ^i field values | 168 |
| Table I-17 | Asoci field values | 168 |

| | | |
|------------|--|-----|
| Table I-19 | Format of the Channel Definition box | 169 |
| Table I-18 | Colours indicated by the Assoc ⁱ field | 169 |
| Table I-20 | Format of the contents of the Capture Resolution box | 172 |
| Table I-21 | Format of the contents of the Default Display Resolution box | 174 |
| Table I-22 | Format of the contents of the Contiguous Codestream box | 175 |
| Table I-23 | Format of the contents of a UUID box | 177 |
| Table I-24 | UUID List box contents data structure values | 179 |
| Table I-25 | Data Entry URL box contents data structure values | 180 |
| Table J-1 | Definition of impulse responses for the 9-7 irreversible analysis filter bank | 186 |
| Table J-2 | Definition of impulse responses for the 9-7 irreversible synthesis filter band | 186 |
| Table J-3 | Source tile component samples | 187 |
| Table J-4 | 2LL subband coefficients (9-7 irreversible wavelet transformation) | 188 |
| Table J-5 | 2HL subband coefficients (9-7 irreversible wavelet transformation) | 188 |
| Table J-6 | 2LH subband coefficient (9-7 irreversible wavelet transformation) | 188 |
| Table J-7 | 2HH subband coefficients (9-7 irreversible wavelet transformation) | 188 |
| Table J-8 | 1HL subband Coefficients (9-7 irreversible wavelet transformation) | 189 |
| Table J-9 | 1LH subband coefficients (9-7 irreversible wavelet transformation) | 189 |
| Table J-11 | 2LL subband coefficients (5-3 reversible wavelet transformation) | 190 |
| Table J-12 | 2HL subband coefficients (5-3 reversible wavelet transformation) | 190 |
| Table J-10 | 1HH subband coefficients (9-7 irreversible wavelet transformation) | 190 |
| Table J-13 | 2LH subband coefficient (5-3 reversible wavelet transformation) | 191 |
| Table J-14 | 2HH subband coefficients (5-3 reversible wavelet transformation) | 191 |
| Table J-15 | 1HL subband coefficients (5-3 reversible wavelet transformation) | 191 |
| Table J-16 | 1LH subband coefficients (5-3 reversible wavelet transformation) | 192 |
| Table J-17 | 1HH subband coefficients (5-3 reversible wavelet transformation) | 192 |
| Table J-18 | Error resilience tools | 199 |
| Table J-19 | Processing tags used by a Restricted ICC profile | 201 |
| Table J-20 | Decoding first packet header | 209 |
| Table J-21 | Decoding second packet header | 209 |
| Table J-22 | Arithmetic decode of first code-block | 210 |
| Table J-23 | Arithmetic decode of second code-block | 211 |
| Table J-24 | Recommended frequency weighting | 213 |

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 15444 may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 15444-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*, in collaboration with ITU-T, but is not published as common text at this time.

ISO/IEC 15444 consists of the following parts, under the general title *Information technology — JPEG 2000 image coding system*:

- *Part 1: Core coding system*
- *Part 2: Extensions*
- *Part 3: Motion JPEG 2000*
- *Part 4: Conformance testing*
- *Part 5: Reference software*
- *Part 6: Compound image file format*

Annexes A to I form a normative part of this part of ISO/IEC 15444. Annexes J, K and L are for information only.

INFORMATION TECHNOLOGY – JPEG 2000 IMAGE CODING SYSTEM – PART 1: CORE CODING SYSTEM

1 Scope

This Recommendation | International Standard defines a set of lossless (bit-preserving) and lossy compression methods for coding bi-level, continuous-tone grey-scale, palletized color, or continuous-tone colour digital still images.

This Recommendation | International Standard

- specifies decoding processes for converting compressed image data to reconstructed image data
- specifies a codestream syntax containing information for interpreting the compressed image data
- specifies a file format
- provides guidance on encoding processes for converting source image data to compressed image data
- provides guidance on how to implement these processes in practice

2 References

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

- ITU-T Recommendation T.81 | ISO/IEC 10918-1:1994, *Information technology — Digital compression and coding of continuous-tone still images: Requirements and guidelines.*
- ITU-T Recommendation T.88 | ISO/IEC 14492, *Information technology — Lossy/lossless coding of bi-level images.*
- ISO/IEC 646:1991, *Information technology — ISO 7-bit coded character set for information interchange.*
- ISO/IEC 8859-15:1999, *Information technology — 8-bit single-byte coded graphic character sets — Part 15: Latin alphabet No. 9.*
- ITU-T Recommendation T.84 | ISO/IEC 10918-3:1997, *Information technology — Digital compression and coding of continuous-tone still images: Extensions.*
- ITU-T Recommendation T.84 | ISO/IEC 10918-3:1997/Amd.1:1999, *Information technology — Digital compression and coding of continuous-tone still images: Extensions — Amendment 1: Provisions to allow registration of new compression types and versions in the SPIFF header.*
- ITU-T Recommendation T.86 | ISO/IEC 10918-4, *Information technology — Digital compression and coding of continuous-tone still images: Registration of JPEG profiles, SPIFF profiles, SPIFF tags, SPIFF colour spaces, APPn markers, SPIFF compression types and Registration Authorities (REGAUT).*

- ITU-T Recommendation T.87 | ISO/IEC 14495-1, *Information technology — Lossless and near-lossless compression of continuous-tone still images: Baseline*.
- International Color Consortium, ICC profile format specification. ICC.1:1998–09.
- IEC 61966-2-1:1999, *Multimedia systems and equipment — Colour measurement and management — Part 2-1: Colour management — Default RGB colour space — sRGB*.
- W3C, Extensible Markup Language (XML 1.0), REC-xml-19980210.
- IETF RFC 2279, UTF-8, A transformation format of ISO 10646. January 1998.
- ISO/IEC 11578:1996, *Information technology — Open Systems Interconnection — Remote Procedure Call (RPC)*.

3 Definitions

For the purposes of this Recommendation | International Standard, the following definitions apply.

- 3.1** $\lfloor x \rfloor$, **floor function**: This indicates the largest integer not exceeding x .
- 3.2** $\lceil x \rceil$, **ceiling function**: This indicates the smallest integer not exceeded by x .
- 3.3** **5-3 reversible filter**: A particular filter pair used in the wavelet transformation. This reversible filter pair has 5 taps in the low-pass and 3 taps in the high-pass.
- 3.4** **9-7 irreversible filter**: A particular filter pair used in the wavelet transformation. This irreversible filter pair has 9 taps in the low-pass and 7 taps in the high-pass.
- 3.5** **AND**: Bit wise AND logical operator.
- 3.6** **arithmetic coder**: An entropy coder that converts variable length strings to variable length codes (encoding) and visa versa (decoding).
- 3.7** **auxiliary channel**: A channel that is used by the application outside the scope of colourspace conversion. For example, an opacity channel or a depth channel would be an auxiliary channel.
- 3.8** **bit**: A contraction of the term “binary digit”; a unit of information represented by a zero or a one.
- 3.9** **bit-plane**: A two dimensional array of bits. In this Recommendation | International Standard a bit-plane refers to all the bits of the same magnitude in all coefficients or samples. This could refer to a bit-plane in a component, tile-component, code-block, region of interest, or other.
- 3.10** **bit stream**: The actual sequence of bits resulting from the coding of a sequence of symbols. It does not include the markers or marker segments in the main and tile-part headers or the EOC marker. It does include any packet headers and in stream markers and marker segments not found within the main or tile-part headers.
- 3.11** **big endian**: The bits of a value representation occur in order from most significant to least significant.
- 3.12** **box**: A portion of the file format defined by a length and unique box type. Boxes of some types may contain other boxes.
- 3.13** **box contents**: Refers to the data wrapped within the box structure. The contents of a particular box are stored within the DBox field within the Box data structure.
- 3.14** **box type**: Specifies the kind of information that shall be stored with the box. The type of a particular box is stored within the TBox field within the Box data structure.
- 3.15** **byte**: Eight bits.
- 3.16** **channel**: One logical component of the image. A channel may be a direct representation of one component from the codestream, or may be generated by the application of a palette to a component from the codestream.
- 3.17** **cleanup pass**: A coding pass performed on a single bit-plane of a code-block of coefficients. The first pass and only coding pass for the first significant bit-plane is a cleanup pass; the third and the last pass of every remaining bit-plane is a cleanup pass.

- 3.18 codestream:** A collection of one or more bit streams and the main header, tile-part headers, and the EOC required for their decoding and expansion into image data. This is the image data in a compressed form with all of the signalling needed to decode.
- 3.19 code-block:** A rectangular grouping of coefficients from the same subband of a tile-component.
- 3.20 code-block scan:** The order in which the coefficients within a code-block are visited during a coding pass. The code-block is processed in stripes, each consisting of four rows (or all remain rows if less than four) and spanning the width of the code-block. Each stripe is processed column by column from top to bottom and from left to right.
- 3.21 coder:** An embodiment of either an encoding or decoding process.
- 3.22 coding pass:** A complete pass through a code-block where the appropriate coefficient values and context are applied. There are three types of coding passes: significance propagation pass, magnitude refinement pass and cleanup pass. The result of each pass (after arithmetic coding, if selective arithmetic coding bypass is not used) is a stream of compressed image data.
- 3.23 coefficient:** The values that are result of a transformation.
- 3.24 colour channel:** A channel that functions as an input to a colour transformation system. For example, a red channel or a greyscale channel would be a colour channel.
- 3.25 component:** A two-dimensional array of samples. A image typically consists of several components, for instance representing red, green, and blue.
- 3.26 compressed image data:** Part or all of a bit stream. Can also refer to a collection of bit streams in part or all of a codestream.
- 3.27 conforming reader:** An application that reads and interprets a JP2 file correctly.
- 3.28 context:** Function of coefficients previously decoded and used to condition the decoding of the present coefficient.
- 3.29 context label:** The arbitrary index used to distinguish different context values. The labels are used as a convenience of notation rather than being normative.
- 3.30 context vector:** The binary vector consisting of the significance states of the coefficients included in a context.
- 3.31 decoder:** An embodiment of a decoding process, and optionally a colour transformation process.
- 3.32 decoding process:** A process which takes as its input all or part of a codestream and outputs all or part of a reconstructed image.
- 3.33 decomposition level:** A collection of wavelet subbands where each coefficient has the same spatial impact or span with respect to the source component samples. These include the HL, LH, and HH subbands of the same two dimensional subband decomposition. For the last decomposition level the LL subband is also included.
- 3.34 delimiting markers and marker segments:** Markers and marker segments that give information about beginning and ending points of structures in the codestream.
- 3.35 discrete wavelet transformation (DWT):** A transformation that iteratively transforms one signal into two or more filtered and decimated signals corresponding to different frequency bands. This transformation operates on spatially discrete samples.
- 3.36 encoder:** An embodiment of an encoding process.
- 3.37 encoding process:** A process, that takes as its input all or part of a source image data and outputs a codestream.
- 3.38 file format:** A codestream and additional support data and information not explicitly required for the decoding of codestream. Examples of such support data include text fields providing titling, security and historical information, data to support placement of multiple codestreams within a given data file, and data to support exchange between platforms or conversion to other file formats.
- 3.39 fixed information markers and fixed information marker segments:** Markers and marker segments that offer information about the original image.

- 3.40 functional markers and functional marker segments:** Markers and marker segments that offer information about the coding procedures.
- 3.41 grid resolution:** The spatial resolution of the reference grid, specifying the distance between neighboring points on the reference grid.
- 3.42 guard bits:** Additional most significant bits that have been added to sample data.
- 3.43 header:** Either a part of the codestream that contains only markers and marker segments (main header and tile-part header) or the signalling part of a packet (packet header).
- 3.44 HH subband:** The subband obtained by forward horizontal high-pass filtering and vertical high-pass filtering. This subband contributes to reconstruction with inverse vertical high-pass filtering and horizontal high-pass filtering.
- 3.45 HL subband:** The subband obtained by forward horizontal high-pass filtering and vertical low-pass filtering. This subband contributes to reconstruction with inverse vertical low-pass filtering and horizontal high-pass filtering.
- 3.46 image:** The set of all components.
- 3.47 image area:** A rectangular part of the reference grid, registered by offsets from the origin and the extent of the reference grid.
- 3.48 image area offset:** The number of reference grid points down and to the right of the reference grid origin where the origin of the image area can be found.
- 3.49 image data:** The components and component samples making up an image. Image data can refer to either the source image data or the reconstructed image data.
- 3.50 in bit stream markers and in bit stream marker segments:** Markers and marker segments that provide error resilience functionality.
- 3.51 informational markers and informational marker segments:** Markers and marker segments that offer ancillary information.
- 3.52 irreversible:** A transformation, progression, system, quantization, or other process that, due to systemic or quantization error, disallows lossless recovery. An irreversible process can only lead to lossy compression.
- 3.53 JP2 file:** The name of a file in the file format described in this specification. Structurally, a JP2 file is a contiguous sequence of boxes.
- 3.54 JPEG:** Used to refer globally to the encoding and decoding process of the following Recommendations | International Standards:
- ITU-T Recommendation T.81 | ISO/IEC 10918-1:1994, Information technology - Digital compression and coding of continuous-tone still images: Requirements and guidelines,
 - ITU-T Recommendation T.83 | ISO/IEC 10918-2:1995, Information technology - Digital compression and coding of continuous-tone still images: Compliance testing,
 - ITU-T Recommendation T.84 | ISO/IEC 10918-3:1996, Information technology - Digital compression and coding of continuous-tone still images: Extensions,
 - ITU-T Recommendation T.84 | ISO/IEC 10918-3 Amd 1 (In preparation), Information technology - Digital compression and coding of continuous-tone still images: Extensions - Amendment 1,
 - ITU-T Recommendation T.86 | ISO/IEC 10918-4, Information technology - Digital compression and coding of continuous-tone still images: Registration of JPEG Profiles, SPIFF Profiles, SPIFF Tags, SPIFF colour Spaces, APPn Markers, SPIFF, Compression types and Registration authorities (REGAUT).
- 3.55 JPEG 2000:** Used to refer globally to the encoding and decoding processes in this Recommendation | International Standard and their embodiment in applications.
- 3.56 LH subband:** The subband obtained by forward horizontal low-pass filtering and vertical high-pass filtering. This subband contributes to reconstruction with inverse vertical high-pass filtering and horizontal low-pass filtering.

- 3.57 LL subband:** The subband obtained by forward horizontal low-pass filtering and vertical low-pass filtering. This subband contributes to reconstruction with inverse vertical low-pass filtering and horizontal low-pass filtering.
- 3.58 layer:** A collection of compressed image data from coding passes of one, or more, code-blocks of a tile-component. Layers have an order for encoding and decoding that must be preserved.
- 3.59 lossless:** A descriptive term for the effect of the overall encoding and decoding processes in which the output of the decoding process is identical to the input to the encoding process. Distortion free restoration can be assured. All of the coding processes or steps used for encoding and decoding are reversible.
- 3.60 lossy:** A descriptive term for the effect of the overall encoding and decoding processes in which the output of the decoding process is not identical to the input to the encoding process. There is distortion (measured mathematically). At least one of the coding processes or steps used for encoding and decoding is irreversible.
- 3.61 magnitude refinement pass:** A type of coding pass.
- 3.62 main header:** A group of markers and marker segments at the beginning of the codestream that describe the image parameters and coding parameters that can apply to every tile and tile-component.
- 3.63 marker:** A two-byte code in which the first byte is hexadecimal FF (0xFF) and the second byte is a value between 1 (0x01) and hexadecimal FE (0xFE).
- 3.64 marker segment:** A marker and associated (not empty) set of parameters.
- 3.65 mod:** $\text{mod}(y,x) = z$, where z is an integer such that $0 \leq z < x$, and such that $y-z$ is a multiple of x .
- 3.66 packet:** A part of the bit stream comprising a packet header and the compressed image data from one layer of one precinct of one resolution level of one tile-component.
- 3.67 packet header:** Portion of the packet that contains signalling necessary for decoding that packet.
- 3.68 pointer markers and pointer marker segments:** Markers and marker segments that offer information about the location of structures in the codestream.
- 3.69 precinct:** A one rectangular region of a transformed tile-component, within each resolution level, used for limiting the size of packets.
- 3.70 precision:** Number of bits allocated to a particular sample, coefficient, or other binary numerical representation.
- 3.71 progression:** The order of a codestream where the decoding of each successive bit contributes to a “better” reconstruction of the image. What metrics make the reconstruction “better” is a function of the application. Some examples of progression are increasing resolution or improved sample fidelity.
- 3.72 quantization:** A method of reducing the precision of the individual coefficients to reduce the number of bits used to entropy code them. This is equivalent to division while compressing and multiplying while decompressing. Quantization can be achieved by an explicit operation with a given quantization value or by dropping (truncating) coding passes from the codestream.
- 3.73 raster order:** A particular sequential order of data of any type within an array. The raster order starts with the top left data point and moves to the immediate right data point, and so on, to the end of the row. After the end of the row is reached the next data point in the sequence is the left-most data point immediately below the current row. This order is continued to the end of the array.
- 3.74 reconstructed image:** An image, that is the output of a decoder.
- 3.75 reconstructed sample:** A sample reconstructed by the decoder. This always equals the original sample value in lossless coding but may differ from the original sample value in lossy coding.
- 3.76 reference grid:** A regular rectangular array of points used as a reference for other rectangular arrays of data. Examples include components and tiles.
- 3.77 reference tile:** A rectangular sub-grid of any size associated with the reference grid.
- 3.78 region of interest (ROI):** A collections of coefficients that are considered of particular relevance by some user defined measure.

- 3.79 resolution level:** Equivalent to decomposition level with one exception: the LL subband is also a separate resolution level.
- 3.80 reversible:** A transformation, progression, system, or other process that does not suffer systemic or quantization error and, therefore, allows lossless signal recovery.
- 3.81 sample:** One element in the two-dimensional array that comprises a component.
- 3.82 segmentation symbol:** A special symbol coded with a uniform context at the end of each coding pass for error resilience.
- 3.83 selective arithmetic coding bypass:** A coding style where some of the code-block passes are not coded by the arithmetic coder. Instead the bits to be coded are appended directly to the bit stream without coding.
- 3.84 shift:** Multiplication or division of a number by powers of two.
- 3.85 sign bit:** A bit that indicates whether a number is positive (zero value) or negative (one value).
- 3.86 sign-magnitude notation:** A binary representation of an integer where the distance from the origin is expressed with a positive number and the direction from the origin (positive or negative) is expressed with a separate single sign bit.
- 3.87 significance propagation pass:** A coding pass performed on a single bit-plane of a code-block of coefficients.
- 3.88 significance state:** State of a coefficient at a particular bit-plane. If a coefficient, in sign-magnitude notation, has the first magnitude 1 bit at, or before, the given bit-plane it is considered "significant." If not, it is considered "insignificant."
- 3.89 source image:** An image used as input to an encoder.
- 3.90 subband:** A group of transform coefficients resulting from the same sequence of low-pass and high-pass filtering operations, both vertically and horizontally.
- 3.91 subband coefficient:** A transform coefficient within a given subband.
- 3.92 subband decomposition:** A transformation of an image tile-component into subbands.
- 3.93 superbox:** A box that itself contains a contiguous sequence of boxes (and only a contiguous sequence of boxes). As the JP2 file contains only a contiguous sequence of boxes, the JP2 file is itself considered a superbox. When used as part of a relationship between two boxes, the term superbox refers to the box which directly contains the other box.
- 3.94 tile:** A rectangular array of points on the reference grid, registered with and offset from the reference grid origin and defined by a width and height. The tiles which overlap are used to define tile-components.
- 3.95 tile-component:** All the samples of a given component in a tile.
- 3.96 tile index:** The index of the current tile ranging from zero to the number of tiles minus one.
- 3.97 tile-part:** A portion of the codestream with compressed image data for some, or all, of a tile. The tile-part includes at least one, and up to all, of the packets that make up the coded tile.
- 3.98 tile-part header:** A group of markers and marker segments at the beginning of each tile-part in the codestream that describe the tile-part coding parameters.
- 3.99 tile-part index:** The index of the current tile-part ranging from zero to the number of tile-parts minus in a given tile.
- 3.100 transformation:** A mathematical mapping from one signal space to another.
- 3.101 transform coefficient:** A value that is the result of a transformation.
- 3.102 XOR:** Exclusive OR logical operator.

4 Abbreviations and symbols

4.1 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply.

CCITT: International Telegraph and Telephone Consultative Committee, now ITU-T

ICC: International Colour Consortium

ICT: Irreversible Colour transformation

IEC: International Electrotechnical Commission

ISO: International Organization for Standardization

ITTF: Information Technology Task Force

ITU: International Telecommunication Union

ITU-T: International Telecommunication Union – Telecommunication Standardization Sector (formerly the CCITT)

JPEG: Joint Photographic Experts Group - The joint ISO/ITU committee responsible for developing standards for continuous-tone still picture coding. It also refers to the standards produced by this committee: ITU-T T.81 | ISO/IEC 10918-1, ITU-T T.83 | ISO/IEC 10918-2, ITU-T T.84 | ISO/IEC 10918-3 and T.87 | ISO/IEC 14495.

JURA: JPEG Utilities Registration Authority

1D-DWT: One-dimensional Discrete Wavelet Transformation

FDWT: Forward Discrete Wavelet Transformation

IDWT: Inverse Discrete Wavelet Transformation

LSB: Least Significant Bit.

MSB: Most Significant Bit.

PCS: Profile Connection Space

RCT: Reversible Colour Transformation

ROI: Region Of Interest

SNR: Signal to Noise Ratio.

UCS: Universal Character Set

URI: Uniform Resource Identifier

URL: Uniform Resource Location

UTF-8: UCS Transformation Format 8

UUID: Universal Unique Identifier

XML: Extensible Markup Language

W3C: World-Wide Web Consortium

4.2 Symbols

For the purposes of this Recommendation | International Standard, the following symbols apply.

0x---: Denotes a hexadecimal number.

\nnn: A three-digit number preceded by a backslash indicates the value of a single byte within a character string, where the three digits specify the octal value of that byte.

ε_b : Exponent of the quantization value for a subband defined in QCD and QCC.

μ_b : Mantissa of the quantization value for a subband defined in QCD and QCC.

M_b : Maximum number of bit-planes coded in a given code-block.

N_L : Number of decomposition levels as defined in COD and COC.

R_b : Dynamic range of a component sample as defined in SIZ.

COC: Coding style component marker

COD: Coding style default marker

COM: Comment marker

CRG: Component registration marker

EPH: End of packet header marker

EOC: End of codestream marker

PLM: Packet length, main header marker

PLT: Packet length, tile-part header marker

POC: Progression order change marker

PPM: Packed packet headers, main header marker

PPT: Packed packet headers, tile-part header marker

QCC: Quantization component marker

QCD: Quantization default marker

RGN: Region of interest marker

SIZ: Image and tile size marker

SOC: Start of codestream marker

SOP: Start of packet marker

SOD: Start of data marker

SOT: Start of tile-part marker

TLM: Tile-part lengths marker

5 General description

This specification describes an image compression system that allows great flexibility, not only for the compression of images, but also for the access into the codestream. The codestream provides a number of mechanisms for locating and extracting portions of the compressed image data for the purpose of retransmission, storage, display, or editing. This access allows storage and retrieval of compressed image data appropriate for a given application, without decoding.

The division of both the original image data and the compressed image data in a number of ways leads to the ability to extract image data from the compressed image data to form a reconstructed image with lower resolution or lower precision, or regions of the original image. This allows the matching of a codestream to the transmission channel, storage device, or display device, regardless of the size, number of components, and sample precision of the original image. The codestream can be manipulated without decoding to achieve a more efficient arrangement for a given application.

Thus, the sophisticated features of this specification allow a single codestream to be used efficiently by a number of applications. The largest image source devices can provide a codestream that is easily processed for the smallest image display device, for example.

In general, this standard deals with three domains: spatial (samples), transformed (coefficients), and compressed image data. Some entities (e.g. tile-component) have meaning in all three domains. Other entities (e.g. code-block or packet) have meaning in only one domain (e.g. transformed or compressed image data respectively). The splitting of an entity into other entities in the same domain (e.g. component to tile-components) is described separately for each of the domains.

5.1 Purpose

There are four main elements described in this Recommendation | International Standard:

Encoder: An embodiment of an encoding process. An encoder takes as input digital source image data and parameter specifications, and by means of a set of procedures generates as output a codestream.

Decoder: An embodiment of a decoding process. A decoder takes as input compressed image data and parameter specifications, and by means of a specified set of procedures generates as output digital reconstructed image data.

Codestream syntax: A representation of the compressed image data that includes all parameter specifications required by the decoding process.

Optional file format: The optional file format is for exchange between application environments. The codestream can be used by other file formats or stand-alone without this file format.

5.2 Codestream

The codestream is a linear stream of bits from the first bit to the last bit. For convenience, it can be divided into (8 bit) bytes, starting with the first bit of the codestream, with the “earlier” bit in a byte viewed as the most significant bit of the byte when given e.g. a hexadecimal representation. This byte stream may be divided into groups of consecutive bytes. The hexadecimal value representation is sometimes implicitly assumed in the text when describing bytes or group of bytes that do not have a “natural” numeric value representation.

5.3 Coding principles

The main procedures for this Recommendation | International Standard are shown in Figure 5-1. This shows the decoding order only. The compressed image data is already conceptually assigned to portions of the image data. Procedures are presented in the Annexes in the order of the decoding process. The coding process is summarized below.

NOTE — Annexes A through I are considered normative to this Recommendation | International Standard. Certain denoted subsections and notes and all examples are informative, however.

Many images have multiple components. This specification has a multiple component transformation to decorrelate three components. This is the only function in this specification that relates components to each other. (See Annex G.)

The image components may be divided into tiles. These tile-components are rectangular arrays that relate to the same portion of each of the components that make up the image. Thus, tiling of the image actually creates tile-components that can be extracted or decoded independently of each other. This tile independence provides one of the methods for extracting a region of the image. (See Annex B.)

The tile-components are decomposed into different decomposition levels using a wavelet transformation. These decomposition levels contain a number of subbands populated with coefficients that describe the horizontal and vertical spatial frequency characteristics of the original tile-components. The coefficients provide frequency information about a local area, rather than across the entire image like the Fourier transformation. That is, a small number of coefficients completely describe a single sample. A decomposition level is related to the next decomposition level by a spatial factor of two. That is, each successive decomposition level of the subbands has approximately half the horizontal and half the vertical resolution of the previous. Images of lower resolution than the original are generated by decoding a selected subset of these subbands. (See Annex F.)

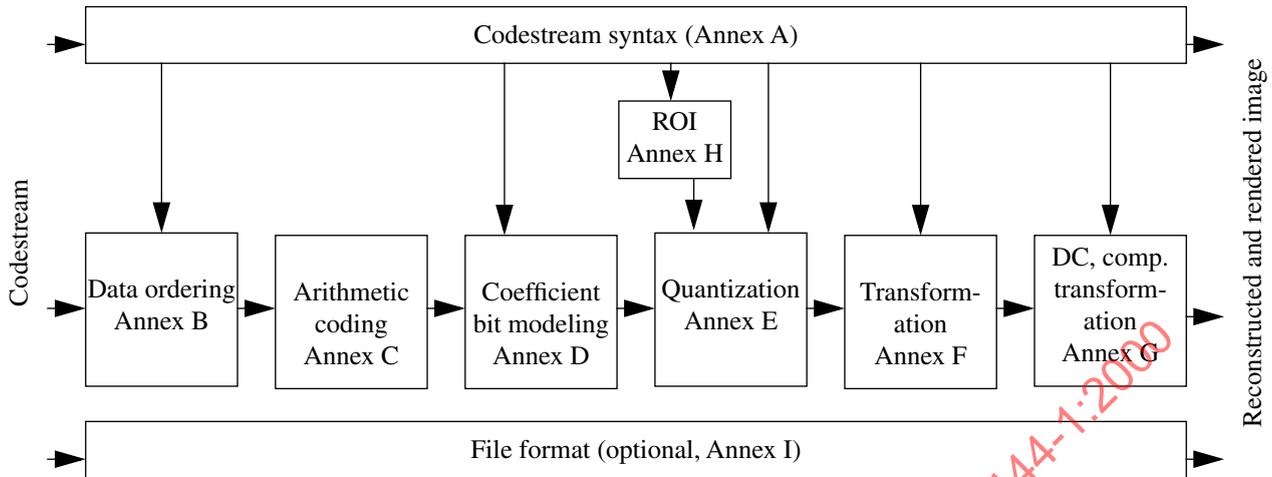


Figure 5-1 — Specification block diagram

Although there are as many coefficients as there are samples, the information content tends to be concentrated in just a few coefficients. Through quantization, the information content of a large number of small-magnitude coefficients is further reduced (Annex E). Additional processing by the entropy coder reduces the number of bits required to represent these quantized coefficients, sometimes significantly compared to the original image. (See Annex C, Annex D, and Annex B.)

The individual subbands of a tile-component are further divided into code-blocks. These rectangular arrays of coefficients can be extracted independently. The individual bit-planes of the coefficients in a code-block are coded with three coding passes. Each of these coding passes collects contextual information about the bit-plane compressed image data. (See Annex D.) An arithmetic coder uses this contextual information, and its internal state, to decode a compressed bit stream. (See Annex C.) Different termination mechanisms allow different levels of independent extraction of this coding pass compressed image data.

The bit stream compressed image data created from these coding passes is grouped in layers. Layers are arbitrary groupings of coding passes from code-blocks. (See Annex B.)

NOTE — Although there is great flexibility in layering, the premise is that each successive layer contributes to a higher quality image.

Subband coefficients at each resolution level are partitioned into rectangular areas called precincts. (See Annex B.)

Packets are a fundamental unit of the compressed codestream. A packet contains compressed image data from one layer of a precinct of one resolution level of one tile-component. Packets provide another method for extracting a spatial region independently from the codestream. These packets are interleaved in the codestream using a few different methods. (See Annex B.)

A mechanism is provided that allows the compressed image data corresponding to regions of interest in the original tile-components to be coded and placed earlier in the bit stream. (See Annex H.)

Several mechanisms are provided to allow the detection and concealment of bit errors that might occur over a noisy transmission channel. (See Annex D.5 and Annex J.7.)

The codestream relating to a tile, organized in packets, are arranged in one, or more, tile-parts. A tile-part header, comprised of a series of markers and marker segments, contains information about the various mechanisms and coding styles that are needed to locate, extract, decode, and reconstruct every tile-component. At the beginning of the entire codestream is a main header, comprised of markers and marker segments, that offers similar information as well as information about the original image. (See Annex A.)

The codestream is optionally wrapped in a file format that allows applications to interpret the meaning of, and other information about, the image. The file format may contain data besides the codestream. (See Annex I.)

To review, procedures that divide the original image are the following:

- The components of the image are divided into rectangular tiles. The tile-component is the basic unit of the original or reconstructed image.
- Performing the wavelet transformation on a tile-component creates decomposition levels.
- These decomposition levels are made up of subbands of coefficients that describe the frequency characteristics of local areas (rather than across the entire tile-component) of the tile-component.
- The subbands of coefficients are quantized and collected into rectangular arrays of code-blocks.
- Each bit-plane of the coefficients in a code-block are entropy coded in three types of coding passes.
- Some of the coefficients can be coded first to provide a region of interest.

At this point the image data is fully converted to compressed image data. The procedures that reassemble these bit stream units into the codestream are the following:

- The compressed image data from the coding passes are collected in layers.
- Packets are composed compressed image data from one precinct of a single layer of a single resolution level of a single tile-component. The packets are the basic unit of the compressed image data.
- All the packets from a tile are interleaved in one of several orders and placed in one, or more, tile-parts.
- The tile-parts have a descriptive tile-part header and can be interleaved in some orders.
- The codestream has a main header at the beginning that describes the original image and the various decomposition and coding styles.
- The optional file format describes the meaning of the image and its components in the context of the application.

6 Encoder requirements

An encoding process converts source image data to compressed image data. Annexes A, B, C, D, E, F, G, and H describe the encoding process. All encoding processes are specified informatively.

An encoder is an embodiment of the encoding process. In order to conform to this Recommendation | International Standard, an encoder shall convert source image data to compressed image data, that conform to the codestream syntax specified in Annex A.

7 Decoder requirements

A decoding process converts compressed image data to reconstructed image data. Annex A through Annex H describe and specify the decoding process. All decoding processes are normative.

A decoder is an embodiment of the decoding process. In order to conform to this Recommendation | International Standard, a decoder shall convert all, or specific parts of, any compressed image data that conform to the codestream syntax specified in Annex A to a reconstructed image.

There is no normative or required implementation for the encoder or decoder. In some cases, the descriptions use particular implementation techniques for illustrative purposes only.

7.1 Codestream syntax requirements

Annex A describes the codestream syntax that defines the coded representation of compressed image data for exchange between application environments. Any compressed image data shall comply with the syntax and code assignments appropriate for the coding processes defined in the Recommendation | International Standard.

This Recommendation | International Standard does not include a definition of compliance or conformance. The parameter values of the syntax described in Annex A are not intended to portray the capabilities required to be compliant.

7.2 Optional file format requirements

Annex I describes the optional file format containing metadata about the image in addition to the codestream. This data allows, for example, screen display or printing at a specific resolution. The optional file format when used, shall comply with the file format syntax and code assignments appropriate for the coding processes defined in the Recommendation | International Standard.

8 Implementation requirements

There is no normative or required implementation for this Recommendation | International Standard. In some cases, the descriptions use particular implementation techniques for illustrative purposes only.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex A

Codestream syntax

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex specifies the marker and marker segment syntax and semantics defined by this Recommendation | International Standard. These markers and marker segments provide codestream information for this Recommendation | International Standard. Further, this Annex provides a marker and marker segment syntax that is designed to be used in future specifications that include this Recommendation | International Standard as a normative reference.

This Recommendation | International Standard does not include a definition of compliance or conformance. The parameter values of the syntax described in this Annex are not intended to portray the capabilities required to be compliant.

A.1 Markers, marker segments, and headers

This Recommendation | International Standard uses markers and marker segments to delimit and signal the characteristics of the source image and codestream. This set of markers and marker segments is the minimal information needed to achieve the features of this Recommendation | International Standard and is not a file format. A minimal file format is offered in Annex I.

Main and tile-part headers are collections of markers and marker segments. The main header is found at the beginning of the codestream. The tile-part headers are found at the beginning of each tile-part (see below). Some markers and marker segments are restricted to only one of the two types of headers while others can be found in either.

Every marker is two bytes long. The first byte consists of a single 0xFF byte. The second byte denotes the specific marker and can have any value in the range 0x01 to 0xFE. Many of these markers are already used in ITU-T Rec. T.81 | ISO/IEC 10918-1 and ITU-T Rec. T.84 | ISO/IEC 10918-3:1996 and shall be regarded as reserved unless specifically used.

A marker segment includes a marker and associated parameters, called marker segment parameters. In every marker segment the first two bytes after the marker shall be an unsigned value that denotes the length in bytes of the marker segment parameters (including the two bytes of this length parameter but not the two bytes of the marker itself). When a marker segment that is not specified in the Recommendation | International Standard in a codestream, the decoder shall use the length parameter to discard the marker segment.

A.1.1 Types of markers and marker segments

Six types of markers and marker segments are used: delimiting, fixed information, functional, in bit stream, pointer, and informational. Delimiting markers and marker segments are used to frame the main and tile-part headers and the bit stream data. Fixed information marker segments give required information about the image. The location of these marker segments, like delimiting marker and marker segments, is specified. Functional marker segments are used to describe the coding functions used. In bit stream markers and marker segments are used for error resilience. Pointer marker segments provide specific offsets in the bit stream. Informational marker segments provide ancillary information.

A.1.2 Syntax similarity with ITU-T Rec. T.81 | ISO/IEC 10918-1

The marker and marker segment syntax uses the same construction as defined in ITU-T Rec. T.81 | ISO/IEC 10918-1.

The marker range 0xFF30 — 0xFF3F is reserved by this specification for markers without marker segment parameters. Table A-1 shows in which specification these markers and marker segments are defined.

Table A-1 — Marker definitions

| Marker code range | Standard definition |
|---|--|
| 0xFF00, 0xFF01, 0xFFFE, 0xFFC0 — 0xFFDF | Defined in ITU-T Rec. T.81 ISO/IEC 10918-1 |
| 0xFFF0 — 0xFFF6 | Defined in ITU-T Rec. T.84 ISO/IEC 10918-3 |
| 0xFFF7 — 0xFFF8 | Defined in ITU-T Rec. T.87 ISO/IEC 14495-1 |
| 0xFF4F — 0xFF6F, 0xFF90 — 0xFF93 | Defined in this Recommendation International Standard |
| 0xFF30 — 0xFF3F | Reserved for definition as markers only (no marker segments) |
| | All other values reserved |

A.1.3 Marker and marker segment and codestream rules

- Marker segments, and therefore the main and tile-part headers, are a multiple of 8 bits (one byte). Further, the bit stream data between the headers and before the EOC marker (see Annex A.4.4) are padded to also be aligned to a multiple of 8 bits.
- All marker segments in a tile-part header apply only to the tile to which they belong.
- All marker segments in the main header apply to the whole image unless specifically overridden by markers or marker segments in a tile-part header.
- Delimiting and fixed information marker and marker segments must appear at specific points in the codestream.
- The marker segments shall correctly describe the image as represented by the codestream. If truncation, alteration, or editing of the codestream has been performed, the marker segments shall be updated, if necessary.
- All parameter values in marker segments are big endian.
- Marker segments can appear in any order in a given header. Exceptions are the delimiting markers and marker segments and the fixed information marker segments.
- All markers with the marker code between 0xFF30 and 0xFF3F have no marker segment parameters. They shall be skipped by the decoder.

NOTE — The markers in the range 0xFF30 — 0xFF3F may be used by future extensions. They may or may not be skipped by a decoder without ramification.

A.1.4 Key to graphical descriptions (informative)

Each marker segment is described in terms of its function, usage, and length. The function describes the information contained in the marker segment. The usage describes the logical location and frequency of this marker segment in the codestream. The length describes which parameters determine the length of the marker segment.

These descriptions are followed by a figure that shows the order and relationship of the parameters in the marker segment. Figure A-1 shows an example of this type of figure. The marker segments are designated by the three letter code of the marker associated with the marker segment. The parameter symbols have capital letter designations followed by the marker's symbol in lower case letters. A rectangle is used to indicate a parameter's location in the marker segment. The width of the rectangle is proportional to the number of bytes of the parameter. A shaded rectangle (diagonal stripes) indicates that the parameter is of varying size. Two parameters with superscripts and a gray area between indicate a run of several of these parameters.

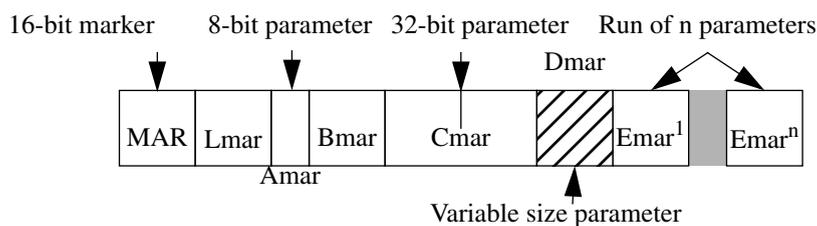


Figure A-1 — Example of the marker segment description figures

The figure is followed by a list that describes the meaning of each parameter in the marker segment. If parameters are repeated, the length and nature of the run of parameters is defined. As an example, in Figure A-1, the first rectangle represents the marker with the symbol MAR. The second rectangle represents the length parameter. Parameters Amar, Bmar, Cmar, and Dmar are 8, 16, 32 bit and variable length respectively. The notation E_{mar}^i implies that there are n different parameters, E_{mar}^i , in a row.

After the list is a table that either describes the allowed parameter values or provides references to other tables that describe these values. Tables for individual parameters are provided to describe any parameter without a simple numerical value. In some cases these parameters are described by a bit value in a bit field. In this case, an “x” is used to denote bits that are not included in the specification of the parameter or sub-parameter in the corresponding row of the table.

Some marker segment parameters are described using the notation “Sxxx” and “SPxxx” (for a marker symbol, XXX). The Sxxx parameter selects between many possible states of the SPxxx parameter. According to this selection, the SPxxx parameter or parameter list is modified.

A.2 Information in the marker segments

Table A-2 lists the markers specified in this Recommendation | International Standard. Table A-3 shows a list of which information is provided by which marker and marker segments.

Table A-2 — List of markers and marker segments

| | Symbol | Code | Main header ^a | Tile-part header ^a |
|---|--------|--------|--------------------------|-------------------------------|
| Delimiting markers and marker segments | | | | |
| Start of codestream | SOC | 0xFF4F | required | not allowed |
| Start of tile-part | SOT | 0xFF90 | not allowed | required |
| Start of data | SOD | 0xFF93 | not allowed | last marker |
| End of codestream ^b | EOC | 0xFFD9 | not allowed | not allowed |
| Fixed information marker segments | | | | |
| Image and tile size | SIZ | 0xFF51 | required | not allowed |
| Functional marker segments | | | | |
| Coding style default | COD | 0xFF52 | required | optional |
| Coding style component | COC | 0xFF53 | optional | optional |

Table A-2 — List of markers and marker segments (continued)

| | Symbol | Code | Main header ^a | Tile-part header ^a |
|--|--------|--------|------------------------------------|---|
| Region-of-interest | RGN | 0xFF5E | optional | optional |
| Quantization default | QCD | 0xFF5C | required | optional |
| Quantization component | QCC | 0xFF5D | optional | optional |
| Progression order change | POC | 0xFF5F | optional ^b | optional ^c |
| Pointer marker segments | | | | |
| Tile-part lengths | TLM | 0xFF55 | optional | not allowed |
| Packet length, main header | PLM | 0xFF57 | optional | not allowed |
| Packet length, tile-part header | PLT | 0xFF58 | not allowed | optional |
| Packed packet headers, main header | PPM | 0xFF60 | optional ^c | not allowed |
| Packed packet headers, tile-part header | PPT | 0xFF61 | not allowed | optional ^d |
| In bit stream markers and marker segments | | | | |
| Start of packet | SOP | 0xFF91 | not allowed | not allowed in tile-part header, optional in bit stream |
| End of packet header | EPH | 0xFF92 | optional inside PPM marker segment | optional inside PPT marker segment or in bit stream |
| Informational marker segments | | | | |
| Component registration | CRG | 0xFF63 | optional | not allowed |
| Comment | COM | 0xFF64 | optional | optional |

a. Required means the marker or marker segment shall be in this header, optional means it may be used.

b. The POC marker segment is required if there are progression order changes.

c. Either the PPM or PPT marker segment is required if the packet headers are not distributed in the bit stream. If the PPM marker segment is used then PPT marker segments shall not be used, and vice versa.

A.3 Construction of the codestream

Figure A-2 shows the construction of the codestream. Figure A-3 shows the main header construction. All of the solid lines show required marker segments. The following markers and marker segments are required to be in a specific location: SOC, SIZ, SOT, SOD, and EOC. The dashed lines show optional or possibly not required marker segments. Figure A-4 shows the construction of the first tile-part header in a given tile. Figure A-5 shows the construction of a tile-part header other than the first in a tile.

The COD and COC marker segments and the QCD and QCC marker segments have hierarchy of usage. This is designed to allow tile-components to have dissimilar coding and quantization characteristics with a minimum of signalling.

Table A-3 — Information in the marker segments

| Information | Marker segment |
|--|----------------|
| Capabilities Image area size or reference grid size (height and width) Tile size (height and width) Number of components Component precision Component mapping to the reference grid (sub-sampling) | SIZ |
| Tile index Tile-part data length | SOT, TLM |
| Progression order Number of layers Multiple component transformation used | COD |
| Coding style Number of decomposition levels Code-block size Code-block style Wavelet transformation Precinct size | COD, COC |
| Region of interest shift | RGN |
| No quantization Quantization derived Quantization expounded | QCD, QCC |
| Progression starting point Progression ending point Progression order default | POC |
| Error resilience | SOP |
| End of packet header | EPH |
| Packet headers | PPM, PPT |
| Packet lengths | PLM, PLT |
| Component registration Optional information | CRG COM |

For example, the COD marker segment is required in the main header. If all components in all the tiles are coded the same way, this is all that is required. If there is one component that is coded differently than the others (for example the luminance component of an image composed of luminance and chrominance components) then the COC can denote that in the main header. If one or more components are coded differently in different tiles, then the COD and COC are used in a similar manner to denote this in the tile-part headers.

The POC marker segment appearing in the main header is used for all tiles unless a different POC appears in the tile-part header.

With the exceptions of the SOC, SOT, SOD, EOC, and SIZ markers and marker segments, the marker segments can appear in any order within the respective headers.

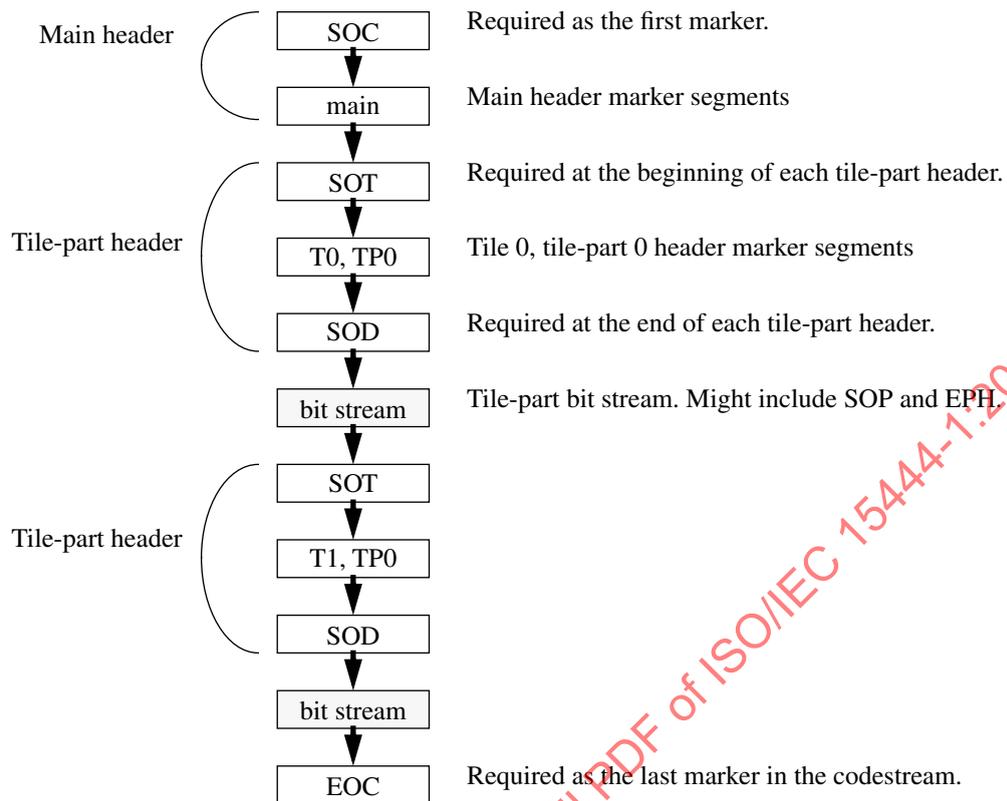


Figure A-2 — Construction of the codestream

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

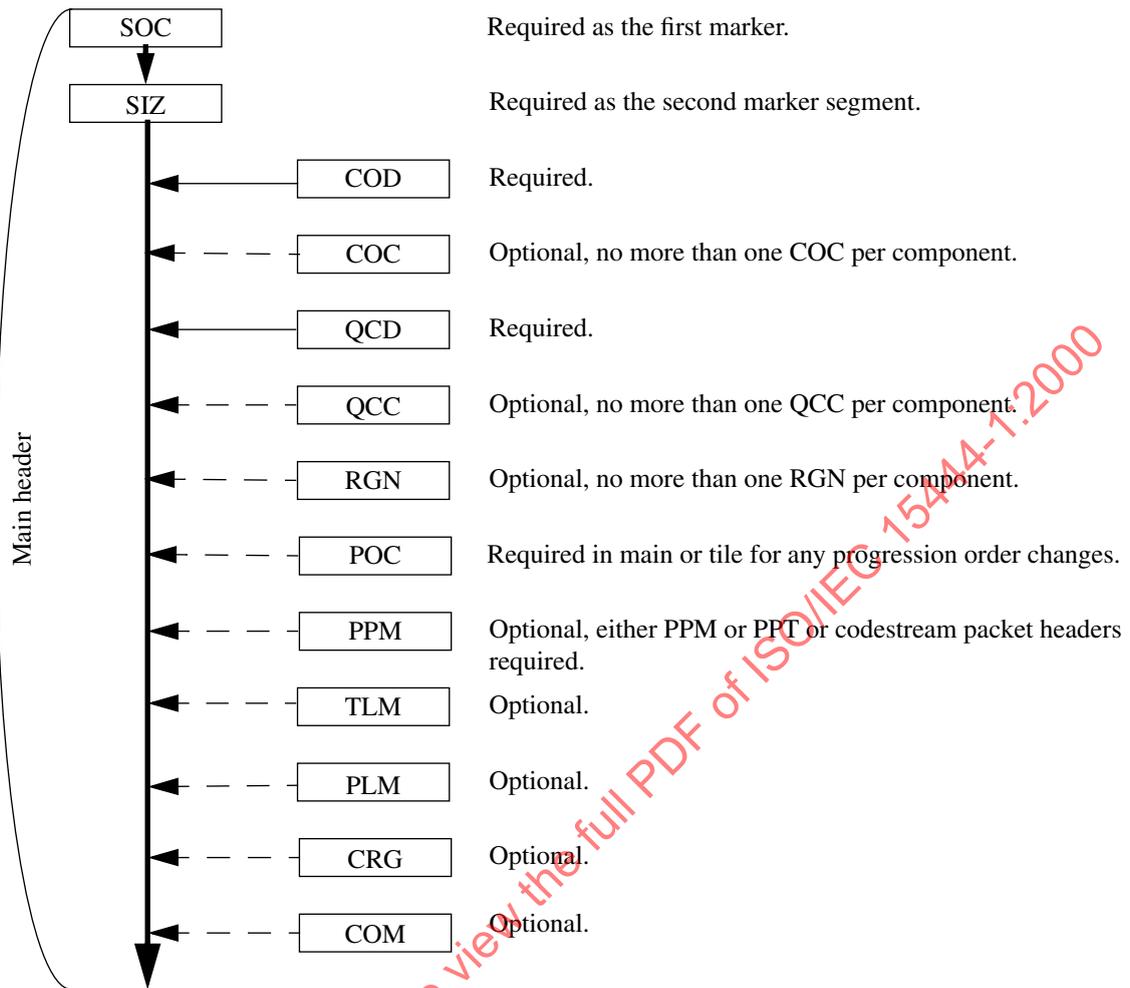


Figure A.3 — Construction of the main header

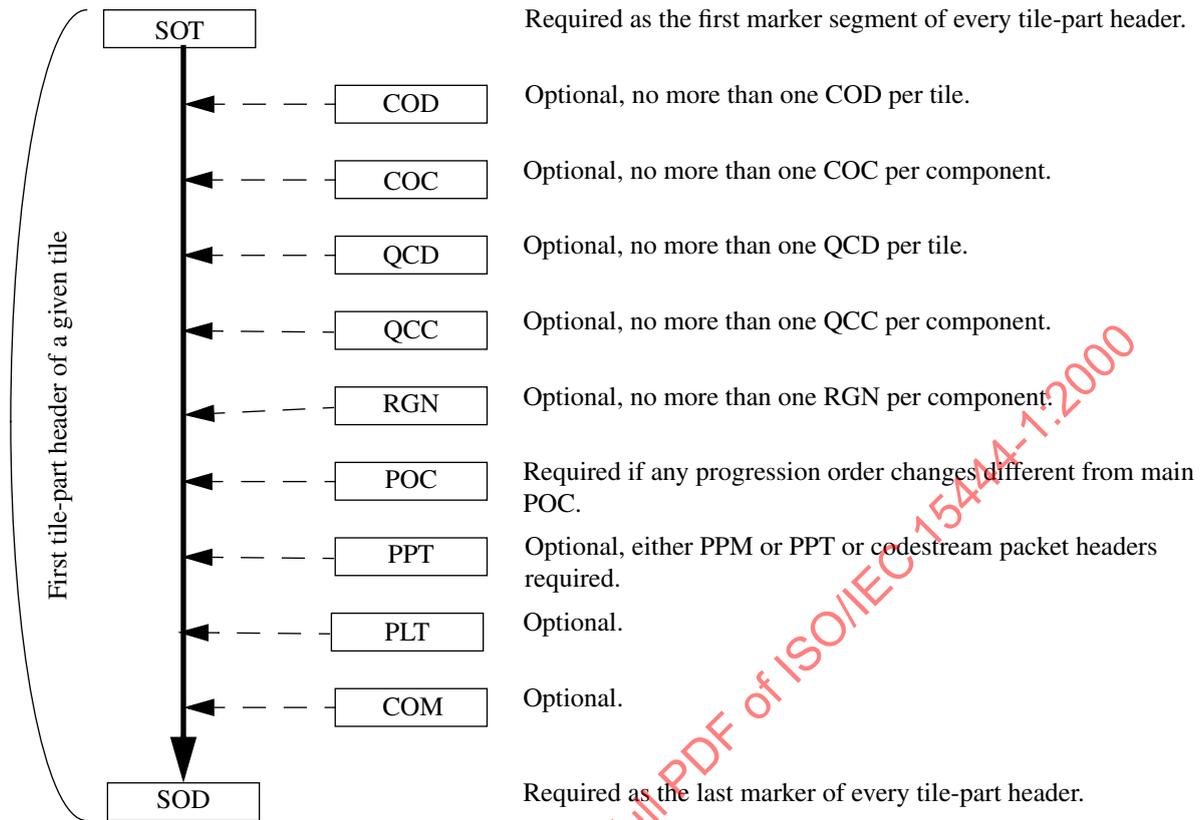


Figure A-4 — Construction of the first tile-part header of a given tile

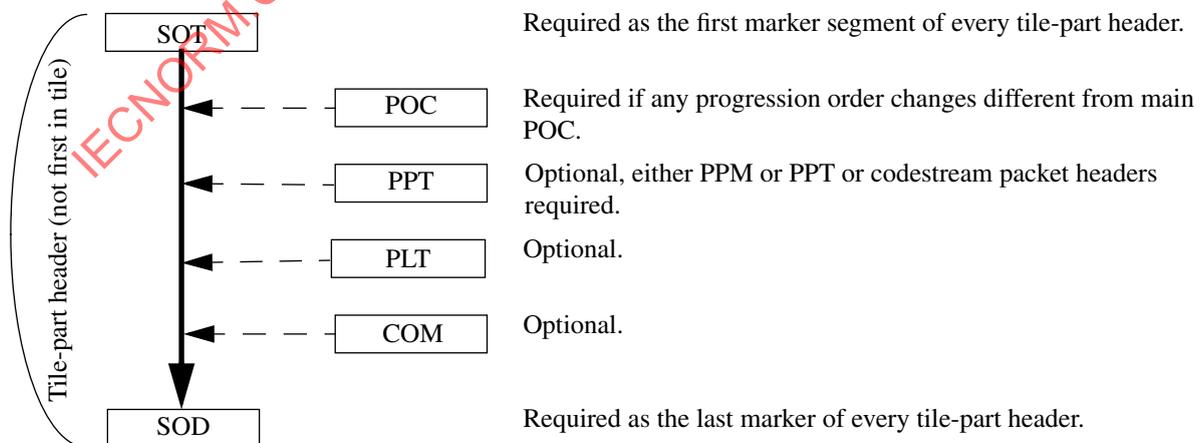


Figure A-5 — Construction of a non-first tile-part header

A.4 Delimiting markers and marker segments

The delimiting marker and marker segments shall be present in all codestreams conforming to this Recommendation | International Standard. Each codestream has only one SOC marker, one EOC marker, and at least one tile-part. Each tile-part has one SOT and one SOD marker. The SOC, SOD, and EOC are delimiting markers, not marker segments, and have no explicit length information or other parameters.

A.4.1 Start of codestream (SOC)

Function: Marks the beginning of a codestream specified in this Recommendation | International Standard.

Usage: Main header. This is the first marker in the codestream. There shall be only one SOC per codestream.

Length: Fixed.

SOC: Marker code.

Table A-4 — Start of codestream parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|--------|
| SOC | 16 | 0xFF4F |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.4.2 Start of tile-part (SOT)

Function: Marks the beginning of a tile-part, the index of its tile, and the index of its tile-part. The tile-parts of a given tile shall appear in order (see TP_{sot}) in the codestream. However, tile-parts from other tiles may be interleaved in the codestream. Therefore, the tile-parts from a given tile may not appear contiguously in the codestream.

Usage: Every tile-part header. Shall be the first marker segment in a tile-part header. There shall be at least one SOT in a codestream. There shall be only one SOT per tile-part.

Length: Fixed.

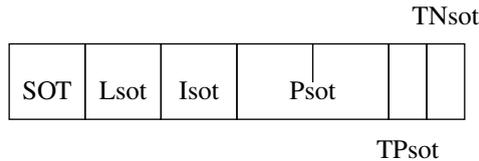


Figure A-6 — Start of tile-part syntax

- SOT:** Marker code. Table A-5 shows the sizes and values of the symbol and parameters for start of tile-part marker segment.
- Lsot:** Length of marker segment in bytes (not including the marker).
- Isot:** Tile index. This number refers to the tiles in raster order starting at the number 0.
- Psot:** Length, in bytes, from the beginning of the first byte of this SOT marker segment of the tile-part to the end of the data of that tile-part. Figure A-16 shows this alignment. Only the last tile-part in the codestream may contain a 0 for Psot. If the Psot is 0, this tile-part is assumed to contain all data until the EOC marker.
- TP_{sot}:** Tile-part index. There is a specific order required for decoding tile-parts; this index denotes the order from 0. If there is only one tile-part for a tile then this value is zero. The tile-parts of this tile shall appear in the codestream in this order, although not necessarily consecutively.
- TN_{sot}:** Number of tile-parts of a tile in the codestream. Two values are allowed: the correct number of tile-parts for that tile and zero. A zero value indicates that the number of tile-parts of this tile is not specified in this tile-part.

Table A-5 — Start of tile-part parameter values

| Parameter | Size (bits) | Values |
|-------------------|-------------|---------------------------|
| SOT | 16 | 0xFF90 |
| Lsot | 16 | 10 |
| Isot | 16 | 0 — 65 534 |
| Psot | 32 | 12 — (2 ³² -1) |
| TP _{sot} | 8 | 0 — 254 |
| TN _{sot} | 8 | Table A-6 |

Table A-6 — Number of tile-parts, TNsot, parameter value

| Value | Number of tile-parts |
|---------|---|
| 0 | Number of tile-parts of this tile in the codestream is not defined in this header |
| 1 — 255 | Number of tile-parts of this tile in the codestream |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.4.3 Start of data (SOD)

Function: Indicates the beginning of bit stream data for the current tile-part. The SOD also indicates the end of a tile-part header.

Usage: Every tile-part header. Shall be the last marker in a tile-part header. Bit stream data between an SOD and the next SOT or EOC (end of image) shall be a multiple of 8 bits — the codestream is padded with bits, as needed. There shall be at least one SOD in a codestream. There shall be one SOD per tile-part.

Length: Fixed.

SOD: Marker code

Table A-7 — Start of data parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|--------|
| SOD | 16 | 0xFF93 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.4.4 End of codestream (EOC)

Function: Indicates the end of the codestream.

NOTE — This marker shares the same code as the EOI marker in ITU-T Rec. T.81 | ISO/IEC 10918-1.

Usage: Shall be the last marker in a codestream. There shall be one EOC per codestream.

NOTE — In the case a file has been corrupted, it is possible that a decoder could extract much useful compressed image data without encountering an EOC marker.

Length: Fixed.

EOC: Marker code

Table A-8 — End of codestream parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|--------|
| EOC | 16 | 0xFFD9 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.5 Fixed information marker segment

This marker segment describes required information about the image. The SIZ marker segment is required in the main header immediately after the SOC marker segment.

A.5.1 Image and tile size (SIZ)

Function: Provides information about the uncompressed image such as the width and height of the reference grid, the width and height of the tiles, the number of components, component bit depth, and the separation of component samples with respect to the reference grid (see Annex B.2).

Usage: Main header. There shall be one and only one in the main header immediately after the SOC marker segment. There shall be only one SIZ per codestream.

Length: Variable depending on the number of components.



Figure A-7 — Image and tile size syntax

SIZ: Marker code. Table A-9 shows the size and parameter values of the symbol and parameters for image and tile size marker segment.

Lsiz: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$Lcod = 38 + 3 \cdot Csiz . \tag{A.1}$$

Rsiz: Denotes capabilities that a decoder needs to properly decode the codestream.

Xsiz: Width of the reference grid.

Ysiz: Height of the reference grid.

XOsiz: Horizontal offset from the origin of the reference grid to the left side of the image area.

YOsiz: Vertical offset from the origin of the reference grid to the top side of the image area.

XTsiz: Width of one reference tile with respect to the reference grid.

YTtiz: Height of one reference tile with respect to the reference grid.

XTosiz: Horizontal offset from the origin of the reference grid to the left side of the first tile.

YTosiz: Vertical offset from the origin of the reference grid to the top side of the first tile.

Csiz: Number of components in the image.

Ssizⁱ: Precision (depth) in bits and sign of the *i*th component samples. The precision is the precision of the component samples before DC level shifting is performed (i.e., the precision of the original component samples before any processing is performed). If the component sample values are signed, then the range of component sample values is $-2^{(Ssiz \text{ AND } 0x7F)-1} \leq \text{component sample value} \leq 2^{(Ssiz \text{ AND } 0x7F)-1} - 1$. There is one occurrence of this parameter for each component. The order corresponds to the component's index, starting with zero.

XR_{siz}ⁱ: Horizontal separation of a sample of *i*th component with respect to the reference grid. There is one occurrence of this parameter for each component.

YR_{siz}ⁱ: Vertical separation of a sample of *i*th component with respect to the reference grid. There is one occurrence of this parameter for each component.

Table A-9 — Image and tile size parameter values

| Parameter | Size (bits) | Values |
|--------------------------------|-------------|--------------------|
| SIZ | 16 | 0xFF51 |
| Lsiz | 16 | 41 — 49 190 |
| Rsiz | 16 | Table A-10 |
| Xsiz | 32 | 1 — $(2^{32} - 1)$ |
| Ysiz | 32 | 1 — $(2^{32} - 1)$ |
| XO _{siz} | 32 | 0 — $(2^{32} - 2)$ |
| YO _{siz} | 32 | 0 — $(2^{32} - 2)$ |
| XT _{siz} | 32 | 1 — $(2^{32} - 1)$ |
| YT _{siz} | 32 | 1 — $(2^{32} - 1)$ |
| XTO _{siz} | 32 | 0 — $(2^{32} - 2)$ |
| YTO _{siz} | 32 | 0 — $(2^{32} - 2)$ |
| Csiz | 16 | 1 — 16 384 |
| S _{siz} ⁱ | 8 | Table A-11 |
| XR _{siz} ⁱ | 8 | 1 — 255 |
| YR _{siz} ⁱ | 8 | 1 — 255 |

Table A-10 — Capability Rsiz parameter

| Value (bits) | | Capability |
|--------------|----------------|---|
| MSB | LSB | |
| 0000 | 0000 0000 0000 | Capabilities specified in this Recommendation International Standard only |
| | | All other values reserved |

Table A-11 — Component Ssiz parameter

| Values (bits) MSB LSB | Component sample precision |
|-------------------------------|--|
| x000 0000 — x010 0101 | Component sample bit depth = value + 1. From 1 bit deep through 38 bits deep respectively (counting the sign bit, if appropriate) ^a , R_I |
| 0xxx xxxx | Component sample values are unsigned values |
| 1xxx xxxx | Component sample values are signed values |
| | All other values reserved. |

- a. The component sample precision is limited by the number of guard bits, quantization, growth of coefficients at each decomposition level and the number of coding passes that can be signalled. Not all combinations of coding styles will allow the coding of 38 bit samples.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.6 Functional marker segments

These marker segments describe the functions used to code the entire tile, if found in the tile-part header, or image, if found in the main header.

A.6.1 Coding style default (COD)

Function: Describes the coding style, number of decomposition levels, and layering that is the default used for compressing all components of an image (if in the main header) or a tile (if in the tile-part header). The parameter values can be overridden for an individual component by a COC marker segment in either the main or tile-part header.

Usage: Main and first tile-part header of a given tile. Shall be one and only one in the main header. Additionally, there may be at most one for each tile. If there are multiple tile-parts in a tile, and this marker segment is present, it shall be found only in the first tile-part (TP_{spot} = 0).

When used in the main header, the COD marker segment parameter values are used for all tile-components that do not have a corresponding COC marker segment in either the main or tile-part header. When used in the tile-part header it overrides the main header COD and COCs and is used for all components in that tile without a corresponding COC marker segment in the tile-part. Thus, the order of precedence is the following:

Tile-part COC > Tile-part COD > Main COC > Main COD

where the “greater than” sign, >, means that the greater overrides the lesser marker segment.

Length: Variable depending on the value of Scod.




Figure A-8 — Coding style default syntax

COD: Marker code. Table A-12 shows the size and values of the symbol and parameters for coding style, default marker segment.

Lcod: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$Lcod = \begin{cases} 12 & \text{maximum_precincts} \\ 13 + \text{number_decomposition_levels} & \text{user-defined_precincts} \end{cases} \quad \text{A.2}$$

where maximum_precincts and user-defined_precincts are indicated in the Scod parameter and number_decomposition_levels is indicated in the SPcod parameter.

Scod: Coding style for all components. Table A-13 shows the value for the Scod parameter.

SGcod: Parameters for coding style designated in Scod. The parameters are independent of components and are designated, in order from top to bottom, in Table A-14. The coding style parameters within the SGcod field appear in the sequence shown in Figure A-9.

SPcod: Parameters for coding style designated in Scod. The parameters relate to all components and are designated, in order from top to bottom, in Table A-15. The coding style parameters within the SPcod field appear in the sequence shown in Figure A-9.

Table A-12 — Coding style default parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|------------|
| COD | 16 | 0xFF52 |
| Lcod | 16 | 12 — 45 |
| Scod | 8 | Table A-13 |
| SGcod | 32 | Table A-14 |
| SPcod | variable | Table A-15 |

Table A-13 — Coding style parameter values for the Scod parameter

| Values (bits) MSB LSB | Coding style |
|-----------------------------|---|
| xxxx xxx0 | Entropy coder, precincts with PPx = 15 and PPy = 15 |
| xxxx xxx1 | Entropy coder with precincts defined below |
| xxxx xx0x | No SOP marker segments used |
| xxxx xx1x | SOP marker segments may be used |
| xxxx x0xx | No EPH marker used |
| xxxx x1xx | EPH marker may be used |
| | All other values reserved |

Table A-14 — Coding style parameter values of the SGcod parameter

| Parameters (in order) | Size (bits) | Values | Meaning of SGcod values |
|-----------------------------------|-------------|------------|---|
| Progression order | 8 | Table A-16 | Progression order |
| Number of layers | 16 | 1 — 65535 | Number of layers |
| Multiple component transformation | 8 | Table A-17 | Multiple component transformation usage |

Table A-15 — Coding style parameter values of the SPcod and SPcoc parameters

| Parameters (in order) | Size (bits) | Values | Meaning of SPcod values |
|--------------------------------|-------------|------------|---|
| Number of decomposition levels | 8 | 0 — 32 | Number of decomposition levels, N_L . Zero implies no transformation. |
| Code-block width | 8 | Table A-18 | Code-block width exponent offset value, xcb |
| Code-block height | 8 | Table A-18 | Code-block height exponent offset value, ycb |
| Code-block style | 8 | Table A-19 | Style of the code-block coding passes |
| Transformation | 8 | Table A-20 | Wavelet transformation used. |
| Precinct size | variable | Table A-21 | If $Scod$ or $Scoc = xxxx\ xxx0$, this parameter is not present, otherwise this indicates precinct width and height. The first parameter (8 bits) corresponds to the N_{LL} subband. Each successive parameter corresponds to each successive resolution level in order. |

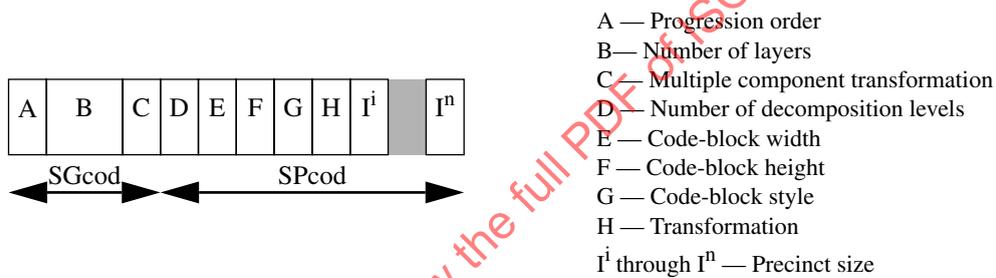


Figure A-9 — Coding style parameter diagram of the SGcod and SPcod parameters

Table A-16 — Progression order for the SPcod, SPcoc, and Ppoc parameters

| Values (bits) MSB LSB | Progression order |
|-----------------------------|---|
| 0000 0000 | Layer-resolution level-component-position progression |
| 0000 0001 | Resolution level-layer-component-position progression |
| 0000 0010 | Resolution level-position-component-layer progression |
| 0000 0011 | Position-component-resolution level-layer progression |
| 0000 0100 | Component-position-resolution level-layer progression |
| | All other values reserved |

Table A-17 — Multiple component transformation for the SPcod parameters

| Values (bits) MSB LSB | Multiple component transformation type |
|-------------------------------|--|
| 0000 0000 | No multiple component transformation specified. |
| 0000 0001 | Component transformation used on components 0, 1, 2 for coding efficiency (see Annex G.2). Irreversible component transformation used with the 9-7 irreversible filter. Reversible component transformation used with the 5-3 reversible filter. |
| | All other values reserved |

Table A-18 — Width or height exponent of the code-blocks for the SPcod and SPcoc parameters

| Values (bits) MSB LSB | Code-block width and height |
|-------------------------------|---|
| xxxx 0000 — xxxx 1000 | Code-block width and height exponent offset value $xcb = value + 2$ or $ycb = value + 2$. The code-block width and height are limited to powers of two with the minimum size being 2^2 and the maximum being 2^{10} . Further, the code-block size is restricted so that $xcb+ycb \leq 12$. |
| | All other values reserved |

Table A-19 — Code-block style for the SPcod and SPcoc parameters

| Values (bits) MSB LSB | Code-block style |
|-------------------------------|--|
| xxxx xxx0 xxxx xxx1 | No selective arithmetic coding bypass Selective arithmetic coding bypass |
| xxxx xx0x xxxx xx1x | No reset of context probabilities on coding pass boundaries Reset context probabilities on coding pass boundaries |
| xxxx x0xx xxxx x1xx | No termination on each coding pass Termination on each coding pass |
| xxxx 0xxx xxxx 1xxx | No vertically causal context Vertically causal context |
| xxx0 xxxx xxx1 xxxx | No predictable termination Predictable termination |
| xx0x xxxx xx1x xxxx | No segmentation symbols are used Segmentation symbols are used |
| | All other values reserved |

Table A-20 — Transformation for the SPcod and SPcoc parameters

| Values (bits) MSB LSB | Transformation type |
|-------------------------------|---------------------------|
| 0000 0000 | 9-7 irreversible filter |
| 0000 0001 | 5-3 reversible filter |
| | All other values reserved |

Table A-21 — Precinct width and height for the SPcod and SPcoc parameters

| Values (bits) MSB LSB | Precinct size |
|-------------------------------|--|
| xxxx 0000 — xxxx 1111 | 4 LSBs are the precinct width exponent, $PPx = value$. This value may only equal zero at the resolution level corresponding to the N_{LL} band. |
| 0000 xxxx — 1111 xxxx | 4 MSBs are the precinct height exponent $PPy = value$. This value may only equal zero at the resolution level corresponding to the N_{LL} band. |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.6.2 Coding style component (COC)

Function: Describes the coding style, number of decomposition levels, and layering used for compressing a particular component.

Usage: Main and first tile-part header of a given tile. Optional in both the main and tile-part headers. No more than one per any given component may be present in either the main or tile-part headers. If there are multiple tile-parts in a tile, and this marker segment is present, it shall be found only in the first tile-part (TP_{sot} = 0).

When used in the main header it overrides the main COD marker segment for the specific component. When used in the tile-part header it overrides the main COD, main COC, and tile COD for the specific component. Thus, the order of precedence is the following:

Tile-part COC > Tile-part COD > Main COC > Main COD

where the “greater than” sign, >, means that the greater overrides the lessor marker segment.

Length: Variable depending on the value of Scoc.




Figure A-10 — Coding style component syntax

COC: Marker code. Table A-22 shows the size and values of the symbol and parameters for coding style component marker segment.

Lcoc: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$Lcoc = \begin{cases} 9 & \text{maximum_precincts AND } Csiz < 257 \\ 10 & \text{maximum_precincts AND } Csiz \geq 257 \\ 10 + \text{number_decomposition_levels} & \text{user-defined_precincts AND } Csiz < 257 \\ 11 + \text{number_decomposition_levels} & \text{user-defined_precincts AND } Csiz \geq 257 \end{cases} \quad \text{A.3}$$

where maximum_precincts and user-defined_precincts are indicated in the Scoc parameter and number_decomposition_levels is indicated in the SPcoc parameter.

Ccoc: The index of the component to which this marker segment relates. The components are indexed 0, 1, 2, etc.

Scoc: Coding style for this component. Table A-23 shows the value for each Scoc parameter.

SPcoc: Parameters for coding style designated in Scoc. The parameters are designated, in order from top to bottom, in Table A-15. The coding style parameters within the SPcoc field appear in the sequence shown in Figure A-11.

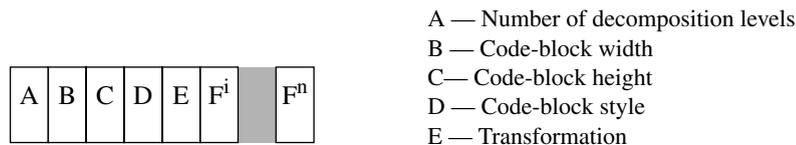


Figure A-11 — Coding style parameter diagram of the SPcoc parameters

Table A-22 — Coding style component parameter values

| Parameter | Size (bits) | Values |
|--------------------|-------------|--|
| COC | 16 | 0xFF53 |
| Lcoc | 16 | 9 — 43 |
| Ccoc | 8 16 | 0 — 255; if Csiz < 257 0 — 16 383; Csiz ≥ 257 |
| Scoc | 8 | Table A-23 |
| SPcoc ⁱ | variable | Table A-15 |

Table A-23 — Coding style parameter values for the Scoc parameter

| Values (bits) MSB LSB | Coding style |
|--------------------------|---|
| 0000 0000 | Entropy coder with maximum precinct values $PP_x = PP_y = 15$ |
| 0000 0001 | Entropy coder with precinct values defined below |
| | All other values reserved |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.6.3 Region of interest (RGN)

Function: Signals the presence of an ROI in the codestream.

Usage: Main and first tile-part header of a given tile. If used in the main header it refers to the ROI scaling value for one component in the whole image, valid for all tiles except those with an RGN marker segment.

When used in the tile-part header the scaling value is valid only for one component in that tile. There may be at most one RGN marker segment for each component in either the main or tile-part headers. The RGN marker segment for a particular component which appears in a tile-part header overrides any marker for that component in the main header, for the tile in which it appears. If there are multiple tile-parts in a tile, then this marker segment shall be found only in the first tile-part header.

Length: Variable.




Figure A-12 — Region of interest syntax

RGN: Marker code. Table A-24 shows the size and values of the symbol and parameters for region of interest marker segment.

Lrgn: Length of marker segment in bytes (not including the marker).

Crgn: The index of the component to which this marker segment relates. The components are indexed 0, 1, 2, etc.

Srgn: ROI style for the current ROI. Table A-25 shows the value for the Srgn parameter.

SPrgn:Parameter for ROI style designated in Srgn.

Table A-24 — Region of interest parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|--|
| RGN | 16 | 0xFF5E |
| Lrgn | 16 | 5 — 6 |
| Crgn | 8 16 | 0 — 255; if Csiz < 257 0 — 16 383; Csiz ≥ 257 |
| Srgn | 8 | Table A-25 |
| SPrgn | 8 | Table A-26 |

Table A-25 — Region-of-interest parameter values for the Srgn parameter

| Values | ROI style (Srgn) |
|--------|------------------------------|
| 0 | Implicit ROI (maximum shift) |
| | All other values reserved |

Table A-26 — Region-of-interest values from SPrgn parameter (Srgn = 0)

| Parameters (in order) | Size (bits) | Values | Meaning of SPrgn value |
|-----------------------|-------------|---------|--|
| Implicit ROI shift | 8 | 0 — 255 | Binary shifting of ROI coefficients above the background |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.6.4 Quantization default (QCD)

Function: Describes the quantization default used for compressing all components not defined by a QCC marker segment. The parameter values can be overridden for an individual component by a QCC marker segment in either the main or tile-part header.

Usage: Main and first tile-part header of a given tile. Shall be one and only one in the main header. May be at most one for all tile-part headers of a tile. If there are multiple tile-parts for a tile, and this marker segment is present, it shall be found only in the first tile-part (TPsot = 0).

When used in the tile-part header it overrides the main QCD and the main QCC for the specific component. Thus, the order of precedence is the following:

Tile-part QCC > Tile-part QCD > Main QCC > Main QCD

where the “greater than” sign, >, means that the greater overrides the lessor marker segment.

Length: Variable depending on the number of quantized elements.




Figure A-13 — Quantization default syntax

QCD: Marker code. Table A-27 shows the size and values of the symbol and parameters for quantization default marker segment.

Lqcd: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$Lqcd = \begin{cases} 4 + 3 \cdot \text{number_decomposition_levels} & \text{no_quantization} \\ 5 & \text{scalar_quantization_derived} \\ 5 + 6 \cdot \text{number_decomposition_levels} & \text{scalar_quantization_expounded} \end{cases} \quad \text{A.4}$$

where number_decomposition_levels is defined in the COD and COC marker segments, and no_quantization, scalar_quantization_derived, or scalar_quantization_expounded is signalled in the Sqcd parameter.

NOTE — The Lqcd can be used to determine how many quantization step sizes are present in the marker segment. However, there is not necessarily a correspondence with the number of subbands present because the subbands can be truncated with no requirement to correct this marker segment.

Sqcd: Quantization style for all components.

SPqcdⁱ:Quantization step size value for the ith subband in the defined order (see Annex F.3.1). The number of parameters is the same as the number of subbands in the tile-component with the greatest number of decomposition levels.

Table A-27 — Quantization default parameter values

| Parameter | Size (bits) | Values |
|--------------------|-------------|------------|
| QCD | 16 | 0xFF5C |
| Lqcd | 16 | 4 — 197 |
| Sqcd | 8 | Table A-28 |
| SPqcd ⁱ | variable | Table A-28 |

Table A-28 — Quantization default values for the Sqcd and Sqcc parameters

| Values (bits) MSB LSB | Quantization style | SPqcd or SPqcc size (bits) | SPqcd or SPqcc usage |
|-----------------------------|---|-------------------------------|-------------------------|
| xxx0 0000 | No quantization | 8 | Table A-29 |
| xxx0 0001 | Scalar derived (values signalled for N_{LL} subband only). Use Equation E.5. | 16 | Table A-30 |
| xxx0 0010 | Scalar expounded (values signalled for each subband). There are as many step sizes signalled as there are subbands. | 16 | Table A-30 |
| 000x xxxx — 111x xxxx | Number of guard bits 0 — 7 | | |
| | All other values reserved | | |

Table A-29 — Reversible step size values for the SPqcd and SPqcc parameters (reversible transform only)

| Values (bits) MSB LSB | Reversible step size values |
|---|--|
| 0000 0xxx — 1111 1xxx | Exponent, ϵ_b , of the reversible dynamic range signalled for each subband (see Equation E.5) |
| | All other values reserved |

Table A-30 — Quantization values for the SPqcd and SPqcc parameters (irreversible transformation only)

| Values (bits) MSB LSB | Quantization step size values |
|--|---|
| xxxx x000 0000 0000 — xxxx x111 1111 1111 | Mantissa, μ_b , of the quantization step size value (see Equation E.3) |
| 0000 0xxx xxxx xxxx — 1111 1xxx xxxx xxxx | Exponent, ϵ_b , of the quantization step size value (see Equation E.3) |

A.6.5 Quantization component (QCC)

Function: Describes the quantization used for compressing a particular component

Usage: Main and first tile-part header of a given tile. Optional in both the main and tile-part headers. No more than one per any given component may be present in either the main or tile-part headers. If there are multiple tile-parts in a tile, and this marker segment is present, it shall be found only in the first tile-part (TP_{slot} = 0).

Optional in both the main and tile-part headers. When used in the main header it overrides the main QCD marker segment for the specific component. When used in the tile-part header it overrides the main QCD, main QCC, and tile QCD for the specific component. Thus, the order of precedence is the following:

Tile-part QCC > Tile-part QCD > Main QCC > Main QCD

where the “greater than” sign, >, means that the greater overrides the lessor marker segment.

Length: Variable depending on the number of quantized elements.

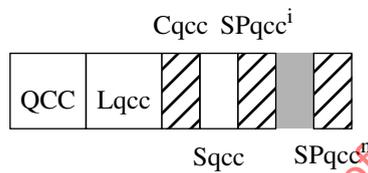


Figure A-14 — Quantization component syntax

QCC: Marker code. Table A-31 shows the size and values of the symbol and parameters for quantization component marker segment.

Lqcc: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$L_{qcc} = \begin{cases} 5 + 3 \cdot \text{number_decomposition_levels} & \text{no_quantization AND } C_{siz} < 257 \\ 6 & \text{scalar_quantization_derived AND } C_{siz} < 257 \\ 6 + 6 \cdot \text{number_decomposition_levels} & \text{scalar_quantization_expounded AND } C_{siz} < 257 \\ 6 + 3 \cdot \text{number_decomposition_levels} & \text{no_quantization AND } C_{siz} \geq 257 \\ 7 & \text{scalar_quantization derived AND } C_{siz} \geq 257 \\ 7 + 6 \cdot \text{number_decomposition_levels} & \text{scalar_quantization_expounded AND } C_{siz} \geq 257 \end{cases} \quad \text{A.5}$$

where *number_decomposition_levels* is defined in the COD and COC marker segments, and *no_quantization*, *scalar_quantization_derived*, or *scalar_quantization_expounded* is signalled in the *Sqcc* parameter.

NOTE — The *Lqcc* can be used to determine how many step sizes are present in the marker segment. However, there is not necessarily a correspondence with the number of subbands present because the subbands can be truncated with no requirement to correct this marker segment.

Cqcc: The index of the component to which this marker segment relates. The components are indexed 0, 1, 2, etc. (Either 8 or 16 bits depending on *Csiz* value.)

Sqcc: Quantization style for this component.

SPqccⁱ: Quantization value for each subband in the defined order (see Annex F.3.1). The number of parameters is the same as the number of subbands in the tile-component with the greatest number of decomposition levels.

Table A-31 — Quantization component parameter values

| Parameter | Size (bits) | Values |
|--------------------|-------------|--|
| QCC | 16 | 0xFF5D |
| Lqcc | 16 | 5 — 199 |
| Cqcc | 8 16 | 0 — 255; if Csiz < 257 0 — 16 383; Csiz ≥ 257 |
| Sqcc | 8 | Table A-28 |
| SPqcc ⁱ | variable | Table A-28 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.6.6 Progression order change (POC)

Function: Describes the bounds and progression order for any progression order other than specified in the COD marker segments in the codestream.

Usage: Main and tile-part headers. At most one POC marker segment may appear in any header. However, several progressions can be described with one POC marker segment. If a POC marker segment is used in the main header it overrides the progression order in the main and tile COD marker segments. If a POC is used to describe the progression of a particular tile, a POC marker segment must appear in the first tile-part header of that tile. Thus, the progression order of a given tile is determined by the presence of the POC or the values of the COD in the following order of precedence:

Tile-part POC > Main POC > Tile-part COD > Main COD

where the “greater than” sign, >, means that the greater overrides the lessor marker segment.

In the case where a POC marker segment is used, the progression of every packet in the codestream (or for that tile of the codestream) shall be defined in one or more POC marker segments. Each progression order is described in only one POC marker segment and shall be described in any tile-part header before any packets of that progression are found.

Length: Variable depending on the number of different progressions.

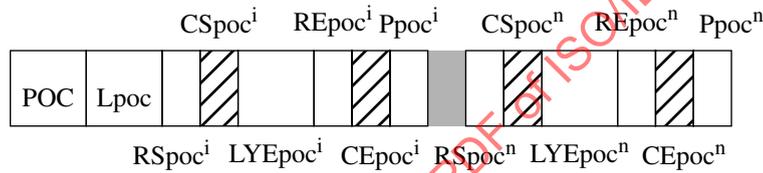


Figure A-15 — Progression order change tile syntax

POC: Marker value. Table A-32 shows the size and values of the symbol and parameters for progression order change marker segment.

Lpoc: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$Lpoc = \begin{cases} 2 + 7 \cdot \text{number_progression_order_change} & \text{Csiz} < 257 \\ 2 + 9 \cdot \text{number_progression_order_change} & \text{Csiz} \geq 257 \end{cases} \quad \text{A.6}$$

where the `number_progression_order_changes` is encoder defined.

RSpocⁱ: Resolution level index (inclusive) for the start of a progression. One value for each progression change in this tile or tile-part. The number of progression changes can be derived from the length of the marker segment.

CSpocⁱ: Component index (inclusive) for the start of a progression. The components are indexed 0, 1, 2, etc. (Either 8 or 16 bits depending on Csiz value.) One value for each progression change in this tile or tile-part. The number of progression changes can be derived from the length of the marker segment.

LYEpocⁱ: Layer index (exclusive) for the end of a progression. The layer index always starts at zero for every progression. Packets that have already been included in the codestream are not included again. One value for each progression change in this tile or tile-part. The number of progression changes can be derived from the length of the marker segment.

REpocⁱ: Resolution Level index (exclusive) for the end of a progression. One value for each progression change in this tile or tile-part. The number of progression changes can be derived from the length of the marker segment.

CEpocⁱ: Component index (exclusive) for the end of a progression. The components are indexed 0, 1, 2, etc. (Either 8 or 16 bits depending on Csiz value.) One value for each progression change in this tile or tile-part. The number of progression changes can be derived from the length of the marker segment.

Ppocⁱ: Progression order. One value for each progression change in this tile or tile-part. The number of progression changes can be derived from the length of the marker segment.

Table A-32 — Progression order change, tile parameter values

| Parameter | Size (bits) | Values |
|---------------------|-------------|--|
| POC | 16 | 0xFF5F |
| Lpoc | 16 | 9 — 65 535 |
| RSpoc ⁱ | 8 | 0 — 33 |
| CSpoc ⁱ | 8 16 | 0 — 255; if Csiz < 257 0 — 16 383; Csiz ≥ 257 |
| LYEpoc ⁱ | 16 | 0 — 65534 |
| REpoc ⁱ | 8 | RSpoc ⁱ — 33 |
| CEpoc ⁱ | 8 16 | CSpoc ⁱ — 255; if Csiz < 257 CSpoc ⁱ — 16 383; Csiz ≥ 257 |
| Ppoc ⁱ | 8 | Table A-16 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.7 Pointer marker segments

Pointer marker segments either provide a length or pointer into the codestream. The TLM marker segment describes the length of the tile-parts. It has the same length information as the SOT marker segment. The PLM or PLT marker segment describes the length of the packets.

NOTE — Having the pointer marker segments all occur in the main header allows direct access into the bit stream data. Having the pointer information in the tile-part headers removes the burden on the encoder of rewinding to store the information.

The TLM (Ptlm) or the SOT (Psot) parameters point from the beginning of the current tile-part’s SOT marker segment to the end of the bit stream data in that tile-part. Because tile-parts are required to be a multiple of 8 bits, these values are always a byte length. Figure A-16 shows the length of a tile-part.

The PLM or PLT marker segments are optional. The PLM marker segment is used in the main header and the PLT marker segments are used in tile-part headers. The PLM and PLT marker segments describe the lengths of each packet in the codestream.

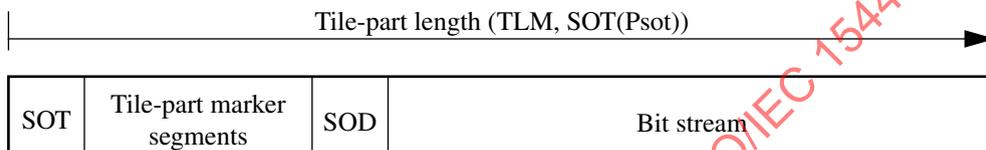


Figure A-16 — Tile-part lengths

A.7.1 Tile-part lengths (TLM)

Function: Describes the length of every tile-part in the codestream. Each tile-part’s length is measured from the first byte of the SOT marker segment to the end of the bit stream data of that tile-part. The value of each individual tile-part length in the TLM marker segment is the same as the value in the corresponding Psot in the SOT marker segment.

Usage: Main header. Optional use in the main header only. There may be multiple TLM marker segments in the main header.

Length: Variable depending on the number of tile-parts in the codestream.

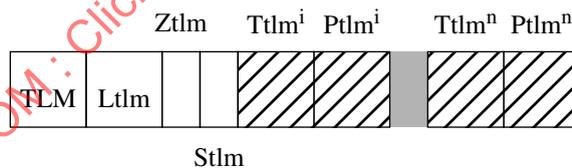


Figure A-17 — Tile-part length syntax

TLM: Marker code. Table A-33 shows the size and values of the symbol and parameters for the tile-part length marker segment.

Ltlm: Length of marker segment in bytes (not including the marker). The value of this parameter is determined by the following equation:

$$L_{tlm} = \begin{cases} 4 + 2 \cdot \text{number_of_tile-parts_in_marker_segment} & \text{ST=0 AND SP=0} \\ 4 + 3 \cdot \text{number_of_tile-parts_in_marker_segment} & \text{ST=1 AND SP=0} \\ 4 + 4 \cdot \text{number_of_tile-parts_in_marker_segment} & \text{ST=2 AND SP=0} \\ 4 + 4 \cdot \text{number_of_tile-parts_in_marker_segment} & \text{ST=0 AND SP=1} \\ 4 + 5 \cdot \text{number_of_tile-parts_in_marker_segment} & \text{ST=1 AND SP=1} \\ 4 + 6 \cdot \text{number_of_tile-parts_in_marker_segment} & \text{ST=2 AND SP=1} \end{cases} \quad \text{A.7}$$

where *number_of_tile-parts_in_marker_segment* is the number of tile-part lengths that are denoted in this marker segment; *ST* and *SP* are signaled by *Stlm* parameter.

Ztlm: Index of this marker segment relative to all other TLM marker segments present in the current header. The sequence of (*Ttlm*^{*i*}, *Ptlm*^{*i*}) pairs from this marker segment is concatenated, in order of increasing *Ztlm*, with the sequences of pairs from other marker segments. The *j*th entry in the resulting list contains the tile index and tile-part length pair for the *j*th tile-part appearing in the codestream.

Stlm: Size of the *Ttlm* and *Ptlm* parameters.

Ttlm^{*i*}: Tile index of the *i*th tile-part. Either none or one value for every tile-part. The number of tile-parts in each tile can be derived from this marker segment (or the concatenated list of all such markers) or from a non-zero *TN*sot parameter, if present.

Ptlm^{*i*}: Length, in bytes, from the beginning of the SOT marker of the *i*th tile-part to the end of the bit stream data for that tile-part. One value for every tile-part.

Table A-33 — Tile-part length parameter values

| Parameter | Size (bits) | Values |
|--------------------------|---|--|
| TLM | 16 | 0xFF55 |
| Ltlm | 16 | 6 — 65 535 |
| Ztlm | 8 | 0 — 255 |
| Stlm | 8 | Table A-34 |
| Ttlm ^{<i>i</i>} | 0 if <i>ST</i> = 0 8 if <i>ST</i> = 1 16 if <i>ST</i> = 2 | tiles in order 0 — 254 0 — 65 534 |
| Ptlm ^{<i>i</i>} | 16 if <i>SP</i> = 0 32 if <i>SP</i> = 1 | 13 — 65 535 13 — (2 ³² -1) |

Table A-34 — Size parameters for Stlm

| Values (bits) MSB LSB | Parameter size |
|-----------------------------|---|
| xx00 xxxx | <i>ST</i> = 0; <i>Ttlm</i> parameter is 0 bits, only one tile-part per tile and the tiles are in index order without omission or repetition |
| xx01 xxxx | <i>ST</i> = 1; <i>Ttlm</i> parameter 8 bits |
| xx10 xxxx | <i>ST</i> = 2; <i>Ttlm</i> parameter 16 bits |
| x0xx xxxx | <i>SP</i> = 0; <i>Ptlm</i> parameter 16 bits |
| x1xx xxxx | <i>SP</i> = 1; <i>Ptlm</i> parameter 32 bits |
| | All other values reserved |

A.7.2 Packet length, main header (PLM)

Function: A list of packet lengths in the tile-parts for every tile-part in order.

Usage: Main header. There may be multiple PLM marker segments. Both the PLM and PLT marker segments are optional and can be used together or separately.

Length: Variable depending on the number of tile-parts in the image and the number of packets in each tile-part.

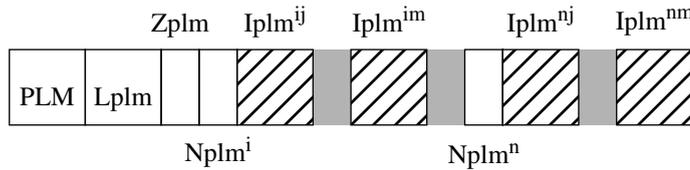


Figure A-18 — Packets length, main header syntax

PLM: Marker code. Table A-35 shows the size and values of the symbol and parameters for the packet length, main header marker segment.

Lplm: Length of marker segment in bytes (not including the marker).

Zplm: Index of this marker segment relative to all other PLM marker segments present in the current header. The sequence of (Nplmⁱ, Iplmⁱ) parameters from this marker segment is concatenated, in order of increasing Zplm, with the sequences of parameters from other marker segments. The kth entry in the resulting list contains the number of bytes and packet header pair for the kth tile-part appearing in the codestream.

Every marker segment in this series shall end with a completed packet header length. However, the series of Iplm parameters described by the Nplm does not have to be complete in a given marker segment. Therefore, it is possible that the next PLM marker segment will not have a Nplm parameter after Zplm, but the continuation of the Iplm series from the last PLM marker segment.

Nplmⁱ: Number of bytes of Iplm information for the ith tile-part in the order found in the codestream. One value for each tile-part. If a codestream contains one, or more, tile-parts exceeding the limitations of PLM markers, these markers shall not be used.

NOTE — This value is expressed with an 8 bit number limiting the number of Iplm bytes to 255 and the number of packets in a tile-part to 255, or less. This is not a restriction on the number of packets that can be in a tile-part. It is merely a limit on this marker segment's ability to describe the packets in a tile-part.

Iplm^{ij}: Length of the jth packet in the ith tile-part. If packet headers are stored with the packet this length includes the packet header. If packet headers are stored in PPM or PPT this length does not include the packet header length. One range of values for each tile-part. One value for each packet in the tile.

Table A-35 — Packets length, main header parameter values

| Parameter | Size (bits) | Values |
|--------------------|-------------|------------|
| PLM | 16 | 0xFF57 |
| Lplm | 16 | 4 — 65 535 |
| Zplm | 8 | 0 — 255 |
| Nplm ⁱ | 8 | 0 — 255 |
| Iplm ^{ij} | variable | Table A-36 |

Table A-36 — Iplm, Iplt list of packet lengths

| Parameters (in order) | Size (bits) | Values | Meaning of Iplm or Iplt values |
|--------------------------|------------------------------------|--|---|
| Packet length | 8 bits repeated as necessary | 0xxx xxxx 1xxx xxxx x000 0000 — x111 1111 | Last 7 bits of packet length, terminate number ^a Continue reading ^b 7 bits of packet length |

a. These are the last 7 bits that make up the packet length.

b. These are not the last 7 bits that make up the packet length. Instead, these 7 bits are a portion of those that make up the packet length. The packet length has been broken into 7 bit segments which are sent in order from the most significant segment to the least significant segment. Furthermore, the bits in the most significant segment are right justified to the byte boundary. For example, a packet length of 128 is signalled as 1000 0001 0000 0000, while a length of 512 is signalled as 1000 0100 0000 0000.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.7.3 Packet length, tile-part header (PLT)

Function: A list of packet lengths in the tile-part.

Usage: Tile-part headers. There may be multiple PLT marker segments per tile. Both the PLM and PLT marker segments are optional and can be used together or separately. Shall appear in any tile-part header before the packets whose lengths are described herein.

Length: Variable depending on the number of packets in each tile-part.

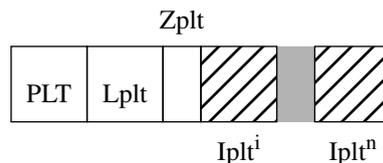


Figure A-19 — Packet length, tile-part header syntax

PLT: Marker code. Table A-37 shows the size and values of the symbol and parameters for the packet length, tile-part header marker segment.

Lplt: Length of marker segment in bytes (not including the marker).

Zplt: Index of this marker segment relative to all other PLT marker segments present in the current header. The sequence of (Ipltⁱ) parameters from this marker segment is concatenated, in order of increasing Zplt, with the sequences of parameters from other marker segments. Every marker segment in this series shall end with a completed packet header length.

Ipltⁱ: Length of the ith packet. If packet headers are stored with the packet this length includes the packet header, if packet headers are stored in PPM or PPT this length does not include the packet header length.

Table A-37 — Packet length, tile-part headers parameter values

| Parameter | Size (bits) | Values |
|-------------------|-------------|------------|
| PLT | 16 | 0xFF58 |
| Lplt | 16 | 4 — 65 535 |
| Zplt | 8 | 0 — 255 |
| Iplt ⁱ | variable | Table A-36 |

A.7.4 Packed packet headers, main header (PPM)

Function: A collection of the packet headers from all tiles.

NOTE — This is useful so multiple reads are not required to decode headers.

Usage: Main header. May be used in the main header for all tile-parts unless a PPT marker segment is used in the tile-part header.

The packet headers shall be in only one of three places within the codestream. If the PPM marker segment is present, all the packet headers shall be found in the main header. In this case, the PPT marker segment and packets distributed in the bit stream of the tile-parts are disallowed.

If there is no PPM marker segment then the packet headers can be distributed either in PPT marker segments or distributed in the codestream as defined in Annex B.10. The packet headers shall not be in both a PPT marker segment and the codestream for the same tile. If the packet headers are in PPT marker segments, they shall appear in a tile-part header before the corresponding packet data appears (i.e. in the same tile-part header or one with a lower TP_{sot} value). There may be multiple PPT marker segments in a tile-part header.

Length: Variable depending on the number of packets in each tile-part and the size of the packet headers.

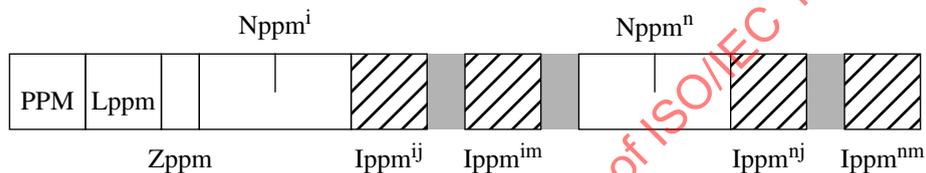


Figure A-20 — Packed packet headers, main header syntax

PPM: Marker code. Table A-38 shows the size and values of the symbol and parameters for the packed packet headers, main header marker segment.

Lppm: Length of marker segment in bytes, not including the marker.

Zppm: Index of this marker segment relative to all other PPM marker segments present in the main header.

The sequence of (N_{ppm}^i , I_{ppm}^i) parameters from this marker segment is concatenated, in order of increasing Z_{ppm} , with the sequences of parameters from other marker segments. The k th entry in the resulting list contains the number of bytes and packet headers for the k th tile-part appearing in the codestream.

Every marker segment in this series shall end with a completed packet header. However, the series of I_{ppm} parameters described by the N_{ppm} does not have to be complete in a given marker segment. Therefore, it is possible that the next PPM marker segment will not have a N_{ppm} parameter after Z_{ppm} , but the continuation of the I_{ppm} series from the last PPM marker segment.

N_{ppm}^i : Number of bytes of I_{ppm} information for the i th tile-part in the order found in the codestream. One value for each tile-part (not tile).

I_{ppm}^{ij} : Packet header for every packet in order in the tile-part. The contents are exactly the packet header which would have been distributed in the bit stream as described in Annex B.10.

Table A-38 — Packed packet headers, main header parameter values

| Parameter | Size (bits) | Values |
|--------------------|-------------|--------------------------|
| PPM | 16 | 0xFF60 |
| Lppm | 16 | 7 — 65 535 |
| Zppm | 8 | 0 — 255 |
| Nppm ⁱ | 32 | 0 — (2 ³² -1) |
| Ippm ^{ij} | variable | packet headers |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.7.5 Packed packet headers, tile-part header (PPT)

Function: A collection of the packet headers from one tile or tile-part.

Usage: Tile-part headers. Shall appear in any tile-part header before the packets whose headers are described herein.

The packet headers shall be in only one of three places within the codestream. If the PPM marker segment is present, all the packet headers shall be found in the main header. In this case, the PPT marker segment and packets distributed in the bit stream of the tile-parts are disallowed.

If there is no PPM marker segment then the packet headers can be distributed either in PPT marker segments or distributed in the codestream as defined in Annex B.10. The packet headers shall not be in both a PPT marker segment and the codestream for the same tile. If the packet headers are in PPT marker segments, they shall appear in a tile-part header before the corresponding packet data appears (i.e. in the same tile-part header or one with a lower TP_{sot} value). There may be multiple PPT marker segments in a tile-part header.

Length: Variable depending on the number of packets in each tile-part and the compression of the packet headers.

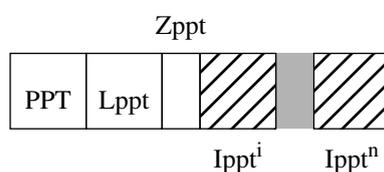


Figure A-21 — Packed packet headers, tile-part header syntax

PPT: Marker code. Table A-39 shows the size and values of the symbol and parameters for the packed packet headers, tile-part header marker segment.

Lppt: Length of marker segment in bytes, not including the marker.

Zppt: Index of this marker segment relative to all other PPT marker segments present in the current header. The sequence of (Ipptⁱ) parameters from this marker segment is concatenated, in order of increasing Zppt, with the sequences of parameters from other marker segments. Every marker segment in this series shall end with a completed packet header.

Ipptⁱ: Packet header for every packet in order in the tile-part. The component index, layer, and resolution level are determined from the method of progression or POC marker segments. The contents are exactly the packet header which would have been distributed in the bit stream as described Annex B.10 packet header information.

Table A-39 — Packet header, tile-part headers parameter values

| Parameter | Size (bits) | Values |
|-------------------|-------------|----------------|
| PPT | 16 | 0xFF61 |
| Lppt | 16 | 4 — 65 535 |
| Zppt | 8 | 0 — 255 |
| Ippt ⁱ | variable | packet headers |

A.8 In bit stream marker and marker segments

These marker and marker segments are used for error resilience. They can be found in the bit stream. (The EPH marker can also be used in the PPM and PPT marker segments.)

A.8.1 Start of packet (SOP)

Function: Marks the beginning of a packet within a codestream.

Usage: Optional. May be used in the bit stream in front of every packet. Shall only be used if indicated in the proper COD marker segment (see Annex A.6.1). If PPM or PPT marker segments are used then the SOP marker segment may appear immediately before the packet data in the bit stream.

If SOP marker segments are allowed (by signalling in the COD marker segment, see Annex A.6.1), each packet in any given tile-part may or may not be prepended with an SOP marker segment (see Annex A.8.1). However, whether or not the SOP marker segment is used, the count in the Nsop is incremented for each packet. If the packet headers are moved to a PPM or PPT marker segments (see Annex A.7.4 and Annex A.7.5), then the SOP marker segments may appear immediately before the packet body in the tile-part compressed image data portion.

Length: Fixed.




Figure A-22 — Start of packet syntax

SOP: Marker code. Table A-40 shows the size and values of the symbol and parameters for start of packet marker segment.

Lsop: Length of marker segment in bytes, not including the marker.

Nsop: Packet sequence number. The first packet in a coded tile is assigned the value zero. For every successive packet in this coded tile this number is incremented by one. When the maximum number is reached, the number rolls over to zero.

Table A-40 — Start of packet parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|------------|
| SOP | 16 | 0xFF91 |
| Lsop | 16 | 4 |
| Nsop | 16 | 0 — 65 535 |

A.8.2 End of packet header (EPH)

Function: Indicates the end of the packet header for a given packet. This delimits the packet header in the bit stream or in the PPM or PPT marker segments. This marker does not denote the beginning of packet data. If packet headers are not in bit stream (i.e. PPM or PPT marker segments are used), this marker shall not be used in the bit stream.

Usage: Optionally used in the bit stream or in the PPM or PPT marker segments. Shall only be used if indicated in the proper COD marker segment (see Annex A.6.1). Appears immediately after a packet header.

If EPH markers are allowed (by signalling in the COD marker segment, see Annex A.6.1), each packet header in any given tile-part may or may not be postpended with an EPH marker segment (see Annex A.8.1). If the packet headers are moved to a PPM or PPT marker segments (see Annex A.7.4 and Annex A.7.5), then the EPH markers may appear after the packet headers in the PPM or PPT marker segments.

Length: Fixed.

EPH: Marker code

Table A-41 — End of packet header parameter values

| Parameter | Size (bits) | Values |
|-----------|-------------|--------|
| EPH | 16 | 0xFF92 |

A.9 Informational marker segments

These marker segments are strictly information and are not necessary for a decoder. However, these marker segments might assist a parser or decoder. More information about the source and characteristics of the image can be obtained by using a file format such as JP2 (see Annex I).

A.9.1 Component registration (CRG)

Function: Allows specific registration of components with respect to each other. For coding purposes the samples of components are considered to be located at reference grid points that are integer multiples of XRsiz and YRsiz (see Annex A.5.1). However, this may be inappropriate for rendering the image. The CRG marker segment describes the “center of mass” of each component’s samples with respect to the separation. This marker segment has no effect on decoding the codestream.

NOTE — This component registration offset is with respect to the image offset (XOsiz and YOsiz) and the component separation (XRsizⁱ and YRsizⁱ). For example, the horizontal reference grid point for the left most samples of component *c* is $XRsiz^c \lceil XOsiz / XRsiz^c \rceil$. (Likewise for the vertical direction.) The horizontal offset denoted in this marker segment is in addition to this offset.

Usage: Main header only. Only one CRG may be used in the main header and is applicable for all tiles.

Length: Variable depending on the number of components.

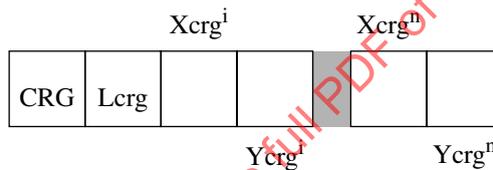


Figure A-23 — Component registration syntax

CRG: Marker code. Table A-42 shows the size and values of the symbol and parameters for the component registration marker segment.

Lcrg: Length of marker segment in bytes (not including the marker).

Xcrgⁱ: Value of the horizontal offset, in units of $1/65\,536$ of the horizontal separation $XRsiz^i$, for the *i*th component. Thus, values range from $0/65\,536$ (sample occupies its reference grid point) to $XRsiz^c(65\,535/65\,536)$ (just before the next sample’s reference grid point). This value is repeated for every component.

Ycrgⁱ: Value of the vertical offset, in units of $1/65\,536$ of the vertical separation $YRsiz^i$, for the *i*th component. Thus, values range from $0/65\,536$ (sample occupies its reference grid point) to $YRsiz^c(65\,535/65\,536)$ (just before the next sample’s reference grid point). This value is repeated for every component.

Table A-42 — Component registration parameter values

| Parameter | Size (bits) | Values |
|-------------------|-------------|------------|
| CRG | 16 | 0xFF63 |
| Lcrg | 16 | 6 — 65 534 |
| Xcrg ⁱ | 16 | 0 — 65 535 |
| Ycrg ⁱ | 16 | 0 — 65 535 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

A.9.2 Comment (COM)

Function: Allows unstructured data in the main and tile-part header.

Usage: Main and tile-part headers. Repeatable as many times as desired in either or both the main or tile-part headers. This marker segment has no effect on decoding the codestream.

Length: Variable depending on the length of the message.

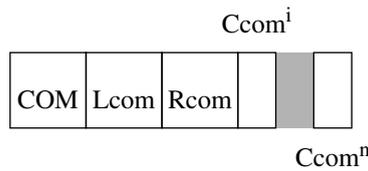


Figure A-24 — Comment syntax

COM: Marker code. Table A-43 shows the size and values of the symbol and parameters for the comment marker segment.

Lcom: Length of marker segment in bytes (not including the marker).

Rcom: Registration value of the marker segment.

Ccomⁱ: Byte of unstructured data.

Table A-43 — Comment parameter values

| Parameter | Size (bits) | Values |
|-------------------|-------------|------------|
| COM | 16 | 0xFF64 |
| Lcom | 16 | 5 — 65 535 |
| Rcom | 16 | Table A-44 |
| Ccom ⁱ | 8 | 0 — 255 |

Table A-44 — Registration values for the Rcom parameter

| Values | Registration values |
|--------|--|
| 0 | General use (binary values) |
| 1 | General use (IS 8859-15:1999 (Latin) values) |
| | All other values reserved |

Annex B

Image and compressed image data ordering

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex describes the various structural entities, and their organization in the codestream: components, tiles, subbands, and their divisions.

B.1 Introduction to image data structure concepts

The reference grid provides a mechanism for co-registering components and for defining subsets of the reference grid, e.g. the image area and tiles.

The components consist of a two dimensional arrays of samples. Each component, c , has parameters XR_{siz}^c , YR_{siz}^c (see Annex A.5.1) which define the mapping between component samples and the reference grid points. Every component sample is associated with a reference grid point (though not vice versa). This mapping induces a registration of components with each other used for coding only.

Each component is divided into tiles corresponding to the tiling of the reference grid. These tile-components are coded independently. Each tile-component is wavelet transformed into several decomposition levels which are related to resolution levels (see Annex F). Each resolution level consists of either the HL, LH, and HH subbands from one decomposition level or the N_{LL} subband. Thus, there is one more resolution level than there are decomposition levels.

Each subband has its own origin. The subband boundary conditions are unique for each HL, LH, and HH subband.

NOTE — This convention differs from the usual wavelet diagrams which place all subbands for a component in a single space

Precincts and code-blocks are defined at the resolution level and subband. Consequently they can vary over tile-components. Precincts are defined so that code-blocks fit neatly, i.e., they “line up” with each other.

In the accompanying figures, boundaries and coordinate axes are shown. In each case, the samples or coefficients coincident with the left and upper boundaries are included in a given region, while samples or coefficients along the right and/or lower boundaries are not included in that region.

Also, in the accompanying formulae, many of the variables have values that can change as a function of component, tile, or resolution level. These values may change explicitly (through syntax described in Annex A) or implicitly (through propagation). For convenience of notation, some dependencies are suppressed in the discussion that follows.

B.2 Component mapping to the reference grid

All components (and many other structures in this Annex) are defined with respect to the reference grid. The various parameters defining the reference grid appear in Figure B-1. The reference grid is a rectangular grid of points with the indices from (0, 0) to ($X_{siz}-1$, $Y_{siz}-1$). An “image area” is defined on the reference grid by the dimensional parameters, (X_{siz} , Y_{siz}) and (XO_{siz} , YO_{siz}). Specifically, the image area on the reference grid is defined by its upper left hand reference grid point at location (XO_{siz} , YO_{siz}), and its lower right hand reference grid point at location ($X_{siz}-1$, $Y_{siz}-1$).

The samples of component c are at integer multiples of (XR_{siz}^c , YR_{siz}^c) on the reference grid. Each component domain is a sub-sampled version of the reference grid with the (0, 0) coordinate as common point for each component. Row samples are located reference grid points that are at integer multiples of XR_{siz}^c and column samples are located reference grid points that are at integer multiples of YR_{siz}^c . Only those samples which fall within the image area actually

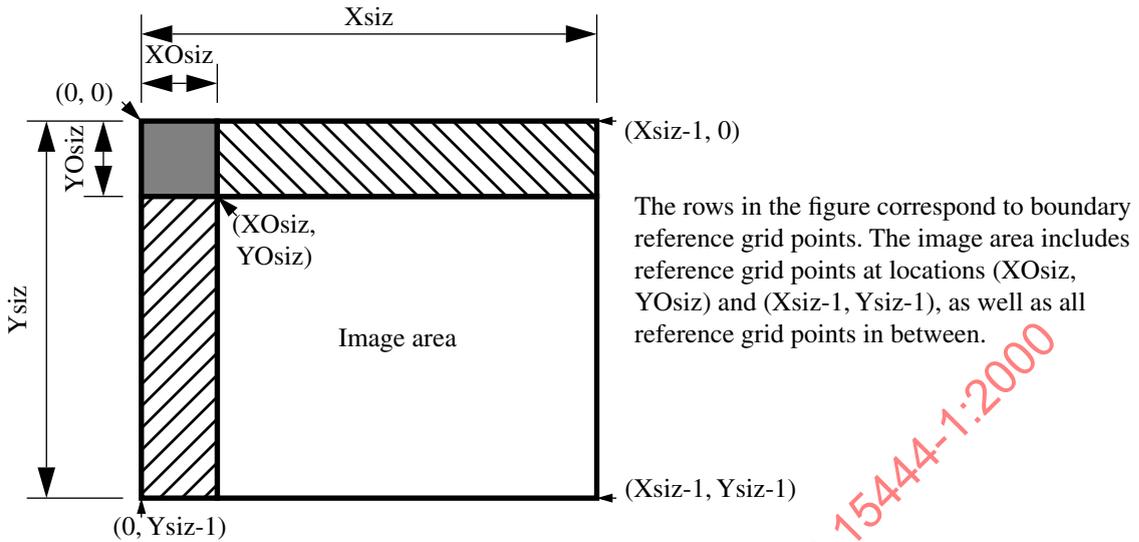


Figure B-1 — Reference grid diagram

belong to the image component. Thus, the samples of component c are mapped to rectangle having upper left hand sample with coordinates (x_0, y_0) and lower right hand sample with coordinates (x_1-1, y_1-1) , where

$$x_0 = \left\lceil \frac{XOsiz}{XRsiz^c} \right\rceil \quad x_1 = \left\lceil \frac{Xsiz}{XRsiz^c} \right\rceil \quad y_0 = \left\lceil \frac{YOsiz}{YRsiz^c} \right\rceil \quad y_1 = \left\lceil \frac{Ysiz}{YRsiz^c} \right\rceil \quad \text{B.1}$$

Thus, the dimensions of component c are given by

$$(width, height) = (x_1 - x_0, y_1 - y_0) \quad \text{B.2}$$

The parameters, $Xsiz$, $Ysiz$, $XOsiz$, $YOsiz$, $XRsiz^c$ and $YRsiz^c$ are all defined in the SIZ marker segment (see Annex A.5.1).

NOTE — The fact that all components share the image offset $(XOsiz, YOsiz)$ and size $(Xsiz, Ysiz)$ induces a registration of the components.

NOTE — Figure B-2 shows an example of three components mapped to the reference grid. Figure B-3 shows the image area from a particular image offset with different $(XRsiz, YRsiz)$ values. The upper left sample coordinate, in the image component domain, that is included in the image area is also illustrated.

B.3 Image area division into tiles and tile-components

The reference grid is partitioned into a regular sized rectangular array of tiles. The tile size and tiling offset are defined, on the reference grid, by dimensional pairs $(XTsiz, YTsiz)$ and $(XTOsiz, YTOsiz)$, respectively. These are all parameters from the SIZ marker segment (see Annex A.5.1).

Every tile is $XTsiz$ reference grid points wide and $YTsiz$ reference grid points high. The top left corner of the first tile (tile 0) is offset from the top left corner of the reference grid by $(XTOsiz, YTOsiz)$. The tiles are numbered in raster order. This is the tile index in the Isot parameter from the SOT marker segment in Annex A.4.2. Thus, the first tile's upper left coordinates relative to the reference grid are $(XTOsiz, YTOsiz)$. Figure B-4 shows this relationship.

The tile grid offsets $(XTOsiz, YTOsiz)$ are constrained to be no greater than the image area offsets. This is expressed by the following ranges:

$$0 \leq XTOsiz \leq XOsiz \quad 0 \leq YTOsiz \leq YOsiz \quad \text{B.3}$$

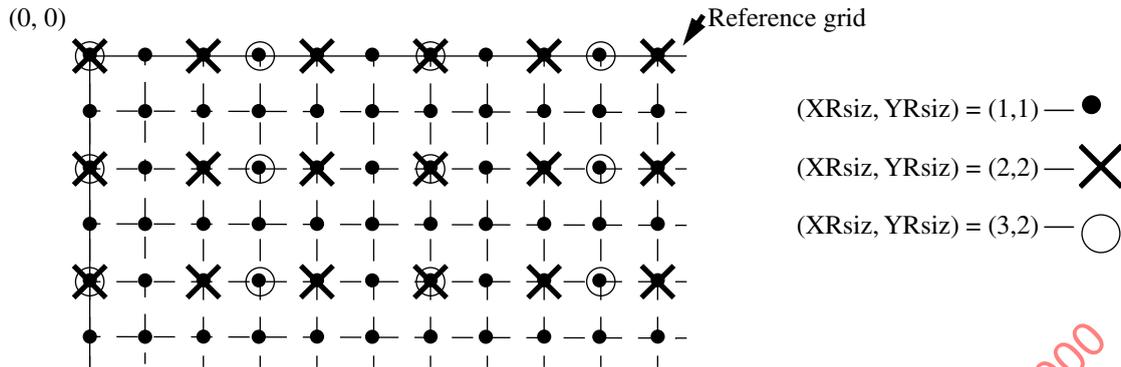


Figure B-2 — Component sample locations on the reference grid for different XRsize and YRsize values

Also, the tile size plus the tile offset shall be greater than the image area offset. This ensures that the first tile (tile 0) will contain at least one reference grid point from the image area. This is expressed by the following ranges:

$$XTsiz + XTOsiz > XOsiz \quad YTsiz + YTOsiz > YOsiz \quad \text{B.4}$$

The number of tiles in the X direction (*numXtiles*) and the Y direction (*numYtiles*) is the following:

$$numXtiles = \left\lceil \frac{Xsiz - XTOsiz}{XTsiz} \right\rceil \quad numYtiles = \left\lceil \frac{Ysiz - YTOsiz}{YTsiz} \right\rceil \quad \text{B.5}$$

For the purposes of this description, it is useful to have tiles indexed in terms of horizontal and vertical position. Let *p* be the horizontal index of a tile, ranging from 0 to *numXtiles* - 1, and *q* be the vertical index of a tile, ranging from 0 to *numYtiles* - 1, determined from the tile index as follows:

$$p = \text{mod}(t, numXtiles) \quad q = \left\lfloor \frac{t}{numXtiles} \right\rfloor \quad \text{B.6}$$

where *t* is the index of the tile in Figure B-4.

The coordinates of a particular tile on the reference grid are described by the following equation:

$$tx_0(p, q) = \max(XTOsiz + p \cdot XTsiz, XOsiz) \quad \text{B.7}$$

$$ty_0(p, q) = \max(YTOsiz + q \cdot YTsiz, YOsiz) \quad \text{B.8}$$

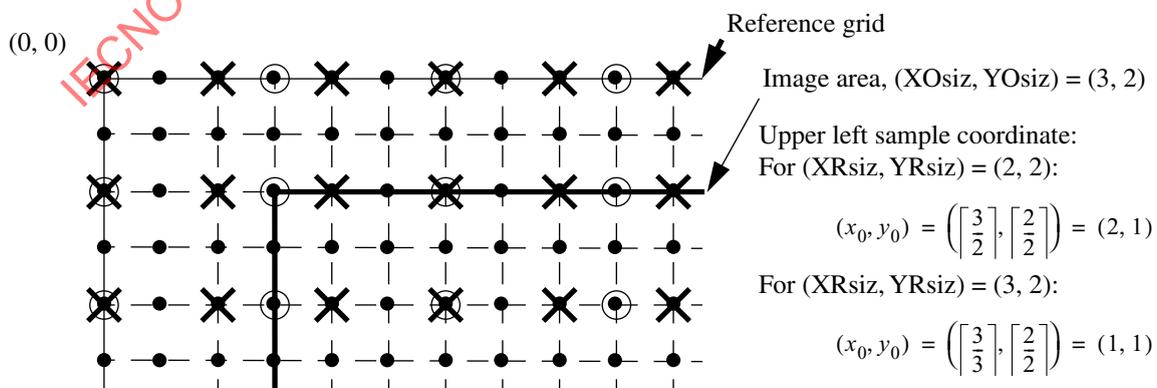


Figure B-3 — Example of upper left component sample locations

$$tx_1(p, q) = \min(XTOsiz + (p + 1) \cdot XTsiz, Xsiz) \tag{B.9}$$

$$ty_1(p, q) = \min(YTOsiz + (q + 1) \cdot YTsiz, Ysiz) \tag{B.10}$$

where $tx_0(p, q)$ and $ty_0(p, q)$ are the coordinates of the upper left corner of the tile, $tx_1(p, q) - 1$ and $ty_1(p, q) - 1$ are the coordinates of the lower right corner of the tile. We will often drop the tile's coordinates in referring to a specific tile and refer to the coordinates (tx_0, ty_0) and (tx_1, ty_1) .

Thus the dimensions of a tile in the reference grid are

$$(tx_1 - tx_0, ty_1 - ty_0) \tag{B.11}$$

Within the domain of image component i , the coordinates of the upper left hand sample are given by (tcx_0, tcy_0) and the coordinates of the lower right hand sample are given by (tcx_1-1, tcy_1-1) , where

$$tcx_0 = \left\lceil \frac{tx_0}{XRsiz^i} \right\rceil \quad tcx_1 = \left\lceil \frac{tx_1}{XRsiz^i} \right\rceil \quad tcy_0 = \left\lceil \frac{ty_0}{YRsiz^i} \right\rceil \quad tcy_1 = \left\lceil \frac{ty_1}{YRsiz^i} \right\rceil \tag{B.12}$$

so that the dimensions of the tile-component are

$$(tcx_1 - tcx_0, tcy_1 - tcy_0) \tag{B.13}$$

B.4 Example of the mapping of components to the reference grid (informative)

The following example is included to illustrate the mapping of image components to the reference grid and the area induced by tiling across components with different sub-sampling factors. The example assumes an application in which an original image with aspect ratio 16:9 is to be compressed with this Recommendation | International Standard. Choices of the image size, image offset, tile size, and tile offset are used such that an image with aspect ratio 4:3 can be cropped from the center of the original image. Figure B-5 shows the reference grid and image areas along with the tiling structure that will be imposed in this example.


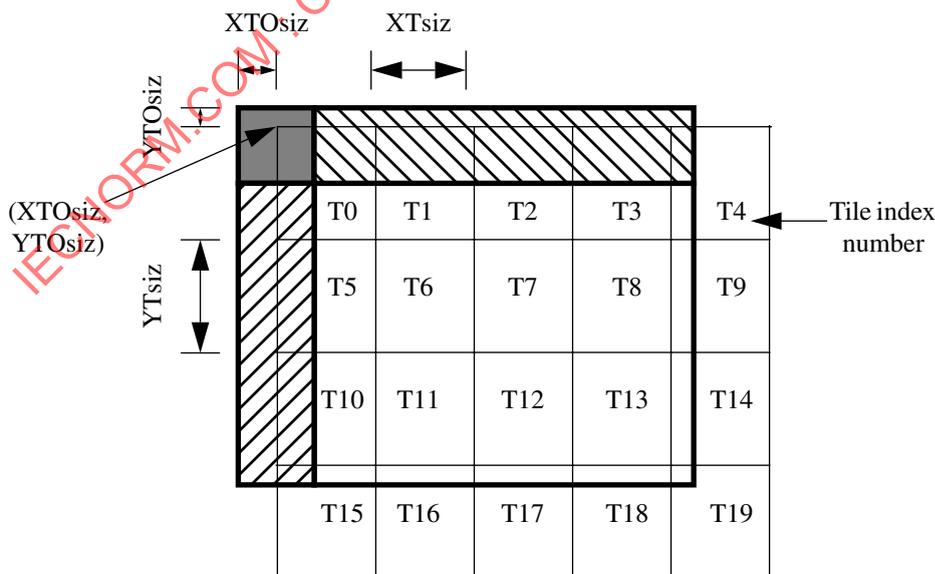


Figure B-4 — Tiling of the reference grid diagram

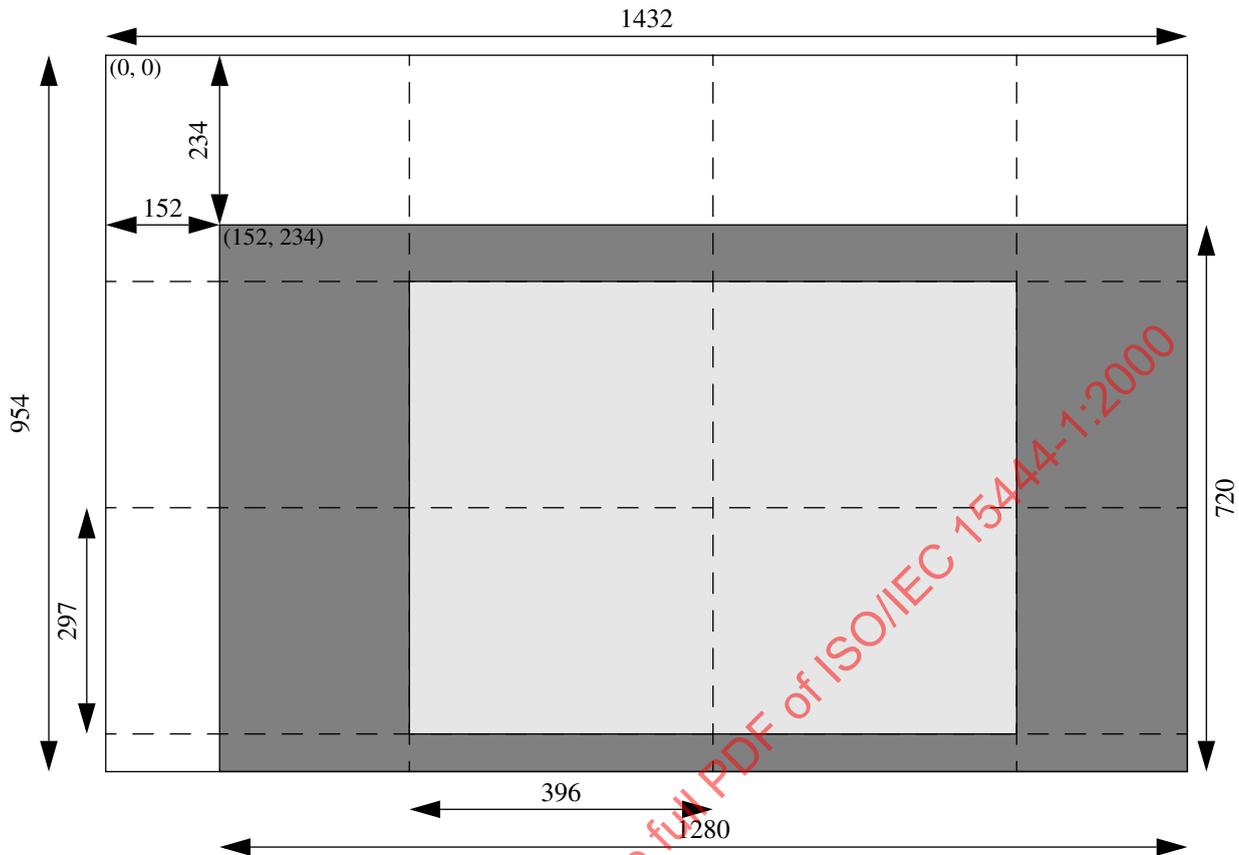


All coordinates figure are in the component domain.

Figure B-5 — Reference grid example

Let the reference grid size (Xsiz, Ysiz) be (1432, 954). In this example, the image will contain two components (component indices will be represented by $i = 0, 1$). The sub-sampling factors XR_{siz}^i and YR_{siz}^i of the two components with respect to the reference grid will be $XR_{siz}^0 = YR_{siz}^0 = 1$ and $XR_{siz}^1 = YR_{siz}^1 = 2$. The image offset is set to be $(XO_{siz}, YO_{siz}) = (152, 234)$. Given these parameters, the sizes of the two image components can be determined from Equation B.1. The upper left corner of component 0 is found at $(\lceil 152/1 \rceil, \lceil 234/1 \rceil) = (152, 234)$. The lower right corner of component 0 is found at $(\lceil 1432/1 \rceil - 1, \lceil 954/1 \rceil - 1) = (1431, 953)$. The actual size of component 0 is therefore 1280 samples in width by 720 samples in height. The upper left corner of component 1 is found at $(\lceil 152/2 \rceil, \lceil 234/2 \rceil) = (76, 117)$, while the lower right corner of that component is found at $(\lceil 1432/2 \rceil - 1, \lceil 954/2 \rceil - 1) = (715, 476)$. The actual size of component 1 is therefore 640 samples in width by 360 samples in height.

The tiles are chosen to have an aspect ratio of 4:3. In this example, (XT_{siz}, YT_{siz}) will be set to (396, 297) and the tile offsets (XTO_{siz}, YTO_{siz}) will be set to (0, 0). The number of tiles in the x and y directions are then determined from Equation B.5 $numX_{tiles} = \lceil 1432/396 \rceil = 4$, $numY_{tiles} = \lceil 954/297 \rceil = 4$. The tiled image components will therefore contain a total of $t = 16$ tiles, with tile grid indices p and q in the range $0 \leq p, q < 4$. It is now possible to compute the locations of the tiles in each image component. To do so, the values of tx_0 , tx_1 , ty_0 , and ty_1 are determined from Equation B.7, Equation B.8, Equation B.9, and Equation B.10. Since p and q share the same set of admissible values, the notation '0:3' will be used to refer to the sequence of values {0, 1, 2, 3}, and the notation '*' will be used to denote that the result is valid for all admissible values. The values of tx_0 are found as $tx_0(0:3, *) = \{152, 396, 792, 1188\}$, and the values of tx_1 are given by $tx_1(0:3, *) = \{396, 792, 1188, 1432\}$. The values of ty_0 are $ty_0(*, 0:3) = \{234, 297, 594, 891\}$, and the values of ty_1 are $ty_1(*, 0:3) = \{297, 594, 891, 954\}$.

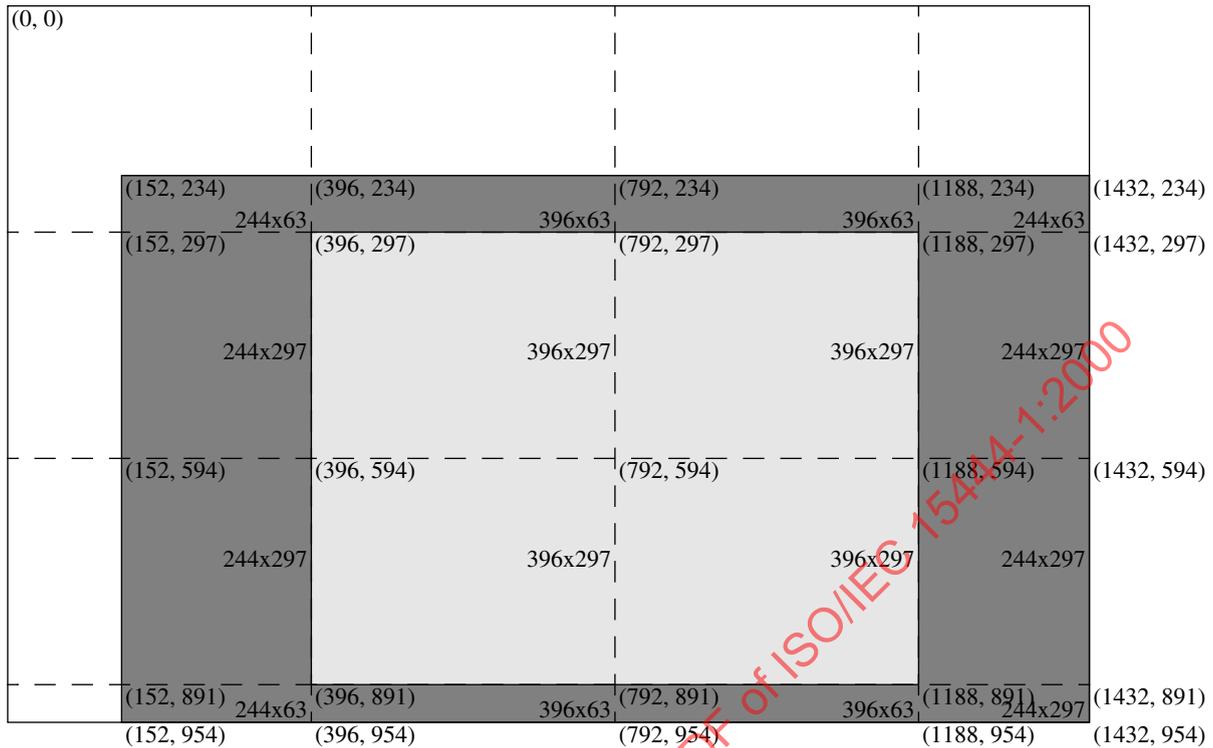

Tiling for component 0. All coordinates in this figure are in the component domain.


Figure B-6 — Example tile sizes and locations for component 0

With the values of tx_0 , tx_1 , ty_0 , and ty_1 now known, the locations and sizes of all tiles can be determined for each of the components. To do so, Equation B.12 is used. The relevant locations and sizes for component 0 are shown in Figure B-6, while the same information is provided for component 1 in Figure B-7. Of particular interest are the ‘interior’ tiles in the figures (tiles (1, 1), (1, 2), (2, 1), and (2, 2)). These tiles are not limited in extent by the image area. In component 0, all of these tiles are the same size. This regularity is a result of the fact that the sub-sampling factors for this component are $(XR_{siz}^0, YR_{siz}^0) = (1, 1)$. However, in component 1, these tiles are not all the same size because $(XR_{siz}^1, YR_{siz}^1) = (2, 2)$. Notice that tiles (1, 1) and (2, 1) are both of size 198 by 148, while tiles (1, 2) and (2, 2) are both of size 198 by 149. This illustrates that the number of samples in the interior tiles of a component can vary depending upon the particular combination of tile size and component sub-sampling factors.

With these choices of reference grid, image offset, tile size, and tile offset, the coded image can be cropped directly to the desired interior region. The four interior tiles from each component can be retained and will represent a cropped image of reference grid size (792, 594). When such a cropping is performed, it will not be necessary to recode the tiles, but the values of some of the reference grid parameters must change. The image offsets must be set to the coordinates of the cropping locations, so that $(XO_{siz}', YO_{siz}') = (396, 297)$ where (XO_{siz}', YO_{siz}') are the image offsets of the cropped image. Similarly, the image size must be adjusted to reflect the cropped size $(Xs_{siz}', Ys_{siz}') = (1\ 188, 891)$ where (Xs_{siz}', Ys_{siz}') are the sizes of the cropped reference grid. Finally, the tile offsets are no longer zero and instead must be set to $(XTO_{siz}', YTO_{siz}') = (396, 297)$ where (XTO_{siz}', YTO_{siz}') are the tile offsets of the cropped reference grid.

B.5 Transformed tile-component division into resolution levels and subbands

Each tile-component is wavelet transformed with N_L decomposition levels as explained in Annex F. Thus, there are N_L+1 distinct resolution levels, denoted $r = 0, 1, \dots, N_L$. The lowest resolution level, $r = 0$, is represented by the N_L LL band. In

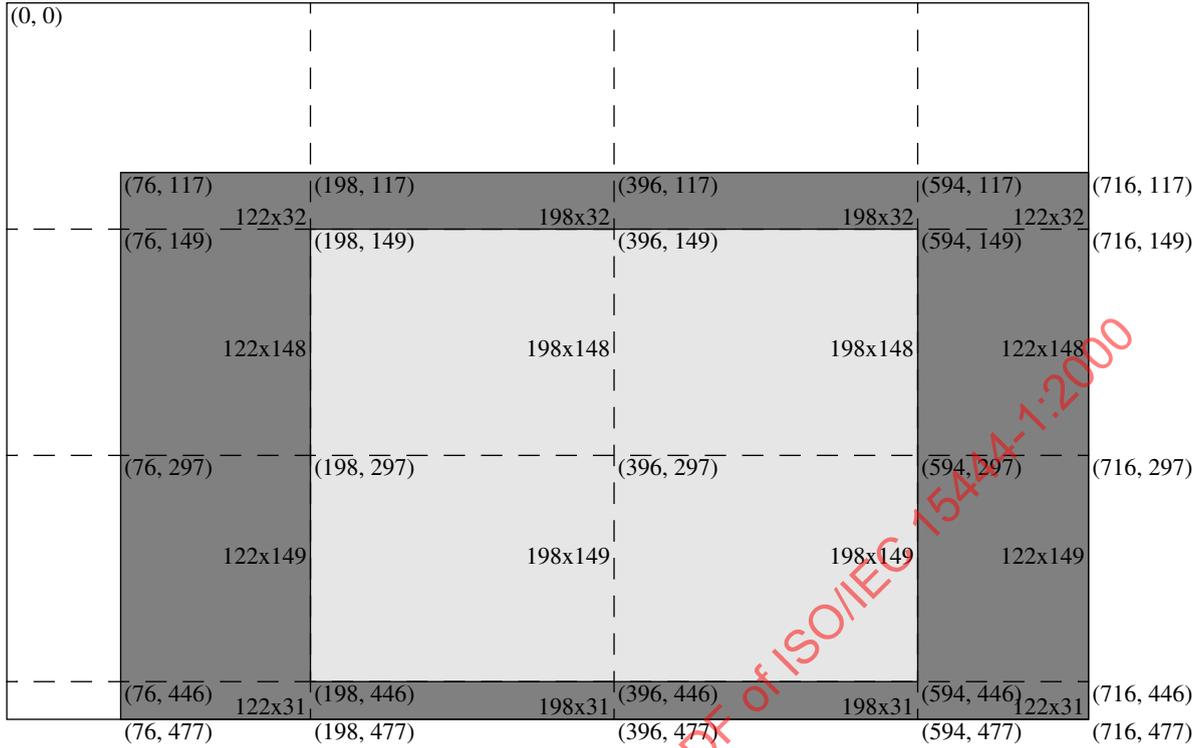

Tiling for component 1. All coordinates in this figure are in the component domain.

Figure B-7 — Example tile sizes and locations for component 1

general, a reduced resolution version of a tile-component with resolution level, r , is the subband nLL , where $n = N_L - r$. This section describes the dimensions of this reduced resolution.

The given tile's coordinates with respect to the reference grid at a particular resolution level, r , yielding upper left hand sample coordinates, (trx_0, try_0) and lower right hand sample coordinates, (trx_{J-1}, try_{J-1}) , where

$$trx_0 = \left\lfloor \frac{tcx_0}{2^{N_L-r}} \right\rfloor \quad try_0 = \left\lfloor \frac{tcy_0}{2^{N_L-r}} \right\rfloor \quad trx_1 = \left\lfloor \frac{tcx_1}{2^{N_L-r}} \right\rfloor \quad try_1 = \left\lfloor \frac{tcy_1}{2^{N_L-r}} \right\rfloor \quad \text{B.14}$$

In a similar manner, the tile coordinates may be mapped into any particular subband, b , yielding upper left hand sample coordinates (tbx_0, tby_0) and lower right hand sample coordinates (tbx_{J-1}, tby_{J-1}) where

$$tbx_0 = \left\lfloor \frac{tcx_0 - (2^{n_b-1} \cdot xo_b)}{2^{n_b}} \right\rfloor \quad tby_0 = \left\lfloor \frac{tcy_0 - (2^{n_b-1} \cdot yo_b)}{2^{n_b}} \right\rfloor$$

$$tbx_1 = \left\lfloor \frac{tcx_1 - (2^{n_b-1} \cdot xo_b)}{2^{n_b}} \right\rfloor \quad tby_1 = \left\lfloor \frac{tcy_1 - (2^{n_b-1} \cdot yo_b)}{2^{n_b}} \right\rfloor \quad \text{B.15}$$

where n_b is the decomposition level associated with subband b , as discussed in Annex F, and the quantities (xo_b, yo_b) are given by the Table B-1.

NOTE — Each of the subband is different as mentioned in Annex B.1.

For each subband, these coordinates define tile boundaries in distinct subband domains. Furthermore, the width of each subband within its domain (at the current decomposition level) is given by $tbx_{J-1} - tbx_0$, and the height is given by $tby_{J-1} - tby_0$.

Table B-1 — Quantities (x_{0b}, y_{0b}) for subband b

| Subband | x_{0b} | y_{0b} |
|------------------------------------|----------|----------|
| n_{bLL} | 0 | 0 |
| n_{bHL} (horizontally high-pass) | 1 | 0 |
| n_{bLH} (vertically high-pass) | 0 | 1 |
| n_{bHH} | 1 | 1 |

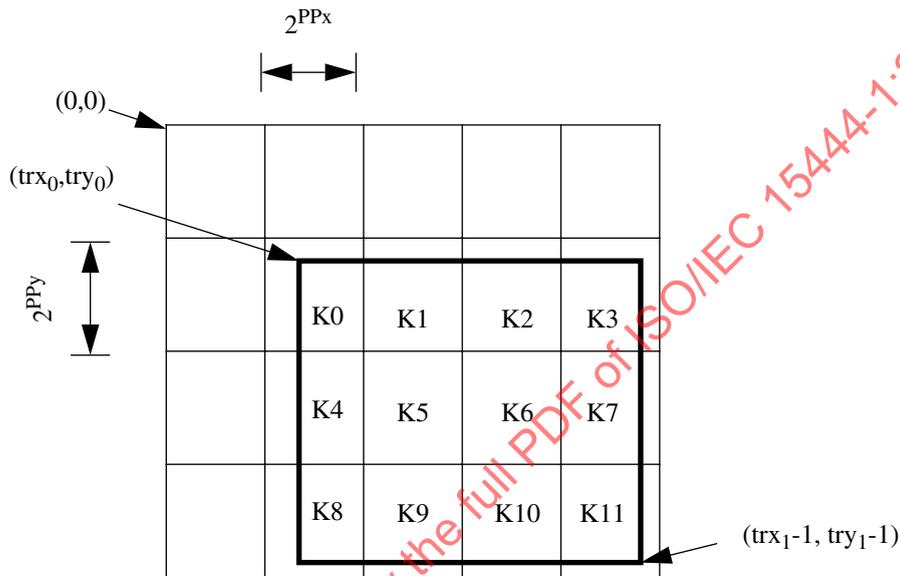


Figure B-8 — Precincts of one reduced resolution

B.6 Division of resolution levels into precincts

Consider a particular tile-component and resolution level whose bounding sample coordinates in the reduced resolution image domain are (trx_0, try_0) and (trx_1-1, try_1-1) , as already described. Figure B-8 shows the partitioning of this tile-component resolution level into precincts. The precinct is anchored at location $(0, 0)$, so that the upper left hand corner of any given precinct in the partition is located at integer multiples of $(2^{PPx}, 2^{PPy})$ where PPx and PPy are signalled in the COD or COC marker segments (see Annex A.6.1 and Annex A.6.2). PPx and PPy may be different for each tile-component and resolution level. PPx and PPy must be at least 1 for all resolution levels except $r = 0$ where they are allowed to be zero.

The number of precincts which span the tile-component at resolution level, r , is given by

$$numprecinctswide = \left\lceil \frac{trx_1}{2^{PPx}} \right\rceil - \left\lfloor \frac{trx_0}{2^{PPx}} \right\rfloor \quad numprecinctshigh = \left\lceil \frac{try_1}{2^{PPy}} \right\rceil - \left\lfloor \frac{try_0}{2^{PPy}} \right\rfloor \quad B.16$$

The precinct index runs from 0 to $numprecincts - 1$ where $numprecincts = numprecinctswide * numprecinctshigh$ in raster order (see Figure B-8). This index is used in determining the order of appearance, in the codestream, of packets corresponding to each precinct, as explained in Annex B.12.

It can happen that a precinct is empty, meaning that no subband coefficients from the relevant resolution level actually contribute to the precinct. This can occur, for example, at the lower right of a tile-component due to sampling with respect

to the reference grid. When this happens every packet corresponding to that precinct must still appear in the codestream (see Annex B.9).

B.7 Division of the subbands into code-blocks

The subbands are partitioned into rectangular code-blocks for the purpose of coefficient modeling and coding. The size of each code-block is determined from two parameters, xcb and ycb , which are signalled in the COD or COC marker segments (see Annex A.6.1 and Annex A.6.2). The code-block size is the same from all resolution levels. However, at each resolution level, the code-block size is bounded by the precinct size. The code-block size for each subband at a particular resolution level is determined as $2^{xcb'}$ by $2^{ycb'}$ where

$$xcb' = \begin{cases} \min(xcb, PPx - 1), & \text{for } r > 0 \\ \min(xcb, PPx), & \text{for } r = 0 \end{cases} \quad \text{B.17}$$

and

$$ycb' = \begin{cases} \min(ycb, PPy - 1), & \text{for } r > 0 \\ \min(ycb, PPy), & \text{for } r = 0 \end{cases} \quad \text{B.18}$$

These equations reflect the fact that the code-block size is constrained both by the precinct size and the code-block size, whose parameters, xcb and ycb , are identical for all subbands in the tile-component. Like the precinct, the code-block partition is anchored at (0, 0), as illustrated in Figure B-9. Thus, all first rows of code-blocks in the code-block partition are located at $y = m2^{ycb'}$ and all first columns of code-blocks are located at $x = n2^{xcb'}$, where m and n are integers.

NOTE — Code-blocks in the partition may extend beyond the boundaries of the subband coefficients. When this happens, only the coefficients lying within the subband are coded using the method described in Annex D. The first stripe coded using this method corresponds to the first four rows of subband coefficients in the code-block or as many of such rows as are present.

B.8 Layers

The compressed image data of each code-block is distributed across one or more layers in the codestream. Each layer consists of some number of consecutive bit-plane coding passes from each code-block in the tile, including all subbands of all components for that tile. The number of coding passes in the layer may vary from code-block to code-block and may be as little as zero for any or all code-blocks. The number of layers for the tile is signalled in the COD marker segment (see Annex A.6.1).

For a given code-block, the first coding pass, if any, in layer n is the coding pass immediately following the last coding pass for the code-block in layer $n-1$, if any.

NOTE — Each layer successively and monotonically improves the image quality.

Layers are indexed from 0 to $L-1$, where L is the number of layers in each tile-component.

NOTE — Figure B-10 shows an example of nine precincts of resolution level m . Table B-2 shows the layer formation.

The basic building blocks of layers are packets. Packets are created from the code-block compressed image data from the precincts of different resolution levels (for a given tile-component).

B.9 Packets

All compressed image data representing a specific tile, layer, component, resolution level and precinct appears in the codestream in a contiguous segment called a packet. Packet data is aligned at 8-bit (one byte) boundaries.

As defined in Annex F.3.1, resolution level $r = 0$ contains the subband coefficients from the N_L LL band, where N_L is the number of decomposition levels. Each subsequent resolution level, $r > 0$, contains the subband coefficients from the n HL,

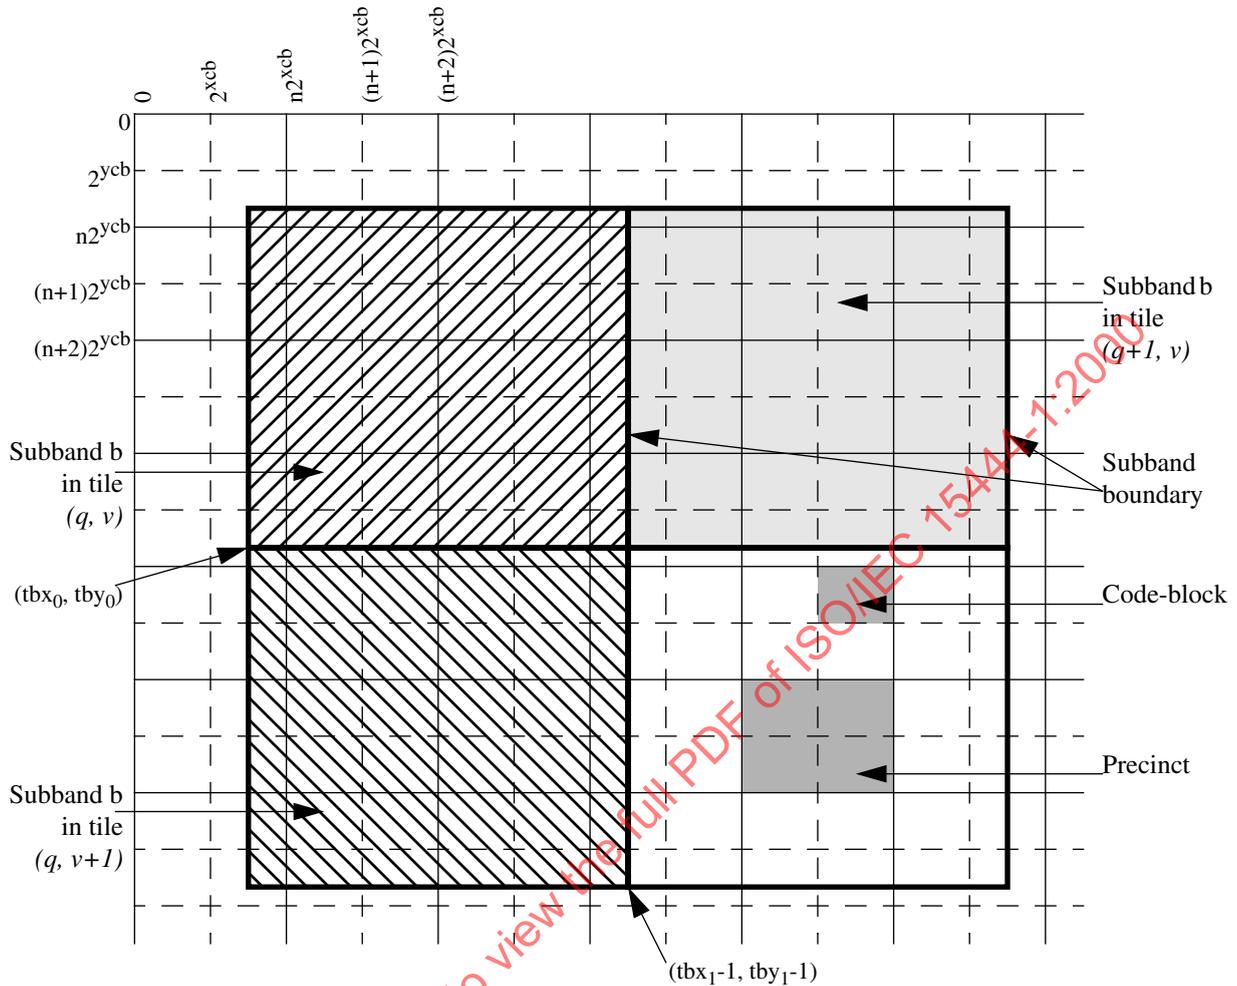


Figure B-9 — Code-blocks and precincts in subband *b* from four different tiles

nLH , and nHH subbands, as defined in Annex F, where $n = N_L - r + 1$. There are $N_L + 1$ resolution levels for a tile-component with N_L decomposition levels.

Table B-2 — Example of layer formation (only one component shown)

| Resolution level | 0 | | | | ... | m | | | | ... | N_L | | |
|------------------|----------|----------|-----|-----|----------|----------|-----|----------|-----|-----------|-----------|-----|--|
| Precinct | P_{00} | P_{01} | ... | ... | P_{m0} | P_{m1} | ... | P_{m8} | ... | P_{Nl0} | P_{Nl1} | ... | |
| Layer 0 | Packet 0 | Packet 0 | ... | ... | Packet 0 | Packet 0 | ... | Packet 0 | ... | Packet 0 | Packet 0 | ... | |
| Layer 1 | Packet 1 | Packet 1 | ... | ... | Packet 1 | Packet 1 | ... | Packet 1 | ... | Packet 1 | Packet 1 | ... | |
| ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | |

The compressed image data in a packet is ordered such that the contribution from the LL, HL, LH and HH subbands appear in that order. This subband order is identical to the order defined in Annex F.3.1. Within each subband, the code-block contributions appear in raster order, confined to the bounds established by the relevant precinct. Resolution level

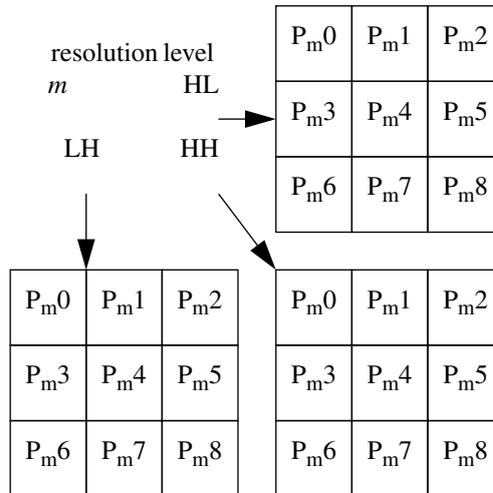


Figure B-10 — Diagram of precincts of one resolution level of one component

$r = 0$ contains only the N_{LL} band and resolution levels $r > 0$ contain only the HL, LH and HH bands. Only those code-blocks that contain samples from the relevant subband, confined to the precinct, have any representation in the packet.

NOTE — Figure B-11 shows the organization of code-blocks within a precinct that form a packet. Table B-3 shows an example of code-block coding passes that form packets. In Table B-3 the variables a, b, and c are code-block coding passes where a = significance propagation pass, b = magnitude refinement pass, and c = cleanup pass (see Annex D).

Packet data is introduced by a packet header whose syntax is described in Annex B.10 and is followed by a packet body containing the actual code-bytes contributed by each of the relevant code-blocks. The order defined above is followed in constructing both the packet header and the packet body.

As described in Annex B.6, it can happen that a precinct contains no code-blocks from any of the subbands at some resolution level. When this occurs, all packets corresponding to that precinct must appear in the codestream as empty packets, in accordance with the packet header described in Annex B.10.

NOTE — Even when a precinct contains relevant code-blocks, an encoder might choose to include no coding passes whatsoever in the corresponding packet at a given layer. In this case, an empty packet must still appear in the codestream.

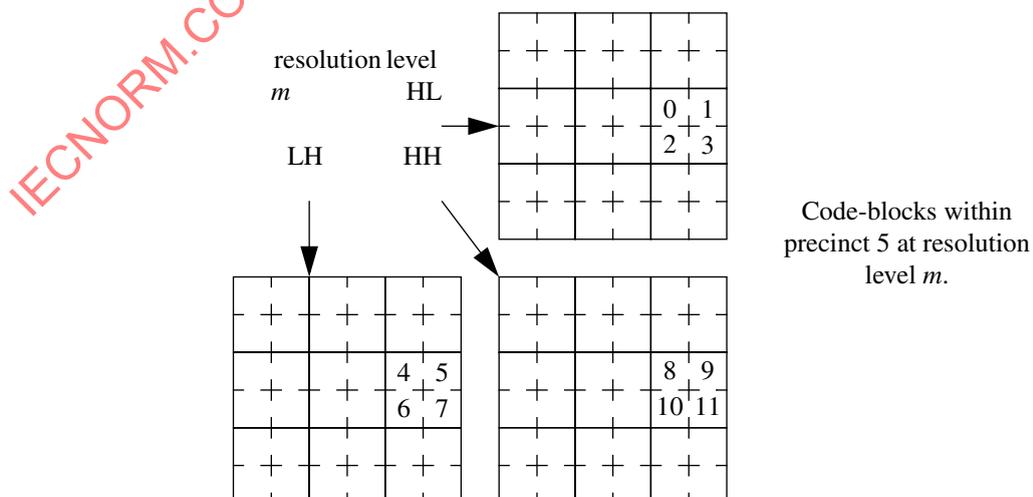


Figure B-11 — Diagram of code-blocks within precincts at one resolution level

Table B-3 — Example of packet formation

| | code-block 0 | code-block 1 | code-block 2 | ... | code-block 10 | code-block 11 | |
|-----|--------------|--------------|--------------|-----|---------------|---------------|----------|
| MSB | c | 0 | 0 | ... | c | 0 | packet 0 |
| | a | 0 | 0 | ... | a | 0 | |
| | b | 0 | 0 | ... | b | 0 | |
| | c | c | 0 | ... | c | 0 | |
| | <hr/> | | | | | | |
| | a | a | 0 | ... | a | 0 | packet 1 |
| | b | b | 0 | ... | b | 0 | |
| | c | c | c | ... | c | c | |
| | ... | ... | ... | ... | ... | ... | |
| | a | a | a | ... | a | a | etc. |
| LSB | b | b | b | ... | b | b | |
| | c | c | c | ... | c | c | |

B.10 Packet header information coding

The packets have headers with the following information:

- Zero length packet
- Code-block inclusion
- Zero bit-plane information
- Number of coding passes
- Length of the code-block compressed image data from a given code-block

Two items in the header are coded with a scheme called tag trees described below. The bits of the packet header are packed into a whole number of bytes with the bit stuffing routine described in Annex B.10.1.

The packet headers appear in the codestream immediately preceding the packet data, unless one of the PPM or PPT marker segments has been used. If the PPM marker segment is used, all of the packet headers are relocated to the main header (see Annex A.7.4). If the PPM is not used, then a PPT marker segment may be used. In this case, all of the packet headers in that tile are relocated to tile-part headers (see Annex A.7.5).

B.10.1 Bit stuffing routine

Bits are packed into bytes from the MSB to the LSB. Once a complete byte is assembled, it is appended to the packet header. If the value of the byte is 0xFF, the next byte includes an extra zero bit stuffed into the MSB. Once all bits of the packet header have been assembled, the last byte is packed to the byte boundary and emitted. The last byte in the packet header shall not be an 0xFF value (thus the single zero bit stuffed after a byte with 0xFF must be included even if the 0xFF would otherwise have been the last byte).

B.10.2 Tag trees

A tag tree is a way of representing a two-dimensional array of non-negative integers in a hierarchical way. It successively creates reduced resolution levels of this two-dimensional array, forming a tree. At every node of this tree the minimum integer of the (up to four) nodes below it is recorded. Figure B-12 shows an example of this representation. The notation, $q_i(m,n)$, is the value at the node that is m th from the left and n th from the top, at the i th level. Level 0 is the lowest level of the tag tree; it contains the top node.

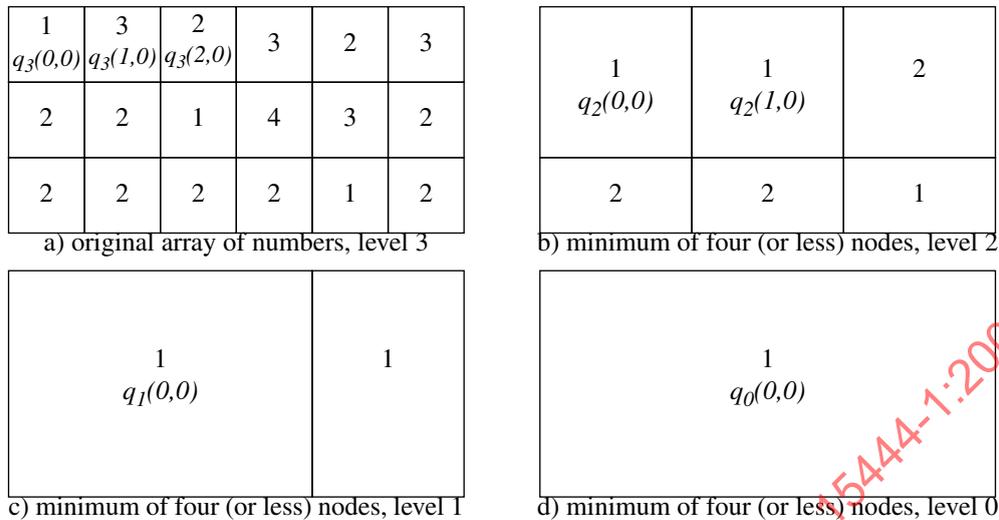


Figure B-12 — Example of a tag tree representation

The elements of the array are traversed in raster order for coding. The coding is the answer to a series of questions. Each node has an associated current value, which is initialized to zero (the minimum). A 0 bit in the tag tree means that the minimum (or the value in the case of the highest level) is larger than the current value and a 1 bit means that the minimum (or the value in the case of the highest level) is equal to the current value. For each contiguous 0 bit in the tag tree the current value is incremented by one. Nodes at higher levels cannot be coded until lower level node values are fixed (i.e. a 1 bit is coded). The top node on level 0 (the lowest level) is queried first. The next corresponding node on level 1 is then queried, and so on.

Only the information needed for the current code-block is stored at the current point in the packet header. The decoding of bits is halted when sufficient information has been obtained. Also, the hierarchical nature of the tag trees means that the answers to many questions will have been formed when adjacent code-blocks and/or layers were coded. This information is not coded again. Therefore, there is a causality to the information in packet headers.

NOTE — For example, in Figure B-12, the coding for the number at $q_3(0,0)$ would be 01111. The two bits, 01, imply that the top node at $q_0(0,0)$ is greater than zero and is, in fact one. The third bit, 1, implies that the node at $q_1(0,0)$ is also one. The fourth bit, 1, implies that the node at $q_2(0,0)$ is also one. And the final bit, 1, implies that the target node at $q_3(0,0)$ is also one. To decode the next node $q_3(1,0)$ the nodes at $q_0(0,0)$, $q_1(0,0)$, and $q_2(0,0)$ are already known. Thus, the bits coded are 001, the zero says that the node at $q_3(1,0)$ is greater than 1, the second zero says it is greater than 2, and the one bit implies that the value is 3. Now that $q_3(0,0)$ and $q_3(1,0)$ are known, the code bits for $q_3(2,0)$ will be 101. The first 1 indicates $q_2(1,0)$ is one. The following 01 then indicates $q_3(2,0)$ is 2. This process continues for the entire array in Figure B-12a.

B.10.3 Zero length packet

The first bit in the packet header denotes whether the packet has a length of zero (empty packet). The value 0 indicates a zero length; no code-blocks are included in this case. The value 1 indicates a non-zero length; this case is considered exclusively hereinafter.

B.10.4 Code-block inclusion

Information concerning whether or not any compressed image data from each code-block is included in the packet is signalled in one of two different ways depending upon whether or not the same code-block has already been included in a previous packet (i.e. within a previous layer).

For code-blocks that have been included in a previous packet, a single bit is used to represent the information, where a 1 means that the code-block is included in this layer and a 0 means that it is not.

For code-blocks that have not been previously included in any packet, this information is signalled with a separate tag tree code for each precinct. The values in this tag tree are the number of the layer in which the current code-block is first included. Although the exact sequence of bits that represent the inclusion tag tree appears in the bit stream, only the bits needed for determining whether the code-block is included are placed in the packet header. If some of the tag tree is already known from previous code-blocks or previous layers, it is not repeated. Likewise, only as much of the tag tree as is needed to determine inclusion in the current layer is included. If a code-block is not included until a later layer, then only a partial tag tree is included at that point in the bit stream.

B.10.5 Zero bit-plane information

If a code-block is included for the first time, the packet header contains information identifying the actual number of bit-planes used to represent coefficients from the code-block. The maximum number of bit-planes available for the representation of coefficients in any subband, b , is given by M_b as defined in Equation E.2. In general, however, the number of actual bit-planes for which coding passes are generated is $M_b - P$, where the number of missing most significant bit-planes, P , may vary from code-block to code-block; these missing bit-planes are all taken to be zero. The value of P is coded in the packet header with a separate tag tree for every precinct, in the same manner as the code-block inclusion information.

B.10.6 Number of coding passes

The number of coding passes included in this packet from each code-block is identified in the packet header using the codewords shown in Table B-4. This table provides for the possibility of signalling up to 164 coding passes.

Table B-4 — Codewords for the number of coding passes for each code-block

| Number of coding passes | Codeword in packet header |
|-------------------------|--|
| 1 | 0 |
| 2 | 10 |
| 3 | 1100 |
| 4 | 1101 |
| 5 | 1110 |
| 6 — 36 | 1111 0000 0 — 1111 1111 0 |
| 37 — 164 | 1111 1111 0000 000 — 1111 1111 1111 111 |

NOTE — Since the value of M_b is limited to a maximum value of 37 by the constraints imposed by the syntax of the QCD and QCC marker segments (see Annex A.6.4, Annex A.6.5, and Equation E.4), it is not possible for more than 109 coding passes to be employed by the code-block coding algorithm described in Annex D.

B.10.7 Length of the compressed image data from a given code-block

The packet header identifies the number of bytes contributed by each included code-block. The sequence of bytes actually included for any given code-block must not end in a 0xFF. Thus, in the event that an 0xFF would have appeared at the end of a code-block’s contribution to some packet, the 0xFF may be safely moved to the subsequent packet which

contains contributions from the code-block, or dropped if there is no such packet. The example coding pass length calculation algorithm described in Annex D ensures that no coding pass will ever be considered as ending with an 0xFF.

NOTE — This is, in fact, not a burdensome requirement, since 0xFFs are always synthesized as necessary by the arithmetic coder described in Annex C.

In signalling the number of bytes contributed by the code-block, there are two cases: the code-block contribution contains a single codeword segment; or the code-block contribution contains multiple codeword segments. Multiple codeword segments arise when a termination occurs between coding passes which are included in the packet, as shown in Table D-8 and Table D-9.

B.10.7.1 Single codeword segment

A codeword segment is the number of bytes contributed to a packet by a code-block. The length of a codeword segment is represented by a binary number of length:

$$bits = Lblock + \lfloor \log_2(\text{coding passes added}) \rfloor \quad \text{B.19}$$

where *Lblock* is a code-block state variable. A separate *Lblock* is used for each code-block in the precinct.

The value of *Lblock* is initially set to three. The number of bytes contributed by each code-block is preceded by signaling bits that increase the value of *Lblock*, as needed. A signaling bit of zero indicates the current value of *Lblock* is sufficient. If there are *k* ones followed by a zero, the value of *Lblock* is incremented by *k*. While *Lblock* can only increase, the number of bits used to signal the length of the code-block contribution can increase or decrease depending on the number of coding passes included.

NOTE — For example, say that in successive layers a code-block has 6 bytes, 31 bytes, 44 bytes, and 134 bytes respectively. Further assume that the number of coding passes is 1, 9, 2, and 5. The code for each would be 0 110 (0 delimits and 110 = 6), 0011111 (0 delimits, $\log_2 9 = 3$ bits for the 9 coding passes, 011111 = 31), 11 0 101100 (110 adds two bits to *Lblock*, $\log_2 2 = 1$, 101100 = 44), and 1 0 1000110 (10 adds one bit to *Lblock*, $\log_2 5 = 2$, 1000110 = 134).

NOTE — There is no requirement that the minimum number of bits be used to signal length (any number is valid).

B.10.7.2 Multiple codeword segments

Let *T* be the set of indices of terminated coding passes included for the code-block in the packet as indicated in Table D-8 and Table D-9. If the index final coding pass included in the packet is not a member of *T*, then it is added to *T*. Let $n_1 < \dots < n_K$ be the indices in *T*. *K* lengths are signaled consecutively with each length using the mechanism described in Annex B.10.7.1. The first length is the number of bytes from the start of the code-block's contribution in this packet to the end of coding pass n_1 . The number of added coding passes for the purposes of Equation B.19 is the number of passes in the packet up through n_1 . The second length is the number of bytes from the end of coding pass, n_1 , to the end of coding pass, n_2 . The number of added coding passes for the purposes of Equation B.19 is $n_2 - n_1$. This procedure is repeated for all *K* lengths.

NOTE — Consider the selective arithmetic coding bypass (see Annex D.6). Say that the passes included in a packet for a given code-block are the cleanup pass of bit-plane number 4 through the significance propagation pass of bit-plane number 6 (see Table D-9). These passes are indexed as {0, 1, 2, 3, 4} and the lengths are given as {6, 31, 44, 134, 192} respectively. Then *T* = {0, 2, 3, 4} and *K* = 4 lengths are signaled. The set of lengths to be signaled is {6, 75, 134, 192} and the corresponding number of coding passes that are added is {1, 2, 1, 1}. A valid code bit sequence is 11 1110 (*Lblock* increased to 8), 0000 0110 ($\log_2 1 = 0$, 8 bits used to code length of 6), 0 0100 1011 ($\log_2 2 = 1$, 9 bits used to code the length of 75), 0 1000 0110 ($\log_2 2 = 1$, 9 bits used to code the length of 134), and 1100 0000 ($\log_2 1 = 0$, 8 bits used to code the length of 192). Notice that the value of *Lblock* is incremented only at the start of the sequence.

B.10.8 Order of information within packet header

The following is the packet header information order for one packet of a specific layer, tile-component, resolution level and precinct.

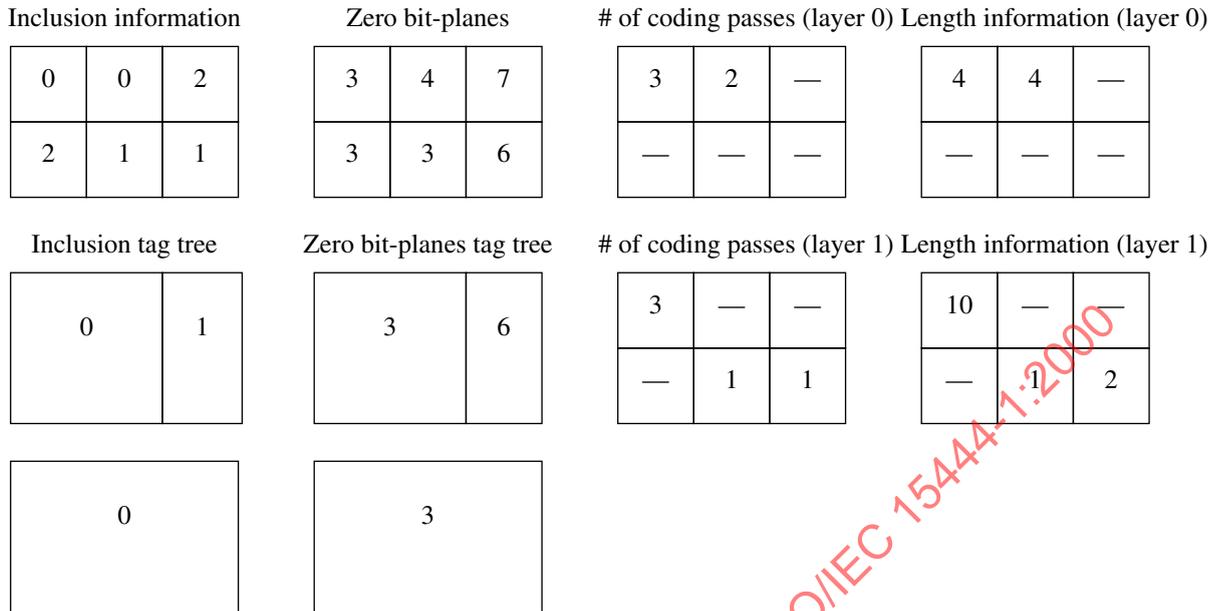


Figure B-13 — Example of the information known to the encoder

- bit for zero or non-zero length packet
- for each subband (LL or HL, LH and HH)
 - for all code-blocks in this subband confined to the relevant precinct, in raster order
 - code-block inclusion bits (if not previously included then tag tree, else one bit)
 - if code-block included
 - if first instance of code-block
 - zero bit-planes information
 - number of coding passes included
 - increase of code-block length indicator (Lblock)
 - for each codeword segment
 - length of codeword segment

The packet header may be immediately followed by the EPH marker as described in Annex A.8.2. The EPH marker may appear regardless of whether the packet contains any code-block contributions. In the event that the packet header appears in a PPM or PPT marker segment, the EPH marker (if used) must appear together with the packet header.

NOTE — Figure B-13 and Table B-5 show a brief example of packet header construction. Figure B-13 shows the information known to the encoder. In particular the “inclusion information” shows the layer where each code-block first appears in a packet. The decoder will receive this information via the inclusion tag tree in several packet headers. Table B-5 shows the resulting bit stream (in part) from this information.

B.11 Tile and tile-parts

Each coded tile is represented by a sequence of packets. The rules governing the order that the packets of a tile appear within the codestream is specified in Annex B.12. It is possible for a tile to contain no packets, in the event that no samples from any image component map to the region occupied by the tile on the reference grid.

Any tile’s representation may be truncated by discarding one or more trailing bytes. Also, any number of whole packets (in order) may be dropped and the final packet appearing in the tile may be partially truncated. The tile length marker segment parameters shall reflect this.

Table B-5 — Example packet header bit stream

| Bit stream (in order) | Derived meaning |
|-----------------------|---|
| 1 | Packet non-zero in length |
| 111 | Code-block 0,0 included for the first time (partial inclusion tag tree) |
| 000111 | Code-block 0,0 insignificant for 3 bit-planes |
| 1100 | Code-block 0,0 has 3 coding passes included |
| 0 | Code-block 0,0 length indicator is unchanged |
| 0100 | Code-block 0,0 has 4 bytes, 4 bits are used, $3 + \text{floor}(\log_2 3)$ |
| 1 | Code-block 1,0 included for the first time (partial inclusion tag tree) |
| 01 | Code-block 1,0 insignificant for 4 bit-planes |
| 10 | Code-block 1,0 has 2 coding passes included |
| 10 | Code-block 1,0 length indicator is increased by 1 bit (3 to 4) |
| 00100 | Code-block 1,0 has 4 bytes, 5 bits are used $4 + \text{floor}(\log_2 2)$, (Note that while this is a legitimate entry, it is not minimal in code length.) |
| 0 | Code-block 2,0 not yet included (partial tag tree) |
| 0 | Code-block 0,1 not yet included |
| 0 | Code-block 1,1 not yet included |
| | Code-block 2,1 not yet included (no data needed, already conveyed by partial tag tree for code-block 2,0) |
| ... | Packet header data for the other subbands, packet data |

Packet for the next layer

| | |
|------|--|
| 1 | Packet non-zero in length |
| 1 | Code-block 0,0 included again |
| 1100 | Code-block 0,0 has 3 coding passes included |
| 0 | Code-block 0,0 length indicator is unchanged |
| 1010 | Code-block 0,0 has 10 bytes, $3 + \log_2(3)$ bits used |
| 0 | Code-block 1,0 not included in this layer |
| 10 | Code-block 2,0 not yet included |
| 0 | Code-block 0,1 not yet included |

Table B-5 — Example packet header bit stream (continued)

| Bit stream (in order) | Derived meaning |
|-----------------------|--|
| 1 | Code-block 1,1 included for the first time |
| 1 | Code-block 1,1 insignificant for 3 bit-planes |
| 0 | Code-block 1,1 has 1 coding passes included |
| 0 | Code-block 1,1 length information is unchanged |
| 001 | Code-block 1,1 has 1 byte, $3 + \log_2(1)$ bits used |
| 1 | Code-block 2,1 included for the first time |
| 00011 | Code-block 2,1 insignificant for 6 bit-planes |
| 0 | Code-block 2,1 has 1 coding passes included |
| 0 | Code-block 2,1 length indicator is unchanged |
| 010 | Code-block 2,1 has 2 bytes, $3 + \log_2 1$ bits used |
| ... | Packet header data for the other subbands, packet data |

The sequence of packets representing any particular tile may be divided into contiguous segments known as tile-parts. Any number of packets (including zero) may be contained in a tile-part. Each tile must contain at least one tile-part. The divisions between tile-parts must occur at packet boundaries. While tiles are coherent geometric areas, the tile-parts may be distributed throughout the codestream in any desired fashion, provided tile-parts from the same tile appear in the order that preserves the original packet sequence. Each tile-part commences with an SOT marker segment (see Annex A.4.2), containing the index of the tile to which the tile-part belongs.

NOTE — It is possible to interleave tile-parts from different tiles, as long as the order of the tile-parts from every tile is preserved. For example, a legitimate codestream might have the following order

Tile number 0, tile-part number 0
 Tile number 1, tile-part number 0
 Tile number 0, tile-part number 1
 Tile number 1, tile-part number 1
 etc.

If SOP marker segments are allowed (by signalling in the COD marker segment, see Annex A.6.1), each packet in any given tile-part may be prepended with an SOP marker segment (see Annex A.8.1). However, whether or not the SOP marker segment is used, the count in the N_{sop} is incremented for each packet. If the packet headers are moved to a PPM or PPT marker segments (see Annex A.7.4 and Annex A.7.5), then the SOP marker segments may appear immediately before the packet body in the tile-part compressed image data portion.

If EPH markers are allowed (by signalling in the COD marker segment, see Annex A.6.1), each packet header in any given tile-part may be postpended with an EPH marker segment (see Annex A.8.1). If the packet headers are moved to a PPM or PPT marker segments (see Annex A.7.4 and Annex A.7.5), then the EPH markers may appear after the packet headers in the PPM or PPT marker segments.

B.12 Progression order

For a given tile-part, the packets contain all compressed image data from a specific layer, a specific component, a specific resolution level, and a specific precinct. The order in which these packets are found in the codestream is called the progression order. The ordering of the packets can progress along four axes: layer, component, resolution level and precinct.

It is possible that components have a different number of resolution levels. In this case, the resolution level that corresponds to the N_{LL} subband is the first resolution level ($r = 0$) for all components. The indices are synchronized from that point on.

NOTE — For example, take the case of resolution level-position-component-layer progression and two components with 7 resolution levels (6 decomposition levels) and 3 resolution levels (2 decomposition levels) respectively. The $r = 0$ will correspond to the N_{LL} subband of both components. From $r = 0$ to $r = 2$ the components will be interleaved as described below. From $r = 3$ to $r = 6$ only component 0 will have packets.

B.12.1 Progression order determination

The COD marker segments signal which of the five progression orders are used (see Annex A.6.1). The progression order can also be overridden with the POC marker segment (see Annex A.6.6) in any tile-part header. For each of the possible progression orders the mechanism to determine the order in which packets are included is described below.

B.12.1.1 Layer-resolution level-component-position progression

Layer-resolution level-component-position progression is defined as the interleaving of the packets in the following order:

for each $l = 0, \dots, L-1$
 for each $r = 0, \dots, N_{max}$
 for each $i = 0, \dots, Csiz-1$
 for each $k = 0, \dots, numprecincts-1$
 packet for component i , resolution level r , layer l , and precinct k .

Here, L is the number of layers and N_{max} is the maximum number of decomposition levels, N_L , used in any component of the tile. A progression of this type might be useful when low sample accuracy is most desirable, but information is needed for all components.

B.12.1.2 Resolution level-layer-component-position progression

Resolution level-layer-component-position progression is defined as the interleaving of the packets in the following order:

for each $r = 0, \dots, N_{max}$
 for each $l = 0, \dots, L-1$
 for each $i = 0, \dots, Csiz-1$
 for each $k = 0, \dots, numprecincts-1$
 packet for component i , resolution level r , layer l , and precinct k .

A progression of this type might be useful in providing low resolution level versions of all image components.

B.12.1.3 Resolution level-position-component-layer progression

Resolution level-position-component-layer progression is defined as the interleaving of the packets in the following order:

for each $r = 0, \dots, N_{max}$
 for each $y = ty_0, \dots, ty_I-1$,
 for each $x = tx_0, \dots, tx_I-1$,

for each $i = 0, \dots, \text{Csiz}-1$
 if ($y = ty_0$ or y divisible by $\text{YRsiz}(i) \cdot 2^{PP_y(r, i) + N_L - r}$)
 if ($x = tx_0$ or x divisible by $\text{XRsiz}(i) \cdot 2^{PP_x(r, i) + N_L - r}$)
 for the next precinct k ,
 for each $l = 0, \dots, L-1$
 packet for component i , resolution level r , layer l , and precinct k .

In the above, k can be obtained from:

$$k = \left\lfloor \left\lfloor \frac{x}{\text{XRsiz}(i) \cdot 2^{N_L - r}} \right\rfloor - \left\lfloor \frac{tx_0}{2^{PP_x(r, i)}} \right\rfloor + \text{numprecinctswide}(r, i) \cdot \left(\left\lfloor \frac{y}{\text{YRsiz}(i) \cdot 2^{N_L - r}} \right\rfloor - \left\lfloor \frac{ty_0}{2^{PP_y(r, i)}} \right\rfloor \right) \right\rfloor \quad \text{B.20}$$

To use this progression, XRsiz and YRsiz values must be powers of two for each component. A progression of this type might be useful in providing low resolution level versions of all image components at a particular spatial location.

NOTE — The iteration of variables x and y in the above formulation is given for simplicity only of expression, not implementation. Most of the (x, y) pairs generated by this loop will generally result in the inclusion of no packets. More efficient iterations can be found based upon the minimum of the dimensions of the various precincts, mapped into the reference grid. This note also applies to the loops given for the following two progressions.

B.12.1.4 Position-component-resolution level-layer progression

Position-component-resolution level-layer progression is defined as the interleaving of the packets in the following order:

for each $y = ty_0, \dots, ty_{J-1}$,
 for each $x = tx_0, \dots, tx_{J-1}$,
 for each $i = 0, \dots, \text{Csiz}-1$
 for each $r = 0, \dots, N_L$ where N_L is the number of decomposition levels for component i ,
 if ($y = ty_0$ or y divisible by $\text{YRsiz}(i) \cdot 2^{PP_y(r, i) + N_L - r}$)
 if ($x = tx_0$ or x divisible by $\text{XRsiz}(i) \cdot 2^{PP_x(r, i) + N_L - r}$)
 for the next precinct, k , in the sequence shown in Figure B-8
 for each $l = 0, \dots, L-1$
 packet for component i , resolution level r , layer l , and precinct k .

In the above, k can be obtained from Equation B.20. To use this progression, XRsiz and YRsiz values shall be powers of two for each component. A progression of this type might be useful in providing high sample accuracy for a particular spatial location in all components.

B.12.1.5 Component-position-resolution level-layer progression

Component-position-resolution level-layer progression is defined as the interleaving of the packets in the following order:

for each $i = 0, \dots, \text{Csiz}-1$
 for each $y = ty_0, \dots, ty_{J-1}$,
 for each $x = tx_0, \dots, tx_{J-1}$,
 for each $r = 0, \dots, N_L$ where N_L is the number of decomposition levels for component i ,
 if ($y = ty_0$ or y divisible by $\text{YRsiz}(i) \cdot 2^{PP_y(r, i) + N_L - r}$)
 if ($x = tx_0$ or x divisible by $\text{XRsiz}(i) \cdot 2^{PP_x(r, i) + N_L - r}$)
 for the next precinct, k , in the sequence shown in Figure B-8
 for each $l = 0, \dots, L-1$

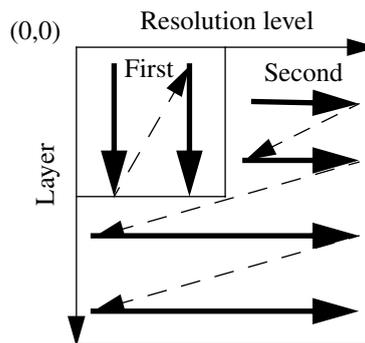


Figure B-14 — Example of progression order volume in two dimensions

packet for component i , resolution level r , layer l , and precinct k .

In the above, k can be obtained from Equation B.20. A progression of this type might be useful in providing high accuracy for a particular spatial location in a particular image component.

B.12.2 Progression order volumes

The progression order default is signaled in the COD marker segment in the main header or tile headers (see Annex A.6.1). The progression loops of Annex B.12.1 all go from zero to the maximum value.

If this progression order is to be changed the POC marker segment is used (see Annex A.6.6). In this case, the “for loops” described in Annex B.12.1 are limited by start points ($CSpod$, $RSpod$, $Layer = 0$, inclusive) and end points ($CEpod$, $REpod$ and $LEpod$, exclusive). This creates a progression order volume of packets. All the packets included in the entire progression order volume are found in order in the codestream before the next progression order change takes effect. No packet is ever repeated in the codestream. Therefore, the layer always starts with the next one for a given tile-component, resolution level, and precinct. The decoder is required to determine the next layer.

Thus, the variables in the above loops are bounded by the progression order volume as described in Equation B.21.

$$\begin{aligned}
 CSpod \leq i < CEPod \\
 RSpod \leq r < REpod \\
 0 \leq l < LEpod
 \end{aligned}
 \tag{B.21}$$

NOTE — Figure B-14 shows an example of two progression volumes for a single component image. First packets are sent in resolution level-layer-component-position progression until the box labeled “First” in the figure is complete; then packets are sent in layer-resolution level-component-position progression for the layers of all resolution levels which were not previously sent.


B.12.3 Progression order change signalling

If there is a progression order change than at least one POC marker segment shall be used in the codestream (see Annex A.6.6). There can only be one POC marker segment in a given header (main or tile-part) but that marker segment can describe many progression order changes.


If the POC marker segment is found in the main header it overrides the progression found in the COD for all tiles. The main header POC marker segment is used for tiles that do not have POC marker segments in their tile-part headers.

If a POC marker segment is used for an individual tile there shall be a POC marker in the first tile-part header of that tile and all of the progression order changes shall be signalled in the tile-part headers of that tile. The COD progression order and the main header POC marker segment (if there is one) are overridden.

If there are progression order changes signalled by POC marker segments (whether in the main header or the tile-part headers), then all the order of all the packets in the codestream, or the effected tile-parts of the codestream shall be described by progression order volumes in the POC marker segments. There will never be the case where a progression



a) All of the progression order volumes are described in the POC marker segment in the first tile-part header.



b) Progression order volumes 1 and 2 are described in the POC marker segment in the first tile-part header, progression order volume 3 is described in the third tile-part header.

Figure B-15 — Example of the placement of POC marker segments

order volume is filled and the next one is not defined. On the other hand, the POC marker segments may describe more progression order volumes than exist in the codestream. Also, the last progression order volume in each tile may be incomplete.

The POC marker segments shall describe progression order volumes in order in any tile-part header before the first included packet appears. However, the POC marker may be, but is not required to be, in the tile-part header immediately before the progression order volume is used. It is possible to describe many progression order volumes in a tile-part header even though those progression order volumes do not appear until later tile-parts.

NOTE — For example, all of the progression order volumes can be described one POC marker segment in the first tile-part header of a tile. Figure B-15a shows this scenario. Equally acceptable, in this case, is describing two progression order volumes in the first tile-part header and one in the third, as shown in Figure B-15b.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex C

Arithmetic entropy coding

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

C.1 Binary encoding (informative)

Figure C-1 shows a simple block diagram of the binary adaptive arithmetic encoder. The decision (D) and context (CX) pairs are processed together to produce compressed image data (CD) output. Both D and CX are provided by the model unit (not shown). CX selects the probability estimate to use during the coding of D. In this International Standard, CX is a label for a context.

C.1.1 Recursive interval subdivision (informative)

The recursive probability interval subdivision of Elias coding is the basis for the binary arithmetic coding process. With each binary decision the current probability interval is subdivided into two sub-intervals, and the code string is modified (if necessary) so that it points to the base (the lower bound) of the probability sub-interval assigned to the symbol which occurred.

In the partitioning of the current interval into two sub-intervals, the sub-interval for the more probable symbol (MPS) is ordered above the sub-interval for the less probable symbol (LPS). Therefore, when the MPS is coded, the LPS sub-interval is added to the code string. This coding convention requires that symbols be recognized as either MPS or LPS, rather than 0 or 1. Consequently, the size of the LPS interval and the sense of the MPS for each decision must be known in order to code that decision.

Since the code string always points to the base of the current interval, the decoding process is a matter of determining, for each decision, which sub-interval is pointed to by the compressed image data. This is also done recursively, using the same interval sub-division process as in the encoder. Each time a decision is decoded, the decoder subtracts any interval the encoder added to the code string. Therefore, the code string in the decoder is a pointer into the current interval relative to the base of the current interval. Since the coding process involves addition of binary fractions rather than concatenation of integer code words, the more probable binary decisions can often be coded at a cost of much less than one bit per decision.

C.1.2 Coding conventions and approximations (informative)

The coding operations are done using fixed precision integer arithmetic and using an integer representation of fractional values in which 0x8000 is equivalent to decimal 0,75. The interval A is kept in the range $0,75 \leq A < 1,5$ by doubling it whenever the integer value falls below 0x8000.

The code register C is also doubled each time A is doubled. Periodically – to keep C from overflowing – a byte of compressed image data is removed from the high order bits of the C-register and placed in an external compressed image data buffer. Carry-over into the external buffer is prevented by a bit stuffing procedure.

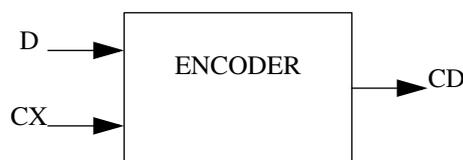


Figure C-1 — Arithmetic encoder inputs and outputs

Keeping A in the range $0,75 \leq A < 1,5$ allows a simple arithmetic approximation to be used in the interval subdivision. The interval is A and the current estimate of the LPS probability is Q_e , a precise calculation of the sub-intervals would require:

$$A - (Q_e * A) = \text{sub-interval for the MPS} \tag{C.1}$$

$$Q_e * A = \text{sub-interval for the LPS} \tag{C.2}$$

Because the value of A is of order unity, these are approximated by

$$A - Q_e = \text{sub-interval for the MPS} \tag{C.3}$$

$$Q_e = \text{sub-interval for the LPS} \tag{C.4}$$

Whenever the MPS is coded, the value of Q_e is added to the code register and the interval is reduced to $A - Q_e$. Whenever the LPS is coded, the code register is left unchanged and the interval is reduced to Q_e . The precision range required for A is then restored, if necessary, by renormalization of both A and C .

With the process illustrated above, the approximations in the interval subdivision process can sometimes make the LPS sub-interval larger than the MPS sub-interval. If, for example, the value of Q_e is 0,5 and A is at the minimum allowed value of 0,75, the approximate scaling gives 1/3 of the interval to the MPS and 2/3 to the LPS. To avoid this size inversion, the MPS and LPS intervals are exchanged whenever the LPS interval is larger than the MPS interval. This MPS/LPS conditional exchange can only occur when a renormalization is needed.

Whenever a renormalization occurs, a probability estimation process is invoked which determines a new probability estimate for the context currently being coded. No explicit symbol counts are needed for the estimation. The relative probabilities of renormalization after coding an LPS or MPS provide an approximate symbol counting mechanism which is used to directly estimate the probabilities.

C.2 Description of the arithmetic encoder (informative)

The ENCODER (Figure C-2) initializes the encoder through the INITENC procedure. CX and D pairs are read and passed on to ENCODE until all pairs have been read. The probability estimation procedures which provide adaptive estimates of the probability for each context are imbedded in ENCODE. Bytes of compressed image data are output when necessary. When all of the CX and D pairs have been read, FLUSH sets the contents of the C-register to as many 1 bits as possible and then outputs the final bytes. FLUSH also terminates the encoding and generates the required terminating marker.

NOTE — While FLUSH is required in ITU-T Rec.T.88 | ISO/IEC 14492, it is informative in this specification. Other methods, such as that defined in Annex D.4.2, are acceptable.

C.2.1 Encoder code register conventions (informative)

The flow charts given in this Annex assume the register structures for the encoder shown in Table C-1.

Table C-1 — Encoder register structures

| | MSB | | | LSB |
|------------|-----------|-----------|-----------|-----------|
| C-register | 0000 cbbb | bbbb bsss | xxxx xxxx | xxxx xxxx |
| A-register | 0000 0000 | 0000 0000 | 1aaa aaaa | aaaa aaaa |

The “a” bits are the fractional bits in the A-register (the current interval value) and the “x” bits are the fractional bits in the code register. The “s” bits are spacer bits which provide useful constraints on carry-over, and the “b” bits indicate the bit

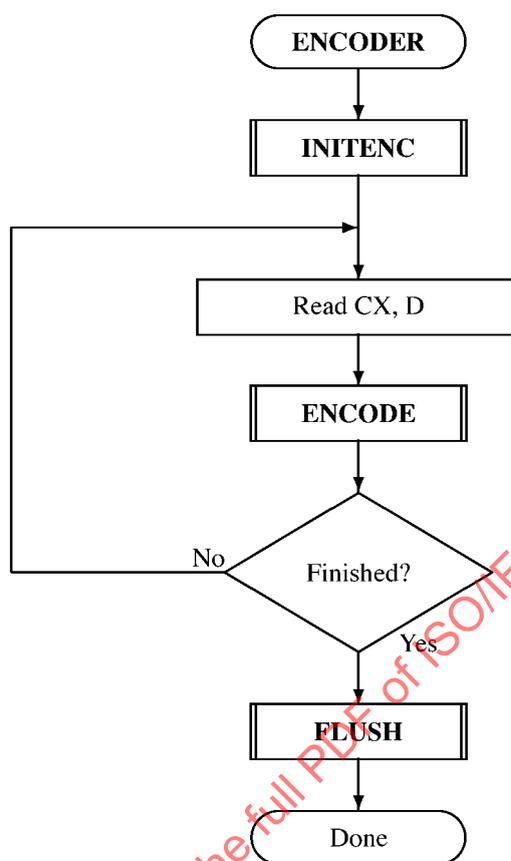


Figure C-2 — Encoder for the MQ-coder

positions from which the completed bytes of the compressed image data are removed from the C-register. The “c” bit is a carry bit. The detailed description of bit stuffing and the handling of carry-over will be given in a later part of this Annex.

C.2.2 Encoding a decision (ENCODE) (informative)

The ENCODE procedure determines whether the decision D is a 0 or not. Then a CODE0 or a CODE1 procedure is called appropriately. Often embodiments will not have an ENCODE procedure, but will call the CODE0 or CODE1 procedures directly to code a 0-decision or a 1-decision. Figure C-3 shows this procedure.

C.2.3 Encoding a 1 or a 0 (CODE1 and CODE0) (informative)

When a given binary decision is coded, one of two possibilities occurs – the symbol is either the more probable symbol or it is the less probable symbol. CODE1 and CODE0 are illustrated in Figure C-4 and Figure C-5. In these figures, CX is the context. For each context, the index of the probability estimate which is to be used in the coding operations and the MPS value are stored. MPS(CX) is the sense (0 or 1) of the MPS for context CX.

C.2.4 Encoding an MPS or LPS (CODEMPS and CODELPS) (informative)

The CODELPS (Figure C-6) procedure usually consists of a scaling of the interval to $Q_e(I(CX))$, the probability estimate of the LPS determined from the index I stored for context CX. The upper interval is first calculated so it can be compared to the lower interval to confirm that Q_e has the smaller size. It is always followed by a renormalization (RENORME). In the event that the interval sizes are inverted, however, the conditional MPS/LPS exchange occurs and the upper interval is coded. In either case, the probability estimate is updated. If the SWITCH flag for the index I(CX) is set, then the MPS(CX) is inverted. A new index I is saved at CX as determined from the next LPS index (NLPS) column in Table C-2.

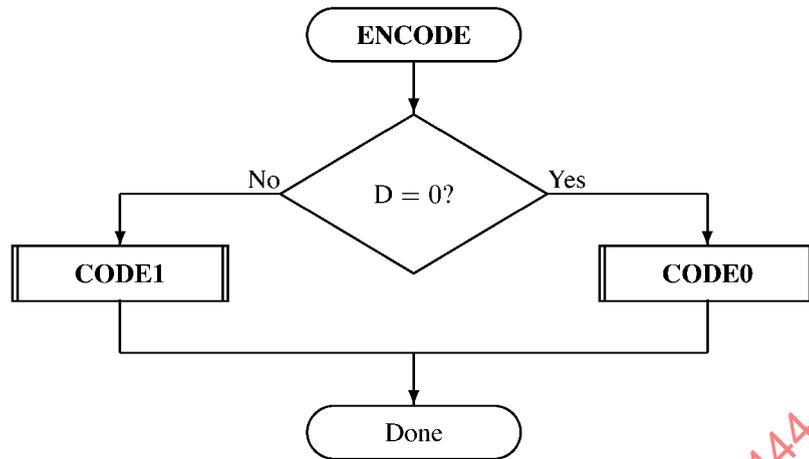


Figure C-3 — ENCODE procedure

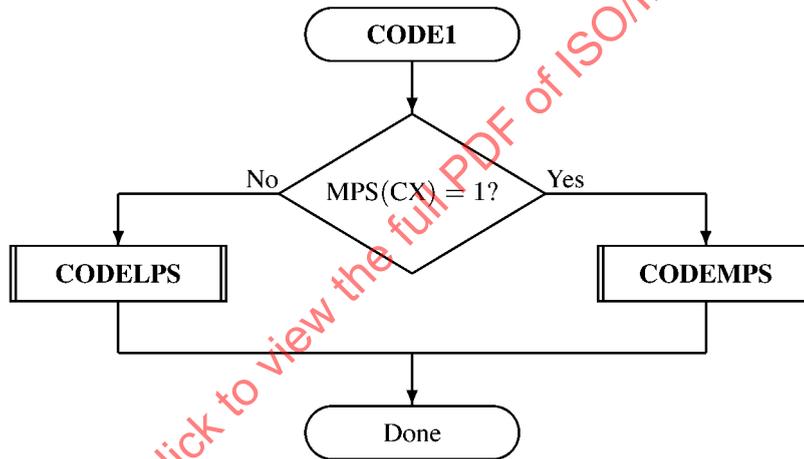


Figure C-4 — CODE1 procedure

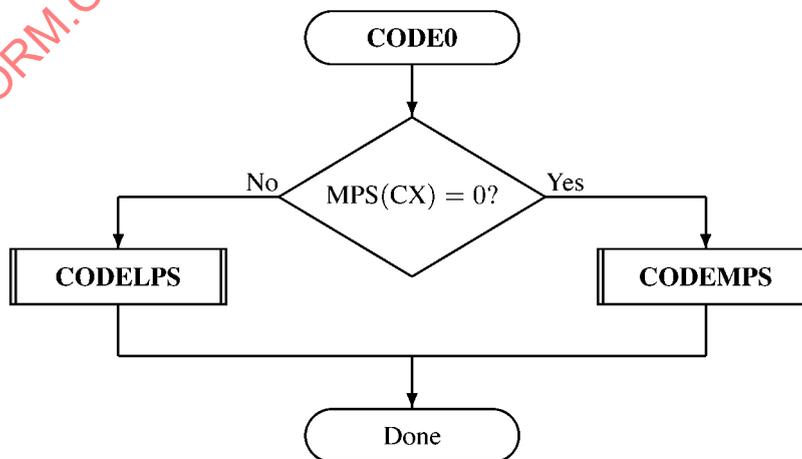


Figure C-5 — CODE0 procedure

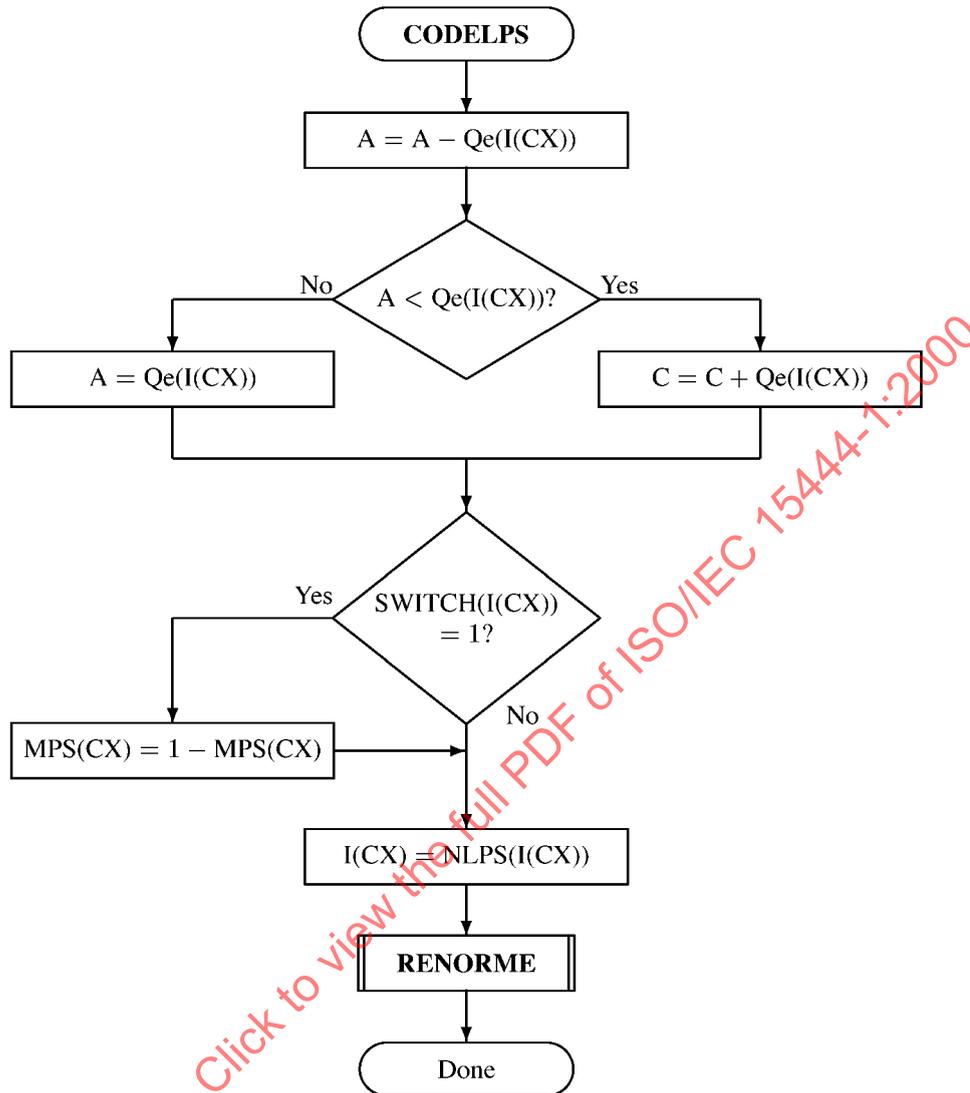


Figure C-6 — CODELPS procedure with conditional MPS/LPS exchange

Table C-2 — Qe values and probability estimation

| Index | Qe_Value | | | NMPS | NLPS | SWITCH |
|-------|---------------|---------------------|-----------|------|------|--------|
| | (hexadecimal) | (binary) | (decimal) | | | |
| 0 | 0x5601 | 0101 0110 0000 0001 | 0,503 937 | 1 | 1 | 1 |
| 1 | 0x3401 | 0011 0100 0000 0001 | 0,304 715 | 2 | 6 | 0 |
| 2 | 0x1801 | 0001 1000 0000 0001 | 0,140 650 | 3 | 9 | 0 |
| 3 | 0x0AC1 | 0000 1010 1100 0001 | 0,063 012 | 4 | 12 | 0 |
| 4 | 0x0521 | 0000 0101 0010 0001 | 0,030 053 | 5 | 29 | 0 |

Table C-2 — Qe values and probability estimation (continued)

| Index | Qe_Value | | | NMPS | NLPS | SWITCH |
|-------|---------------|---------------------|-----------|------|------|--------|
| | (hexadecimal) | (binary) | (decimal) | | | |
| 5 | 0x0221 | 0000 0010 0010 0001 | 0,012 474 | 38 | 33 | 0 |
| 6 | 0x5601 | 0101 0110 0000 0001 | 0,503 937 | 7 | 6 | 1 |
| 7 | 0x5401 | 0101 0100 0000 0001 | 0,492 218 | 8 | 14 | 0 |
| 8 | 0x4801 | 0100 1000 0000 0001 | 0,421 904 | 9 | 14 | 0 |
| 9 | 0x3801 | 0011 1000 0000 0001 | 0,328 153 | 10 | 14 | 0 |
| 10 | 0x3001 | 0011 0000 0000 0001 | 0,281 277 | 11 | 17 | 0 |
| 11 | 0x2401 | 0010 0100 0000 0001 | 0,210 964 | 12 | 18 | 0 |
| 12 | 0x1C01 | 0001 1100 0000 0001 | 0,164 088 | 13 | 20 | 0 |
| 13 | 0x1601 | 0001 0110 0000 0001 | 0,128 931 | 29 | 21 | 0 |
| 14 | 0x5601 | 0101 0110 0000 0001 | 0,503 937 | 15 | 14 | 1 |
| 15 | 0x5401 | 0101 0100 0000 0001 | 0,492 218 | 16 | 14 | 0 |
| 16 | 0x5101 | 0101 0001 0000 0001 | 0,474 640 | 17 | 15 | 0 |
| 17 | 0x4801 | 0100 1000 0000 0001 | 0,421 904 | 18 | 16 | 0 |
| 18 | 0x3801 | 0011 1000 0000 0001 | 0,328 153 | 19 | 17 | 0 |
| 19 | 0x3401 | 0011 0100 0000 0001 | 0,304 715 | 20 | 18 | 0 |
| 20 | 0x3001 | 0011 0000 0000 0001 | 0,281 277 | 21 | 19 | 0 |
| 21 | 0x2801 | 0010 1000 0000 0001 | 0,234 401 | 22 | 19 | 0 |
| 22 | 0x2401 | 0010 0100 0000 0001 | 0,210 964 | 23 | 20 | 0 |
| 23 | 0x2201 | 0010 0010 0000 0001 | 0,199 245 | 24 | 21 | 0 |
| 24 | 0x1C01 | 0001 1100 0000 0001 | 0,164 088 | 25 | 22 | 0 |
| 25 | 0x1801 | 0001 1000 0000 0001 | 0,140 650 | 26 | 23 | 0 |
| 26 | 0x1601 | 0001 0110 0000 0001 | 0,128 931 | 27 | 24 | 0 |
| 27 | 0x1401 | 0001 0100 0000 0001 | 0,117 212 | 28 | 25 | 0 |
| 28 | 0x1201 | 0001 0010 0000 0001 | 0,105 493 | 29 | 26 | 0 |
| 29 | 0x1101 | 0001 0001 0000 0001 | 0,099 634 | 30 | 27 | 0 |

Table C-2 — Qe values and probability estimation (continued)

| Index | Qe_Value | | | NMPS | NLPS | SWITCH |
|-------|---------------|---------------------|-----------|------|------|--------|
| | (hexadecimal) | (binary) | (decimal) | | | |
| 30 | 0x0AC1 | 0000 1010 1100 0001 | 0,063 012 | 31 | 28 | 0 |
| 31 | 0x09C1 | 0000 1001 1100 0001 | 0,057 153 | 32 | 29 | 0 |
| 32 | 0x08A1 | 0000 1000 1010 0001 | 0,050 561 | 33 | 30 | 0 |
| 33 | 0x0521 | 0000 0101 0010 0001 | 0,030 053 | 34 | 31 | 0 |
| 34 | 0x0441 | 0000 0100 0100 0001 | 0,024 926 | 35 | 32 | 0 |
| 35 | 0x02A1 | 0000 0010 1010 0001 | 0,015 404 | 36 | 33 | 0 |
| 36 | 0x0221 | 0000 0010 0010 0001 | 0,012 474 | 37 | 34 | 0 |
| 37 | 0x0141 | 0000 0001 0100 0001 | 0,007 347 | 38 | 35 | 0 |
| 38 | 0x0111 | 0000 0001 0001 0001 | 0,006 249 | 39 | 36 | 0 |
| 39 | 0x0085 | 0000 0000 1000 0101 | 0,003 044 | 40 | 37 | 0 |
| 40 | 0x0049 | 0000 0000 0100 1001 | 0,001 671 | 41 | 38 | 0 |
| 41 | 0x0025 | 0000 0000 0010 0101 | 0,000 847 | 42 | 39 | 0 |
| 42 | 0x0015 | 0000 0000 0001 0101 | 0,000 481 | 43 | 40 | 0 |
| 43 | 0x0009 | 0000 0000 0000 1001 | 0,000 206 | 44 | 41 | 0 |
| 44 | 0x0005 | 0000 0000 0000 0101 | 0,000 114 | 45 | 42 | 0 |
| 45 | 0x0001 | 0000 0000 0000 0001 | 0,000 023 | 45 | 43 | 0 |
| 46 | 0x5601 | 0101 0110 0000 0001 | 0,503 937 | 46 | 46 | 0 |

C.2.5 Probability estimation (informative)

Table C-2 shows the Qe value associated with each Qe index. The Qe values are expressed as hexadecimal integers, as binary integers, and as decimal fractions. To convert the 15 bit integer representation of Qe to the decimal probability, the Qe values are divided by $(4/3) * (0x8000)$.

The estimator can be defined as a finite-state machine – a table of Qe indexes and associated next states for each type of renormalization (i.e., new table positions) – as shown in Table C-2. The change in state occurs only when the arithmetic coder interval register is renormalized. This is always done after coding the LPS, and whenever the interval register is less than 0x8000 (0,75 in decimal notation) after coding the MPS.

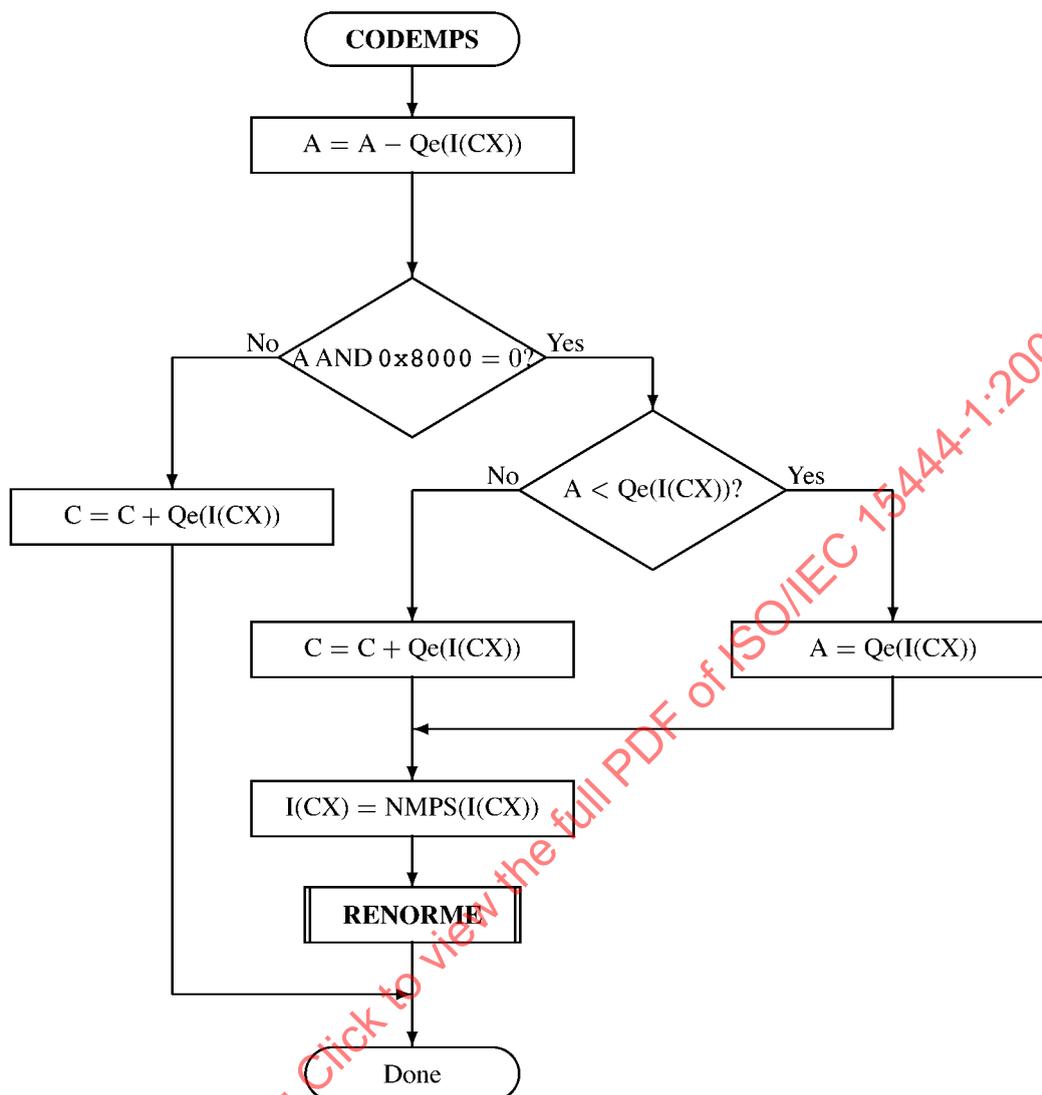


Figure C-7 — CODEMPS procedure with conditional MPS/LPS exchange

After an LPS renormalization, NLPS gives the new index for the LPS probability estimate. If the switch is 1, the MPS symbol sense is reversed.

The index to the current estimate is part of the information stored for context CX. This index is used as the index to the table of values in NMPS, which gives the next index for an MPS renormalization. This index is saved in the context storage at CX. MPS(CX) does not change.

The procedure for estimating the probability on the LPS renormalization path is similar to that of an MPS renormalization, except that when SWITCH(I(CX)) is 1, the sense of MPS(CX) is inverted.

The final index state 46 can be used to establish a fixed 0,5 probability estimate.

C.2.6 Renormalization in the encoder (RENORME) (informative)

Renormalization is very similar in both encoder and decoder, except that in the encoder it generates compressed bits and in the decoder it consumes compressed bits.

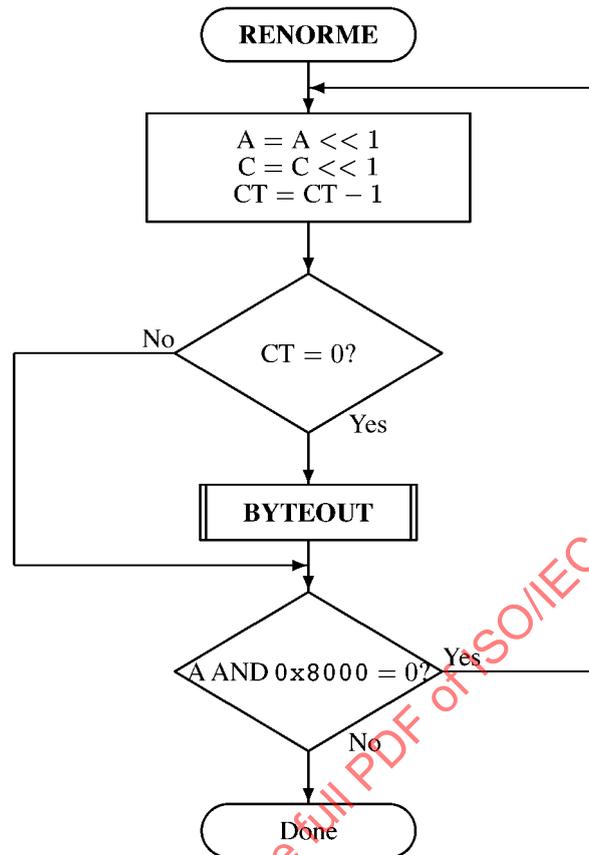


Figure C-8 — Encoder renormalisation procedure

The RENORME procedure for the encoder renormalization is illustrated in Figure C-8. Both the interval register A and the code register C are shifted, one bit at a time. The number of shifts is counted in the counter CT, and when CT is counted down to zero, a byte of compressed image data is removed from C by the procedure BYTEOUT. Renormalization continues until A is no longer less than 0x8000.

C.2.7 Compressed image data output (BYTEOUT) (informative)

The BYTEOUT routine called from RENORME is illustrated in Figure C-9. This routine contains the bit-stuffing procedures which are needed to limit carry propagation into the completed bytes of compressed image data. The conventions used make it impossible for a carry to propagate through more than the byte most recently written to the compressed image data buffer.

The procedure in the block in the lower right section does bit stuffing after a 0xFF byte; the similar procedure on the left is for the case where bit stuffing is not needed.

B is the byte pointed to by the compressed image data buffer pointer BP. If B is not a 0xFF byte, the carry bit is checked. If the carry bit is set, it is added to B and B is again checked to see if a bit needs to be stuffed in the next byte. After the need for bit stuffing has been determined, the appropriate path is chosen, BP is incremented and the new value of B is removed from the code register "b" bits.

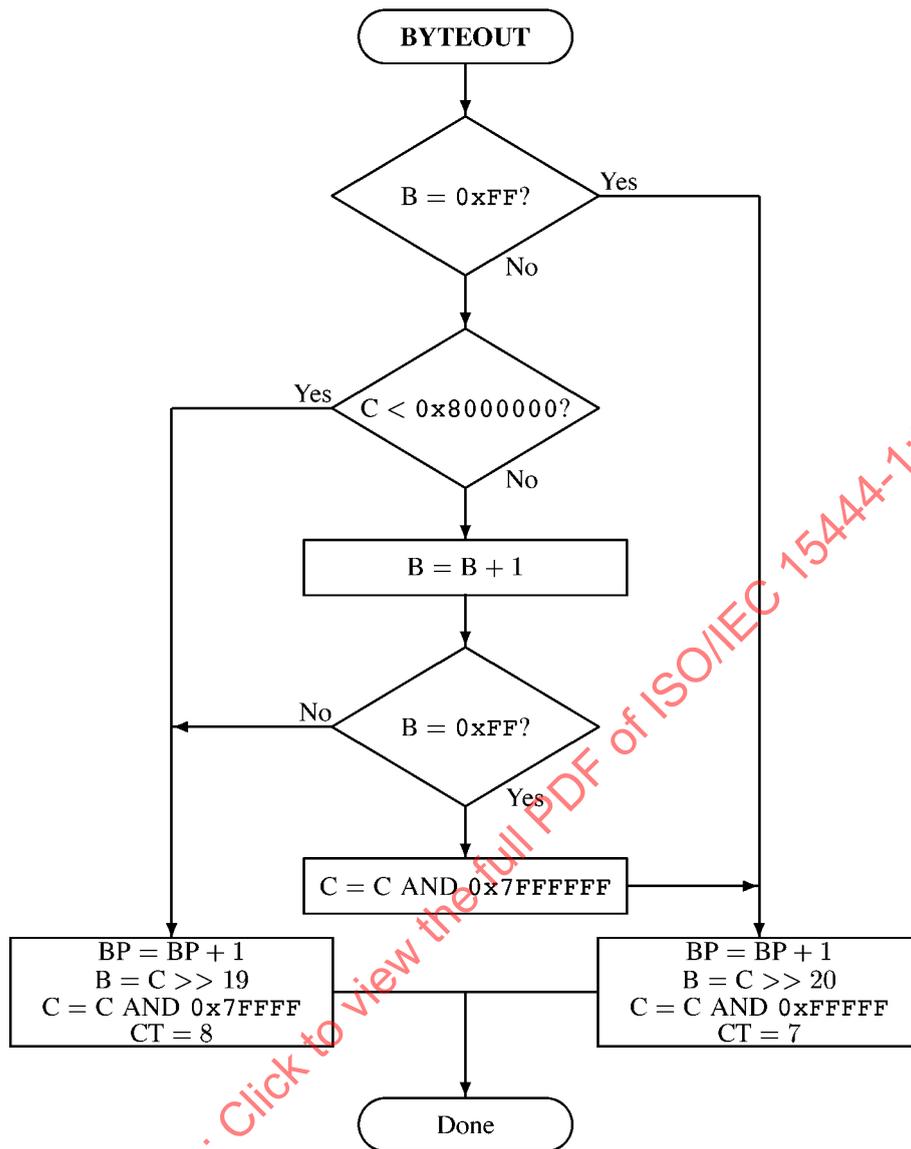


Figure C-9 — BYTEOUT procedure for encoder

C.2.8 Initialisation of the encoder (INITENC) (informative)

The INITENC procedure is used to start the arithmetic coder. After MPS and I are initialized, the basic steps are shown in Figure C-10.

The interval register and code register are set to their initial values, and the bit counter is set. Setting CT = 12 reflects the fact that there are three spacer bits in the register which need to be filled before the field from which the bytes are removed is reached. BP always points to the byte preceding the position BPST where the first byte is placed. Therefore, if the preceding byte is a 0xFF byte, a spurious bit stuff will occur, but can be compensated for by increasing CT. The initial settings for MPS and I are shown in Table D-7.

C.2.9 Termination of coding (FLUSH) (informative)

The FLUSH procedure shown in Figure C-11 is used to terminate the encoding operations and generate the required terminating marker. The procedure guarantees that the 0xFF prefix to the marker code overlaps the final bits of the

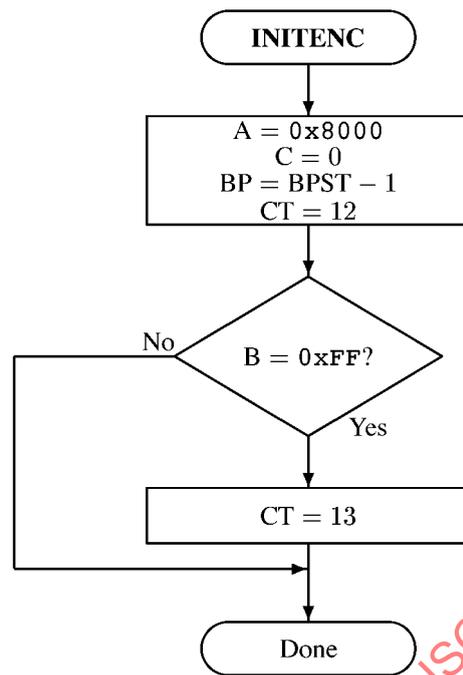


Figure C-10 — Initialisation of the encoder

compressed image data. This guarantees that any marker code at the end of the compressed image data will be recognized and interpreted before decoding is complete.

The first part of the FLUSH procedure sets as many bits in the C-register to 1 as possible as shown in Figure C-12. The exclusive upper bound for the C-register is the sum of the C-register and the interval register. The low order 16 bits of C are forced to 1, and the result is compared to the upper bound. If C is too big, the leading 1-bit is removed, reducing C to a value which is within the interval.

The byte in the C-register is then completed by shifting C, and two bytes are then removed. If the byte in buffer, B, is an 0xFF then it is discarded. Otherwise, buffer B is output to the bit stream.

NOTE — This is the only normative option for termination in ITU-T Rec.T.88 | ISO/IEC 14492. However, further reduction of the bit stream is allowed in this Recommendation | International Standard provided correct decoding is assured (see Table D.4.2).

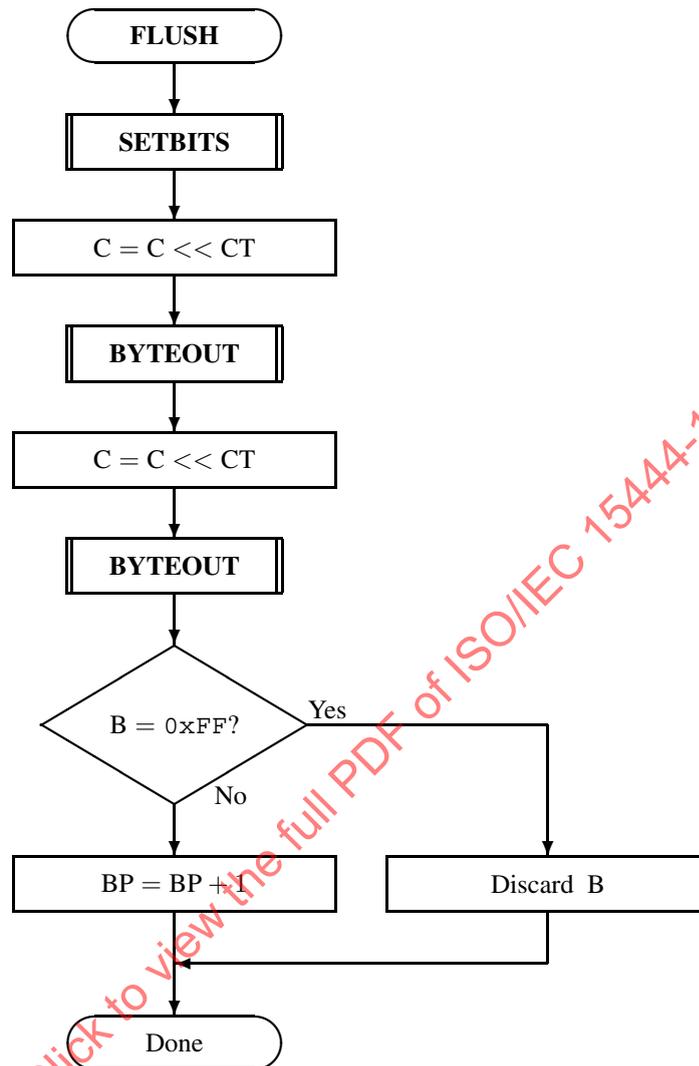


Figure C-11 — FLUSH procedure

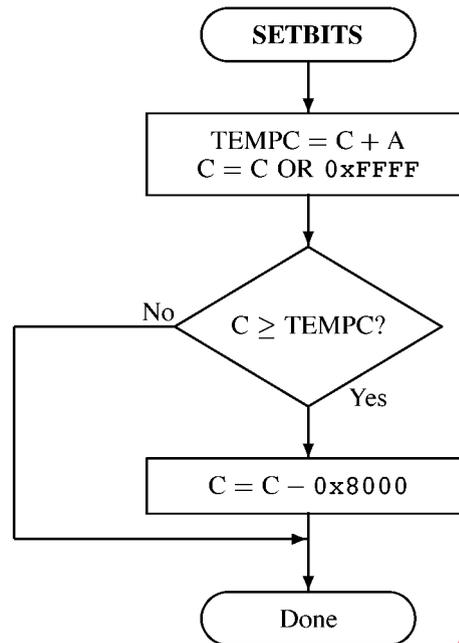


Figure C-12 — Setting the final bits in the C register

C.3 Arithmetic decoding procedure

Figure C-13 shows a simple block diagram of a binary adaptive arithmetic decoder. The compressed image data CD and a context CX from the decoder's model unit (not shown) are input to the arithmetic decoder. The decoder's output is the decision D. The encoder and decoder model units need to supply exactly the same context CX for each given decision.

The DECODER (Figure C-14) initializes the decoder through INITDEC. Contexts, CX, and bytes of compressed image data (as needed) are read and passed on to DECODE until all contexts have been read. The DECODE routine decodes the binary decision D and returns a value of either 0 or 1. The probability estimation procedures which provide adaptive estimates of the probability for each context are embedded in DECODE. When all contexts have been read, the compressed image data has been decompressed.

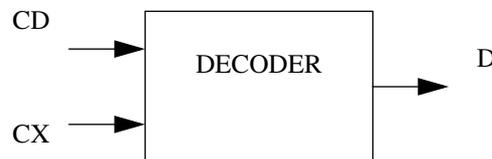


Figure C-13 — Arithmetic decoder inputs and outputs

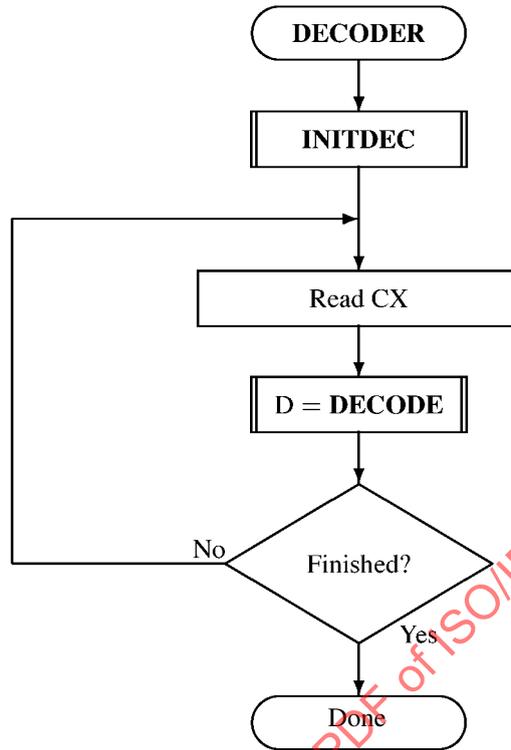


Figure C-14 — Decoder for the MQ-coder

C.3.1 Decoder code register conventions

The flow charts given in this Annex assume the register structures for the decoder shown in Table C-3.

Table C-3 — Decoder register structures

| | MSB | LSB |
|----------------|-----------|-----------|
| Chigh register | xxxx xxxx | xxxx xxxx |
| Clow register | bbbb bbbb | 0000 0000 |
| A-register | aaaa aaaa | aaaa aaaa |

Chigh and Clow can be thought of as one 32 bit C-register in that renormalization of C shifts a bit of new data from the MSB of Clow to the LSB of Chigh. However, the decoding comparisons use Chigh alone. New data is inserted into the “b” bits of Clow one byte at a time.

The detailed description of the handling of data with stuff-bits will be given later in this Annex.

Note that the comparisons shown in the various procedures in this section assume precisions greater than 16 bits. Logical comparisons can be used with 16 bit precision.

C.3.2 Decoding a decision (DECODE)

The decoder decodes one binary decision at a time. After decoding the decision, the decoder subtracts any amount from the compressed image data that the encoder added. The amount left in the compressed image data is the offset from the

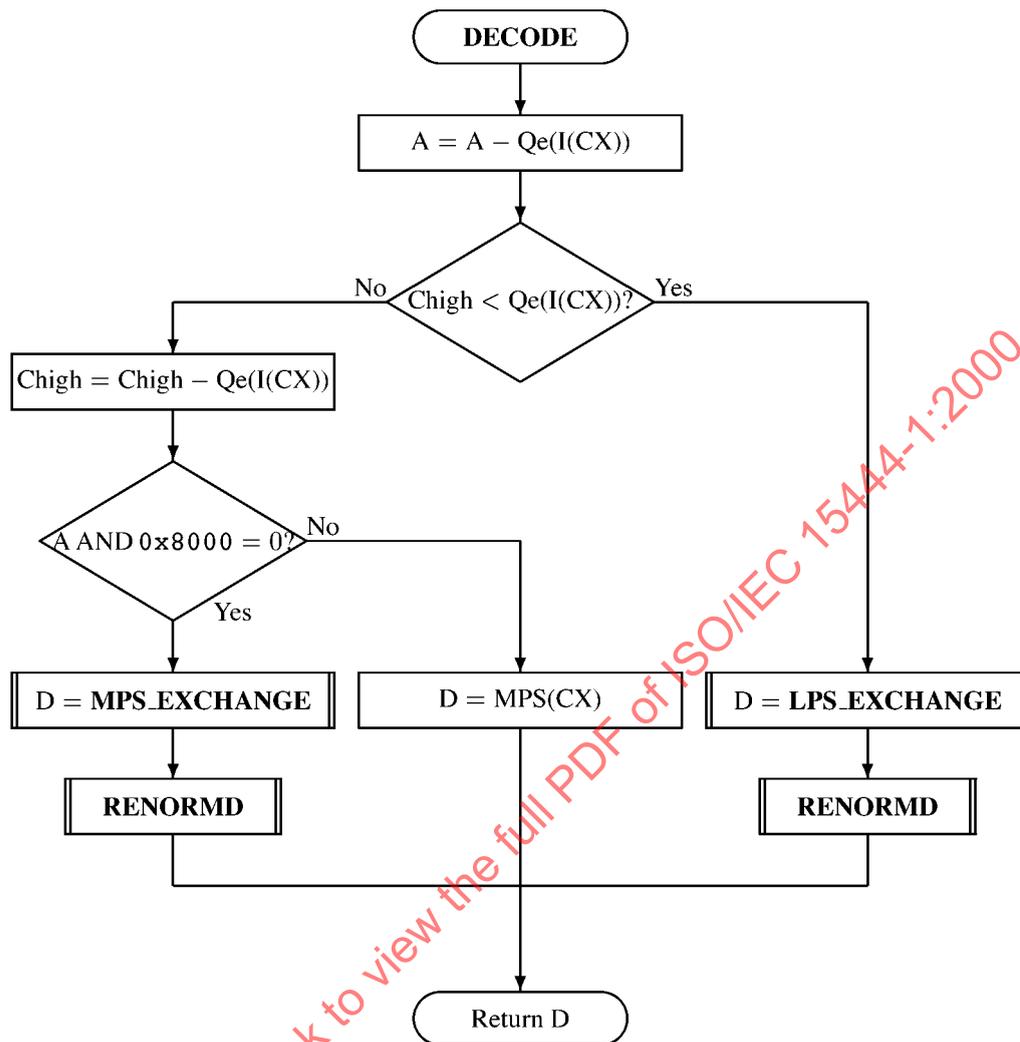


Figure C-15 — Decoding an MPS or an LPS

base of the current interval to the sub-interval allocated to all binary decisions not yet decoded. In the first test in the DECODE procedure illustrated in Figure C-15 the Chigh register is compared to the size of the LPS sub-interval. Unless a conditional exchange is needed, this test determines whether a MPS or LPS is decoded. If Chigh is logically greater than or equal to the LPS probability estimate $Qe(I(CX))$, then Chigh is decremented by that amount. If A is not less than 0x8000, then the MPS sense stored at CX is used to set the decoded decision D.

When a renormalization is needed, the MPS/LPS conditional exchange may have occurred. For the MPS path the conditional exchange procedure is shown in Figure C-16. As long as the MPS sub-interval size A calculated as the first step in Figure C-16 is not logically less than the LPS probability estimate $Qe(I(CX))$, an MPS did occur and the decision can be set from MPS(CX). Then the index I(CX) is updated from the next MPS index (NMPS) column in Table C-2. If, however, the LPS sub-interval is larger, the conditional exchange occurred and an LPS occurred. D is set by inverting MPS(CX). The probability update switches the MPS sense if the SWITCH column has a “1” and updates the index I(CX) from the next LPS index (NLPS) column in Table C-2. The probability estimation in the decoder needs to be identical to the probability estimation in the encoder.

For the LPS path of the decoder the conditional exchange procedure is given the LPS_EXCHANGE procedure shown in Figure C-17. The same logical comparison between the MPS sub-interval A and the LPS sub-interval $Qe(I(CX))$ determines if a conditional exchange occurred. On both paths the new sub-interval A is set to $Qe(I(CX))$. On the left path

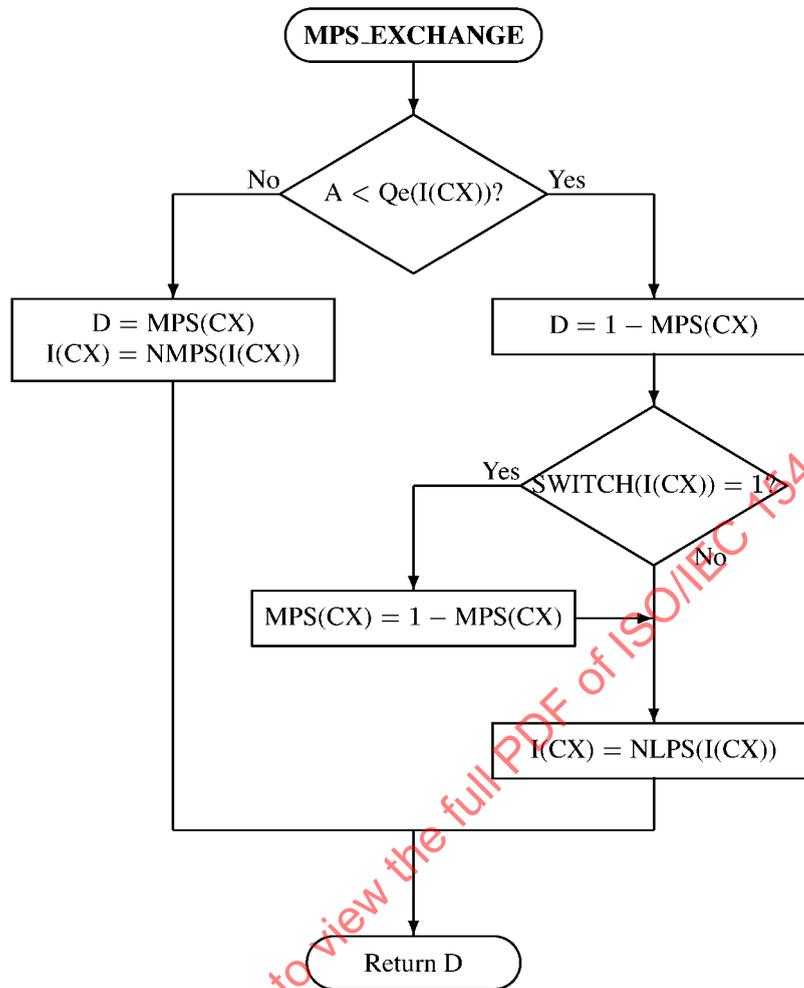


Figure C-16 Decoder MPS path conditional exchange procedure

the conditional exchange occurred so the decision and update are for the MPS case. On the right path, the LPS decision and update are followed.

C.3.3 Renormalization in the decoder (RENORMD)

The RENORMD procedure for the decoder renormalization is illustrated in Figure C-18. A counter keeps track of the number of compressed bits in the C-low section of the C-register. When CT is zero, a new byte is inserted into C-low in the BYTEIN procedure. The C-register in this procedure is the concatenation of the Chigh and C-low registers.

Both the interval register A and the code register C are shifted, one bit at a time, until A is no longer less than 0x8000.

C.3.4 Compressed image data input (BYTEIN)

The BYTEIN procedure called from RENORMD is illustrated in Figure C-19. This procedure reads in one byte of data, compensating for any stuff bits following the 0xFF byte in the process. It also detects the marker codes which must occur at the end of a coding pass. The C-register in this procedure is the concatenation of the Chigh and C-low registers.

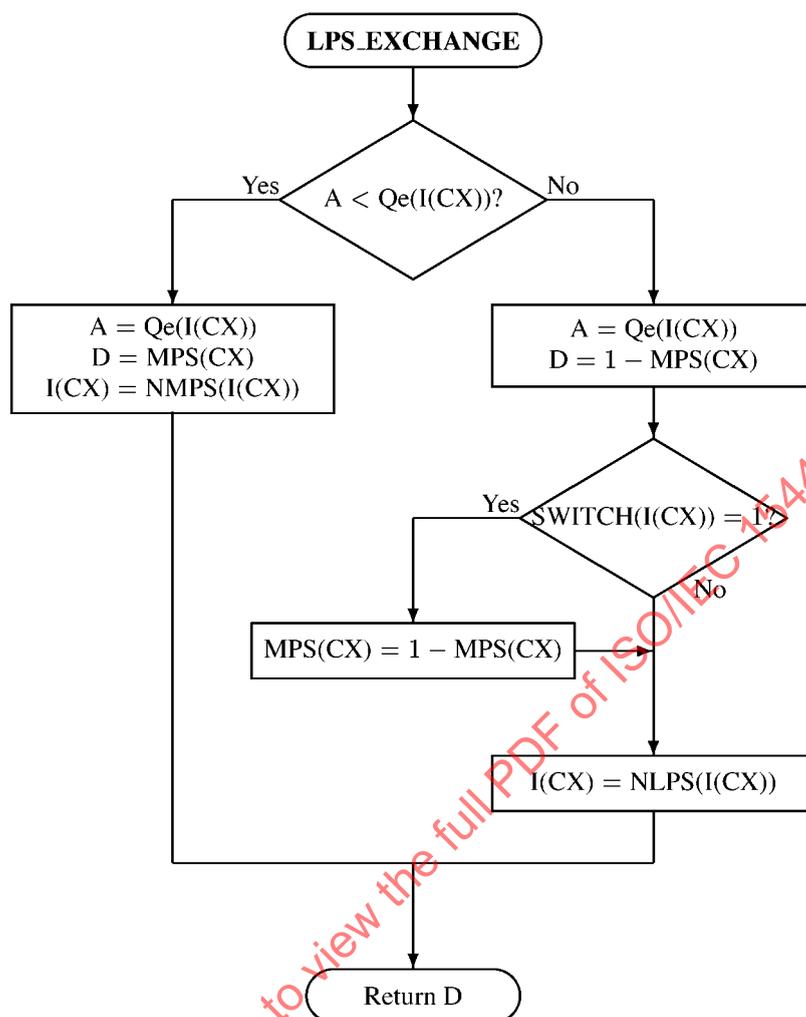


Figure C-17 — Decoder LPS path conditional exchange procedure

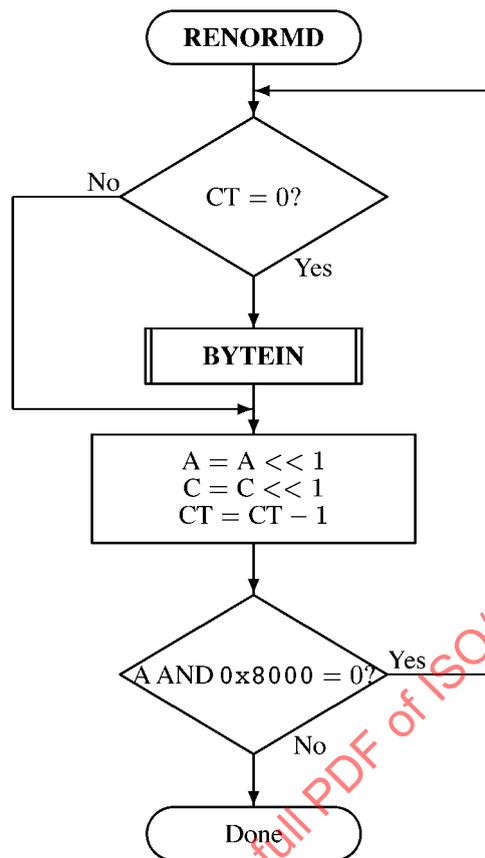


Figure C-18 — Decoder renormalisation procedure

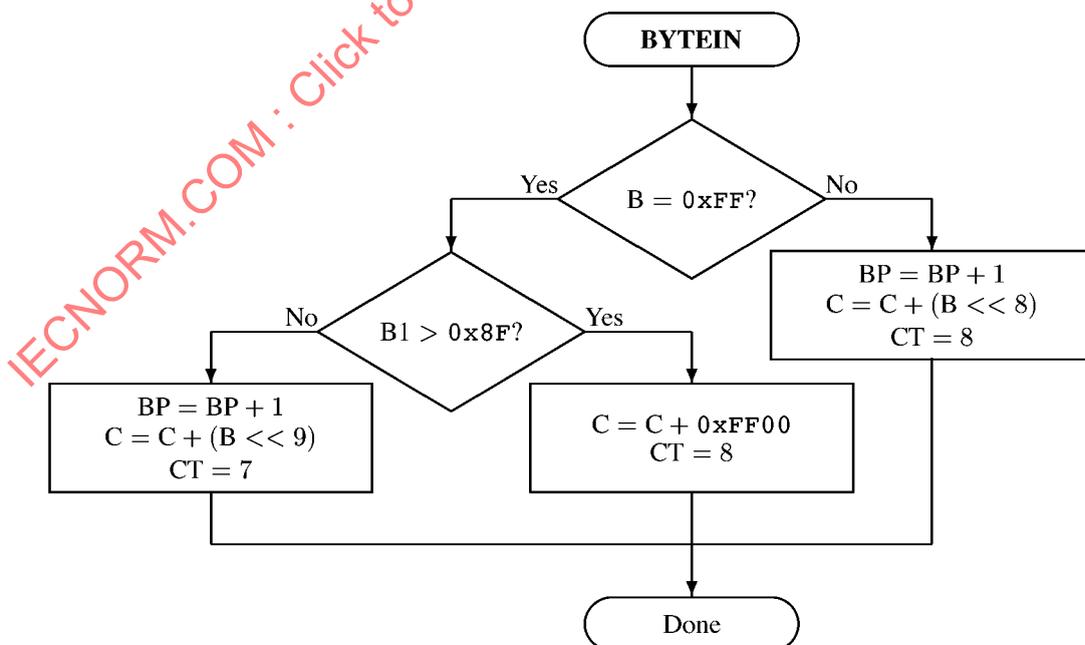


Figure C-19 — BYTEIN procedure for decoder

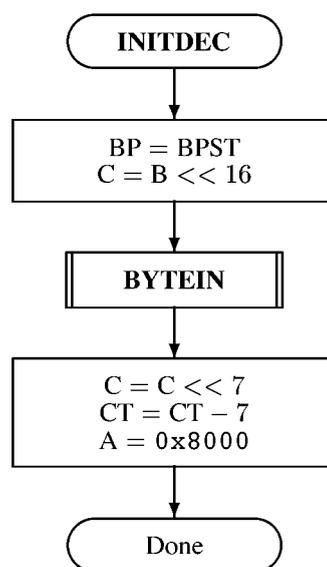


Figure C-20 — Initialisation of the decoder

B is the byte pointed to by the compressed image data buffer pointer BP. If B is not a 0xFF byte, BP is incremented and the new value of B is inserted into the high order 8 bits of Clow.

If B is a 0xFF byte, then B1 (the byte pointed to by BP+1) is tested. If B1 exceeds 0x8F, then B1 must be one of the marker codes. The marker code is interpreted as required, and the buffer pointer remains pointed to the 0xFF prefix of the marker code which terminates the arithmetically compressed image data. 1-bits are then fed to the decoder until the decoding is complete. This is shown by adding 0xFF00 to the C-register and setting the bit counter CT to 8.

If B1 is not a marker code, then BP is incremented to point to the next byte which contains a stuffed bit. The B is added to the C-register with an alignment such that the stuff bit (which contains any carry) is added to the low order bit of Chigh.

C.3.5 Initialisation of the decoder (INITDEC)

The INITDEC procedure is used to start the arithmetic decoder. After MPS and I are initialized, the basic steps are shown in Figure C-20.

BP, the pointer to the compressed image data, is initialized to BPST (pointing to the first compressed byte). The first byte of the compressed image data is shifted into the low order byte of Chigh, and a new byte is then read in. The C-register is then shifted by 7 bits and CT is decremented by 7, bringing the C-register into alignment with the starting value of A. The interval register A is set to match the starting value in the encoder. The initial settings for MPS and I are shown in Table D-7.

C.3.6 Resetting arithmetic coding statistics

At certain points during the decoding some or all of the arithmetic coding statistics are reset. This process involves returning I(CX) and MPS(CX) to their initial values as defined in Table D-7 for some or all values of CX.

C.3.7 Saving arithmetic coding statistics

In some cases, the decoder needs to save or restore some values of I(CX) and MPS(CX).

(Blank page)

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex D

Coefficient bit modeling

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex defines the modeling and scanning of transform coefficient bits.

Code-blocks (see Annex B) are decoded a bit-plane at a time starting from the most significant bit-plane with a non-zero element to the least significant bit-plane. For each bit-plane in a code-block, a special code-block scan pattern is used for each of three coding passes. Each coefficient bit in the bit-plane appears in only one of the three coding passes called significance propagation, magnitude refinement, and cleanup. For each pass contexts are created which are provided to the arithmetic coder, CX, along with the bit stream, CD, (see Annex C.3).

D.1 Code-block scan pattern within code-blocks

Each bit-plane of a code-block is scanned in a particular order. Starting at the top left, the first four coefficients of the first column are scanned, followed by the first four coefficients of the second column and so on, until the right side of the code-block is reached. The scan then returns to the left of the code-block and the second set of four coefficients in each column is scanned. The process is continued to the bottom of the code-block. If the code-block height is not divisible by 4, the last set of coefficients scanned in each column will contain fewer than 4 members. Figure D-1 shows an example of the code-block scan pattern for a code-block.

D.2 Coefficient bits and significance

D.2.1 General case notations

The decoding procedures specified in this Annex produce for each transform coefficient (u, v) of subband b the decoded bits which will be used to reconstruct the transform coefficient value $\bar{q}_b(u, v)$. The bits produced are: a sign bit $s_b(u, v)$ and a number $N_b(u, v)$ of decoded magnitude MSBs, ordered from most to least significant: $MSB_i(b, u, v)$ is the i th MSB of transform coefficient (u, v) of subband b ($i = 1, \dots, N_b(u, v)$). As indicated in Equation D.1, the sign bit $s_b(u, v)$ has a value of one for negative coefficients and of zero for positive coefficients. The number $N_b(u, v)$ of decoded MSBs includes the number of all zero most significant bit-planes signalled in the packet header (see Annex B.10.5).

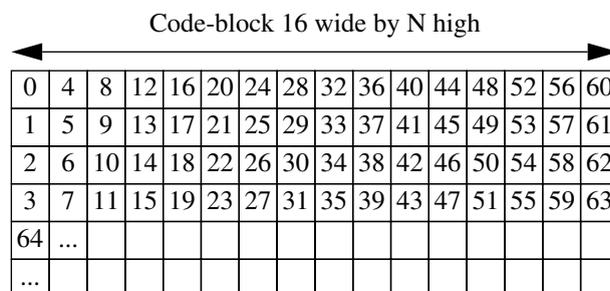


Figure D-1 — Example scan pattern of a code-block bit-plane

D.2.2 Notation in the case with ROI

In the case of the presence of the RGN marker segment (indicating the presence of an ROI), modifications need to be made to the decoded bits, as well as the number of decoded bits $N_b(u, v)$. These modifications are specified in Annex H.1. In the absence of the RGN marker segment, no modification is required.

D.3 Decoding passes over the bit-planes

Each coefficient in a code-block has an associated binary state variable called its significance state. Significance states are initialized to 0 (coefficient is insignificant) and may become 1 (coefficient is significant) during the course of the decoding of the code-block. The “significance state” changes from insignificant to significant (see the section below) at the bit-plane where the most significant magnitude bit equal to 1 is found. The context vector for a given current coefficient is the binary vector consisting of the significance states of its 8 nearest-neighbor coefficients, as shown in Figure D-2. Any nearest neighbor lying outside the current coefficient’s code-block is regarded as insignificant (i.e., it is treated as having a zero significance state) for the purpose creating a context vector for decoding the current coefficient.

In general, a current coefficient can have 256 possible context vectors. These are clustered into a smaller number of contexts according to the rules specified below for context formation. Four different context formation rules are defined, one for each of the four coding passes: significance coding, sign coding, magnitude refinement coding, and cleanup coding. These coding operations are performed in three coding passes over each bit-plane: significance and sign coding in a significance propagation pass, magnitude refinement coding in a magnitude refinement pass, and cleanup and sign coding in a cleanup pass. For a given coding operation, the context label (or context) provided to the arithmetic coding engine is a label assigned to the current coefficient’s context.

NOTE — Although (for the sake of concreteness) specific integers are used in the tables below for labeling contexts, the tokens used for context labels are implementation-dependent and their values are not mandated by this Recommendation | International Standard.

The first bit-plane within the current block with a non-zero element has a cleanup pass only. The remaining bit-planes are decoded in three coding passes. Each coefficient bit is decoded in exactly one of the three coding passes. Which pass a coefficient bit is decoded in depends on the conditions for that pass. In general, the significance propagation pass includes the coefficients that are predicted, or “most likely,” to become significant and their sign bits, as appropriate. The magnitude refinement pass includes bits from already significant coefficients. The cleanup pass includes all the remaining coefficients.

D.3.1 Significance propagation decoding pass

The eight surrounding neighbor coefficients of a current coefficient (shown in Figure D-2 where X denotes the current coefficient) are used to create a context vector that maps into one of the 9 contexts shown in Table D-1. If a coefficient is significant then it is given a 1 value for the creation of the context, otherwise it is given a 0 value. The mapping to the contexts also depends on the subband.

The significance propagation pass only includes bits of coefficients that were insignificant (the significance state has yet to be set) and have a non-zero context. All other coefficients are skipped. The context is delivered to the arithmetic decoder (along with the bit stream) and the decoded coefficient bit is returned. If the value of this bit is 1 then the

| | | |
|----------------|----------------|----------------|
| D ₀ | V ₀ | D ₁ |
| H ₀ | X | H ₁ |
| D ₂ | V ₁ | D ₃ |

Figure D-2 — Neighbors states used to form the context

significance state is set to 1 and the immediate next bit to be decoded is the sign bit for the coefficient. Otherwise, the significance state remains 0. When the contexts of successive coefficients and coding passes are considered, the most current significance state for this coefficient is used.

D.3.2 Sign bit decoding

The context label for sign bit decoding is determined using another context vector from the neighborhood. Computation of the context label can be viewed as a two-step process. The first step summarizes the contribution of the vertical and the horizontal neighbors. The second step reduces those contributions to one of 5 context labels.

For the first step, the two vertical neighbors (see Figure D-2) are considered together. Each neighbor may have one of three states: significant positive, significant negative, or insignificant. If the two vertical neighbors are both significant with the same sign, or if only one is significant, then the vertical contribution is 1 if the sign is positive or -1 if the sign is negative. If both vertical neighbors are insignificant, or both are significant with different signs, then the vertical contribution is 0. The horizontal contribution is created the same way. Once again, if the neighbors fall outside the code-block they are considered to be insignificant. Table D-2 shows these contributions.

Table D-1 — Contexts for the significance propagation and cleanup coding passes

| LL and LH subbands (vertical high-pass) | | | HL subband (horizontal high-pass) | | | HH subband (diagonally high-pass) | | Context label ^a |
|--|--------------|--------------|--------------------------------------|--------------|--------------|--------------------------------------|--------------|-------------------------------|
| ΣH_i | ΣV_i | ΣD_i | ΣH_i | ΣV_i | ΣD_i | $\Sigma(H_i+V_i)$ | ΣD_i | |
| 2 | x^b | x | x | 2 | x | x | ≥ 3 | 8 |
| 1 | ≥ 1 | x | ≥ 1 | 1 | x | ≥ 1 | 2 | 7 |
| 1 | 0 | ≥ 1 | 0 | 1 | ≥ 1 | 0 | 2 | 6 |
| 1 | 0 | 0 | 0 | 1 | 0 | ≥ 2 | 1 | 5 |
| 0 | 2 | x | 2 | 0 | x | 1 | 1 | 4 |
| 0 | 1 | x | 1 | 0 | x | 0 | 1 | 3 |
| 0 | 0 | ≥ 2 | 0 | 0 | ≥ 2 | ≥ 2 | 0 | 2 |
| 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 1 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

- a. Note that the context labels are indexed only for identification convenience in this specification. The actual identifiers used is a matter of implementation.
- b. x = do not care.

The second step reduces the nine permutations of the vertical and horizontal contributions into 5 context labels. Table D-3 shows these context labels. This context is provided to the arithmetic decoder with the bit stream. The bit returned, D (see Annex C), is then logically exclusive ORed with the $XORbit$ in Table D-3 to produce the sign bit. The following equation is used:

$$signbit = D \otimes XORbit \quad D.1$$

where $signbit$ is the sign bit of the current coefficient (a one bit indicates a negative coefficient, a zero bit a positive coefficient), D is the value returned from the arithmetic decoder given the context label and the bit stream, and the $XORbit$ is found in Table D-3 for the current context label.

Table D-2 — Contributions of the vertical (and the horizontal) neighbors to the sign context

| V_0 (or H_0) | V_1 (or H_1) | V (or H) contribution |
|-----------------------|-----------------------|-----------------------|
| significant, positive | significant, positive | 1 |
| significant, negative | significant, positive | 0 |
| insignificant | significant, positive | 1 |
| significant, positive | significant, negative | 0 |
| significant, negative | significant, negative | -1 |
| insignificant | significant, negative | -1 |
| significant, positive | insignificant | 1 |
| significant, negative | insignificant | -1 |
| insignificant | insignificant | 0 |

Table D-3 — Sign contexts from the vertical and horizontal contributions

| Horizontal contribution | Vertical contribution | Context label | XORbit |
|-------------------------|-----------------------|---------------|--------|
| 1 | 1 | 13 | 0 |
| 1 | 0 | 12 | 0 |
| 1 | -1 | 11 | 0 |
| 0 | 1 | 10 | 0 |
| 0 | 0 | 9 | 0 |
| 0 | -1 | 10 | 1 |
| -1 | 1 | 11 | 1 |
| -1 | 0 | 12 | 1 |
| -1 | -1 | 13 | 1 |

D.3.3 Magnitude refinement pass

The magnitude refinement pass includes the bits from coefficients that are already significant (except those that have just become significant in the immediately preceding significance propagation pass).

The context used is determined by the summation of the significance state of the horizontal, vertical, and diagonal neighbors. These are the states as currently known to the decoder, not the states used before the significance decoding pass. Further, it is dependent on whether this is the first refinement bit (the bit immediately after the significance and sign bits) or not. Table D-4 shows the three contexts for this pass.

Table D-4 — Contexts for the magnitude refinement coding passes

| $\Sigma H_i + \Sigma V_i + \Sigma D_i$ | First refinement for this coefficient | Context label |
|--|---------------------------------------|---------------|
| x^a | false | 16 |
| ≥ 1 | true | 15 |
| 0 | true | 14 |

a. "x" indicates a "don't care" state.

The context is passed to the arithmetic coder along with the bit stream. The bit returned is the value of the current coefficient in the current bit-plane.

D.3.4 Cleanup pass

All the remaining coefficients are insignificant and had the context value of zero during the significance propagation pass. These are all included in the cleanup pass. The cleanup pass not only uses the neighbor context, like that of the significance propagation pass, from Table D-1, but also a run-length context.

During this pass the neighbor contexts for the coefficients in this pass are recreated using Table D-1. The context label can now have any value because the coefficients that were found to be significant in the significance propagation pass are considered to be significant in the cleanup pass. Run-lengths are decoded with a unique single context. If the four contiguous coefficients in the column being scanned are all decoded in the cleanup pass and the context label for all is 0 (including context coefficients from previous magnitude, significance and cleanup passes), then the unique run-length context is given to the arithmetic decoder along with the bit stream. If the symbol 0 is returned, then all four contiguous coefficients in the column remain insignificant and are set to zero.

Otherwise, if the symbol 1 is returned, then at least one of the four contiguous coefficients in the column is significant. The next two bits, returned with the UNIFORM context (index 46 in Table C-2), denote which coefficient from the top of the column down is the first to be found significant. The two bits decoded with the UNIFORM context are decoded MSB then LSB. That coefficient's sign bit is determined as described in Annex D.3.2. The decoding of any remaining coefficients continues in the manner described in Annex D.3.1.

If the four contiguous coefficients in a column are not all decoded in the cleanup pass or the context bin for any is non-zero, then the coefficient bits are decoded with the context in Table D-1 as in the significance propagation pass. The same contexts as the significance propagation are used here (the state is used as well as the model). Table D-5 shows the logic for the cleanup pass.

If there are fewer than four rows remaining in a code-block, then no run-length coding is used. Once again, the significance state of any coefficient is changed immediately after decoding the first 1 magnitude bit.

D.3.5 Example of coding passes and significance propagation (informative)

Table D-6 shows an example of the decoding order for the quantized coefficients of one 4-coefficient column in the scan. This example assumes all neighbors not included in the table are identically zero, and indicates in which pass each bit is decoded. The sign bit is decoded after the initial 1 bit and is indicated in the table by the + or - sign. The very first pass in a new block is always a cleanup pass because there can be no predicted significant, or refinement bits. After the first pass, the decoded 1 bit of the first coefficient causes the second coefficient to be decoded in the significance pass for the next bit-plane. The 1 bit decoded for the last coefficient in the second cleanup pass causes the third coefficient to be decoded in the next significance pass.

D.4 Initializing and terminating

When the contexts are initialized, or re-initialized, they are set to the values in the Table D-7

Table D-5 — Run-length decoder for cleanup passes

| Four contiguous coefficients in a column remaining to be decoded and each currently has the 0 context | Symbols with run-length context | Four contiguous bits to be decoded are zero | Symbols decoded with UNIFORM ^a context | Number of coefficients to decode |
|---|---------------------------------|---|---|----------------------------------|
| true | 0 | true | none | none |
| true | 1 | false skip to first coefficient sign skip to second coefficient sign skip to third coefficient sign skip to fourth coefficient sign | MSB LSB 00 01 10 11 | 3 2 1 0 |
| false | none | x | none | rest of column |

a. See Annex C.

Table D-6 — Example of sub-bit-plane coding order and significance propagation

| | | | | | |
|---------------|----|----|----|----|------------------------------------|
| Coding Passes | 10 | 1 | 3 | -7 | Coefficient value |
| | + | + | + | - | Coefficient sign |
| | 1 | 0 | 0 | 0 | Coefficient magnitude (MSB to LSB) |
| | 0 | 0 | 0 | 1 | |
| 1 | 0 | 1 | 1 | | |
| 0 | 1 | 1 | 1 | | |
| Cleanup | 1+ | 0 | 0 | 0 | |
| Significance | | 0 | | | |
| Refinement | 0 | | | | |
| Cleanup | | | 0 | 1- | |
| Significance | | 0 | 1+ | | |
| Refinement | 1 | | | 1 | |
| Cleanup | | | | | |
| Significance | | 1+ | | | |
| Refinement | 0 | | 1 | 1 | |
| Cleanup | | | | | |

In normal operation (not selective arithmetic coding bypass), the arithmetic coder shall be terminated either at the end of every coding pass or only at the end of every code-block (see Annex D.4.1). Table D-8 shows two examples of termination patterns for the coding passes in a code-block. The COD or COC marker signals which termination pattern is used (see Annex A.6.1 and Annex A.6.2).

Table D-7 — Initial states for all contexts

| Context | Initial index from Table C-3 | MPS |
|---|------------------------------|-----|
| UNIFORM | 46 | 0 |
| Run-length | 3 | 0 |
| All zero neighbors (context label 0 in Table D-1) | 4 | 0 |
| All other contexts | 0 | 0 |

Table D-8 — Arithmetic coder termination patterns

| # | Pass | Coding Operation Termination only on last pass | Coding Operation Termination on every pass |
|-------|--------------------------|---|---|
| 1 | cleanup | Arithmetic Coder (AC) | AC, terminate |
| 2 | significance propagation | AC | AC, terminate |
| 2 | magnitude refinement | AC | AC, terminate |
| 2 | cleanup | AC | AC, terminate |
| ... | ... | ... | ... |
| final | significance propagation | AC | AC, terminate |
| final | magnitude refinement | AC | AC, terminate |
| final | cleanup | AC, terminate | AC, terminate |

When multiple terminations of the arithmetic coder are present, the length of each terminated segment is signalled in the packet header as described in Annex B.10.7.

NOTE — Termination should never create a byte aligned value between 0xFF90 and 0xFFFF inclusive. These values are available as in bit stream marker values.

D.4.1 Expected codestream termination

The decoder anticipates that the given number of codestream bytes will decode a given number of coding passes before the arithmetic coder is terminated. During decoding, bytes are pulled successively from the codestream until all the bytes for those coding passes have been consumed. The number of bytes corresponding to the coding passes is specified in the packet header. Often at that point there are more symbols to be decoded. Therefore, the decoder shall extend the input bit stream to the arithmetic coder with 0xFF bytes, as necessary, until all symbols have been decoded.

It is sufficient to append no more than two 0xFF bytes. This will cause the arithmetic coder to have at least one pair of consecutive 0xFF bytes at its input which is interpreted as an end-of-stream marker (see Annex C.3.4). The bit stream does not actually contain a terminating marker. However, the byte length is explicitly signalled enabling the terminating marker to be synthesized for the arithmetic decoder.

NOTE — Two 0xFF bytes appended in this way is the simplest method. However, other equivalent extensions exist. This might be important since some arithmetic coder implementations might attach special meaning to the specific termination marker.

D.4.2 Arithmetic coder termination

The FLUSH procedure performs this task (see Annex C.2.9). However, since the FLUSH procedure increases the length of the codestream, and frequent termination may be desirable, other techniques may be employed. Any technique that places all of the needed bytes in the codestream in such a way that the decoder need not backtrack to find the position at which the next segment of the codestream should begin is acceptable.

When the predictable termination flag is set (see COD and COC in Annex A.6.1 and Annex A.6.2) the following termination procedure shall be used. Using the notation of Annex C.2, the followings steps can be used:

- 1 Identify the number of bits in code register, C , which must be pushed out through the byte buffer. This is given by $k = (11 - CT) + 1$
- 2 While ($k > 0$)
 - Shift C left by CT and set $CT = 0$.
 - Execute the BYTEOUT procedure. This sets CT equal to the number of bits cleared out of the C register.
 - Subtract CT from k .
- 3 Execute the BYTEOUT procedure to push the contents of the byte buffer register out to the codestream. This step shall be skipped if the byte in the byte buffer has an 0xFF byte value.

The relevant truncation length in this case is simply the total number of bytes pushed out onto the codestream.

If the predictable termination flag is not set, the last byte output by the above procedure can generally be modified, within certain bounds, without affecting the symbols to be decoded. It will sometimes be possible to augment the last byte to the special value, 0xFF, which shall not be sent. It can be shown that this happens approximately 1/8 of the time.

D.4.3 Length computation (informative)

To include coding pass compressed image data into packets the number of bytes to be included must be determined. If the coding pass compressed image data is terminated, the algorithm in the previous section may be used. Otherwise, the encoder should calculate a suitable length such that corresponding bytes are sufficient for the decoder to reconstruct the coding passes.

D.5 Error resilience segmentation symbol

A segmentation symbol is a special symbol. Whether it is used is signalled in the COD or COC marker segments (Annex A.6.1 and Annex A.6.2). The symbol is coded with the UNIFORM context of the arithmetic coder at the end of each bit-plane. The correct decoding of this symbol confirms the correctness of the decoding of this bit-plane, which allows error detection. At the decoder, a segmentation symbol 1010 or 0xA should be decoded at the end of each bit-plane (at the end of a cleanup pass). If the segmentation symbol is not decoded correctly, then bit errors occurred for this bit-plane.

NOTE — This can be used with or without the predictable termination.

D.6 Selective arithmetic coding bypass

This style of coding allows bypassing the arithmetic coder for the significance propagation pass and magnitude refinement coding passes starting in the fifth significant bit-plane of the code-block. The COD or COC marker signals whether or not this coding style is used (see Annex A.6.1 and Annex A.6.2).

The first cleanup pass (which is the first bit-plane of a code-block with a non-zero element) and the next three sets of significance propagation, magnitude refinement, and cleanup coding passes are decoded with the arithmetic coder. The fourth cleanup pass shall include an arithmetic coder termination (see Table D-9).

Table D-9 — Selective arithmetic coding bypass

| Bit-plane number | Pass type | Coding Operations |
|------------------|--------------------------|------------------------|
| 1 | cleanup | Arithmetic Coding (AC) |
| 2 | significance propagation | AC |
| 2 | magnitude refinement | AC |
| 2 | cleanup | AC |
| 3 | significance propagation | AC |
| 3 | magnitude refinement | AC |
| 3 | cleanup | AC |
| 4 | significance propagation | AC |
| 4 | magnitude refinement | AC |
| 4 | cleanup | AC, terminate |
| 5 | significance propagation | raw |
| 5 | magnitude refinement | raw, terminate |
| 5 | cleanup | AC, terminate |
| ... | ... | ... |
| final | significance | raw |
| final | magnitude refinement | raw, terminate |
| final | cleanup | AC, terminate |

Starting with the fourth significance propagation and magnitude refinement coding passes the bits that would have been returned from the arithmetic coder are instead returned directly from the bit stream. (A routine that undoes the effects of bit stuffing precedes the return of bits. Specifically, this routine throws out the first bit after an 0xFF byte value.) After each magnitude refinement pass the bit stream has been “terminated” by padding to the byte boundary.

When all the bits from a coding pass have been assembled the last byte is packed to a byte boundary with an alternating sequence of 0's and 1's, if necessary. This sequence should start with a 0 regardless of the number of bits to be padded.

The cleanup coding passes continue to receive compressed image data directly from the arithmetic coder and are always terminated.

The sign bit is computed with Equation D.2:

$$\text{signbit} = \text{raw_value} \quad \text{D.2}$$

where $\text{raw_value} = 1$ is a negative sign bit and $\text{raw_value} = 0$ is a positive sign bit. Table D-9 shows the coding sequence.

The length of each terminated segment, plus the length of any remaining unterminated passes, is signalled in the packet header as described in Annex B.10.7. If termination on each coding pass is selected see Annex A.6.1 and Annex A.6.2), then every pass is terminated (including both raw passes).

NOTE — Using the selective bypass mode when encoding an image with an ROI may significantly decrease the compression efficiency.

If a 0xFF value is encountered in the bit stream, then the first bit of the next byte is discarded. The sequence of bits used in the selective arithmetic coding bypass have been stuffed into bytes using a bit stuffing routine.

At the encoder, bits are packed into bytes from the most significant bit to the least significant bit. Once a complete byte is assembled, it is emitted to the bit stream. If the value of the byte is an 0xFF a single zero bit is stuffed into the most significant bit of the next byte. Once all bits of the coding pass have been assembled, the last byte is packed to the byte boundary and emitted. The last byte shall not be an 0xFF value.

NOTE — Since the decoder appends 0xFF values, as necessary, to the bit stream representing the coding pass (see Annex D.4.1), truncation of the bit stream may be possible.

D.7 Vertically causal context formation

This style of coding constrains the context formation to the current and past code-block scans (four rows of vertically scanned coefficients). That is, any coefficient from the next code-block scan are considered to be insignificant. The COD or COC marker signals whether or not this style of coding is used (see Annex A.6.1 and Annex A.6.2).

To illustrate, the bit labelled 14 in Figure D-1 is decoded as usual using the neighbor states as specified in Figure D-2, independent of whether or not contexts are vertically causal. However when vertically causal context formation is used, the bit labeled 15 is decoded assuming $D_2 = V_1 = D_3 = 0$ in Figure D-2.

D.8 Flow diagram of the code-block coding

The steps for modeling each bit-plane of each code-block can be viewed graphically in Figure D-3. The decisions made are in Table D-10 and the bits and context sent to the coder are in Table D-11. These show the context without the selective arithmetic coding bypass or the vertically causal model.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Table D-10 — Decisions in the context model flow chart

| Decision | Question | Description |
|----------|---|-------------|
| D0 | Is this the first significant bit-plane for the code-block? | Annex D.3 |
| D1 | Is the current coefficient significant? | Annex D.3.1 |
| D2 | Is the context bin zero? (see Table D-1) | Annex D.3.1 |
| D3 | Did the current coefficient just become significant? | Annex D.3.1 |
| D4 | Are there more coefficients in the significance propagation? | |
| D5 | Is the coefficient insignificant? | Annex D.3.3 |
| D6 | Was the coefficient coded in the last significance propagation? | Annex D.3.3 |
| D7 | Are there more coefficients in the magnitude refinement pass? | |
| D8 | Are four contiguous undecoded coefficients in a column each with a 0 context? | Annex D.3.4 |
| D9 | Is the coefficient significant? | Annex D.3.4 |
| D10 | Are there more coefficients remaining of the four column coefficients? | |
| D11 | Are the four contiguous bits all zero? | Annex D.3.4 |
| D12 | Are there more coefficients in the cleanup pass? | |

Table D-11 — Decoding in the context model flow chart

| Code | Decoded symbol | Context | Brief explanation | Description |
|------|-----------------------|-----------------------------|--|---------------------------|
| C0 | — | — | Go to the next coefficient or column | |
| C1 | Newly significant? | Table D-1, 9 context labels | Decode significance bit of current coefficient (significance propagation or cleanup) | Annex D.3.1 |
| C2 | Sign bit | Table D-3, 5 context labels | Decode sign bit of current coefficient | Annex D.3.2 |
| C3 | Current magnitude bit | Table D-4, 3 context labels | Decode magnitude refinement pass bit of current coefficient | Annex D.3.3 |
| C4 | 0 1 | Run-length context label | Decode run-length of four zeros Decode run-length not of four zeros | Annex D.3.4 |
| C5 | 00 01 10 11 | UNIFORM | First coefficient is first with non-zero bit Second coefficient is first with non-zero bit Third coefficient is first with non-zero bit Fourth coefficient is first with non-zero bit | Annex D.3.4 and Table C-2 |

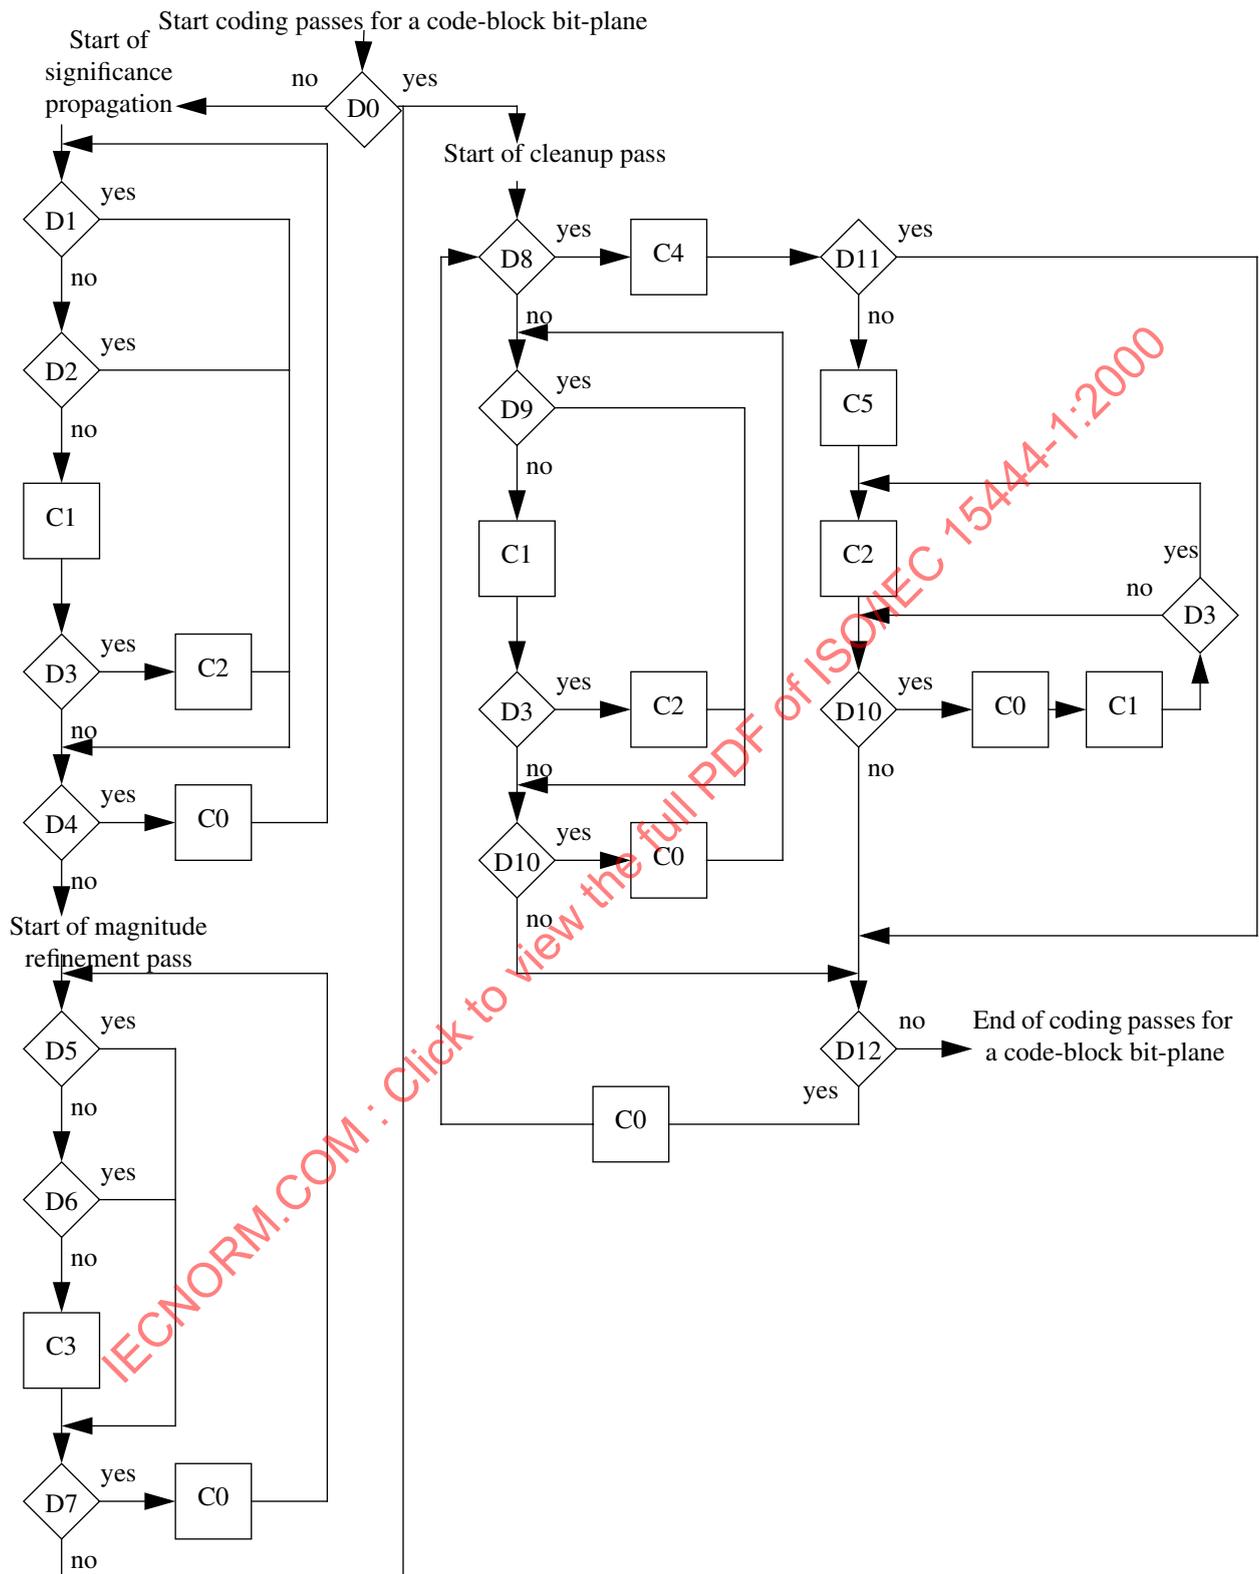


Figure D-3 — Flow chart for all coding passes on a code-block bit-plane

Annex E

Quantization

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex specifies the forms of inverse quantization used for the reconstruction of tile-component transform coefficients. Information about quantization of transform coefficients for encoding is also provided. Quantization is the process by which the transform coefficients are reduced in precision.

E.1 Inverse quantization procedure

For each transform coefficient (u, v) of a given subband b , the transform coefficient value $q_b(u, v)$ is given by the following equation

$$\bar{q}_b(u, v) = (1 - 2s_b(u, v)) \cdot \left(\sum_{i=1}^{N_b(u, v)} MSB_i(b, u, v) \cdot 2^{M_b - i} \right), \quad \text{E.1}$$

where $s_b(u, v)$, $N_b(u, v)$ and $MSB_i(b, u, v)$ are given in Annex D.2, and where M_b is retrieved using Equation E.2, where the number of guard bits G and the exponent ε_b are specified in the QCD or QCC marker segments (see Annex A.6.4 and Annex A.6.5)

$$M_b = G + \varepsilon_b - 1. \quad \text{E.2}$$

Each decoded transform coefficient $q_b(u, v)$ of subband b is used to generate a reconstructed transform coefficient $Rq_b(u, v)$, as will be described in Annex E.1.1.

NOTE — Decoding only $N_b(u, v)$ (see Annex D.2.1) bit-planes is equivalent to decoding data which has been encoded using a scalar quantizer with step size $2^{M_b - N_b(u, v)} \cdot \Delta_b$ for all the coefficients of this code-block. Due to the nature of the three coding passes (see Annex D.3), $N_b(u, v)$ may be different for different coefficients within the same code-block.

E.1.1 Irreversible transformation

E.1.1.1 Determination of the quantization step size

For the irreversible transformation, the quantization step size Δ_b for a given subband b is calculated from the dynamic range R_b of subband b , the exponent ε_b and mantissa μ_b as given in Equation E.3.

$$\Delta_b = 2^{R_b - \varepsilon_b} \left(1 + \frac{\mu_b}{2^{11}} \right). \quad \text{E.3}$$

NOTE — The denominator, 2^{11} , in Equation E.3 is due to the allocation of 11 bits in the codestream for μ_b , as given in Table A-30.

In Equation E.3, the exponent ε_b and the mantissa μ_b are specified in the QCD or QCC marker segments (see Annex A.6.4 and Annex A.6.5), and the nominal dynamic range R_b (as given by Equation E.4) is the sum of R_l (the number of

bits used to represent the original tile-component samples which can be extracted from the SIZ marker - see Table A-11 in Annex A.5.1) and the base 2 exponent of the subband gain ($gain_b$) of the current subband b , which varies with the type of subband b ($levLL$, $levLH$ or $levHL$, $levHH$ - see Annex F.3.1) and can be found in Table E-1

Table E-1 — Subband gains

| subband b | $gain_b$ | $\log_2(gain_b)$ |
|-------------|----------|------------------|
| $levLL$ | 1 | 0 |
| $levLH$ | 2 | 1 |
| $levHL$ | 2 | 1 |
| $levHH$ | 4 | 2 |

$$R_b = R_l + \log_2(gain_b). \tag{E.4}$$

The exponent/mantissa pairs (ϵ_b, μ_b) are either signaled in the codestream for every subband (expounded quantization) or else signaled only for the N_{LL} subband and derived for all other subbands (derived quantization) (see Table A-30). In the case of derived quantization, all exponent/mantissa pairs (ϵ_b, μ_b) are derived from the single exponent/mantissa pair (ϵ_o, μ_o) corresponding to the N_{LL} subband, according to Equation E.5

$$(\epsilon_b, \mu_b) = (\epsilon_o - N_L + n_b, \mu_o) \tag{E.5}$$

where n_b denotes the number of decomposition levels from the original tile-component to the subband b .

NOTE — For a given subband b , a quantized transform coefficient may exceed the dynamic range R_b .

E.1.1.2 Reconstruction of the transform coefficient

For the irreversible transformation, the reconstructed transform coefficient is given by Equation E.6:

$$Rq_b(u, v) = \begin{cases} (\overline{q}_b(u, v) + r2^{M_b - N_b(u, v)}) \cdot \Delta_b & \text{for } \overline{q}_b(u, v) > 0 \\ (\overline{q}_b(u, v) - r2^{M_b - N_b(u, v)}) \cdot \Delta_b & \text{for } \overline{q}_b(u, v) < 0 \\ 0 & \text{for } \overline{q}_b(u, v) = 0 \end{cases} \tag{E.6}$$

where r is a reconstruction parameter, which can be arbitrarily chosen by the decoder.

NOTE — The reconstruction parameter r may be chosen for example to produce the best visual or objective quality for reconstruction. Generally, values for r fall in the range of $0 \leq r < 1$, and a common value is $r = 1/2$. (This note also applies to Annex E.1.2).

E.1.2 Reversible transformation

E.1.2.1 Determination of the quantization step size

For the reversible transformation, the quantization step size Δ_b is equal to one (no quantization is performed).

E.1.2.2 Reconstruction of the transform coefficient

For the reversible transformation, the reconstructed transform coefficient $Rq_b(u, v)$ is recovered differently depending on whether all the coefficient bits are decoded, i.e. whether $N_b(u, v) = M_b$ or $N_b(u, v) < M_b$.

If $N_b(u, v) = M_b$, then the reconstructed transform coefficient $Rq_b(u, v)$ is given by Equation E.7.

$$Rq_b(u, v) = \bar{q}_b(u, v) \quad \text{E.7}$$

If $N_b(u, v) < M_b$, then the reconstructed transform coefficient $Rq_b(u, v)$ is given by Equation E.8.

$$Rq_b(u, v) = \begin{cases} \left[(\bar{q}_b(u, v) + r2^{M_b - N_b(u, v)}) \cdot \Delta_b \right] & \text{for } \bar{q}_b(u, v) > 0 \\ \left[(\bar{q}_b(u, v) - r2^{M_b - N_b(u, v)}) \cdot \Delta_b \right] & \text{for } \bar{q}_b(u, v) < 0 \\ 0 & \text{for } \bar{q}_b(u, v) = 0 \end{cases} \quad \text{E.8}$$

E.2 Scalar coefficient quantization (informative)

For irreversible compression, after the irreversible forward discrete wavelet transformation (see Annex F), each of the transform coefficients $a_b(u, v)$ of the subband b is quantized to the value $q_b(u, v)$ according to Equation E.9.

$$q_b(u, v) = \text{sign}(a_b(u, v)) \cdot \left\lfloor \frac{|a_b(u, v)|}{\Delta_b} \right\rfloor \quad \text{E.9}$$

where Δ_b is the quantization step size. The exponent ϵ_b and mantissa μ_b corresponding to Δ_b can be derived from Equation E.5, and must be recorded in the codestream in the QCD or QCC markers (see Annex A.6.4 and Annex A.6.5).

For reversible compression, the quantization step size is required to be 1. In this case, a parameter ϵ_b has to be recorded in the codestream in the QCD or QCC markers (see Annex A.6.4 and Annex A.6.5), and is calculated as

$$\epsilon_b = R_I + \log_2(\text{gain}_b) + \zeta_c, \quad \text{E.10}$$

where R_I and gain_b are as described in Annex E.1.1, and where ζ_c is zero if the RCT is not used and ζ_c is the number of additional bits added by the RCT if the RCT is used, as described in Annex G.2.1.

For both reversible and irreversible compression, in order to prevent possible overflow or excursion beyond the nominal range of the integer representation of $|q_b(u, v)|$ arising, for example during floating point calculations, the number M_b of bits for the integer representation of $q_b(u, v)$ used at the encoder side is defined by Equation E.2. The number G of guard bits, has to be specified in the QCD or QCC marker (see Annex A.6.4 and Annex A.6.5). Typical values for the number of guard bits are $G = 1$ or $G = 2$.

(Blank page)

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex F

Discrete wavelet transformation of tile-components

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex describes the forward discrete wavelet transformation applied to one tile-component and specifies the inverse discrete wavelet transformation used to reconstruct the tile-component.

F.1 Tile-component parameters

Consider the tile-component defined by the coordinates tex_0 , tex_1 , tey_0 and tey_1 given in Equation B.12, in Annex B.3. Then the coordinates (x, y) of the tile-component (with sample values $I(x, y)$) lie in the range defined by:

$$tex_0 \leq x < tex_1 \text{ and } tey_0 \leq y < tey_1. \quad \text{F.1}$$

F.2 Discrete wavelet transformations

F.2.1 Low-pass and high-pass filtering (informative)

To perform the forward discrete wavelet transformation (FDWT), this Recommendation | International Standard uses a one-dimensional subband decomposition of a one-dimensional array of samples into low-pass coefficients, representing a downsampled low-resolution version of the original array, and high-pass coefficients, representing a downsampled residual version of the original array, needed to perfectly reconstruct the original array from the low-pass array.

To perform the inverse discrete wavelet transformation (IDWT), this Recommendation | International Standard uses a one-dimensional subband reconstruction of a one-dimensional array of samples from low-pass and high-pass coefficients.

F.2.2 Decomposition levels

Each tile-component is transformed into a set of two-dimensional subband signals (called subbands), each representing the activity of the signal in various frequency bands, at various spatial resolutions. N_L denotes the number of decomposition levels.

F.2.3 Discrete wavelet filters (informative)

This Recommendation | International Standard specifies one reversible transformation and one irreversible transformation. Given that tile-component samples are integer-valued, a reversible transformation requires the specification of a rounding procedure for intermediate non-integer-valued transform coefficients.

F.3 Inverse discrete wavelet transformation

F.3.1 The IDWT procedure

The inverse discrete wavelet transformation (IDWT) transforms a set of subbands, $a_b(u_b, v_b)$ into a DC-level shifted tile-component, $I(x, y)$ (IDWT procedure). The IDWT procedure also takes as input a parameter N_L , which represents the number of decomposition levels (see Figure F-1). The number of decomposition levels N_L is signalled in the COD or COC markers (see Annex A.6.1 and Annex A.6.2).

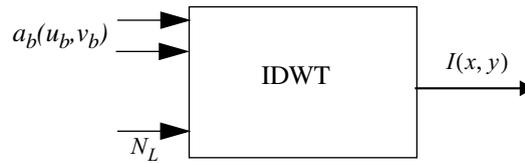


Figure F-1 — Inputs and outputs of the IDWT procedure

The subbands are labelled in the following way: an index *lev* corresponding to the decomposition level, followed by two letters which are either LL, HL, LH or HH.

The subband $b = levLL$ corresponds to a downsampled version of subband $(lev-1)LL$ which has been low-pass filtered vertically and low-pass filtered horizontally. The subband $b = 0LL$ corresponds to the original tile-component. The subband $b = levHL$ corresponds to a downsampled version of subband $(lev-1)LL$ which has been low-pass filtered vertically and high-pass filtered horizontally. The subband $b = levLH$ corresponds to a downsampled version of subband $(lev-1)LL$ which has been high-pass filtered vertically and low-pass filtered horizontally. The subband $b = levHH$ corresponds to a downsampled version of subband $(lev-1)LL$ which has been high-pass filtered vertically and high-pass filtered horizontally.

For a given value of N_L , only the following subbands are present in the codestream, and in the following order (these subbands are sufficient to fully reconstruct the original tile-component):

$$N_L LL, N_L HL, N_L LH, N_L HH, (N_L - 1)HL, (N_L - 1)LH, (N_L - 1)HH, \dots, 1HL, 1LH, 1HH.$$

For a given subband b , the number n_b represents the decomposition level at which it has been generated at the time of encoding, and is given in Table F-1:

Table F-1 — Decomposition level n_b for subband b

| | | | | | | | | | | | |
|-------|----------|----------|----------|----------|---------------|---------------|---------------|-----|-----|-----|-----|
| b | $N_L LL$ | $N_L HL$ | $N_L LH$ | $N_L HH$ | $(N_L - 1)HL$ | $(N_L - 1)LH$ | $(N_L - 1)HH$ | ... | 1HL | 1LH | 1HH |
| n_b | N_L | N_L | N_L | N_L | $N_L - 1$ | $N_L - 1$ | $N_L - 1$ | ... | 1 | 1 | 1 |

The subbands for the case where $N_L = 2$ are illustrated in Figure F-2.

The IDWT procedure starts with the initialization of the variable *lev* (the current decomposition level) to N_L . The 2D_SR procedure (see Annex F.3.2) is performed at every level *lev*, where the level *lev* decreases at each iteration, until N_L iterations are performed. The 2D_SR procedure is iterated over the *lev*LL subband produced at each iteration. Finally, the subband $a_{0LL}(u_{0LL}, v_{0LL})$ is the output array $I(x, y)$.

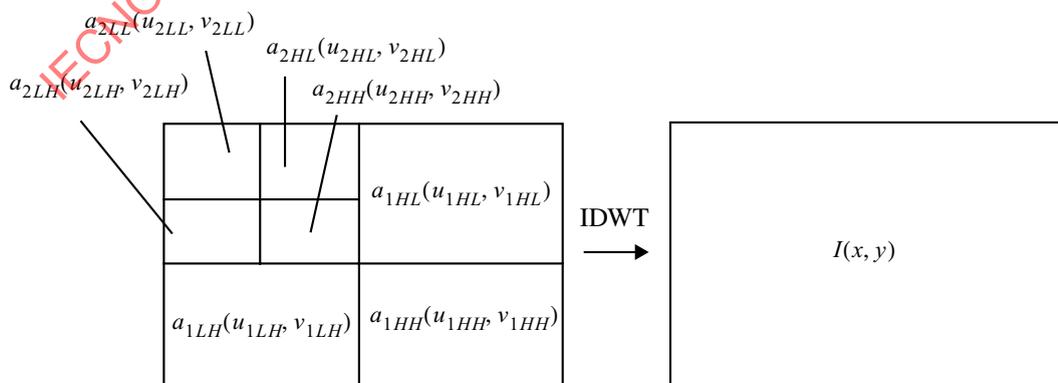


Figure F-2 — The IDWT ($N_L=2$)

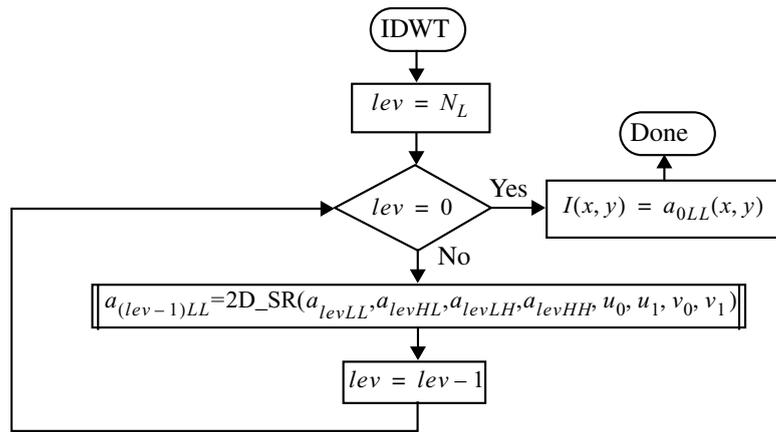


Figure F-3 — The IDWT Procedure

As defined in Equation B.15, the indices (u_b, v_b) of subband coefficients $a_b(u_b, v_b)$ for a given subband b lie in the range defined by:

$$tbx_0 \leq u_b < tbx_1 \text{ and } tby_0 \leq v_b < tby_1. \tag{F.2}$$

Figure F-3 describes the IDWT procedure.

F.3.2 The 2D_SR procedure

The 2D_SR procedure performs a reconstruction of subband $a_{(lev-1)LL}(u, v)$ from the four subbands $a_{levLL}(u, v)$, $a_{levHL}(u, v)$, $a_{levLH}(u, v)$ and $a_{levHH}(u, v)$ (see Figure F-4). The total number of coefficients of the reconstructed $levLL$ subband is equal to the sum of the total number of coefficients of the four subbands input to the 2D_SR procedure (see Figure F-5).

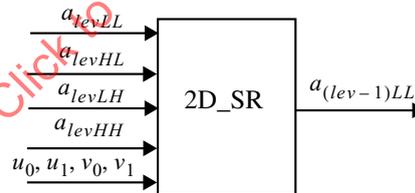


Figure F-4 — Inputs and outputs of the 2D_SR procedure

First, the four subbands $a_{levLL}(u, v)$, $a_{levHL}(u, v)$, $a_{levLH}(u, v)$ and $a_{levHH}(u, v)$ are interleaved to form an array $a(u, v)$ using the 2D_INTERLEAVE procedure. The 2D_SR procedure then applies the HOR_SR procedure to all rows of $a(u, v)$, and finally applies the VER_SR procedure to all columns of $a(u, v)$ to produce the reconstructed subband $a_{(lev-1)LL}(u, v)$. Figure F-6 describes the 2D_SR procedure.

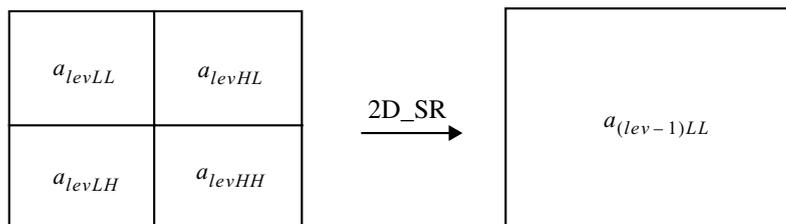


Figure F-5 — One level of reconstruction from four subbands (2D_SR procedure) into subbands

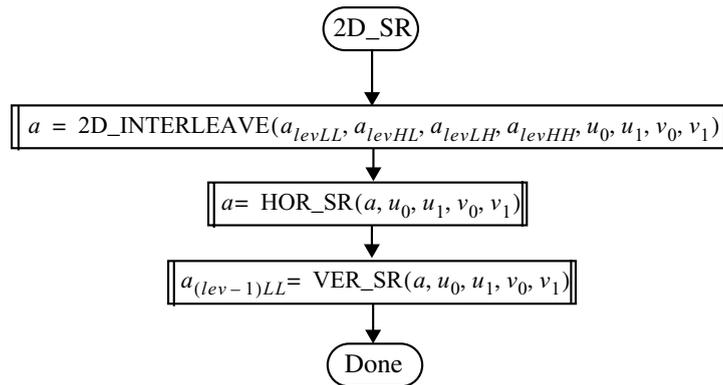


Figure F-6 — The 2D_SR procedure

F.3.3 The 2D_INTERLEAVE procedure

As illustrated in Figure F-7, the 2D_INTERLEAVE procedure interleaves the coefficients of four subbands $a_{levLL}, a_{levHL}, a_{levLH}, a_{levHH}$ to form $a(u, v)$. The values of u_0, u_1, v_0, v_1 used by the 2D_INTERLEAVE procedure are those of $tbx_0, tbx_1, tby_0, tby_1$ corresponding to subband $b = (lev - 1)LL$ (see definition in Equation B.15).

The way these subbands are interleaved to form the output $a(u, v)$ is described by the 2D_INTERLEAVE procedure given in Figure F-8.

F.3.4 The HOR_SR procedure

The HOR_SR procedure performs a horizontal subband reconstruction of a two-dimensional array of coefficients. It takes as input a two-dimensional array $a(u, v)$, the horizontal and vertical extent of its coefficients as indicated by $u_0 \leq u < u_1$ and $v_0 \leq v < v_1$ (see Figure F-9) and produces as output a horizontally filtered version of the input array, row by row.

As illustrated in Figure F-10, the HOR_SR procedure applies the one-dimensional subband reconstruction (1D_SR procedure) to each row v of the input array $a(u, v)$, and stores the result back in each row.

F.3.5 The VER_SR procedure

The VER_SR procedure performs a vertical subband reconstruction of a two-dimensional array of coefficients. It takes as input a two-dimensional array $a(u, v)$, the horizontal and vertical extent of its coefficients as indicated by $u_0 \leq u < u_1$ and $v_0 \leq v < v_1$ (see Figure F-11) and produces as output a vertically filtered version of the input array, column by column.

As illustrated in Figure F-12, the VER_SR procedure applies the one-dimensional subband reconstruction (1D_SR procedure) to each column u of the input array $a(u, v)$ and stores the result back in each column.

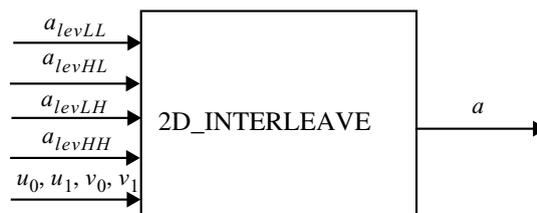


Figure F-7 — Parameters of 2D_INTERLEAVE procedure

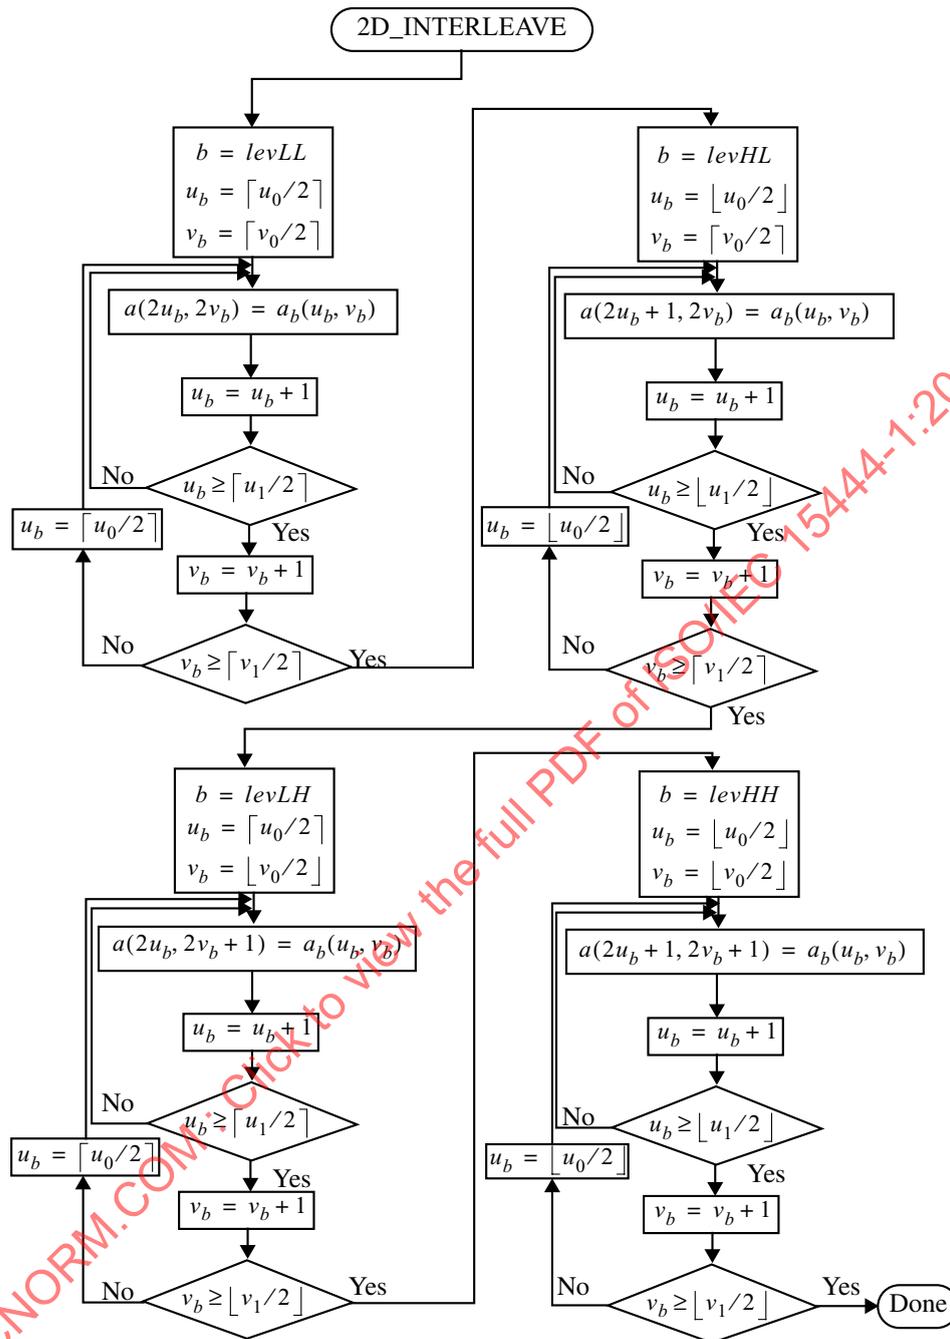


Figure F-8 — The 2D_INTERLEAVE procedure




Figure F-9 — Inputs and outputs of the HOR_SR procedure

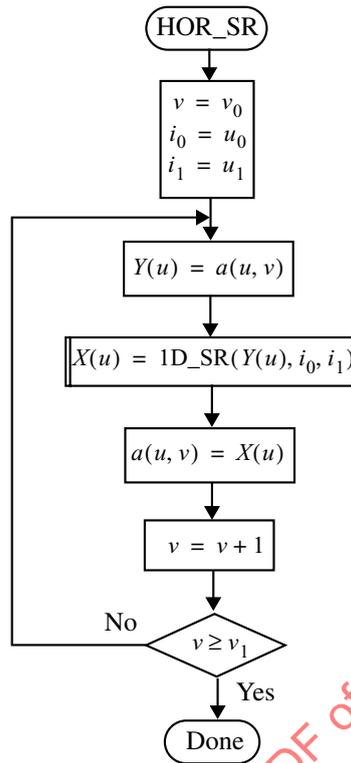


Figure F-10 — The HOR_SR procedure

F.3.6 The 1D_SR procedure

As illustrated in Figure F-13, the 1D_SR procedure takes as input a one-dimensional array $Y(i)$, the extent of its coefficients as indicated by $i_0 \leq i < i_1$. It produces as output an array X , with the same indices (i_0, i_1) .

For signals of length one (i.e. $i_0 = i_1 - 1$), the 1D_SR procedure sets the value of $X(i_0)$ to $X(i_0) = Y(i_0)$ if i_0 is an even integer, and to $X(i_0) = Y(i_0) \times 2$ if i_0 is an odd integer.

For signals of length greater than or equal to two (i.e. $i_0 < i_1 - 1$), as illustrated in Figure F-14, the 1D_SR procedure first uses the 1D_EXTR procedure to extend the signal Y beyond its left and right boundaries resulting in the extended signal Y_{ext} , and then uses the 1D_FILTR procedure to inverse filter the extended signal Y_{ext} and produce the desired filtered signal X . The 1D_EXTR and 1D_FILTR procedures depend on whether the 9-7 irreversible wavelet transform (irreversible transformation) or 5-3 reversible wavelet transform (reversible transformation) is selected: this is signalled in the COD or COC markers (see Annex A.6.1 and Annex A.6.2).



Figure F-11 — Inputs and outputs of the VER_SR procedure

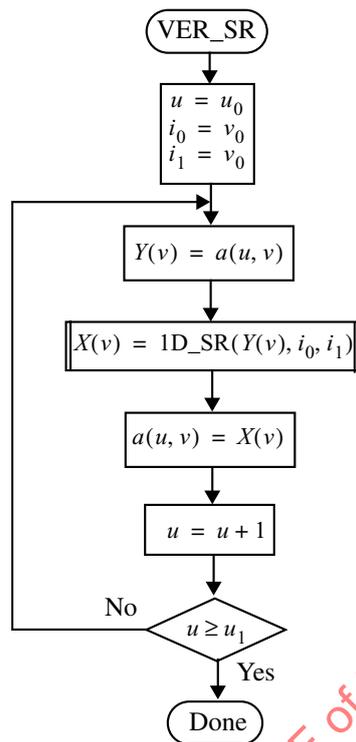


Figure F-12 — The VER_SR procedure

F.3.7 The 1D_EXTR procedure

As illustrated in Figure F-15, the 1D_EXTR procedure extends signal Y by i_{left} coefficients to the left and i_{right} coefficients to the right. The extension of the signal is needed to enable filtering at both boundaries of the signal.

The first coefficient of Y is coefficient i_0 , and the last coefficient of signal Y is coefficient i_1-1 . This extension procedure is known as “periodic symmetric extension”. Symmetric extension consists in extending the signal with the signal coefficients obtained by a reflection of the signal centered on the first coefficient (coefficient i_0) for extension to the left, and in extending the signal with the signal coefficients obtained by a reflection of the signal centered on the last coefficient (coefficient i_1-1) for extension to the right. Periodic symmetric extension is a generalisation of symmetric extension for the more general case where the number of coefficients by which to extend the signal on any one side may exceed the signal length i_1-i_0 : this case may happen at higher decomposition levels.

The 1D_EXTR procedure calculates the values of $Y_{ext}(i)$ for values of i beyond the range $i_0 \leq i < i_1$, as given in Equation F.3:

$$Y_{ext}(i) = Y(PSE_O(i, i_0, i_1)), \tag{F.3}$$

where $PSE_O(i, i_0, i_1)$ is given by Equation F.4:




Figure F-13 — Parameters of the 1D_SR procedure




Figure F-14 — The 1D_SR procedure

$$PSE_O(i, i_0, i_1) = i_0 + \min(\text{mod}(i - i_0, 2(i_1 - i_0 - 1)), 2(i_1 - i_0 - 1) - \text{mod}(i - i_0, 2(i_1 - i_0 - 1))) \quad \text{F.4}$$

Two extension procedures are defined, depending on whether the 5-3 wavelet transformation (1D_EXTR₅₋₃ procedure) or 9-7 wavelet transformation (1D_EXTR₉₋₇ procedure). The procedures only differ in the minimum values of the extension parameters ($i_{left5-3}$ and $i_{right5-3}$ for the 5-3 wavelet transformation, and $i_{left9-7}$ and $i_{right9-7}$ for the 9-7 wavelet transformation) which are given in Table F-2 and Table F-3, and depend on the parity of the indices i_0 and i_1 . Values equal to or greater than those given in Table F-2 and Table F-3 will produce the same array X at the output of the 1D_IFILTR procedure of Figure F-14.

Table F-2 — Extension to the left

| i_0 | $i_{left5-3}$ | $i_{left9-7}$ |
|-------|---------------|---------------|
| even | 1 | 3 |
| odd | 2 | 4 |

Table F-3 — Extension to the right

| i_1 | $i_{right5-3}$ | $i_{right9-7}$ |
|-------|----------------|----------------|
| odd | 1 | 3 |
| even | 2 | 4 |

F.3.8 The 1D_FILTR procedure

One reversible filtering procedure 1D_FILTR_{5-3R} and one irreversible filtering procedure 1D_FILTR_{9-7I} are specified, depending on whether the 5-3 reversible or 9-7 irreversible wavelet transformation is used.

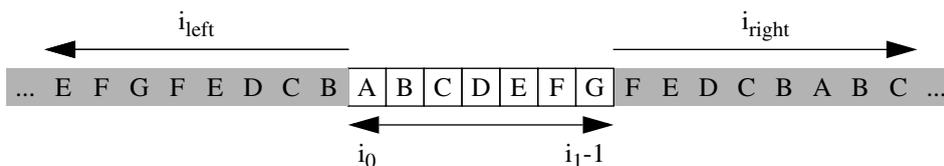


Figure F-15 — Periodic symmetric extension of signal



Figure F-16 — Parameters of the 1D_FILTR procedure

As illustrated in Figure F-16, both procedures take as input an extended 1D signal Y_{ext} , the index of the first coefficient i_0 , and the index of the coefficient i_1 immediately following the last coefficient (i_1-1). They both produce as output signal X .

Both procedures use lifting-based filtering, which consists in applying to the signal a sequence of very simple filtering operations called lifting steps, which alternately modify odd-indexed coefficient values of the signal with a weighted sum of even-indexed coefficient values, and even-indexed coefficient values with a weighted sum of odd-indexed coefficient values.

F.3.8.1 The 1D_FILTR_{5,3R} procedure

The 1D_FILTR_{5,3R} procedure uses lifting-based filtering in conjunction with rounding operations. Equation F.5 is first performed for all values of n indicated, followed by Equation F.6 which uses values calculated from Equation F.5:

$$X(2n) = Y_{ext}(2n) - \left\lfloor \frac{Y_{ext}(2n-1) + Y_{ext}(2n+1) + 2}{4} \right\rfloor \quad \text{for } \left\lfloor \frac{i_0}{2} \right\rfloor \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor + 1, \quad \text{F.5}$$

$$X(2n+1) = Y_{ext}(2n+1) + \left\lfloor \frac{X(2n) + X(2n+2)}{2} \right\rfloor \quad \text{for } \left\lfloor \frac{i_0}{2} \right\rfloor \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor. \quad \text{F.6}$$

The values of $X(k)$ such that $i_0 \leq k < i_1$ form the output of the 1D_FILTR_{5,3R} procedure.

F.3.8.2 The 1D_FILTR_{9,7I} procedure

The 1D_FILTR_{9,7I} procedure uses lifting-based filtering (there is no rounding operation). The lifting parameters $(\alpha, \beta, \gamma, \delta)$ and the scaling parameter K for all filtering steps are defined in the following section (section F.3.8.2.1).

Equation F.7 describes the two scaling steps (1 and 2) and the four lifting steps (3 through 6) of the 1D filtering performed on the extended signal $Y_{ext}(n)$ to produce the i_1-i_0 coefficients of signal X . These steps are performed in the following order.

Firstly, step 1 is performed for all values of n such that $\left\lfloor \frac{i_0}{2} \right\rfloor - 1 \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor + 2$, and step 2 is performed for all values of n such that $\left\lfloor \frac{i_0}{2} \right\rfloor - 1 \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor + 1$.

Then, step 3 is performed for all values of n such that $\left\lfloor \frac{i_0}{2} \right\rfloor - 1 \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor + 2$, and uses values calculated in steps 1 and 2.

Then, step 4 is performed for all values of n such that $\left\lfloor \frac{i_0}{2} \right\rfloor - 1 \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor + 1$, and uses values calculated in steps 2 and 3.

Then, step 5 is performed for all values of n such that $\left\lfloor \frac{i_0}{2} \right\rfloor \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor + 1$, and uses values calculated in steps 3 and 4.

Finally, step 6 is performed for all values of n such that $\left\lfloor \frac{i_0}{2} \right\rfloor \leq n < \left\lfloor \frac{i_1}{2} \right\rfloor$, and uses values calculated in steps 4 and 5.

$$\left\{ \begin{array}{ll} X(2n) = KY_{ext}(2n) & [STEP1] \\ X(2n+1) = (1/K)Y_{ext}(2n+1) & [STEP2] \\ X(2n) = X(2n) - \delta(X(2n-1) + X(2n+1)) & [STEP3] \\ X(2n+1) = X(2n+1) - \gamma(X(2n) + X(2n+2)) & [STEP4] \\ X(2n) = X(2n) - \beta(X(2n-1) + X(2n+1)) & [STEP5] \\ X(2n+1) = X(2n+1) - \alpha(X(2n) + X(2n+2)) & [STEP6] \end{array} \right. \quad F.7$$

where the values of the lifting parameters ($\alpha, \beta, \gamma, \delta$) and K are defined in Table F-4.

The values of $X(k)$ such that $i_0 \leq k < i_1$ form the output of the 1D_FILTR₁ procedure.

F.3.8.2.1 Filtering parameters for the 1D_FILTR_{9,71} procedure

The filtering parameters ($\alpha, \beta, \gamma, \delta, K$) are defined in Table F-4, in terms of parameters g_n from Table F-5, and parameters (r_0, r_1, s_0, t_0) from Table F-6. The parameters g_n are defined in terms of parameters $x_1, \Re x_2$ and $|x_2|^2$ given in Table F-7. All tables give a closed-form expression for all parameters, including approximations up to 15 decimal points. -

Table F-4 — Definition of lifting parameters for the 9-7 irreversible filter

| Parameter | Exact expression | Approximate value |
|-----------|------------------|------------------------|
| α | $-g_4/g_3$ | -1.586 134 342 059 924 |
| β | g_3/r_1 | -0.052 980 118 572 961 |
| γ | r_1/s_0 | 0.882 911 075 530 934 |
| δ | s_0/t_0 | 0.443 506 852 043 971 |
| K | $1/t_0$ | 1.230 174 104 914 001 |

Table F-5 — Definition of coefficients g_n

| n | coefficients g_n | approximate value of g_n |
|---|--------------------------------------|----------------------------|
| 0 | $5x_1(48 x_2 ^2 - 16\Re x_2 + 3)/32$ | -0.602 949 018 236 360 |
| 1 | $-5x_1(8 x_2 ^2 - \Re x_2)/8$ | 0.266 864 118 442 875 |
| 2 | $5x_1(4 x_2 ^2 + 4\Re x_2 - 1)/16$ | 0.078 223 266 528 990 |
| 3 | $-5x_1(\Re x_2)/8$ | -0.016 864 118 442 875 |
| 4 | $5x_1/64$ | -0.026 748 757 410 810 |

Table F-6 — Intermediate expressions (r_0, r_1, s_0, t_0)

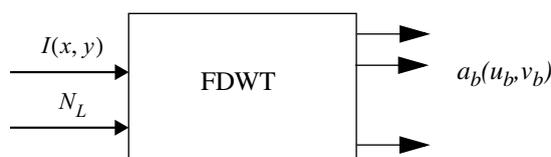
| Parameter | Exact expression | Approximate value |
|-----------|---------------------------|-----------------------|
| r_0 | $-g_0 + 2g_1g_4/g_3$ | 1.449 513 704 087 943 |
| r_1 | $-g_2 + g_4 + g_1g_4/g_3$ | 0.318 310 318 985 991 |
| s_0 | $g_1 - g_3 - g_3r_0/r_1$ | 0.360 523 644 801 462 |
| t_0 | $r_0 - 2r_1$ | 0.812 893 066 115 961 |

Table F-7 — Intermediate expressions

| Parameter | Exact expression | Approximate value |
|-----------|---|------------------------|
| A | $\sqrt[3]{\frac{63-14\sqrt{15}}{1080\sqrt{15}}}$ | 0.128 030 244 703 494 |
| B | $-\sqrt[3]{\frac{63+14\sqrt{15}}{1080\sqrt{15}}}$ | -0.303 747 672 895 197 |
| x_1 | $A + B - 1/6$ | -0.342 384 094 858 369 |
| $\Re x_2$ | $\frac{(A+B)}{2} - \frac{1}{6}$ | -0.078 807 952 570 815 |
| $ x_2 ^2$ | $\left[\frac{(A+B)}{2} + \frac{1}{6}\right]^2 + \frac{3(A-B)^2}{4}$ | 0.146 034 820 982 800 |

F.4 Forward transformation (informative)**F.4.1 The FDWT procedure (informative)**

The forward discrete wavelet transformation (FDWT) transforms DC-level shifted tile-component samples $I(x, y)$ into a set of subbands with coefficients $a_b(u_b, v_b)$ (FDWT procedure). The FDWT procedure (see Figure F-17) also takes as input the number of decomposition levels N_L signalled in the COD or COC markers (see Annex A.6.1 and Annex A.6.2).

**Figure F-17 — Inputs and outputs of the FDWT procedure**

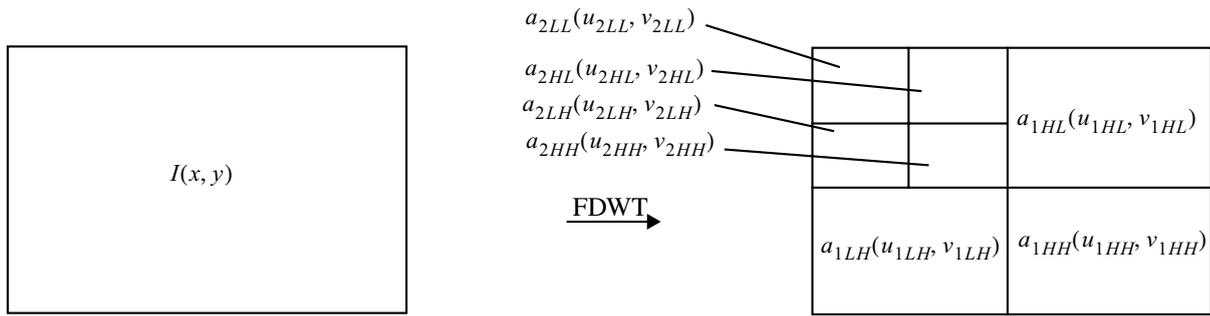


Figure F-18 — The FDWT ($N_L=2$)

As illustrated in Figure F-18, all the subbands in the case where $N_L=2$ can be represented in the following way:

The FDWT procedure starts with the initialization of the variable lev (the current decomposition level) to zero, and setting the subband $a_{0LL}(u_{0LL}, v_{0LL})$ to the input array $I(u, v)$. The 2D_SD procedure is performed at every level lev , where the level lev increases by one at each iteration, and until N_L iterations are performed. The 2D_SD procedure is iterated over the $levLL$ subband produced at each iteration.

As defined in Annex B (see Equation B.15), the coordinates of the subband $a_{levLL}(u, v)$ lie in the range defined by:

$$tbx_0 \leq u < tbx_1 \text{ and } tby_0 \leq v < tby_1. \tag{F.8}$$

Figure F-19 describes the FDWT procedure.

F.4.2 The 2D_SD procedure (informative)

The 2D_SD procedure performs a decomposition of a two-dimensional array of coefficients or samples $a_{(lev-1)LL}(u, v)$ into four groups of subband coefficients $a_{levLL}(u, v)$, $a_{levHL}(u, v)$, $a_{levLH}(u, v)$, and $a_{levHH}(u, v)$.

The total number of coefficients of the $levLL$ subband is equal to the sum of the total number of coefficients of the four subbands resulting from the 2D_SD procedure.

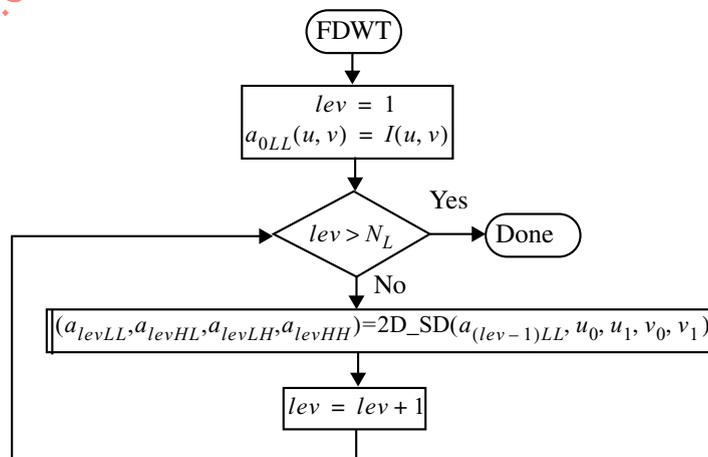


Figure F-19 — The FDWT procedure

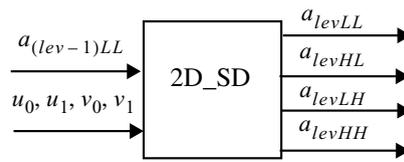


Figure F-20 — Inputs and outputs of the 2D_SD procedure

Figure F-20 describes the input and output parameters of the 2D_SD procedure.

Figure F-21 illustrates the subband decomposition performed by the 2D_SD procedure.

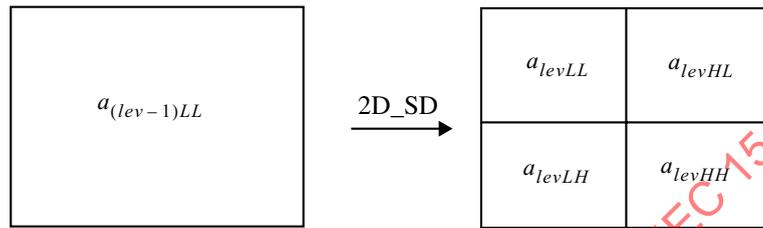


Figure F-21 — One-level decomposition into four subbands (2D_SD procedure)

The 2D_SD procedure first applies the VER_SD procedure to all columns of $a(u, v)$. It then applies the HOR_SD procedure to all rows of $a(u, v)$. The coefficients thus obtained from $a(u, v)$ are deinterleaved into the four subbands using the 2D_DEINTERLEAVE procedure.

Figure F-22 describes the 2D_SD procedure.

F.4.3 The VER_SD procedure (informative)

The VER_SD procedure performs a vertical subband decomposition of a two-dimensional array of coefficients. It takes as input the two-dimensional array $a_{(lev-1)LL}(u, v)$, the horizontal and vertical extent of its coefficients as indicated by $u_0 \leq u < u_1$ and $v_0 \leq v < v_1$ (see Figure F-23) and produces as output a vertically filtered version $a(u, v)$ of the input array, column by column. The values of u_0, u_1, v_0, v_1 used by the VER_SD procedure are those of $tbx_0, tbx_1, tby_0, tby_1$ corresponding to subband $b = (lev-1)LL$ (see definition in Equation B.15).

As illustrated in Figure F-24, the VER_SD procedure applies the one-dimensional subband decomposition (1D_SD procedure) to each column of the input array $a(u, v)$, and stores the result back into each column.

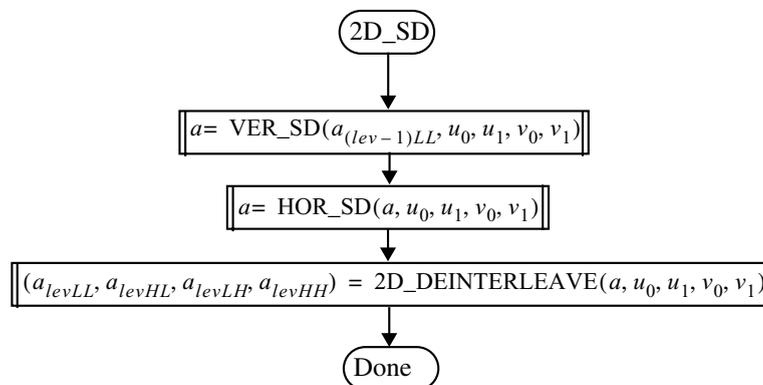


Figure F-22 — The 2D_SD procedure



Figure F-23 — Inputs and outputs of the VER_SD procedure

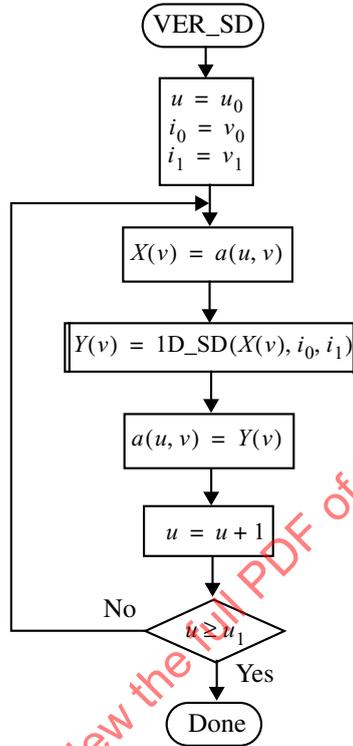


Figure F-24 — The VER_SD procedure

F.4.4 The HOR_SD procedure (informative)

The HOR_SD procedure performs a horizontal subband decomposition of a two-dimensional array of coefficients. It takes as input a two-dimensional array $a(u, v)$, the horizontal and vertical extent of its coefficients as indicated by $u_0 \leq u < u_1$ and $v_0 \leq v < v_1$ (see Figure F-25) and produces as output a horizontally filtered version of the input array, row by row.

As illustrated in Figure F-26, the HOR_SD procedure applies the one-dimensional subband decomposition (1D_SD procedure) to each row of the input array $a(u, v)$ and stores the result back in each row.

F.4.5 The 2D_DEINTERLEAVE procedure (informative)

As illustrated in Figure F-27, the 2D_DEINTERLEAVE procedure deinterleaves the coefficients of $a(u, v)$ into four subbands. The arrangement is dependent on the coordinates (u_0, v_0) of the first coefficient of $a(u, v)$.




Figure F-25 — Inputs and outputs of the HOR_SD procedure

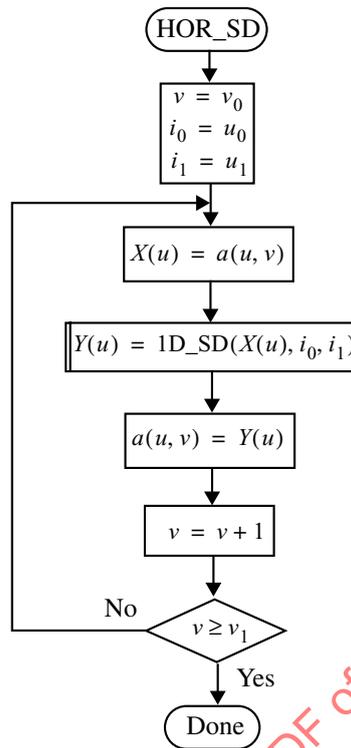


Figure F-26 — The HOR_SD procedure

The way these subbands are formed from the output $a(u, v)$ of the HOR_SD procedure is described by the 2D_DEINTERLEAVE procedure illustrated in Figure F-27.

F.4.6 The 1D_SD procedure (informative)

As illustrated in Figure F-29, the 1D_SD procedure takes as input a one-dimensional array $X(i)$, the extent of its coefficients as indicated by $i_0 \leq i < i_1$. It produces as output an array $Y(i)$, with the same indices (i_0, i_1) .

For signals of length one (i.e. $i_0 = i_1 - 1$), the 1D_SD procedure sets the value of $Y(i_0)$ to $Y(i_0) = X(i_0)$ if i_0 is an even integer, and to $Y(i_0) = 2X(i_0)$ if i_0 is an odd integer.

For signals of length greater than or equal to two (i.e. $i_0 < i_1 - 1$), as illustrated in Figure F-30, the 1D_SD procedure first uses the 1D_EXTD procedure to extend the signal X beyond its left and right boundaries resulting in the extended signal X_{ext} , and then uses the 1D_FILTD procedure to filter the extended signal X_{ext} and produce the desired filtered signal Y .

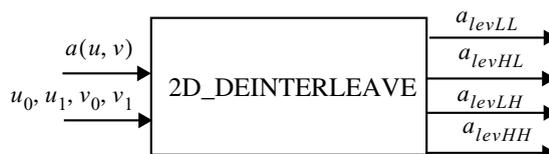


Figure F-27 — Parameters of 2D_DEINTERLEAVE procedure

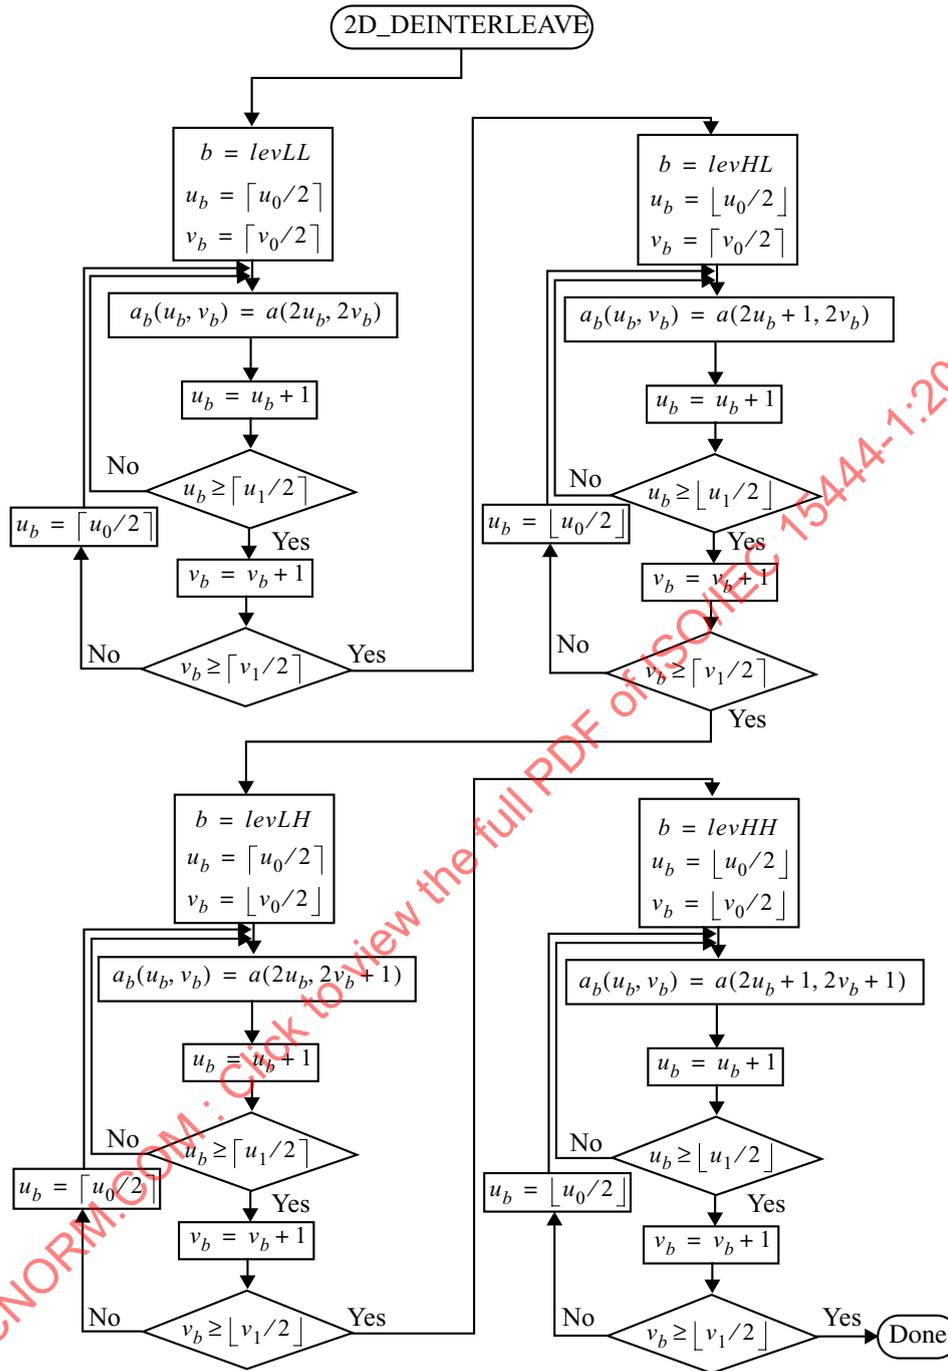


Figure F-28 — The 2D_DEINTERLEAVE procedure




Figure F-29 — Parameters of the 1D_SD procedure

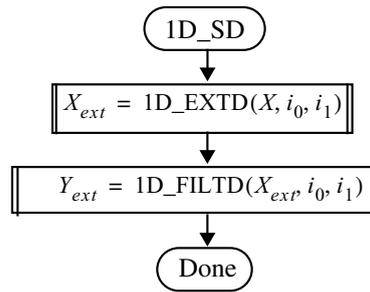


Figure F-30 — The 1D_SD procedure

F.4.7 The 1D_EXTD procedure (informative)

The 1D_EXTD procedure is identical to the 1D_EXTR procedure, except for the values of the $i_{left_{9-7}}$, $i_{right_{9-7}}$, $i_{left_{5-3}}$ and $i_{right_{5-3}}$ parameters, which are given in Table F-8 and Table F-9.

Table F-8 — Extension to the left

| i_0 | $i_{left_{5-3}}$ | $i_{left_{9-7}}$ |
|-------|------------------|------------------|
| even | 2 | 4 |
| odd | 1 | 3 |

Table F-9 — Extension to the right

| i_1 | $i_{right_{5-3}}$ | $i_{right_{9-7}}$ |
|-------|-------------------|-------------------|
| odd | 2 | 4 |
| even | 1 | 3 |

F.4.8 The 1D_FILTD procedure (informative)

This Recommendation | International Standard specifies one irreversible procedure (1D_FILTD_{9-7I}) and one reversible filtering procedure (1D_FILTD_{5-3R}), depending on whether the 9-7 irreversible or 5-3 reversible wavelet transformation is selected.

As illustrated in Figure F-31, both procedures take as input an extended 1D signal X_{ext} , the index of the first coefficient i_0 , and the index of the coefficient i_1 immediately following the last coefficient (i_1-1). They both produce an output signal, Y . The even-indexed coefficients of the Y signal are a low-pass downsampled version of the extended signal X_{ext} , while the odd-indexed coefficients of the signal Y are a high-pass downsampled version of the extended signal X_{ext} .




Figure F-31 — Parameters of the 1D_FILTD procedure

F.4.8.1 The 1D_FILTD_{5-3R} procedure (informative)

The reversible transformation described in this section is the reversible lifting-based implementation of filtering by the 5-3 reversible wavelet filter. The reversible transformation is defined using lifting-based filtering. The odd-indexed coefficients of output signal Y are computed first for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil - 1 \leq n < \left\lceil \frac{i_1}{2} \right\rceil$ as given in Equation F.9:

$$Y(2n+1) = X_{ext}(2n+1) - \left\lfloor \frac{X_{ext}(2n) + X_{ext}(2n+2)}{2} \right\rfloor. \quad \text{F.9}$$

Then the even-indexed coefficients of output signal Y are computed from the even-indexed values of extended signal X_{ext} and the odd-indexed coefficients of signal Y for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil \leq n < \left\lceil \frac{i_1}{2} \right\rceil$ as given in Equation F.10:

$$Y(2n) = X_{ext}(2n) + \left\lfloor \frac{Y(2n-1) + Y(2n+1) + 2}{4} \right\rfloor \quad \text{F.10}$$

The values of $Y(k)$ such that $i_0 \leq k < i_1$ form the output of the 1D_FILTD_R procedure.

F.4.8.2 The 1D_FILTD_I procedure (informative)

The irreversible transformation described in this section is the lifting-based DWT implementation of filtering by the 9-7 irreversible filter.

Equation F.11 describes the four lifting steps (1 through 4) and the two scaling steps (5 and 6) of the 1D filtering performed on the extended signal $X_{ext}(n)$ to produce the i_1-i_0 coefficients of signal Y . These steps are performed in the following order.

Firstly, step 1 is performed for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil - 2 \leq n < \left\lceil \frac{i_1}{2} \right\rceil + 1$.

Then, step 2 is performed for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil - 1 \leq n < \left\lceil \frac{i_1}{2} \right\rceil + 1$, and uses values calculated at step 1.

Then, step 3 is performed for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil - 1 \leq n < \left\lceil \frac{i_1}{2} \right\rceil$, and uses values calculated at step 1 and 2.

Then, step 4 is performed for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil \leq n < \left\lceil \frac{i_1}{2} \right\rceil$, and uses values calculated at steps 2 and 3.

Finally, step 5 is performed for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil - 1 \leq n < \left\lceil \frac{i_1}{2} \right\rceil$ and uses values calculated at step 3, and step 6

is performed for all values of n such that $\left\lceil \frac{i_0}{2} \right\rceil \leq n < \left\lceil \frac{i_1}{2} \right\rceil$ and uses values calculated at step 4.

$$\left\{ \begin{array}{ll} Y(2n+1) = X_{ext}(2n+1) + \alpha(X_{ext}(2n) + X_{ext}(2n+2)) & \text{[STEP1]} \\ Y(2n) = X_{ext}(2n) + \beta(Y(2n-1) + Y(2n+1)) & \text{[STEP2]} \\ Y(2n+1) = Y(2n+1) + \gamma(Y(2n) + Y(2n+2)) & \text{[STEP3]} \\ Y(2n) = Y(2n) + \delta(Y(2n-1) + Y(2n+1)) & \text{[STEP4]} \\ Y(2n+1) = KY(2n+1) & \text{[STEP5]} \\ Y(2n) = (1/K)Y(2n) & \text{[STEP6]} \end{array} \right. \quad \text{F.11}$$

where the values of the lifting parameters α , β , γ , δ , and K are defined in Table F-4.

The values of $Y(k)$ such that $i_0 \leq k < i_1$ form the output of the 1D_FILTD₁ procedure.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

(Blank page)

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex G

DC level shifting and multiple component transformations

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex specifies DC level shifting that converts the signed values resulting from the decoding process to the proper reconstructed samples.

This Annex also describes two different multiple component transformations. These multiple component transformations are used to improve compression efficiency. They are not related to multiple component transformations used to map colour values for display purposes. One multiple component transformation is reversible and may be used for lossy or lossless coding. The other is irreversible and may only be used for lossy coding.

G.1 DC level shifting of tile-components

Figure G-1 shows the flow of DC level shifting in the system with a multiple component transformation.

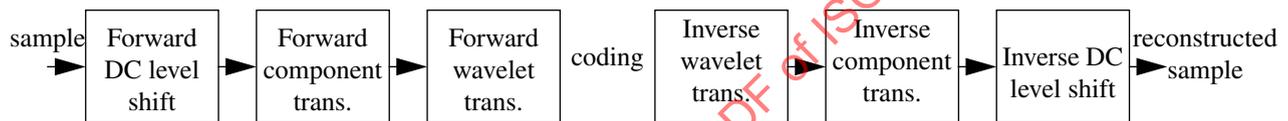


Figure G-1 — Placement of the DC level shifting with component transformation

Figure G-2 shows the flow of DC level shifting in the system without a multiple component transformation.

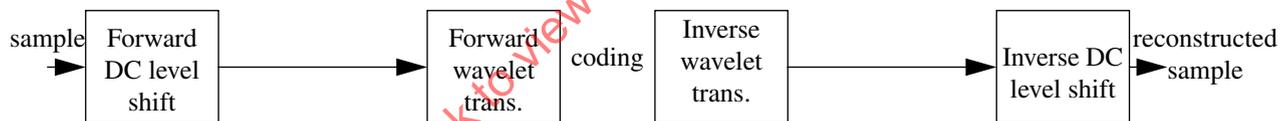


Figure G-2 — Placement of the DC level shifting without component transformation

G.1.1 DC level shifting of tile-components (informative)

DC level shifting is performed on samples of components that are unsigned only. It is performed prior to computation of a forward multiple component transformation (RCT or ICT), if one is used. Otherwise it is performed prior to the wavelet transformation described in Annex F. If the MSB of $Ssiz^i$ from the SIZ marker segment (see Annex A.5.1) is zero, all samples $I(x,y)$ of the i th component are level shifted by subtracting the same quantity from each sample as follows

$$I(x, y) \leftarrow I(x, y) - 2^{Ssiz^i - 1} . \quad G.1$$

G.1.2 Inverse DC level shifting of tile-components

Inverse DC level shifting is performed on reconstructed samples of components that are unsigned only. It is performed after to computation of the inverse multiple component transformation (RCT or ICT), if one is used. Otherwise it is performed after the inverse wavelet transformation described in Annex F. If the MSB of $Ssiz^i$ from the SIZ marker segment (see Annex A.6.1) is zero, all samples $I(x,y)$ of the i th component are level shifted by adding the same quantity from each sample as follows

$$I(x, y) \leftarrow I(x, y) + 2^{Ssiz^i - 1} . \quad G.2$$

NOTE — Due to quantization effects, the reconstructed samples $I(x, y)$ may exceed the dynamic range of the original samples. There is no normative procedure for this overflow or underflow situation. However, clipping the value to the nearest value within the original dynamic range is a typical solution.

G.2 Reversible multiple component transformation (RCT)

The use of the reversible multiple component transformation is signaled in the COD marker segment (see Annex A.6.1). The RCT shall be used only with the 5-3 reversible filter. The RCT is a decorrelating transformation applied to the first three components of an image (indexed as 0, 1 and 2). The three components input into the RCT shall have the same separation on the reference grid and the same bit-depth.

NOTE — While the RCT is reversible, and thus capable of lossless compression, it may be used in truncated codestreams to provide lossy compression.

G.2.1 Forward RCT (informative)

Prior to applying the Forward RCT, the image component samples are DC level shifted, for unsigned components.

The Forward RCT is applied to components $I_0(x,y)$, $I_1(x,y)$, $I_2(x,y)$ as follows:

$$Y_0(x, y) = \left\lfloor \frac{I_0(x, y) + 2I_1(x, y) + I_2(x, y)}{4} \right\rfloor \quad \text{G.3}$$

$$Y_1(x, y) = I_2(x, y) - I_1(x, y) \quad \text{G.4}$$

$$Y_2(x, y) = I_0(x, y) - I_1(x, y) \quad \text{G.5}$$

If I_0 , I_1 , and I_2 are normalized to the same precision, then Equation G.4 and Equation G.5 result in a numeric precision of Y_1 and Y_2 that is one bit greater than the precision of the original components. This increase in precision is necessary to ensure reversibility.

G.2.2 Inverse RCT

After the inverse wavelet transformation is performed as described in Annex F, the following Inverse RCT is applied:

$$I_1(x, y) = Y_0(x, y) - \left\lfloor \frac{Y_2(x, y) + Y_1(x, y)}{4} \right\rfloor \quad \text{G.6}$$

$$I_0(x, y) = Y_2(x, y) + I_1(x, y) \quad \text{G.7}$$

$$I_2(x, y) = Y_1(x, y) + I_1(x, y) \quad \text{G.8}$$

After applying the Inverse RCT, the unsigned image components are inverse DC level shifted.

G.3 Irreversible multiple component transformation (ICT)

This section specifies an irreversible multiple component transformation. The use of the irreversible component transformation is signaled in the COD marker segment (see Annex A.6.1). The ICT shall be used only with the 9-7 irreversible filter. The ICT is a decorrelating transformation applied to the first three components of an image (indexed as 0, 1 and 2). The three components input into the ICT shall have the same separation on the reference grid and the same bit-depth.

G.3.1 Forward ICT (informative)

The Forward ICT is applied to image component samples $I_0(x,y)$, $I_1(x,y)$, $I_2(x,y)$, as follows:

$$Y_0(x, y) = 0,299I_0(x, y) + 0,587I_1(x, y) + 0,114I_2(x, y) \quad \text{G.9}$$

$$Y_1(x, y) = -0,168\ 75\ I_0(x, y) - 0,331\ 26\ 0I_1(x, y) + 0,5\ I_2(x, y) \quad \text{G.10}$$

$$Y_2(x, y) = 0,5\ I_0(x, y) - 0,418\ 69\ I_1(x, y) - 0,081\ 31\ I_2(x, y) \quad \text{G.11}$$

NOTE — If the first three components are Red, Green and Blue components, then the Forward ICT is of a YCbCr transformation.

G.3.2 Inverse ICT

After inverse wavelet transformation is performed as described in Annex F, the following Inverse ICT is applied:

$$I_0(x, y) = Y_0(x, y) + 1,402\ Y_2(x, y) \quad \text{G.12}$$

$$I_1(x, y) = Y_0(x, y) - 0,344\ 13\ Y_1(x, y) - 0,714\ 14\ Y_2(x, y) \quad \text{G.13}$$

$$I_2(x, y) = Y_0(x, y) + 1,772\ Y_1(x, y) \quad \text{G.14}$$

Equation G.12, Equation G.13, and Equation G.14 do not imply a required precision for the coefficients. After applying the Inverse ICT, the unsigned image component samples are inverse DC level shifted.

G.4 Chrominance component sub-sampling and the reference grid

The relationship between the components and the reference grid is signaled in the SIZ marker (see Annex A.5.1) and described in Annex B.2.

(Blank page)

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex H

Coding of images with regions of interest

(This Annex forms a normative and integral part of this Recommendation | International Standard.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

This Annex describes the region of interest (ROI) technology. An ROI is a part of an image that is coded earlier in the codestream than the rest of the image (the background). The coding is also done in such a way that the information associated with the ROI precedes the information associated with the background. The method used (and described in this Annex) is the Maxshift method.

H.1 Decoding of ROI

The procedure specified in this section is applied only in the case of the presence of an RGN marker segment (indicating the presence of an ROI).

The procedure realigns the significant bits of ROI coefficients and background coefficients. It is defined using the following steps:

- 1) Get the scaling value, s , from the SPrgn parameter of the RGN marker segment in the codestream (Annex A.6.3). The following steps (2, 3 and 4) are applied to each coefficient (u, v) of subband b .
- 2) If $N_b(u, v) < M_b$ (see definition of $N_b(u, v)$ in Annex D.2.1 and of M_b in Equation E.2), then no modification takes place.
- 3) If $N_b(u, v) \geq M_b$ and if at least one of the first M_b (see definition in Annex E.1) MSBs ($i = 1, \dots, M_b$) is non-zero, then the value of $N_b(u, v)$ is updated as $N_b(u, v) = M_b$.
- 4) If $N_b(u, v) \geq M_b$ and if all first M_b MSBs are equal to zero, then the following modifications are made:
 - a) discard the first s MSBs and shift the remaining MSBs s places, as described in Equation H.1, for $i = 1, \dots, M_b$

$$MSB_i(b, u, v) = \begin{cases} MSB_{i+s}(b, u, v) & \text{if } i + s \leq N_b(u, v) \\ 0 & \text{if } i + s > N_b(u, v) \end{cases} \quad \text{H.1}$$

- b) update the value of $N_b(u, v)$ as given in Equation H.2

$$N_b(u, v) = \max(0, N_b(u, v) - s) \quad \text{H.2}$$

H.2 Description of the Maxshift method

H.2.1 Encoding of ROI (informative)

The encoding of the quantized transform coefficients is done in a similar way to encoding without any ROIs. At the encoder side an ROI mask is created describing which quantized transform coefficients must be encoded with better quality (even up to losslessly) in order to encode the ROI with better quality (up to lossless). The ROI mask is a bit map describing these coefficients. See Annex H.3 for details on how the mask is generated.

The quantized transform coefficients outside of the ROI mask, called background coefficients, are scaled down so that the bits associated with the ROI are placed in higher bit-planes than the background. This means that when the entropy coder encodes the quantized transform coefficients, the bit-planes associated with the ROI are coded before the information associated with the background.

The method can be described using the following steps:

- 1) Generate ROI mask, $M(x, y)$ (Annex H.3).
- 2) Find the scaling value s (Annex H.2.2).
- 3) Add s LSB's to each coefficient $|q_b(u, v)|$. The number M'_b of magnitude bit-planes will then be

$$M'_b = M_b + s \quad \text{H.3}$$

where M_b is given by Equation E.2 and the new value of each coefficient is given by

$$|q_b(u, v)| = |q_b(u, v)| \cdot 2^s \quad \text{H.4}$$

- 4) Scale down all background coefficients given by $M(x, y)$ using the scaling value s (see Annex H.3). Thus, if $|q_b(u, v)|$ is a background coefficient given by $M(x, y)$, then

$$|q_b(u, v)| = \frac{|q_b(u, v)|}{2^s} \quad \text{H.5}$$

- 5) Write the scaling value s into the codestream using the SPrgn parameter of the RGN marker segment.

After these steps the quantized transform coefficients are entropy coded as usual.

H.2.2 Selection of scaling value, s , at encoder side (informative)

The scaling value, s , may be chosen so that Equation H.6 holds, where $\max(M_b)$ is the largest number of magnitude bit-planes, see Equation E.1, for any background coefficient, $q_{BG}(x, y)$ in any code-block in the current component.

$$s \geq \max(M_b) \quad \text{H.6}$$

This guarantees that the scaling value used will be sufficiently large to ensure all the significant bits associated with the ROI will be in higher bit-planes than all the significant bits associated with the background.

H.3 Remarks on region of interest coding (informative)

The ROI functionality described in Annex H.2 depends only on the scaling value chosen on the encoder side and hence only on the amplitude of the coefficients on the decoder side. It is up to the encoder to generate a mask that corresponds to the coefficients that need to be encoded with better quality to yield an ROI with better quality than the Background. Annex H.3.1 describes how to generate the ROI mask for a particular region in the image. Annex H.3.2 describes how to generate the mask in the case of multi-component images and Annex H.3.3 describes how to generate the ROI mask for disjoint regions. Annex H.3.4 describes a possible way to deal with the increase of coefficient bit depth. Annex H.3.5 describes how the ROI mask can be extended so as to not correspond exactly to a region in the image domain and how the Maxshift method may be used to encode the ROI and the Background with different quality.

H.3.1 Region of interest mask generation

To achieve an ROI with better quality than the rest of the image while maintaining a fair amount of compression, bits need to be saved by sending less information for the background. To do this an ROI mask is calculated. The mask is a bit-

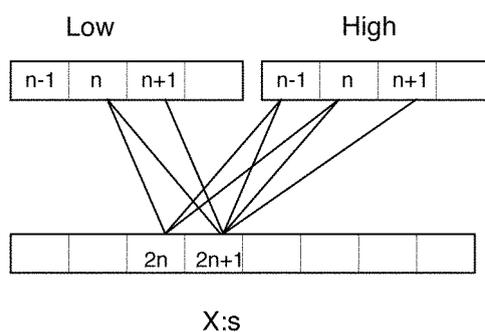


Figure H-1 — The inverse wavelet transformation with the 5-3 reversible filter

plane indicating a set of quantized transform coefficients whose coding is sufficient in order for the receiver to reconstruct the desired region with better quality than the background (up to lossless).

To illustrate the concept of ROI mask generation, let us restrict ourselves to a single ROI and a single image component, and identify the samples that belong to the ROI in the image domain by a binary mask, $M(x, y)$, where

$$M(x, y) = \begin{cases} 1 & \text{wavelet coefficient (x,y) is needed} \\ 0 & \text{accuracy on (x,y) can be sacrificed without affecting ROI} \end{cases} \quad \text{H.7}$$

The mask is a map of the ROI in the wavelet domain so that it has a non-zero value inside the ROI and 0 outside. In each step the LL sub-band of the mask is then updated row by row and then column by column. The mask will then indicate which coefficients are needed at this step so that the inverse wavelet transformation will reproduce the coefficients of the previous mask.

For example, the last step of the inverse wavelet transformation is a composition of two sub-bands into one. Then to trace this step backwards, one finds the coefficients of both sub-bands that are needed. The step before that is a composition of four sub-bands into two. To trace this step backwards, the coefficients in the four sub-bands that are needed to give a perfect reconstruction of the coefficients included in the mask for two sub-bands are found.

All steps are then traced backwards to give the mask. If the coefficients corresponding to the mask are transmitted and received, and the inverse wavelet transformation calculated on them, the desired ROI will be reconstructed with better quality than the rest of the image (up to lossless if the ROI coefficients were coded losslessly).

Given below is a description of how the expansion of the mask is acquired from the various filters. Similar methods can be used for other filters.

H.3.1.1 Region of interest mask generation using the 5-3 reversible filter

In order to get the optimal set of quantized coefficients to be scaled, the following equations described in this section should be used.

To see what coefficients need to be in the mask, the inverse wavelet transformation is studied. Equation F.5 and Equation F.6 give the coefficients needed to reconstruct $X(2n)$ and $X(2n+1)$ losslessly. It can immediately be seen that these are $L(n), L(n+1), H(n-1), H(n), H(n+1)$ (see Figure H-1). Hence if $X(2n)$ and $X(2n+1)$ are in the ROI, the listed low and high sub-band coefficients are in the mask. Notice that $X(2n)$ and $X(2n+1)$ are even and odd indexed points respectively, relative to the origin of the reference grid.

H.3.1.2 Region of interest mask generation using the 9-7 irreversible filter

Successful decoding does not depend upon the selection of samples to be scaled. In order to get the optimal set of quantized coefficients to be scaled the following equations described in this section should be used.

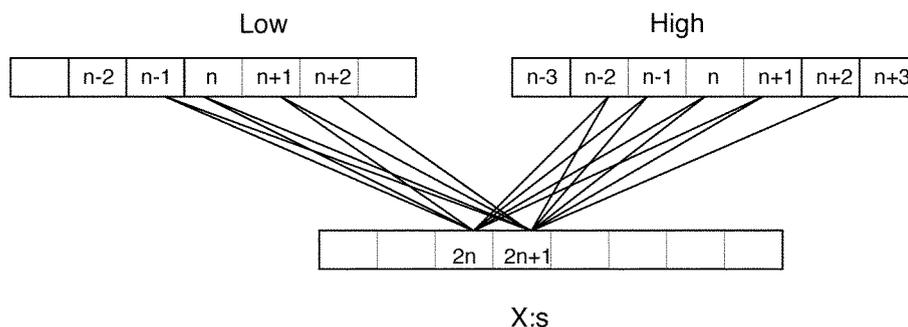


Figure H-2 — The inverse wavelet transformation with the 9-7 irreversible filter

To see what coefficients need to be in the mask, the inverse wavelet transformation is studied as in Annex H.3.1.1. Figure H-2 shows this. $X(2n)$ and $X(2n+1)$ are even and odd indexed points respectively, related to the origin of the reference grid.

The coefficients needed to reconstruct $X(2n)$ and $X(2n+1)$ losslessly can immediately be seen to be $L(n-1)$ to $L(n+2)$ and $H(n-2)$ to $H(n+2)$. Hence if $X(2n)$ and $X(2n+1)$ are in the ROI, those Low and High sub-band coefficients are in the mask.

H.3.2 Multi-component remark

For the case of colour images, the method applies separately in each colour component. If some of the colour components are down-sampled, the mask for the down-sampled components is created in the same way as the mask for the non-down-sampled components.

H.3.3 Disjoint regions remark

If the ROI consists of disjoint parts then all parts have the same scaling value s .

H.3.4 Implementation precision remark

This ROI coding method might in some cases create situations where the dynamic range is exceeded. This is however easily solved by simply discarding the least significant bit-planes that exceed the limit due to the down-scaling operation. The effect will be that the ROI will have better quality than the background, even though the entire bit stream is decoded. It might however create problems when the image is coded with ROI's in a lossless mode. Discarding least significant bit-planes for the background might result in the background not being coded losslessly and in the worst case not being reconstructed at all. This depends on the dynamic range available.

H.3.5 An example of the usage of the Maxshift method

The Maxshift method, as described above, allows the user/application to specify multiple regions of arbitrary shape, which will be assigned higher priority compared to the rest of the image. The method does not require encoding or decoding of the ROI shape.

The Maxshift method allows the implementers of an encoder to exploit a number of functionalities that are supported by a compliant decoder. For example, it is possible to use the Maxshift method to encode an image with different quality for the ROI and the Background. The image is quantized so that the ROI gets the desired quality (lossy or lossless) and then the Maxshift method is applied. If the image is encoded progressively by layer, not all of the layers of the wavelet coefficients belonging to the background need be encoded. This corresponds to using different quantization steps for the ROI and the Background.

If the ROI is to be encoded losslessly the most optimal set of wavelet coefficients giving a lossless result for the ROI is described by the mask generated using the algorithms described in Annex H.3.1. However, the Maxshift method supports the use of any mask since the decoder does not need to generate the mask. Thus, it is possible for the encoder to include

an entire sub-band, e.g. the low-low sub-band, in the ROI mask and thus send a low-resolution version of the background at an early stage of the progressive transmission. This is done by scaling all the quantized transform coefficients of the entire sub-band. In other words, the user can decide in which sub-band he will start coding ROI and thus, it is not necessary to wait for the entire ROI before receiving any information for the background.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

(Blank page)

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

Annex I

JP2 file format syntax

(This Annex forms a normative and integral part of this Recommendation | International Standard. This Annex is optional for the minimum decoder.)

In this Annex and all of its subclauses, the flow charts and tables are normative only in the sense that they are defining an output that alternative implementations shall duplicate.

I.1 File format scope

This Annex of this Recommendation | International Standard defines an optional file format that applications may choose to use to wrap JPEG 2000 compressed image data. While not all applications will use this format, many applications will find that this format meets their needs. However, those applications that do implement this file format shall implement it as described in this entire Annex of this Recommendation | International Standard.

This Annex of this Recommendation | International Standard

- specifies a binary container for both image and metadata
- specifies a mechanism to indicate image properties, such as the tonescale or colourspace of the image
- specifies a mechanism by which readers may recognize the existence of intellectual property rights information in the file
- specifies a mechanism by which metadata (including vendor specific information) can be included in files specified by this Recommendation | International Standard

I.2 Introduction to the JP2 file format

The JPEG 2000 file format (JP2 file format) provides a foundation for storing application specific data (metadata) in association with a JPEG 2000 codestream, such as information which is required to display the image. As many applications require a similar set of information to be associated with the compressed image data, it is useful to define the format of that set of data along with the definition of the compression technology and codestream syntax.

Conceptually, the JP2 file format encapsulates the JPEG 2000 codestream along with other core pieces of information about that codestream. The building-block of the JP2 file format is called a box. All information contained within the JP2 file is encapsulated in boxes. This Recommendation | International Standard defines several types of boxes; the definition of each specific box type defines the kinds of information that may be found within a box of that type. Some boxes will be defined to contain other boxes.

I.2.1 File identification

JP2 files can be identified using several mechanisms. When stored in traditional computer file systems, JP2 files should be given the file extension “.jp2” (readers should allow mixed case for the alphabetic characters). On Macintosh file systems, JP2 files should be given the type code ‘jp2\040’.

I.2.2 File organization

A JP2 file represents a collection of boxes. Some of those boxes are independent, and some of those boxes contain other boxes. The binary structure of a file is a contiguous sequence of boxes. The start of the first box shall be the first byte of the file, and the last byte of the last box shall be the last byte of the file.

The binary structure of a box is defined in Annex I.4.

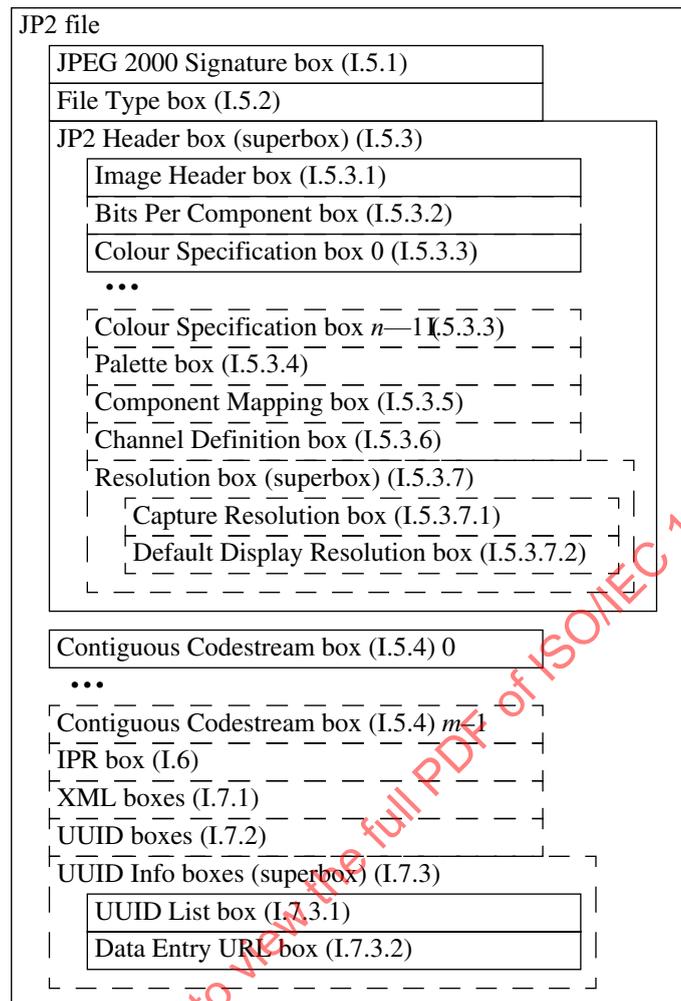


Figure I-1 — Conceptual structure of a JP2 file

Logically, the structure of a JP2 file is as shown in Figure I-1. Boxes with dashed borders are optional in conforming JP2 files. However, an optional box may define mandatory boxes within that optional box. In that case, if the optional box exists, those mandatory boxes within the optional box shall exist. If the optional box does not exist, then the mandatory boxes within those boxes shall also not exist.

Figure I-1 specifies only the containment relationship between the boxes in the file. A particular order of those boxes in the file is not generally implied. However, the JPEG 2000 Signature box shall be the first box in a JP2 file, the File Type box shall immediately follow the JPEG 2000 Signature box and the JP2 Header box shall fall before the Contiguous Codestream box.

The file shown in Figure I-1 is a strict sequence of boxes. Other boxes may be found between the boxes defined in this Recommendation | International Standard. However, all information contained within a JP2 file shall be in the box format; byte-streams not in the box format shall not be found in the file.

As shown in Figure I-1, a JP2 file contains a JPEG 2000 Signature box, JP2 Header box, and one or more Contiguous Codestream boxes. A JP2 file may also contain other boxes as determined by the file writer. For example, a JP2 file may contain several XML boxes (containing metadata) between the JP2 Header box and the first Contiguous Codestream box.

I.2.3 Greyscale, colour, palette, multi-component specification

The JP2 file format provides two methods to specify the colour space of the image. The enumerated method specifies the colour space of an image by specifying a numeric value that specifies the colour space. In this Recommendation | International Standard, images in the sRGB colour space and greyscale images can be defined using the enumerated method.

The JP2 file format also provides for the specification of the colour space of an image by embedding a restricted form of an ICC profile in the file. That profile shall be of either the Monochrome or Three-Component Matrix-Based class of input profiles as defined by the ICC Profile Format Specification, ICC.1:1998–09. This allows for the specification of a wide range of greyscale and RGB class colour spaces, as well as a few other spaces that can be represented by those two profile classes. See Annex J.9 for a more detailed description of the legal colour space transforms, how those transforms are stored in the file, and how to process an image using that transform without using an ICC colour management engine. While restricted, these ICC profiles are fully compliant ICC profiles and the image can thus be processed through any ICC compliant engine that supports profiles as defined in ICC.1:1998–09.

In addition to specifying the colour space of the image, this Recommendation | International Standard provides a means by which a single component palettized image can be decoded and converted back to multiple-component form by the translation from index space to multiple-component space. Any such depalettization is applied before the colour space is interpreted. In the case of palettized images, the specification of the colour space of the image is applied to the multiple-component values stored in the palette.

I.2.4 Inclusion of opacity channels

The JP2 file format provides a means to indicate the presence of auxiliary channels (such as opacity), to define the type of those channels, and to specify the ordering and source of those channels (whether they are directly extracted from the codestream or generated by applying a palette to a codestream component). When a reader opens the JP2 file, it will determine the ordering and type of each component. The application must then match the component definition and ordering from the JP2 file with the component ordering as defined by the colour space specification. Once the file components have been mapped to the colour channels, the decompressed image can be processed through any needed colour space transformations.

In many applications, components other than the colour channels are required. For example, many images used on web pages contain opacity information; the browser uses this information to blend the image into the background. It is thus desirable to include both the colour and auxiliary channels within a single codestream.

How applications deal with opacity or other auxiliary channels is outside the scope of this Recommendation | International Standard.

I.2.5 Metadata

One important aspect of the JP2 file format is the ability to add metadata to a JP2 file. Because all information is encapsulated in boxes, and all boxes have types, the format provides a simple mechanism for a reader to extract relevant information, while ignoring any box that contains information that is not understood by that particular reader. In this way, new boxes can be created, either through this or other Recommendations | International Standards or private implementation. Also, any new box added to a JP2 file shall not change the visual appearance of the image.

I.2.6 Conformance with the file format

All conforming files shall contain all boxes required by this Recommendation | International Standard, and those boxes shall be as defined in this Recommendation | International Standard. Also, all conforming readers shall correctly interpret all required boxes defined in this Recommendation | International Standard and thus shall correctly interpret all conforming files.

I.3 Greyscale/Colour/Palettized/multi-component specification architecture

One of the most important aspects of a file format is that it specifies the colour space of the contained image data. In order to properly display or interpret the image data, it is essential that the colour space of that image is properly characterized. The JP2 file format provides a multi-level mechanism for characterizing the colour space of an image.

I.3.1 Enumerated method

The simplest method for characterizing the colour space of an image is to specify an integer code representing the colour space in which the image is encoded. This method handles the specification of sRGB and greyscale images. Extensions to this method can be used to specify other colour spaces, including the definition of multi-component images.

For example, the image file may indicate that a particular image is encoded in the sRGB colour space. To properly interpret and display the image, an application must natively understand the definition of the sRGB colour space. Because an application must natively understand each specified colour space, the complexity of this method is dependent on the exact colour spaces specified. Also, complexity of this mechanism is proportional to the number of colour spaces that are specified and required for conformance. While this method provides a high level of interoperability for images encoded using colour spaces for which correct interpretation is required for conformance, this method is very inflexible. This Recommendation | International Standard defines a specific set of colour spaces for which interpretation is required for conformance.

I.3.2 Restricted ICC profile method

An application may also specify the colour space of an image using two restricted types of ICC profiles. This method handles the specification of the most commonly used RGB and greyscale class colour spaces through a low-complexity method.

An ICC profile is a standard representation of the transformation required to convert one colour space into another colour space. With respect to the JP2 file format, an ICC profile defines how decompressed samples from the codestream are converted into a standard colour space (the Profile Connection Space (PCS)). Depending on the original colour space of the samples, this transformation may be either very simple or very complex.

The ICC Profile Format Specification defines two specific classes of ICC profiles that are simple to implement, referred to within the profile specification as Monochrome Input and Three-Component Matrix-Based Input Profiles. These profiles limit the transformation from the source colour space to the PCS_{XYZ} to the application of a non-linearity curve and a 3x3 matrix. It is practical to expect all applications, including simple devices, to be able to process the image through this transformation. Thus all conforming applications are required to correctly interpret the colour space of any image that specifies the colour space using this subset of possible ICC profile types.

For the JP2 file format, profiles shall conform to the ICC profile definition as defined by the ICC Profile Format Specification, ICC.1:1998-09, as well as the restrictions specified above. See Annex J.9 for a more detailed description of the legal colour space transforms, how those transforms are stored in the file, and how to process an image using that transform without using an ICC colour management engine.

I.3.3 Using multiple methods

Architecturally, the format allows for multiple methods to be embedded in a file and allows other standards to define additional enumerated methods and to define extended methods. This provides readers conforming to those extensions a choice as to what image processing path should be used to interpret the colour space of the image. However, the first method found in the file (in the first Colour Space Specification box in the JP2 Header box) shall be one of the methods as defined and restricted in this Recommendation | International Standard. A conforming reader shall use that first method and ignore all other methods (in additional Colour Space Specification boxes) found in the file.

I.3.4 Palettized images

In addition to specifying the interpretation of the image in terms of colour space, this Recommendation | International Standard allows for the decoding of a single component where the value of that single component represents an index into a palette of colours. Input of a decompressed sample to the palette converts the single value to a multiple-component tuple. The value of that tuple represents the colour of that sample; that tuple shall then be interpreted according to the other colour specification methods (Enumerated or Restricted ICC) as if that multiple-component sample had been directly extracted from multiple components in the codestream.

I.3.5 Interactions with the decorrelating multiple component transform

The specification of colour within the JP2 file format is independent of the use of a multiple component transformation within the codestream (the CSsiz parameter of the SIZ marker segment as specified in Annex A.5.1 and Annex G). The colour space transformations specified through the sequence of Colour Specification boxes shall be applied to the image samples after the reverse multiple component transformation has been applied to the decompressed samples. While the application of these decorrelating component transformations is separate, the application of an encoder-based multiple component transformation will often improve the compression of colour image data.

I.3.6 Key to graphical descriptions (informative)

Each box is described in terms of its function, usage, and length. The function describes the information contained in the box. The usage describes the logical location and frequency of this box in the file. The length describes which parameters determine the length of the box.

These descriptions are followed by a figure that shows the order and relationship of the parameters in the box. Figure I-2 shows an example of this type of figure. A rectangle is used to indicate the parameters in the box. The width of the rectangle is proportional to the number of bytes in the parameter. A shaded rectangle (diagonal stripes) indicates that the parameter is of varying size. Two parameters with superscripts and a gray area between indicate a run of several of these parameters. A sequence of two groups of multiple parameters with superscripts separated by a gray area indicates a run of that group of parameters (one set of each parameter in the group, followed by the next set of each parameter in the group). Optional parameters or boxes will be shown with a dashed rectangle.

The figure is followed by a list that describes the meaning of each parameter in the box. If parameters are repeated, the length and nature of the run of parameters is defined. As an example, in Figure I-2, parameters C, D, E and F are 8, 16, 32 bit and variable length respectively. The notation G^0 and G^{N-1} implies that there are n different parameters, G^i , in a row. The group of parameters H^0 and H^{M-1} and J^0 and J^{M-1} specify that the box will contain H^0 , followed by J^0 , followed by H^1 and J^1 , continuing to H^{M-1} and J^{M-1} (M instances of each parameter in total). Also, the field E is optional and may not be found in this box.

After the list is a table that either describes the allowed parameter values or provides references to other tables that describe these values.

In addition, in a figure describing the contents of a superbox, an ellipsis (...) will be used to indicate that contents of the file between two boxes is not specifically defined. Any box (or sequence of boxes), unless otherwise specified by the definition of that box, may be found in place of the ellipsis.

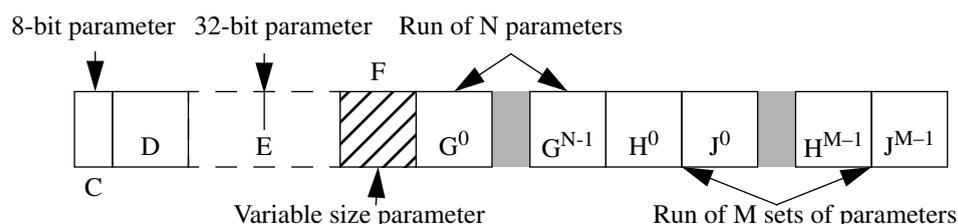


Figure I-2 — Example of the box description figures




Figure I-3 — Example of the superbox description figures

For example, the superbox shown in Figure I-3 must contain an AA box and a BB box, and the BB box must follow the AA box. However, there may be other boxes found between boxes AA and BB. Dealing with unknown boxes is discussed in Annex I.8.

I.4 Box definition

Physically, each object in the file is encapsulated within a binary structure called a box. That binary structure is as follows:




Figure I-4 — Organization of a Box

LBox: Box Length. This field specifies the length of the box, stored as a 4-byte big endian unsigned integer. This value includes all of the fields of the box, including the length and type. If the value of this field is 1, then the XLBox field shall exist and the value of that field shall be the actual length of the box. If the value of this field is 0, then the length of the box was not known when the LBox field was written. In this case, this box contains all bytes up to the end of the file. If a box of length 0 is contained within another box (its superbox), then the length of that superbox shall also be 0. This means that this box is the last box in the file. The values 2–7 are reserved for ISO use.

TBox: Box Type. This field specifies the type of information found in the DBox field. The value of this field is encoded as a 4-byte big endian unsigned integer. However, boxes are generally referred to by an ISO 646 character string translation of the integer value. For all box types defined within this Recommendation | International Standard, box types will be indicated as both character string (normative) and as 4-byte hexadecimal integers (informative). Also, a space character is shown in the character string translation of the box type as “\040”. All values of TBox not defined within this Recommendation | International Standard are reserved for ISO use.


XLBox: Box Extended Length. This field specifies the actual length of the box if the value of the LBox field is 1. This field is stored as an 8-byte big endian unsigned integer. The value includes all of the fields of the box, including the LBox, TBox and XLBox fields.

DBox: Box Contents. This field contains the actual information contained within this box. The format of the box contents depends on the box type and will be defined individually for each type.

Table I-1 — Binary structure of a box

| Field name | Size (bits) | Value |
|------------|-------------|---|
| LBox | 32 | 0, 1, or $8 - (2^{32}-1)$ |
| TBox | 32 | Variable |
| XLBox | 64 0 | $16 - (2^{64}-1)$; if LBox = 1 Not applicable; if LBox \neq 1 |
| DBox | Variable | Variable |

For example, consider the following illustration of a sequence of boxes, including one box that contains other boxes:

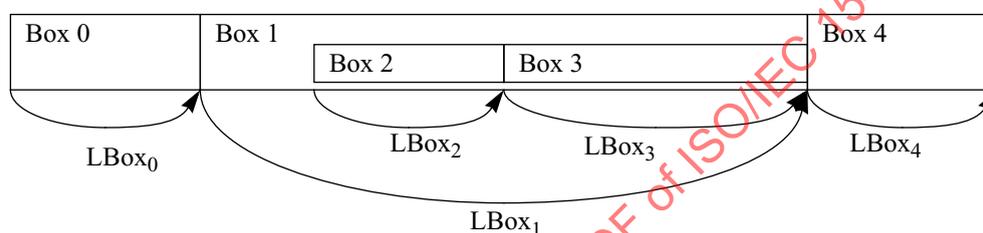**Figure I-5 — Illustration of box lengths**

As shown in Figure I-5, the length of each box includes any boxes contained within that box. For example, the length of Box 1 includes the length of Boxes 2 and 3, in addition to the LBox and TBox fields for Box 1 itself. In this case, if the type of Box 1 was not understood by a reader, it would not recognize the existence of boxes 2 and 3 because they would be completely skipped by jumping the length of box 1 from the beginning of box 1.

The following table lists all boxes defined by this Recommendation | International Standard. Indentation within the table indicates the hierarchical containment structure of the boxes within a JP2 file:

Table I-2 — Defined boxes

| Box name | Type | Superbox | Required? | Comments |
|-------------------------|-------------------------------|----------|-----------|--|
| JPEG 2000 Signature box | 'jp\040\040' (0x6A50 2020) | No | Required | This box uniquely identifies the file as being part of the JPEG 2000 family of files. |
| File Type box | 'ftyp' (0x6674 7970) | No | Required | This box specifies file type, version and compatibility information, including specifying if this file is a conforming JP2 file or if it can be read by a conforming JP2 reader. |
| JP2 Header box | 'jp2h' (0x6A70 3268) | Yes | Required | This box contains a series of boxes that contain header-type information about the file. |
| Image Header box | 'ihdr' (0x6968 6472) | No | Required | This box specifies the size of the image and other related fields. |

Table I-2 — Defined boxes (continued)

| Box name | Type | Superbox | Required? | Comments |
|--------------------------------|----------------------------|----------|-----------|---|
| Bits Per Component box | 'bpcc' (0x6270 6363) | No | Optional | This box specifies the bit depth of the components in the file in cases where the bit depth is not constant across all components. |
| Colour Specification box | 'colr' (0x636F 6C72) | No | Required | This box specifies the colour space of the image. |
| Palette box | 'pclr' (0x7063 6C72) | No | Optional | This box specifies the palette which maps a single component in index space to a multiple-component image. |
| Component Mapping box | 'cmap' (0x636D 6170) | No | Optional | This box specifies the mapping between a palette and codestream components. |
| Channel Definition box | 'cdef' (0x6364 6566) | No | Optional | This box specifies the type and ordering of the components within the codestream, as well as those created by the application of a palette. |
| Resolution box | 'res\040' (0x7265 7320) | Yes | Optional | This box contains the grid resolution. |
| Capture Resolution box | 'resc' (0x7265 7363) | No | Optional | This box specifies the grid resolution at which the image was captured. |
| Default Display Resolution box | 'resd' (0x7265 7364) | No | Optional | This box specifies the default grid resolution at which the image should be displayed. |
| Contiguous Codestream box | 'jp2c' (0x6A70 3263) | No | Required | This box contains the codestream as defined by Annex A of this Recommendation International Standard |
| Intellectual Property box | 'jp2i' (0x6A70 3269) | No | Optional | This box contains intellectual property information about the image. |
| XML box | 'xml\040' (0x786D 6C20) | No | Optional | This box provides a tool by which vendors can add XML formatted information to a JP2 file. |
| UUID box | 'uuid' (0x7575 6964) | No | Optional | This box provides a tool by which vendors can add additional information to a file without risking conflict with other vendors. |
| UUID Info box | 'uinf' (0x7569 6E66) | Yes | Optional | This box provides a tool by which a vendor may provide access to additional information associated with a UUID |

Table I-2 — Defined boxes *(continued)*

| Box name | Type | Superbox | Required? | Comments |
|---------------|----------------------------|----------|-----------|--------------------------------------|
| UUID List box | 'ulst' (0x7563 7374) | No | Optional | This box specifies a list of UUID's. |
| URL box | 'url\040' (0x7572 6C20) | No | Optional | This box specifies a URL. |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.5 Defined boxes

The following boxes shall properly be interpreted by all conforming readers. Each of these boxes conforms to the standard box structure as defined in Annex I.4. The following sections define the value of the DBox field from Table I-1 (the contents of the box). It is assumed that the LBox, TBox and XLBox fields exist for each box in the file as defined in Annex I.4.

I.5.1 JPEG 2000 Signature box

The JPEG 2000 Signature box identifies that the format of this file was defined by the JPEG 2000 Recommendation International Standard, as well as provides a small amount of information which can help determine the validity of the rest of the file. The JPEG 2000 Signature box shall be the first box in the file, and all files shall contain one and only one JPEG 2000 Signature box.

The type of the JPEG 2000 Signature box shall be 'jP\040\040' (0x6A50 2020). The length of this box shall be 12 bytes. The contents of this box shall be the 4-byte character string '<CR><LF><0x87><LF>' (0x0D0A 870A). For file verification purposes, this box can be considered a fixed-length 12-byte string which shall have the value: 0x0000 000C 6A50 2020 0D0A 870A.

The combination of the particular type and contents for this box enable an application to detect a common set of file transmission errors. The CR-LF sequence in the contents catches bad file transfers that alter newline sequences. The control-Z character in the type stops file display under MS-DOS. The final linefeed checks for the inverse of the CR-LF translation problem. The third character of the box contents has its high-bit set to catch bad file transfers that clear bit 7.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.5.2 File Type box

The File Type box specifies the Recommendation | International Standard which completely defines all of the contents of this file, as well as a separate list of readers, defined by other Recommendations | International Standards, with which this file is compatible, and thus the file can be properly interpreted within the scope of that other standard. This box shall immediately follow the JPEG 2000 Signature box. This differentiates between the standard which completely describes the file, from other standards that interpret a subset of the file.

All files shall contain one and only one File Type box.

The type of the File Type Box shall be 'ftyp' (0x6674 7970). The contents of this box shall be as follows:



Figure I-6 — Organization of the contents of a File Type box

BR: Brand. This field specifies the Recommendation | International Standard which completely defines this file. This field is specified by a four byte string of ISO 646 characters. The value of this field is defined in Table I-3:

Table I-3 — Legal Brand values

| Value | Meaning |
|--------------|--|
| 'jp2\040' | IS 15444-1, Annex I (This Recommendation International Standard) |
| other values | Reserved for other ISO uses |

In addition, the Brand field shall be considered functionally equivalent to a major version number. A major version change (if there ever is one), representing an incompatible change in the JP2 file format, shall define a different value for the Brand field.

If the value of the Brand field is not 'jp2\040', then a value of 'jp2\040' in the Compatibility list indicates that a JP2 reader can interpret the file in some manner as intended by the creator of the file.

MinV: Minor version. This parameter defines the minor version number of this JP2 specification for which the file complies. The parameter is defined as a 4-byte big endian unsigned integer. The value of this field shall be zero. However, readers shall continue to parse and interpret this file even if the value of this field is not zero.

CLⁱ: Compatibility list. This field specifies a code representing this Recommendation | International Standard, another standard, or a profile of another standard, to which the file conforms. This field is encoded as a four byte string of ISO 646 characters. A file that conforms to this Recommendation | International Standard shall have at least one CLⁱ field in the File Type box, and shall contain the value 'jp2\040' in one of the CLⁱ fields in the File Type box, and all conforming readers shall properly interpret all files with 'jp2\040' in one of the CLⁱ fields.

Other values of the Compatibility list field are reserved for ISO use.

The number of CLⁱ fields is determined by the length of this box.

Table I-4 — Format of the contents of the File Type box

| Field name | Size (bits) | Value |
|-----------------|-------------|------------------|
| BR | 32 | 0 — $(2^{32}-1)$ |
| MinV | 32 | 0 |
| CL ⁱ | 32 | 0 — $(2^{32}-1)$ |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.5.3 JP2 Header box (superbox)

The JP2 Header box contains generic information about the file, such as number of components, colourspace, and grid resolution. This box is a superbox. Within a JP2 file, there shall be one and only one JP2 Header box. The JP2 Header box may be located anywhere within the file after the File Type box but before the Contiguous Codestream box. It also must be at the same level as the JPEG 2000 Signature and File Type boxes (it shall not be inside any other superbox within the file).

The type of the JP2 Header box shall be 'jp2h' (0x6A70 3268).

This box contains several boxes. Other boxes may be defined in other standards and may be ignored by conforming readers. Those boxes contained within the JP2 Header box that are defined within this Recommendation | International Standard are as follows:

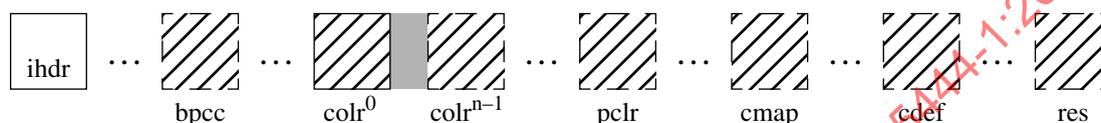


Figure I-7 — Organization of the contents of a JP2 Header box

- ihdr:** Image Header box. This box specifies information about the image, such as its height and width. Its structure is specified in Annex I.5.3.1. This box shall be the first box in the JP2 Header box.
- bpsc:** Bits Per Component box. This box specifies the bit depth of each component in the codestream after decompression. Its structure is specified in Annex I.5.3.2. This box may be found anywhere in the JP2 Header box provided that it comes after the Image Header box.
- colrⁱ:** Colour Specification boxes. These boxes specify the colourspace of the decompressed image. Their structures are specified in Annex I.5.3.3. There shall be at least one Colour Specification box within the JP2 Header box. The use of multiple Colour Specification boxes provides the ability for a decoder to be given multiple optimization or compatibility options for colour processing. These boxes may be found anywhere in the JP2 Header box provided that they come after the Image Header box. All Colour Specification boxes shall be contiguous within the JP2 Header box.
- pclr:** Palette box. This box defines the palette to use to create multiple components from a single component. Its structure is specified in Annex I.5.3.4. This box may be found anywhere in the JP2 Header box provided that it comes after the Image Header box.
- cmap:** Component Mapping box. This box defines how image channels are identified from the actual components in the codestream. Its structure is specified in Annex I.5.3.5. This box may be found anywhere in the JP2 Header box provided that it comes after the Image Header box.
- cdef:** Channel Definition box. This box defines the channels in the image. Its structure is specified in Annex I.5.3.6. This box may be found anywhere in the JP2 Header box provided that it comes after the Image Header box.
- res:** Resolution box. This box specifies the capture and default display grid resolutions of the image. Its structure is specified in Annex I.5.3.7. This box may be found anywhere in the JP2 Header box provided that it comes after the Image Header box.

I.5.3.1 Image Header box

This box contains fixed length generic information about the image, such as the image size and number of components. The contents of the JP2 Header box shall start with an Image Header box. Instances of this box in other places in the file shall be ignored. The length of the Image Header box shall be 22 bytes, including the box length and type fields. Much of the information within the Image Header box is redundant with information stored in the codestream itself.

All references to “the codestream” in the descriptions of fields in this Image Header box apply to the codestream found in the first Contiguous Codestream box in the file. Files that contain contradictory information between the Image Header box and the first codestream are not conforming files. However, readers may choose to attempt to read these files by using the values found within the codestream.

The type of the Image Header box shall be ‘ihdr’ (0x6968 6472) and contents of the box shall have the following format:

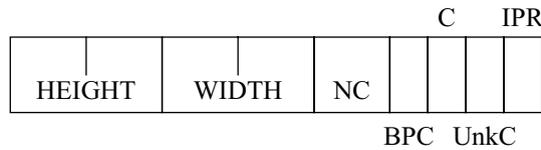


Figure I-8 — Organization of the contents of an Image Header box

HEIGHT: Image area height. The value of this parameter indicates the height of the image area. This field is stored as a 4-byte big endian unsigned integer. The value of this field shall be $Ysiz - YOsiz$, where $Ysiz$ and $YOsiz$ are the values of the respective fields in the SIZ marker in the codestream. See Figure B-1 for an illustration of the image area. However, reference grid points are not necessarily square; the aspect ratio of a reference grid point is specified by the Resolution box. If the Resolution box is not present, then a reader shall assume that reference grid points are square.

WIDTH: Image area width. The value of this parameter indicates the width of the image area. This field is stored as a 4-byte big endian unsigned integer. The value of this field shall be $Xsiz - XOsiz$, where $Xsiz$ and $XOsiz$ are the values of the respective fields in the SIZ marker in the codestream. See Figure B-1 for an illustration of the image area. However, reference grid points are not necessarily square; the aspect ratio of a reference grid point is specified by the Resolution box. If the Resolution box is not present, then a reader shall assume that reference grid points are square.

NC: Number of components. This parameter specifies the number of components in the codestream and is stored as a 2-byte big endian unsigned integer. The value of this field shall be equal to the value of the $Csiz$ field in the SIZ marker in the codestream.

BPC: Bits per component. This parameter specifies the bit depth of the components in the codestream, minus 1, and is stored as a 1-byte field.

If the bit depth is the same for all components, then this parameter specifies that bit depth and shall be equivalent to the values of the $Ssiz^1$ fields in the SIZ marker in the codestream (which shall all be equal). If the components vary in bit depth, then the value of this field shall be 255 and the JP2 Header box shall also contain a Bits Per Component box defining the bit depth of each component (as defined in Annex I.5.3.2).

The low 7-bits of the value indicate the bit depth of the components. The high-bit indicates whether the components are signed or unsigned. If the high-bit is 1, then the components contain signed values. If the high-bit is 0, then the components contain unsigned values.

C: Compression type. This parameter specifies the compression algorithm used to compress the image data. The value of this field shall be 7. It is encoded as a 1-byte unsigned integer. Other values are reserved for ISO use.

UnkC: Colourspace Unknown. This field specifies if the actual colourspace of the image data in the codestream is known. This field is encoded as a 1-byte unsigned integer. Legal values for this field are 0, if the colourspace of the image is known and correctly specified in the Colourspace Specification

boxes within the file, or 1, if the colourspace of the image is not known. A value of 1 will be used in cases such as the transcoding of legacy images where the actual colourspace of the image data is not known. In those cases, while the colourspace interpretation methods specified in the file may not accurately reproduce the image with respect to some original, the image should be treated as if the methods do accurately reproduce the image. Values other than 0 and 1 are reserved for ISO use.

IPR: Intellectual Property. This parameter indicates whether this JP2 file contains intellectual property rights information. If the value of this field is 0, this file does not contain rights information, and thus the file does not contain an IPR box. If the value is 1, then the file does contain rights information and thus does contain an IPR box as defined in Annex I.6. Other values are reserved for ISO use.

Table I-5 — Format of the contents of the Image Header box

| Field name | Size (bits) | Value |
|------------|-------------|------------------|
| HEIGHT | 32 | 1 — $(2^{32}-1)$ |
| WIDTH | 32 | 1 — $(2^{32}-1)$ |
| NC | 16 | 1 — 16 384 |
| BPC | 8 | See Table I-6 |
| C | 8 | 7 |
| Unk | 8 | 0 — 1 |
| IPR | 8 | 0 — 1 |

Table I-6 — BPC values

| Values (bits) MSB LSB | Component sample precision |
|-------------------------------|--|
| x000 0000 — x010 0101 | Component bit depth = value + 1. From 1 bit deep through 38 bits deep respectively (counting the sign bit, if appropriate) |
| 0xxx xxxx | Components are unsigned values |
| 1xxx xxxx | Components are signed values |
| 1111 1111 | Components vary in bit depth |
| | All other values reserved for ISO use. |

I.5.3.2 Bits Per Component box

The Bits Per Component box specifies the bit depth of each component. If the bit depth of all components in the codestream is the same (in both sign and precision), then this box shall not be found. Otherwise, this box specifies the bit depth of each individual component. The order of bit depth values in this box is the actual order in which those components are enumerated within the codestream. The exact location of this box within the JP2 Header box may vary provided that it follows the Image Header box.

The type of the Bits Per Component Box shall be 'bpcc' (0x6270 6363). The contents of this box shall be as follows:




Figure I-9 — Organization of the contents of a Bits Per Component box

BPCⁱ: Bits per component. This parameter specifies the bit depth of component *i*, minus 1, encoded as a 1-byte value. The ordering of the components within the Bits Per Component Box shall be the same as the ordering of the components within the codestream. The number of BPCⁱ fields shall be the same as the value of the NC field from the Image Header box. The value of this field shall be equivalent to the respective Ssizⁱ field in the SIZ marker in the codestream.

The low 7-bits of the value indicate the bit depth of this component. The high-bit indicates whether the component is signed or unsigned. If the high-bit is 1, then the component contains signed values. If the high-bit is 0, then the component contains unsigned values.

Table I-7 — Format of the contents of the Bits Per Component box

| Field name | Size (bits) | Value |
|------------------|-------------|---------------|
| BPC ⁱ | 8 | See Table I-8 |

Table I-8 — BPCⁱ values

| Values (bits) MSB LSB | Component sample precision |
|-----------------------------|--|
| x000 0000 — x010 0101 | Component bit depth = value + 1. From 1 bit deep through 38 bits deep respectively (counting the sign bit, if appropriate) |
| 0xxx xxxx | Components are unsigned values |
| 1xxx xxxx | Components are signed values |
| | All other values reserved for ISO use. |

I.5.3.3 Colour Specification box

Each Colour Specification box defines one method by which an application can interpret the colourspace of the decompressed image data. This colour specification is to be applied to the image data after it has been decompressed and after any reverse decorrelating component transform has been applied to the image data.

A JP2 file may contain multiple Colour Specification boxes, but must contain at least one, specifying different methods for achieving “equivalent” results. A conforming JP2 reader shall ignore all Colour Specification boxes after the first. However, readers conforming to other standards may use those boxes as defined in those other standards.

The type of a Colour Specification box shall be ‘colr’ (0x636F 6C72). The contents of a Colour Specification box is as follows:

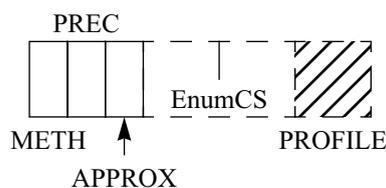


Figure I-10 — Organization of the contents of a Colour Specification box

METH: Specification method. This field specifies the method used by this Colour Specification box to define the colourspace of the decompressed image. This field is encoded as a 1-byte unsigned integer. The value of this field shall be 1 or 2, as defined in Table I-9.

PREC: Precedence. This field is reserved for ISO use and the value shall be set to zero; however, conforming readers shall ignore the value of this field. This field is specified as a signed 1 byte integer.

APPROX: Colourspace approximation. This field specifies the extent to which this colour specification method approximates the “correct” definition of the colourspace. The value of this field shall be set to zero; however, conforming readers shall ignore the value of this field. Other values are reserved for other ISO use. This field is specified as 1 byte unsigned integer.

EnumCS: Enumerated colourspace. This field specifies the colourspace of the image using integer codes. To correctly interpret the colour of an image using an enumerated colourspace, the application must know the definition of that colourspace internally. This field contains a 4-byte big endian unsigned integer value indicating the colourspace of the image. If the value of the METH field is 2, then the EnumCS field shall not exist. Valid EnumCS values for the first colourspace specification box in conforming files are limited to 16 and 17 as defined in Table I-10:

PROFILE: ICC profile. This field contains a valid ICC profile, as specified by the ICC Profile Format Specification, which specifies the transformation of the decompressed image data into the PCS. This field shall not exist if the value of the METH field is 1. If the value of the METH field is 2, then the ICC profile shall conform to the Monochrome Input Profile class or the Three-Component Matrix-Based Input Profile class as defined in ICC.1:1998-09.

Table I-9 — Legal METH values

| Value | Meaning |
|--------------|--|
| 1 | <p>Enumerated Colourspace. This colourspace specification box contains the enumerated value of the colourspace of this image. The enumerated value is found in the EnumCS field in this box. If the value of the METH field is 1, then the EnumCS shall exist in this box immediately following the APPROX field, and the EnumCS field shall be the last field in this box</p> |
| 2 | <p>Restricted ICC profile. This Colour Specification box contains an ICC profile in the PROFILE field. This profile shall specify the transformation needed to convert the decompressed image data into the PCS_{XYZ}, and shall conform to either the Monochrome Input or Three-Component Matrix-Based Input profile class, and contain all the required tags specified therein, as defined in ICC.1:1998-09. As such, the value of the Profile Connection Space field in the profile header in the embedded profile shall be 'XYZ\040' (0x5859 5A20) indicating that the output colourspace of the profile is in the XYZ colourspace.</p> <p>Any private tags in the ICC profile shall not change the visual appearance of an image processed using this ICC profile.</p> <p>The components from the codestream may have a range greater than the input range of the tone reproduction curve (TRC) of the ICC profile. Any decoded values should be clipped to the limits of the TRC before processing the image through the ICC profile. For example, negative sample values of signed components may be clipped to zero before processing the image data through the profile.</p> <p>See Annex J.9 for a more detailed description of the legal colourspace transforms, how those transforms are stored in the file, and how to process an image using that transform without using an ICC colour management engine.</p> <p>If the value of METH is 2, then the PROFILE field shall immediately follow the APPROX field and the PROFILE field shall be the last field in the box.</p> |
| other values | <p>Reserved for other ISO use. If the value of METH is not 1 or 2, there may be fields in this box following the APPROX field, and a conforming JP2 reader shall ignore the entire Colour Specification box.</p> |

Table I-10 — Legal EnumCS values

| Value | Meaning |
|--------------|---|
| 16 | sRGB as defined by IEC 61966-2-1 |
| 17 | <p>greyscale: A greyscale space where image luminance is related to code values using the sRGB non-linearity given in Eqs. (2) through (4) of IEC 61966-2-1 (sRGB) specification:</p> $Y' = Y_{8bit}/255 \quad \text{I.1}$ $\text{for}(Y' \leq 0,040 45), Y_{lin} = Y'/12,92$ $\text{for}(Y' > 0,040 45), Y_{lin} = \left(\frac{Y' + 0,055}{1,055}\right)^{2,4} \quad \text{I.2}$ <p>where Y_{lin} is the linear image luminance value in the range 0.0 to 1.0. The image luminance values should be interpreted relative to the reference conditions in Section 2 of IEC 61966-2-1.</p> |
| other values | Reserved for other ISO uses |

Table I-11 — Format of the contents of the Colour Specification box

| Field name | Size (bits) | Value |
|------------|-----------------------------|--|
| METH | 8 | 1 — 2 |
| PREC | 8 | 0 |
| APPROX | 8 | 0 |
| EnumCS | 32 if METH=1 0 if METH=2 | 0 — (2 ³² -1) no value |
| PROFILE | Variable | Variable; see the ICC Profile Format Specification, version ICC.1:1998-09. |

I.5.3.4 Palette box

The palette specified in this box is applied to a single component to convert it into multiple components. The colour space of the components generated by the palette is then interpreted based on the values of the Colour Specification boxes in the JP2 Header box in the file. The mapping of an actual component from the codestream through the palette is specified in the Component Mapping box. If the JP2 Header box contains a Palette box, then it shall also contain a Component Mapping box. If the JP2 Header box does not contain a Palette box, then it shall not contain a Component Mapping box.

The type of the Palette box shall be 'pclr' (0x7063 6C72). The contents of this box shall be as follows:

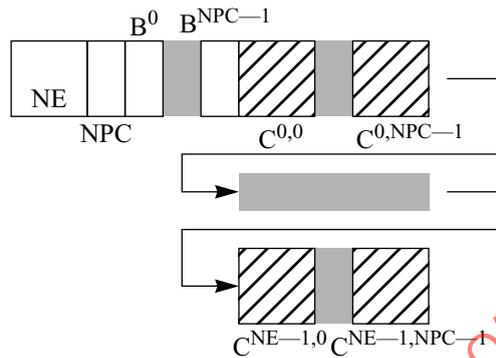


Figure I-11 — Organization of the contents of the Palette box

- NE:** Number of entries in the table. This value shall be in the range 1 to 1 024 and is encoded as a 2-byte big endian unsigned integer.
- NPC:** Number of components created by the application of the palette. For example, if the palette turns a single index component into a three-component RGB image, then the value of this field shall be 3. This field is encoded as a 1-byte unsigned integer
- Bⁱ:** This parameter specifies the bit depth of generated component *i*, encoded as a 1-byte big endian integer. The low 7-bits of the value indicate the bit depth of this component. The high-bit indicates whether the component is signed or unsigned. If the high-bit is 1, then the component contains signed values. If the high-bit is 0, then the component contains unsigned values. The number of Bⁱ values shall be the same as the value of the NPC field.
- C^{ji}:** The generated component value for entry *j* for component *i*. C^{ji} values are organized in component major order; all of the component values for entry *j* are grouped together, followed by all of the entries for component *j*+1. The size of C^{ji} is the value specified by field Bⁱ. The number of components shall be the same as the NPC field. The number of C^{ji} values shall be the number of created components (the NPC field) times the number of entries in the palette (NE). If the value of Bⁱ is not a multiple of 8, then each C^{ji} value is padded with zeros to a multiple of 8 bits and the actual value shall be stored in the low-order bits of the padded value. For example, if the value of Bⁱ is 10 bits, then the individual C^{ji} values shall be stored in the low 10 bits of a 16 bit field.

Table I-12 — Format of the contents of the Palette box

| Field name | Size (bits) | Value |
|-----------------|-------------|----------------|
| NE | 16 | 1 — 1 024 |
| NPC | 8 | 1 — 255 |
| B ⁱ | 8 | See Table I-13 |
| C ^{ji} | Variable | Variable |

Table I-13 — B^i values

| Values (bits) MSB LSB | Component sample precision |
|-------------------------------|--|
| x000 0000 — x010 0101 | Component bit depth = value + 1. From 1 bit deep through 38 bits deep respectively (counting the sign bit, if appropriate) |
| 0xxx xxxx | Components are unsigned values |
| 1xxx xxxx | Components are signed values |
| | All other values reserved for ISO use. |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.5.3.5 Component Mapping box

The Component Mapping box defines how image channels are identified from the actual components decoded from the codestream. This abstraction allows a single structure (the Channel Definition box) to specify the colour or type of both palettized images and non-palettized images. This box contains an array of CMP^i , $MTYP^i$ and $PCOL^i$ fields. Each group of these fields represents the definition of one channel in the image. The channels are numbered in order starting with zero, and the number of channels specified in the Component Mapping box is determined by the length of the box.

If the JP2 Header box contains a Palette box, then the JP2 Header box shall also contain a Component Mapping box. If the JP2 Header box does not contain a Palette box, then the JP2 Header box shall not contain a Component Mapping box. In this case, the components shall be mapped directly to channels, such that component i is mapped to channel i .

The type of the Component Mapping box shall be 'cmap' (0x636D 6170). The contents of this box shall be as follows:




Figure I-12 — Organization of the contents of a Channel Definition box

CMP^i : This field specifies the index of component from the codestream that is mapped to this channel (either directly or through a palette). This field is encoded as a 2-byte big endian unsigned integer.

$MTYP^i$: This field specifies how this channel is generated from the actual components in the file. This field is encoded as a 1-byte unsigned integer. Legal values of the $MTYP^i$ field are as follows:

Table I-14 — $MTYP^i$ field values

| Value | Meaning |
|---------|---|
| 0 | Direct use. This channel is created directly from an actual component in the codestream. The index of the component mapped to this channel is specified in the CMP^i field for this channel. |
| 1 | Palette mapping. This channel is created by applying the palette to an actual component in the codestream. The index of the component mapped into the palette is specified in the CMP^i field for this channel. The column from the palette to use is specified in the $PCOL^i$ field for this channel. |
| 2 — 255 | Reserved for ISO use |

$PCOL^i$: This field specifies the index component from the palette that is used to map the actual component from the codestream. This field is encoded as a 1-byte unsigned integer. If the value of the $MTYP^i$ field for this channel is 0, then the value of this field shall be 0.

Table I-15 — Format of the contents of the Component Mapping box

| Field name | Size (bits) | Value |
|------------|-------------|------------|
| CMP^i | 16 | 1 — 16 384 |
| $MTYP^i$ | 8 | 0 — 1 |
| $PCOL^i$ | 8 | 0 — 255 |

I.5.3.6 Channel Definition box

The Channel Definition box specifies the meaning of the samples in each channel in the image. The exact location of this box within the JP2 Header box may vary provided that it follows the Image Header box. The mapping between actual components from the codestream to channels is specified in the Component Mapping box. If the JP2 Header box does not contain a Component Mapping box, then a reader shall map component i to channel i , for all components in the codestream.

This box contains an array of channel descriptions. For each description, three values are specified: the index of the channel described by that association, the type of that channel, and the association of that channel with particular colours. This box may specify multiple descriptions for a single channel; however, the type value in each description for the same channel shall be the same in all descriptions.

If a multiple component transform is specified within the codestream, the image must be in an RGB colourspace and the red, green and blue colours as channels 0, 1 and 2 in the codestream, respectively.

The type of the Channel Definition box shall be 'cdef' (0x6364 6566). The contents of this box shall be as follows:




Figure I-13 — Organization of the contents of a Channel Definition box

- N:** Number of channel descriptions. This field specifies the number of channel descriptions in this box. This field is encoded as a 2-byte big endian unsigned integer.
- Cnⁱ:** Channel index. This field specifies the index of the channel for this description. The value of this field represents the index of the channel as defined within the Component Mapping box (or the actual component from the codestream if the file does not contain a Component Mapping box). This field is encoded as a 2-byte big endian unsigned integer.
- Typⁱ:** Channel type. This field specifies the type of the channel for this description. The value of this field specifies the meaning of the decompressed samples in this channel. This field is encoded as a 2-byte big endian unsigned integer. Legal values of this field are shown in Table I-16:
- Asocⁱ:** Channel association. This field specifies the index of the colour for which this channel is directly associated (or a special value to indicate the whole image or the lack of an association). For example, if this channel is an opacity channel for the red channel in an RGB colourspace, this field would specify the index of the colour red. Table I-17 specifies legal association values. Table I-18 specifies legal colour indices. This field is encoded as a 2-byte big endian unsigned integer.

The values in Table I-18 specify indices that have been assigned to represent specific "colours" and do not refer to specific channels (or components within the codestream or palette). Readers must use the information contained within the Channel Definition box to determine which channels contain which colours.

In this box, channel indices are mapped from particular components within the codestream or palette. Colour indices specify how that channel shall be interpreted based on the specification of the colourspace of the image.

For example, the green colour in an RGB image is specified by a {Cn, Typ, Asoc} value of { i , 0, 2}, where i is the index of that channel (either directly or as generated by applying the reverse multiple component transform to the actual components in the codestream). Applications that are only concerned with extracting the colour channels can treat the Typ/Asoc field pair as a four-byte value where the combined value maps directly to the colour indices (as the Typ field for a colour channel shall be 0).

In another example, the codestream may contain a channel i that specifies opacity blending samples for the red and green channels, and a channel j that specifies opacity blending samples for the blue channel. In that file, the following {Cn,

Table I-16 — Typⁱ field values

| Value | Meaning |
|--------------------------|---|
| 0 | This channel is the colour image data for the associated colour |
| 1 | Opacity. A sample value of 0 indicates that the sample is 100% transparent, and the maximum value of the channel (related to the bit depth of the codestream component or the related palette component mapped to this channel) indicates a 100% opaque sample. All opacity channels shall be mapped from unsigned components. |
| 2 | Premultiplied opacity. An opacity channel as specified above, except that the value of the opacity channel has been multiplied into the colour channels for which this channel is associated. Premultiplication is defined as follows: $S_p = S \times \frac{\alpha}{\alpha_{max}} \quad \text{I.3}$ <p>where S is the original sample, S_p is the pre multiplied sample (the sample stored in the image, α is the value of the opacity channel, and α_{max} is the maximum value of the opacity channel as defined by the bit depth of the opacity channel.</p> |
| 3 — (2 ¹⁶ -2) | Reserved for ISO use |
| 2 ¹⁶ -1 | The type of this channel is not specified |

Table I-17 — Assocⁱ field values

| Value | Meaning |
|--------------------------|---|
| 0 | This channel is associated as the image as a whole (for example, an independent opacity channel that should be applied to all color channels). |
| 1 — (2 ¹⁶ -2) | This channel is associated with a particular colour as indicated by this value. This value is used to associate a particular channel with a particular aspect of the specification of the colour space of this image. For example, indicating that a channel is associated with the red channel of an RGB image allows the reader to associate that decoded channel with the Red input to an ICC profile contained within a Colour Specification box. Colour indicators are specified in Table I-18 |
| 2 ¹⁶ -1 | This channel is not associated with any particular colour |

Typ, Assoc} tuples would be found in the Channel Definition box for the two opacity channels: { i , 1, 1}, { i , 1, 2} and { j , 1, 3}.

There shall not be more than one channel in a JP2 file with a the same Typⁱ and Assocⁱ value pair, with the exception of Typⁱ and Assocⁱ values of 2¹⁶-1 (not specified). For example a JP2 file in an RGB colour space shall only contain one green channel, and a greyscale image shall contain only one grey channel. There also shall not be more than one opacity or premultiplied opacity channel associated with a single colour channel in an image.

If the codestream contains only colour channels and those channels are ordered in the same order as the associated colours (for example, an RGB image with three channels in the order R, G, then B), then this box shall not exist. If there are any auxiliary channels or the channels are not in the same order as the colour indices, then the Channel Definition box shall be found within the JP2 Header box with a complete list of channel definitions. However, if this file contains a

Table I-18 — Colours indicated by the Asocⁱ field

| Class of colour space | Colour indicated by the following value of the Asoc ⁱ field | | | |
|--|--|----------------|----------------|---|
| | 1 | 2 | 3 | 4 |
| RGB | R | G | B | |
| Greyscale | Y | | | |
| The following colour space classes are listed for future reference, as well as to aid in understanding of the use of the Asoc ⁱ field | | | | |
| XYZ | X | Y | Z | |
| Lab | L | a | b | |
| Luv | L | u | v | |
| YCbCr | Y | C _b | C _r | |
| Yxy | Y | x | y | |
| HSV | H | S | V | |
| HLS | H | L | S | |
| CMYK | C | M | Y | K |
| CMY | C | M | Y | |
| Jab | J | a | b | |
| <i>n</i> colour colour spaces | 1 | 2 | 3 | 4 |

Palette box, the component specified as input to the palette in the Component Mapping box is not itself directly assigned to a channel and thus shall not be listed in the Channel Definition box.

Table I-19 — Format of the Channel Definition box

| Parameter | Size (bits) | Value |
|-------------------|-------------|--------------------------|
| N | 16 | 0 — (2 ¹⁶ -1) |
| Cn ⁱ | 16 | 0 — (2 ¹⁶ -1) |
| Typ ⁱ | 16 | 0 — (2 ¹⁶ -1) |
| Asoc ⁱ | 16 | 0 — (2 ¹⁶ -1) |

I.5.3.7.1 Capture Resolution box

This box specifies the grid resolution at which the source was digitized to create the image samples specified by the codestream. For example, this may specify the resolution of the flatbed scanner that captured a page from a book. The capture grid resolution could also specify the resolution of an aerial digital camera or satellite camera.

The vertical and horizontal capture grid resolutions are calculated using the six parameters (Table I-20) stored in this box in the following two equations, respectively:

$$VRc = \frac{VRcN}{VRcD} \times 10^{VRcE} \quad \text{I.4}$$

$$HRc = \frac{HRcN}{HRcD} \times 10^{HRcE} \quad \text{I.5}$$

The values VRc and HRc are always in reference grid points per meter. If an application requires the grid resolution in another unit, then that application must apply the appropriate conversion.

The type of a Capture Resolution box shall be 'resc' (0x7265 7363). The contents of the Capture Resolution box are as follows:

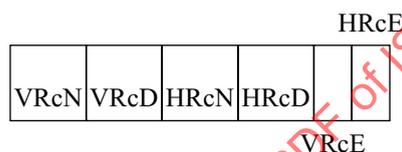


Figure I-15 — Organization of the contents of the Capture Resolution box

- VRcN:** Vertical Capture grid resolution numerator. This parameter specifies the $VRcN$ value in Equation I.4, which is used to calculate the vertical capture grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- VRcD:** Vertical Capture grid resolution denominator. This parameter specifies the $VRcD$ value in Equation I.4, which is used to calculate the vertical capture grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- HRcN:** Horizontal Capture grid resolution numerator. This parameter specifies the $HRcN$ value in Equation I.5, which is used to calculate the horizontal capture grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- HRcD:** Horizontal Capture grid resolution denominator. This parameter specifies the $HRcD$ value in Equation I.5, which is used to calculate the horizontal capture grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- VRcE:** Vertical Capture grid resolution exponent. This parameter specifies the $VRcE$ value in Equation I.4, which is used to calculate the vertical capture grid resolution. This parameter is encoded as a two-complement 1-byte signed integer.
- HRcE:** Horizontal Capture grid resolution exponent. This parameter specifies the $HRcE$ value in Equation I.5, which is used to calculate the horizontal capture grid resolution. This parameter is encoded as a two-complement 1-byte signed integer.

Table I-20 — Format of the contents of the Capture Resolution box

| Field name | Size (bits) | Value |
|------------|-------------|------------------|
| VRcN | 16 | $1 - (2^{16}-1)$ |
| VRcD | 16 | $1 - (2^{16}-1)$ |
| HRcN | 16 | $1 - (2^{16}-1)$ |
| HRcD | 16 | $1 - (2^{16}-1)$ |
| VRcE | 8 | -128 — 127 |
| HRcE | 8 | -128 — 127 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.5.3.7.2 Default Display Resolution box

This box specifies a desired display grid resolution. For example, this may be used to determine the size of the image on a page when the image is placed in a page-layout program. However, this value is only a default. Each application must determine an appropriate display size for that application.

The vertical and horizontal display grid resolutions are calculated using the six parameters (Table I-21) stored in this box in the following two equations, respectively:

$$VRd = \frac{VRdN}{VRdD} \times 10^{VRdE} \quad \text{I.6}$$

$$HRd = \frac{HRdN}{HRdD} \times 10^{HRdE} \quad \text{I.7}$$

The values VRd and HRd are always in reference grid points per meter. If an application requires the grid resolution in another unit, then that application must apply the appropriate conversion.

The type of a Default Display Resolution box shall be 'resd' (0x7265 7364). The contents of the Default Display Resolution box are as follows:



Figure I-16 — Organization of the contents of the Default Display Resolution box

- VRdN:** Vertical Display grid resolution numerator. This parameter specifies the $VRdN$ value in Equation I.6, which is used to calculate the vertical display grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- VRdD:** Vertical Display grid resolution denominator. This parameter specifies the $VRdD$ value in Equation I.6, which is used to calculate the vertical display grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- HRdN:** Horizontal Display grid resolution numerator. This parameter specifies the $HRdN$ value in Equation I.7, which is used to calculate the horizontal display grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- HRdD:** Horizontal Display grid resolution denominator. This parameter specifies the $HRdD$ value in Equation I.7, which is used to calculate the horizontal display grid resolution. This parameter is encoded as a 2-byte big endian unsigned integer.
- VRdE:** Vertical Display grid resolution exponent. This parameter specifies the $VRdE$ value in Equation I.6, which is used to calculate the vertical display grid resolution. This parameter is encoded as a two-complement 1-byte signed integer.
- HRdE:** Horizontal Display grid resolution exponent. This parameter specifies the $HRdE$ value in Equation I.7, which is used to calculate the horizontal display grid resolution. This parameter is encoded as a two-complement 1-byte signed integer.

Table I-21 — Format of the contents of the Default Display Resolution box

| Field name | Size (bits) | Value |
|------------|-------------|------------------|
| VRdN | 16 | 1 — $(2^{16}-1)$ |
| VRdD | 16 | 1 — $(2^{16}-1)$ |
| HRdN | 16 | 1 — $(2^{16}-1)$ |
| HRdD | 16 | 1 — $(2^{16}-1)$ |
| VRdE | 8 | -128 — 127 |
| HRdE | 8 | -128 — 127 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.5.4 Contiguous Codestream box

The Contiguous Codestream box contains a valid and complete JPEG 2000 codestream, as defined in Annex A of this Recommendation | International Standard. When displaying the image, a conforming reader shall ignore all codestreams after the first codestream found in the file. Contiguous Codestream boxes may be found anywhere in the file except before the JP2 Header box.

The type of a Contiguous Codestream box shall be 'jp2c' (0x6A70 3263). The contents of the box shall be as follows:



Code

Figure I-17 — Organization of the contents of the Contiguous Codestream box

Code: This field contains a valid and complete JPEG 2000 codestream as specified by Annex A of this Recommendation | International Standard.

Table I-22 — Format of the contents of the Contiguous Codestream box

| Field name | Size (bits) | Value |
|------------|-------------|----------|
| Code | Variable | Variable |

I.6 Adding intellectual property rights information in JP2

This Recommendation | International Standard specifies a box type for a box which is devoted to carrying intellectual property rights information within a JP2 file. Inclusion of this information in a JP2 file is optional for conforming files. The definition of the format of the contents of this box is reserved for ISO. However, the type of this box is defined in this Recommendation | International Standard as a means to allow applications to recognize the existence of IPR information. Use and interpretation of this information is beyond the scope of this Recommendation | International Standard.

The type of the Intellectual Property Box shall be 'jp2i' (0x6A70 3269).

I.7 Adding vendor specific information to the JP2 file format

The following boxes provide a set of tools by which applications can add vendor specific information to the JP2 file format. All of the following boxes are optional in conforming files and may be ignored by conforming readers.

I.7.1 XML boxes

An XML box contains vendor specific information (in XML format) other than the information contained within boxes defined by this Recommendation | International Standard. There may be multiple XML boxes within the file, and those boxes may be found anywhere in the file except before the File Type box.

The type of an XML box is 'xml\040' (0x786D 6C20). The contents of the box shall be as follows:



Figure I-18 — Organization of the contents of the XML box

DATA:This field shall contain a well-formed XML instance document as defined by REC-xml-19980210.

The existence of any XML boxes is optional for conforming files. Also, any XML box shall not contain any information necessary for decoding the image to the extent that is defined within this part of this Recommendation | International Standard, and the correct interpretation of the contents of any XML box shall not change the visual appearance of the image. All readers may ignore any XML box in the file.

I.7.2 UUID boxes

A UUID box contains vendor specific information other than the information contained within boxes defined within this Recommendation | International Standard. There may be multiple UUID boxes within the file, and those boxes may be found anywhere in the file except before the File Type box.

The type of a UUID box shall be 'uuid' (0x7575 6964). The contents of the box shall be as follows:




Figure I-19 — Organization of the contents of the UUID box

ID: This field contains a 16-byte UUID as specified by ISO/IEC 11578:1996. The value of this UUID specifies the format of the vendor specific information stored in the DATA field and the interpretation of that information.

DATA: This field contains the vendor specific information. The format of this information is defined outside of the scope of this standard, but is indicated by the value of the UUID field.

Table I-23 — Format of the contents of a UUID box

| Field name | Size (bits) | Value |
|------------|-------------|----------|
| UUID | 128 | Variable |
| DATA | Variable | Variable |

The existence of any UUID boxes is optional for conforming files. Also, any UUID box shall not contain any information necessary for decoding the image to the extent that is defined within this part of this Recommendation | International Standard, and the interpretation of the information in any UUID box shall not change the visual appearance of the image. All readers may ignore any UUID box.

I.7.3 UUID Info boxes (superbox)

While it is useful to allow vendors to extend JP2 files by adding information using UUID boxes, it is also useful to provide information in a standard form which can be used by non-extended applications to get more information about the extensions in the file. This information is contained in UUID Info boxes. A JP2 file may contain zero or more UUID Info boxes. These boxes may be found anywhere in the top level of the file (the superbox of a UUID Info box shall be the JP2 file itself) except before the File Type box.

These boxes, if present, may not provide a complete index for the UUID's in the file, may reference UUID's not used in the file, and possibly may provide multiple references for the same UUID.

The type of a UUID Info box shall be 'uinf' (0x7569 6E66). The contents of a UUID Info box are as follows:




Figure I-20 — Organization of the contents of a UUID Info box

- UList:** UUID List box. This box contains a list of UUID's for which this UUID Info box specifies a link to more information. The format of the UUID List box is specified in Annex I.7.3.1.
- DE:** Data Entry URL box. This box contains a URL. An application can acquire more information about the UUID's contained in the UUID List box. The format of a Data Entry URL box is specified in Annex I.7.3.2

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000

I.7.3.1 UUID List box

This box contains a list of UUID's. The type of a UUID List box shall be 'ulst' (0x756C 7374). The contents of a UUID List box shall be as follows:



Figure I-21 — Organization of the contents of a UUID List box

- NU:** Number of UUID's. This field specifies the number of UUID's found in this UUID List box. This field is encoded as a 2-byte big endian unsigned integer.
- IDⁱ:** ID. This field specifies one UUID, as specified in ISO/IEC 11578:1996, which shall be associated with the URL contained in the URL box within the same UUID Info box. The number of UUIDⁱ fields shall be the same as the value of the NU field. The value of this field shall be a 16-byte UUID.

Table I-24 — UUID List box contents data structure values

| Parameter | Size (bits) | Value |
|-------------------|-------------|---------------------------|
| NU | 16 | 0 — (2 ¹⁶ −1) |
| UUID ⁱ | 128 | 0 — (2 ¹²⁸ −1) |

I.7.3.2 Data Entry URL box

This box contains a URL which can be used by an application to acquire more information about the associated vendor specific extensions. The format of the information acquired through the use of this URL is not defined in this Recommendation | International Standard. The URL type should be of a service which delivers a file (e.g. URL's of type file, http, ftp, etc.), which ideally also permits random access. Relative URL's are permissible and are relative to the file containing this Data Entry URL box.

The type of a Data Entry URL box shall be 'url\040' (0x7572 6C20). The contents of a Data Entry URL box shall be as follows:




Figure I-22 — Organization of the contents of a Data Entry URL box

- VERS:**Version number. This field specifies the version number of the format of this box and is encoded as a 1-byte unsigned integer. The value of this field shall be 0.
- FLAG:**Flags. This field is reserved for other use to flag particular attributes of this box and is encoded as a 3-byte unsigned integer. The value of this field shall be 0.
- LOC:** Location. This field specifies the URL of the additional information associated with the UUID's contained in the UUID List box within the same UUID info superbox. The URL is encoded as a null terminated string of UTF-8 characters

Table I-25 — Data Entry URL box contents data structure values

| Parameter | Size (bits) | Value |
|-----------|-------------|--------|
| VERS | 8 | 0 |
| FLAG | 24 | 0 |
| LOC | varies | varies |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15444-1:2000