

---

---

**Information technology — Generic digital  
audio-visual systems —**

**Part 1:  
System reference models and scenarios**

*Technologies de l'information — Systèmes audiovisuels numériques  
génériques —*

*Partie 1: Modèles et scénarios de référence système*

IECNORM.COM : Click to view the full PDF of ISO/IEC 16500-1:1999

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 16500-1:1999

© ISO/IEC 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 734 10 79  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

<b>Contents</b>	<b>Page</b>
<b>Foreword</b> .....	<b>v</b>
<b>Introduction</b> .....	<b>vi</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Definitions</b> .....	<b>1</b>
<b>4 Acronyms and abbreviations</b> .....	<b>5</b>
<b>5 Conventions</b> .....	<b>7</b>
<b>6 Abstract System Reference Model</b> .....	<b>7</b>
6.1 Abstract System Reference Model description .....	7
6.1.1 Generic ASRM Instance Example.....	9
6.1.2 Specific ASRM Instance Example .....	10
6.2 Object and interface categories .....	10
6.3 Service layers and planes.....	12
6.4 Reference points and interfaces.....	13
6.5 Reference point and interface template .....	14
<b>7 DAVIC System Reference Model</b> .....	<b>16</b>
7.1 P0 Partition level DSRM .....	16
7.2 P1 Partition level DSRM .....	16
7.2.1 System entities.....	17
7.2.2 Information flows .....	18
7.2.3 Reference points .....	19
7.3 Service Provider System.....	20
7.3.1 Service Provider System Control Plane Elements.....	21
7.3.2 Information Transport Service Models.....	23
7.4 Delivery System .....	25
7.4.1 Delivery System Elements.....	25
7.4.2 Enhanced Broadcast Reference Model (User Plane).....	26
7.4.3 DAVIC System Manager Reference Model (User Plane).....	27
7.5 Service Consumer System .....	27
7.5.1 Set Top Unit .....	28
7.5.2 Human or Machine Peripheral system block.....	29
7.5.3 Generic Service Consumer System model .....	29
<b>8 DAVIC System transaction flow scenarios</b> .....	<b>29</b>
8.1 Functional entity definitions.....	30
8.2 Relationship (information flow) definitions.....	30

8.3	Transaction Flows .....	31
<b>Annex A</b>	(informative) <b>Supplementary definitions</b> .....	<b>32</b>
<b>Annex B</b>	(informative) <b>Acronyms and abbreviations</b> .....	<b>46</b>
<b>Annex C</b>	(informative) <b>Bibliography</b> .....	<b>54</b>
<b>Annex D</b>	(informative) <b>Interface examples</b> .....	<b>55</b>
<b>Annex E</b>	(informative) <b>ISO/IEC 16500 normative and informative references</b> .....	<b>62</b>

IECNORM.COM : Click to view the full PDF of ISO/IEC 16500-1:1999

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 16500 may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 16500-1 was prepared by DAVIC (Digital Audio-Visual Council) and was adopted, under the PAS procedure, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

ISO/IEC 16500 consists of the following parts, under the general title *Information technology — Generic digital audio-visual systems*:

- *Part 1: System reference models and scenarios*
- *Part 2: System dynamics, scenarios and protocol requirements*
- *Part 3: Contours: Technology domain*
- *Part 4: Lower-layer protocols and physical interfaces*
- *Part 5: High and mid-layer protocols*
- *Part 6: Information representation*
- *Part 7: Basic security tools*
- *Part 8: Management architecture and protocols*
- *Part 9: Usage information protocols*

Annexes A to E of this part of ISO/IEC 16500 are for information only.

## Introduction

ISO/IEC 16500 defines the minimum tools and dynamic behavior required by digital audio-visual systems for end-to-end interoperability across countries, applications and services. To achieve this interoperability, it defines the technologies and information flows to be used within and between the major components of generic digital audio-visual systems. Interoperability between these components and between individual sub-systems is assured through specification of tools and specification of dynamic systems behavior at defined reference points. A reference point can comprise one or more logical (non-physical) information-transfer interfaces, and one or more physical signal-transfer interfaces. A logical interface is defined by a set of information flows and associated protocol stacks. A physical interface is an external interface and is fully defined by its physical and electrical characteristics. Accessible reference points are used to determine and demonstrate compliance of a digital audio-visual subsystem with this international standard.

A summary of each part follows.

ISO/IEC 16500-1 (DAVIC 1.3.1a Part 2) defines the normative digital audio-visual systems technical framework. It provides a vocabulary and a Systems Reference Model, which identifies specific functional blocks and information flows, interfaces and reference points.

ISO/IEC 16500-2 (DAVIC 1.3.1a Part 12) defines system dynamic behavior and physical scenarios. It details the locations of the control functional entities along with the normative protocols needed to support the systems behavior. It is structured as a set of protocol walk-throughs, or "*Application Notes*", that rehearse both the steady state and dynamic operation of the system at relevant reference points using specified protocols. Detailed dynamics are given for the following scenarios: video on demand, switched video broadcast, interactive broadcast, and internet access.

ISO/IEC 16500-3 (DAVIC 1.3.1a Part 14) provides the normative definition of DAVIC Technology Contours. These are strict sets of Applications, Functionalities and Technologies which allow compliance and conformance criteria to be easily specified and assessed. This part of ISO/IEC 16500 contains the full details of two contours. These are the Enhanced Digital Broadcast (EDB) and Interactive Digital Broadcast (IDB). ISO/IEC 16500-3 specifies required technologies and is a mandatory compliance document for contour implementations.

ISO/IEC 16500-4 (DAVIC 1.3.1a Part 8) defines the toolbox of technologies used for lower layer protocols and physical interfaces. The tools specified are those required to digitize signals and information in the Core Network and in the Access Network. Each tool is applicable at one or more of the reference points specified within the Delivery System. In addition a detailed specification is provided of the physical interfaces between the Network Interface Unit and the Set Top Unit and of the physical interfaces used to connect Set Top Boxes to various peripheral devices (digital video recorder, PC, printer). The physical Delivery System mechanisms included are copper pairs, coaxial cable, fiber, HFC, MMDS, LMDS, satellite and terrestrial broadcasting.

ISO/IEC 16500-5 (DAVIC 1.3.1a Part 7) defines the technologies used for high and mid-layer protocols for ISO/IEC 16500 digital audio-visual systems. In particular, this part defines the specific protocol stacks and requirements on protocols at specific interfaces for the content, control and management information flows.

ISO/IEC 16500-6 (DAVIC 1.3.1a Part 9) defines what the user will eventually see and hear and with what quality. It specifies the way in which monomedia and multimedia information types are coded and exchanged. This includes the definition of a virtual machine and a set of APIs to support interoperable exchange of program code. Interoperability of applications is achieved, without specifying the internal design of a set top unit, by a normative Reference Decoder Model which defines specific memory and behavior constraints for content decoding. Separate profiles are defined for different sets of multimedia components.

ISO/IEC 16500-7 (DAVIC 1.3.1a Part 10) defines the interfaces and the security tools required for an ISO/IEC 16500 system implementing security profiles. These tools include security protocols which operate across one or both of the defined conditional access interfaces CA0 and CA1. The interface CA0 is to all security and conditional access functions, including the high speed descrambling functions. The interface CA1 is to a tamper resistant device used for low speed cryptographic processing. This cryptographic processing function is implemented in a smart card.

ISO/IEC 16500-8 (DAVIC 1.3.1a Part 6) specifies the information model used for managing ISO/IEC 16500 systems. In particular, this part defines the managed object classes and their associated characteristics for managing the access network and service-related data in the Delivery System. Where these definitions are taken from existing standards, full reference to the required standards is provided. Otherwise a full description is integrated in the text of this part. Usage-related information model is defined in ISO/IEC 16500-9.

ISO/IEC 16500-9 (DAVIC 1.3.1a Part 11) specifies the interface requirements and defines the formats for the collection of usage data used for billing, and other business-related operations such as customer profile maintenance. It also specifies the protocols for the transfer of Usage Information into and out of the ISO/IEC 16500 digital audio-visual system. In summary, flows of audio, video and audio-visual works are monitored at defined usage data collection elements (e.g. servers, elements of the Delivery System, set-top boxes). Information concerning these flows is then collected, processed and passed to external systems such as billing or a rights administration society via a standardised usage data transfer interface.

### **Additional Information**

ISO/IEC TR 16501 is an accompanying Technical Report. Further architectural and conformance information is provided in other non-normative parts of DAVIC 1.3.1a (1999). A summary of these documents is included here for information.

ISO/IEC TR 16501 (DAVIC 1.3.1a Part 1) provides a detailed listing of the functionalities required by users and providers of digital audio-visual applications and systems. It introduces the concept of a contour and defines the IDB (Interactive Digital Broadcast) and EDB (Enhanced Digital Broadcast) functionality requirements which are used to define the normative contour technology toolsets provided in ISO/IEC 16500-3.

DAVIC 1.3.1a Parts 3, 4 and 5 are DAVIC technical reports. They provide additional architectural and other information for the server, the delivery-system, and the Service Consumer systems respectively. Part 3 defines how to load an application, once created, onto a server and gives information and guidance on the protocols transmitted from the set-top user to the server, and those used to control the set-up and execution of a selected application. Part 4 provides an overview of Delivery Systems and describes instances of specific DAVIC networked service architectures. These include physical and wireless networks. Non-networked delivery (e.g. local storage physical media like discs, tapes and CD-ROMs) are not specified. Part 5 provides a Service Consumer systems architecture and a description of the DAVIC Set Top reference points defined elsewhere in the normative parts of the specification.

DAVIC 1.3.1a Part 13 is a DAVIC technical report, which provides guidelines on how to validate the systems, technology tools and protocols through conformance and/or interoperability testing.

[IECNORM.COM](http://IECNORM.COM) : Click to view the full PDF of ISO/IEC 16500-1:1999

# Information technology — Generic digital audio-visual systems — Part 1: System reference models and scenarios

## 1 Scope

This part of ISO/IEC 16500 describes an Abstract System Reference Model (ASRM) at the highest level first and then creates a specific instance of this abstract model to define the DAVIC System Reference Model (DSRM). The ASRM and DSRM are not intended to indicate preferred implementations of the DAVIC System; but are to be used as a tool to guide the definition of DAVIC specifications. Additionally, as DAVIC specifications are issued, the reference models can be used to aid the development and implementation of DAVIC-compliant systems and products.

## 2 Normative references

ISO/IEC 16500-1 does not contain any normative references.

See Annex C and Annex E for a list of documents referenced in ISO/IEC 16500.

## 3 Definitions

This clause defines new terms, and the intended meaning of certain common terms, used in this part of ISO/IEC 16500. Annex A defines additional terms and, in some cases, alternative interpretations that are appropriate in other contexts. For convenience, the normative definitions below are included in the annex.

**3.1 Access Node:** the element of the Access Network containing centralized functions responsible for processing information flows in preparation for transport through the selected distribution network.

**3.2 Application Service Layer (SL1):** a collection of associated objects that use or provide an application service to peers and to SL0 client objects, e.g., application control such as audio/video stream playback functions and ISP-provided applications such as LIGW services.

**3.3 application:** a set of objects that provides an environment for processing Application Service Layer information flows.

**3.4 behavior:** in SDL, behavior is either:

- a) externally observable behavior: the set of sequences of responses of a system to sequences of stimuli, or
- b) internally observable behavior: a set of actions and tasks, triggered by a stimulus, executed before the state machine transitions to another state.

**3.5 block:** a part of a system or parent block that is the container for one or more processes of one block substructure. A block is a scope unit and provides a static interface. When used by itself, block is a synonym for block instance.

**3.6 call:** (in signaling) an association between two or more users, or between a user and a network entity, that is established by use of network capabilities. This association may have zero or multiple information exchange mechanisms established within this call, for example in connection-oriented or in connectionless modes.

**3.7 channel:** a connection conveying signals between two blocks (the conveyed signals represent information). Channels also convey signals between a block and the environment. Channels may be unidirectional or bi-directional.

**3.8 client:** a service consuming object or system (block); (a synonym for **user**).

**3.9 conditional access:** a means of allowing system users to access only those services that are authorized to them.

**3.10 connect:** indicates the connection of a channel to one or more signal routes or the interconnection of signal routes.

- 3.11 connection:** an association of transmission channels or circuits, switching and other functional units set up to provide a means for a transfer of user, control and management information between two or more end points (blocks) in a telecommunications network.
- 3.12 Connectivity Entity:** the Connectivity Entity is responsible for the error-free receipt and transmission of content flow information to and from the STU.
- 3.13 content-information:** information that does not alter the state of the object intercepting the information flow, e.g., audio, video, or data in a television program that is processed transparently by a television receiver (the control state of the receiver will not change as a result of such information)
- 3.14 control-information:** information that may change the state of the object intercepting the information flow, e.g., a remote control channel up command input. (In some cases an object may interpret a message but reject a request and remain in its current state.)
- 3.15 Control Plane (CP):** a classification for objects that interact to establish, maintain, and release resources and provide session, transport, and connection control functions that facilitate transparent information transfers between ISP clients.
- 3.16 Content Provider:** one who owns or is licensed to sell content.
- 3.17 Content Service Element:** the Content Service Element provides the processing required by the Service Provider System when content-information is being loaded to the server.
- 3.18 Core Network:** a portion of the Delivery System composed of networks, systems, equipment and infrastructures, connecting the Service Providers to the Access Networks.  
NOTE: The term Core Network, in the DAVIC use, is wide sense as it includes the notion of the access networks that are needed to link the Service Providers Systems to the Core Network in strict sense (i.e., exclusive of any access network).
- 3.19 Delivery System (DS):** the portion of the DAVIC System that enables the transfer of information between DS-users.
- 3.20 Distribution Network:** a collection of equipment and infrastructures that delivers information flows from the Access Node to the Network Termination elements of the Access Network.
- 3.21 domain:** a scope that delimits (makes clear what is included and what is not) the extent of influence of one object on another. Domain boundaries may represent regulatory, ownership, span-of-control and other influence factors.
- 3.22 End-Service Consumer (ESC):** a user, either human or machine, whose primary interaction with the system is through the STU.
- 3.23 End-Service Consumer System (ESCS):** a system that (predominantly) consumes information. ESCSs are ISPS and ESPS clients. The ESCS includes the STU and the ESC.
- 3.24 End-Service Provider (ESP):** an entity with jurisdiction over a domain that contains a system that (predominantly) provides information to clients.
- 3.25 End-Service Provider System (ESPS):** a system that (predominantly) provides information to clients. ESPSs are ISPS clients and may also be clients of other ESPSs. ESPSs consist of hardware and software sub-systems that use ISP services to provide video and multimedia services to ESCSs.
- 3.26 environment:** a synonym for the environment of a system. Also when context allows, it may be a synonym for the environment of a block, process, procedure, or service.
- 3.27 Environment Entity:** this entity is responsible for establishing and terminating the environment in which an application will operate. This environment includes the quality of service requirements for both the application and product entities.
- 3.28 error:** an error occurs during the interpretation of a valid specification of a system when one of the dynamic conditions of SDL is violated. Once an error has occurred, the subsequent behavior of the system is not defined.
- 3.29 function:** features of a Digital Audio-Visual System that are realized through Services. For example, interactive play control (VCR-type controls) is a function. (See also **service**).

- 3.30 information flow:** the transfer of information from an information-source-object to an information-destination-object.
- 3.31 instance:** the definition of an object with all its properties. An instance of a type is an object which has all the properties of the type as given in the type definition.
- 3.32 interface:** a point of demarcation between two blocks through which information flows from one block to the other. See logical and physical interface definitions for further details. A DAVIC interface may be physical-interface or a logical-interface.
- 3.33 Intermediate-Service Provider (ISP):** ISPs provide adjunct services and convey information among ESPs and ESCs.
- 3.34 layer:** a collection of objects of the same hierarchical rank.
- 3.35 logical interface:** an interface where the semantic, syntactic, and symbolic attributes of information flows is defined. Logical interfaces do not define the physical properties of signals used to represent the information. A logical interface can be an internal or external interface. It is defined by a set of information flows and associated protocol stacks.
- 3.36 Management Entity:** the Management Entity is responsible for the operation and maintenance functions of a network. Several instances of information flow S5 exist for the Management entity.
- 3.37 Management Plane (MP):** a plane that contains those interfaces and functions which support interactions which may be typified as being temporally disjoint from an off-hook interaction. Interactions among Management Plane objects may also occur concurrently with an off-hook interaction.
- 3.38 management-information:** information exchanged by Management Plane objects; may be content-information or control-information.
- 3.39 name:** a lexical unit used to name SDL objects.
- 3.40 Network Interface Unit (NIU):** the NIU accepts network specific content-information flows from the Delivery System and provides a non-network specific interface to the Connectivity Entity in the STU. (additional definitions of the NIU may exist).
- 3.41 Network Related Control:** the Network Related Control entity provides control functions for network configuration, connection establishment and termination and information routing in a network instance of a Delivery System.
- 3.42 Network Service Access Point (NSAP):** an interface between SL2 Session and Transport Service Layer and SL3 Network Service Layer objects through which the SL3 (server) objects provide services to the SL2 (client) object.
- 3.43 Network Service Layer (SL3):** a collection of objects that enable client objects to communicate with remote peers: SL3 objects provide basic lower-layer network services such as addressing/routing, connection services, and physical layer services to SL2 clients.
- 3.44 Network Termination (NT):** the element of the Access Network performing the connection between the infrastructure owned by the Access Network operator and the Service Consumer System (ownership decoupling). The NT can be passive or active, transparent or not.
- 3.45 network:** a collection of interconnected elements that provides connection services to users.
- 3.46 partition:** a decomposition or subdivision of an object into smaller objects; the created objects are peers with respect to each other, but are hierarchically subordinate to the original partitioned object.
- 3.47 partitioning:** the subdivision of a unit into smaller components which when taken as a whole have the same behavior as the original unit. Partitioning does not affect the static interface of a unit.
- 3.48 peer:** of the same rank or order: peer objects belong to the same layer (category or classification).
- 3.49 physical interface:** an interface where the physical characteristics of signals used to represent information and the physical characteristics of channels used to carry the signals are defined. A physical interface is an external interface. It is fully defined by its physical and electrical characteristics. Logical information flows map to signal flows that pass through physical interfaces.

- 3.50 plane:** a category that identifies a collection of related objects, e.g., objects that execute similar or complementary functions; or peer objects that interact to use or to provide services in a class that reflects authority, capability, or time period. Management-plane service objects, for example, may authorize ISP-clients' access to certain control-plane service objects that in turn may allow the clients to use services provided by certain user-plane objects.
- 3.51 port:** an abstraction used by transport protocols to distinguish among multiple destinations associated with particular applications running on a host computer: an application can specify the ports it wants to use; some ports are reserved for standard applications/services such as e-mail (also known as well-known ports).
- 3.52 Principal Service Layer (SL0):** a collection of associated objects that interact with peers to use or provide principal service, e.g., sending or receiving and presenting content-information such as movies, music, or stock market data to the end information users (human or machine); SL0 objects rely on services provided by SL1 objects.
- 3.53 principal service:** the top service class of peer objects interacting in some defined context.
- 3.54 process:** a communicating extended finite state machine. Communication can take place via signals or shared variables. The behavior of a process depends on the order of arrival of signals in its input port.
- 3.55 Product Entity:** the entity in the STU responsible for accepting transparent content-information and presenting the information to the appropriate using machine.
- 3.56 protocol:** set of message formats (semantic, syntactic, and symbolic rules) and the rules for message exchange between peer layer entities (which messages are valid when).
- 3.57 provider:** an object that interacts with clients or users.
- 3.58 reference point:** a set of interfaces between any two related blocks through which information flows from one block to the other. A reference point comprises one or more logical (non-physical) information-transfer interfaces, and one or more physical signal-transfer interfaces.
- 3.59 S1:** content-information flow, from a source to a destination object on the User Plane of any service layer.
- 3.60 S2:** control-information flow from a source to a destination object on the Control Plane of the Application Service Layer (SL1).
- 3.61 S3:** control-information flow from a source to a destination object on the Control Plane of the Session and Transport Service Layer (SL2).
- 3.62 S4:** control-information flow from a source to a destination object on the Control Plane of the Network Service Layer (SL3).
- 3.63 S5:** management-information flow from a source to a destination object on the Management Plane of the container object: the objects may be peers (service layer is known), or the service layer may be unspecified.
- 3.64 server:** any service providing system.
- 3.65 service:** a set of elementary streams offered to the user as a program. They are related by a common synchronization. They may be made of different data, eg. video, audio, subtitles, other data.
- 3.66 service layer:** a set of **service objects** of the same hierarchical rank.
- 3.67 service object:** an object characterized in terms of the services it uses or provides, and not in terms of the physical attributes: different real systems may use or provide identical services.
- 3.68 Service Provider:** an entity that provides a service to a client.
- 3.69 Service Related Control:** an entity that provides all control functions for the services that are offered by a network instance of the Delivery System. The DSRM allows for SL0, SL1 and SL2 Service Related Control subsets.
- 3.70 Session and Transport Service Layer (SL2):** a collection of objects that interact to establish and maintain an environment for local or remote application-layer services; client of network services when remote services are used or provided: SL2 objects provide session services over reliable transport to SL1 clients.

- 3.71 Session Control Function:** this entity, in a Service Provider System, is responsible for establishing and terminating the environment in which an application will operate. This environment includes the quality of service requirements for both the application and product entities.
- 3.72 Session Service Access Point (SSAP):** an interface between an Application Service Layer and a Sessions and Transport Service Layer through which SL2 (server) objects provide services to SL1 (client) objects.
- 3.73 session services:** provide basic functions to create, modify, maintain, and tear down sessions (negotiate and allocate network resources).
- 3.74 session:** an interval during which a logical, mutually agreed correspondence between two objects exists for the transfer of related information. A session defines a relationship between the participating users in a service instance.
- 3.75 Set Top Box (STB):** a module that comprises both Set Top Unit (STU) and Network Interface Unit (NIU) functional elements. The STB may be either “integrated” or “modular”. An integrated STB is designed for connection to a single DAVIC A1 or equivalent interface. A modular STB may be equipped with a DAVIC A0 or equivalent interface to enable connection of a range of NIUs.
- 3.76 Set Top Unit (STU):** a module that contains the “network independent” functionalities of a Set Top Box (STB). The following functionalities are contained in a typical STU:- Processing & Memory Functions; MPEG2 Demux & AV Decoders; Graphics Display; Modulator Output for TV; Peripheral Interfaces.
- 3.77 signal:** an instance of a defined signal type representing information meaningful to a process instance.
- 3.78 specification:** a definition of the requirements of a system. A specification consists of general parameters required of the system and the functional specification of its required behavior. Specification may also be used as a shorthand for specification and/or description, e.g., in SDL specification or system specification.
- 3.79 Stream Service Element:** this Service Provider System entity allows for the processing of the content-information flows at the stream level. The content stream is a sub-set of the actual content-information flow and processing at the stream level allow the ability to uniquely align a service offering.
- 3.80 subsystem:** a decomposition of a system into smaller collections of objects; decomposition may be performed recursively.
- 3.81 system:** a collection of interacting objects that serves a useful purpose; typically, a primary subdivision of an object of any size or composition (including domains).
- 3.82 transparent information:** information that is not significant semantically to an object used to transport the information.
- 3.83 type:** a set of properties for instances. Examples of types in SDL include blocks, processes, services, signals, and systems. [1]-mod.
- 3.84 User Plane (UP):** a classification for objects whose principal function is to provide transfer of (end) user information: user information may be user-to-user content (e.g., a movie), or private user-to-user data.
- 3.85 user:** a service consuming object or system (block).

## 4 Acronyms and abbreviations

This clause defines the acronyms and abbreviations used in this part of ISO/IEC 16500. Annex B defines acronyms and abbreviations used within ISO/IEC 16500. For convenience, the definitions below are included in the annex.

AAL	ATM Adaptation Layer
ADSL	Asymmetric Digital Subscriber Line
AE	Application Entity
AN	Access Network, or
ANSI	American National Standards Institute
API	Application Programming Interface
ASAP	Application(-Service-Layer) Service Access Point
ASE	Application Service Element

ASN.1	Abstract Syntax Notation 1
ASRM	Abstract System Reference Model
ATM	Asynchronous Transfer Mode
BasicL1GW	Basic Level 1 Gateway
CCITT	Comité Consultatif International Telegraphique et Telephonique
CLNP	Connectionless Network Protocol
CMIP	Common Management Information Protocol
CP	Control Plane
CPS	Content Provider System
DIS	Draft International Standard
DS	Delivery System, or
DSM-CC	Digital Storage Media - Command and Control
DSRM	DAVIC System Reference Model
ECM	Entitlement Control Message
EMM	Entitlement Management Message
EnhancedL1GW	Enhanced Level 1 Gateway
ESC	End Service Consumer
ESCS	End-Service Consumer System
ESP	End Service Provider
ESPS	End-Service Provider System
GIOP	Generic Inter-ORB Protocol
HDTV	High Definition Television
IDL	Interface Definition Language
IEC	International Electrotechnical Commission
IIOP	Internet Inter-ORB Protocol, or Internet Inter-Object Protocol
IP	Internet Protocol
IPR	Intellectual Property Rights
ISO	International Organization for Standardization
ISP	Intermediate Service Provider
ITU	International Telecommunications Union
L1GW	Level 1 Gateway
L2GW	Level 2 Gateway
MHEG	Multimedia and Hypermedia information coding Experts Group
MP	Management Plane
MPEG	Moving Picture Experts Group
NIF	Network Interface Function
NIU	Network Interface Unit
NMS	Network Management System
NNI	Network Node Interface
NSAP	Network Service Access Point
NT	Network Termination
OAM	Operation Administration and Maintenance
OMG	Object Management Group
OS	Operating System
OSB	Output Signal Balance
OSI	Open Systems Interconnection (Reference Model)
PES	Packetized Elementary Stream
RPC	Remote Procedure Call
SAAL	Signaling ATM Adaptation Layer
SAP	Service Access Point
SC	Scrambling
SCS	Service Consumer System
SDL	Specification and Description Language, or
SGW	Service Gateway
SL0	Principal Service Layer identifier
SL1	Application Service Layer identifier
SL2	Session and Transport Service Layer identifier
SL3	Network Service Layer identifier

SNMP	Simple Network Management Protocol
SPS	Service Provider System
SSAP	Session Service Access Point
SSCF	Service Specific Coordination Function
SSCOP	Service Specific Connection Oriented Protocol
STB	Set-Top Box
STU	Set-Top Unit
TBD	To be defined
TC	Transmission Convergence
TCP	Transmission Control Protocol
TDMA	Time Division Multiple Access
TMN	Telecommunication Management Network
TSB	Telecommunication Standardization Bureau
TV	Television
UDP	User Datagram Protocol
UNI	User-Network Interface
UNO	Universal Networked Object
UP	User Plane
VASP	Value-Added Service Provider
VCR	Video Cassette Recorder
VOD	Video-On-Demand

## 5 Conventions

The style of this part of ISO/IEC 16500 follows the *Guide for ITU-T and ISO/IEC JTC 1 cooperation. Appendix II: Rules for presentation of ITU-T / ISO/IEC common text* (March 1993).

## 6 Abstract System Reference Model

This clause describes an Abstract System Reference Model (ASRM) that establishes a set of basic building blocks and relationships that are used in clause 7 to develop the DAVIC System Reference Model (DSRM). The ASRM is a hierarchical model that allows the external behavior of a set of system blocks at a given partition level to be described completely by characterizing their external interfaces. Interface descriptions capture all essential properties of interacting objects including all logical information flows and protocols used to communicate, as well as physical signals and channel characteristics used to represent and convey information between blocks. As much detail as is necessary to define a relationship may be represented by the ASRM by partitioning system blocks to any desired depth.

### 6.1 Abstract System Reference Model description

Figure 6.1-1 shows the overall Abstract System Reference Model at the highest level. The ASRM is organized as a hierarchical structure. The hierarchical partitions are labeled  $P_0$ ,  $P_1$ ,  $P_2$ ... in the figure. Each partition represents an abstraction level that masks the details of hierarchically-lower levels. The partitioning process may be applied recursively to any desired depth to reveal all necessary details that define a system's interfaces and behavior.

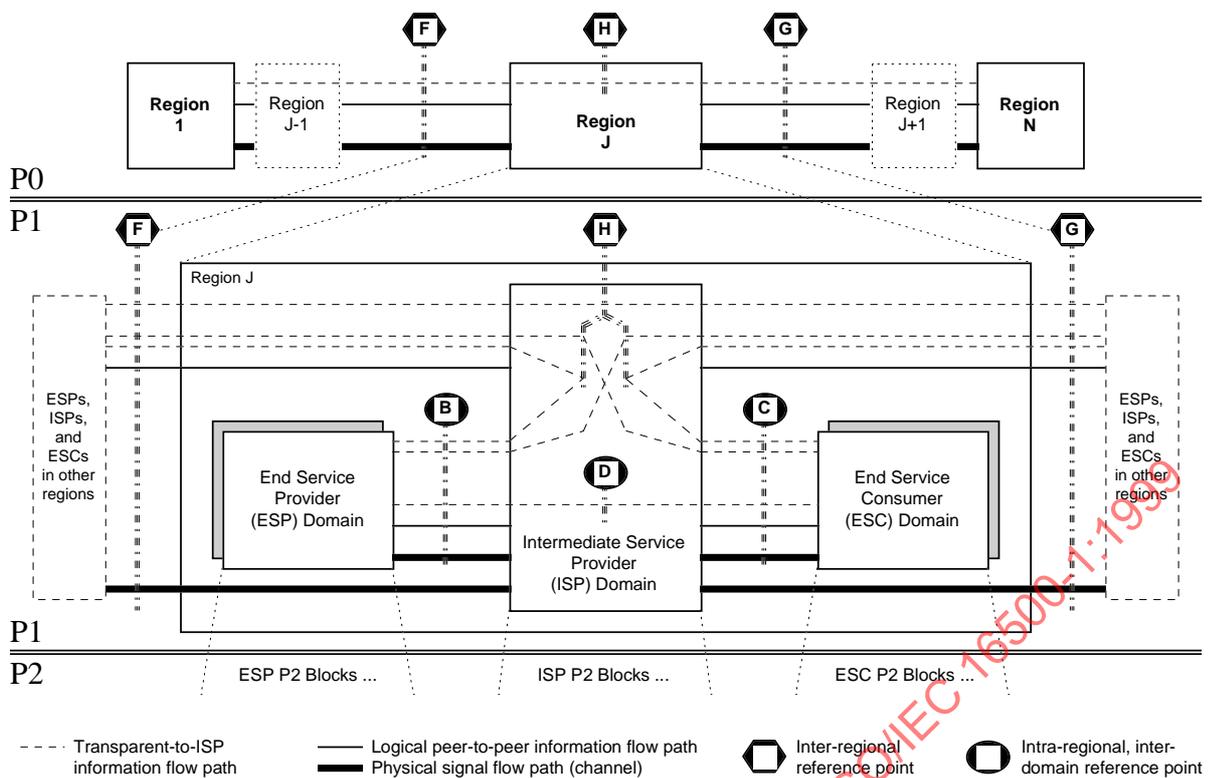


Figure 6.1-1 — Abstract System Reference Model

The P0 partition in Figure 6.1-1 is the highest abstraction level used in the ASRM to delimit objects on the basis of regulatory domains. At this level, the complete DAVIC System is seen as an array of blocks, named *regions*, joined by lines representing information flows from one block to another. The boundaries of regulatory domains are determined by national or regional laws and regulations. Where necessary, large regions may be subdivided into sub-regions on the basis of geographical, political, business, technological, or other factors.

### Reference points

A reference point represents a set of interfaces between any two related blocks through which information flows from one block to the other. A reference point comprises one or more logical (non-physical) information-transfer interfaces, *and* one or more physical signal-transfer interfaces. Physical signals flow from one block to another through one or more channels connecting the blocks. The signals represent the information transferred through logical interfaces in some appropriate manner.

Reference Points F and G represent sets of interfaces carrying information between adjacent regions. Reference Point H represents interfaces through which transparent information flows from one side of Region J to the other.

### Information flows and flow paths

The model depicts a general case where information flows between Region 1 and Region N via an intermediate Region J. Region 1 is simply the first subdivision block of the DAVIC System, and Region N is the last identified block in the model. *N* can be any value.

The Region-J block represents any intermediate block through which information flows transparently between objects in Region 1 and Region N. Information may originate from, terminate in, or pass transparently through Region J. Regions J-1 and J+1 illustrate cases with information flow paths that comprise two or more segments.

### Partition level P1 blocks

The P1-partition-level magnified view of Region J shown in Figure 6.1-1 illustrates different types of information flows through reference points. Reference Point H includes interfaces through which information passes from one side of the ISP to the other, interfaces that reflect information flows between a Region-J object and an object in

another region. (Non-transparent inter-regional information flows that originate or terminate at the ISP are defined at Reference Point F or G, but not at H.)

Each region may contain different configurations of objects that are not visible at the P0 partition level but do become visible at the P1 partition level. The expanded view of Region J in Figure 6.1-1 shows that, in this case, the region contains three objects:

- End-Service Provider (ESP), an
- Intermediate-Service Provider (ISP) and an
- End-Service Consumer (ESC).

There may be more than one instance of each object type in a region. The model represents a set of possible relationships for a representative ESP, ISP, and ESC triplet.

Reference Point B represents a set of ESP-ISP interfaces that are local to the region and a set of ESP interfaces to objects in other regions. External ESP interfaces map to Reference Points F or G: via H.

Reference Point C represents a set of ISP-ESC interfaces that are local to the region and a set of ESC interfaces to objects in other regions. External ESC interfaces map to Reference Points F or G: via H.

Reference point D represents a set of interfaces between ESPs and ESCs in the same region. Information flowing through Reference Point D is transparent to the ISP.

Reference Point H represents transparent information-flow interfaces through the ISP. The flows may originate or terminate in the region at an ESP or an ESC, or they may pass solely through the ISP.

### 6.1.1 Generic ASRM Instance Example

A generic ASRM instance example of a region that reveals some possible P1 and P2-partition objects is shown in Figure 6.1-2. The model subdivides the ESP, ISP, and ESC (P1-partition objects) into two categories: Principal-Service and Communication-Service (P2-partition objects). The first category contains objects whose primary function is to provide end-to-end services to peers. The second category contains objects whose primary function is to support the communication needs of the Principal-Service objects. Reference point E represents a set of interfaces within the Communications Service Objects block through which transparent-to-ISP information flows between the ESP and ESC clients of the ISP.

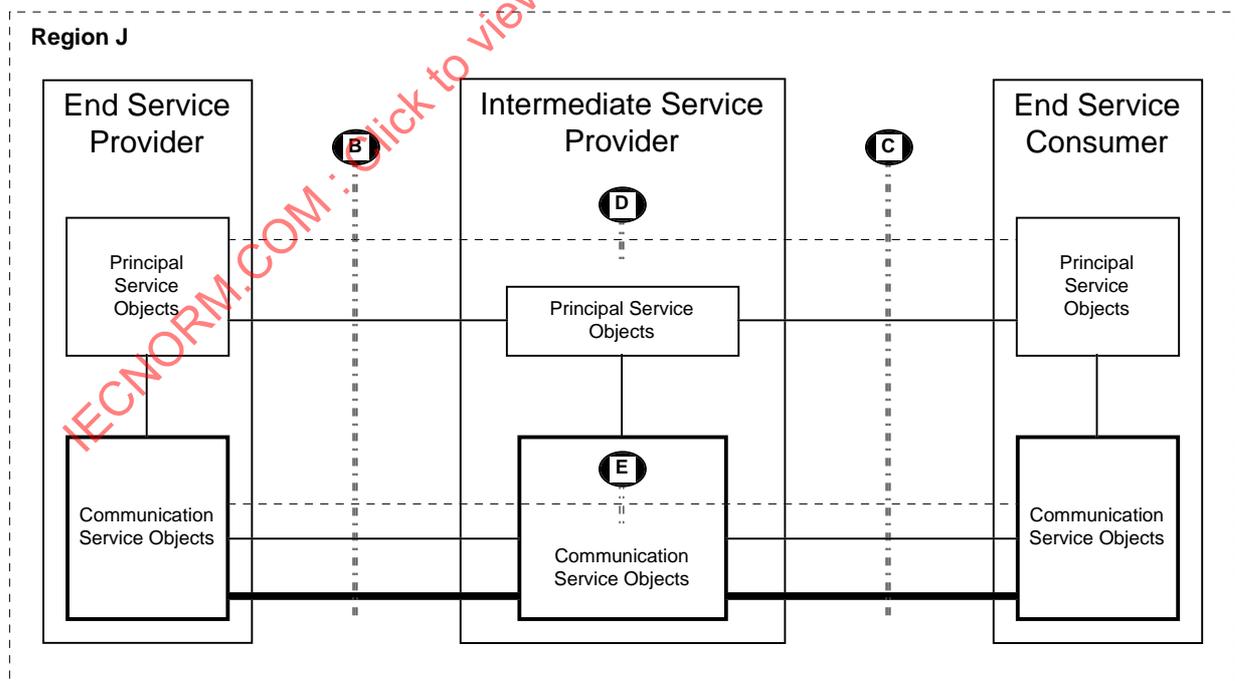


Figure 6.1-2 — Generic ASRM instance example

### 6.1.2 Specific ASRM Instance Example

An example of how the ASRM may be used to represent various P2-partition subsystems in a Video-on-Demand (VOD) instance is shown as Figure 6.1-3. The example is intended to illustrate a simple application of the ASRM and does not reflect any particular or a preferred VOD-service configuration. Note the progression from abstract object names to more specific names that are meaningful in a given context. The example illustrates how abstract views may be replaced by more concrete views while the general shape and relationships of the abstract model are preserved. Retaining the basic form and interfaces of the ASRM allows different parts of a complex model to be defined in greater detail while safeguarding fundamental relationships among larger container objects.

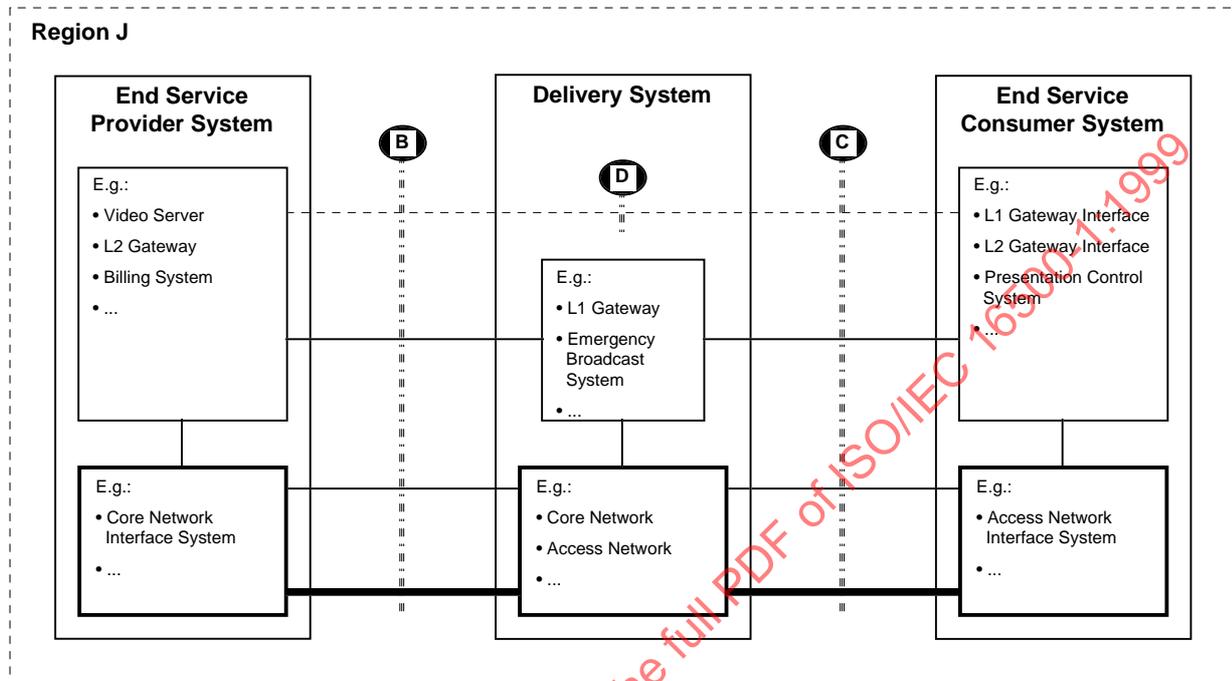



Figure 6.1-3 — VOD instance example

### 6.2 Object and interface categories

Figure 6.2-1 shows an object that contains smaller objects classified into user, control, and management categories. In the ASRM, each category maps to a plane.

To keep the ASRM as simple as possible, peer-to-peer information exchanges can occur only between objects in the same category (plane).

All external interfaces that are specified must be specified fully, including all protocol stacks required to support the information transfer needs of objects on the U, C, and M planes.

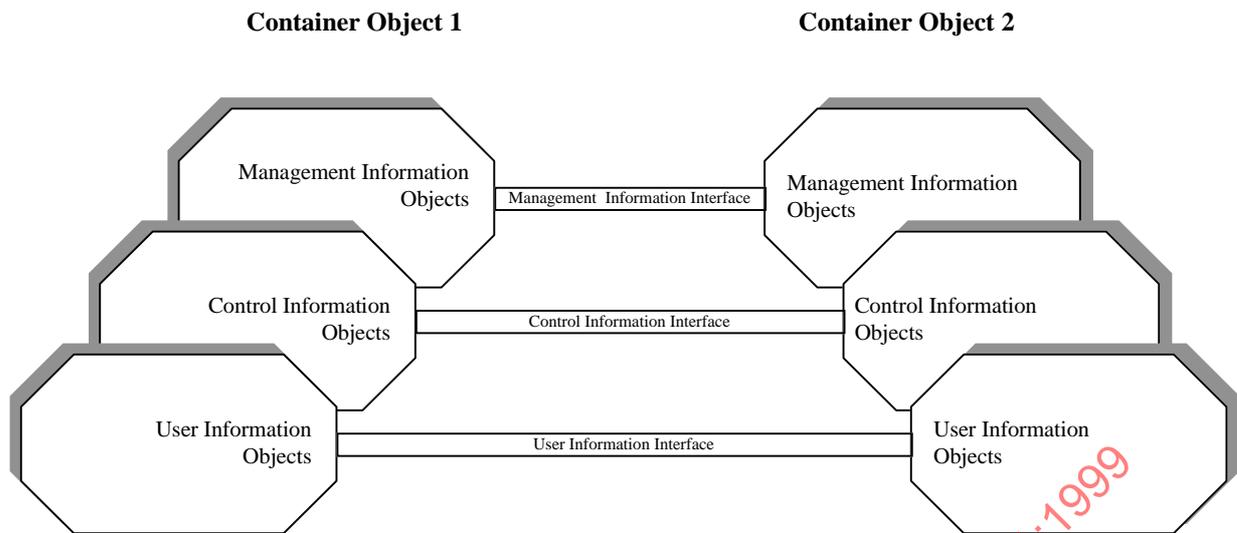

**Figure 6.2-1 — Object and interface categories**

Three logical interface categories are defined in the ASRM: User, Control, Management. Each logical interface must map to a physical interface if information transfer between objects is to take place. The ASRM classifies all physical interfaces into one category. In the model, a given logical interface category may be null if there are no objects in the system assigned to that category. In such cases, the category is null.

The logical interface categories in the ASRM are:

#### **User Plane interface category**

The User Plane interface category provides for transparent user information flow transfer between objects. The transfer of information is significant only to the sender and receiver objects. Only those characteristics of the signal necessary to convey the signals from source to destination need to be known publicly. To what use such information is put is known only to the sender and receiver(s) of the information. In the case of multimedia services or applications, user information may be user-to-user content (e.g., a movie, bulk data download as part of a service application), or private user-to-user data.

#### **Control Plane interface category**

The Control Plane interface category provides for the flow of information between control objects in any protocol layer. In the case of network protocol layers, performs the call control and connection control functions (e.g., network connection control). It deals with the signaling necessary to set up, supervise and release calls and connections (e.g., Set Top Unit to Service Provider System connect sequence).

#### **Management Plane interface category**

The Management Plane interface category provides for the flow of information between management objects in any protocol layer. It performs management functions (e.g., fault, configuration, accounting, performance, security) related to the system as a whole and provides coordination between all interface categories. In addition, it performs management functions (e.g., meta-signaling, operations and maintenance information flows) relating to resources and parameters residing in the protocol layers of the other categories.

#### **Physical interface category**

The physical interface category represents the physical description of the interface (e.g., the properties of the directly interconnected physical components).

### 6.3 Service layers and planes

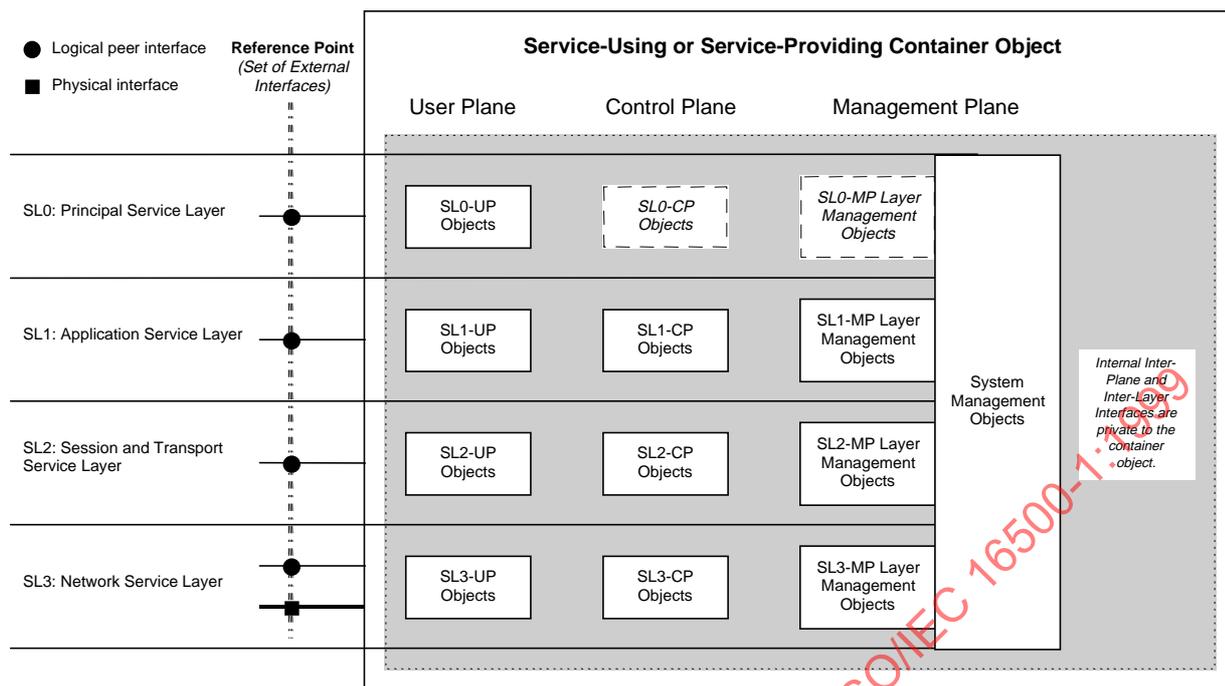


Figure 6.3-1 — Service layers and planes

#### Container object partitions

Service layers are partitions of a container object. A service layer contains a set of objects that interact with peers in another block (a container object in the same or in another system) to use or perform services for one another. A service-layer-view of an object focuses primarily on properties that are important for peer-to-peer interactions and not on how the objects are implemented.

User, Control, and Management Planes provide a second dimension for categorizing objects based on their functional capabilities.

#### Container object external interfaces

Each service layer has an external interface through which all logical peer-to-peer service interactions occur. Service interactions consist of sequences of information flows from an information source object in one container object sending a message to an information destination object in another container object. There may be user, control, or management information flows through any given interface if the service layer contains objects assigned to corresponding planes. Each such information flow constitutes a logical communication channel between interacting peers.

Signals representing logical information flows between objects, in any service layer or plane, flow from one container object to another through each object's SL3 external physical interface.

The set of external logical interfaces together with the external physical interface constitutes a reference point between two container objects through which all information flows take place, and therefore, through which all services are exchanged.

Four service layers are shown in Figure 6.3-1:

#### SL0: Principal Service Layer

These are the principal services used to achieve some fundamental purpose. SL0 objects are local SL1 service clients.

NOTE: No SL0-CP or SL0-MP objects are defined in this international standard at this time. The dashed outline blocks shown in Figure 6.3-1 are placeholders to indicate where such objects would go if the scope of the international standard included them.

**SL1: Application Service Layer**

Application services are resources that support the needs of the principal Service Consumers and service providers. Application services may be local to a domain, or may use remote services provided by a service object in another domain. Application services have a logical peer interface and use SL2 services to communicate.


**SL2: Session and Transport Service Layer**

Session and transport services establish and maintain end-to-end communication capabilities for SL1 clients.

**SL3: Network Service Layer**

The Network Service Layer is the only layer that has physical communication links to other systems. All logical peer-service interaction information is carried in physical channels that interconnect SL3 service objects in linked domains.

**6.4 Reference points and interfaces**

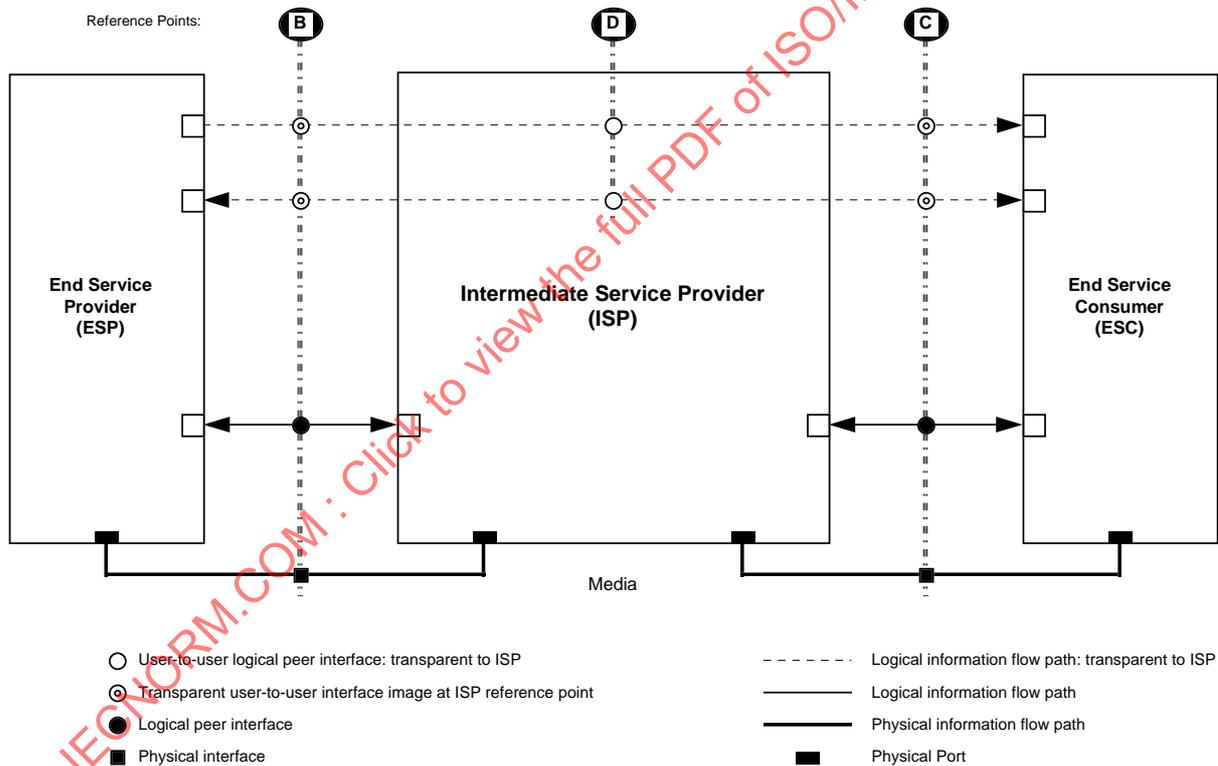

**Figure 6.4-1 — Reference points and interfaces**

Figure 6.4-1 illustrates the relationship between reference points and logical and physical interfaces. A reference point is a named set of defined interfaces through which information sources can transfer information to information sinks. To ensure interoperability, interacting systems must comply with the functional requirements and with the interface requirements specified at a given reference point for a given set of services.

The following factors determine the relationships in a series of interfaces that intercept a given information flow:

- Semantics of the information flow (meaning of the information to intercepting objects): Is the information identical at all interfaces? Is it significant to an intercepting object?

- Syntax of the information flow (grammar): if altered along the way, may change the semantics. Is the syntax significant to an intercepting object?
- Symbolic representation of the information flow: different sets of symbols may be used to represent identical information flows.
- Physical signal representation of the logical symbolic representation of the information flow: different signals may be used to represent identical symbols.

Reference Point D in Figure 6.4-1 consists of two logical interfaces between an ESP and an ESC. Information flow through one interface is unidirectional, and bi-directional through the other. The information flows are transparent to the ISP at the semantic and syntactic levels. The ISP intercepts and processes such information flows only at the symbolic level. The symbols are recovered from incoming signal flows, pass through the ISP from one side to the other and exit the ISP represented by output signal flows. Input and output signal flows need not be identical to preserve unaltered information flows through the ISP.

Information flows through Reference Point D in Figure 6.4-1 also intersect Reference Points B and C. It is not sufficient to define interfaces only at Reference Point D, or at Reference Points B and C together (while omitting the definition of a Reference Point D interface) in all cases. There are three relationships, which may not be identical, that need to be preserved: a) ESP and ESC, b) ESP and ISP, and c) ISP and ESC. The model in Figure 6.4-1 considers interfaces at Reference Points B or C to be images of a corresponding interface at Reference Point D. All three interfaces may share many attributes, but not necessarily all. The model allows each interface to be defined separately or to share a common definition where appropriate.

## 6.5 Reference point and interface template

Figure 6.5-1 shows a generic four-layer service model and a set of possible relationships among three interacting domain objects. The model is general enough to serve as a template for most anticipated DAVIC interaction cases. It may be used as an aid to identify, categorize, and define pertinent services and interfaces in a given interaction scenario. Any unnecessary elements may be deleted from an instance. Specifically, the template provides place holders for:

Service layers used to segregate peer service objects in the ESP, ISP, and ESC domains,

Peer-to-peer interfaces between service objects in different domains, and

Inter-layer Service Access Points (SAPs) between adjacent service layers within each domain system object.

Note that only external services and interfaces are of interest for purposes of this international standard.

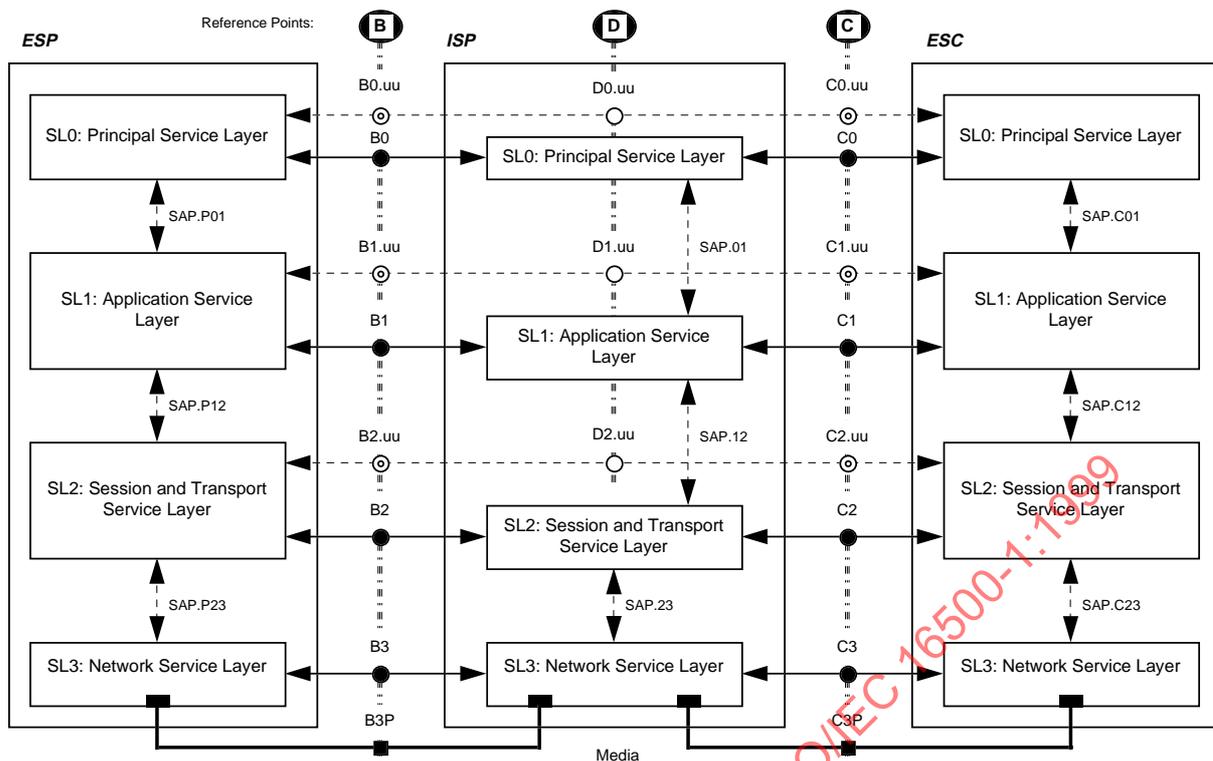


Figure 6.5-1 — Reference point and interface template

### Service interactions

Service interactions can be peer-to-peer or hierarchical. Figure 6.5-1 shows a general L(N)-layer service object interfacing with adjacent-layer objects and with a peer object. Inter-layer interfaces are identified as SAPs that are *local* to each system. The set of external interfaces between peer objects constitute a reference point.

### Peer-to-peer interfaces

Peer-to-peer interactions are information exchanges between service objects in the same service layer. A logical peer-to-peer interface represents a set of rules for information exchange.

### Hierarchical interfaces

Service objects in adjacent service layers interact hierarchically using SAPs. SAPs are hierarchical, logical information exchanges between objects in adjacent layers.

### Generic four-layer service model

The top Principal Service Layer (SL0) in the generic model in Figure 6.5-1 contains objects that use the services of SL1 objects to exchange information. Information flows between an ESP and an ESC through the principal peer-service interface D0 is transparent to the ISP. Although the information passes through the ISP, at the SL0 layer, the ISP does not *see* the information. The information flow becomes meaningful to the ISP only at the SL2 layer—and then only as symbols passing through the end-to-end digital *pipe*. The information flows are not meaningful to the ISP at a syntactic or semantic level. When the ISP is, in fact, either the source or the sink of end-to-end information, then the interfaces become the *visible* B0 and C0 layer-SL0 interfaces.

The Application Service Layer (SL1) represents a set of objects that create an environment for processing SL0 information.

The Session and Transport Service Layer (SL2) represents objects that manage and control the resources needed locally and in the ISP to establish communication pipes through which SL1 clients can communicate with peers elsewhere.

The Network Service Layer (SL3) is the only layer that contains objects that have physical external interfaces to other real systems. All logical information flows eventually map to one or more physical SL3 interfaces.

Annex D provides Management, Control, and User Plane interface examples that illustrate in more detail how the general principles described above can be used in specific interfaces between related objects.

## 7 DAVIC System Reference Model

This clause describes the DAVIC System Reference Model (DSRM). The model is based on the Abstract System Reference Model described in clause 6. However, the DSRM is less abstract and refers to actual system blocks that are defined in other parts of ISO/IEC 16500.

The DSRM identifies major system blocks of a general DAVIC System and reference points between them. Internal details of system blocks are revealed only to the level necessary to identify relationships and information flows that are discernible outside a block.

A typical region in the DAVIC System contains principal Service Provider Systems, Delivery Systems, and Service Consumer Systems. This clause identifies the interfaces and reference points of internal elements of such systems configured to provide digital audio, video, or data information transfer services.

The example architectures and interfaces included in this clause are intended to serve as templates for developing specific DAVIC System models to be included in other parts of this international standard. The examples are not intended to represent all possible DAVIC System configurations. Services that are not supported by these examples can be represented by the ASRM or by modifications of the DSRM such as adding or deleting interfaces and changing element specifications.

### 7.1 P0 Partition level DSRM

The P0 partition view of the DSRM follows the P0 partition view of the ASRM shown in Figure 7.1-1.

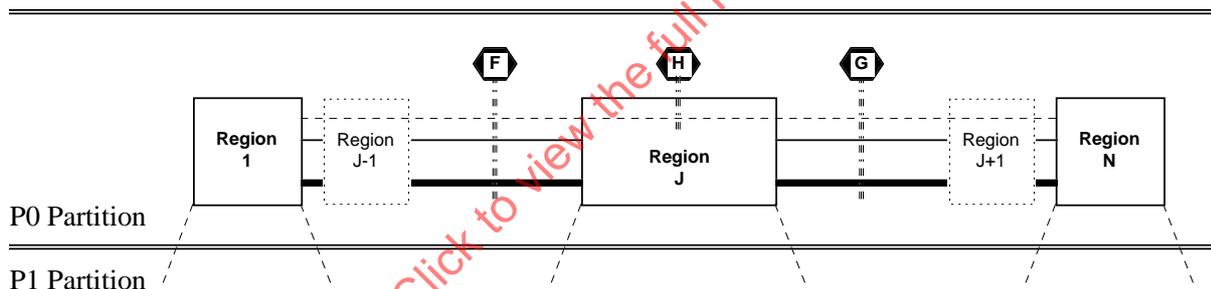


Figure 7.1-1 — P0 Partition level DAVIC System Reference Model

### 7.2 P1 Partition level DSRM

An instance of the Abstract System Reference Model is shown in Figure 7.2-1. This shows the Region J application of the abstract reference model in a specific realization. This instance defines a DAVIC System Reference Model of a region and reveals the objects visible at the P1 partition level. Each P1 object is a container for P2-partition objects. Information flows through a P1 object may be transparent at a given service layer or may terminate on internal P2 objects (unlabeled blocks in Figure 7.2-1).

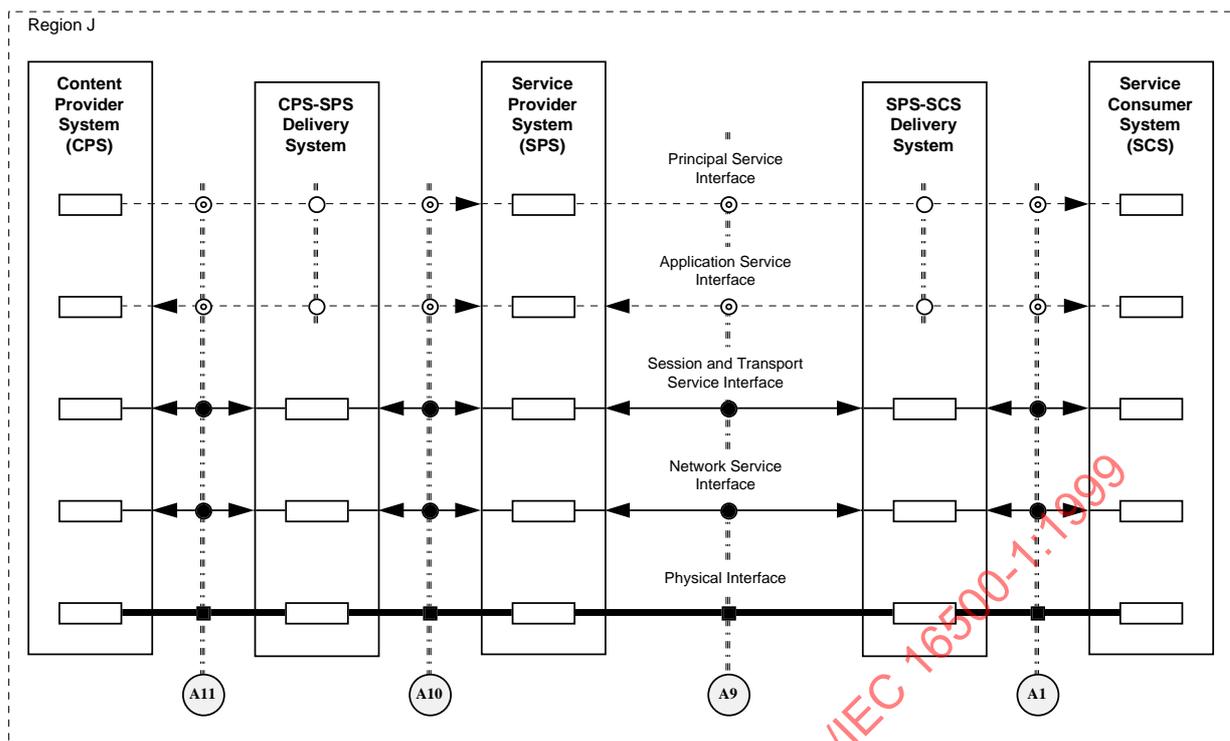


Figure 7.2-1 — P1 Partition level DAVIC System Reference Model

The DAVIC entities of Service Provider System (SPS), Delivery System (DS) and Service Consumer System (SCS) are likely to be present in a typical region of the DAVIC System. The SPS corresponds to the ESP in the abstract model, the Delivery System objects correspond to the ISP, and the SCS object to the ESC. The purpose of the Content Provider System (CPS) is to load content into the Service Provider System using the services of the CPS-SPS Delivery System. (These CPS and the CPS-SPS Delivery System entities are not defined in this revision of the international standard.)

The DSRM is multidimensional in the sense that multiple SPSs may connect through several networks to many SCSs. Each entity is composed of subsystem objects which may or may not exist in a specific implementation of the reference architecture. The links between entities represent logical information flow. Similar flows may exist between subsystems within an entity as well.

The work of defining the system entities, defining the information flow between entities and identifying the physical interface requirements at various reference points is the scope of this reference model definition.

### Component definition

The specific DAVIC Systems Reference Model (DSRM) can be obtained by defining an instance of the Abstract Reference Model as illustrated. To describe this instance four main components are identified and defined. These components are as follows:

- System Entities
- Information Flows
- Reference Points
- Interface Definitions

Each of these components provide key constructs that form the building blocks for the definition of the DAVIC System Reference Model.

### 7.2.1 System entities

The main DSRM system entities in a given region of the DAVIC System are the Service Provider System (SPS), Delivery System (DS) and Service Consumer System (SCS). The Service Provider System is a collection of

system blocks that accept, process, and present addressed information for delivery to a Service Consumer System. The Delivery System entity is responsible for accepting information from the SPS or SCS and delivering it, with an agreed quality level, to an appropriate destination. The SCS entity provides the user interface, accepts incoming information, and presents addressed information to the Delivery System.

Internal to each of the main entities are additional system blocks that are defined in this and in other parts of this international standard.

## 7.2.2 Information flows

This international standard defines two basic information categories: content-information and control-information. Information flows from a source object to a destination object may be content-information only, control-information only, or both.

Information flows may be considered at semantic, syntactic, and symbolic levels. An object handling an information flow must be sensitive to the flow at least at the symbolic level. (Symbols may be just single bits or a defined set of multi-bit patterns that are meaningful to an intercepting object.) An object may also understand syntactic rules that apply to a given information flow, and in some cases, understands what the information flow means (semantics).

Information flows that are not meaningful to an object at the syntactic and semantic levels are defined as transparent information flows. The transit of such flows through an object do not alter the object's state. The object's behavior before and after interception of the flow appears to be unchanged to external observers. Information flows may change as a result of path properties. In a general case, therefore, a flow is not necessarily identical at its information source and destination.

### 7.2.2.1 S1 information flow

S1 is content-information flow from a source object to a destination object, normally in the User Plane. The flow is transparent to any intermediate object through which the flow passes. The flow does not appear to alter the behavior of the information source and destination objects. E.g., audio, video, or data transferred from an ESP to an ESC.

### 7.2.2.2 S2 information flow

S2 is control-information flow, normally in the DS User Plane, from an Application Service Layer source object to a peer destination object. The flow is transparent to any intermediate object through which the flow passes (it is an S1-category information flow as far as the intermediate object is concerned). In the usual case, the end-to-end information source and destination objects are Control Plane objects.

The behavior of the source or destination object may change as a result of the flow. For example:

1. An application may understand and accept a request to perform an operation that results in a change in its state, or
2. It may reject a message because it does not understand the flow, or is unable to execute a service request for some reason. The destination object may reject the flow silently, i.e., without informing the source object that anything is wrong, and return to its pre-message state, or
3. It may reject a message for the reasons above, and let the source know that its message was rejected (and perhaps why).

Initializing or reconfiguring a downloaded application, while it is idle, is an example S2 flow that changes the state of an application to enable it to provide a service to an SL0 client. Once the application is serving a client, S2 messages may also affect S1 information flows such as messages to *Play* or *Stop* a movie.

### 7.2.2.3 S3 information flow

S3 is control-information flow, normally in the Control Plane, from a Session and Transport Service Layer source object to a peer destination object. Other than the change of service layer, S3 is similar to S2. Examples of S3 flows are messages to establish, modify, or terminate a session; negotiate resource requirements, and report exceptions.

### 7.2.2.4 S4 information flow

S4 is control-information flow, normally in the Control Plane, from a Network Service Layer source object to a peer destination object. Other than the change of service layer, S4 is similar to S2 and S3. Examples of S4 information flows include messages to establish or release connections, communicate addresses, port information, and other routing data.

### 7.2.2.5 S5 information flow

S5 is management-information flow from a source object to a peer destination object on the Management Plane of a container object. This category includes information flows between peer Management Plane objects in any given service layer (Layer Management objects), and information flows between objects where no service layer is indicated (System Management objects).

## 7.2.3 Reference points

DSRM Reference Points define sets of interfaces through which peer objects transfer information.

Reference points are defined only at a given partition level. Since partition levels encapsulate details of hierarchically-lower partition levels, reference points are meaningful only on a designated partition level. Consequently, reference points do not cross partition boundaries.

The following reference points are defined in the DSRM.

### 7.2.3.1 P0 partition reference points

DSRM P0 partition reference points shown in Figure 7.1-1 are:



Adjacent regions (Region J-1 and Region J in ): a set of interfaces through which content-information and control-information flows between the regions.



Adjacent regions (Region J and Region J+1): a set of interfaces through which content-information and control-information flows between the regions.



Non-adjacent regions (Region 1 and Region N via Regions J-1 and J+1): a set of transparent interfaces.

### 7.2.3.2 P1 partition reference points

DSRM P1 partition reference points shown in Figure 7.2-1 are:



SCS and DS linking SPS and SCS



SPS and DS linking SPS and SCS



SPS and DS linking Content Provider System (CPS) and SPS, or recipient SPS and DS linking it to a source SPS in the case of cascaded SPS systems



CPS and DS linking CPS and SPS, or source SPS and DS linking it to a recipient SPS in the case of cascaded SPS systems



STB and peripheral, human or machine, STB-users.

### 7.2.3.3 P2 partition reference points

The P2 partition level reference points show in Figure 7.4-1 are internal to the Delivery System and are not visible at the external interfaces of the Delivery System:

	Core Network and Access Network
	Network Related Control and Core Network
	Service and Network Related Control
	Network Related Control and Access Network
	Management (object) and all related DS P2 objects

Reference Point A0 show in Figure 7.5-1 is internal to the STB and is not visible at the external interfaces of the Service Consumer System:

	Network Interface Unit and other internal STB elements. Reference Point A0 terminates inside the SL2 Session and Transport Service Layer. Since the NIU does not contain session service objects, only interfaces between NIU and STU Transport Service objects in SL2, and between SL3 Network Service Layer objects are defined.
---	--

Reference Point A9\* is internal to the SPS and is not visible at the external interfaces of the Service Provider System:

	Internal elements of the Distributed Server. A9* interconnects hosts and service elements with multiplexors and the Service Gateway element.
---	--

### 7.2.3.4 P3 partition reference points

The following internal reference points in the Access Network block in Figure 7.4-1 are P3-partition-level interfaces and are not visible outside the block:

	Access Node and Distribution Network
	Distribution Network and Network Termination

The following internal reference points in the Settop Unit block in Figure 7.5-1 are P3-partition-level interfaces and are not visible outside the block. These reference points define sets of inter-service-layer Application Program Interfaces (APIs) as shown in Figure 7.5-2. APIs provide a defined means for objects in an adjacent higher layer to request services from an object in an adjacent lower layer, and for the service-performing objects to return results.

	STU Environment Entity and STU Connectivity Entity
	STU Application Entity and STU Environment Entity
	STU Product Entity and STU Application Entity

## 7.3 Service Provider System

Figure 7.3-1 models the Service Provider System at the P1 partition level. The system entities, information flows and reference points are indicated in the model. This part of ISO/IEC 16500 identifies and describes the general properties of these elements. For specific requirements, refer to other parts of this international standard.

Figure 7.3-3 models the Service Provider System at the P2 partition level, showing the A9\* reference point and a physical view of the Service Provider System with host elements instead of service elements.

### 7.3.1 Service Provider System Control Plane Elements

The Service Provider System contains the following Control Plane elements. Figure 7.3-1 shows the relationship of the elements at the A9 Reference Point and Figure 7.3-2 at the A10 Reference Point.

#### 7.3.1.1 Content Provider Subdomain Elements

Content Provider Subdomains comprise a Content Group and Application Group. Each Content Provider Subdomain instance is associated with one particular content provider. Access to content or application assets in any given Content Provider Subdomain is restricted to the associated Content Provider.

##### 7.3.1.1.1 Content Group

A Content Group is a set of S1-category assets associated with a given Content Provider.

##### 7.3.1.1.2 Application Group

An Application Group is a set of S2-category assets associated with a given Content Provider.

#### 7.3.1.2 Service Gateway Element

The Service Gateway Element controls control access to assets in Content Provider Subdomains. Only the associated Content Provider, a client designated by the Content Provider, has read or write access to information in a given subdomain.

#### 7.3.1.3 Management Function

The Management Function interfaces with peer management functions in the Service Consumer System.

#### 7.3.1.4 Session and Transport Control Function

The Session and Transport Control Function is responsible for establishing and terminating the environment in which an application will operate. This environment includes the quality of service requirements for both the application and product entities.

#### 7.3.1.5 Network Control Function

The Network Control Function is responsible for the error-free receipt and transmission of content flow information to and from the Server.

#### 7.3.1.6 Network Interface Function

The Network Interface Function (NIF) accepts network specific content-information flows from the DS and provides a non-network specific interface to the remainder of the SPS. (additional definitions of the NIF may exist).

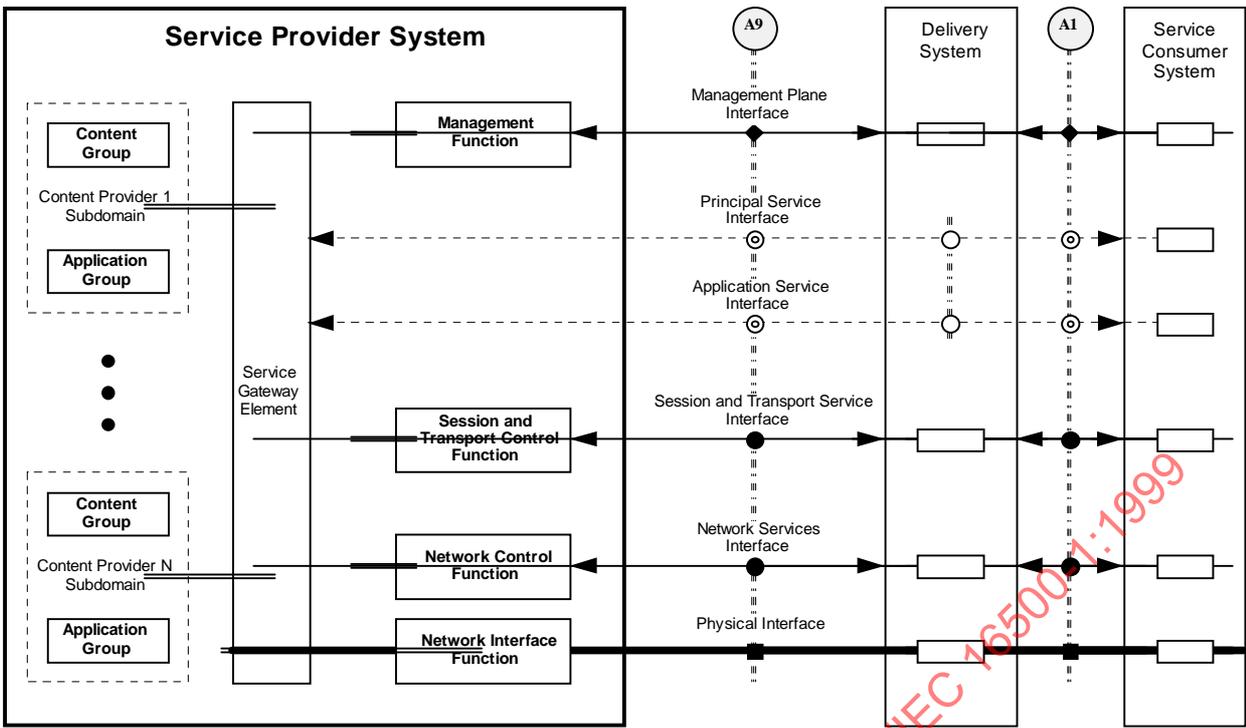


Figure 7.3-1 — Service Provider System model: A9 Reference Point

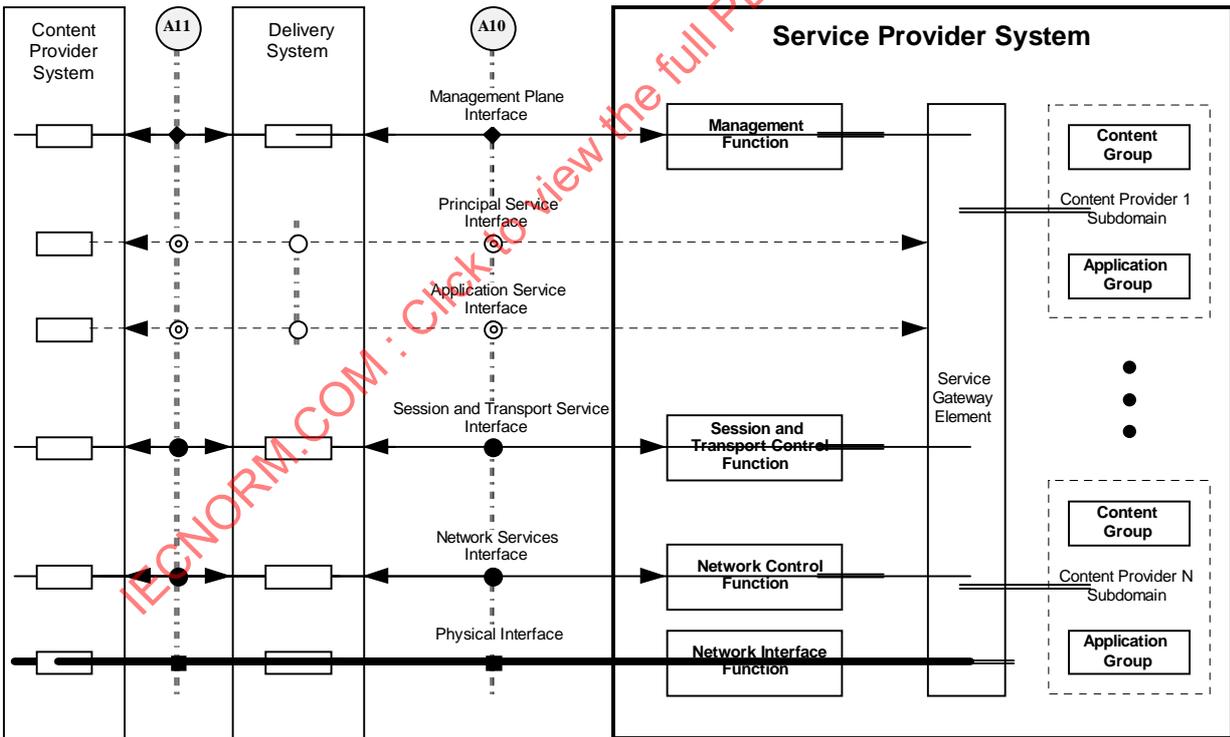


Figure 7.3-2 — Service Provider System model: A10 Reference Point

### 7.3.1.7 Physical Model and internal reference point

An interface specification is defined, with protocol stacks for internal interconnection of hosts/service elements in the Service Provider System (called A9\* in Figure 7.3-3), including MPEG-2 stream servers, real-time encoders, DVB-SI servers, ECM and EMM servers and data servers amongst others. Optional MPEG-2 transport multiplexors may combine the Single Program Transport Streams delivered on S1 across the A9\* reference point and other data flows that will form an integral part of the outgoing S1 flow into Multi-Program Transport Streams for delivery across the A9 and A11 reference points

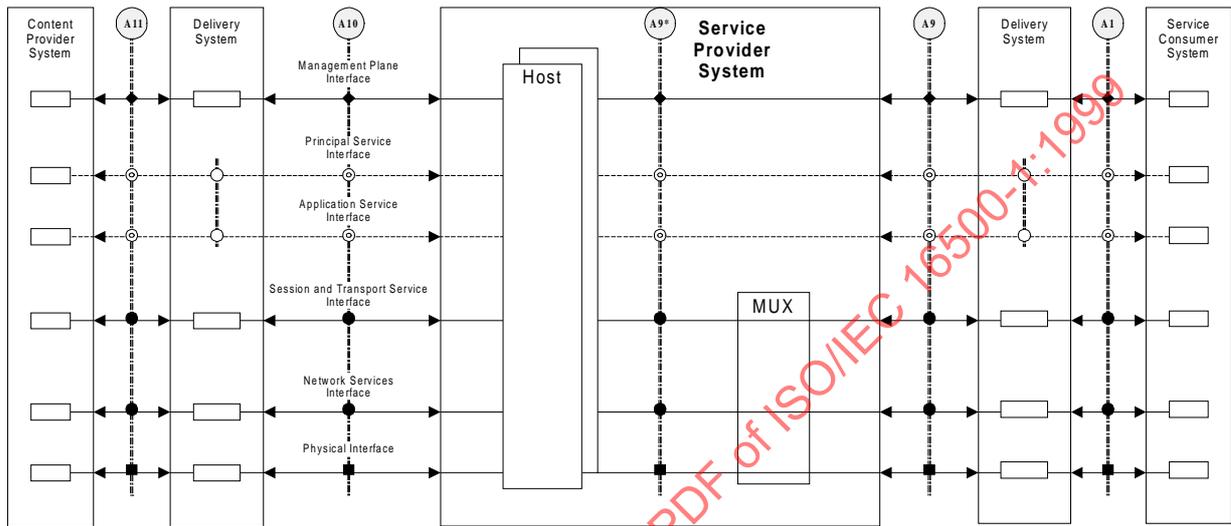


Figure 7.3-3 — Service Provider System model: A9\* Reference point

### 7.3.2 Information Transport Service Models

Figure 7.3-4 shows a unidirectional stream service and a bi-directional transport services between a Service Provider System and a Service Consumer System.

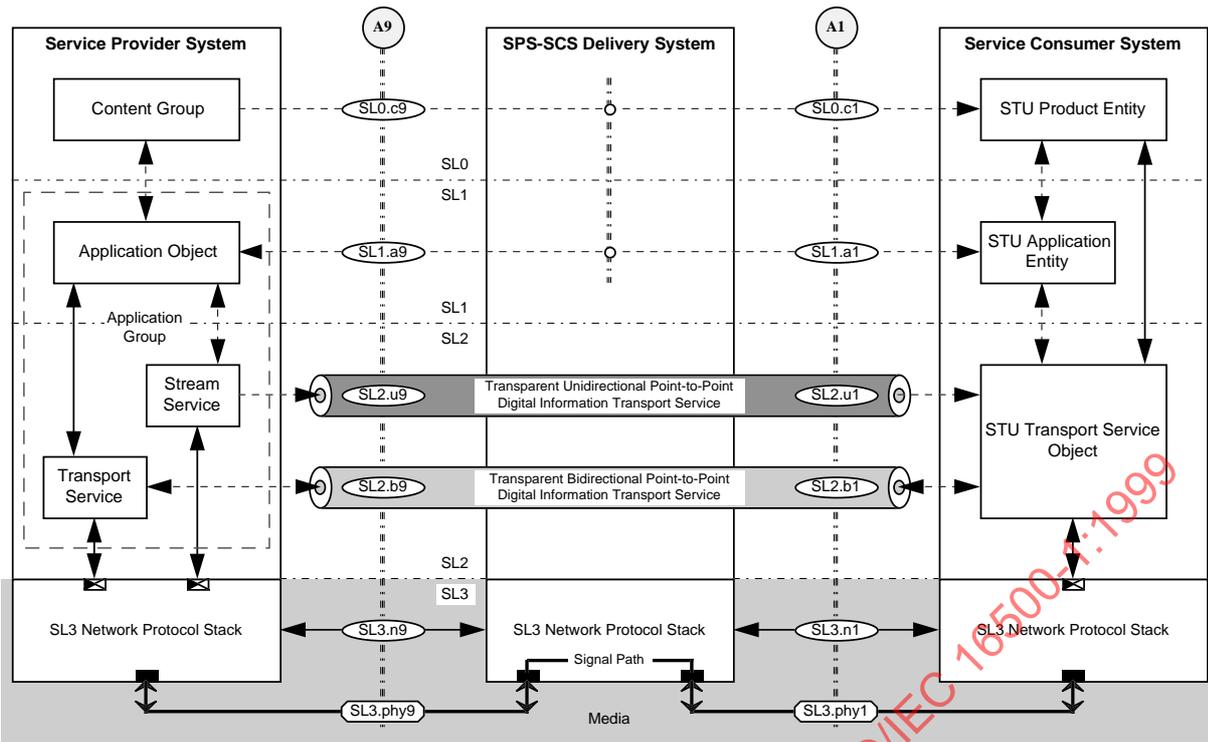


Figure 7.3-4 — SPS-SCS information transport service model

Figure 7.3-5 shows a bi-directional transport services between two Content Provider System instances. Both Content Provider System interface with the Delivery System at an A11 Reference Point.

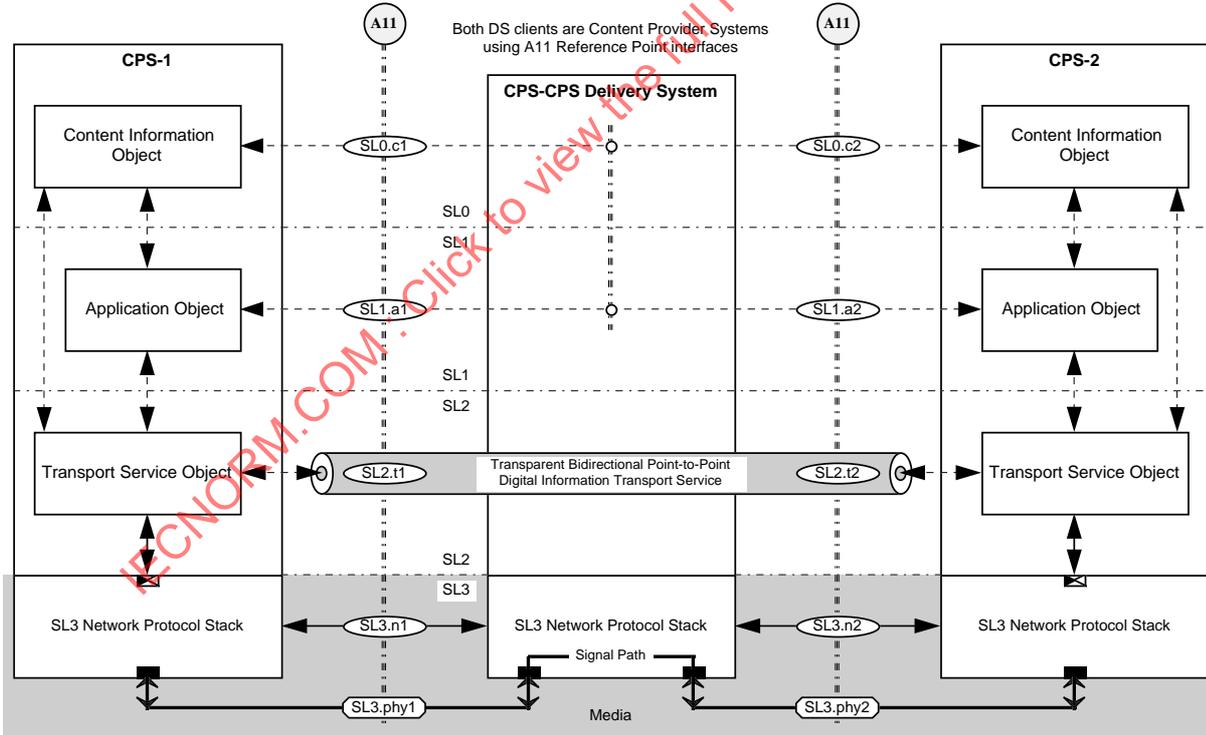


Figure 7.3-5 — CPS-CPS information transport service model

## 7.4 Delivery System

Figure 7.4-1 defines the Delivery System Control Plane reference model for a system configuration used to transfer audio or video information from a Service Provider System to a Service Consumer System. System entities, information flows, and reference points are indicated. This part of ISO/IEC 16500 identifies and describes the general properties of these elements. For specific requirements, refer to other parts of this international standard.

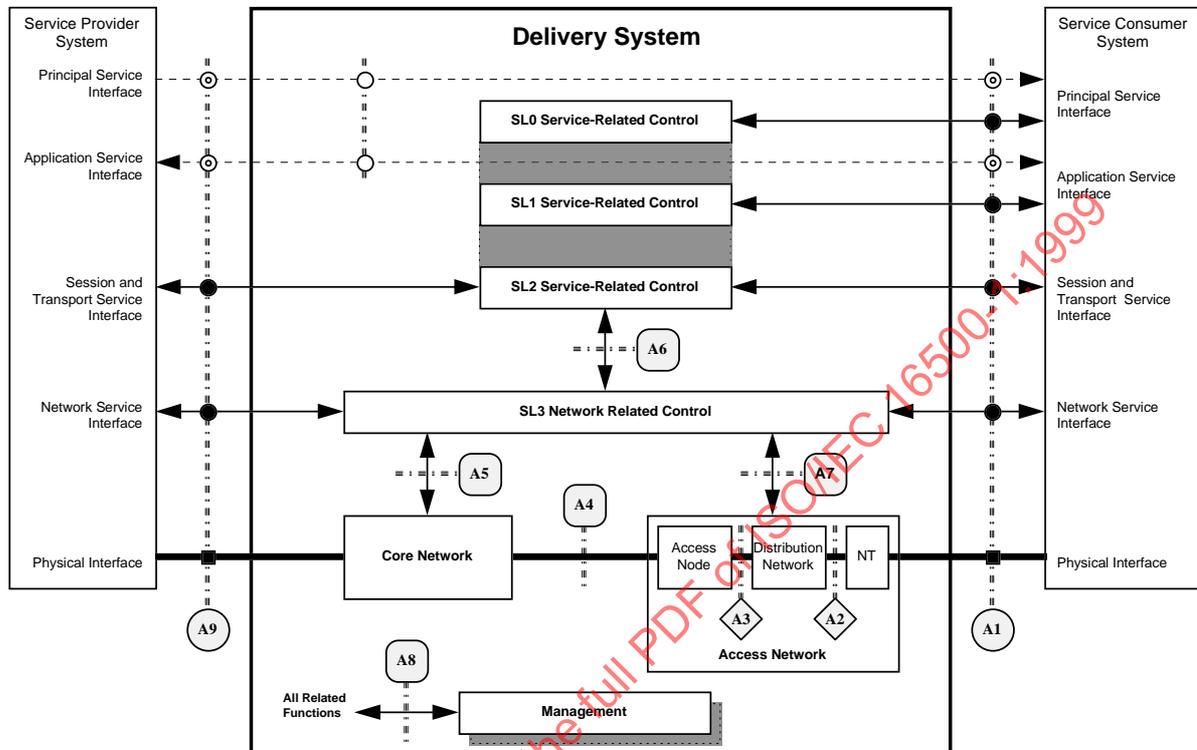


Figure 7.4-1 — Delivery System Control Plane model

### 7.4.1 Delivery System Elements

The Delivery System Control Plane contains the following system blocks.

#### 7.4.1.1 SL0, SL1, and SL2 Service Related Control

The Service Related Control provides all control for the services that are offered by the Delivery System. The DSRM allows for SL0, SL1, and SL2 Service Related Control subsets.

#### 7.4.1.2 SL3 Network Related Control

The Network Related Control entity provides control functions for network configuration, connection establishment and termination, and information routing. Different sets of A5, A6, and A7 specifications may be defined in case different Core Network and Access Network elements are used to provide interoperable Delivery System services at the A1 and A9 Reference Points.

#### 7.4.1.3 Core Network

The Core Network is responsible for accepting information flows and transmitting the information, error-free, from a source location to a destination location. This network can be characterized as a high speed digital network or series of networks.

**7.4.1.4 Access Network**

The Access Network is the final delivery segment of the system. It can take many forms depending on the specific implementation. The entity is composed of the following sub-entities (at the P3 partition level):

**7.4.1.4.1 Access Node**

The Access Node is responsible for processing information flows in preparation for transport through the selected distribution network.

**7.4.1.4.2 Distribution Network**

The Distribution Network provides the final transport medium used to deliver information flows from a source location to a destination location.

**7.4.1.4.3 Network Termination**


A Network Termination is an optional entity used to adapt information flows from one network configuration to another. This device, if used, serves as a bridge for the system.

**7.4.1.5 Management Entity**

The Management Entity is responsible for the operation and maintenance functions of the network. In most instances, the Management Entity will communicate using S5 information flows.

**7.4.2 Enhanced Broadcast Reference Model (User Plane)**

Figure 7.4-2 illustrates enhanced broadcast information transport services via the Delivery System User Plane. Both services are end-to-end and transparent to the Delivery System. The broadcast service is unidirectional, whereas the point-to-point service is bi-directional.

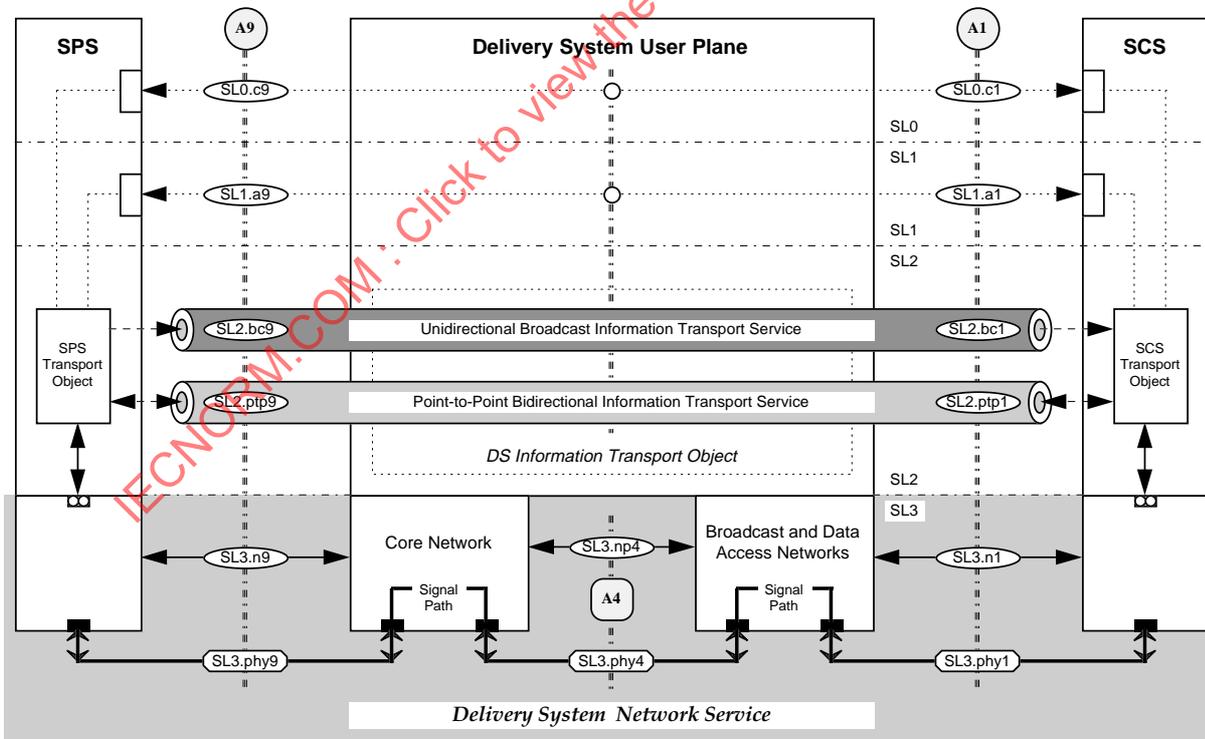

**Figure 7.4-2 — Enhanced Broadcast reference model: User Plane**

### 7.4.3 DAVIC System Manager Reference Model (User Plane)

Figure 7.4-3 shows the system blocks on the Delivery System that perform system management functions and their interfaces to peer objects in an External Support Service system, and to Delivery System information transport objects.

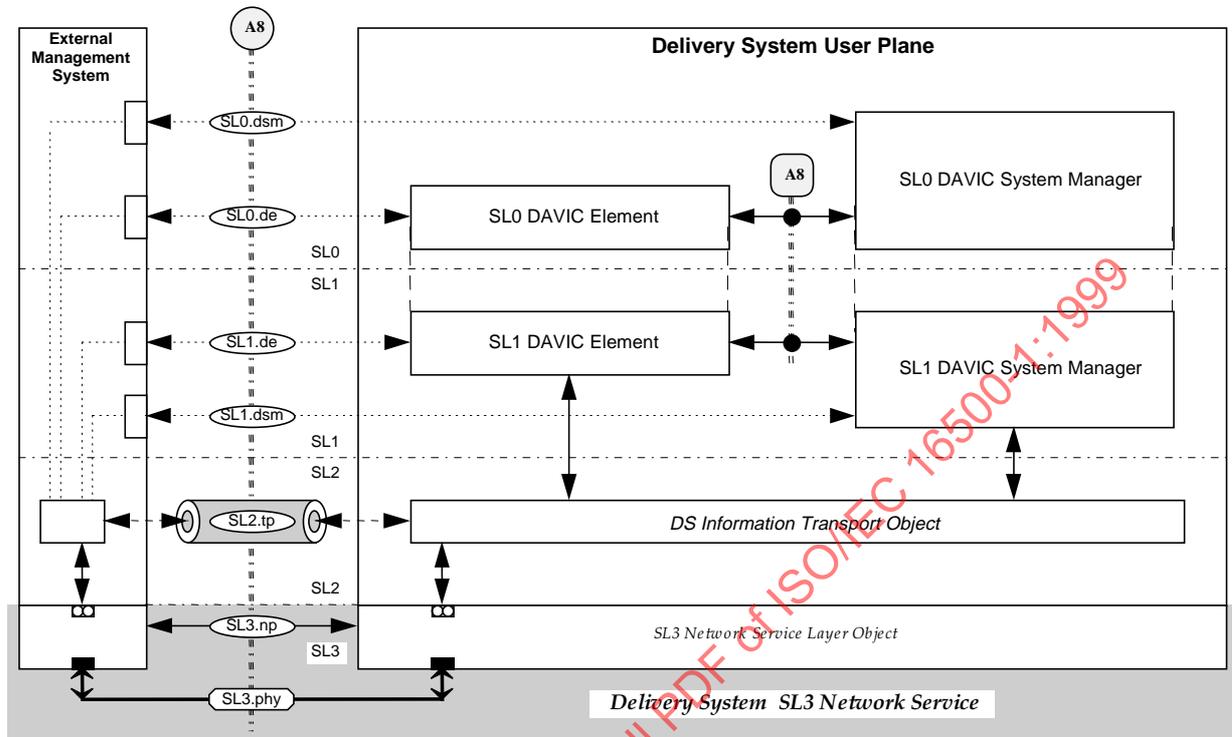


Figure 7.4-3 — DAVIC System Manager reference model: User Plane

### 7.5 Service Consumer System

Figure 7.5-1 models the Service Consumer System (SCS) at the P1 partition level. The system entities, information flows, and reference points are indicated in the model. This part of ISO/IEC 16500 identifies and describes the general properties of these elements. For specific requirements, refer to other parts of this international standard.

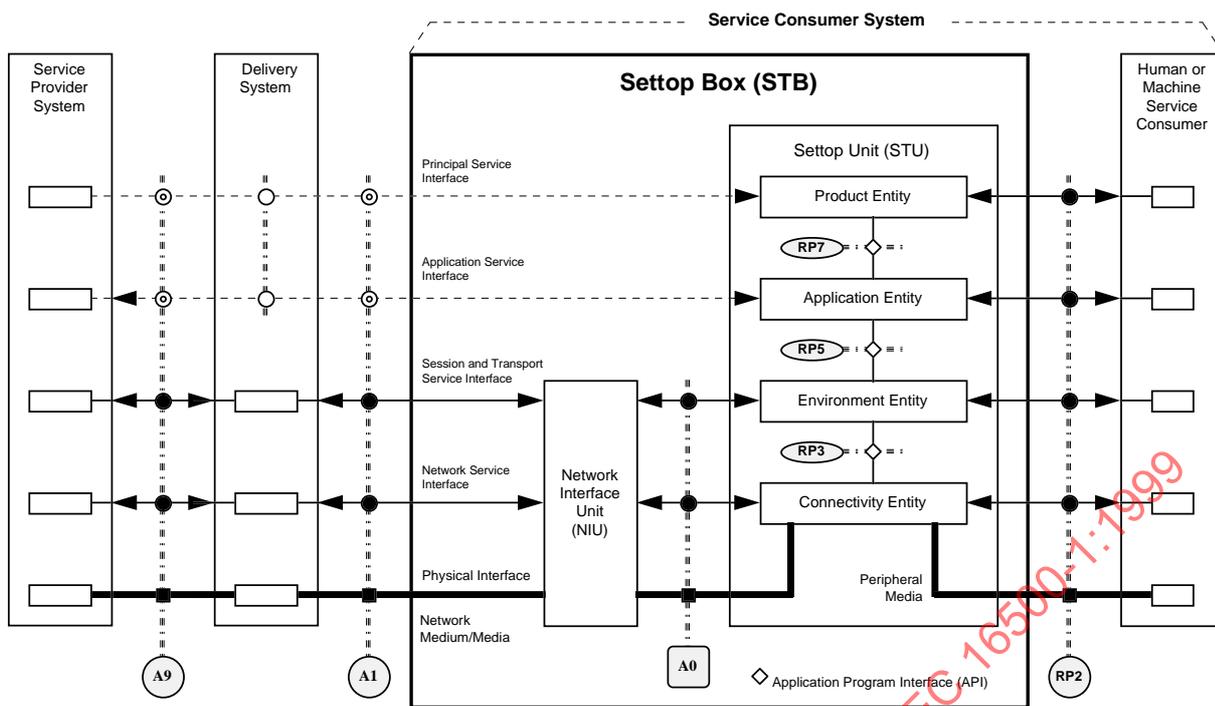


Figure 7.5-1 — Service Consumer System model

## Service Consumer System system blocks

### 7.5.1 Set Top Unit

The Set Top Unit (STU) contains the primary functions of the Service Consumer System that permit a human or machine Service Consumer to interact with the Delivery System and Service Provider System. The following blocks are contained in the STU:

#### 7.5.1.1 Product Entity

The entity responsible for accepting transparent content-information and presenting the information to the appropriate using machine.

#### 7.5.1.2 Application Entity

The entity that accepts or generates application services. The Application Entity will provide the interactive information processing for the consuming device.

#### 7.5.1.3 Environment Entity

This entity is responsible for establishing and terminating the environment in which an application will operate. This environment includes the quality of service requirements for both the application and product entities.

#### 7.5.1.4 Connectivity Entity

The Connectivity Entity is responsible for the error-free receipt and transmission of content flow information to and from the STU.

#### 7.5.1.5 Network Interface Unit

The Network Interface Unit (NIU) accepts network specific content-information flows from the Delivery System and provides a non-network specific interface to the Connectivity Entity.

NOTE: The NIU shown in Figure 7.5-1 contains only functions. Other NIU configurations are possible when Network Service Layer and, perhaps, Session and Transport Service Layer functions are relocated from the Connectivity and Environment Entities to the NIU.

## 7.5.2 Human or Machine Peripheral system block

The behavior and interfaces of Human or Machine Peripheral system blocks are not defined in this revision of the international standard.

## 7.5.3 Generic Service Consumer System model

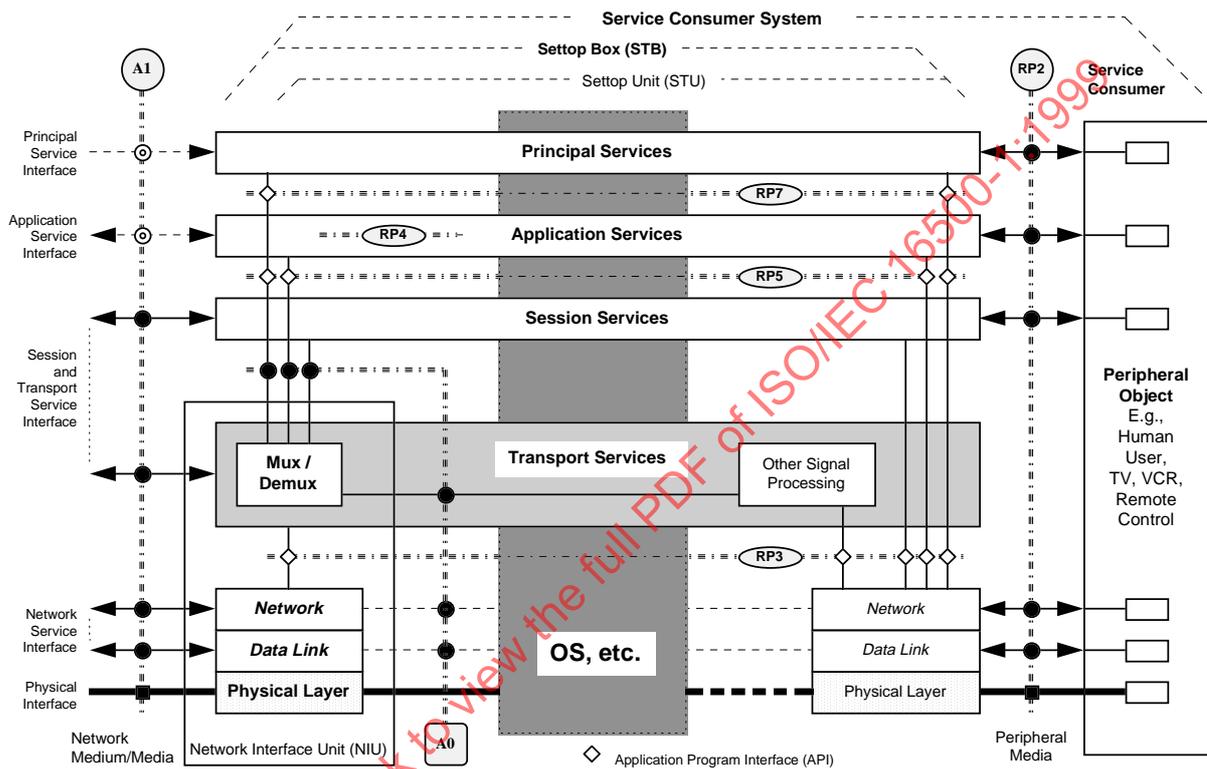


Figure 7.5-2 — Generic Service Consumer System model

Figure 7.5-2 maps the interfaces identified in Figure 7.5-1 to a generic Service Consumer System model. The model provides additional information flow details and functional block relationships. Place-holder functional elements and layers are used to illustrate that both network and peripheral media sides of the STU can be modeled symmetrically.

NOTE: The NIU in Figure 7.5-2 includes only physical layer functions to illustrate one possible locus for the A0 reference point.

The transport layer in Figure 7.5-2 contains multiplexing, demultiplexing, and other signal processing functions. Information flows entering the transport layer may be composite streams that consist of one or more information subchannels. The functions in the transport layer separate and reconstruct the subchannels for use by other layer entities and the functional block labeled OS, etc., The STU block contains an operating system performing the services shown and may contain other STU functions such as conditional access and system management.

## 8 DAVIC System transaction flow scenarios

The purpose of this clause is to provide a communications functional model that identifies the functional entities and the protocol independent information flows between them.

The functional entities are identified and the functions defined at a high level. The information flows, called relationships, are also identified and defined at a high level.

These functional entities and information flows are used in ISO/IEC 16500-2 to describe particular scenarios.

Transaction flows are also described which expand on the actual functions and flows that occur with different transactions that make up a relationship. Repetitively used transaction flows are referred to as *macros*.

### Functional entities and their relationships

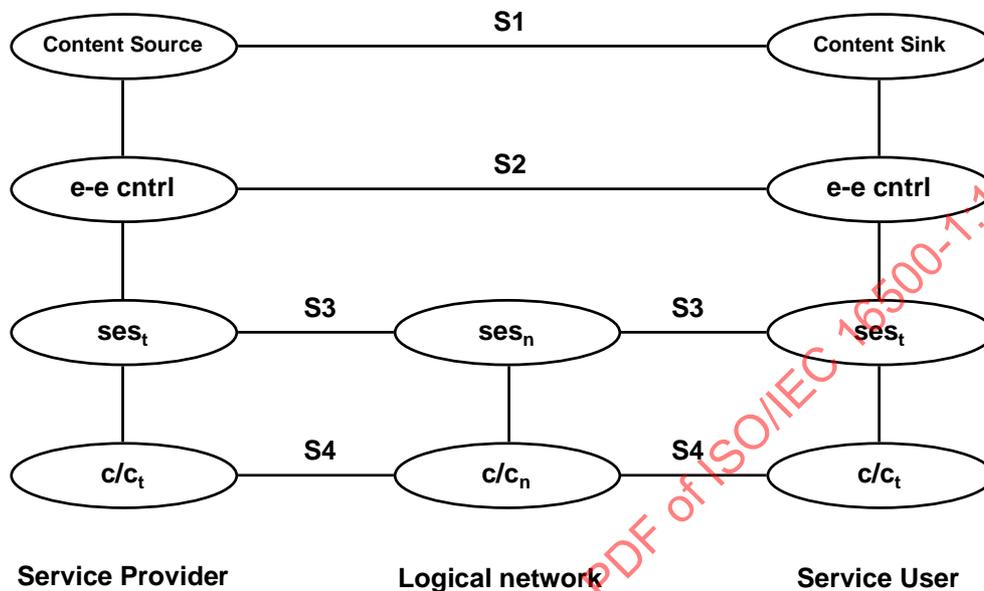


Figure 8.0-1 — Functional entities and relationships

## 8.1 Functional entity definitions

**PRSt:** Primary Service provision by the Service Provider and Primary Service acceptance by the Service User.

**APPSt:** Application Service control by the Service User and Application Service actions by the Service Provider.

**SESt:** Session Signaling at the Terminal (t) level to request, identify, accept and clear sessions.

**SESn:** Session Signaling at the Network (n) level to setup and clear sessions, initiate CONn functions and maintain logical linkages between R3 and R4.

**CONt:** Connection Signaling at the Terminal (t) level including single connection setup and clear, carry session information (if required).

**CONn:** Connection Signaling at the Network (n) level including single connection setup and clear, carry session information (if required), maintain logical linkage between R5 and R6.

## 8.2 Relationship (information flow) definitions

**R1:** Peer relationship between two PRSt carrying S1 service information from the Service Provider to the Service User.

**R2:** Peer relationship between two APPSt carrying service control-information from the Service User to the Service Provider and carrying status/acknowledgment information from the Service Provider to the Service User.

**R3:** Peer relationship between SESt and SESn carrying information from the source terminal to the network and including user to network session request, user to network session acknowledge plus additional UN messages.

- R4:** Peer relationship between SESn and SESt carrying information from the network to the destination terminal and including user to network session request, user to network session acknowledge plus additional UN messages.
- R5:** Peer relationship between the source CONt and the network CONn carrying information defining user to network connection requirements.
- R6:** Peer relationship between the network CONn and the destination CONt carrying information defining user to network connection requirements.
- R7:** Client/Server relationship between PRSt and APPSt to request control of the Service and to indicate the status of that Service
- R8:** Client/Server relationship between APPSt and SESt to indicate the presence of an R2 and/or an R1 relationship.
- R9:** Client/Server relationship between the source SESt and the source CONt defining a request from the session entity requiring a response from the connection entity.
- R10:** Client/Server relationship between the network SESn and the network CONn defining a request from the session entity requiring a response from the connection entity.
- R11:** Client/Server relationship between PRSt and APPSt to control and support the service.
- R12:** Client/Server relationship between APPSt and SESt to initiate a session and connection(s).
- R13:** Client/Server relationship between the destination SESt and the destination CONt defining a request from the session entity requiring a response from the connection entity.

### 8.3 Transaction Flows

Transaction flows provide more detail about the information flows that occur within a relationship. Transaction flows are always peer-to-peer. Transaction flows do not show the Client/Server relationships but these are assumed to exist as defined above.

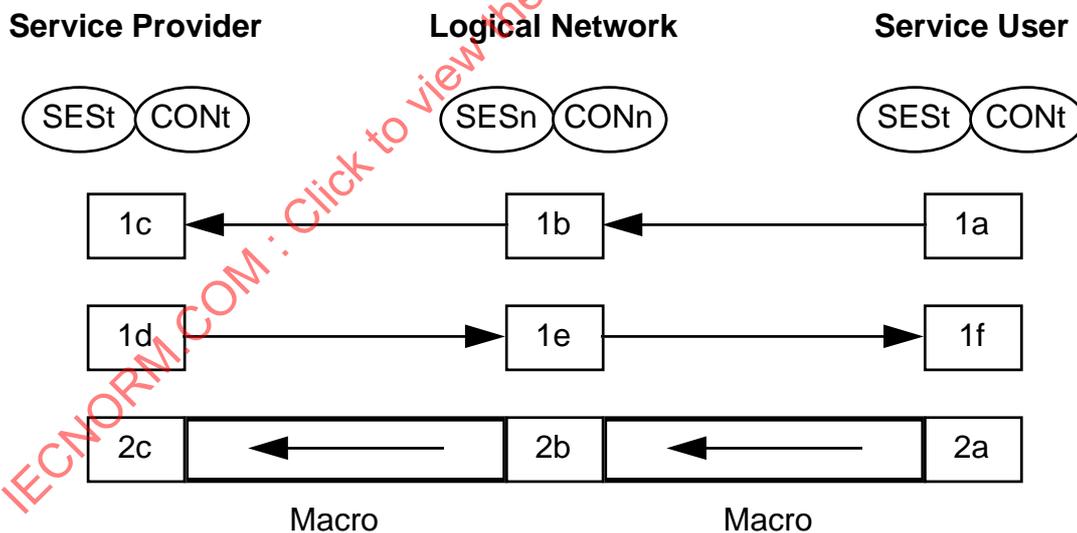


Figure 8.3-1 — Examples of transaction flows and macros

Transaction flows exist between peer entities, e.g., between 1a and 1b and also between 1b and 1, etc. Each transaction flow will be defined in Part 12. Any transaction flow that is identical to another will have the same name, e.g., 1a-1b.

A macro is defined where some extra transaction flows exist. A macro simply hides the detail of a more complex transaction flow and saves repeating that detail in a particular transaction flow diagram. Macros are defined in ISO/IEC 16500-2.

## Annex A (informative) Supplementary definitions

The following definitions are listed in alphabetic order and provided for reference purposes only. They are derived from various sources. Some are direct quotes, others have been modified. Known sources are referenced.

[*Number*] identifies references listed in Annex C. In altered definitions, - *mod* is appended to the reference number.

NOTE: For convenience, Annex A contains normative and non-normative term definitions. Clause 3 in each part of this international standard specifies normative terms.

**abstract syntax:** abstract data types that define data in terms of abstract properties rather than in concrete implementation terms. An abstract data type is a class of type which defines sets of values (sorts), a set of operators which are applied to these values, and a set of algebraic rules (equations) defining the behavior when the operators are applied to the values.

**Abstract Test Suite (ATS):** a test suite composed of abstract test cases. [ISO/IEC 9646]

**access control:** provides means to access services and protection against unauthorized use of resources, including protection against the use of resources in an unauthorized manner.

**Access Network:** a part of the Delivery System consisting of a collection of equipment and infrastructures, that link a number of Service Consumer Systems to the rest of the Delivery System through a single (or a limited number of) common port(s).

**Access Node:** the element of the Access Network containing centralized functions responsible for processing information flows in preparation for transport through the selected distribution network.

**Account Access:** the on-line access to historical and current account information. For example, this information might include past purchases and associated chosen payment methods for provider accounts, current charges for utility accounts and three-month debits and credits for financial accounts.

**Accreditation:** procedure by which an authoritative body gives formal recognition that a body or person is competent to carry out specific tasks. [ISO/IEC Guide 2]

**Actor:** a person or system component who interacts with the system as a whole and who provides stimulus which invoke actions.

**anchor:** one of two ends of a hyperlink.

**application:** a set of objects that provides an environment for processing Application Service Layer information flows.

**Application Entity (AE):** the entity that accepts or generates application services in the Settop Box. The Application Entity will provide the interactive information processing for the consuming device.

**Application Programming Interface (API):** set of inter-layer service request and service response messages, message formats, and the rules for message exchange between hierarchical clients and servers. API messages may be executed locally by the server, or the server may rely on remote resources to provide a response to the client.

**Application Service Access Point (ASAP):** an interface between a Principal Service Layer and an Application Service Layer through which SL1 (server) objects provide services to SL0 (client) objects; (ASAPs are introduced as a distinct interface between Principal Service Layer and Application Service Layer objects to allow clear segregation of hierarchical application-client and application-server objects. In the OSI Reference Model, such interfaces are hidden within Application Layer 7.)

**Application Service Element (ASE):** this entity accepts and transmits application control-information flows and provides the processing of this information for the Service Provider System.

**Application Service Layer (SL1):** a collection of associated objects that use or provide an application service to peers and to SL0 client objects, e.g., application control such as audio/video stream playback functions and ISP-provided applications such as L1GW services.

**assets:** things that a user sees or hears, e.g., bitmap, audio, text.

**Asynchronous Transfer Mode (ATM):** a transfer mode in which the information is organised into cells. It is asynchronous in the sense that the recurrence of cells containing information from an individual user is not necessarily periodic.

**ATM Adaptation Layer Type 5 (AAL5):** AAL functions in support of variable bit rate, delay-tolerant connection-oriented data traffic requiring minimal sequencing or error detection support.

**Basic Level 1 Gateway (BasicL1GW):** this provides direct access to a single service provider via the connection functionality within the network.

**behavior:** in SDL, behavior is either:

- a) externally observable behavior: the set of sequences of responses of a system to sequences of stimuli, or
- b) internally observable behavior: a set of actions and tasks, triggered by a stimulus, executed before the state machine transitions to another state.

**block:** a part of a system or parent block that is the container for one or more processes of one block substructure. A block is a scope unit and provides a static interface. When used by itself, block is a synonym for block instance.

**block substructure:** the partitioning of the block into subblocks and new channels at a lower level of abstraction.

**block tree diagram:** an auxiliary document in SDL/GR representing the partitioning of a system into blocks at successively lower levels of abstraction by means of an inverted tree diagram (i.e., parent block at the top).

**block type:** the association of a name and a set of properties that all block instances of this type will have.

**Bulk External Transfer Interface:** the portion of the interface between the Event Data Manager and an External Support System by which the External Support System receives a bulk download of a collection of Event Data in the form of a file of Event Data Records.

**Bulk Usage Data Transfer Interface:** the portion of the interface between a DAVIC System Manager and an External Support System by which the External Support System receives a bulk download of a collection of Usage Data in the form of a Usage Data File.

**cable modem:** a device that interfaces between an A4 reference point and an Hybrid Fiber Coax plant, or between an A0 reference point and that plant, such that the whole comprises a physical layer tool.

**call:** (in signaling) an association between two or more users, or between a user and a network entity, that is established by use of network capabilities. This association may have zero or multiple information exchange mechanisms established within this call, for example in connection-oriented or in connectionless modes. (ITU-T Rec. Q.9)

**call entity or connection entity:** user or network process which terminates S4 flow (c/c).

**certification:** procedure by which a third party gives written assurance in the form of a certificate of conformity that a product, process or service conforms to specified requirements. [ISO/IEC Guide 2]

**CGI:** Common Gateway Interface. CGI allows HTTP servers on the Internet to execute external programs. HTTP servers invoke external programs via the Common Gateway Interface by passing arguments in, and receive results from the external program via the same interface.

**channel:** a connection conveying signals between two blocks (the conveyed signals represent information). Channels also convey signals between a block and the environment. Channels may be unidirectional or bidirectional.

**channel substructure:** a partitioning of a channel into a set of channels and blocks at a lower level of abstraction.

**channel surfing:** viewing of many broadcast channels in a short time period by the End-User.

**character:** an atom of textual information, for example a letter or a digit.

**class:** describes a group of Objects with similar properties and behavior.

**class and object modeling:** used to define business objects and application architecture. Shows how classes interoperate dynamically to offer use cases and application behavior.

**class diagram:** shows the existence of classes and their relationships in the logical view of the system.

**client:** a service consuming object or system (block); ( a synonym for user).

**component diagram:** shows the dependencies between software components.

**computational model:** gives a description of a system in a graphical form highlighting Objects and their interfaces, as such it is similar to the OMT and UML notion of a class Diagram. An Object Distributed processing (ODP) concept.

**conditional access:** a means of allowing system users to access only those services that are authorized to them.

**confidentiality:** the protection of information from unauthorized disclosure.

**conformance testing:** testing the extent to which an implementation under test is a conforming implementation. [ISO/IEC 9646]

**connect:** indicates the connection of a channel to one or more signal routes or the interconnection of signal routes.

**connection:** an association of transmission channels or circuits, switching and other functional units set up to provide a means for a transfer of user, control and management information between two or more end points (blocks) in a telecommunications network. (ITU-P.10).

**connection service:** provides basic functions to create, maintain, and teardown connections.

**connectivity entity:** the connectivity entity is responsible for the error-free receipt and transmission of content flow information to and from the STU.

**content data:** data in a format for representing the object (e.g. video object's content data is MPEG-2 stream data).

**content-information:** information that does not alter the state of the object intercepting the information flow, e.g., audio, video, or data in a television program that is processed transparently by a television receiver (the control state of the receiver will not change as a result of such information).

**content item:** a collection of content items / content item elements that will form a complete application or a complete programme.

**content item element:** the smallest (and indivisible) content component.

**content package:** a set of content item elements and/or content items for transfer across an A10 interface between.

**Content Provider:** one who owns or is licensed to sell content.

**Content Service Element:** the Content Service Element provides the processing required by the Service Provider System when content-information is being loaded to the server.

**Control Plane (CP):** a classification for objects that interact to establish, maintain, and release resources and provide session, transport, and connection control functions that facilitate transparent information transfers between ISP clients.

**control word:** the secret key used for a scrambling algorithm.

**control-information:** information that may change the state of the object intercepting the information flow, e.g., a remote control channel up command input. (In some cases an object may interpret a message but reject a request and remain in its current state).

**core event data:** event data whose meaning is specified in this international standard.

**Core Network:** a portion of the Delivery System composed of networks, systems, equipment and infrastructures, connecting the Service Providers to the Access Networks.

NOTE: The term Core Network, in the DAVIC use, is wide sense as it includes the notion of the access networks that are needed to link the Service Providers Systems to the Core Network in strict sense (i.e., exclusive of any access network). This kind of access network is not under consideration within DAVIC.

**correlation key:** a component of an event message header that serves as a globally unique identifier for the service session that generated the event. It can be used by the Event Data Manager to correlate (i.e., associate and collect together) all of the events that have been produced during a service session.

**create request:** the action causing the creation and starting of a new process instance using a specified process type as a template. The actual parameters in the create request replace the formal parameters in the process.

**Custom Event Data:** Event Data whose meaning is not specified in this international standard. Data of this type is not expressible using any of the Core Event Data types.

**Data Aggregation:** the process of summarizing usage events.

**Data Correlation:** the association of Event Data generated by different DAVIC Elements for the same service usage instance.

**Data Distribution:** process of sending Event Data to specific External Support Systems based on pre-established information about the data needed by those systems.

**Data Formatting:** the process of creating a structured representation of the unformatted usage records using a pre-defined format.

**Data Generation:** the process of determining what Event Data must be measured and recorded, and producing the necessary data.

**data integrity:** the detection or protection of unauthorized modification of data.

**data origin authentication:** corroboration that the identity of the source of data is as claimed.

**DAVIC Element:** a component of a DAVIC system. A possible source generator of Usage Data.

**DAVIC System Manager:** a component that supports the overall management of the DAVIC System, of which Usage Data management (or Accounting Management) is a part.

**Delivery System (DS):** the portion of the DAVIC System that enables the transfer of information between DS-users.

**Deployment Modeling:** allows you to model how your application is mapped to a distributed deployment network.

**device:** a small piece of hardware, not working by itself, designed to run specialized tasks in association with a host, or to provide resources required by an application but not provided directly by the host. Examples include a conditional access sub system or an electronic program guide application device.

**Distribution Network:** a collection of equipment and infrastructures that delivers information flows from the Access Node to the Network Termination elements of the Access Network.

**domain:** a scope that delimits (makes clear what is included and what is not) the extent of influence of one object on another. Domain boundaries may represent regulatory, ownership, span-of-control and other influence factors.

**Domain Analysis:** an iterative process which focuses on what is in the system but not on how it is implemented. Domain Analysis builds a language/system independent description of the domain.

**downstream:** information flow direction is from an End Service Provider System to an End Service Consumer System.

**element:** a component of the hierarchical structure defined by a document type definition; it is identified in a document instance by descriptive markup, usually a start-tag and end-tag.

**Email:** Electronic mail. Email allows the sending of information in an electronic format from one Internet user to another. Users are identified on the Internet by a unique email address.

**encryption:** a mathematical technique used to ensure the confidentiality of security management information.

**End-Service Consumer (ESC):** a user, either human or machine, whose primary interaction with the system is through the STU.

**End-Service Consumer System (ESCS):** a system that (predominantly) consumes information. ESCSs are ISPS and ESPS clients. The ESCS includes the STU and the ESC.

**End-Service Provider (ESP):** an entity with jurisdiction over a domain that contains a system that (predominantly) provides information to clients.

**End-Service Provider System (ESPS):** a system that (predominantly) provides information to clients. ESPSs are ISPS clients and may also be clients of other ESPSs. ESPSs consist of hardware and software sub-systems that use ISP services to provide video and multimedia services to ESCSs.

**end-tag:** descriptive markup that identifies the end of an element

**Enhanced Level 1 Gateway (EnhancedL1GW):** this provides the first-point-of-connection for the customer to the service environment. It supplies the customer with the top level navigation information, allowing a choice of multiple service gateways or service providers.

**Entitlement Control Message (ECM):** conditional access messages carrying an encrypted form of the control words or a means to recover the control words, together with access parameters, i.e., an identification of the service and of the conditions required for accessing this service.

**Entitlement Management Message (EMM):** conditional access messages used to convey entitlements or keys to users, or to invalidate or delete entitlements or keys.

**environment:** a synonym for the environment of a system. Also when context allows, it may be a synonym for the environment of a block, process, procedure, or service.

**Environment Entity:** this entity is responsible for establishing and terminating the environment in which an application will operate. This environment includes the quality of service requirements for both the application and product entities.

**environment of a system:** the external world of the system being specified. The environment interacts with the system by sending/receiving signal instances to/from the system.

**error:** an error occurs during the interpretation of a valid specification of a system when one of the dynamic conditions of SDL is violated. Once an error has occurred, the subsequent behavior of the system is not defined.

**Event Data:** data relating to events and usage of resources, typically needed for financial transactions involving end Service Consumers, network providers, end service providers and Content Providers. This data is collected from the system by an Event Data Manager and made available at the External Transfer Interface.

**Event Data Collection Element:** a portion of each DAVIC Element which aggregates internal usage events that occur within the DAVIC Element and then produces Event Messages which it transmits over the Event Data Interface to the Event Data Manager.

**Event Data File:** a collection of Event Data Records sent by an Event Data Manager to an External Support System over the Bulk External Transfer Interface.

**Event Data Functions:** the functions that the Event Data Collection Element and the Event Data Manager perform on Event Data. These functions are Data Generation, Data Aggregation, Data Formatting, Data Correlation, and Data Distribution.

**Event Data Interface:** the interface between a DAVIC Element and the Event Data Manager. This interface supports: (1) registration by the DAVIC Elements with the Event Data Manager, and (2) the delivery of Event Data to the Event Data Manager.

**Event Data Manager:** a DAVIC system component that supports the Event Data Interface and the External Transfer interface. It accepts Registration Messages and Event Data Messages over the Event Data Interface. For received Event Data, it performs the Event Data Functions of Data Formatting, Data Correlation, and Data Distribution.

**Event Data Message:** a message containing Event Data sent to report a usage event of a registered event type.

**Event Data Record:** a set of associated Event Data. These records are sent in transactional messages and files from an Event Data Manager to an External Support System over the External Transfer Interface.

**Event Trace Diagram:** Interaction Diagram or Message Trace Diagram.

**External Support System :** a component external to the DAVIC System which receives Usage Data through the Usage Data Transfer Interface (Interactive or Bulk).

**FTP:** File Transfer Protocol. FTP allows a connection to be made between two Internet computers in order to transfer files between them.

**function:** features of a Digital Audio Visual System that are realized through Services. For example, interactive play control (VCR-type controls) is a function. (see also Service)

**functional control entities:** call/connection entity and session entity.

**functional entity:** process which terminates an information flow.

**Functional Model (OMT):** shows how objects in the system interact.

**Gopher:** file and information retrieval system that presents distributed documents and directories on the Internet in an integrated manner to the user. Gopher clients are typically text based information retrieval tools.

**hierarchy:** an arrangement of objects in order of rank; some objects in the arrangement are subordinate to others; objects of the same hierarchical rank are peer objects.

**host:** a piece of equipment where one or more devices can be connected (eg. an IRD, a VCR, a PC or a STU).

**HTML:** Hypertext Mark-up Language. HTML is a document formatting language used to specify the format of Hypertext documents on the World Wide Web. HTML consists of ASCII text files with special tags to specify formatting information. This includes the specification of Hypertext links, graphics information and plain text.

**HTTP:** Hypertext Transfer Protocol. HTTP is the protocol Web servers and browsers use to send request, accept request, send responses and receive response of documents on the World Wide Web. It also specifies how to initiate transfers of data using other protocols such as FTP and SMTP.

**hyperlink:** a relationship between two anchors.

**Hypertext:** hypertext is text that a user may select in some manner to cause some different set of information to be retrieved and displayed. A common example is a link on a Web page, which may be selected causing a new Web page to be retrieved.

**identifier:** the unique identification of an object, formed from a qualifier part and a name.

**Implementation Conformance Statement (ICS):** a statement made by the supplier of an implementation or system claimed to conform to a given specification, stating which capabilities have been implemented. [ISO/IEC 9646]

**Implementation eXtra Information for Testing (IXIT):** a statement made by a supplier or implementers of an implementation under test which contains or references all of the information (in addition to that given to the ICS) related to the implementation under test and its testing environment, which will enable the test laboratory to run an appropriate test suite against the implementation under test. [ISO/IEC 9646]

**information flow:** the transfer of information from an information-source-object to an information-destination-object.

**information flow entities:** the Information Flow Entities define the various types of information that pass through the DSRM. These flows encompass the User, Control and Management functions defined in the abstract system reference model. (S1-S5).

**instance:** the definition of an object with all its properties. An instance of a type is an object which has all the properties of the type as given in the type definition. [ITU: SDL]

**inter layer interface:** an interface between a subordinate and superior service layer

**Interaction Diagram:** similar in principle to collaboration diagrams. Show the interaction between objects over time.

**Interactive External Transfer Interface:** the portion of the External Transfer Interface used for transactional transfer of Event Data Records.

**Interactive:** the portion of the Usage Data Transfer Interface used for transactional transfer of Usage Data Records.

**interface:** a point of demarcation between two blocks through which information flows from one block to the other. See logical and physical interface definitions for further details. A DAVIC interface may be physical-interface or a logical-interface.

**interface definition:** interface definitions are the detailed physical definitions used to define the method of interaction between system entities. These definitions are provided for the various reference points. A finite set of interfaces may exist at each particular reference point.

**interface image:** a logical interface through which transparent information flows from one block to another; the characteristics of the interface image are defined at another reference point.

**Intermediate-Service Provider (ISP):** ISPs provide adjunct services and convey information among ESPs and ESCs.

**Internet:** the term Internet is used in many ways in this international standard. It is widely understood to mean the global network of computers tied together via different types of networks. These computers use a standard set of protocols to communicate, mainly TCP/IP and UDP/IP.

**Interoperability Testing:** testing the extend to which two or more implementations behave together as expected by the relevant specification.

**joint stereo:** a coding option in MPEG-1 audio that exploits the redundancy between the left and right audio channels.

**key management:** the generation, storage, distribution archiving, deletion, revocation, registration, and deregistration of cryptographic keys.

**layer:** a collection of objects of the same hierarchical rank.

**layer management:** a set of objects in a given service layer that establish and control what services are provided by servers to what users on any plane in the service layer.

**layer service:** functions provided by a layer to a layer above through a Service Access Point.

**Level 1 Gateway (L1GW):** see Basic Level 1 Gateway and Enhanced Level 1 Gateway.

**Level 2 Gateway (L2GW):** provides components offering navigational services allowing choice of service providers and listings of services provided.

**level of abstraction:** one of the levels of a block tree diagram. A description of a system is one block at the highest level of abstraction and is shown as a single block at the top of a block tree diagram.

**logical information flow path:** a sequence of information transfers from an initial information source object to a terminal information destination object either directly or through intermediate objects; different physical information flow paths may be associated with a logical information flow path segment or with the entire path in different implementations.

**logical interface:** an interface where the semantic, syntactic, and symbolic attributes of information flows is defined. Logical interfaces do not define the physical properties of signals used to represent the information. A logical interface can be an internal or external interface. It is defined by a set of information flows and associated protocol stacks.

**Management Entity:** the Management Entity is responsible for the operation and maintenance functions of a network. Several instances of information flow S5 exist for the Management Entity.

**Management Plane (MP):** a plane that contains those interfaces and functions which support interactions which may be typified as being temporally disjoint from an off-hook interaction. Interactions among Management Plane objects may also occur concurrently with an off-hook interaction.

**management-information:** information exchanged by Management Plane objects; may be content-information or control-information.

**Message Trace Diagram:** Interaction Diagram or Event Trace Diagram.

**Method:** a systematic way to achieve a particular goal.

**Methodology:** a coherent, integrated set of methods from which a coherent sub-set can be selected for particular applications. A methodology should contain at least four components:

1. a conceptual model of constructs essential to the problem;
2. a set of procedures suggesting the direction and order to proceed;
3. a series of guidelines identifying things to be avoided;
4. a collection of evaluative criteria for assessing the quality of the product.

**Methodology framework:** a way, or structure, that supports a number of methods and languages to be used together when developing a system.

**MHEG-5 class:** the abstract definition of exchanged and internal attributes of parts of interchangeable multimedia/hypermedia objects. It also defines the semantics of internal behaviours and the effect of MHEG-5 actions for these objects.

**MHEG-5 object:** an instance of an MHEG-5 class. An MHEG-5 object is not a physical object, but rather an abstraction that may have many representations of different types. Various software services handle such representations.

**monomedia component:** a collection of data representing a single type of audiovisual information.

**monospace format:** a presentation format of characters in which each character utilizes a character matrix of the same size, independent of the width and height of the character.

**multimedia component:** a collection of data comprising one or more multimedia components.

**name:** a lexical unit used to name SDL objects.

**navigation:** the process of reaching a service objective by means of making successive choices; the term may be applied to the selection of a service category, a service provider or an offer within a particular service.

**network:** a collection of interconnected elements that provides connection services to users.

**network control function:** the Network Control Function is responsible for the error-free receipt and transmission of content flow information to and from the Server.

**Network Element (NE):** a component of a telecommunications network whose function it is to provide communications services to users. These functions include information transport, adaptation, switching and control.

**Network Interface Unit (NIU):** the NIU accepts network specific content-information flows from the Delivery System and provides a non-network specific interface to the Connectivity Entity in the STU. (additional definitions of the NIU may exist).

**Network Related Control:** the Network Related Control entity provides control functions for network configuration, connection establishment and termination and information routing in a network instance of a Delivery System.

**Network Service Access Point (NSAP):** an interface between SL2 Session Layer and SL3 Network Service Layer objects through which the SL3 (server) objects provide services to the SL2 (client) objects.

**Network Service Layer (SL3):** a collection of objects that enable client objects to communicate with remote peers: SL3 objects provide basic lower-layer network services such as addressing/routing, connection services, and physical layer services to SL2 clients.

**Network Termination (NT):** the element of the Access Network performing the connection between the infrastructure owned by the Access Network operator and the Service Consumer System (ownership decoupling). The NT can be passive or active, transparent or not.

**non-repudiation:** the proof of the origin and reception of a message. This means that the sender cannot deny the sending of the message and the receiver cannot deny the reception of the message.

**Object:** a representation of a system component that has both state and behavior.

**Object Collaboration Diagram:** provides a snapshot of a systems state and is used to emphasize relationships.

**Object Model:** shows the static relationships between classes. The Object Model is described by a class diagram. The Object Model defines the behavior required by the various classes to ensure that the use cases and business rules are supported correctly.

**Operations Support System (OS):** a system whose main function is to run applications that manage network elements, networks and services.

**Package:** a nested name space in a model which contains classes.

**partition:** a decomposition or subdivision of an object into smaller objects; the created objects are peers with respect to each other, but are hierarchically subordinate to the original partitioned object.

**partitioning:** the subdivision of a unit into smaller components which when taken as a whole have the same behavior as the original unit. Partitioning does not affect the static interface of a unit.

**PC card:** a physical packaging standard conforming to PCMCIA Type 1 or Type 2 implementations.

**peer:** of the same rank or order: peer objects belong to the same layer (category or classification).

**peer-entity authentication:** corroboration that a communicating entity has the claimed identity.

**physical information flow path:** a channel or a sequence of channels that constitutes a real or virtual connection between an information source object and an information destination object.

**physical interface:** an interface where the physical characteristics of signals used to represent information and the physical characteristics of channels used to carry the signals are defined. A physical interface is an external interface. It is fully defined by its physical and electrical characteristics. Logical information flows map to signal flows that pass through physical interfaces.

**plane:** a category that identifies a collection of related objects, e.g., objects that execute similar or complementary functions; or peer objects that interact to use or to provide services in a class that reflects authority, capability, or time period. Management-plane service objects, for example, may authorize ISP-clients' access to certain control-plane service objects that in turn may allow the clients to use services provided by certain user-plane objects.

**port:** an abstraction used by transport protocols to distinguish among multiple destinations associated with particular applications running on a host computer: an application can specify the ports it wants to use; some ports are reserved for standard applications/services such as e-mail (also known as well-known ports).

**primitive:** an abstract interaction between a user of a layer service and the provider of a layer service; four basic primitive types are commonly used: (service-) request, indication, response, and confirmation.

**principal service:** the top service class of peer objects interacting in some defined context.

**Principal Service Layer (SL0):** a collection of associated objects that interact with peers to use or provide principal service, e.g., sending or receiving and presenting content-information such as movies, music, or stock market data to the end information users (human or machine); SL0 objects rely on services provided by SL1 objects.

**privacy:** privacy protects authorized participants from illegal utilization or knowledge of information related to their components in the DAVIC System.

**procedure:** an encapsulation of the behavior of part of a process. A procedure is defined in one place but may be referred to several times within a process.

**process:** a communicating extended finite state machine. Communication can take place via signals or shared variables. The behavior of a process depends on the order of arrival of signals in its input port.

**process instance:** an instance of a process created at system creation time or dynamically as a result of a create [request].

**Product Entity:** the entity in the STU responsible for accepting transparent content-information and presenting the information to the appropriate using machine.

**protocol:** set of message formats (semantic, syntactic, and symbolic rules) and the rules for message exchange between peer layer entities (which messages are valid when).

**provider:** an object that interacts with clients or users.

**proxy signalling agent:** signalling process performing end point signalling function on behalf of the end user. Extended definition is required if proxy is used also in hybrid network, e.g., MPEG HFC and ATM.

**Q.2931 MACRO:** single notation which summarizes the exchange of information (S4 flow) between call/connection control entities during the call set-up or release phases.

**randomization:** the process of removing auto-correlation from a signal, i.e. white noise spectrum shaping at the transmitter side to ease symbol or bit timing recovery at the receiver side.

**Real-time:** quality of a process, the execution of which is determined or controlled in time. The term is sometimes extended to refer to a delivery process which is perceived fast enough to be considered as almost instantaneous.

**Real-time Payment:** the determination of the payment method desired by the end Service Consumer and the access to corresponding account information, if any.

**Real-time Pricing:** the determination of the price of a service soon after a pre-defined event occurs, for example an end Service Consumer's request for information about a service or the conclusion of a service usage instance.

**real-time stream:** an MPEG-2 transport stream containing monomedia components of which the timing of the decoding and presentation in an STU is controlled by the characteristics of the stream during the delivery of the stream to the STU.

**reference point:** a set of interfaces between any two related blocks through which information flows from one block to the other. A reference point comprises one or more logical (non-physical) information-transfer interfaces, and one or more physical signal-transfer interfaces.

**refinement:** the addition of new details to the functionality at a certain level of abstraction. The refinement of a system causes an enrichment in its behavior or its capabilities to handle more types of signals and information, including those signals to and from the environment. Compare with partitioning.

**Registration Message:** a message used to register to send (for a DAVIC Element) or receive (for an External Support System) Event Data.

**rendering:** the process in the STU to combine one or more monomedia components such as characters, text, and graphical objects into one presentation on a screen.

**resource:** a unit of functionality provided by the host for use by a device. A resource defines a set of objects exchanged between device and host by which the device uses the resource.

**S1:** content-information flow, from a source to a destination object on the User Plane of any service layer.

**S2:** control-information flow from a source to a destination object on the Control Plane of the Application Service Layer (SL1).

**S3:** control-information flow from a source to a destination object on the Control Plane of the Session and Transport Service Layer (SL2).

**S4:** control-information flow from a source to a destination object on the Control Plane of the Network Service Layer (SL3).

**S5:** management-information flow from a source to a destination object on the Management Plane of the container object: the objects may be peers (service layer is known), or the service layer may be unspecified.

**Scenario Diagram:** shows how the Objects in a system interact over time.

**scope unit:** the concrete grammar which defines the range of visibility of identifiers. Examples of scope units include the system, block, process, procedure, partial typed definitions and service definitions.

**scrambling:** the process of making a signal unintelligible at the transmission point in order that it can only be received if an appropriate descrambling system is in place at the point of reception. Scrambling can be applied to audio, video or data signals.

**SDL (CCITT Specification and Description Language):** a formal language providing a set of constructs for the specification of the behavior of a system.

**SDL/GR:** the graphical representation in SDL. The grammar for SDL/GR is defined by the concrete graphical grammar and the common textual grammar.

**security auditing:** a security audit trail, or log, is data collected and potentially used to facilitate a security audit. A security audit is an independent review and examination of system records and activities in order to test for adequacy of system controls, to ensure compliance with established policy and operational procedures, to detect breaches in security, and to recommend any indicated changes in control, policy and procedures.

**server:** any service providing system.

**service:** a set of elementary streams offered to the user as a program. They are related by a common synchronization. They may be made of different data, e.g. video, audio, subtitles, other data.

**Service Access Point (SAP):** an interface between two service layers through which the higher layer may access services provided by the lower layer.

**Service Data:** data, such as prices and account (e.g., credit card) numbers, needed dynamically by DAVIC Elements or External Support Systems. This data is required or provided by an end Service Consumer during the billing-related part of a service session (e.g., when the price of a service is being provided, when the end Service Consumer chooses a method of payment) and, therefore, must be delivered promptly through the Service Data Interface.

**Service Data Functions:** the functions implemented by External Support Systems and offered to DAVIC Elements through the Service Data Interface. These functions include Real-time Pricing, Spending Control, Real-time Payment and Account Access.

**Service Data Interface:** a transactional interface between DAVIC Elements and External Support Systems used by DAVIC Elements and External Support Systems to promptly deliver Service Data.

**Service Data Message:** a message containing Service Data sent over the Service Data Interface.

**Service Gateway (SGW):** an element of the service domain through which a client can browse available services; also a mechanism for a client to obtain an object reference (message connection) to an instance of a service.

**Service Information (SI):** digital data describing the Delivery System, content and scheduling/timing of MPEG-2 Transport Streams. It includes MPEG-2 PSI together with independently defined extensions.

**service layer:** a set of service objects of the same hierarchical rank

**service object:** an object characterized in terms of the services it uses or provides, and not in terms of the physical attributes: different real systems may use or provide identical services.

**Service Provider:** an entity that provides a service to a client.

**Service Provider System (SPS):** a general reference to ESP or ISP systems.

**Service Related Control:** an entity that provides all control functions for the services that are offered by a network instance of the Delivery System. The DSRM allows for SL0, SL1 and SL2 Service Related Control subsets.

**session:** an interval during which a logical, mutually agreed correspondence between two objects exists for the transfer of related information. A session defines a relationship between the participating users in a service instance.

**Session and Transport Service Layer (SL2):** a collection of objects that interact to establish and maintain an environment for local or remote application-layer services; client of network services when remote services are used or provided: SL2 objects provide session services over reliable transport to SL1 clients.

**Session Control Function:** This entity, in a Service Provider System, is responsible for establishing and terminating the environment in which an application will operate. This environment includes the quality of service requirements for both the application and product entities.

**session entity:** user or network process which terminates S3 flow (ses).

**Session Service Access Point (SSAP):** an interface between an Application Service Layer and a Sessions and Transport Service Layer through which SL2 (server) objects provide services to SL1 (client) objects.

**session services:** provide basic functions to create, modify, maintain, and tear down sessions (negotiate and allocate network resources).

**Set Top Box (STB):** a module that comprises both Set Top Unit (STU) and Network Interface Unit (NIU) functional elements. The STB may be either "integrated" or "modular". An integrated STB is designed for connection to a single DAVIC A1 or equivalent interface. A modular STB may be equipped with a DAVIC A0 or equivalent interface to enable connection of a range of NIUs.

**Set Top Unit (STU):** a module that contains the "network independent" functionalities of a Set Top Box (STB). The following functionalities are contained in a typical STU:- Processing & Memory Functions; MPEG2 Demux & AV Decoders; Graphics Display; Modulator Output for TV; Peripheral Interfaces.

**signal:** an instance of a defined signal type representing information meaningful to a process instance.

**signal route:** indicates the flow of signals between a process type and either another process type in the same block or the channels connected to the block. [1]

**smart card:** a physical packaging standard conforming to ISO-7816 Part 1 and 2.

**socket:** communications transport API that provides applications interprocess communication services using the underlying services provided by TCP/IP; the API allows an application to open a socket, request delivery services, and bind the socket to the desired destination and then send or receive data.

**specification:** a definition of the requirements of a system. A specification consists of general parameters required of the system and the functional specification of its required behavior. Specification may also be used as a shorthand for specification and/or description, e.g., in SDL specification or system specification.

**Spending Control:** the monitoring of spending during and across service usage instances, and the indication that a budget limit or credit limit has been reached.

**start-tag:** descriptive markup that identifies the start of an element.

**State Transition Diagram:** shows the state of a given context, the events that cause a transition from one state to another and the actions that result.

**Stream Service Element:** this Service Provider System entity allows for the processing of the content-information flows at the stream level. The content stream is a sub-set of the actual content-information flow and processing at the stream level allow the ability to uniquely align a service offering.

**subblock:** a block contained within another block. Subblocks are formed when a block is partitioned.

**subchannel:** a channel formed when a block is partitioned. A subchannel connects a subblock to a boundary of the partitioned block or a block to the boundary of a partitioned channel.

**subsignal:** a refinement of a signal and may be further refined.

**subsystem:** a decomposition of a system into smaller collections of objects; decomposition may be performed recursively.

**Support Data:** data, such as prices and account (e.g., credit card) numbers, needed dynamically by DAVIC Elements or External Support Systems. This data is required or provided by an Service Consumer during the billing-related part of a service session (e.g., when the price of a service is being provided, or when the Service Consumer chooses a method of payment).

**symbol:** a bit or a defined sequence of bits.

**system:** a collection of interacting objects that serves a useful purpose; typically, a primary subdivision of an object of any size or composition (including domains).

**System Conformance Statement (SCS):** a document summarizing which OSI International Standards, ITU-T Recommendations or Profiles are implemented and to which ones conformance is claimed. [ISO/IEC 9646]

**System Entity:** the main DSRM System Entities are the Service Provider System (SPS), Delivery System (DS), and Set Top Unit (STU).

**tag:** markup that delimits an element.

**Technique:** a way that a method is realized, or implemented.

**Telecommunications Management Network (TMN):** a network consisting of Operations Support Systems (OS) and data networking facilities whose purpose it is to provide management capabilities for telecommunications networks, network elements, resources and services.

**telecommunication service:** that which is offered by an Administration to its customers in order to satisfy a specific telecommunication requirement. (ITU-T Recs. I.112, M.60, Q.9).

**Telnet:** application providing a direct connection from one computer to another computer. The first computer behaves as a terminal of the host. All processes are executed on the host computer.

**Test Laboratory (TL):** an organization that carries out conformance testing and/or interoperability testing. [ISO/IEC 9646]

**Time Division Multiple Access (TDMA):** method to access a shared transmission medium where time is divided into slots and the nodes connected to the medium are synchronized by assigning each one of them one or more specific time slots to transmit.

**Tool:** a software item which automates or supports the use of a particular method or language [REED93]. In system/software engineering, a step-by-step formalized, manual or automated process for solving an engineering problem. [BRAE93]

**trading conditions:** commercial or contractual terms which, for instance, may be negotiated between a Content Provider and a Service Provider.

**transparent information:** information that is not significant semantically to an object used to transport the information.

**Transport Stream:** MPEG-2 Transport Stream.

**type:** a set of properties for instances. Examples of types in SDL include blocks, processes, services, signals, and systems.

**upstream:** information flow direction is from an ESC System to an ESP System.

**Usage Data:** data relating to usage of services and resources, typically needed for financial transactions involving Service Consumers, Network Providers, Service Providers and Content Providers. This data is collected from DAVIC Elements by DAVIC System Managers using the Usage Data Collection Interface, and is delivered to External Support Systems by DAVIC System Managers using the Usage Data Transfer Interface.

**Usage Data Accumulation:** the process of summarizing raw Usage Data.

**Usage Data Assembly:** the process of gathering together all of the Usage Data generated by a specific DAVIC Element for a specific use of a service.

**Usage Data Collection Administration:** the process of determining the disposition of logged Usage Data, providing External Support Systems access to the Usage Data, and scheduling the reporting of Usage Data based on pre-determined rules about the data needed for the External Support Systems.

**Usage Data Collection Element:** the portion of each DAVIC Element which generates Usage Data and transmits the data to the DAVIC System Manager over the Usage Data Collection Interface. This element could also perform Usage Data Accumulation, Usage Data Validation, Usage Data Assembly and Usage Data Formatting.

**Usage Data Collection Interface:** the interface between a DAVIC Element and a DAVIC System Manager. This interface supports the delivery of Usage Data to the DAVIC System Manager.

**Usage Data Correlation Support:** the process of supporting the correlation (i.e., association) of Usage Data generated by different DAVIC Elements for the same service usage instance. This support includes producing correlation keys, administering correlation keys, exchanging correlation keys, inserting correlation keys into Usage Data Records and correlating Usage Data based on correlation keys.

**Usage Data File:** a collection of Usage Data Records sent by a DAVIC System Manager to an External Support System over the Usage Data Transfer Interface.

**Usage Data Formatting:** the process of creating a structured representation of unformatted Usage Data using a pre-defined format.

**Usage Data Functions:** the functions that the Usage Data Collection Element and the DAVIC System Manager perform on Usage Data. These functions are Usage Data Generation, Usage Data Accumulation, Usage Data Assembly, Usage Data Validation, Usage Data Formatting, Usage Data Correlation Support and Usage Data Collection Administration.

**Usage Data Generation:** the process of determining what Usage Data must be measured and recorded, and producing this data.

**Usage Data Interface:** the Event Data Interface, the Service Data Interface and/or the External Transfer Interface. The main subject of this part of the specification.

**Usage Data Record:** a set of associated Usage Data. These records are sent in transactional messages over the Usage Data Collection Interface, and in transactional messages and files over the Usage Data Transfer Interface.

**Usage Data Transfer Interface:** the interface between a DAVIC System Manager and an External Support System. This interface has two subparts for different modes of data transfer. The bulk transfer part is used to transfer a collection of Usage Data Records in the form of a file. The interactive transfer part is used for transactional transfer of Usage Data Records.

**Usage Data Validation:** the process of editing Usage Data to ensure that it meets specific integrity checks and conforms to semantic and syntactic rules.

**Use Case Diagram:** shows the system's main Use Cases and the Actors that interact with them.

**Use Case Modeling:** requirements analysis technique. Use Cases capture the functional requirements of a system.

**user:** a service consuming object or system (block).

**User Plane (UP):** a classification for objects whose principal function is to provide transfer of (end) user information: user information may be user-to-user content (e.g., a movie), or private user-to-user data.

**Value-Added Service Provider (VASP):** this provider offers, for example, a Video-on-Demand Service to the end-user. Within the Systems Reference Model this is the ESP.

**variable:** an entity owned by a process instance or procedure instance which can be associated with a value through an assignment statement. When accessed, a variable yields the last value which was assigned to it.

**virtual channel:** communication channel that provides for the sequential unidirectional transport of ATM cells.

**virtual machine (VM):** an abstract specification of a micro-processor and its behaviour

NOTE: A VM may be implemented on different hardware processors. A VM therefore implements the mechanism for all these processors to execute the same instruction set. It is also possible for a micro-processor to be designed so that its instruction set is identical to that of a VM. VM code can be used to make software portable. In the context of DAVIC, the VM is used to extend interoperability by allowing program code produced once to be delivered to and executed on any compliant STU.

**WAIS:** Wide Area Information Search. WAIS is a network service for database browsing using specific search criteria. Requests must be made to a given WAIS server and the response consists of a list of documents and references to other WAIS servers.

**World Wide Web:** the WWW consists of a collection of servers on the Internet, which through a common communication protocol (HTTP), appear as a large distributed collection of information. Originally intended to regroup capabilities of gopher and WAIS and to extend them, it is now thought of as a network containing HTML documents that are accessed by a specific tool called a Web browser.

IECNORM.COM : Click to view the full PDF of ISO/IEC 16500-1:1999

## Annex B (informative) Acronyms and abbreviations

The following acronyms and abbreviations are used in this international standard. Some acronyms and abbreviations may have more than one definition. The context determines which interpretation applies in such instances.

AAL	ATM Adaptation Layer
AC	Access Control
AC-3	ATSC A52 Audio
ACSE	Application Control Service Element
ACTS	Advanced Communications Telematics Services
ACU	Access Control Unit
ADSL	Asymmetric Digital Subscriber Line
AE	Application Entity
AFI	Authority and Format Identifier
AIFF	Audio Interchange File Format
AII	Active Input Interface
AIS	Alarm Indication Signal
AN	Access Network, or Access Node
ANSI	American National Standards Institute
ANT	Active Network Termination
AOI	Active Output Interface
AOI	Active Output Interface
API	Application Programming Interface
ASAP	Application(-Service-Layer) Service Access Point
ASCII	American Standard Code for Information Exchange
ASE	Application Service Element
ASN.1	Abstract Syntax Notation 1
ASRM	Abstract System Reference Model
ATM	Asynchronous Transfer Mode
ATSC	Advanced Television Systems Committee
AU4	Administrative Unit - 4
AU44C	Administrative Unit - 44C
AUG	Administrative Unit Group
AWG	American Wire Gauge
BAF	Bellcore Automatic Message Accounting Format
BasicL1GW	Basic Level 1 Gateway
BCC	Bearer Channel Connection
BCU	Broadcast Control Unit
BER	Bit Error Ratio, or Basic Encoding Rules (re.: ASN.1)
B-ETI	Bulk External Transfer Interface
B-ISDN	Broadband Integrated Services Digital Network
BNF	Backus-Naur Format
bslbf	bit string left bit first
B-UDTI	bulk usage data transfer interface
BW	Bandwidth
c/c	call/connection entity
CA	Conditional Access
CAGR	Customers' Anticipated Growth Rate
CAP	Carrierless Amplitude and Phase modulation
CASE	Computer Aided Software Engineering
CATV	Cable Television, or Community Antenna Television
CBD	Connection Block Descriptor

CCIR	Comite Consultatif International de la Radiodiffusion
CCITT	Comité Consultatif International Telegraphique et Telephonique
CCP	Channel Change Protocol
CFP	Call for Proposals
CGM	Computer Graphics Metafile
CI	Content Item
CIE	Content Item Element
CLNP	Connectionless Network Protocol
CLP	Cell Loss Priority
CLUT	Color LookUp Table
CMB	CRC Message Block
CMIP	Common Management Information Protocol
CMIS	Common Management Information Service
CMISE	Common Management Information Service Element
CMSL	Content Metadata Specification Language
CN	Core Network
CORBA	Common Object Request Broker Architecture
CP	Common Part, or Control Plane
CPCS	Common Part Convergence Sub-layer
CPE	Customer Premises Equipment
CPN	Customer Premises Network
CPS	Content Provider System
CRC	Cyclic Redundancy Check
CRM	Connection Resource Manager
CTP	Connection Termination Point
CW	Control Word
DAB	Digital Audio Broadcasting
DAVIC	Digital Audio-Visual Council
DBR	Deterministic Bit Rate
DBS	Digital Broadcast Satellite
DE	DAVIC Element
DFP	Downstream Frame Period
DII	DAVIC Interface Initialization
DIIP	DAVIC Interface Initialization Protocol
DIS	Draft International Standard
DLL	Data Link Layer
DS	Delivery System, or Descrambling, or Downstream
DS3	Digital Signal - Level 3
DSA	Digital Signature Algorithm
DSDM	DAVIC System Dynamic Modeling
DSM	DAVIC System Manager
DSM-CC	Digital Storage Media - Command and Control
DSM-CC U-N	DSM-CC User-Network
DSM-CC U-U	DSM-CC User-User
DSRM	DAVIC System Reference Model
DSS	Digital Signature Standard
DSUR	Delivery System Usage Records
DTS	Decoding Time Stamp
DTTB	Digital Terrestrial Television Broadcasting
DVB	Digital Video Broadcasting
DVB-SI	DVB - Service Information
EBCDIC	Extended Binary Coded Decimal Interchange Code
ECM	Entitlement Control Message
EDCE	Event Data Collection Element
EDI	Event Data Interface, or Electronic Data Interchange

EDM	Event Data Manager
e-e cntrl	end-to-end control
EFD	Event Forwarding Discriminator
EL-FEXT	Equal Level - Far End Cross Talk
EMC	Electromagnetic Compatibility
EMM	Entitlement Management Message
EMMA	European Multimedia experiments in ATM environment
EMS	Element Manager System
EnhancedL1GW	Enhanced Level 1 Gateway
EPG	Electronic Program Guide
ESC	End Service Consumer
ESCS	End-Service Consumer System
ESF	Extended SuperFrame
ESI	End System Identifier
ESIGN	Efficient digital SIGNature scheme for smart cards
ESP	End Service Provider
ESPS	End-Service Provider System
ESS	External Support System
ETI	External Transfer Interface
ETR	European Telecommunications Recommendation
ETS(I)	European Telecommunications Standard(s Institute)
FCC	Federal Communications Committee
FEC	Forward Error Correction
FEXT	Far End Cross Talk
FFS	For Further Study
FIFO	First In First Out
FITL	Fiber Into The Loop
fpvsbf	floating point value sign bit first
FR	Frame Relay
FSN	Full Service Network
FTP	File Transfer Protocol
FTTB	Fiber to the Building
FTTC	Fiber to the Curb
FTTH	Fiber to the Home
GDMO	Guidelines for the definition of managed objects
GIOP	Generic Inter-ORB Protocol
GPS	Global Positioning System
GSM	Global System for Mobile communications
HDTV	High Definition Television
HEC	Header Error Control
HFC	Hybrid Fiber Coax
HFTTB	Hybrid Fiber To The Building
HMI	Human Machine Interface
HMSC	Human Machine Service Consumer
HO-DSP	High Order - Domain Specific Part
HRM	High Reliability Marker
HTML	HyperText Markup Language
I <sup>2</sup> C	Inter-Integrated Circuit
IBC	Inter-Integrated Circuit
ID	Identification
IDL	Interface Definition Language
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers
IETF	Internet Engineering Task Force
I-ETI	Interactive External Transfer Interface
IIOP	Internet Inter-ORB Protocol, or Internet Inter-Object Protocol
ILMI	Interim Local Management Interface
IMA	Interactive Multimedia Association

IN	Intelligent Network
INVOD	Intelligent Near Video On Demand
IOP	Inter-ORB Protocol
IP	Internet Protocol
IPR	Intellectual Property Rights
ISDN	Integrated Services Digital Network
ISO	International Organization for Standardization
ISP	Intermediate Service Provider, or Internet Service Provider
ITU	International Telecommunications Union
ITU-T	ITU - Telecommunications Standardization Sector
I-UDTI	Interactive usage data transfer interface
IWU	Interworking Unit
JBIG	Joint Bi-level Image Group
JPEG	Joint Photographic Experts Group
KOD	Karaoke-On-Demand
L1GW	Level 1 Gateway
L2GW	Level 2 Gateway.
LAN	Local Area Network
LAPB	Link Access Procedure Balanced
LAPD	Link Access Procedure D-Channel
LE	Local Exchange
LEWS	Local Exploitation Work station
LFSR	Linear Feedback Shift Register
LLC	Logical Link Control
LMDS	Local Microwave Distribution System
LSB	Least Significant Bit
MAC	Medium Access Control
Mbps	Megabits per second
MF	Management Function
MFS	Multiframe Synchronization
MHEG	Multimedia and Hypermedia information coding Experts Group
MIB	Management Information Base
MIME	Multimedia Internet Mail Extensions
MMC	Multimedia Conferencing
MMDS	Multi-channel Microwave Distribution System
MMS	Multimedia Conference Services
MO	Managed Object
MOC	Managed Object Class
MOD	Movies-On-Demand
MP	Management Plane
MPEG	Moving Picture Experts Group
MPEG-TS	MPEG-2 Transport Stream
MPTS	Multi-Program Transport Stream (ISO/IEC 13818-1 MPEG-2 Systems)
MS	Multiplex Section
MSB	Most Significant Bit
MUX	Multiplex
MVDS	Multimedia Video on Demand System
NC	Network Computer
NE	Network Element
NEF	Network Element Functionality
NIF	Network Interface Function
N-ISDN	Narrowband ISDN
NIU	Network Interface Unit
NMF	Network Management Forum
NMS	Network Management System
NNI	Network Node Interface
NOD	Network Ownership Decoupling, or News On Demand

NPT	Normal Play Time
NRC	Network Related Control
NRSS	National Renewable Security Standard committee
NRZ	Non-Return to Zero
NSAP	Network Service Access Point
NT	Network Termination
NTSC	National Television Systems Committee
NVOD	Near Video-On-Demand (Also N-VOD)
NW	Network
OAM	Operation Administration and Maintenance
OAM&P	Operations, Administration, Maintenance and Planning
OAN	Optical Access Network
OFDM	Orthogonal Frequency Division Multiplexing
OLT	Optical Line Termination
OMG	Object Management Group, OR Object Modeling Group
OMG-CDR	Object Management Group - Common Data Representation
OMG-GIOP	Object Management Group - Generic Inter-ORB Protocol
OMG-UNO	Object Management Group - Universal Networked Object
OMT	Object Modeling Technique
ONC	Open Network Computing
ONP	Open Network Provision
ONU	Optical Network Unit
OO	Object Oriented
OOAD	Object Oriented Analysis and Design
ORB	Object Request Broker
OS	Operating System
OSB	Output Signal Balance
OSF	Operations System Functionality
OSI	Open Systems Interconnection (Reference Model)
PC	Personal Computer
PCMCIA	Personal Computer Memory Card International Association
PCR	Program Clock Reference, OR Peak Cell Rate
PDH	Plesiochronous Digital Hierarchy
PDU	Protocol Data Unit, or Packet Data Unit
PES	Packetized Elementary Stream
PG	Parental Guidance
PHY	Physical Layer
PID	Packet Identifier, or Program Identification
PIN	Personal Identification Number
PKP	Public Key Partner
PLCP	Physical Layer Conversion Protocol
PLMN	Public Land Mobile Network
PM	Phase Modulation
PMD	Physical Medium Dependent
PMT	Program Map Table
PN	Program Number (MPEG-2)
PNG	Portable Network Graphics (specified by W3C)
PNO	Public Network Operator
PON	Passive Optical Network
POST	Power On Self Test
POTS	Plain Old Telephone System
PPI	Pay Per Information unit
PPM	Pulses Per Million
PPP	Point-to-Point Protocol, OR Pay Per Page

P-PSN	Public Packet Switched Network
PPT	Pay Per Time
PPV	Pay-Per-View
PRBS	Pseudo Random Binary Sequence
pses	Pseudo-session control entity (used in some Internet Access scenarios)
PSI	Program Specific Information (MPEG-2)
PSK	Phase Shift Keying
PSTN	Public Switched Telephone Network
PTI	Payload Type Identifier
PTS	Presentation Time Stamp
PVC	Permanent Virtual Channel
QAM	Quadrature Amplitude Modulation
QoS	Quality of Service
QPSK	Quaternary Phase Shift Keying
RDM	Reference Decoder Model
RDN	Relative Distinguished Name
RF	Radio Frequency
RFC	Request for Comments
RGB	Red Green Blue
RL	Return Loss
ROSE	Remote Operation Service Element
RPC	Remote Procedure Call
RS	Reed-Solomon, OR Regenerator Section
RSA	Rivest Shamir Adleman
RSVP	Resource ReServations Protocol
RTE	RunTime Engine
SAAL	Signaling ATM Adaptation Layer
SAP	Service Access Point
SAR	Segmentation and Re-assembly
SBR	Statistical Bit Rate
SC	Scrambling
SCR	Sustainable Cell Rate
SCS	Service Consumer System
SCTE	Society of Cable Telecommunications Engineers, Inc
SDB	Switched Digital Broadcast
SDH	Synchronous Digital Hierarchy
SDIE	Service Data Interaction Element
SDL	Specification and Description Language, or Syntax Description Language
SDL/GR	The Graphical Representation in SDL
SDU	Service Data Unit
SDV	Switched Digital Video
SEL	Selector
Ses	Session control entity
SFP	SuperFrame Period
SFSC	SuperFrame Synchronization Control
SGML	Standard Generalized Markup Language
SGW	Service Gateway
SI	Service Information
SK	Secret Key
SL0	Principal Service Layer identifier
SL1	Application Service Layer identifier
SL2	Session and Transport Service Layer identifier
SL3	Network Service Layer identifier
SL-ESF	Signaling Link Extended SuperFrame
SM	Security Management
SMATV	Satellite Master Antenna TeleVision
SMF	System Management Function

SMPTE	Society of Motion Picture and Television Engineers
SNMP	Simple Network Management Protocol
SONET	Synchronous Optical Network
SPI	Synchronous Physical Interface
SPIFF	Still Picture Image File Format
SPS	Service Provider System
SPTS	Single Program Transport Stream (ISO/IEC 13818-1 MPEG-2 Systems)
SPv	Service Provider
SPVC	Semi-Permanent Virtual Connection
SRC	Service Related Control
SRM	Session and Resource Manager
SRP	Security Reference Point
SSAP	Session Service Access Point
SSCF	Service Specific Coordination Function
SSCOP	Service Specific Connection Oriented Protocol
STB	Set-Top Box
STP	Shielded Twisted Pair
STS	Satellite Transmission System
STU	Set-Top Unit
SUR	Service Usage Records
SUS	Service User System
SVC	Switched Virtual Channel, or Switching Virtual Connection
TBD	To be defined
TC	Transmission Convergence
tcimbsf	two's complement integer, msb (sign) bit first
TCP	Transmission Control Protocol
TDM	Time Division Multiplex
TDMA	Time Division Multiple Access
TE	Terminal Equipment
TFTP	Trivial File Transfer Protocol
TIFF	Tag Image File Format
TMN	Telecommunication Management Network
TS	Transport Stream
TSB	Telecommunication Standardization Bureau
T-STD	Transport System Target Decoder
TTD	Transmission Technology Decoupling
TTP	Trail Termination Point
TV	Television
UD	User Data
UDCE	Usage Data Collection Element
UDP	User Datagram Protocol, or Usage Data Protocol
UDTI	Usage Data Transfer Interface
uimbsf	unsigned integer most significant bit first
UMD	Usage Metering Data
UML	Unified Modeling Language
UMR	Usage metering Record
UNI	User-Network Interface
UNO	Universal Networked Object
UP	User Plane
UPI	User Premises Interface
URL	Uniform Resource Locator
US	Upstream
UTC	Universal Coordinated Time
UTP	Unshielded Twisted Pair
VASP	Value Added Service Provider

VC	Virtual Channel, or Virtual Circuit, or Virtual Connection
VC4	Virtual Container 4
VC44C	Virtual Container 44C
vcCTP	Virtual Channel Connection Termination Point
VCI	Virtual Channel Identifier
VCR	Video Cassette Recorder
VDSL	Very high speed Digital Subscriber Line
VDT	Video Dial Tone
VM	Virtual Machine
VOD	Video-On-Demand
VP	Virtual Path
VPCI	Virtual Path Connection Identifier
VPI	Virtual Path Identifier
VPN	Virtual Private Network
W3C	World Wide Web Consortium
WWW	World Wide Web

IECNORM.COM : Click to view the full PDF of ISO/IEC 16500-1:1999

## Annex C (informative) Bibliography


The following documents are referenced in non-integral annexes of this part of ISO/IEC 16500:

- [1] Study Group X, *Report on the Meeting Held in Geneva from 18 to 27 May 1992; Part II.4—Annex B to Recommendation Z.100—Glossary*, COM X-R 27-E, (Geneva: International Telecommunications Union, July 1992.)
- [2] IXth Plenary Assembly, Melbourne, 14-25 November 1988, *Blue Book, Volume VII – Fascicle VII.3: Terminal equipment and protocols for telematic services. Recommendations T.0-T.63. (Rec. T62)*. (Geneva: International Telecommunications Union, 1989.)
- [3] IXth Plenary Assembly, Melbourne, 14-25 November 1988, *Blue Book, Volume I – Fascicle I.3: Terms and definitions. Abbreviations and acronyms. Recommendations on: means of expression (Series B), General telecommunications statistics (Series C)*. (Geneva: International Telecommunications Union, 1989.)

IECNORM.COM : Click to view the full PDF of ISO/IEC 16500-1:1999

## Annex D (informative) Interface examples

### D.1 ESP-ISP Management Plane interface example

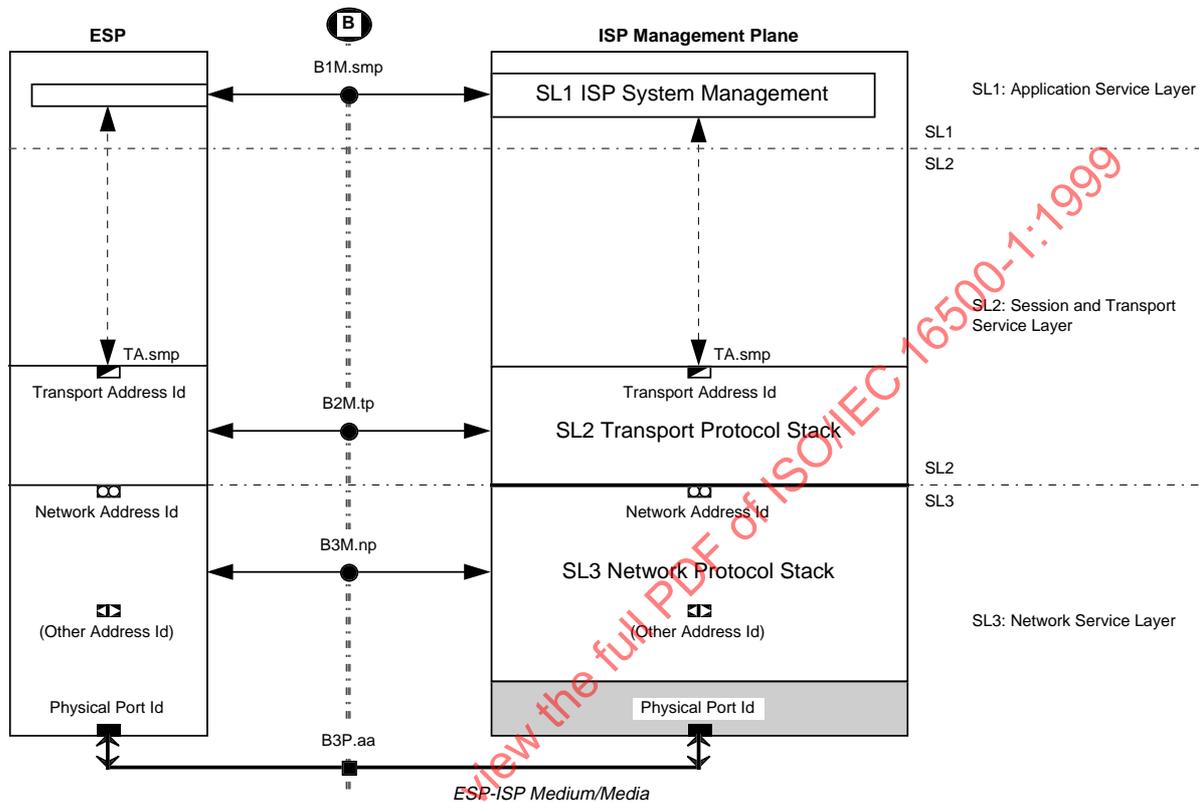

**Figure D-1. ESP-ISP Management Plane interface example**

The general models described above can be applied at various system partition levels. Figure D-1 is an example that illustrates Reference Point B interfaces between management-category objects in an ESP domain interacting with peers in an ISP domain.

The example shows an SL1 ISP System Management object using the services of an SL2 Transport Protocol Stack (object) to communicate with a peer management object in the ESP domain. The SL2 Transport Protocol Stack, in turn, relies on the services of an SL3 Network Protocol Stack (object).

To define the complete service capabilities of a case similar to this example, the three logical peer-to-peer interfaces and the physical interface identified in the example would need to be specified in full detail. In addition to the peer-to-peer information flows, the example shows the need to correlate vertical information flows in each domain (by using appropriate addressing schemes) to ensure that information flows are proper.

Figure D-1 contains the following elements (listed alphabetically):

**B**: a reference point between the ESP and ISP domains that, in this example, represents a set of logical and physical interfaces used by Management Plane objects to exchange information.

**B1M.smp**: a logical peer-to-peer interface through which information flows between the ISP System Management object and its ESP peer using an arbitrary *System Management Protocol*.

**B2M.tp**: a logical peer-to-peer interface through which information flows between the SL2 Transport Protocol Stack object and its ESP peer using an arbitrary *Transport Protocol*.

**B3M.np:** a logical peer-to-peer interface through which information flows between the SL3 Network Protocol Stack object and its ESP peer using an arbitrary *Network Protocol*.

**B3P.aa:** an arbitrary SL3 physical interface, consisting of one or more channels, through which all signal flows between the ESP and ISP occur. Channels map to Port Address Ids.

**ESP:** in this example, a collection of Management Plane objects in the End Service Provider domain.

**ISP Management Plane:** a collection of objects in the Intermediate Service Provider domain that contains layer and system management objects. Management message exchanges may take place during sessions established exclusively for management-information flows (as in this example), or such message exchanges may be part of a session established for another purpose. In either case, the TA.smp Transport Address Id serves to identify information flows between associated peers.

**Network Address Id:** an address identifier for routing messages to a particular SL2 Transport Protocol Stack.

**Other Address Id:** to provide connectivity, SL3 Network Service Layer objects may use other address identifiers.

**Physical Port Id:** identifies physical ports through which signals flow between the ESP and ISP domains. The signals represent information flows between logical peers in the two domains.

**SL1 Application Service Layer:** contains objects that communicate with peers in other domains using SL2 services.

**SL1 ISP System Management:** an SL1 object that interacts with a peer (unlabeled) object in the ESP, using some arbitrary *System Management Protocol*, through interface B1M.smp. SL1 peers do not communicate directly. Each uses the services of a local object, the SL2 Transport Protocol Stack to transfer information.

**SL2 Session and Transport Service Layer:** contains objects that provide SL1 clients transparent information transfer services. SL2 objects use SL3 services to communicate with peers in other domains.

**SL2 Transport Protocol Stack:** provides information flow pipes through which SL1 client information flows. The transport object uses an arbitrary *Transport Protocol* to communicate with its peer via interface B2M.tp, and relies on the services of the SL3 Network Protocol Stack object for connectivity to its peer via a Service Access Point identified by its Network Address Id.

**SL3 Network Protocol Stack:** provides logical and physical information transfer services for its SL2 clients. The network object uses an arbitrary *Network Protocol* to communicate with its peer via interface B3M.np. (The possible need for other SL3 addressing information is indicated by the Other Address Id reference.)

**SL3 Network Service Layer:** contains objects that provide logical and physical connection services that allow SL2 client objects to communicate.

**TA.smp:** an instance of Transport Address Id that identifies information flows between the ISP System Management object and its peer in the ESP domain; an attribute of the B1M.scp interface.

**Transport Address Id:** is an address identifier for message flows between the ISP System Management object and its peer in the ESP domain.

## D.2 ESP-ISP Control Plane interface example

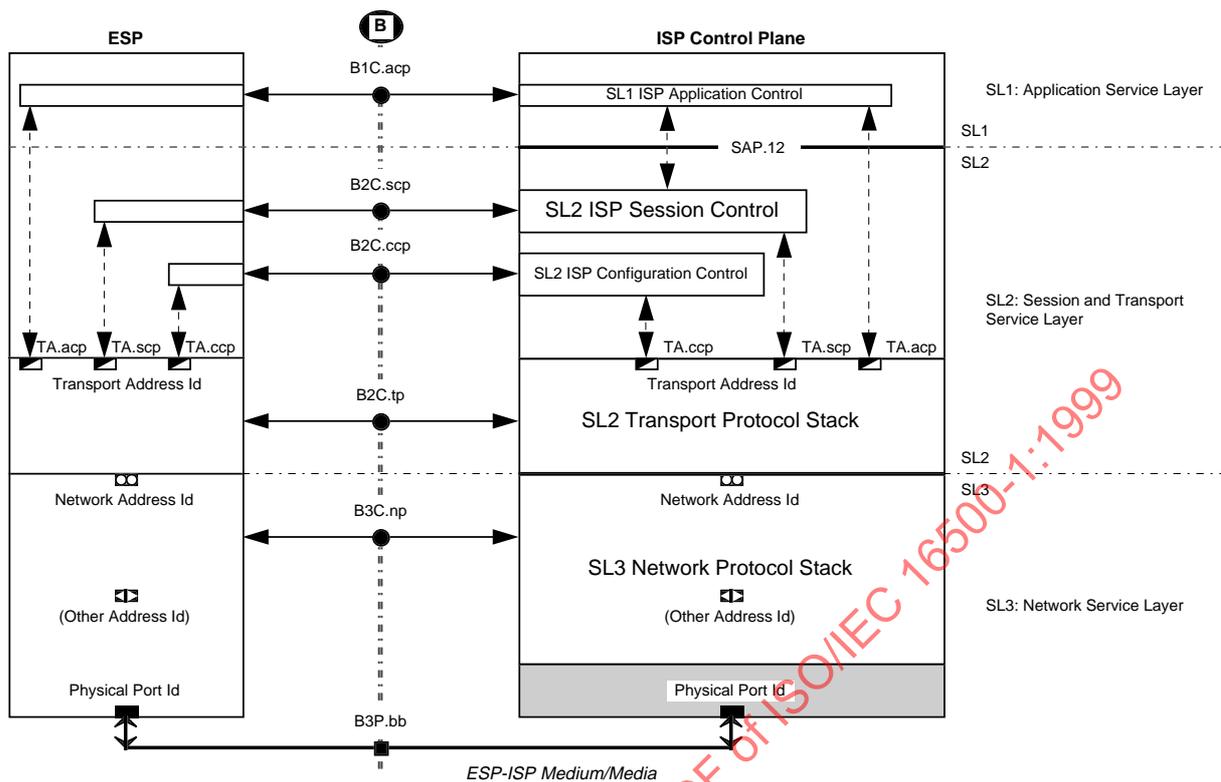


Figure D-2. ESP-ISP Control Plane interface example

The ESP-ISP Control Plane interface example shown in Figure D-2 illustrates multiple SL1 and SL2 objects using the services of one SL2 Transport Protocol Stack that, in turn, uses the services of one SL3 Network Protocol Stack (object). The SL2 Transport Protocol Stack uses different Transport Address Id instances to ensure that information flows are directed to the proper associated objects.

Figure D-2 contains the following elements (listed alphabetically):

**B**: a reference point between the ESP and ISP domains that, in this example, represents a set of logical and physical interfaces used by Control Plane objects to exchange information.

**B1C.acp**: a logical peer-to-peer interface through which information flows between the SL1 ISP Application Control object and its ESP peer using an arbitrary *Application Control Protocol*.

**B2C.ccp**: a logical peer-to-peer interface through which information flows between the SL2 ISP Configuration Control object and its ESP peer using an arbitrary *Configuration Control Protocol*.

**B2C.scp**: a logical peer-to-peer interface through which information flows between the SL2 ISP Session Control object in the ISP and its ESP peer using an arbitrary *Session Control Protocol*.

**B2C.tp**: a logical peer-to-peer interface through which information flows between the SL2 Transport Protocol Stack object in the ISP and its ESP peer using an arbitrary *Transport Protocol*.

**B3C.np**: a logical peer-to-peer interface through which information flows between the SL3 Network Protocol Stack object in the ISP and its ESP peer using an arbitrary *Network Protocol*.

**B3P.bb**: an arbitrary SL3 physical interface, consisting of one or more channels, through which all signal flows between the ESP and ISP occur. Channels map to Port Address Ids.

**ESP**: in this example, a collection of Control Plane objects in the End Service Provider domain.