
**Information technology — Coding-
independent code points —**

**Part 3:
Audio**

*Technologies de l'information — Points de code indépendants du
codage —*

Partie 3: Audio

IECNORM.COM : Click to view the full PDF of ISO/IEC 23091-3:2018



IECNORM.COM : Click to view the full PDF of ISO/IEC 23091-3:2018



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Code points and usage	2
4.1 General.....	2
4.2 Applicability.....	3
5 Principles for definition and referencing of code points	3
5.1 Code point encoding and defaults.....	3
5.2 Externally defined values.....	3
5.3 Reference format.....	3
5.4 Uniform Resource Name format.....	4
6 Audio code point definitions	4
6.1 Loudspeaker index and speaker channel position.....	4
6.2 Loudspeaker layout index and channel configuration.....	7
6.3 Loudspeaker positioning.....	12
6.4 Program loudness level.....	17
6.5 Anchor loudness level.....	17
6.6 Range of loudness.....	18
6.7 Top of loudness range.....	18
6.8 Maximum of momentary loudness level.....	18
6.9 Maximum of short-term loudness level.....	18
6.10 Short-term loudness level.....	18
6.11 Peak level.....	18
6.12 Compressor characteristic.....	19
Bibliography	22

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/IEC JTC1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

Together with ISO/IEC 23091-1 and ISO/IEC 23091-2¹⁾, this first edition of ISO/IEC 23091-3 cancels and replaces ISO/IEC 23001-8:2016, which has been technically revised.

A list of all parts in the ISO/IEC 23091 series can be found on the ISO website.

1) Under preparation. Stage at time of publication: ISO/IEC DIS 23091-2:2017.

Introduction

There is a need to identify some characteristics of media that are logically independent of the compression format (for example, aspects that relate to the sourcing or presentation or the role of the media component). These media characteristics have typically been documented by fields that take an encoded value or item selected from an enumerated list, herein called code points.

Prior to the existence of the parts of this standard, the specification of these fields was copied into every document that needed them, sometimes with new values being added.

This past practice has raised a number of issues, including the following.

- a) A lack of a formal way to avoid conflicting assignments being made.
- b) Having additional values defined in later documents that may be practically used with older compression formats, without clear formal applicability of these new values.
- c) Any update or correction of code point semantics can incur significant effort to update all places in which the code point is specified, instead of enabling a single central specification to apply.
- d) The choice of reference for other specifications (such as container or delivery formats) not being obvious; wherein a formal reference to a compression format specification appears to favour that one format over others, and also appears to preclude definitions defined in other compression format specifications.
- e) Burdensome maintenance needs to ensure that a reference to material defined in a compression format specification is maintained appropriately over different revisions of the referenced format specification, as the content of a compression format specification may change over time and is ordinarily not intended as a point of reference for defining such code points.

The parts of this series provide a central definition of such code points to address these issues. In this document, code points that are used for audio are specified. ISO/IEC 23091-1 specifies a Uniform Resource Name (URN) format that can be used with the code points defined in all parts of the series, including this one.

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of ISO/IEC 23091-3:2018

Information technology — Coding-independent code points —

Part 3: Audio

1 Scope

This document defines various code points and fields that establish properties of an audio stream that are independent of the compression encoding and bit rate. These properties could describe the appropriate interpretation of decoded audio data or could, similarly, describe the characteristics of such signals before the signal is compressed by an encoder that is suitable for compressing such an input signal.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 23091-1, *Information technology — Coding-independent code points — Part 1: Systems*

Rec. ITU-R BS.1771-1, *Requirements for loudness and true-peak indicating meters*

EBU R 128, *Loudness normalization and permitted maximum level of audio signals*

EBU Tech 3341, *Loudness Metering: 'EBU mode' metering to supplement Loudness normalization in accordance with EBU R 128*

EBU Tech 3342, *Loudness Range: A measure to supplement Loudness normalisation in accordance with EBU R 128*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 channel Ch

conceptual representation of an audio signal for coding or transmission as it may be used within the digital signal processing chain of an audio codec

3.2 dynamic range compressor DRC

process that modifies the amplitude of an audio signal

3.3

K-weighted

frequency weighting by means of a two-stage filter

Note 1 to entry: As defined in Reference [3].

3.4

LKFS

loudness, K-weighted, relative to nominal full scale

Note 1 to entry: As defined in Reference [3].

3.5

loudspeaker

LS

physical loudspeaker with a given geometric position relative to the listener and, if applicable, a label or name

Note 1 to entry: Even though the loudspeaker names used in this document each describe one discrete loudspeaker position, some loudspeaker signals may, in practice, be rendered on a loudspeaker array consisting of multiple loudspeakers which are all driven with the same audio signal, for example, in a theatrical setting.

3.6

loudspeaker index

association of a loudspeaker geometric position to a given index

3.7

loudspeaker layout

set of loudspeakers with a specific constellation of geometric positions meant for authoring or playback of audio content

3.8

loudspeaker layout index

association of a loudspeaker layout to a given index

4 Code points and usage

4.1 General

This Clause identifies the code points defined in this document, as listed in [Table 1](#) with cross-references to the subclause in which each is specified.

Table 1 — List of code points

Name	Abstract	Subclause
OutputChannelPosition	Audio channel assignment	6.1
ChannelConfiguration	Audio channel configuration	6.2
LoudspeakerGeometry	Audio loudspeaker geometry	6.3
LoudspeakerElevation	Audio loudspeaker elevation	6.3
LoudspeakerAzimuth	Audio loudspeaker azimuth	6.3
ProgramLoudness	Audio program loudness level	6.4
AnchorLoudness	Audio anchor content loudness level	6.5
LoudnessRange	Range of loudness	6.6
LoudnessRangeTop	Top value of loudness range	6.7
MomentaryLoudnessMax	Maximum Loudness (400 ms window)	6.8
ShortTermLoudnessMax	Maximum Loudness (3 s window)	6.9

Table 1 (continued)

Name	Abstract	Subclause
ShortTermLoudness	Loudness (3 s window)	6.10
SamplePeakLevel	Level of sample peak magnitude	6.11
TruePeakLevel	Level of true peak	6.11
DrcCharacteristic	Index of DRC characteristic	6.12

4.2 Applicability

The usage of this document is illustrated in [Figure 1](#). This document can be used to provide universal descriptions to assist interpretation of signals following decoding or to describe the properties of the signals before they are encoded.

This document provides code points for coding-independent description of multimedia signal characteristics.

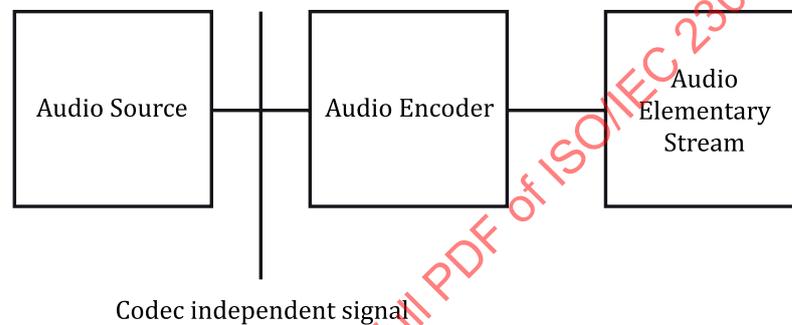


Figure 1 — Scope of this document

5 Principles for definition and referencing of code points

5.1 Code point encoding and defaults

The code points defined herein may be specified as a value or a label of an enumerated list. The definition of their encoding and representation (e.g. as a binary number) is the responsibility of the specification using the code point, as is the identification of any applicable default value not specified herein. It is also possible for external specifications to use a mapping to values defined here, if they wish to preserve identical semantics but different code point assignments.

Guidance is given for each code point as to a suitable type (e.g. unsigned integer) and a suitable value range (e.g. 0 to 63) for assistance in writing derived specifications. In some instances, default flag values are provided that are suggested to be inferred for code point parameters with associated flags that may not be explicitly signalled or specified in derived specifications.

5.2 Externally defined values

If the external specification permits values not defined by this document to be identified in the same field that carries values defined by this document, then that other specification should identify how values defined herein can be distinguished from values not defined herein.

5.3 Reference format

References to code points in this document should use only the code point name (i.e. a "Name" from Table 1) and specification title, and not use subclause numbers or any other "fragile" reference such as a table number. Example: **ChocolateDensity** as defined in ISO/IEC 23091-1".

5.4 Uniform Resource Name format

ISO/IEC 23091-1 specifies a URN format that may be used.

6 Audio code point definitions

6.1 Loudspeaker index and speaker channel position

Type: Unsigned integer, enumeration

Range: 0 – 127

OutputChannelPosition indicates the descriptive loudspeaker position in the 3D environment relative to the listener.

For the purpose of this document, the terms "loudspeaker" and "loudspeaker layout" are preferred over the terms "channel" and "channel configuration" because the latter appear to be potentially codec-dependent. Certain standards use these terms (channel, channel configuration) and in their respective contexts should be understood synonymously to the terms "loudspeaker" and "loudspeaker layout".

When a speaker is indicated as being at an explicit position, the position is provided by some means outside the scope of this specification. That might include signalling by azimuth, elevation, distance, or by some other suitable means.

Table 2 — Definition of loudspeaker index, OutputChannelPosition

Value	Loudspeaker position		Loudspeaker position according to Reference [1] (informative)	
	Abbr.	Name	Abbr.	Name
0	L	Left front	FL	Front left
1	R	Right front	FR	Front right
2	C	Centre front	FC	Front centre
3	LFE	Low frequency enhancement	LFE1	Low frequency effects-1
4	Ls	Left surround	LS	Left surround
5	Rs	Right surround	RS	Right surround
6	Lc	Left front centre	FLc	Front left centre
7	Rc	Right front centre	FRc	Front right centre
8	Lsr	Rear surround left	BL	Back left
9	Rsr	Rear surround right	BR	Back right
10	Cs	Rear centre	BC	Back centre
11	Lsd	Left surround direct	LSd	Left surround direct
12	Rsd	Right surround direct	RSd	Right surround direct
13	Lss	Left side surround	SL	Side left
14	Rss	Right side surround	SR	Side right
15	Lw	Left wide front	FLw	Front left wide
16	Rw	Right wide front	FRw	Front right wide
17	Lv	Left front vertical height	TpFL	Top front left
18	Rv	Right front vertical height	TpFR	Top front right
19	Cv	Centre front vertical height	TpFC	Top front centre
20	Lvr	Left surround vertical height rear	TpBL	Top back left
21	Rvr	Right surround vertical height rear	TpBR	Top back right

Table 2 (continued)

Value	Loudspeaker position		Loudspeaker position according to Reference [1] (informative)	
	Abbr.	Name	Abbr.	Name
22	Cvr	Centre vertical height rear	TpBC	Top back centre
23	Lvss	Left vertical height side surround	TpSiL	Top side left
24	Rvss	Right vertical height side surround	TpSiR	Top side right
25	Ts	Top centre surround	TpC	Top centre
26	LFE2	Low frequency enhancement 2	LFE2	Low frequency effects-2
27	Lb	Left front vertical bottom	BtFL	Bottom front left
28	Rb	Right front vertical bottom	BtFR	Bottom front right
29	Cb	Centre front vertical bottom	BtFC	Bottom front centre
30	Lvs	Left vertical height surround	TpLS	Top left surround
31	Rvs	Right vertical height surround	TpRS	Top right surround
32		Reserved		
33		Reserved		
34		Reserved		
35		Reserved		
36	LFE3	Low frequency enhancement 3		
37	Leos	Left edge of screen		
38	Reos	Right edge of screen		
39	Hwbcsl	half-way between centre of screen and left edge of screen		
40	Hwbcar	half-way between centre of screen and right edge of screen		
41	Lbs	Left back surround		
42	Rbs	Right back surround		
43–125		Reserved		Reserved
126	Expl	Explicit position (see text)		
127		Unknown / undefined		

Figure 2 shows a subset of the loudspeaker positions in the 3D environment relative to the listener, with each loudspeaker labelled with an abbreviation from Table 2. Loudspeakers lying on the innermost box are in the bottom level, those on the middle box are in the middle level, and those on the outermost

box are in the top level. The circles labelled Ts represent the top centre loudspeaker directly above the listener's position.

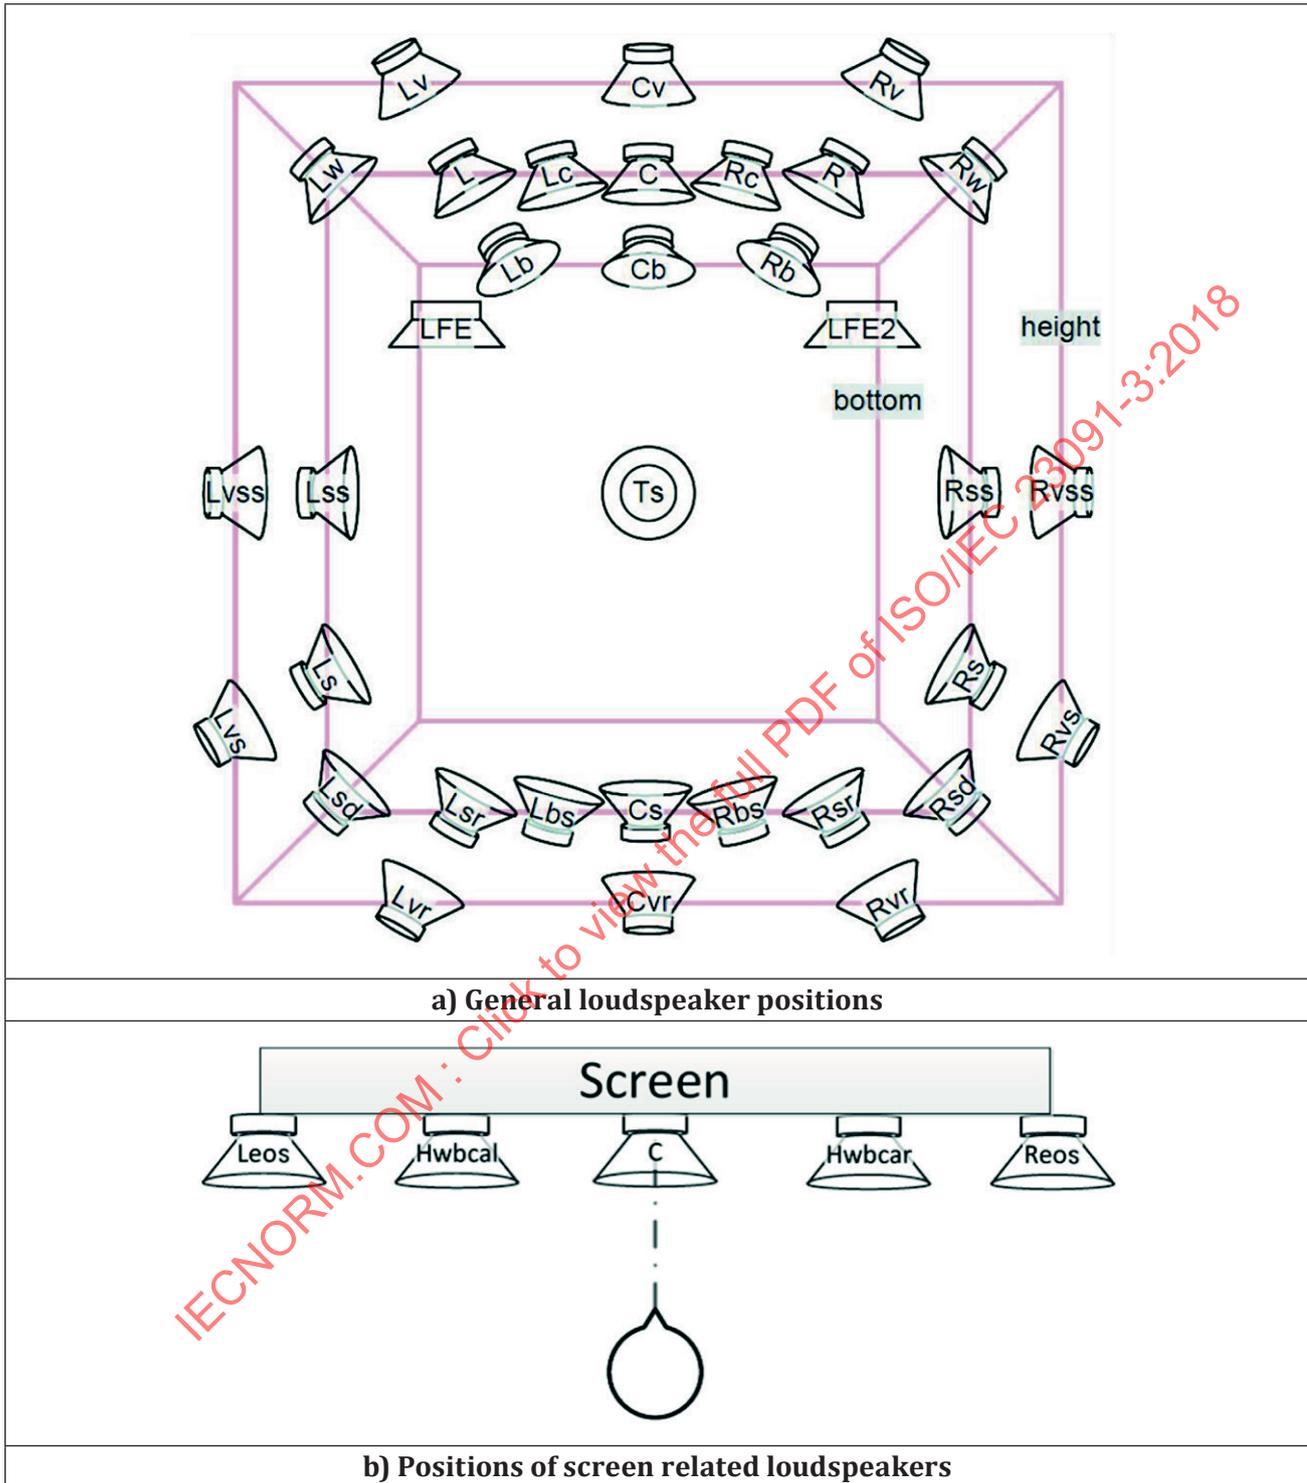


Figure 2 — Loudspeaker positions

6.2 Loudspeaker layout index and channel configuration

Type: Unsigned integer, enumeration

Range: 0 – 31

The **ChannelConfiguration** specifies the loudspeaker layout. This defines the number of loudspeakers and their associated positions. The name, abbreviation, and general position of each loudspeaker are informative and can be deduced from [Table 3](#). Due to historical reasons, loudspeaker names may correspond to different geometrical positions or coordinates depending on the loudspeaker layouts in which they have been defined.

Unless otherwise noted, the list of loudspeaker names in [Table 3](#) does not imply any particular order in which corresponding channel signals are stored or transmitted in a certain coding scheme. If such an order is required by a coding scheme, then the corresponding document should mandate an order of channels within the scope of its own specification.

Table 3 — ChannelConfiguration, loudspeaker layout index, corresponding number of loudspeakers and their associated positions

Value	"Front/Surr. LFE" notation	Loudspeaker names in loudspeaker layout	Loudspeaker abbrev.	Informative geometric position Azim., Elev. ^{a)}		Ch. is LFE
0	—	any setup	—	—	—	—
1	1/0.0	centre front	C	0,	0	0
2	2/0.0	left front, right front	L R	30, -30,	0 0	0 0
3	3/0.0	centre front, left front, right front	C L R	0, 30, -30,	0 0 0	0 0 0
4	3/1.0	centre front, left front, right front, rear centre	C L R Cs	0, 30, -30, 180,	0 0 0 0	0 0 0 0
5	3/2.0	centre front, left front, right front, left surround, right surround	C L R Ls Rs	0, 30, -30, 110, -110,	0 0 0 0 0	0 0 0 0 0
6	3/2.1	centre front, left front, right front, left surround, right surround, LFE	C L R Ls Rs LFE	0, 30, -30, 110, -110, 0,	0 0 0 0 0 -15	0 0 0 0 0 1

a) "Nominal" positions as found in typical layout definitions. Tolerances for the angular positions are omitted by intention as the values vary between various definitions that can be found in relevant industry standard documents. The azimuth angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The elevation angle is expressed in degrees where positive values indicate angles above the horizontal plane.

Table 3 (continued)

Value	"Front/ Surr. LFE" notation	Loudspeaker names in loudspeaker layout	Loudspeaker abbrev.	Informative geometric position Azim., Elev. ^{a)}		Ch. is LFE
7	5/2.1	centre front,	C	0,	0	0
		left front centre,	Lc	30,	0	0
		right front centre,	Rc	-30,	0	0
		left front,	L	45,	0	0
		right front,	R	-45,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110,	0	0
		LFE	LFE	0,	-15	1
8	1+1	channel1	N.A.	N.A.		0
		channel2	N.A.	N.A.		0
9	2/1.0	left front,	L	30,	0	0
		right front,	R	-30,	0	0
		rear centre	Cs	180,	0	0
10	2/2.0	left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround	Rs	-110,	0	0
11	3/3.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110,	0	0
		rear centre,	Cs	180,	0	0
		LFE	LFE	0,	-15	1
12	3/4.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110,	0	0
		rear surround left,	Lsr	135,	0	0
		rear surround right,	Rsr	-135,	0	0
		LFE	LFE	0,	-15	1

^{a)} "Nominal" positions as found in typical layout definitions. Tolerances for the angular positions are omitted by intention as the values vary between various definitions that can be found in relevant industry standard documents. The azimuth angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The elevation angle is expressed in degrees where positive values indicate angles above the horizontal plane.

Table 3 (continued)

Value	"Front/Surr. LFE" notation	Loudspeaker names in loudspeaker layout	Loudspeaker abbrev.	Informative geometric position Azim., Elev. ^{a)}		Ch. is LFE
13	11/11.2	centre front,	C	0,	0	0
		left front centre,	Lc	30,	0	0
		right front centre,	Rc	-30,	0	0
		left front,	L	60,	0	0
		right front,	R	-60,	0	0
		left side surround,	Lss	90,	0	0
		right side surround,	Rss	-90,	0	0
		rear left surround,	Lsr	135,	0	0
		rear right surround,	Rsr	-135,	0	0
		rear centre,	Cs	180,	0	0
		left front LFE,	LFE	45,	-15	1
		right front LFE,	LFE2	-45,	-15	1
		centre front vertical height,	Cv	0,	35	0
		left front vertical height,	Lv	45,	35	0
		right front vertical height,	Rv	-45,	35	0
		left vertical height side surround,	Lvss	90,	35	0
		right vertical height side surround,	Rvss	-90,	35	0
		top centre surround,	Ts	0,	90	0
		left surround vertical height rear,	Lvr	135,	35	0
		right surround vertical height rear,	Rvr	-135,	35	0
centre vertical height rear,	Cvr	180,	35	0		
centre front vertical bottom,	Cb	0,	-15	0		
left front vertical bottom,	Lb	45,	-15	0		
right front vertical bottom	Rb	-45,	-15	0		
14	5/2.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110	0	0
		LFE,	LFE	45,	-15	1
		left front vertical height,	Lv	30,	35	0
		right front vertical height	Rv	-30,	35	0
<p>a) "Nominal" positions as found in typical layout definitions. Tolerances for the angular positions are omitted by intention as the values vary between various definitions that can be found in relevant industry standard documents. The azimuth angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The elevation angle is expressed in degrees where positive values indicate angles above the horizontal plane.</p>						

Table 3 (continued)

Value	"Front/ Surr. LFE" notation	Loudspeaker names in loudspeaker layout	Loudspeaker abbrev.	Informative geometric position Azim., Elev. ^{a)}		Ch. is LFE
15	5/5.2	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left side surround,	Lss	90,	0	0
		right side surround,	Rss	-90,	0	0
		left surround,	Ls	135,	0	0
		right surround,	Rs	-135,	0	0
		left front vertical height,	Lv	45,	35	0
		right front vertical height,	Rv	-45,	35	0
		centre vertical height rear,	Cvr	180,	45	0
		LFE1,	LFE	45,	-15	1
LFE2	LFE2	45,	-15	1		
16	5/4.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110,	0	0
		LFE,	LFE	0,	-15	1
		left front vertical height,	Lv	30,	30	0
		right front vertical height,	Rv	-30,	30	0
		left vertical height surround,	Lvs	110,	30	0
		right vertical height surround	Rvs	-110,	30	0
17	6/5.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110,	0	0
		LFE,	LFE	0,	-15	1
		left front vertical height,	Lv	30,	30	0
		right front vertical height,	Rv	-30,	30	0
		centre front vertical height,	Cv	0,	30	0
		left vertical height surround,	Lvs	110,	30	0
		right vertical height surround,	Rvs	-110,	30	0
		top centre surround	Ts	0,	90	0

a) "Nominal" positions as found in typical layout definitions. Tolerances for the angular positions are omitted by intention as the values vary between various definitions that can be found in relevant industry standard documents. The azimuth angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The elevation angle is expressed in degrees where positive values indicate angles above the horizontal plane.

Table 3 (continued)

Value	"Front/Surr. LFE" notation	Loudspeaker names in loudspeaker layout	Loudspeaker abbrev.	Informative geometric position		Ch. is LFE
				Azim., Elev. ^{a)}		
18	6/7.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left surround,	Ls	110,	0	0
		right surround,	Rs	-110,	0	0
		left back surround,	Lbs	150,	0	0
		right back surround	Rbs	-150,	0	0
		LFE,	LFE	0,	-15	1
		left front vertical height,	Lv	30,	30	0
		right front vertical height,	Rv	-30,	30	0
		centre front vertical height,	Cv	0,	30	0
		left vertical height surround,	Lvs	110,	30	0
		right vertical height surround,	Rvs	-110,	30	0
		top centre surround	Ts	0,	90	0

^{a)} "Nominal" positions as found in typical layout definitions. Tolerances for the angular positions are omitted by intention as the values vary between various definitions that can be found in relevant industry standard documents. The azimuth angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The elevation angle is expressed in degrees where positive values indicate angles above the horizontal plane.

Table 3 (continued)

Value	"Front/Surr. LFE" notation	Loudspeaker names in loudspeaker layout	Loudspeaker abbrev.	Informative geometric position Azim., Elev. ^{a)}		Ch. is LFE
19	5/6.1	centre front,	C	0,	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left side surround,	Lss	90,	0	0
		right side surround,	Rss	-90,	0	0
		rear surround left,	Lsr	135,	0	0
		rear surround right,	Rsr	-135,	0	0
		LFE,	LFE	0,	-15	1
		left front vertical height,	Lv	30,	30	0
		right front vertical height,	Rv	-30,	30	0
		left surround vertical height rear,	Lvr	135,	30	0
		right surround vertical height rear	Rvr	-135,	30	0
20	7/6.1	centre front,	C	0,	0	0
		left edge of screen,	Leos	"left eos",	0	0
		right edge of screen,	Reos	"right eos",	0	0
		left front,	L	30,	0	0
		right front,	R	-30,	0	0
		left side surround,	Lss	90,	0	0
		right side surround,	Rss	-90,	0	0
		rear surround left,	Lsr	135,	0	0
		rear surround right,	Rsr	-135,	0	0
		LFE,	LFE	0,	-15	1
		left front vertical height,	Lv	45,	30	0
		right front vertical height,	Rv	-45,	30	0
		left vertical height surround,	Lvs	110,	30	0
		right vertical height surround	Rvs	-110,	30	0
21-63	Reserved					

^{a)} "Nominal" positions as found in typical layout definitions. Tolerances for the angular positions are omitted by intention as the values vary between various definitions that can be found in relevant industry standard documents. The azimuth angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The elevation angle is expressed in degrees where positive values indicate angles above the horizontal plane.

6.3 Loudspeaker positioning

LoudspeakerGeometry

Type: Unsigned integer, enumeration

Range: 0 – 127

LoudspeakerAzimuth

Type: Signed integer

Range: from -180 to 180

LoudspeakerElevation

Type: Signed integer

Range: from -90 to 90

LoudspeakerGeometry specifies the nominal geometric position of a loudspeaker or audio channel according to [Table 4](#), with azimuth and elevation angles in polar coordinates. The **LoudspeakerAzimuth** angle is expressed in degrees; positive values rotate to the left when facing the front, i.e. counter clockwise when looking from above. The **LoudspeakerElevation** angle is expressed in degrees; positive values go up from the horizontal plane. The horizontal plane is defined as the horizontal plane at ear level, i.e. elevation is 0.

Table 4 — Definition of LoudspeakerGeometry

Value	Ch. is LFE	Nominal geometric position in polar coordinates (radius omitted)	
		Azimuth[°]	Elevation[°]
0	0	30	0
1	0	-30	0
2	0	0	0
3a)	1	0	-15
4	0	110	0
5	0	-110	0
6	0	22	0
7	0	-22	0
8	0	135	0
9	0	-135	0
10	0	180	0
11	Reserved	Reserved	Reserved
12	Reserved	Reserved	Reserved
13	0	90	0
14	0	-90	0
15	0	60	0
16	0	-60	0
17	0	30	35
18	0	-30	35
19	0	0	35
20	0	135	35
21	0	-135	35
22	0	180	35
23	0	90	35
24	0	-90	35
25	0	0	90
26a)	1	45	-15
27	0	45	-15
28	0	-45	-15

a) In addition to the geometrical position, these entries also indicate an "LFE" channel, which typically has a strongly reduced frequency content.

Table 4 (continued)

Value	Ch. is LFE	Nominal geometric position in polar coordinates (radius omitted)	
		Azimuth[°]	Elevation[°]
29	0	0	-15
30	0	110	35
31	0	-110	35
32	0	45	35
33	0	-45	35
34	0	45	0
35	0	-45	0
36 ^{a)}	1	-45	-15
37	0	left edge of screen	0
38	0	right edge of screen	0
39	0	half-way between centre of screen and left edge of screen	0
40	0	half-way between centre of screen and right edge of screen	0
41	0	150	0
42	0	-150	0
43-127	Reserved		
a) In addition to the geometrical position, these entries also indicate an "LFE" channel, which typically has a strongly reduced frequency content.			

Figure 3 through Figure 6 indicate the loudspeaker position in the 3D environment relative to the listener, each labelled with the LoudspeakerGeometry (circled with arrow) and the nominal azimuth angle in degrees).

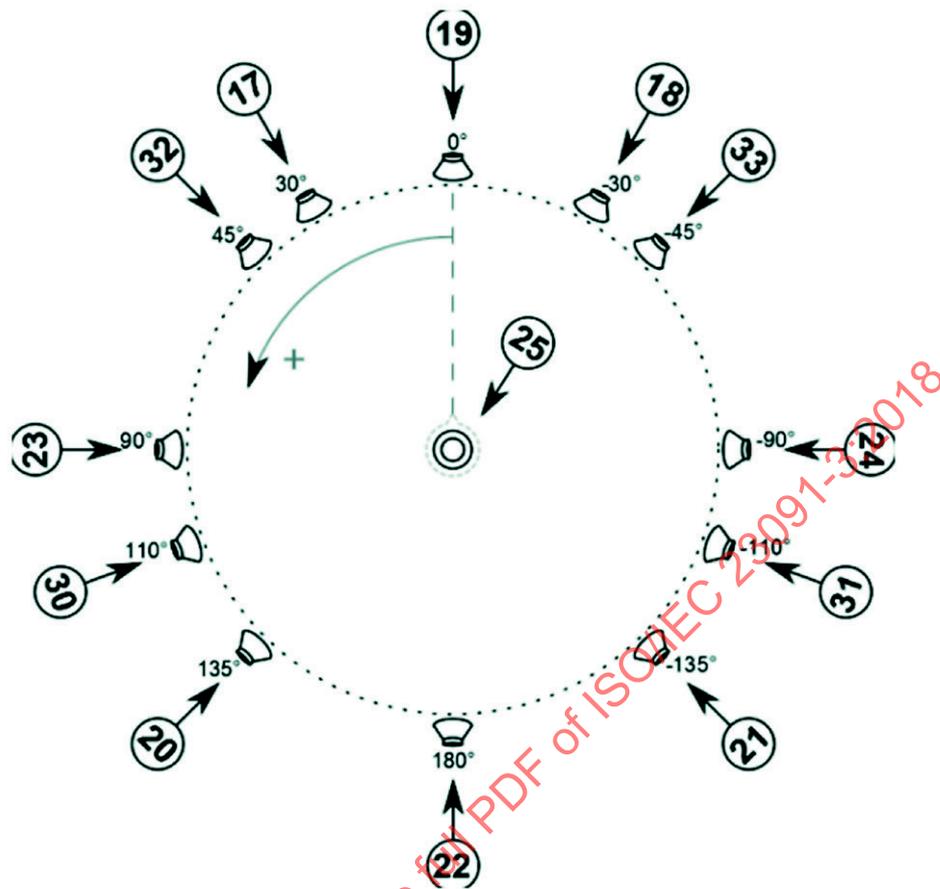


Figure 3 — Loudspeaker positions, upper layer [index 25 indicates the loudspeaker directly above the listener, sometimes referred to as the "voice of god (VoG)" loudspeaker]

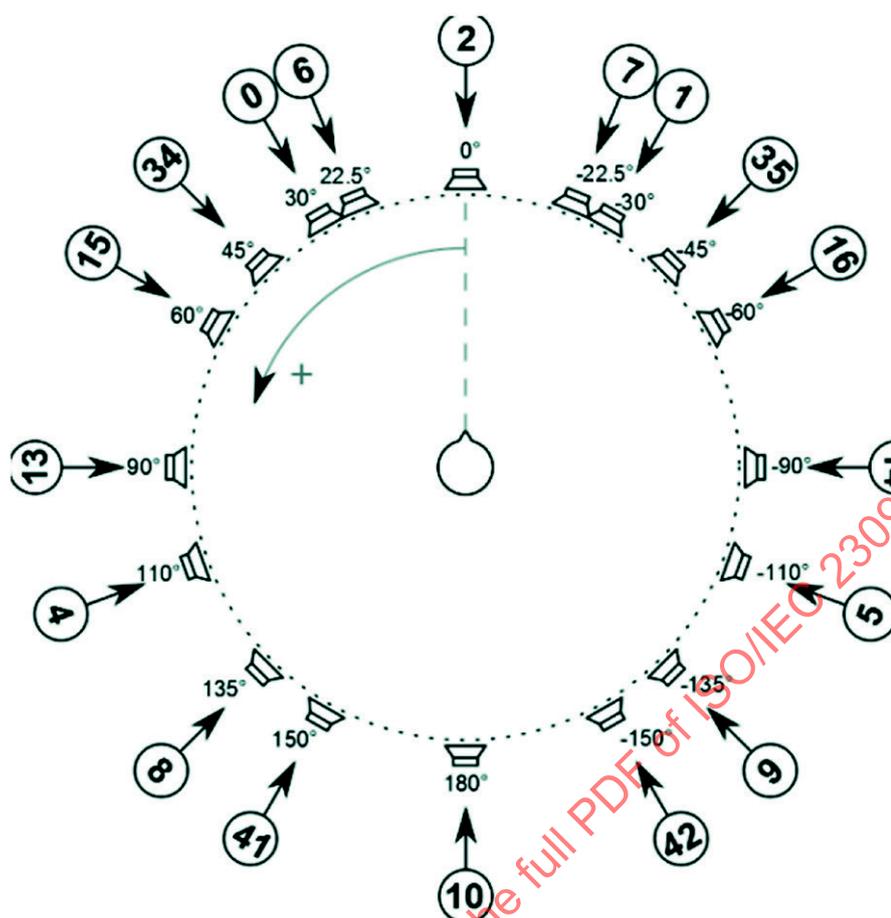


Figure 4 — Loudspeaker positions, mid layer

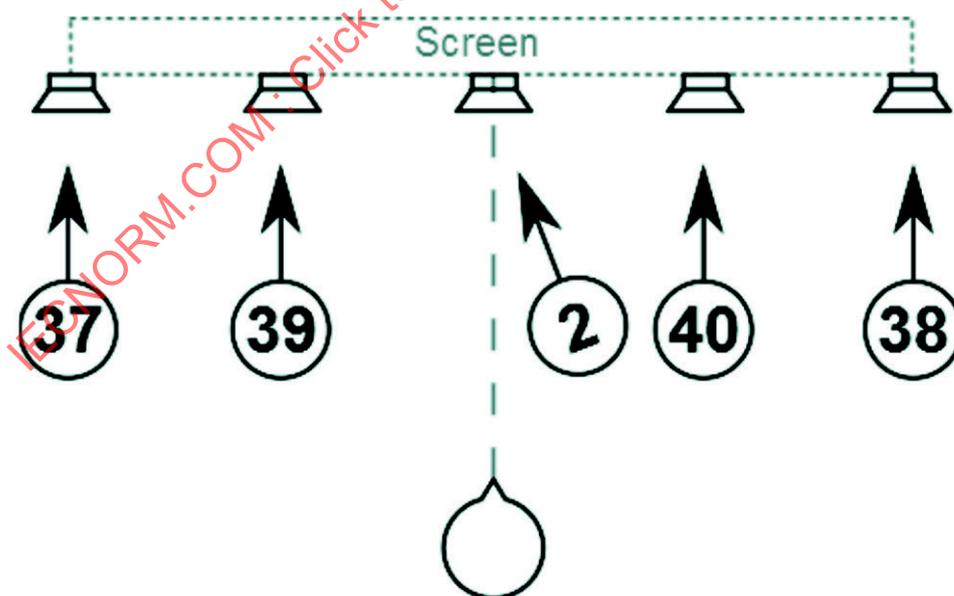


Figure 5 — Loudspeaker positions, screen relative

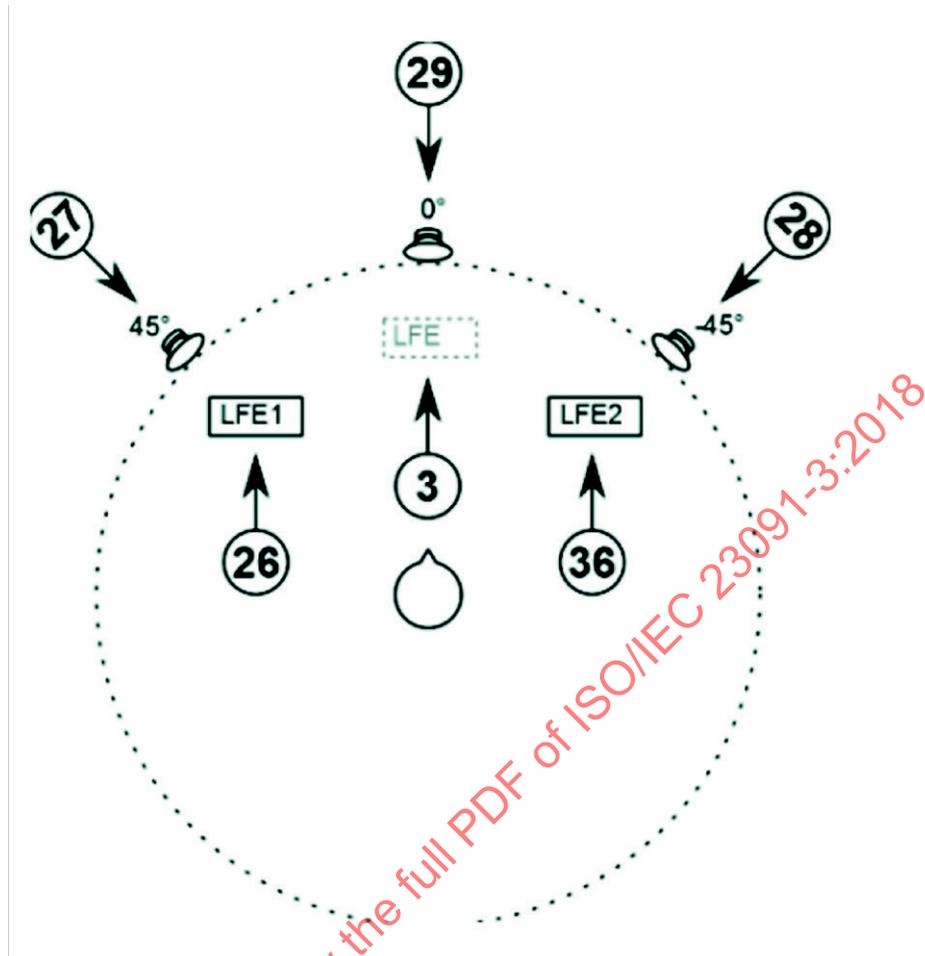


Figure 6 — Loudspeaker positions, bottom layer

6.4 Program loudness level

Type: fixed-point or integer value

Range: -41 to 0 dB, with a precision of at least 1 dB

ProgramLoudness indicates the overall loudness of the corresponding audio program. It should be measured in such a way that if two pieces of content have their loudness normalized using the value of ProgramLoudness, the resulting audio will have consistent loudness. Decoders evaluate this value and apply an appropriate level shift to audio to maintain a consistent loudness of output audio, matched with a user-given target loudness. The ProgramLoudness should be the overall loudness measured in LKFS according to Reference [3].

6.5 Anchor loudness level

Type: fixed-point or integer value

Range: -41 to 0 dB, with a precision of at least 1 dB

AnchorLoudness indicates the loudness of the anchor elements of the corresponding audio signal (usually the dialog). The method of identifying the anchor elements is chosen by the content author and is out of scope for this document. It should be chosen in such a way that, if two pieces of content have their loudness normalized using the values of AnchorLoudness, the anchor elements of the resulting audio will have consistent loudness. The AnchorLoudness should be the loudness of the anchor content of the program, measured in LKFS according to Reference [3].

6.6 Range of loudness

Type: fixed-point or integer value

Range: 0 to 90 dB, with a precision of at least 1 dB

LoudnessRange indicates the loudness range of the corresponding audio program. It is the loudness difference between the loudest and softest part of that audio program. The loudness of the loudest part is described by LoudnessRangeTop. LoudnessRange is measured in dB according to EBU R 128 and EBU Tech 3342.

6.7 Top of loudness range

Type: fixed-point or integer value

Range: -41 to 6 dB, with a precision of at least 1 dB

LoudnessRangeTop indicates the loudness value of the top of the loudness range described by LoudnessRange of the corresponding audio program. LoudnessRangeTop is measured in LKFS according to EBU R 128 and, EBU Tech 3342.

6.8 Maximum of momentary loudness level

Type: fixed-point or integer value

Range: -41 to 6 dB, with a precision of at least 1 dB

MomentaryLoudnessMax indicates the maximum value of the loudness values obtained from measurements of the corresponding audio program using a 400 ms window. MomentaryLoudnessMax is measured in LKFS as specified in EBU R 128, EBU Tech 3341 and Rec. ITU-R BS.1771-1.

6.9 Maximum of short-term loudness level

Type: fixed-point or integer value

Range: -41 to 6 dB, with a precision of at least 1 dB

ShortTermLoudnessMax indicates the maximum value of the loudness values in LKFS obtained from measurements of the corresponding audio program using a 3 s window. Measurements are specified in EBU R 128, EBU Tech 3341 and Rec. ITU-R BS.1771-1.

6.10 Short-term loudness level

Type: fixed-point or integer value

Range: -70 to 6 dB, with a precision of at least 1 dB

ShortTermLoudness indicates the value of the loudness values in LKFS obtained from measurements of the corresponding audio program using a 3 s window. Measurements are specified in EBU R 128, EBU Tech 3341 and Rec. ITU-R BS.1771-1. The 3 s window shall include the current frame.

6.11 Peak level

Type: fixed-point or integer value

Range: -41 to 40 dB, with a precision of at least 1 dB

SamplePeakLevel indicates the level of the largest magnitude of the corresponding audio program samples. SamplePeakLevel is measured in dB relative to full scale.