
**Information technology — Coding-
independent code points —**

Part 4:

Usage of video signal type code points

IECNORM.COM : Click to view the full PDF of ISO/IEC TR 23091-4:2019



IECNORM.COM : Click to view the full PDF of ISO/IEC TR 23091-4:2019



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

| | Page |
|---|-----------|
| Foreword | iv |
| Introduction | v |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Abbreviated terms | 2 |
| 5 Overview | 4 |
| 6 Workflow domains | 5 |
| 7 Common video signal type combinations | 6 |
| 7.1 General..... | 6 |
| 7.2 Colorimetry and colour range descriptions..... | 7 |
| 7.2.1 General..... | 7 |
| 7.2.2 Colour properties..... | 7 |
| 7.2.3 Common descriptions and carriage – standard dynamic range video with narrow colour gamut..... | 9 |
| 7.2.4 Common descriptions and carriage – standard dynamic range video with wide colour gamut..... | 10 |
| 7.2.5 Common descriptions and carriage – high dynamic range video with wide colour gamut..... | 11 |
| 7.3 Mastering display colour volume descriptions..... | 12 |
| 7.3.1 Mastering display colour volume properties..... | 12 |
| 7.3.2 Common descriptions and carriage – mastering display colour volume descriptions..... | 13 |
| Bibliography | 15 |

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information* in collaboration with ITU-T. The technically identical text is published as ITU-T Series H Supplement 19 (03/2019).

A list of all parts in the ISO/IEC 23091 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document discusses video signal property description code points and their combinations that are widely used in production and video content workflows. Video properties and values are usually expressed in "metadata" that can exist across production and distribution workflows. Knowledge of these properties and their combinations has value as content is processed in the end-to-end production-to-distribution workflow chain.

The combinations of all possible expressible video properties as code point values could hypothetically result in hundreds or thousands of permutations; but many of those combinations are rarely or never used in practice. For example, it is highly unlikely that perceptual quantization (PQ) transfer characteristics function specified in Rec. ITU-R BT.2100 would be combined with the colour primaries specified in Rec. ITU-R BT.601. Only a small subset of the possible combinations is used in practice.

This document is intended to help the producers of various content processing tools to avoid processing mistakes that can cause video quality degradation due to having incorrect assumptions made about video property combinations. There are only a few limited sets of video property combinations that are widely used in present-day video production and distribution equipment chains. This document describes these limited sets of combinations that are currently widely used and describes how the associated signal type metadata is carried to aid in the automation of content workflows across various domains of capture, production and distribution. Lastly, this document aims to help its readers, especially toolset developers, to repurpose tools to work properly across several domains (e.g., capture, production, production distribution, and service distribution) where similar video conversion functions (e.g., chroma sub-sampling or colour space conversions) may be performed.

IECNORM.COM : Click to view the full PDF of ISO/IEC TR 23091-4:2019

Information technology — Coding-independent code points —

Part 4: Usage of video signal type code points

1 Scope

This document describes common industry representation practices for the usage of video signal type code points, as these properties are conveyed across video content production and distribution carriage systems.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Rec. ITU-T H.264 | ISO/IEC 14496-10, *Information technology — Coding of audio-visual objects — Part 10: Advanced video coding*

Rec. ITU-T H.265 | ISO/IEC 23008-2, *Information technology — High efficiency coding and media delivery in heterogeneous environments — High efficiency video coding*

Rec. ITU-T H.273 | ISO/IEC 23091-2, *Information technology — Coding-independent code points — Part 2: Video*

3 Terms and definitions

For the purposes of this document, the terms and definitions in Rec. ITU-T H.265 | ISO/IEC 23008-2, Rec. ITU-T H.264 | ISO/IEC 14496-10 and Rec. ITU-T H.273 | ISO/IEC 23091-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org>

3.1 colour volume

space of all colours and intensities that a device or signal can reproduce or convey

3.2 creative intent

desired vision of the content creator who adjusts and approves the appearance of rendered content in the production process

Note 1 to entry: Examples of a content creator are a director, cinematographer, videographer, editor or colourist.

3.3 electro-optical transfer function EOTF

function to map a non-linear video signal to display linear light

3.4

full range

range in a fixed-point (integer) representation that spans the full range of values that could be expressed with that bit depth

3.5

inverse electro-optical transfer function

inverse EOTF

function that is the inverse of an *EOTF* (3.3)

3.6

narrow range

range in a fixed-point (integer) representation that does not span the full range of values that could be expressed with that bit depth

Note 1 to entry: Narrow range is, in some applications, referred to by synonyms such as: “limited range”, “video range”, “legal range”, “SMPTE range” or “standard range”.

3.7

opto-electrical transfer function

OETF

function to map relative scene linear light to a non-linear video signal

3.8

opto-optical transfer function

OOTF

function to map relative scene linear light to display linear light

3.9

random access point access unit

RAPAU

access unit in a video bitstream containing an intra-coded picture with the property that all pictures following the intra-coded picture in output order can be correctly decoded without using any information preceding it in the bitstream

3.10

transfer function

function among any of the following: *EOTF* (3.3), *inverse EOTF* (3.5), *OETF* (3.7), *inverse OETF*, *OOTF* (3.8), or *inverse OOTF*

4 Abbreviated terms

| | |
|------|---|
| 2K | informally used to refer to an HD resolution (1920 × 1080 for television or 2048 × 1080 for film) |
| 4K | informally used to refer a UHD resolution (3840 × 2160 for television or 4096 × 2160 for film) |
| 8K | informally used to refer to a UHD resolution (7680 × 4320 or 8192 × 4320) |
| AVC | advanced video coding (Rec. ITU-T H.264 ISO/IEC 14496-10) |
| CICP | coding-independent code points (Rec. ITU-T H.273 ISO/IEC 23091-2) |
| GBR | green, blue and red component colour system in linear light domain; same as RGB, although emphasizing that the green component is handled as the primary colour component by some technical elements of the video coding technology |
| NOTE | The colour representation does not indicate the media component order in a coded representation. For example, GBR represents the same component colour system as RGB. |

| | |
|--------|---|
| G'B'R' | green, blue and red component colour system in a non-linear domain associated with a transfer function which maps the linear light domain to a more perceptually uniform domain; same as R'G'B', although emphasizing that the green component is handled as the primary colour component by some technical elements of the video coding technology NOTE The colour representation does not indicate the media component order in a coded representation. For example, G'B'R' represents the same component colour system as R'G'B'. |
| HD | high definition |
| HDR | high dynamic range |
| HEVC | high efficiency video coding (Rec. ITU-T H.265 ISO/IEC 23008-2) |
| HLG | hybrid log-gamma (as defined in Rec. ITU-R BT.2100) |
| HVS | human visual system |
| LCD | liquid crystal display |
| LED | light-emitting diode |
| LUT | look-up table |
| MDCV | mastering display colour volume |
| MXF | material exchange format (as defined in SMPTE ST 377-1) |
| N/A | not applicable |
| N/R | not required |
| NGG | narrow colour gamut (typically as per Rec. ITU-R BT.709) |
| NCL | non-constant luminance |
| OLED | organic light-emitting diode |
| PQ | perceptual quantizer (as defined in Rec. ITU-R BT.2100) |
| QP | quantization parameter |
| RGB | red, green and blue component colour system in linear light domain NOTE The colour representation does not indicate the media component order in a coded representation. For example, RGB represents the same component colour system as GBR. |
| R'G'B' | red, green and blue component colour system in a non-linear domain associated with a transfer function which maps the linear light domain to a more perceptually uniform domain NOTE The colour representation does not indicate the media component order in a coded representation. For example, R'G'B' represents the same component colour system as G'B'R'. |
| SD | standard definition |
| SDR | standard dynamic range |
| SEI | supplemental enhancement information |
| UHD | ultra-high definition |
| UL | universal label (as defined in SMPTE ST 377-1) |

| | |
|--------|--|
| VUI | video usability information (a sequence-level syntax structure in HEVC and AVC bitstreams) |
| WCG | wide colour gamut (a gamut substantially wider than the gamut conveyed by Rec. ITU-R BT.709, e.g., as per Rec. ITU-R BT.2020 or Rec. ITU-R BT.2100) |
| XYZ | CIE 1931 colour space (wherein Y corresponds to the luminance signal) |
| Y'CbCr | luma (Y'), chroma blue (Cb) and chroma red (Cr) colour representation defined by a matrix transformation relationship to an $R'G'B'$ colour system |

NOTE A Y'CbCr representation is commonly used for video/image distribution as a way of encoding RGB information. Such a representation is also commonly expressed as YCbCr, $Y'_{CB}C'_R$, or $Y'_{CB}C'_R$, and can also be known as YUV in some documents. The relationship between Y'CbCr and $R'G'B'$ considered in this document is defined by matrix coefficients specified in Rec. ITU-R BT.601, Rec. ITU-R BT.709, Rec. ITU-R BT.2020 or Rec. ITU-R BT.2100. Unlike the CIE-Y component in the linear-light XYZ representation, the non-linear, the approximately perceptual uniform Y' in this representation might not be representing true luminance, regardless of the transfer function.

5 Overview

This document discusses video signal property description code points and their combinations that are widely used in production and video content workflows. Video properties and values are usually expressed in "metadata" that can exist across production and distribution workflows. Knowledge of these properties and their combinations has value as content is processed in the end-to-end production-to-distribution workflow chain.

The combinations of all possible expressible video properties as code point values could hypothetically result in hundreds or thousands of permutations; but many of those combinations are rarely or never used in practice. For example, it is highly unlikely that perceptual quantization (PQ) transfer characteristics function specified in Rec. ITU-R BT.2100 would be combined with the colour primaries specified in Rec. ITU-R BT.601. Only a small subset of the possible combinations is used in practice.

This document is written to provide information to help the producers of various content processing tools to avoid processing mistakes that can cause video quality degradation due to having incorrect assumptions made about video property combinations. There are only a few limited sets of video property combinations that are widely used in present-day video production and distribution equipment chains. This document describes these limited sets of combinations that are currently widely used and describes how the associated signal type metadata is carried to aid in the automation of content workflows across various domains of capture, production and distribution. Lastly, this document aims to help its readers, especially toolset developers, to repurpose tools to work properly across several domains (e.g., capture, production, production distribution, and service distribution) where similar video conversion functions (e.g., chroma subsampling or colour space conversions) may be performed.

The coding-independent code points (CICP) specification for video (Rec. ITU-T H.273 | ISO/IEC 23091-2) defines code points and fields that identify some properties of video signals. These are defined independently from how these properties are carried in a coded video-layer bitstream such as an HEVC or AVC bitstream, which could differ depending on bitstream format. The compressed representation is sometimes considered to be a temporary, compacted state for distribution or delivery of the video signal, while the reconstructed video signal output from a video decoder may be interpreted as having the same meaning as a video signal immediately prior to compression by a compression encoder.

[Subclauses 7.2](#) and [7.3](#) define system identifier tags combinations of the described commonly used values of such video signal property combinations that apply across domains. In addition, these subclauses also identify how the video property values are carried in the signal processing workflow.

6 Workflow domains

Figure 1 illustrates workflow domains (capture, production, production distribution and service distribution) in which video content may exist, be edited or be converted. Typical content workflows across these domains are theatrical/scripted TV or live events. There are many similar video processing functions that can be performed in each domain and often these may be repeated in the next successive domain.

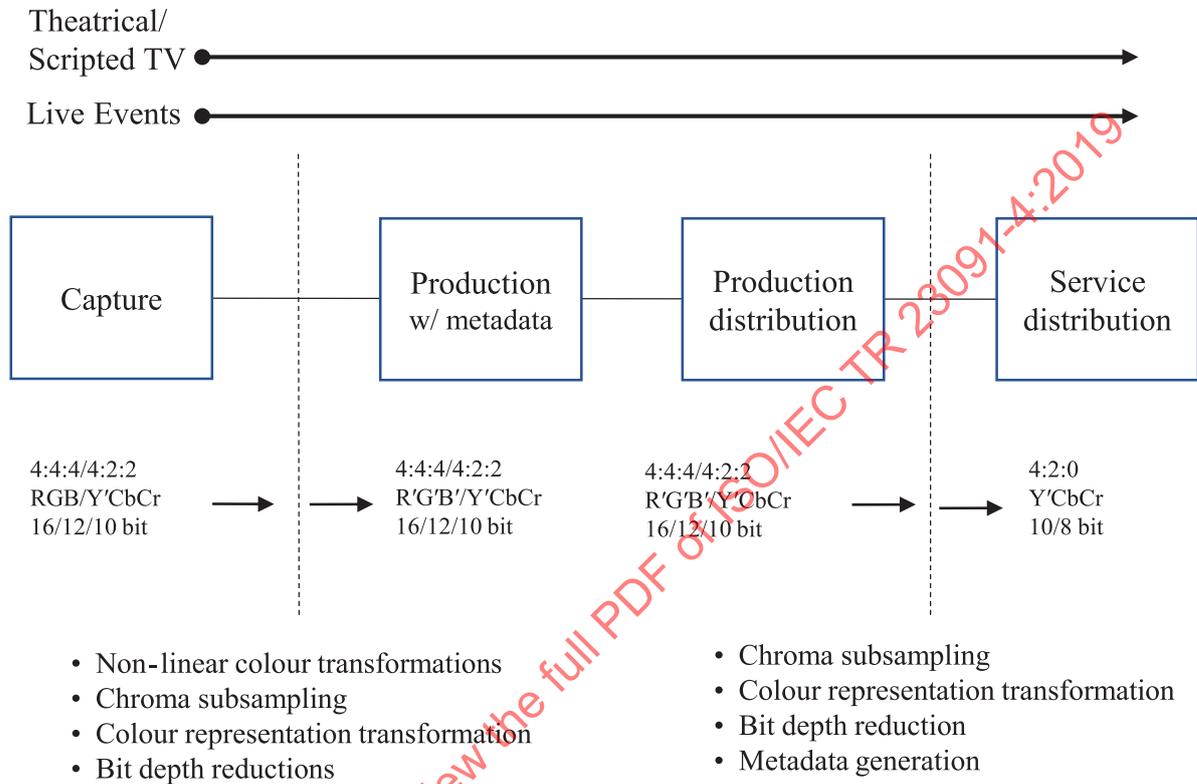


Figure 1 — Video workflows through different carriage domains

In the capture domain, content is created through sensors on cameras converting optical signals into a digital format. Content is retained at its highest informational format, although some conversions may be performed to reduce transport bandwidth demands.

In the interface to the production domain, content undergoes further processing transformations such as non-linear transformations, chroma subsampling (e.g., 4:4:4 to 4:2:2), colour representation changes (e.g. RGB to Y'CbCr NCL), and bit depth reduction (e.g., 16 bits per sample to 10 bits per sample). For theatrical/scripted TV workflows entering in the production domain, content can be added to by computer-generated imagery sources, overlaid with graphics, and colour graded using a mastering display. For live event workflows, there is always a real-time constraint, which limits content processing to real-time operations. After the colour grading, both static and dynamic metadata may be generated that are to be attached to the content workflow. However, for live events, the generation of highly customized metadata may not be practical, and metadata may need to be generated further downstream by automated content analysis approaches.

In the production distribution domain, some additional processing is done to the content to further reduce transport bandwidth demands. This may include some sample-wise processing transformations (chroma subsampling and bit depth) and compression (e.g., using HEVC or AVC) but mostly employing spatial compression techniques.

For 4:2:0 chroma subsampling operations, it is important to make known the relative location alignment of the initial subsampling location processing of the content to avoid unnecessary quality degradation upon further content processing. For purposes of this document, this property is described

in terms of the ChromaLocType variable as defined in HEVC, which further corresponds with the value of the syntax elements `chroma_sample_loc_type_top_field` and `chroma_sample_loc_type_bottom_field` in HEVC and AVC. For NCG material, the usual alignment corresponds to ChromaLocType equal to 0 (vertically interstitial). For WCG material, the usual alignment corresponds to ChromaLocType equal to 2 (co-sited).

At the service distribution domain, the content version in the workflow is in final form, though the presentation of it may have some additional overlay graphics. Content processing at this interface continues to reduce signal information to address transport bandwidth distribution demands while still maximizing perceptual optimizations to retain content video quality. Operations reduce the content to a 4:2:0 Y'CbCr 8 or 10 bit compressed stream using HEVC, AVC, or even Rec. ITU-T H.262 | ISO/IEC 13818-2 for the compression representation. This content workflow then finishes by the content being distributed to the customer through broadcast, multicast, or unicast approaches and then being presented for viewing.

Many of the content processing operations may employ multiple third-party content processing tools. Currently most such tools are designed and operate within a specific domain with general assumptions of how content was handled in the preceding domain. Tools may also have further constraints depending on the content resolutions (e.g., HD or UHD). Some applications restrict the utilized colour volume to be smaller than that of a full Rec. ITU-T BT.2020 and Rec. ITU-T BT.2100 container, such as the smaller P3D65 colour gamut (as specified in SMPTE ST 2113) and intensity range of common mastering or reference displays used in content production and delivery presentations. The approved colour volume is often indicated with SMPTE ST 2086 metadata. Over time, it is expected that WCG and/or HDR applications will evolve to use more of the available container colour volume.

7 Common video signal type combinations

7.1 General

This subclause enumerates common combinations of video properties and values that are currently used within the content industry. Common methods of conveying video property information are also described for the capture, production, production distribution, and service distribution carriage domains.

System identifier tags are provided in this document to succinctly identify each commonly used combination. Such system identifier tags may be used as out of band metadata for conversion tools, and by production/distribution teams, to identify the workflow path needed to process and distribute content.

Content conversion tools need the locations and values of stream properties and metadata values associated with the corresponding system identifier. In some cases, the information to identify and locate video properties of the stream information are described in a specific coded video stream specification.

For example, SMPTE MXF structured streams indicate parameters and values through universal label (UL) structures located in MXF headers. Such ULs are a set of registered labels maintained by SMPTE (at registry.smpte-ra.org). An MXF UL structure is a 16-byte structure comprised of a UL Header [4 bytes-"0"] (per SMPTE ST 298), a UL Designator [4 bytes-"0"] (per SMPTE ST 336), and an Item Designator [8 bytes-"000"] (per SMPTE ST 335, SMPTE ST 395, and SMPTE ST 2003). SMPTE MXF subtables provide these 16-byte labels in addition to any values associated with the label.

As another example, HEVC or AVC bitstreams indicate parameters and values through VUI and SEI constructs at the sequence parameter set level.

7.2 Colorimetry and colour range descriptions

7.2.1 General

Colour volume information can describe combinations of video properties that are needed to convert between colour volumes. Such conversions may include changes in bit depth, changes in colour subsampling, non-linear optimizations, and may also include transformations based on carriage and bit rate restrictions. SD, HD, and UHD material are typically associated with certain colorimetry properties as indicated in [Table 1](#), but this information can be carried in different places or may be inferred depending on the storage or streaming format.

Table 1 — SD, HD and UHD video colorimetry properties

| | Tag | Colour | | Light | | Container space properties | | |
|-----------------|----------------|---------|-----------|---------------|-------------------|----------------------------|------------------------------|--|
| | | Gamut | Primaries | Dynamic Range | Transfer function | Colour Representation | Integer code level scaling | 4:2:0 chroma sample location alignment (ChromaLocType) |
| HD or SD | BT601_525 | NCG | BT.601 | SDR | BT.709 | Y'CbCr | Narrow | Vertically interstitial (ChromaLocType = 0) |
| | BT601_625 | | | | | Y'CbCr | Narrow | Vertically interstitial (ChromaLocType = 0) |
| | BT709_YCC | | BT.709 | | | Y'CbCr | Narrow | Vertically interstitial (ChromaLocType = 0) |
| | BT709_RGB | | | | | R'G'B' | Narrow | N/A |
| | FR709_RGB | | | | | R'G'B' | Full | N/A |
| UHD | BT2020_YCC_NCL | WCG | BT.2020 | | | Y'CbCr | Narrow | Co-sited (ChromaLocType = 2) |
| | BT2020_RGB | | | | | R'G'B' | Narrow | N/A |
| | FR2020_RGB | | | | | R'G'B' | Full | N/A |
| | BT2100_PQ_YCC | BT.2100 | HDR | PQ | Y'CbCr | Narrow | Co-sited (ChromaLocType = 2) | |
| | BT2100_PQ_RGB | | | | R'G'B' | Narrow | N/A | |
| | BT2100_HLG_YCC | | | HLG | Y'CbCr | Narrow | Co-sited (ChromaLocType = 2) | |
| | BT2100_HLG_RGB | | | | R'G'B' | Narrow | N/A | |

In this document, as in various industry groups such as UltraHD Forum, EBU, and DVB, UHD applications are considered as those having at least one major property greater than HD (Rec. ITU-R BT.709), such as colour gamut, resolution, dynamic range, or frame rate (e.g., 1080p60 HDR/WCG is considered UHD herein).

Carriage formats for colour properties in each domain (capture, production, production distribution, and service distribution) contain the same payload but in different wrappers. In the capture and production domains, the colour property information can be carried in an MXF wrapper using a generic picture essence descriptor as specified by SMPTE ST 2067-21:2016, Annex C. Colour volume information in the distribution domain can be carried within the video stream as syntax information in the selected video format such as HEVC, AVC, or MPEG-2 through VUI or equivalent syntax. The full and narrow range scaling video property is not carried explicitly in all technologies and may need to be taken implicitly or through a system identifier. In common practice, Y'CbCr colour representation uses narrow range scaled levels.

7.2.2 Colour properties

For colorimetry and range scaling descriptions, the video properties described in [Table 2](#) ordinarily apply. Remarks on common usage are included in the table.

Table 2 — Video colour description properties and their common usage

| Carriage parameter names | Colloquial names | Common usage |
|---|--|---|
| ColourPrimaries [CICP] colour_primaries [HEVC or AVC] colour primaries [MXF] | Colour space, colour gamut | SDR video uses a Rec. ITU-R BT.709 colour representation. WCG video may restrict colour to the P3D65 gamut (SMPTE ST 2113) but in a Rec. ITU-R BT.2020 colour space container. HDR over time is expected to exhibit a more complete coverage of the Rec. ITU-R BT.2020 colour representation. |
| TransferCharacteristics [CICP] transfer_characteristics [HEVC or AVC] transfer characteristic [MXF] | Transfer curves, log curves, gamma curves | HDR video uses either PQ or HLG. SDR video typically uses the transfer characteristic for Rec. ITU-R BT.709, assuming a display characteristic corresponding to Rec. ITU-R BT.1886. |
| MatrixCoefficients [CICP] matrix_coeffs [HEVC] matrix_coefficients [AVC] coding equations [MXF] | Colour representation, GBR, NCL, YCC, YUV, Y'UV, R'G'B' | Specifies the encoding equations to convert RGB image components to component colour difference image components. For R'G'B' representations, no matrix applies, which is typically indicated by the value 0. (The colour representation notation does not indicate the media component order in a coded representation.) |
| VideoFullRangeFlag [CICP] video_full_range_flag [HEVC or AVC] N/A [MXF] | Full range, narrow range, headroom, footroom, legal range, SMPTE range, QE.1, QE.2 | Y'CbCr colour representations ordinarily use narrow range scaling for video. |
| ChromaLocType [HEVC] chroma_sample_loc_type_top_field and chroma_sample_loc_type_bottom_field [AVC or HEVC] N/A [CICP or MXF] | 4:2:0 subsampled chroma location type | Indicates the horizontal and vertical positions of chroma samples (Cb, Cr) with respect to luma samples with subsample position accuracy. The alignment is typically horizontally co-sited with even-numbered columns of luma samples (indexed starting from 0). For SD and HD video, the alignment is typically vertically interstitial between rows of luma samples (ChromaLocType = 0). For UHD video, the alignment is typically vertically co-sited with even-numbered rows of luma samples (ChromaLocType = 0). |

Table 3 indicates the code values for each property that are widely used for video content production and distribution systems.

Table 3 — Code point values widely used for colorimetry properties

| HEVC property | Code point value | Meaning |
|------------------|------------------|---|
| colour_primaries | 1 | Rec. ITU-R BT.709 primaries |
| | 5 | Rec. ITU-R BT.601 625-line systems primaries |
| | 6 | Rec. ITU-R BT.601 525-line systems primaries |
| | 9 | Rec. ITU-R BT.2020 and Rec. ITU-R BT.2100 primaries (share the same code point since their values are identical) |

Table 3 (continued)

| HEVC property | Code point value | Meaning |
|--------------------------|------------------|---|
| transfer_characteristics | 1, 6, 14, 15 | Rec. ITU-R BT.709, Rec. ITU-R BT.601, Rec. ITU-R BT.2020, and Rec. ITU-R BT.2100 transfer characteristics (functionally equivalent values) |
| | 16 | Rec. ITU-R BT.2100 PQ |
| | 18 | Rec. ITU-R BT.2100 HLG (Hybrid Log-Gamma) |
| matrix_coeffs | 0 | R'G'B' (identity matrix applied to primaries after transfer function) |
| | 1 | Y'CbCr for Rec. ITU-R BT.709 primaries |
| | 5 | Y'CbCr for Rec. ITU-R BT.601 625-line primaries |
| | 6 | Y'CbCr for Rec. ITU-R BT.601 525-line primaries |
| | 9 | Y'CbCr for Rec. ITU-R BT.2020 and Rec. ITU-R BT.2100 primaries |
| ChromaLocType | 0 | Vertically interstitial, horizontally co-sited |
| | 2 | Vertically co-sited, horizontally co-sited |

7.2.3 Common descriptions and carriage – standard dynamic range video with narrow colour gamut

This colour volume describes SDR video with NCG, which includes the majority of the production and distribution workflows currently used in the industry. There are several combinations of values of video properties that are used for this colour volume. Table 4 describes these combinations. There are several one-way operations that can be performed for this colour volume including bit depth reductions, colour sampling reductions and full-to-narrow range scaling operations.

The following system identifier tags are described herein, as defined in Table 4:

- BT709_YCC
- BT709_RGB
- FR709_RGB
- BT601_525
- BT601_625

Table 4 — SDR NCG common colour volume descriptions

| | System Identifier | BT709_YCC | BT709_RGB | FR709_RGB | BT601_525 | BT601_625 |
|--------------------------|--|--------------|-----------|-----------|--------------|--------------|
| Colour properties | Colour primaries | BT.709 | BT.709 | BT.709 | BT.601 | BT.601 |
| | Transfer characteristics | BT.709 | BT.709 | BT.709 | BT.709 | BT.709 |
| | Colour representation | Y'CbCr | R'G'B' | R'G'B' | Y'CbCr | Y'CbCr |
| Other | Full/narrow range | Narrow | Narrow | Full | Narrow | Narrow |
| | 4:2:0 chroma sample location alignment | Interstitial | N/A | N/A | Interstitial | Interstitial |

Table 4 (continued)

| | System Identifier | BT709_YCC | BT709_RGB | FR709_RGB | BT601_525 | BT601_625 |
|---|--|--|-----------|-----------|---|---|
| CICP parameters Rec. ITU-T H.273 ISO/IEC 23091-2 | ColourPrimaries | 1 | 1 | 1 | 6 | 5 |
| | TransferCharacteristics | 1 | 1 | 1 | 6 | 6 |
| | MatrixCoefficients | 1 | 0 | 0 | 6 | 5 |
| | VideoFullRangeFlag | 0 | 0 | 1 | 0 | 0 |
| SMPTE MXF parameters SMPTE ST 2067-21 | Colour primaries | 06.0E.2B.34.04.01.01.06.04.01.01.01.03.03.00.00 | | | 06.0E.2B.34.04.01.01.06.04.01.01.01.03.01.00.00 | 06.0E.2B.34.04.01.01.06.04.01.01.01.03.02.00.00 |
| | Transfer characteristic | 06.0E.2B.34.04.01.01.01.04.01.01.01.01.02.00.00 | | | | |
| | Coding equations | 06.0E.2B.34.04.01.01.01.04.01.01.01.02.02.00.00 | N/R | N/R | 06.0E.2B.34.04.01.01.01.04.01.01.01.02.01.00.00 | |
| | Full/narrow level range | Inferred (indicated in black reference level, white reference level, colour range) | | | | |
| | 4:2:0 chroma sample location alignment | Inferred (ChromaLocType = 0) | N/A | N/A | Inferred (ChromaLocType = 0) | Inferred (ChromaLocType = 0) |

Particular aspects of the usage described in [Table 4](#) are clarified as follows:

- Rec. ITU-R BT.601 colour volumes are used for SD material only.
- The transfer characteristics indicator values of 1, 6, 14, and 15 are functionally the same. Blu-ray BD-ROM 3.1 (“4K”) and the DVB UHD specifications list use of the transfer characteristics value of 14 for SDR/WCG (Rec. ITU-R BT.2020) video. ATSC specifications list use of the transfer characteristics value of 1 for SDR NCG video.
- Matrix coefficients indicator values of 5 and 6 are functionally the same.
- The indicated chroma sample location alignment is only applicable for 4:2:0 chroma sampling. ChromaLocType (the generic label used in this document for the HEVC and AVC bitstream syntax elements: chroma_sample_loc_type_top_field and chroma_sample_loc_type_bottom_field), listed in [Tables 1](#) and [2](#), indicate the 4:2:0 chroma sample position alignment.

7.2.4 Common descriptions and carriage – standard dynamic range video with wide colour gamut

This colour volume describes SDR video with WCG, which is typically identified by the combination of the colour primary video property with the identified matrix coefficients. In some cases, the same colour property may be described with two different values depending on the colour primary container used. It is important for tools to process video according to the colour volume it is operating in to make sure the conversion is consistent.

The following system identifier tags are described, as defined in [Table 5](#):

- BT2020_YCC_NCL
- BT2020_RGB
- FR2020_RGB

Table 5 — SDR WCG common colour volume descriptions

| | System Identifier | BT2020_YCC_NCL | BT2020_RGB | FR2020_RGB |
|---|--|--|------------|------------|
| Colour properties | Colour primaries | BT.2020 | BT.2020 | BT.2020 |
| | Transfer characteristics | BT.2020 | BT.2020 | BT.2020 |
| | Colour representation | Y'CbCr | R'G'B' | R'G'B' |
| Other | Full/narrow range | Narrow | Narrow | Full |
| | 4:2:0 chroma sample location alignment | Co-sited | N/A | N/A |
| CICP parameters Rec. ITU-T H.273 ISO/IEC 23091-2 | ColourPrimaries | 9 | 9 | 9 |
| | TransferCharacteristics | 14 | 14 | 14 |
| | MatrixCoefficients | 9 | 0 | 0 |
| | VideoFullRangeFlag | 0 | 0 | 1 |
| SMPTE MXF parameters SMPTE ST 2067-21 | Colour primaries | 06.0E.2B.34.04.01.01.0D.04.01.01.01.03.04.00.0 | | |
| | Transfer characteristic | 06.0E.2B.34.04.01.01.0E.04.01.01.01.01.09.00.00 | | |
| | Coding equations | 06.0E.2B.34.04.01.01.0D.04.01.01.01.02.06.00.00 | N/R | N/R |
| | Full/narrow level range | Inferred (indicated in black reference level, white reference level, colour range) | | |
| | 4:2:0 chroma sample location alignment | Inferred (ChromaLocType = 2) | N/A | N/A |

Particular aspects of the usage described in [Table 5](#) are clarified as follows:

- The transfer characteristics indicator values of 1, 6, 14, and 15 are functionally the same. Blu-ray BD-ROM 3.1 (“4K”) and the DVB UHD specifications list use of the transfer characteristics value of 14 for SDR/WCG (Rec. ITU-R BT.2020) video. ATSC specifications list use of the transfer characteristics value of 1 for SDR video. ARIB STD B32 lists use of the transfer characteristics value 1 for HD and 14 for UHD for SDR WCG video.
- The indicated chroma sample location alignment is only applicable for 4:2:0 chroma sampling. ChromaLocType (the generic label used in this document for the HEVC and AVC bitstream syntax elements: chroma_sample_loc_type_top_field and chroma_sample_loc_type_bottom_field), listed in [Tables 1](#) and [2](#), indicate the 4:2:0 chroma sample position alignment.

7.2.5 Common descriptions and carriage – high dynamic range video with wide colour gamut

This colour volume describes HDR video with WCG, which is typically associated with ultra high definition video.

The following system identifier tags are described, as defined in [Table 6](#):

- BT2100_PQ_YCC
- BT2100_HLG_YCC
- BT2100_PQ_RGB
- BT2100_HLG_RGB

Table 6 — HDR WCG common colour volume descriptions

| | System Identifier | BT2100_PQ_YCC | BT2100_HLG_YCC | BT2100_PQ_RGB | BT2100_HLG_RGB |
|---|--|--|---|--|--|
| Colour properties | Colour primaries | BT.2020 / BT.2100 | BT.2020 / BT.2100 | BT.2020 / BT.2100 | BT.2020 / BT.2100 |
| | Transfer characteristics | BT.2100 PQ | BT.2100 HLG | BT.2100 PQ | BT.2100 HLG |
| | Colour representation | Y'CbCr | Y'CbCr | R'G'B' | R'G'B' |
| Other | Full/narrow range | Narrow | Narrow | Narrow | Narrow |
| | 4:2:0 chroma sample location alignment | Co-sited | Co-sited | N/A | N/A |
| CICP parameters Rec. ITU-T H.273 ISO/IEC 23091-2 | ColourPrimaries | 9 | 9 | 9 | 9 |
| | TransferCharacteristics | 16 | 18 | 16 | 18 |
| | MatrixCoefficients | 9 | 9 | 0 | 0 |
| | VideoFullRangeFlag | 0 | 0 | 0 | 0 |
| SMPTE MXF parameters SMPTE ST 2067-21 | Colour primaries | 06.0E.2B.34.04.01.01.0D.04.01.01.01.03.04.00.00 | | | |
| | Transfer characteristic | 06.0E.2B.34.04.01.01.0D.04.01.01.01.01.0A.00.00 | 06.0E.2B.34.04.01.01.0D.04.01.01.01.01.0B.00.00 | 06.0E.2B.34.04.01.01.0D.04.01.01.01.01.01.0A.00.00 | 06.0E.2B.34.04.01.01.0D.04.01.01.01.01.01.0B.00.00 |
| | Coding equations | 06.0E.2B.34.04.01.01.0D.04.01.01.01.02.06.00.00 | | N/R | N/R |
| | Full/narrow level range | Inferred (indicated in black reference level, white reference level, colour range) | | | |
| | 4:2:0 chroma sample location alignment | Inferred (ChromaLocType = 2) | Inferred (ChromaLocType = 2) | N/A | N/A |

Particular aspects of the usage described in [Table 6](#) are clarified as follows:

- The colour primaries specified in Rec. ITU-R BT.2020 and Rec. ITU-R BT.2100 are the same.
- The indicated chroma sample location alignment is only applicable for 4:2:0 chroma sampling. ChromaLocType (the generic label used in this document for the HEVC and AVC bitstream syntax elements: chroma_sample_loc_type_top_field and chroma_sample_loc_type_bottom_field), listed in [Tables 1](#) and [2](#), indicate the 4:2:0 chroma sample position alignment.

7.3 Mastering display colour volume descriptions

7.3.1 Mastering display colour volume properties

A display colour volume can be defined as a solid in colorimetric space containing all possible colours that a display can produce. Mastering display colour volume (MDCV) information describes the colour volume through specification of the colour primaries, white point, and luminance range parameters of the display that was used for authoring/grading video content; i.e., it is the display where creative work performed during the mastering process achieved the creative intent of the content author. When the authored content is shown on other displays, MDCV information can be used to more closely reproduce the original creative intent than may otherwise be feasible.

For the MDCV descriptions, the following mastering display properties are included, with values in specific combinations that represent widely used mastering display setups used to grade content. This document discusses MDCV properties as described in SMPTE ST 2086 and in the corresponding SEI messages of HEVC and AVC, as listed below:

- mastering display primaries;
- mastering display white point chromaticity;
- mastering display maximum luminance;

- mastering display minimum luminance.

7.3.2 Common descriptions and carriage – mastering display colour volume descriptions

The following system identifier tags, as defined in [Table 7](#), are used to describe properties of commonly used mastering displays. (All commonly used mastering display systems have a D65 white point.)

- BT709x100n05 – representing a mastering display LCD or LED environment for mastering of SDR content with displays having 100 cd/m² of peak brightness, 0.05 minimum brightness, and a D65 white point setting within a Rec. ITU-R BT.709 colour representation.
- P3D65x1000n0005 – representing a mastering display OLED environment for mastering of HDR content with displays having 1000 cd/m² of peak brightness, 0.0005 minimum brightness, and a D65 white point setting within a Rec. ITU-R BT.2100 colour representation constrained to P3 colour gamut values.
- BT2100x108n0005 – representing a mastering display laser projector environment for mastering of HDR content for cinema presentations with displays having 108 cd/m² of peak brightness, 0.0005 minimum brightness, and a D65 white point setting.

Carriage formats for a MDCV descriptions in each of the domains (capture, production, production distribution, and service distribution) contain the same payload but in different wrappers. In the capture and production domains, the MDCV information can be carried in an MXF wrapper using Generic Picture Essence descriptor as described by SMPTE ST 2067-21:2016, Annex C. In the distribution domain using HEVC or AVC, the MDCV information is carried an MDCV SEI message (SEI message payload type 137) that needs to be repeated at least in every random-access point access unit (RAPAU).

Table 7 — Mastering display colour volume descriptions

| | System identifier | BT709x100n05 | P3D65x1000n0005 | BT2100x108n0005 |
|--|--|------------------------|------------------|------------------|
| Mastering display properties defined according to SMPTE ST 2086 | Colour primaries (x,y) | {0.6400, 0.3300} | {0.6800, 0.3200} | {0.7080, 0.2920} |
| | | {0.3000, 0.6000} | {0.2650, 0.6900} | {0.1700, 0.7970} |
| | | {0.1500, 0.0600} | {0.1500, 0.0600} | {0.1310, 0.0460} |
| | White point chromaticity (x,y) | {0.3127, 0.3290} (D65) | | |
| | Maximum luminance [cd/m ²] | 100 | 1000 | 108 |
| | Minimum luminance [cd/m ²] | 0.05 for LCD/LED | 0.0005 for OLED | 0.0005 for laser |
| HEVC or AVC MDCV SEI message Rec. ITU-T H.265 ISO/IEC 23008-2 | Display_primaries_x[0]/y[0] | {32000, 16500} | {35400, 14600} | {34000, 16000} |
| | Display_primaries_x[1]/y[1] | {15000, 30000} | {8500, 39850} | {13250, 34500} |
| | Display_primaries_x[2]/y[2] | {7500, 3000} | {6550, 2300} | {7500, 3000} |
| | White_point_x/y | {15635, 16450} | | |
| | Max/min_display_mastering_luminance | {1000000, 500} | {10000000, 5} | {10000000, 5} |