

TECHNICAL REPORT



INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

Television broadcast receivers and associated equipment – Immunity characteristics – Methods of objective picture assessment

STANDARDSISO.COM : Click to view the full PDF of CISPR TR 29:2020 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

STANDARDSISO.COM : Click to view the FULL TEXT OF IEC TR 29:2020 RLV

TECHNICAL REPORT



INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

Television broadcast receivers and associated equipment – Immunity characteristics – Methods of objective picture assessment

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.100.20

ISBN 978-2-8322-8345-5

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Abbreviated terms	5
4 Test method for objective picture assessment	5
5 Methodology for detection of analogue picture degradations	6
5.1 General	6
5.2 Algorithm for superimposed patterns, moiré patterns	6
5.3 Algorithm for loss of luminance and contrast	7
5.4 Algorithm for loss of colour	7
5.5 Algorithm for loss of synchronisation	7
6 Methodology for detection of digital picture degradations	8
6.1 General	8
6.2 Algorithm for blocking	8
6.3 Algorithm for frozen patterns, stop of moving element	8
6.4 Algorithm for total loss of picture, irrecoverable data stream error	8
7 Alternative methodology for detection of digital picture degradations	9
7.1 Test pattern	9
7.2 Analysis	9
7.2.1 General	9
7.2.2 Automatic spatial synchronisation	10
7.2.3 Spatial activity parameter	10
7.2.4 Temporal activity parameter	10
7.2.5 Blocking effect parameter	10
7.3 Comparison	10
Bibliography	12
Figure 1 – Colour bar pattern with test elements for detection of analog picture degradation	7
Figure 2 – Colour bar pattern with moving element for detection of digital picture degradation	8
Figure 3 – Alternative colour bar pattern with moving element for detection of digital picture degradation	9

STANDARDS50.COM: Click to view the full PDF of CISPR TR 29:2020 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**TELEVISION BROADCAST RECEIVERS AND ASSOCIATED EQUIPMENT –
IMMUNITY CHARACTERISTICS –
METHODS OF OBJECTIVE PICTURE ASSESSMENT**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

CISPR 29, which is a technical report, has been prepared by CISPR subcommittee I: Electromagnetic compatibility of information technology equipment, multimedia equipment and receivers.

This second edition cancels and replaces the first edition published in 2004. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) update of the references, and
- b) editorial improvements.

The text of this Technical Report is based on the following documents:

Draft TR	Report on voting
CIS/II/634/DTR	CIS/II/638/RVDTR

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

TELEVISION BROADCAST RECEIVERS AND ASSOCIATED EQUIPMENT – IMMUNITY CHARACTERISTICS – METHODS OF OBJECTIVE PICTURE ASSESSMENT

1 Scope

This document describes the algorithms used for objective picture assessment in immunity tests of analogue and digital TV broadcast receivers and associated equipment.

The algorithms used were developed on the basis of the specifications originally included in Annex K of CISPR 20:2002/AMD2:2004, the later edition of which has been replaced by CISPR 35:2016. The method of objective picture assessment described in that annex employs the same interference mechanism and is based on the same wanted signal definition as specified in ~~CISPR 20~~ CISPR 35 for subjective picture assessment. Objective picture assessment, therefore, constitutes an alternative to the subjective method and offers the advantage of direct correlation to the subjective method.

2 Normative references

~~The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.~~

~~CISPR 20:2002, Sound and television broadcast receivers and associated equipment – Immunity characteristics – Limits and methods of measurement
Amendment 1 (2002)~~

~~ITU-R BT.500-10, Methodology for the subjective assessment of the quality of television pictures~~

~~ITU-R BT.801-1, Test signals for digitally encoded colour television signals conforming with Recommendations ITU-R BT.601 (Part A) and ITU-R BT.656~~

There are no normative references in this document.

3 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

~~CCVS – composite colour video signal (chrominance, video, blanking and sync signal)~~

DCT discrete cosine transform

EUT equipment under test

HSL hue, saturation, luminance (colour space model)

~~SSCQE (single stimulus continuous quality evaluation)~~

4 Test method for objective picture assessment

Objective picture assessment is based on comparison of the picture displayed on an EUT with a reference picture or a reduced reference picture.

Both the reference picture and the test picture can be recorded from the EUT monitor by means of a video camera or at the EUT's video output ~~(CCVS) direct~~ if it has one.

The recorded test picture is digitised, and deviations from a stored reference picture are determined by means of the picture assessment algorithms described below. An alternative methodology computes the deviation from specific features determined on both the reference picture and the picture to assess.

5 Methodology for detection of analogue picture degradations

5.1 General

Analogue picture degradations are defined as:

- superimposed patterns, moiré patterns;
- loss of luminance and contrast;
- loss of colour;
- loss of synchronization.

5.2 Algorithm for superimposed patterns, moiré patterns

To assess picture degradation showing as a set of lines, an average signal value is formed for a defined area in the simplest case. The deviation of the average signal value of this area from a reference value determined from an undisturbed picture serves as a criterion of whether or not picture degradation is present.

For picture assessment according to this method, the colour bar pattern ~~according to ITU-R BT.801-1~~ used for the test is first converted to a suitable colour space, preferably grey. From each colour bar, a rectangular section is taken into which a rectangular test window is positioned. The test window is divided into column segments (see Figure 1).

To reliably detect picture degradation, the test window is rotated by a constant angular increment of 2° until 180° is attained. For picture degradation in the form of lines, the test window segments will, in the case of one of the angles measured, be aligned approximately parallel to the interference lines, thus producing a significant deviation from average signal values.

As already mentioned, an average value or column sum is determined for each segment, and the deviation from a reference value is calculated. In addition, a regression line over all column sums is formed, and the square offset of each column sum from the regression line is calculated. If the sum of the square offsets of the column sums exceeds the corresponding value determined for a reference picture, a superimposed pattern or moiré pattern is detected.

The position and size of the test window, or the test window diagonal, should be selected such that for any angular position of the test window, all pixels of the test window are located within the same colour bar of the test pattern, i.e. within the homogeneous area of the colour bar. This excludes impairment of results by influences from the cross-colour region.

After a 180° rotation, the test window is shifted vertically, i.e. parallel to the borders of the colour bar section, by a length increment of half the test window height. In its new position, the test window is again rotated by 180° , and a measurement is performed for each angular increment. By repeatedly shifting the test window within the colour bar section, virtually the complete colour bar is covered.

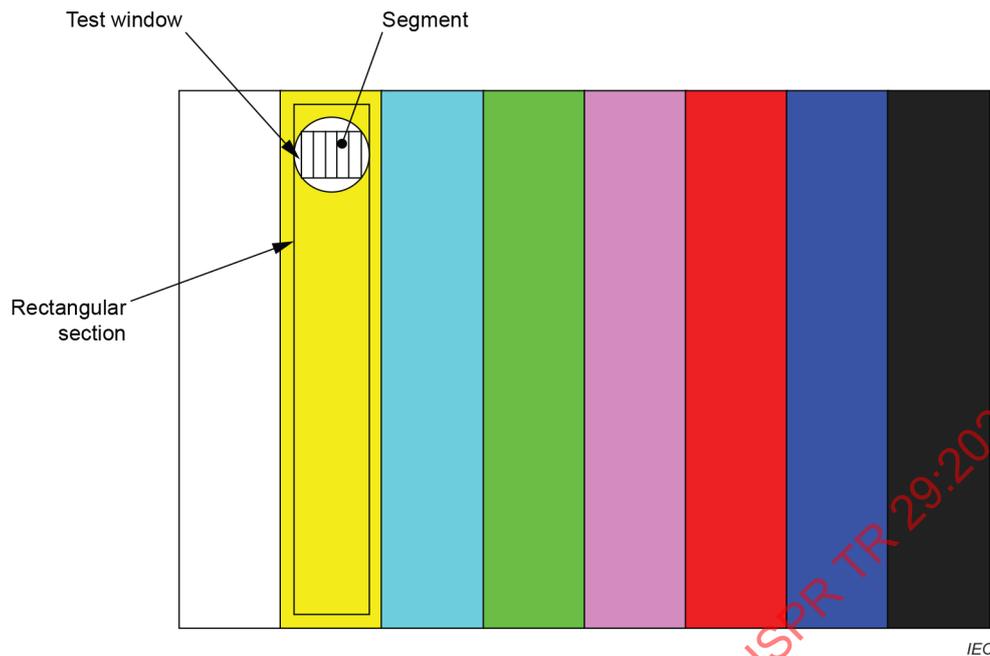


Figure 1 – Colour bar pattern with test elements for detection of analog picture degradation

The above procedure is repeated for each colour bar of the test pattern.

To cover the complete colour bar pattern, the ~~cross-colour~~ transition regions between the bars also have to be analysed. For this purpose, the ~~cross-colour~~ transition regions are divided into vertical segments of seven pixels in height. For each segment, the position of the colour transition edge and its deviation are determined. The evaluation is performed on the assumption of a Gaussian distribution of the colour transition edge in each segment over a defined number of reference pictures, preferably 20 and based on a confidence interval of five times the standard deviation, σ . Picture degradation is present if the position of colour transition in a segment is found to be outside the confidence interval of the corresponding reference segment.

5.3 Algorithm for loss of luminance and contrast

As described under 5.2, the colour bar pattern is converted to a suitable colour space, preferably grey. Any change in luminance or contrast directly affects the grey level, so this type of degradation can be reliably identified. The algorithm detects grey-level errors if the grey level deviates by a minimum of ± 5 grey tones from the grey level of the stored reference picture based on a quantisation of 8 Bit (256 grey tones).

5.4 Algorithm for loss of colour

Colour errors are identified by checking the hue of each colour contained in the colour bar pattern. To this effect, the test window is additionally converted to another colour space, preferably HSL. The algorithm detects colour errors if the hue deviates by a minimum of $\pm 10^\circ$ from the value of the stored reference picture.

5.5 Algorithm for loss of synchronisation

Synchronisation errors or total sync loss manifest themselves by the loss of one or more colour components. The algorithm detects loss of colour components if the hue deviates by a minimum of $\pm 10^\circ$ from the value of the stored reference picture. Total loss of sync is present if the grey level drops below 30 in all colour bars (black screen).

6 Methodology for detection of digital picture degradations

6.1 General

Digital picture degradations are defined as:

- blocking;
- frozen patterns, stop of moving element, blocking in moving element;
- total loss of picture, irrecoverable data stream error.

6.2 Algorithm for blocking

Blocking is characterised by the loss of macroblocks (e.g. 8 pixels × 8 pixels). The edges of lost macroblocks show as interfering lines that can be detected using the method described under 5.2. Rotating the test window is not necessary here as the loss of a macroblock always produces interfering lines at 0° and 90°. The test window size can therefore be expanded to extend over the full colour bar width so that lost macroblocks will be reliably detected also in the cross-colour regions.

6.3 Algorithm for frozen patterns, stop of moving element

Frozen patterns are ~~characterised by a stop of the moving element~~ video images that fail to ~~update over time~~. To detect this type of picture degradation, a colour bar pattern ~~according to ITU-R BT.801-1~~ is used that includes a rectangular moving element (see Figure 2). The movement of this element is effected by partially shifting the green-to-magenta colour transition by one pixel per frame, the maximum shift being 40 pixels in either direction. The movement of the colour transition (edge) is monitored by means of an edge filter. ~~A stop~~ Freezing of the edge movement is detected if there is no change in the position of the colour transition while the picture is continuously being captured.

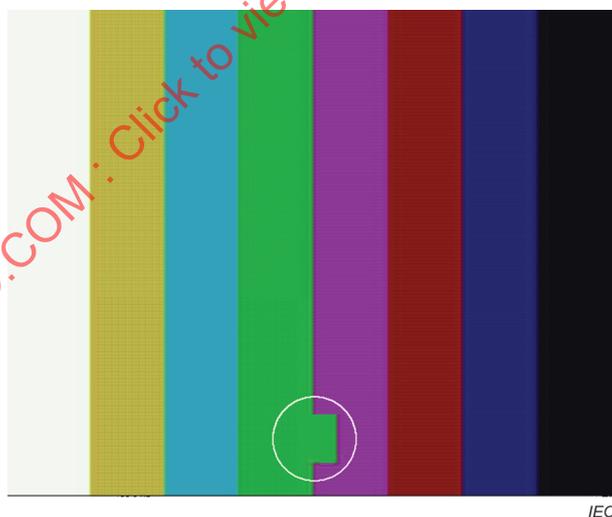


Figure 2 – Colour bar pattern with moving element for detection of digital picture degradation

6.4 Algorithm for total loss of picture, irrecoverable data stream error

Total loss of picture means a drastic change in the grey-level characteristics. This type of picture degradation can also be interpreted as extreme blocking and therefore be detected by means of the algorithm described under 6.2.

7 Alternative methodology for detection of digital picture degradations

7.1 Test pattern

To be able to detect frozen pictures due to digital degradations, ~~CISPR 20 recommends the use of~~ it is recommended that a colour bar test pattern including a moving element is used. The following ~~described~~ quality assessment method uses the test pattern represented in Figure 3.

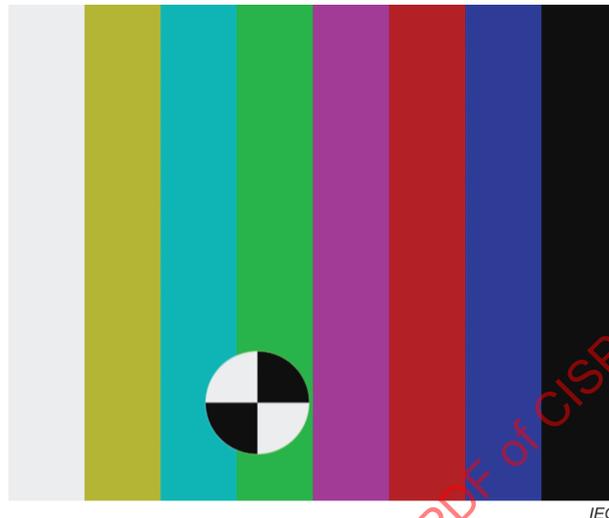


Figure 3 – Alternative colour bar pattern with moving element for detection of digital picture degradation

The test pattern is composed of the common colour bar ~~in compliance with ITU-R BT.801-4,~~ with a moving black and white disk. The disk describes a horizontal translation with a period of 30 pictures.

7.2 Analysis

7.2.1 General

The methodology is a reduced reference approach. This is based on computation of specific features that are sensitive to perceived video impairments. Features are first computed on pictures from the equipment ~~without stress with no disturbance applied,~~ and then compared with the same features computed on pictures from the equipment ~~under stress with the disturbance applied.~~ Comparison of the features provides an indication of perceived video quality. The video quality is then converted ~~in binary~~ using a computation-based evaluation to raise alarms.

In the first step, impairment features are extracted. ~~They seek to~~ which represent typical encoding and transmission error impairments. Usual impairments include blocking effects, false edges, and empty or misplaced macroblocks, to black or frozen areas. Each of these impairments affects picture contents in a specific way. Based on this assumption, a set of four parameters that seek to track these impairments has been defined, with computationally efficient algorithms. The process analyses all pictures in real time to track all transmission errors.

These parameters are based on a discrete cosine transform (DCT) blocks-based transform. Such an analysis in the transformed domain has the advantage of being close to the principle that MPEG uses for the compression, and to integrate other features like the human eye ~~sensibility~~ sensitivity to spatial frequencies. Each feature is computed on the DCT luma component blocks of the picture.

7.2.2 Automatic spatial synchronisation

A preliminary algorithm of spatial synchronisation is performed, in order to compute features at the same position for the reference picture and for the current signal. This algorithm is based on the computation of several horizontal gradients all over the picture and merged in a mean gradient sequence for each horizontal position studied. The gradients sequence is then converted into a frequency domain. The frequency sequence is used to match the region of interest with the picture, excluding 16 pixel borders at the bottom, top, left and right. The same synchronisation algorithm is processed for both the reference signal and the signal under test, which guarantee a successful synchronisation between the reference computation and the computation of the signal under test. This procedure is particularly efficient because it prevents the user from performing long and difficult alignment of signals.

7.2.3 Spatial activity parameter

~~The first and the second features represent the spatial activity of the picture. The first one~~ The spatial activity parameter is dedicated to the global content of the picture, calculated as the mean of the picture. This allows easy detection of black pictures.

7.2.4 Temporal activity parameter

The ~~third feature~~ next parameter deals with temporal activity. It is based on the integration of the spatial activity for several pictures. The spatial activity sequence is transformed into frequency and then summarised into a squared sum to obtain one value for the length of the sequence. This feature is ~~really~~ especially efficient ~~to detect~~ at detecting frozen pictures, for example, or jerky motion.

7.2.5 Blocking effect parameter

The last ~~feature~~ parameter is the blocking effect indicator. It is sensitive to DCT patterns and perceptually annoying block edges. The blocking effect parameter is the ratio of the spatial activity computed for the picture to the spatial activity computed for the picture shifted in a translation equivalent to half of the block diagonal. Thus, the ratio of shifted spatial activities is particularly relevant for enhancing the increase or loss of the block's edge.

Once these reference parameters are computed for the source test pattern, they are recorded ~~on the hard disk of the measurement equipment~~. The reference has to be recorded for twice the length of the sequence. The dedicated test pattern is 30 pictures long, so the reference-recording step takes only 60 pictures, i.e. for less than 3 s. Parameters are also computed on the current video signal, and then compared.

7.3 Comparison

In the second step, the equipment ~~realises the synchronisation of~~ synchronises the incoming signal (delivered by the receiver under test), with the recorded reference data. This procedure is automatic, it does not require any other information than the incoming signal and is ~~realised~~ achieved in a very short time.

Finally, comparative impairment features are computed based on the changes of a parameter between the reference measure and the current measure. These features are designed to be representative of the perceptual video quality. In order to be correlated to subjective data, the impairment feature is first computed using a comparison, and then time-collapsed with a specific norm.

The features are individually well correlated with the operator evaluation for small degradation levels, but a single feature is more difficult to correlate with a subjective evaluation for strong impairments. One major reason is that several types of impairments occur simultaneously with the impairment for which each feature is designed, requiring other specific parameters. This optimising approach has been used to set up several features.

A video quality assessment method should provide a single quality evaluation value, but for application in EMC tests, it is even more relevant to only raise alarms. So, the assessment method is specifically tuned to detect visible degradation. To achieve this, the defined features are merged into a single alarm prediction value, since several impairment types can occur simultaneously to influence the subjective judgement. The model combines in a non-linear process the relevance of the video impairment features to predict an alarm.

To this end, an optimisation procedure carried out with subjective data obtained by the single stimulus continuous quality evaluation (~~SSCQE~~) standard is used to set up the model (see ~~ITU-R BT.500-10~~ ITU-R BT.500-13). Thus, the equipment computes a ~~binary~~ quality score for each frame, and displays the score to the operator.

STANDARDSISO.COM : Click to view the full PDF of CISPR TR 29:2020 RLV

Bibliography

- [1] CISPR 20:2006, *Sound and television broadcast receivers and associated equipment – Immunity characteristics – Limits and methods of measurement*
- [2] CISPR 35:2016, *Electromagnetic compatibility of multimedia equipment – Immunity requirements*
- [3] ITU-R BT.500-13 (01/2012), *Methodology for the subjective assessment of the quality of television images*

STANDARDSISO.COM : Click to view the full PDF of CISPR TR 29:2020 RLV

TECHNICAL REPORT



INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

**Television broadcast receivers and associated equipment – Immunity
characteristics – Methods of objective picture assessment**

STANDARDSISO.COM : Click to view the full PDF of CISPR TR 29:2020 RLV

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Abbreviated terms	5
4 Test method for objective picture assessment	5
5 Methodology for detection of analogue picture degradations	5
5.1 General	5
5.2 Algorithm for superimposed patterns, moiré patterns	6
5.3 Algorithm for loss of luminance and contrast	7
5.4 Algorithm for loss of colour	7
5.5 Algorithm for loss of synchronisation	7
6 Methodology for detection of digital picture degradations	8
6.1 General	8
6.2 Algorithm for blocking	8
6.3 Algorithm for frozen patterns, stop of moving element	8
6.4 Algorithm for total loss of picture, irrecoverable data stream error	8
7 Alternative methodology for detection of digital picture degradations	9
7.1 Test pattern	9
7.2 Analysis	9
7.2.1 General	9
7.2.2 Automatic spatial synchronisation	9
7.2.3 Spatial activity parameter	10
7.2.4 Temporal activity parameter	10
7.2.5 Blocking effect parameter	10
7.3 Comparison	10
Bibliography	12
Figure 1 – Colour bar pattern with test elements for detection of analog picture degradation	7
Figure 2 – Colour bar pattern with moving element for detection of digital picture degradation	8
Figure 3 – Alternative colour bar pattern with moving element for detection of digital picture degradation	9

STANDARDS50.COM: Click to view the full PDF of CISPR TR 29:2020 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**TELEVISION BROADCAST RECEIVERS AND ASSOCIATED EQUIPMENT –
IMMUNITY CHARACTERISTICS –
METHODS OF OBJECTIVE PICTURE ASSESSMENT**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

CISPR 29, which is a technical report, has been prepared by CISPR subcommittee I: Electromagnetic compatibility of information technology equipment, multimedia equipment and receivers.

This second edition cancels and replaces the first edition published in 2004. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) update of the references, and
- b) editorial improvements.

The text of this Technical Report is based on the following documents:

Draft TR	Report on voting
CIS//634/DTR	CIS//638/RVDTR

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

STANDARDSISO.COM : Click to view the full PDF of CISPR TR 29:2020 PLV

TELEVISION BROADCAST RECEIVERS AND ASSOCIATED EQUIPMENT – IMMUNITY CHARACTERISTICS – METHODS OF OBJECTIVE PICTURE ASSESSMENT

1 Scope

This document describes the algorithms used for objective picture assessment in immunity tests of analogue and digital TV broadcast receivers and associated equipment.

The algorithms used were developed on the basis of the specifications originally included in Annex K of CISPR 20:2002/AMD2:2004, the later edition of which has been replaced by CISPR 35:2016. The method of objective picture assessment described in that annex employs the same interference mechanism and is based on the same wanted signal definition as specified in CISPR 35 for subjective picture assessment. Objective picture assessment, therefore, constitutes an alternative to the subjective method and offers the advantage of direct correlation to the subjective method.

2 Normative references

There are no normative references in this document.

3 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

DCT discrete cosine transform
EUT equipment under test
HSL hue, saturation, luminance (colour space model)

4 Test method for objective picture assessment

Objective picture assessment is based on comparison of the picture displayed on an EUT with a reference picture or a reduced reference picture.

Both the reference picture and the test picture can be recorded from the EUT monitor by means of a video camera or at the EUT's video output if it has one.

The recorded test picture is digitised, and deviations from a stored reference picture are determined by means of the picture assessment algorithms described below. An alternative methodology computes the deviation from specific features determined on both the reference picture and the picture to assess.

5 Methodology for detection of analogue picture degradations

5.1 General

Analogue picture degradations are defined as:

- superimposed patterns, moiré patterns;
- loss of luminance and contrast;
- loss of colour;

- loss of synchronization.

5.2 Algorithm for superimposed patterns, moiré patterns

To assess picture degradation showing as a set of lines, an average signal value is formed for a defined area in the simplest case. The deviation of the average signal value of this area from a reference value determined from an undisturbed picture serves as a criterion of whether or not picture degradation is present.

For picture assessment according to this method, the colour bar pattern used for the test is first converted to a suitable colour space, preferably grey. From each colour bar, a rectangular section is taken into which a rectangular test window is positioned. The test window is divided into column segments (see Figure 1).

To reliably detect picture degradation, the test window is rotated by a constant angular increment of 2° until 180° is attained. For picture degradation in the form of lines, the test window segments will, in the case of one of the angles measured, be aligned approximately parallel to the interference lines, thus producing a significant deviation from average signal values.

As already mentioned, an average value or column sum is determined for each segment, and the deviation from a reference value is calculated. In addition, a regression line over all column sums is formed, and the square offset of each column sum from the regression line is calculated. If the sum of the square offsets of the column sums exceeds the corresponding value determined for a reference picture, a superimposed pattern or moiré pattern is detected.

The position and size of the test window, or the test window diagonal, should be selected such that, for any angular position of the test window, all pixels of the test window are located within the same colour bar of the test pattern, i.e. within the homogeneous area of the colour bar. This excludes impairment of results by influences from the cross-colour region.

After a 180° rotation, the test window is shifted vertically, i.e. parallel to the borders of the colour bar section, by a length increment of half the test window height. In its new position, the test window is again rotated by 180° , and a measurement is performed for each angular increment. By repeatedly shifting the test window within the colour bar section, virtually the complete colour bar is covered.

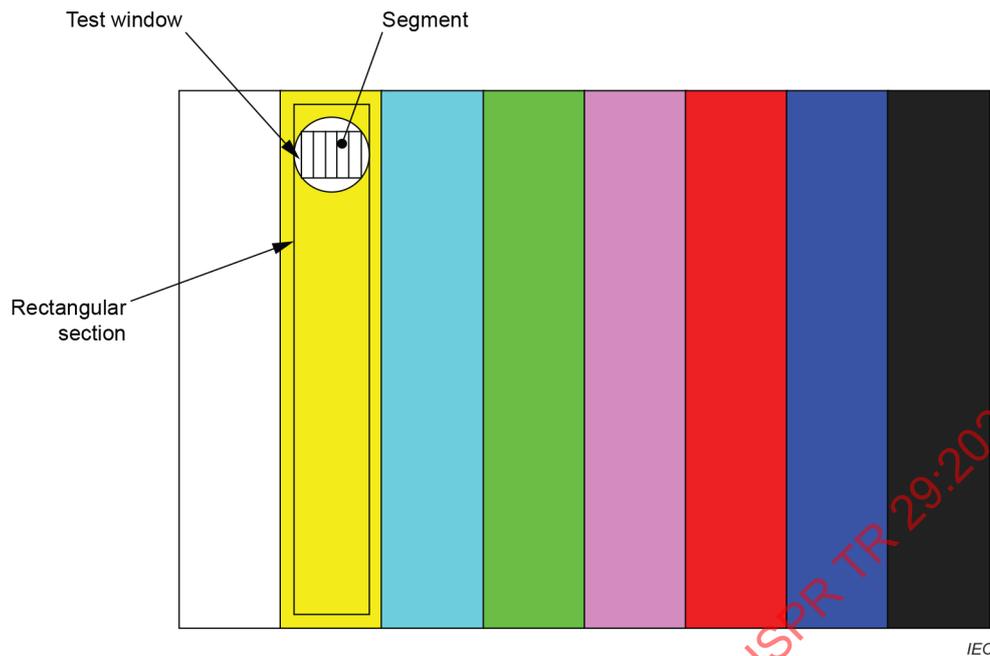


Figure 1 – Colour bar pattern with test elements for detection of analog picture degradation

The above procedure is repeated for each colour bar of the test pattern.

To cover the complete colour bar pattern, the transition regions between the bars also have to be analysed. For this purpose, the transition regions are divided into vertical segments of seven pixels in height. For each segment, the position of the colour transition edge and its deviation are determined. The evaluation is performed on the assumption of a Gaussian distribution of the colour transition edge in each segment over a defined number of reference pictures, preferably 20 and based on a confidence interval of five times the standard deviation, σ . Picture degradation is present if the position of colour transition in a segment is found to be outside the confidence interval of the corresponding reference segment.

5.3 Algorithm for loss of luminance and contrast

As described under 5.2, the colour bar pattern is converted to a suitable colour space, preferably grey. Any change in luminance or contrast directly affects the grey level, so this type of degradation can be reliably identified. The algorithm detects grey-level errors if the grey level deviates by a minimum of ± 5 grey tones from the grey level of the stored reference picture based on a quantisation of 8 Bit (256 grey tones).

5.4 Algorithm for loss of colour

Colour errors are identified by checking the hue of each colour contained in the colour bar pattern. To this effect, the test window is additionally converted to another colour space, preferably HSL. The algorithm detects colour errors if the hue deviates by a minimum of $\pm 10^\circ$ from the value of the stored reference picture.

5.5 Algorithm for loss of synchronisation

Synchronisation errors or total sync loss manifest themselves by the loss of one or more colour components. The algorithm detects loss of colour components if the hue deviates by a minimum of $\pm 10^\circ$ from the value of the stored reference picture. Total loss of sync is present if the grey level drops below 30 in all colour bars (black screen).

6 Methodology for detection of digital picture degradations

6.1 General

Digital picture degradations are defined as:

- blocking;
- frozen patterns, stop of moving element, blocking in moving element;
- total loss of picture, irrecoverable data stream error.

6.2 Algorithm for blocking

Blocking is characterised by the loss of macroblocks (e.g. 8 pixels × 8 pixels). The edges of lost macroblocks show as interfering lines that can be detected using the method described under 5.2. Rotating the test window is not necessary here as the loss of a macroblock always produces interfering lines at 0° and 90°. The test window size can therefore be expanded to extend over the full colour bar width so that lost macroblocks will be reliably detected also in the cross-colour regions.

6.3 Algorithm for frozen patterns, stop of moving element

Frozen patterns are video images that fail to update over time. To detect this type of picture degradation, a colour bar pattern is used that includes a rectangular moving element (see Figure 2). The movement of this element is effected by partially shifting the green-to-magenta colour transition by one pixel per frame, the maximum shift being 40 pixels in either direction. The movement of the colour transition (edge) is monitored by means of an edge filter. Freezing of the edge movement is detected if there is no change in the position of the colour transition while the picture is continuously being captured.

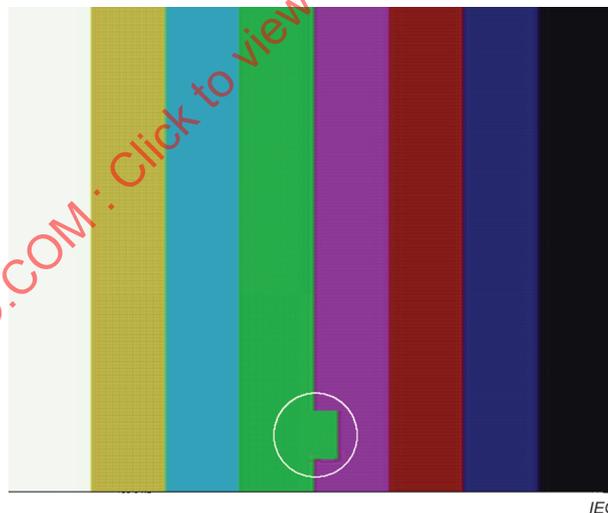


Figure 2 – Colour bar pattern with moving element for detection of digital picture degradation

6.4 Algorithm for total loss of picture, irrecoverable data stream error

Total loss of picture means a drastic change in the grey-level characteristics. This type of picture degradation can also be interpreted as extreme blocking and therefore be detected by means of the algorithm described under 6.2.