
Personal fall-arrest systems —

Part 5:

**Connectors with self-closing and
self-locking gates**

Systèmes individuels d'arrêt de chute —

Partie 5: Connecteurs à portail autofermant et autoverrouillant



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 10333-5:2001

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

	Page
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Requirements	5
5 Test methods	6
6 Instructions for general use, marking, packaging and maintenance	9
Bibliography.....	11

STANDARDSISO.COM : Click to view the full PDF of ISO 10333-5:2001

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 10333 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 10333-5 was prepared by Technical Committee ISO/TC 94, *Personal safety — Protective clothing and equipment*, Subcommittee SC 4, *Personal equipment for protection against falls*.

ISO 10333 consists of the following parts, under the general title *Personal fall-arrest systems*:

- *Part 1: Full-body harnesses*
- *Part 2: Lanyards and energy absorbers*
- *Part 3: Self-retracting lifelines*
- *Part 4: Vertical rails and vertical lifelines incorporating a sliding-type fall arrester*
- *Part 5: Connectors with self-closing and self-locking gates*

The system performance tests will be the subject of a future part 6 to ISO 10333.

Introduction

In cases where the hazard of falling from a height exists and where, for technical reasons or for work of very short duration, safe access cannot be otherwise provided, it is necessary to consider the use of personal fall-arrest systems (PFAS). Such use should never be improvised and its adoption should be specifically provided for in the appropriate formal provisions for safety in the work place.

PFAS complying with this part of ISO 10333 should satisfy ergonomic requirements and should only be used if the work allows means of connection to a suitable anchor device of demonstrated strength and if it can be implemented without compromising the safety of the user. Personnel should be trained and instructed in the safe use of the equipment and be observant of such training and instruction.

This part of ISO 10333 is based on current knowledge and practice concerning the use of PFAS that incorporate a full body harness.

This part of ISO 10333 presumes that the manufacturer of the PFAS, subsystems or components will, for the sake of consistency and traceability, operate a quality management system which will comply with national and regional regulations in force at the time. Guidance on the form this quality management system may take can be found in ISO 9000 (all parts), *Quality management and quality assurance standards*.

STANDARDSISO.COM : Click to view the full PDF of ISO 10333-5:2001

STANDARDSISO.COM : Click to view the full PDF of ISO 10333-5:2007

Personal fall-arrest systems —

Part 5:

Connectors with self-closing and self-locking gates

1 Scope

This part of ISO 10333 specifies requirements, test methods, instructions for use and maintenance, marking, labelling and packaging, as appropriate, for connectors with self-closing and self-locking gates made from metallic materials.

Connectors are used in personal fall-arrest systems (PFAS), which will be specified in a future International Standard (see ISO 10333-6 in the Bibliography), such that, if an arrest takes place, the arresting force will not exceed 6 kN. This part of ISO 10333 is applicable only to connectors limited to single person use of a total mass not exceeding 100 kg.

NOTE Users of fall protection equipment whose total mass (including tools and equipment) exceeds 100 kg are advised to seek advice from the equipment manufacturer regarding the suitability of this equipment, which may need additional testing.

The scope of this part of ISO 10333 does not extend to:

- a) attachment elements, fastening buckles, adjusting buckles and other metallic fittings used in the manufacture of full-body harnesses, which are specified in ISO 10333-6;
- b) connectors used for material-lifting purposes;
- c) connectors used in special techniques or situations, e.g. rescue, or rope access.

This part of ISO 10333 does not specify those additional requirements that would apply when connectors are subjected to special conditions of use (where, for example, there exist unusual limitations concerning access to the place of work and/or particular environmental factors). Thus, treatments to ensure the durability of the materials of construction (such as heat treatment, anti-corrosion treatment, protection against physical and chemical hazards) are not specified in this part of ISO 10333, but should comply with appropriate International Standards or, failing that, with national standards and other specifications dealing with relevant physical characteristics and/or the safety of users. In particular, when it is considered necessary to test the corrosion resistance of metallic parts of the equipment, reference should be made to ISO 9227.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 10333. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 10333 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 9227:1990, *Corrosion tests in artificial atmospheres — Salt spray tests*

ISO 10333-1, *Personal fall-arrest systems — Part 1: Full-body harnesses*

3 Terms and definitions

For the purposes of this part of ISO 10333, the following terms and definitions apply.

3.1 Connectors


3.1.1

connector


device, which is used to assemble a PFAS by enabling two other components or subsystems to be physically connected

See Figure 1.

NOTE A connector has an opening guarded by a self-closing gate with a self-locking feature.

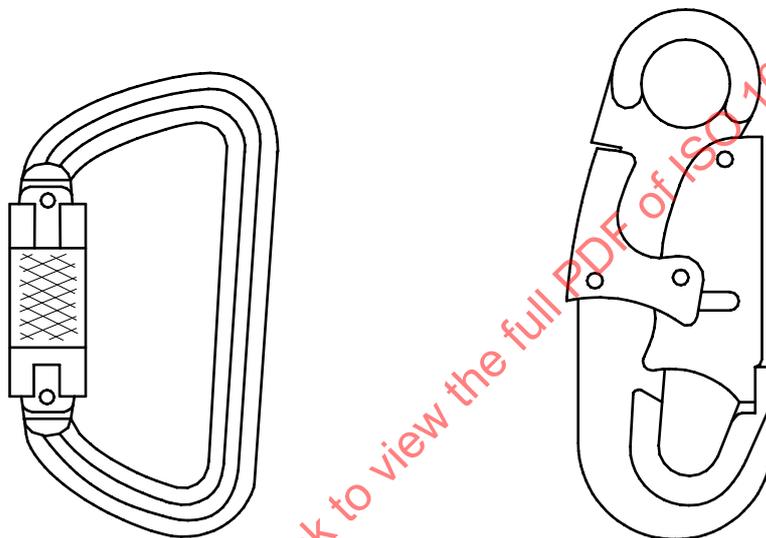


a) Karabiner and small snap hook

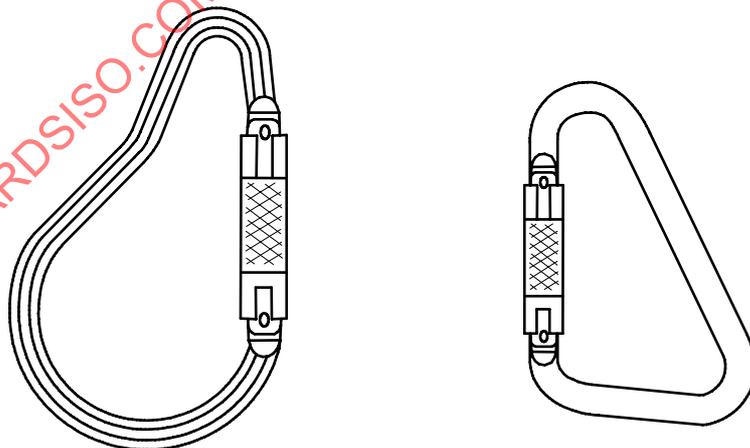

b) Large hooks

Figure 1 — Examples of connectors

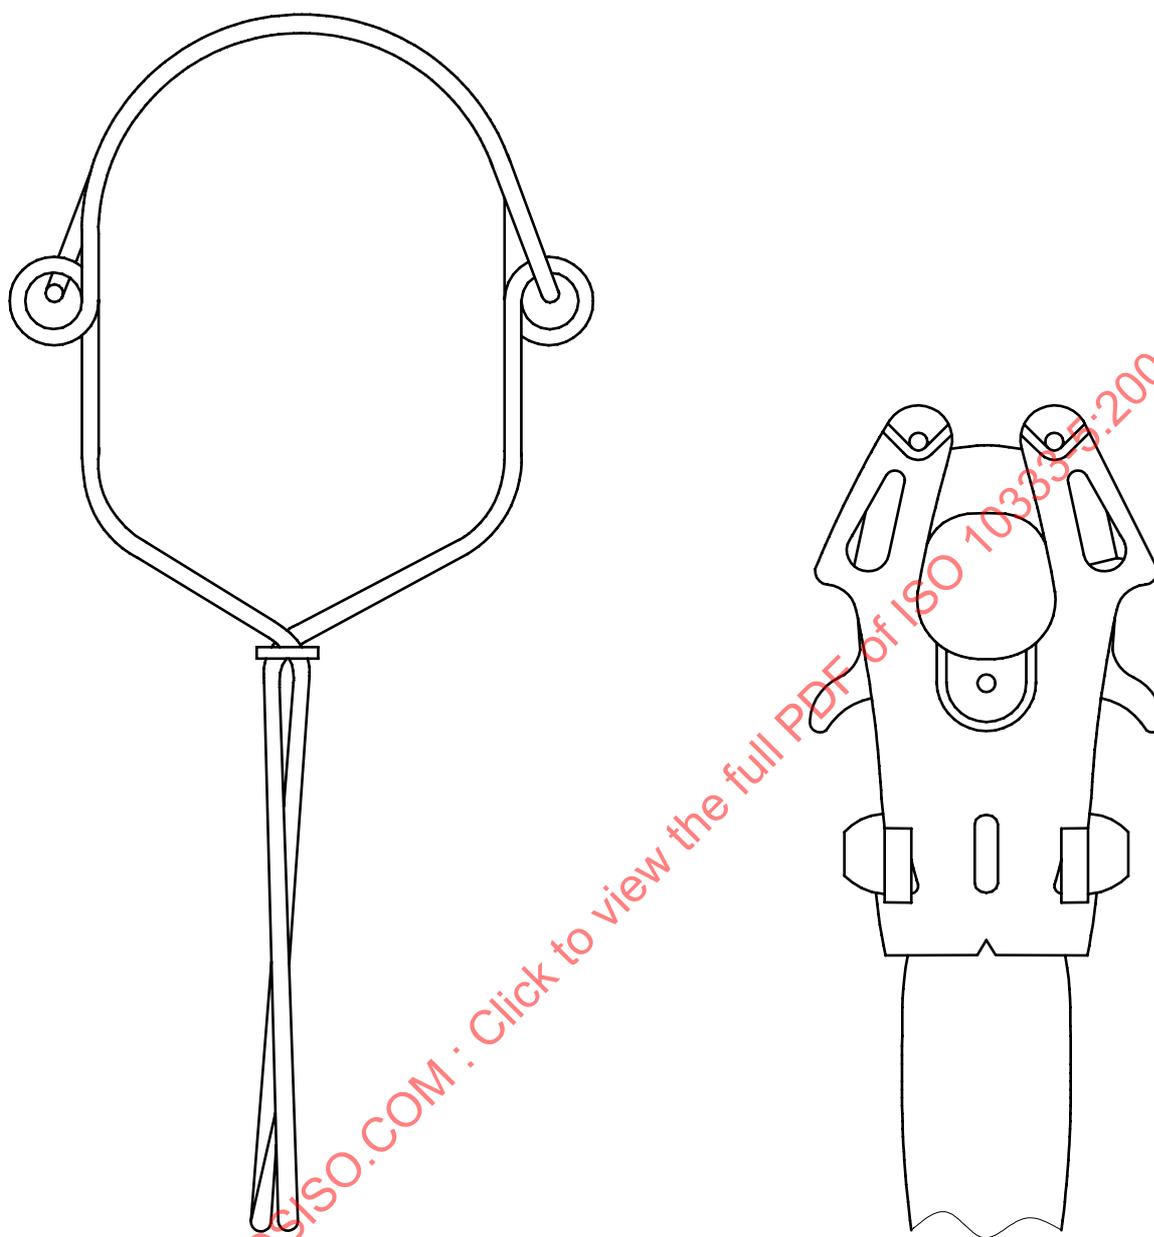

c) Anchor connector

d) System assembly connector

Figure 1 — Examples of connectors (*continued*)

3.1.2 gate

self-closing, sliding or hinged mechanism which, when opened, allows passage of the components or sub-systems to be coupled into the connector

See Figure 2.

NOTE When closed and with the locking feature engaged it is designed to prevent the unintentional separation of the coupled components or subsystems.

3.1.3

self-locking feature


mechanism which operates automatically upon closure of the gate and is opened by at least two consecutive, deliberate actions

3.1.4

opening

maximum gap for the passage of a component or subsystem into the connector with a fully opened gate

See Figure 2.

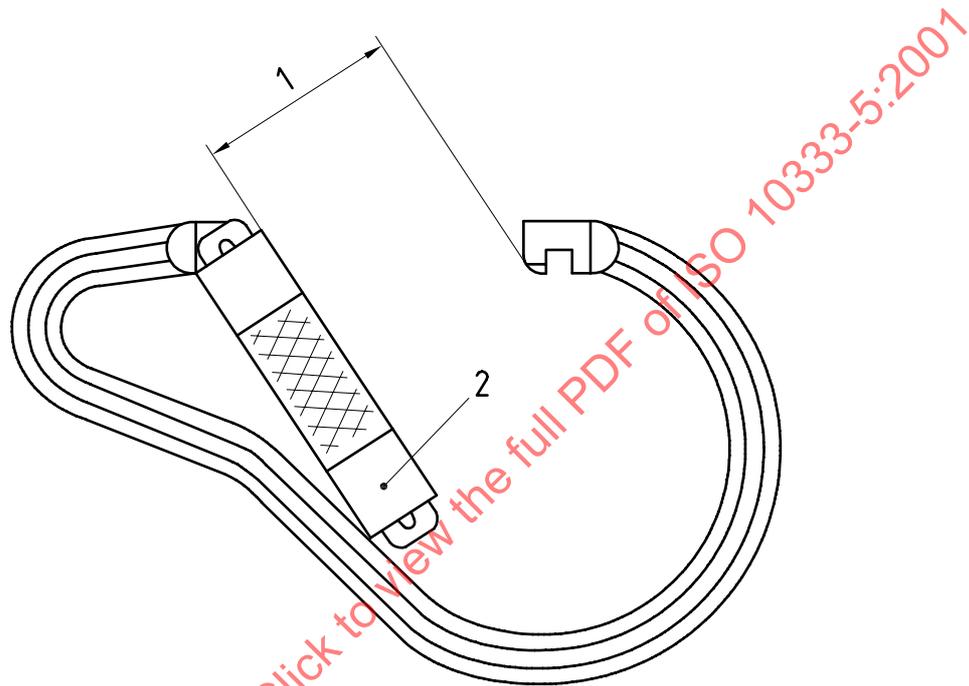

Key

- 1 Opening
- 2 Gate

Figure 2 — Example of opening dimension

3.1.5

retention pin

pin, which when inserted across one end of a connector, maintains the position of a lanyard termination, so that the termination is constrained to bear on a part of the connector which has been designed to sustain a fall-arrest force

3.1.6

retention eye

eye or hole which is similar in function to a retention pin, but which becomes integral to the connector during manufacture

3.1.7

latch

that part of the connector which engages with the free end of the gate

3.1.8

total mass

sum of the user's mass plus the mass of all attached clothing and equipment

3.2 General terms and definitions

3.2.1

personal fall-arrest system

PFAS

assembly of interconnected components and subsystems, including a full-body harness worn by the user, that when connected to a suitable anchor device will arrest a fall from a height

NOTE A PFAS minimizes the fall-arrest forces, controls the total fall distance as to prevent collision with the ground or other relevant obstruction and maintains the faller in a suitable post fall-arrest attitude for rescue purposes.

3.2.2

component

constituent part of a PFAS or subsystem that has completed the manufacturer's production cycle and is available for purchase

3.2.3

subsystem

constituent part of a PFAS which may consist of one or more components and is used to connect the user from the fall-arrest attachment element of the full-body harness to the anchor device and performs the two essential functions of a PFAS as follows:

- a) connecting;
- b) arresting and energy absorbing

4 Requirements

4.1 General

4.1.1 All connectors shall be made from smoothly finished metal and shall be free from defects due to faulty material and manufacture; they shall not have sharp edges or burrs that may cause injury to the user, or that may cut, abrade or otherwise damage webbing or rope.

4.1.2 In order to reduce the probability of involuntary opening, all connectors shall be self-closing and self-locking and shall be capable of being opened only by at least two consecutive, deliberate actions.

4.1.3 The self-closing gate shall be so designed that when it is released from the open position, it shall automatically close, and the locking feature shall automatically engage.

4.2 Gate resistance

4.2.1 Gate-face resistance

When tested in accordance with 5.1, the connector shall withstand a minimum force of 1,0 kN for 1 min without the gate separating from the latch by more than 3 mm. Following this test, the gate shall function in accordance with 4.1.3.

4.2.2 Gate side-load resistance

When tested in accordance with 5.1, the connector shall withstand a minimum force of 1,5 kN for 1 min without the gate separating from the latch by more than 3 mm. In addition, there shall be no partial fractures, and permanent deformation of the gate shall not exceed 3,0 mm. Following this test, the gate shall function in accordance with 4.1.3.

4.3 Static strength

When conditioned in accordance with 5.3 and tested in accordance with 5.2, the connector shall withstand a minimum force of 20 kN for 1 min. There shall be no partial fractures or inadvertent opening of the gate.

NOTE When special circumstances require a higher minimum strength, this value should replace the 20 kN requirement for testing, instructions and marking.

4.4 Corrosion resistance

When tested in accordance with 5.3, the connector gate shall continue to function in accordance with 4.1.3.

There shall be no evidence of corrosion of the base metal; tarnishing and/or white scale is acceptable.

5 Test methods

5.1 Gate-resistance tests

5.1.1 Gate-face resistance

Insert the connector into a fixture with the gate uppermost, and so as to apply the test load or force in a perpendicular direction, towards the gate, as shown in Figure 3. Using a rigid bar, of the dimensions shown in Figure 3, apply a minimum force of 1,0 kN for 60 s^{+10}_0 to the gate at a point as close to the latch as possible. The rate of application of the force shall not exceed 75 mm/min.

With the 1,0 kN force applied, measure and record any gap between the gate and the latch.

5.1.2 Gate side-load resistance

Insert the connector into a fixture with its side uppermost, so as to apply the test load or force in a perpendicular direction, towards the gate, as shown in Figure 4. Measure and record the height to the gate, as shown in Figure 4. Using a rigid bar, of the dimensions shown in Figure 3, apply a minimum force of 1,5 kN to the gate at a point halfway between the hinge and latch for 60 s^{+10}_0 . The rate of application of the force shall not exceed 75 mm/min.

With the 1,5 kN force applied, measure and record any gap between the gate and the latch. Remove the load and measure the height to the gate. Calculate the permanent deformation of the gate.

5.2 Static strength test


5.2.1 Mount the connector in a conventional tensile-testing machine to enable a tensile load to be applied by means of two pins of diameter $(12 \pm 0,1)$ mm, which are arranged to be perpendicular to the major axis. It is important that the connector be free so as to be located on the pins at the start of the test and as the load is applied. The pins shall be coated with a molybdenum-based grease where they come into contact with the tests specimen. Alternative fixtures may be used, providing that the application of the tensile load reproduces as closely as practicable the manner in which the connector is to be stressed in service, in accordance with the manufacturer's instructions. See Figure 5.

Alternatively the connector may be tested in a horizontal-axis test machine, with the connector positioned in a vertical plane with the gate downwards.

5.2.2 Apply a minimum force of 20 kN and maintain it for 60 s^{+10}_0 . During loading, the crosshead velocity shall lie within the range of 20 mm/min to 50 mm/min.

NOTE When special circumstances require a higher minimum strength, this value should replace the 20 kN requirement for testing, instructions and marking.


Dimensions in millimetres (inches)

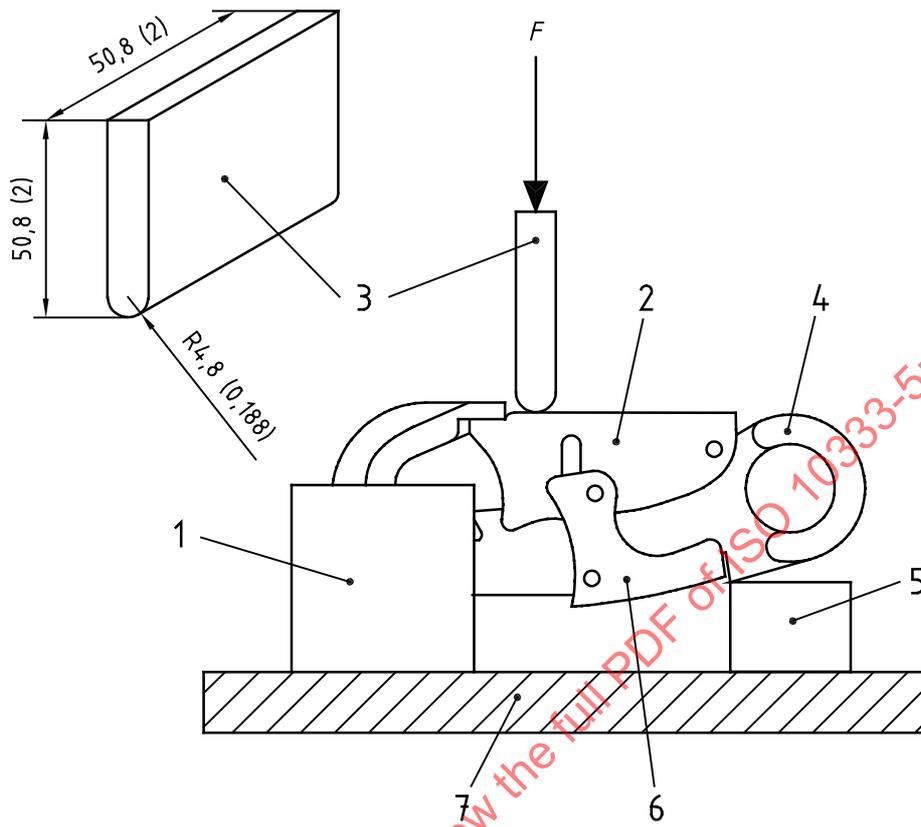**Key**

- | | |
|-----|-----------------------|
| 1 | Clamping feature |
| 2 | Gate |
| 3 | Load (rigid bar) |
| 4 | Snap hook |
| 5 | Resting block |
| 6 | Latch |
| 7 | Test bed |
| F | Force applied to gate |

Figure 3 — Gate-face resistance test**5.3 Corrosion test**


Salt-spray test the connector in accordance with ISO 9227, with an initial exposure of 24 h, followed by 1 h drying, followed by an additional exposure of 24 h. Check that the requirements of 4.4 have been met.

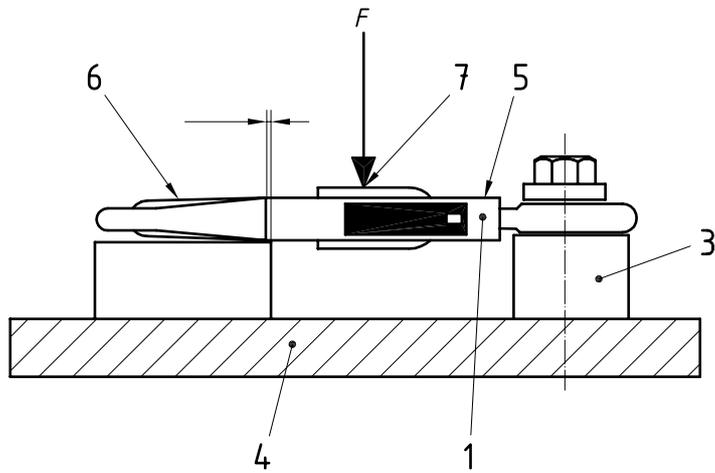

Key

- 1 Gate
- 2 Load
- 3 Resting block
- 4 Test bed
- 5 Hinge
- 6 Nose
- 7 Halfway between nose and hinge
- F Force applied to gate

Figure 4 — Gate side-load resistance test

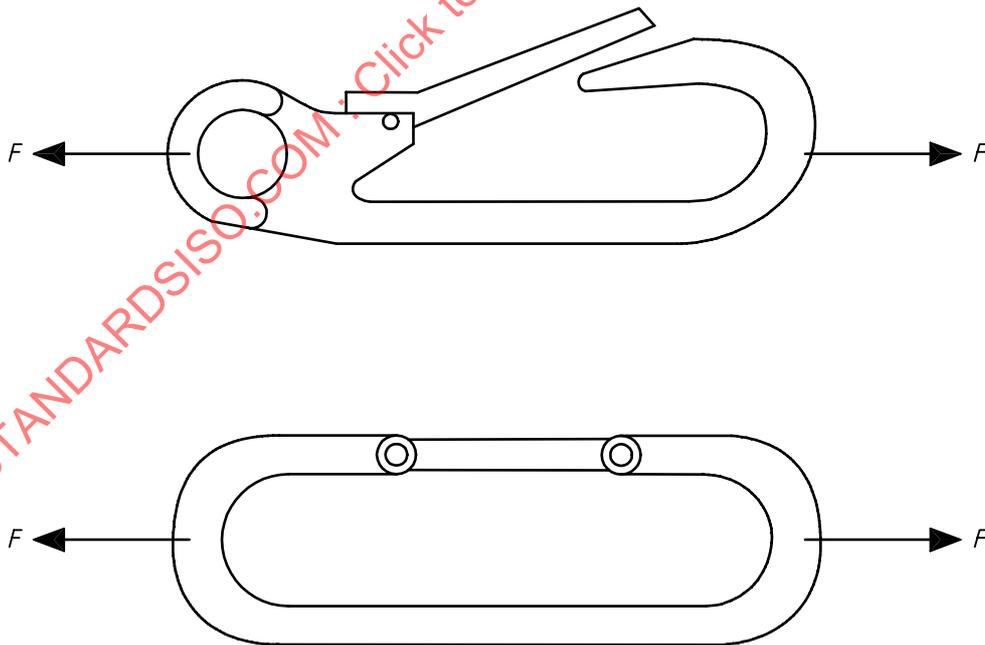

- F Force applied to connector

Figure 5 — Example of a static strength test for an alternative fixture