
**Cutter arbors with parallel key and
tenon drive —**

Part 4:
**Dimensions and designation of tool
holders with 7/24 taper without
automatic tool changer**

Mandrins porte-fraise à entraînement par clavette et tenon —

*Partie 4: Dimensions et désignation des porte-outils à conicité 7/24
sans changement automatique d'outils*



STANDARDSISO.COM : Click to view the full PDF of ISO 10649-4:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Dimensions	1
3.1 General	1
3.2 Dimensions of arbors with 7/24 taper shanks without automatic tool changers	1
4 Material	2
5 Designation	2
6 Delivery conditions	3
Annex A (informative) Relationship between the symbols of this part of ISO 10649 and the ISO 13399 series	4
Bibliography	5

STANDARDSISO.COM : Click to view the full PDF of ISO 10649-4:2013

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 2, *High speed steel cutting tools and their attachments*.

This second edition cancels and replaces the first edition (ISO 10649-4:2010), of which it constitutes a minor revision with the following changes:

- addition of [Annex A](#), which gives the relationship between the symbols of this part of ISO 10649 and the symbols according to the ISO 13399 series.

ISO 10649 consists of the following parts, under the general title *Cutter arbors with parallel key and tenon drive*:

- *Part 1: General dimensions*
- *Part 2: Dimensions and designation of tool holders with taper interface with flange contact surface*
- *Part 3: Dimensions and designation of tool holders with 7/24 taper for automatic tool changer*
- *Part 4: Dimensions and designation of tool holders with 7/24 taper without automatic tool changer*
- *Part 5: Dimensions and designation of tool holders with polygonal taper interface with flange contact surface*
- *Part 6: Dimensions and designation of tool holders with modular taper interface with ball track system*

Introduction

The aim of ISO 10649 (all parts) is to specify the main dimensions for tool holders for this type of interface, and prevent the risk of collision when exchanging the assembled tool within the machine tools.

STANDARDSISO.COM : Click to view the full PDF of ISO 10649-4:2013

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 10649-4:2013

Cutter arbors with parallel key and tenon drive —

Part 4:

Dimensions and designation of tool holders with 7/24 taper without automatic tool changer

1 Scope

This part of ISO 10649 specifies the dimensions of cutter arbors with parallel key and tenon drive with 7/24 tapers without automatic tool changers.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 297, *7/24 tapers for tool shanks for manual changing*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 2768-2, *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications*

ISO 2780, *Milling cutters with tenon drive — Interchangeability dimensions for cutter arbors — Metric series*

ISO 10643, *Dimensions of accessories for cutter arbors with parallel key and tenon drive*

ISO 10649-1, *Cutter arbors with parallel key and tenon drive — Part 1: General dimensions*

3 Dimensions

3.1 General

All dimensions and tolerances are given in millimetres. Tolerances not specified shall be of tolerance class “m” in accordance with ISO 2768-1 and of class “K” in accordance with ISO 2768-2.


[Figure 1](#) is schematic and is not intended to specify a given design; only the given dimension shall be met.

The interchangeability dimensions of the milling cutter bearing on the cutter arbors shall be in conformity with ISO 2780. The retaining bolt used has the dimensions specified in ISO 2780.

The dimensions of tool interface for arbors with parallel key and tenon drive shall be in accordance with ISO 10649-1.

3.2 Dimensions of arbors with 7/24 taper shanks without automatic tool changers

The dimensions for cutter arbors with parallel key and tenon drive with 7/24 tapers without automatic tool changers shall be in accordance with the dimensions shown in [Figure 1](#) and given in [Table 1](#).

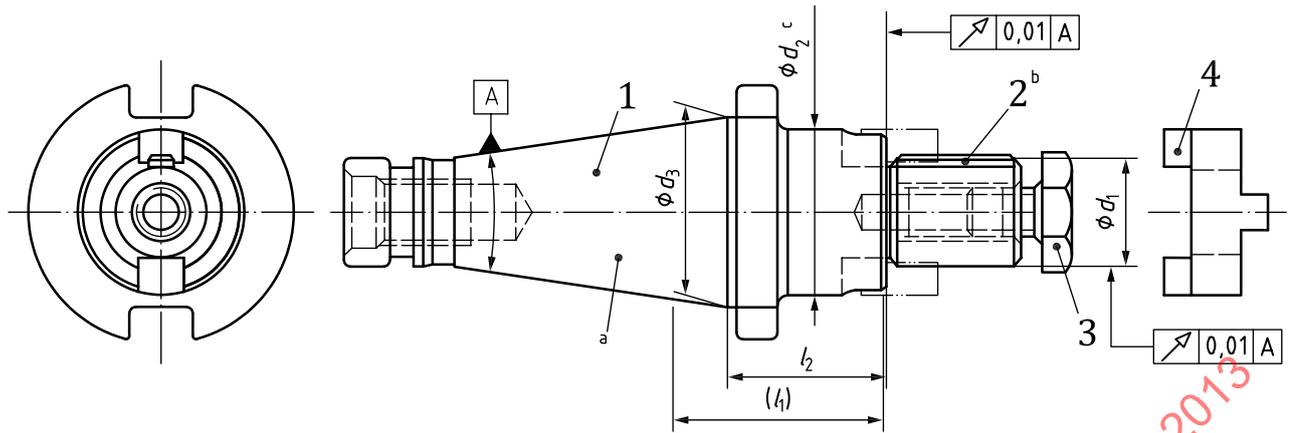

Key

- 1 tool holder with 7/24 taper in accordance with ISO 297
- 2 parallel key in accordance with ISO 10643
- 3 retaining screw in accordance with ISO 10643
- 4 clutch drive ring in accordance with ISO 10643
- a Taper shank 7/24 in accordance with ISO 297.
- b Not convex.
- c The values of d_2 shall be as given in ISO 10649-1.

Figure 1 — Arbors with 7/24 taper shanks without automatic tool changers

Table 1 — Dimensions of arbors with 7/24 taper shanks without automatic tool changers

Shank no.	30				40					45					50					60							
	d_1	d_3	l_1	l_2	d_1	d_3	l_1	l_2																			
	16	22	27	32	16	22	27	32	40	50	16	22	27	32	40	50	16	22	27	32	40	50	27	32	40	50	60
	31,75				44,45					57,15					69,85					107,95							
	35			50	52				55		65			55					82								
	25	23	23	36	42	40	40	38	38	36	45	43	43	41	41	39	45	43	43	41	41	39	70	68	68	66	66

4 Material

The material is left to the manufacturer’s discretion; the tensile strength shall be at least 800 N/mm².

The surface hardness shall be (56 + 4) HRC in the area of the taper surface and the surfaces of the spigot. The hardness depth is left to the manufacturer’s discretion.

5 Designation

The cutter arbors with parallel key and tenon drive with 7/24 taper shank without automatic tool changer in accordance with this part of ISO 10649 shall be designated by:

- a) “Arbor”;
- b) the reference to this part of ISO 10649, i.e. ISO 10649-4:2013;
- c) a hyphen;
- d) the shank number;

- e) a hyphen;
- f) the diameter of the cutter arbor d_1 .

EXAMPLE Designation of a manual tool changer, shank No. 40, and cutter arbor diameter $d_1 = 32$ mm, with parallel key, clutch drive ring, and cutter retaining screw:

Arbor ISO 10649-4 - 40 - 32

6 Delivery conditions

The cutter arbors with parallel key and tenon drive with 7/24 taper shank without automatic tool changer in accordance with this part of ISO 10649 shall be delivered with at least the following:

- a parallel key in accordance with ISO 10643;
- a clutch drive ring in accordance with ISO 10643;
- a cutter retaining screw in accordance with ISO 10643.

STANDARDSISO.COM : Click to view the full PDF of ISO 10649-4:2013